

TEST REPORT

FCC LTE Test for SM-T727V

Certification

APPLICANT

SAMSUNG Electronics Co., Ltd.

REPORT NO.

HCT-RF-1906-FC020-R1

DATE OF ISSUE

10 June 2019

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

**TEST
REPORT**
FCC LTE Test for
SM-T727V

REPORT NO.

HCT-RF-1906-FC020-R1

DATE OF ISSUE

10 June 2019

Other ID

FCC: A3LSMT727V

Applicant

SAMSUNG Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of
Korea

**Eut Type
Model Name**

Tablet
SM-T727V

Date of Receipt

May 03, 2019

FCC Rule Part(s)

§ 27, § 2

FCC Classification

PCS Licensed Transmitter (PCB)

Manufacturer

SAMSUNG Electronics Co., Ltd.

Tested by
Kwon Jeong

Technical Manager
Jong Seok Lee

HCT CO., LTD.

Soo Chan Lee

SooChan Lee / CEO
Accredited by KOLAS, Republic of KOREA

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	June 10, 2019	Initial Release
1	June 13, 2019	Revised the Description of EUT Added the 5MHz bandwidth configuration on page 22 Revised the test setting & limit of band edge Revised the test summary of test results Retested the channel edge

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION	7
2.1. DESCRIPTION OF EUT	7
2.2. MEASURING INSTRUMENT CALIBRATION	7
2.3. TEST FACILITY	7
3. DESCRIPTION OF TESTS	8
3.1 TEST PROCEDURE	8
3.2 RADIATED POWER	9
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.	15
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	17
3.7 BAND EDGE	18
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	20
3.8 WORST CASE(RADIATED TEST)	21
3.9 WORST CASE(CONDUCTED TEST)	22
4. LIST OF TEST EQUIPMENT	23
5. MEASUREMENT UNCERTAINTY	24
6. SUMMARY OF TEST RESULTS	25
6.1 Test Condition : Conducted Test	25
6.2 Test Condition : Radiated Test	25
7. SAMPLE CALCULATION	26
7.1 ERP Sample Calculation	26
7.2 EIRP Sample Calculation	26
7.3. Emission Designator	27
8. TEST DATA	28
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	28
8.2 RADIATED SPURIOUS EMISSIONS	30
8.3 PEAK-TO-AVERAGE RATIO	34
8.4 OCCUPIED BANDWIDTH	35
8.5 CONDUCTED SPURIOUS EMISSIONS	36
8.6 CHANNEL EDGE	37
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	38
9. TEST PLOTS	50
10. APPENDIX A_ TEST SETUP PHOTO	123

MEASUREMENT REPORT**1. GENERAL INFORMATION**

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMT727V
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§ 27, § 2
EUT Type:	Tablet
Model(s):	SM-T727V
Keyboard Information	Model : EJ-FT720 Manufacture: SAMSUNG
Charging Doc Information	Model : EE-D3200 Manufacture: SAMSUNG
Ear-jack Information	Model : EHS64AVFWE Manufacture: ALMUS
Tx Frequency:	2502.5 – 2567.5 : 5 MHz 2505.0 – 2565.0 : 10 MHz 2507.5 – 2562.5 : 15 MHz 2510.0 – 2560.0 : 20 MHz
Date(s) of Tests:	May 03, 2019 ~ May 28, 2019 June 13, 2019 ~ June 13, 2019

1.1. MAXIMUM OUTPUT POWER

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 7 (5)	2502.5 – 2567.5	4M51G7D	QPSK	0.335	25.25
		4M50W7D	16QAM	0.284	24.54
		4M51W7D	64QAM	0.223	23.48
LTE – Band 7 (10)	2505.0 – 2565.0	8M98G7D	QPSK	0.315	24.98
		8M97W7D	16QAM	0.267	24.27
		8M98W7D	64QAM	0.208	23.18
LTE – Band 7 (15)	2507.5 – 2562.5	13M4G7D	QPSK	0.314	24.97
		13M5W7D	16QAM	0.265	24.24
		13M4W7D	64QAM	0.208	23.17
LTE – Band 7 (20)	2510.0 – 2560.0	17M9G7D	QPSK	0.290	24.62
		17M9W7D	16QAM	0.246	23.90
		17M9W7D	64QAM	0.190	22.79

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), ANT+, Bluetooth, BT LE.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

3.4 PEAK- TO- AVERAGE RATIO

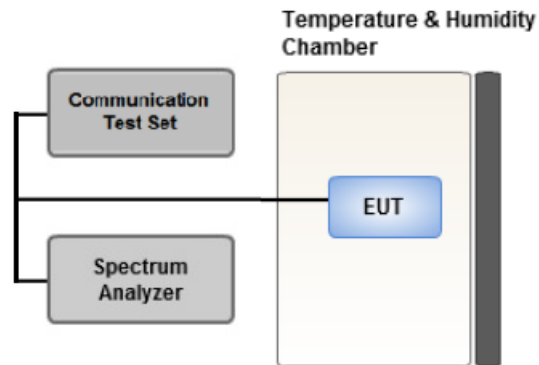

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.


1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)

9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

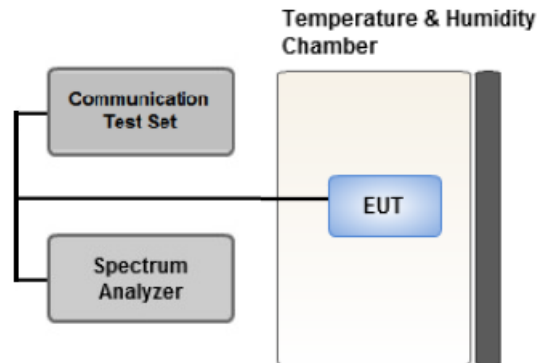

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 - 5\%$ of the expected OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within

1 – 5% of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

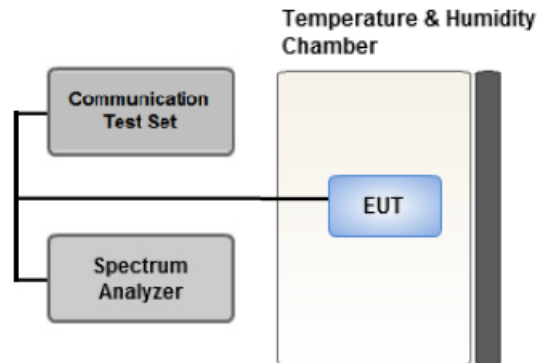

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.7 BAND EDGE

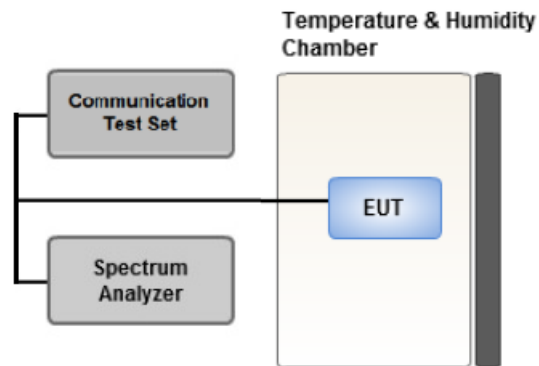

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

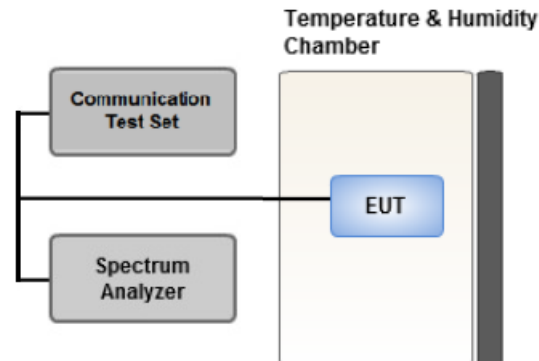

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- .- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- .- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.
- SM-T727V with Stand alone, Keyboard, Ear-jack and Charging pad were tested and the worst case results are reported.

(Worst case : Stand alone)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64-QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Y

3.9 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64-QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM	5, 10, 15, 20	Mid	Full RB	0
Band Edge	* QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	5, 10, 15, 20	Low, Mid, High	1	0

* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/16/2019	Annual	04/16/2020
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/02/2019	Annual	04/02/2020
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/02/2019	Annual	04/02/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	MY51360711	07/16/2018	Annual	07/16/2019
Agilent	E3632A/DC Power Supply	MY40004326	07/05/2018	Annual	07/05/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY46471250	09/05/2018	Annual	09/05/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/13/2018	Annual	08/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	E
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§ 2.1046	N/A	See Note1
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2502.5	LTE B7/ 5 MHz	QPSK	-19.58	15.06	10.98	1.60	H	< 2.00	0.278	24.44
		16-QAM	-20.28	14.36	10.98	1.60	H		0.237	23.74
		64-QAM	-21.37	13.27	10.98	1.60	H		0.184	22.65
2535.0		QPSK	-19.67	15.14	11.00	1.61	H		0.284	24.53
		16-QAM	-20.38	14.43	11.00	1.61	H		0.241	23.82
		64-QAM	-21.45	13.36	11.00	1.61	H		0.188	22.75
2567.5		QPSK	-18.97	15.86	11.02	1.63	H		0.335	25.25
		16-QAM	-19.68	15.15	11.02	1.63	H		0.284	24.54
		64-QAM	-20.74	14.09	11.02	1.63	H		0.223	23.48

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2505.0	LTE B7/ 10 MHz	QPSK	-19.56	15.01	10.98	1.61	H	< 2.00	0.274	24.38
		16-QAM	-20.25	14.32	10.98	1.61	H		0.234	23.69
		64-QAM	-21.38	13.19	10.98	1.61	H		0.180	22.56
2535.0		QPSK	-19.63	15.18	11.00	1.61	H		0.286	24.57
		16-QAM	-20.35	14.46	11.00	1.61	H		0.243	23.85
		64-QAM	-21.46	13.35	11.00	1.61	H		0.188	22.74
2565.0		QPSK	-19.25	15.59	11.02	1.63	H		0.315	24.98
		16-QAM	-19.96	14.88	11.02	1.63	H		0.267	24.27
		64-QAM	-21.05	13.79	11.02	1.63	H		0.208	23.18

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2507.5	LTE B7/ 15 MHz	QPSK	-19.55	14.95	10.98	1.62	H	< 2.00	0.270	24.31
		16-QAM	-20.28	14.22	10.98	1.62	H		0.228	23.58
		64-QAM	-21.36	13.14	10.98	1.62	H		0.178	22.50
2535.0		QPSK	-19.70	15.11	11.00	1.61	H		0.282	24.50
		16-QAM	-20.43	14.38	11.00	1.61	H		0.238	23.77
		64-QAM	-21.49	13.32	11.00	1.61	H		0.187	22.71
2562.5		QPSK	-19.27	15.57	11.02	1.62	H		0.314	24.97
		16-QAM	-20.00	14.84	11.02	1.62	H		0.265	24.24
		64-QAM	-21.07	13.77	11.02	1.62	H		0.208	23.17

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2510.0	LTE B7/ 20 MHz	QPSK	-19.54	14.96	10.98	1.62	H	< 2.00	0.270	24.32
		16-QAM	-20.25	14.25	10.98	1.62	H		0.229	23.61
		64-QAM	-21.32	13.18	10.98	1.62	H		0.179	22.54
2535.0		QPSK	-19.77	15.04	11.00	1.61	H		0.277	24.43
		16-QAM	-20.45	14.36	11.00	1.61	H		0.237	23.75
		64-QAM	-21.53	13.28	11.00	1.61	H		0.185	22.67
2560.0		QPSK	-19.62	15.22	11.02	1.62	H		0.290	24.62
		16-QAM	-20.34	14.50	11.02	1.62	H		0.246	23.90
		64-QAM	-21.45	13.39	11.02	1.62	H		0.190	22.79

8.2 RADIATED SPURIOUS EMISSIONS

- ☐ OPERATING FREQUENCY : 2567.50 MHz
☐ MEASURED OUTPUT POWER: 25.25 dBm = 0.335 W
☐ MODE: LTE B7
☐ MODULATION SIGNAL: 5 MHz QPSK
☐ DISTANCE: 1 meters
☐ LIMIT: $55 + 10 \log_{10}(W) =$ 50.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20775 (2502.5)	5,005.00	-57.08	12.88	-71.00	2.48	H	-60.60	85.85
	7,507.50	-47.89	11.54	-54.03	2.90	V	-45.39	70.64
	10,010.00	-56.91	11.26	-60.19	3.37	V	-52.30	77.55
	12,512.50	-46.11	14.24	-50.67	3.98	H	-40.41	65.66
21100 (2535.0)	5,070.00	-57.67	12.63	-69.60	2.49	H	-59.46	84.71
	7,605.00	-44.94	11.86	-51.78	3.00	V	-42.92	68.17
	10,140.00	-57.37	11.47	-60.85	3.49	V	-52.87	78.12
	12,675.00	-49.96	13.96	-53.94	4.24	V	-44.22	69.47
21425 (2567.5)	5,135.00	-57.23	12.72	-70.94	2.52	H	-60.74	85.99
	7,702.50	-40.78	12.04	-47.87	3.01	V	-38.84	64.09
	10,270.00	-53.97	11.05	-57.63	3.50	V	-50.08	75.33
	12,837.50	-46.44	13.60	-50.16	4.17	H	-40.73	65.98
	15,405.00	-53.93	15.95	-58.22	4.40	V	-46.67	71.92

▣ OPERATING FREQUENCY :	<u>2565.00 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>24.98 dBm = 0.315 W</u>
▣ MODE:	<u>LTE B7</u>
▣ MODULATION SIGNAL:	<u>10 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10} (W) =$	<u>49.98 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20800 (2505.0)	5,010.00	-54.28	12.86	-68.41	2.49	H	-58.04	83.02
	7,515.00	-47.60	11.56	-53.33	2.92	V	-44.69	69.67
	10,020.00	-58.58	11.27	-61.62	3.43	H	-53.78	78.76
	12,525.00	-47.31	14.23	-51.80	4.11	H	-41.68	66.66
21100 (2535.0)	5,070.00	-57.16	12.63	-69.09	2.49	H	-58.95	83.93
	7,605.00	-43.82	11.86	-50.66	3.00	V	-41.80	66.78
	10,140.00	-57.60	11.47	-61.08	3.49	V	-53.10	78.08
	12,675.00	-50.38	13.96	-54.36	4.24	H	-44.64	69.62
21400 (2565.0)	5,130.00	-58.19	12.68	-71.90	2.52	H	-61.74	86.72
	7,695.00	-40.21	12.04	-47.71	3.00	V	-38.67	63.65
	10,260.00	-57.72	11.06	-61.09	3.53	H	-53.56	78.54
	12,825.00	-47.79	13.67	-51.96	4.24	H	-42.53	67.51

- ▣ OPERATING FREQUENCY : 2562.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.97 dBm = 0.314 W
- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 49.97 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20825 (2507.5)	5,015.00	-57.71	12.85	-71.87	2.51	V	-61.53	86.50
	7,522.50	-45.31	11.57	-50.62	2.93	H	-41.98	66.96
	10,030.00	-59.32	11.31	-61.94	3.52	V	-54.15	79.12
	12,537.50	-47.24	14.21	-51.74	4.15	V	-41.68	66.65
21100 (2535.0)	5,070.00	-57.78	12.63	-69.71	2.49	H	-59.57	84.54
	7,605.00	-43.29	11.86	-50.13	3.00	H	-41.27	66.25
	10,140.00	-58.44	11.47	-61.92	3.49	H	-53.94	78.92
	12,675.00	-49.92	13.96	-53.90	4.24	V	-44.18	69.15
21375 (2562.5)	5,125.00	-58.50	12.64	-72.12	2.53	V	-62.01	86.98
	7,687.50	-43.09	12.04	-51.02	2.98	V	-41.96	66.93
	10,250.00	-57.16	11.06	-60.40	3.58	V	-52.92	77.89
	12,812.50	-48.30	13.71	-52.34	4.26	H	-42.89	67.87

■ OPERATING FREQUENCY : 2560.00 MHz
 ■ MEASURED OUTPUT POWER: 24.62 dBm = 0.290 W
 ■ MODE: LTE B7
 ■ MODULATION SIGNAL: 20 MHz QPSK
 ■ DISTANCE: 1 meters
 ■ LIMIT: $55 + 10 \log_{10}(W) =$ 49.62 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20850 (2510.0)	5,020.00	-58.05	12.83	-72.23	2.53	H	-61.93	86.55
	7,530.00	-46.43	11.64	-51.77	2.93	H	-43.06	67.68
	10,040.00	-57.48	11.34	-60.96	3.68	V	-53.30	77.92
	12,550.00	-47.22	14.20	-51.31	4.20	H	-41.31	65.93
21100 (2535.0)	5,070.00	-57.97	12.63	-69.90	2.49	H	-59.76	84.38
	7,605.00	-41.59	11.86	-48.43	3.00	H	-39.57	64.20
	10,140.00	-58.62	11.47	-62.10	3.49	V	-54.12	78.75
	12,675.00	-49.33	13.96	-53.31	4.24	V	-43.59	68.21
21350 (2560.0)	5,120.00	-57.59	12.60	-71.13	2.54	V	-61.07	85.69
	7,680.00	-39.88	12.04	-47.91	2.94	V	-38.81	63.43
	10,240.00	-57.73	11.13	-60.93	3.59	H	-53.39	78.01
	12,800.00	-48.16	13.73	-52.09	4.23	H	-42.59	67.22

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
7	5 MHz	2535.0	QPSK	25	0	4.89
			16-QAM	25	0	6.04
			64-QAM	25	0	6.57
	10 MHz		QPSK	50	0	4.90
			16-QAM	50	0	6.03
			64-QAM	50	0	6.52
	15 MHz		QPSK	75	0	4.83
			16-QAM	75	0	6.02
			64-QAM	75	0	6.58
	20 MHz		QPSK	100	0	4.83
			16-QAM	100	0	5.98
			64-QAM	100	0	6.50

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 63 ~ 74.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
7	5 MHz	2535.0	QPSK	25	0	4.5069
			16-QAM	25		4.5015
			64-QAM	25		4.5095
	10 MHz		QPSK	50		8.9819
			16-QAM	50		8.9677
			64-QAM	50		8.9835
	15 MHz		QPSK	75		13.442
			16-QAM	75		13.459
			64-QAM	75		13.429
	20 MHz		QPSK	100		17.881
			16-QAM	100		17.899
			64-QAM	100		17.910

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 51 ~ 62.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
7	5	2502.5	26.1320	30.131	-76.297	-46.166	-25.00
		2535.0	26.1415	30.131	-76.595	-46.464	
		2567.5	26.1209	30.131	-76.623	-46.492	
	10	2505.0	5.0020	28.591	-75.613	-47.022	
		2535.0	26.0999	30.131	-76.536	-46.405	
		2565.0	26.1452	30.131	-76.090	-45.959	
	15	2507.5	26.1329	30.131	-76.487	-46.356	
		2535.0	26.1869	30.131	-76.335	-46.204	
		2562.5	26.1254	30.131	-76.606	-46.475	
	20	2510.0	25.8375	30.131	-76.380	-46.249	
		2535.0	25.8123	30.131	-76.710	-46.579	
		2560.0	26.4270	30.131	-76.749	-46.618	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 99 ~122.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.6 CHANNEL EDGE

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1MHz)		2 496 MHz ~ 2 499 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	2 490.5 MHz ~ 2 496 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Below 2 490.5 MHz	Above (C.E + X MHz)
			Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper
5MHz	2502.5	25 / 0	-25.51	-25.55	-27.50	-25.38	-28.83	-29.73	-44.32	-29.45
10MHz	2505.0	50 / 0	-28.00	-27.19	-29.95	-27.67	-31.41	-26.80	-39.15	-32.79
15MHz	2507.5	75 / 0	-28.55	-27.58	-28.93	-28.00	-31.65	-27.48	-33.60	-34.42
20MHz	2510.0	100 /	-28.75	-27.32	-28.54	-27.42	-30.15	-29.26	-35.48	-38.03
Limit			-10.0		-10.0		-13.0		-25.0	

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
			Lower	Upper	Lower	Upper
5MHz (QPSK)	2535.0	25 / 0	-25.66	-25.78	-27.12	-26.88
	2567.5	25 / 0	-25.81	-25.66	-28.14	-26.95
10MHz (QPSK)	2535.0	50 / 0	-27.75	-27.71	-30.57	-29.25
	2565.0	50 / 0	-27.51	-27.83	-30.43	-30.37
15MHz (QPSK)	2535.0	75 / 0	-28.35	-28.69	-30.64	-30.54
	2562.5	75 / 0	-27.85	-28.99	-30.49	-31.57
20MHz (QPSK)	2535.0	100 / 0	-28.32	-28.56	-31.21	-31.53
	2560.0	100 / 0	-26.85	-28.18	-29.63	-29.66
Limit			-10.0		-10.0	

Band Width (Modulation)	Frequency (MHz)	Resource Block Size	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
			Lower	Upper	Lower	Upper
5MHz (QPSK)	2535.0	25 / 0	-30.34	-30.30	-30.12	-30.15
	2567.5	25 / 0	-31.04	-31.86	-30.54	-31.77
10MHz (QPSK)	2535.0	50 / 0	-29.45	-28.26	-34.06	-33.83
	2565.0	50 / 0	-31.65	-31.93	-34.61	-37.64
15MHz (QPSK)	2535.0	75 / 0	-29.72	-28.73	-35.62	-35.28
	2562.5	75 / 0	-30.73	-32.68	-35.36	-41.74
20MHz (QPSK)	2535.0	100 / 0	-31.21	-30.15	-38.52	-37.83
	2560.0	100 / 0	-31.01	-33.35	-36.32	-46.82
Limit			-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 75 ~ 98.

FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,502,500,000 Hz
- ▣ CHANNEL: 20775 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2502 500 004	0.0	0.000 000	0.000
100%		-30	2502 499 998	-5.8	0.000 000	-0.002
100%		-20	2502 499 994	-9.3	0.000 000	-0.004
100%		-10	2502 500 009	5.3	0.000 000	0.002
100%		0	2502 499 999	-4.4	0.000 000	-0.002
100%		+10	2502 499 996	-8.0	0.000 000	-0.003
100%		+30	2502 499 993	-10.9	0.000 000	-0.004
100%		+40	2502 500 002	-1.9	0.000 000	-0.001
100%		+50	2502 499 991	-12.3	0.000 000	-0.005
85%	3.400	+20	2502 499 999	-4.1	0.000 000	-0.002

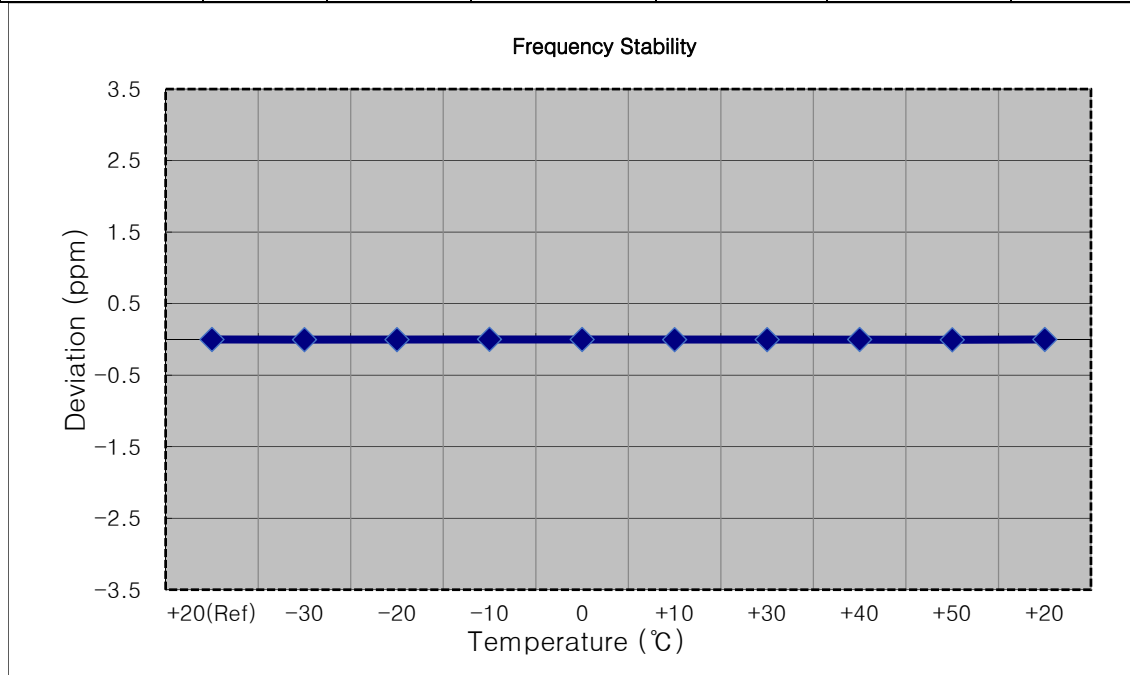


MODE:	<u>LTE 7</u>
OPERATING FREQUENCY:	<u>2,505,000,000 Hz</u>
CHANNEL:	<u>20800 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.85 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2505 000 007	0.0	0.000 000	0.000
100%		-30	2505 000 012	5.4	0.000 000	0.002
100%		-20	2505 000 010	3.5	0.000 000	0.001
100%		-10	2505 000 000	-6.5	0.000 000	-0.003
100%		0	2505 000 015	8.4	0.000 000	0.003
100%		+10	2505 000 014	7.3	0.000 000	0.003
100%		+30	2505 000 012	5.6	0.000 000	0.002
100%		+40	2504 999 997	-9.7	0.000 000	-0.004
100%		+50	2505 000 005	-2.0	0.000 000	-0.001
85%	3.400	+20	2505 000 005	-1.8	0.000 000	-0.001

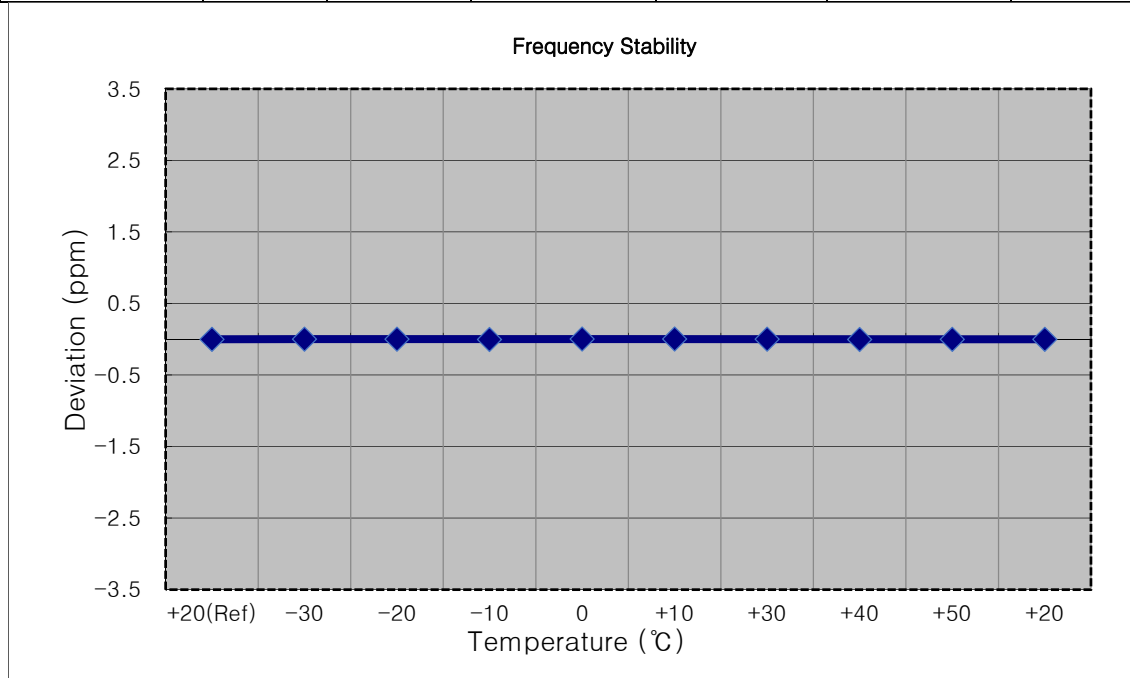


☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,507,500,000 Hz
☐ CHANNEL: 20825 (15 MHz)
☐ REFERENCE VOLTAGE: 3.85 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2507 500 002	0.0	0.000 000	0.000
100%		-30	2507 500 006	4.1	0.000 000	0.002
100%		-20	2507 500 010	8.1	0.000 000	0.003
100%		-10	2507 500 012	10.1	0.000 000	0.004
100%		0	2507 500 016	14.2	0.000 001	0.006
100%		+10	2507 500 006	4.1	0.000 000	0.002
100%		+30	2507 499 999	-3.6	0.000 000	-0.001
100%		+40	2507 500 006	3.4	0.000 000	0.001
100%		+50	2507 500 017	15.1	0.000 001	0.006
85%	3.400	+20	2507 500 017	14.5	0.000 001	0.006

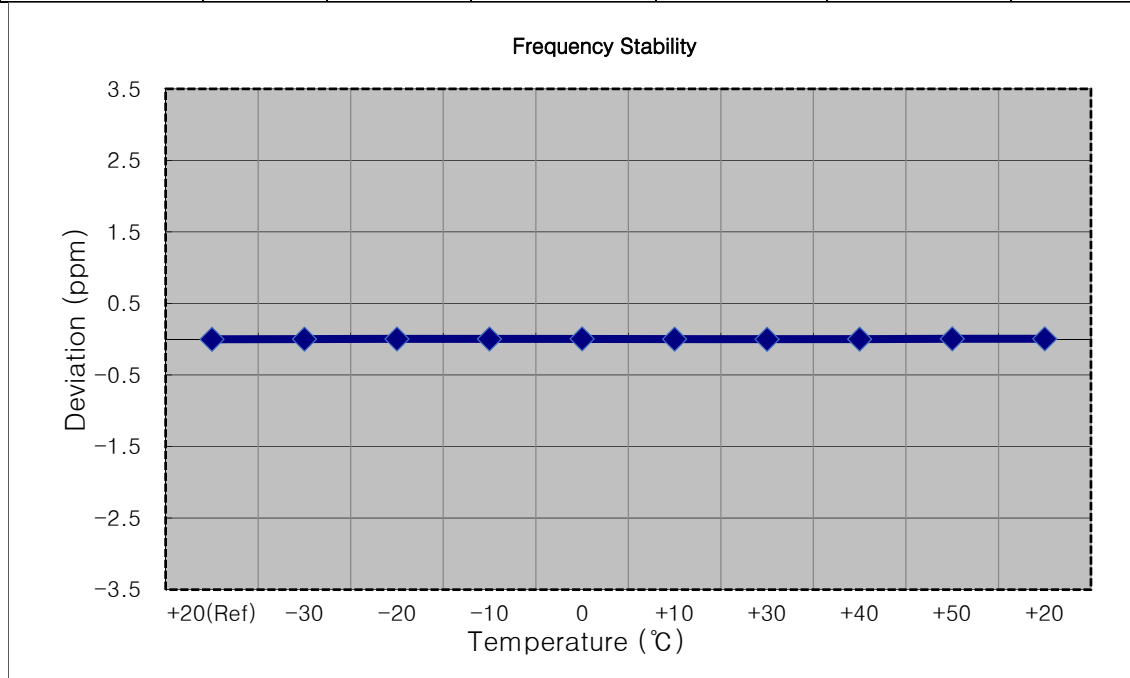


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,510,000,000 Hz
- ▣ CHANNEL: 20850 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2510 000 006	0.0	0.000 000	0.000
100%		-30	2510 000 004	-1.7	0.000 000	-0.001
100%		-20	2509 999 996	-9.1	0.000 000	-0.004
100%		-10	2509 999 997	-8.8	0.000 000	-0.004
100%		0	2509 999 996	-9.7	0.000 000	-0.004
100%		+10	2509 999 997	-8.6	0.000 000	-0.003
100%		+30	2510 000 014	8.6	0.000 000	0.003
100%		+40	2510 000 013	7.0	0.000 000	0.003
100%		+50	2510 000 003	-2.6	0.000 000	-0.001
85%	3.400	+20	2509 999 997	-8.9	0.000 000	-0.004

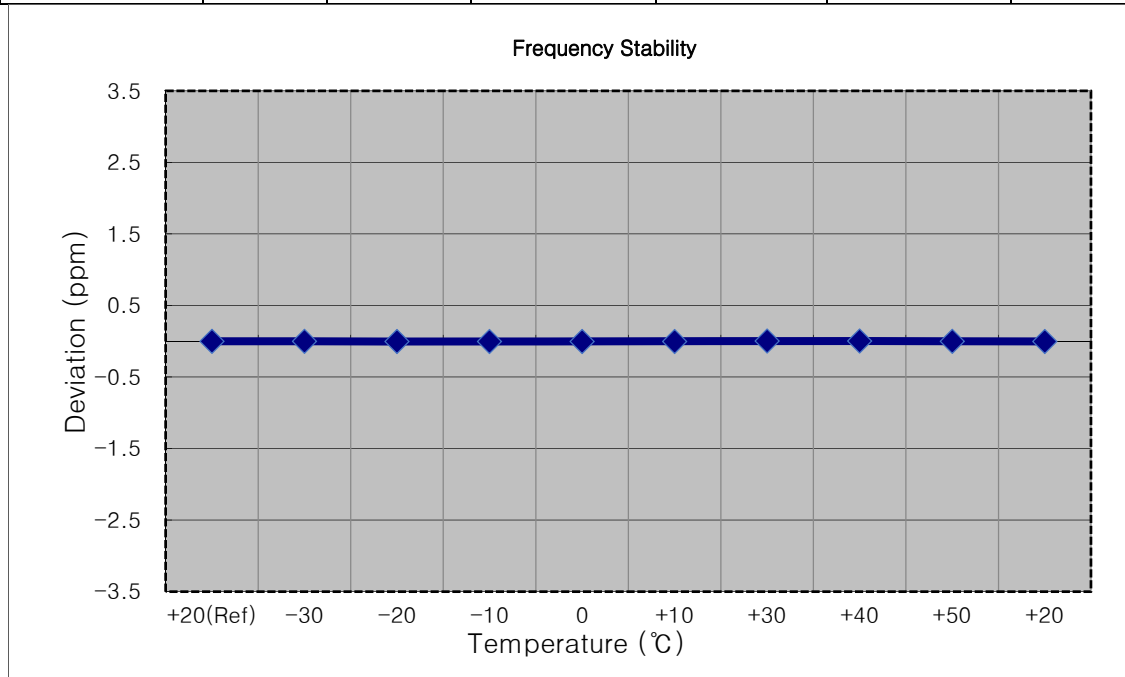


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2534 999 991	0.0	0.000 000	0.000
100%		-30	2534 999 998	6.8	0.000 000	0.003
100%		-20	2534 999 994	2.9	0.000 000	0.001
100%		-10	2534 999 987	-4.4	0.000 000	-0.002
100%		0	2534 999 980	-10.6	0.000 000	-0.004
100%		+10	2534 999 995	3.7	0.000 000	0.001
100%		+30	2534 999 988	-3.5	0.000 000	-0.001
100%		+40	2534 999 984	-7.0	0.000 000	-0.003
100%		+50	2534 999 982	-8.8	0.000 000	-0.003
85%	3.400	+20	2535 000 000	8.6	0.000 000	0.003

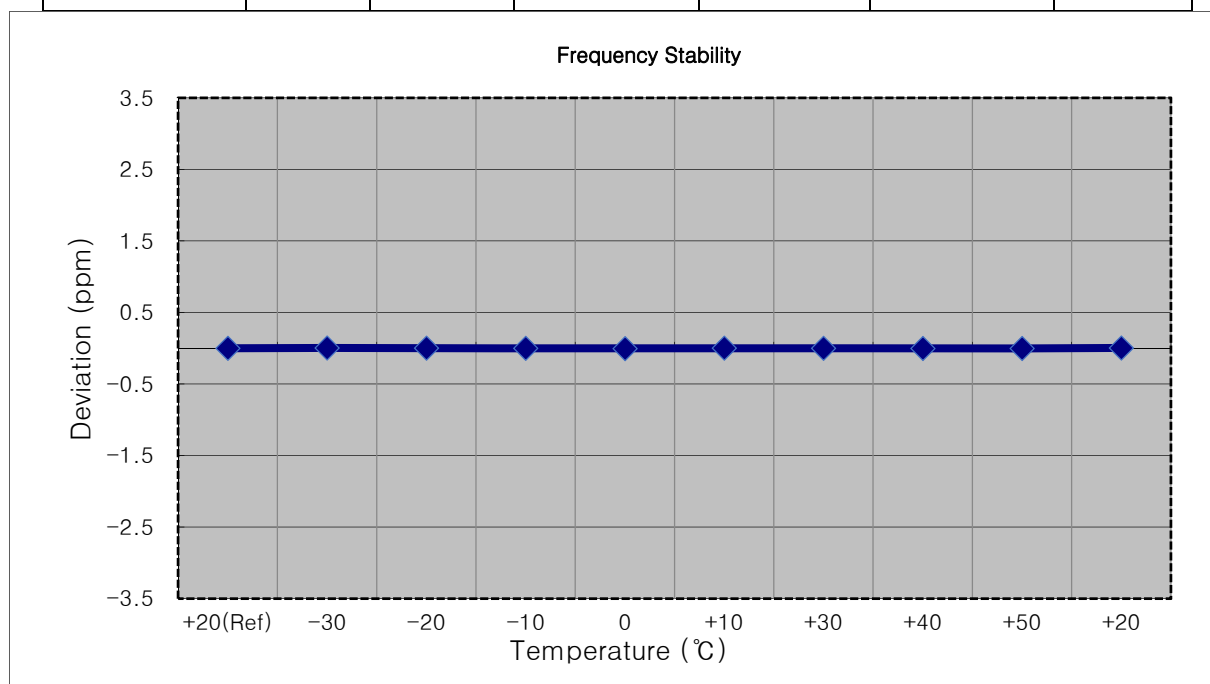


MODE:	<u>LTE 7</u>
OPERATING FREQUENCY:	<u>2,535,000,000 Hz</u>
CHANNEL:	<u>21100 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.85 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2535 000 005	0.0	0.000 000	0.000
100%		-30	2535 000 008	3.7	0.000 000	0.001
100%		-20	2534 999 996	-8.2	0.000 000	-0.003
100%		-10	2535 000 011	6.3	0.000 000	0.002
100%		0	2535 000 016	11.4	0.000 000	0.004
100%		+10	2534 999 999	-6.0	0.000 000	-0.002
100%		+30	2535 000 012	7.7	0.000 000	0.003
100%		+40	2535 000 013	7.9	0.000 000	0.003
100%		+50	2535 000 002	-2.8	0.000 000	-0.001
85%	3.400	+20	2534 999 995	-9.4	0.000 000	-0.004

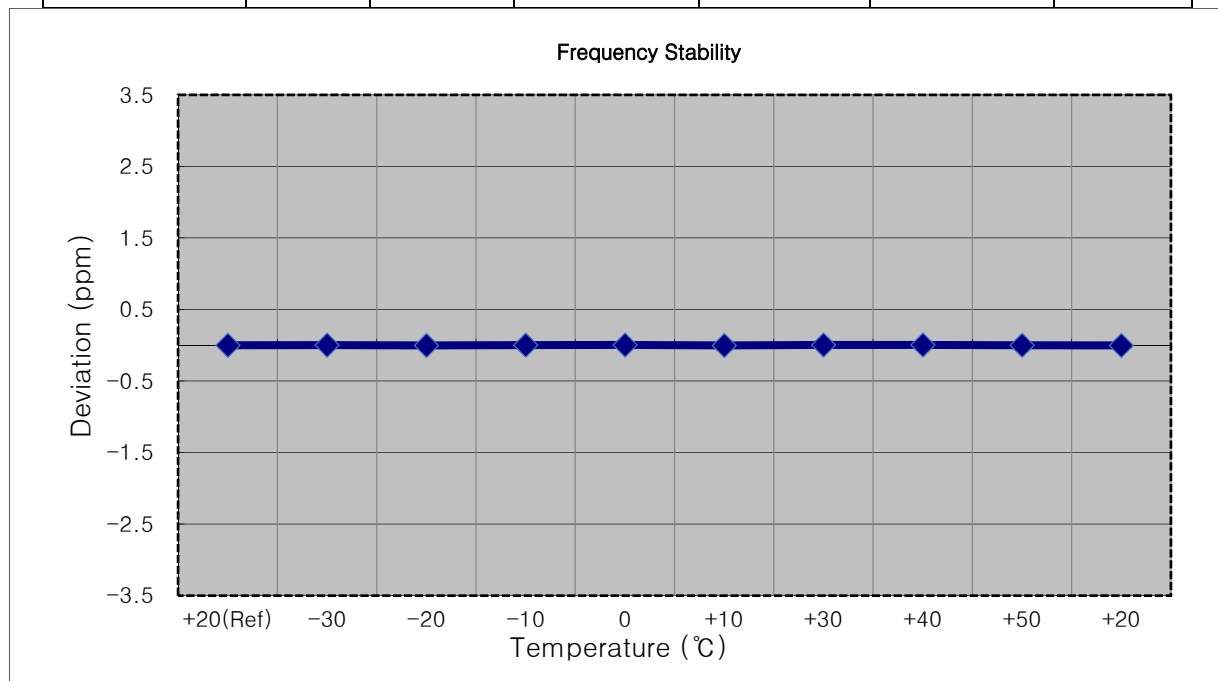


MODE:	<u>LTE 7</u>
OPERATING FREQUENCY:	<u>2,535,000,000 Hz</u>
CHANNEL:	<u>21100 (15 MHz)</u>
REFERENCE VOLTAGE:	<u>3.85 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2534 999 996	0.0	0.000 000	0.000
100%		-30	2535 000 005	8.8	0.000 000	0.003
100%		-20	2534 999 999	2.5	0.000 000	0.001
100%		-10	2535 000 007	11.1	0.000 000	0.004
100%		0	2534 999 999	2.9	0.000 000	0.001
100%		+10	2534 999 989	-7.4	0.000 000	-0.003
100%		+30	2535 000 000	4.3	0.000 000	0.002
100%		+40	2534 999 999	3.1	0.000 000	0.001
100%		+50	2534 999 998	1.9	0.000 000	0.001
85%	3.400	+20	2534 999 993	-3.4	0.000 000	-0.001

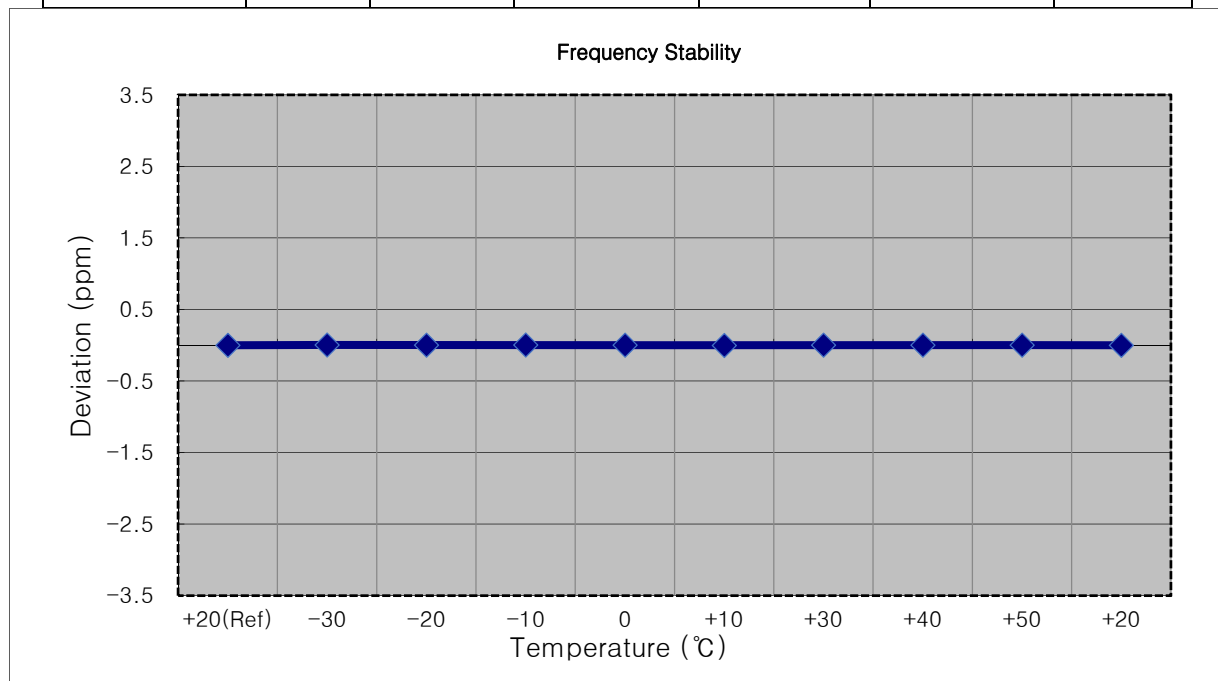


MODE:	<u>LTE 7</u>
OPERATING FREQUENCY:	<u>2,535,000,000 Hz</u>
CHANNEL:	<u>21100 (20 MHz)</u>
REFERENCE VOLTAGE:	<u>3.85 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2535 000 006	0.0	0.000 000	0.000
100%		-30	2535 000 014	7.9	0.000 000	0.003
100%		-20	2535 000 000	-6.8	0.000 000	-0.003
100%		-10	2535 000 002	-4.6	0.000 000	-0.002
100%		0	2535 000 009	2.8	0.000 000	0.001
100%		+10	2535 000 013	6.3	0.000 000	0.002
100%		+30	2535 000 015	8.6	0.000 000	0.003
100%		+40	2534 999 997	-9.5	0.000 000	-0.004
100%		+50	2535 000 001	-5.5	0.000 000	-0.002
85%	3.400	+20	2535 000 011	4.9	0.000 000	0.002

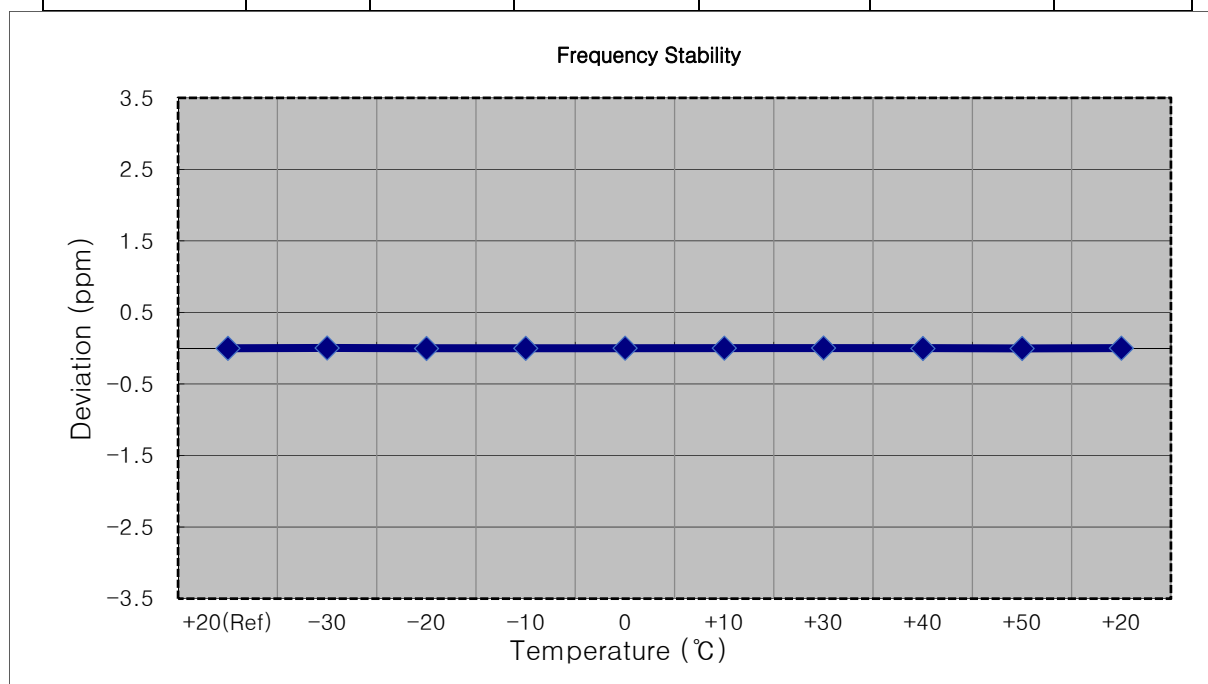


☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,567,500,000 Hz
☐ CHANNEL: 21425 (5 MHz)
☐ REFERENCE VOLTAGE: 3.85 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2567 499 994	0.0	0.000 000	0.000
100%		-30	2567 499 984	-9.9	0.000 000	-0.004
100%		-20	2567 499 979	-14.6	-0.000 001	-0.006
100%		-10	2567 499 998	3.6	0.000 000	0.001
100%		0	2567 499 990	-3.9	0.000 000	-0.002
100%		+10	2567 499 988	-5.6	0.000 000	-0.002
100%		+30	2567 499 983	-10.9	0.000 000	-0.004
100%		+40	2567 499 980	-14.2	-0.000 001	-0.006
100%		+50	2567 499 986	-7.9	0.000 000	-0.003
85%	3.400	+20	2567 499 983	-11.0	0.000 000	-0.004

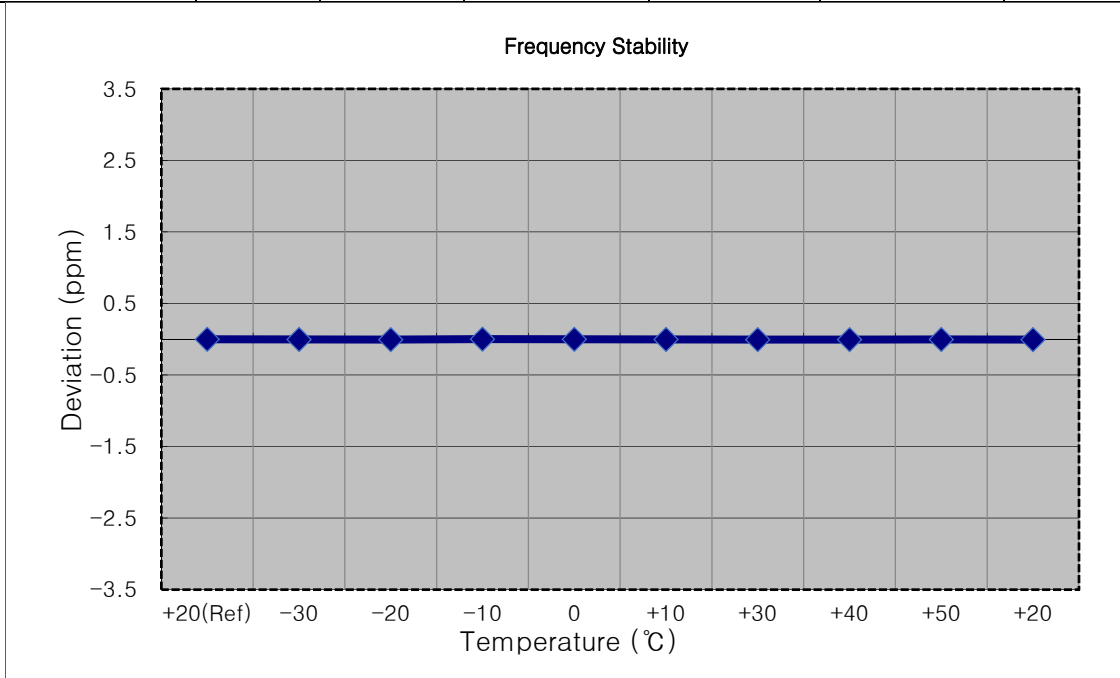


MODE:	<u>LTE 7</u>
OPERATING FREQUENCY:	<u>2,565,000,000 Hz</u>
CHANNEL:	<u>21400 (10 MHz)</u>
REFERENCE VOLTAGE:	<u>3.85 VDC</u>
DEVIATION LIMIT:	<u>Emission must remain in band</u>

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2564 999 991	0.0	0.000 000	0.000
100%		-30	2564 999 987	-4.3	0.000 000	-0.002
100%		-20	2564 999 996	4.9	0.000 000	0.002
100%		-10	2565 000 000	8.7	0.000 000	0.003
100%		0	2564 999 995	3.7	0.000 000	0.001
100%		+10	2564 999 985	-5.9	0.000 000	-0.002
100%		+30	2564 999 993	2.0	0.000 000	0.001
100%		+40	2565 000 001	10.0	0.000 000	0.004
100%		+50	2564 999 989	-2.4	0.000 000	-0.001
85%	3.400	+20	2564 999 982	-9.7	0.000 000	-0.004

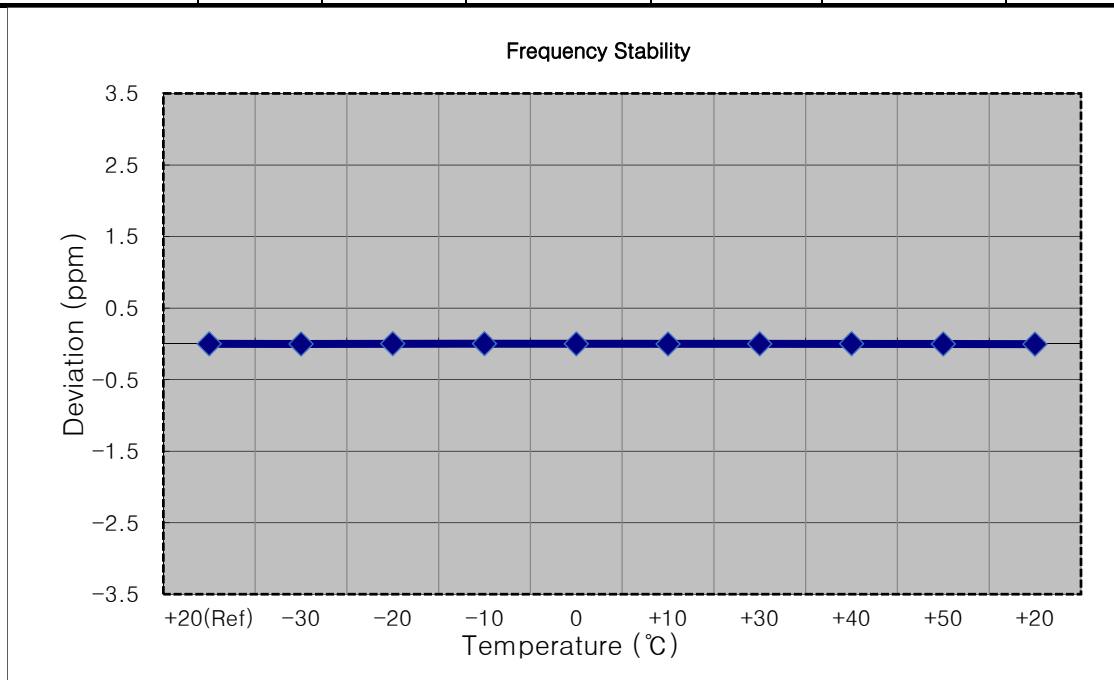


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,562,500,000 Hz
- ▣ CHANNEL: 21375 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2562 500 003	0.0	0.000 000	0.000
100%		-30	2562 499 988	-15.8	-0.000 001	-0.006
100%		-20	2562 499 998	-5.9	0.000 000	-0.002
100%		-10	2562 500 008	4.2	0.000 000	0.002
100%		0	2562 499 992	-11.4	0.000 000	-0.004
100%		+10	2562 499 993	-10.3	0.000 000	-0.004
100%		+30	2562 499 994	-9.3	0.000 000	-0.004
100%		+40	2562 499 994	-9.2	0.000 000	-0.004
100%		+50	2562 499 996	-7.4	0.000 000	-0.003
85%	3.400	+20	2562 500 007	3.9	0.000 000	0.002

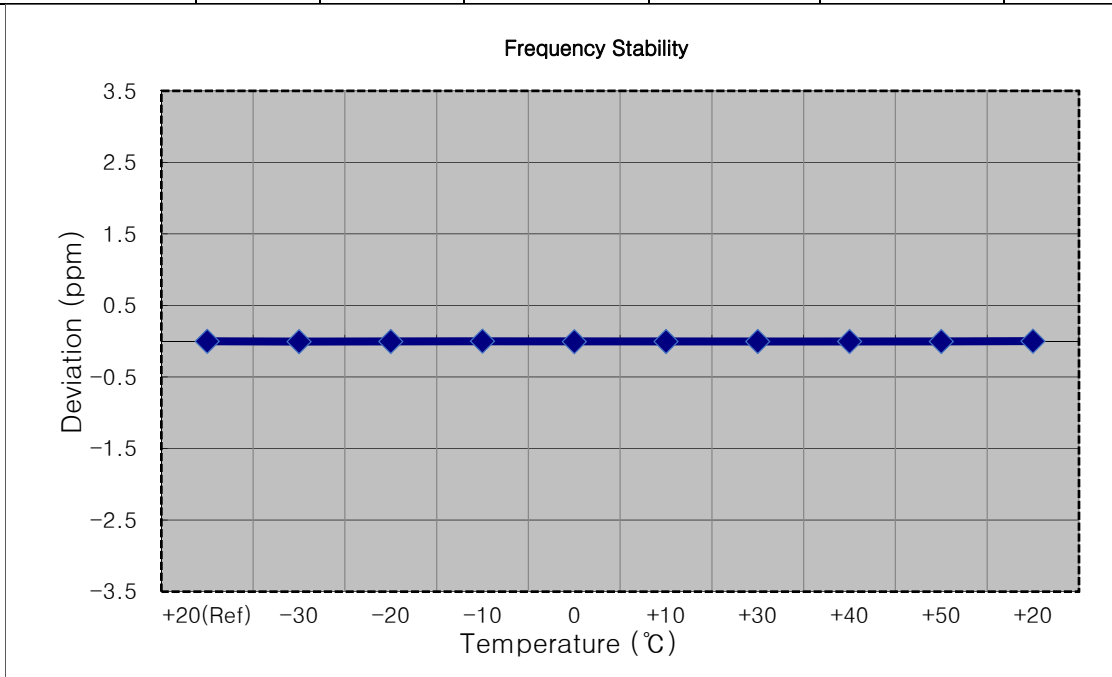


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,560,000,000 Hz
- ▣ CHANNEL: 21350 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	2559 999 998	0.0	0.000 000	0.000
100%		-30	2560 000 000	2.2	0.000 000	0.001
100%		-20	2560 000 003	5.2	0.000 000	0.002
100%		-10	2560 000 002	4.4	0.000 000	0.002
100%		0	2560 000 007	8.6	0.000 000	0.003
100%		+10	2560 000 012	13.7	0.000 001	0.005
100%		+30	2560 000 002	3.8	0.000 000	0.001
100%		+40	2560 000 003	4.9	0.000 000	0.002
100%		+50	2560 000 003	5.2	0.000 000	0.002
85%	3.400	+20	2560 000 001	3.2	0.000 000	0.001

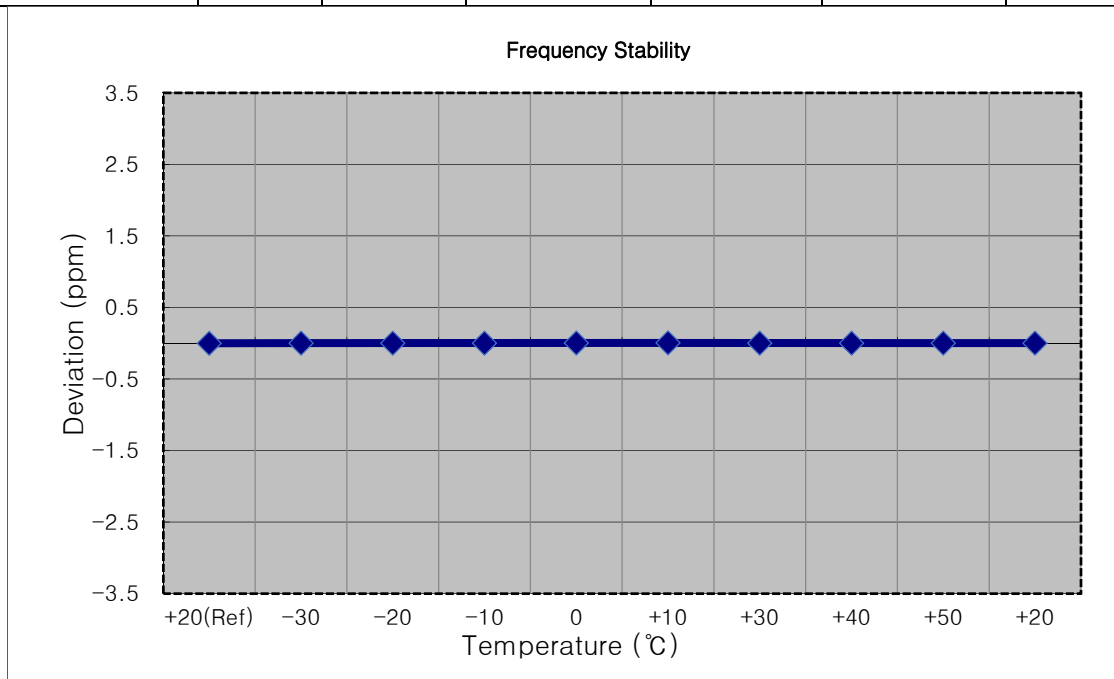


9. TEST PLOTS


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 QPSK RB 25)

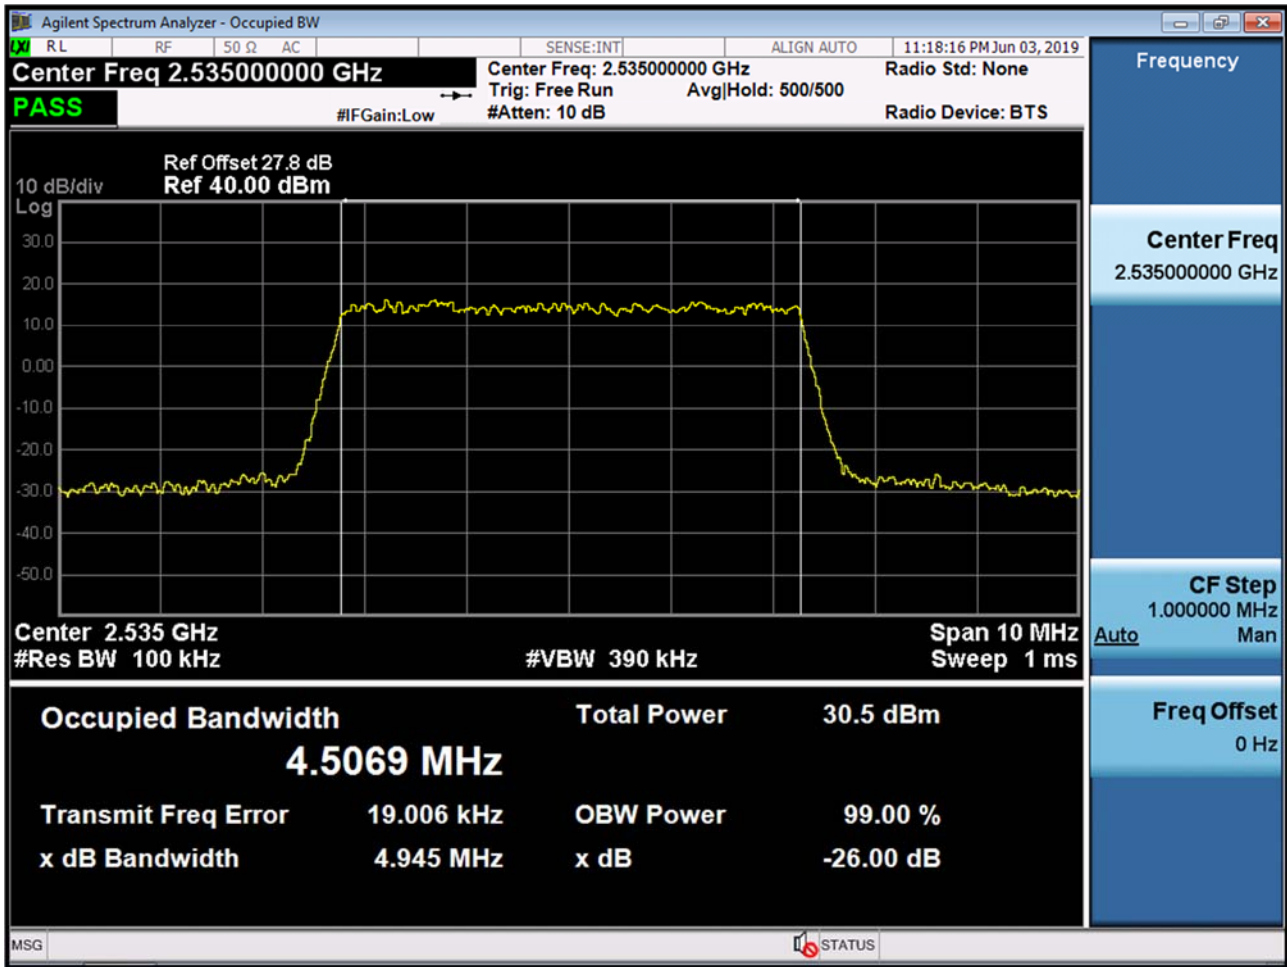


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 16-QAM RB 25)

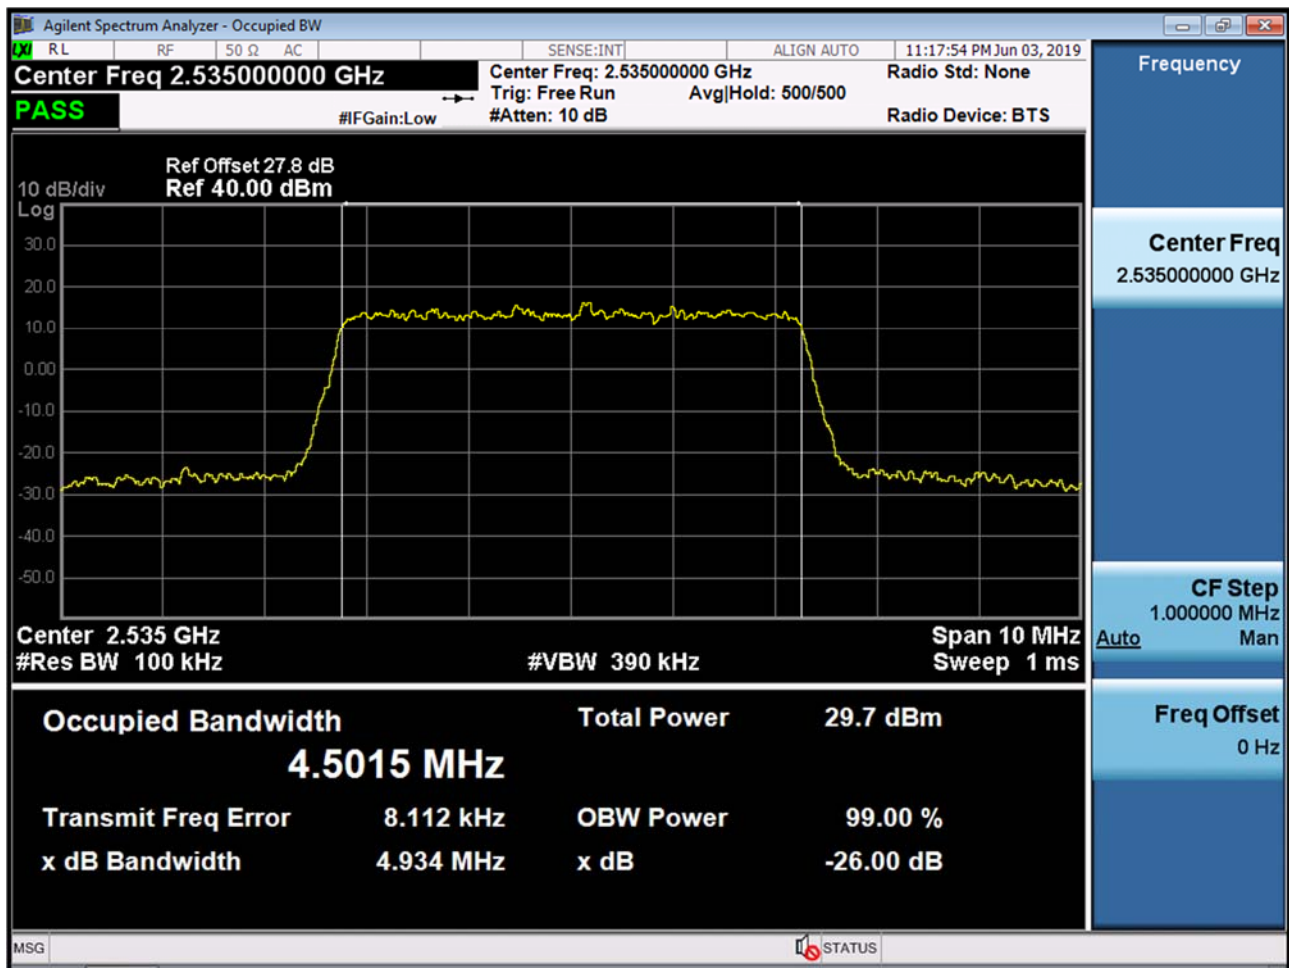


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 64-QAM RB 25)

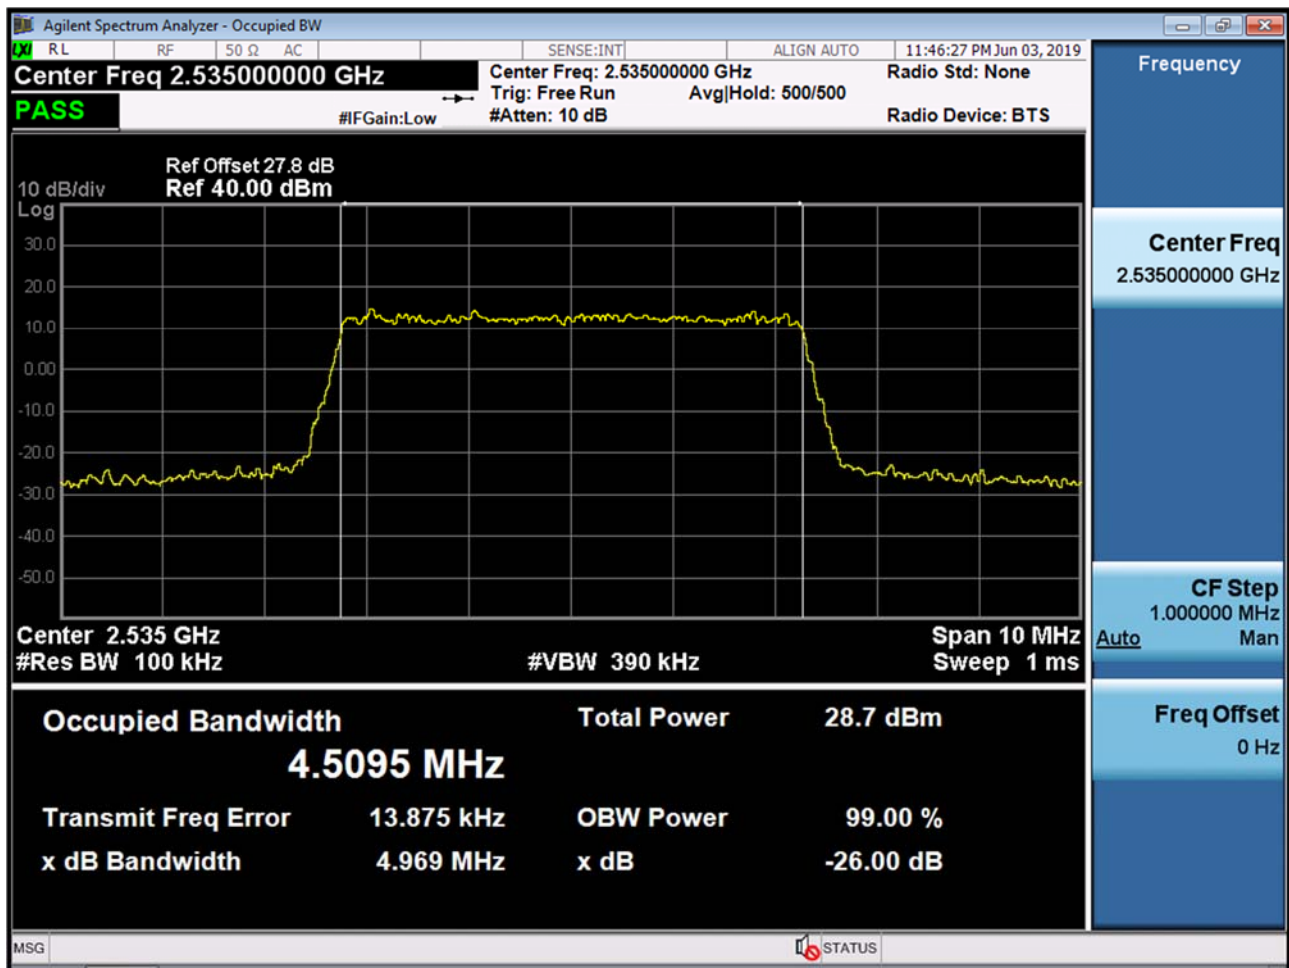


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 QPSK RB 50)

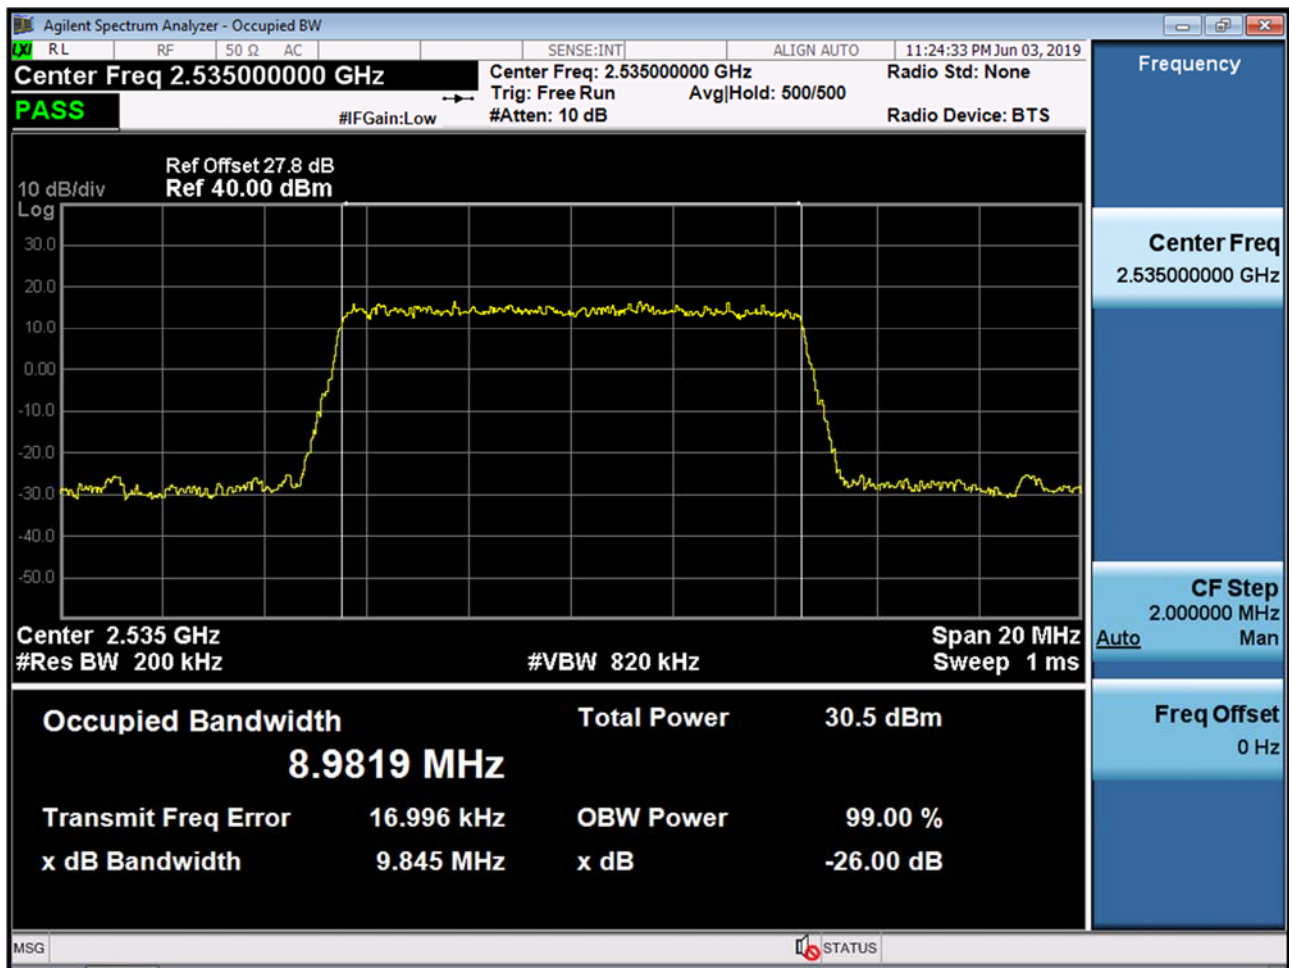


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 16-QAM RB 50)

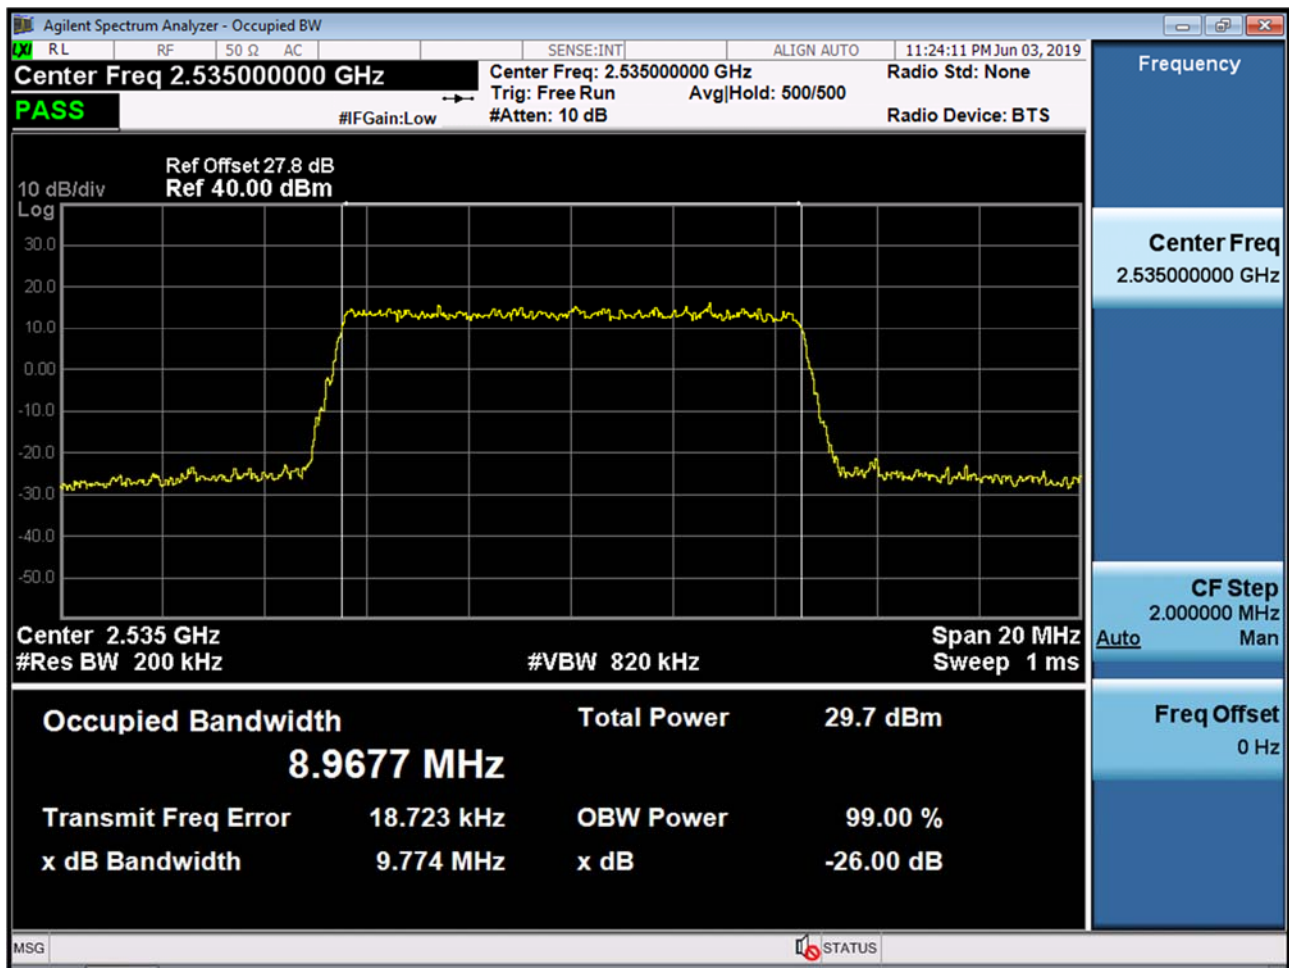


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 64-QAM RB 50)

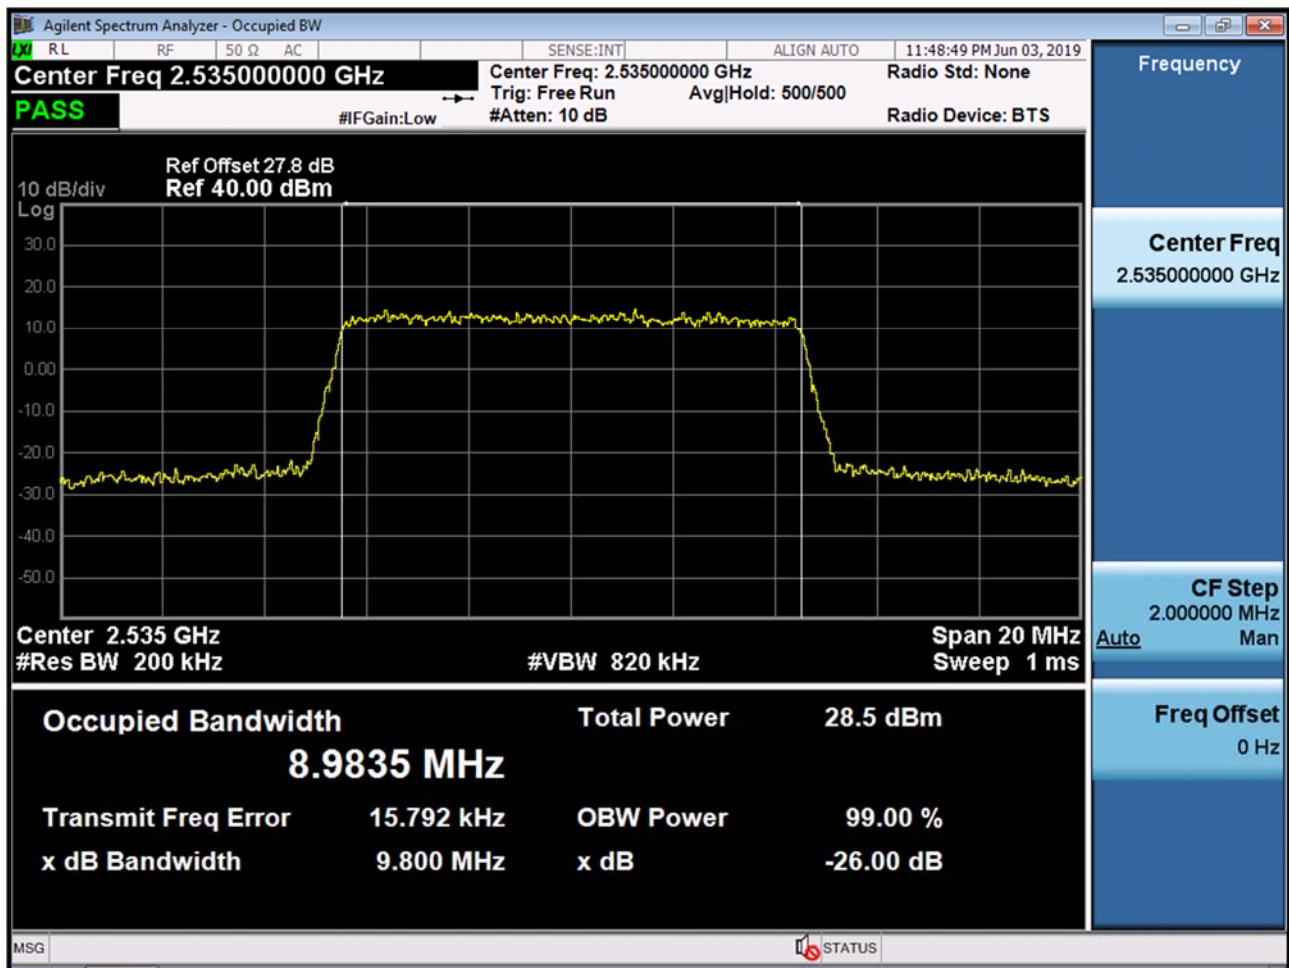


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 QPSK RB 75)

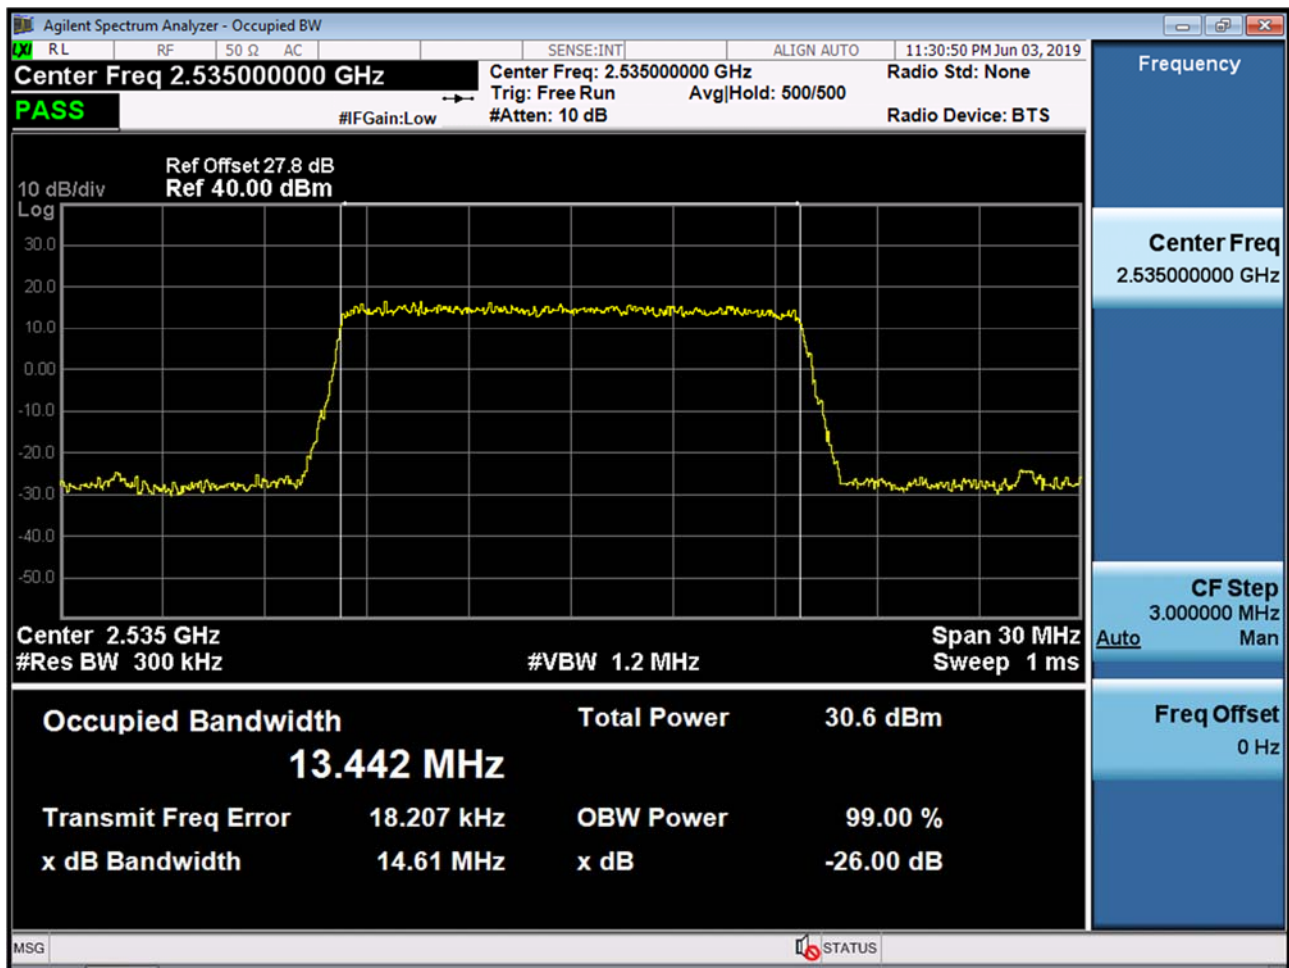


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 16-QAM RB 75)

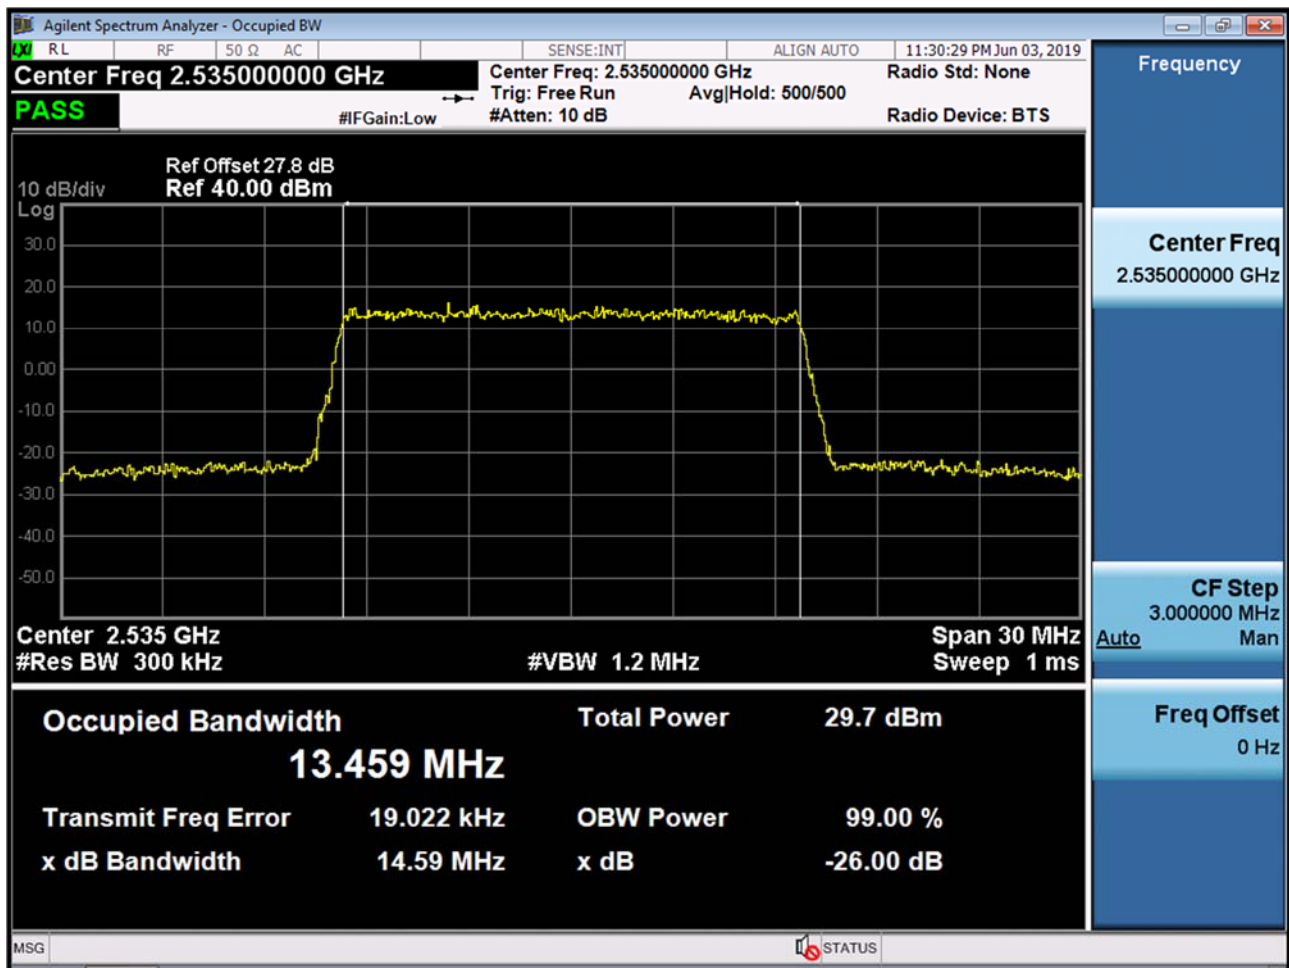


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 64-QAM RB 75)

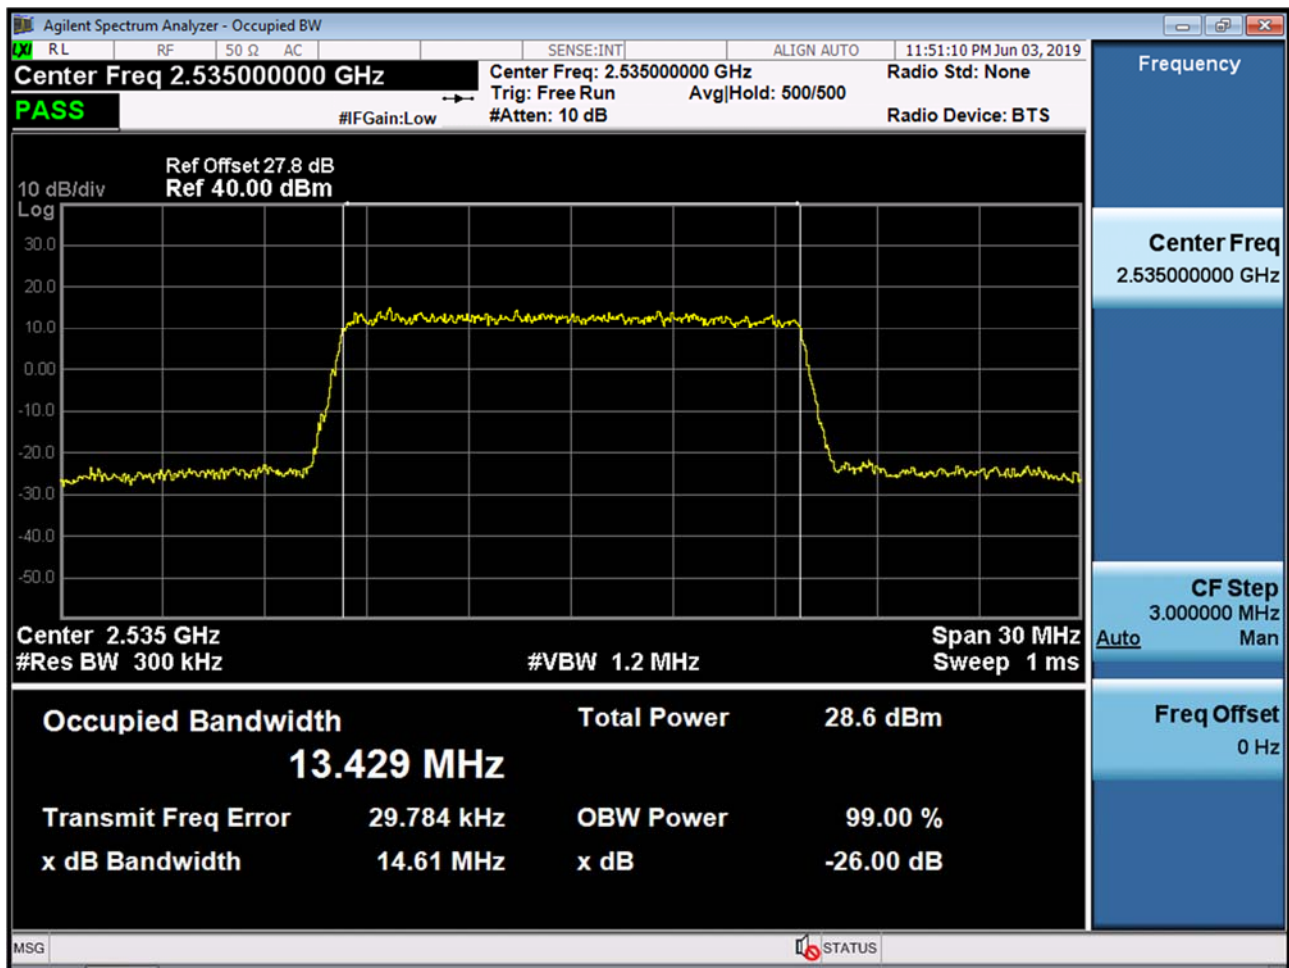


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 QPSK RB 100)

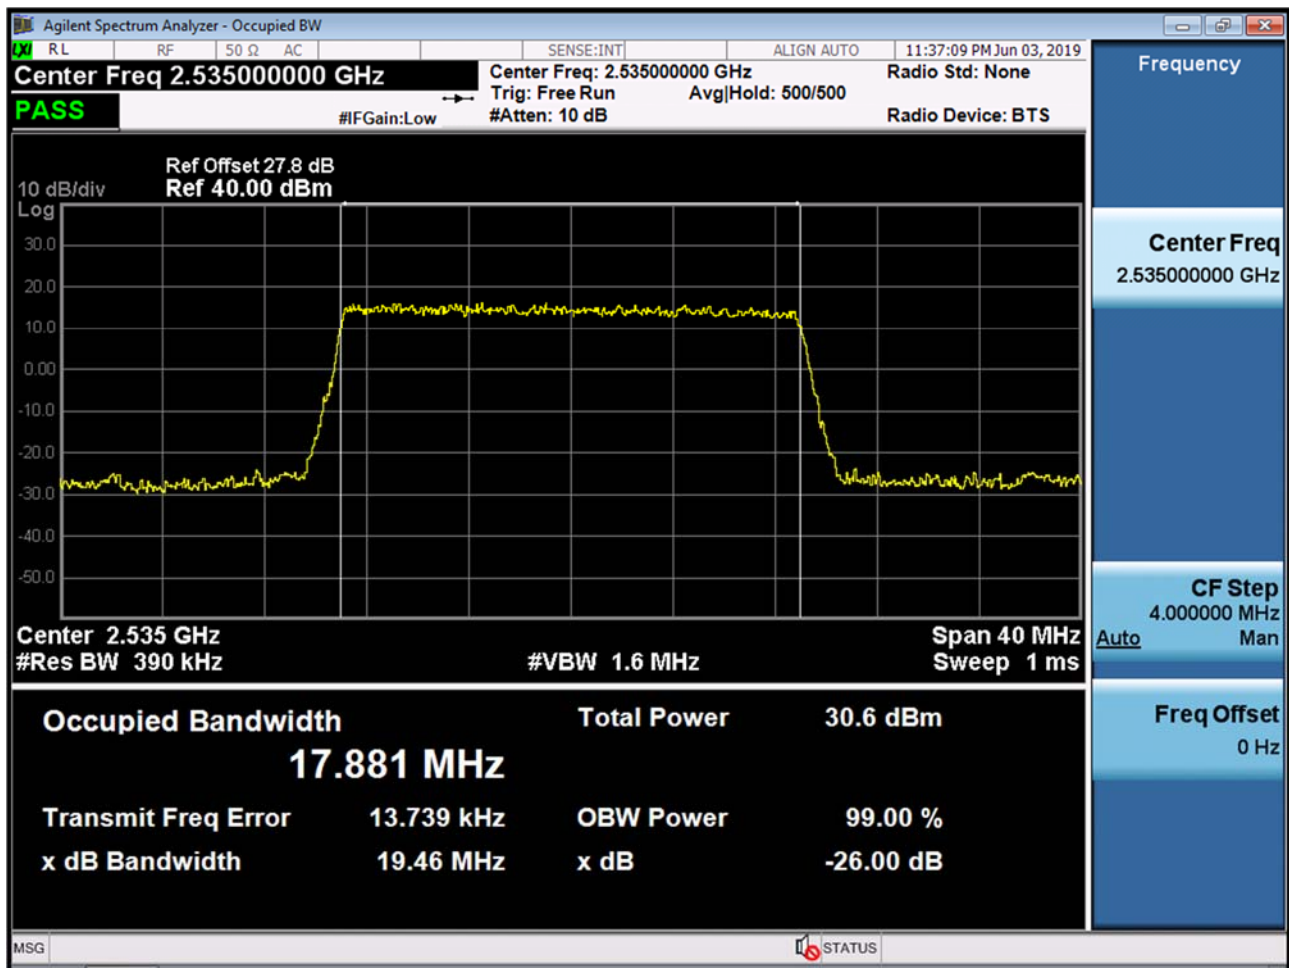


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 16-QAM RB 100)

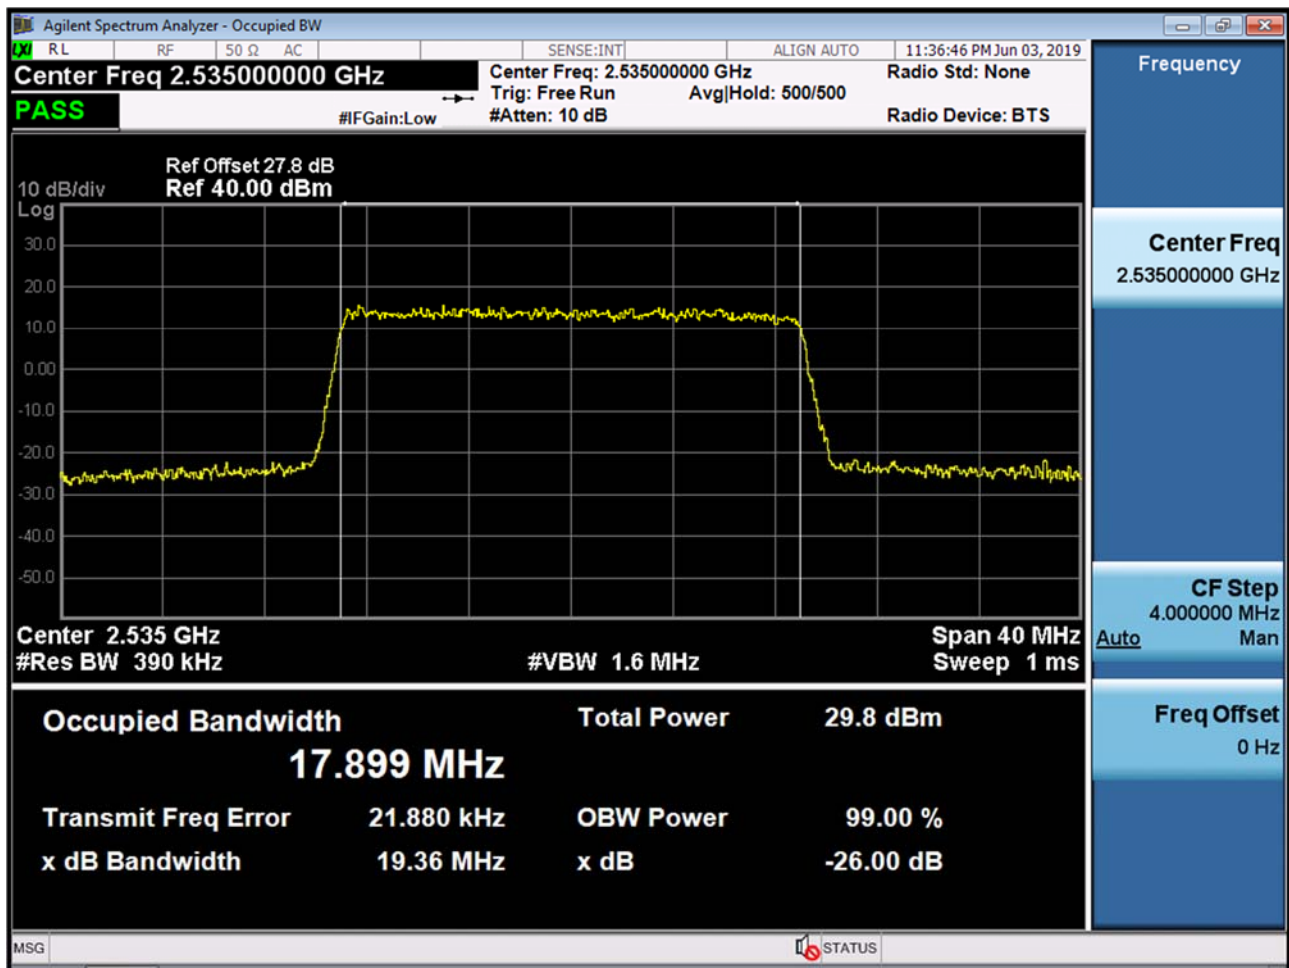


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 64-QAM RB 100)

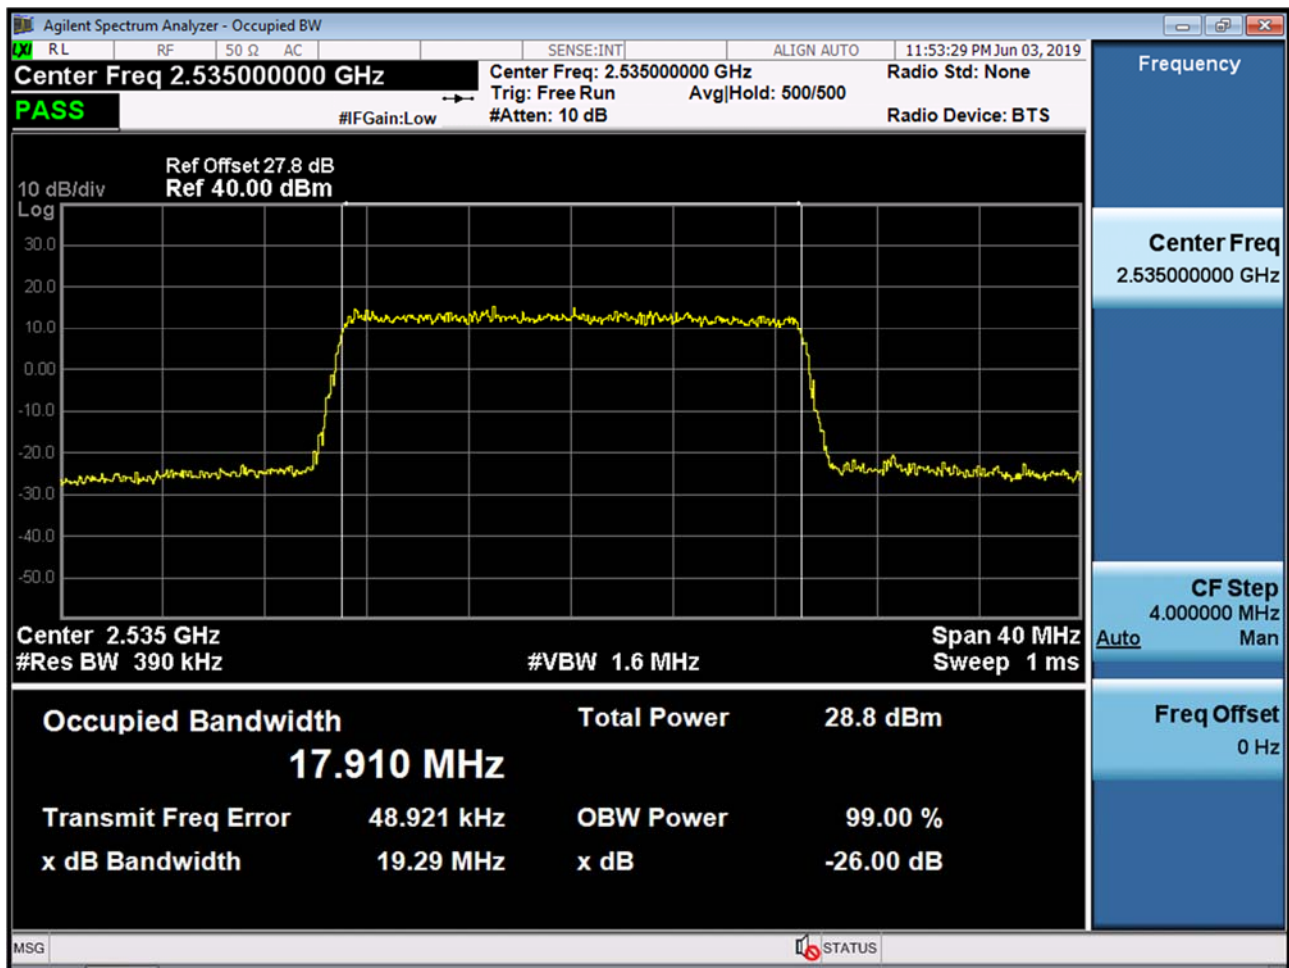


BAND 7. PAR Plot (5M BW Ch.21100 QPSK RB 25_0)

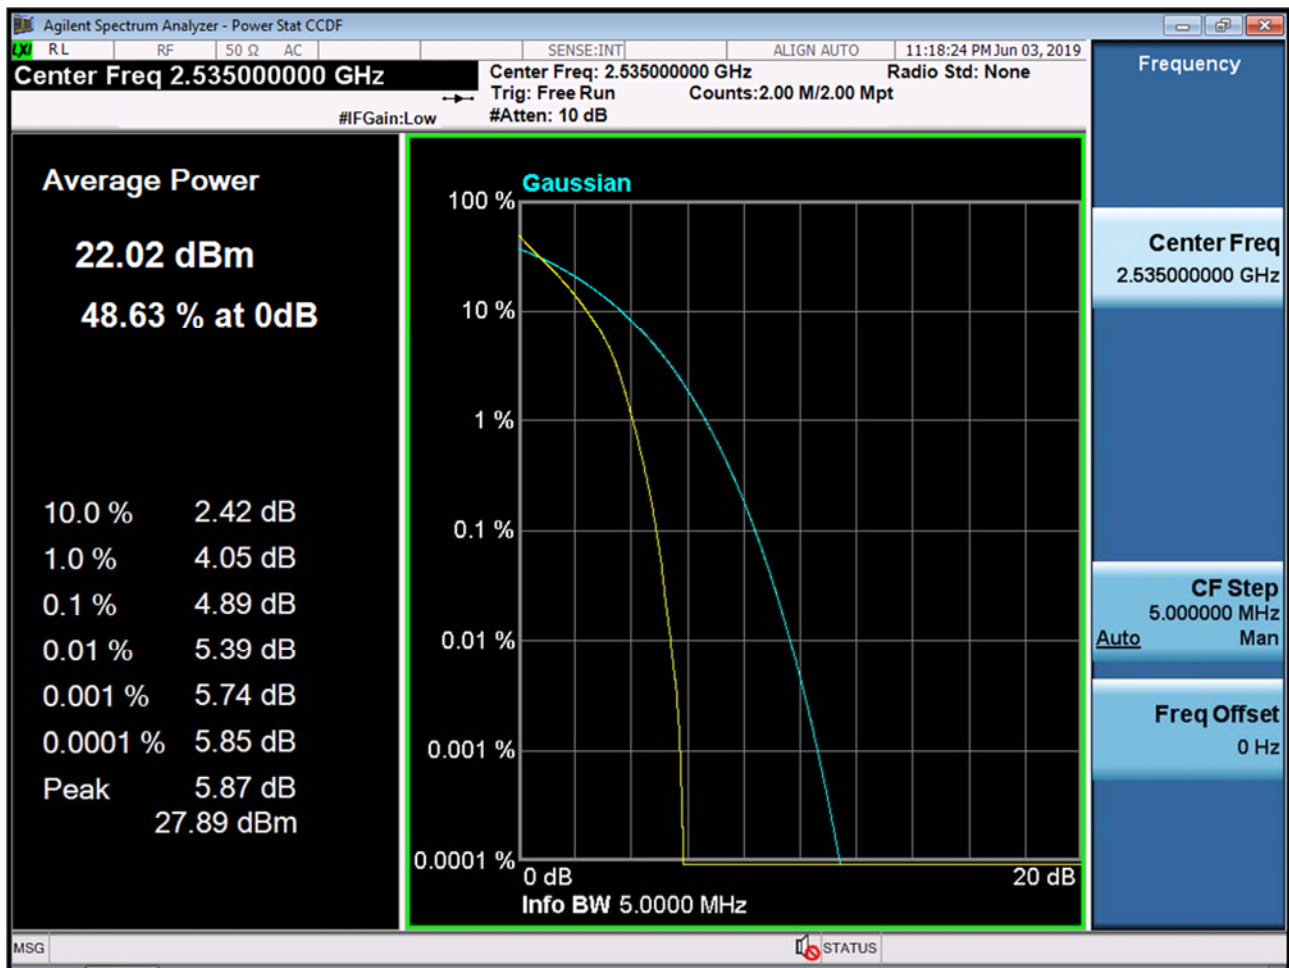


BAND 7. PAR Plot (5M BW Ch.21100 16QAM RB 25_0)

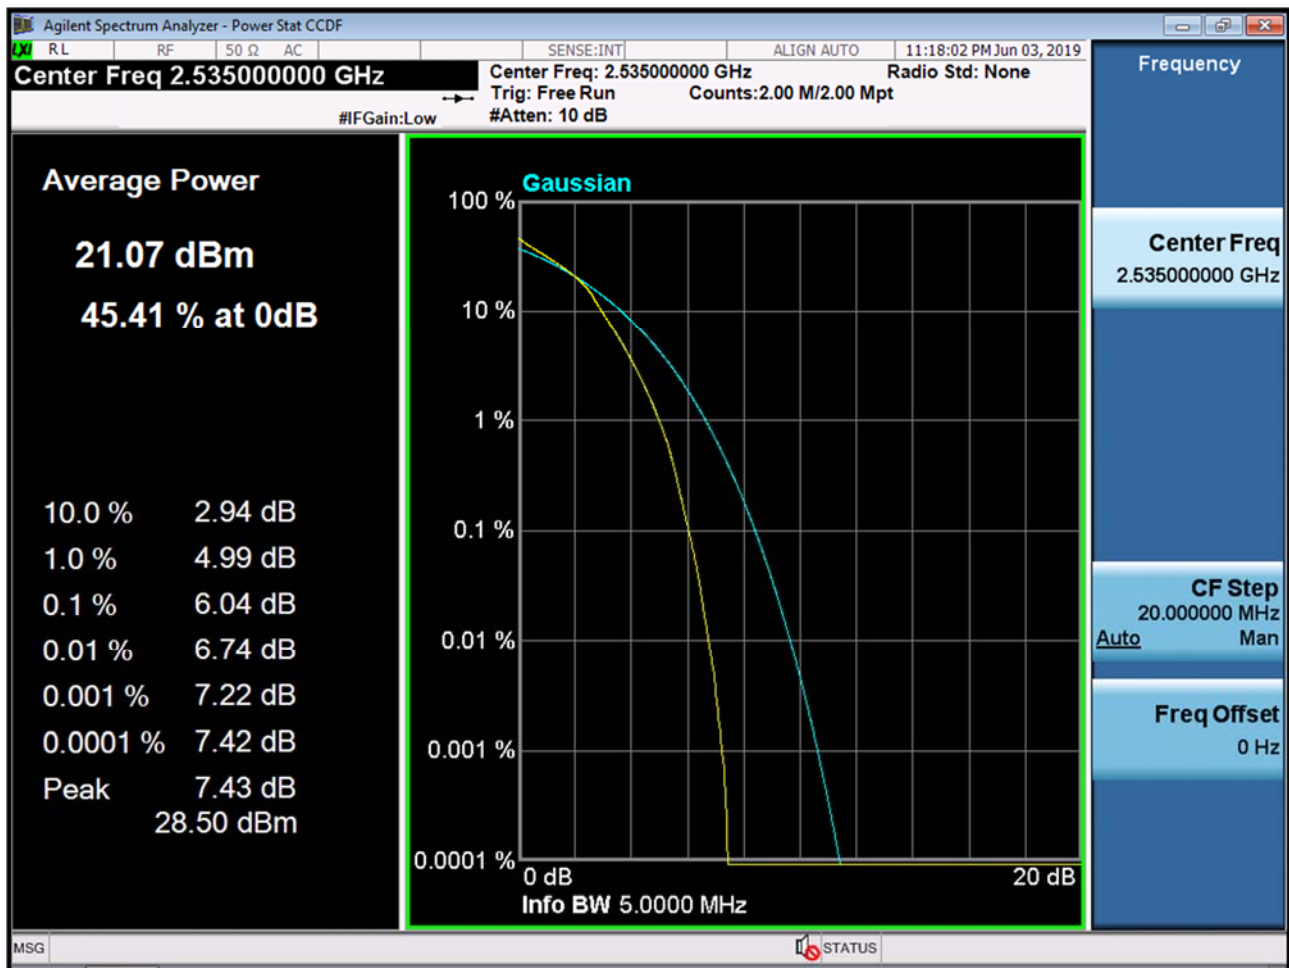


BAND 7. PAR Plot (5M BW Ch.21100 64QAM RB 25_0)

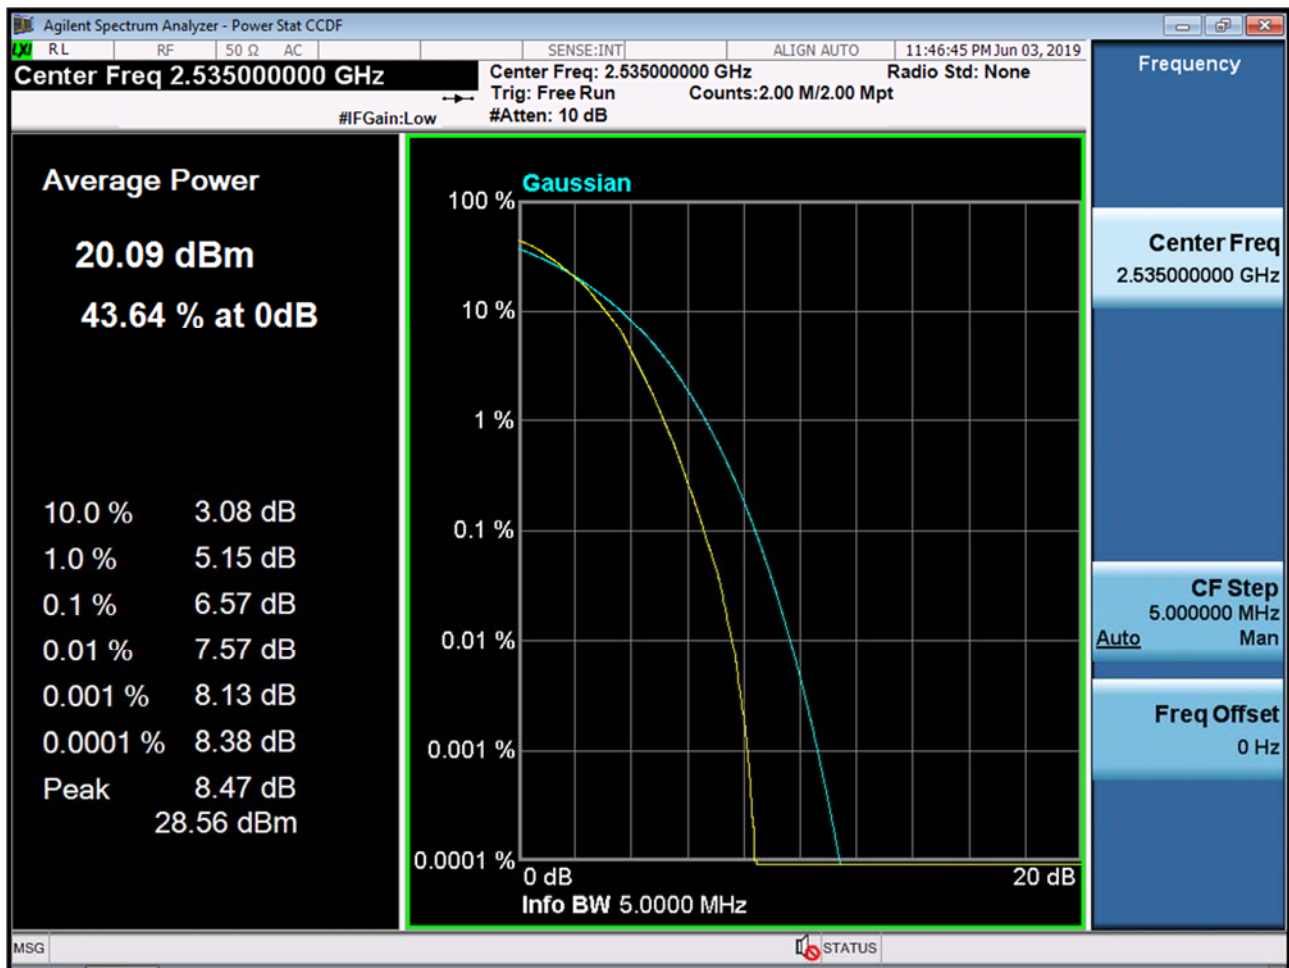


BAND 7. PAR Plot (10M BW Ch.21100 QPSK RB 50_0)

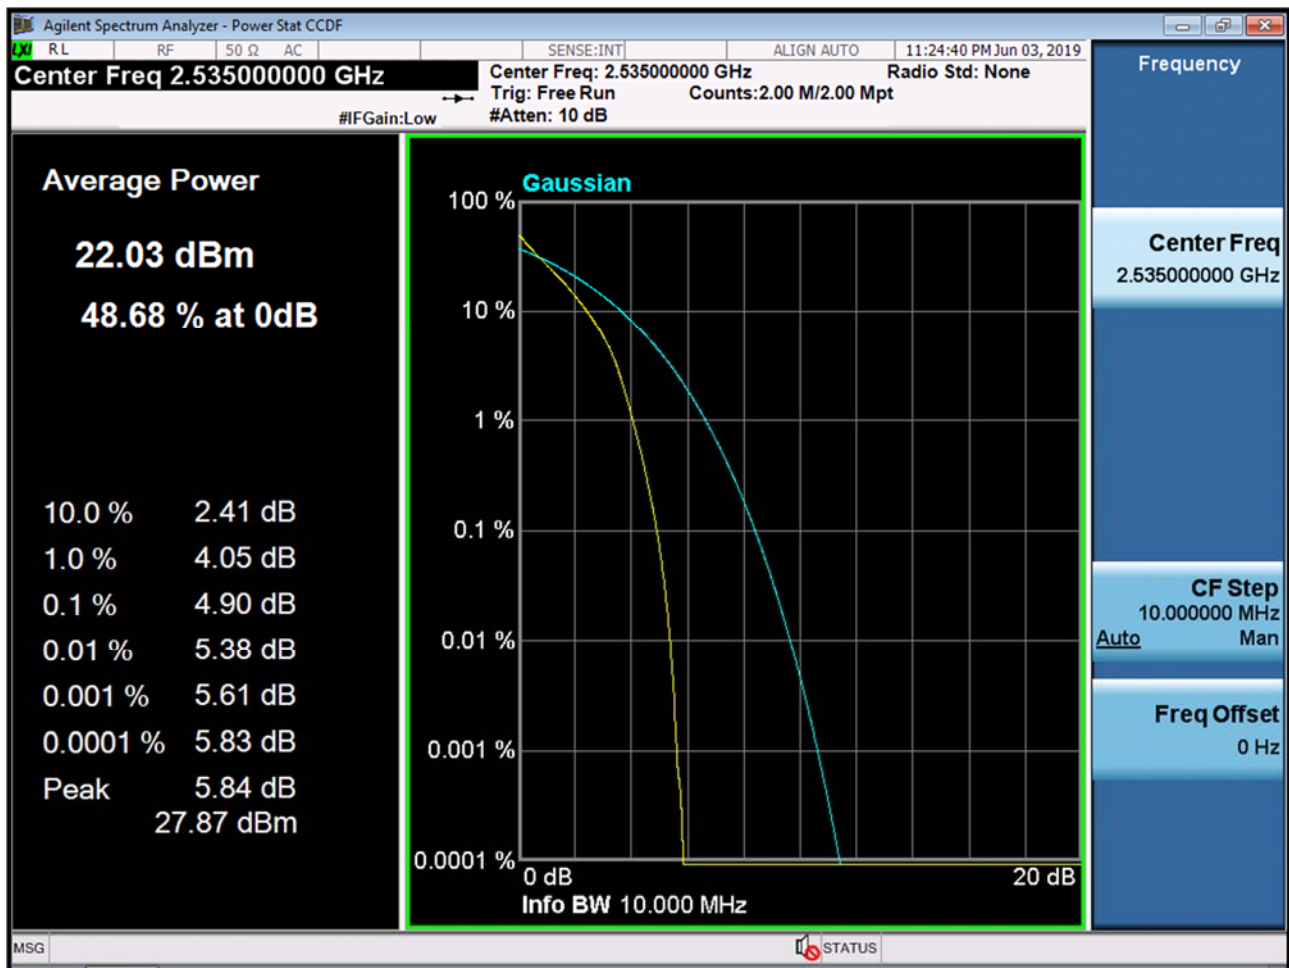


BAND 7. PAR Plot (10M BW Ch.21100 16QAM RB 50_0)

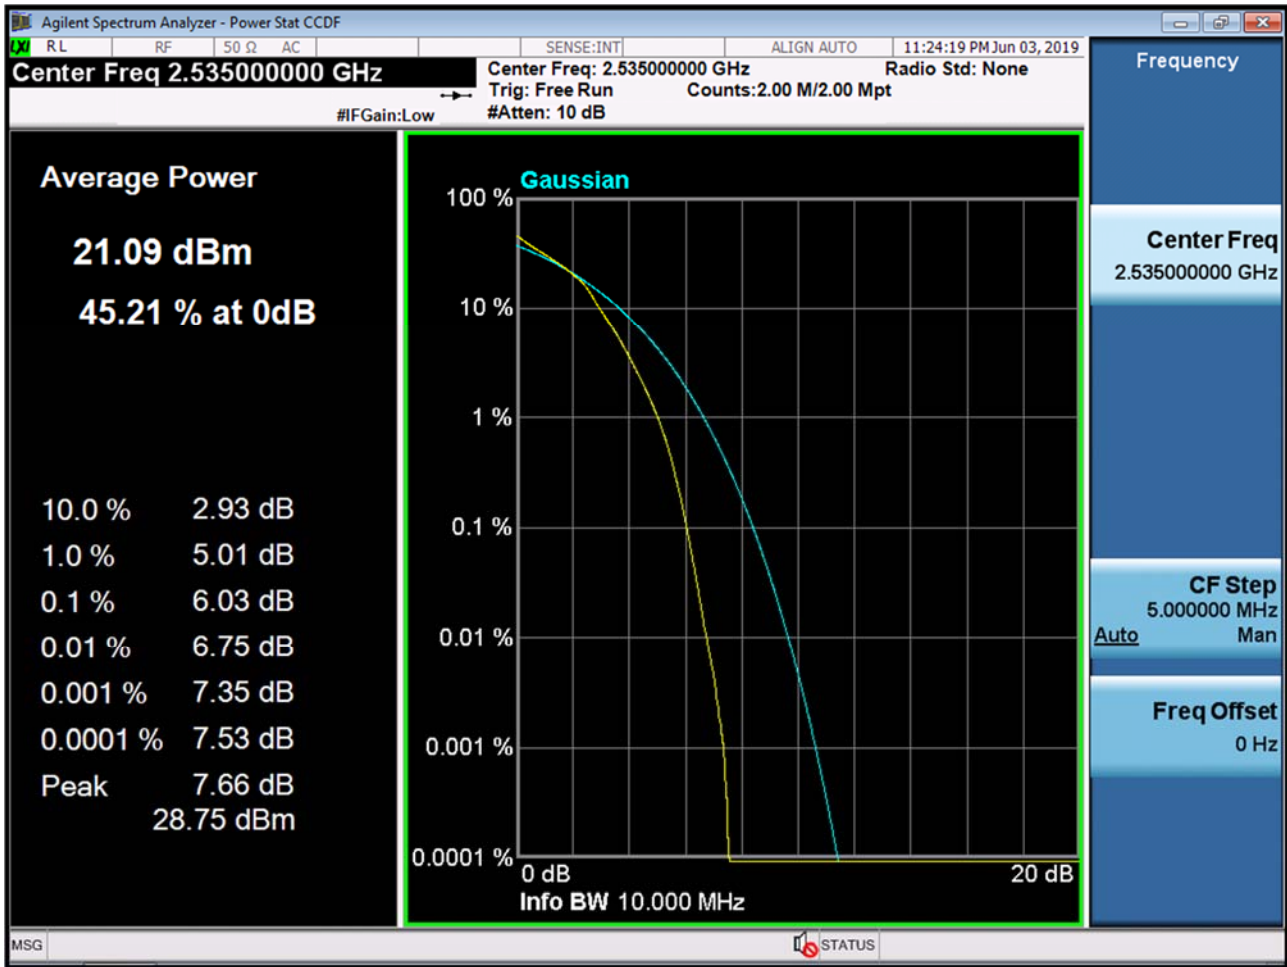


BAND 7. PAR Plot (10M BW Ch.21100 64QAM RB 50_0)

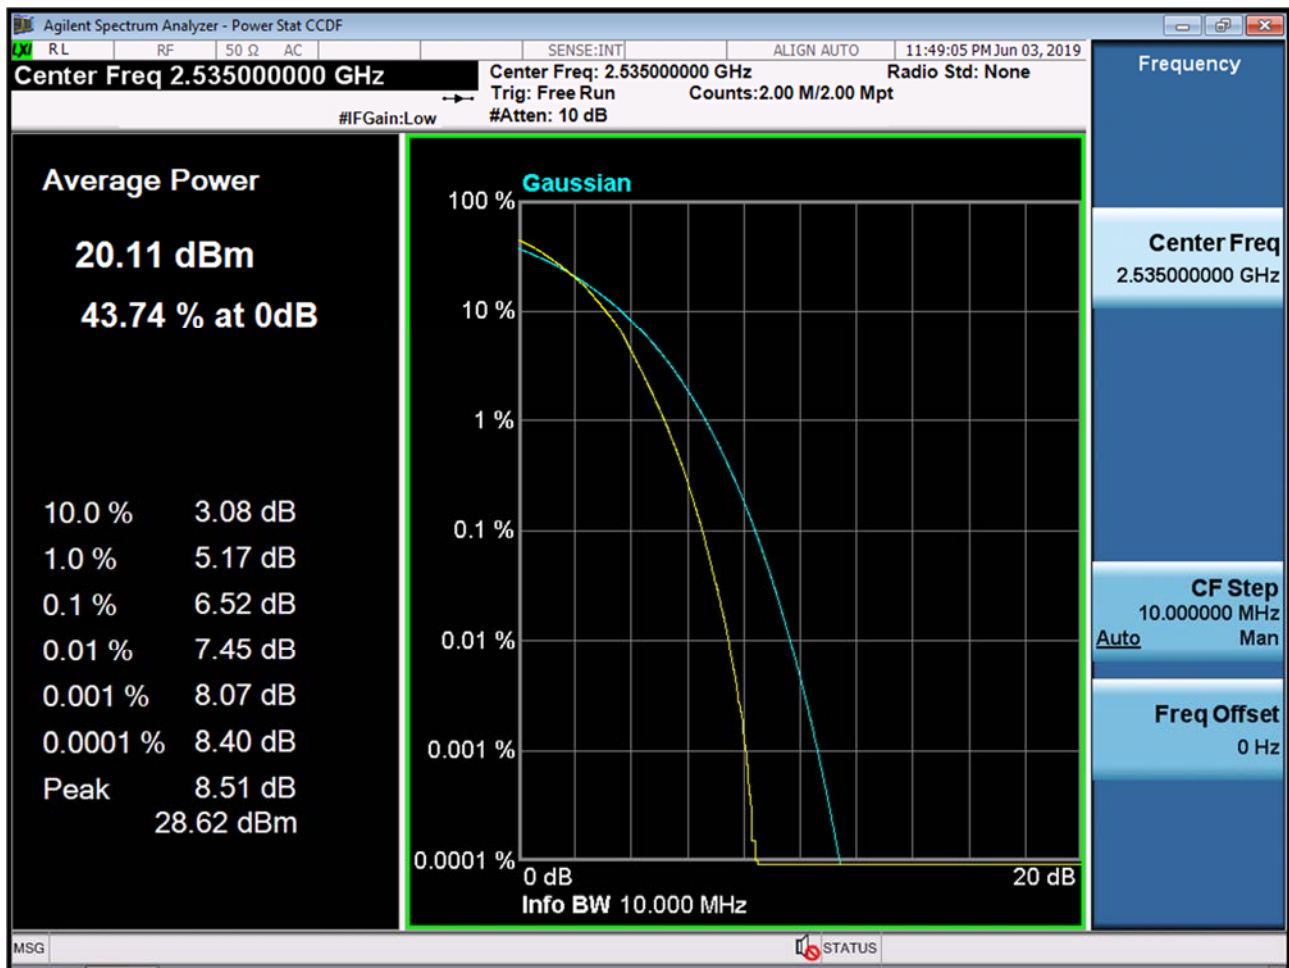


BAND 7. PAR Plot (15M BW Ch.21100 QPSK RB 75_0)

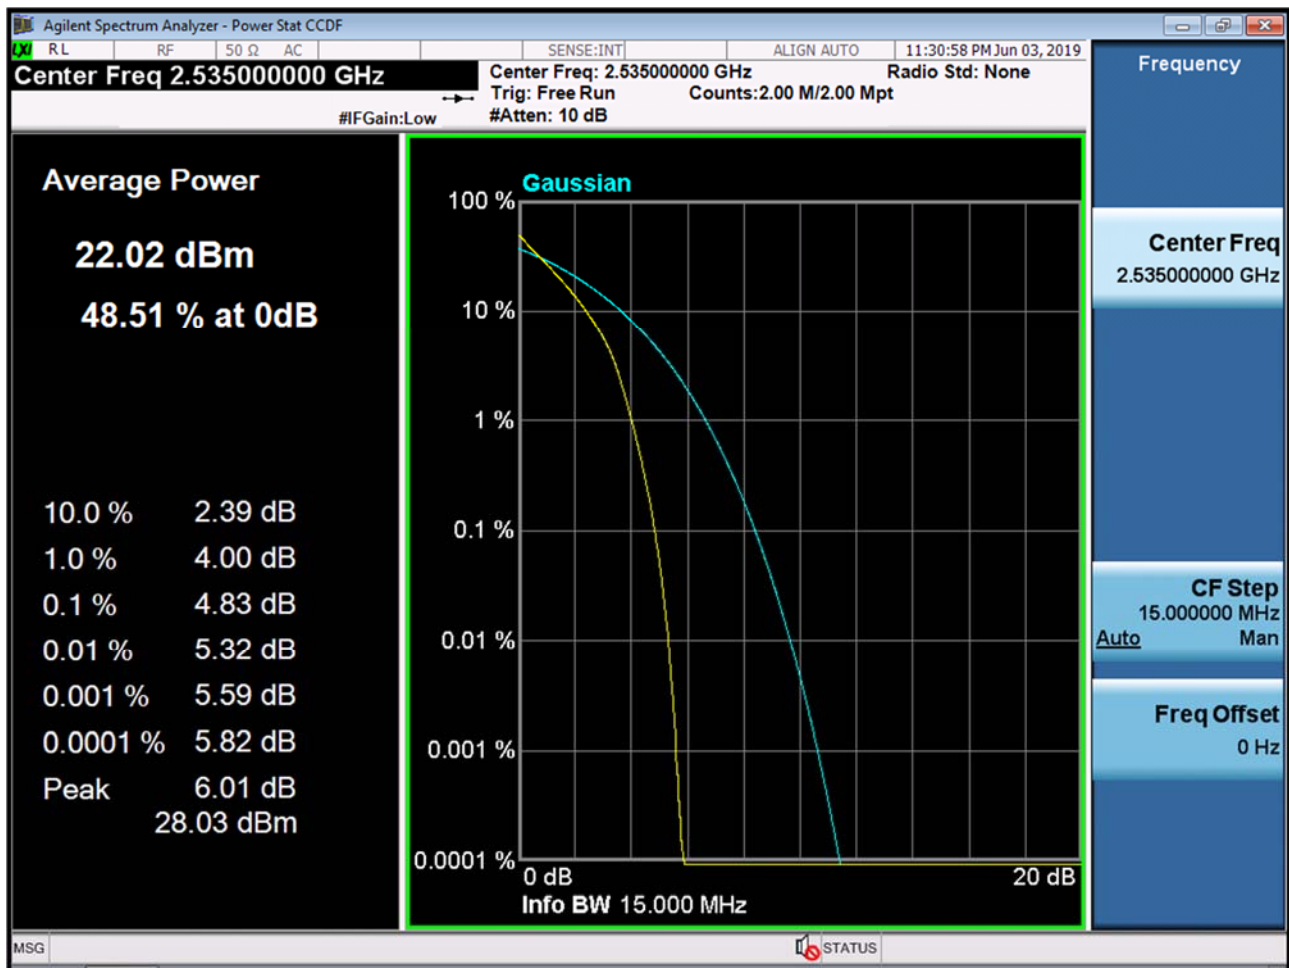


BAND 7. PAR Plot (15M BW Ch.21100 16QAM RB 75_0)

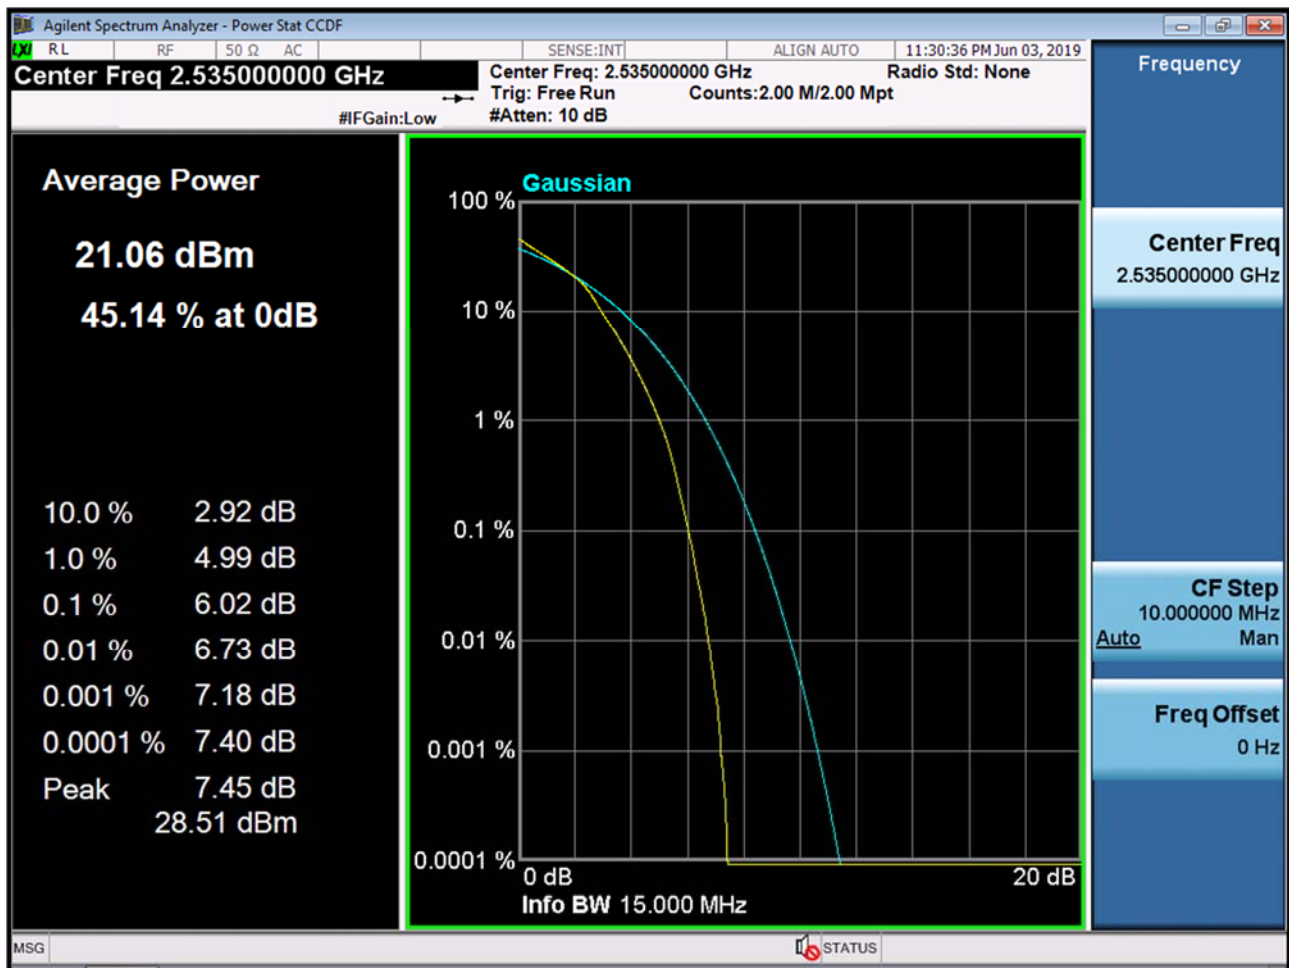


BAND 7. PAR Plot (15M BW Ch.21100 64QAM RB 75_0)

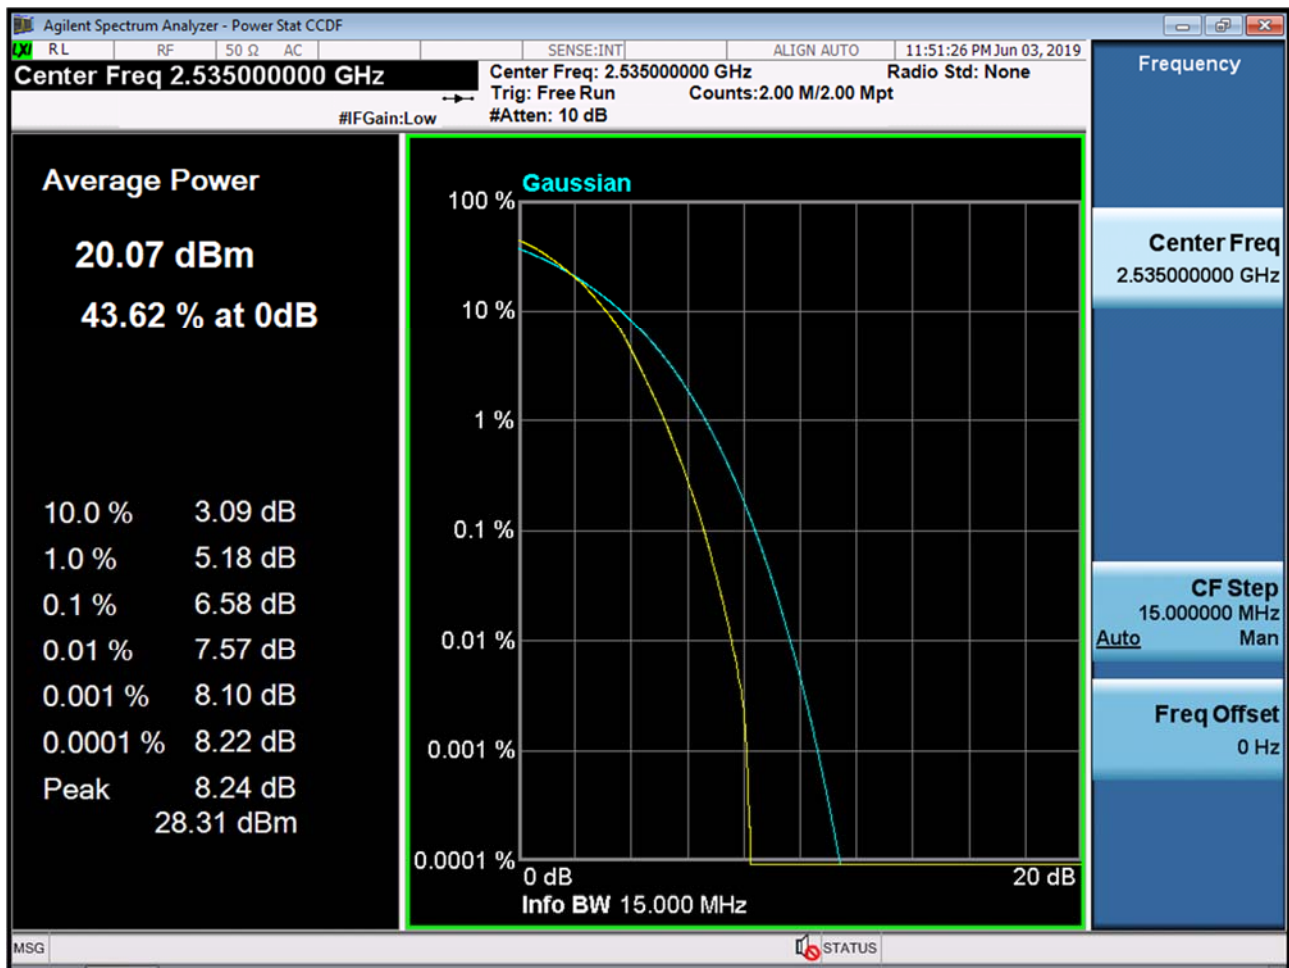


BAND 7. PAR Plot (20M BW Ch.21100 QPSK RB 100_0)

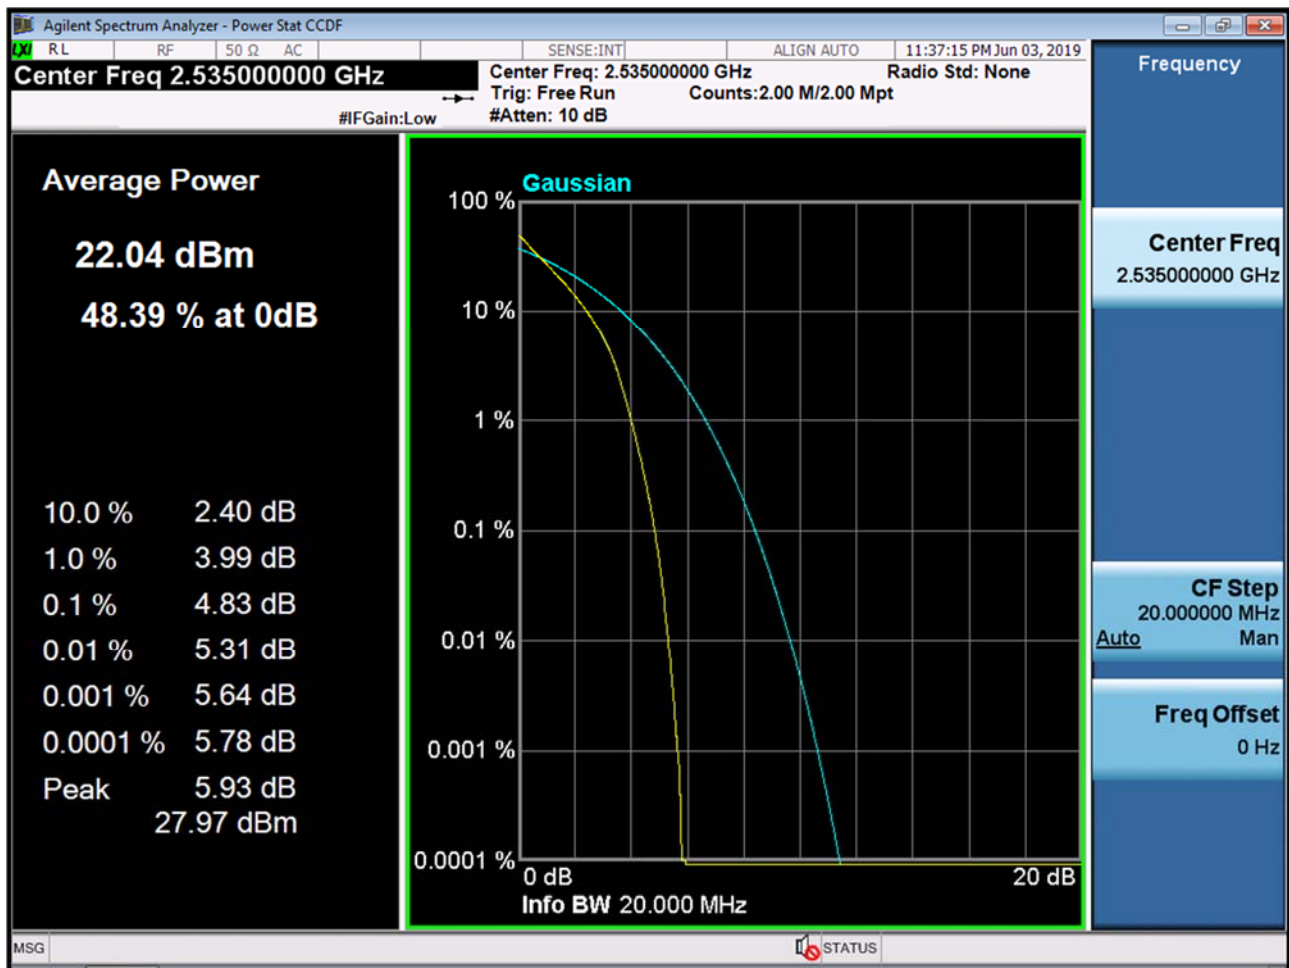


BAND 7. PAR Plot (20M BW Ch.21100 16QAM RB 100_0)

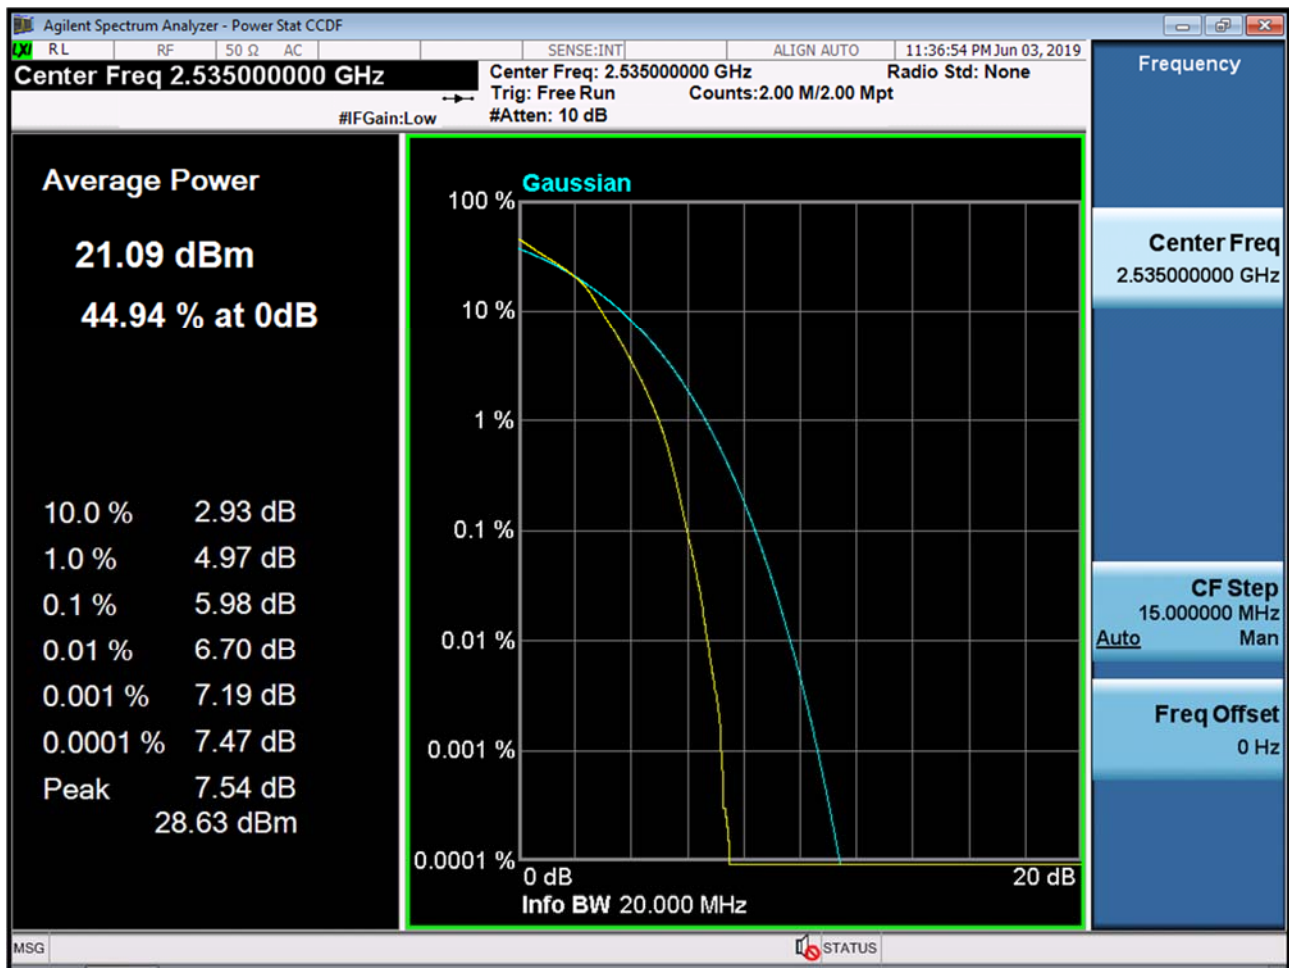


BAND 7. PAR Plot (20M BW Ch.21100 64QAM RB 100_0)

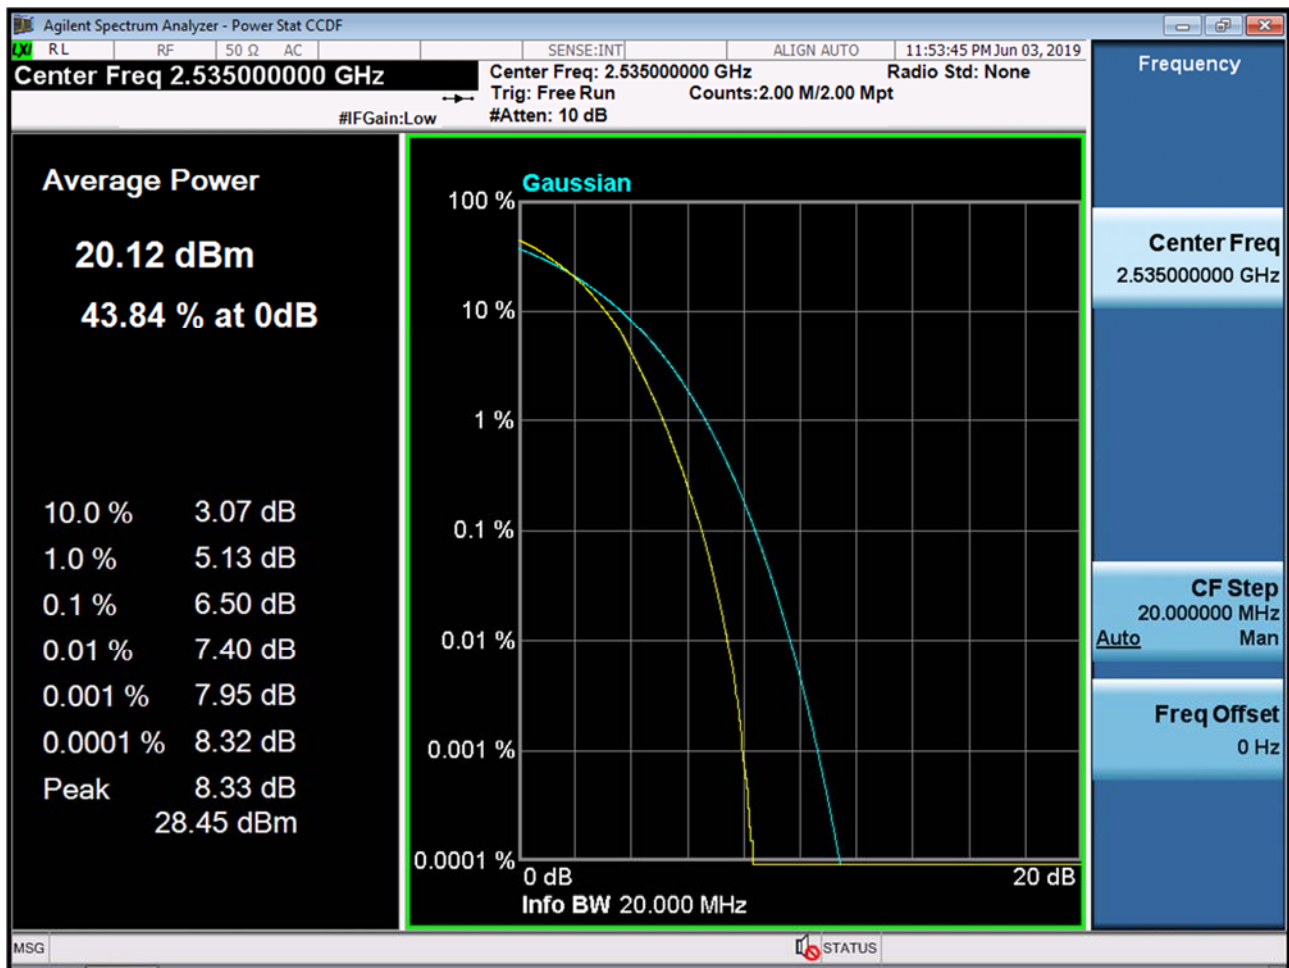


BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK RB 1, Offset 0)-1

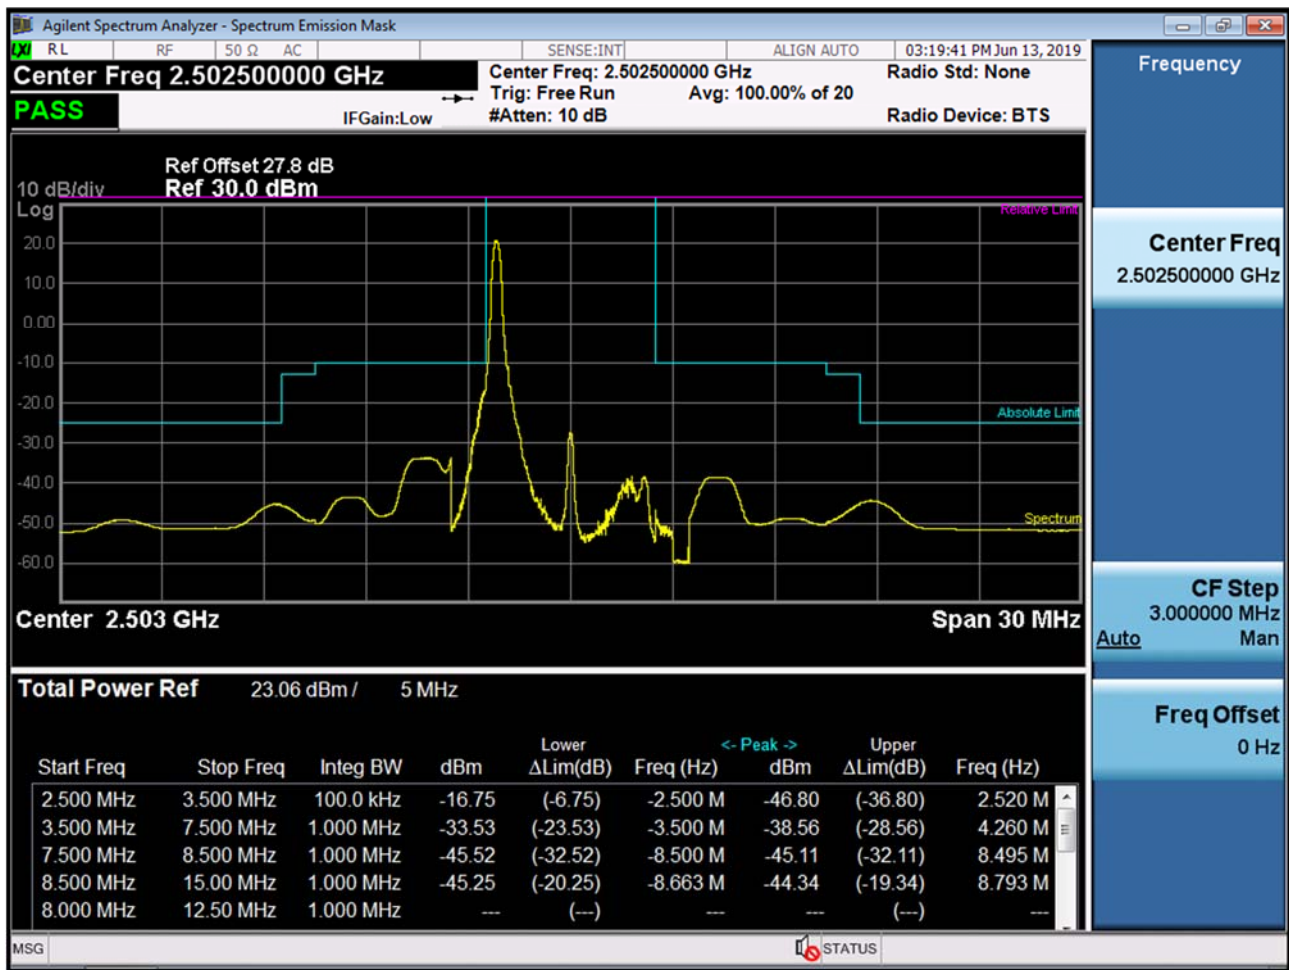


BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK RB 1, Offset 0)-2

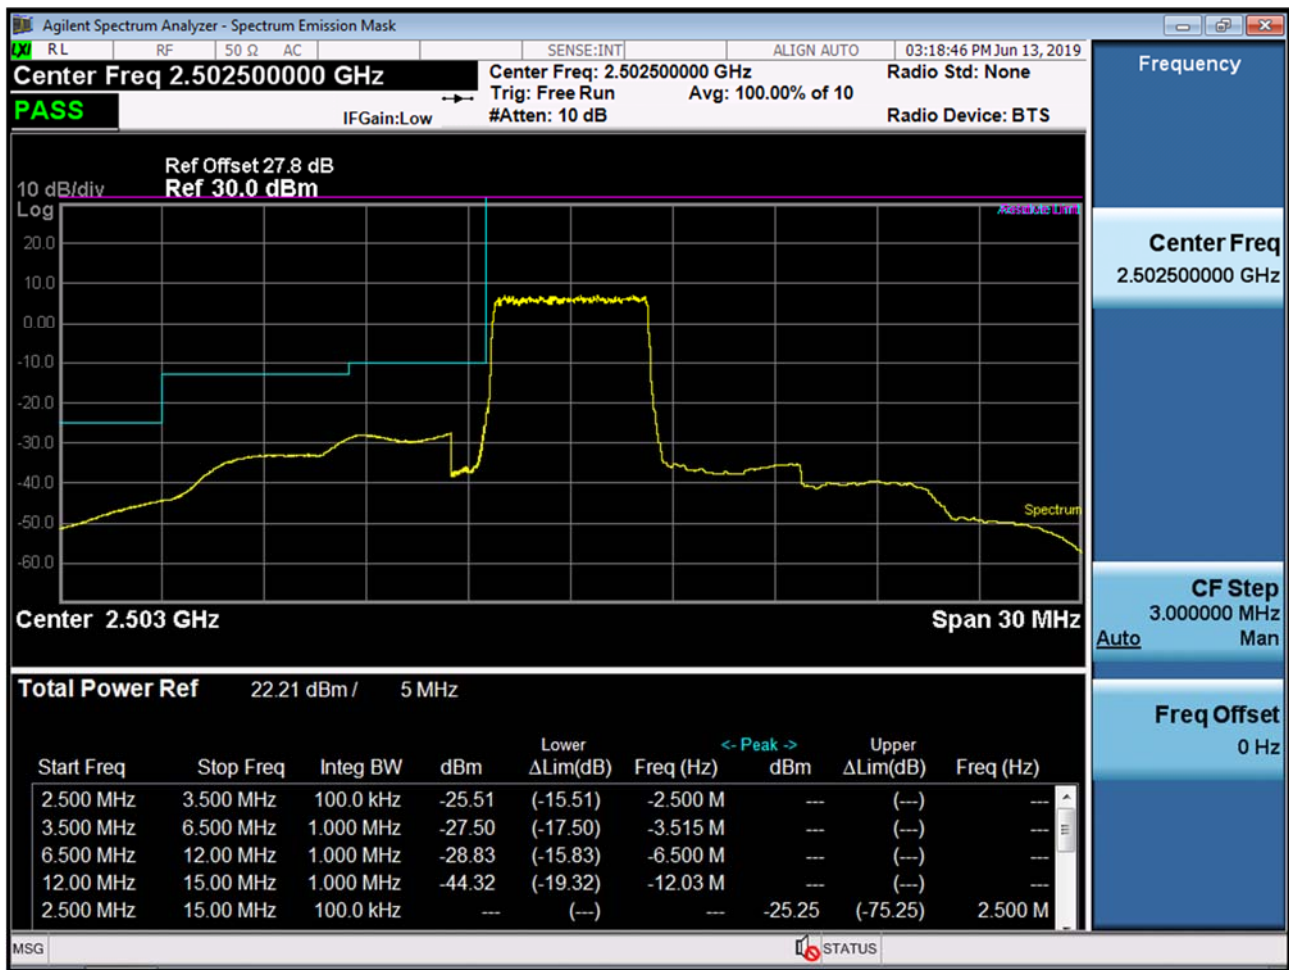

BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK_RB25_Offset 0)

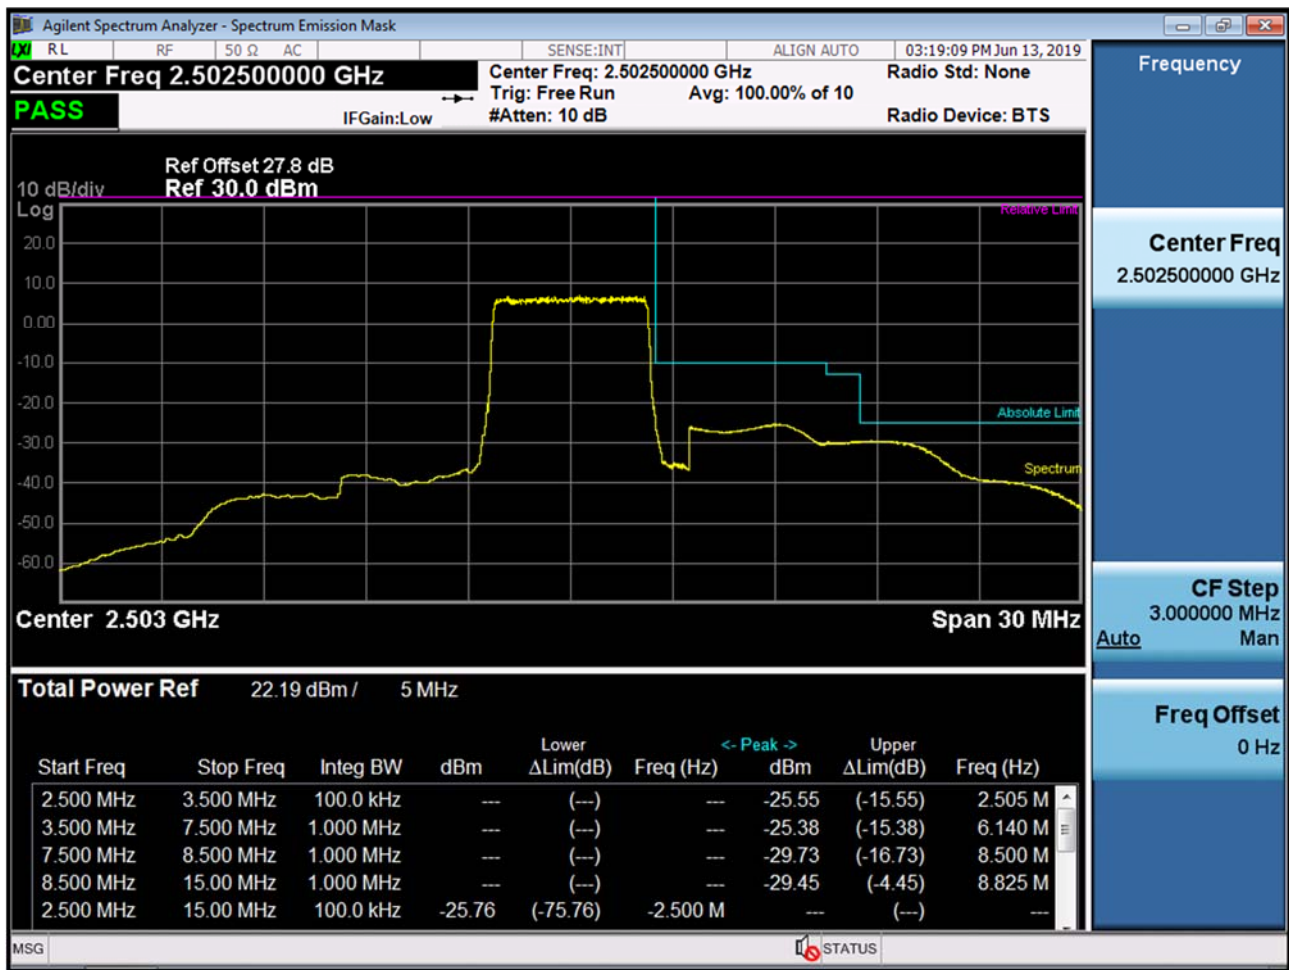

BAND 7. Mid Channel Edge Plot (5 MHz Ch.21100 QPSK RB 25)

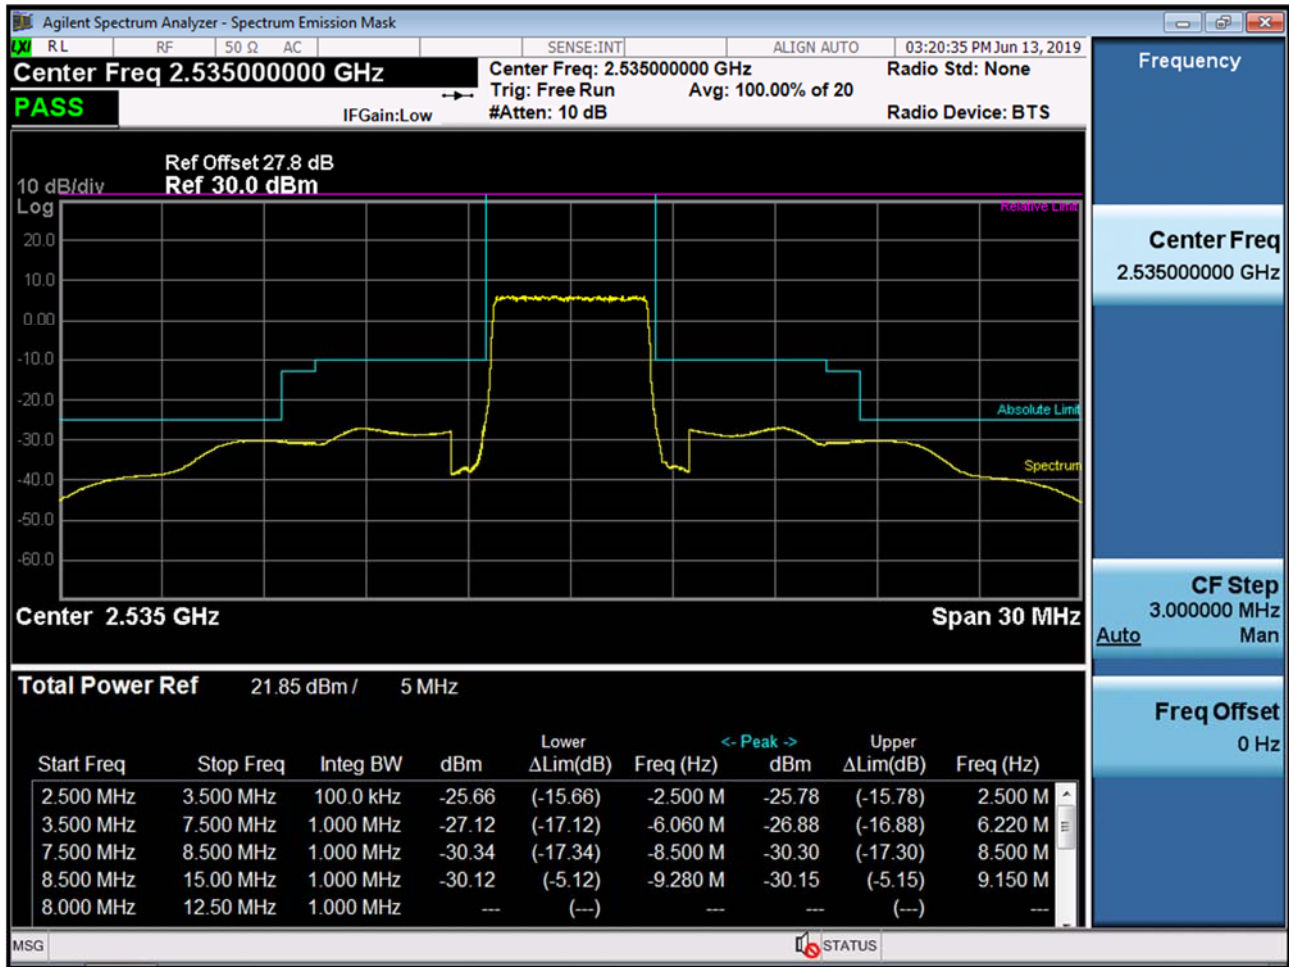

BAND 7. High Channel Edge Plot (5 MHz Ch.21425 QPSK RB 1, Offset 0)

