



SAR EVALUATION REPORT

**FCC 47 CFR § 2.1093
IEEE Std 1528-2013**

For

WCDMA/LTE Tablet + Bluetooth & DTS/UNII a/b/g/n/ac

**FCC ID: A3LSMW707
Model Name: SM-W707N0, SM-W708, SM-W708N0**

**Report Number: 16K22598-S1V1
Issue Date: 1/22/2016**

Prepared for
**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by
**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



TL-637

Revision History

Rev.	Date	Revisions	Revised By
V1	1/22/2016	Initial Issue	DoYoung Seo

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	7
4.2.	<i>SAR Scan Procedures.....</i>	8
4.3.	<i>Test Equipment.....</i>	10
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	11
6.1.	<i>DUT Description</i>	11
6.2.	<i>Wireless Technologies.....</i>	11
6.3.	<i>Nominal and Maximum Output Power.....</i>	12
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	13
6.5.	<i>Power Reduction by Proximity Sensing</i>	14
6.5.1.	<i>Proximity Sensor Triggering Distance (KDB 616217 §6.2).....</i>	14
6.5.2.	<i>Proximity Sensor Coverage (KDB 616217 §6.3)</i>	18
6.5.3.	<i>Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4).....</i>	18
6.5.4.	<i>Resulting test positions for SAR measurements</i>	18
7.	RF Exposure Conditions (Test Configurations)	19
7.1.	<i>Standalone SAR Test Exclusion Considerations.....</i>	19
7.2.	<i>Required Test Configurations</i>	22
8.	Dielectric Property Measurements & System Check	23
8.1.	<i>Dielectric Property Measurements</i>	23
8.2.	<i>System Check.....</i>	26
9.	Conducted Output Power Measurements.....	28
9.1.	<i>W-CDMA</i>	28
9.2.	<i>LTE.....</i>	32
9.3.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	36
9.4.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	37
9.5.	<i>Bluetooth</i>	41
10.	Measured and Reported (Scaled) SAR Results.....	42
10.1.	<i>W-CDMA Band V</i>	44
10.2.	<i>W-CDMA Band II.....</i>	44

10.3. LTE Band 5 (10MHz Bandwidth) 44

10.4. LTE Band 17 (10MHz Bandwidth) 44

10.5. Wi-Fi (DTS Band) 45

10.6. Wi-Fi (U-NII Band) 46

10.7. Bluetooth 47

11. SAR Measurement Variability 48

12. Simultaneous Transmission SAR Analysis 49

12.1. Sum of the SAR for WWAN & DTS 51

12.2. Sum of the SAR for WWAN & U-NII 51

Appendixes 54

16K22598-S1V1 FCC Report SAR_App A_Photos & Ant. Locations 54



16K22598-S1V1 FCC Report SAR_App B_Highest SAR Test Plots 54

16K22598-S1V1 FCC Report SAR_App C_System Check Plots 54

16K22598-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients 54

16K22598-S1V1 FCC Report SAR_App E_Probe Cal. Certificates 54

1. Attestation of Test Results

Applicant Name	SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID	A3LSMW707			
Model Name	SM-W707N0 and SM-W708 and SM-W708N0			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)				
Exposure Category	Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure	1.6			
The Highest Reported SAR (W/kg)				
RF Exposure Conditions	Equipment Class			
	Licensed	DTS	U-NII	DSS(BT)
Standalone	1.024	1.032	0.423	0.213
Simultaneous TX	1.447	1.409	1.447	1.237
Date Tested	1/7/2016 to 1/22/2016			
Test Results	Pass			
<p>*Note: The WLAN (DTS, U-NII, Bluetooth) SAR measurement results from the original filling can be found in SAR test report 15K21999-S1V1, FCC ID A3LSMW700. The WLAN (DTS) antennas and surrounding circuitry is the same between these two units, and tune up power targets are identical for WLAN operations. Therefore, SAR data for WLAN from the original filling was used for this model. Spot checks for WLAN, were performed to ensure that the SAR measurements for both devices are the same.</p>				
<p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>				
Approved & Released By:		Prepared By:		
				
JiHo Choi Operations Manager UL Korea, Ltd Suwon Laboratory		DoYoung Seo Laboratory Engineer UL Korea, Ltd Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02r02
- 447498 D01 General RF Exposure Guidance v06
- 616217 D04 SAR for laptop and tablets v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D01 3G SAR Procedures v03r01
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D06 Hotspot Mode v02r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

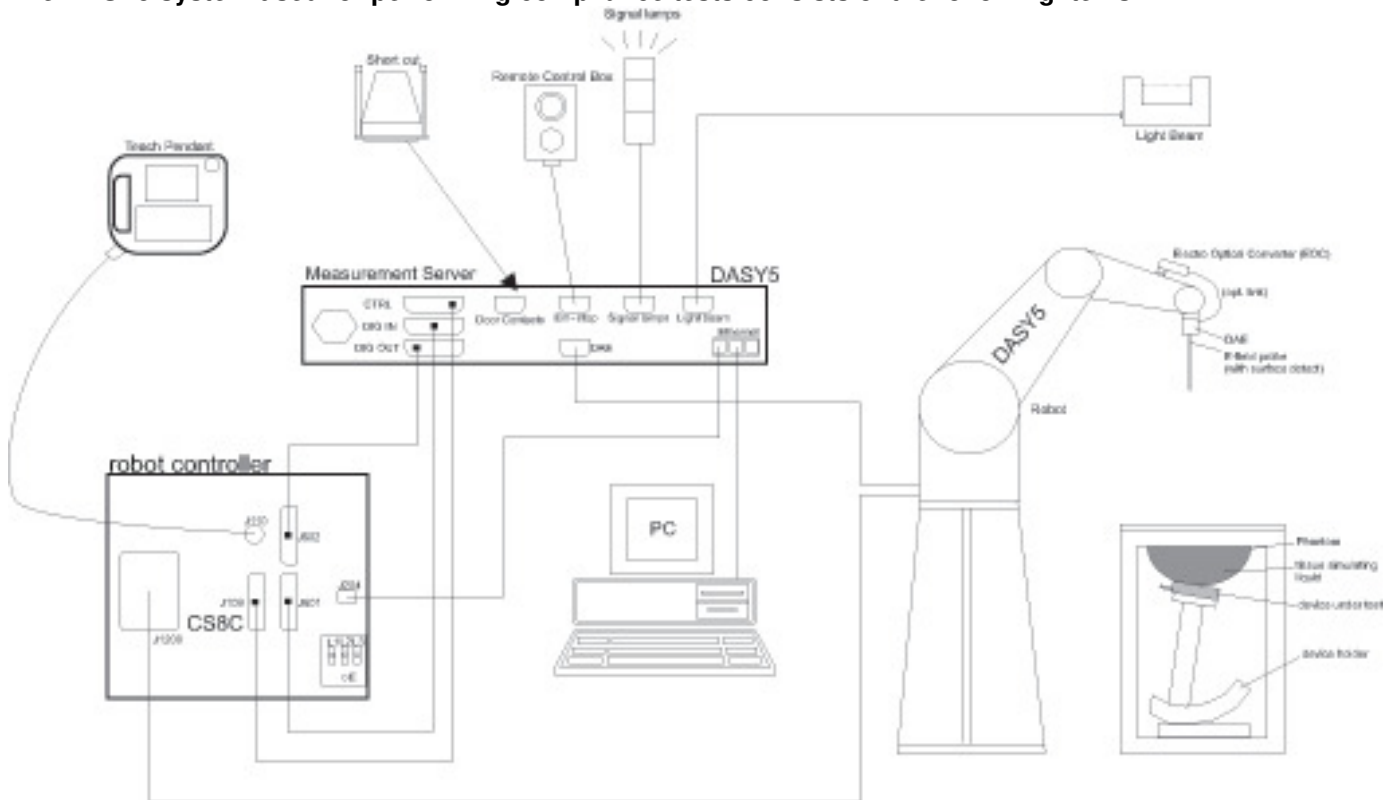

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	8-18-2016
Dielectric Assessment Kit	SPEAG	DAK-3.5	1196	8-4-2016
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	8-19-2016
Thermometer	Lutron	MHB-382SD	AH.91478	8-12-2016

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	8-18-2016
Power Sensor	Agilent	U2000A	MY54260010	8-18-2016
Power Sensor	Agilent	U2000A	MY54260007	8-18-2016
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	8-18-2016
Directional Coupler	Agilent	772D	MY52180193	8-18-2016
Directional Coupler	Agilent	778D	MY52180432	8-18-2016
Low Pass Filter	MICROLAB	LA-15N	03943	8-18-2016
Low Pass Filter	FILTRON	L14012FL	1410003S	8-18-2016
Low Pass Filter	MICROLAB	LA-60N	03942	8-18-2016
Attenuator	Agilent	8491B/003	MY39269292	8-18-2016
Attenuator	Agilent	8491B/010	MY39269315	8-18-2016
Attenuator	Agilent	8491B/020	MY39269298	8-18-2016
E-Field Probe (SAR1)	SPEAG	EX3DV4	7314	9-25-2016
E-Field Probe (SAR2)	SPEAG	EX3DV4	7376	9-2-2016
E-Field Probe (SAR3)	SPEAG	EX3DV4	7330	2-12-2016
Data Acquisition Electronics (SAR1)	SPEAG	DAE4	1447	9-23-2016
Data Acquisition Electronics (SAR2)	SPEAG	DAE4	1468	9-15-2016
Data Acquisition Electronics (SAR3)	SPEAG	DAE4	1494	11-11-2016
System Validation Dipole	SPEAG	D750V3	1122	8-17-2016
System Validation Dipole	SPEAG	D835V2	4d194	9-17-2016
System Validation Dipole	SPEAG	D1900V2	5d199	2-6-2016
System Validation Dipole	SPEAG	D2450V2	960	2-5-2016
System Validation Dipole	SPEAG	D5GHzV2	1184	8-26-2016
Thermometer (SAR1)	Lutron	MHB-382SD	AH.91463	8-12-2016
Thermometer (SAR2)	Lutron	MHB-382SD	AH.50215	8-19-2016
Thermometer (SAR3)	Lutron	MHB-382SD	AH.50213	8-24-2016

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-18-2016
Base Station Simulator	R & S	CMW500	150314	8-18-2016
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	8-18-2016

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 287.5 mm x 196 mm Overall Diagonal: 348 mm Display Diagonal: 315 mm																											
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.																											
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.																											
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)																											
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5.8 GHz)																											
Test Sample Information	<table border="1"> <thead> <tr> <th>No.</th> <th>S/N</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>123490EN400015</td> <td>Conducted (A3LSMW700)</td> </tr> <tr> <td>2</td> <td>8JA3R32GB000MZX</td> <td>SAR (A3LSMW700)</td> </tr> <tr> <td>3</td> <td>8JA3R32GB000M7F</td> <td>SAR (A3LSMW700)</td> </tr> <tr> <td>4</td> <td>R34GC0064S</td> <td>Conducted</td> </tr> <tr> <td>5</td> <td>R34GC00605</td> <td>Conducted</td> </tr> <tr> <td>6</td> <td>R34GC00603</td> <td>SAR</td> </tr> <tr> <td>7</td> <td>R34GC0064M</td> <td>SAR</td> </tr> <tr> <td>8</td> <td>R34GC00606</td> <td>SAR</td> </tr> </tbody> </table>	No.	S/N	Notes	1	123490EN400015	Conducted (A3LSMW700)	2	8JA3R32GB000MZX	SAR (A3LSMW700)	3	8JA3R32GB000M7F	SAR (A3LSMW700)	4	R34GC0064S	Conducted	5	R34GC00605	Conducted	6	R34GC00603	SAR	7	R34GC0064M	SAR	8	R34GC00606	SAR
No.	S/N	Notes																										
1	123490EN400015	Conducted (A3LSMW700)																										
2	8JA3R32GB000MZX	SAR (A3LSMW700)																										
3	8JA3R32GB000M7F	SAR (A3LSMW700)																										
4	R34GC0064S	Conducted																										
5	R34GC00605	Conducted																										
6	R34GC00603	SAR																										
7	R34GC0064M	SAR																										
8	R34GC00606	SAR																										

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)	100%
LTE	FDD Band 5 FDD Band 17	QPSK 16QAM	100% (FDD)
Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
	5 GHz	802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
	Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		
Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No			
Bluetooth	2.4 GHz	Version 4.1 LE	76.85% (DH5)

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB):		-1.5 ~ 0.5		Max. RF Output Power (dBm)		Reduce RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit	Target	Max. tune-up tolerance limit		
W-CDMA Band V	R99	23.5	24.0	16.5	17.0		
	HSDPA	23.5	24.0	16.5	17.0		
	HSUPA	23.5	24.0	16.5	17.0		
W-CDMA Band II	R99	21.5	22.0	14.5	15.0		
	HSDPA	21.5	22.0	14.5	15.0		
	HSUPA	20.5	21.0	14.5	15.0		
LTE Band 5	QPSK, 16QAM	24.0	24.5	17.5	18.0		
LTE Band 17	QPSK, 16QAM	23.5	24.0	18.0	18.5		
Upper limit (dB):		~ 0.5		Max. RF Output Power (dBm)		Reduce RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. Power limit	Target	Max. Power limit		
WiFi 2.4 GHz (Ch.1 ~ Ch.11)	802.11b	16.0	16.5	11.0	11.5		
	802.11g	14.0	14.5	11.0	11.5		
	802.11n HT20	14.0	14.5	11.0	11.5		
WiFi 2.4 GHz (Ch.12)	802.11b	13.0	13.5	11.0	11.5		
	802.11g	11.0	11.5	11.0	11.5		
	802.11n HT20	11.0	11.5	11.0	11.5		
WiFi 2.4 GHz (Ch.13)	802.11b	13.0	13.5	11.0	11.5		
	802.11g	4.0	4.5	4.0	4.5		
	802.11n HT20	3.0	3.5	3.0	3.5		
WiFi 5 GHz	802.11a	13.0	13.5	9.0	9.5		
	802.11n HT20	13.0	13.5	9.0	9.5		
	802.11n HT40	11.0	11.5	9.0	9.5		
	802.11ac VHT20	11.0	11.5	9.0	9.5		
	802.11ac VHT40	11.0	11.5	9.0	9.5		
	802.11ac VHT80	10.0	10.5	9.0	9.5		
Bluetooth		9.5	10.0	N/A			
Bluetooth LE		4.0	4.5	N/A			

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz																																					
		Channel Bandwidth																																					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																
	Band 17	Frequency range: 704 - 716 MHz																																					
		Channel Bandwidth																																					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																
	Low			23780/ 709	23755/ 706.5																																		
	Mid			23790/ 710	23790/ 710																																		
	High			23800/ 711	23825/ 713.5																																		
LTE transmitter and antenna implementation	LTE has one (1) TX/RX antennas and one (1) RX antennas Refer to Appendix A...																																						
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
Power reduction	Yes																																						
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						


6.5. Power Reduction by Proximity Sensing

6.5.1. Proximity Sensor Triggering Distance (KDB 616217 §6.2)

Rear of the DUT was placed directly below the flat phantom. The DUT was moved toward the phantom in accordance with the steps outlined in KDB 616217 §6.2 to determine the trigger distance for enabling power reduction. The DUT was moved away from the phantom to determine the trigger distance for resuming full power.

The DUT featured a visual indicator on its display that showed the status of the proximity sensor (Triggered or not triggered). This was used to determine the status of the sensor during the proximity sensor assessment as monitoring the output power directly was not practical without affecting the measurement.

It was confirmed separately that the output power was altered according to the proximity sensor status indication. This was achieved by observing the proximity sensor status at the same time as monitoring the conducted power. Section 9 contains both the full and reduced conducted power measurements.

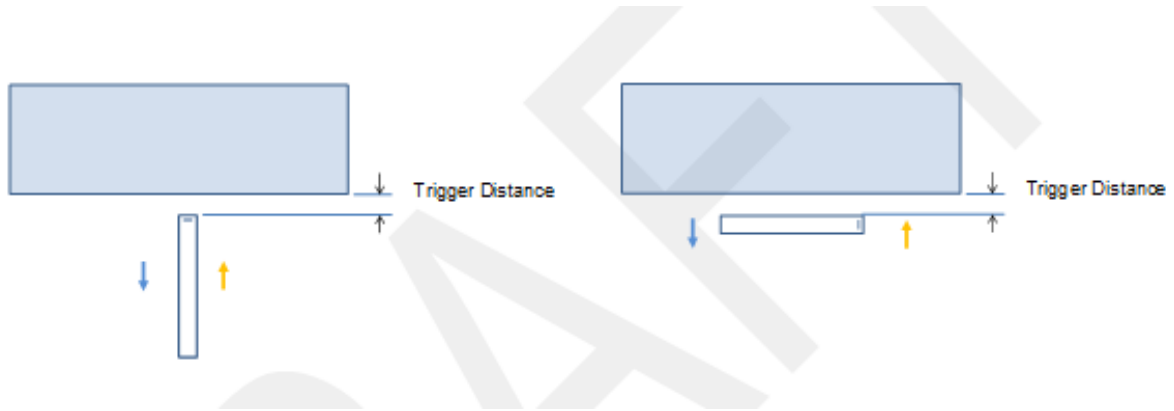

LEGEND

- Direction of DUT travel for determination of power reduction triggering point
- Direction of DUT travel for determination of full power resumption triggering point

Summary of Trigger Distances


Tissue simulating liquid	Trigger distance - Edge 1		Trigger distance - Rear	
	Moving toward phantom	Moving from phantom	Moving toward phantom	Moving from phantom
750 muscle	20 mm	20 mm	17 mm	17 mm
850 muscle	20 mm	20 mm	17 mm	17 mm
1900 muscle	20 mm	20 mm	17 mm	17 mm
2450 muscle	N/A	N/A	6 mm	6 mm
5000 muscle	N/A	N/A	6 mm	6 mm

Proximity Sensor Triggering Distance Measurement Results

WCDMA Bands V & II

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	13	14	15	16	17	18	19	20	21	22
WCDMA Band V	16.9	16.5	16.7	16.9	16.9	23.3	23.2	23.5	23.2	23.2
WCDMA Band II	14.9	14.8	14.6	14.6	14.7	21.4	21.6	21.6	21.4	21.5

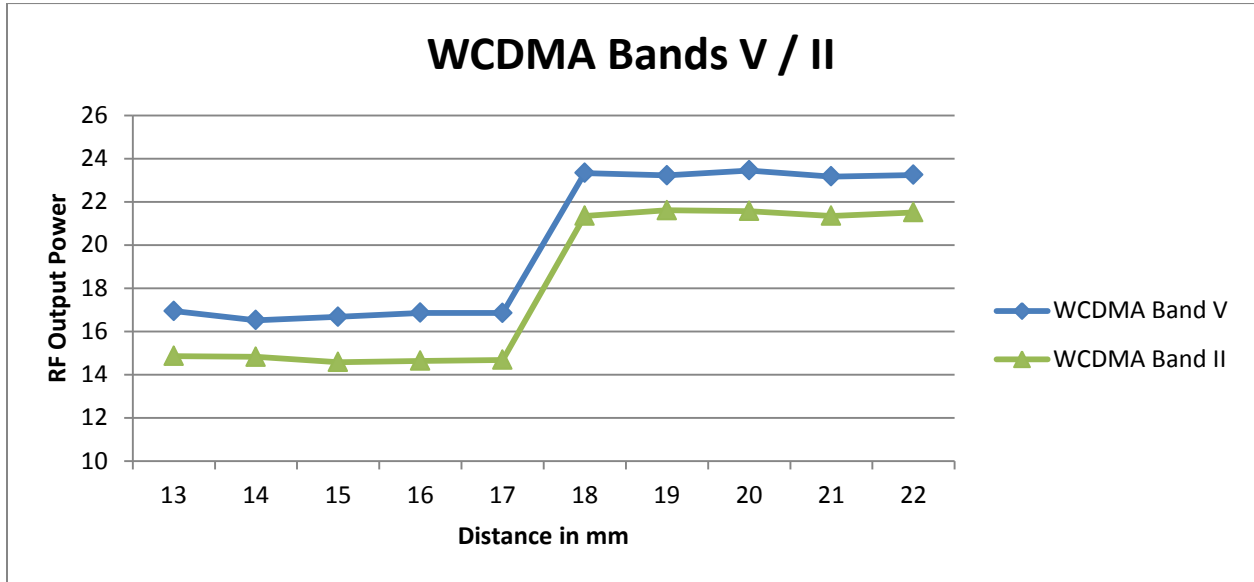

WCDMA Bands V & II

Edge 1, DUT Moving Toward (Trigger) and Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	16	17	18	19	20	21	22	23	24	25
WCDMA Band V	16.9	17.0	16.8	16.6	16.8	23.3	23.4	23.3	23.3	23.5
WCDMA Band II	14.9	14.7	14.7	14.9	14.8	21.7	21.6	21.4	21.7	21.5

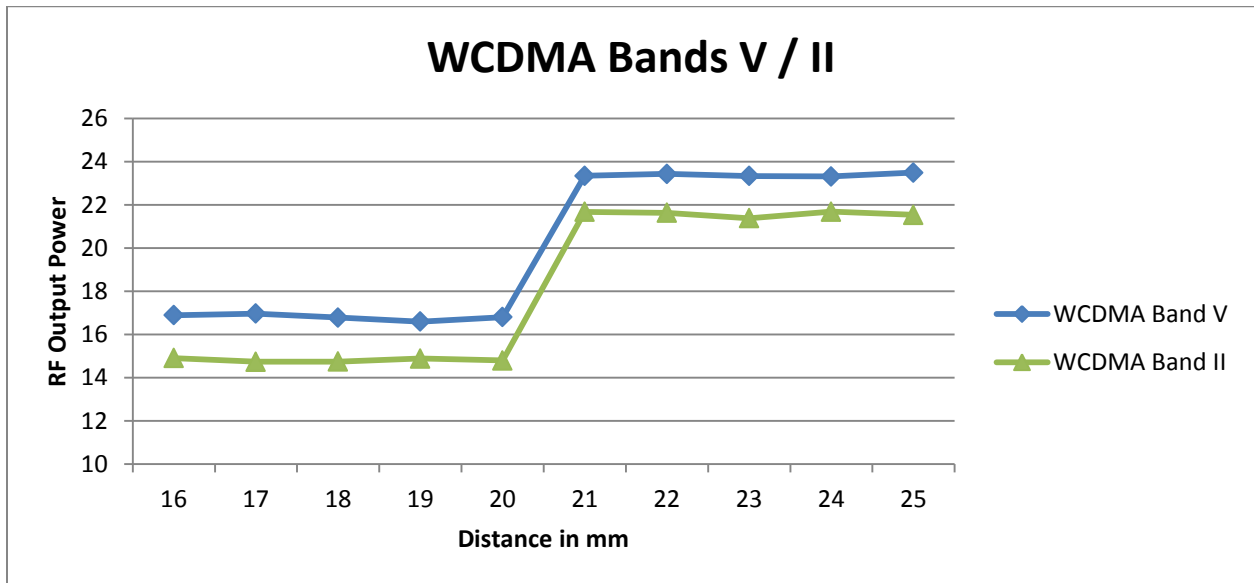

LTE Bands 5 / 17

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	13	14	15	16	17	18	19	20	21	22
LTE Band 5	17.9	18.0	17.9	18.0	17.7	23.9	23.7	23.7	23.8	23.5
LTE Band 17	18.3	18.1	18.0	18.2	18.4	23.4	23.1	23.3	23.1	23.5

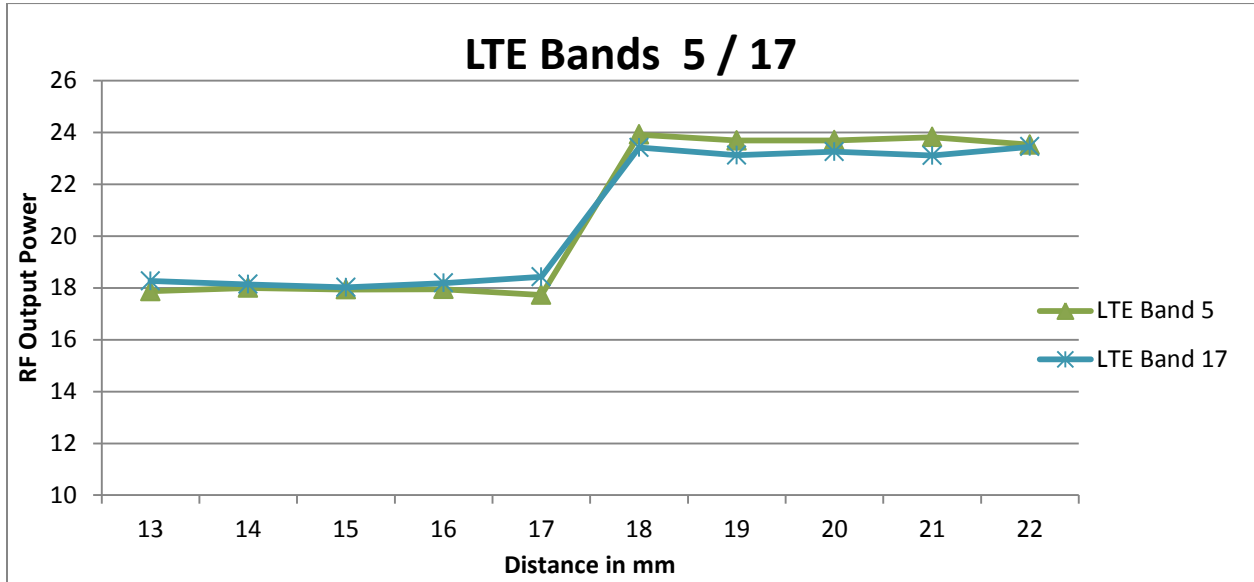

LTE Bands 5 / 17

Edge 1, DUT Moving Toward (Trigger) and Away (Release) from the Phantom


Distance to DUT vs. Output Power in dBm										
Distance (mm)	16	17	18	19	20	21	22	23	24	25
LTE Band 5	17.9	17.8	17.7	17.9	17.6	23.9	23.9	23.6	23.7	23.7
LTE Band 17	18.1	18.3	18.2	18.4	18.0	23.5	23.5	23.1	23.4	23.5

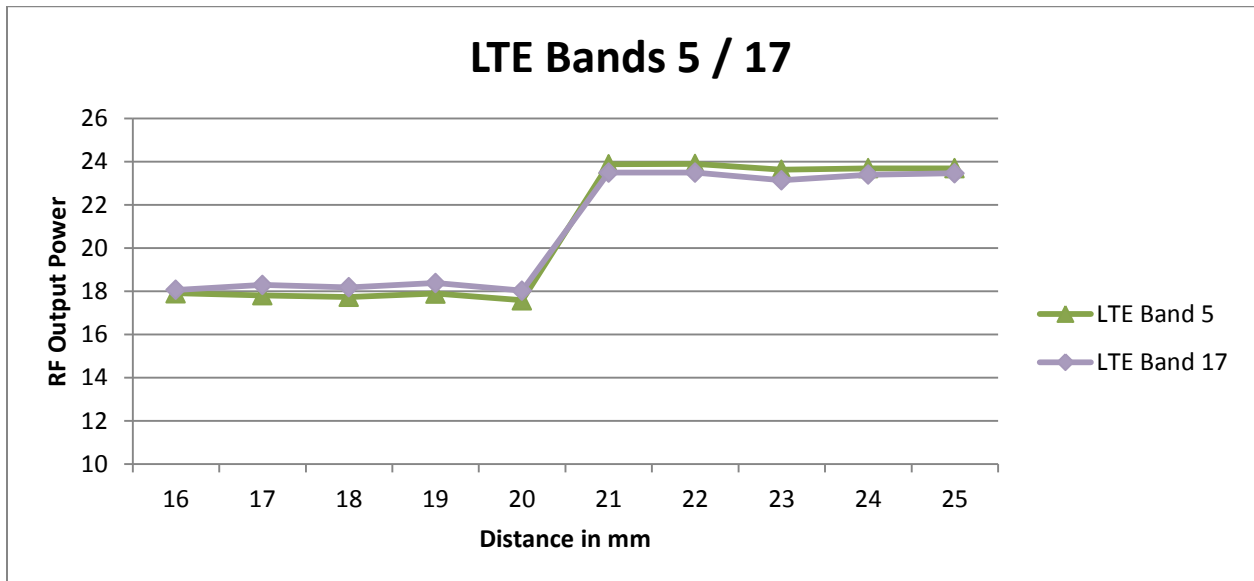

Wi-Fi 2.4GHz and 5GHz

Rear, DUT Moving Toward (Trigger) and Away (Release) from the Phantom

Distance to DUT vs. Output Power in dBm										
Distance	2	3	4	5	6	7	8	9	10	11
2.4G Wi-Fi 11b Tx	10.98	11.10	10.96	10.96	10.99	16.04	15.98	15.99	16.01	15.97
2.4G Wi-Fi 11g Tx	11.05	10.96	11.08	11.08	10.96	13.99	13.98	14.02	13.93	14.03
2.4G Wi-Fi 11n Tx	10.99	10.91	10.95	10.98	10.98	14.03	14.07	13.99	14.04	13.94
5GHz Wi-Fi(20MHz BW) 11a	9.07	9.10	8.94	8.99	9.03	12.99	12.92	12.96	13.03	13.02
5GHz Wi-Fi(20MHz BW) 11n	9.09	9.00	8.98	8.95	9.05	12.93	12.97	13.05	12.99	12.98
5GHz Wi-Fi(40MHz BW) 11n	8.96	9.08	9.00	9.06	8.99	10.94	11.05	11.03	10.97	11.05
5GHz Wi-Fi(20MHz BW) 11ac	9.01	8.94	8.96	9.03	9.02	10.92	11.03	10.98	11.04	11.02
5GHz Wi-Fi(40MHz BW) 11ac	9.03	8.95	9.02	9.02	8.98	10.94	11.05	10.97	11.00	10.96
5GHz Wi-Fi(80MHz BW) 11ac	8.96	9.04	9.01	9.04	8.99	10.05	9.98	10.04	10.02	9.99

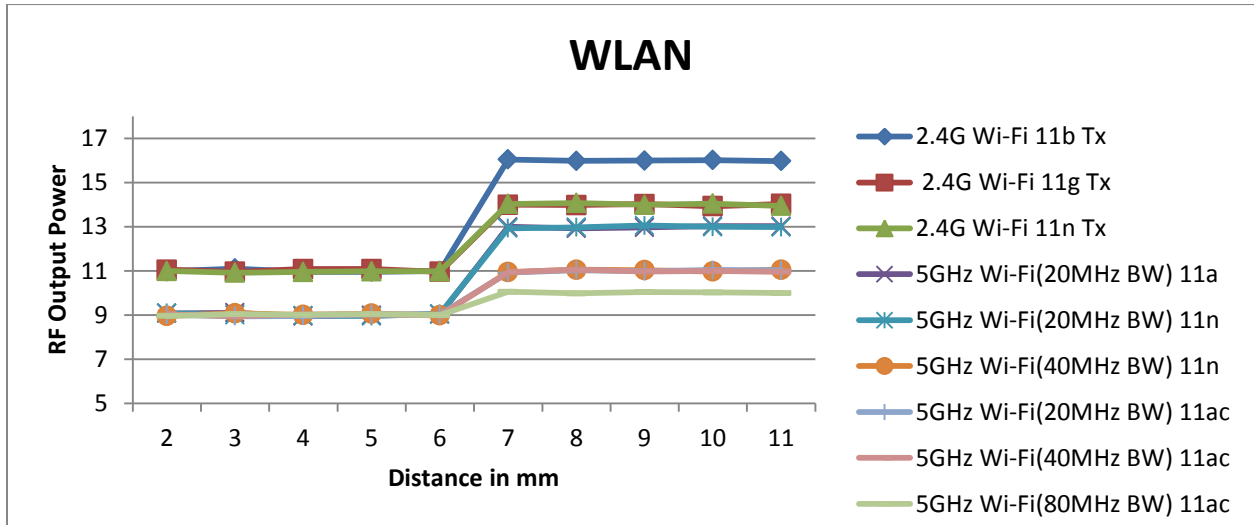


6.5.2. Proximity Sensor Coverage (KDB 616217 §6.3)

As there is no spatial offset between the antenna and the proximity sensor element, proximity sensor coverage did not need to be assessed.

6.5.3. Proximity Sensor Tilt Angle Assessment (KDB 616217 §6.4)

The DUT was positioned directly below the flat phantom at the minimum measured trigger distance with Edge 1 parallel to the base of the flat phantom for each band.

The EUT was rotated about Edge 1 for angles up to +/- 45°. If the output power increased during the rotation the DUT was moved 1mm toward the phantom and the rotation repeated. This procedure was repeated until the power remained reduced for all angles up to +/- 45°.

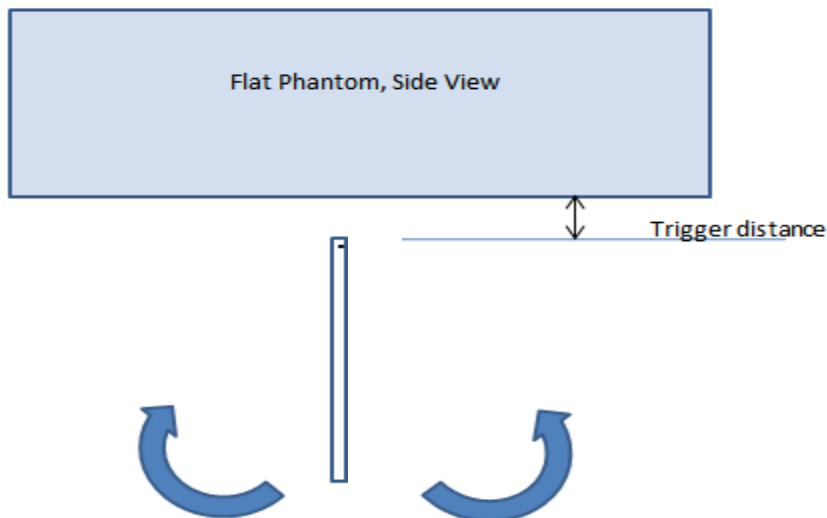

Proximity sensor tilt angle assessment (Edge 1) KDB 616217 §6.4

Summary of Tablet Tilt Angle Influence to Proximity Sensor Triggering

Band (MHz)	Minimum trigger distance measured according to KDB 616217 §6.2	Minimum distance at which power reduction was maintained over +/-45°	Power reduction status											
			-45°	-40°	-30°	-20°	-10°	0°	10°	20°	30°	40°	45°	
750	17 mm	17 mm	On	On	On	On	On	On	On	On	On	On	On	On
850	17 mm	17 mm	On	On	On	On	On	On	On	On	On	On	On	On
1900	17 mm	17 mm	On	On	On	On	On	On	On	On	On	On	On	On

6.5.4. Resulting test positions for SAR measurements

Wireless technologies	Position	§6.2 Triggering Distance	§6.3 Coverage	§6.4 Tilt Angle	Worst case distance for SAR
WWAN	Rear	20 mm	N/A	N/A	19 mm
	Edge 1	17 mm	N/A	17 mm	16 mm
WLAN	Rear	6 mm	N/A	N/A	5 mm

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

7.1. Standalone SAR Test Exclusion Considerations

Since the *Dedicated Host Approach* is applied, the standalone SAR test exclusion procedure in KDB 447498 § 4.3.1 is applied in conjunction with KDB 616217 § 4.3 to determine the minimum test separation distance:

- When the separation distance from the antenna to an adjacent edge is ≤ 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.
- When the separation distance from the antenna to an adjacent edge is > 5 mm, the actual antenna-to-edge separation distance is applied to determine SAR test exclusion.

SAR Test Exclusion Calculations for WWAN

Antennas < 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value						
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Full Power, Proximity Sensor Off																	
Cellular	W-CDMA 2	1907.6	22.00	158	1	0	105	188	106			43.6 -MEASURE-	43.6 -MEASURE-	> 50 mm	> 50 mm	> 50 mm	
Cellular	W-CDMA 5	846.6	24.00	251	1	0	105	188	106			46.2 -MEASURE-	46.2 -MEASURE-	> 50 mm	> 50 mm	> 50 mm	
Cellular	LTE Band 5	844	24.50	282	1	0	105	188	106			51.8 -MEASURE-	51.8 -MEASURE-	> 50 mm	> 50 mm	> 50 mm	
Cellular	LTE Band 17	710	24.00	251	1	0	105	188	106			42.3 -MEASURE-	42.3 -MEASURE-	> 50 mm	> 50 mm	> 50 mm	
Power Back-off, Proximity Sensor On																	
Cellular	W-CDMA 2	1907.6	15.00	32	1	0						8.8 -MEASURE-	8.8 -MEASURE-				
Cellular	W-CDMA 5	846.6	17.00	50	1	0						9.2 -MEASURE-	9.2 -MEASURE-				
Cellular	LTE Band 5	844	18.00	63	1	0						11.6 -MEASURE-	11.6 -MEASURE-				
Cellular	LTE Band 17	710	18.50	71	1	0						12 -MEASURE-	12 -MEASURE-				

Note(s):

1. According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value						
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Full Power, Proximity Sensor Off																	
Cellular	W-CDMA 2	1907.6	22.00	158	1	0	105	188	106			< 50 mm	< 50 mm	658.6 mW -EXEMPT-	1488.6 mW -EXEMPT-	668.6 mW -EXEMPT-	
Cellular	W-CDMA 5	846.6	24.00	251	1	0	105	188	106			< 50 mm	< 50 mm	473.4 mW -EXEMPT-	941.9 mW -EXEMPT-	479.1 mW -EXEMPT-	
Cellular	LTE Band 5	844	24.50	282	1	0	105	188	106			< 50 mm	< 50 mm	472.7 mW -EXEMPT-	939.8 mW -EXEMPT-	478.4 mW -EXEMPT-	
Cellular	LTE Band 17	710	24.00	251	1	0	105	188	106			< 50 mm	< 50 mm	438.4 mW -EXEMPT-	831.2 mW -EXEMPT-	443.1 mW -EXEMPT-	
Power Back-off, Proximity Sensor On																	
Cellular	W-CDMA 2	1907.6	15.00	32	1	0						< 50 mm	< 50 mm				
Cellular	W-CDMA 5	846.6	17.00	50	1	0						< 50 mm	< 50 mm				
Cellular	LTE Band 5	844	18.00	63	1	0						< 50 mm	< 50 mm				
Cellular	LTE Band 17	710	18.50	71	1	0						< 50 mm	< 50 mm				

Note(s):

1. According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

SAR Test Exclusion Calculations for WLAN

Antennas < 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value						
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Full Power, Proximity Sensor Off																	
Main	Wi-Fi 2.4 GHz	2462	16.50	45	1	95	281	90	4		14.1	> 50 mm	> 50 mm	> 50 mm	14.1		
	Wi-Fi 5.2 GHz	5240	13.50	22	1	95	281	90	4		-MEASURE- 10.1	> 50 mm	> 50 mm	> 50 mm	-MEASURE- 10.1		
	Wi-Fi 5.3 GHz	5320	13.50	22	1	95	281	90	4		-MEASURE- 10.1	> 50 mm	> 50 mm	> 50 mm	-MEASURE- 10.1		
	Wi-Fi 5.5 GHz	5700	13.50	22	1	95	281	90	4		-MEASURE- 10.5	> 50 mm	> 50 mm	> 50 mm	-MEASURE- 10.5		
	Wi-Fi 5.8 GHz	5825	13.50	22	1	95	281	90	4		-MEASURE- 10.6	> 50 mm	> 50 mm	> 50 mm	-MEASURE- 10.6		
	Bluetooth	2480	10.00	10	1	95	281	90	4		-MEASURE- 3.1	> 50 mm	> 50 mm	> 50 mm	-MEASURE- 3.1		
	Power Back-off, Proximity Sensor On																
	Wi-Fi 2.4 GHz	2462	11.50	14	1							4.4					
	Wi-Fi 5.2 GHz	5240	9.50	9	1							-MEASURE- 4.1					
	Wi-Fi 5.3 GHz	5320	9.50	9	1							-MEASURE- 4.2					
Wi-Fi 5.5 GHz	5700	9.50	9	1							-MEASURE- 4.3						
Wi-Fi 5.8 GHz	5825	9.50	9	1							-MEASURE- 4.3						
Full Power, Proximity Sensor Off																	
Sub	Wi-Fi 2.4 GHz	2462	16.50	45	1	5	232	184	24		14.1	14.1	> 50 mm	> 50 mm	2.9		
	Wi-Fi 5.2 GHz	5240	13.50	22	1	5	232	184	24		-MEASURE- 10.1	-MEASURE- 10.1	> 50 mm	> 50 mm	-EXEMPT- 2.1		
	Wi-Fi 5.3 GHz	5320	13.50	22	1	5	232	184	24		-MEASURE- 10.1	-MEASURE- 10.1	> 50 mm	> 50 mm	-EXEMPT- 2.1		
	Wi-Fi 5.5 GHz	5700	13.50	22	1	5	232	184	24		-MEASURE- 10.5	-MEASURE- 10.5	> 50 mm	> 50 mm	-EXEMPT- 2.2		
	Wi-Fi 5.8 GHz	5825	13.50	22	1	5	232	184	24		-MEASURE- 10.6	-MEASURE- 10.6	> 50 mm	> 50 mm	-EXEMPT- 2.2		
	Power Back-off, Proximity Sensor On																
	Wi-Fi 2.4 GHz	2462	11.50	14	1							4.4					
	Wi-Fi 5.2 GHz	5240	9.50	9	1							-MEASURE- 4.1					
	Wi-Fi 5.3 GHz	5320	9.50	9	1							-MEASURE- 4.2					
	Wi-Fi 5.5 GHz	5700	9.50	9	1							-MEASURE- 4.3					
Wi-Fi 5.8 GHz	5825	9.50	9	1							-MEASURE- 4.3						

Note(s):

1. According to KDB 447498, if the calculated threshold value is >3 then SAR testing is required.

Antennas > 50mm to adjacent edges

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Calculated Threshold Value						
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Full Power, Proximity Sensor Off																	
Main	Wi-Fi 2.4 GHz	2462	16.50	45	1	95	281	90	4		< 50 mm	545.6 mW -EXEMPT-	2405.6 mW -EXEMPT-	495.6 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.2 GHz	5240	13.50	22	1	95	281	90	4		< 50 mm	515.5 mW -EXEMPT-	2375.5 mW -EXEMPT-	465.5 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.3 GHz	5320	13.50	22	1	95	281	90	4		< 50 mm	515 mW -EXEMPT-	2375 mW -EXEMPT-	465 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.5 GHz	5700	13.50	22	1	95	281	90	4		< 50 mm	512.8 mW -EXEMPT-	2372.8 mW -EXEMPT-	462.8 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.8 GHz	5825	13.50	22	1	95	281	90	4		< 50 mm	512.2 mW -EXEMPT-	2372.2 mW -EXEMPT-	462.2 mW -EXEMPT-	< 50 mm		
	Bluetooth	2480	10.00	10	1	95	281	90	4		< 50 mm	545.3 mW -EXEMPT-	2405.3 mW -EXEMPT-	495.3 mW -EXEMPT-	< 50 mm		
	Power Back-off, Proximity Sensor On																
Wi-Fi 2.4 GHz	2462	11.50	14	1							< 50 mm						
Wi-Fi 5.2 GHz	5240	9.50	9	1							< 50 mm						
Wi-Fi 5.3 GHz	5320	9.50	9	1							< 50 mm						
Wi-Fi 5.5 GHz	5700	9.50	9	1							< 50 mm						
Wi-Fi 5.8 GHz	5825	9.50	9	1							< 50 mm						
Full Power, Proximity Sensor Off																	
Sub	Wi-Fi 2.4 GHz	2462	16.50	45	1	5	232	184	24		< 50 mm	< 50 mm	1915.6 mW -EXEMPT-	1435.6 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.2 GHz	5240	13.50	22	1	5	232	184	24		< 50 mm	< 50 mm	1885.5 mW -EXEMPT-	1405.5 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.3 GHz	5320	13.50	22	1	5	232	184	24		< 50 mm	< 50 mm	1885 mW -EXEMPT-	1405 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.5 GHz	5700	13.50	22	1	5	232	184	24		< 50 mm	< 50 mm	1882.8 mW -EXEMPT-	1402.8 mW -EXEMPT-	< 50 mm		
	Wi-Fi 5.8 GHz	5825	13.50	22	1	5	232	184	24		< 50 mm	< 50 mm	1882.2 mW -EXEMPT-	1402.2 mW -EXEMPT-	< 50 mm		
	Power Back-off, Proximity Sensor On																
	Wi-Fi 2.4 GHz	2462	11.50	14	1							< 50 mm					
Wi-Fi 5.2 GHz	5240	9.50	9	1							< 50 mm						
Wi-Fi 5.3 GHz	5320	9.50	9	1							< 50 mm						
Wi-Fi 5.5 GHz	5700	9.50	9	1							< 50 mm						
Wi-Fi 5.8 GHz	5825	9.50	9	1							< 50 mm						

Note(s):

1. According to KDB 447498, if the calculated Power threshold is less than the output power then SAR testing is required.

7.2. Required Test Configurations

The table below identifies the standalone test configurations required for this device according to the findings in Section 7.1:

Test Configurations	Pwr Back-off	Rear	Edge 1	Edge 2	Edge 3	Edge 4
			(Top Edge)	(Right Edge)	(Bottom Edge)	(Left Edge)
W-CDMA Band 2	OFF	Yes	Yes	No	No	No
	ON	Yes	Yes	No	No	No
W-CDMA Band 5	OFF	Yes	Yes	No	No	No
	ON	Yes	Yes	No	No	No
LTE Band 5	OFF	Yes	Yes	No	No	No
	ON	Yes	Yes	No	No	No
LTE Band 17	OFF	Yes	Yes	No	No	No
	ON	Yes	Yes	No	No	No
Wi-Fi 2.4 GHz (Main Antenna)	OFF	Yes	No	No	No	Yes
	ON	Yes	No	No	No	No
Wi-Fi 2.4 GHz (Sub Antenna)	OFF	Yes	Yes	No	No	No
	ON	Yes	No	No	No	No
Wi-Fi 5 GHz (Main Antenna)	OFF	Yes	No	No	No	Yes
	ON	Yes	No	No	No	No
Wi-Fi 5 GHz (Sub Antenna)	OFF	Yes	Yes	No	No	No
	ON	Yes	No	No	No	No
Bluetooth	OFF	Yes	No	No	No	Yes

Note(s):

1. Yes = Testing is required.
2. No = Testing is not required.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:**SAR 1 Room**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
1-13-2016	Body 5180	e'	48.8700	Relative Permittivity (ϵ_r):	48.87	49.05	-0.36	5	
		e"	18.4600	Conductivity (σ):	5.32	5.27	0.86	5	
	Body 5200	e'	48.8400	Relative Permittivity (ϵ_r):	48.84	49.02	-0.37	5	
		e"	18.4900	Conductivity (σ):	5.35	5.29	0.97	5	
	Body 5600	e'	48.1500	Relative Permittivity (ϵ_r):	48.15	48.48	-0.68	5	
		e"	18.8200	Conductivity (σ):	5.86	5.76	1.72	5	
	Body 5800	e'	47.8400	Relative Permittivity (ϵ_r):	47.84	48.20	-0.75	5	
		e"	18.9900	Conductivity (σ):	6.12	6.00	2.07	5	
	Body 5825	e'	47.8000	Relative Permittivity (ϵ_r):	47.80	48.20	-0.83	5	
		e"	19.0300	Conductivity (σ):	6.16	6.00	2.73	5	
	1-17-2016	Body 5180	e'	49.0500	Relative Permittivity (ϵ_r):	49.05	49.05	0.01	5
			e"	17.8300	Conductivity (σ):	5.14	5.27	-2.58	5
Body 5200		e'	49.0200	Relative Permittivity (ϵ_r):	49.02	49.02	0.00	5	
		e"	17.8500	Conductivity (σ):	5.16	5.29	-2.52	5	
Body 5600		e'	48.3300	Relative Permittivity (ϵ_r):	48.33	48.48	-0.30	5	
		e"	18.3000	Conductivity (σ):	5.70	5.76	-1.09	5	
Body 5800		e'	48.0400	Relative Permittivity (ϵ_r):	48.04	48.20	-0.33	5	
		e"	18.5200	Conductivity (σ):	5.97	6.00	-0.46	5	
Body 5825		e'	47.9900	Relative Permittivity (ϵ_r):	47.99	48.20	-0.44	5	
		e"	18.5600	Conductivity (σ):	6.01	6.00	0.19	5	
1-22-2016		Body 5180	e'	48.5800	Relative Permittivity (ϵ_r):	48.58	49.05	-0.95	5
			e"	18.2600	Conductivity (σ):	5.26	5.27	-0.23	5
	Body 5200	e'	48.5800	Relative Permittivity (ϵ_r):	48.58	49.02	-0.90	5	
		e"	18.3000	Conductivity (σ):	5.29	5.29	-0.07	5	
	Body 5600	e'	47.8600	Relative Permittivity (ϵ_r):	47.86	48.48	-1.27	5	
		e"	18.6400	Conductivity (σ):	5.80	5.76	0.75	5	
	Body 5800	e'	47.5400	Relative Permittivity (ϵ_r):	47.54	48.20	-1.37	5	
		e"	18.9100	Conductivity (σ):	6.10	6.00	1.64	5	
	Body 5825	e'	47.5000	Relative Permittivity (ϵ_r):	47.50	48.20	-1.45	5	
		e"	18.9400	Conductivity (σ):	6.13	6.00	2.24	5	

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-11-2016	Body 835	e'	55.6900	Relative Permittivity (ϵ_r):	55.69	55.20	0.89	5
		e"	21.7800	Conductivity (σ):	1.01	0.97	4.25	5
	Body 820	e'	55.8200	Relative Permittivity (ϵ_r):	55.82	55.28	0.98	5
		e"	21.8400	Conductivity (σ):	1.00	0.97	2.82	5
	Body 850	e'	55.6000	Relative Permittivity (ϵ_r):	55.60	55.16	0.80	5
		e"	21.7500	Conductivity (σ):	1.03	0.99	4.14	5
1-13-2016	Body 2450	e'	50.7500	Relative Permittivity (ϵ_r):	50.75	52.70	-3.70	5
		e"	14.8400	Conductivity (σ):	2.02	1.95	3.67	5
	Body 2410	e'	50.9200	Relative Permittivity (ϵ_r):	50.92	52.76	-3.49	5
		e"	14.7600	Conductivity (σ):	1.98	1.91	3.69	5
	Body 2475	e'	50.6600	Relative Permittivity (ϵ_r):	50.66	52.67	-3.81	5
		e"	14.9500	Conductivity (σ):	2.06	1.99	3.64	5
1-19-2016	Body 835	e'	54.0000	Relative Permittivity (ϵ_r):	54.00	55.20	-2.17	5
		e"	21.4600	Conductivity (σ):	1.00	0.97	2.72	5
	Body 820	e'	54.1200	Relative Permittivity (ϵ_r):	54.12	55.28	-2.09	5
		e"	21.5100	Conductivity (σ):	0.98	0.97	1.27	5
	Body 850	e'	53.8900	Relative Permittivity (ϵ_r):	53.89	55.16	-2.30	5
		e"	21.4300	Conductivity (σ):	1.01	0.99	2.60	5
1-19-2016	Body 2450	e'	52.1700	Relative Permittivity (ϵ_r):	52.17	52.70	-1.01	5
		e"	14.7500	Conductivity (σ):	2.01	1.95	3.04	5
	Body 2410	e'	52.4100	Relative Permittivity (ϵ_r):	52.41	52.76	-0.66	5
		e"	14.5500	Conductivity (σ):	1.95	1.91	2.22	5
	Body 2475	e'	52.0500	Relative Permittivity (ϵ_r):	52.05	52.67	-1.17	5
		e"	14.9200	Conductivity (σ):	2.05	1.99	3.43	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1-11-2016	Body 1900	e'	51.1900	Relative Permittivity (ϵ_r):	51.19	53.30	-3.96	5
		e"	14.8900	Conductivity (σ):	1.57	1.52	3.49	5
	Body 1850	e'	51.3700	Relative Permittivity (ϵ_r):	51.37	53.30	-3.62	5
		e"	14.8100	Conductivity (σ):	1.52	1.52	0.23	5
	Body 1910	e'	51.1700	Relative Permittivity (ϵ_r):	51.17	53.30	-4.00	5
		e"	14.9000	Conductivity (σ):	1.58	1.52	4.11	5
1-14-2016	Body 750	e'	54.3900	Relative Permittivity (ϵ_r):	54.39	55.55	-2.08	5
		e"	23.1500	Conductivity (σ):	0.97	0.96	0.24	5
	Body 700	e'	54.9900	Relative Permittivity (ϵ_r):	54.99	55.74	-1.34	5
		e"	23.7000	Conductivity (σ):	0.92	0.96	-3.83	5
	Body 790	e'	54.0600	Relative Permittivity (ϵ_r):	54.06	55.39	-2.41	5
		e"	22.9600	Conductivity (σ):	1.01	0.97	4.39	5
1-18-2016	Body 750	e'	53.2800	Relative Permittivity (ϵ_r):	53.28	55.55	-4.08	5
		e"	22.9200	Conductivity (σ):	0.96	0.96	-0.75	5
	Body 700	e'	54.0600	Relative Permittivity (ϵ_r):	54.06	55.74	-3.01	5
		e"	23.5600	Conductivity (σ):	0.92	0.96	-4.40	5
	Body 790	e'	52.8900	Relative Permittivity (ϵ_r):	52.89	55.39	-4.52	5
		e"	22.8100	Conductivity (σ):	1.00	0.97	3.71	5
1-19-2016	Body 1900	e'	52.8300	Relative Permittivity (ϵ_r):	52.83	53.30	-0.88	5
		e"	14.9500	Conductivity (σ):	1.58	1.52	3.91	5
	Body 1850	e'	53.0000	Relative Permittivity (ϵ_r):	53.00	53.30	-0.56	5
		e"	14.9200	Conductivity (σ):	1.53	1.52	0.97	5
	Body 1910	e'	52.8000	Relative Permittivity (ϵ_r):	52.80	53.30	-0.94	5
		e"	14.9400	Conductivity (σ):	1.59	1.52	4.39	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D750V3	1122	8-17-2015	750	1g	8.23	8.6
				10g	5.37	5.67
D835V2	4d194	9-17-2015	835	1g	9.38	9.49
				10g	6.09	6.18
D1900V2	5d199	2-6-2015	1900	1g	41.0	40.6
				10g	21.4	21.6
D2450V2	960	2-5-2015	2450	1g	53.3	50.8
				10g	24.8	23.6
D5GHzV2	1184	8-26-2015	5200	1g	79.6	76.1
				10g	22.7	21.2
			5600	1g	82.8	80.5
				10g	23.6	22.3
			5800	1g	80.3	78.7
				10g	22.8	21.7

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-13-2016	D5GhzV2 (5200)	1184	Body	1g	7.69	76.90	76.10	1.05	
				10g	2.17	21.70	21.20	2.36	
1-13-2016	D5GhzV2 (5600)	1184	Body	1g	8.28	82.80	80.50	2.86	
				10g	2.30	23.00	22.30	3.14	
1-13-2016	D5GhzV2 (5800)	1184	Body	1g	7.58	75.80	78.70	-3.68	
				10g	2.12	21.20	21.70	-2.30	
1-17-2016	D5GhzV2 (5200)	1184	Body	1g	7.74	77.40	76.10	1.71	
				10g	2.18	21.80	21.20	2.83	
1-17-2016	D5GhzV2 (5600)	1184	Body	1g	8.31	83.10	80.50	3.23	
				10g	2.32	23.20	22.30	4.04	
1-17-2016	D5GhzV2 (5800)	1184	Body	1g	7.33	73.30	78.70	-6.86	1,2
				10g	2.05	20.50	21.70	-5.53	
1-22-2016	D5GhzV2 (5200)	1184	Body	1g	7.60	76.00	76.10	-0.13	
				10g	2.17	21.70	21.20	2.36	
1-22-2016	D5GhzV2 (5600)	1184	Body	1g	8.43	84.30	80.50	4.72	
				10g	2.35	23.50	22.30	5.38	
1-22-2016	D5GhzV2 (5800)	1184	Body	1g	7.53	75.30	78.70	-4.32	
				10g	2.12	21.20	21.70	-2.30	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1-11-2016	D835V2	4d194	Body	1g	1.00	10.00	9.49	5.37	3,4
				10g	0.66	6.60	6.18	6.80	
1-13-2016	D2450V2	960	Body	1g	5.33	53.30	50.8	4.92	5,6
				10g	2.44	24.40	23.6	3.39	
1-19-2016	D835V2	4d194	Body	1g	0.99	9.86	9.49	3.90	
				10g	0.65	6.49	6.18	5.02	
1-19-2016	D2450V2	960	Body	1g	5.32	53.20	50.80	4.72	
				10g	2.41	24.10	23.60	2.12	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
01-11-2016	D1900V2	5d199	Body	1g	3.99	39.90	40.6	-1.72	7,8
				10g	2.04	20.40	21.6	-5.56	
01-14-2016	D750V3	1122	Body	1g	0.85	8.50	8.6	-1.16	9,10
				10g	0.57	5.66	5.67	-0.18	
01-18-2016	D750V3	1122	Body	1g	0.85	8.51	8.6	-1.05	
				10g	0.57	5.65	5.67	-0.35	
01-19-2016	D1900V2	5d199	Body	1g	4.01	40.10	40.6	-1.23	
				10g	2.02	20.20	21.6	-6.48	

9. Conducted Output Power Measurements

9.1. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
A _{hs} = β_{hs}/β_c	30/15				

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
A _{hs} = β_{hs}/β_c	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

WCDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	MPR (dB)	Reduced Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	22.7	N/A	16.4	
			4183	836.6	N/A	22.8	N/A	16.6	
			4233	846.6	N/A	22.6	N/A	16.5	
	HSDPA	Subtest 1	4132	826.4	0	22.6	0	16.3	
			4183	836.6	0	22.6	0	16.6	
			4233	846.6	0	22.6	0	16.6	
		Subtest 2	4132	826.4	0	22.4	0	16.2	
			4183	836.6	0	22.5	0	16.4	
			4233	846.6	0	22.6	0	16.4	
		Subtest 3	4132	826.4	0.5	22.2	0	16.0	
			4183	836.6	0.5	22.3	0	16.2	
			4233	846.6	0.5	22.2	0	16.1	
		Subtest 4	4132	826.4	0.5	22.0	0	15.8	
			4183	836.6	0.5	22.1	0	16.0	
			4233	846.6	0.5	22.1	0	15.9	
		HSUPA	Subtest 1	4132	826.4	0	22.3	0	15.7
				4183	836.6	0	22.5	0	15.8
				4233	846.6	0	22.5	0	15.7
	Subtest 2		4132	826.4	2	20.5	0	14.3	
			4183	836.6	2	20.7	0	14.4	
			4233	846.6	2	20.6	0	14.3	
	Subtest 3		4132	826.4	1	21.5	0	15.2	
			4183	836.6	1	21.7	0	15.4	
			4233	846.6	1	21.6	0	15.4	
	Subtest 4		4132	826.4	2	20.8	0	14.4	
			4183	836.6	2	20.9	0	14.6	
			4233	846.6	2	20.9	0	14.6	
	Subtest 5		4132	826.4	0	22.6	0	16.3	
			4183	836.6	0	22.7	0	16.5	
			4233	846.6	0	22.7	0	16.4	

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Max. Pwr (dBm)	MPR (dB)	Reduced Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	20.8	N/A	14.8
			9400	1880.0	N/A	20.5	N/A	14.4
			9538	1907.6	N/A	20.7	N/A	14.5
	HSDPA	Subtest 1	9262	1852.4	0	20.8	0	14.5
			9400	1880.0	0	20.5	0	14.3
			9538	1907.6	0	20.8	0	14.4
		Subtest 2	9262	1852.4	0	20.6	0	14.6
			9400	1880.0	0	20.4	0	14.2
			9538	1907.6	0	20.5	0	14.3
		Subtest 3	9262	1852.4	0.5	20.5	0	14.3
			9400	1880.0	0.5	20.1	0	14.0
			9538	1907.6	0.5	20.3	0	14.1
		Subtest 4	9262	1852.4	0.5	20.3	0	14.1
			9400	1880.0	0.5	19.9	0	13.8
			9538	1907.6	0.5	20.1	0	13.9
	HSUPA	Subtest 1	9262	1852.4	0	19.5	0	14.0
			9400	1880.0	0	19.2	0	13.7
			9538	1907.6	0	19.3	0	13.8
		Subtest 2	9262	1852.4	2	18.8	0	12.6
			9400	1880.0	2	18.4	0	12.3
			9538	1907.6	2	18.6	0	12.4
		Subtest 3	9262	1852.4	1	19.7	0	13.6
			9400	1880.0	1	19.4	0	13.3
			9538	1907.6	1	19.6	0	13.4
		Subtest 4	9262	1852.4	2	18.9	0	12.8
			9400	1880.0	2	18.6	0	12.5
			9538	1907.6	2	18.7	0	12.7
		Subtest 5	9262	1852.4	0	20.7	0	14.6
			9400	1880.0	0	20.4	0	14.3
			9538	1907.6	0	20.6	0	14.4

9.2. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz		829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	23.2	23.4	23.3	0	17.3	17.4	17.4
			1	25	0	23.1	23.3	23.2	0	17.3	17.4	17.3
			1	49	0	23.1	23.2	23.2	0	17.2	17.3	17.2
			25	0	1	22.2	22.2	22.2	0	16.3	16.5	16.3
			25	12	1	22.1	22.2	22.1	0	16.3	16.3	16.2
			25	25	1	22.2	22.2	22.1	0	16.3	16.3	16.2
		16QAM	1	0	1	22.1	22.5	22.2	0	16.3	16.8	16.5
			1	25	1	22.0	22.5	22.1	0	16.2	16.7	16.3
			1	49	1	22.0	22.5	22.0	0	16.2	16.6	16.3
			25	0	2	21.2	21.2	21.3	0	15.4	15.4	15.5
			25	12	2	21.2	21.2	21.2	0	15.3	15.4	15.4
			25	25	2	21.2	21.2	21.2	0	15.3	15.4	15.4
			50	0	2	21.2	21.2	21.2	0	15.3	15.4	15.3
			50	0	2	21.2	21.2	21.2	0	15.3	15.4	15.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz		826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.1	23.2	23.0	0	17.2	17.4	17.2
			1	12	0	23.2	23.2	23.0	0	17.3	17.4	17.2
			1	24	0	23.1	23.1	22.9	0	17.1	17.2	17.1
			12	0	1	22.1	22.1	22.0	0	16.3	16.3	16.3
			12	6	1	22.0	22.0	22.0	0	16.3	16.3	16.2
			12	11	1	22.1	22.1	22.0	0	16.3	16.3	16.2
		16QAM	25	0	1	22.1	22.1	22.0	0	16.3	16.3	16.2
			1	0	1	22.0	22.3	22.5	0	16.3	16.6	17.0
			1	12	1	22.0	22.4	22.5	0	16.4	16.6	16.9
			1	24	1	22.0	22.3	22.5	0	16.3	16.6	16.9
			12	0	2	21.2	21.2	21.1	0	15.4	15.5	15.4
			12	6	2	21.1	21.2	21.1	0	15.4	15.4	15.3
			12	11	2	21.2	21.2	21.1	0	15.4	15.4	15.3
			25	0	2	21.2	21.1	21.0	0	15.5	15.4	15.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz		825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.3	23.4	23.3	0	17.4	17.6	17.5
			1	7	0	23.4	23.4	23.4	0	17.6	17.7	17.6
			1	14	0	23.3	23.4	23.2	0	17.5	17.6	17.5
			8	0	1	22.2	22.2	22.1	0	16.5	16.5	16.5
			8	4	1	22.2	22.2	22.1	0	16.5	16.6	16.5
			8	7	1	22.2	22.2	22.1	0	16.5	16.5	16.5
		16QAM	15	0	1	22.2	22.2	22.1	0	16.5	16.5	16.5
			1	0	1	22.1	22.5	22.1	0	16.5	17.0	16.7
			1	7	1	22.2	22.5	22.2	0	16.6	17.0	16.7
			1	14	1	22.1	22.5	22.1	0	16.4	16.9	16.6
			8	0	2	21.3	21.1	21.4	0	15.5	15.4	15.7
			8	4	2	21.4	21.2	21.4	0	15.6	15.5	15.8
			8	7	2	21.3	21.2	21.4	0	15.6	15.5	15.7
			15	0	2	21.3	21.3	21.2	0	15.6	15.6	15.5

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)			Target MPR	Reduced Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz		824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.5	23.5	23.3	0	17.6	17.7	17.6
			1	2	0	23.0	23.1	23.0	0	17.2	17.2	17.2
			1	5	0	23.5	23.5	23.4	0	17.6	17.7	17.6
			3	0	0	23.3	23.3	23.2	0	17.5	17.6	17.4
			3	1	0	23.1	23.1	23.1	0	17.4	17.4	17.3
			3	2	0	23.1	23.2	23.0	0	17.4	17.4	17.3
		16QAM	6	0	1	22.1	22.2	22.0	0	16.4	16.5	16.4
			1	0	1	22.4	22.5	22.2	0	16.7	16.7	16.9
			1	2	1	21.9	22.2	21.8	0	16.3	16.2	16.5
			1	5	1	22.3	22.5	22.2	0	16.7	16.7	16.9
			3	0	1	22.3	22.4	22.3	0	16.7	16.6	16.5
			3	1	1	22.2	22.2	22.2	0	16.5	16.5	16.4
			3	2	1	22.2	22.2	22.1	0	16.5	16.5	16.4
			6	0	2	21.3	21.0	21.4	0	15.7	15.8	15.3

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)	Target MPR	Reduced Avg Pwr (dBm)
						710 MHz		710 MHz
LTE Band 17	10	QPSK	1	0	0	22.6	0	18.0
			1	25	0	22.6	0	17.9
			1	49	0	22.5	0	17.8
			25	0	1	21.6	0	17.0
			25	12	1	21.6	0	16.9
			25	25	1	21.6	0	16.9
			50	0	1	21.6	0	16.9
		16QAM	1	0	1	21.5	0	17.3
			1	25	1	21.6	0	17.3
			1	49	1	21.5	0	17.3
			25	0	2	20.8	0	16.0
			25	12	2	20.7	0	16.0
			25	25	2	20.7	0	16.0
			50	0	2	20.8	0	16.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)	Target MPR	Reduced Avg Pwr (dBm)
						710 MHz		710 MHz
LTE Band 17	5	QPSK	1	0	0	22.7	0	17.9
			1	12	0	22.6	0	17.9
			1	24	0	22.7	0	17.8
			12	0	1	21.7	0	16.9
			12	6	1	21.7	0	16.9
			12	11	1	21.7	0	16.9
			25	0	1	21.7	0	16.9
		16QAM	1	0	1	21.6	0	17.2
			1	12	1	21.5	0	17.3
			1	24	1	21.5	0	17.2
			12	0	2	20.8	0	16.1
			12	6	2	20.8	0	16.1
			12	11	2	20.8	0	16.1
			25	0	2	20.8	0	16.0

Note(s):

10/5 MHz Bandwidths does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

9.3. Wi-Fi 2.4GHz (DTS Band)

Measured Results

SISO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduced Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
Main	2.4	802.11b	1 Mbps	1	2412	16.3	16.5	Yes	11.3	11.5	Yes
				6	2437	15.7			11.0		
				11	2462	15.7			10.8		
				12	2467	12.8			10.6		
				13	2472	12.9			10.9		
		802.11g	6 Mbps	1	2412	Not Required	14.5	No	10.9	11.5	No
				6	2437		11.5		10.6		
				11	2462		4.5		10.5		
				12	2467		4.6		10.5		
		802.11n (HT20)	6.5 Mbps	1	2412	Not Required	14.5	No	10.7	11.5	No
				6	2437		11.5		10.5		
				11	2462		3.5		10.4		
				12	2467		3.5		10.4		
				13	2472		3.5		3.5		
		Sub	2.4	802.11b	1 Mbps	1	2412	16.4	16.5	Yes	11.3
6	2437					16.1	11.3				
11	2462					16.3	11.4				
12	2467					13.3	11.1				
13	2472					13.2	11.1				
802.11g	6 Mbps			1	2412	Not Required	14.5	No	10.5	11.5	No
				6	2437		11.5		10.8		
				11	2462		4.5		10.9		
				12	2467		4.5		10.9		
802.11n (HT20)	6.5 Mbps			1	2412	Not Required	14.5	No	10.3	11.5	No
				6	2437		11.5		10.8		
				11	2462		3.5		10.9		
				12	2467		3.5		10.7		
				13	2472		3.5		3.3		

MIMO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduced Pwr.		
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)
MINO Main	2.4	802.11n (HT20)	6.5 Mbps	1	2412	13.9	14.5	No	10.4	11.5	No
				6	2437	13.4			10.6		
				11	2462	13.3			10.4		
				12	2467	10.4			10.3		
				13	2472	3.0			3.4		
MINO Sub	2.4	802.11n (HT20)	6.5 Mbps	1	2412	14.0	14.5	No	10.6	11.5	No
				6	2437	13.8			10.9		
				11	2462	14.0			11.1		
				12	2467	11.0			10.8		
				13	2472	3.4			3.3		

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.4. Wi-Fi 5GHz (U-NII Bands)

Measured Results

SISO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr			
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	
SISO Main	5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	12.7	13.5	Yes	9.4	9.5	No	
				56	5280	12.8			9.4			
				60	5300	13.0			9.4			
				64	5320	13.2			9.4			
		802.11n (HT20)	6.5 Mbps	52	5260	13.3	13.5	No	9.0	9.5	No	
				56	5280	13.4			9.0			
				60	5300	12.5			9.1			
		802.11n (HT40)	13.5 Mbps	54	5270	Not Required	11.5	No	8.8	9.5	No	
				62	5310				9.4			
				52	5260				9.0			
		802.11ac (VHT20)	6.5 Mbps	56	5280	Not Required	11.5	No	9.0	9.5	No	
				60	5300				9.1			
				64	5320				9.0			
		802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	11.5	No	8.8	9.5	No	
				62	5310				9.4			
		802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	10.5	No	9.5	9.5	Yes	
				62	5310				9.4			
		5.5 (U-NII 2C) <5.65GHz	802.11a	6 Mbps	100	5500	12.6	13.5	Yes	9.5	9.5	No
	112				5560	13.5	8.8					
	116				5580	12.8	8.7					
	128				5640	12.7	8.9					
	802.11n (HT20)		6.5 Mbps	100	5500	13.3	13.5	No	9.2	9.5	No	
				112	5560	13.2			9.4			
				116	5580	12.5			9.4			
	802.11n (HT40)		13.5 Mbps	102	5510	Not Required	11.5	No	8.8	9.5	No	
				110	5550				8.9			
				118	5590				9.0			
	802.11ac (VHT20)		6.5 Mbps	100	5500	Not Required	11.5	No	9.2	9.5	No	
				112	5560				9.4			
				116	5580				9.4			
	802.11ac (VHT40)		13.5 Mbps	102	5510	Not Required	11.5	No	8.7	9.5	No	
				110	5550				8.8			
				118	5590				8.9			
	802.11ac (VHT80)		29.3 Mbps	106	5530	Not Required	10.5	No	9.4	9.5	Yes	
				122	5610				9.5			
				126	5630				9.2			
	5.5 (U-NII 2C) >5.65GHz + 5.8 (U-NII 3)		802.11a	6 Mbps	132	5660	12.8	13.5	Yes	8.9	9.5	No
					149	5745	12.9			8.9		
					165	5825	12.6			8.8		
			802.11n (HT20)	6.5 Mbps	132	5660	13.4	13.5	No	8.9	9.5	No
					149	5745	12.5			8.9		
		165			5825	13.2	8.9					
802.11n (HT40)		13.5 Mbps	134	5670	Not Required	11.5	No	8.8	9.5	No		
			142	5710				8.7				
			151	5755				8.8				
802.11ac (VHT20)		6.5 Mbps	132	5660	Not Required	11.5	No	8.9	9.5	No		
			149	5745				8.8				
			165	5825				8.8				
802.11ac (VHT40)		13.5 Mbps	134	5670	Not Required	11.5	No	8.7	9.5	No		
			142	5710				8.8				
			151	5755				8.7				
802.11ac (VHT80)		29.3 Mbps	138	5790	Not Required	10.5	No	8.9	9.5	Yes		
			155	5775				8.9				
			159	5795				8.8				

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr			
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	
SISO Aux	5.3 (U-NII 2A)	802.11a	6 Mbps	52	5260	12.9	13.5	Yes	9.1	9.5	No	
				56	5280	12.8			9.1			
				60	5300	12.7			9.0			
				64	5320	12.7			9.1			
		802.11n (HT20)	6.5 Mbps	52	5260	12.6	13.5	No	9.0	9.5	No	
				56	5280	12.5			9.0			
				60	5300	13.4			9.0			
		802.11n (HT40)	13.5 Mbps	54	5270	Not Required	11.5	No	9.0	9.5	No	
				62	5310				8.9			
		802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	11.5	No	9.0	9.5	No	
				56	5280				9.0			
				60	5300				9.0			
		802.11ac (VHT40)	13.5 Mbps	54	5270	Not Required	11.5	No	9.0	9.5	No	
				62	5310				9.1			
		802.11ac (VHT80)	29.3 Mbps	58	5290	Not Required	10.5	No	9.1	9.5	Yes	
		5.5 (U-NII 2C) <5.65GHz	802.11a	6 Mbps	100	5500	12.9	13.5	Yes	9.4	9.5	No
					112	5560	13.5			9.3		
					116	5580	12.9			9.3		
	128				5640	12.9	8.6					
	802.11n (HT20)		6.5 Mbps	100	5500	12.6	13.5	No	9.0	9.5	No	
				112	5560	13.3			9.0			
				116	5580	12.6			9.1			
				128	5640	13.5			9.2			
	802.11n (HT40)		13.5 Mbps	102	5510	Not Required	11.5	No	9.3	9.5	No	
				110	5550				9.3			
				118	5590				9.3			
				126	5630				9.3			
	802.11ac (VHT20)		6.5 Mbps	100	5500	Not Required	11.5	No	9.0	9.5	No	
				112	5560				9.0			
				116	5580				9.1			
				128	5640				9.2			
	802.11ac (VHT40)		13.5 Mbps	102	5510	Not Required	11.5	No	9.3	9.5	No	
				110	5550				9.4			
				118	5590				9.3			
				126	5630				9.3			
	802.11ac (VHT80)		29.3 Mbps	106	5530	Not Required	10.5	No	9.1	9.5	Yes	
	5.5 (U-NII 2C) >5.65GHz + 5.8 (U-NII 3)		802.11a	6 Mbps	132	5660	12.8	13.5	Yes	9.4	9.5	No
					149	5745	13.0			9.4		
					165	5825	12.7			9.2		
		802.11n (HT20)	6.5 Mbps	132	5660	13.4	13.5	No	9.0	9.5	No	
				149	5745	12.6			9.1			
				165	5825	13.3			8.8			
		802.11n (HT40)	13.5 Mbps	134	5670	Not Required	11.5	No	9.4	9.5	No	
				142	5710				9.4			
				151	5755				9.4			
				159	5795				9.4			
		802.11ac (VHT20)	6.5 Mbps	132	5660	Not Required	11.5	No	9.0	9.5	No	
				149	5745				9.1			
165				5825	8.8							
802.11ac (VHT40)		13.5 Mbps	134	5670	Not Required	11.5	No	9.4	9.5	No		
			142	5710				9.4				
			151	5755				9.4				
			159	5795				9.3				
802.11ac (VHT80)		29.3 Mbps	138	5790	Not Required	10.5	No	9.2	9.5	Yes		
									9.4			

MIMO

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr			
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	
MIMO Main	5.3 (U-NII2A)	802.11n (HT20)	6.5 Mbps	52	5260	12.2	13.5	No	9.0	9.5	No	
				56	5280	12.2			9.0			
				60	5300	12.2			9.1			
				64	5320	12.2			9.1			
		802.11n (HT40)	13.5 Mbps	54	5270	Not Required	11.5	No	9.4	9.5	No	
				62	5310				9.4			
		802.11ac (VHT20)	6.5 Mbps	52	5260	Not Required	11.5	No	9.1	9.5	No	
				56	5280				9.1			
				60	5300				9.2			
		802.11ac (VHT40)	13.5 Mbps	64	5320	Not Required	11.5	No	9.1	9.5	No	
				54	5270				9.4			
		802.11ac (VHT80)	29.3 Mbps	62	5310	Not Required	11.5	No	9.4	9.5	No	
	58			5290	9.4							
	5.5 (U-NII2C) <5.65GHz	802.11n (HT20)	6.5 Mbps	100	5500	12.3	13.5	No	9.0	9.5	No	
				112	5560	12.6			9.2			
				116	5580	12.5			9.2			
				128	5640	12.8			8.6			
		802.11n (HT40)	13.5 Mbps	102	5510	Not Required	11.5	No	9.1	9.5	No	
				110	5550				9.2			
				118	5590				8.7			
				126	5630				8.9			
		802.11ac (VHT20)	6.5 Mbps	100	5500	Not Required	11.5	No	9.2	9.5	No	
				112	5560				9.2			
				116	5580				9.2			
		802.11ac (VHT40)	13.5 Mbps	128	5640	Not Required	11.5	No	8.6	9.5	No	
				102	5510				9.2			
				110	5550				9.1			
		802.11ac (VHT80)	29.3 Mbps	118	5590	Not Required	11.5	No	8.7	9.5	No	
				126	5630				8.9			
				106	5530				9.2			
		802.11ac (VHT80)	29.3 Mbps	122	5610	Not Required	10.5	No	8.6	9.5	No	
				102	5510				9.2			
		5.5 (U-NII2C) >5.65GHz + 5.8 (U-NII 3)	802.11n (HT20)	6.5 Mbps	132	5660	12.8	13.5	No	8.5	9.5	No
					149	5745	12.6			8.5		
					165	5825	12.3			9.0		
			802.11n (HT40)	13.5 Mbps	134	5670	Not Required	11.5	No	8.8	9.5	No
					142	5710				8.9		
	151				5755	8.8						
	159				5795	8.8						
	802.11ac (VHT20)		6.5 Mbps	132	5660	Not Required	11.5	No	8.6	9.5	No	
149				5745	8.5							
165				5825	9.0							
802.11ac (VHT40)	13.5 Mbps		134	5670	Not Required	11.5	No	8.8	9.5	No		
			142	5710				8.9				
			151	5755				8.8				
802.11ac (VHT40)	13.5 Mbps		159	5795	Not Required	11.5	No	8.8	9.5	No		
			142	5710				8.9				
			151	5755				8.8				
802.11ac (VHT80)	29.3 Mbps		138	5790	Not Required	10.5	No	9.0	9.5	No		
			155	5775				9.0				

Antenna	Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Max Pwr.			Reduce Pwr			
						Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	
MIMO Aux	5.3 (U-NII2A)	802.11n (HT20)	6.5 Mbps	52	5260	12.7	13.5	No	9.2	9.5	No	
				56	5280	12.5			9.1			
				60	5300	12.5			9.1			
				64	5320	12.5			9.1			
		802.11n (HT40)	13.5 Mbps	54	5270	Not Required	11.5	No	9.1	9.5	No	
				62	5310				9.2			
		802.11ac (VHT20)	6.5 Mbps	52	5260		11.5	No	9.2	9.5	No	
				56	5280				9.1			
				60	5300				9.1			
				64	5320				9.2			
		802.11ac (VHT40)	13.5 Mbps	54	5270		11.5	No	9.2	9.5	No	
				62	5310				9.1			
	802.11ac (VHT80)	29.3 Mbps	58	5290	10.5		No	9.2	9.5	No		
	5.5 (U-NII2C) <5.65GHz	802.11n (HT20)	6.5 Mbps	100	5500		12.7	13.5	No	9.1	9.5	No
				112	5560		12.4			9.1		
				116	5580		12.7			9.2		
				128	5640	12.6	9.3					
		802.11n (HT40)	13.5 Mbps	102	5510	Not Required	11.5	No	9.3	9.5	No	
				110	5550				9.3			
				118	5590				9.2			
				126	5630				9.0			
		802.11ac (VHT20)	6.5 Mbps	100	5500		11.5	No	9.1	9.5	No	
				112	5560				9.1			
				116	5580				9.2			
				128	5640				9.3			
		802.11ac (VHT40)	13.5 Mbps	102	5510		11.5	No	9.3	9.5	No	
				110	5550				9.3			
				118	5590				9.2			
				126	5630				9.1			
		802.11ac (VHT80)	29.3 Mbps	106	5530	10.5	No	9.3	9.5	No		
122				5610	8.7							
5.5 (U-NII2C) >5.65GHz + 5.8 (U-NII 3)	802.11n (HT20)	6.5 Mbps	132	5660	12.4	13.5	No	9.1	9.5	No		
			149	5745	12.8			9.2				
			165	5825	12.4			8.8				
	802.11n (HT40)	13.5 Mbps	134	5670	Not Required	11.5	No	9.4	9.5	No		
			142	5710				9.3				
			151	5755				9.4				
	802.11ac (VHT20)	6.5 Mbps	132	5660		11.5	No	9.1	9.5	No		
			149	5745				9.2				
			165	5825				8.9				
	802.11ac (VHT40)	13.5 Mbps	134	5670		11.5	No	9.4	9.5	No		
			142	5710				9.3				
			151	5755				9.4				
	802.11ac (VHT80)	29.3 Mbps	138	5790		10.5	No	8.5	9.5	No		
			155	5775				8.6				

Note(s):

- Output Power and SAR measurement is not required for 802.11n/ac (V)HT20/(V)HT40/VHT80 channels when the specified tune-up tolerances for 802.11n/ac (V)HT20/(V)HT40/VHT80 are lower than 802.11a by more than 1/2 dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.5. Bluetooth

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
2.4	V3.0 + EDR, GFSK	0	2402	9.1
		39	2441	9.0
		78	2480	7.5
	V3.0 + EDR, $\pi/4$ DQPSK	0	2402	6.0
		39	2441	5.8
		78	2480	4.1
	V3.0 + EDR, 8-DPSK	0	2402	6.0
		39	2441	5.8
		78	2480	4.2
	V4.0 LE, GFSK	0	2402	1.9
		19	2440	2.2
		39	2480	1.3

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11 v02r02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the initial test position(s) by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The initial test position(s) is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the reported SAR for the initial test position is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions are tested.
 - For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
 - When it is unclear, all equivalent conditions must be tested.

- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is ≤ 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is ≤ 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the *initial test position*, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the *initial test position*.

10.1. W-CDMA Band V

Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Rel 99 RMC	ON	0	Rear	4132	826.4	17.0	16.4	0.712	0.826	1
				4183	836.6	17.0	16.6	0.754	0.822	
			Edge 1	4183	836.6	17.0	16.6	0.640	0.698	
Rel 99 RMC	OFF	16	Rear	4183	836.6	24.0	22.8	0.515	0.683	
		19	Edge 1	4183	836.6	24.0	22.8	0.419	0.556	

10.2. W-CDMA Band II

Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Rel 99 RMC	ON	0	Rear	9400	1880.0	15.0	14.4	0.637	0.726	2
			Edge 1	9400	1880.0	15.0	14.4	0.509	0.580	
Rel 99 RMC	OFF	16	Rear	9400	1880.0	22.0	20.5	0.177	0.249	
		19	Edge 1	9400	1880.0	22.0	20.5	0.156	0.220	

10.3. LTE Band 5 (10MHz Bandwidth)

Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
QPSK	ON	0	Rear	20450	829.0	1	0	18.0	17.3	0.859	1.009	3
				20525	836.5	1	0	18.0	17.4	0.884	1.008	
				20600	844.0	25	0	17.0	16.5	0.700	0.794	
			Edge 1	20450	829.0	1	0	18.0	17.3	0.724	0.851	
				20525	836.5	1	0	18.5	17.4	0.716	0.916	
				20600	844.0	25	0	17.5	16.4	0.588	0.762	
QPSK	OFF	16	Rear	20450	829.0	1	0	24.5	23.2	0.691	0.939	
				20525	836.5	1	0	24.5	23.4	0.683	0.885	
				20600	844.0	25	0	23.5	22.2	0.543	0.729	
		Edge 1	20525	836.5	1	0	24.5	23.4	0.567	0.735		
			20600	844.0	25	0	23.5	22.2	0.447	0.600		
			20525	836.5	25	0	23.5	22.2	0.447	0.600		

10.4. LTE Band 17 (10MHz Bandwidth)

Mode	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
QPSK	ON	0	Rear	23790	710.0	1	0	18.0	18.0	0.657	0.665	4
								17.5	17.0	0.523	0.594	
			Edge 1	23790	710.0	1	0	18.0	18.0	0.651	0.659	
										17.5	17.0	0.523
QPSK	OFF	16	Rear	23790	710.0	1	25	24.0	22.6	0.379	0.526	
								23.0	21.6	0.292	0.400	
		Edge 1	23790	710.0	1	25	24.0	22.6	0.321	0.445		
									23.0	21.6	0.248	0.340

10.5. Wi-Fi (DTS Band)

Frequency Band	Mode	Antenna	RF Exposure Conditions	Pwr Back-off	Dist. (mm)	Test Position	Ch #	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
2.4GHz	802.11b 1 Mbps	SISO Main	Body	On	0	Rear	1	2412.0	1.002	11.5	11.3	0.656	0.693	
		SISO Sub	Body		0	Rear	11	2462.0	0.434	11.5	11.4	0.442	0.451	
	802.11b 1 Mbps	SISO Main	Body	Off	5	Rear	1	2412.0	1.268	16.5	16.3	0.870	0.909	
					6	Rear	1	2437.0	1.205	16.5	15.7	0.857	1.023	
		0	Edge 1		1	2412.0	0.146	16.5	16.3	0.091	0.095			
		0	Edge 4		1	2412.0	0.447	16.5	16.3	0.383	0.400			
		SISO Sub	Body		5	Rear	1	2412.0	1.028	16.5	16.4	0.948	0.979	
					11	Rear	1	2462.0	1.433	16.5	16.3	0.988	1.032	5
	0	Edge 1	1	2412.0	0.486	16.5	16.4	0.363	0.375					

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
- SAR data of Wi-Fi (DTS Band) used in this report were taken from SAR report 15K21999-S1V2, submitted under FCC ID A3LSMW700. Both models share identical antennas and output power. Spot checks were performed on model SM-W707N0, SM-W708, SM-W708N0 to ensure SAR values were the same between both models.

10.6. Wi-Fi (U-NII Band)

Frequency Band	Mode	Antenna	RF Exposure Conditions	Pwr Back-off	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
										Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11ac 29.3 Mbps (VHT80)	SISO Main	Body	On	0	Rear	58	5290.0	0.415	9.5	9.5	0.283	0.285	6
		SISO Sub	Body		0	Rear	58	5290.0	0.507	9.5	9.1	0.208	0.228	
	802.11a 6 Mbps	SISO Main	Body	Off	5	Rear	64	5320.0	0.410	13.5	13.2			
					0	Edge 4	64	5320.0	0.480	13.5	13.2	0.267	0.283	
		SISO Sub	Body		5	Rear	52	5260.0	0.305	13.5	12.9	0.127	0.146	
					0	Edge 1	52	5260.0	0.059	13.5	12.9			
5.5 GHz U-NII 2C	802.11ac 29.3 Mbps (VHT80)	SISO Main	Body	On	0	Rear	122	5610.0	0.928	9.5	9.5	0.423	0.423	7
		SISO Sub	Body		0	Rear	122	5610.0	0.651	9.5	9.4	0.225	0.232	
	802.11a 6 Mbps	SISO Main	Body	Off	5	Rear	112	5560.0	0.511	13.5	13.5			
					0	Edge 4	112	5560.0	0.777	13.5	13.5	0.256	0.256	
		SISO Sub	Body		5	Rear	112	5560.0	0.722	13.5	13.5	0.311	0.311	
					0	Edge 1	112	5560.0	0.164	13.5	13.5			
5.8 GHz U-NII 3	802.11ac 29.3 Mbps (VHT80)	SISO Main	Body	On	0	Rear	155	5775.0	0.478	9.5	8.9	0.231	0.265	
		SISO Sub	Body		0	Rear	155	5775.0	0.461	9.5	9.4	0.198	0.205	
	802.11a 6 Mbps	SISO Main	Body	Off	5	Rear	149	5745.0	0.380	13.5	12.9			
					0	Edge 4	149	5745.0	0.503	13.5	12.9	0.242	0.280	8
		SISO Sub	Body		5	Rear	149	5745.0	0.395	13.5	13.0	0.189	0.212	
					0	Edge 1	149	5745.0	0.093	13.5	13.0			

Note(s):

- Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
- Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in this exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
- Testing for a second channel was required because the reported SAR for this test position was > 0.8 W/kg.
- Additional testing required in order satisfying FCC simultaneous transmission limit criteria.
- SAR data of Wi-Fi (U-NII Band) used in this report were taken from SAR report 15K21999-S1V2, submitted under FCC ID A3LSMW700. Both models share identical antennas and output power. Spot checks were performed on model SM-W707N0, SM-W708, SM-W708N0 to ensure SAR values were the same between both models.

10.7. Bluetooth

Frequency Band	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	GFSK	0	Rear	0	2402.0	10.0	9.1	0.174	0.213	5
			Edge 4	0	2402.0	10.0	9.1	0.026	0.032	

Note(s):

- SAR data of Bluetooth used in this report were taken from SAR report 15K21999-S1V2, submitted under FCC ID A3LSMW700. Both models share identical antennas and output power. Spot checks were performed on model SM-W707N0, SM-W708, SM-W708N0 to ensure SAR values were the same between both models.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
700	LTE Band 17	Standalone	Rear	No	0.657	N/A	N/A
850	WCDMA Band V	Standalone	Rear	No	0.752	N/A	N/A
	LTE Band 5	Standalone	Rear	Yes	0.893	0.887	1.01
1900	WCDMA Band II	Standalone	Rear	No	0.637	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Standalone	Rear	No	0.988	1.01	1.02
	Bluetooth	Standalone	Rear	No	0.174	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.283	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Standalone	Rear	No	0.423	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Standalone	Edge 4	No	0.242	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations	
Standalone	1	WCDMA	+ DTS
	2	WCDMA	+ U-NII
	3	WCDMA	+ BT
	4	LTE	+ DTS
	5	LTE	+ U-NII
	6	LTE	+ BT
Notes:			
<ol style="list-style-type: none"> 1. W-CDMA and LTE support Hotspot. 2. VoIP is supported in W-CDMA and LTE. 3. DTS, U-NII supports Wi-Fi Direct. 4. DTS Radio cannot transmit simultaneously with Bluetooth Radio. 5. DTS Radio cannot transmit simultaneously with U-NII Radio. 6. U-NII Radio cannot transmit simultaneously with Bluetooth Radio. 			

Estimated SAR for WWAN

Antenna	Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)					
			dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front
Full Power, Proximity Sensor Off																
Cellular	W-CDMA 2	1907.6	23.00	200	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	W-CDMA 5	846.6	24.00	251	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	LTE Band 5	844	24.50	282	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	LTE Band 17	710	24.00	251	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Power Back-off, Proximity Sensor On																
Cellular	W-CDMA 2	1907.6	13.00	20	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	W-CDMA 5	846.6	16.00	40	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	LTE Band 5	844	17.50	56	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	
Cellular	LTE Band 17	710	18.50	71	0	0	105	188	106		-MEASURE-	-MEASURE-	0.400	0.400	0.400	

Estimated SAR for WLAN (Full Power, Proximity Sensor Off)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)						
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Wi-Fi Main Antenna																
Wi-Fi 2.4 GHz	2462	16.50	45	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.2 GHz	5240	13.50	22	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.3 GHz	5320	13.50	22	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.5 GHz	5700	13.50	22	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.8 GHz	5825	13.50	22	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Bluetooth	2480	10.00	10	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi Sub Antenna																
Wi-Fi 2.4 GHz	2462	16.50	45	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.392		
Wi-Fi 5.2 GHz	5240	13.50	22	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.280		
Wi-Fi 5.3 GHz	5320	13.50	22	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.282		
Wi-Fi 5.5 GHz	5700	13.50	22	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.292		
Wi-Fi 5.8 GHz	5825	13.50	22	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.295		

Estimated SAR for WLAN (Power Back-Off, Proximity Sensor On)

Tx Interface	Frequency (MHz)	Output Power		Separation Distances (mm)						Estimated 1-g SAR Value (W/kg)						
		dBm	mW	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	Rear	Edge 1	Edge 2	Edge 3	Edge 4	Front	
Wi-Fi Main Antenna																
Wi-Fi 2.4 GHz	2462	11.50	14	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.2 GHz	5240	9.50	9	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.3 GHz	5320	9.50	9	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.5 GHz	5700	9.50	9	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi 5.8 GHz	5825	9.50	9	1	95	281	90	4		-MEASURE-	0.400	0.400	0.400	-MEASURE-		
Wi-Fi Sub Antenna																
Wi-Fi 2.4 GHz	2462	11.50	14	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.122		
Wi-Fi 5.2 GHz	5240	9.50	9	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.114		
Wi-Fi 5.3 GHz	5320	9.50	9	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.115		
Wi-Fi 5.5 GHz	5700	9.50	9	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.119		
Wi-Fi 5.8 GHz	5825	9.50	9	1	5	232	184	24		-MEASURE-	-MEASURE-	0.400	0.400	0.121		

12.1. Sum of the SAR for WWAN & DTS

Test Position	① WWAN	② DTS (Main Ant)	③ DTS (Sub Ant)	④ BT (Main Ant)
Rear	1.024	1.023	1.032	0.213
Edge 1	0.939	0.095	0.375	0.213
Edge 4	0.400	0.400	0.400	0.032

Test Position	① + ② WWAN + DTS (Main)		① + ③ WWAN + DTS (Sub)		① + ④ WWAN + BT		① + ② + ③ WWAN + DTS (Main) + DTS	
	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Rear	2.047	Yes	2.056	Yes	1.237	No	3.079	Yes
Edge 1	1.034	No	1.314	No	1.152	No	1.409	No
Edge 4	0.800	No	0.800	No	0.432	No	1.200	No

SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination			∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure	
	① WWAN	② DTS (Main Ant)	③ DTS (Sub Ant)						
Rear	1.024	1.023	1.032	① + ② + ③	3.079			1	
	1.024	1.023		① + ②	2.047	161.8	0.018		No
	1.024		1.032	① + ③	2.056	104.2	0.028		No
		1.023	1.032	② + ③	2.055	91.5	0.032		No

12.2. Sum of the SAR for WWAN & U-NII

Test Position	① WWAN	② U-NII (Main Ant)	③ U-NII (Sub Ant)	④ BT (Main Ant)
Rear	1.024	0.423	0.311	0.213
Edge 1	0.939	0.400	0.075	0.213
Edge 4	0.400	0.283	0.400	0.032

Test Position	① + ② WWAN + U-NII (Main)		① + ③ WWAN + U-NII (Sub)		① + ② + ③ WWAN + U-NII (Main) + U-NII	
	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Rear	1.447	No	1.335	No	1.758	Yes
Edge 1	1.339	No	1.014	No	1.414	No
Edge 4	0.683	No	0.800	No	1.083	No


SAR to Peak Location Separation Ratio (SPLSR)

Test Position	Worst-case combination			∑ 1-g SAR (mW/g)	Calculated distance (mm)	SPLSR (≤ 0.04)	Volume Scan (Yes/ No)	Figure	
	① WWAN	② U-NII (Main Ant)	③ U-NII (Sub Ant)						
Rear	1.024	0.423	0.311	① + ② + ③	1.758			2	
	1.024	0.423		① + ②	1.447	162.3	0.011		No
	1.024		0.311	① + ③	1.335	99.0	0.016		No
		0.423	0.311	② + ③	0.734	93.9	0.007		No

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.


Figure (1)

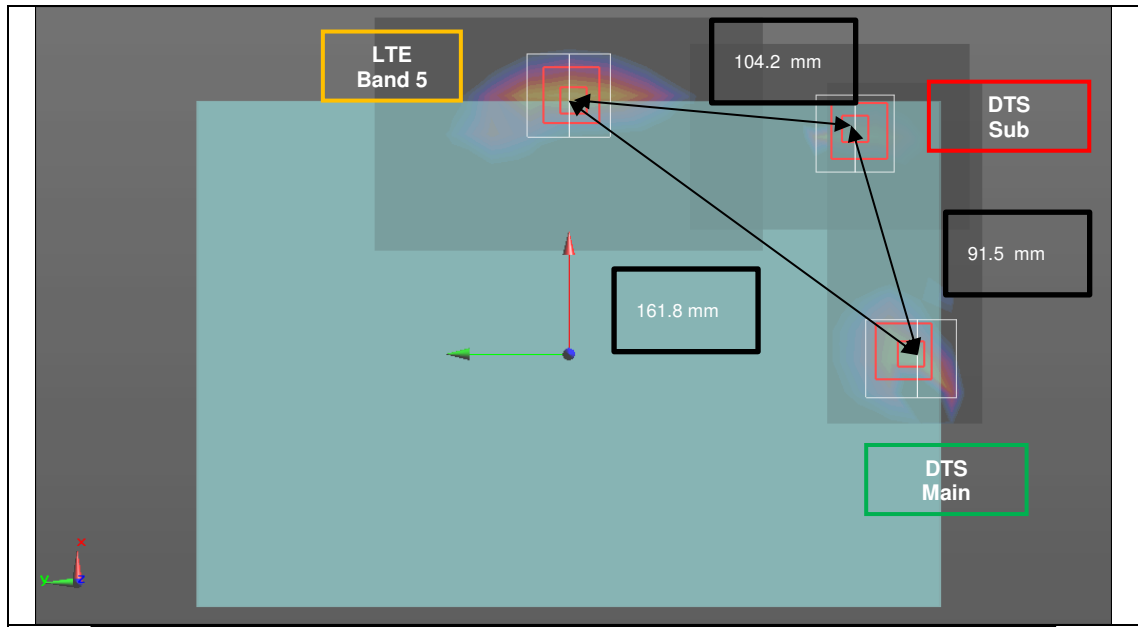

Mode		Peak SAR	X	Y	Z	d: Calculated distance (mm)	
		mW/g	m	m	m		
LTE Band 5	①	1.024	0.0968	-0.0048	-0.0023	① + ②	161.8
DTS (Main)	②	1.023	-0.0008	-0.1338	-0.0029		
LTE Band 5	①	1.024	0.0968	-0.0048	-0.0023	① + ③	104.2
DTS (Aux)	③	1.032	0.0872	-0.1086	-0.002		
DTS (Main)	②	1.023	-0.0008	-0.1338	-0.0029	② + ③	91.5
DTS (Aux)	③	1.032	0.0872	-0.1086	-0.002		

The Peak Location Separation Distance is computed by using the $\text{SQRT}((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Figure (2)

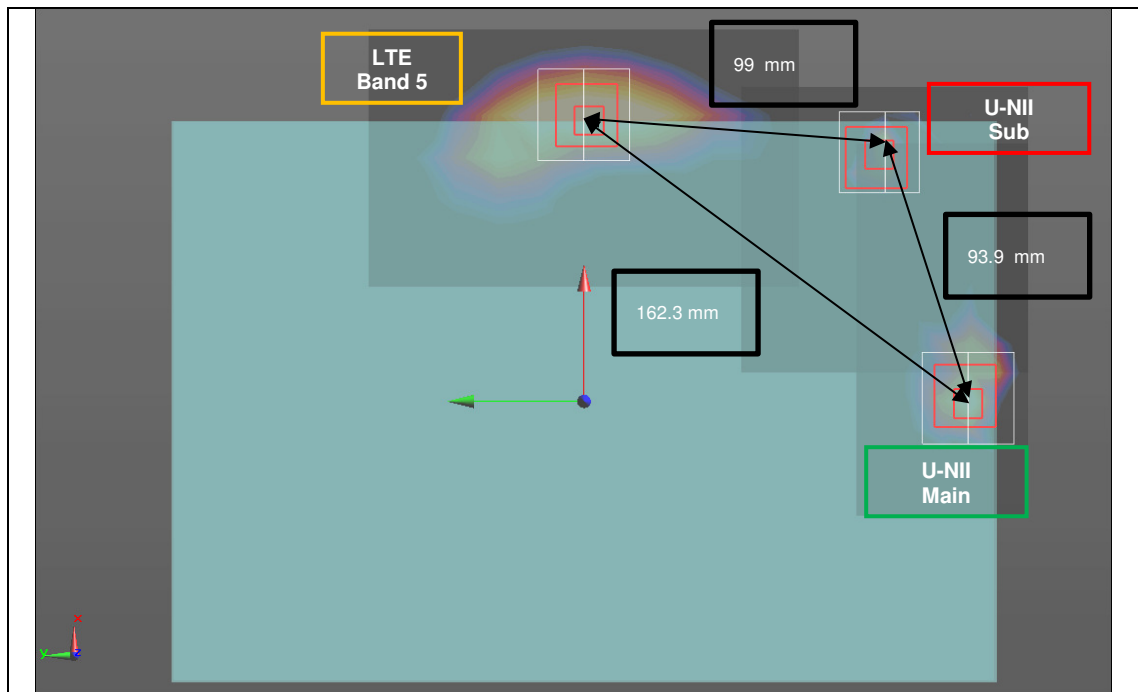

Mode		Peak SAR mW/g	X m	Y m	Z m	d: Calculated distance (mm)	
LTE Band 5	①	1.024	0.0968	-0.0048	-0.0023	① + ②	162.3
U-NII (Main)	②	0.423	-0.0014	-0.134	-0.0034		
LTE Band 5	①	0.939	0.0968	-0.0048	-0.0023	① + ③	99.0
U-NII (Sub)	③	0.311	0.0874	-0.1034	-0.003		
U-NII (Main)	②	0.423	-0.0014	-0.134	-0.0034	② + ③	93.9
U-NII (Sub)	③	0.311	0.0874	-0.1034	-0.003		

The Peak Location Separation Distance is computed by using the
 $SQRT((X1-X2)^2+(Y1-Y2)^2+(Z1-Z2)^2)$

Appendixes

Refer to separated files for the following appendixes.

16K22598-S1V1 FCC Report SAR_App A_Photos & Ant. Locations

16K22598-S1V1 FCC Report SAR_App B_Highest SAR Test Plots

16K22598-S1V1 FCC Report SAR_App C_System Check Plots

16K22598-S1V1 FCC Report SAR_App D_SAR Tissue Ingredients

16K22598-S1V1 FCC Report SAR_App E_Probe Cal. Certificates

16K22598-S1V1 FCC Report SAR_App F_Dipole Cal. Certificates

END OF REPORT