

FCC LTE REPORT

Certification

Applicant Name:
 SAMSUNG Electronics Co., Ltd.

Date of Issue:
 December 07, 2021

Address:
 129, Samsung-ro, Yeongtong-gu,
 Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
 HCT CO., LTD.,
 74, Seoicheon-ro 578beon-gil, Majang-myeon,
 Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2111-FC041-R1

FCC ID: A3LSMX808U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-X808U
 EUT Type: Tablet
 FCC Classification: PCS Licensed Transmitter (PCB)
 FCC Rule Part(s): §27, §2

-Lower Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 7 (5)	2502.5 – 2567.5	4M52G7D	QPSK	0.051	17.07
		4M52W7D	16QAM	0.040	16.05
		4M51W7D	64QAM	0.032	15.07
		4M52W7D	256QAM	0.016	12.10
LTE – Band 7 (10)	2505.0 – 2565.0	9M00G7D	QPSK	0.046	16.59
		8M98W7D	16QAM	0.036	15.59
		8M98W7D	64QAM	0.030	14.70
		8M99W7D	256QAM	0.016	12.05
LTE – Band 7 (15)	2507.5 – 2562.5	13M5G7D	QPSK	0.048	16.85
		13M5W7D	16QAM	0.038	15.80
		13M5W7D	64QAM	0.030	14.82
		13M5W7D	256QAM	0.015	11.70
LTE – Band 7 (20)	2510.0 – 2560.0	18M0G7D	QPSK	0.052	17.16
		18M0W7D	16QAM	0.041	16.11
		18M0W7D	64QAM	0.032	15.11
		18M0W7D	256QAM	0.017	12.24

-Upper Ant-

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 7 (5)	2502.5 – 2567.5	4M54G7D	QPSK	0.168	22.25
		4M52W7D	16QAM	0.146	21.65
		4M53W7D	64QAM	0.113	20.55
		4M51W7D	256QAM	0.055	17.43
LTE – Band 7 (10)	2505.0 – 2565.0	8M99G7D	QPSK	0.172	22.36
		8M99W7D	16QAM	0.142	21.53
		8M99W7D	64QAM	0.113	20.52
		8M98W7D	256QAM	0.060	17.76
LTE – Band 7 (15)	2507.5 – 2562.5	13M5G7D	QPSK	0.174	22.41
		13M5W7D	16QAM	0.145	21.62
		13M5W7D	64QAM	0.115	20.59
		13M5W7D	256QAM	0.053	17.21
LTE – Band 7 (20)	2510.0 – 2560.0	18M0G7D	QPSK	0.175	22.44
		17M9W7D	16QAM	0.146	21.64
		18M0W7D	64QAM	0.115	20.60
		18M0W7D	256QAM	0.051	17.08

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)

Report No.: HCT-RF-2111-FC041-R1

REVIEWED BY



Report prepared by : Jae Mun Do
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2111-FC041	November 24, 2021	- First Approval Report
HCT-RF-2111-FC041-R1	December 07, 2021	- Revised the 3.9 & 3.10 Section.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	3
1. GENERAL INFORMATION	7
2. INTRODUCTION.....	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER	10
3.3 RADIATED SPURIOUS EMISSIONS	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	15
3.7 CHANNEL EDGE	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	18
3.9 WORST CASE(RADIATED TEST).....	19
3.10 WORST CASE(CONDUCTED TEST)	20
4. LIST OF TEST EQUIPMENT	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	26
8.1.1 Lower Ant	26
8.1.2 Upper Ant.....	28
8.2 RADIATED SPURIOUS EMISSIONS	30
8.2.1 Lower Ant	30
8.2.2 Upper Ant.....	34
8.3 PEAK-TO-AVERAGE RATIO	38
8.3.1 Lower Ant	38
8.3.2 Upper Ant.....	39
8.4 OCCUPIED BANDWIDTH.....	40
8.4.1 Lower Ant	40
8.4.2 Upper Ant.....	41
8.5 CONDUCTED SPURIOUS EMISSIONS	42
8.5.1 Lower Ant	42
8.5.2 Upper Ant.....	43

8.6 CHANNEL EDGE	44
8.6.1 Lower Ant	44
8.6.2 Upper Ant.....	45
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	46
8.7.1 Lower Ant	46
8.7.2 Upper Ant.....	58
9. TEST PLOTS	70
10. APPENDIX A_ TEST SETUP PHOTO.....	231

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMX808U
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter (PCB)
FCC Rule Part(s):	§27, §2
EUT Type:	Tablet
Model(s):	SM-X808U
Tx Frequency:	2502.5 – 2567.5 : 5 MHz 2505.0 – 2565.0 : 10 MHz 2507.5 – 2562.5 : 15 MHz 2510.0 – 2560.0 : 20 MHz
Date(s) of Tests:	September 17, 2021 ~ November 24, 2021
Serial number:	Radiated: R32R9001N1N(Upper Ant), R32R9003GPK(Lower Ant) Conducted: R32R9001H5N(Upper Ant), R32R9003GNA(Lower Ant)

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Tablet with UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), WIFI 6E, Bluetooth, BT LE, WPT, mmWave(n260/261).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

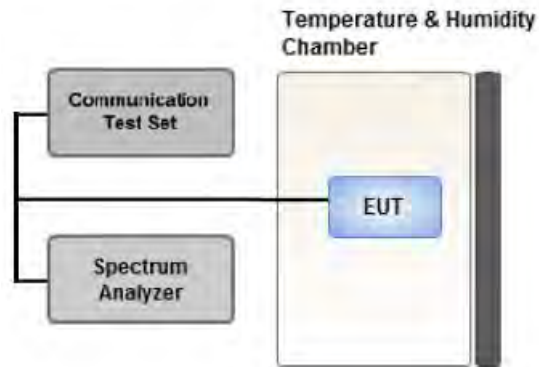

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

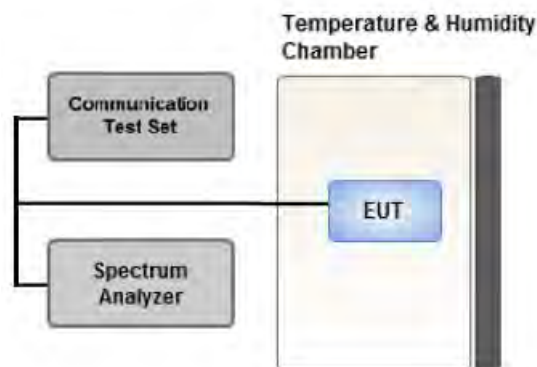

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

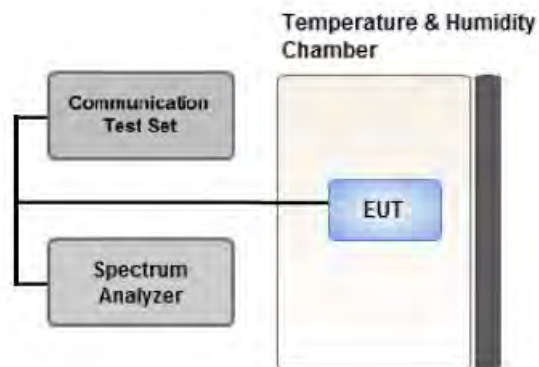

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 CHANNEL EDGE

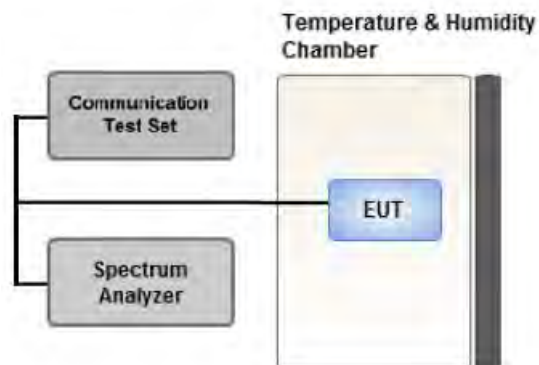

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2. $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3. $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz.
5. $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

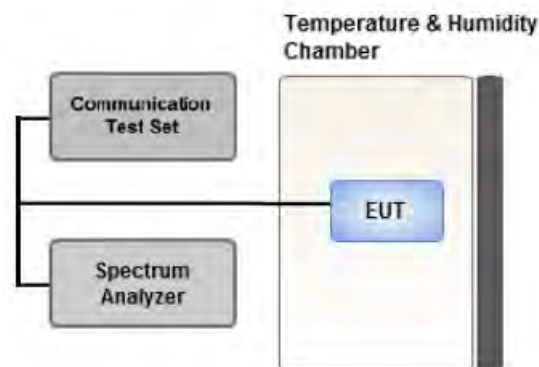

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
 - The test results below, the lower antenna is the Sub1 antenna, and the upper antenna is the Main 1 antenna.
 - All modes of operation were investigated and the worst case configuration results are reported.
- Mode : Stand alone, Stand alone + External accessories (Earphone, Keyboard, AC adapter, etc)
- Worst case : Stand alone

[Lower Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

[Upper Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.10 WORST CASE(CONDUCTED TEST)

- The test results below, the lower antenna is the Sub1 antenna, and the upper antenna is the Main 1 antenna.
- All modes of operation were investigated and the worst case configuration results are reported.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Band Edge	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		5, 10, 15, 20	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	03/02/2022	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	02/11/2022	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/19/2022	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	01/07/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

8.1.1 Lower Ant

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2502.5	LTE B7/ 5 MHz	QPSK	-28.97	7.51	10.20	2.49	H	< 2.00	0.033	15.22
		16-QAM	-29.96	6.52	10.20	2.49	H		0.027	14.23
		64-QAM	-30.88	5.60	10.20	2.49	H		0.021	13.31
		256-QAM	-33.58	2.90	10.20	2.49	H		0.012	10.61
2535.0		QPSK	-27.13	9.14	10.48	2.56	H		0.051	17.07
		16-QAM	-28.15	8.12	10.48	2.56	H		0.040	16.05
		64-QAM	-29.13	7.14	10.48	2.56	H		0.032	15.07
		256-QAM	-32.10	4.17	10.48	2.56	H		0.016	12.10
2567.5		QPSK	-28.05	8.68	10.52	2.64	H		0.045	16.56
		16-QAM	-29.21	7.52	10.52	2.64	H		0.035	15.40
		64-QAM	-30.14	6.59	10.52	2.64	H		0.028	14.47
		256-QAM	-33.04	3.69	10.52	2.64	H		0.014	11.57

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2505.0	LTE B7/ 10 MHz	QPSK	-28.96	7.59	10.24	2.50	H	< 2.00	0.034	15.33
		16-QAM	-30.17	6.38	10.24	2.50	H		0.026	14.12
		64-QAM	-31.18	5.37	10.24	2.50	H		0.021	13.11
		256-QAM	-33.87	2.68	10.24	2.50	H		0.011	10.42
2535.0		QPSK	-27.61	8.66	10.48	2.56	H		0.046	16.59
		16-QAM	-28.61	7.66	10.48	2.56	H		0.036	15.59
		64-QAM	-29.50	6.77	10.48	2.56	H		0.030	14.70
		256-QAM	-32.16	4.11	10.48	2.56	H		0.016	12.04
2565.0		QPSK	-28.31	8.57	10.54	2.63	H		0.045	16.48
		16-QAM	-29.28	7.60	10.54	2.63	H		0.036	15.51
		64-QAM	-30.18	6.70	10.54	2.63	H		0.029	14.61
		256-QAM	-32.74	4.14	10.54	2.63	H		0.016	12.05

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2507.5	LTE B7/ 15 MHz	QPSK	-29.34	7.28	10.28	2.51	H	< 2.00	0.032	15.04
		16-QAM	-30.33	6.29	10.28	2.51	H		0.025	14.05
		64-QAM	-31.30	5.32	10.28	2.51	H		0.020	13.08
		256-QAM	-33.98	2.64	10.28	2.51	H		0.011	10.40
2535.0		QPSK	-27.87	8.40	10.48	2.56	H		0.043	16.33
		16-QAM	-28.96	7.31	10.48	2.56	H		0.033	15.24
		64-QAM	-29.95	6.32	10.48	2.56	H		0.027	14.25
		256-QAM	-32.72	3.55	10.48	2.56	H		0.014	11.48
2562.5		QPSK	-28.13	8.91	10.56	2.62	H		0.048	16.85
		16-QAM	-29.18	7.86	10.56	2.62	H		0.038	15.80
		64-QAM	-30.16	6.88	10.56	2.62	H		0.030	14.82
		256-QAM	-33.28	3.76	10.56	2.62	H		0.015	11.70

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2510.0	LTE B7/ 20 MHz	QPSK	-29.37	7.25	10.28	2.51	H	< 2.00	0.032	15.01
		16-QAM	-30.36	6.26	10.28	2.51	H		0.025	14.02
		64-QAM	-31.31	5.31	10.28	2.51	H		0.020	13.07
		256-QAM	-33.82	2.80	10.28	2.51	H		0.011	10.56
2535.0		QPSK	-28.11	8.16	10.48	2.56	H		0.041	16.09
		16-QAM	-29.21	7.06	10.48	2.56	H		0.032	14.99
		64-QAM	-30.21	6.06	10.48	2.56	H		0.025	13.99
		256-QAM	-32.99	3.28	10.48	2.56	H		0.013	11.21
2560.0		QPSK	-27.82	9.22	10.56	2.62	H		0.052	17.16
		16-QAM	-28.87	8.17	10.56	2.62	H		0.041	16.11
		64-QAM	-29.87	7.17	10.56	2.62	H		0.032	15.11
		256-QAM	-32.74	4.30	10.56	2.62	H		0.017	12.24

8.1.2 Upper Ant

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2502.5	LTE B7/ 5 MHz	QPSK	-22.86	14.04	10.70	2.49	V	< 2.00	0.168	22.25
		16-QAM	-23.46	13.44	10.70	2.49	V		0.146	21.65
		64-QAM	-24.56	12.34	10.70	2.49	V		0.113	20.55
		256-QAM	-27.68	9.22	10.70	2.49	V		0.055	17.43
2535.0		QPSK	-23.87	13.25	10.70	2.51	V		0.139	21.44
		16-QAM	-24.62	12.50	10.70	2.51	V		0.117	20.69
		64-QAM	-25.70	11.42	10.70	2.51	V		0.092	19.61
		256-QAM	-28.87	8.25	10.70	2.51	V		0.044	16.44
2567.5		QPSK	-24.96	12.06	10.66	2.52	V		0.105	20.20
		16-QAM	-25.77	11.25	10.66	2.52	V		0.087	19.39
		64-QAM	-26.84	10.18	10.66	2.52	V		0.068	18.32
		256-QAM	-29.93	7.09	10.66	2.52	V		0.033	15.23

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2505.0	LTE B7/ 10 MHz	QPSK	-22.80	14.16	10.70	2.50	V	< 2.00	0.172	22.36
		16-QAM	-23.63	13.33	10.70	2.50	V		0.142	21.53
		64-QAM	-24.64	12.32	10.70	2.50	V		0.113	20.52
		256-QAM	-27.40	9.56	10.70	2.50	V		0.060	17.76
2535.0		QPSK	-26.68	10.44	10.70	2.51	V		0.073	18.63
		16-QAM	-24.43	12.69	10.70	2.51	V		0.123	20.88
		64-QAM	-25.51	11.61	10.70	2.51	V		0.096	19.80
		256-QAM	-28.92	8.20	10.70	2.51	V		0.044	16.39
2565.0		QPSK	-24.65	12.38	10.67	2.52	V		0.113	20.53
		16-QAM	-25.45	11.58	10.67	2.52	V		0.094	19.73
		64-QAM	-26.52	10.51	10.67	2.52	V		0.073	18.66
		256-QAM	-29.84	7.19	10.67	2.52	V		0.034	15.34

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2507.5	LTE B7/ 15 MHz	QPSK	-22.81	14.21	10.70	2.50	V	< 2.00	0.174	22.41
		16-QAM	-23.60	13.42	10.70	2.50	V		0.145	21.62
		64-QAM	-24.63	12.39	10.70	2.50	V		0.115	20.59
		256-QAM	-28.01	9.01	10.70	2.50	V		0.053	17.21
2535.0		QPSK	-23.53	13.59	10.70	2.51	V		0.151	21.78
		16-QAM	-24.34	12.78	10.70	2.51	V		0.125	20.97
		64-QAM	-25.43	11.69	10.70	2.51	V		0.097	19.88
		256-QAM	-28.72	8.40	10.70	2.51	V		0.046	16.59
2562.5		QPSK	-24.53	12.50	10.68	2.52	V		0.116	20.66
		16-QAM	-25.34	11.69	10.68	2.52	V		0.097	19.85
		64-QAM	-26.37	10.66	10.68	2.52	V		0.076	18.82
		256-QAM	-29.60	7.43	10.68	2.52	V		0.036	15.59

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2510.0	LTE B7/ 20 MHz	QPSK	-22.78	14.24	10.70	2.50	V	< 2.00	0.175	22.44
		16-QAM	-23.58	13.44	10.70	2.50	V		0.146	21.64
		64-QAM	-24.62	12.40	10.70	2.50	V		0.115	20.60
		256-QAM	-28.14	8.88	10.70	2.50	V		0.051	17.08
2535.0		QPSK	-23.65	13.47	10.70	2.51	V		0.147	21.66
		16-QAM	-24.48	12.64	10.70	2.51	V		0.121	20.83
		64-QAM	-25.51	11.61	10.70	2.51	V		0.096	19.80
		256-QAM	-28.87	8.25	10.70	2.51	V		0.044	16.44
2560.0		QPSK	-24.21	12.82	10.68	2.52	V		0.125	20.98
		16-QAM	-24.98	12.05	10.68	2.52	V		0.105	20.21
		64-QAM	-26.06	10.97	10.68	2.52	V		0.082	19.13
		256-QAM	-29.33	7.70	10.68	2.52	V		0.039	15.86

8.2 RADIATED SPURIOUS EMISSIONS

8.2.1 Lower Ant

- ▣ OPERATING FREQUENCY : 2535.0 MHz
- ▣ MEASURED OUTPUT POWER: 17.06 dBm = 0.051 W
- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10} (W) =$ 42.06 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20775 (2502.5)	5 005.00	-54.61	10.91	-54.31	3.78	V	-47.18	64.24
	7 507.50	-64.88	11.52	-55.40	4.52	H	-48.40	65.46
	10 010.00	-64.54	11.78	-53.62	5.29	V	-47.13	64.19
21100 (2535.0)	5 070.00	-58.03	11.08	-57.64	3.73	H	-50.29	67.36
	7 605.00	-64.75	11.60	-55.76	4.55	V	-48.71	65.77
	10 140.00	-63.43	11.60	-51.80	5.32	V	-45.52	62.59
21425 (2567.5)	5 135.00	-58.18	11.34	-58.04	3.74	H	-50.44	67.50
	7 702.50	-63.97	11.50	-54.92	4.53	H	-47.95	65.01
	10 270.00	-65.97	11.64	-52.81	5.39	H	-46.56	63.63

- ☐ OPERATING FREQUENCY : 2535.0 MHz
☐ MEASURED OUTPUT POWER: 16.58 dBm = 0.046 W
☐ MODE: LTE B7
☐ MODULATION SIGNAL: 10 MHz QPSK
☐ DISTANCE: 1 meters
☐ LIMIT: $55 + 10 \log_{10} (W) =$ 41.58 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20800 (2505.0)	5 010.00	-57.00	10.92	-56.44	3.77	H	-49.29	65.88
	7 515.00	-64.35	11.53	-54.93	4.52	V	-47.91	64.50
	10 020.00	-64.27	11.76	-53.45	5.30	H	-46.99	63.58
21100 (2535.0)	5 070.00	-58.21	11.08	-57.82	3.73	H	-50.47	67.06
	7 605.00	-65.53	11.60	-56.54	4.55	H	-49.49	66.07
	10 140.00	-62.16	11.60	-50.53	5.32	V	-44.25	60.84
21400 (2565.0)	5 130.00	-56.05	11.32	-55.82	3.78	H	-48.28	64.86
	7 695.00	-63.91	11.51	-54.53	4.55	H	-47.56	64.15
	10 260.00	-64.09	11.62	-51.08	5.37	H	-44.83	61.41

- ▣ OPERATING FREQUENCY : 2562.5 MHz
- ▣ MEASURED OUTPUT POWER: 16.85 dBm = 0.048 W
- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10} (W) =$ 41.85 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20825 (2507.5)	5 015.00	-57.50	10.93	-57.14	3.75	H	-49.95	66.80
	7 522.50	-64.29	11.54	-54.93	4.51	H	-47.90	64.74
	10 030.00	-64.85	11.74	-54.08	5.30	H	-47.64	64.49
21100 (2535.0)	5 070.00	-57.62	11.08	-57.23	3.73	H	-49.88	66.73
	7 605.00	-65.50	11.60	-56.51	4.55	V	-49.46	66.31
	10 140.00	-63.65	11.60	-52.02	5.32	V	-45.74	62.59
21375 (2562.5)	5 125.00	-57.08	11.30	-56.82	3.81	V	-49.32	66.17
	7 687.50	-64.44	11.52	-54.72	4.56	H	-47.76	64.61
	10 250.00	-64.23	11.60	-51.93	5.35	V	-45.68	62.53

- OPERATING FREQUENCY : 2560.0 MHz
 □ MEASURED OUTPUT POWER: 17.16 dBm = 0.052 W
 □ MODE: LTE B7
 □ MODULATION SIGNAL: 20 MHz QPSK
 □ DISTANCE: 1 meters
 □ LIMIT: $55 + 10 \log_{10} (W) =$ 42.16 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20850 (2510.0)	5 020.00	-56.30	10.94	-56.14	3.72	V	-48.92	66.07
	7 530.00	-63.31	11.56	-54.41	4.54	V	-47.39	64.55
	10 040.00	-62.59	11.72	-51.38	5.29	H	-44.95	62.10
21100 (2535.0)	5 070.00	-56.19	11.08	-55.80	3.73	H	-48.45	65.61
	7 605.00	-62.11	11.60	-53.12	4.55	V	-46.07	63.23
	10 140.00	-64.25	11.60	-52.62	5.32	H	-46.34	63.50
21350 (2560.0)	5 120.00	-56.16	11.28	-55.87	3.83	H	-48.42	65.58
	7 680.00	-64.45	11.54	-54.63	4.60	V	-47.69	64.84
	10 240.00	-63.95	11.60	-51.48	5.33	H	-45.21	62.37

8.2.2 Upper Ant

- ▣ OPERATING FREQUENCY : 2502.5 MHz
- ▣ MEASURED OUTPUT POWER: 22.25 dBm = 0.168 W
- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10} (W) =$ 47.25 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20775 (2502.5)	5 005.00	-55.02	12.59	-64.61	3.60	H	-55.62	77.87
	7 507.50	-54.68	10.82	-55.55	4.48	V	-49.21	71.45
	10 010.00	-59.08	11.22	-54.58	5.27	H	-48.63	70.88
21100 (2535.0)	5 070.00	-54.72	12.38	-62.58	3.65	V	-53.85	76.10
	7 605.00	-57.20	11.12	-58.41	4.49	V	-51.77	74.02
	10 140.00	-59.02	11.40	-55.27	5.29	V	-49.16	71.41
21425 (2567.5)	5 135.00	-54.68	12.27	-63.45	3.67	V	-54.85	77.09
	7 702.50	-56.34	11.40	-57.38	4.51	V	-50.49	72.74
	10 270.00	-57.79	11.50	-52.86	5.40	V	-46.76	69.01

- ☐ OPERATING FREQUENCY : 2505.0 MHz
☐ MEASURED OUTPUT POWER: 22.36 dBm = 0.172 W
☐ MODE: LTE B7
☐ MODULATION SIGNAL: 10 MHz QPSK
☐ DISTANCE: 1 meters
☐ LIMIT: $55 + 10 \log_{10} (W) =$ 47.36 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20800 (2505.0)	5 010.00	-53.85	12.58	-63.60	3.59	H	-54.61	76.97
	7 515.00	-56.76	10.83	-57.47	4.47	H	-51.11	73.48
	10 020.00	-59.72	11.24	-55.25	5.27	H	-49.28	71.65
21100 (2535.0)	5 070.00	-54.98	12.38	-62.84	3.65	V	-54.11	76.36
	7 605.00	-58.10	11.12	-59.31	4.49	H	-52.67	74.92
	10 140.00	-58.68	11.40	-54.93	5.29	H	-48.82	71.07
21400 (2565.0)	5 130.00	-55.06	12.26	-63.76	3.67	V	-55.17	77.54
	7 695.00	-57.43	11.39	-58.75	4.51	H	-51.87	74.23
	10 260.00	-58.32	11.50	-53.66	5.40	V	-47.56	69.92

- ▣ OPERATING FREQUENCY : 2507.5 MHz
- ▣ MEASURED OUTPUT POWER: 22.41 dBm = 0.174 W
- ▣ MODE: LTE B7
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10} (W) =$ 47.41 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20825 (2507.5)	5 015.00	-55.21	12.57	-65.11	3.60	H	-56.13	78.54
	7 522.50	-56.62	10.84	-57.18	4.46	H	-50.80	73.21
	10 030.00	-59.76	11.26	-55.45	5.29	V	-49.48	71.89
21100 (2535.0)	5 070.00	-55.59	12.38	-63.45	3.65	H	-54.72	76.97
	7 605.00	-57.68	11.12	-58.89	4.49	V	-52.25	74.50
	10 140.00	-57.57	11.40	-53.82	5.29	H	-47.71	69.96
21375 (2562.5)	5 125.00	-56.57	12.25	-65.08	3.67	V	-56.50	78.91
	7 687.50	-57.11	11.38	-58.70	4.51	H	-51.83	74.24
	10 250.00	-59.28	11.50	-54.68	5.39	H	-48.57	70.98

□ OPERATING FREQUENCY : 2510.0 MHz
 □ MEASURED OUTPUT POWER: 22.44 dBm = 0.175 W
 □ MODE: LTE B7
 □ MODULATION SIGNAL: 20 MHz QPSK
 □ DISTANCE: 1 meters
 □ LIMIT: $55 + 10 \log_{10} (W) =$ 47.44 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
20850 (2510.0)	5 020.00	-54.58	12.56	-64.63	3.60	H	-55.67	78.11
	7 530.00	-58.02	10.86	-58.16	4.45	H	-51.75	74.19
	10 040.00	-59.00	11.28	-54.90	5.32	H	-48.94	71.38
21100 (2535.0)	5 070.00	-55.15	12.38	-63.01	3.65	V	-54.28	76.53
	7 605.00	-57.15	11.12	-58.36	4.49	H	-51.72	73.97
	10 140.00	-59.97	11.40	-56.22	5.29	H	-50.11	72.36
21350 (2560.0)	5 120.00	-56.01	12.24	-64.32	3.67	V	-55.75	78.19
	7 680.00	-57.01	11.36	-58.76	4.50	H	-51.90	74.34
	10 240.00	-58.63	11.50	-54.07	5.37	V	-47.94	70.38

8.3 PEAK-TO-AVERAGE RATIO

8.3.1 Lower Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
7	5 MHz	2535.0	QPSK	25	0	5.36
			16-QAM	25	0	6.21
			64-QAM	25	0	6.56
			256-QAM	25	0	6.67
	10 MHz		QPSK	50	0	5.46
			16-QAM	50	0	6.22
			64-QAM	50	0	6.54
			256-QAM	50	0	6.68
	15 MHz		QPSK	75	0	5.39
			16-QAM	75	0	6.18
			64-QAM	75	0	6.52
			256-QAM	75	0	6.67
	20 MHz		QPSK	100	0	5.42
			16-QAM	100	0	6.22
			64-QAM	100	0	6.25
			256-QAM	100	0	6.33

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 103 ~ 118.

8.3.2 Upper Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
7	5 MHz	2535.0	QPSK	25	0	5.44
			16-QAM	25	0	6.26
			64-QAM	25	0	6.61
			256-QAM	25	0	6.78
	10 MHz		QPSK	50	0	5.51
			16-QAM	50	0	6.24
			64-QAM	50	0	6.58
			256-QAM	50	0	6.78
	15 MHz		QPSK	75	0	5.44
			16-QAM	75	0	6.24
			64-QAM	75	0	6.57
			256-QAM	75	0	6.77
	20 MHz		QPSK	100	0	5.41
			16-QAM	100	0	6.23
			64-QAM	100	0	6.56
			256-QAM	100	0	6.76

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 119 ~ 134.

8.4 OCCUPIED BANDWIDTH

8.4.1 Lower Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
7	5 MHz	2535.0	QPSK	25	0	4.5163
			16-QAM	25		4.5209
			64-QAM	25		4.5124
			256-QAM	25		4.5216
	10 MHz		QPSK	50		9.0033
			16-QAM	50		8.9778
			64-QAM	50		8.9751
			256-QAM	50		8.9893
	15 MHz		QPSK	75		13.493
			16-QAM	75		13.528
			64-QAM	75		13.504
			256-QAM	75		13.510
	20 MHz		QPSK	100		18.001
			16-QAM	100		18.021
			64-QAM	100		18.000
			256-QAM	100		18.025

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 71 ~ 86.

8.4.2 Upper Ant

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
7	5 MHz	2535.0	QPSK	25	0	4.5380
			16-QAM	25		4.5151
			64-QAM	25		4.5287
			256-QAM	25		4.5074
	10 MHz		QPSK	50		8.9944
			16-QAM	50		8.9918
			64-QAM	50		8.9874
			256-QAM	50		8.9793
	15 MHz		QPSK	75		13.495
			16-QAM	75		13.524
			64-QAM	75		13.522
			256-QAM	75		13.456
	20 MHz		QPSK	100		17.962
			16-QAM	100		17.939
			64-QAM	100		17.987
			256-QAM	100		18.013

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 87 ~ 102.

8.5 CONDUCTED SPURIOUS EMISSIONS

8.5.1 Lower Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
7	5	2502.5	5.0005	31.815	-76.169	-44.354	-25.00
		2535.0	5.0653	31.815	-74.965	-43.150	
		2567.5	5.1391	31.815	-72.454	-40.639	
	10	2505.0	6.0190	31.815	-80.760	-48.945	
		2535.0	8.6216	31.815	-80.221	-48.406	
		2565.0	5.1386	31.815	-71.939	-40.124	
	15	2507.5	9.4407	31.815	-80.281	-48.466	
		2535.0	4.5858	31.200	-79.477	-48.277	
		2562.5	9.6780	31.815	-80.012	-48.197	
	20	2510.0	8.8819	31.815	-79.749	-47.934	
		2535.0	5.0703	31.815	-74.921	-43.106	
		2560.0	5.1376	31.815	-73.639	-41.824	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 183 ~ 206.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.294
1 – 5	31.200
5 – 10	31.815
10 – 15	32.340
15 – 20	32.713
Above 20	33.355

8.5.2 Upper Ant

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
7	5	2502.5	26.1296	30.131	-76.787	-46.656	-25.00
		2535.0	26.1398	30.131	-77.007	-46.876	
		2567.5	26.1491	30.131	-77.109	-46.978	
	10	2505.0	26.4063	30.131	-76.779	-46.648	
		2535.0	26.1755	30.131	-77.028	-46.897	
		2565.0	26.1385	30.131	-76.789	-46.658	
	15	2507.5	26.1585	30.131	-76.984	-46.853	
		2535.0	26.0952	30.131	-76.769	-46.638	
		2562.5	26.1810	30.131	-76.708	-46.577	
	20	2510.0	26.1253	30.131	-76.835	-46.704	
		2535.0	26.1326	30.131	-76.555	-46.424	
		2560.0	26.1487	30.131	-76.841	-46.710	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 207 ~230.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.6 CHANNEL EDGE

8.6.1 Lower Ant

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1 MHz)		2 496 MHz ~ 2 499 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	2 490.5 MHz ~ 2 496 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Below 2 490.5 MHz	Above (C.E + X MHz)
			Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper
5 MHz	2502.5	25 / 0	-25.80	-24.32	-27.06	-25.29	-33.35	-33.36	-48.81	-35.73
10 MHz	2505.0	50 / 0	-30.37	-28.27	-29.03	-25.98	-32.18	-28.36	-40.49	-35.46
15 MHz	2507.5	75 / 0	-32.88	-30.19	-32.19	-29.09	-34.20	-31.27	-37.33	-39.26
20 MHz	2510.0	100 / 0	-34.46	-32.02	-34.13	-31.72	-35.75	-34.14	-37.74	-40.49
Limit			-10.0		-10.0		-13.0		-25.0	

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
			Lower	Upper	Lower	Upper
5 MHz (QPSK)	2535.0	25 / 0	-26.22	-25.01	-28.07	-27.99
	2567.5	25 / 0	-26.62	-25.79	-29.06	-28.38
10 MHz (QPSK)	2535.0	50 / 0	-30.57	-29.28	-29.54	-28.95
	2565.0	50 / 0	-30.91	-30.09	-30.04	-30.26
15 MHz (QPSK)	2535.0	75 / 0	-32.64	-31.18	-31.97	-30.62
	2562.5	75 / 0	-31.80	-32.64	-31.26	-32.33
20 MHz (QPSK)	2535.0	100 / 0	-33.76	-31.82	-32.95	-31.94
	2560.0	100 / 0	-32.56	-33.65	-32.27	-34.04
Limit			-10.0		-10.0	

Band Width (Modulation)	Frequency (MHz)	Resource Block Size	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
			Lower	Upper	Lower	Upper
5 MHz (QPSK)	2535.0	25 / 0	-38.00	-34.85	-40.77	-37.44
	2567.5	25 / 0	-37.31	-36.90	-40.15	-40.46
10 MHz (QPSK)	2535.0	50 / 0	-32.72	-30.77	-38.80	-36.17
	2565.0	50 / 0	-32.90	-33.93	-37.63	-39.08
15 MHz (QPSK)	2535.0	75 / 0	-33.49	-33.06	-41.88	-40.14
	2562.5	75 / 0	-33.12	-35.36	-41.66	-46.28
20 MHz (QPSK)	2535.0	100 / 0	-34.46	-34.27	-44.68	-41.70
	2560.0	100 / 0	-34.04	-36.57	-44.53	-57.42
Limit			-13.0		-25.0	

Note:

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 135 ~ 158.

8.6.2 Upper Ant

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1 MHz)		2 496 MHz ~ 2 499 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	2 490.5 MHz ~ 2 496 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Below 2 490.5 MHz	Above (C.E + X MHz)
			Lower	Upper	Lower	Upper	Lower	Upper	Lower	Upper
5 MHz	2502.5	25 / 0	-23.68	-23.48	-25.67	-24.59	-32.73	-34.07	-44.73	-35.50
10 MHz	2505.0	50 / 0	-27.35	-26.00	-26.04	-24.52	-29.33	-28.67	-37.53	-34.49
15 MHz	2507.5	75 / 0	-29.15	-28.31	-28.19	-27.00	-30.91	-29.62	-35.56	-37.78
20 MHz	2510.0	100 / 0	-30.88	-29.18	-30.67	-29.21	-32.36	-31.22	-35.94	-39.98
Limit			-10.0		-10.0		-13.0		-25.0	

Band Width (Modulation)	Frequency (MHz)	RB Size / Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
			Lower	Upper	Lower	Upper
5 MHz (QPSK)	2535.0	25 / 0	-23.12	-23.34	-25.58	-26.00
	2567.5	25 / 0	-22.60	-23.27	-23.67	-24.62
10 MHz (QPSK)	2535.0	50 / 0	-27.58	-26.67	-26.92	-26.97
	2565.0	50 / 0	-26.46	-26.38	-24.86	-25.69
15 MHz (QPSK)	2535.0	75 / 0	-29.50	-29.27	-29.20	-29.36
	2562.5	75 / 0	-28.33	-29.65	-28.36	-28.77
20 MHz (QPSK)	2535.0	100 / 0	-30.68	-30.64	-30.88	-30.83
	2560.0	100 / 0	-30.41	-30.65	-30.10	-30.68
Limit			-10.0		-10.0	

Band Width (Modulation)	Frequency (MHz)	Resource Block Size	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
			Lower	Upper	Lower	Upper
5 MHz (QPSK)	2535.0	25 / 0	-34.67	-34.28	-36.67	-36.51
	2567.5	25 / 0	-32.66	-34.37	-35.19	-37.48
10 MHz (QPSK)	2535.0	50 / 0	-30.53	-30.14	-35.84	-35.33
	2565.0	50 / 0	-28.46	-30.13	-33.79	-35.91
15 MHz (QPSK)	2535.0	75 / 0	-31.83	-31.92	-39.39	-38.66
	2562.5	75 / 0	-30.81	-32.26	-38.17	-43.15
20 MHz (QPSK)	2535.0	100 / 0	-32.84	-32.71	-41.63	-40.46
	2560.0	100 / 0	-31.85	-33.44	-40.44	-50.68
Limit			-13.0		-25.0	

Note:


1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth.
3. X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 159 ~ 182.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

8.7.1 Lower Ant


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,502,500,000 Hz
- ▣ CHANNEL: 20775 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2502 500 012	0.0	0.000 000	0.000
100 %		-30	2502 500 012	-0.5	0.000 000	0.000
100 %		-20	2502 500 011	-1.8	0.000 000	-0.001
100 %		-10	2502 500 017	4.3	0.000 000	0.002
100 %		0	2502 500 015	2.3	0.000 000	0.001
100 %		+10	2502 500 021	8.3	0.000 000	0.003
100 %		+30	2502 500 013	0.2	0.000 000	0.000
100 %		+40	2502 500 012	-0.2	0.000 000	0.000
100 %		+50	2502 500 021	8.9	0.000 000	0.004
Batt. Endpoint	3.400	+20	2502 500 021	8.1	0.000 000	0.003

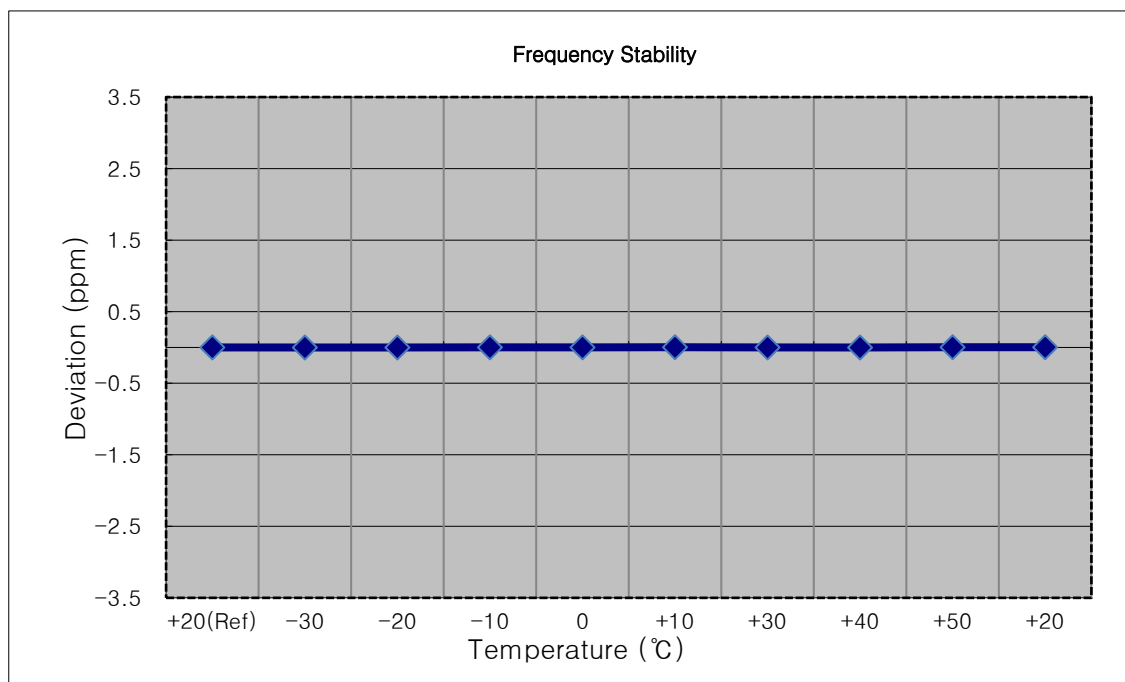


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,505,000,000 Hz
☐ CHANNEL: 20800 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2505 000 005	0.0	0.000 000	0.000
100 %		-30	2505 000 005	-0.2	0.000 000	0.000
100 %		-20	2505 000 014	8.4	0.000 000	0.003
100 %		-10	2505 000 015	9.4	0.000 000	0.004
100 %		0	2505 000 009	4.0	0.000 000	0.002
100 %		+10	2505 000 004	-1.3	0.000 000	-0.001
100 %		+30	2505 000 013	7.7	0.000 000	0.003
100 %		+40	2505 000 011	5.4	0.000 000	0.002
100 %		+50	2505 000 015	9.5	0.000 000	0.004
Batt. Endpoint	3.400	+20	2505 000 009	3.3	0.000 000	0.001

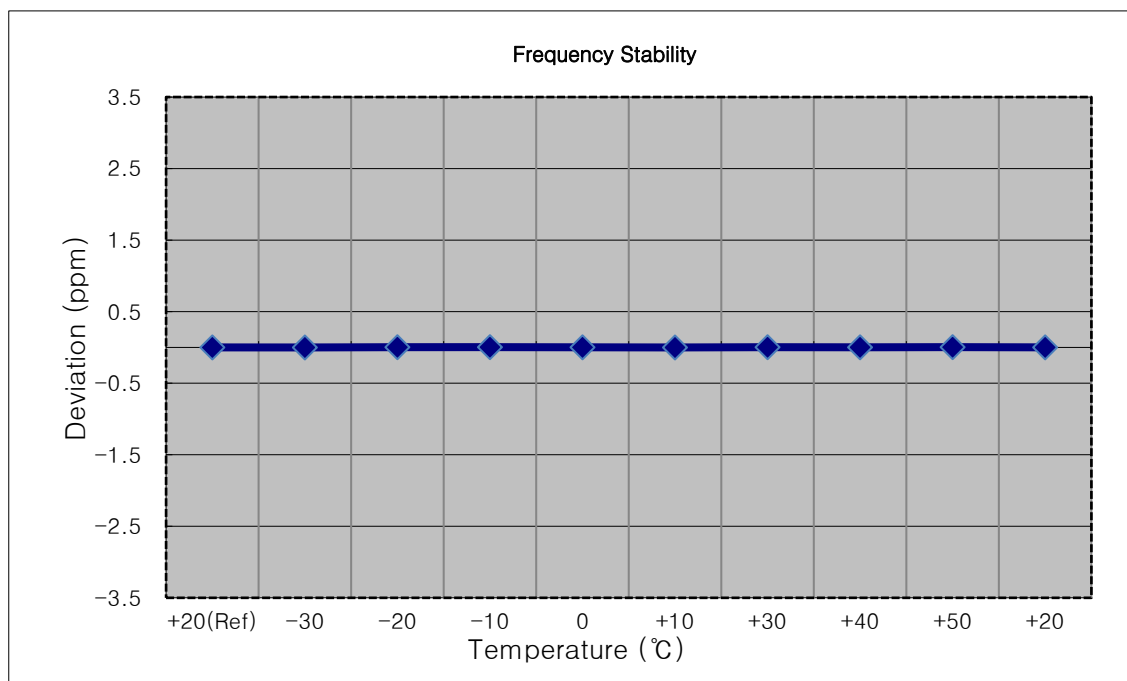


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,507,500,000 Hz
☐ CHANNEL: 20825 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2507 500 006	0.0	0.000 000	0.000
100 %		-30	2507 500 014	8.1	0.000 000	0.003
100 %		-20	2507 500 010	4.8	0.000 000	0.002
100 %		-10	2507 500 007	1.8	0.000 000	0.001
100 %		0	2507 500 011	5.7	0.000 000	0.002
100 %		+10	2507 500 014	8.9	0.000 000	0.004
100 %		+30	2507 500 006	0.9	0.000 000	0.000
100 %		+40	2507 500 011	6.0	0.000 000	0.002
100 %		+50	2507 500 012	6.7	0.000 000	0.003
Batt. Endpoint	3.400	+20	2507 500 009	3.2	0.000 000	0.001

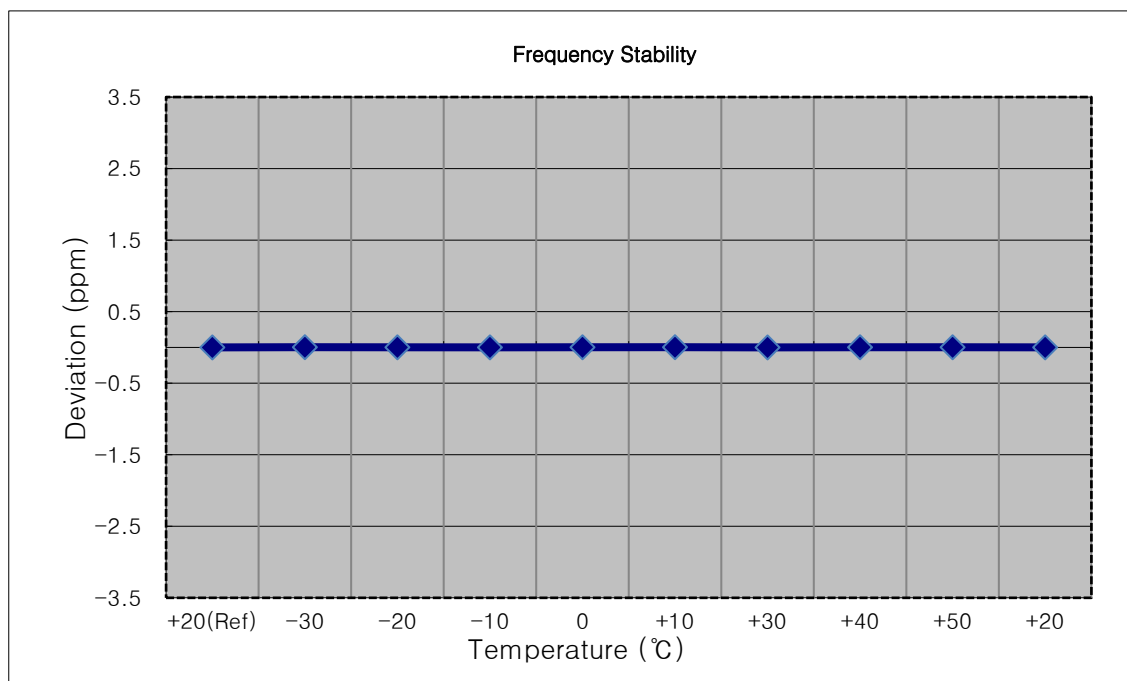


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,510,000,000 Hz
☐ CHANNEL: 20850 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2510 000 001	0.0	0.000 000	0.000
100 %		-30	2510 000 000	-0.9	0.000 000	0.000
100 %		-20	2510 000 000	-1.8	0.000 000	-0.001
100 %		-10	2510 000 010	8.4	0.000 000	0.003
100 %		0	2510 000 002	1.1	0.000 000	0.000
100 %		+10	2510 000 001	-0.1	0.000 000	0.000
100 %		+30	2510 000 003	1.4	0.000 000	0.001
100 %		+40	2510 000 006	5.0	0.000 000	0.002
100 %		+50	2510 000 004	3.0	0.000 000	0.001
Batt. Endpoint	3.400	+20	2510 000 001	-0.9	0.000 000	0.000

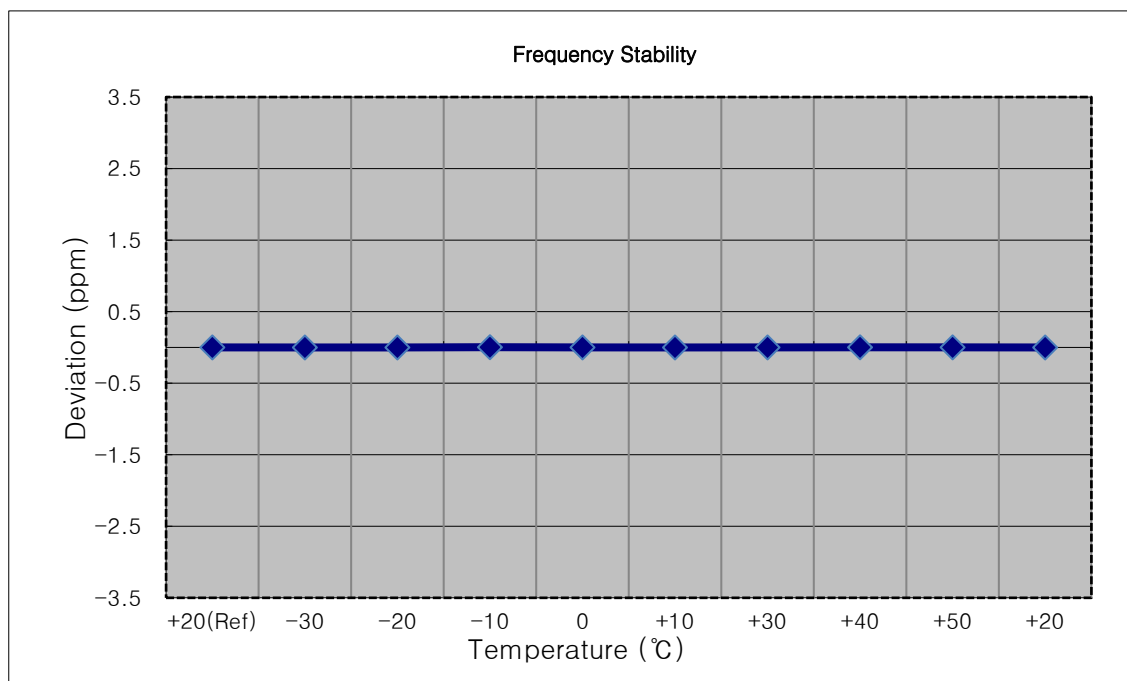


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,535,000,000 Hz
☐ CHANNEL: 21100 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 011	0.0	0.000 000	0.000
100 %		-30	2535 000 010	-1.8	0.000 000	-0.001
100 %		-20	2535 000 018	6.2	0.000 000	0.002
100 %		-10	2535 000 017	5.7	0.000 000	0.002
100 %		0	2535 000 013	1.7	0.000 000	0.001
100 %		+10	2535 000 010	-1.2	0.000 000	0.000
100 %		+30	2535 000 017	5.6	0.000 000	0.002
100 %		+40	2535 000 011	0.0	0.000 000	0.000
100 %		+50	2535 000 013	1.5	0.000 000	0.001
Batt. Endpoint	3.400	+20	2535 000 011	-0.3	0.000 000	0.000

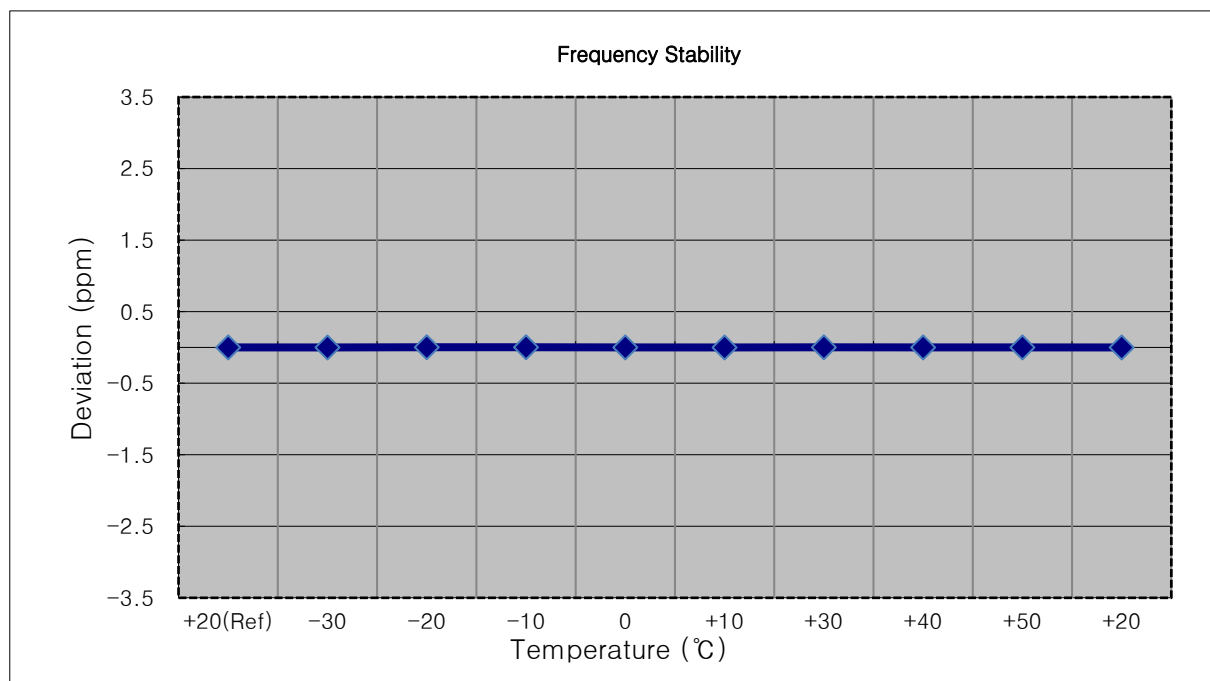


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,535,000,000 Hz
☐ CHANNEL: 21100 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 013	0.0	0.000 000	0.000
100 %		-30	2535 000 019	6.9	0.000 000	0.003
100 %		-20	2535 000 019	7.0	0.000 000	0.003
100 %		-10	2535 000 011	-1.3	0.000 000	-0.001
100 %		0	2535 000 019	6.2	0.000 000	0.002
100 %		+10	2535 000 020	7.5	0.000 000	0.003
100 %		+30	2535 000 015	2.3	0.000 000	0.001
100 %		+40	2535 000 021	8.1	0.000 000	0.003
100 %		+50	2535 000 012	-0.8	0.000 000	0.000
Batt. Endpoint	3.400	+20	2535 000 015	2.5	0.000 000	0.001

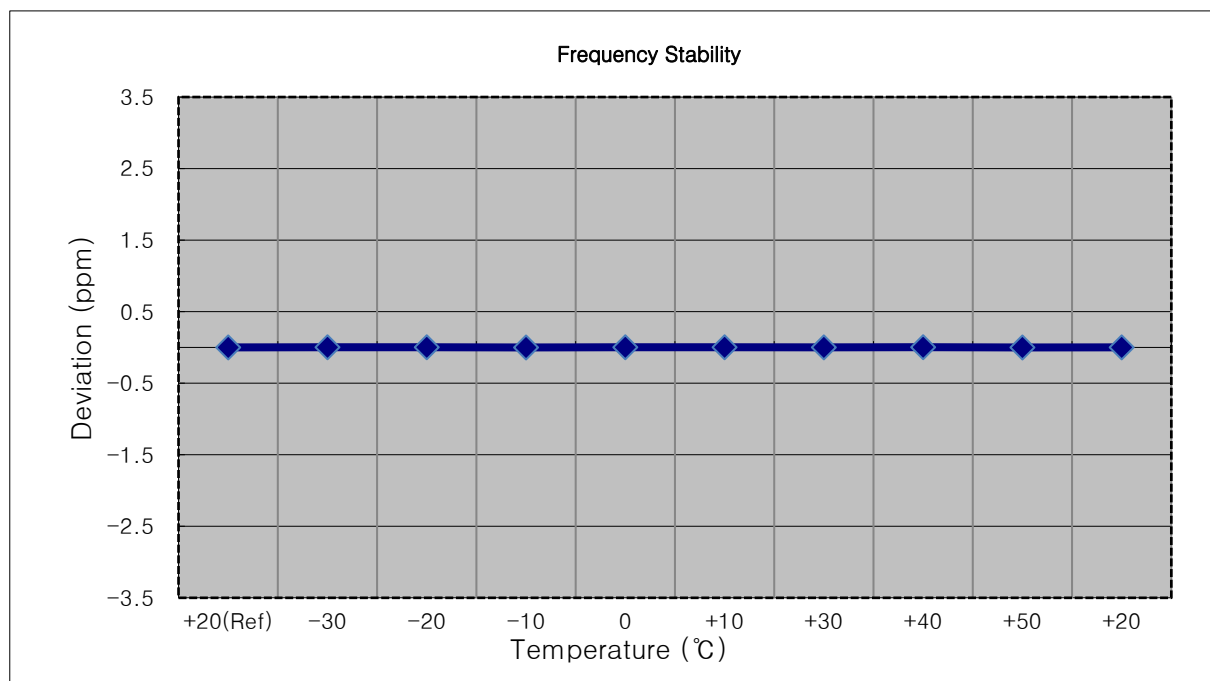


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 002	0.0	0.000 000	0.000
100 %		-30	2535 000 006	3.6	0.000 000	0.001
100 %		-20	2535 000 009	6.3	0.000 000	0.002
100 %		-10	2534 999 999	-2.8	0.000 000	-0.001
100 %		0	2535 000 011	8.8	0.000 000	0.003
100 %		+10	2535 000 000	-2.0	0.000 000	-0.001
100 %		+30	2535 000 008	5.8	0.000 000	0.002
100 %		+40	2535 000 011	8.6	0.000 000	0.003
100 %		+50	2535 000 006	3.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	2535 000 006	3.8	0.000 000	0.002

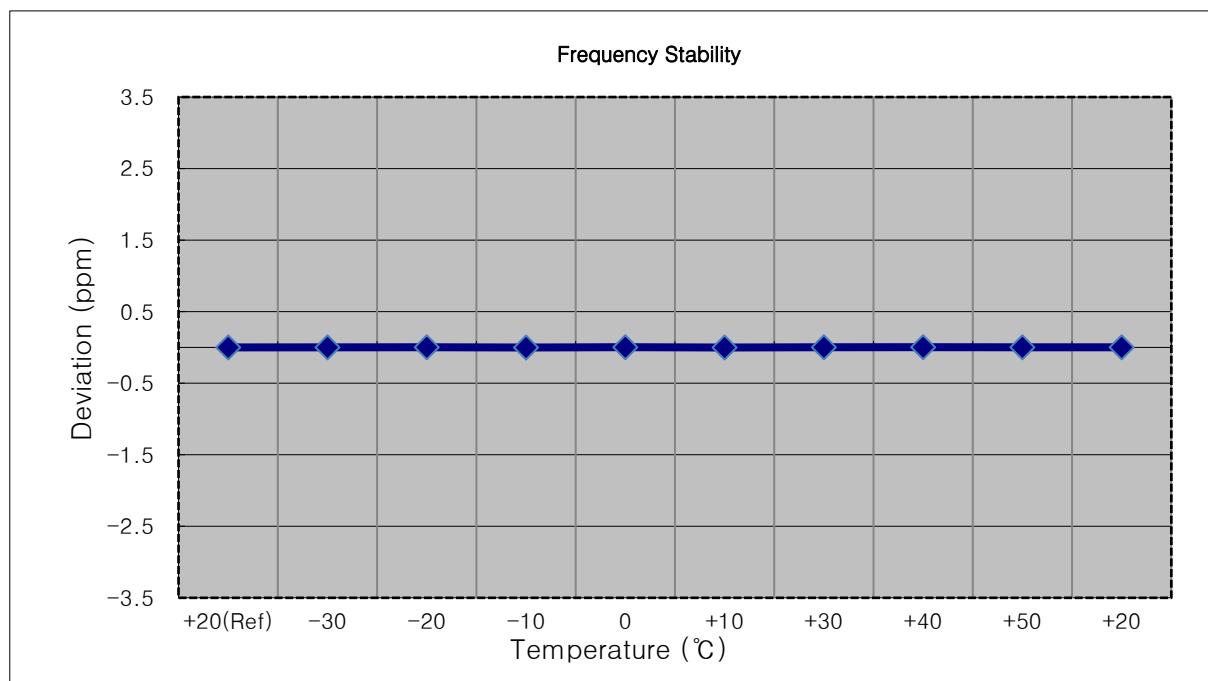


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,535,000,000 Hz
☐ CHANNEL: 21100 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 013	0.0	0.000 000	0.000
100 %		-30	2535 000 013	0.1	0.000 000	0.000
100 %		-20	2535 000 011	-2.4	0.000 000	-0.001
100 %		-10	2535 000 019	5.8	0.000 000	0.002
100 %		0	2535 000 013	-0.3	0.000 000	0.000
100 %		+10	2535 000 012	-1.2	0.000 000	0.000
100 %		+30	2535 000 017	3.3	0.000 000	0.001
100 %		+40	2535 000 018	5.1	0.000 000	0.002
100 %		+50	2535 000 014	1.1	0.000 000	0.000
Batt. Endpoint	3.400	+20	2535 000 018	4.9	0.000 000	0.002

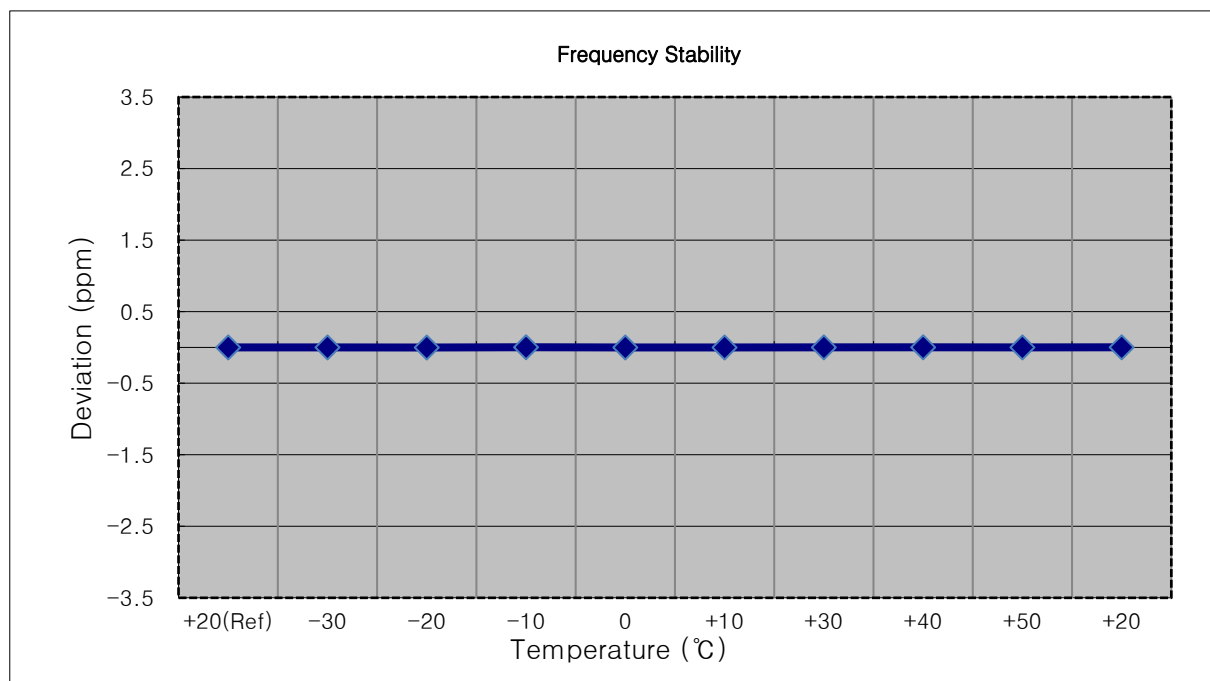


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,567,500,000 Hz
☐ CHANNEL: 21425 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2567 499 988	0.0	0.000 000	0.000
100 %		-30	2567 499 986	-2.0	0.000 000	-0.001
100 %		-20	2567 499 988	0.1	0.000 000	0.000
100 %		-10	2567 499 995	6.9	0.000 000	0.003
100 %		0	2567 499 991	3.6	0.000 000	0.001
100 %		+10	2567 499 994	6.1	0.000 000	0.002
100 %		+30	2567 499 996	8.0	0.000 000	0.003
100 %		+40	2567 499 992	4.1	0.000 000	0.002
100 %		+50	2567 499 995	7.4	0.000 000	0.003
Batt. Endpoint	3.400	+20	2567 499 988	0.2	0.000 000	0.000

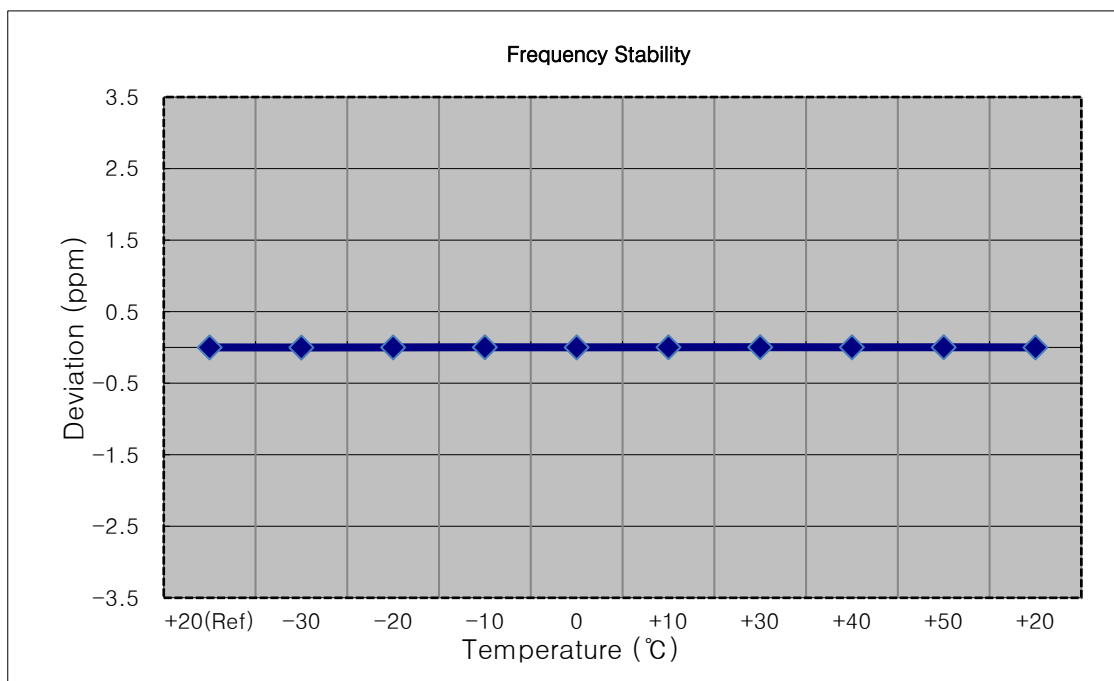


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,565,000,000 Hz
☐ CHANNEL: 21400 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2564 999 994	0.0	0.000 000	0.000
100 %		-30	2565 000 002	8.3	0.000 000	0.003
100 %		-20	2565 000 002	8.2	0.000 000	0.003
100 %		-10	2564 999 992	-1.6	0.000 000	-0.001
100 %		0	2564 999 993	-0.7	0.000 000	0.000
100 %		+10	2564 999 997	2.7	0.000 000	0.001
100 %		+30	2565 000 003	9.2	0.000 000	0.004
100 %		+40	2565 000 003	8.8	0.000 000	0.003
100 %		+50	2564 999 994	0.0	0.000 000	0.000
Batt. Endpoint	3.400	+20	2565 000 001	7.2	0.000 000	0.003

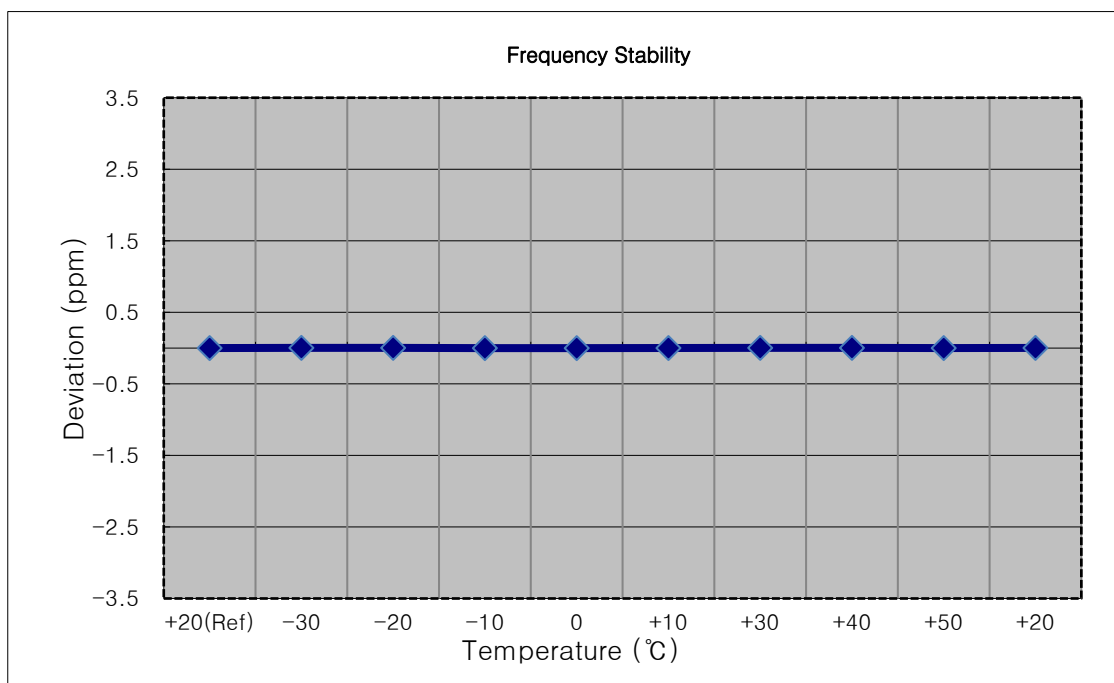


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,562,500,000 Hz
- ▣ CHANNEL: 21375 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2562 499 992	0.0	0.000 000	0.000
100 %		-30	2562 499 997	4.6	0.000 000	0.002
100 %		-20	2562 499 993	0.7	0.000 000	0.000
100 %		-10	2562 499 998	5.8	0.000 000	0.002
100 %		0	2562 499 995	3.3	0.000 000	0.001
100 %		+10	2562 499 992	0.1	0.000 000	0.000
100 %		+30	2562 499 990	-2.3	0.000 000	-0.001
100 %		+40	2562 499 993	1.3	0.000 000	0.001
100 %		+50	2562 499 994	1.8	0.000 000	0.001
Batt. Endpoint	3.400	+20	2562 499 996	3.7	0.000 000	0.001

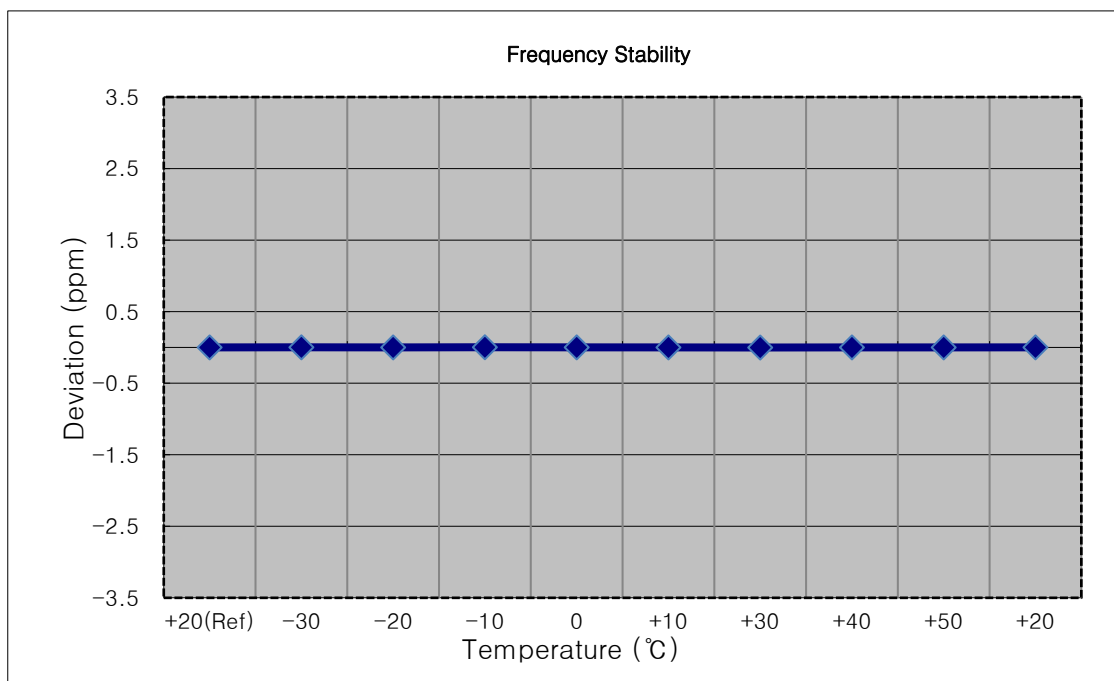

- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,560,000,000 Hz
☐ CHANNEL: 21350 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2559 999 994	0.0	0.000 000	0.000
100 %		-30	2559 999 992	-2.7	0.000 000	-0.001
100 %		-20	2560 000 001	7.0	0.000 000	0.003
100 %		-10	2559 999 993	-1.4	0.000 000	-0.001
100 %		0	2559 999 996	1.9	0.000 000	0.001
100 %		+10	2559 999 994	-0.6	0.000 000	0.000
100 %		+30	2559 999 999	5.2	0.000 000	0.002
100 %		+40	2559 999 999	4.6	0.000 000	0.002
100 %		+50	2560 000 003	8.5	0.000 000	0.003
Batt. Endpoint	3.400	+20	2560 000 000	6.2	0.000 000	0.002

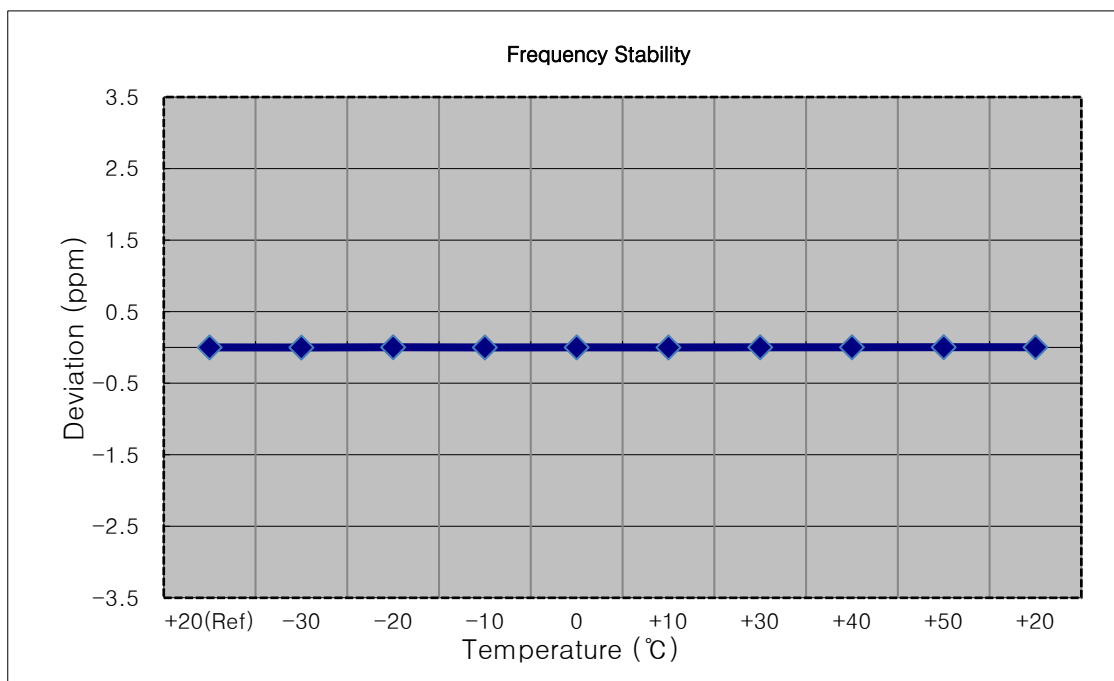

8.7.2 Upper Ant


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,502,500,000 Hz
- ▣ CHANNEL: 20775 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2502 500 006	0.0	0.000 000	0.000
100 %		-30	2502 500 014	8.9	0.000 000	0.004
100 %		-20	2502 500 012	6.7	0.000 000	0.003
100 %		-10	2502 500 014	8.5	0.000 000	0.003
100 %		0	2502 500 019	13.3	0.000 001	0.005
100 %		+10	2502 500 015	9.1	0.000 000	0.004
100 %		+30	2502 500 017	11.4	0.000 000	0.005
100 %		+40	2502 500 013	7.4	0.000 000	0.003
100 %		+50	2502 500 013	7.4	0.000 000	0.003
Batt. Endpoint	3.400	+20	2502 500 013	7.7	0.000 000	0.003

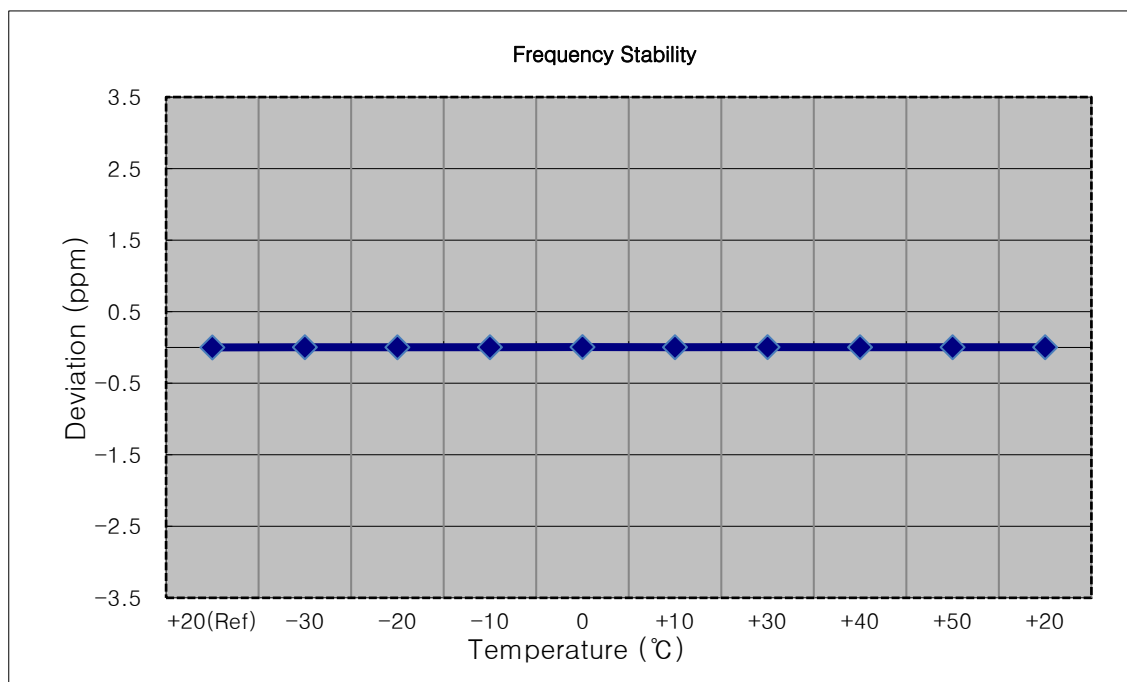


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,505,000,000 Hz
- ▣ CHANNEL: 20800 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2505 000 005	0.0	0.000 000	0.000
100 %		-30	2505 000 012	7.2	0.000 000	0.003
100 %		-20	2505 000 011	6.0	0.000 000	0.002
100 %		-10	2505 000 012	6.8	0.000 000	0.003
100 %		0	2505 000 008	3.3	0.000 000	0.001
100 %		+10	2505 000 010	5.3	0.000 000	0.002
100 %		+30	2505 000 012	7.4	0.000 000	0.003
100 %		+40	2505 000 008	3.4	0.000 000	0.001
100 %		+50	2505 000 011	6.6	0.000 000	0.003
Batt. Endpoint	3.400	+20	2505 000 012	7.5	0.000 000	0.003

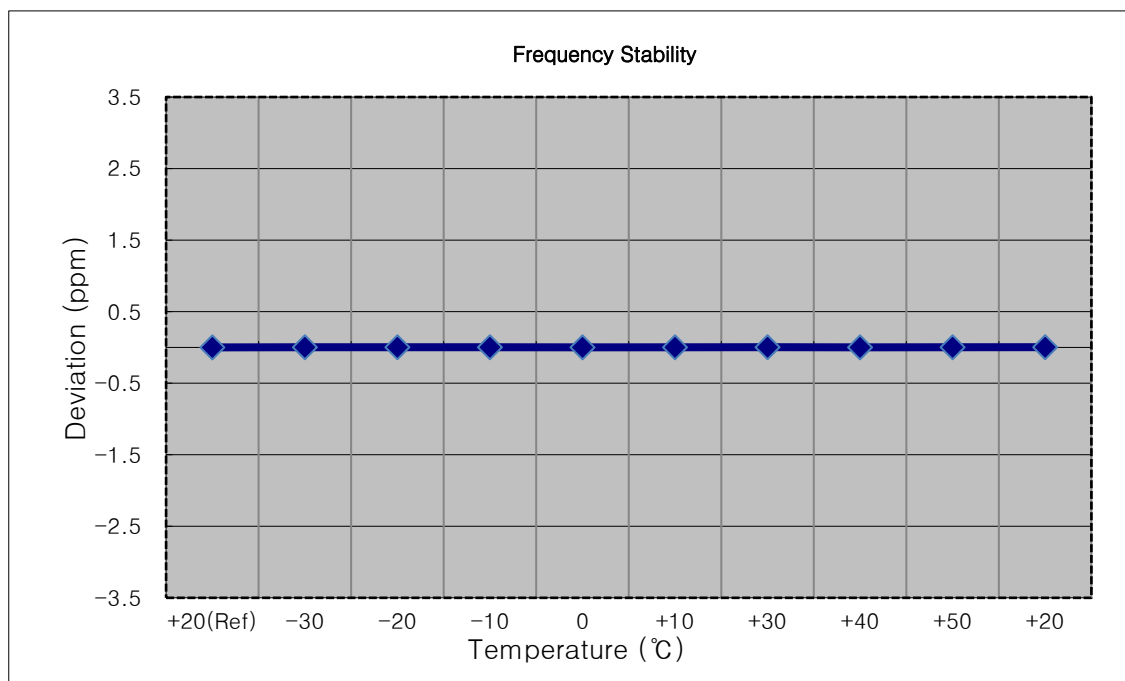


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,507,500,000 Hz
☐ CHANNEL: 20825 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2507 500 007	0.0	0.000 000	0.000
100 %		-30	2507 500 014	7.0	0.000 000	0.003
100 %		-20	2507 500 011	4.1	0.000 000	0.002
100 %		-10	2507 500 010	2.9	0.000 000	0.001
100 %		0	2507 500 012	5.0	0.000 000	0.002
100 %		+10	2507 500 012	5.3	0.000 000	0.002
100 %		+30	2507 500 011	4.7	0.000 000	0.002
100 %		+40	2507 500 014	6.9	0.000 000	0.003
100 %		+50	2507 500 012	5.6	0.000 000	0.002
Batt. Endpoint	3.400	+20	2507 500 012	5.7	0.000 000	0.002

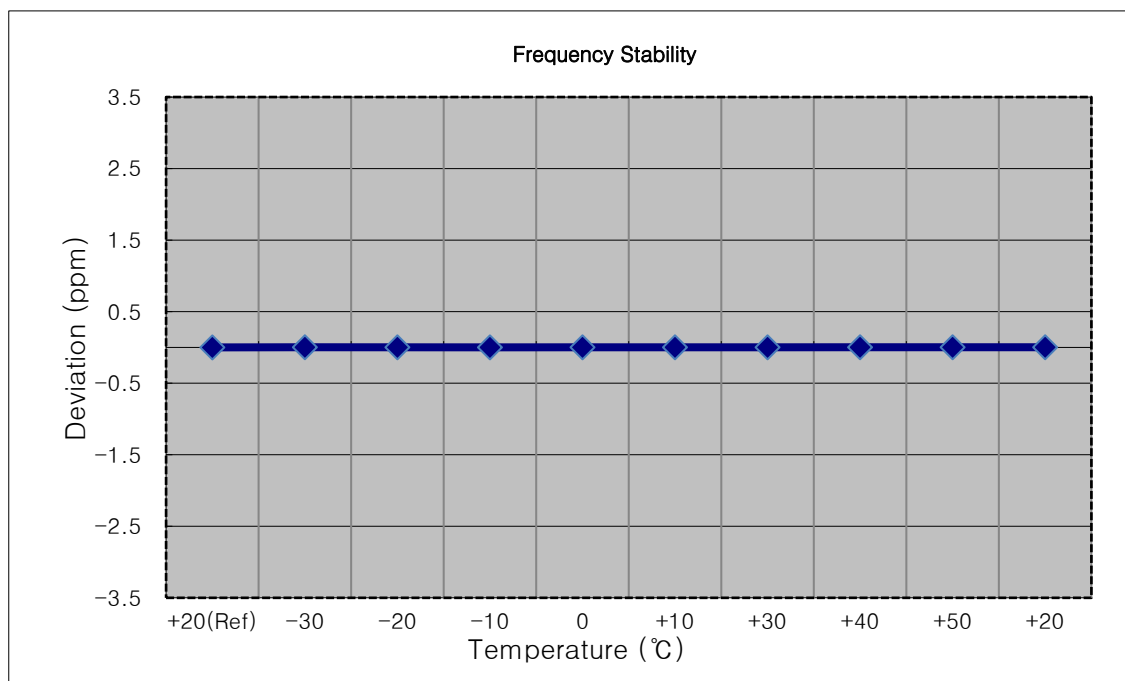


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,510,000,000 Hz
☐ CHANNEL: 20850 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2510 000 006	0.0	0.000 000	0.000
100 %		-30	2510 000 011	5.1	0.000 000	0.002
100 %		-20	2510 000 010	4.1	0.000 000	0.002
100 %		-10	2510 000 009	3.2	0.000 000	0.001
100 %		0	2510 000 012	6.0	0.000 000	0.002
100 %		+10	2510 000 009	3.3	0.000 000	0.001
100 %		+30	2510 000 012	6.5	0.000 000	0.003
100 %		+40	2510 000 011	5.1	0.000 000	0.002
100 %		+50	2510 000 014	8.0	0.000 000	0.003
Batt. Endpoint	3.400	+20	2510 000 010	4.6	0.000 000	0.002

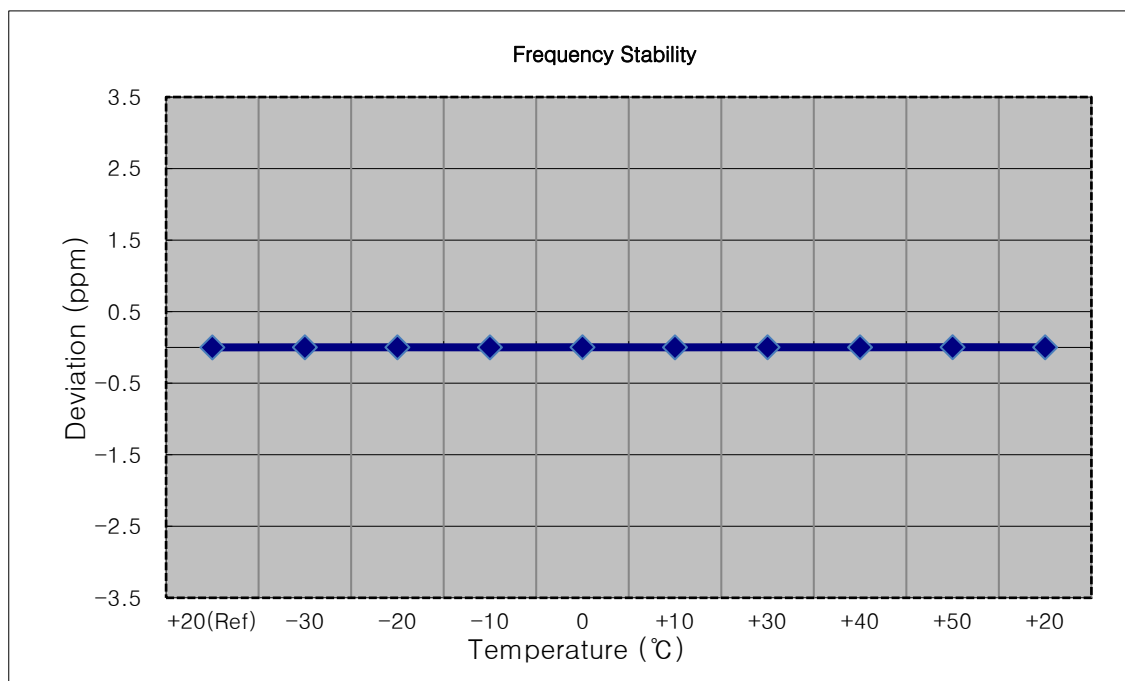


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 010	0.0	0.000 000	0.000
100 %		-30	2535 000 023	12.6	0.000 000	0.005
100 %		-20	2535 000 020	9.8	0.000 000	0.004
100 %		-10	2535 000 022	11.5	0.000 000	0.005
100 %		0	2535 000 024	13.4	0.000 001	0.005
100 %		+10	2535 000 021	10.7	0.000 000	0.004
100 %		+30	2535 000 022	11.4	0.000 000	0.004
100 %		+40	2535 000 022	11.5	0.000 000	0.005
100 %		+50	2535 000 018	7.8	0.000 000	0.003
Batt. Endpoint	3.400	+20	2535 000 018	8.1	0.000 000	0.003

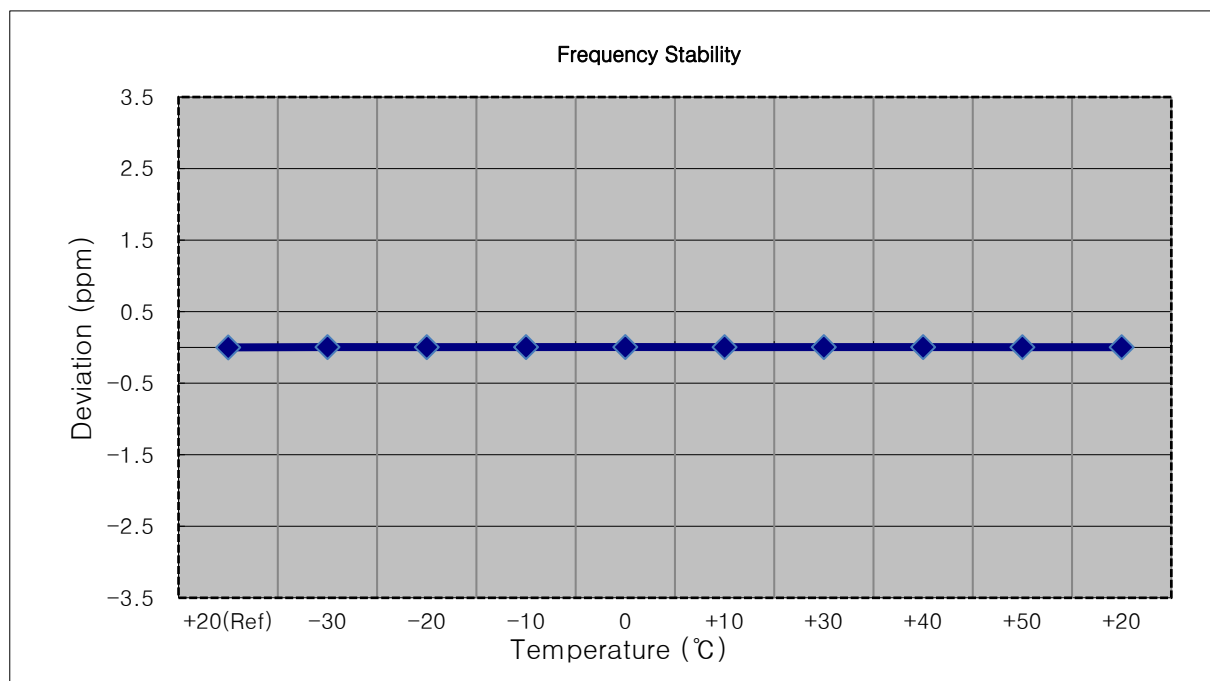


- ▣ MODE: LTE 7
- ▣ OPERATING FREQUENCY: 2,535,000,000 Hz
- ▣ CHANNEL: 21100 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 009	0.0	0.000 000	0.000
100 %		-30	2535 000 016	7.3	0.000 000	0.003
100 %		-20	2535 000 016	6.9	0.000 000	0.003
100 %		-10	2535 000 020	10.5	0.000 000	0.004
100 %		0	2535 000 019	9.7	0.000 000	0.004
100 %		+10	2535 000 015	5.6	0.000 000	0.002
100 %		+30	2535 000 017	8.2	0.000 000	0.003
100 %		+40	2535 000 016	6.7	0.000 000	0.003
100 %		+50	2535 000 014	5.2	0.000 000	0.002
Batt. Endpoint	3.400	+20	2535 000 017	8.1	0.000 000	0.003

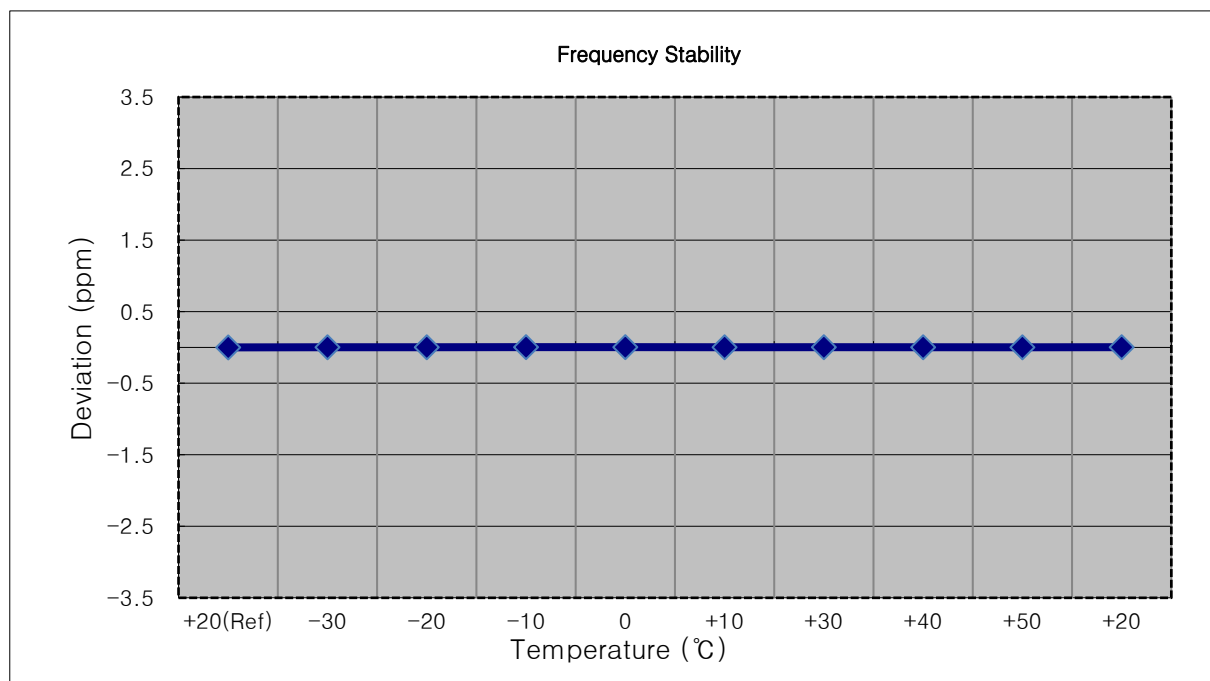


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,535,000,000 Hz
☐ CHANNEL: 21100 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 009	0.0	0.000 000	0.000
100 %		-30	2535 000 016	7.0	0.000 000	0.003
100 %		-20	2535 000 017	8.6	0.000 000	0.003
100 %		-10	2535 000 018	9.2	0.000 000	0.004
100 %		0	2535 000 018	9.1	0.000 000	0.004
100 %		+10	2535 000 016	7.5	0.000 000	0.003
100 %		+30	2535 000 021	12.2	0.000 000	0.005
100 %		+40	2535 000 019	10.2	0.000 000	0.004
100 %		+50	2535 000 017	8.4	0.000 000	0.003
Batt. Endpoint	3.400	+20	2535 000 016	6.9	0.000 000	0.003

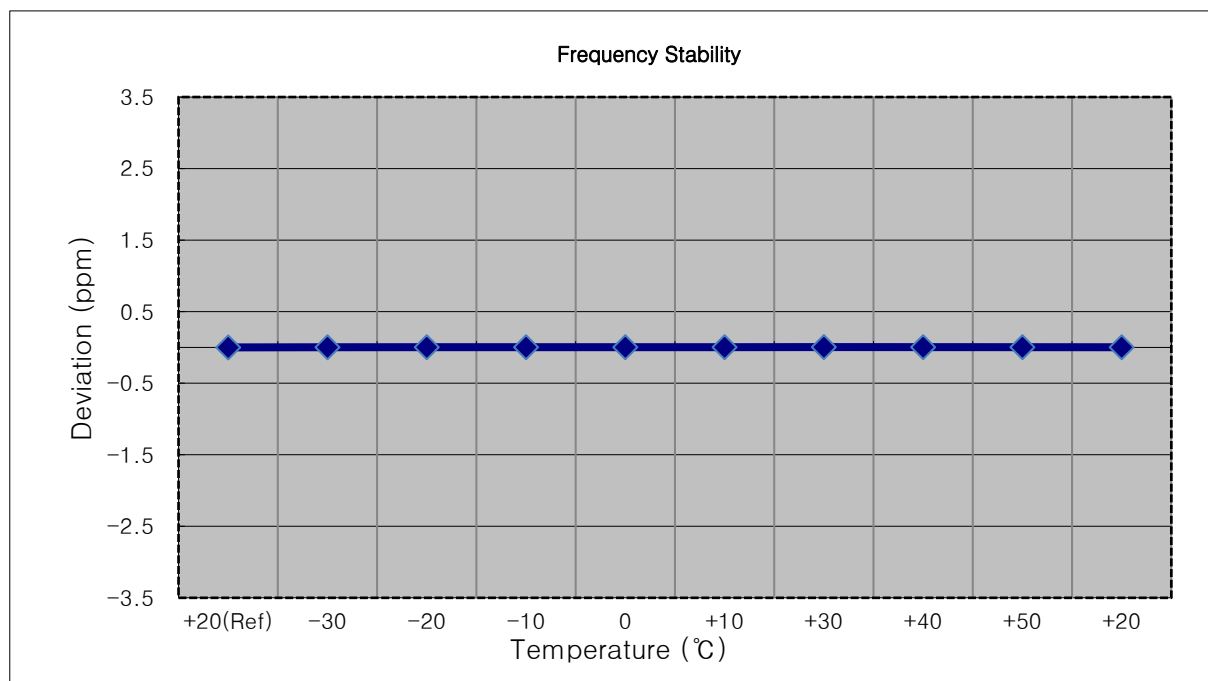


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,535,000,000 Hz
☐ CHANNEL: 21100 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2535 000 009	0.0	0.000 000	0.000
100 %		-30	2535 000 018	8.9	0.000 000	0.004
100 %		-20	2535 000 019	9.8	0.000 000	0.004
100 %		-10	2535 000 015	6.3	0.000 000	0.002
100 %		0	2535 000 019	9.4	0.000 000	0.004
100 %		+10	2535 000 016	6.4	0.000 000	0.003
100 %		+30	2535 000 022	12.6	0.000 000	0.005
100 %		+40	2535 000 017	7.4	0.000 000	0.003
100 %		+50	2535 000 018	8.9	0.000 000	0.004
Batt. Endpoint	3.400	+20	2535 000 018	9.2	0.000 000	0.004

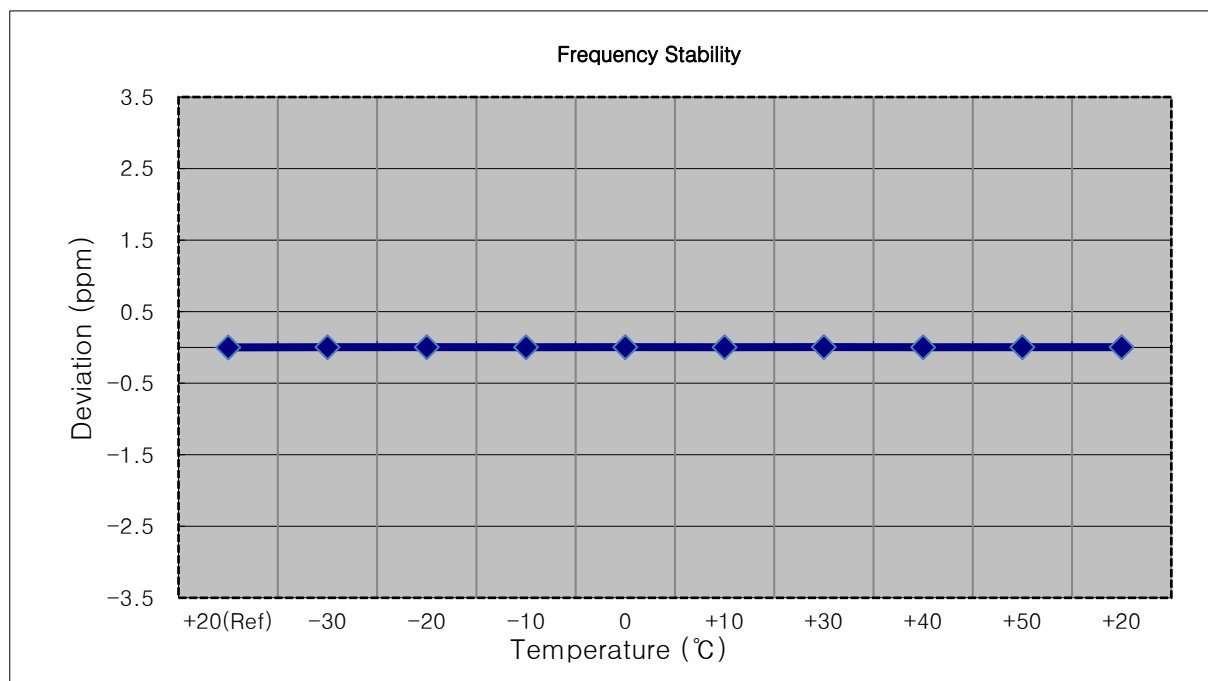


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,567,500,000 Hz
☐ CHANNEL: 21425 (5 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2567 500 004	0.0	0.000 000	0.000
100 %		-30	2567 499 998	-5.9	0.000 000	-0.002
100 %		-20	2567 499 999	-4.5	0.000 000	-0.002
100 %		-10	2567 500 009	5.3	0.000 000	0.002
100 %		0	2567 499 999	-4.7	0.000 000	-0.002
100 %		+10	2567 499 997	-6.7	0.000 000	-0.003
100 %		+30	2567 499 999	-4.5	0.000 000	-0.002
100 %		+40	2567 499 997	-6.8	0.000 000	-0.003
100 %		+50	2567 499 998	-5.6	0.000 000	-0.002
Batt. Endpoint	3.400	+20	2567 500 000	-4.0	0.000 000	-0.002

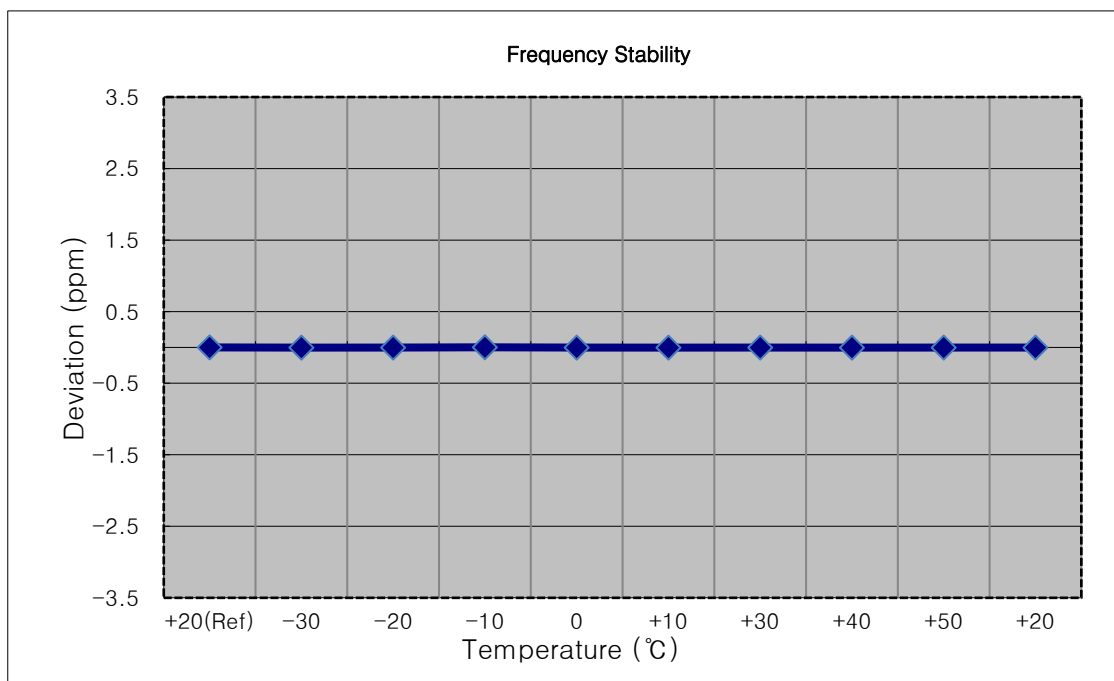


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,565,000,000 Hz
☐ CHANNEL: 21400 (10 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2564 999 990	0.0	0.000 000	0.000
100 %		-30	2564 999 983	-6.7	0.000 000	-0.003
100 %		-20	2564 999 984	-5.5	0.000 000	-0.002
100 %		-10	2564 999 981	-9.2	0.000 000	-0.004
100 %		0	2564 999 981	-9.2	0.000 000	-0.004
100 %		+10	2564 999 983	-6.6	0.000 000	-0.003
100 %		+30	2564 999 994	4.0	0.000 000	0.002
100 %		+40	2564 999 985	-5.2	0.000 000	-0.002
100 %		+50	2564 999 981	-9.1	0.000 000	-0.004
Batt. Endpoint	3.400	+20	2564 999 985	-4.3	0.000 000	-0.002

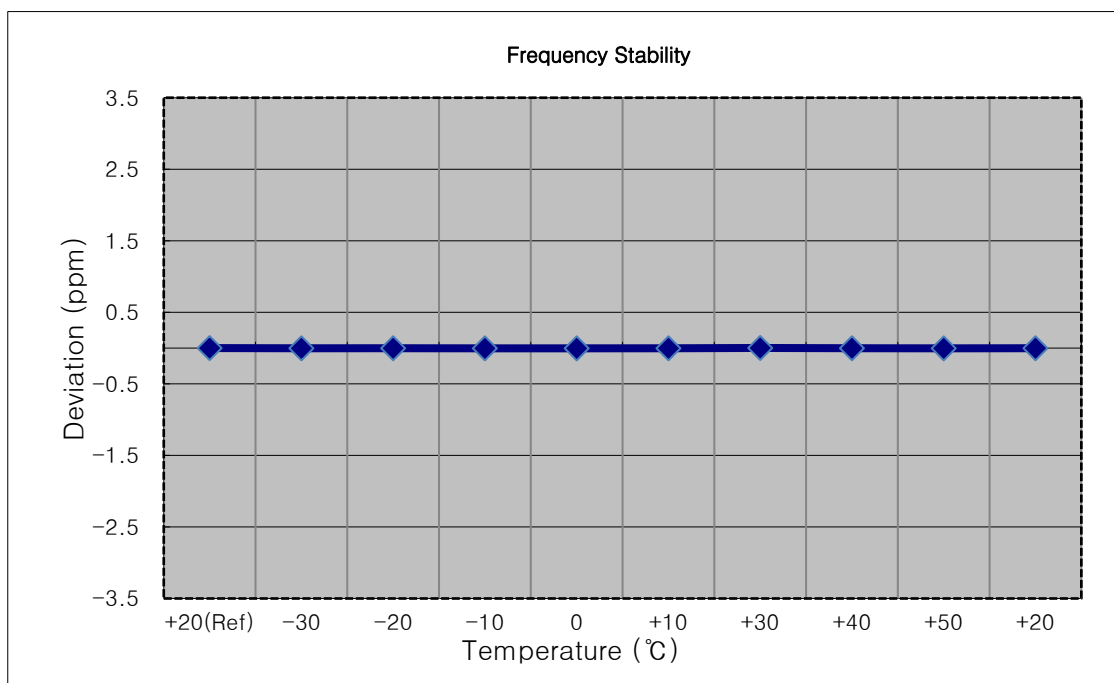


- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,562,500,000 Hz
☐ CHANNEL: 21375 (15 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2562 499 993	0.0	0.000 000	0.000
100 %		-30	2562 499 985	-8.4	0.000 000	-0.003
100 %		-20	2562 499 984	-9.1	0.000 000	-0.004
100 %		-10	2562 499 987	-6.4	0.000 000	-0.002
100 %		0	2562 499 998	4.7	0.000 000	0.002
100 %		+10	2562 499 988	-5.0	0.000 000	-0.002
100 %		+30	2562 499 987	-6.8	0.000 000	-0.003
100 %		+40	2562 499 983	-10.8	0.000 000	-0.004
100 %		+50	2562 499 984	-8.9	0.000 000	-0.003
Batt. Endpoint	3.400	+20	2562 499 987	-6.2	0.000 000	-0.002

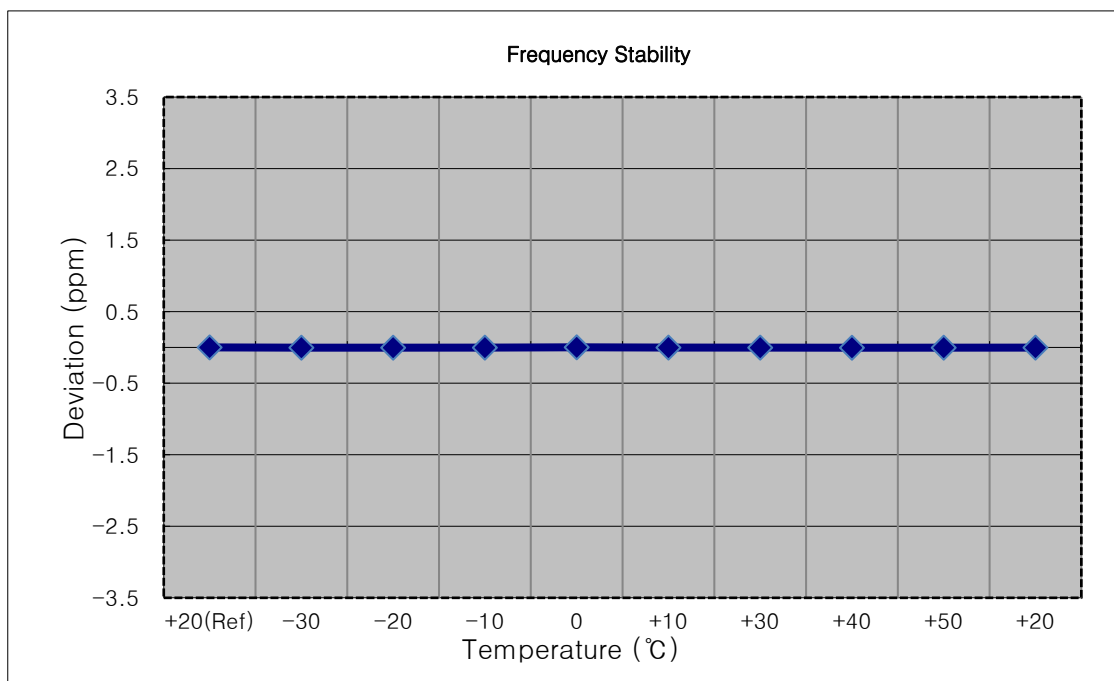

- ☐ MODE: LTE 7
☐ OPERATING FREQUENCY: 2,560,000,000 Hz
☐ CHANNEL: 21350 (20 MHz)
☐ REFERENCE VOLTAGE: 3.860 VDC
☐ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	2559 999 987	0.0	0.000 000	0.000
100 %		-30	2559 999 979	-8.3	0.000 000	-0.003
100 %		-20	2559 999 982	-5.4	0.000 000	-0.002
100 %		-10	2559 999 977	-10.5	0.000 000	-0.004
100 %		0	2559 999 979	-8.8	0.000 000	-0.003
100 %		+10	2559 999 978	-9.4	0.000 000	-0.004
100 %		+30	2559 999 979	-8.6	0.000 000	-0.003
100 %		+40	2559 999 984	-3.0	0.000 000	-0.001
100 %		+50	2559 999 981	-6.6	0.000 000	-0.003
Batt. Endpoint	3.400	+20	2559 999 979	-8.6	0.000 000	-0.003

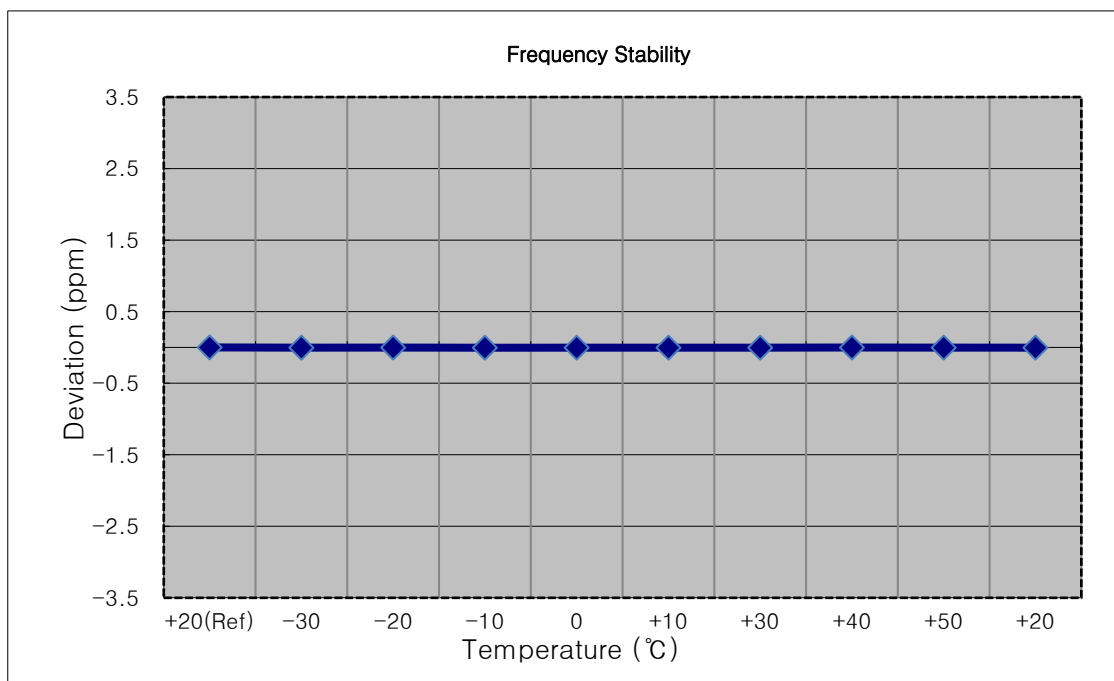


9. TEST PLOTS


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 QPSK RB 25) (Lower Ant)



BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 16-QAM RB 25) (Lower Ant)

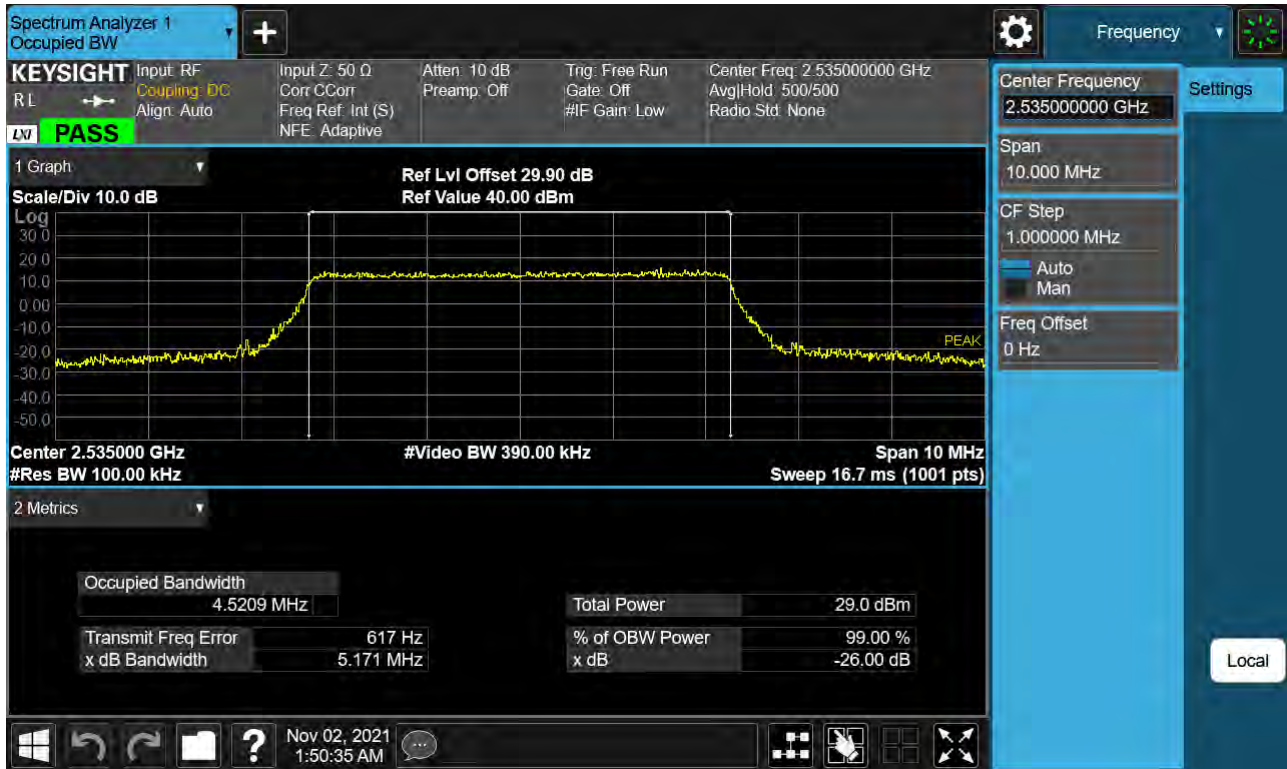


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 64-QAM RB 25) (Lower Ant)

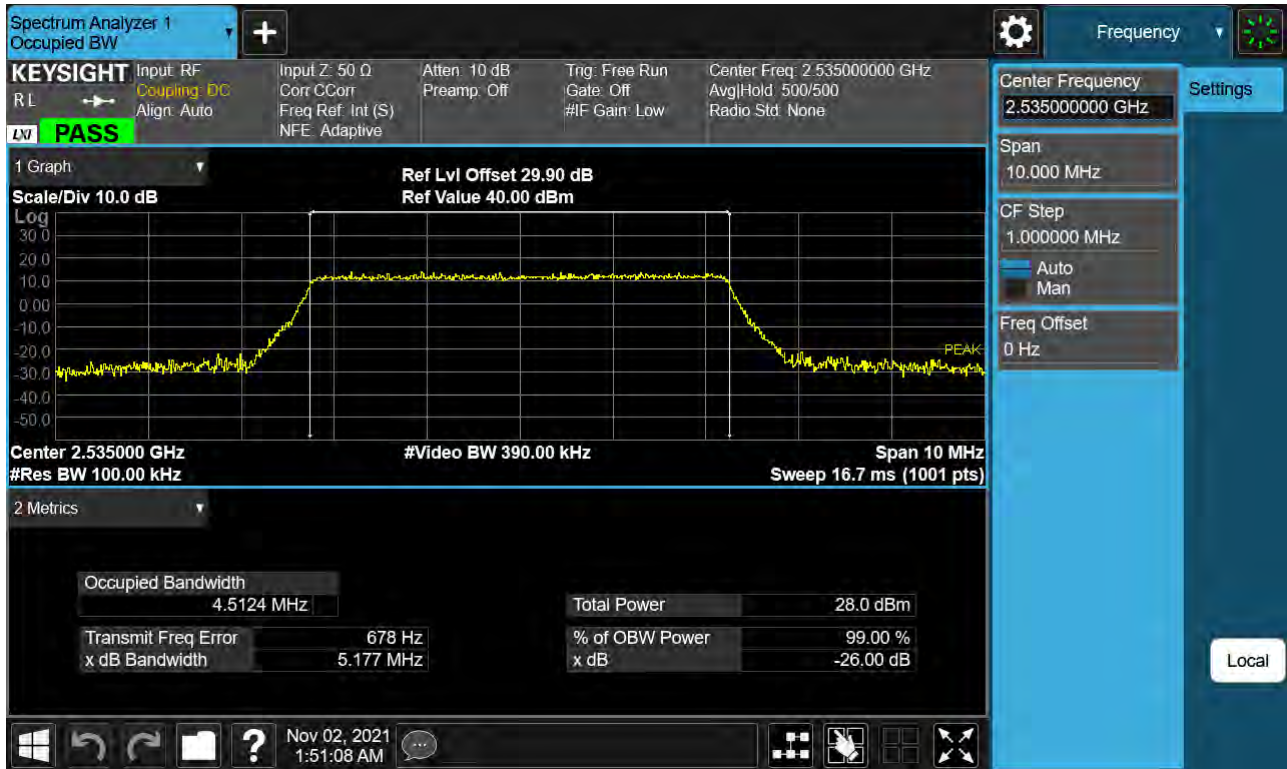


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 256-QAM RB 25) (Lower Ant)




BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 QPSK RB 50) (Lower Ant)

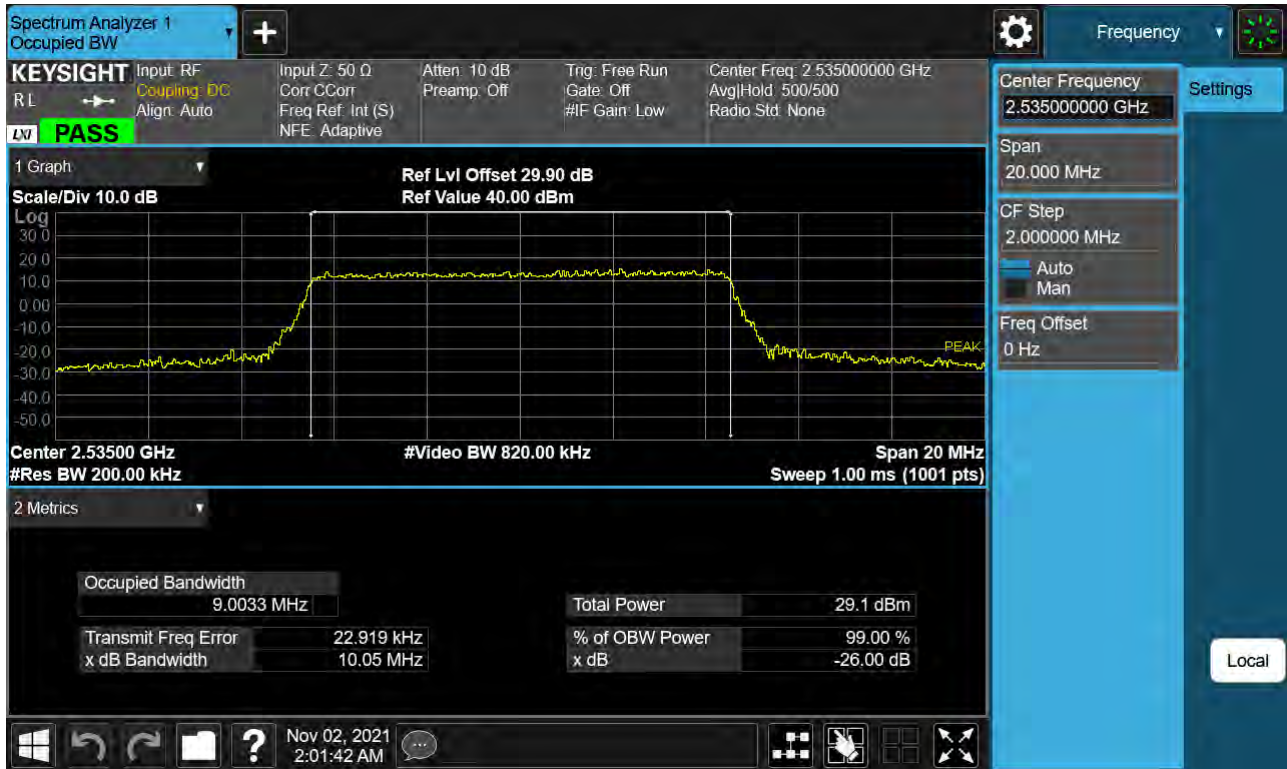


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 16-QAM RB 50) (Lower Ant)

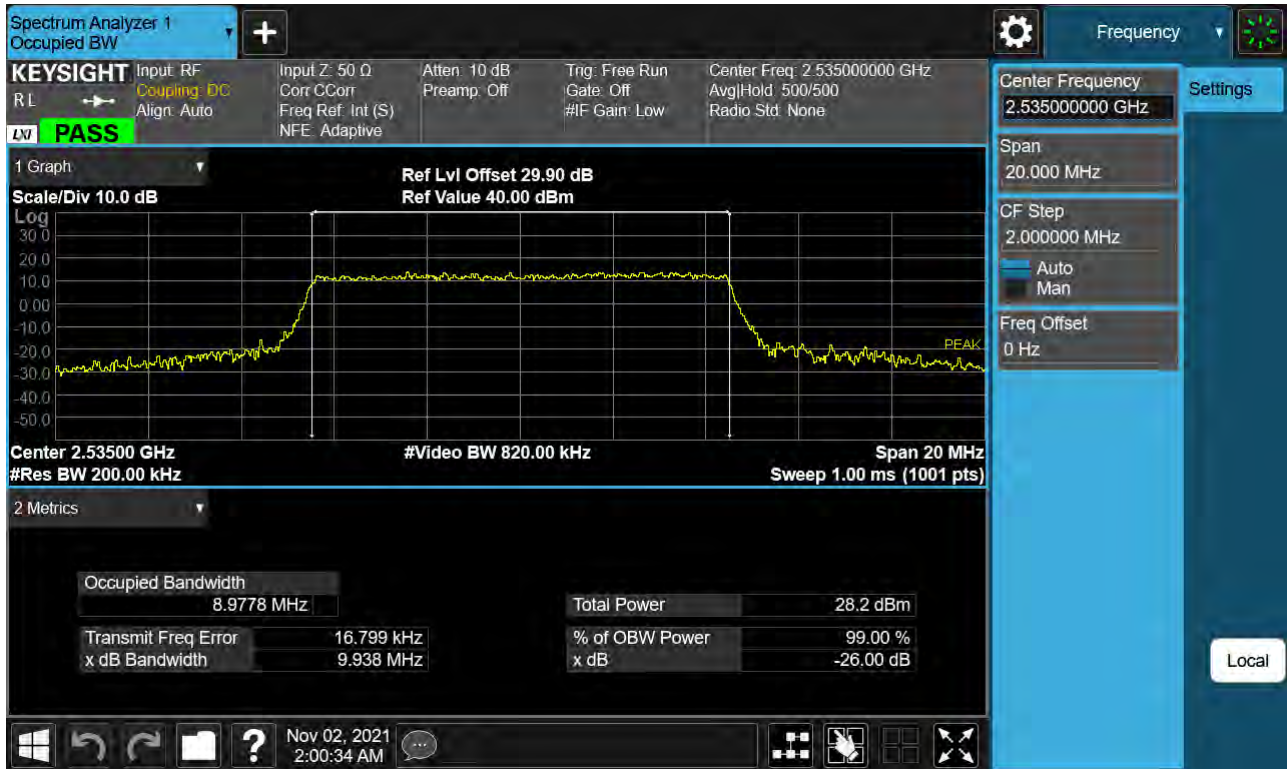

BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 64-QAM RB 50) (Lower Ant)

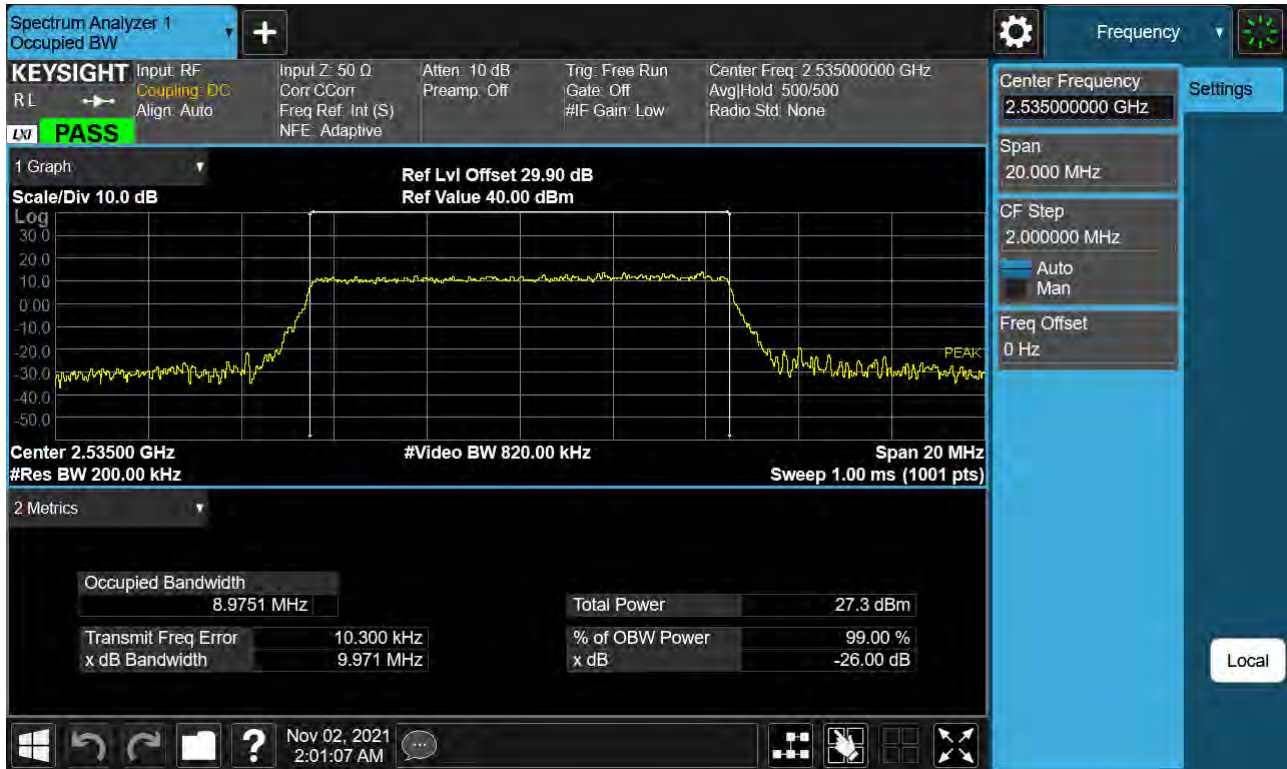

BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 256-QAM RB 50) (Lower Ant)

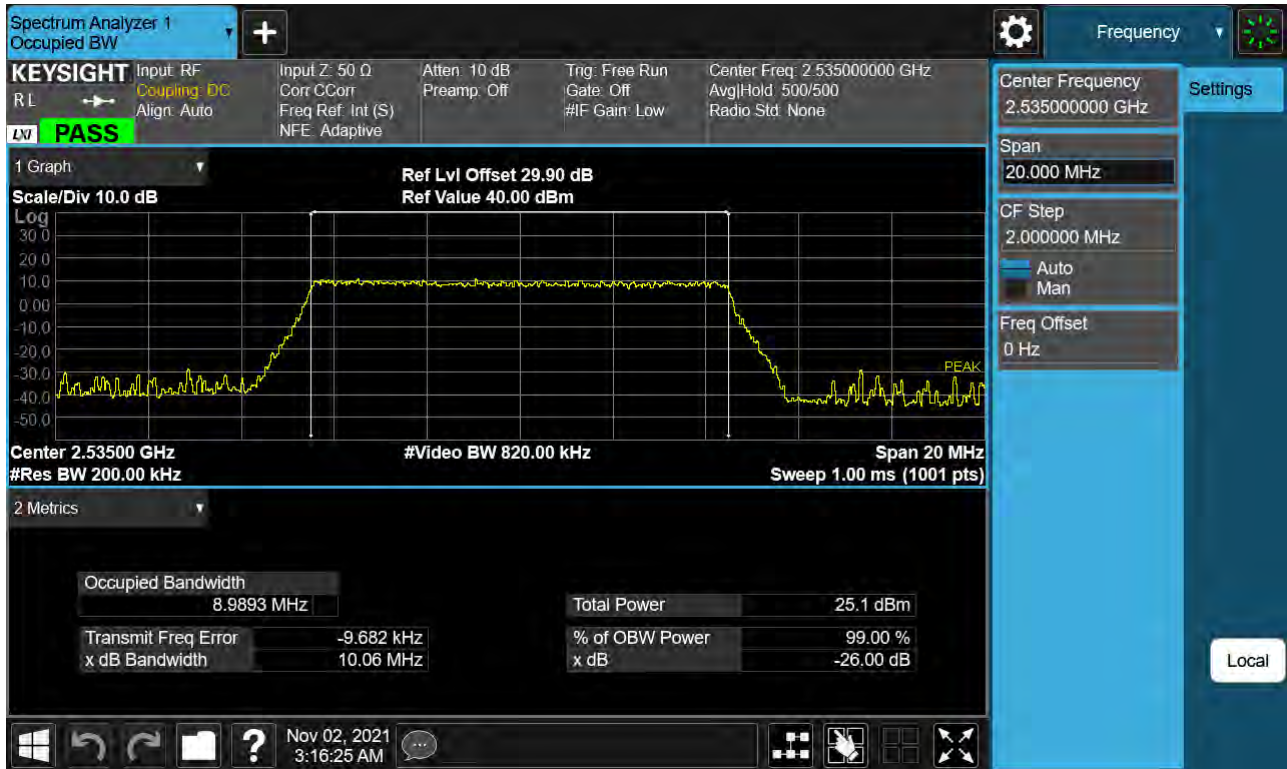


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 QPSK RB 75) (Lower Ant)




BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 16-QAM RB 75) (Lower Ant)




BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 64-QAM RB 75) (Lower Ant)

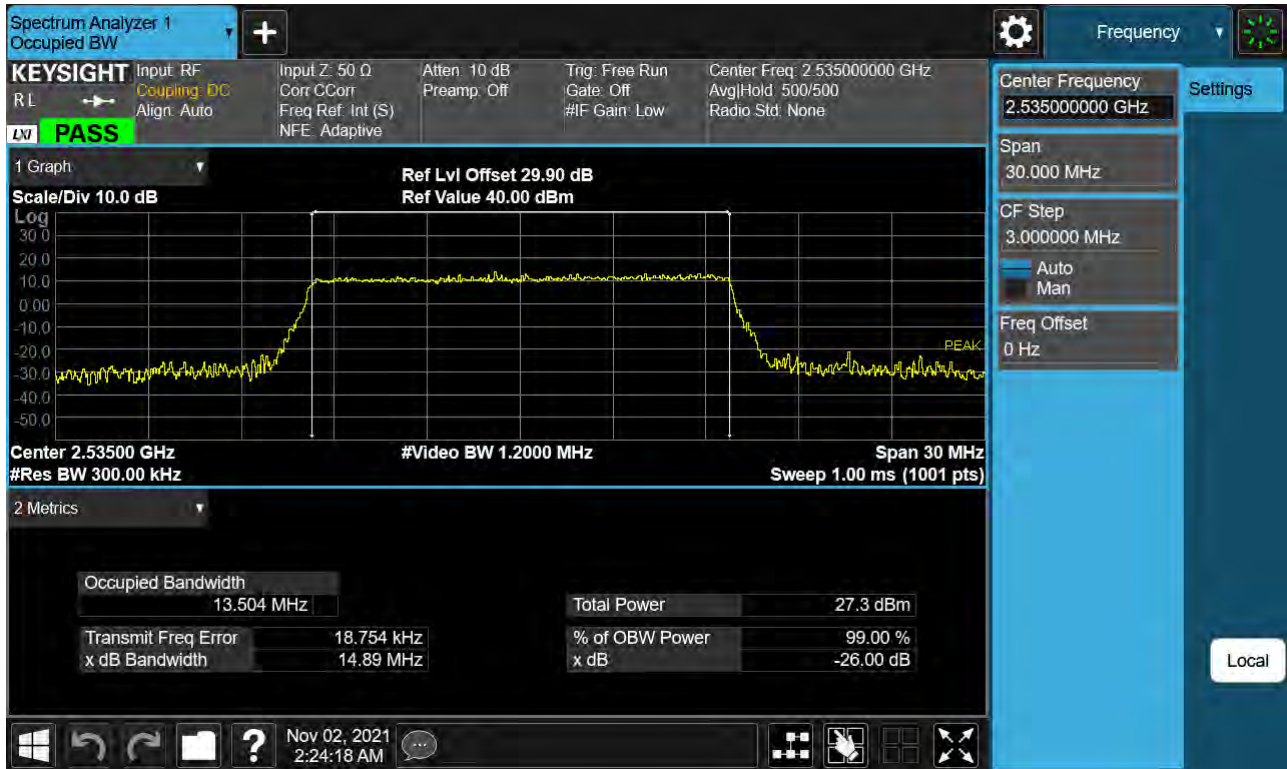

BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 256-QAM RB 75) (Lower Ant)

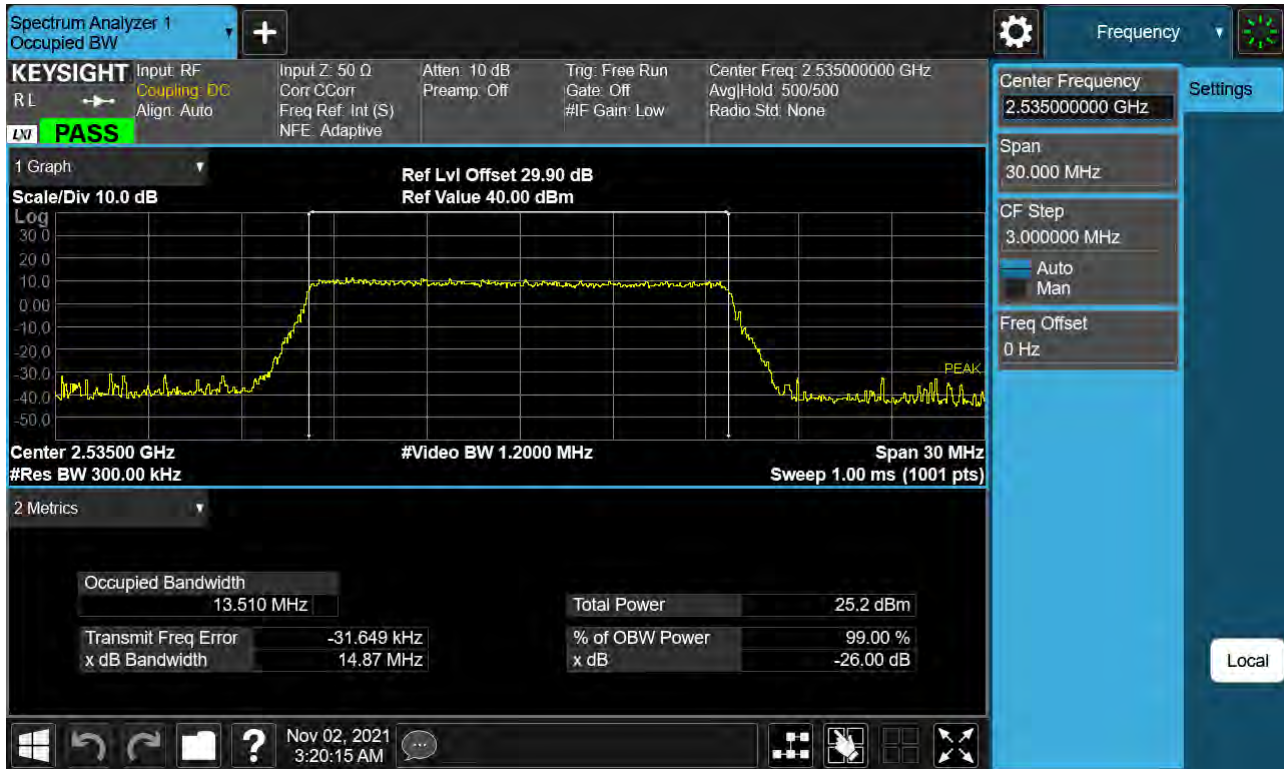


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 QPSK RB 100) (Lower Ant)

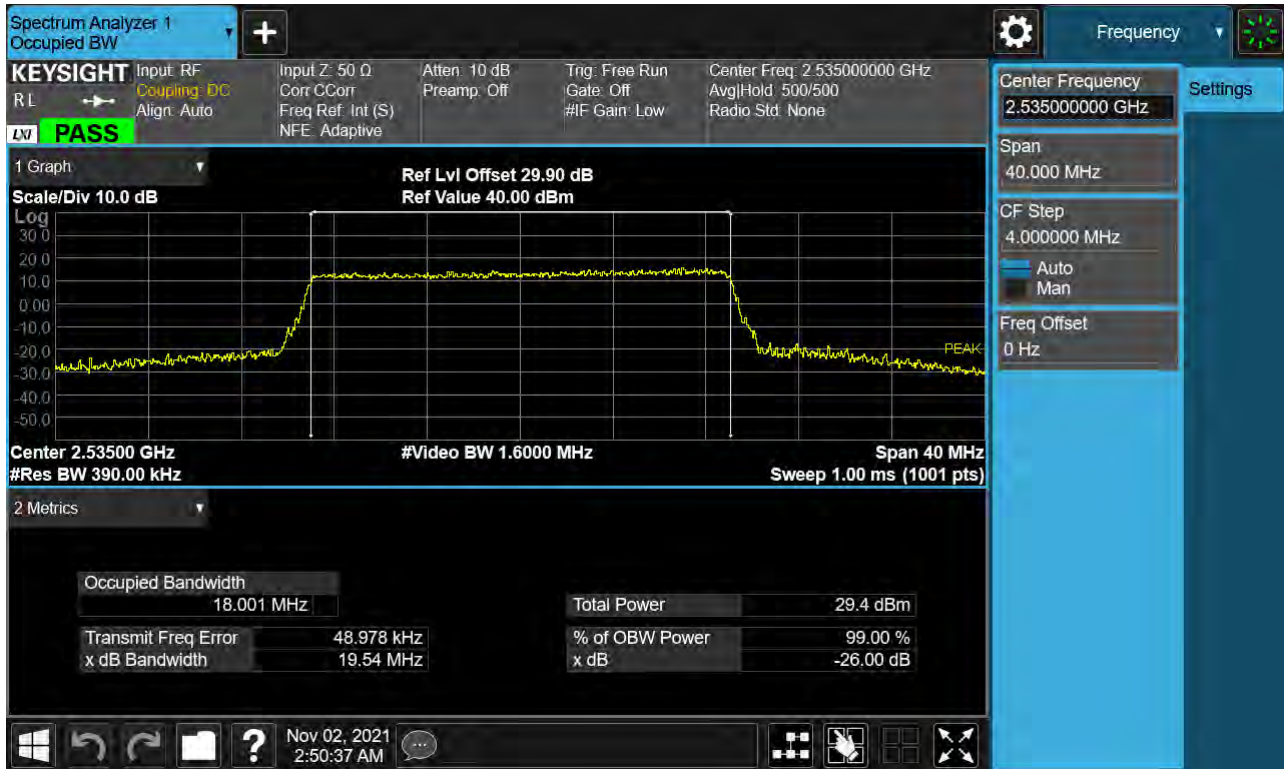

BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 16-QAM RB 100) (Lower Ant)




BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 64-QAM RB 100) (Lower Ant)

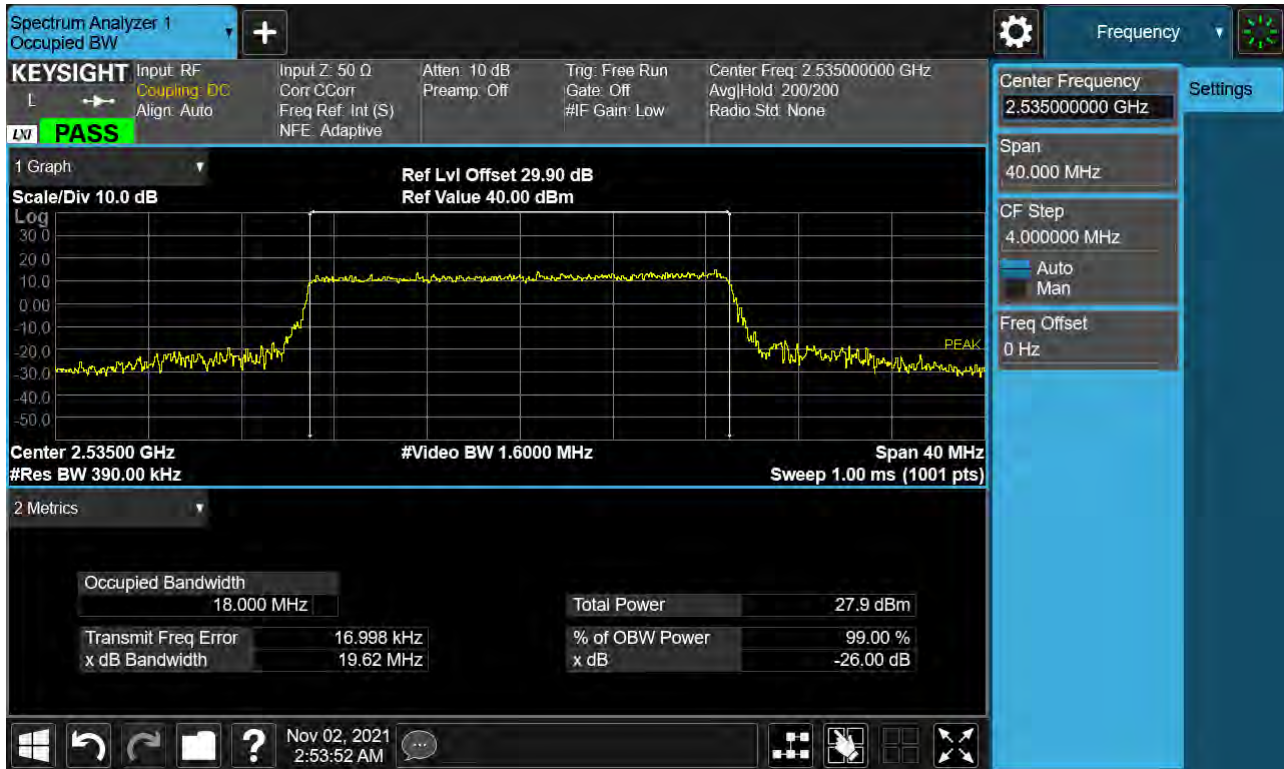


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 256-QAM RB 100) (Lower Ant)




BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 QPSK RB 25) (Upper Ant)

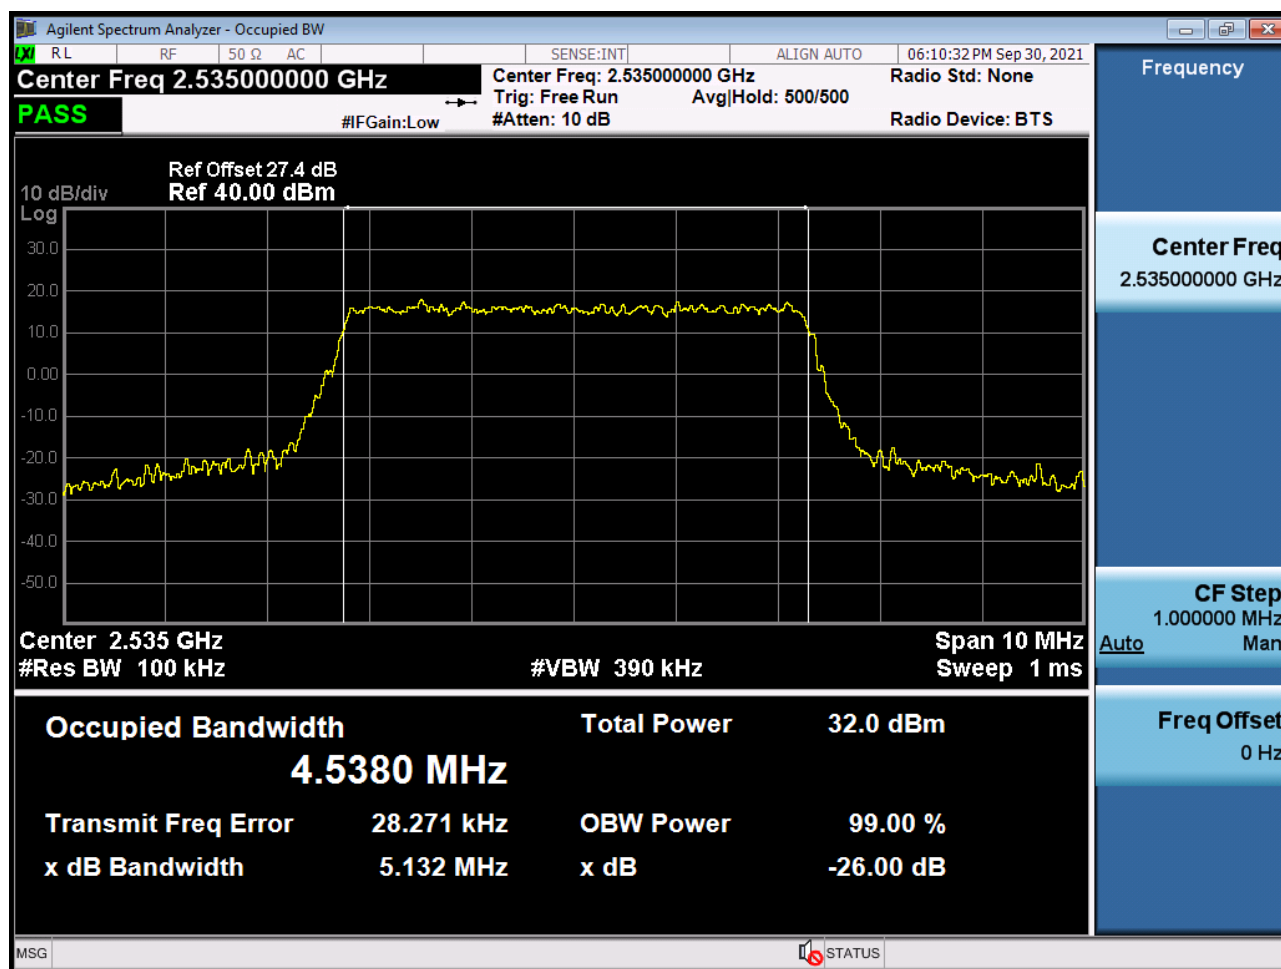


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 16-QAM RB 25) (Upper Ant)

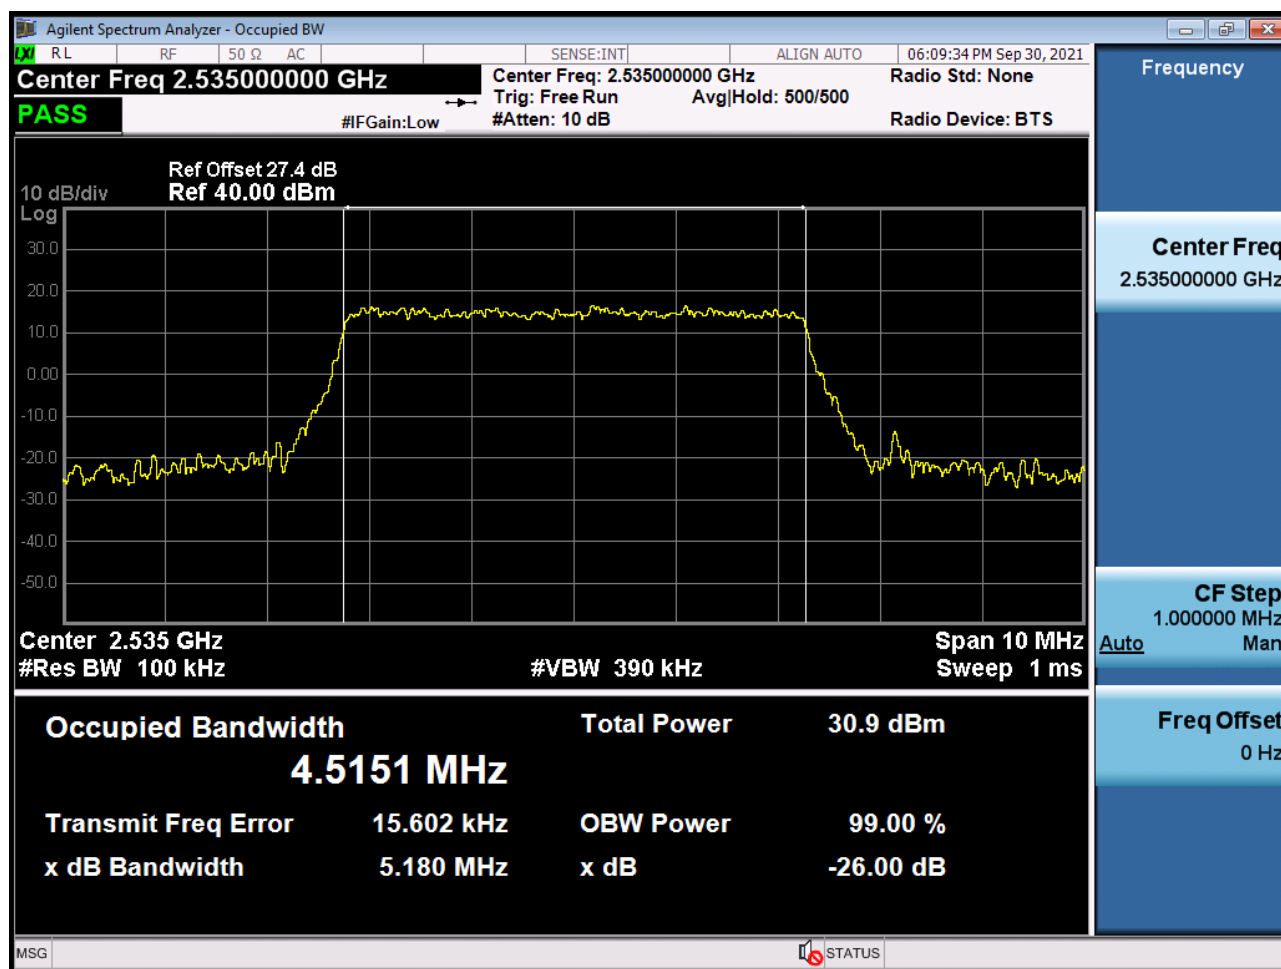


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 64-QAM RB 25) (Upper Ant)

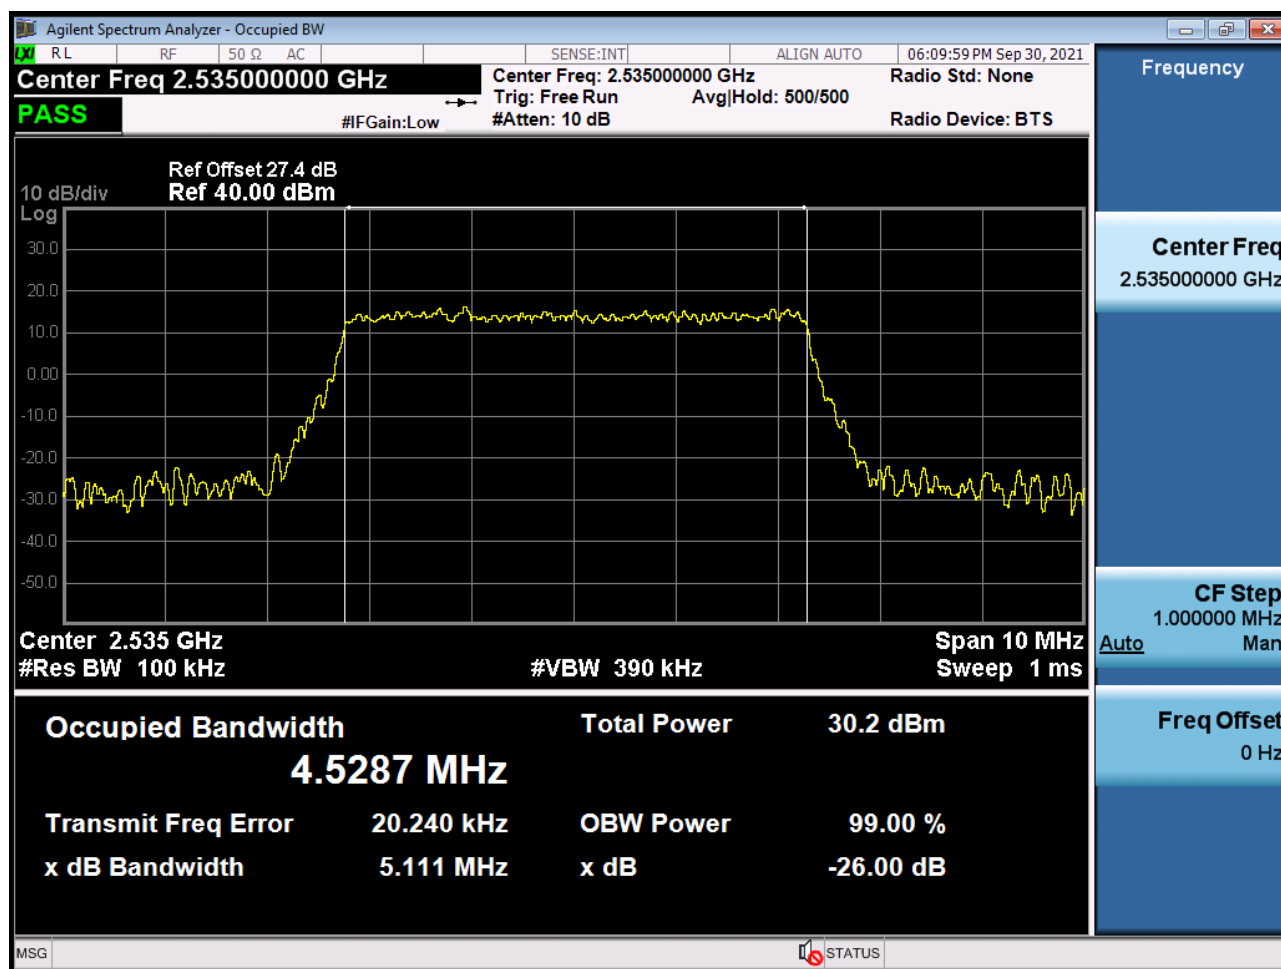


BAND 7. Occupied Bandwidth Plot (5 MHz Ch.21100 256-QAM RB 25) (Upper Ant)

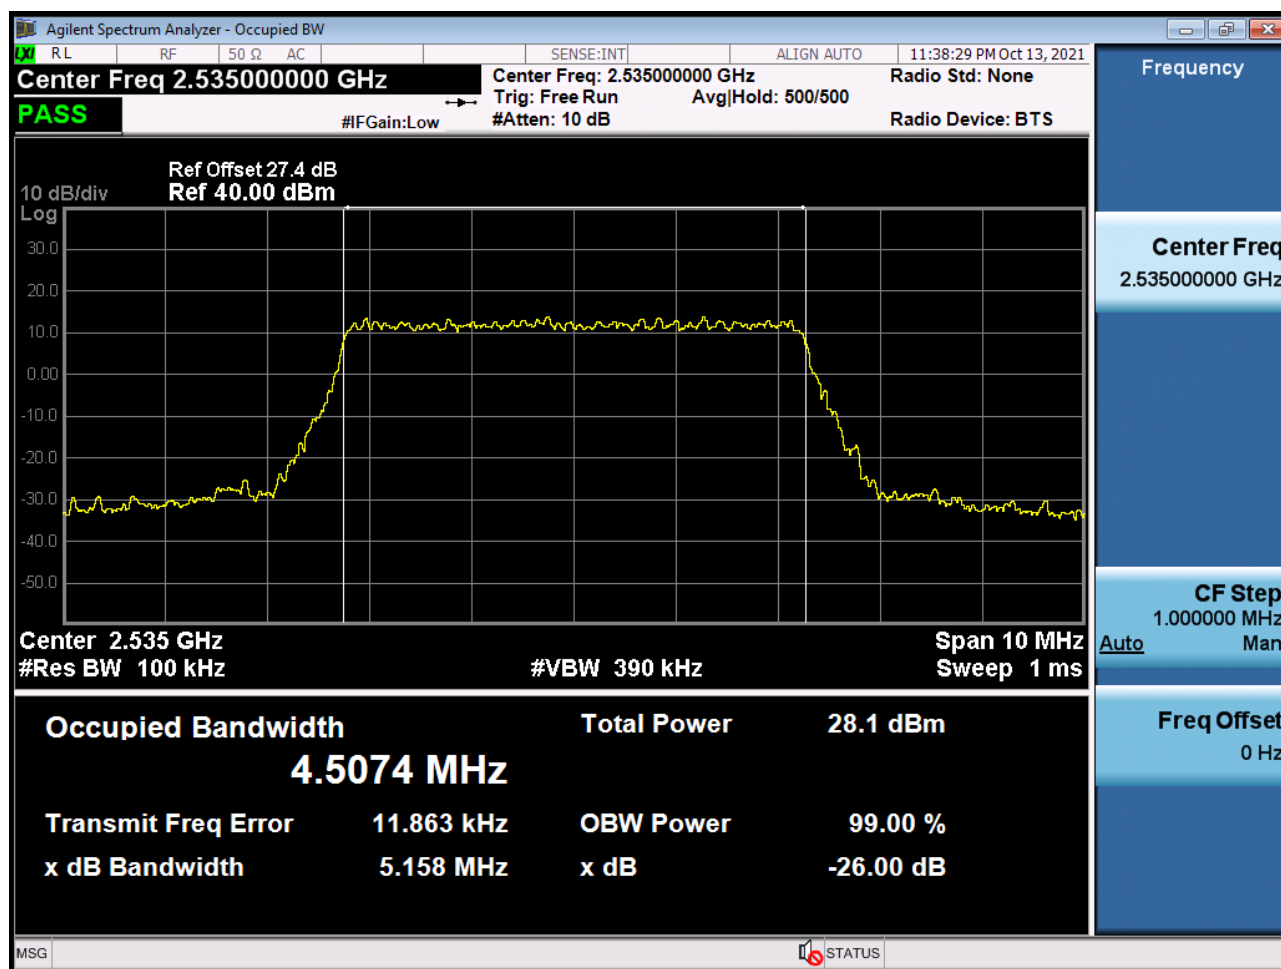


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 QPSK RB 50) (Upper Ant)

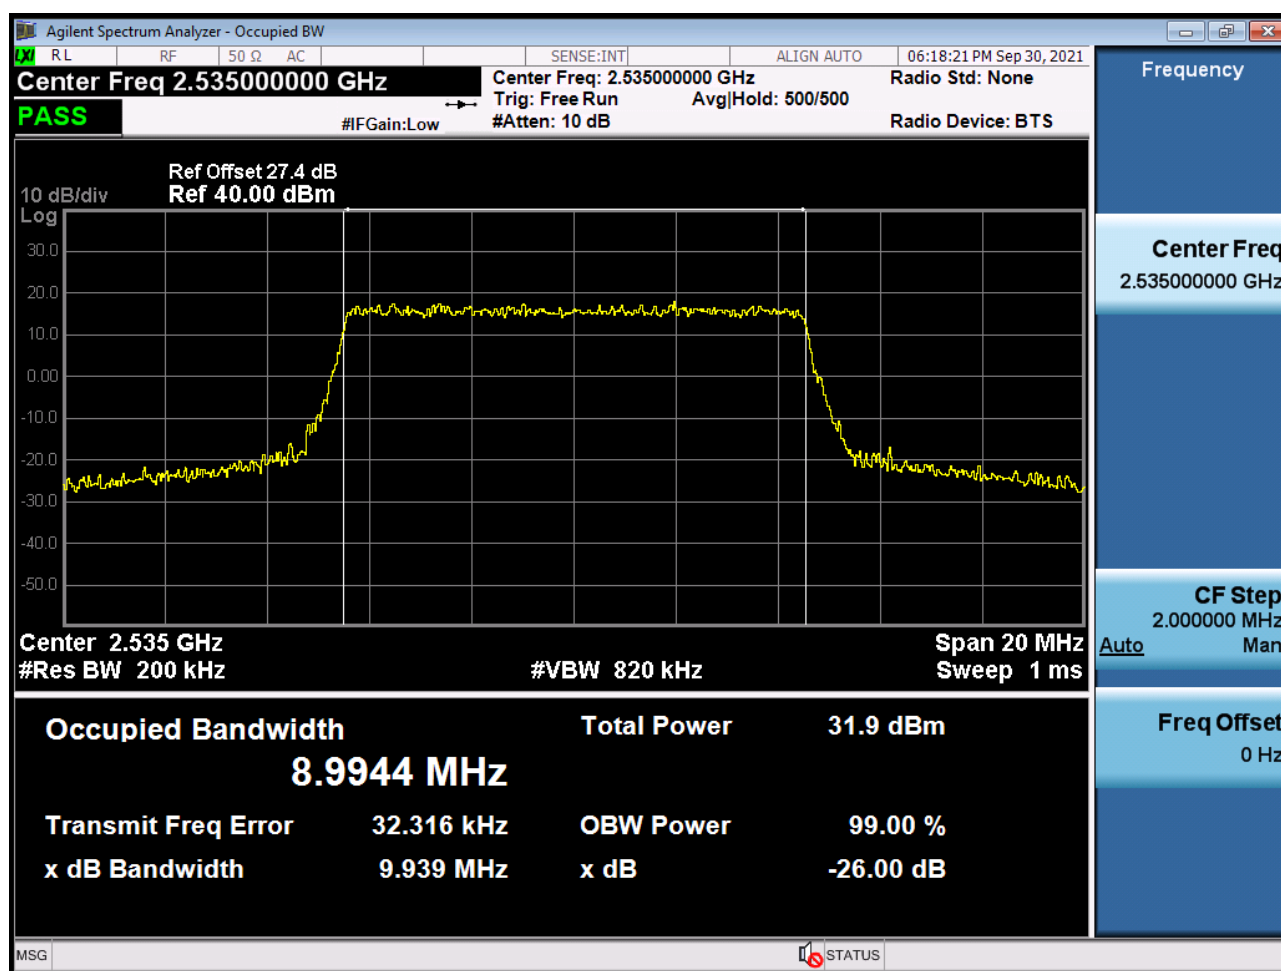


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 16-QAM RB 50) (Upper Ant)

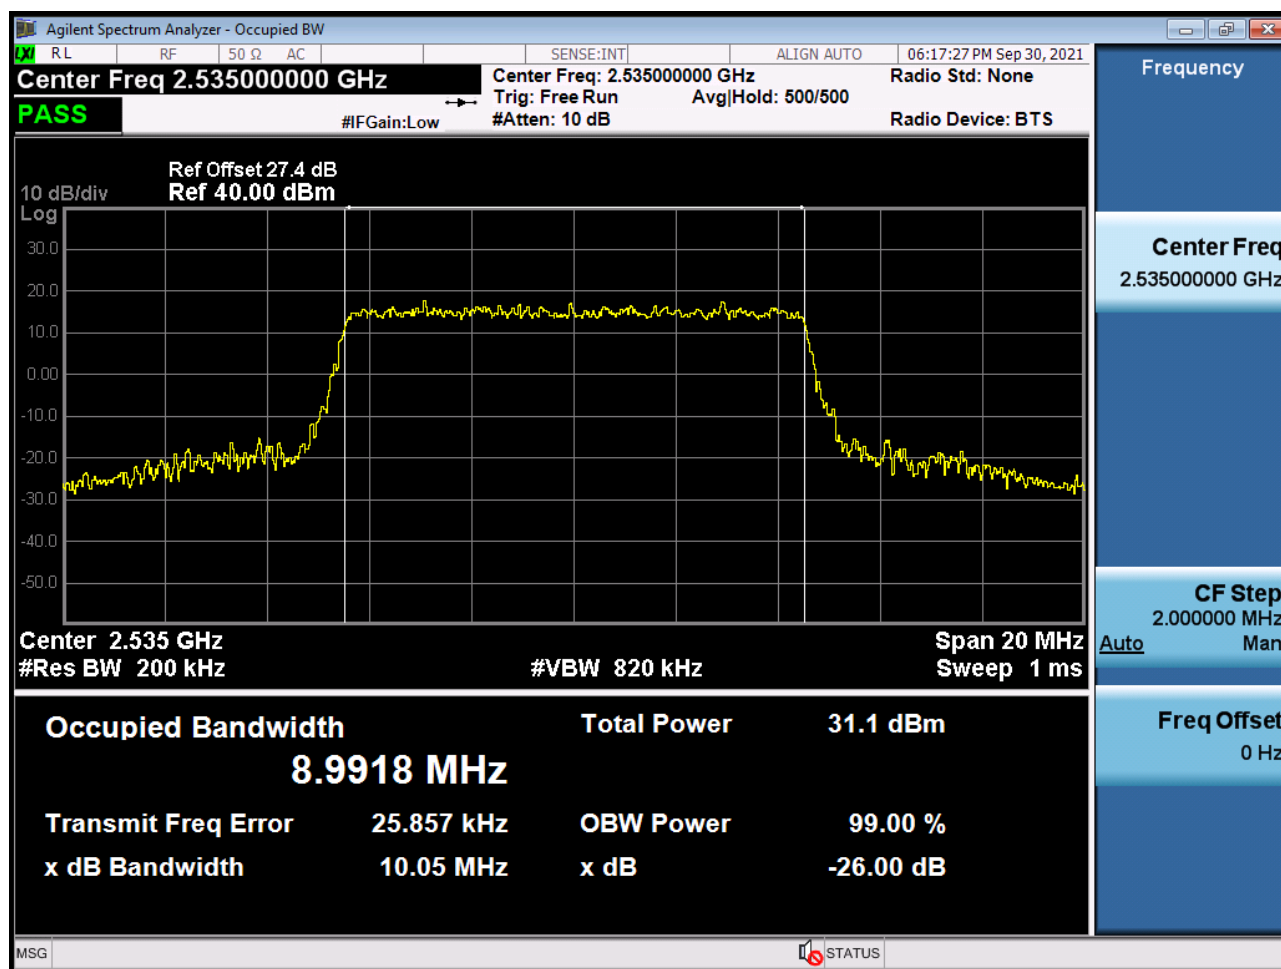


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 64-QAM RB 50) (Upper Ant)

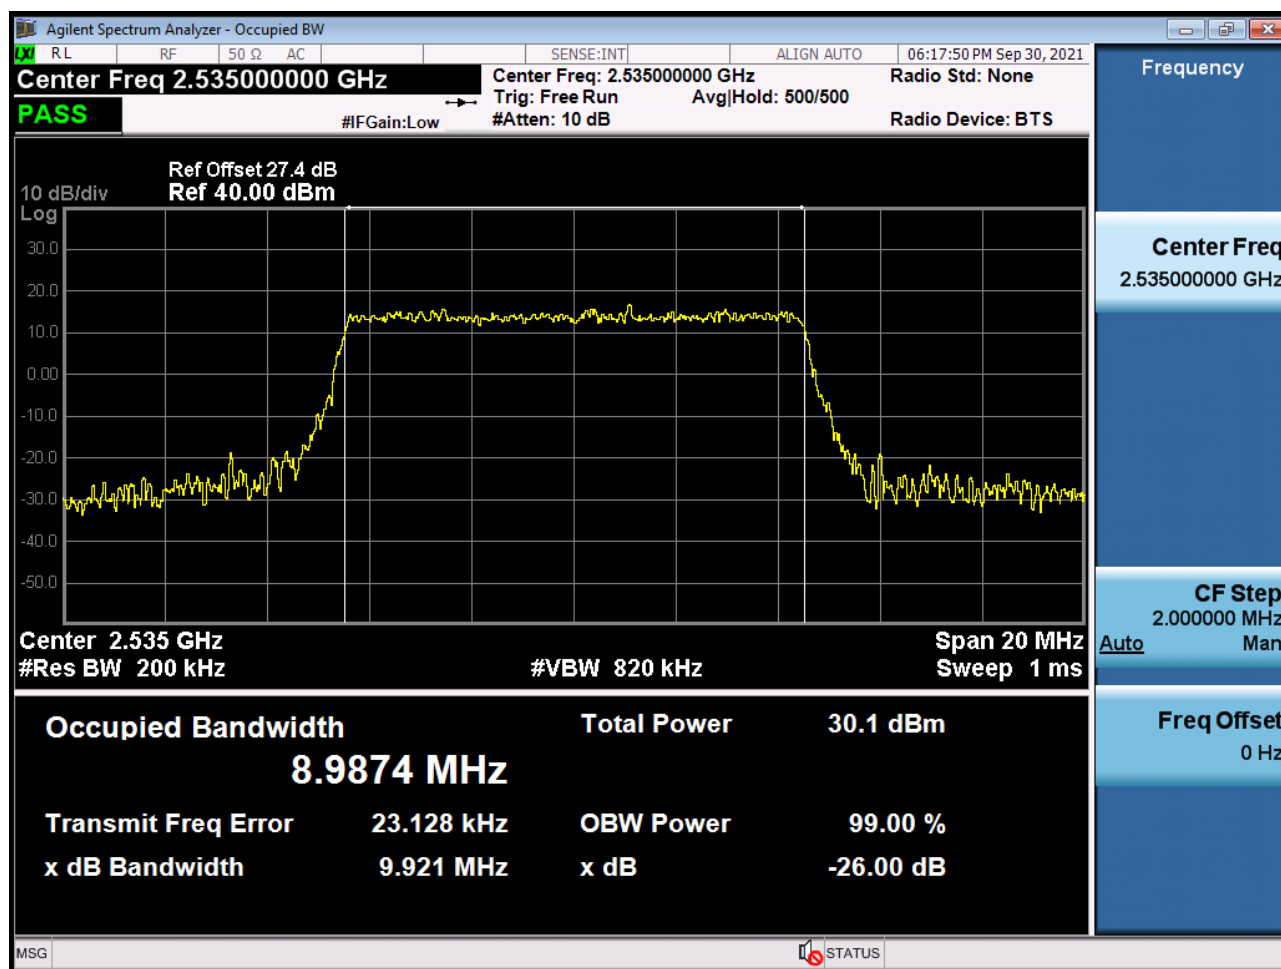


BAND 7. Occupied Bandwidth Plot (10 MHz Ch.21100 256-QAM RB 50) (Upper Ant)

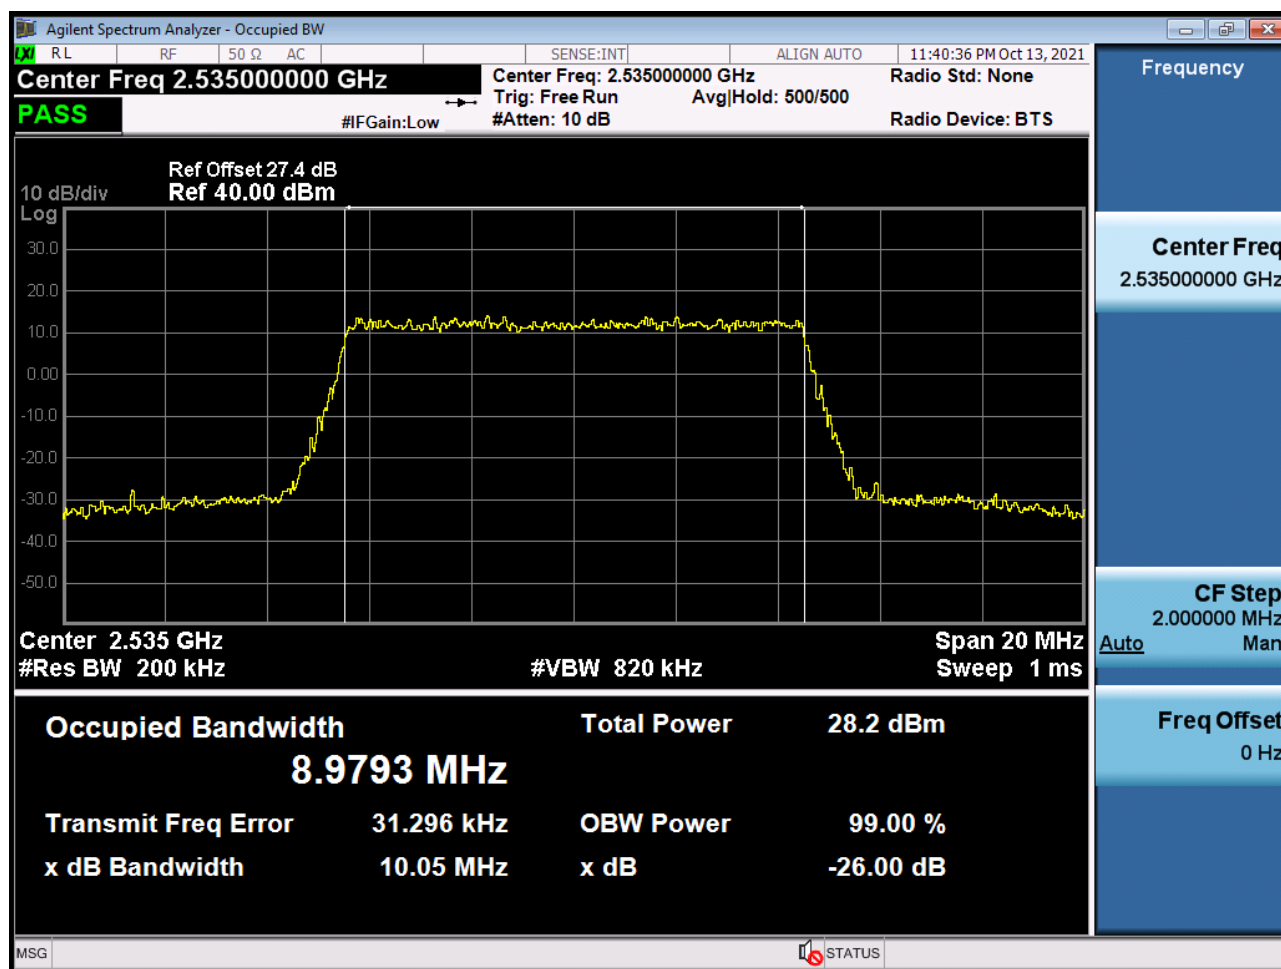


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 QPSK RB 75) (Upper Ant)

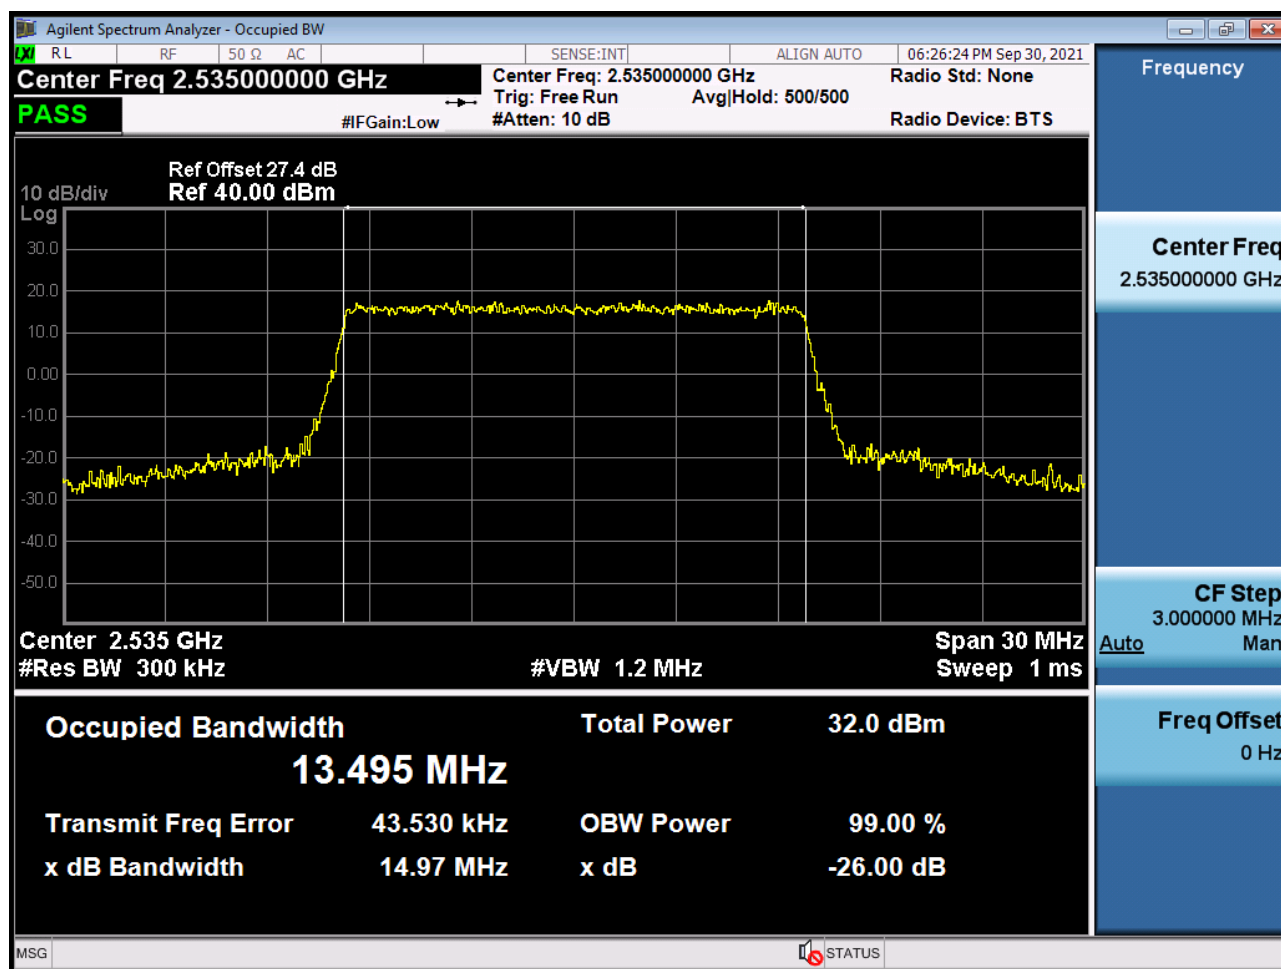


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 16-QAM RB 75) (Upper Ant)

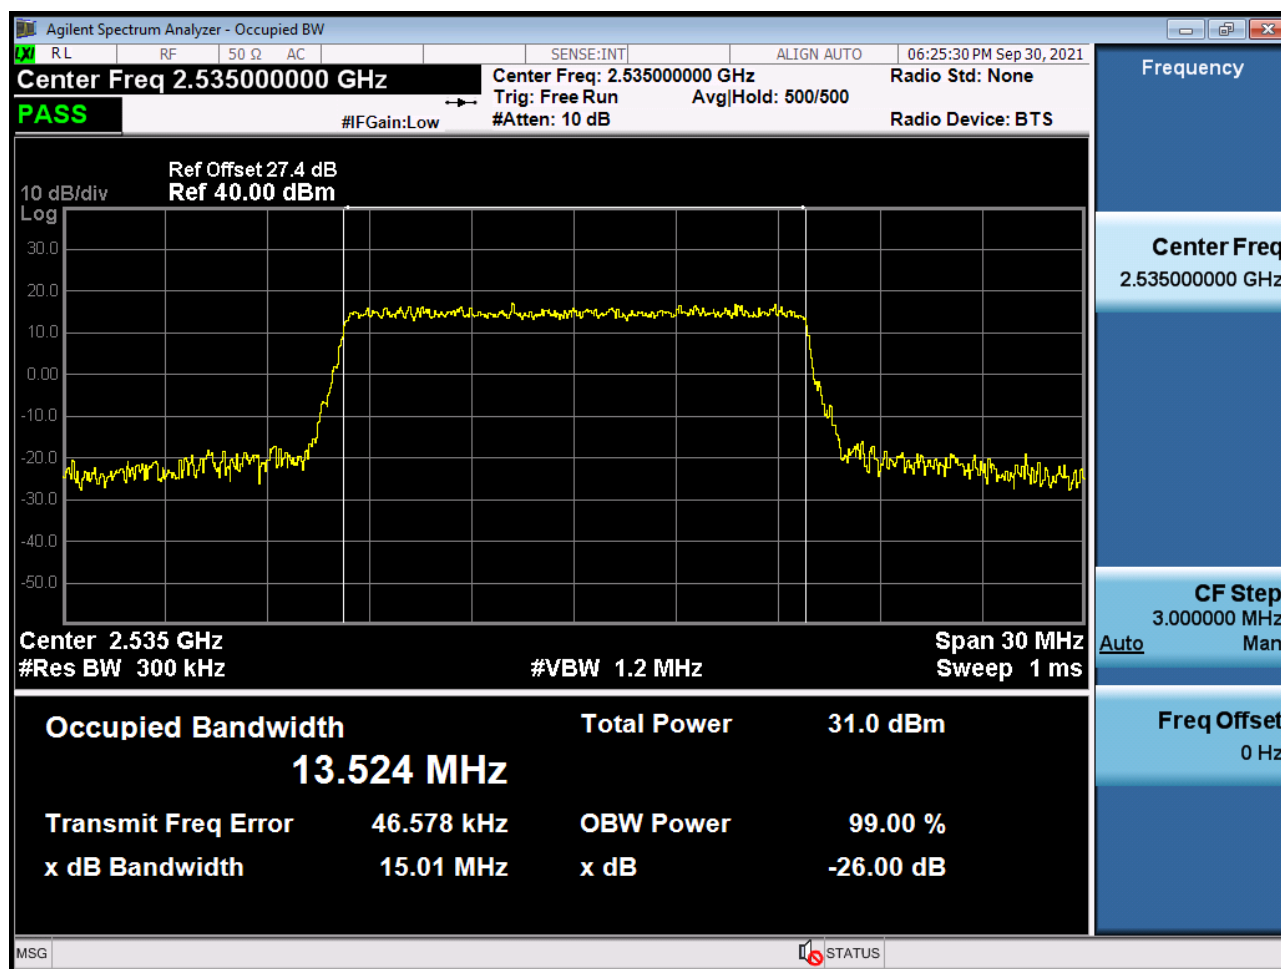


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 64-QAM RB 75) (Upper Ant)

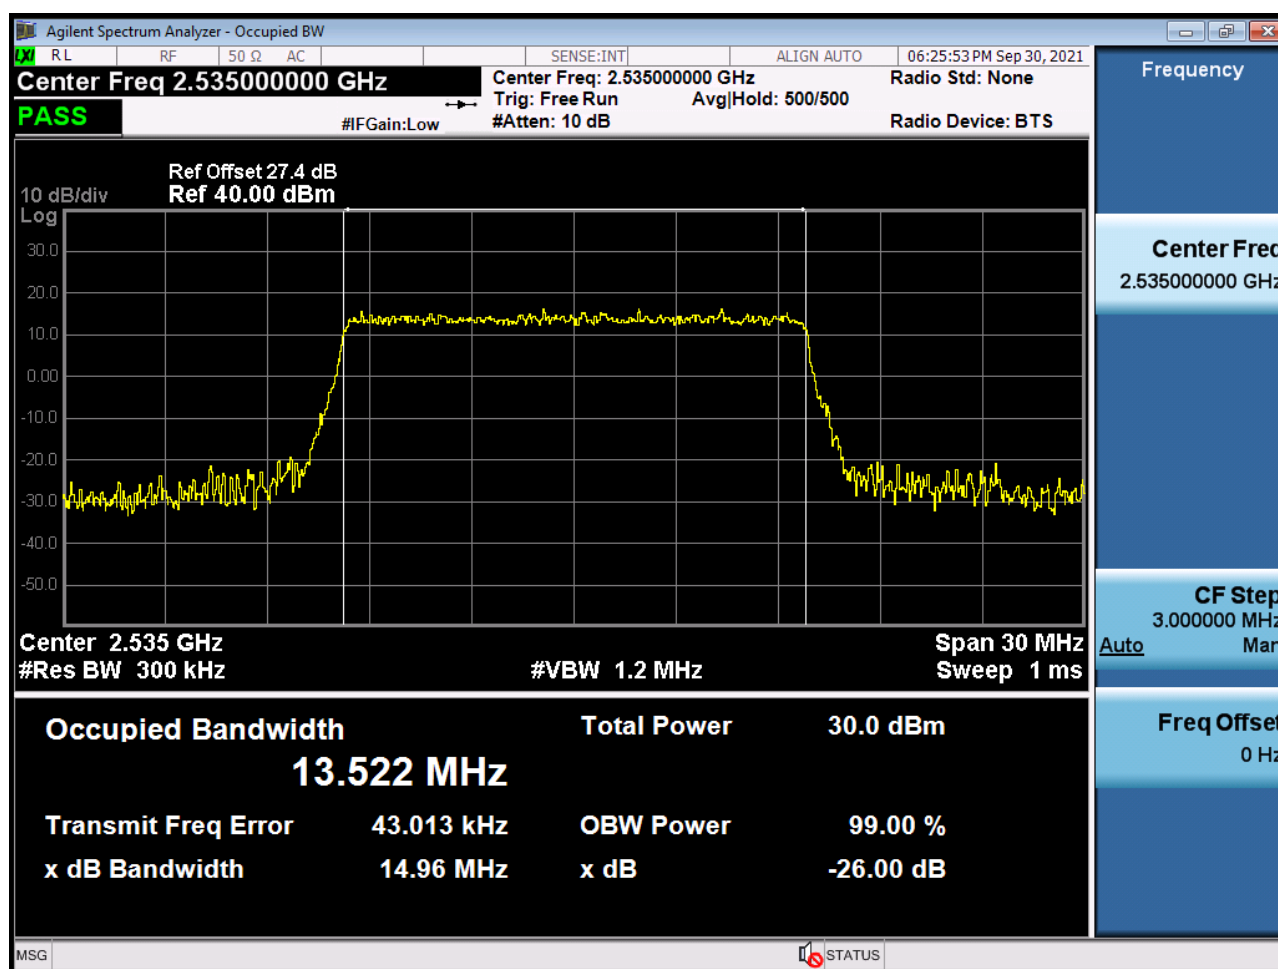


BAND 7. Occupied Bandwidth Plot (15 MHz Ch.21100 256-QAM RB 75) (Upper Ant)

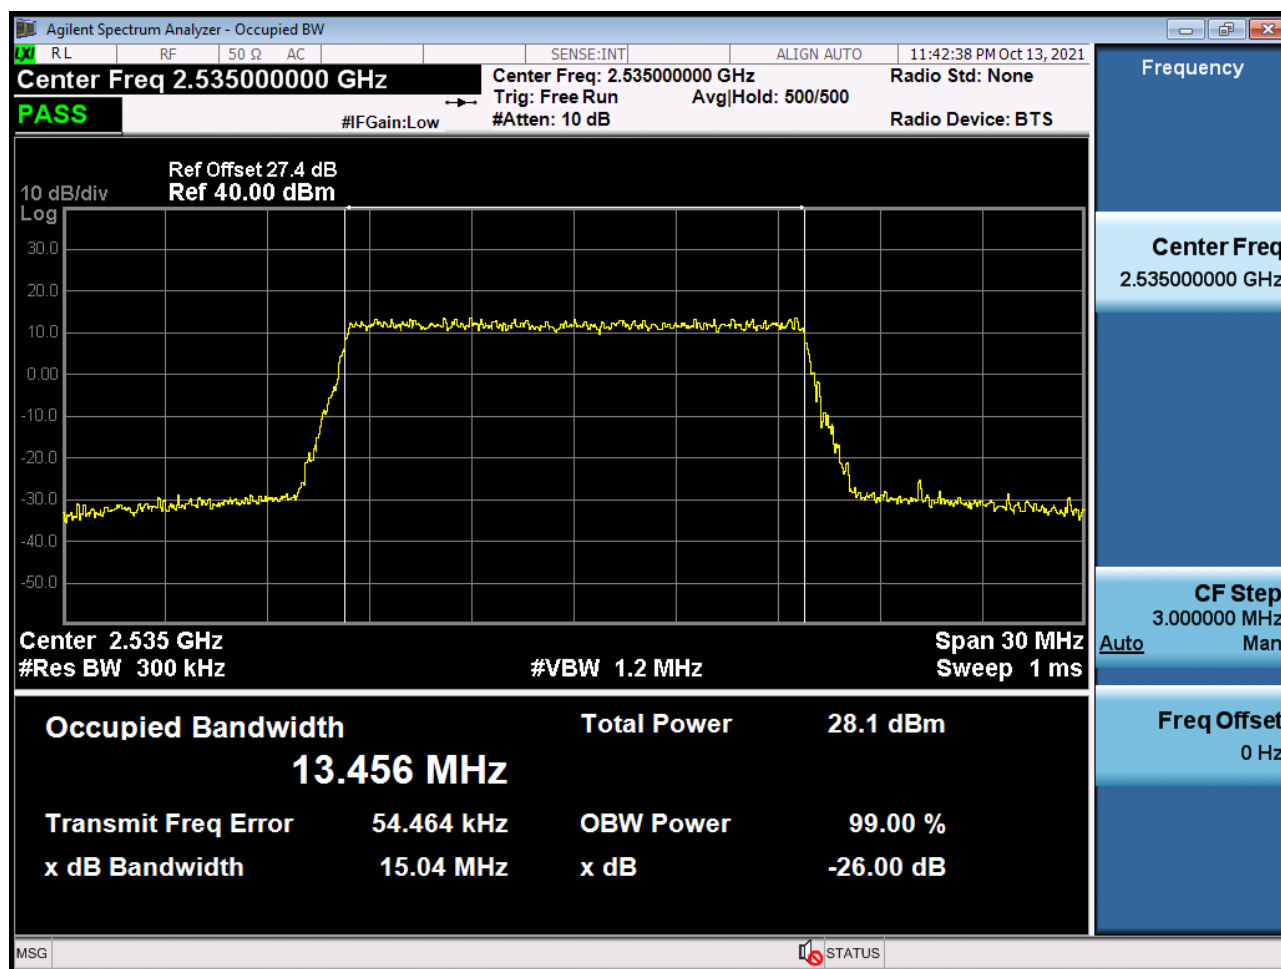


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 QPSK RB 100) (Upper Ant)

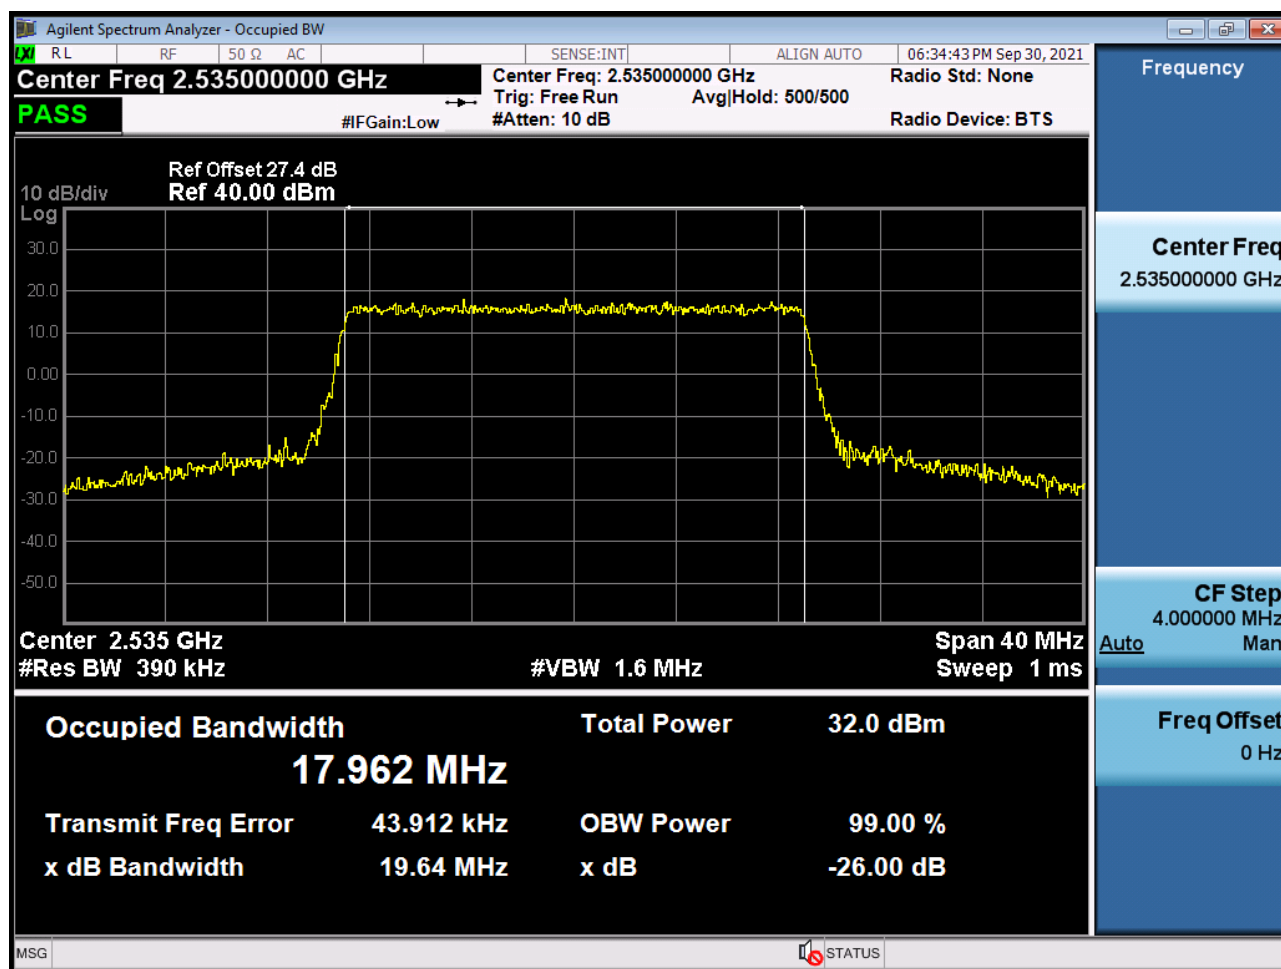


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 16-QAM RB 100) (Upper Ant)

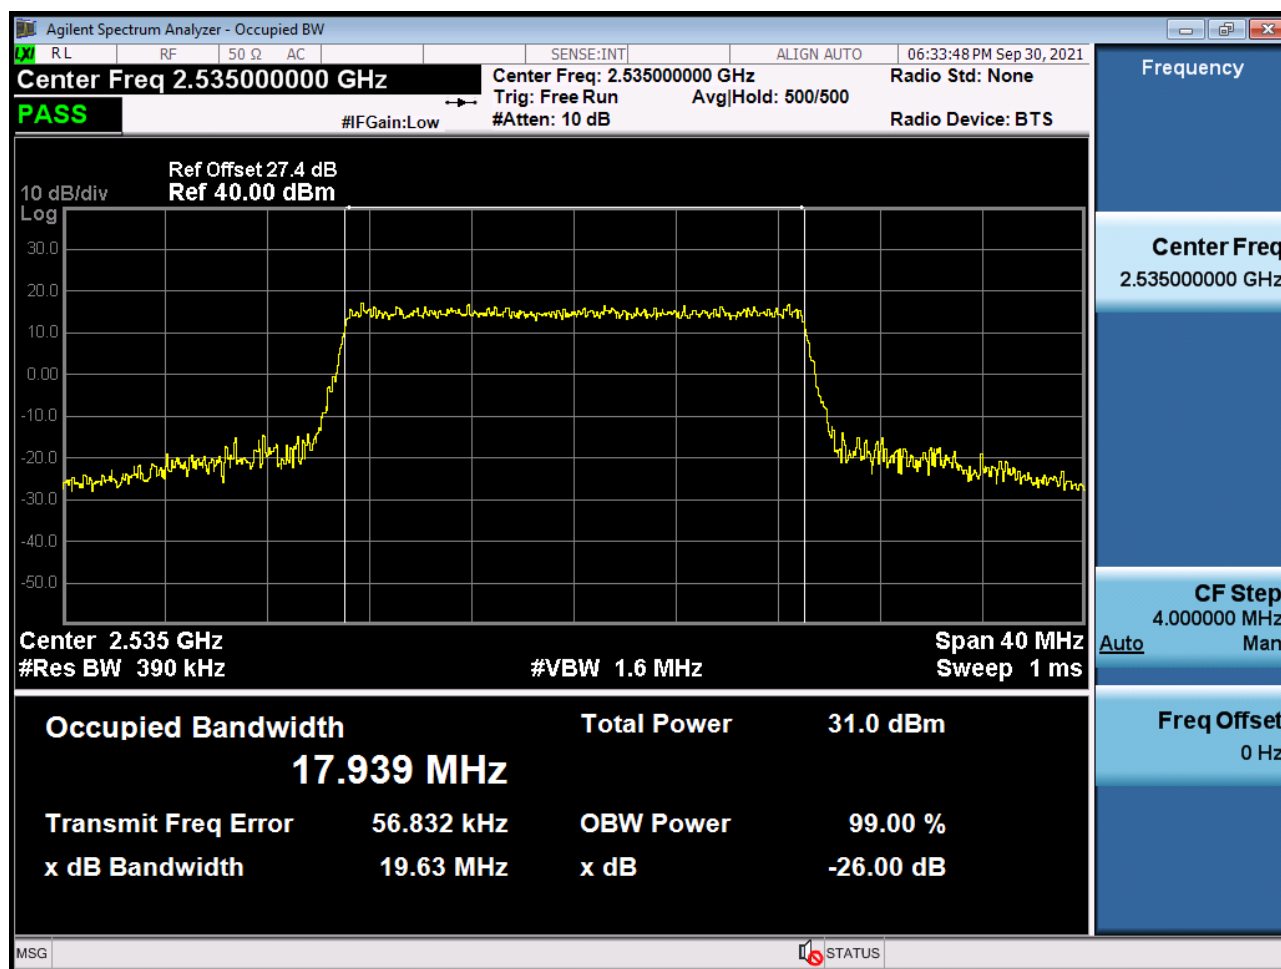


BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 64-QAM RB 100) (Upper Ant)

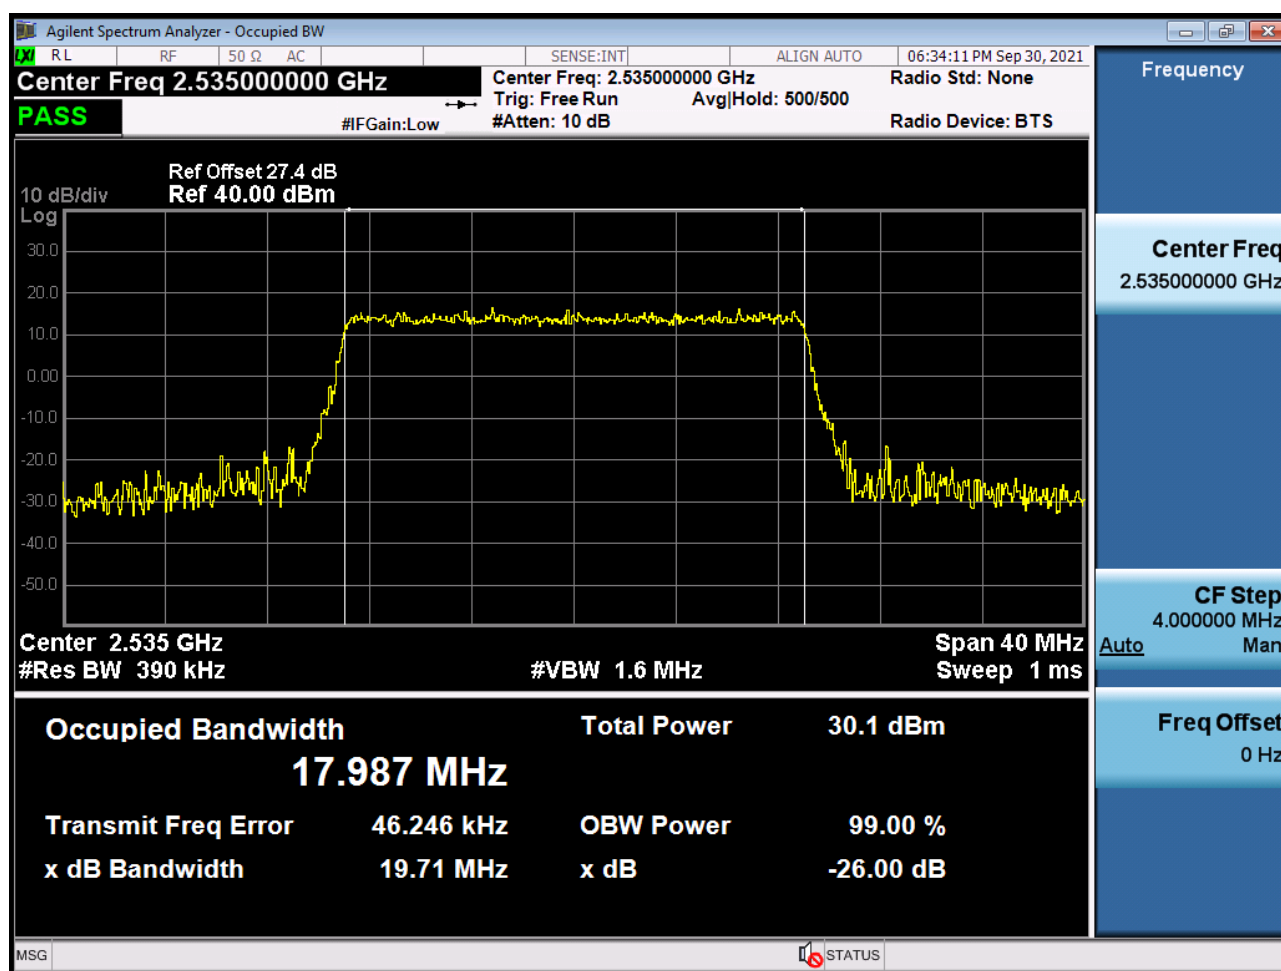

BAND 7. Occupied Bandwidth Plot (20 MHz Ch.21100 256-QAM RB 100) (Upper Ant)

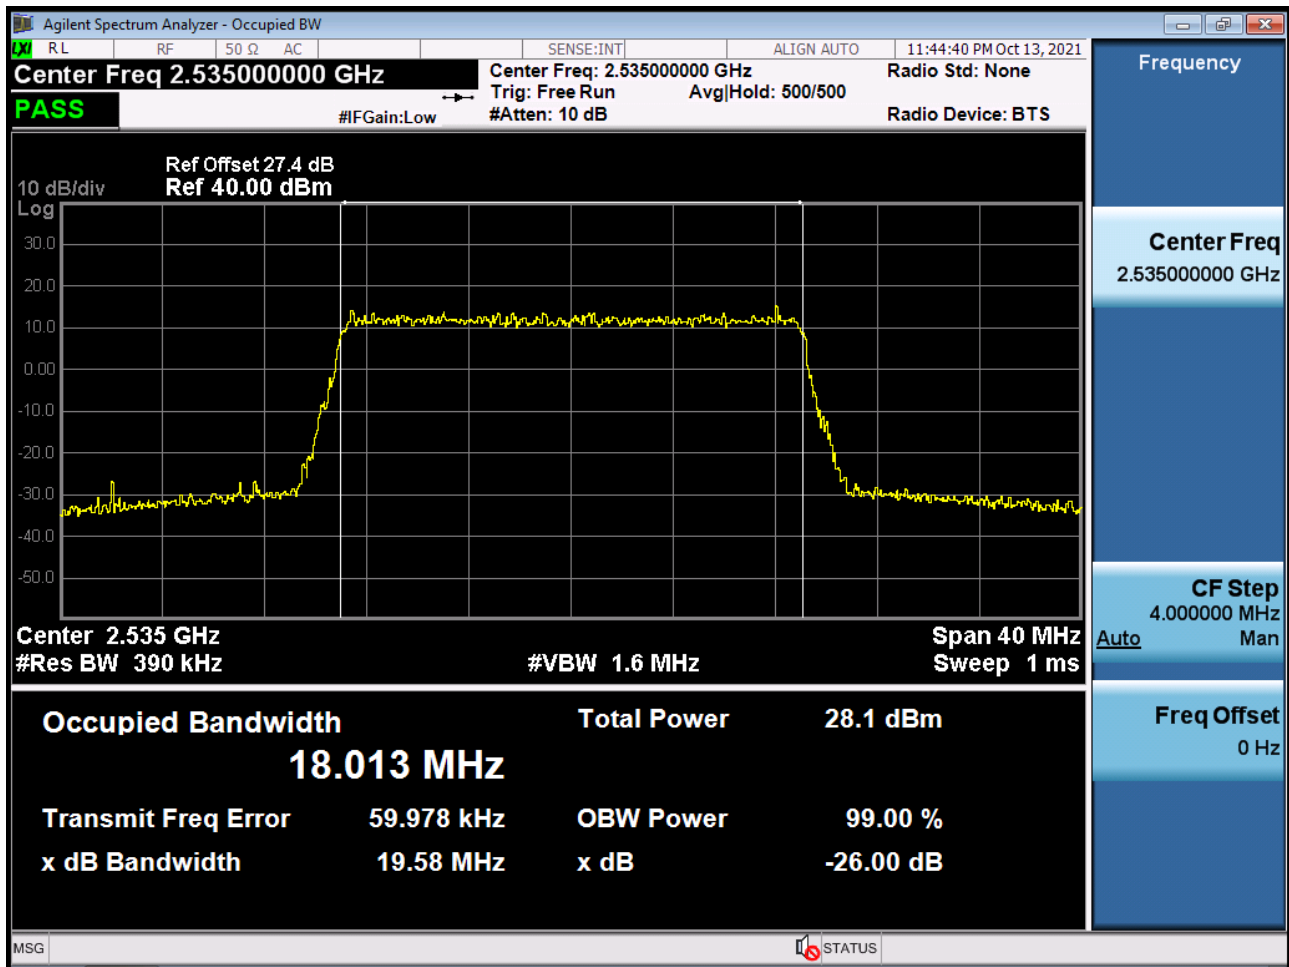


BAND 7. PAR Plot (5 M BW Ch.21100 QPSK RB 25_0) (Lower Ant)

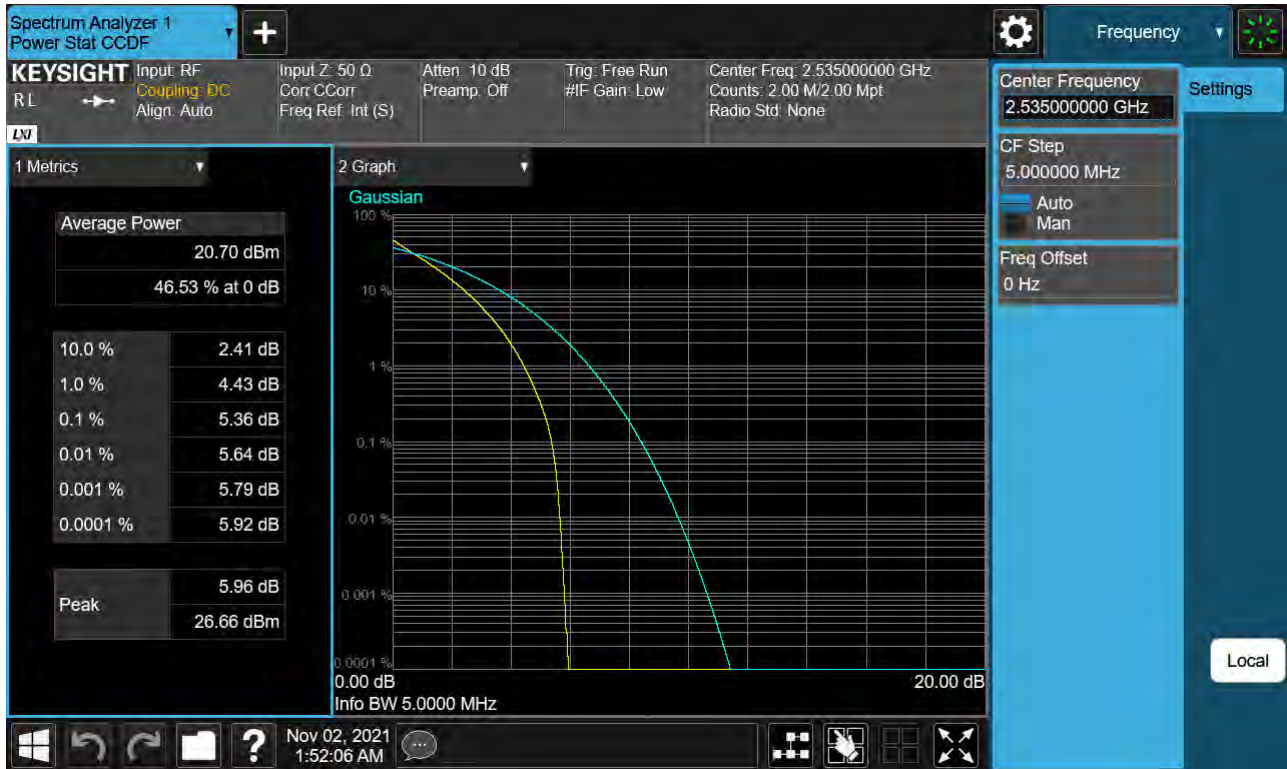

BAND 7. PAR Plot (5 M BW Ch.21100 16QAM RB 25_0) (Lower Ant)




BAND 7. PAR Plot (5 M BW Ch.21100 64QAM RB 25_0) (Lower Ant)

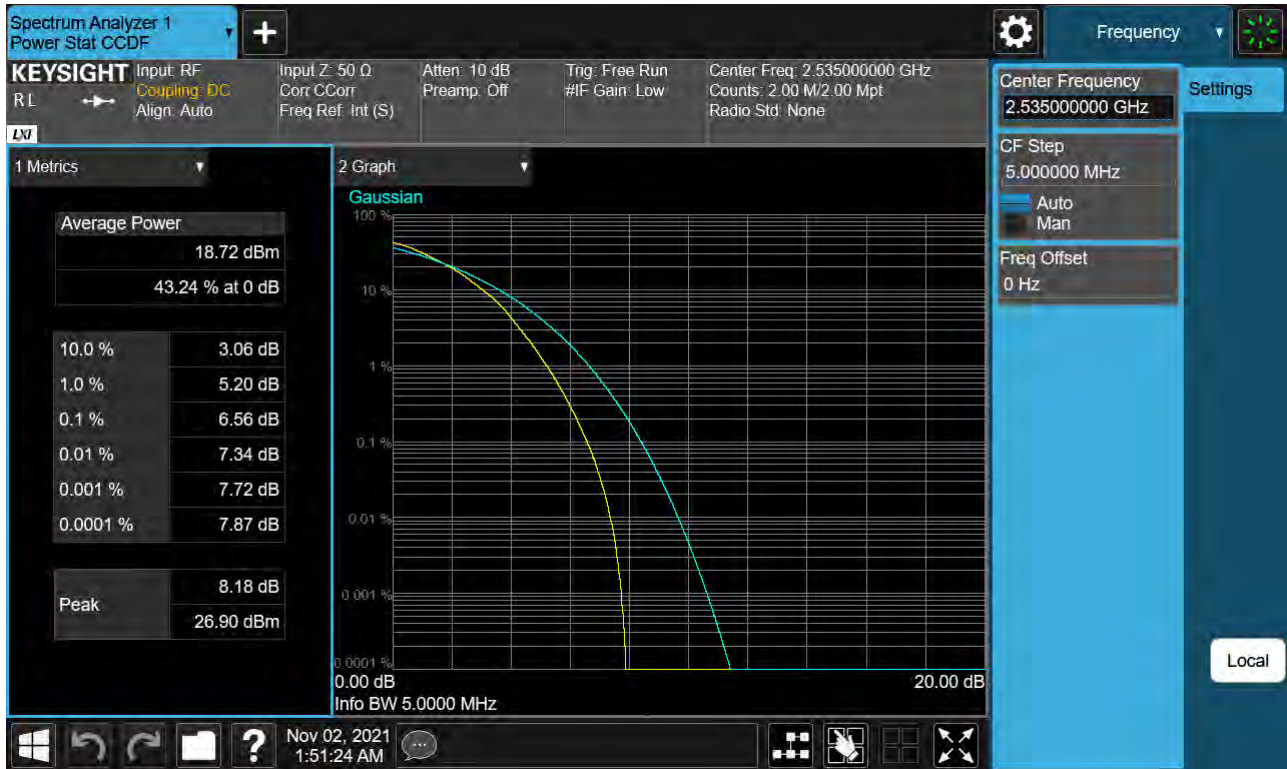

BAND 7. PAR Plot (5 M BW Ch.21100 256QAM RB 25_0) (Lower Ant)



BAND 7. PAR Plot (10 M BW Ch.21100 QPSK RB 50_0) (Lower Ant)

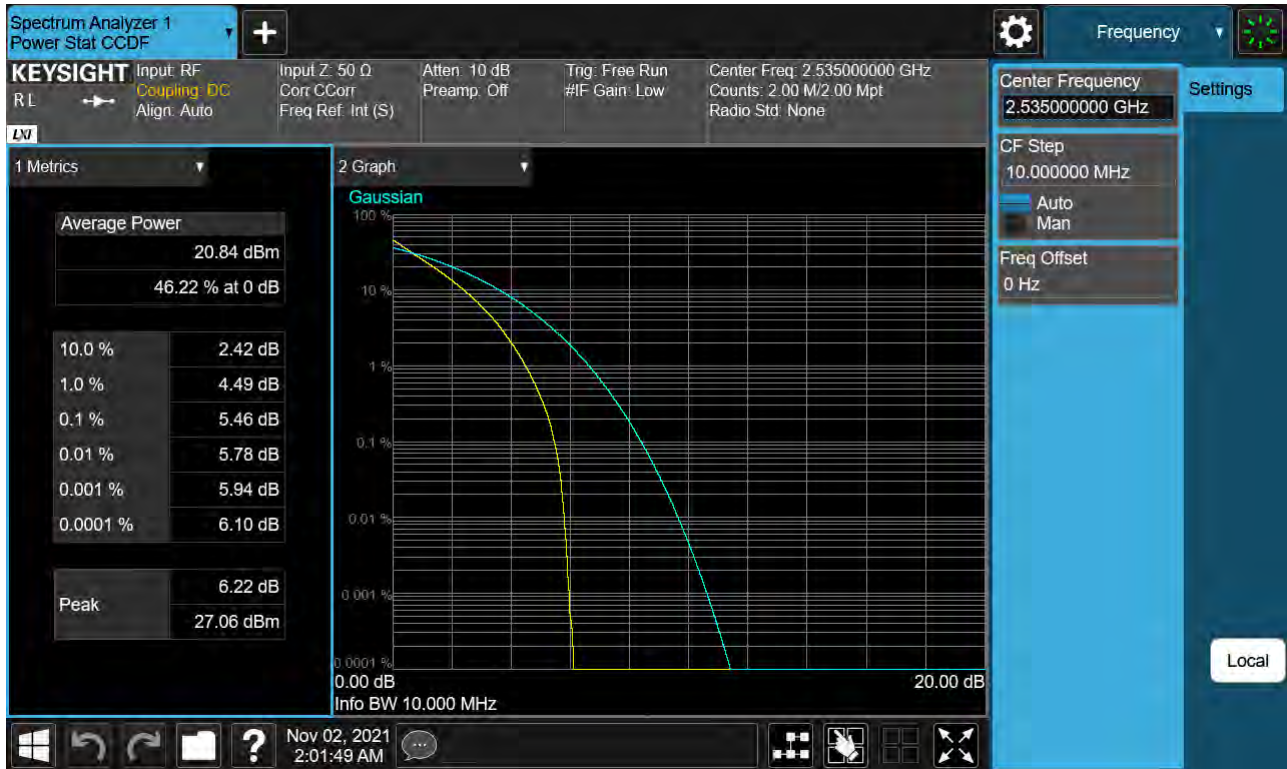


BAND 7. PAR Plot (10 M BW Ch.21100 16QAM RB 50_0) (Lower Ant)




BAND 7. PAR Plot (10 M BW Ch.21100 64QAM RB 50_0) (Lower Ant)



BAND 7. PAR Plot (10 M BW Ch.21100 256QAM RB 50_0) (Lower Ant)

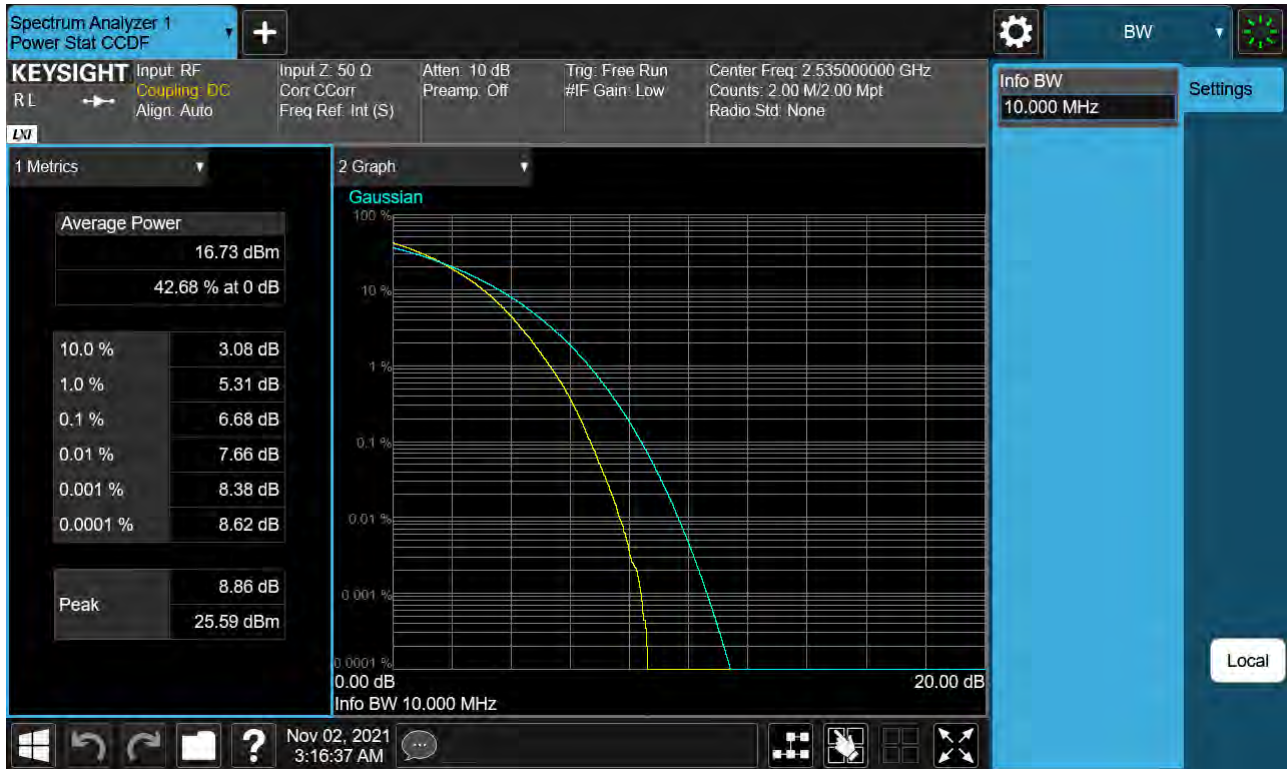

BAND 7. PAR Plot (15 M BW Ch.21100 QPSK RB 75_0) (Lower Ant)

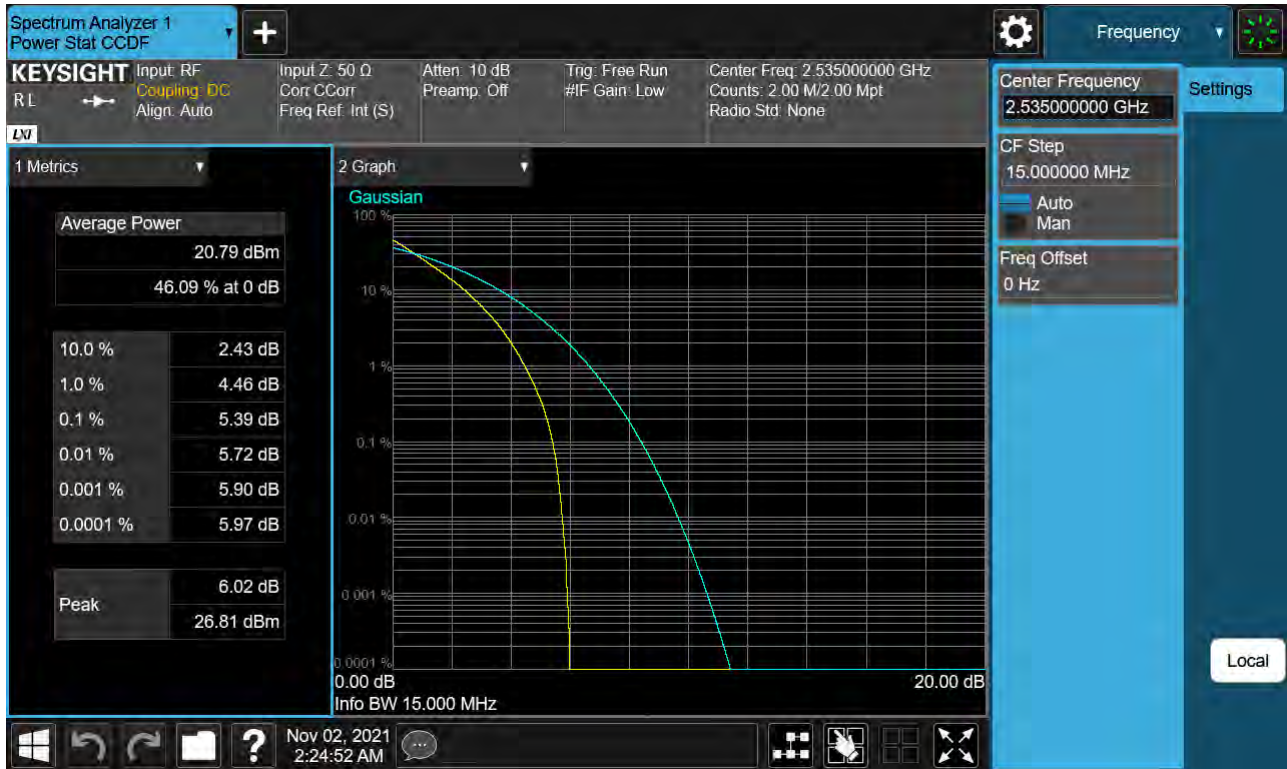


BAND 7. PAR Plot (15 M BW Ch.21100 16QAM RB 75_0) (Lower Ant)




BAND 7. PAR Plot (15 M BW Ch.21100 64QAM RB 75_0) (Lower Ant)




BAND 7. PAR Plot (15 M BW Ch.21100 256QAM RB 75_0) (Lower Ant)

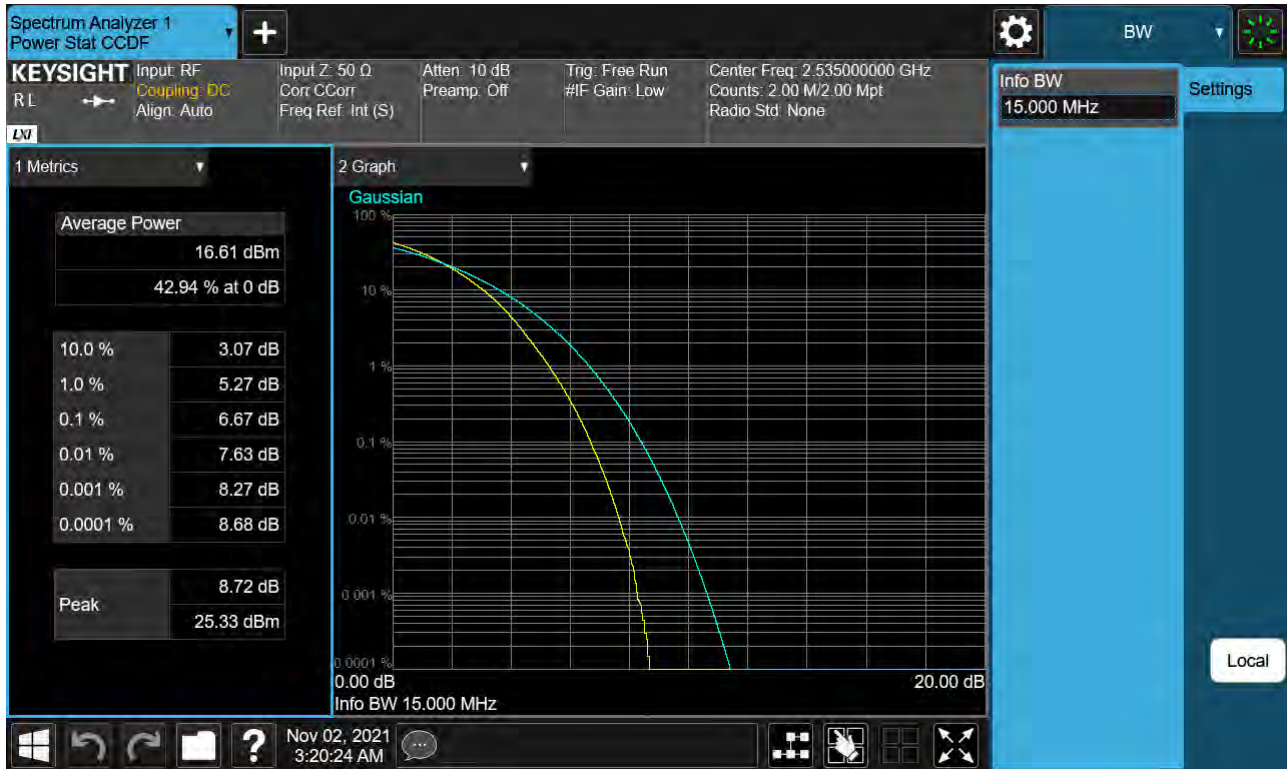


BAND 7. PAR Plot (20 M BW Ch.21100 QPSK RB 100_0) (Lower Ant)

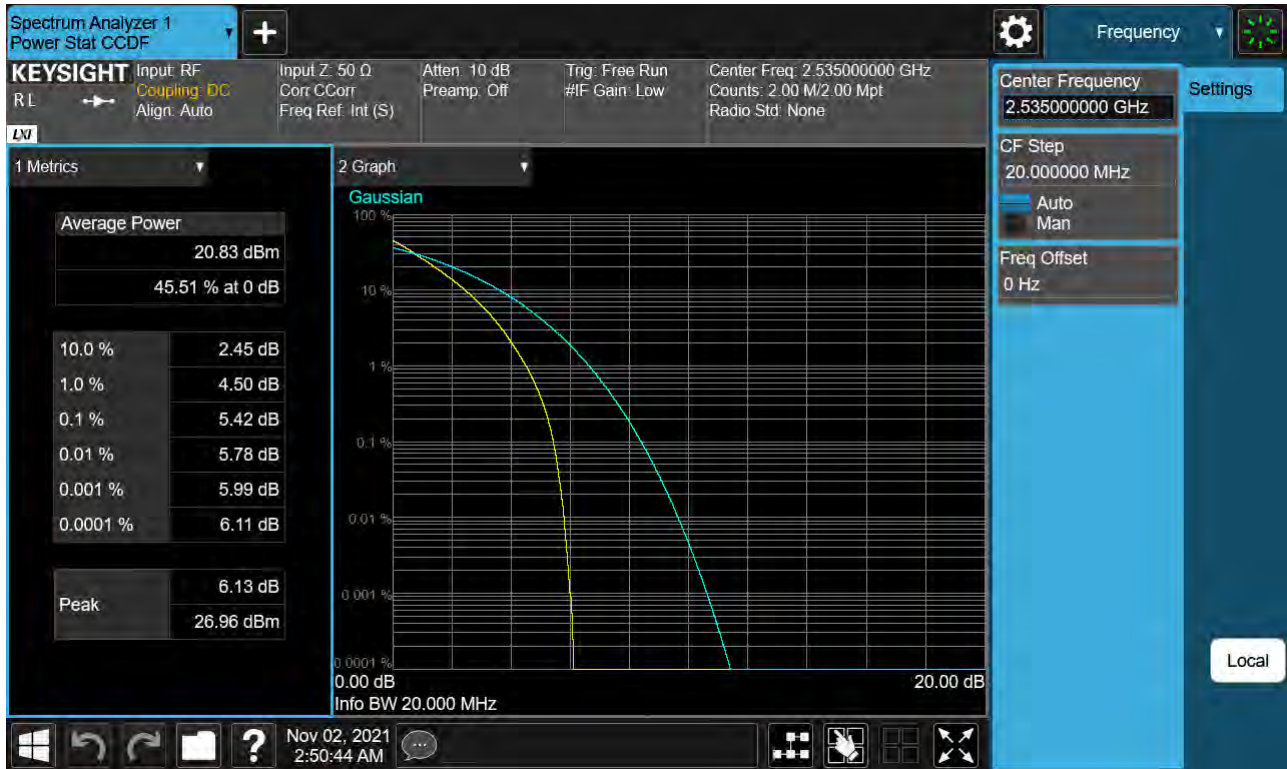

BAND 7. PAR Plot (20 M BW Ch.21100 16QAM RB 100_0) (Lower Ant)

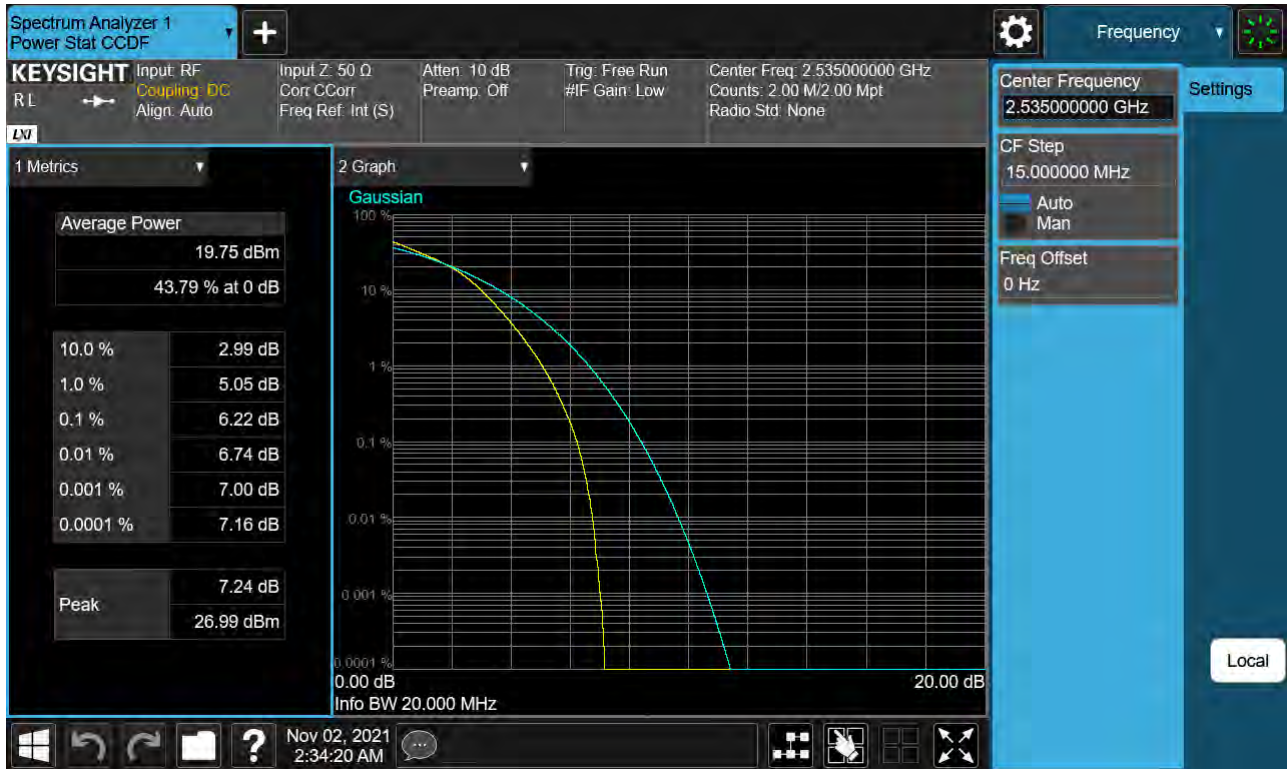


BAND 7. PAR Plot (20 M BW Ch.21100 64QAM RB 100_0) (Lower Ant)

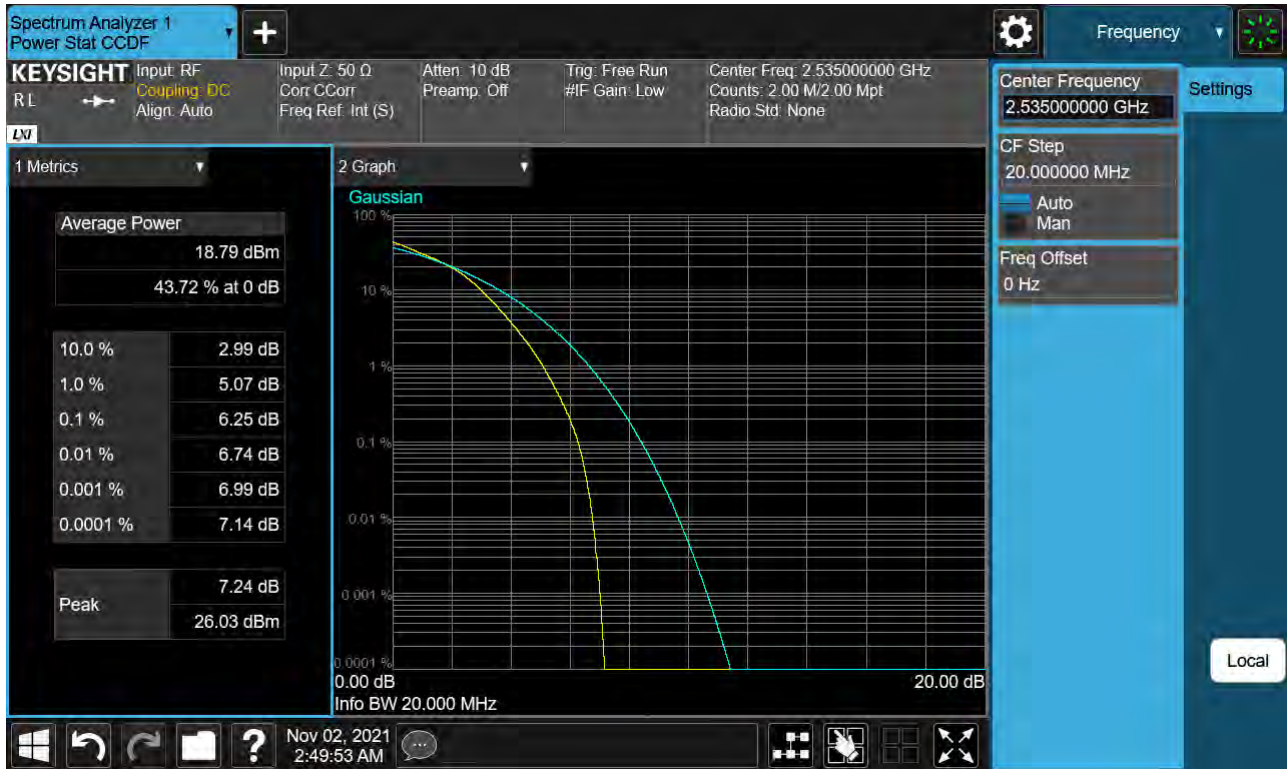


BAND 7. PAR Plot (20 M BW Ch.21100 256QAM RB 100_0) (Lower Ant)




BAND 7. PAR Plot (5 M BW Ch.21100 QPSK RB 25_0) (Upper Ant)

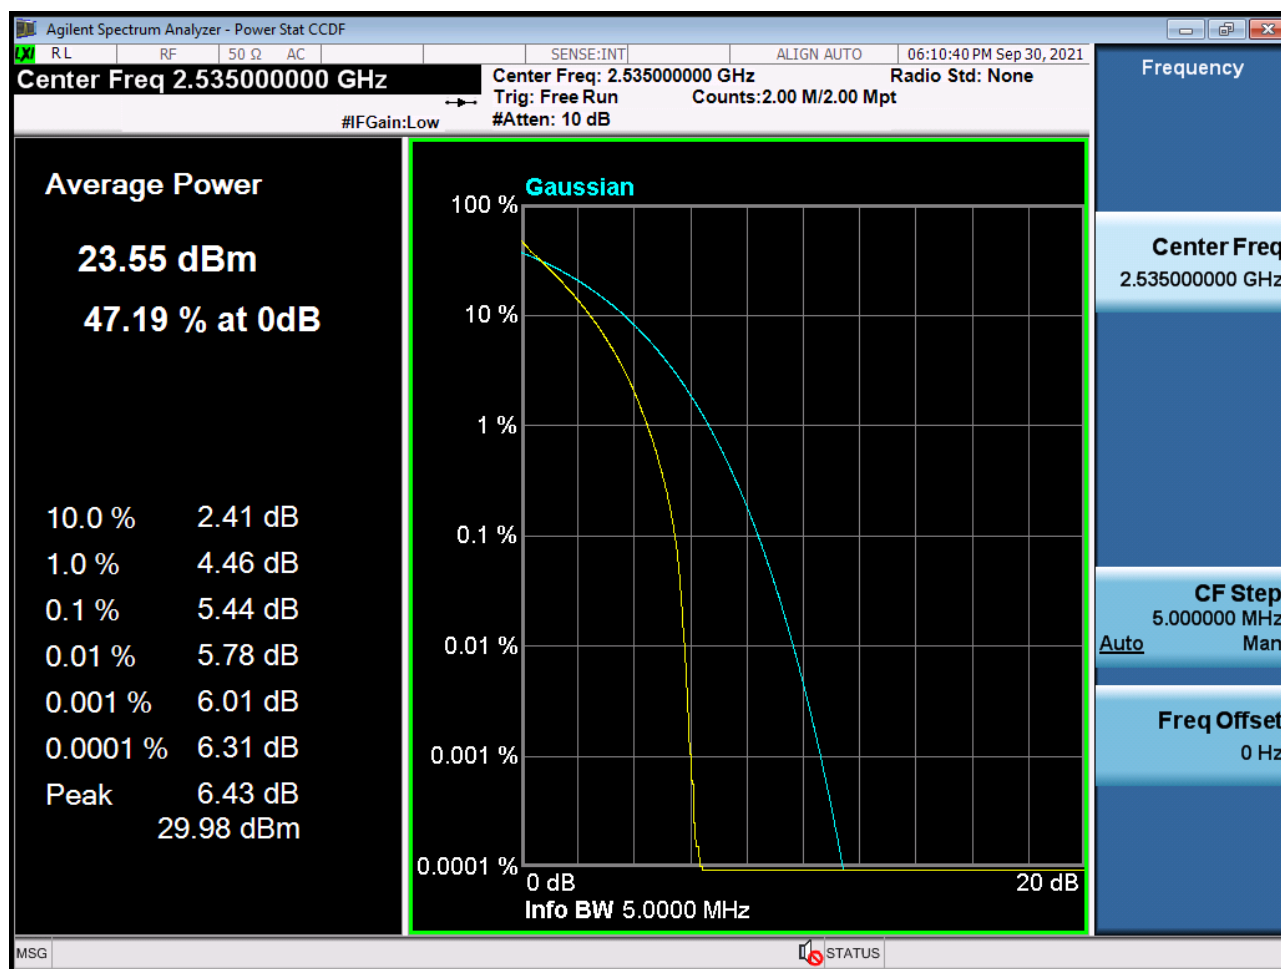


BAND 7. PAR Plot (5 M BW Ch.21100 16QAM RB 25_0) (Upper Ant)

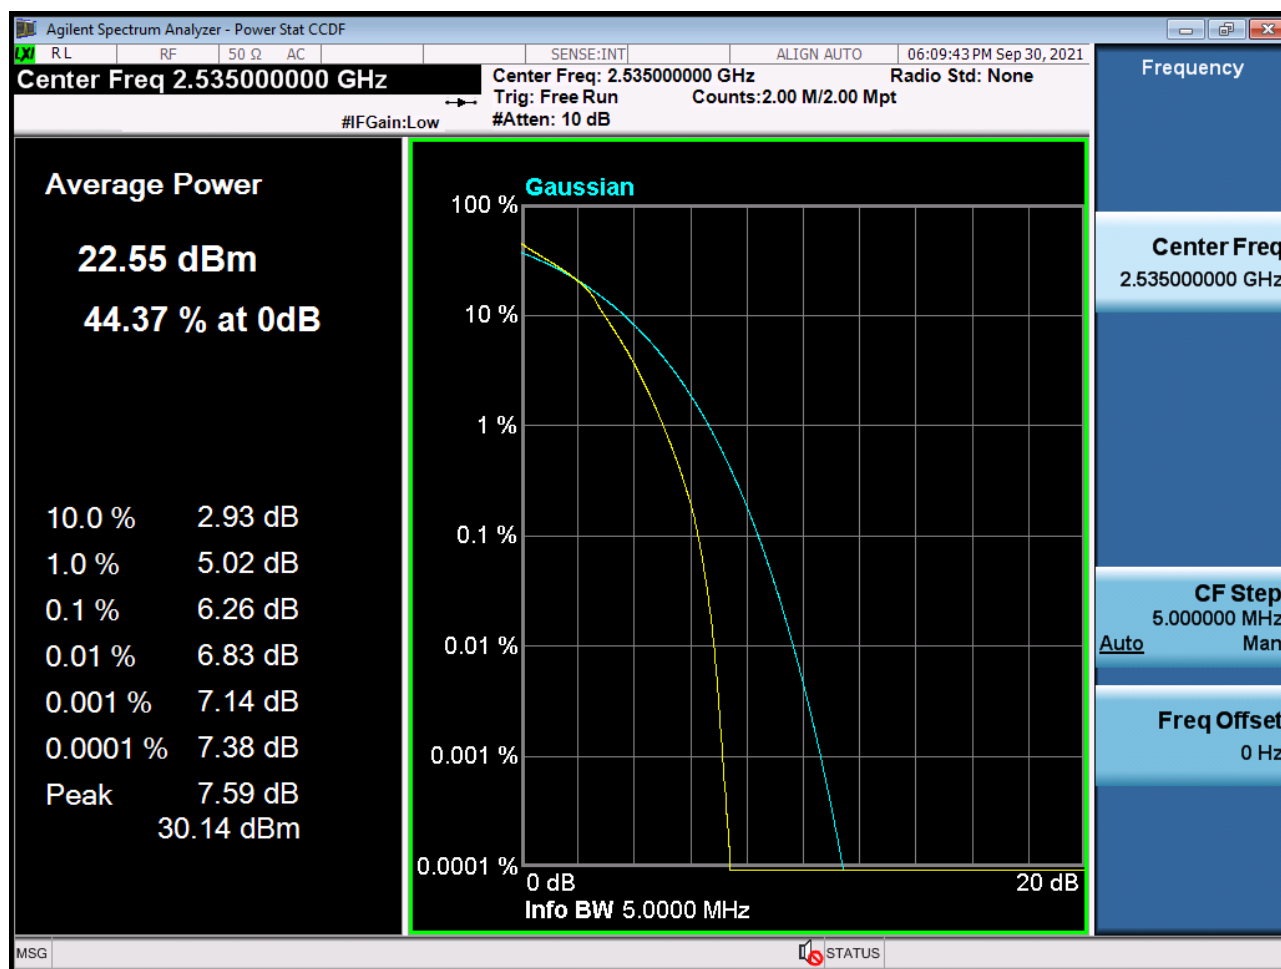


BAND 7. PAR Plot (5 M BW Ch.21100 64QAM RB 25_0) (Upper Ant)

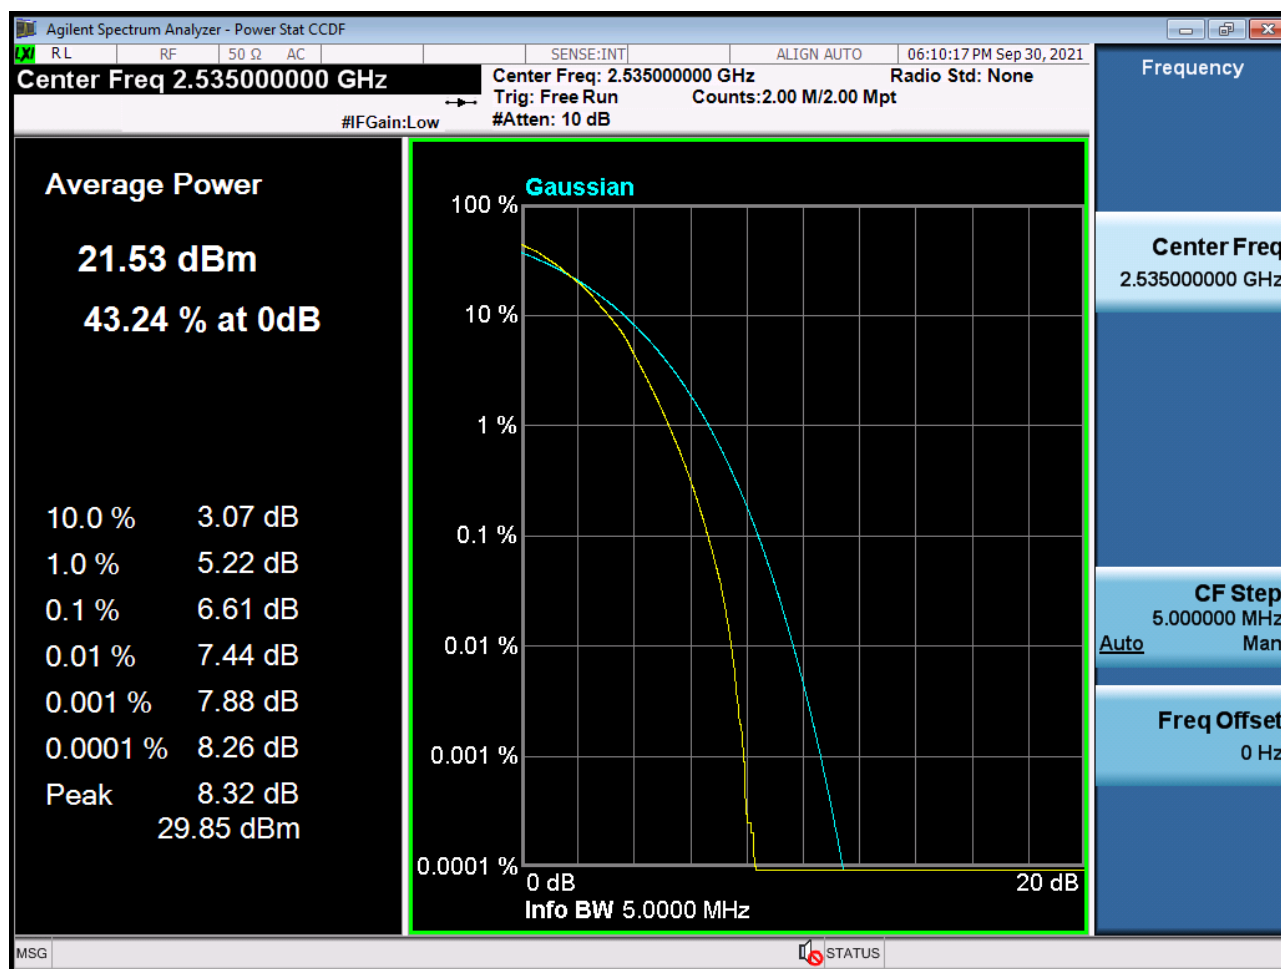


BAND 7. PAR Plot (5 M BW Ch.21100 256QAM RB 25_0) (Upper Ant)

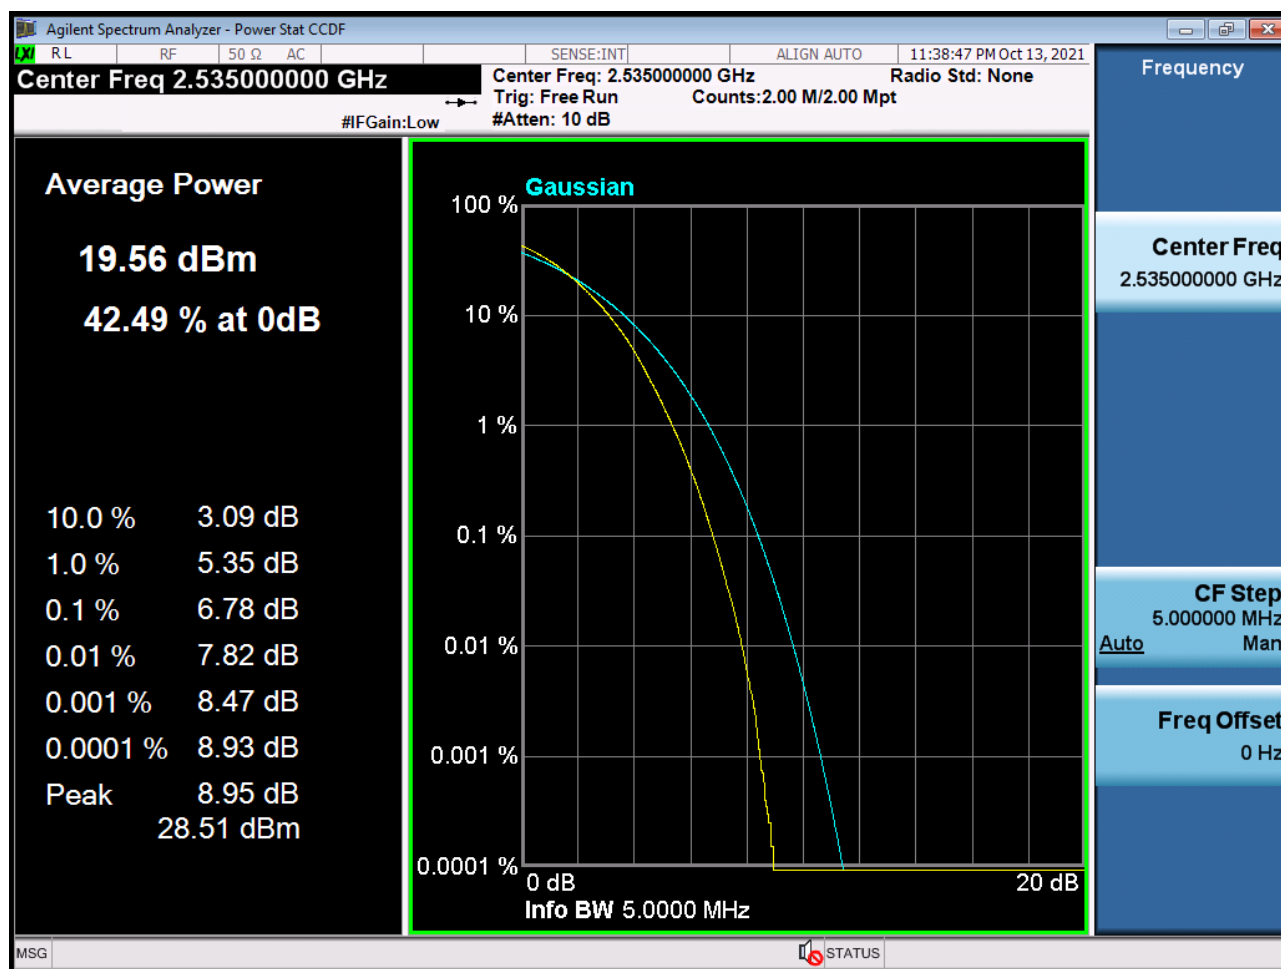


BAND 7. PAR Plot (10 M BW Ch.21100 QPSK RB 50_0) (Upper Ant)

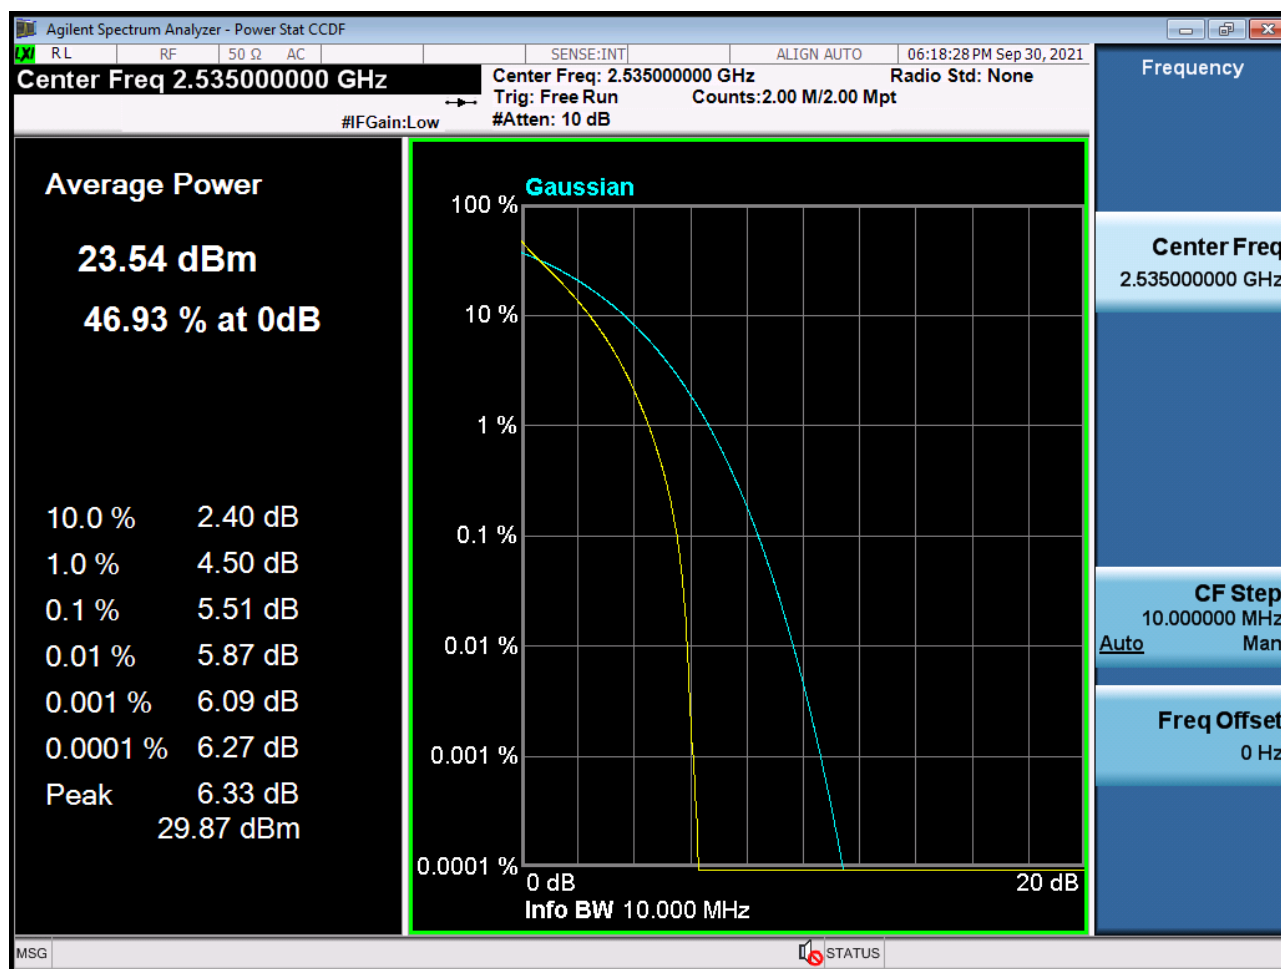


BAND 7. PAR Plot (10 M BW Ch.21100 16QAM RB 50_0) (Upper Ant)

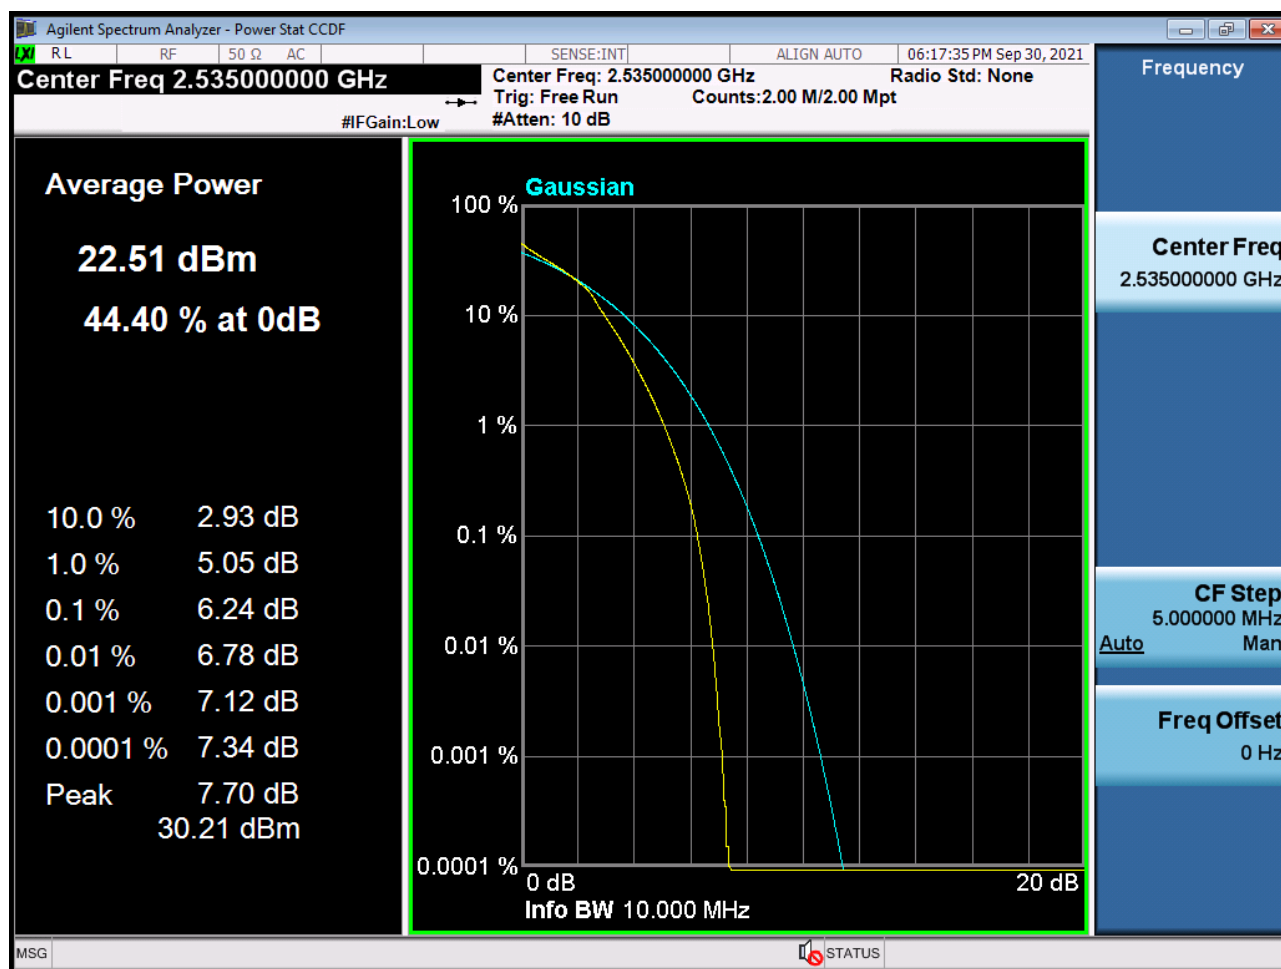


BAND 7. PAR Plot (10 M BW Ch.21100 64QAM RB 50_0) (Upper Ant)

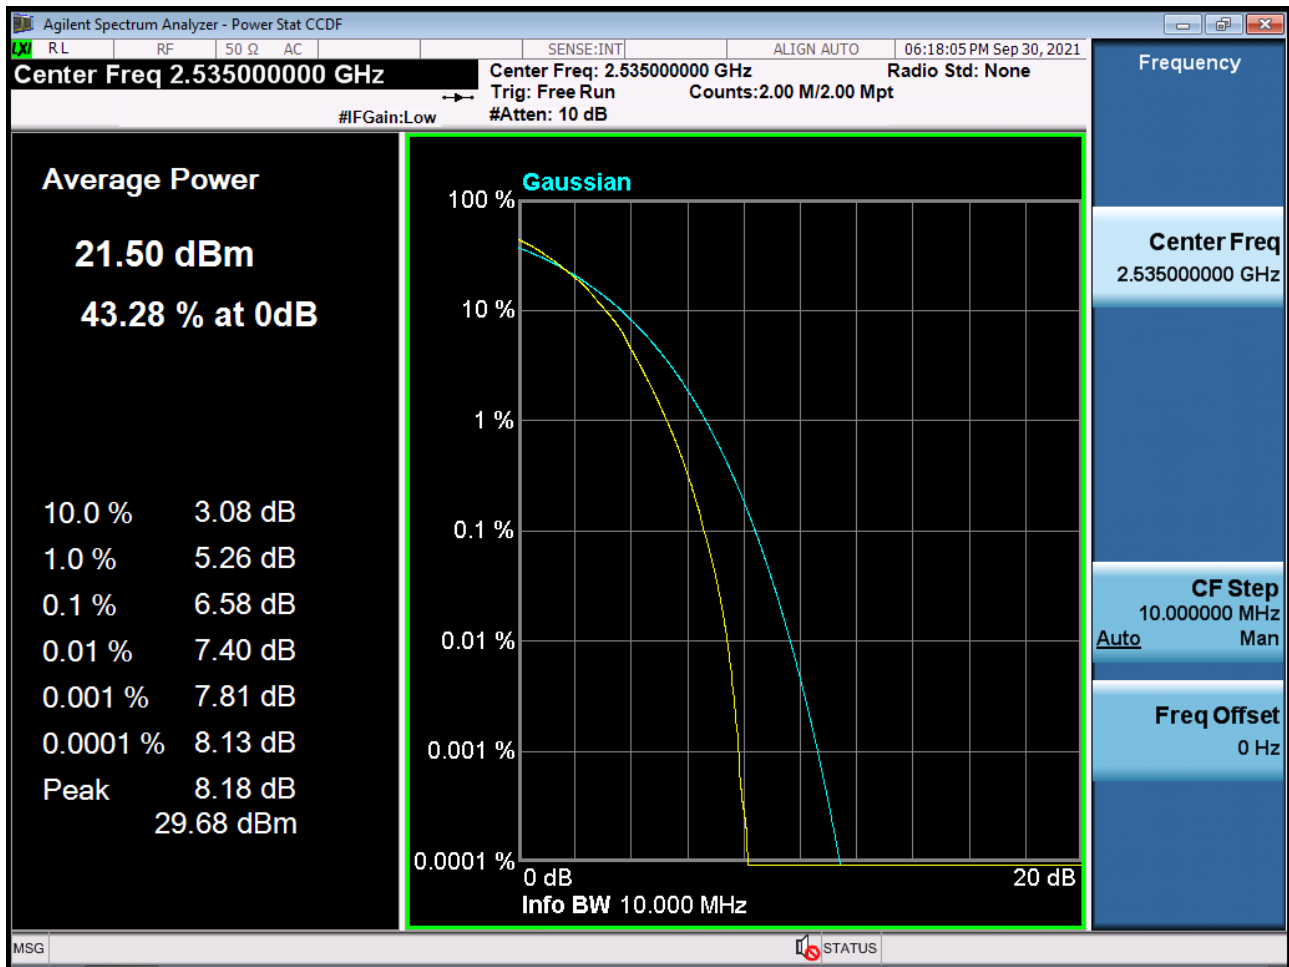


BAND 7. PAR Plot (10 M BW Ch.21100 256QAM RB 50_0) (Upper Ant)

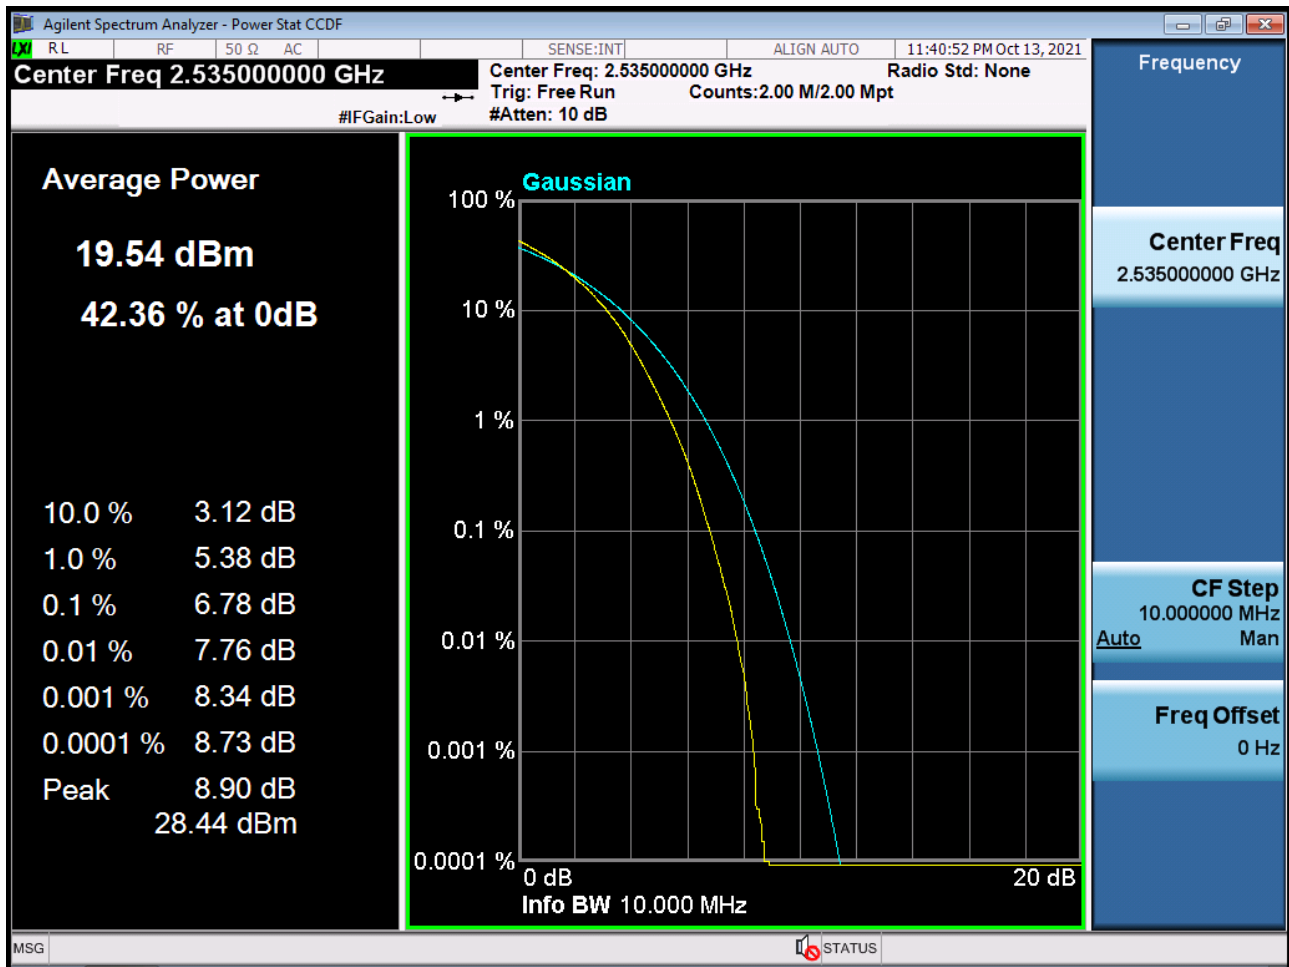


BAND 7. PAR Plot (15 M BW Ch.21100 QPSK RB 75_0) (Upper Ant)

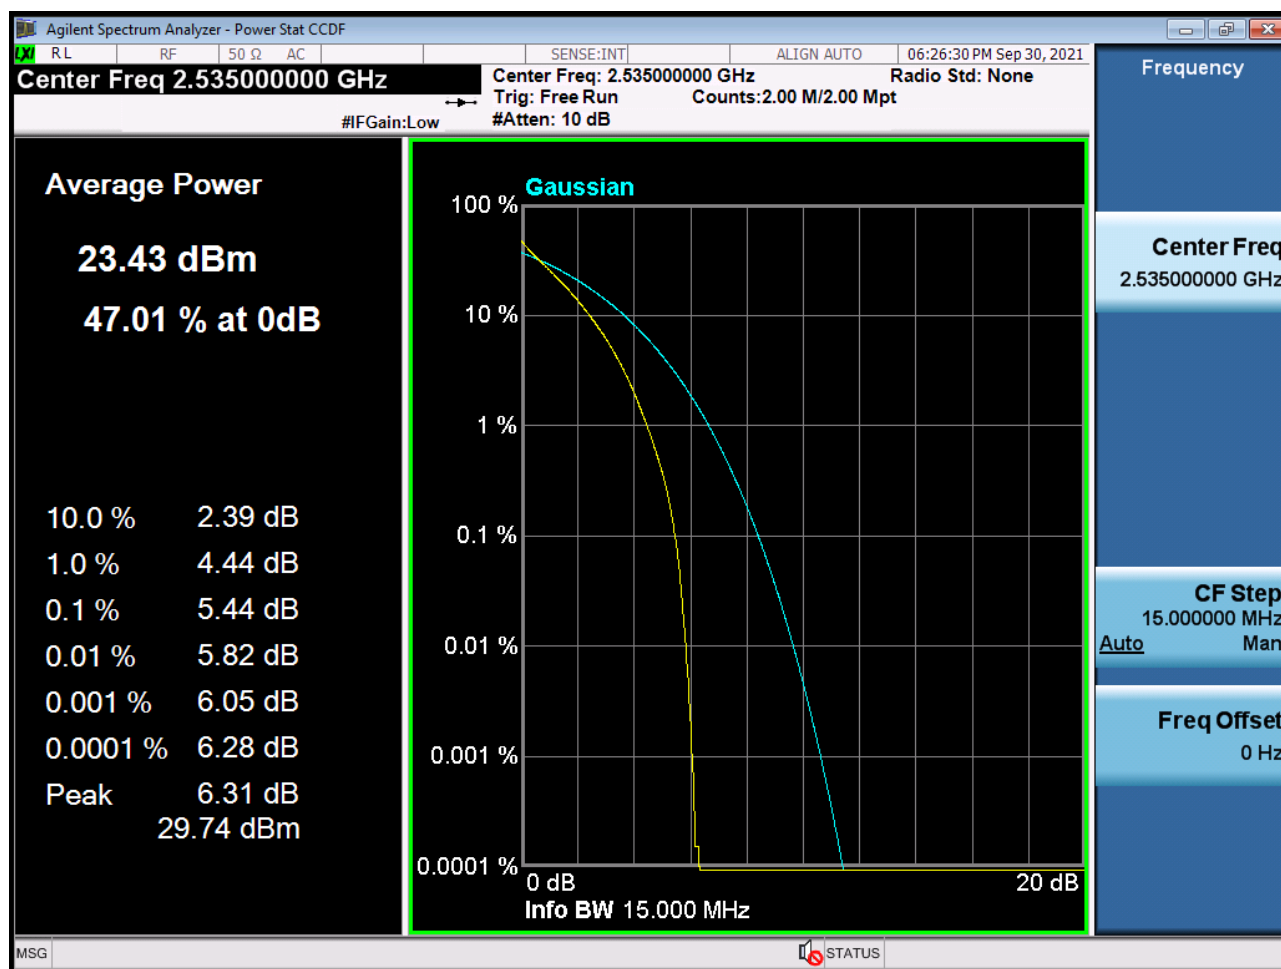


BAND 7. PAR Plot (15 M BW Ch.21100 16QAM RB 75_0) (Upper Ant)

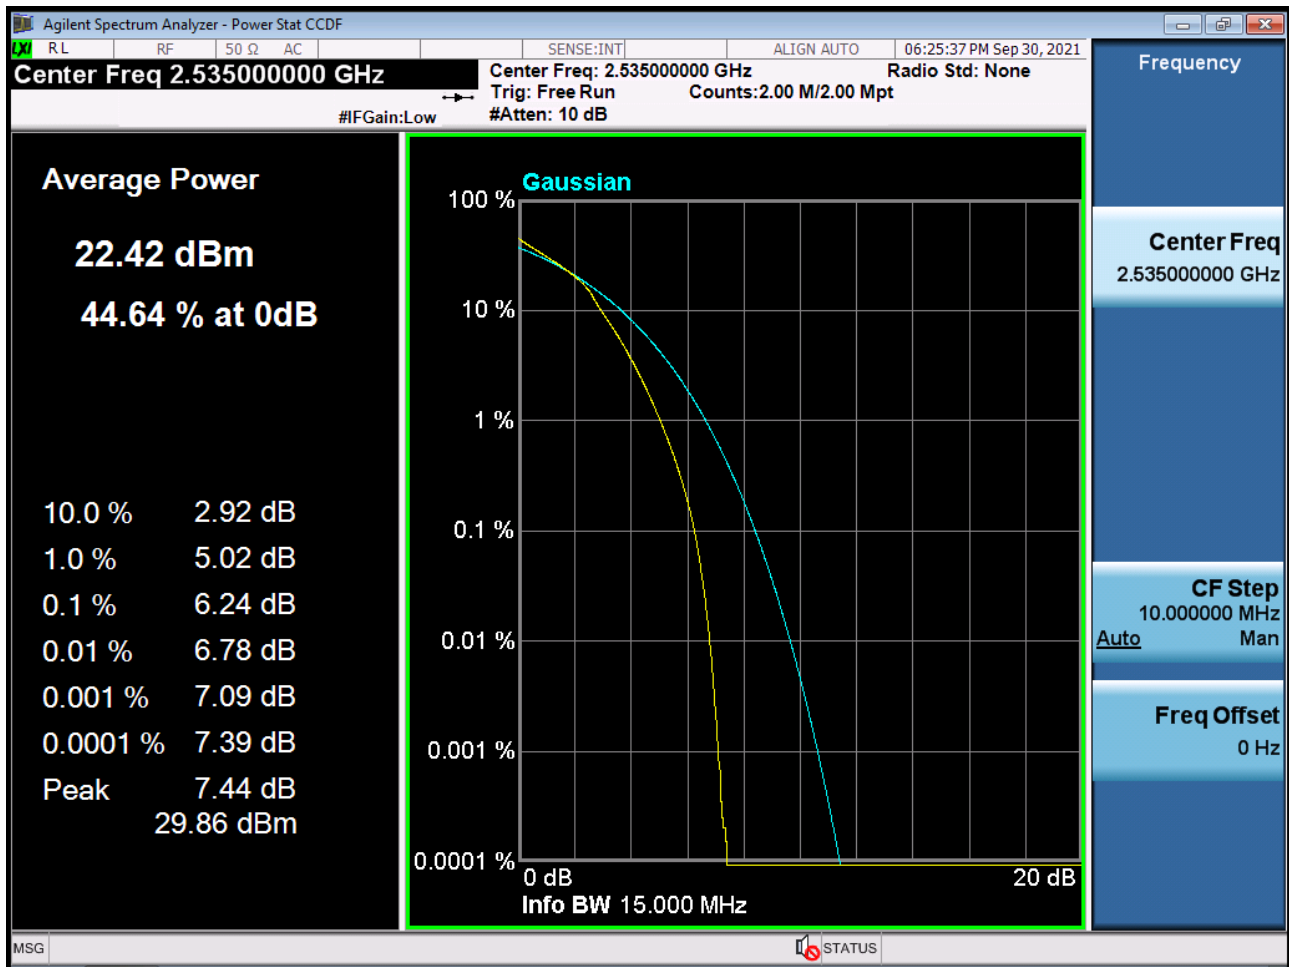


BAND 7. PAR Plot (15 M BW Ch.21100 64QAM RB 75_0) (Upper Ant)

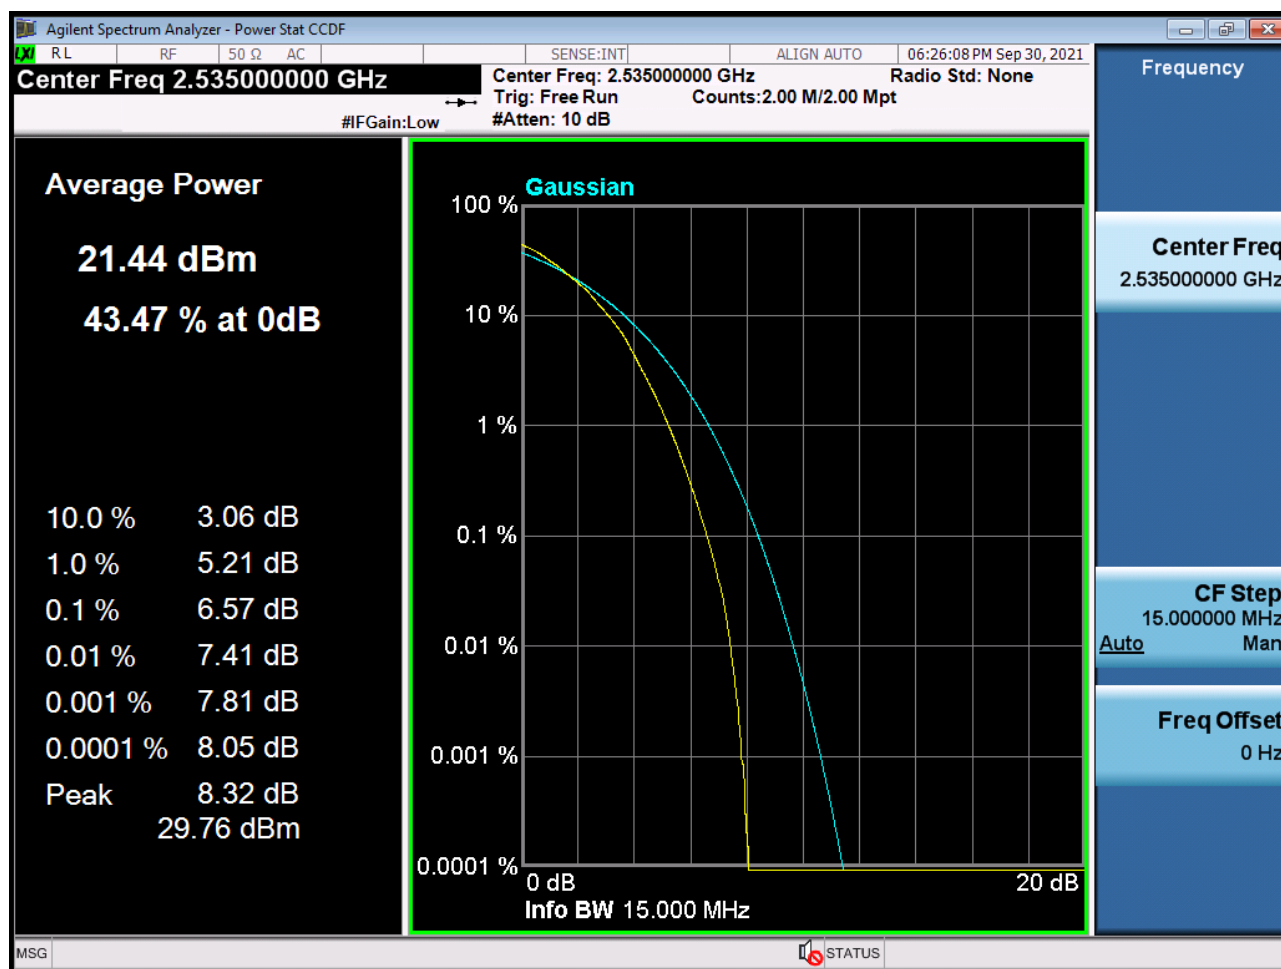


BAND 7. PAR Plot (15 M BW Ch.21100 256QAM RB 75_0) (Upper Ant)

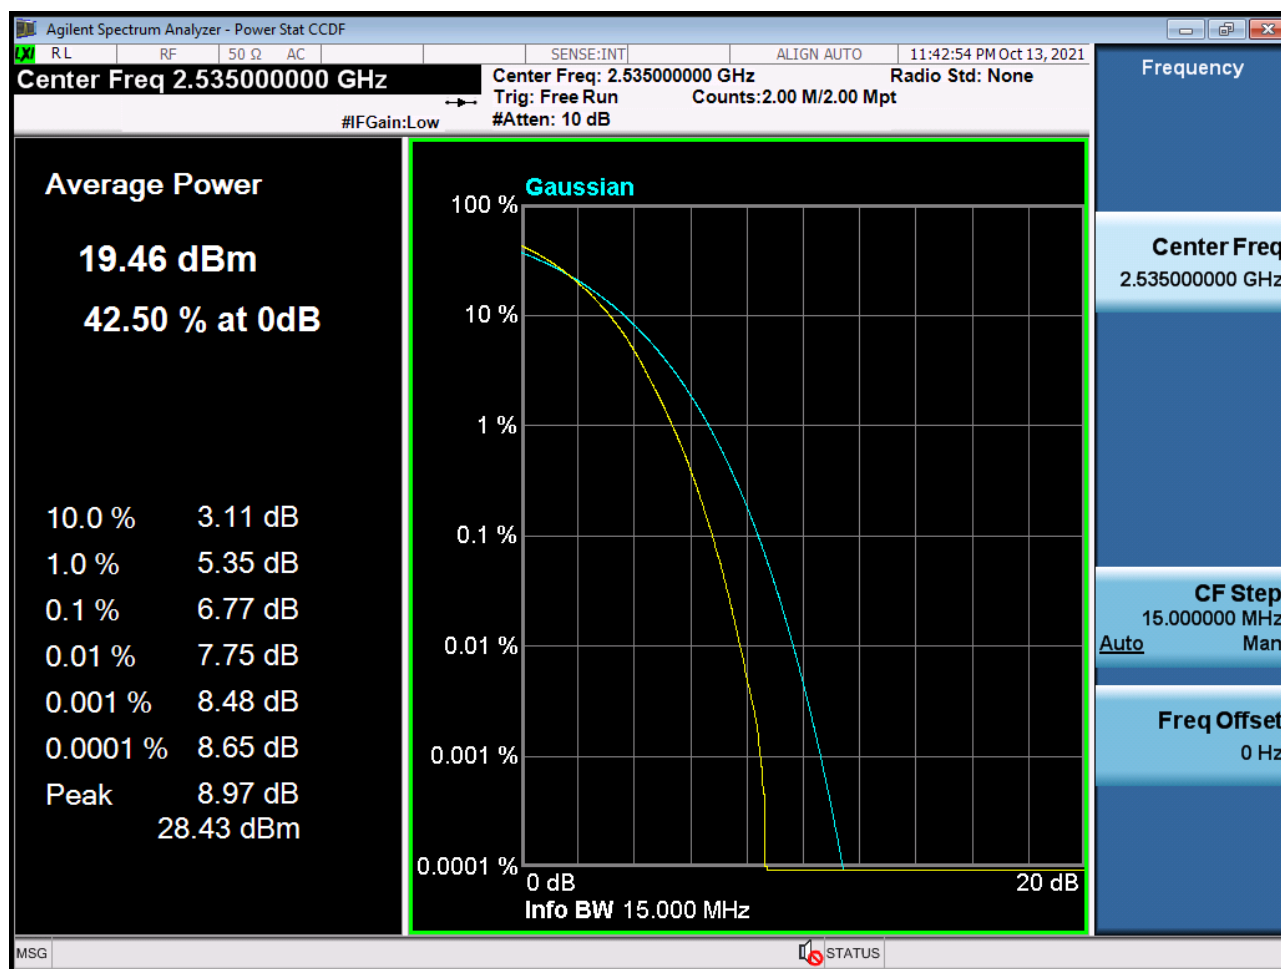


BAND 7. PAR Plot (20 M BW Ch.21100 QPSK RB 100_0) (Upper Ant)

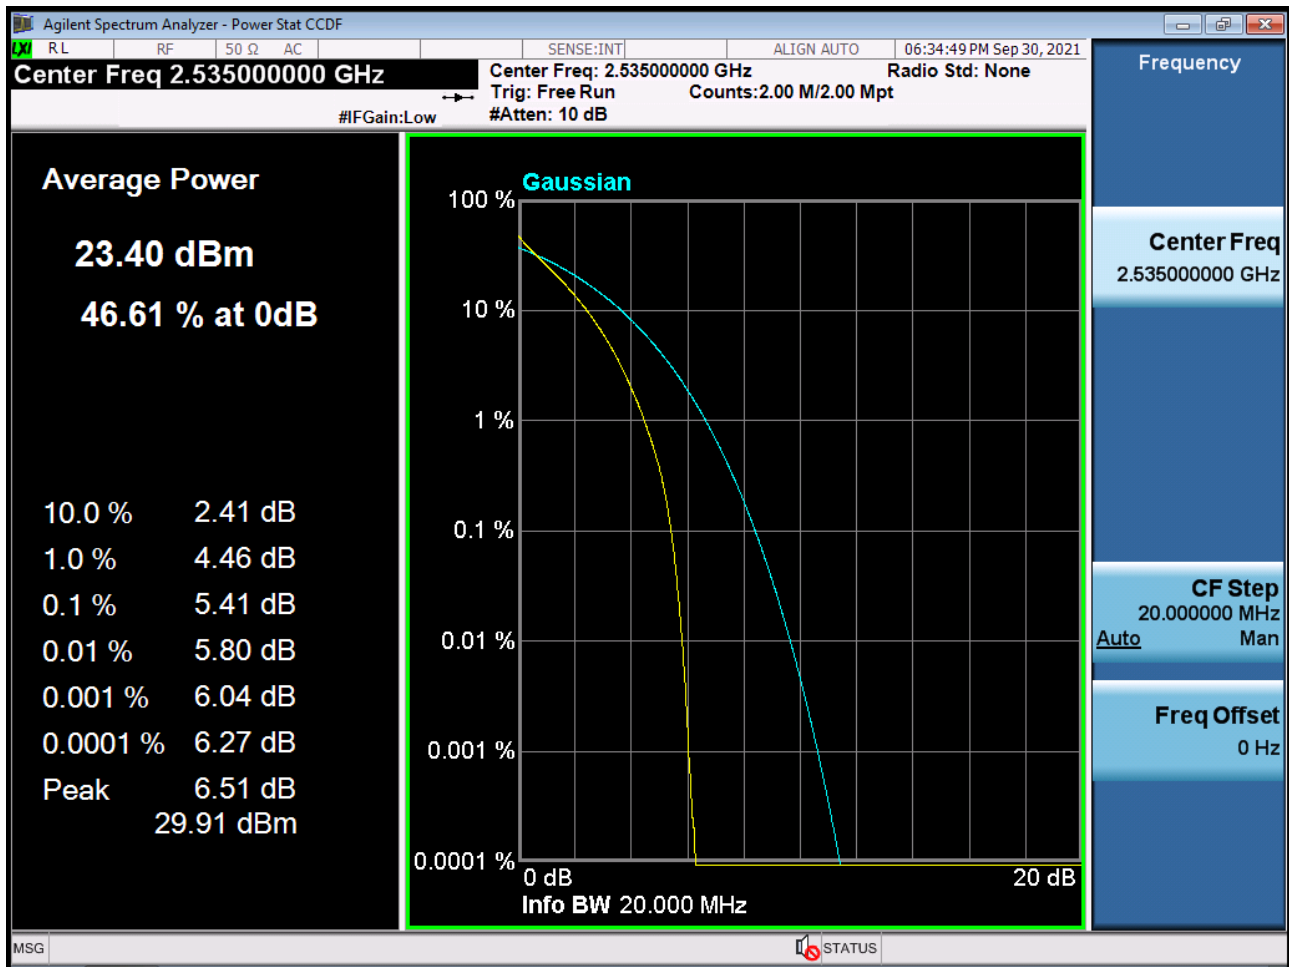


BAND 7. PAR Plot (20 M BW Ch.21100 16QAM RB 100_0) (Upper Ant)

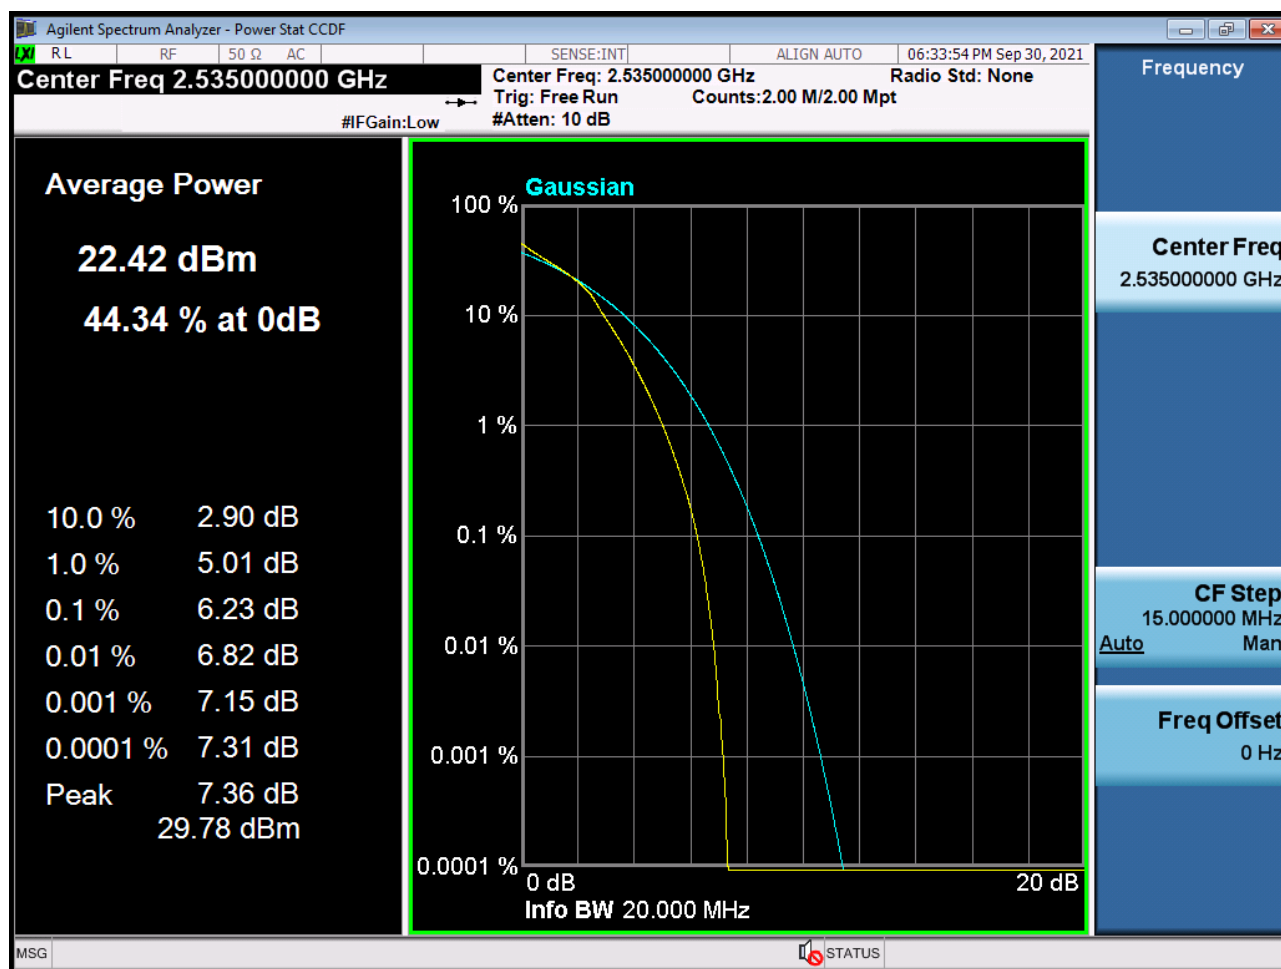


BAND 7. PAR Plot (20 M BW Ch.21100 64QAM RB 100_0) (Upper Ant)

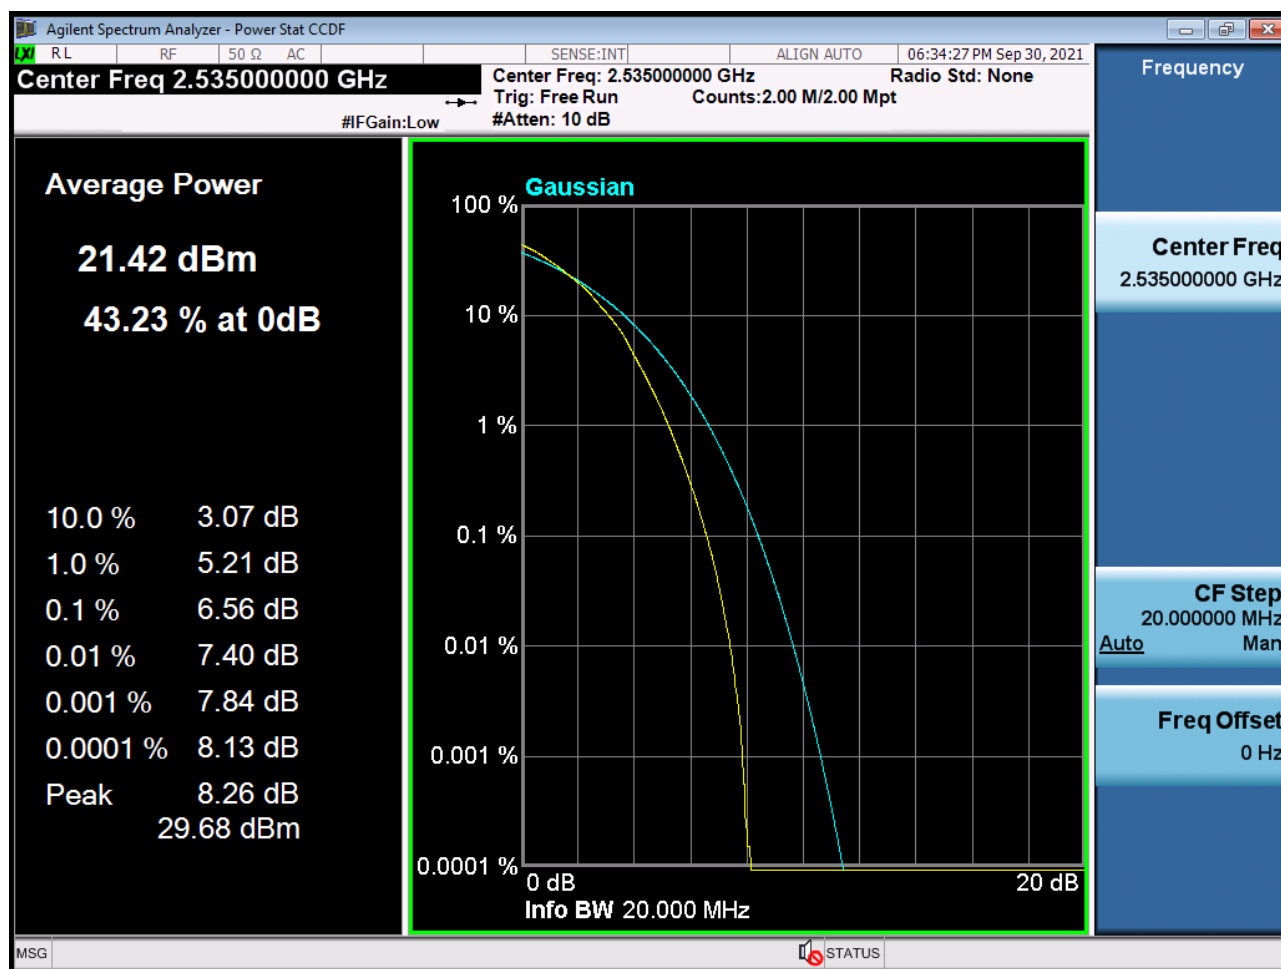

BAND 7. PAR Plot (20 M BW Ch.21100 256QAM RB 100_0) (Upper Ant)

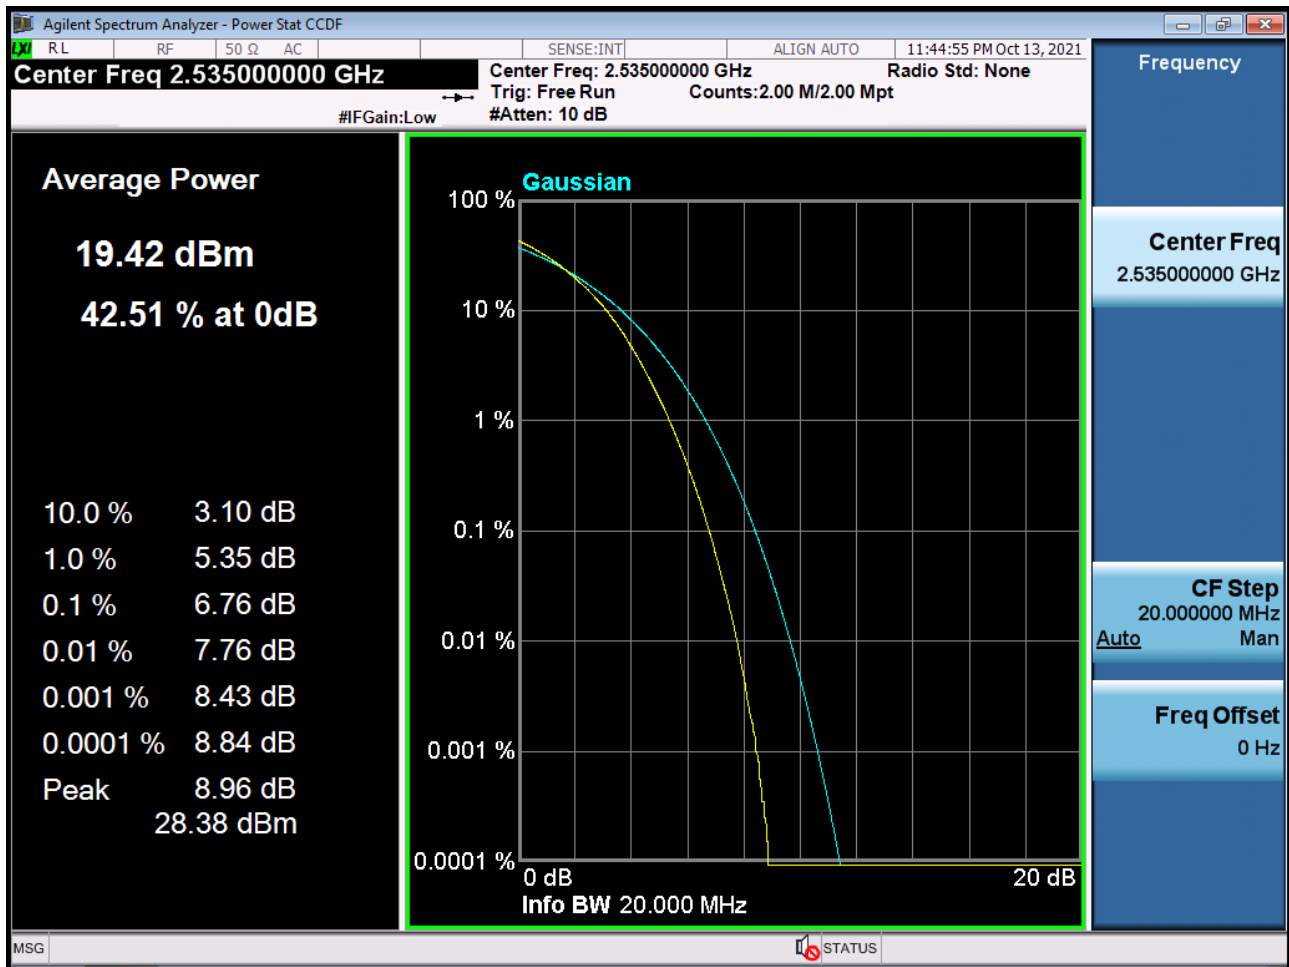

BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK RB 1, Offset 0) (Lower Ant)

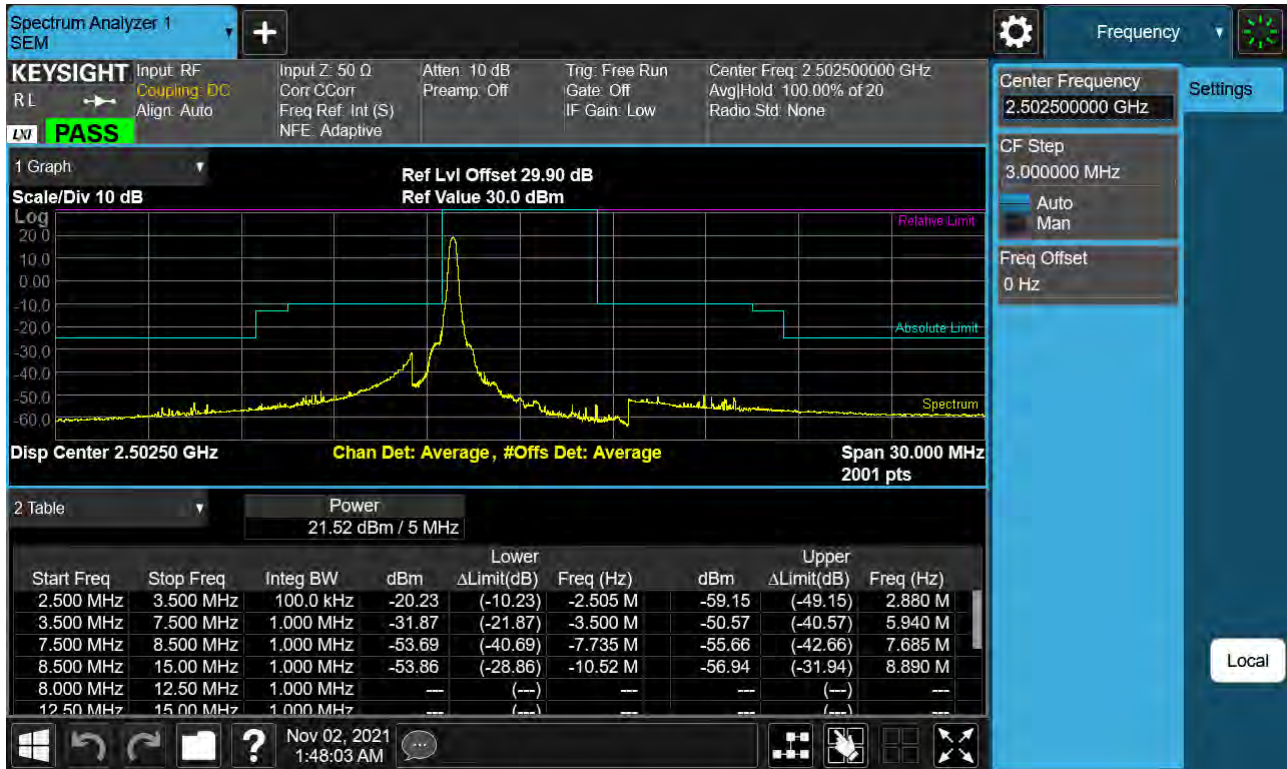

BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK RB 25, Offset 0) (Lower Ant)




BAND 7. Low Channel Edge Plot (5 MHz Ch.20775 QPSK_RB 1_Offset 24) (Lower Ant)



BAND 7. Mid Channel Edge Plot (5 MHz Ch.21100 QPSK RB 25) (Lower Ant)




BAND 7. High Channel Edge Plot (5 MHz Ch.21425 QPSK RB 1, Offset 24) (Lower Ant)

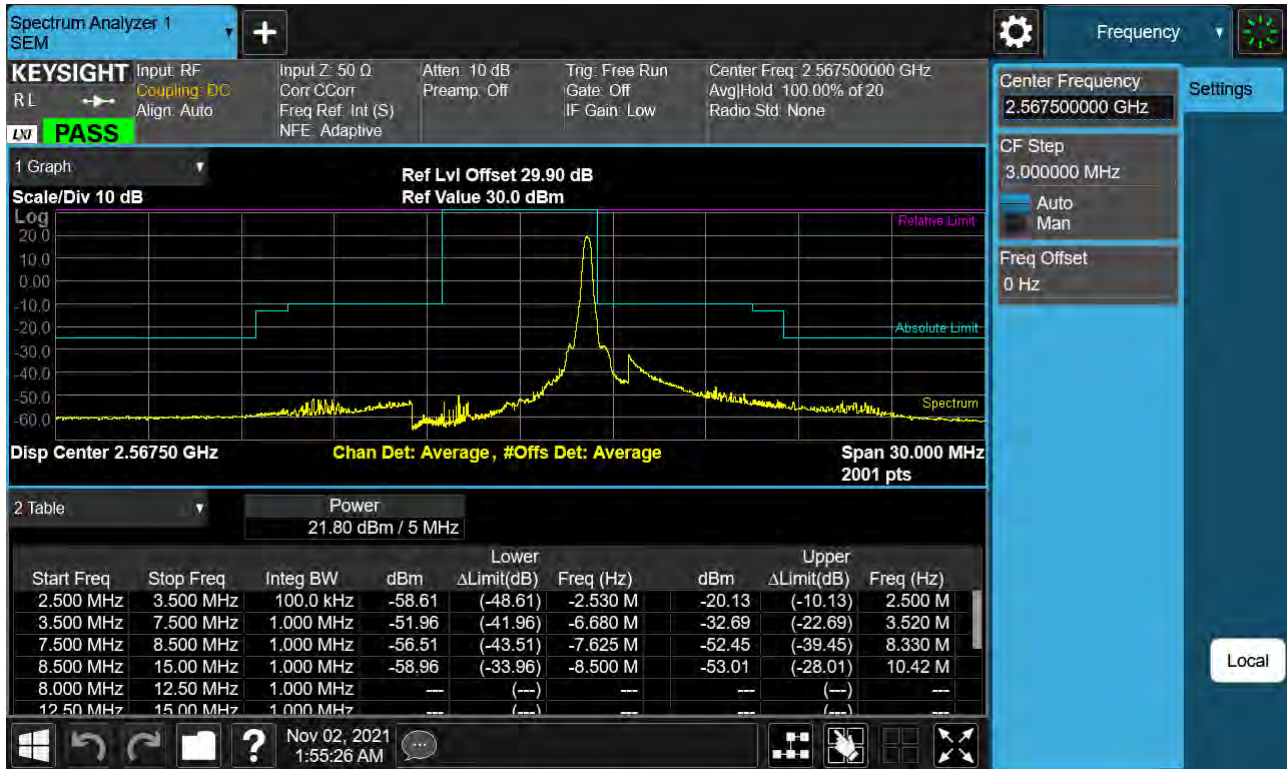

BAND 7. High Channel Edge Plot (5 MHz Ch.21425 QPSK_RB25_Offset 0) (Lower Ant)



BAND 7. Low Channel Edge Plot (10 MHz Ch.20800 QPSK RB 1, Offset 0) (Lower Ant)

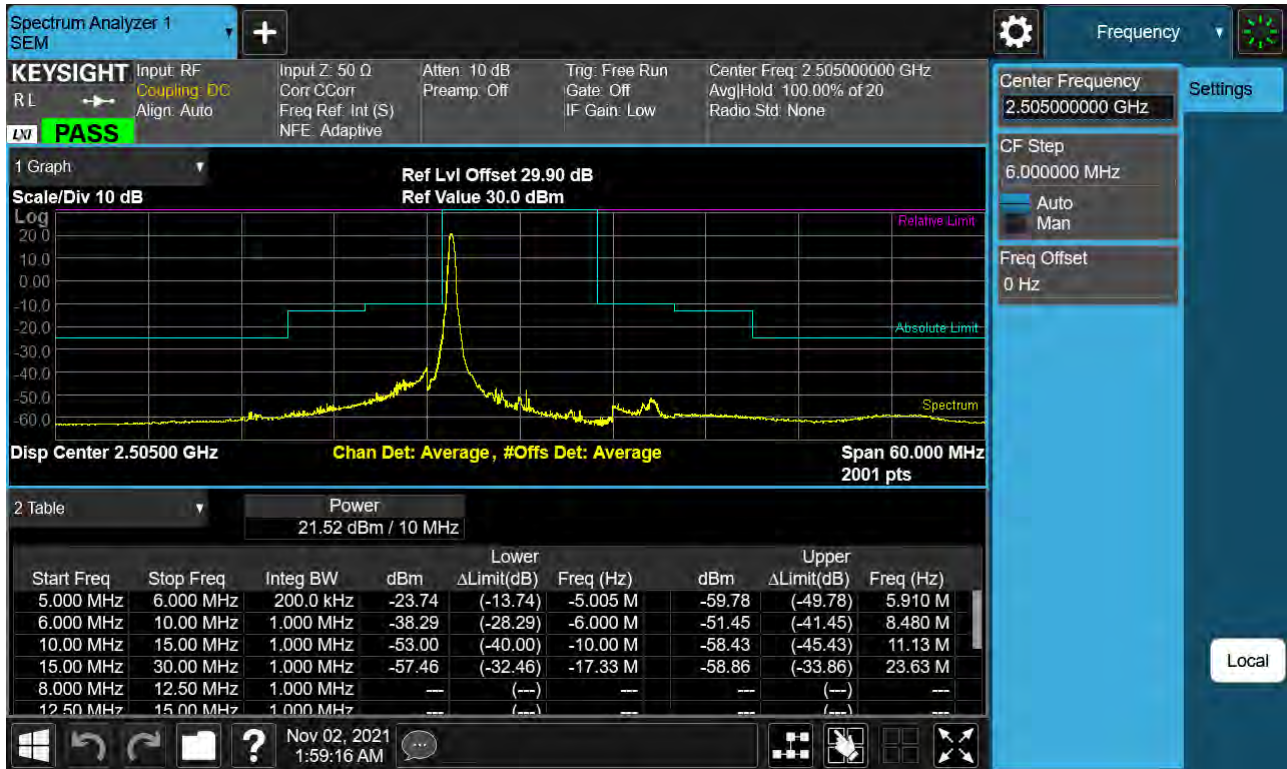

BAND 7. Low Channel Edge Plot (10 MHz Ch.20800 QPSK RB 50, Offset 0)-1(Lower Ant)




BAND 7. Low Channel Edge Plot (10 MHz Ch.20800 QPSK_RB50_Offset 0)-2(Lower Ant)



BAND 7. Mid Channel Edge Plot (10 MHz Ch.21100 QPSK RB 50) (Lower Ant)




BAND 7. High Channel Edge Plot (10 MHz Ch.21400 QPSK RB 1, Offset 49) (Lower Ant)

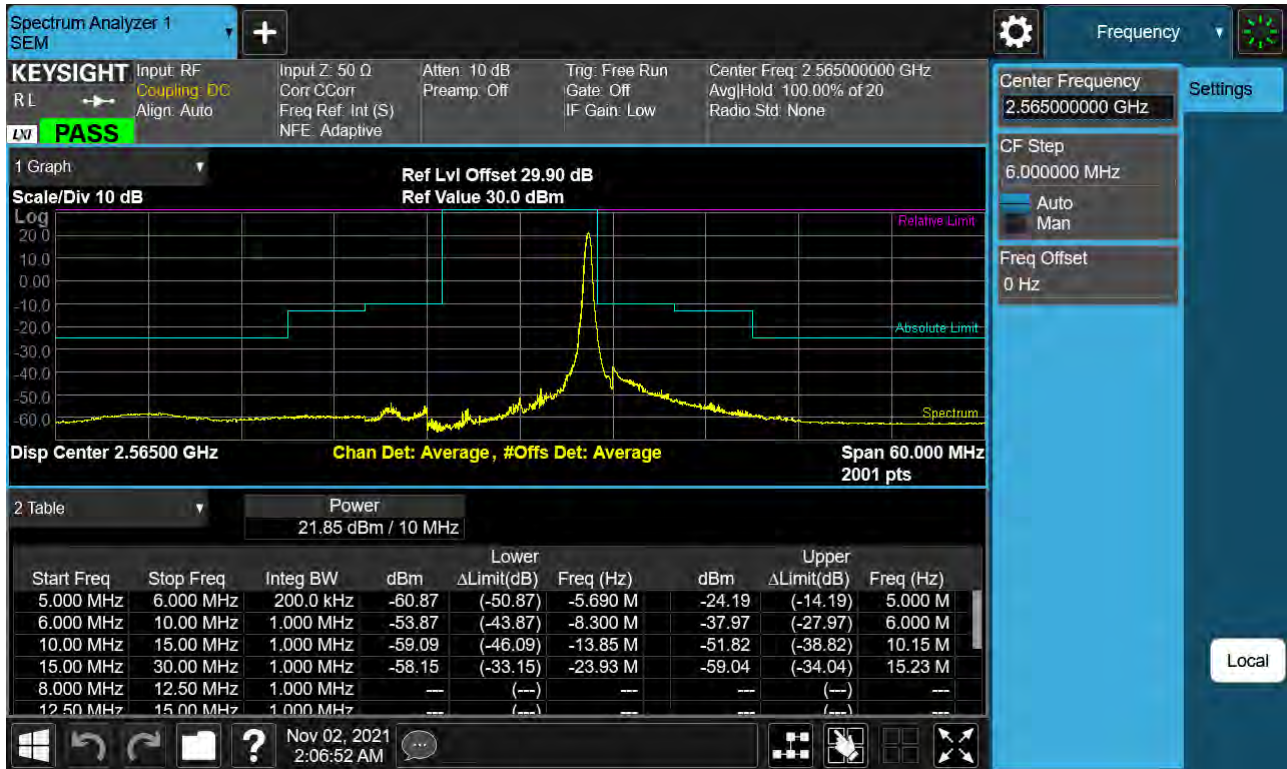

BAND 7. High Channel Edge Plot (10 MHz Ch.21400 QPSK_RB50_Offset 0) (Lower Ant)



BAND 7. Low Channel Edge Plot (15 MHz Ch.20825 QPSK RB 1, Offset 0) (Lower Ant)

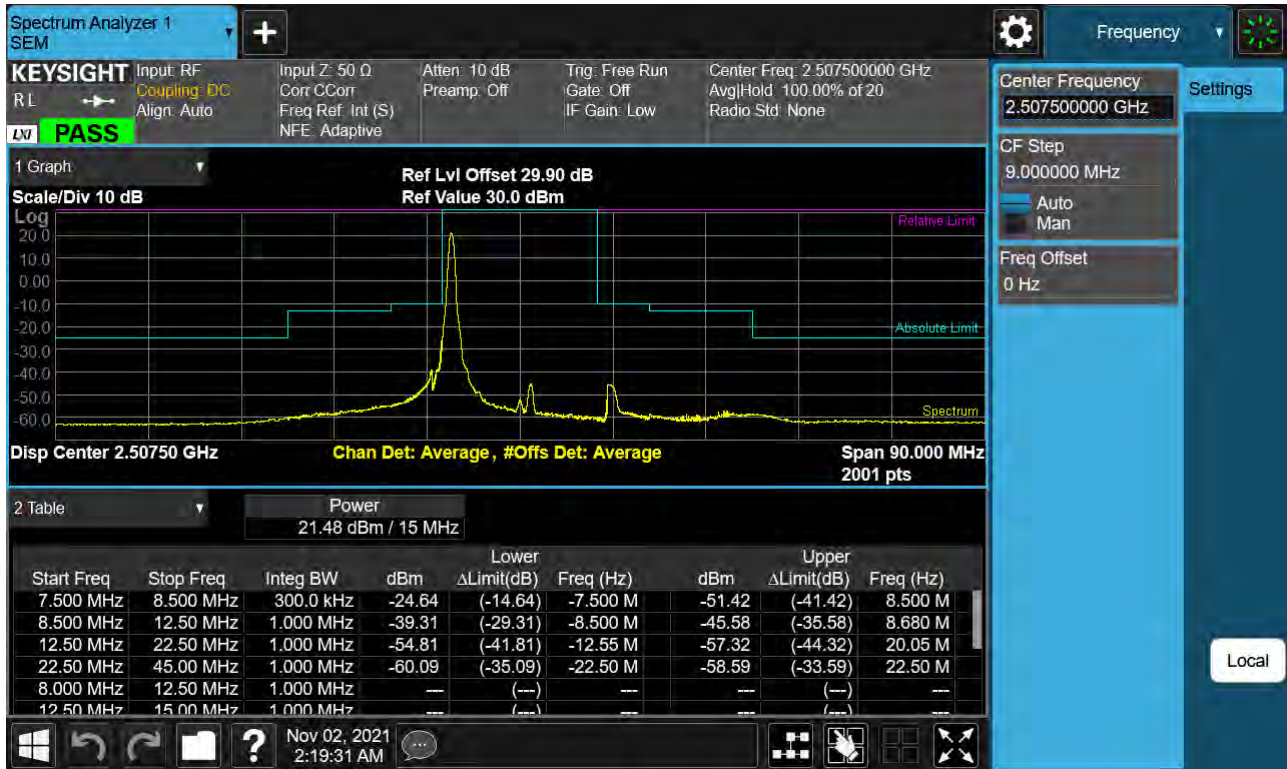

BAND 7. Low Channel Edge Plot (15 MHz Ch.20825 QPSK RB75, Offset 0)-1(Lower Ant)



BAND 7. Low Channel Edge Plot (15 MHz Ch.20825 QPSK_RB75_Offset 0)-2(Lower Ant)




BAND 7. Mid Channel Edge Plot (15 MHz Ch.21100 QPSK RB 75, Offset 0) (Lower Ant)



BAND 7. High Channel Edge Plot (15 MHz Ch.21375 QPSK RB 1, Offset 74) (Lower Ant)



BAND 7. High Channel Edge Plot (15 MHz Ch.21375 QPSK_RB75_Offset 0) (Lower Ant)

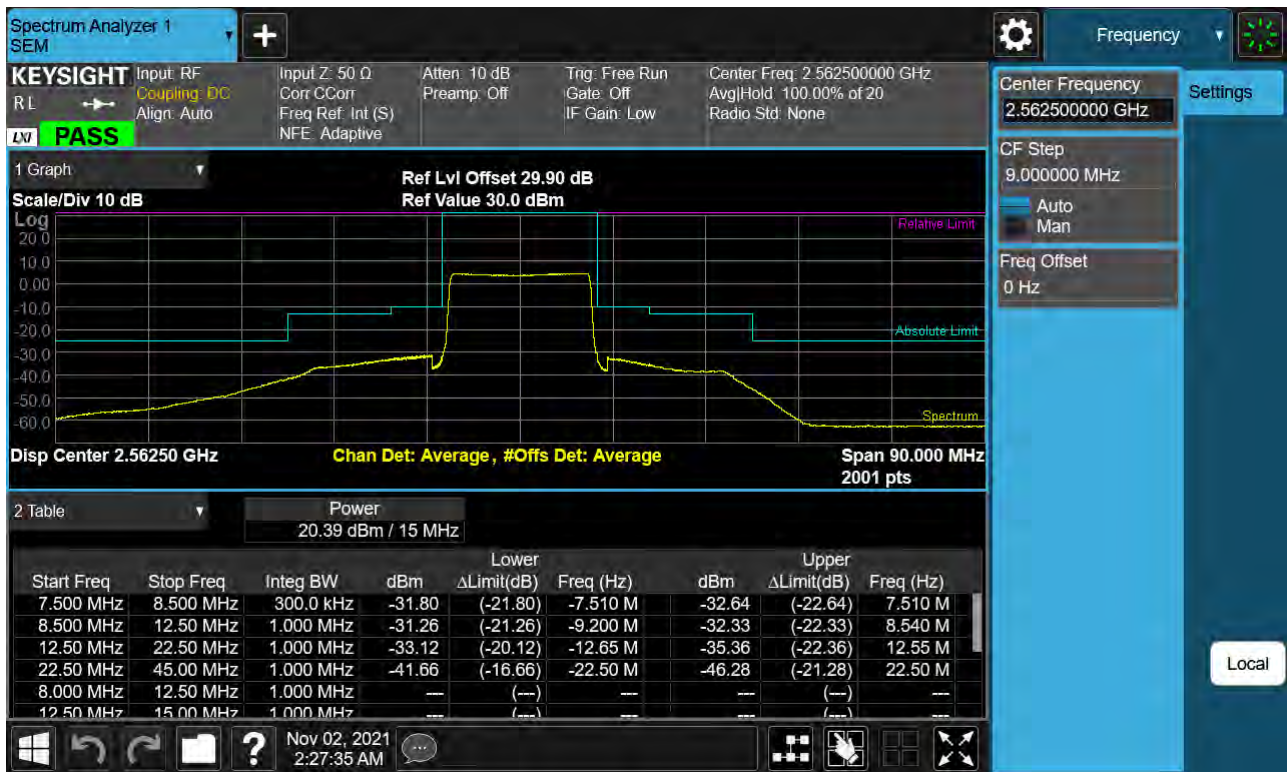

BAND 7. Low Channel Edge Plot (20 MHz Ch.20850 QPSK RB 1, Offset 0) (Lower Ant)



BAND 7. Low Channel Edge Plot (20 MHz Ch.20850 QPSK RB100, Offset 0)-1(Lower Ant)



BAND 7. Low Channel Edge Plot (20 MHz Ch.20850 QPSK_RB100_Offset 0)-2(Lower Ant)



BAND 7. Mid Channel Edge Plot (20 MHz Ch.21100 QPSK RB 100, offset 0) (Lower Ant)



BAND 7. High Channel Edge Plot (20 MHz Ch.21350 QPSK RB 1, Offset 99) (Lower Ant)



BAND 7. High Channel Edge Plot (20 MHz Ch.21350 QPSK_RB100_Offset 0) (Lower Ant)

