

# TEST REPORT

(Class II Permissive change)

of


FCC Part 15 Subpart B&amp;C §15.247 / RSS-210 Issue 8, RSS-Gen Issue 3

FCC ID/IC Certification: A3LWB850F / 649E-WB850F

Equipment Under Test : Digital Camera  
Model Name : WB850F  
Serial No. : N/A  
Applicant : SAMSUNG ELECTRONICS Co., Ltd.  
Manufacturer : SAMSUNG ELECTRONICS Co., Ltd.  
Manufacturer's factory : TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.  
Date of Test(s) : 2012. 04. 05 ~ 2012. 04. 19  
Date of Issue : 2012. 04. 23

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Logan Lee

Date

2012. 04. 23

Approved By:



Feel Jeong

Date

2012. 04. 23

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)

# INDEX

## Table of contents

1. General information -----	3
2. Transmitter radiated spurious emissions -----	6
3. Receiver Radiated Spurious Emission -----	16
4. Maximum peak output power -----	18

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea, 435-040

Tel. +82 31 428 5700 / Fax. +82 31 427 2371

[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)  
 Wireless Div. 3FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea  
[www.ee.sgs.com/korea](http://www.ee.sgs.com/korea)  
 Telephone : +82 31 428 5700  
 FAX : +82 31 427 2371

### 1.2. Details of Applicant

Applicant : SAMSUNG ELECTRONICS Co., Ltd.  
 Address : 416, Maetan-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea  
 Contact Person : Lee, Mi-Hyeon  
 Phone No. : +82 31 277 6803

### 1.3. Details of Factory Information

Factory : TIANJIN SAMSUNG OPTO-ELECTRONICS CO., LTD.  
 Address : No.9 ZhangHeng Street, Micro-Electronic Industrial Park, JinGang Road, Tianjin, China

### 1.4. Description of EUT

<b>FCC Identifier</b>	A3LWB850F
<b>IC Certification No.</b>	649E-WB850F
<b>Kind of Product</b>	Digital Camera
<b>Model Name</b>	WB850F
<b>Serial Number</b>	N / A
<b>Power Supply</b>	DC 3.7 V (Li-ion Battery)
<b>Frequency Range</b>	2 412 MHz ~ 2 462 MHz (802.11b/g/n-HT20_SISO)
<b>Modulation Technique</b>	DSSS, OFDM
<b>Number of Channels</b>	11
<b>Antenna Type</b>	Integral Type
<b>Antenna Gain</b>	1.5 dBi
<b>H/W version</b>	WB850_PV1
<b>S/W version</b>	G202070

### 1.5. Declaration by the manufacturer

- 802.11n supports HT20 mode only.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.6. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Due.
Signal Generator	R & S	SMR40	100272	Jul. 15, 2012
Signal Generator	Agilent	8648D	3847M00534	Mar. 29, 2013
Spectrum Analyzer	R&S	FSV30	101004	Jul. 06, 2012
Power Sensor	R&S	NRP-Z81	100748	Aug. 22, 2012
Low Pass Filter	Mini-Circuits	NLP-1200+	V8979400903-1	Jul. 11, 2012
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Jul. 07, 2012
High Pass Filter	Wainwright	WHNX7.5/26.5G-6SS	11	Sep. 15, 2012
DC Power Supply	Agilent	6553A	MY40000695	Jul. 04, 2012
Preamplifier	H.P.	8447F	2944A03909	Jul. 04, 2012
Preamplifier	R & S	SCU 18	10117	Jan. 12, 2013
Preamplifier	SCHWARZBECK MESSELEKTRONIK	JS44-18004000-35-8P	1546891	Jul. 04, 2012
Test Receiver	R & S	ESU26	100109	Feb. 21, 2013
Bilog Antenna	SCHWARZBECK MESSELEKTRONIK	VULB9163	396	May 12, 2013
Horn Antenna	R & S	HF 907	100019	Jul. 29, 2012
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170223	Jun. 30, 2012
Antenna Master	INN-CO	MM 4000	N.C.R.	N.C.R.
Turn Table	INN-CO	DS 1200 S	N.C.R.	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N.C.R.	N.C.R.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.7. Summary of Test Results

Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005 is used.

The EUT has been tested according to the following specifications:

APPLIED STANDARD:FCC Part15 subpart B&C, RSS-210, RSS-Gen			
Standard section		Test Item	Result
15.205(a) 15.209	A8.5	Transmitter Radiated Spurious Emissions	Complied
15.109(a)	RSS-Gen 6	Receiver Radiated Spurious Emission	Complied
15.247(b)(3)	A8.4(4)	Maximum Peak Output Power	Complied

### 1.8. Conclusion of worst-case

The field strength of spurious emission was measured in three orthogonal EUT positions(X-axis, Y-axis and Z-axis). Worst case is X-axis. 1 Mbps is the highest output power in the 11b. 6 Mbps is the highest output power in the 11g. In case of 11n, we chose MCS0 mode.

### 1.9. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL005493	Initial


*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2. Transmitter Radiated Spurious Emissions


### 2.1. Test Setup

#### 2.1.1. Transmitter Radiated Spurious Emissions

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

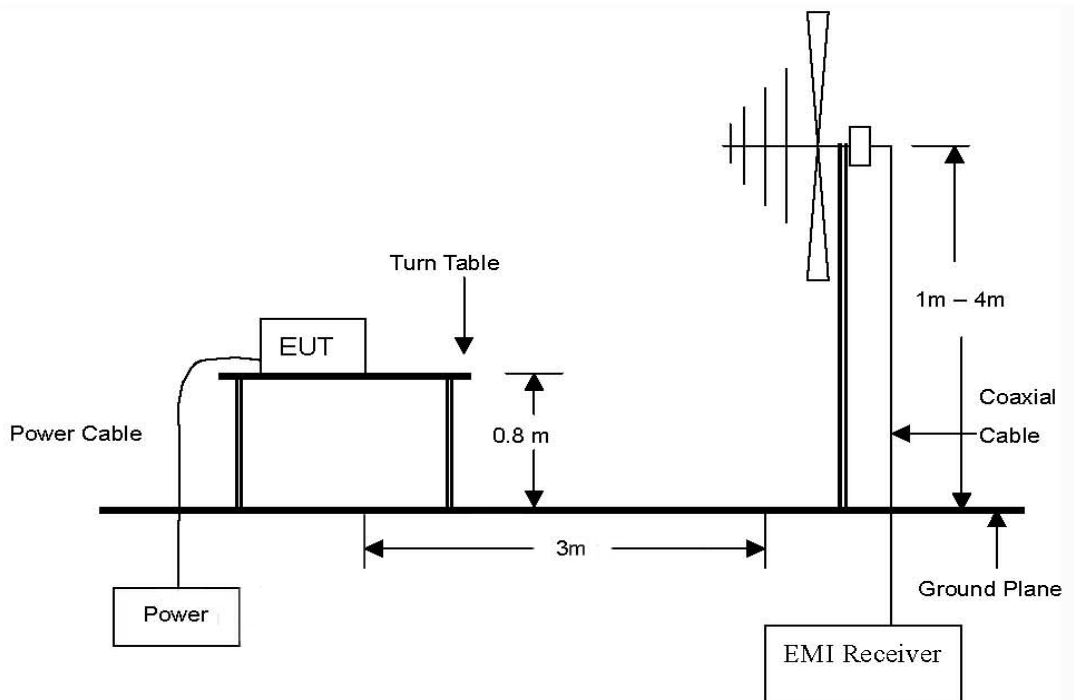

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 26.5 GHz Emissions.

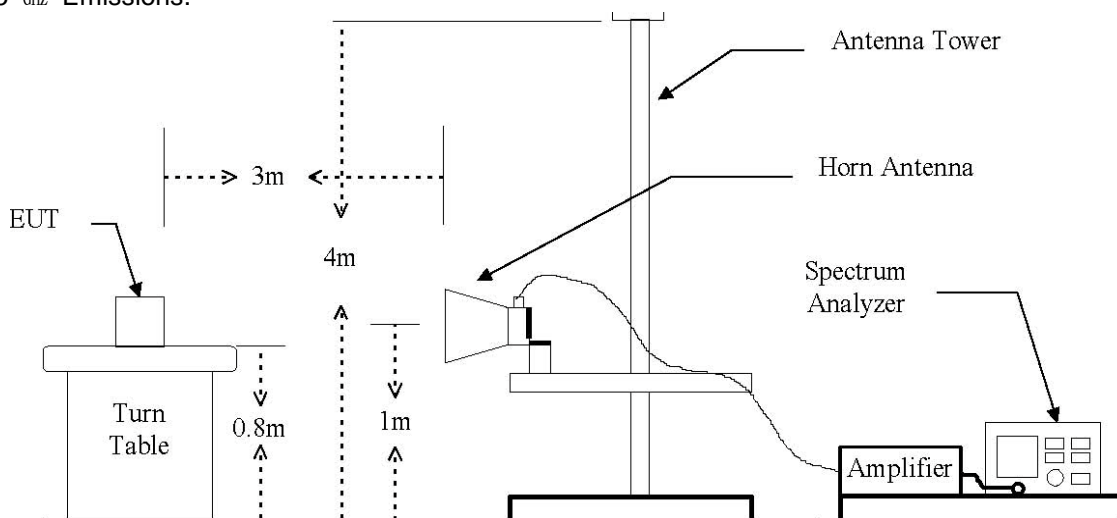

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.2. Limit

According to § 15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Distance (Meters)	Field Strength (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of KDB558074

### 2.3.1. Test Procedures for Radiated Spurious Emissions

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. During performing radiated emission below 1 GHz, the EUT was set 3 meters away from the interference receiving antenna, which was mounted on the top of a variable-height antenna tower. During performing radiated emission above 1 GHz, the EUT was set 3 meter away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### NOTE ;

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test Results

Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

### 2.4.1. Spurious Radiated Emission (Worst case configuration\_11b mode)

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
33.92	48.00	Peak	V	12.00	-26.60	33.40	40.00	6.60
133.31	42.50	Peak	H	8.80	-26.00	25.30	43.50	18.20
177.72	41.30	Peak	H	9.90	-25.50	25.70	43.50	17.80
222.18	41.90	Peak	H	11.70	-25.10	28.50	46.00	17.50
266.64	44.60	Peak	H	12.60	-24.90	32.30	46.00	13.70
355.52	38.10	Peak	H	13.20	-25.60	25.70	46.00	20.30
901.46	35.10	Peak	H	21.70	-24.30	32.50	46.00	13.50
Above 910.00	Not detected	-	-	-	-	-	-	-

#### Remark:

1. All spurious emission at channels are almost the same below 1 GHz, so that the middle channel was chosen at representative in final test.
2. Actual = Reading + AF + AMP + CL

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 2.4.2. Spurious Radiated Emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB.

#### DSSS : 802.11b

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 390.00	30.40	Peak	V	28.05	5.14	63.59	74.00	10.41
*2 390.00	16.42	Average	V	28.05	5.14	49.61	54.00	4.39

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 823.98	45.51	Peak	V	32.31	-34.98	42.84	74.00	31.16
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 874.10	46.15	Peak	V	32.79	-34.96	43.98	74.00	30.02
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 483.50	28.78	Peak	V	28.31	5.19	62.28	74.00	11.72
*2 483.50	16.08	Average	V	28.31	5.19	49.58	54.00	4.42

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 923.78	43.46	Peak	V	33.10	-34.87	41.69	74.00	32.31
Above 5 000.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**OFDM : 802.11g**

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 390.00	31.21	Peak	V	28.05	5.14	64.40	74.00	9.60
*2 390.00	17.34	Average	V	28.05	5.14	50.53	54.00	3.47

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 823.04	42.94	Peak	V	32.29	-34.98	40.25	74.00	33.75
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 869.70	42.57	Peak	V	32.75	-34.99	40.33	74.00	33.67
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 483.50	28.91	Peak	V	28.31	5.19	62.41	74.00	11.59
*2 483.50	16.38	Average	V	28.31	5.19	49.88	54.00	4.12

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 925.89	42.69	Peak	V	33.12	-34.88	40.93	74.00	33.07
Above 5 000.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**OFDM : 802.11n**

Low Channel (2 412 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 390.00	29.82	Peak	V	28.05	5.14	63.01	74.00	10.99
*2 390.00	17.23	Average	V	28.05	5.14	50.42	54.00	3.58

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 825.73	42.34	Peak	V	32.33	-34.99	39.68	74.00	34.32
Above 4 900.00	Not detected	-	-	-	-	-	-	-

Middle Channel (2 437 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 873.23	42.42	Peak	V	32.78	-34.97	40.23	74.00	33.77
Above 4 900.00	Not detected	-	-	-	-	-	-	-

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel (2 462 MHz)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
*2 483.50	28.28	Peak	V	28.31	5.19	61.78	74.00	12.22
*2 483.50	16.29	Average	V	28.31	5.19	49.79	54.00	4.21

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 925.64	42.32	Peak	V	33.12	-34.88	40.56	74.00	33.44
Above 5 000.00	Not detected	-	-	-	-	-	-	-

■ Remarks

1. "\*" means the restricted band.
2. Measuring frequencies from 1 GHz to the 10<sup>th</sup> harmonic of highest fundamental Frequency.
3. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
4. Average test would be performed if the peak result were greater than the average limit.
5. Actual = Reading + AF + AMP + CL
6. To get a maximum emission level from the EUT, the EUT was moved throughout the x-axis, y-axis and z-axis. The worst case is x-axis.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3. Receiver Radiated spurious emissions

#### 3.1. Test setup - Same as clause 2.1.

##### 3.1.1. Receiver Radiated Spurious Emissions - Same as clause 2.1.1.

#### 3.2. Limit

According to §15.109(a), Except for Class A digital devices, the field strength of radiated emission from unintentional radiator at a distance of 3 m shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

#### 3.3. Test Procedures - Same as clause 2.3.

Radiated emissions from the EUT were measured according to the dictates of KDB558074

##### 3.3.1. Test Procedures for Radiated Spurious Emissions- Same as clause 2.3.1.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 3.4. Test Results

Ambient temperature : (24 ± 2) °C  
 Relative humidity : 47 % R.H.

#### 3.4.1. Spurious Radiated Emission (Worst case configuration\_11b mode)

The frequency spectrum from 30 MHz to 26.5 GHz was investigated. Emission levels are not reported much lower than the limits by over 30 dB. All reading values are peak values.

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (MHz)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBμV/m)	Limit (dBμV/m)	Margin (dB)
33.88	46.80	Peak	V	12.00	-26.60	32.20	40.00	7.80
174.25	40.50	Peak	H	9.80	-25.50	24.80	43.50	18.70
224.10	39.20	Peak	H	11.80	-25.10	25.90	46.00	20.10
265.82	42.70	Peak	H	12.60	-24.90	30.40	46.00	15.60
356.29	39.80	Peak	H	13.30	-25.60	27.50	46.00	18.50
910.74	38.40	Peak	H	19.60	-24.30	33.70	46.00	12.30
Above 1 000.000	Not detected	-	-	-	-	-	-	-


#### Remark:

1. All spurious emission at channels are almost the same from 30 MHz to 26.5 GHz, so that the middle channel was chosen as representative in final test.
2. Actual = Reading + AF + AMP + CL

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 4. Maximum Peak Output Power

### 4.1. Test Setup

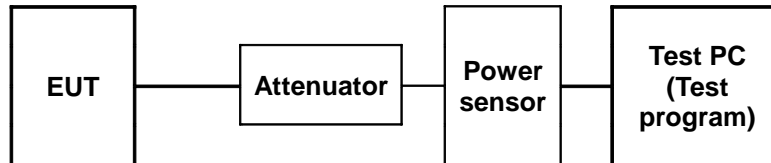

### 4.2. Limit

According to §15.247(b)(3), for systems using digital modulation in the 902 ~ 928 MHz, 2 400 ~2 483.5 MHz, and 5 725 ~ 5 850 MHz band: 1 Watt. As an alternative to a peak power measurement, compliance with the one watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antenna elements. The average must not include any intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to power sensor.
3. Adjust the period of operating transmission in test program in order to use power sensor and then measure average power and peak power about each data rate of WLAN at the appropriate frequencies.
4. Test program : (S/W name : R&S Power Viewer, Version : 3.2.0)
5. Record in the test report.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 4.4. Test result

Ambient temperature : (24 ± 2) °C

Relative humidity : 47 % R.H.

Mode	Channel Frequency (MHz)	Channel	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
DSSS (802.11b)	2 412	Low	1	16.68	<b>16.17</b>	<b>19.67</b>
			2		16.13	19.54
			5.5		16.08	19.48
			11		16.00	19.32
	2 437	Middle	1	16.70	<b>16.15</b>	<b>19.47</b>
			2		16.10	19.36
			5.5		16.03	19.27
			11		15.95	19.42
	2 462	High	1	16.69	<b>16.04</b>	<b>19.44</b>
			2		15.97	19.31
			5.5		15.89	19.24
			11		15.75	19.14
OFDM (802.11g)	2 412	Low	6	16.68	<b>15.36</b>	<b>24.67</b>
			9		15.15	24.51
			12		15.06	24.24
			18		15.01	24.32
			24		14.87	24.58
			36		14.45	24.35
			48		14.29	24.48
			54		14.07	24.32
	2 437	Middle	6	16.70	<b>15.40</b>	24.36
			9		15.35	24.22
			12		15.19	24.30
			18		14.96	24.11
			24		14.77	<b>24.38</b>
			36		14.53	24.14
			48		14.15	24.27
			54		14.04	24.22
	2 462	High	6	16.69	<b>15.27</b>	<b>24.36</b>
			9		14.98	24.32
			12		14.89	24.17
			18		14.78	24.20
			24		14.59	24.06
			36		14.32	23.98
			48		14.14	23.97
			54		14.06	23.81

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

Mode	Channel Frequency (MHz)	Channel	Data rate (Mbps)	Attenuator + Cable offset (dB)	Average power Result (dB m)	Peak Power Result (dB m)
OFDM (802.11n)	2 412	Low	MCS0	16.68	<b>12.17</b>	<b>24.07</b>
			MCS1		11.86	24.05
			MCS2		11.54	23.98
			MCS3		11.32	23.66
			MCS4		11.08	23.88
			MCS5		11.05	23.74
			MCS6		10.87	23.89
			MCS7		10.81	23.54
	2 437	Middle	MCS0	16.70	<b>12.08</b>	<b>24.02</b>
			MCS1		11.81	23.86
			MCS2		11.71	23.74
			MCS3		11.45	23.69
			MCS4		11.17	23.45
			MCS5		10.81	23.44
			MCS6		10.67	23.17
			MCS7		10.66	23.02
	2 462	High	MCS0	16.69	<b>11.94</b>	<b>23.17</b>
			MCS1		11.85	22.86
			MCS2		11.48	22.94
			MCS3		11.32	22.58
			MCS4		11.14	22.62
			MCS5		10.98	22.54
			MCS6		10.72	22.87
			MCS7		10.58	22.86

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.