

Test of Samsung WEA403i

To: DFS Requirements of  
FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HCTA05-U2 Rev B



# TEST REPORT

FROM



Test of Samsung WEA403i

to

To DFS requirements of FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: HCTA05-U2 Rev B

This report supersedes; HCTA05-U2 Rev A

Applicant: Samsung Electronics Co., Ltd  
129 Samsung-ro, Yeongtong-gu  
Suwon-si, Gyeonggi-do  
443-742, Republic of Korea

Product Function: Wireless Access Point

Copy No: pdf Issue Date: 30th June 2014

**This Test Report is Issued Under the Authority of:**

**MiCOM Labs, Inc.**

575 Boulder Court

Pleasanton, CA 94566 USA

Phone: + 1 (925) 462-0304

Fax: + 1 (925) 462-0306

[www.micomlabs.com](http://www.micomlabs.com)



TESTING CERT # 2381.01

**MiCOM Labs is an ISO 17025 Accredited Testing Laboratory**



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 3 of 83

---

This page has been left intentionally blank

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## TABLE OF CONTENTS

<b>ACCREDITATION, LISTINGS &amp; RECOGNITION</b> .....	<b>5</b>
TESTING ACCREDITATION .....	5
RECOGNITION .....	6
PRODUCT CERTIFICATION .....	7
<b>1. TEST RESULT CERTIFICATE</b> .....	<b>9</b>
<b>2. REFERENCES AND MEASUREMENT UNCERTAINTY</b> .....	<b>10</b>
2.1. Normative References.....	10
2.2. Test and Uncertainty Procedures.....	11
<b>3. PRODUCT DETAILS AND TEST CONFIGURATIONS</b> .....	<b>12</b>
3.1. Technical Details.....	12
3.2. Scope of Test Program .....	13
3.3. Equipment Model(s) and Serial Number(s).....	16
3.4. Antenna Details.....	16
3.5. Cabling and I/O Ports.....	16
3.6. Equipment Modifications .....	17
3.7. Deviations from the Test Standard.....	17
<b>4. TEST SUMMARY</b> .....	<b>18</b>
<b>5. TEST RESULTS</b> .....	<b>19</b>
5.1.1. <i>Dynamic Frequency Selection (DFS)</i> .....	19
5.1.2. <i>Interference Threshold values, Master or Client incorporating In-Service Monitoring</i> .....	19
5.1.3. <i>DFS Response requirement values</i> .....	19
5.2. WEA403i: Ports A1, A2, A3 Test Results.....	26
5.3. WEA403i: Ports M1, M2, M3 Test Results.....	63
<b>6. PHOTOGRAPHS</b> .....	<b>80</b>
6.1. DFS Test Setup.....	80
<b>7. TEST EQUIPMENT DETAILS</b> .....	<b>82</b>

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 5 of 83

## **ACCREDITATION, LISTINGS & RECOGNITION**

### **TESTING ACCREDITATION**

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



American Association for Laboratory Accreditation

## *Accredited Laboratory*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 28<sup>th</sup> day of February 2014.

President & CEO  
For the Accreditation Council  
Certificate Number 2381.01  
Valid to November 30, 2015



*For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## **RECOGNITION**

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA\*\* countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	US0159 Listing #: 4143A-2 4143A-3
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	RCB 210
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Science, ICT and Future Planning (MSIP) and Radio Research Agency (RRA)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

\*\*APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement. Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

\*\*EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

\*\*NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 7 of 83

## **PRODUCT CERTIFICATION**

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC 17065. The company is accredited by the American Association for Laboratory Accreditation (A2LA) [www.a2la.org](http://www.a2la.org) test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



**American Association for Laboratory Accreditation**

### *Accredited Product Certification Body*

A2LA has accredited

**MICOM LABS**

*Pleasanton, CA*

for technical competence as a

**Product Certification Body**

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC 17065:2012 - *Requirements for bodies certifying products, processes and services*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system.

Presented this 28<sup>th</sup> day of February 2014.



*Peter Noyes*

President & CEO  
For the Accreditation Council  
Certificate Number 2381.02  
Valid to November 30, 2015

*For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation*

**USA Telecommunication Certification Body (TCB)** - TCB Identifier – US0159

**Industry Canada Certification Body** - CAB Identifier – US0159

**European Notified Body** - Notified Body Identifier - 2280

**Japan – Recognized Certification Body (RCB)** - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 8 of 83

---

## DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	23 <sup>rd</sup> June 2014	Initial release
Rev B	30 <sup>th</sup> June 2014	Correction to antenna gains listed in Section 3.4.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 9 of 83

## 1. TEST RESULT CERTIFICATE

<b>Applicant:</b>	Samsung Electronics Co., Ltd 129 Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do 443-742, Republic of Korea	<b>Tested By:</b>	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California, 94566, USA
<b>EUT:</b>	Wireless LAN Access point	<b>Tel:</b>	+1 925 462 0304
<b>Model:</b>	WEA403i Antenna Ports A1, A2, A3 Antenna Ports M1, M2, M3	<b>Fax:</b>	+1 925 462 0306
<b>S/N:</b>	#14		
<b>Test Date(s):</b>	15th - 20th May 2014	<b>Website:</b>	www.micomlabs.com

STANDARD(S)	TEST RESULTS
DFS Requirements of FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

### Notes:


1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

**Approved & Released for MiCOM Labs, Inc. by:**



TESTING CERT # 2381.01

  
\_\_\_\_\_  
Graeme Grieve  
Quality Manager MiCOM Labs,

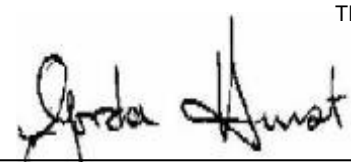  
\_\_\_\_\_  
Gordon Hurst  
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## **2. REFERENCES AND MEASUREMENT UNCERTAINTY**

### **2.1. Normative References**

<b>Ref.</b>	<b>Publication</b>	<b>Year</b>	<b>Title</b>
(i)	FCC 47 CFR Part 15.407	2014	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	FCC OET KDB 662911	4 <sup>th</sup> April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
(iv)	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(v)	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(vi)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vii)	CISPR 22/ EN 55022	2008/ 2010	Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement
(viii)	M 3003	Edition 3 Nov 2012	Expression of Uncertainty and Confidence in Measurements
(ix)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(x)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(xi)	A2LA	April 2014	Requirements when making references to A2LA Accredited Status.
(xii)	KDB 789033	April 2014	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 11 of 83

---

## **2.2. Test and Uncertainty Procedures**

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 12 of 83

### 3. PRODUCT DETAILS AND TEST CONFIGURATIONS

#### 3.1. Technical Details

Details	Description
Purpose:	Test of the Samsung WEA403i in the frequency range 5,250 - 5,350 and 5,470 – 5,725 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Samsung Electronics Co., Ltd 129 Samsung-ro, Yeongtong-gu Suwon-si, Gyeonggi-do, 443-742, Republic of Korea
Manufacturer:	SAMSUNG Electronics Co., Ltd. #244, 1 gongdan-ro, Gumi-si, Gyeongsangbuk-do, Korea
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court, Pleasanton, California 94566 USA
Test report reference number:	HCTA05-U2 Rev B
Date EUT received:	10 <sup>th</sup> May 2014
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	15th - 20th May 2014
No of Units Tested:	One
Type of Equipment:	802.11a/b/g/n/ac Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration + 3x3 Monitoring Ports
Applicants Trade Name:	Samsung Electronics Co. Ltd
Model(s):	WEA403i
Location for use:	Indoor only
Declared Frequency Range(s):	5,250 – 5,350 MHz and 5470 – 5725 MHz
Hardware Rev	PCS01G
Software Rev	2.2.0.D
Type of Modulation:	Per 802.11 – OFDM
EUT Modes of Operation:	802.11a/n/ac
Declared Nominal Output Power: (Average Power)	802.11a/n/ac: +21 dBm
Transmit/Receive Operation:	Time Division Duplex
Rated Input Voltage and Current:	POE 48 Vdc 0.75 A 48 Vdc 0.75 A
Operating Temperature Range:	Declared range 0° to +40°C
ITU Emission Designator:	802.11a 16M5D1D 802.11n HT-20 17M7D1D 802.11n HT-40 36M4D1D 802.11ac-80 76M0D1D
Equipment Dimensions:	200 mm (Diameter) x 40mm (Height)
Weight:	0.65 kg
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 13 of 83

---

### **3.2. Scope of Test Program**

The scope of the test program was to test the Samsung WEA403i 802.11a/b/g/n/ac Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration + 2x2 Monitoring Ports in the frequency range 5,250 - 5,350 MHz and 5,470 – 5,725 MHz for compliance against the DFS requirements of FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

U-NII devices operating in the 5,250 – 5,350 MHz and 5,470 - 5,725 MHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

The Samsung WEA403i product operates as a Master device with full radar detection and Dynamic Frequency Selection (DFS) capability.

The Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

The EUT will not operate in the weather radar band 5600 – 5650 MHz.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Samsung WEA403i  
802.11 a/b/g/n/ac Wireless Access Point



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Samsung WEA403i  
802.11 a/b/g/n/ac Wireless Access Point (Rear)



---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 16 of 83

### 3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	Wireless LAN Access Point	Samsung Electronics Co, Ltd	WEA403i	#14
Support	Laptop PC	IBM	Thinkpad	None

### 3.4. Antenna Details

#### Integral Antennas – Service Ports

Model	Type	Gain dBi	Freq. Band MHz
PIFA	Omni	5.6	4900 - 5875

#### Integral Antennas – Monitor Ports

Model	Type	Gain dBi	Freq. Band MHz
PIFA	Omni	6.22	4900 - 5875

### 3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 10/100/1000 Ethernet (POE) x1
2. 10/100/1000 Ethernet X1
3. Console - Serial maintenance terminal
4. 48 Vdc, jack connector

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 17 of 83

---

### **3.6. Equipment Modifications**

The following modifications were required to bring the equipment into compliance:

1. NONE

### **3.7. Deviations from the Test Standard**

The following deviations from the test standard were required in order to complete the test program:

1. NONE

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



#### 4. TEST SUMMARY

##### Dynamic Frequency Selection (DFS)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407(h)(2)** and **FCC Memorandum Opinion and Order FCC 06-96 (Compliance Measurement procedures for Unlicensed National Information Infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection)**.

##### Tests performed on Master Device

Section	Test Items	Description	Condition	Result	Test Report Section
	DFS	Dynamic Frequency Selection	Conducted	Complies	5.2 and 5.3
7.8.1	Detection Bandwidth	UNII Detection Bandwidth	Conducted		
7.8.2.1	Performance Requirements Check	Initial Channel Availability Check Time	Conducted		
7.8.2.2		Radar Burst at the Beginning of the Channel Availability Check Time	Conducted		
7.8.2.3		Radar Burst at the End of the Channel Availability Check Time	Conducted		
7.8.3	In-Service Monitoring	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period	Conducted		
7.8.4	Radar Detection	Statistical Performance Check	Conducted		

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



## 5. TEST RESULTS

### 5.1.1. Dynamic Frequency Selection (DFS)

FCC, Part 15 Subpart C §15.407(h)  
FCC 06-96 Memorandum Opinion and Order  
Industry Canada RSS-210 A9.4

### 5.1.2. Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna

### 5.1.3. DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 80% of the 99% power bandwidth See Note 3.

Note 1: The instant that the *Channel Move Time* and the *Channel Closing Transmission Time* begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the *Burst*.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar *Burst* generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate *Channel* changes (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90%. Measurements are performed with no data traffic.



### 5.1.3.1. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the short pulse radar types 2 through 4. For short pulse radar type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for short pulse radar types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of short pulse radar types 1-4.

#### Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 21 of 83

---

Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 *Bursts* in the 12 second period, with the number of *Bursts* being randomly chosen. This number is *Burst Count*.
- 3) Each *Burst* consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each *Burst* within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a *Burst* will have the same pulse width. Pulses in different *Bursts* may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a *Burst* will have the same chirp width. Pulses in different *Bursts* may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a *Burst*, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a *Burst*, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to *Burst\_Count*. Each interval is of length  $(12,000,000 / \textit{Burst\_Count})$  microseconds. Each interval contains one *Burst*. The start time for the *Burst*, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \textit{Burst\_Count}) - (\textit{Total Burst Length}) + (\textit{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each *Burst* is chosen independently.


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

**A representative example of a Long Pulse radar test waveform:**

- 1) The total test signal length is 12 seconds.
- 2) 8 *Bursts* are randomly generated for the *Burst\_Count*.
- 3) *Burst 1* has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) *Bursts 2* through 8 are generated using steps 3 – 5.
- 7) Each *Burst* is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, *Burst 1* is randomly generated (1 to 1,500,000 minus the total *Burst 1* length + 1 random PRI interval) at the 325,001 microsecond step. *Bursts 2* through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. *Burst 2* falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical representation of the Long Pulse radar Test Waveform.**

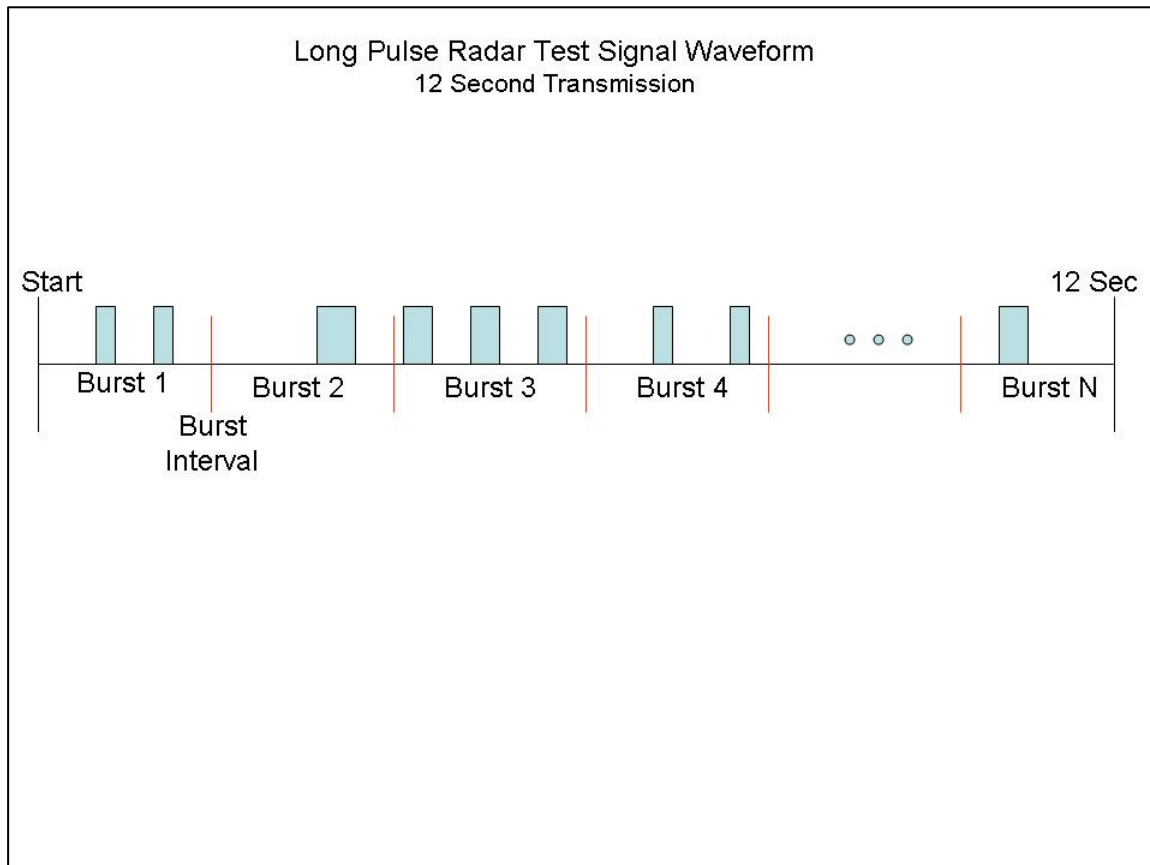

### 5.1.3.2. Frequency Hopping Radar Test Waveform

**Frequency Hopping Radar Test Waveform**


Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	9	.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

### 5.1.3.3. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted Radar Waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) mode at the frequency of the Radar Waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm (Ref Section 5.1). The 30dB amplifier gain was entered as an amplitude offset on the spectrum analyzer.

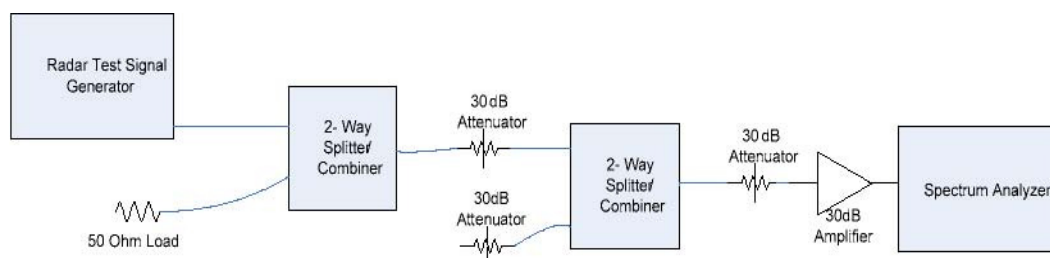


**Conducted Calibration Setup**

**5.1.3.4. Test Set Up:**  
**Block Diagram(s) of Test Setup**

Setup for Conducted Measurements where the EUT is the Master with injection of Radar Test Waveforms at the Master.

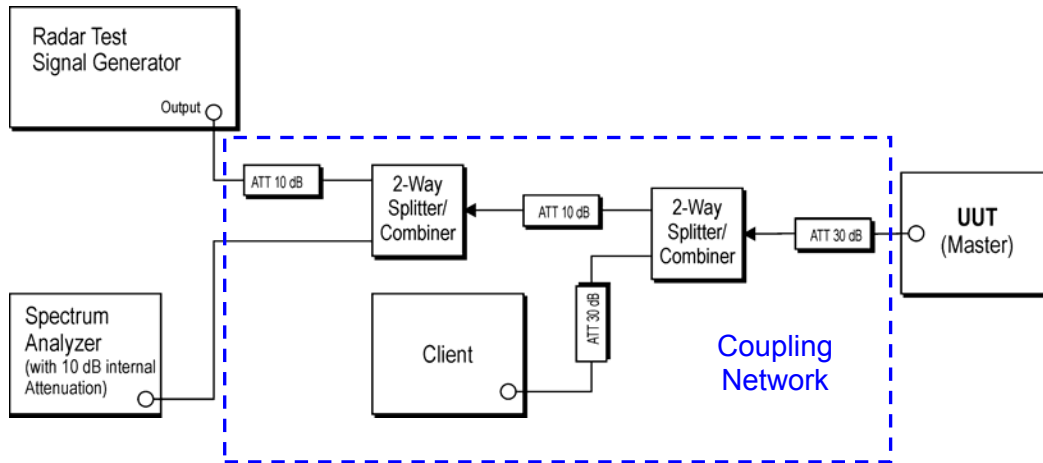

**Support Equipment Configuration**

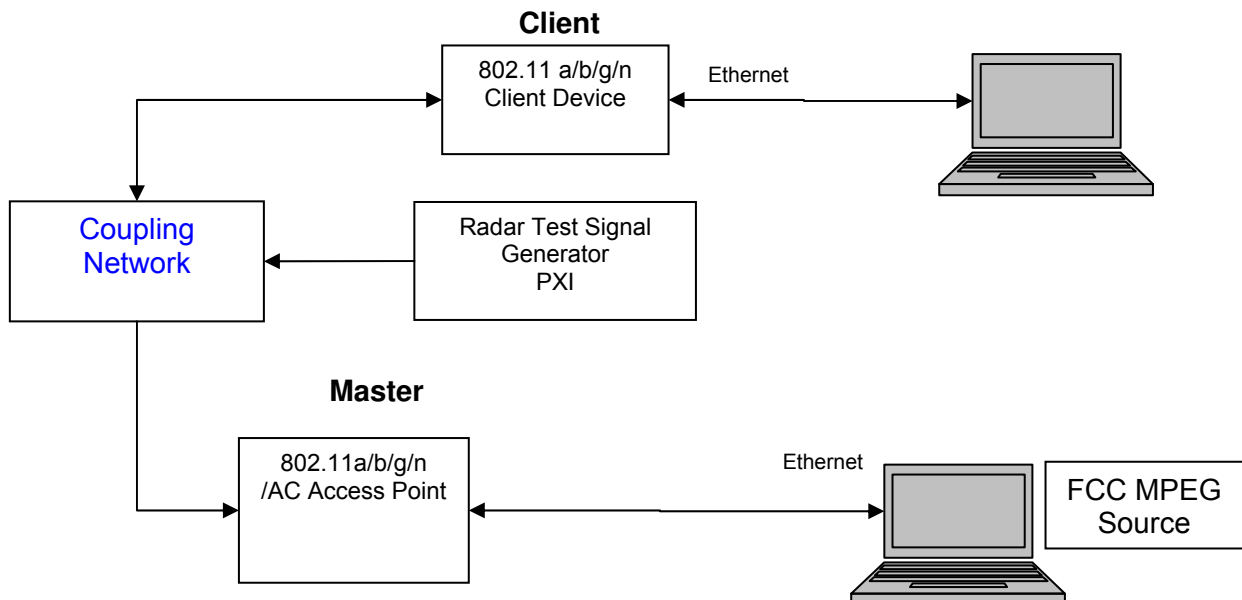

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



The EUT is a Master Device with radar detection.

**Applicability of DFS Requirements Prior to Use of a Channel**  
**(Ref Table 1 of FCC 06-96)**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>Non-Occupancy Period</i>	Yes	Not required	Yes
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Availability Check Time</i>	Yes	Not required	Not required
<i>Uniform Spreading</i>	Yes	Not required	Not required
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

**Applicability of DFS requirements during normal operation**  
**(Ref Table 2 of FCC 06-96)**

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required	Yes
<i>Channel Closing Transmission Time</i>	Yes	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required	Yes

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 26 of 83

---

## 5.2. WEA403i: Ports A1, A2, A3 Test Results

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm. The EUT was tested in HT-40 mode.

Declared minimum antenna gain 5.6 dBi. ;

Radar receive signal level = -64 dBm + minimum antenna gain

$$= -64 + 5.6$$

Radar receive signal level = -58.4 dBm

### Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57%    Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

### Operational Details - Dynamic Frequency Selection (DFS)

Operational Modes: 802.11a, 802.11n HT40, and 802.11ac 80

Data Rates: 6mpbs 802.11a/ 0MCS 802.11n/ac

*\*Note\* video pixilation was observed during the video stream at these rates, however they were very minor and only occurred a few times but the video maintained 30 frames per second.*

### Video Streaming Method - Dynamic Frequency Selection (DFS)

Using the VideoLan player a video stream was setup on the master laptop with the destination being the client laptop. The video profile chosen for the video stream is “MPEG-2 + MPGA (TS)”. On the client laptop the VideoLan player was setup to listen to an incoming video stream from the master device.

The requisite MPEG video file (“TestFile.mpg” available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is used during this video stream.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 27 of 83

---

### 5.2.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz (802.11a), 5510MHz (HT40), and 5530 (AC80).

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz (802.11a) , 5,510 MHz (802.11n HT40), and 5,530 MHz (802.11ac 80 at a level of -62 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power Table of results are continued on the next page.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



EUT Frequency= 5,500 MHz 802.11a (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-20											%
-19											%
-18											%
-17											%
-16											%
-15											%
-14											%
-13											%
-12											%
-11											%
-10											%
-9	o	o									<90%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	o	o									<90%
+10											%
+11											%
+12											%
+13											%
+14											%
+15											%
+16											%
+17											%
Detection Bandwidth = F <sub>H</sub> -F <sub>L</sub> = 5508 - 5492 = 16 MHz											
EUT 99% Bandwidth = 16.53 MHz (ref. bandwidth channel 5500 MHz)											
16.53 MHz *80% = 13.224 MHz											

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 29 of 83

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-21											%
-20											%
-19	o	o									<90%
-18	v	v	v	v	v	v	v	v	v	v	100%
-17	v	v	v	v	v	v	v	v	v	v	100%
-16	v	v	v	v	v	v	v	v	v	v	100%
-15	v	v	v	v	v	v	v	v	v	v	100%
-14	v	v	v	v	v	v	v	v	v	v	100%
-13	v	v	v	v	v	v	v	v	v	v	100%
-12	v	v	v	v	v	v	v	v	v	v	100%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 30 of 83

EUT Frequency= 5,510 MHz 802.11n HT40 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	v	v	v	v	v	v	v	v	v	v	100%
+13	v	v	v	v	v	v	v	v	v	v	100%
+14	v	v	v	v	v	v	v	v	v	v	100%
+15	v	v	v	v	v	v	v	v	v	v	100%
+16	v	v	v	v	v	v	v	v	v	v	100%
+17	v	v	v	v	v	v	v	v	v	v	100%
+18	v	v	v	v	v	v	v	v	v	v	100%
+19	o	o									<90%
+20											%
+21											%
Detection Bandwidth = F <sub>H</sub> -F <sub>L</sub> = 5528-5492 = 36 MHz											
EUT 99% Bandwidth = 36.40 MHz (ref. bandwidth channel 5510 MHz)											
36.40 MHz *80% = 29.12 MHz											

For each frequency step the minimum percentage detection is 90%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 31 of 83

Center Frequency= 5,530 MHz , 802.11ac ,HT80 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-41											%
-40											%
-39	o	o									<90%
-38	v	v	v	v	v	v	v	v	v	v	100%
-37	v	v	v	v	v	v	v	v	v	v	100%
-36	v	v	v	v	v	v	v	v	v	v	100%
-35	v	v	v	v	v	v	v	v	v	v	100%
-34	v	v	v	v	v	v	v	v	v	v	100%
-33	v	v	v	v	v	v	v	v	v	v	100%
-32	v	v	v	v	v	v	v	v	v	v	100%
-31	v	v	v	v	v	v	v	v	v	v	100%
-30	v	v	v	v	v	v	v	v	v	v	100%
-29	v	v	v	v	v	v	v	v	v	v	100%
-28	v	v	v	v	v	v	v	v	v	v	100%
-27	v	v	v	v	v	v	v	v	v	v	100%
-26	v	v	v	v	v	v	v	v	v	v	100%
-25	v	v	v	v	v	v	v	v	v	v	100%
-24	v	v	v	v	v	v	v	v	v	v	100%
-23	v	v	v	v	v	v	v	v	v	v	100%
-22	v	v	v	v	v	v	v	v	v	v	100%
-21	v	v	v	v	v	v	v	v	v	v	100%
-20	v	v	v	v	v	v	v	v	v	v	100%
-19	v	v	v	v	v	v	v	v	v	v	100%
-18	v	v	v	v	v	v	v	v	v	v	100%
-17	v	v	v	v	v	v	v	v	v	v	100%
-16	v	v	v	v	v	v	v	v	v	v	100%
-15	v	v	v	v	v	v	v	v	v	v	100%
-14	v	v	v	v	v	v	v	v	v	v	100%
-13	v	v	v	v	v	v	v	v	v	v	100%
-12	v	v	v	v	v	v	v	v	v	v	100%
-11	v	v	v	v	v	v	v	v	v	v	100%
-10	v	v	v	v	v	v	v	v	v	v	100%
-9	v	v	v	v	v	v	v	v	v	v	100%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 32 of 83

Center Frequency= 5,530 MHz, 802.11ac , HT80 (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	v	v	v	v	v	v	v	v	v	v	100%
+10	v	v	v	v	v	v	v	v	v	v	100%
+11	v	v	v	v	v	v	v	v	v	v	100%
+12	v	v	v	v	v	v	v	v	v	v	100%
+13	v	v	v	v	v	v	v	v	v	v	100%
+14	v	v	v	v	v	v	v	v	v	v	100%
+15	v	v	v	v	v	v	v	v	v	v	100%
+16	v	v	v	v	v	v	v	v	v	v	100%
+17	v	v	v	v	v	v	v	v	v	v	100%
+18	v	v	v	v	v	v	v	v	v	v	100%
+19	v	v	v	v	v	v	v	v	v	v	100%
+20	v	v	v	v	v	v	v	v	v	v	100%
+21	v	v	v	v	v	v	v	v	v	v	100%
+22	v	v	v	v	v	v	v	v	v	v	100%
+23	v	v	v	v	v	v	v	v	v	v	100%
+24	v	v	v	v	v	v	v	v	v	v	100%
+25	v	v	v	v	v	v	v	v	v	v	100%
+26	v	v	v	v	v	v	v	v	v	v	100%
+27	v	v	v	v	v	v	v	v	v	v	100%
+28	v	v	v	v	v	v	v	v	v	v	100%
+29	v	v	v	v	v	v	v	v	v	v	100%
+30	v	v	v	v	v	v	v	v	v	v	100%
+31	v	v	v	v	v	v	v	v	v	v	100%
+32	v	v	v	v	v	v	v	v	v	v	100%
+33	v	v	v	v	v	v	v	v	v	v	100%
+34	v	v	v	v	v	v	v	v	v	v	100%
+35	v	v	v	v	v	v	v	v	v	v	100%
+36	v	v	v	v	v	v	v	v	v	v	100%
+37	v	v	v	v	v	v	v	v	v	v	100%
+38	v	v	v	v	v	v	v	v	v	v	100%
+39	o	o									<90%
+40											%
Detection Bandwidth = F <sub>H</sub> -F <sub>L</sub> = 5568 - 5492 = 76 MHz											
EUT 99% Bandwidth = 75.96 MHz (ref. bandwidth channel 100 - 112 Center 5530 MHz)											
75.96 MHz *80% = 60.77 MHz											

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 33 of 83

---

### 5.2.2. Initial Channel Availability Check Time

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500MHz 802.11a and 5,510MHz 802.11n HT40. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500, 5,510, and 5530 MHz with a 260 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e.  $T_0$  (as defined within the FCC's MO&O 06-96 Normative Reference 2 ). The power-up reference  $T_0$  is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.


The Channel Availability Check Time commences at instant  $T_0$  and will end no sooner than  $T_0 + 60$  seconds.



EUT power up and Initial Channel Availability Check Time  
5,500MHz 802.11a Power On = 88.056 Seconds




Marker 1 [T1] RBW 1 MHz RF Att 10 dB  
Ref Lvl -106.11 dBm VBW 1 MHz  
-36 dBm 28.056112 s SWT 260 s Unit dBm

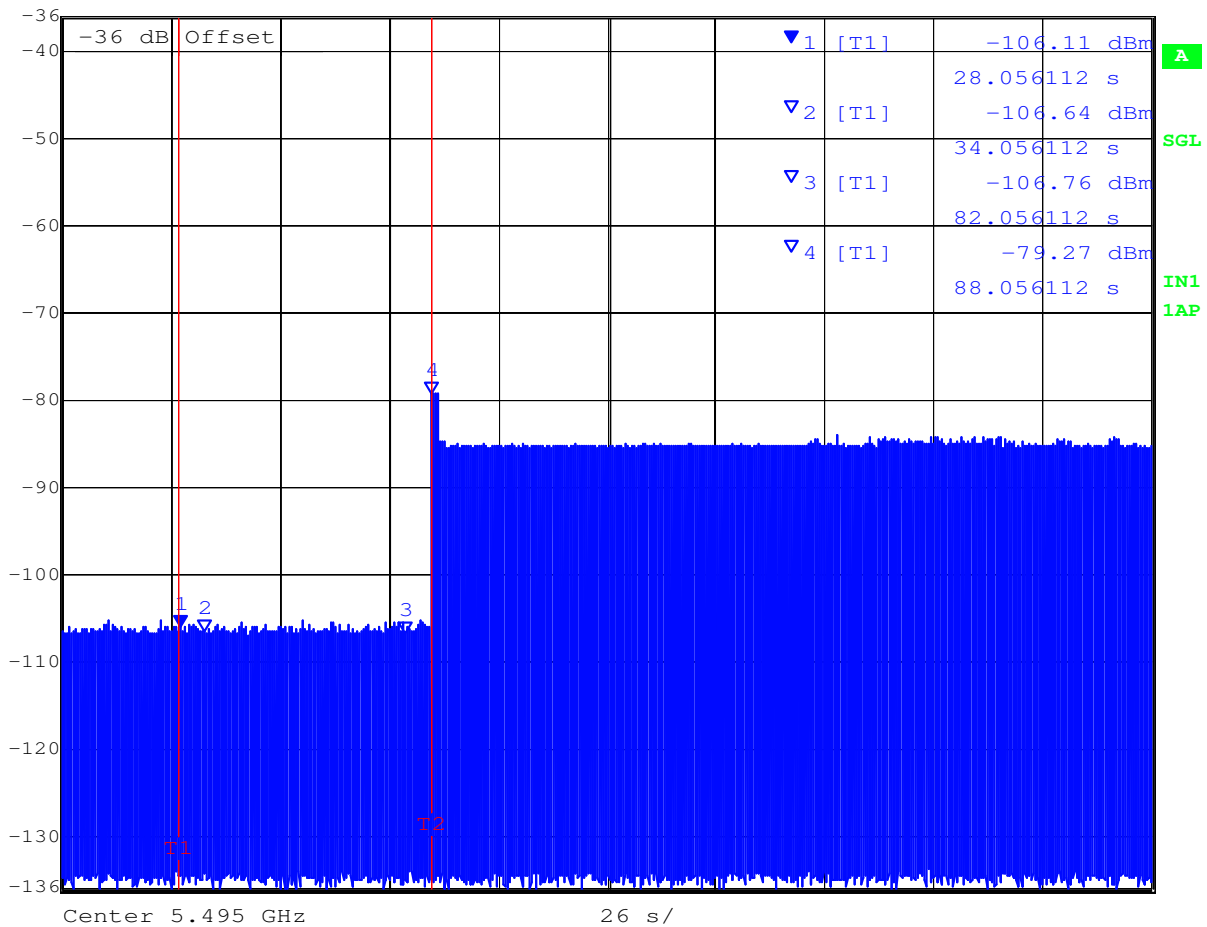

Date: 13.MAY.2014 18:22:34

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


**EUT power up and Initial Channel Availability Check Time**  
**5,510MHz 802.11n HT40 Power On = 86.49 Seconds**

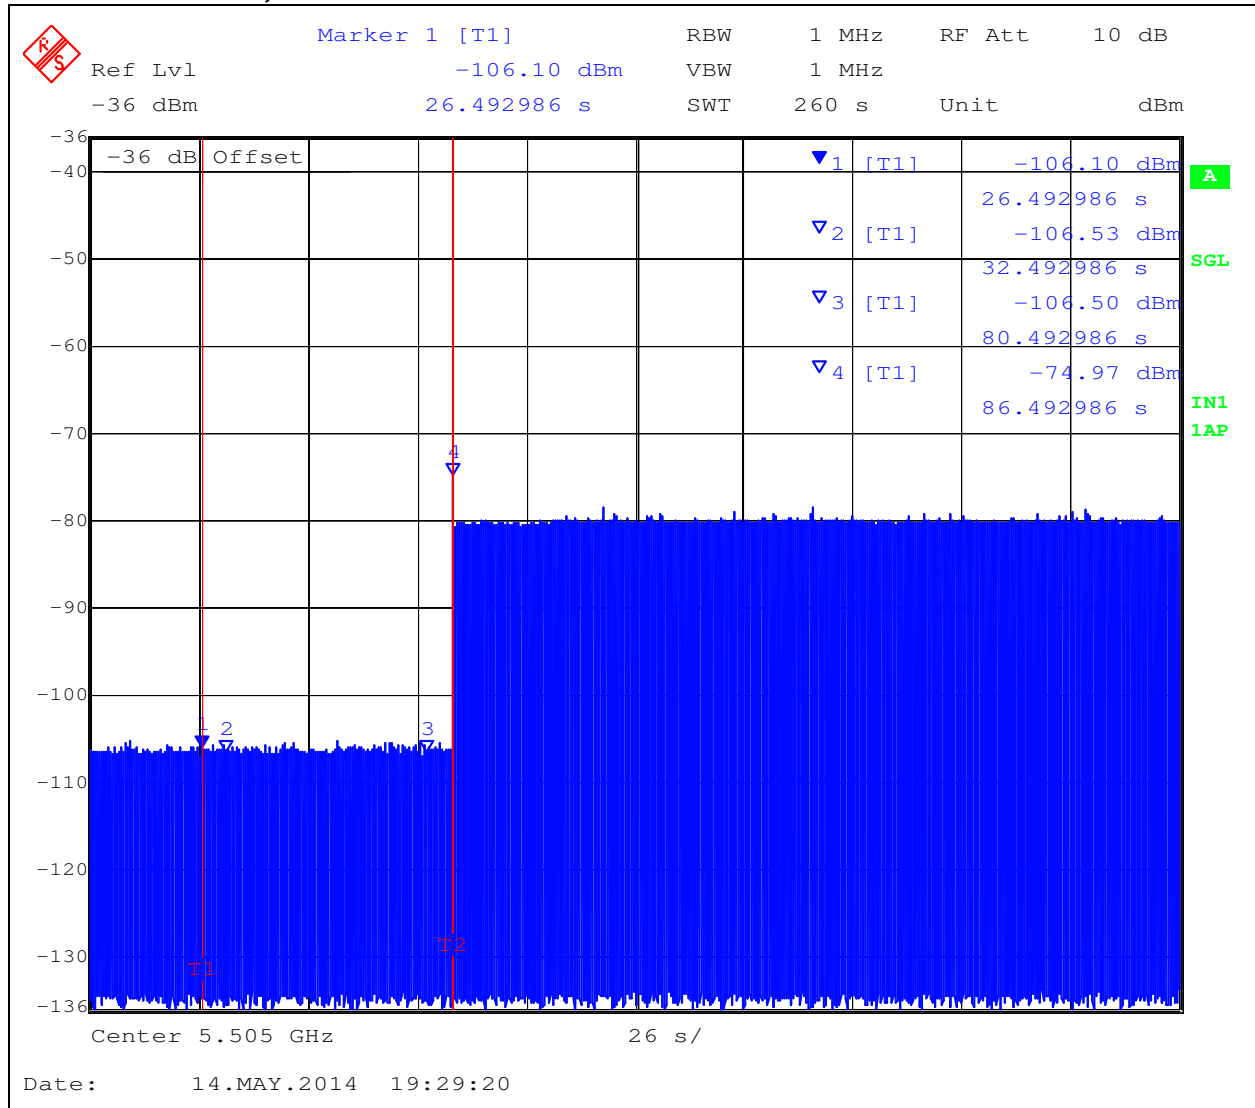

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



EUT power up and Initial Channel Availability Check Time  
5,530MHz 802.11ac 80 Power On = 80.24Second

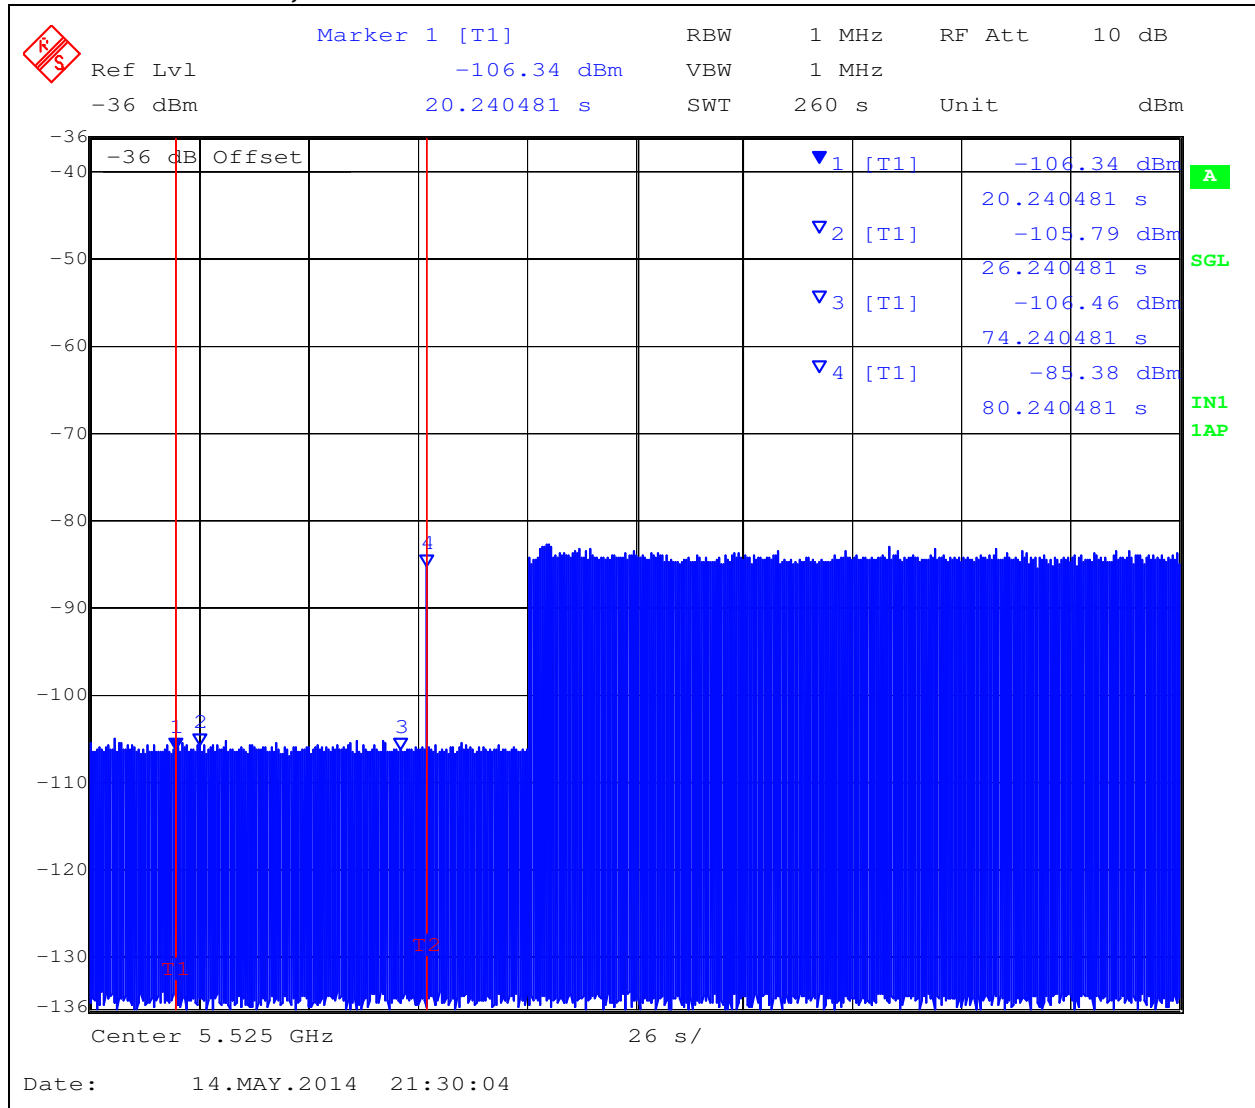

Initial EUT transmission observed at 80.24 Seconds.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 37 of 83

---

### **5.2.3. Radar Burst at the Beginning of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-62 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.

A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at  $T_0$  (first red marker line on the following plot).


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a & 5,510MHz, 802.11n HT40, 802.11ac 80, and will continue for 2.5 minutes after the radar burst has been generated.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




**Channel Availability Check Time at the start T0 + 6 seconds Check Time  
5,500MHz 802.11a**

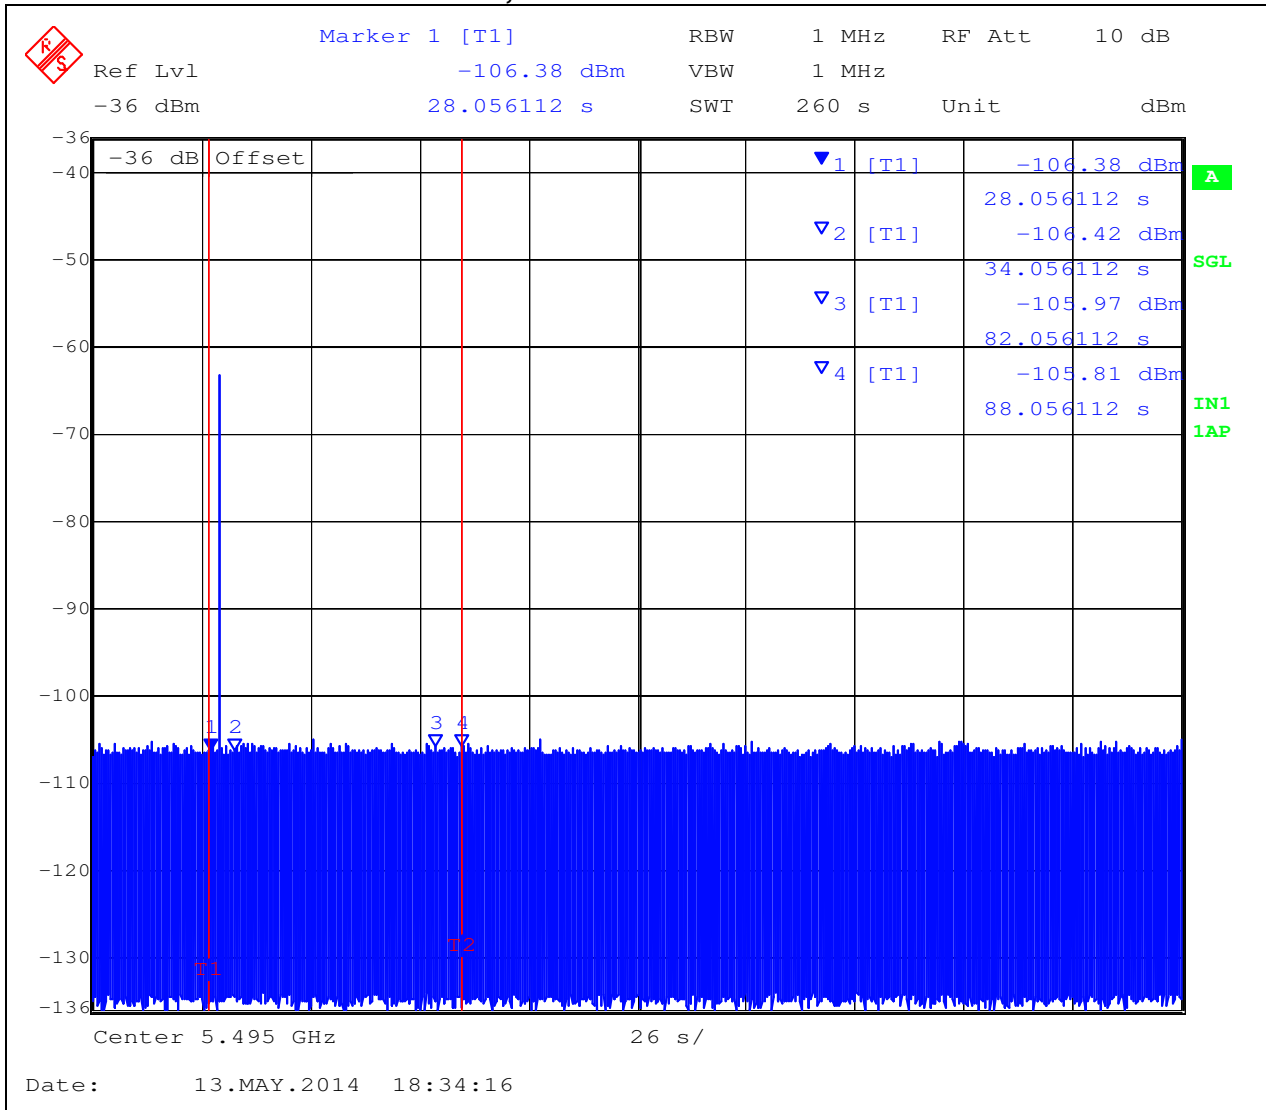

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Channel Availability Check Time at the start T0 + 6 seconds Check Time  
5,510MHz 802.11n HT40

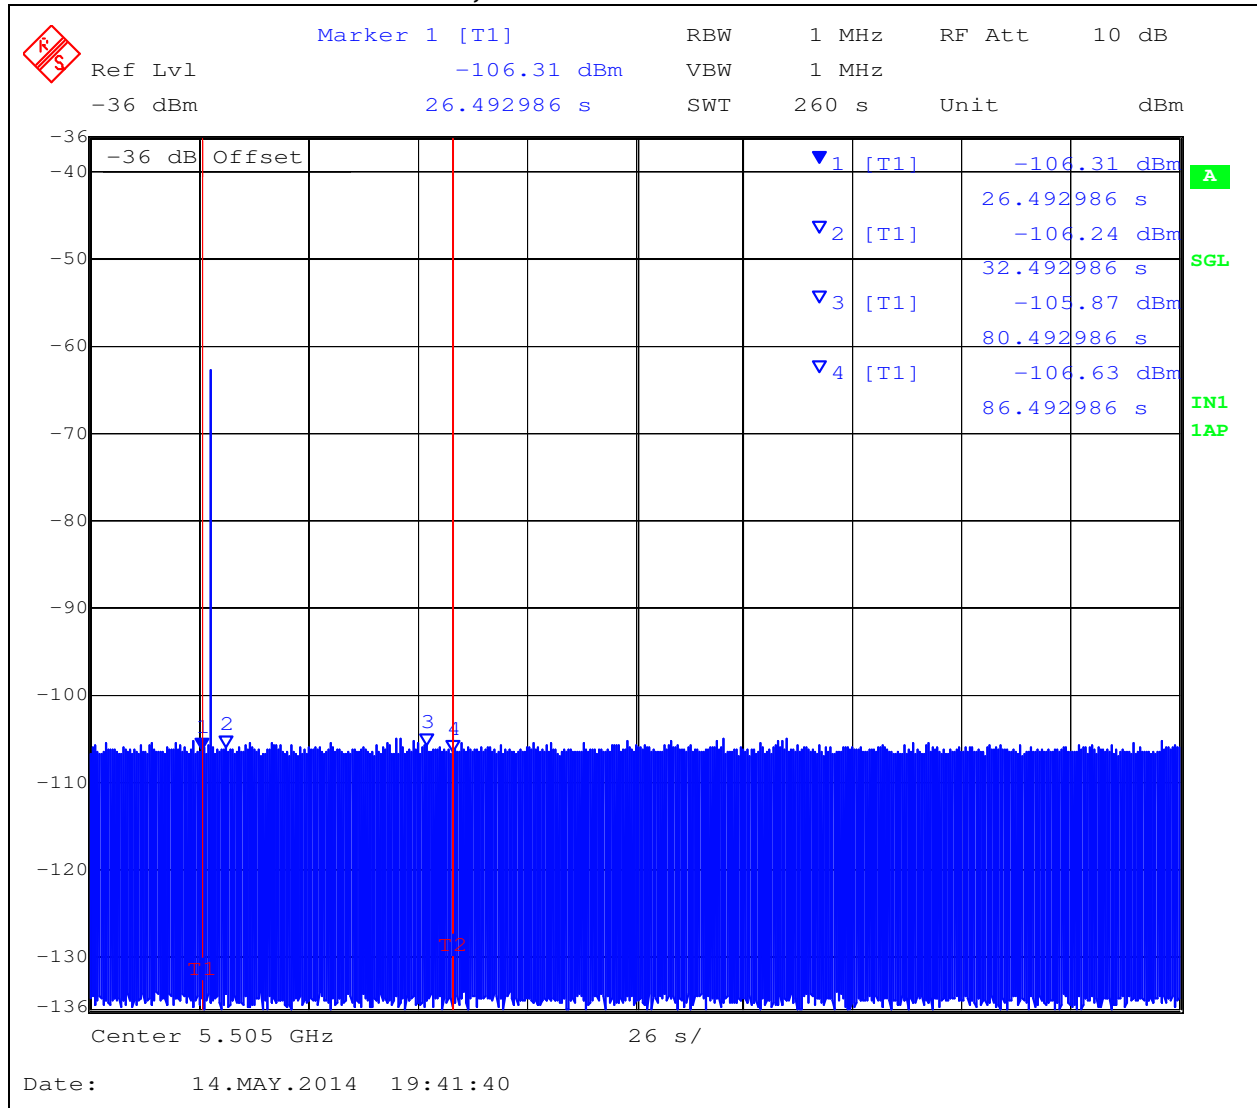

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Channel Availability Check Time at the start T0 + 6 seconds Check Time  
5,530MHz 802.11ac 80

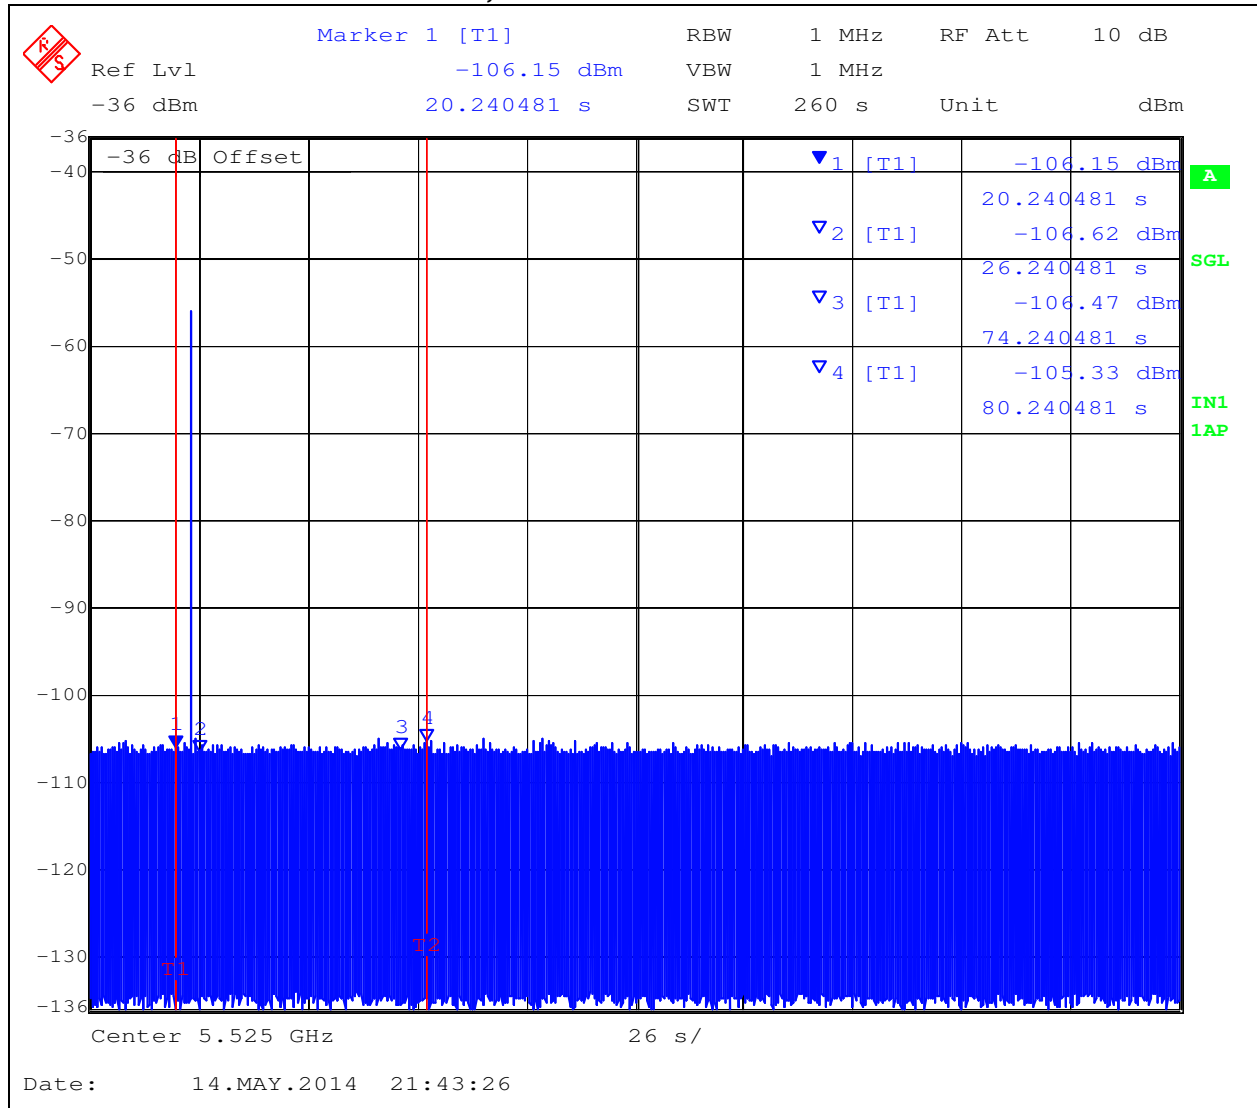

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 41 of 83

---

#### **5.2.4. Radar Burst at the End of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.

A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at  $T_0 + 54$  seconds. The window will commence at marker 2 and end at the red frequency line  $T_2$ .


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, 802.11ac 80 will continue for 2.5 minutes after the radar burst has been generated.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Channel Availability Check Time at T0 + 54 seconds Check Time  
5,500MHz 802.11a

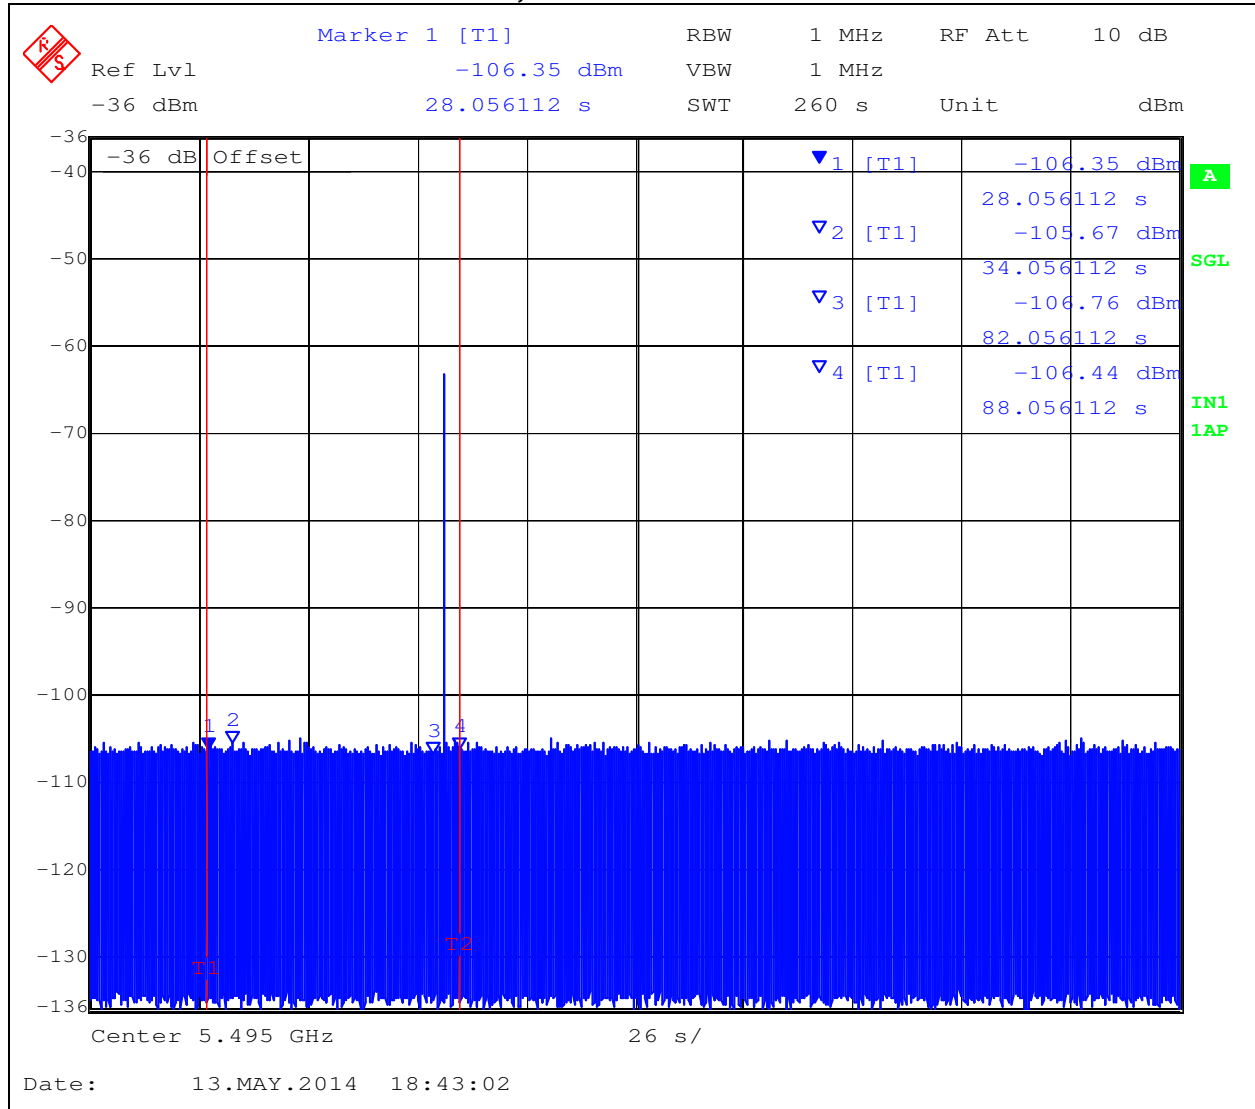

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Channel Availability Check Time at T0 + 54 seconds Check Time  
5,510MHz 802.11n HT40

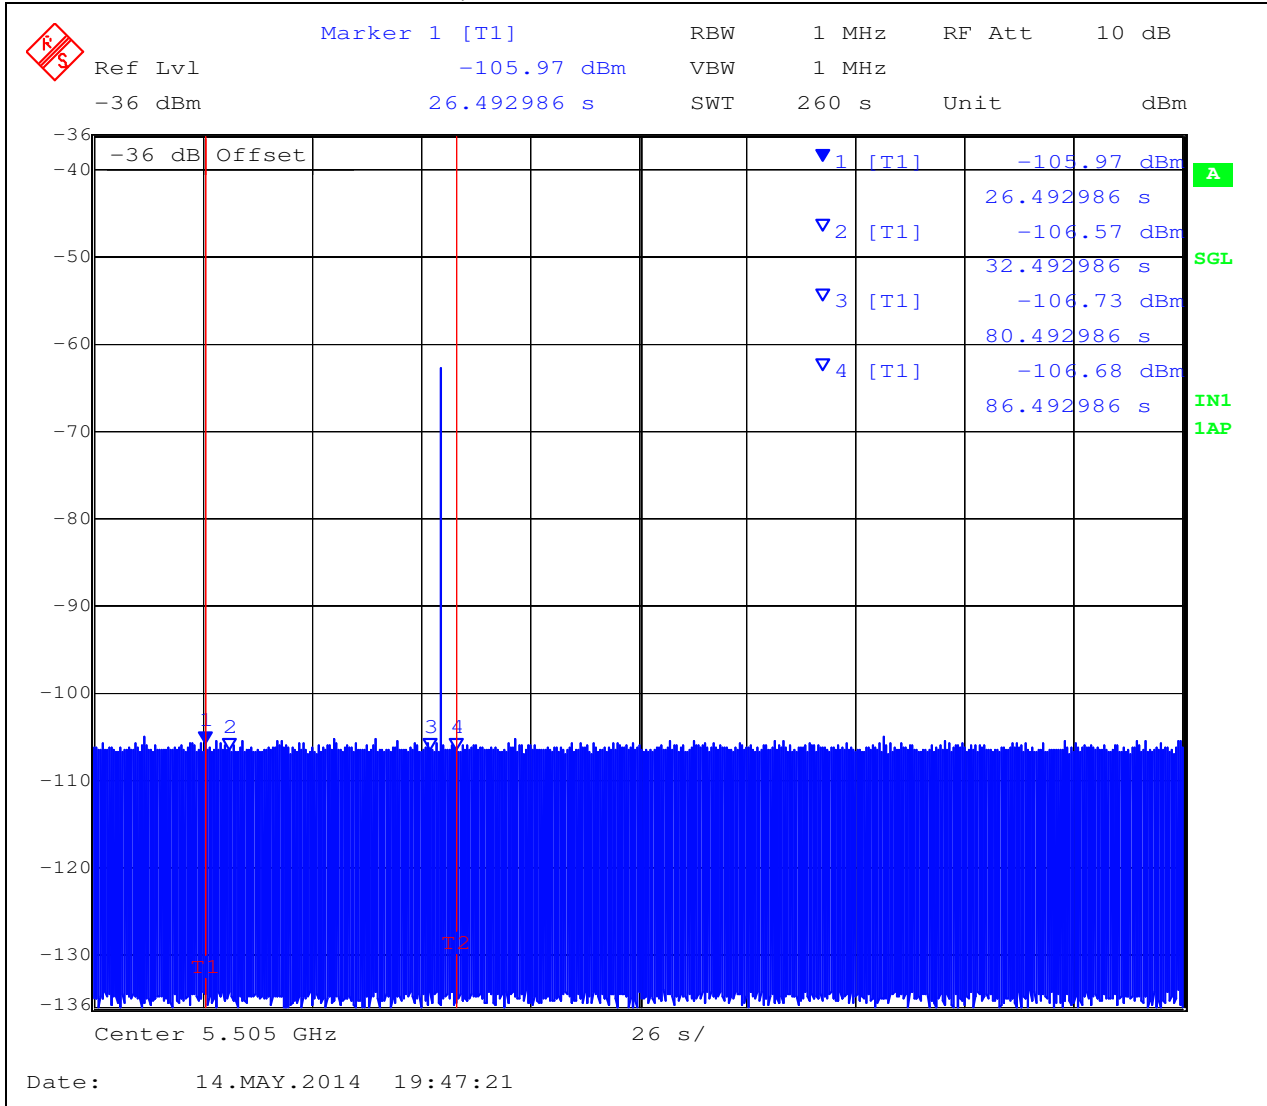

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Channel Availability Check Time at T0 + 54 seconds Check Time  
5,530MHz 802.11ac 80

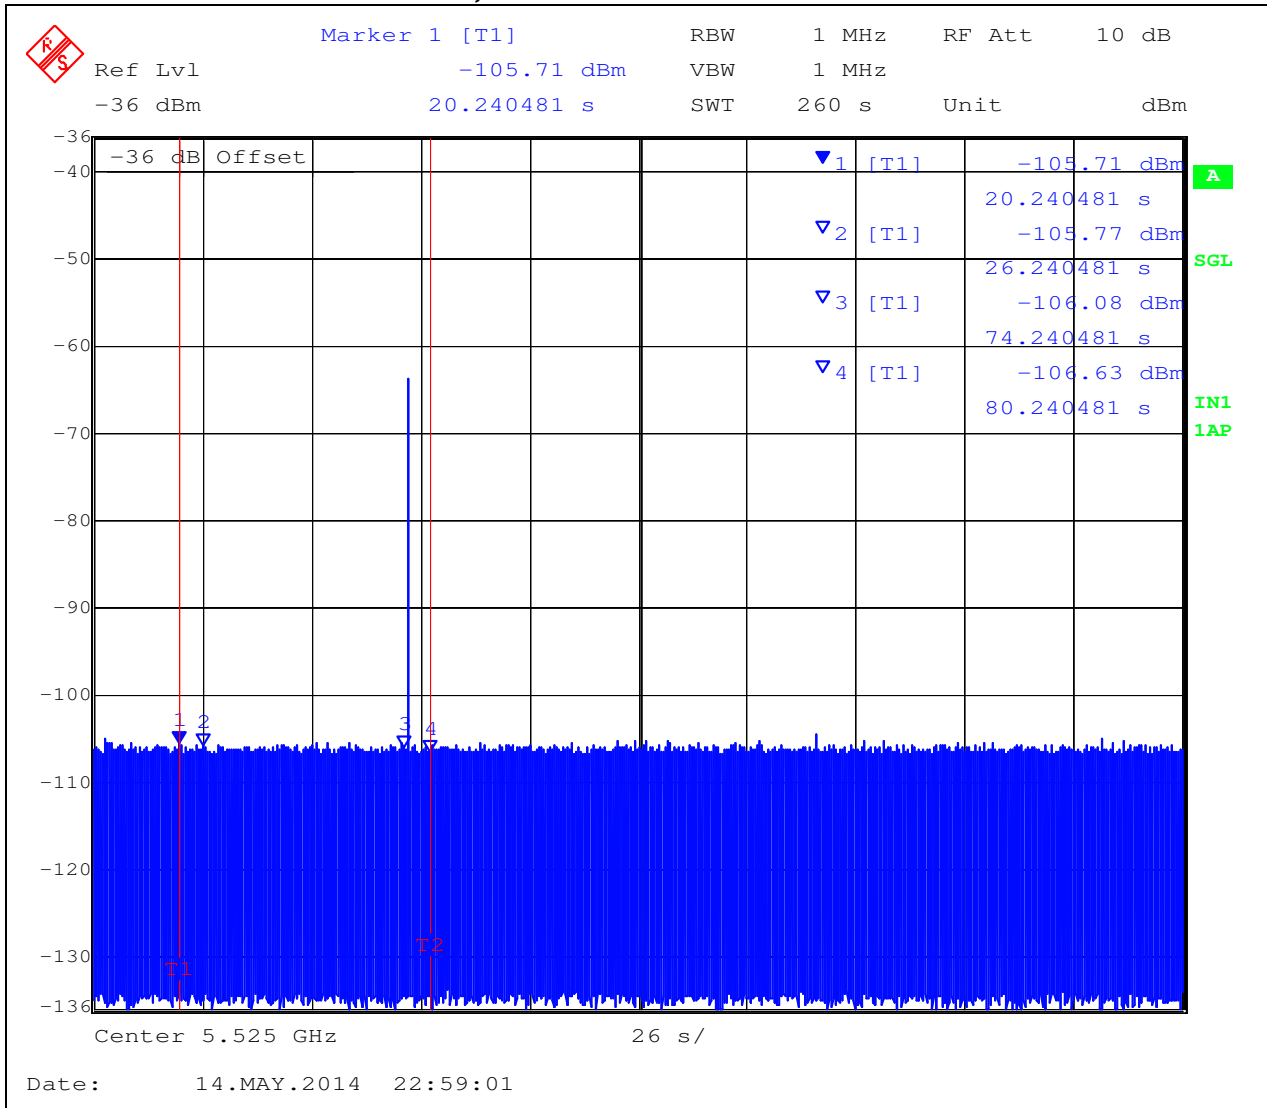

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 45 of 83

---

### **5.2.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period**

#### **FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

#### **Channel Closing Transmission Time and Channel Mode Time - Measurement**

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events.

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured. The start of the Type 1 radar waveform is indicated in the test result plot as "Start Waveform", the end of the waveform is indicated as "End waveform".

Channel Closing Transmission Time, and the Channel Move Time start immediately after the last radar pulse is transmitted.

The aggregate of all pulses seen after the end of the radar injection are measured as the "Channel Closing Transmission time".

The last EUT activity after the end of the radar pulse is identified and used to determine the "Channel Mode Time"




Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 46 of 83

5,500 MHz (802.11a)

Channel Closing Transmission Time = 6.795 mSecs (limit 260 mSecs)

Channel Move Time = 0.111 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar  
Captured by the Test System - 0 to 12 seconds**

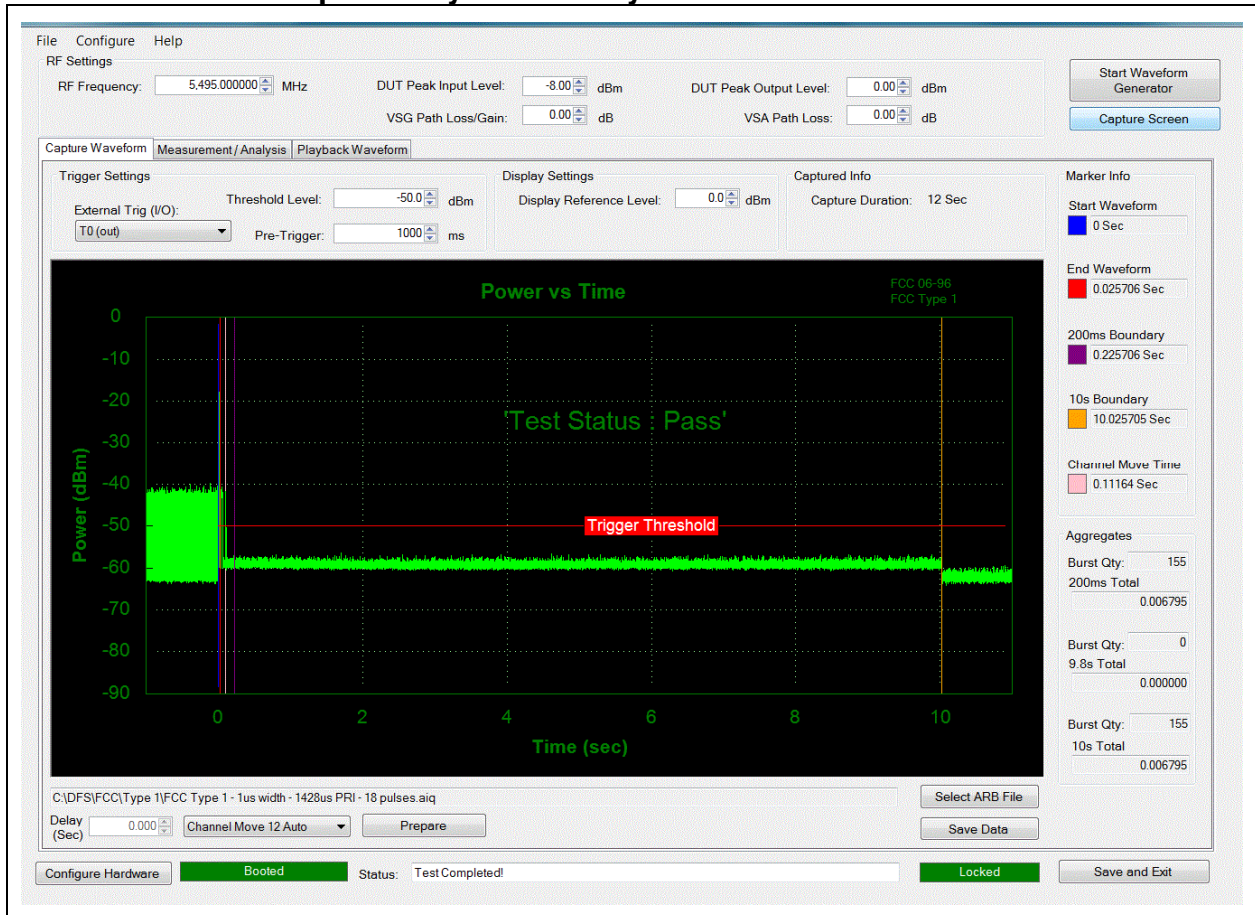

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 47 of 83

5,510 MHz (802.11n HT40)

Channel Closing Transmission Time = 10.565 mSecs (limit 260 mSecs)

Channel Move Time = 0.237 Secs (limit 10 Secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 48 of 83

5,530 MHz (802.11ac 80)

Channel Closing Transmission Time = 11.387 mSecs (limit 260 mSecs)

Channel Move Time = 0.166 Secs (limit 10 Secs)

### Channel Move Time, Channel Closing Transmission Time for Type 1 Radar Captured by the Test System - 0 to 12 seconds

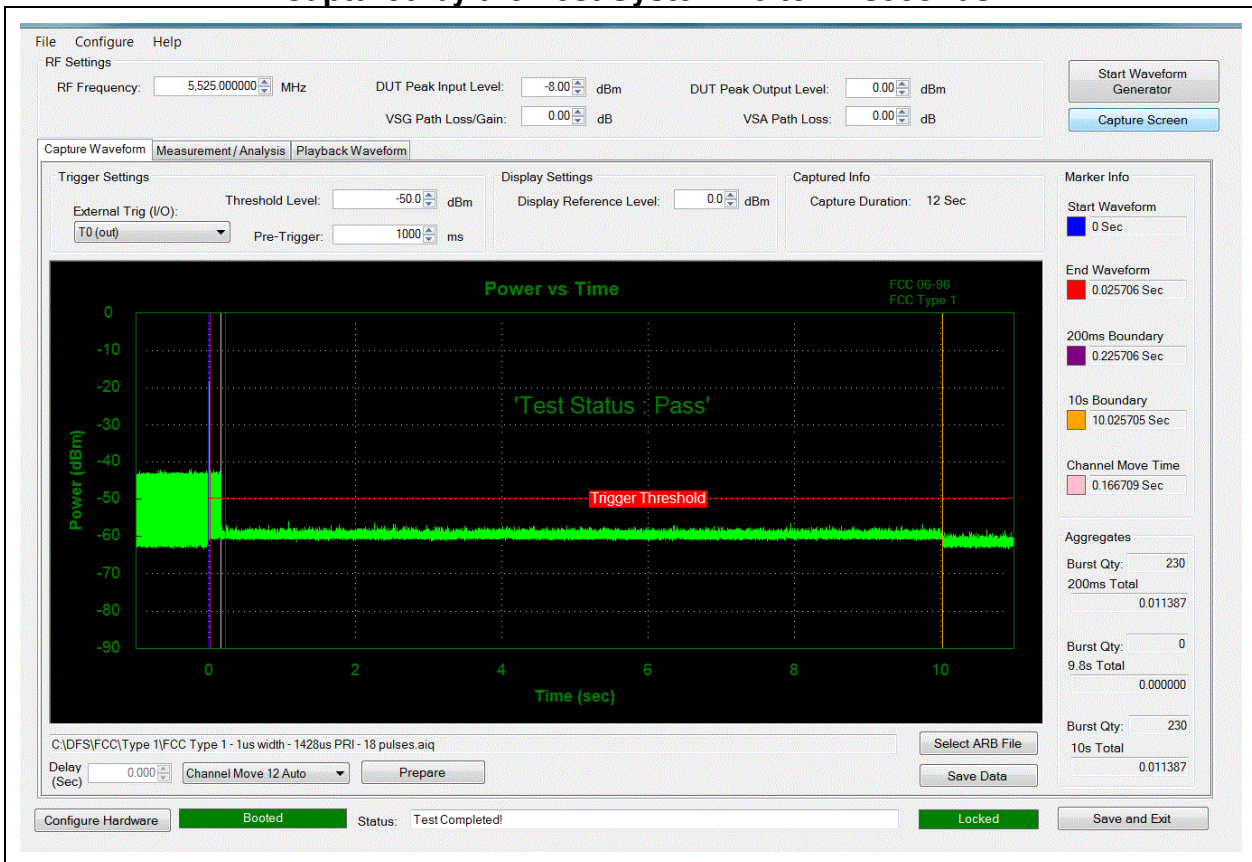

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.









**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 52 of 83

---

#### **5.2.6. Statistical Performance Check**

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, and 802.11ac 80.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

Total # of detections ÷ Total # of Trials × 100 = Probability of Detection

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,500MHz 802.11a (Offset 5MHz)**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	0
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	0	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	0	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	√	√
19	√	√	√	√	√	√
20	√	√	√	√	0	√
21	√	√	√	√	√	0
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	0
29	√	√	√	√	√	√
30	√	√	√	√	0	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	100% (>60%)	100% (>60%)	86.6% (>80%)	90% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 100\% + 100\%) / 4 = 100\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,510MHz 802.11n HT-40 (Offset 5MHz)**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	0	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	√	√
12	√	√	√	√	√	√
13	√	√	√	√	0	√
14	√	√	√	√	√	√
15	√	√	√	√	0	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	0	√
19	√	√	√	√	√	√
20	√	√	√	√	0	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	0
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	100% (>60%)	100% (>60%)	83.3% (>80%)	96.6% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 100\% + 100\%) / 4 = 100\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,530MHz 802.11ac ac-80 (Offset 5MHz)**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	0	√	0	√
5	√	√	√	√	√	0
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	√
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	0	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	0	√
19	√	√	√	√	√	√
20	√	√	√	√	0	√
21	√	√	√	√	√	√
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	0	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	√	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	96.6% (>60%)	100% (>60%)	83.3% (>80%)	96.6% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 96.6\% + 100\%) / 4 = 99.15\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 56 of 83

---

**Measurement Uncertainty Time/Power**

Measurement uncertainty	
- Time	4%
- Power	1.33dB

**Traceability**


Test Equipment Used
0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329

---


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




### 5.2.7. Weather Radar Band Edge Plots

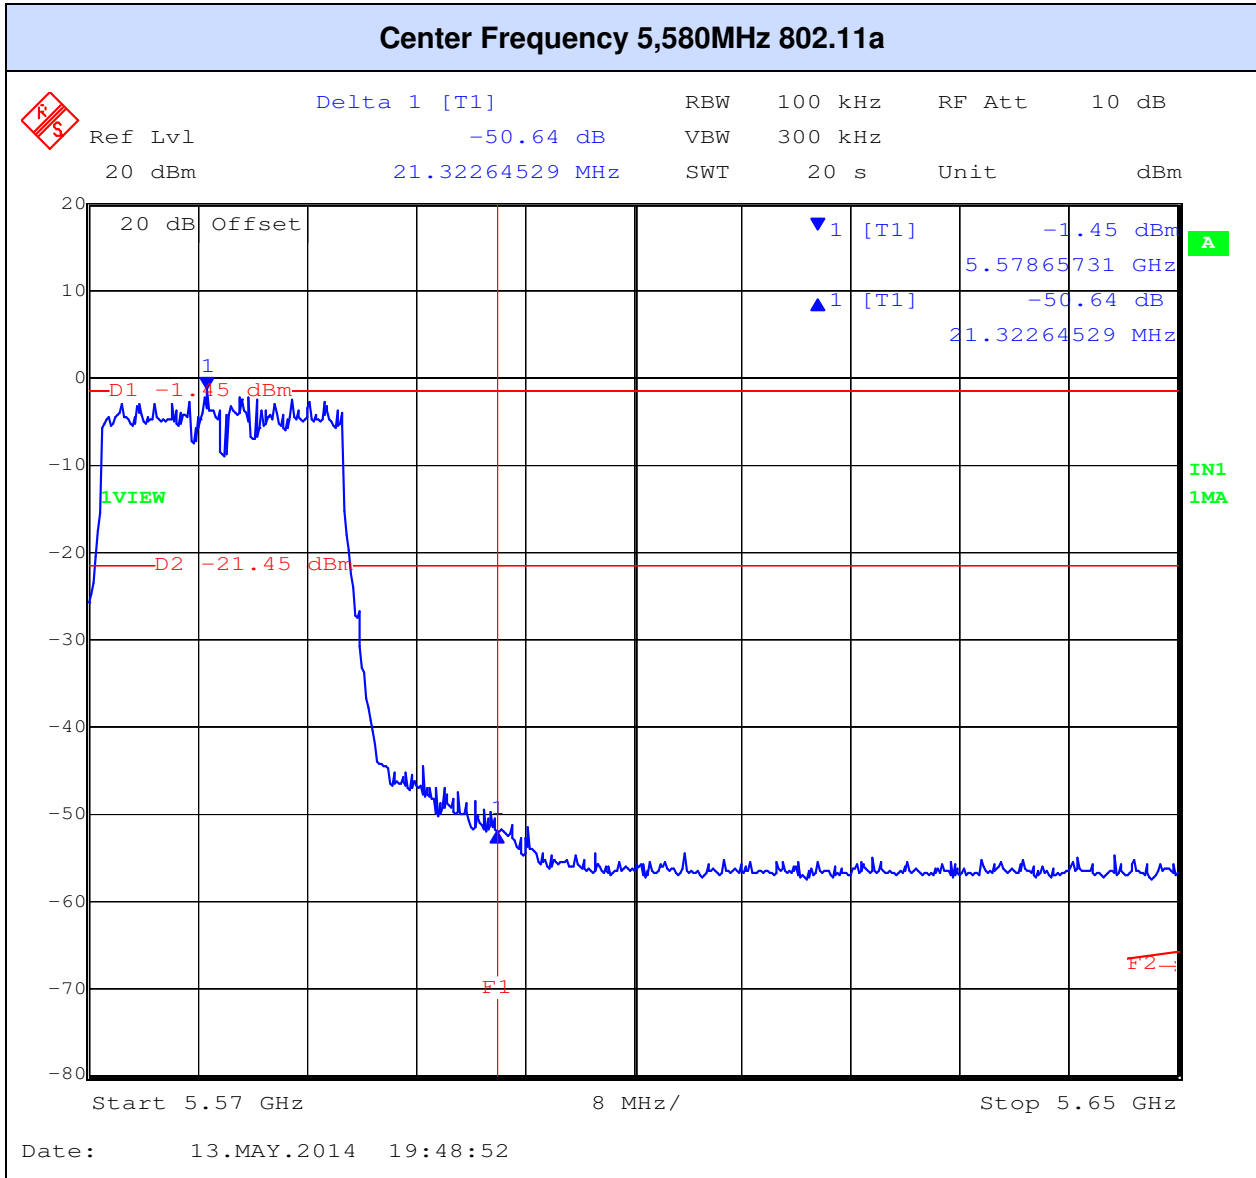

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

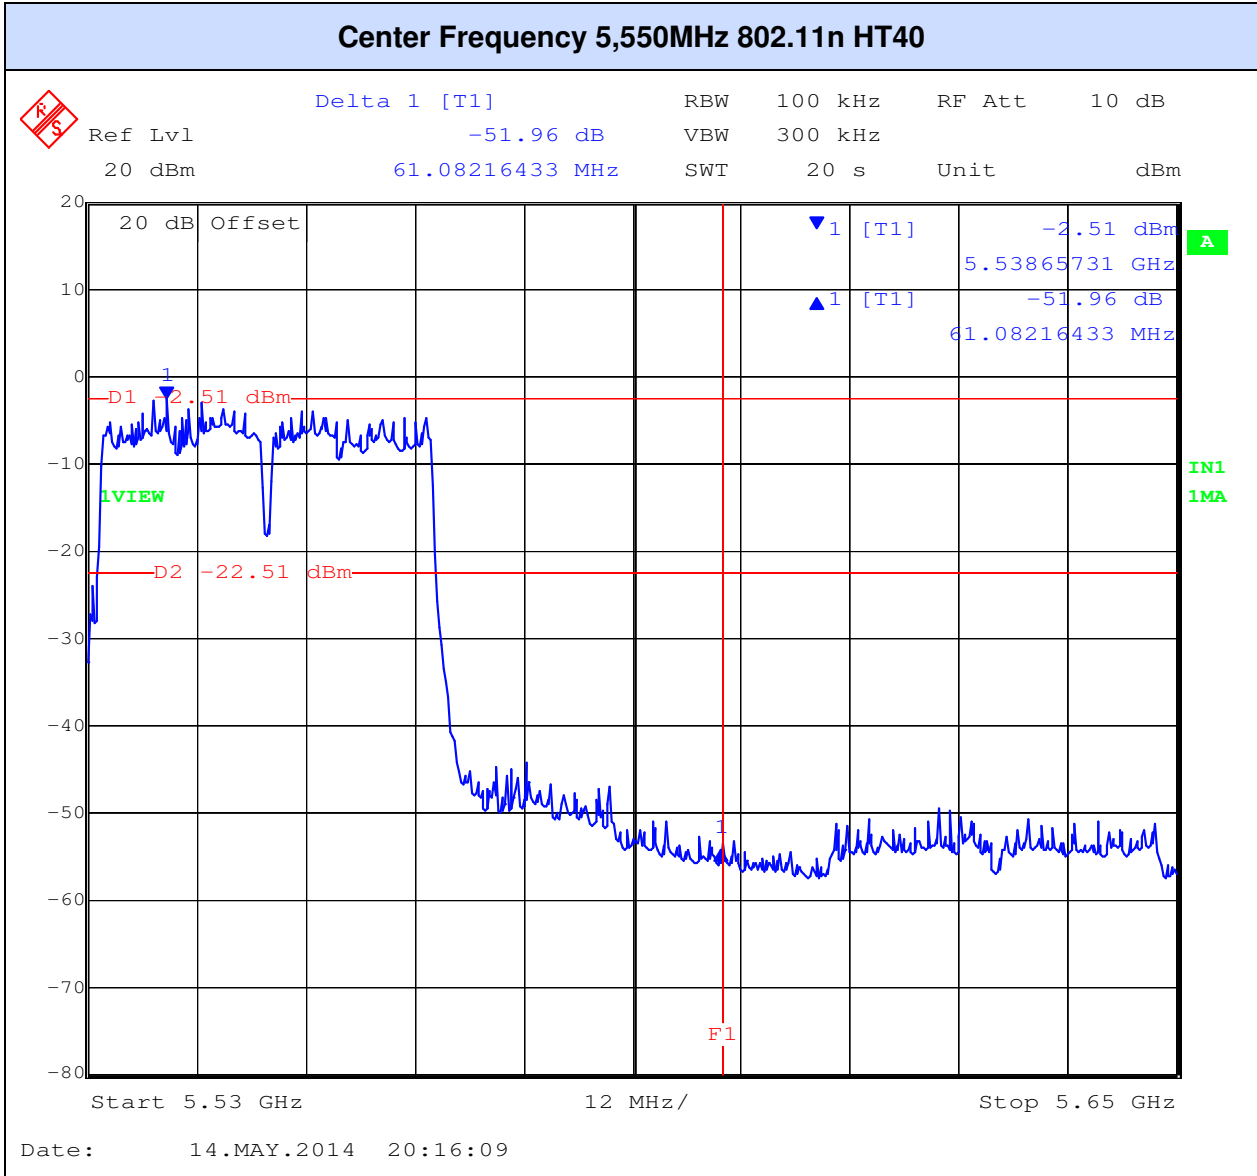


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

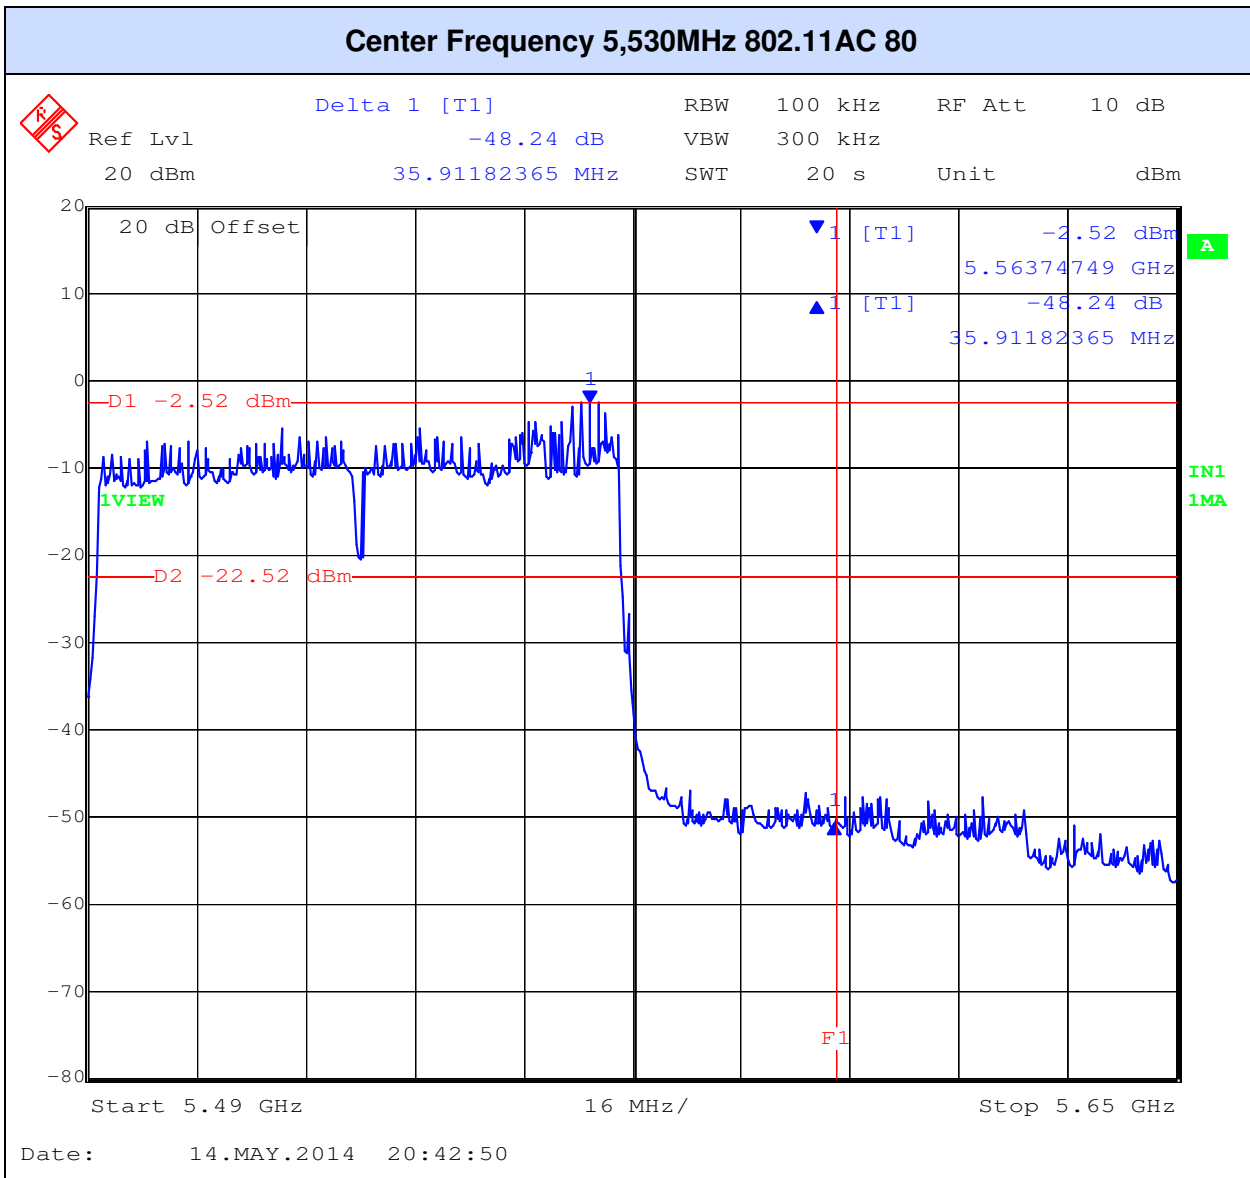

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 60 of 83

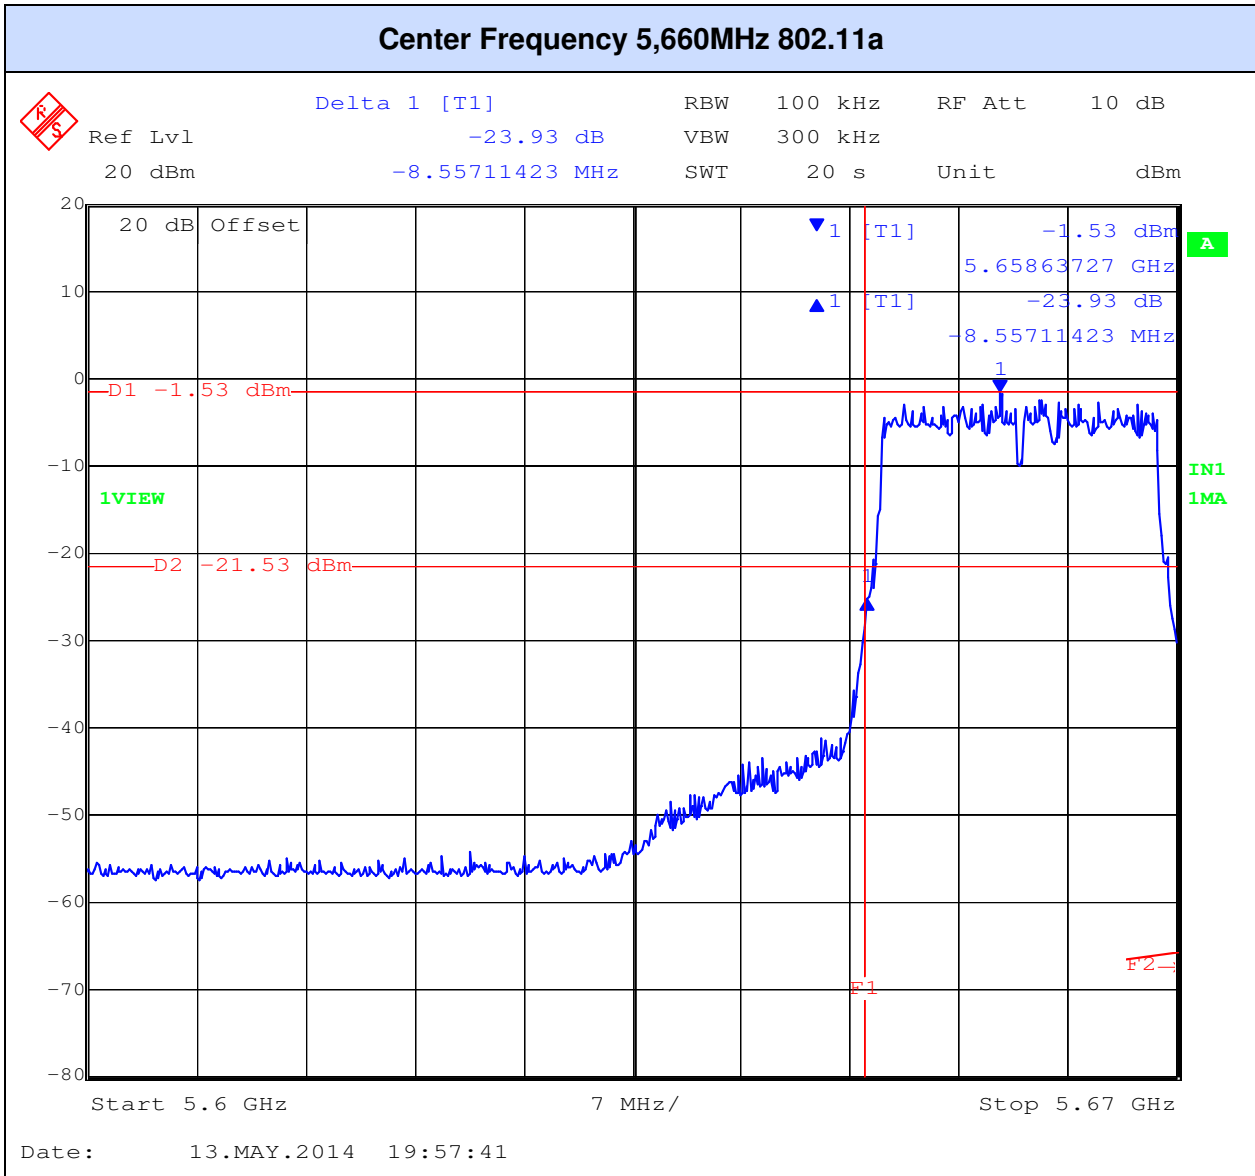


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 61 of 83

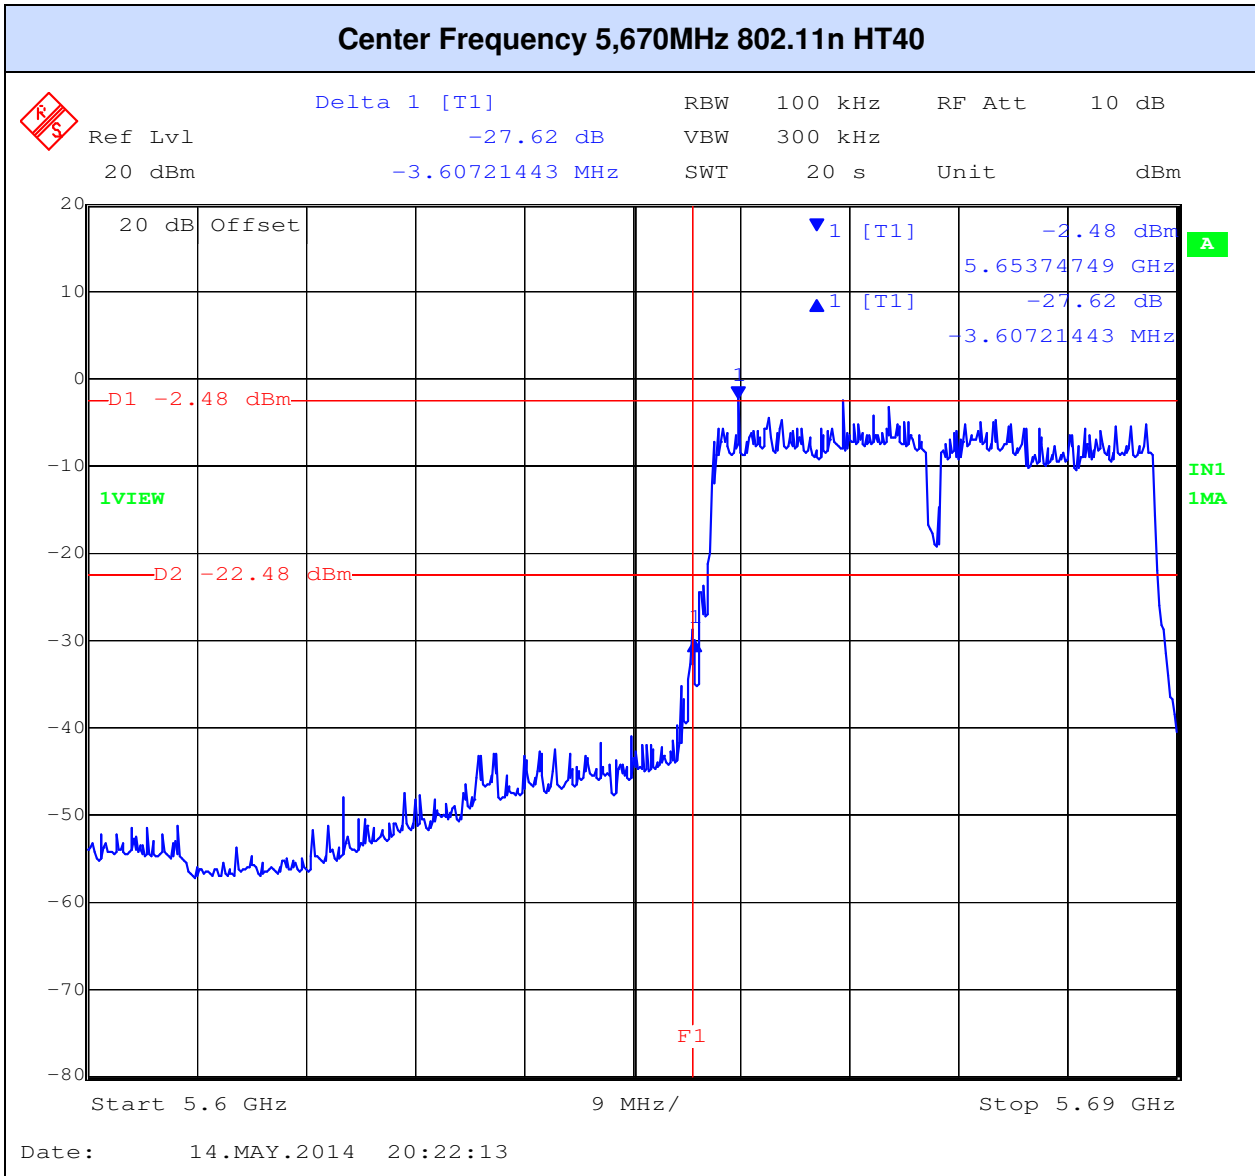

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

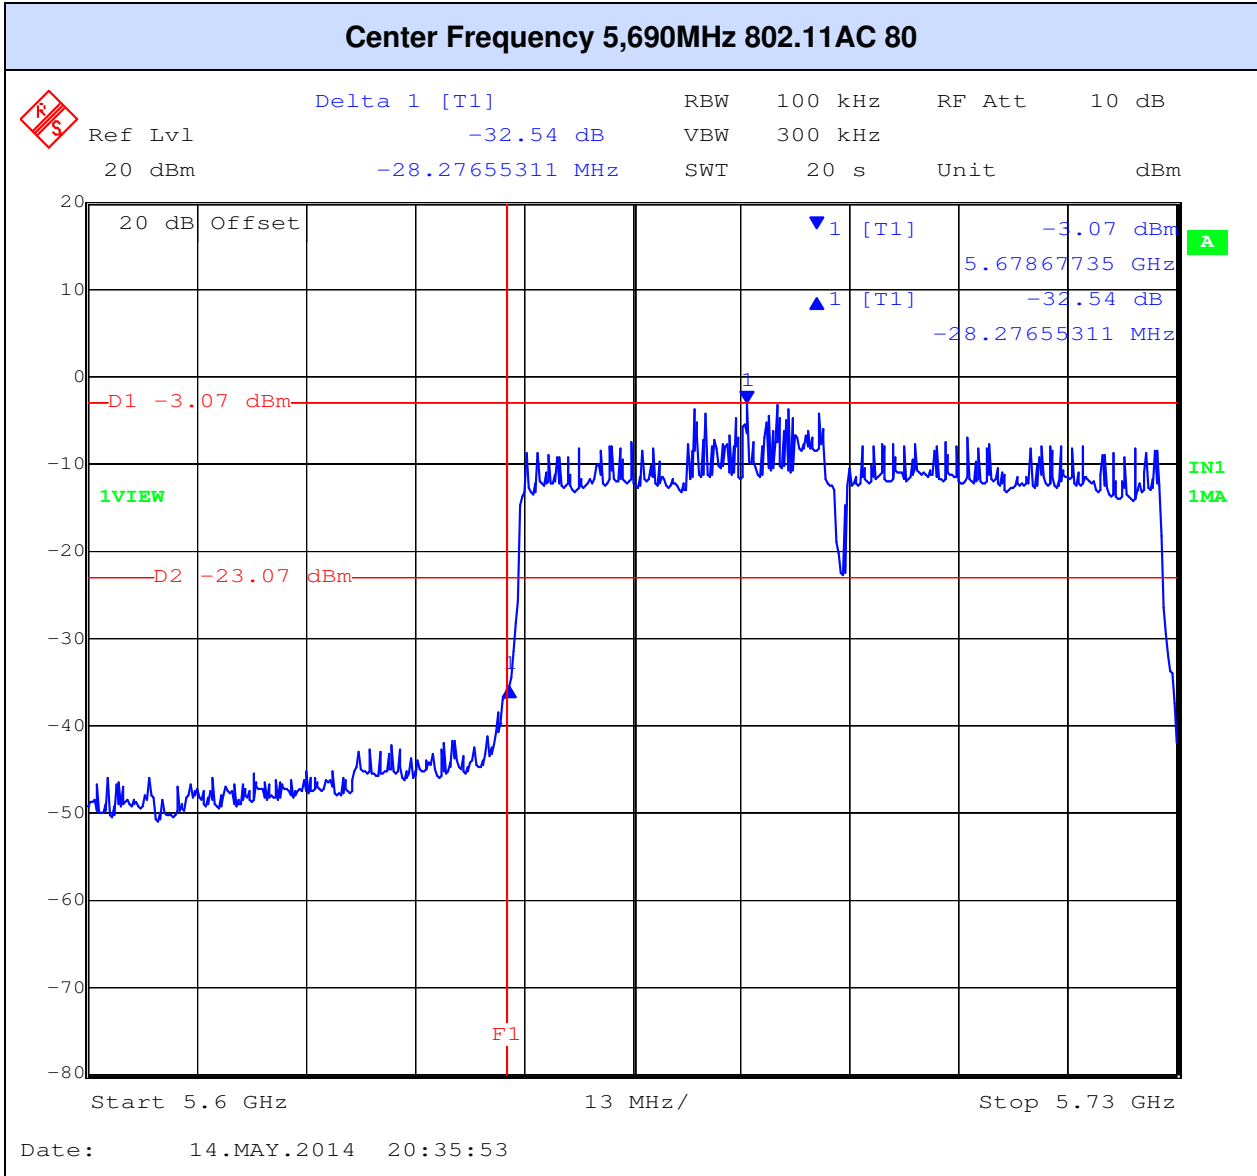

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 63 of 83

---

### 5.3. WEA403i: Ports M1, M2, M3 Test Results

For the frequency band 5,470 – 5,725 MHz, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

Declared minimum antenna gain 6.22 dBi. ;

Radar receive signal level = -64 dBm + minimum antenna gain

$$= -64 + 6.22$$

Radar receive signal level = -57.78 dBm

#### Measurement Results - Dynamic Frequency Selection (DFS)

Ambient conditions.

Temperature: 17 to 23 °C    Relative humidity: 31 to 57%    Pressure: 999 to 1012 mbar

Radio parameters.

Test methodology: Conducted

Device Type: Master

Transmit Power: Maximum

#### Operational Details - Dynamic Frequency Selection (DFS)

Operational Modes: 802.11a

Data Rates: 6mpbs 802.11a

*\*Note\* video pixilation was observed during the video stream at these rates, however they were very minor and only occurred a few times but the video maintained 30 frames per second.*

#### Video Streaming Method - Dynamic Frequency Selection (DFS)

Using the VideoLan player a video stream was setup on the master laptop with the destination being the client laptop. The video profile chosen for the video stream is "MPEG-2 + MPGA (TS)". On the client laptop the VideoLan player was setup to listen to an incoming video stream from the master device.

The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is used during this video stream.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 64 of 83

---

### 5.3.1. UNII Detection Bandwidth:

All UNII channels for this device have identical channel bandwidths and DFS testing was completed on channel 5,500 MHz (802.11a), 5510MHz (HT40), and 5530 (AC80).

The generating equipment is configured as shown in the Conducted Test Setup above. A single Burst of the short pulse radar Type 1 through 6 was produced at 5,500 MHz (802.11a) , 5,510 MHz (802.11n HT40), and 5,530 MHz (802.11ac 80 at a level of -62 dBm (Ref Section 5.1). The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted. The EUT must detect the Radar Waveform 90% or more of the time.

The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as  $F_H$ .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as  $F_L$ .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 80% of the EUT transmitter 99% power Table of results are continued on the next page.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



EUT Frequency= 5,500 MHz 802.11a (Detection = √, No Detection = 0)											
Radar Frequency (MHz)	1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
-20											%
-19											%
-18											%
-17											%
-16											%
-15											%
-14											%
-13											%
-12											%
-11											%
-10											%
-9	o	o									<90%
-8	v	v	v	v	v	v	v	v	v	v	100%
-7	v	v	v	v	v	v	v	v	v	v	100%
-6	v	v	v	v	v	v	v	v	v	v	100%
-5	v	v	v	v	v	v	v	v	v	v	100%
-4	v	v	v	v	v	v	v	v	v	v	100%
-3	v	v	v	v	v	v	v	v	v	v	100%
-2	v	v	v	v	v	v	v	v	v	v	100%
-1	v	v	v	v	v	v	v	v	v	v	100%
F <sub>0</sub>	v	v	v	v	v	v	v	v	v	v	100%
+1	v	v	v	v	v	v	v	v	v	v	100%
+2	v	v	v	v	v	v	v	v	v	v	100%
+3	v	v	v	v	v	v	v	v	v	v	100%
+4	v	v	v	v	v	v	v	v	v	v	100%
+5	v	v	v	v	v	v	v	v	v	v	100%
+6	v	v	v	v	v	v	v	v	v	v	100%
+7	v	v	v	v	v	v	v	v	v	v	100%
+8	v	v	v	v	v	v	v	v	v	v	100%
+9	o	o									<90%
+10											%
+11											%
+12											%
+13											%
+14											%
+15											%
+16											%
+17											%
Detection Bandwidth = F <sub>H</sub> -F <sub>L</sub> = 5508-5492 = 16 MHz											
EUT 99% Bandwidth = 16.51 MHz (ref. bandwidth channel 5500 MHz)											
16.51 MHz *80% = 13.21 MHz											

For each frequency step the minimum percentage detection is

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 66 of 83

---

### 5.3.2. Initial Channel Availability Check Time

This test verifies that the EUT does not emit pulse, control, or data signals on the test Channel until the power-up sequence has been completed and the U-NII device checks for Radar Waveforms for one minute on the test Channel. This test does not use any Radar Waveforms.

The U-NII device is powered on and be instructed to operate at 5,500MHz 802.11a. At the same time the EUT is powered on, the spectrum analyzer is set for zero span with a 1 MHz resolution bandwidth at 5,500 MHz with a 260 second sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.


The EUT should not transmit any pulse or data transmissions until at least 1 minute after the completion of the power-on cycle.

The first red marker line shown on the following plot denotes the instant when the EUT starts its power-up sequence i.e.  $T_0$  (as defined within the FCC's MO&O 06-96 Normative Reference 2 ). The power-up reference  $T_0$  is determined by the time it takes for the EUT to start "beaconing" i.e. initial beacon – 60 secs = end of power-up.

The Channel Availability Check Time commences at instant  $T_0$  and will end no sooner than  $T_0 + 60$  seconds.



EUT power up and Initial Channel Availability Check Time  
5,500MHz 802.11a Power On = 92.74 Seconds

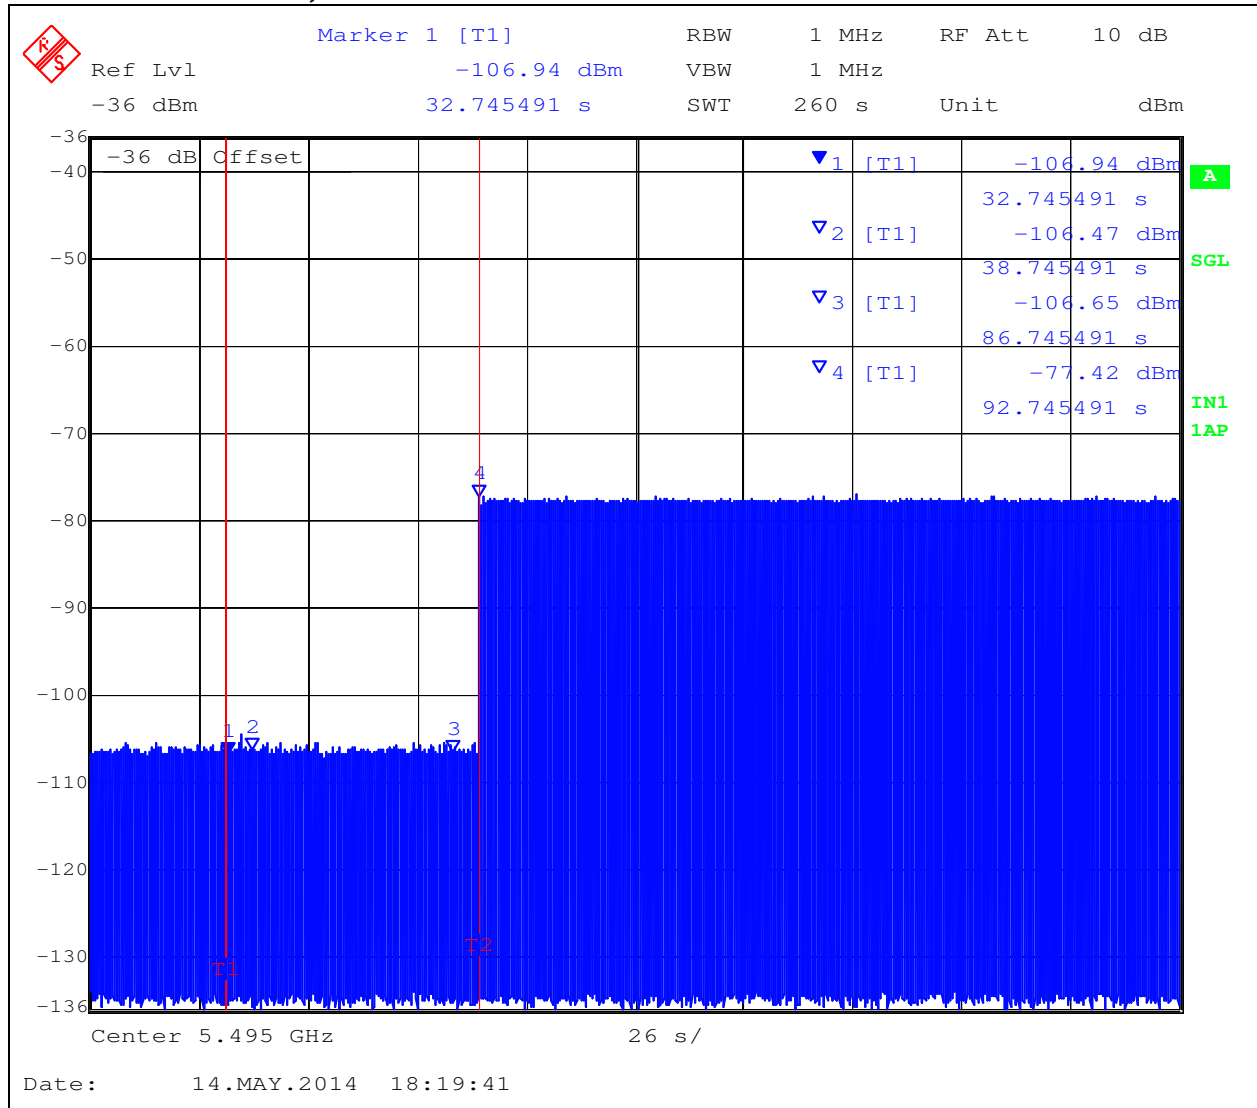

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 68 of 83

---

### **5.3.3. Radar Burst at the Beginning of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold +6 dB (-62 dBm Ref Section 6.1.7) occurs at the beginning of the Channel Availability Check Time.

A single Burst of short pulse of radar Type 1 will commence within a 6 second window starting at  $T_0$  (first red marker line on the following plot).

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500 MHz 802.11a and will continue for 2.5 minutes after the radar burst has been generated.


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Channel Availability Check Time at the start T0 + 6 seconds Check Time  
5,500 MHz 802.11a

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
Ref Lvl	-106.86 dBm	VBW	1 MHz		
-36 dBm	32.745491 s	SWT	260 s	Unit	dBm

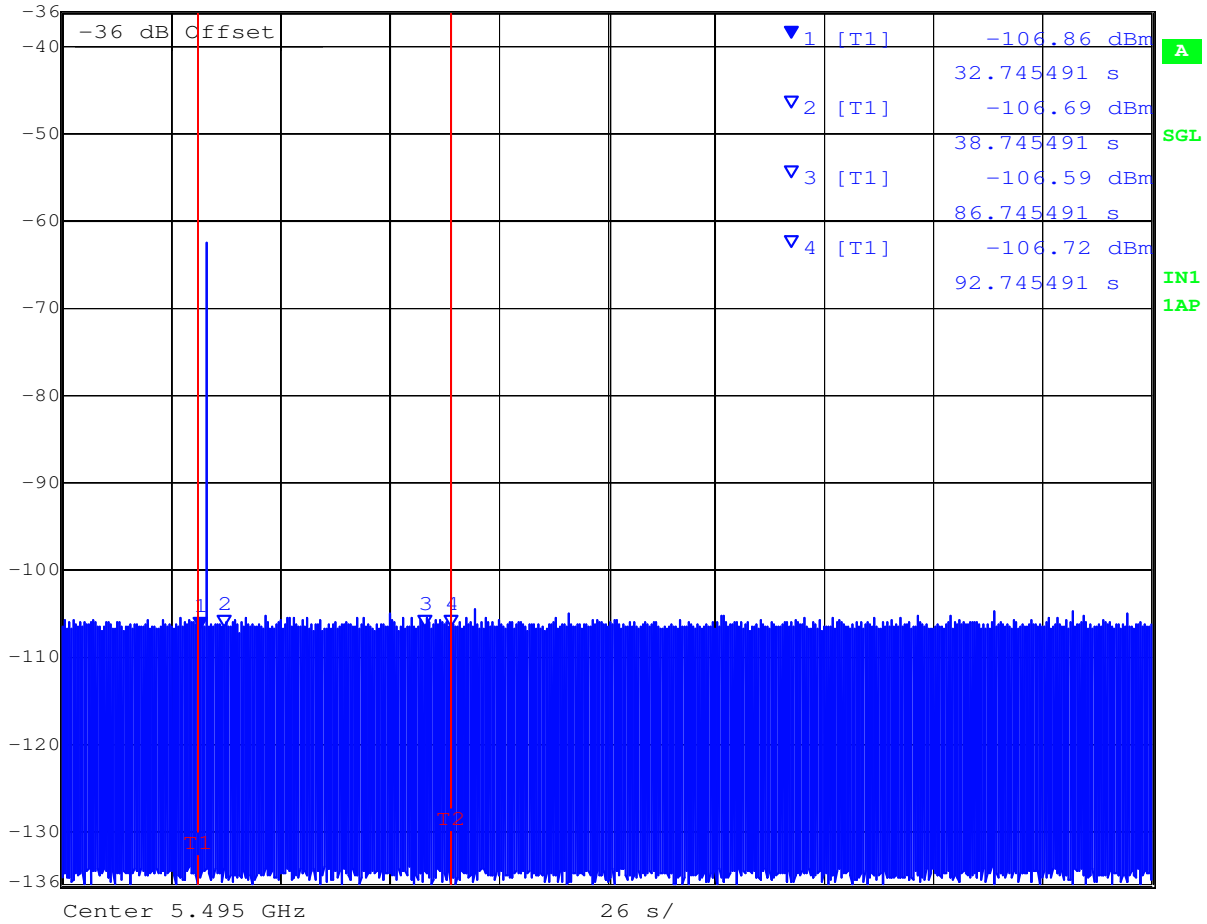

Date: 14.MAY.2014 18:29:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 70 of 83

---

#### **5.3.4. Radar Burst at the End of the Channel Availability Check Time:**

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold occurs at the end of the Channel Availability Check Time.

A single Burst of short pulse of radar type 1 will commence within a 6 second window starting at  $T_0 + 54$  seconds. The window will commence at marker 2 and end at the red frequency line  $T_2$ .


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5,500MHz 802.11a, 5,510MHz 802.11n HT40, 802.11ac 80 will continue for 2.5 minutes after the radar burst has been generated.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Channel Availability Check Time at T0 + 54 seconds Check Time  
5,500MHz 802.11a

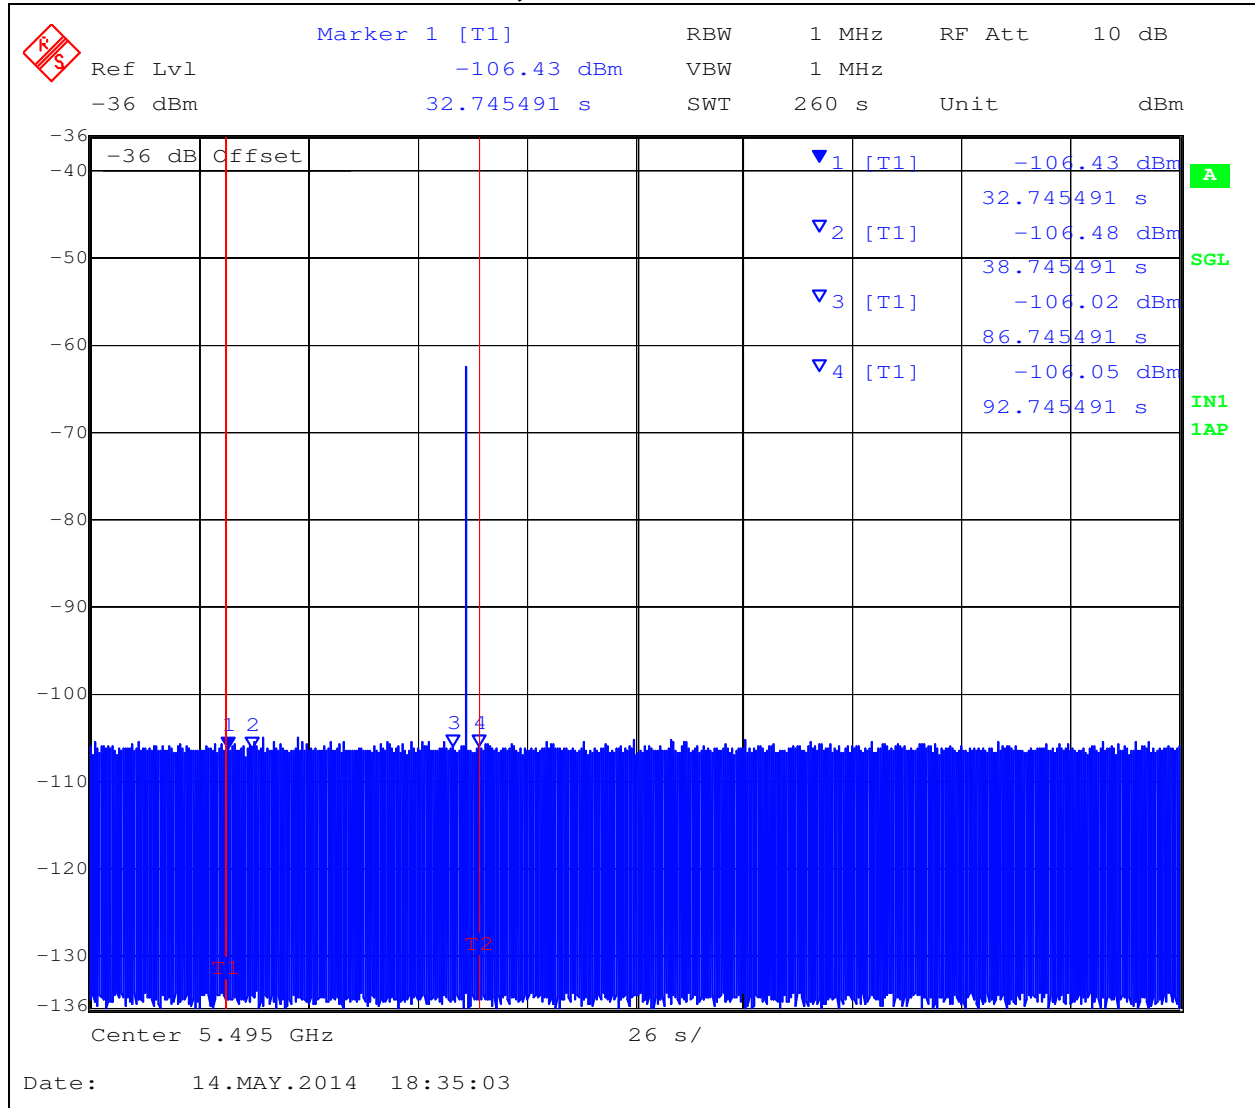

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 72 of 83

---

### **5.3.5. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period**

#### **FCC §15.407(h)(2)(iii)**

The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the EUT (Master). The requisite MPEG video file ("TestFile.mpg" available on the NTIA website at the following link <http://ntiacsd.ntia.doc.gov/dfs/>) is streamed from the master device (AP) to the client.

#### **Channel Closing Transmission Time and Channel Mode Time - Measurement**

The test system was set-up to capture all transmission data for access point events above a threshold level of -50 dBm. The test equipment time stamps all captured events.

A Type 1 waveform was introduced to the EUT, from which a 12 second transmission record was digitally captured. The start of the Type 1 radar waveform is indicated in the test result plot as "Start Waveform", the end of the waveform is indicated as "End waveform".

Channel Closing Transmission Time, and the Channel Move Time start immediately after the last radar pulse is transmitted.

The aggregate of all pulses seen after the end of the radar injection are measured as the "Channel Closing Transmission time".

The last EUT activity after the end of the radar pulse is identified and used to determine the "Channel Mode Time"



Title: Samsung WEA403i  
To: FCC 47 CFR Part 15.407 & IC RSS-210  
Serial #: HCTA05-U2 Rev B  
Issue Date: 30th June 2014  
Page: 73 of 83

5,500 MHz (802.11a)

Channel Closing Transmission Time = 12.548 mSecs (limit 260 mSecs)

Channel Move Time = 0.0956 Secs (limit 10 Secs)

**Channel Move Time, Channel Closing Transmission Time for Type 1 Radar  
Captured by the Test System - 0 to 12 seconds**



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.





**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 75 of 83

---

### 5.3.6. Statistical Performance Check

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5,500MHz 802.11a.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs. The percentage of successful detection is calculated by:

Total # of detections ÷ Total # of Trials × 100 = Probability of Detection

The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in the Radar Test Waveforms section.

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Verification of Detection 5,500MHz 802.11a (Offset 5MHz)**

Trial #	Detection = √, No Detection = 0					
	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6
1	√	√	√	√	√	√
2	√	√	√	√	√	√
3	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	√	√
6	√	√	√	√	√	√
7	√	√	√	√	√	√
8	√	√	√	√	√	0
9	√	√	√	√	√	√
10	√	√	√	√	√	√
11	√	√	√	√	0	√
12	√	√	√	√	√	√
13	√	√	√	√	√	√
14	√	√	√	√	√	√
15	√	√	√	√	√	√
16	√	√	√	√	√	√
17	√	√	√	√	√	√
18	√	√	√	√	0	√
19	√	√	√	√	√	√
20	√	√	√	√	0	√
21	√	√	√	√	√	0
22	√	√	√	√	√	√
23	√	√	√	√	√	√
24	√	√	√	√	√	√
25	√	√	√	√	√	√
26	√	√	√	√	√	√
27	√	√	√	√	√	√
28	√	√	√	√	√	√
29	√	√	√	√	√	√
30	√	√	√	√	0	√
<b>Detection Percentage</b>	100% (>60%)	100% (>60%)	100% (>60%)	100% (>60%)	86.6% (>80%)	93.3% (>70%)

In addition an average minimum percentage of successful detection across all four Short pulse radar test waveforms is required and calculated as follows;

$$(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4 = (100\% + 100\% + 100\% + 100\%) / 4 = 100\% (> 80\%)$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 77 of 83

---

**Measurement Uncertainty Time/Power**

Measurement uncertainty		
- Time		4%
- Power		1.33dB


**Traceability**

Test Equipment Used
0072, 0083, 0098, 0116, 0132, 0158, 0313, 0314, 0193, 0223, 0252, 0253, 0251, 0256, 0328, 0329


---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### 5.3.7. Weather Radar Band Edge Plots

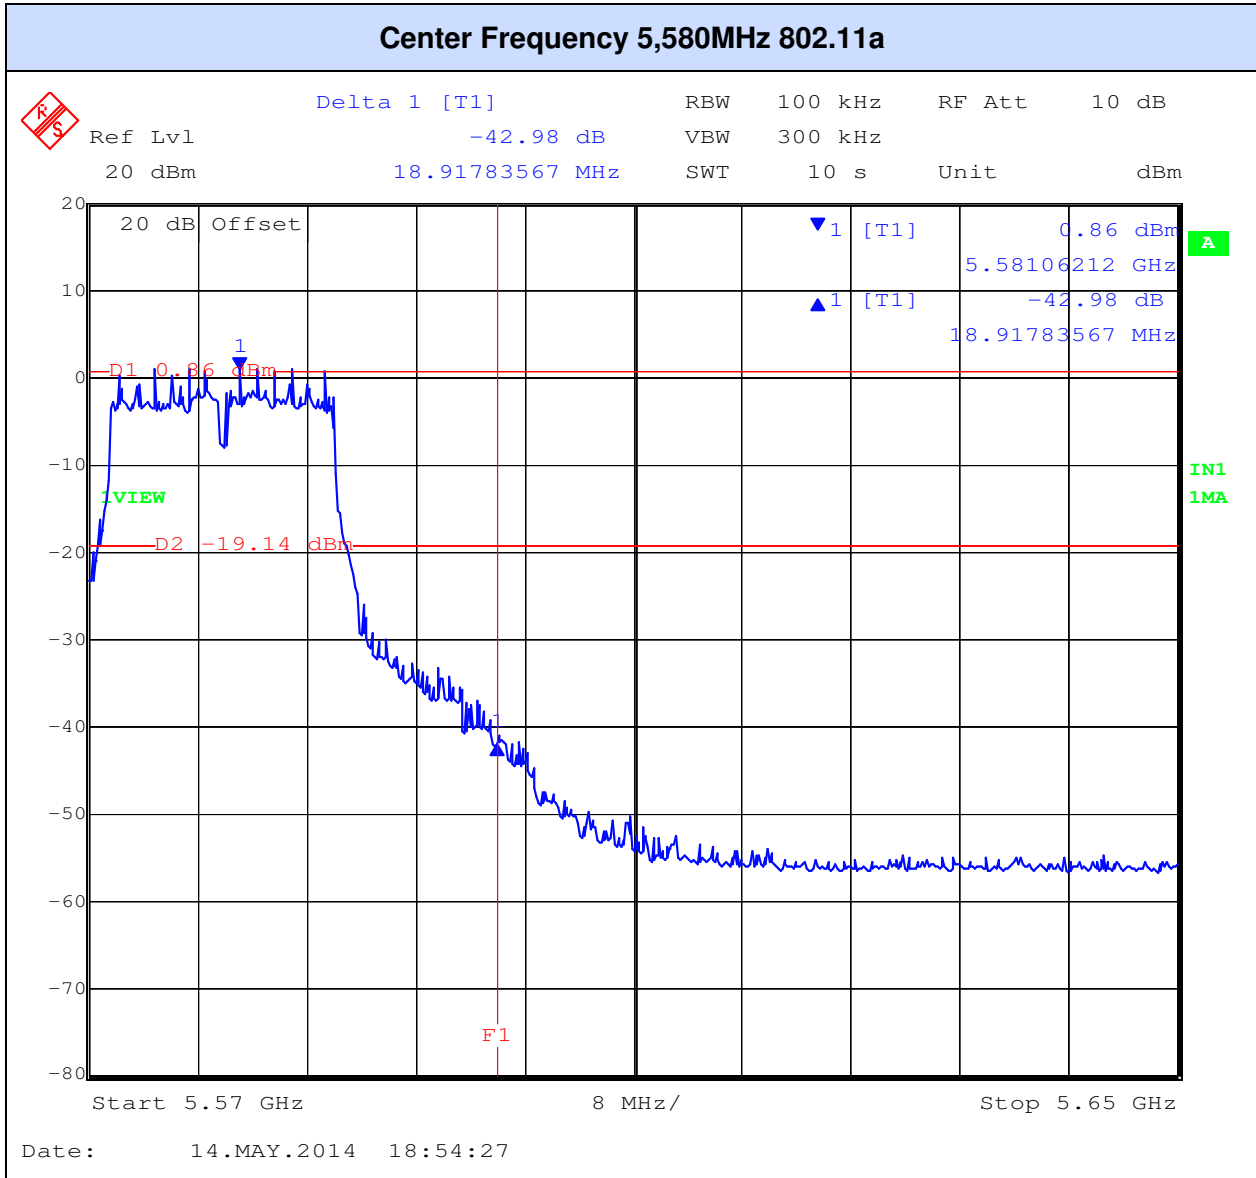

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

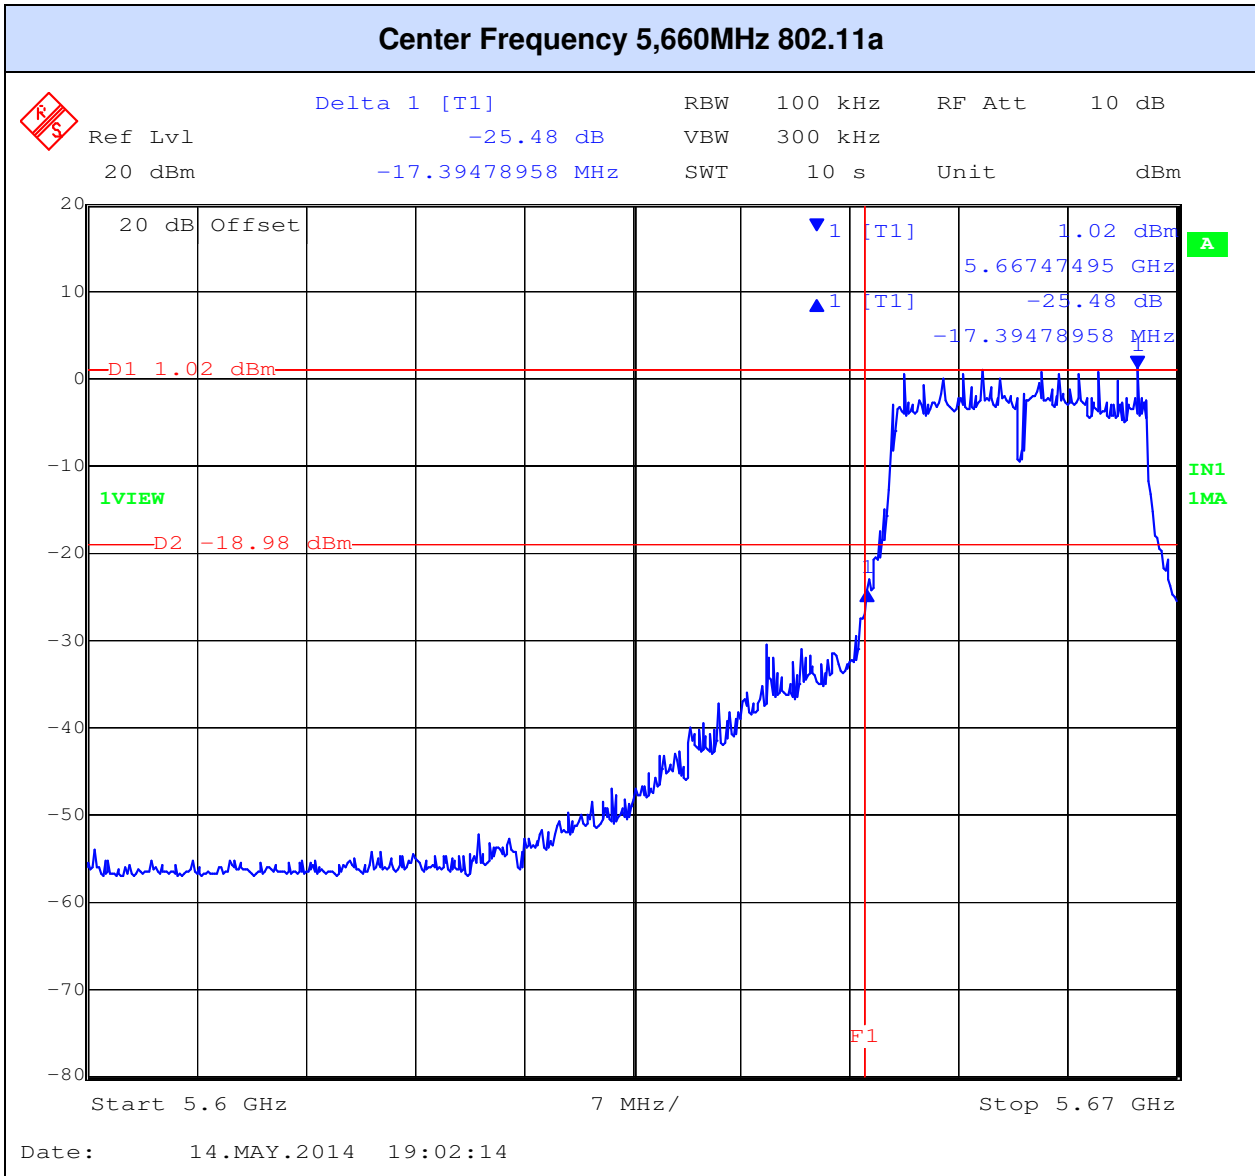


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

## 6. PHOTOGRAPHS

### 6.1. DFS Test Setup


#### General DFS Test Setup

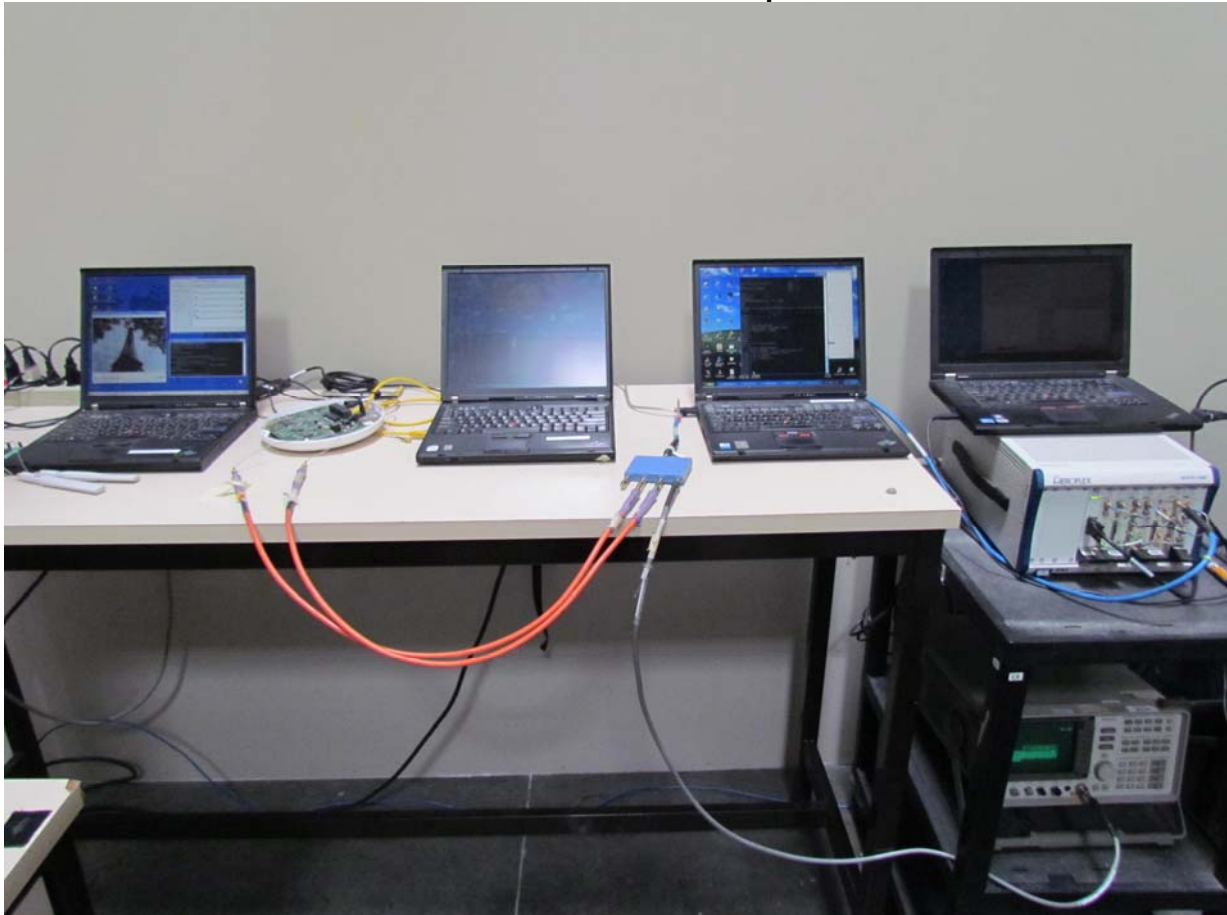

---

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

### DFS Test Equipment

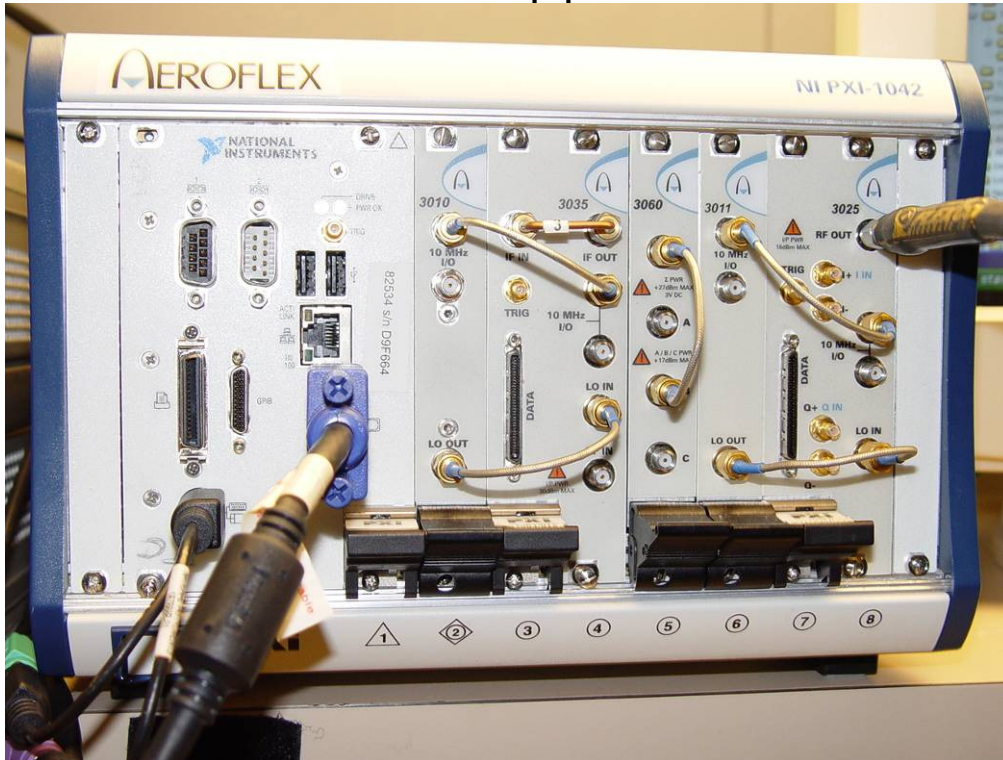

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



**Title:** Samsung WEA403i  
**To:** FCC 47 CFR Part 15.407 & IC RSS-210  
**Serial #:** HCTA05-U2 Rev B  
**Issue Date:** 30th June 2014  
**Page:** 82 of 83

## 7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #	Calibration Due Date
0117	Power Sensor	Hewlett Packard	8487D	3318A00371	18 <sup>th</sup> Oct 14
0223	Power Meter	Hewlett Packard	EPM-442A	US37480256	18 <sup>th</sup> Oct 14
0376	Power Sensor	Agilent	U2000A	MY51440005	28 <sup>th</sup> Oct 14
0390	Power Sensor	Agilent	U2002A	MY50000103	17 <sup>th</sup> Oct 14
0158	Barometer /Thermometer	Control Co.	4196	E2846	6 <sup>th</sup> Dec 14
0287	EMI Receiver	Rhode & Schwartz	ESIB40	100201	31 <sup>st</sup> Jul 14
0378	EMI Receiver	Rhode & Schwartz	ESIB40	100107/040	17 <sup>th</sup> Jul 14
0338	30 - 3000 MHz Antenna	Sunol	JB3	A052907	14 <sup>th</sup> Aug 14
0399	1-18 GHz Horn Antenna	EMCO	3117	00154575	10 <sup>th</sup> Oct 14
0252	SMA Cable	Megaphase	Sucoflex 104	None	N/A
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001	N/A
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001	N/A
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623	N/A
0359	DFS Test System	Aeroflex	PXI-1042	300001/004	21 <sup>st</sup> Oct 14
0299	DFS Test Software	Aeroflex	PXI Module	Version 7.1.0	N/A
0502	EMC Test Software	EMISoft	Vasona	5.0051	N/A
0503	RF Conducted Test Software	National Instruments	Labview	Version 8.2	N/A
0398	RF Conducted Test Software	MiCOM Labs ATS	--	Version 1.8	N/A
0380	RF Switch	MiCOM Labs	MIC001	MIC001	20 <sup>th</sup> Dec 14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



575 Boulder Court  
Pleasanton,  
California 94566, USA  
Tel: 1.925.462.0304  
Fax: 1.925.462.0306  
[www.micomlabs.com](http://www.micomlabs.com)