

Recognized by the  
Federal Communications Commission  
**FCC-Identification Number: 90462**  
**TCB ID: DE 001**



Accredited by the  
German Accreditation Council  
**DAR-Registration Number**  
**TTI-P-G 166/98**



Independent ETSI  
compliance test house



**Accredited Bluetooth™ Test Facility (BQTF)**

**Test report no.: 2\_3350-01-01/03**

**FCC Part 24/22/15**

**MC-46**

**FCC ID: QIPMC46**

**IC: 267W-MC46**

CETECOM – ICT Services GmbH

Untertürkheimerstr. 6-10

66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 9075

## Table of Contents

### 1 General information

- 1.1 Notes
- 1.2 Testing laboratory
- 1.3 Details of applicant
- 1.4 Application details
- 1.5 Test item
- 1.6 Test standards

### 2 Technical test

- 2.1 Summary of test results
- 2.2 Test report

### 1 General information

#### 1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### 1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Telephone : + 49 681 598 - 9100

Telefax : + 49 681 598 - 9075

E-mail : Michael.Berg@ict.cetecom.de

Internet : www.cetecom-ict.de

#### Accredited testing laboratory

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR registration number: TTI-P-G-166/98

Listed by : Federal Communications Commission (FCC)

Identification/Registration No : 90462

**Accredited Bluetooth™ Test Facility (BQTF)**

*BLUETOOTH™ is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM*

## 1.3 Details of applicant

**Name** : Siemens AG  
**Street** : Siemensdamm 50  
**City** : D-13629 Berlin  
**Country** : Germany  
**Telephone** : +49 (0)30 386-0  
**Telefax** : +49 (0)30 386-366-56  
**Contact** : Mr. Hussein Halawi  
**Telephone** : +49 (0)30 386-302-11  
**e-mail** : hussein.halawi@bln.siemens.de

## 1.4 Application details

Date of receipt of application : 2003-07-28  
Date of receipt of test item : 2003-07-30  
Date of test : 2003-07-30/31

## 1.5 Test item

Type of equipment : **Triple Band GSM Module (PCS 850/1800/1900 MHz)**  
Type designation : MC-46  
Manufacturer : applicant  
Street :  
City :  
Country :  
Serial numbers : IMEI : 00499900.254170.0  
**Additional information:** :  
Frequency : 1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz  
Type of modulation : 300KGXW / 300KG7W  
Number of channels : 300 (PCS1900) and 125 (PCS850)  
Antenna : Integral antenna  
Power supply : 3,7V DC Li-ion Battery  
Output power GSM 850 : cond.: 33.00 dBm Peak , ERP: 24.80 dBm (Burst);  
EIRP: 26.90 dBm (Burst)  
Output power GSM 1900 : cond: 29.7dBm Peak, ERP : 28.50dBm(Burst),  
EIRP: 30.6 dBm (Burst)  
Type of equipment : Temperature range : -30°C - +60°C  
FCC – ID : QIPMC46  
IC : 267W-MC46  
Hardware : S30880-S8320-A100-1 (B2.9)  
Software : Release 3 (SV96)

**1.6 Test standards:** **FCC Part 24, 22**  
**FCC Part 15**

2 Technical test

For Part 24/22 we use the substitution method ( TIA/EIA 603).

All measurements in this report are done in GSM mode. Device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link ).

Remarks:

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

FINAL VERDICT: PASS

Technical responsibility for area of testing :

2003-08-01 RSC 8411 Berg M.

Date Section Name

Signature

Technical responsibility for area of testing :

2003-08-01 RSC8412 Hausknecht D.

Date Section Name

Signature

**2.2 Test report**

**TEST REPORT**

**Test report no. : 2\_3350-01-01/03**

**TEST REPORT REFERENCE**

**LIST OF MEASUREMENTS**

**PARAMETER TO BE MEASURED**

**PAGE**

**Part PCS 1900**

**EMISSIONS LIMITS §24.238**

**7**

**Part PCS 850**

**POWER OUTPUT SUBCLAUSE § 24.232**

**15**

**FREQUENCY STABILITY SUBCLAUSE § 24.235**

**17**

**AFC FREQ ERROR vs. VOLTAGE**

**18**

**AFC FREQ ERROR vs. TEMPERATURE**

**18**

**EMISSIONS LIMITS §24.238**

**20**

**CONDUCTED SPURIOUS EMISSIONS**

**34**

**BLOCK EDGE REQUIREMENTS FOR BLOCK 1 TO BLOCK 4**

**43**

**OCCUPIED BANDWIDTH §2.989**

**59**

**EMISSION LIMITATIONS FOR CELLULAR §22.917(F)**

**66**

**ADDITIONAL MEASUREMENTS FOR IDLE MODE PART 15.109**

**74**

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

**82**

**Test site**

**84**

**Photographs of the equipment**

**86**

## EMISSIONS LIMITS

§24.238

### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognised by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### **The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1879.8 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:**

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots show the worst case.  
 As can be seen from this data, the emissions from the test item were within the specification limit.

**RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:**


EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power (dBm)	actual attenuation below frequency of operation (dBc)	results
<b>CH 512</b>					
1850.2		30.1	-13.0 (43.1 dBc)		carrier
5550.6		-42.5		72.6	complies
11101.2		-33.4		63.5	complies
<b>CH 661</b>					
1880.0		30.0	-13.0 (43.0 dBc)		carrier
5640.0		-42.2		72.2	complies
11280.0		-33.5		63.5	complies
<b>CH 810</b>					
1909.8		30.6	-13.0 (43.6 dBc)		carrier
5729.4		-42.1		72.7	complies
11458.8		-33.2		63.9	complies
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)



Channel 661 (up to 4 GHz )

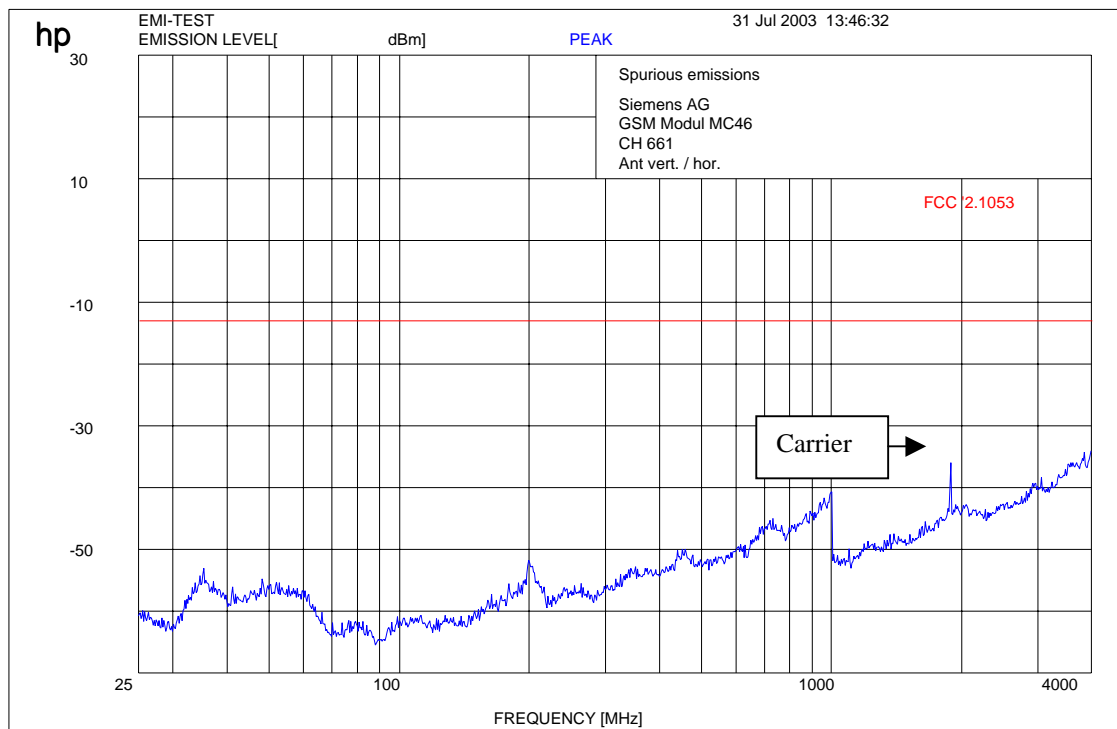

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW / VBW 1 MHz


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24; 64

**Channel 661 (up to 12 GHz )**

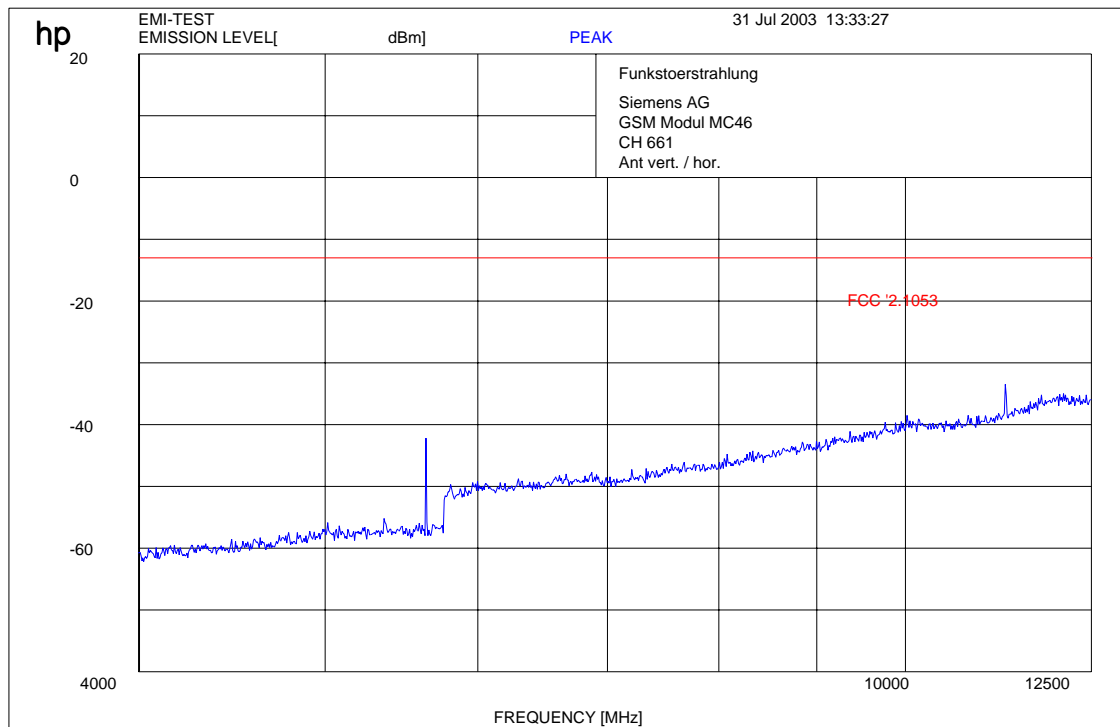

**f < 1 GHz : RBW/VBW: 100 kHz**

**f ≥ 1GHz : RBW / VBW 1 MHz**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)


17 – 24; 64

Channel 661 : -25 GHz



Ref Lvl  
30 dBm

RBW 1 MHz RF Att 10 dB  
VBW 1 MHz  
SWT 74 ms Unit dBm

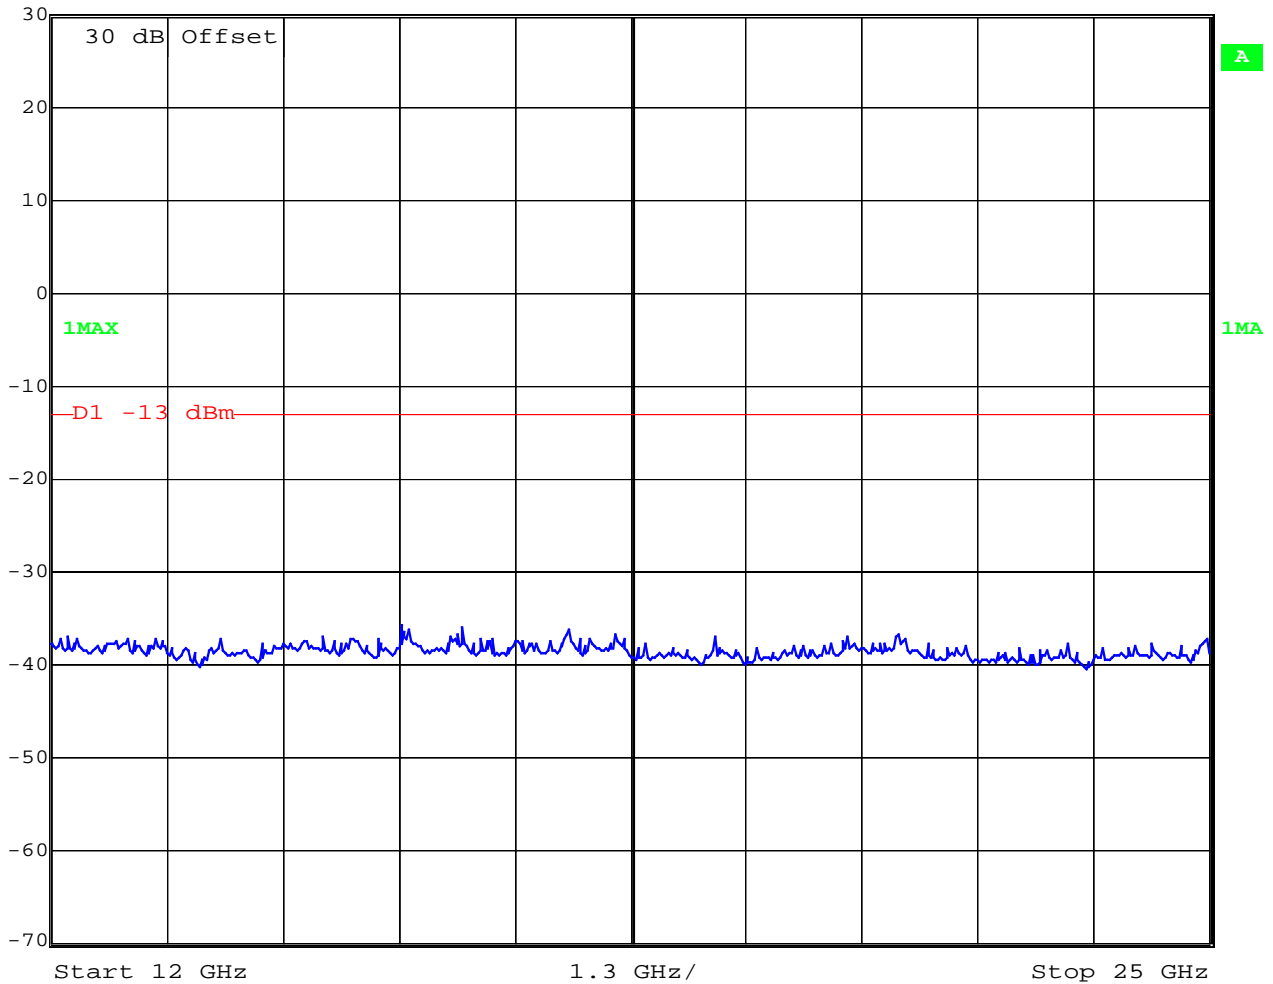


Date: 31.JUL.2003 14:18:49

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)  
17 - 24; 64

**Channel 661 (this is valid for all 3 channels and up to 4 GHz)**  
**Idle-Mode**

**no peak found**

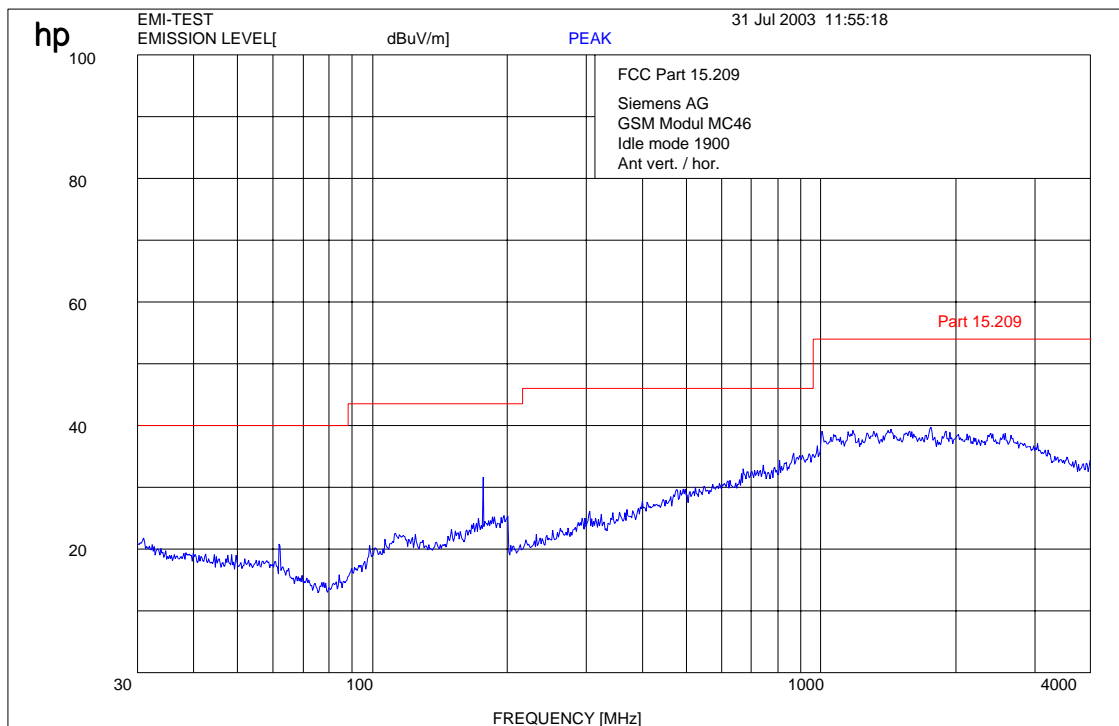


**f < 1 GHz : RBW/VBW: 100 kHz**

**f ≥ 1GHz : RBW/VBW 1 MHz**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
**(for reference numbers see test equipment listing)**  
**17 – 24, 64**

**Channel 661 (this is valid for all 3 channels and up to 12 GHz)**  
**Idle-Mode**

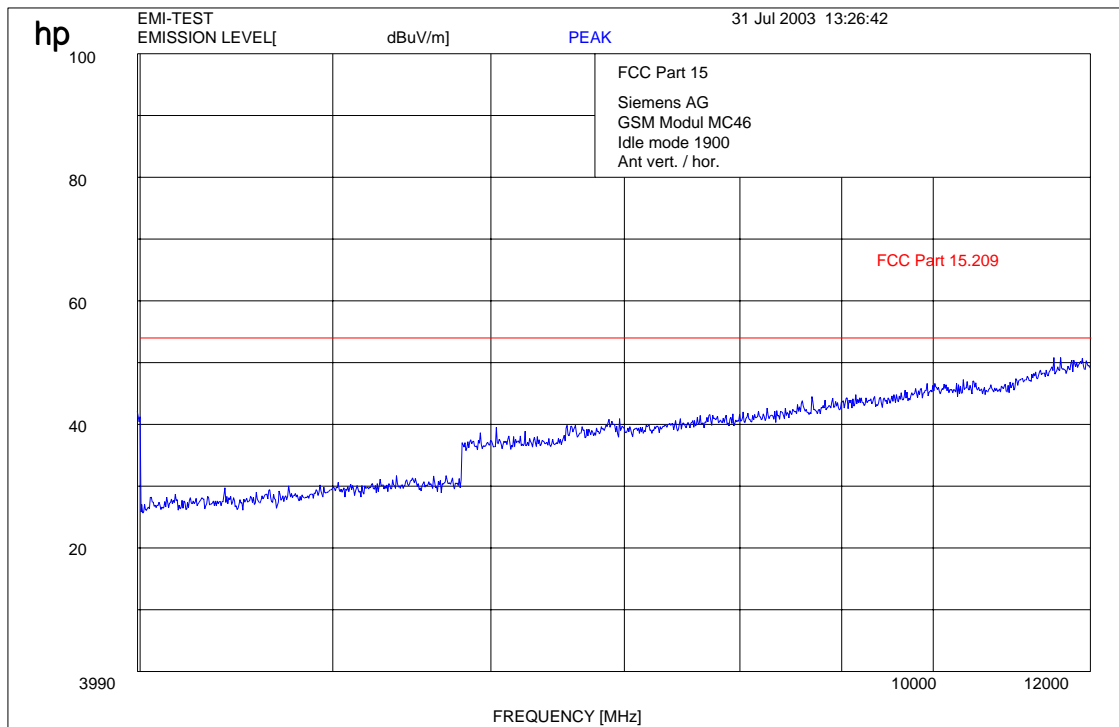

**f < 1 GHz : RBW/VBW: 100 kHz**

**f ≥ 1GHz : RBW/VBW 1 MHz**


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24, 64

**Channel 661 (this is valid for all 3 channels and up to 25 GHz)  
Idle-Mode**

	Ref Lvl	RBW	1 MHz	RF Att	0 dB
	89.3 dB*	VBW	1 MHz		
		SWT	46 ms	Unit	dBµV/m

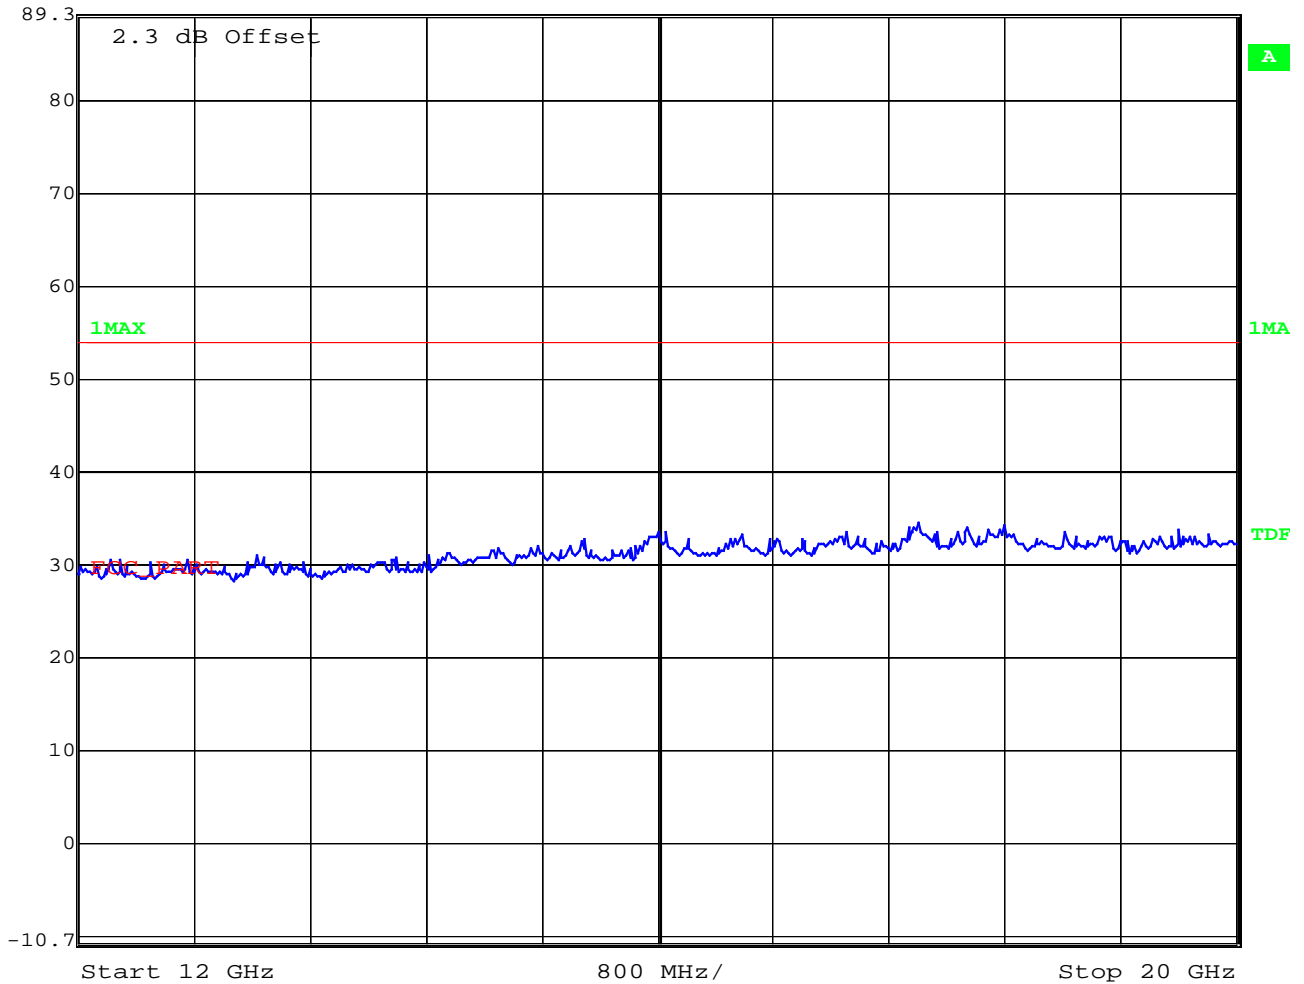

Date: 31.JUL.2003 14:04:51

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

**PART PCS850**

**POWER OUTPUT** **SUBCLAUSE § 24.232**

**Summary:**

This paragraph contains both average , peak output powers and EIRP measurements for the mobile station.

In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

**Method of Measurements:**

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 ( peak and average)

This measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range)

**Limits:**

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

**Power Measurements:**

**Conducted:**

Frequency (MHz)	Power Step	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5	33.00	32.90
836.4	5	32.94	32.84
848.8	5	32.87	32.77
Measurement uncertainty		±0.5 dB	

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 – 24; 64

**EIRP Measurements**

Description: This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Method of Measurement:

1. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference center of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
2. A "reference path loss" is established as  $Pin + 2.1 - Pr$ .
3. The EUT is substituted for the dipole at the reference centre of the chamber. The EUT is put into CW test mode and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs is identified.
5. The EUT is then put into pulse mode at its maximum power level (Power Step 0).
6. "Gated mode" power measurements are performed with the receiving antenna placed at the co-ordinates determined in Step 3 to determine the output power as defined in FCC Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.1 dBi) and known input power (Pin).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.1\text{dBi}$ .

**Limits:**

<b>Power Step</b>	<b>Burst Average EIRP (dBm)</b>
<b>0</b>	<b>&lt;33</b>

**Power Measurements ( Radiated )**

**Normal Cover**

<b>Frequency (MHz)</b>	<b>Power Step</b>	<b>BURST AVERAGE (dBm)</b>		<b>MODULATION AVERAGE (dBm)</b>	
		<b>EIRP</b>	<b>ERP</b>	<b>EIRP</b>	<b>ERP</b>
<b>824.2</b>	<b>5</b>	<b>26.70</b>	<b>24.60</b>	<b>20.70</b>	<b>18.60</b>
<b>836.4</b>	<b>5</b>	<b>26.80</b>	<b>24.70</b>	<b>20.80</b>	<b>18.70</b>
<b>848.8</b>	<b>5</b>	<b>26.90</b>	<b>24.80</b>	<b>20.90</b>	<b>18.90</b>
<b>Measurement uncertainty</b>		<b>±3 dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)



## FREQUENCY STABILITY

## SUBCLAUSE § 24.235

### **Method of Measurement:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a "call mode". This is accomplished with the use of a R&S CMU 200 DIGITAL RADIOCOMMUNICATION TESTER..

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with 3.6 Volts, connected to the CMU 200 and in a simulated call on channel 661 (centre channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10 C increments from -30 C to +60 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal 3.6 Volts. Vary supply voltage from minimum 3.3 Volts to maximum 4.4 Volts, in 13 steps re-measuring carrier frequency at each voltage. Pause at 3.7 V ac Volts for 1 1/2 hours un-powered, to allow any self heating to stabilize, before continuing.
6. Subject the mobile station to overnight soak at +60 C.
7. With the mobile station, powered with 3.7 Volts, connected to the CMU 200 and in a simulated call on channel 661(center channel), measure the carrier frequency. These measurements should be made within 2 minutes of powering up the mobile station, to prevent significant self warming.
8. Repeat the above measurements at 10 C increments from +60 C to -30 C. Allow at least 1 1/2 hours at each temperature, un-powered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5 C during the measurement procedure.

### **Measurement Limit:**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.. This transceiver is specified to operate with an input voltage of between 3.3 V dc and 4.4 V dc, with a nominal voltage of 3.7 V dc.



**AFC FREQ ERROR vs. VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
3.5	24	0,00000128	0,0128
3.6	20	0,00000106	0,0106
3.7	22	0,00000117	0,0117
3.8	26	0,00000138	0,0138
3.9	24	0,00000128	0,0128
4.0	23	0,00000122	0,0122
4.1	24	0,00000128	0,0128
4.2	25	0,00000133	0,0133
4.3	26	0,00000138	0,0138
4.4	23	0,00000122	0,0122
4.5	23	0,00000122	0,0122

**AFC FREQ ERROR vs. TEMPERATURE**

TEMPERATURE (°C)	Frequency Error (Hz)	Frequency Error (%)	Frequency Error (ppm)
-30	13	0,00000069	0,0069
-20	16	0,00000085	0,0085
-10	26	0,00000138	0,0138
±0.0	15	0,00000080	0,0080
+10	14	0,00000074	0,0074
+20	17	0,00000090	0,0090
+30	26	0,00000138	0,0138
+40	30	0,00000160	0,0160
+50	28	0,00000149	0,0149
+60	25	0,00000133	0,0133

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

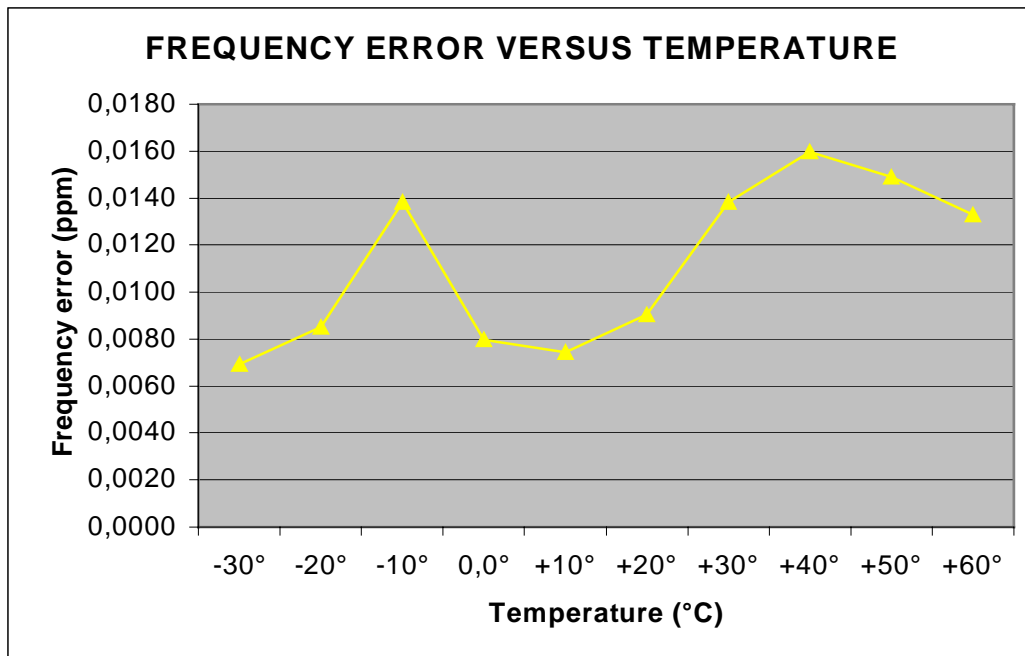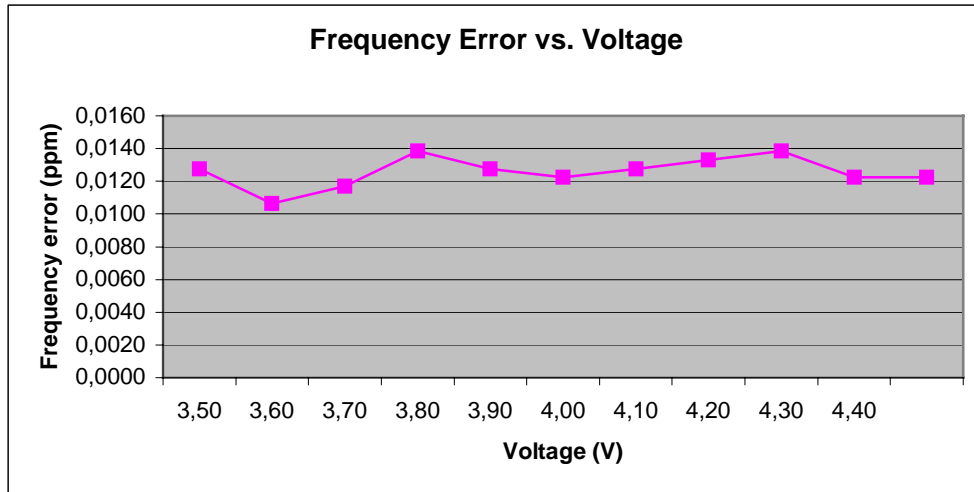

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24, 64

## EMISSIONS LIMITS

§24.238

### **Measurement Procedure:**

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4 – 1992 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

### **The final open field emission ( here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:**

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1 MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603 .

### **Measurement Limit:**

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee' s frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Measurement Results:**

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.2 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

**RESULTS OF OPEN FIELD RADIATED TEST FOR FCC-24:**


The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.  
As can be seen from this data, the emissions from the test item were within the specification limit.

<b>EMISSION LIMITATIONS</b>					
<b>f (MHz)</b>		<b>amplitude of emission (dBm)</b>	<b>limit max. allowed emission power (dBm)</b>	<b>actual attenuation below frequency of operation (dBc)</b>	<b>results</b>
<b>CH 128</b>					
<b>824,2</b>		<b>26.70</b>	<b>-13.0 (39.70 dBc)</b>		<b>carrier</b>
<b>1648.4</b>		<b>-32.9</b>		<b>59.60</b>	<b>complies</b>
<b>CH 189</b>					
<b>836,4</b>		<b>26.80</b>	<b>-13.0 (39.80 dBc)</b>		<b>carrier</b>
<b>1672.8</b>		<b>-32.0</b>		<b>58.80</b>	<b>complies</b>
<b>CH 251</b>					
<b>848,8</b>		<b>26.90</b>	<b>-13.0 (39.90 dBc)</b>		<b>carrier</b>
<b>1697.6</b>		<b>-33.80</b>		<b>60.70</b>	<b>complies</b>
<b>5092.8</b>		<b>-53.40</b>		<b>80.30</b>	<b>complies</b>
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

Channel 128 (up to 4 GHz )

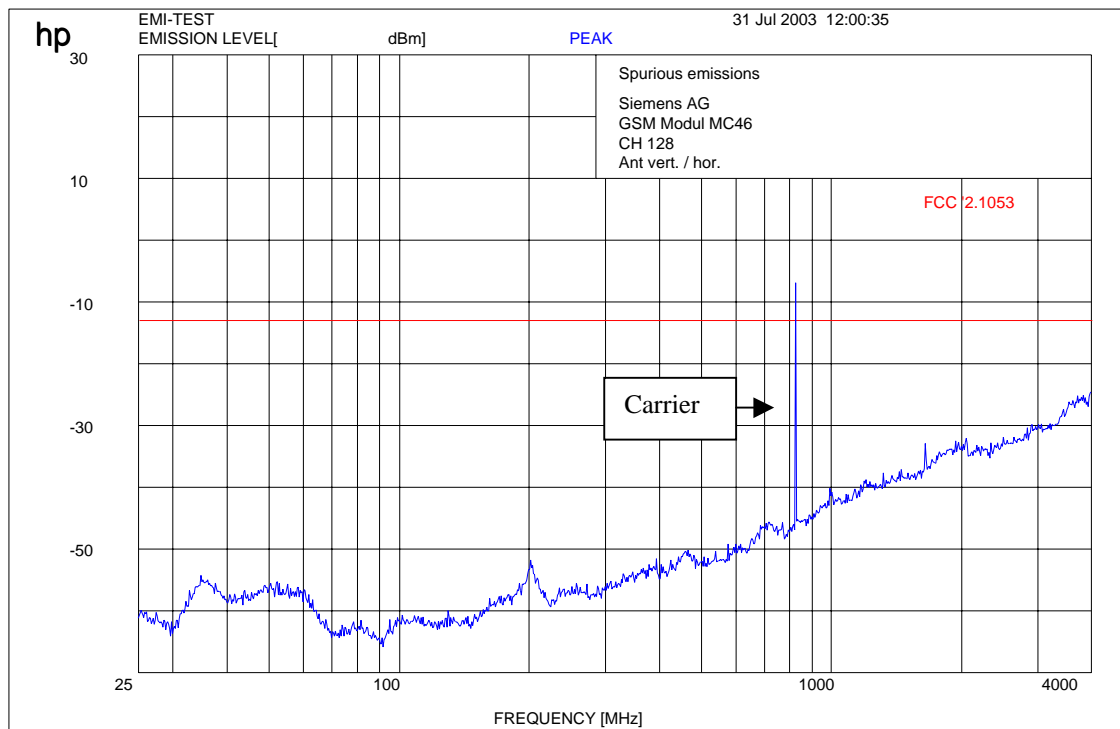


$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$        $f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$

Carrier suppressed with a rejection filter

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

Channel 128 (up to 12 GHz )

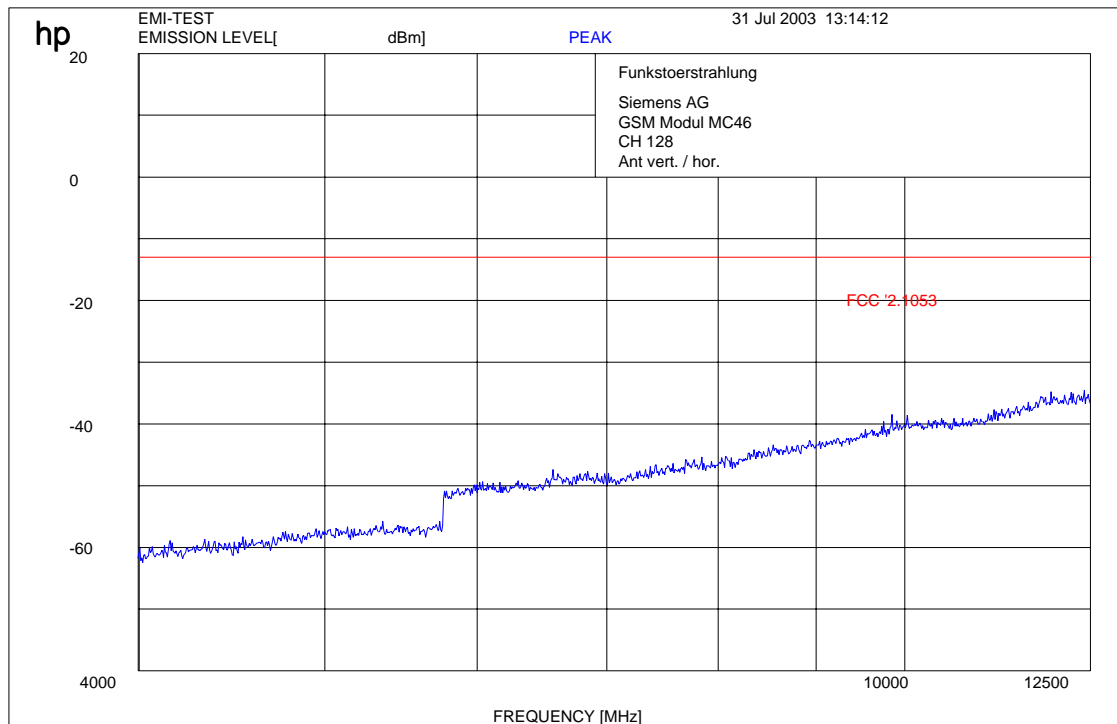

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz

Carrier suppressed with a rejection filter


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24. 64

Channel 128 :- 25 GHz


	Ref Lvl	26.8 dBm	Marker 1 [T1]	-41.43 dBm	RBW	1 MHz	RF Att	20 dB
				6.55060120 GHz	VBW	1 MHz		
					SWT	110 ms	Unit	dBm

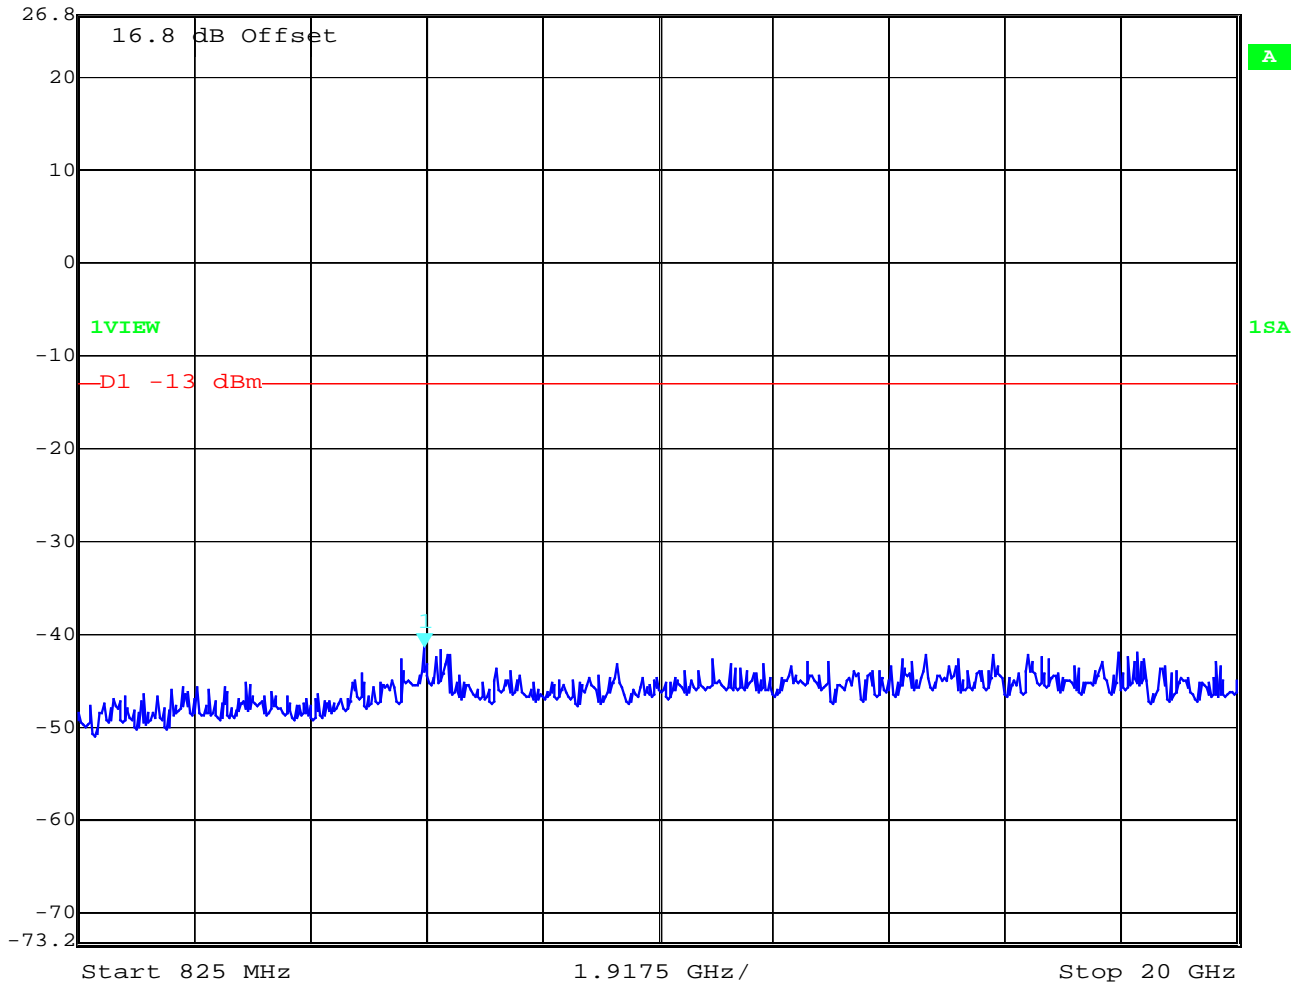

Date: 1.AUG.2003 07:54:08




Channel 189 (up to 4 GHz )

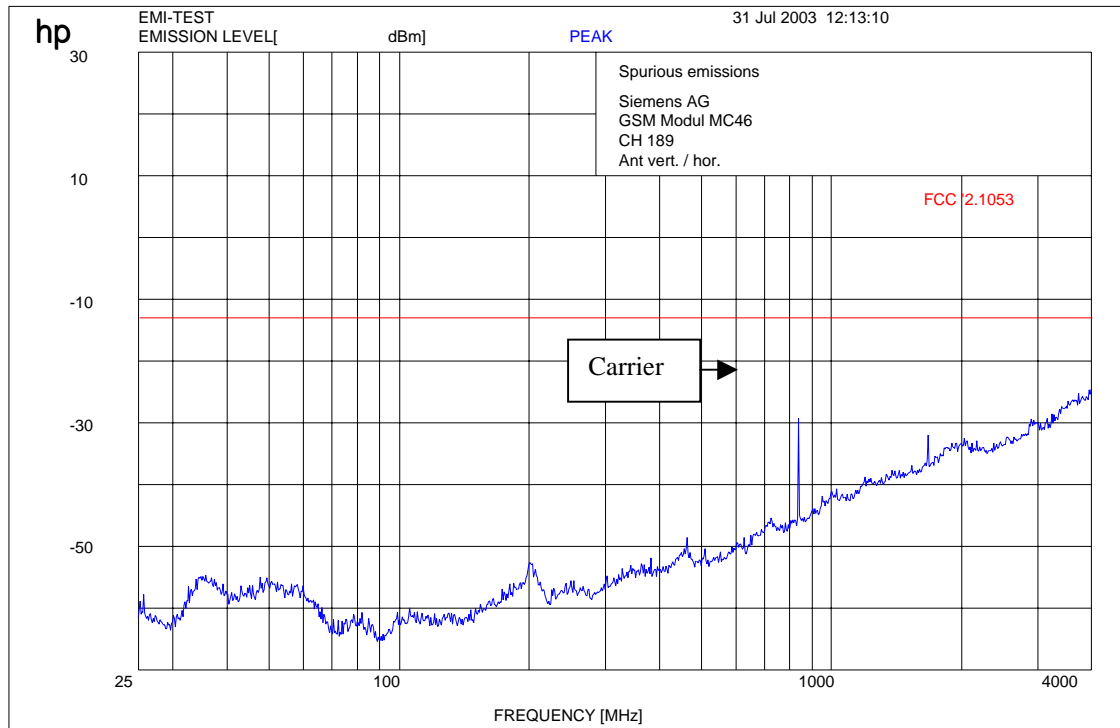

f < 1 GHz : RBW/VBW: 100 kHz      f ≥ 1GHz : RBW/VBW 1 MHz  
Carrier suppressed with a rejection filter


Channel 189 (up to 12 GHz )

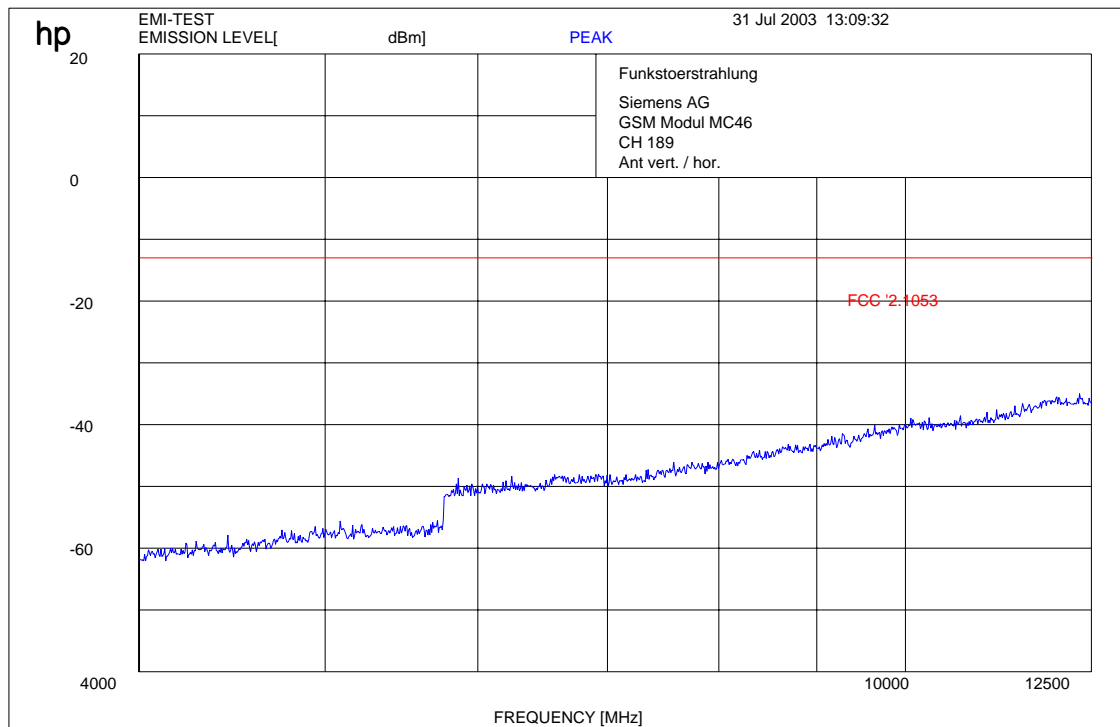

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz       $f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz  
Carrier suppressed with a rejection filter


## Channel 189 : -25 GHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	Ref Lvl	-36.74 dBm	VBW	1 MHz	
	30 dBm	14.50100200 GHz	SWT	74 ms	Unit      dBm

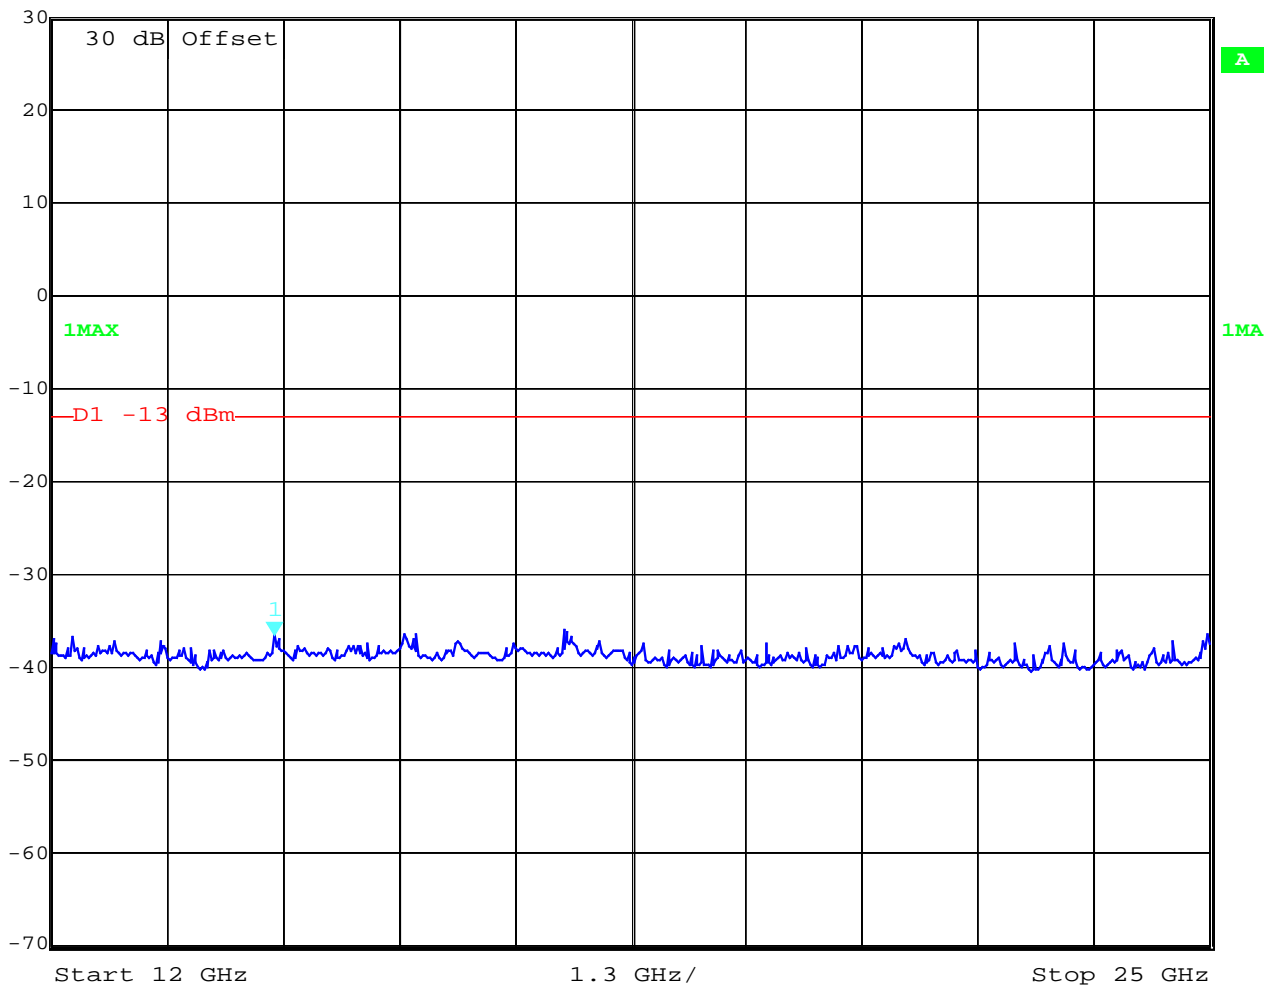

Date:      31.JUL.2003      14:50:35

Channel 251 up to 4 GHz

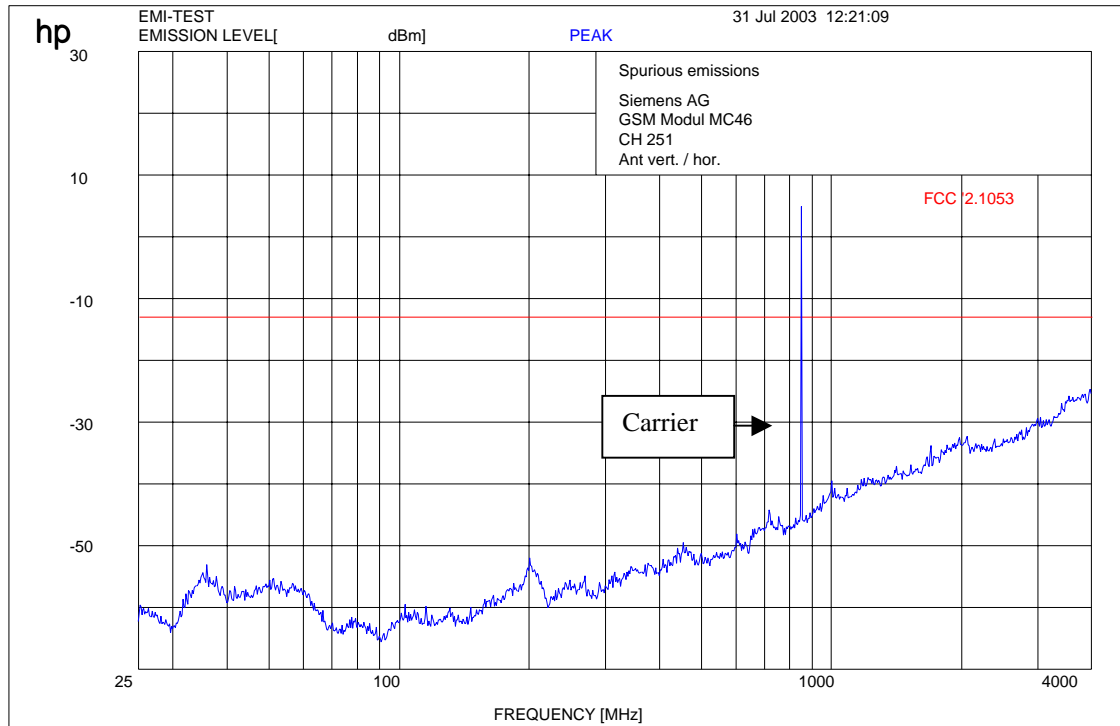

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$

$f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$


Carrier suppressed with a rejection filter

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 – 24. 64


Channel 251 up to 12 GHz

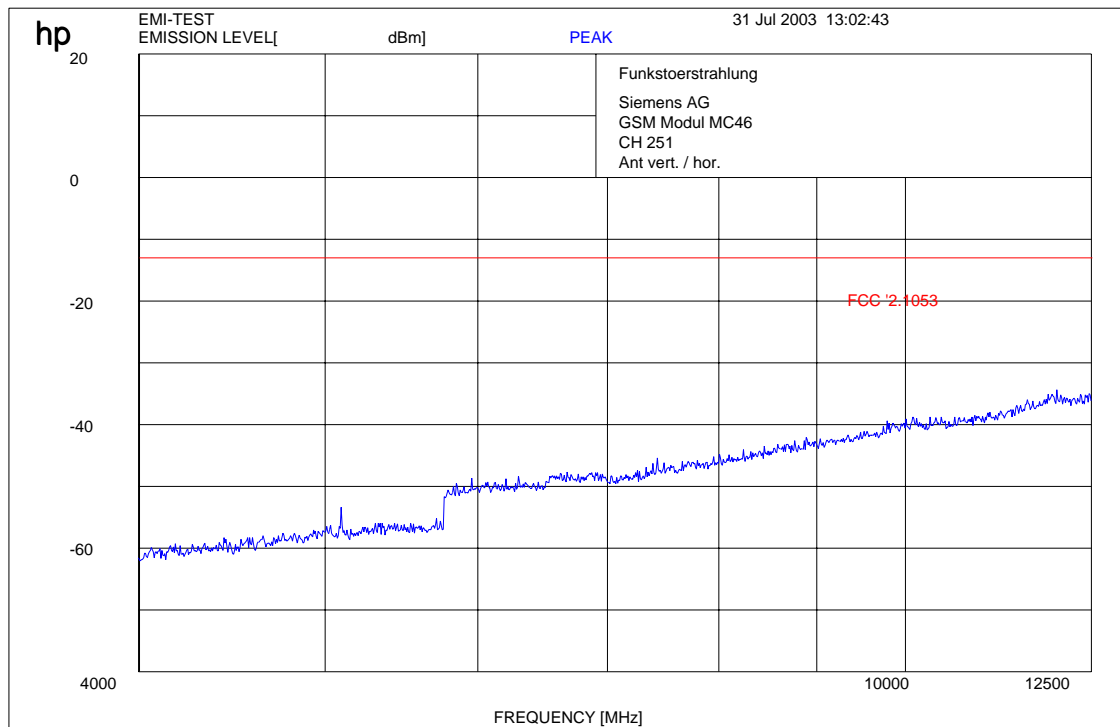

$f < 1 \text{ GHz} : \text{RBW/VBW: } 100 \text{ kHz}$        $f \geq 1 \text{ GHz} : \text{RBW/VBW } 1 \text{ MHz}$   
**Carrier suppressed with a rejection filter**


Channel 251 : -25 GHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
	Ref Lvl	-36.78 dBm	VBW	1 MHz	
	30 dBm	15.80360721 GHz	SWT	74 ms	Unit dBm

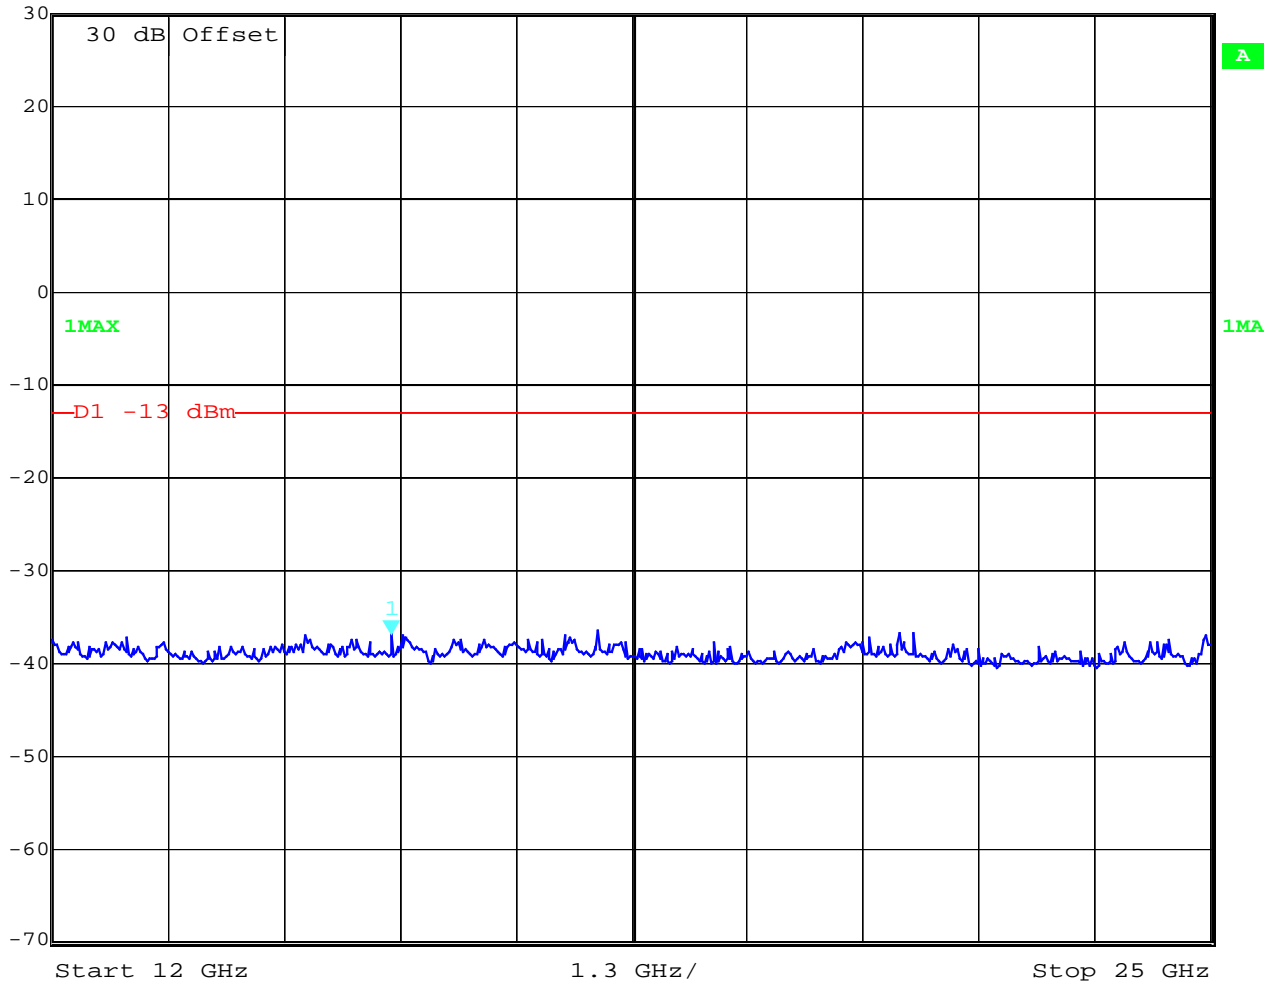

Date: 31.JUL.2003 14:52:18

**Channel 189 (this is valid for all 3 channels and up to 4 GHz)**  
**Idle-Mode**

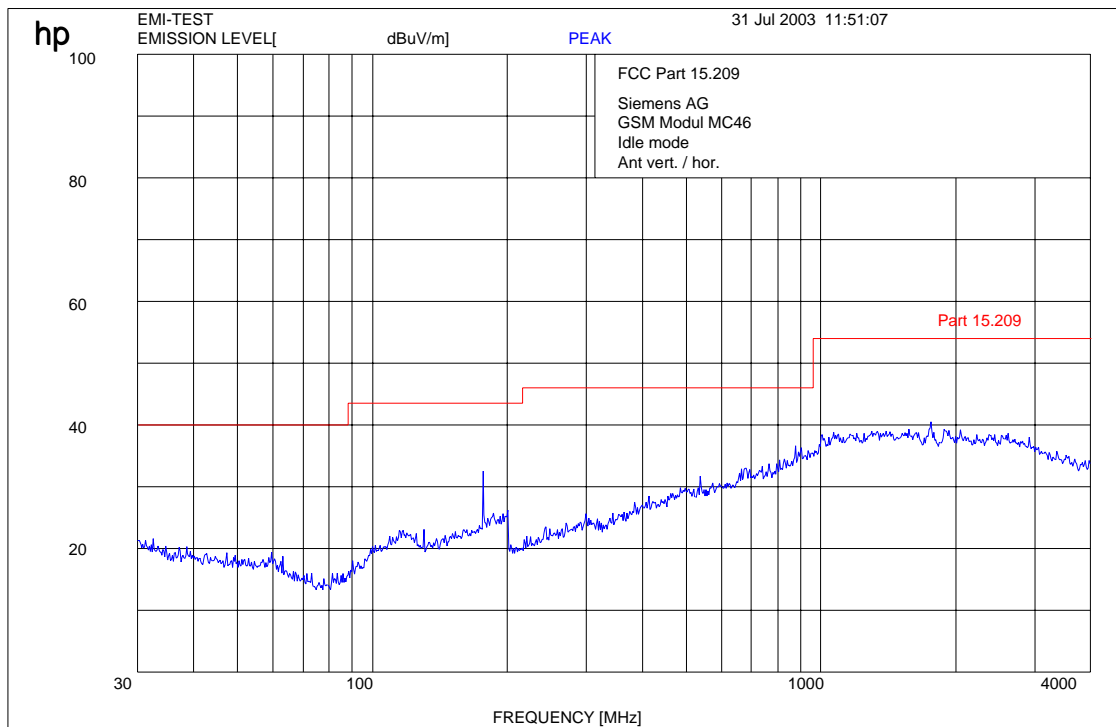

**f < 1 GHz : RBW/VBW: 100 kHz**


**f ≥ 1GHz : RBW/VBW 1 MHz**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

**(for reference numbers see test equipment listing)**

**17 – 24, 64**

**Channel 189 (this is valid for all 3 channels and up to 12 GHz)**  
**Idle-Mode**

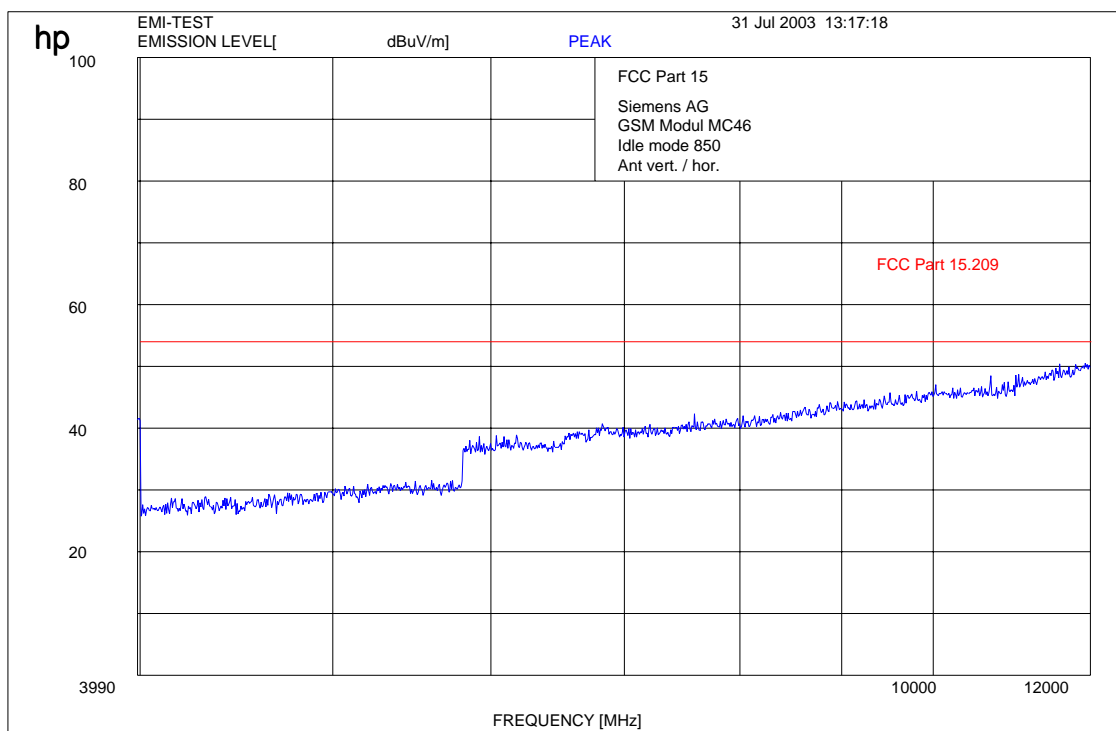


f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW 1 MHz



**Channel 189 (this is valid for all 3 channels and up to 25 GHz )**

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	33.88 dB $\mu$ V/m	VBW	1 MHz	
	89.3 dB*	17.80360721 GHz	SWT	46 ms	Unit      dB $\mu$ V/m

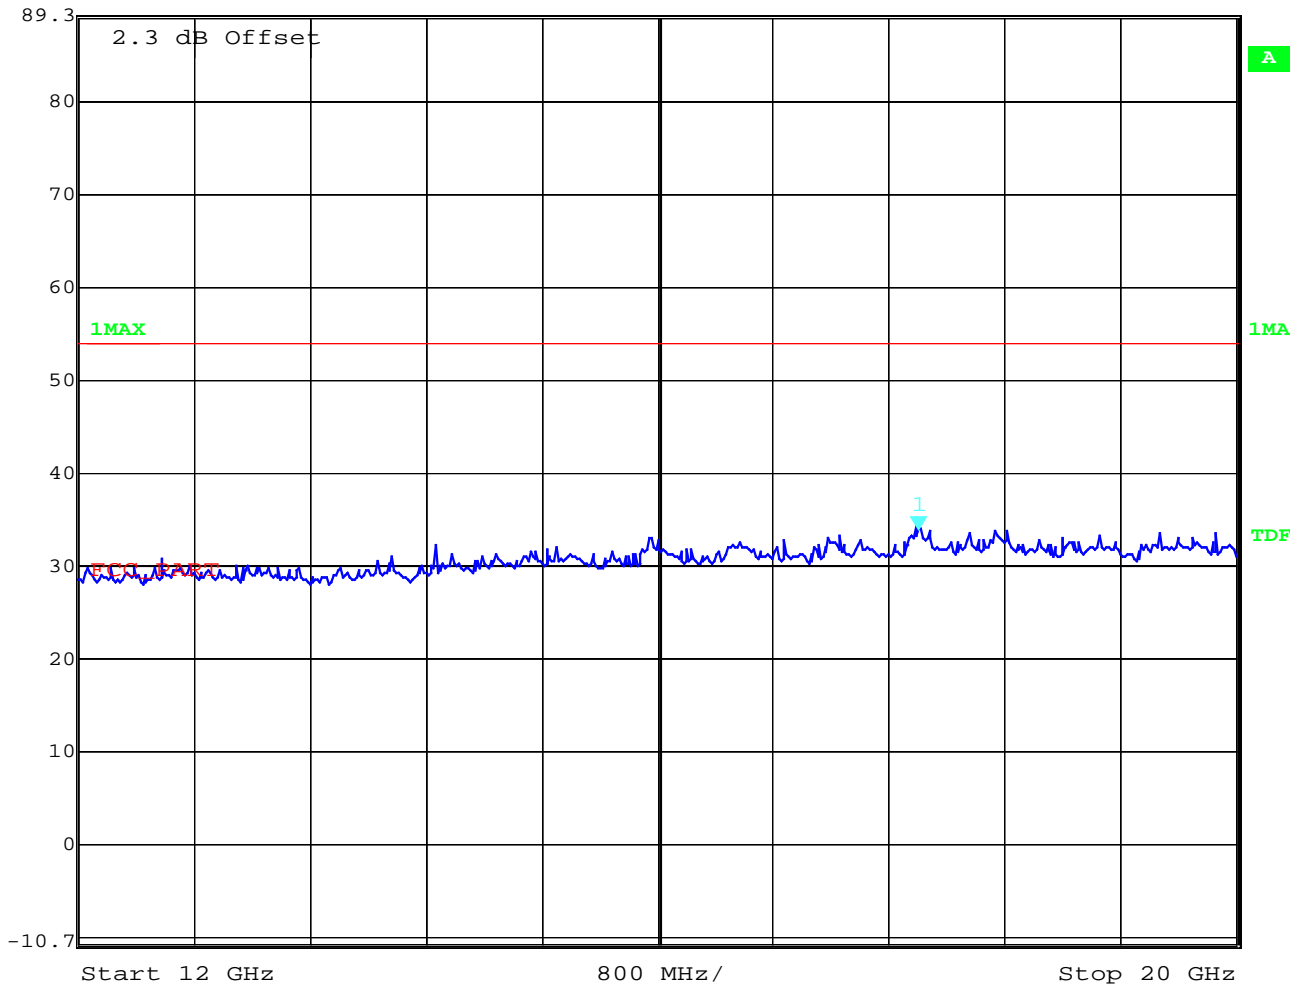

Date:      31.JUL.2003      14:08:21

**CONDUCTED SPURIOUS EMISSIONS**

**Measurement Procedure:**

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.

For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 19.1 GHz, data taken from 10 MHz to 20 GHz.

2. Determine mobile station transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

**USPCS Transmitter**

**Channel Frequency**

128 824.2 MHz

189 836.2 MHz

251 848.8 MHz

**Measurement Limit:**

Sec. 24.238 Emission Limits.


(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.


<b>EMISSION LIMITATIONS</b>					
<b>f (MHz)</b>		<b>amplitude of emission (dBm)</b>	<b>limit max. allowed emission power (dBm)</b>	<b>actual attenuation below frequency of operation (dBc)</b>	<b>results</b>
<b>CH 128</b>					
<b>824,2</b>		<b>33.0</b>	<b>-13.0 (46.00 dBc)</b>		<b>carrier</b>
<b>823.996</b>		<b>-15.65</b>		<b>48.65</b>	<b>complies</b>
<b>6550.6</b>		<b>-41.43</b>		<b>74.43</b>	<b>complies</b>
<b>CH 189</b>					
<b>836,4</b>		<b>32.94</b>	<b>-13.0 (45.94 dBc)</b>		<b>carrier</b>
<b>835.874</b>		<b>-45.89</b>		<b>78.83</b>	<b>complies</b>
<b>6904.6</b>		<b>-41.86</b>		<b>74.80</b>	<b>complies</b>
<b>CH 251</b>					
<b>848,8</b>		<b>32.87</b>	<b>-13.0 (45.87 dBc)</b>		<b>carrier</b>
<b>849.018</b>		<b>-15.96</b>		<b>48.83</b>	<b>complies</b>
<b>12823.5</b>		<b>-42.08</b>		<b>74.95</b>	<b>complies</b>
<b>Measurement uncertainty</b>		<b>± 0.5dB</b>			

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Measurements:**

**Channel: 128**

	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
Ref Lvl	-46.93 dBm	VBW	1 MHz		
26.8 dBm	512.93525451 MHz	SWT	5 ms	Unit	dBm

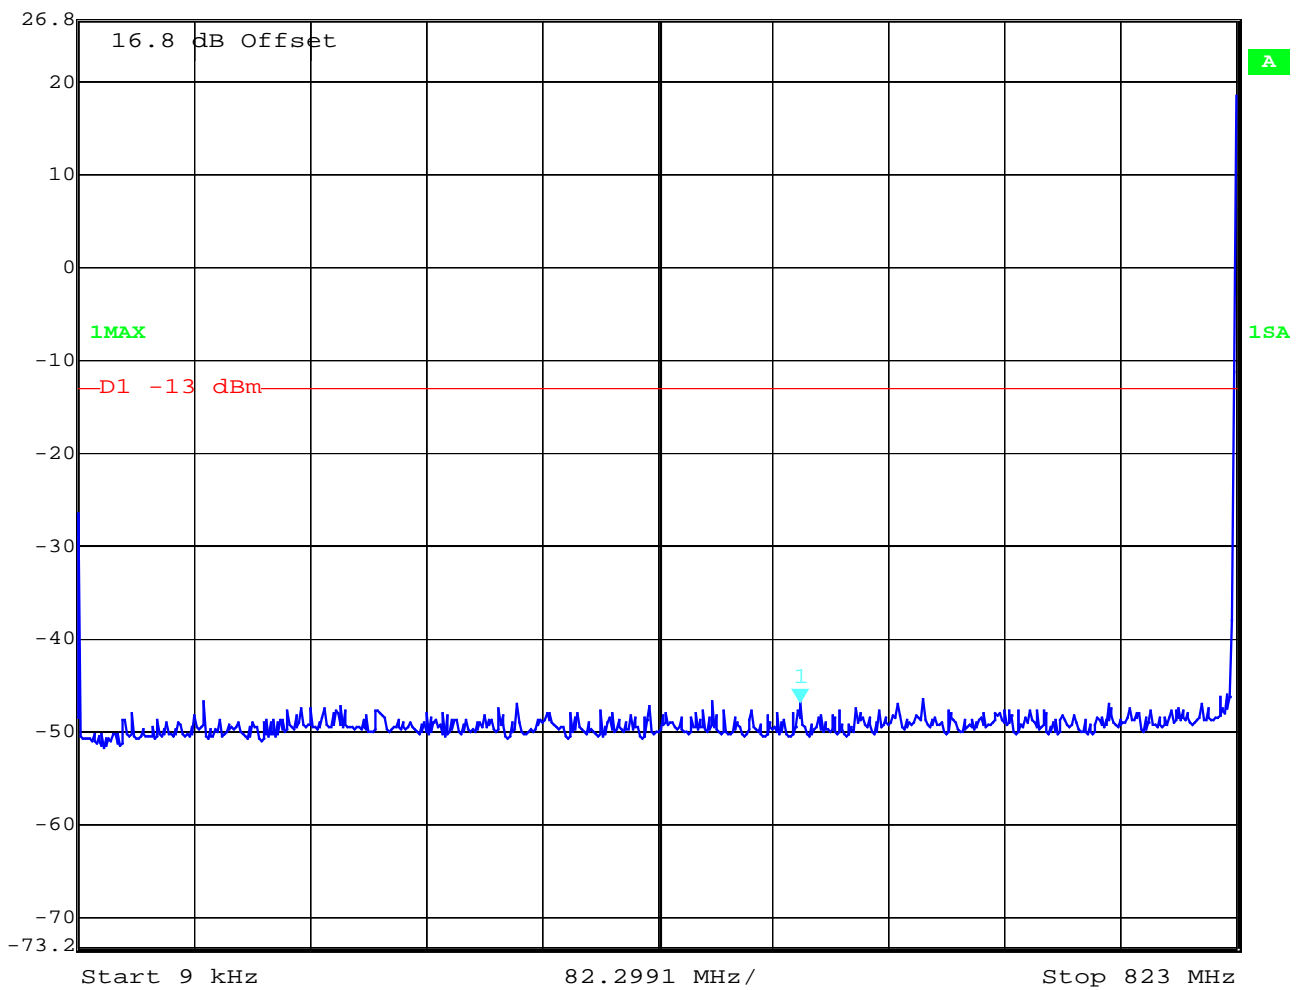


Date:            1.AUG.2003    07:50:54

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

Channel 128

	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
	Ref Lvl	-15.65 dBm	VBW	3 kHz	
	26.8 dBm	823.99599198 MHz	SWT	280 ms	Unit dBm

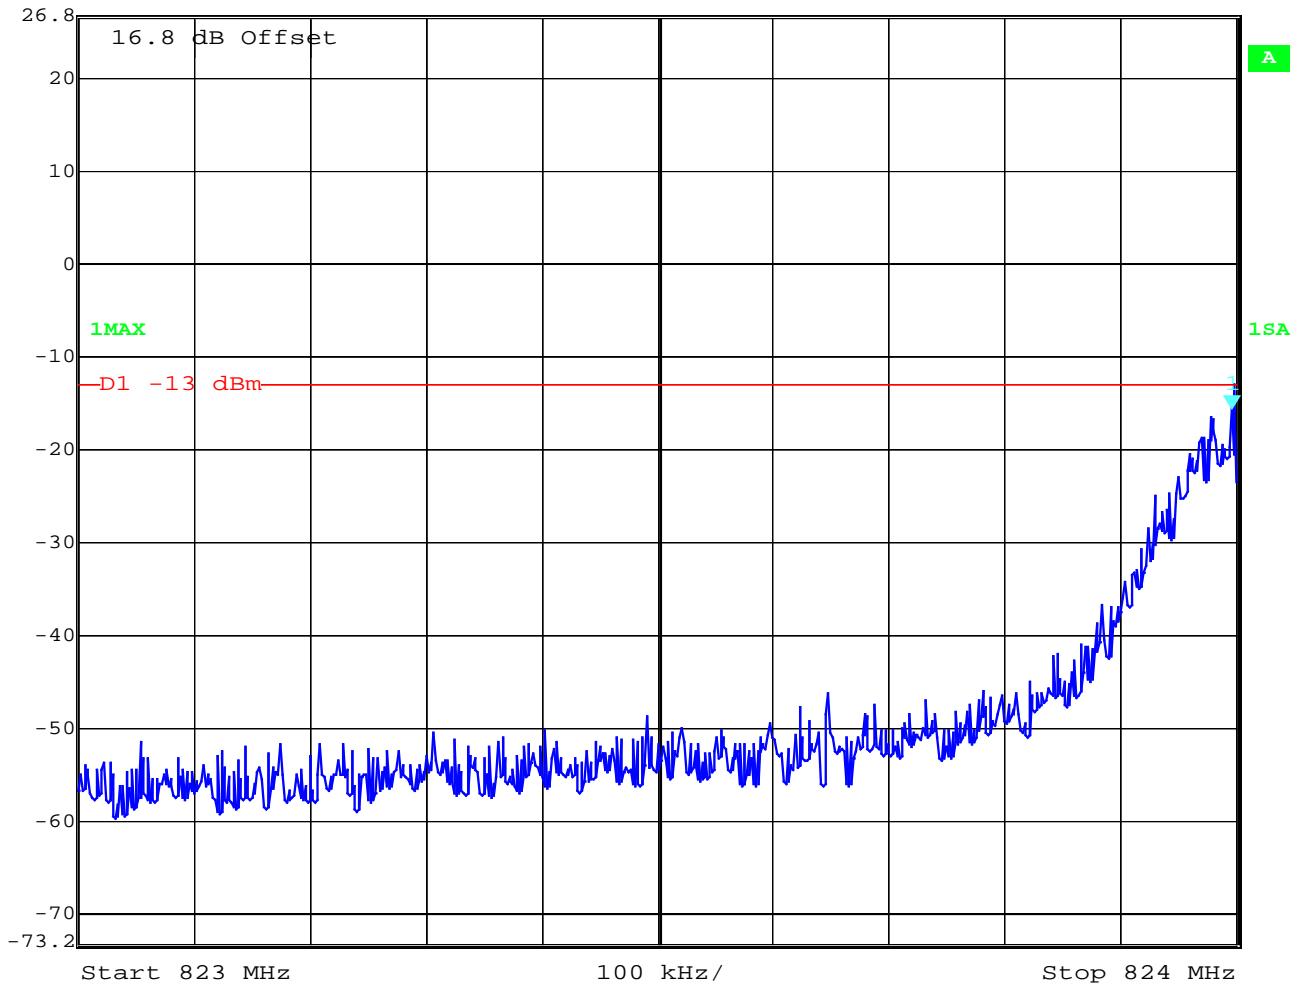

Date: 1.AUG.2003 07:52:39

Channel 128



Marker 1 [T1]

RBW 1 MHz RF Att 20 dB


Ref Lvl -41.86 dBm

VBW 1 MHz

26.8 dBm 6.90464329 GHz

SWT 110 ms

Unit dBm

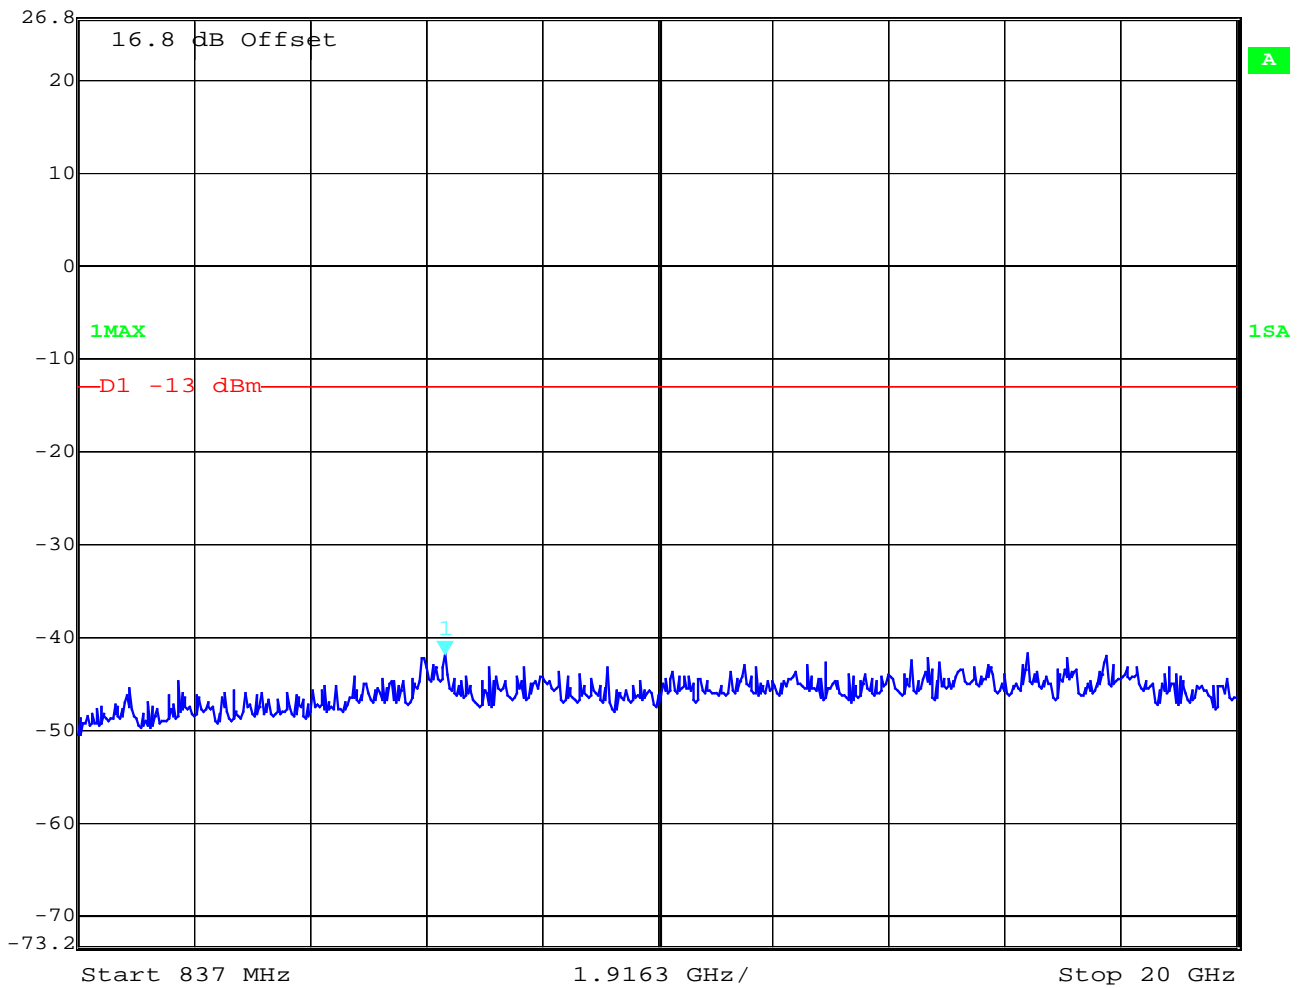


Date: 1.AUG.2003 07:56:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 189

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	20 dB
	26.8 dBm	-45.89 dBm	VBW	1 MHz		
		635.87388978 MHz	SWT	5 ms	Unit	dBm

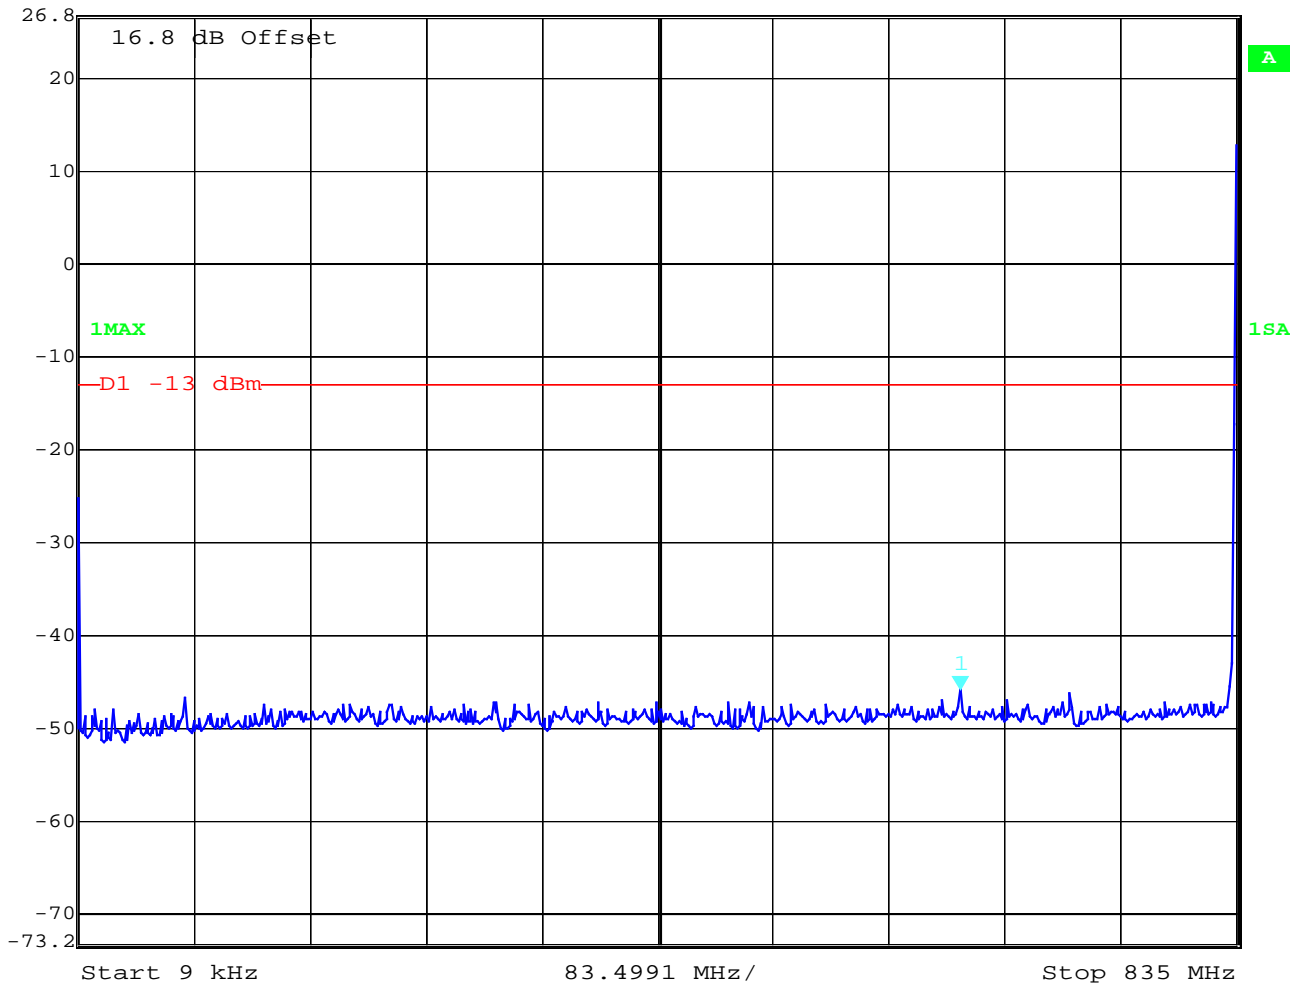

Date: 1.AUG.2003 07:55:41

Channel 189



Marker 1 [T1]

RBW 1 MHz RF Att 20 dB

Ref Lvl -41.86 dBm

VBW 1 MHz


26.8 dBm

6.90464329 GHz

SWT 110 ms

Unit

dBm

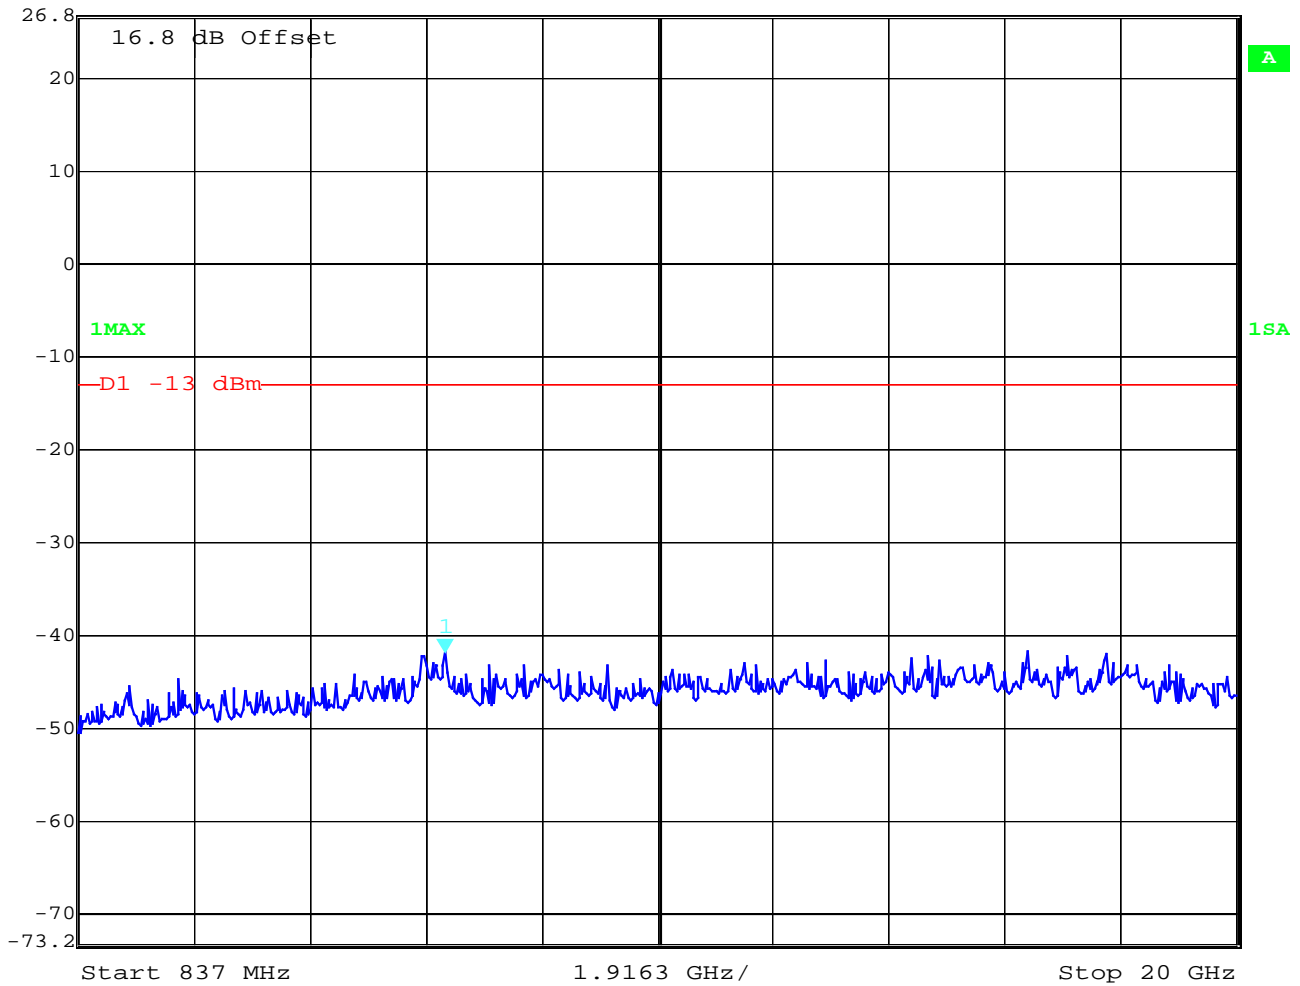


Date: 1.AUG.2003 07:56:53

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Channel 251

Marker 1 [T1]
RBW 1 MHz RF Att 20 dB  
Ref Lvl -46.47 dBm
VBW 1 MHz  
26.8 dBm
298.74730862 MHz
SWT 5 ms Unit dBm

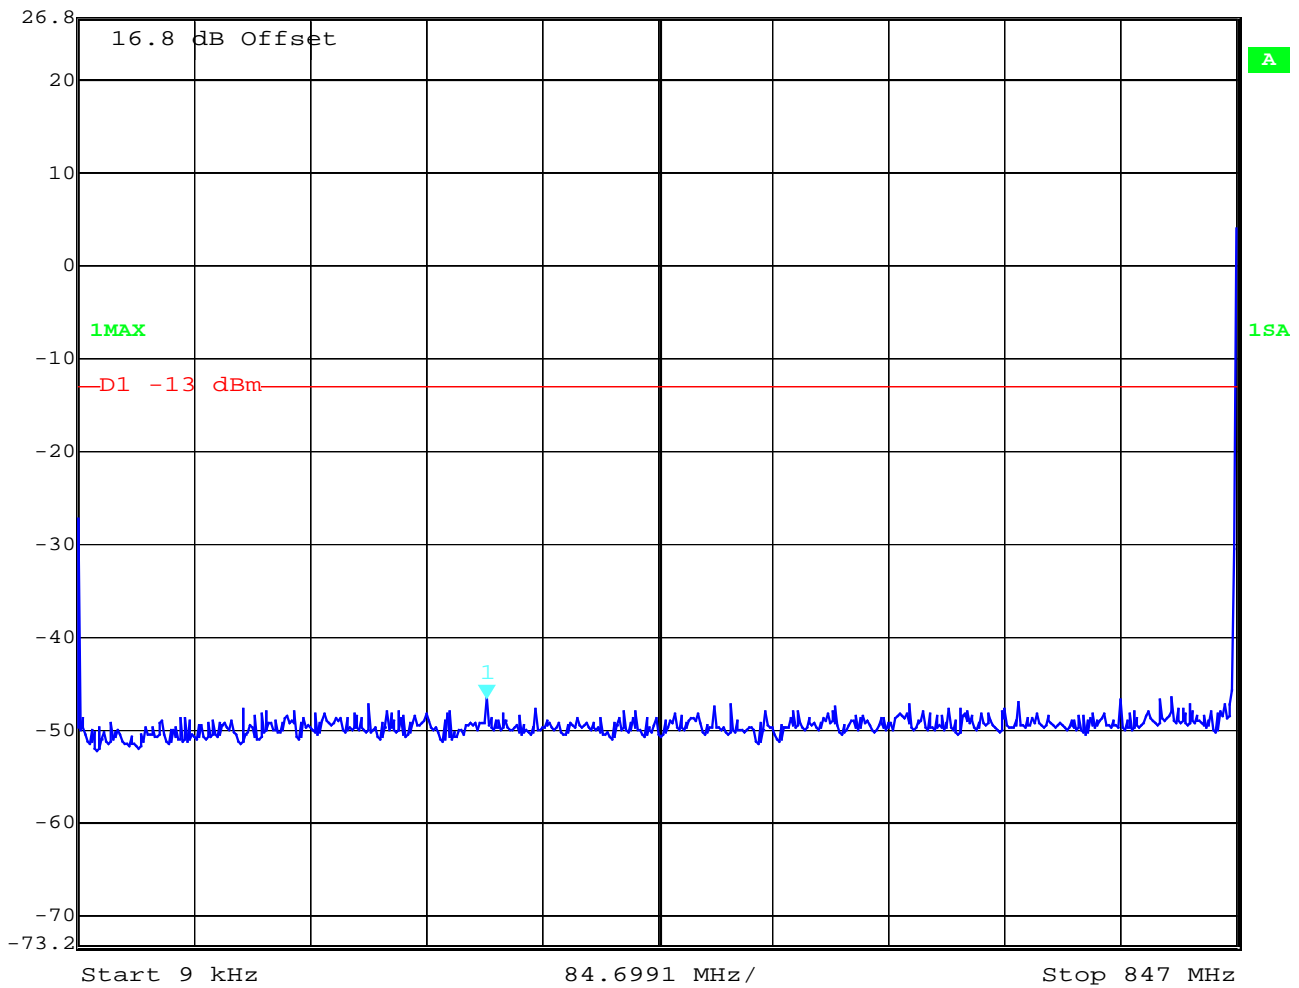


Date: 1.AUG.2003 07:58:26



Channel 251

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
	26.8 dBm	-15.96 dBm	VBW	3 kHz		
		849.01803607 MHz	SWT	280 ms	Unit	dBm

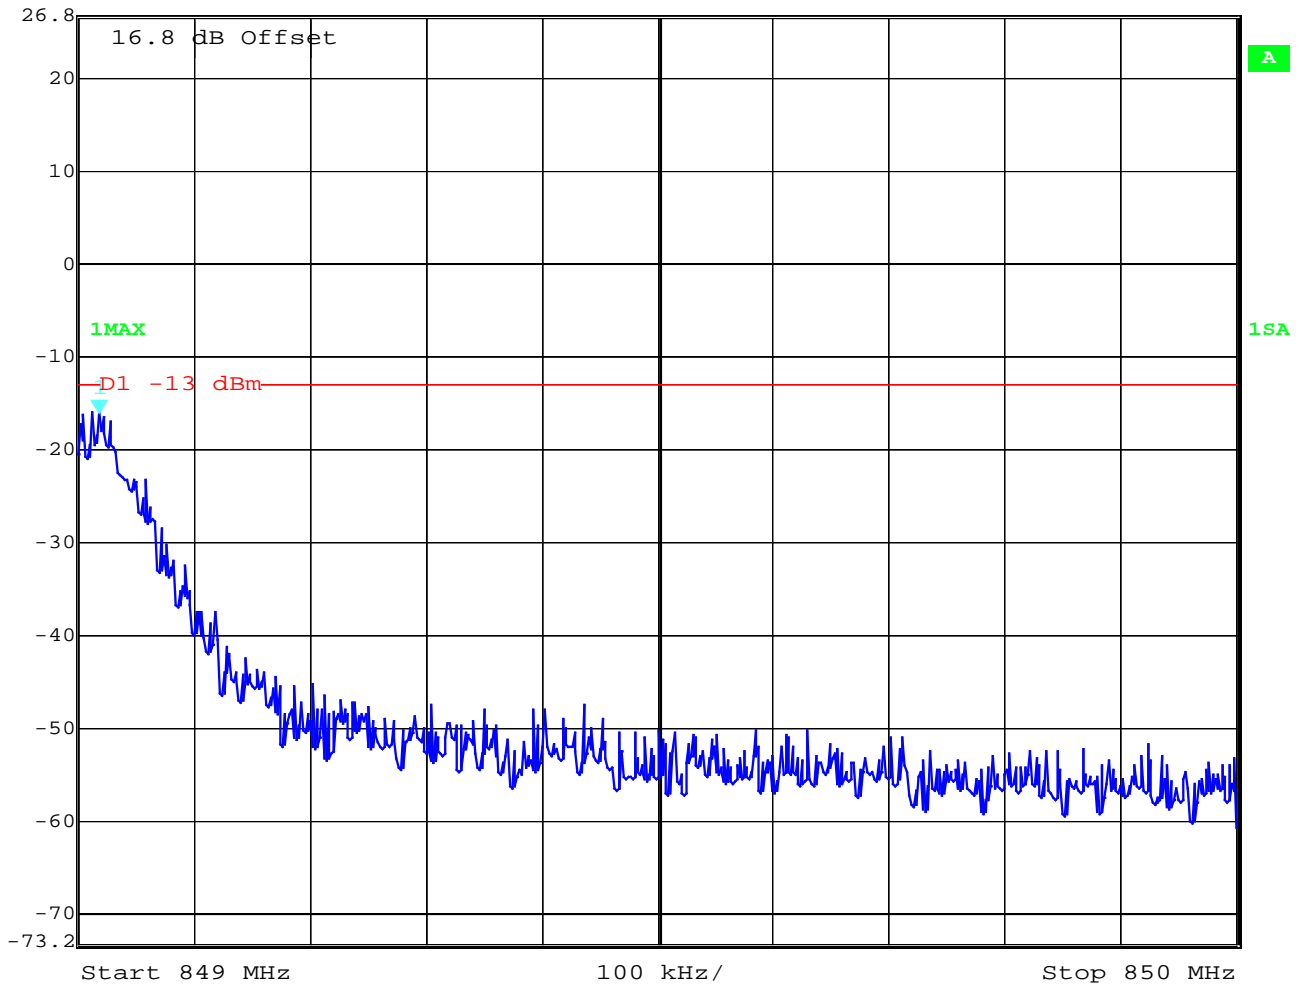

Date: 1.AUG.2003 07:59:50

Channel 251



Marker 1 [T1]


RBW 1 MHz RF Att 20 dB

Ref Lvl -42.08 dBm

VBW 1 MHz

26.8 dBm 12.82354709 GHz

SWT 110 ms Unit dBm

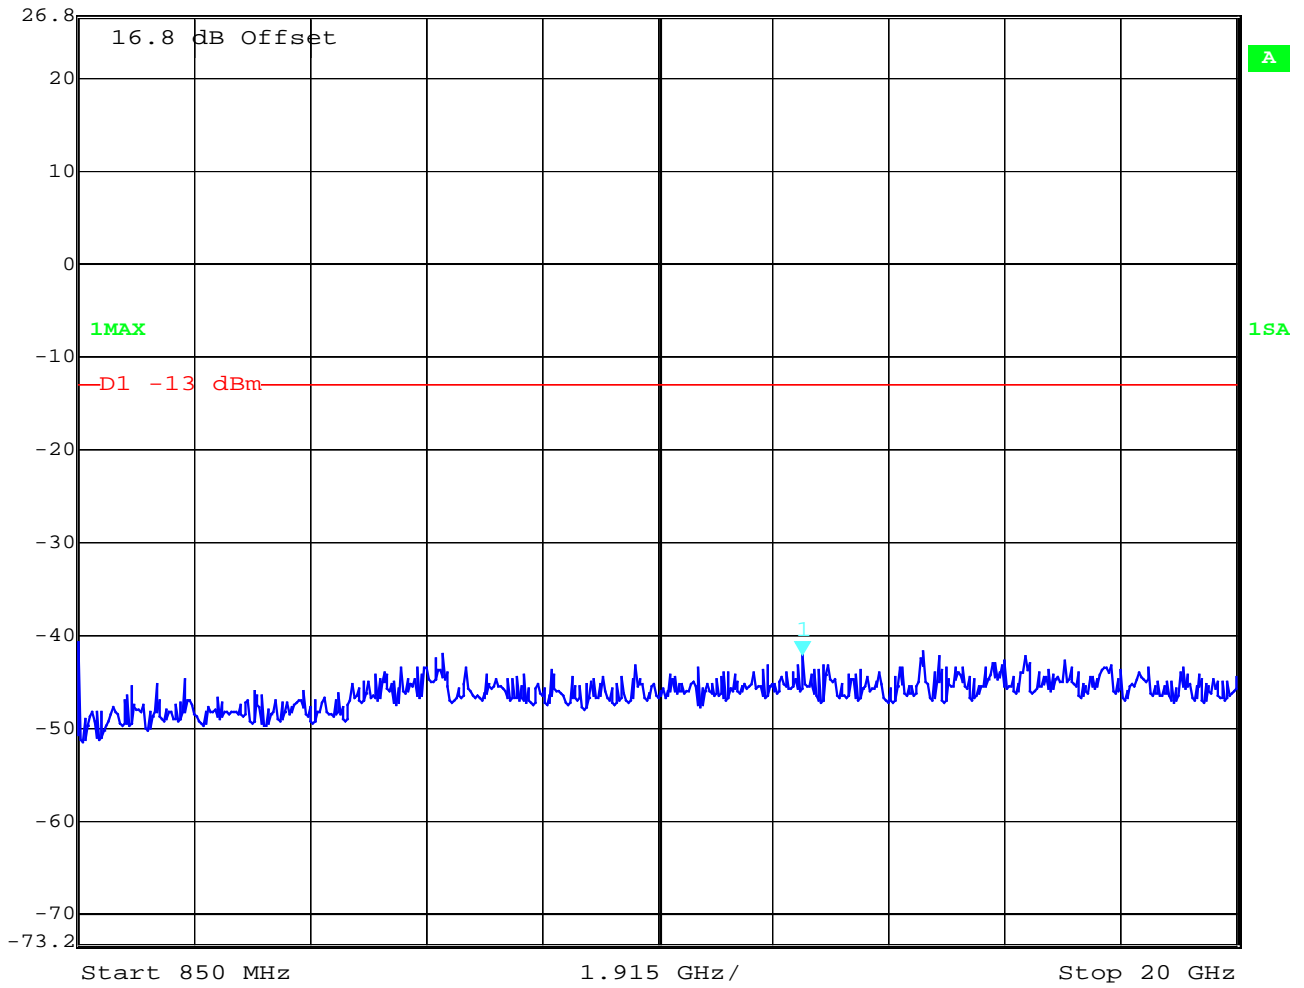

Date: 1.AUG.2003 08:01:00

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

**BLOCK EDGE REQUIREMENTS FOR BLOCK 1 TO BLOCK 4**

**Measurement Limit:**


Sec. 22.917(b) Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +33 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**Measurements:**

**Block 1 Channel 128**

	Marker 1 [T1]	RBW	3 kHz	RF Att	20 dB
	Ref Lvl	-15.98 dBm	VBW	3 kHz	
	26.8 dBm	824.0000000 MHz	SWT	280 ms	Unit

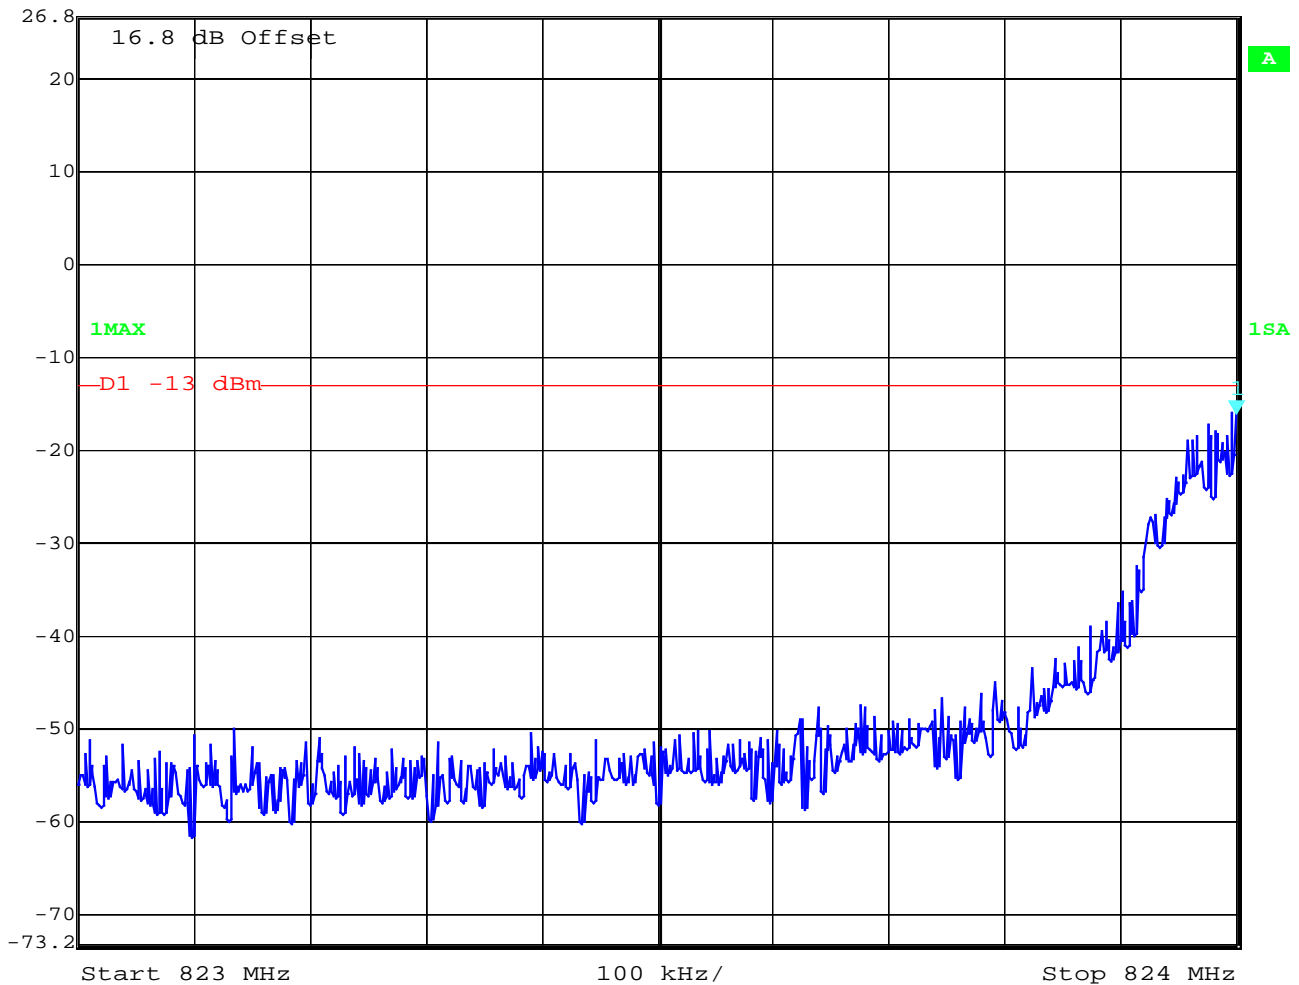


Date: 1.AUG.2003 08:11:03

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**

(for reference numbers see test equipment listing)

17 - 24, 64

Block 1 Channel 128

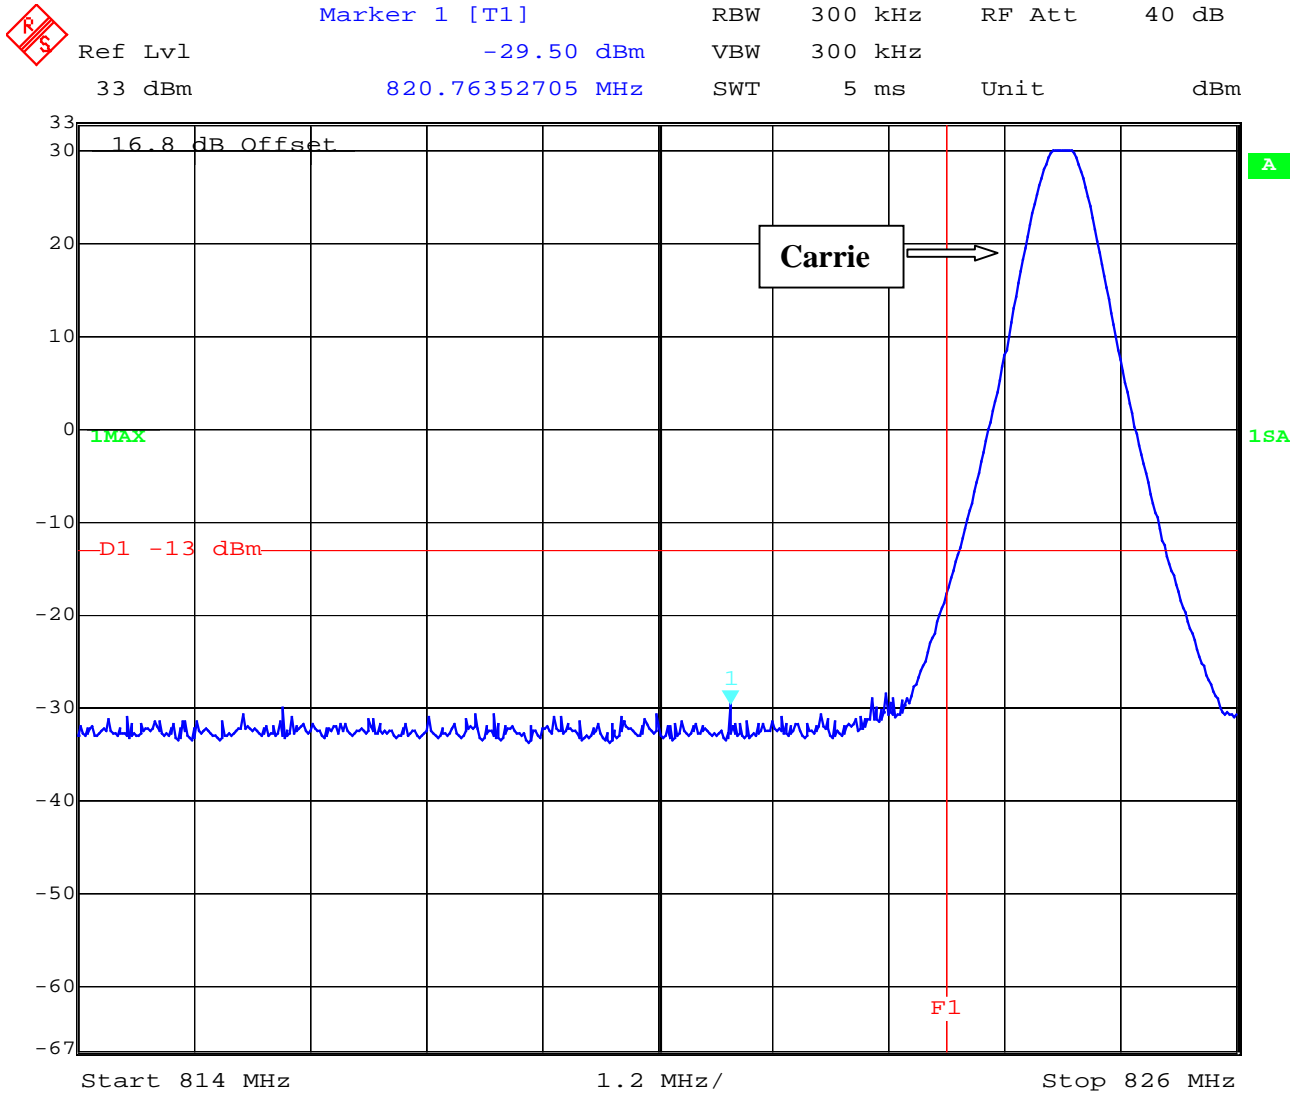

Date: 1.AUG.2003 08:25:37

Block 1 Channel 181



Marker 1 [T1]


RBW 3 kHz RF Att 40 dB

Ref Lvl -15.40 dBm

VBW 3 kHz

33 dBm 835.01803607 MHz

SWT 280 ms Unit dBm

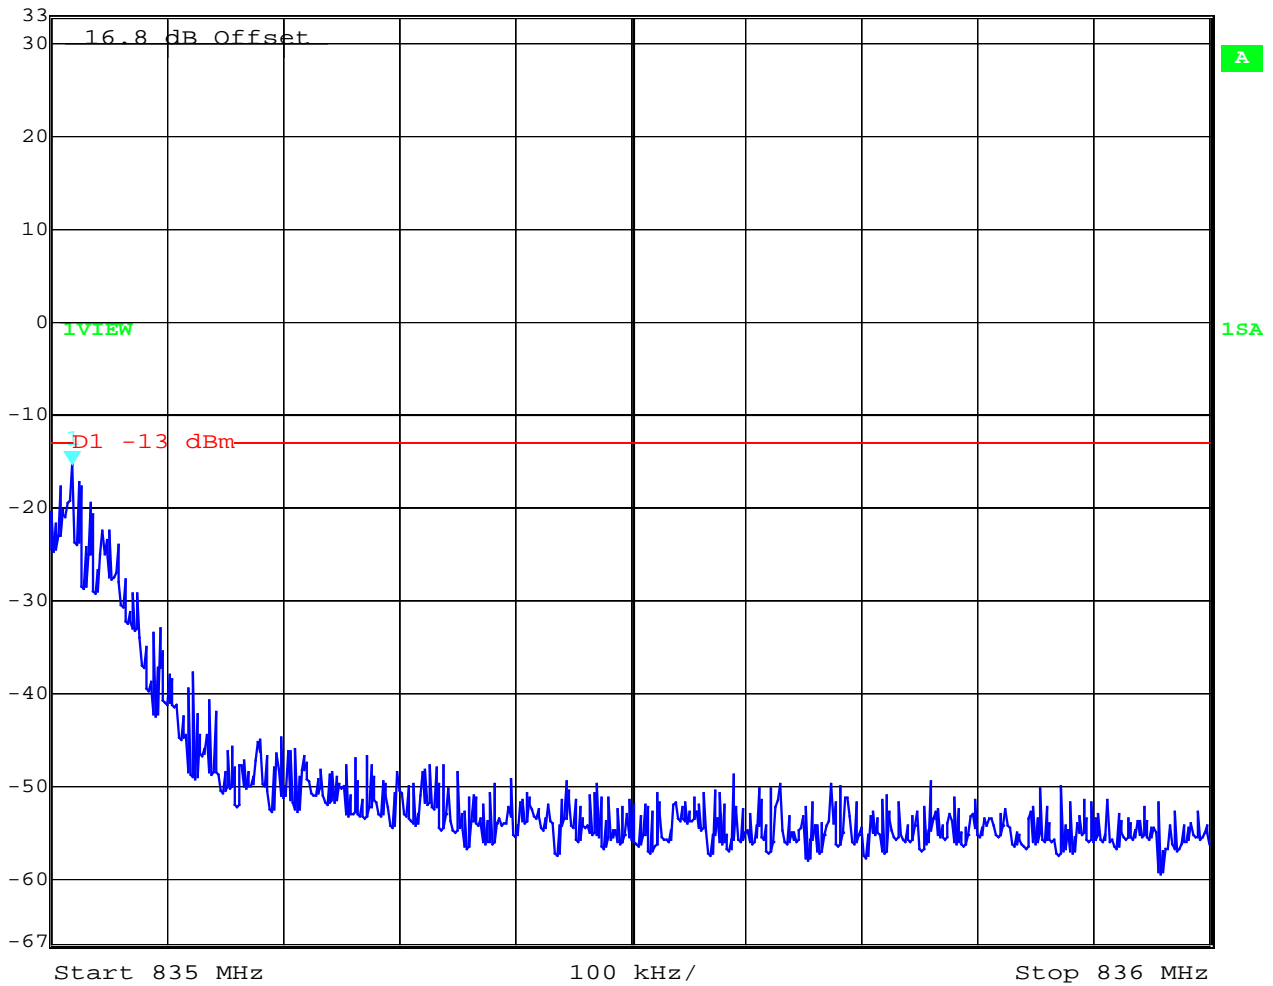

Date: 1.AUG.2003 08:28:26


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64


## Block 1 Channel 181

	Ref Lvl	Marker 1 [T1]	RBW	300 kHz	RF Att	40 dB
	33 dBm	-30.14 dBm	VBW	300 kHz		
		837.30260521 MHz	SWT	5 ms	Unit	dBm

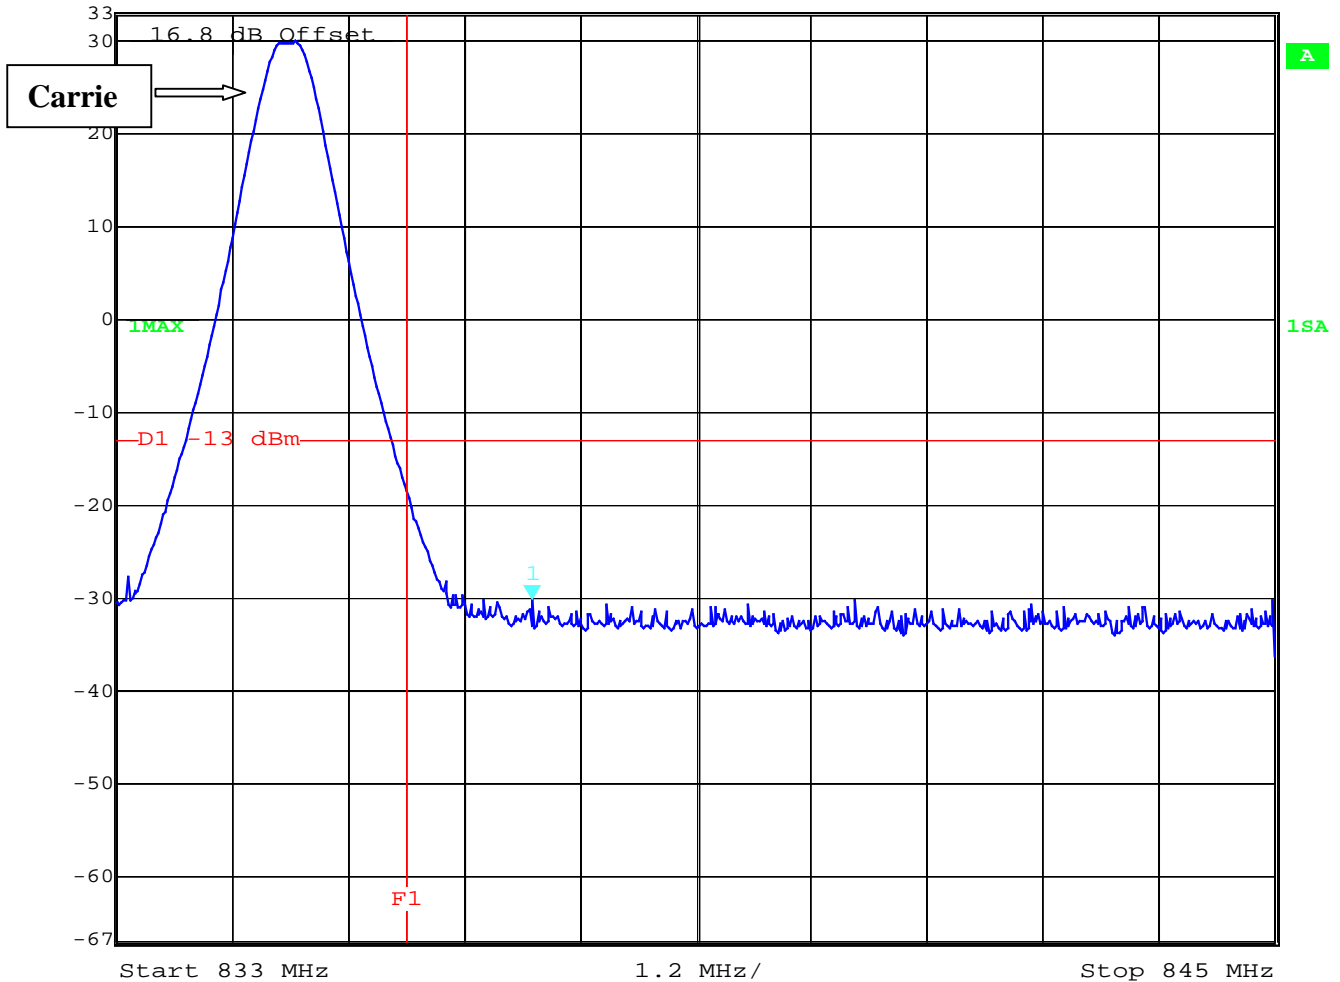

Date: 1.AUG.2003 08:31:53

Block 2 Channel 183

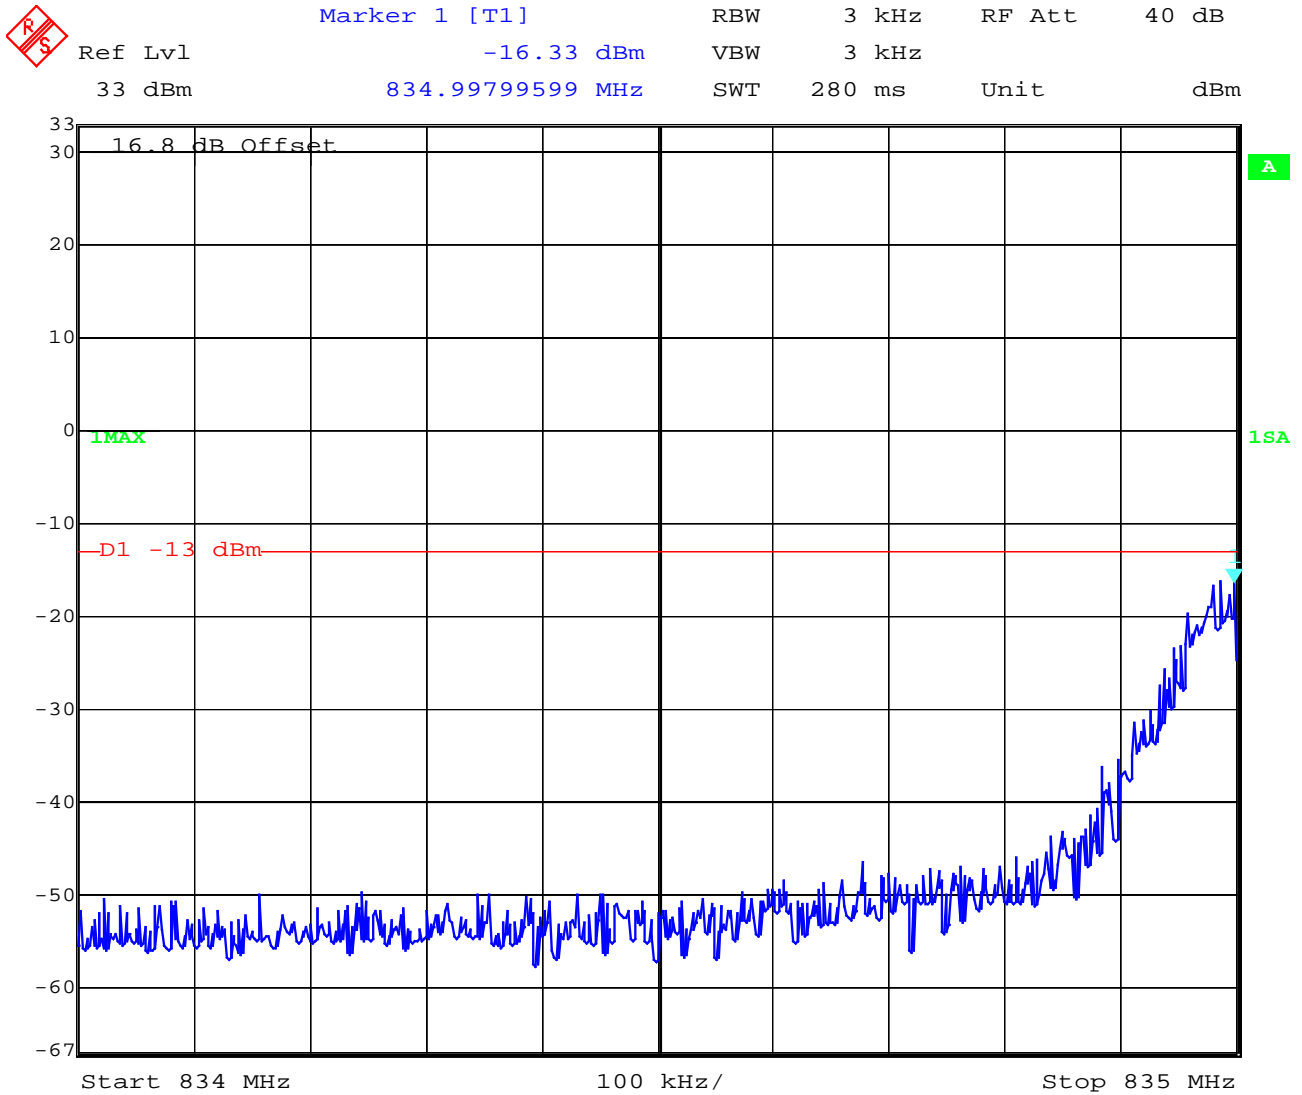


Date: 1.AUG.2003 08:33:13

Block 2 Channel 183



	Marker 1 [T1]	RBW	300 kHz	RF Att	40 dB
Ref Lvl	-29.48 dBm	VBW	300 kHz		
33 dBm	833.24248497 MHz	SWT	5 ms	Unit	dBm

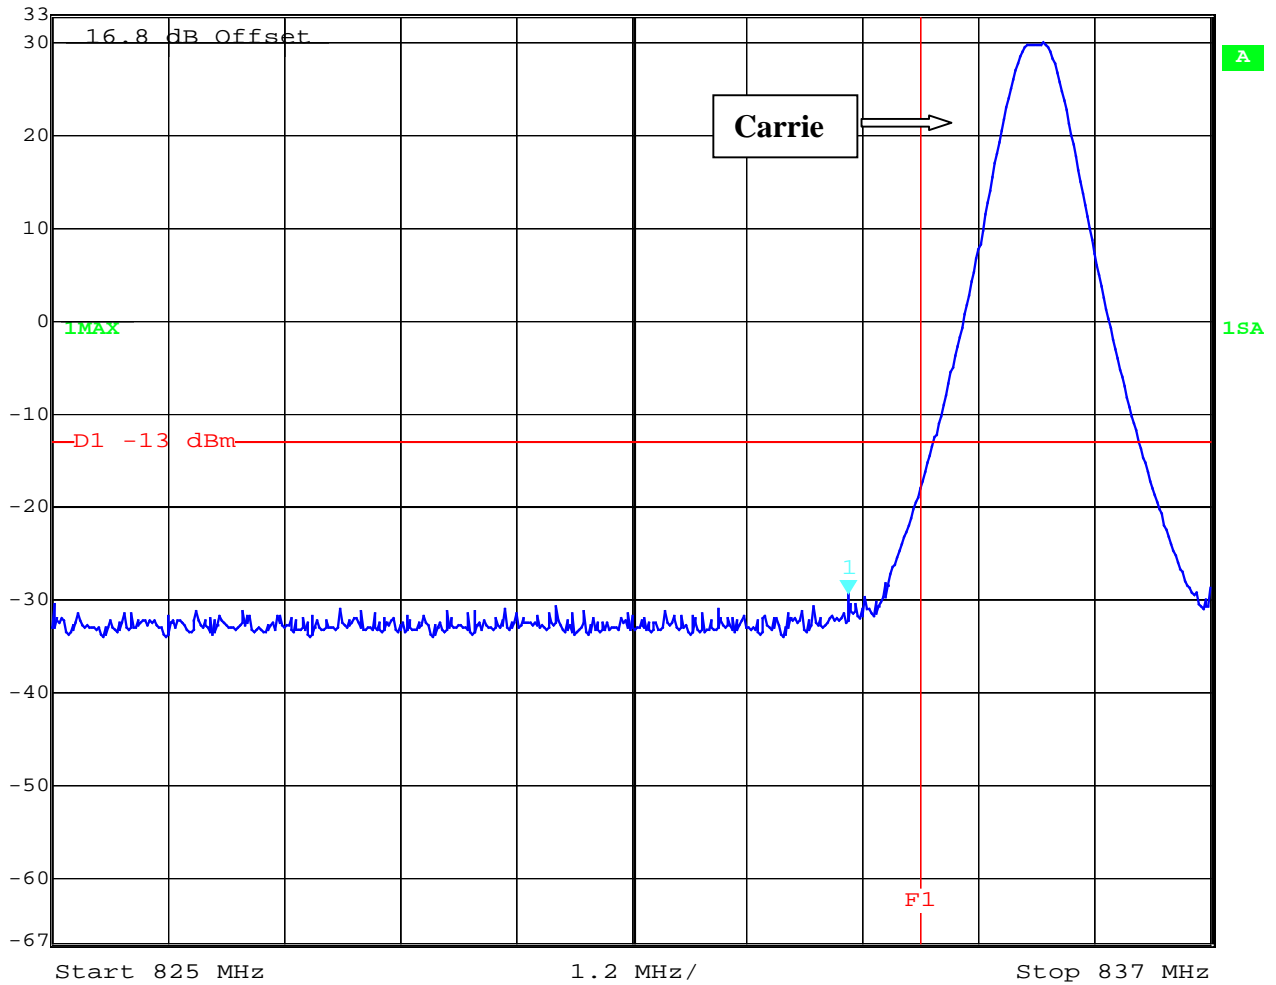


Date: 1.AUG.2003 08:34:52



Block 2 Channel 231



Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
 Ref Lvl -18.02 dBm VBW 3 kHz  
 33 dBm 845.01603206 MHz SWT 280 ms Unit dBm

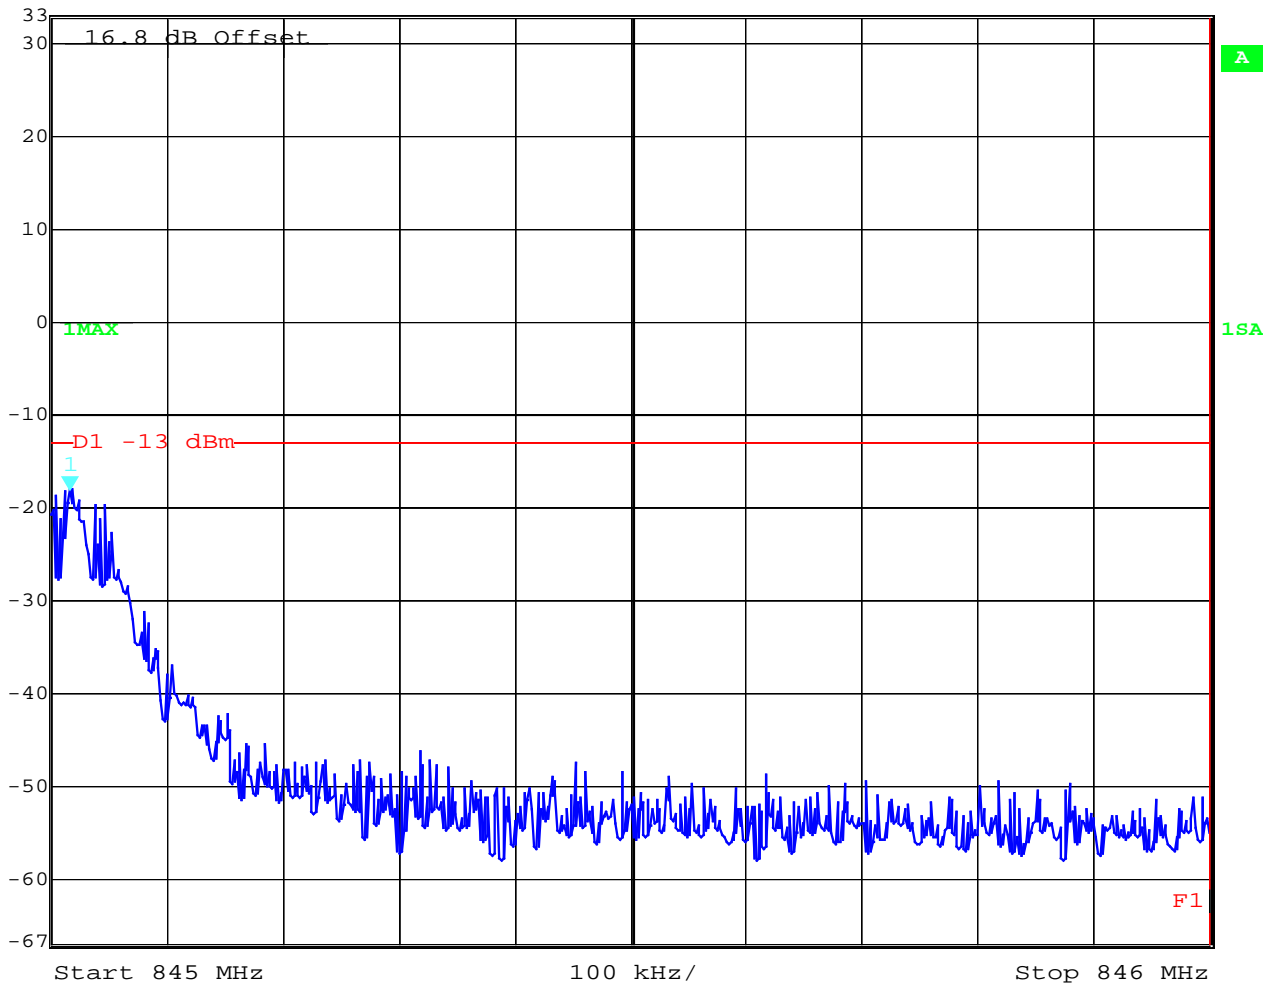

Date: 1.AUG.2003 08:36:49


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64


Block 2 Channel 231

	Ref Lvl	Marker 1 [T1]	RBW	300 kHz	RF Att	40 dB
	33 dBm	-30.53 dBm	VBW	300 kHz		
		847.28456914 MHz	SWT	5 ms	Unit	dBm

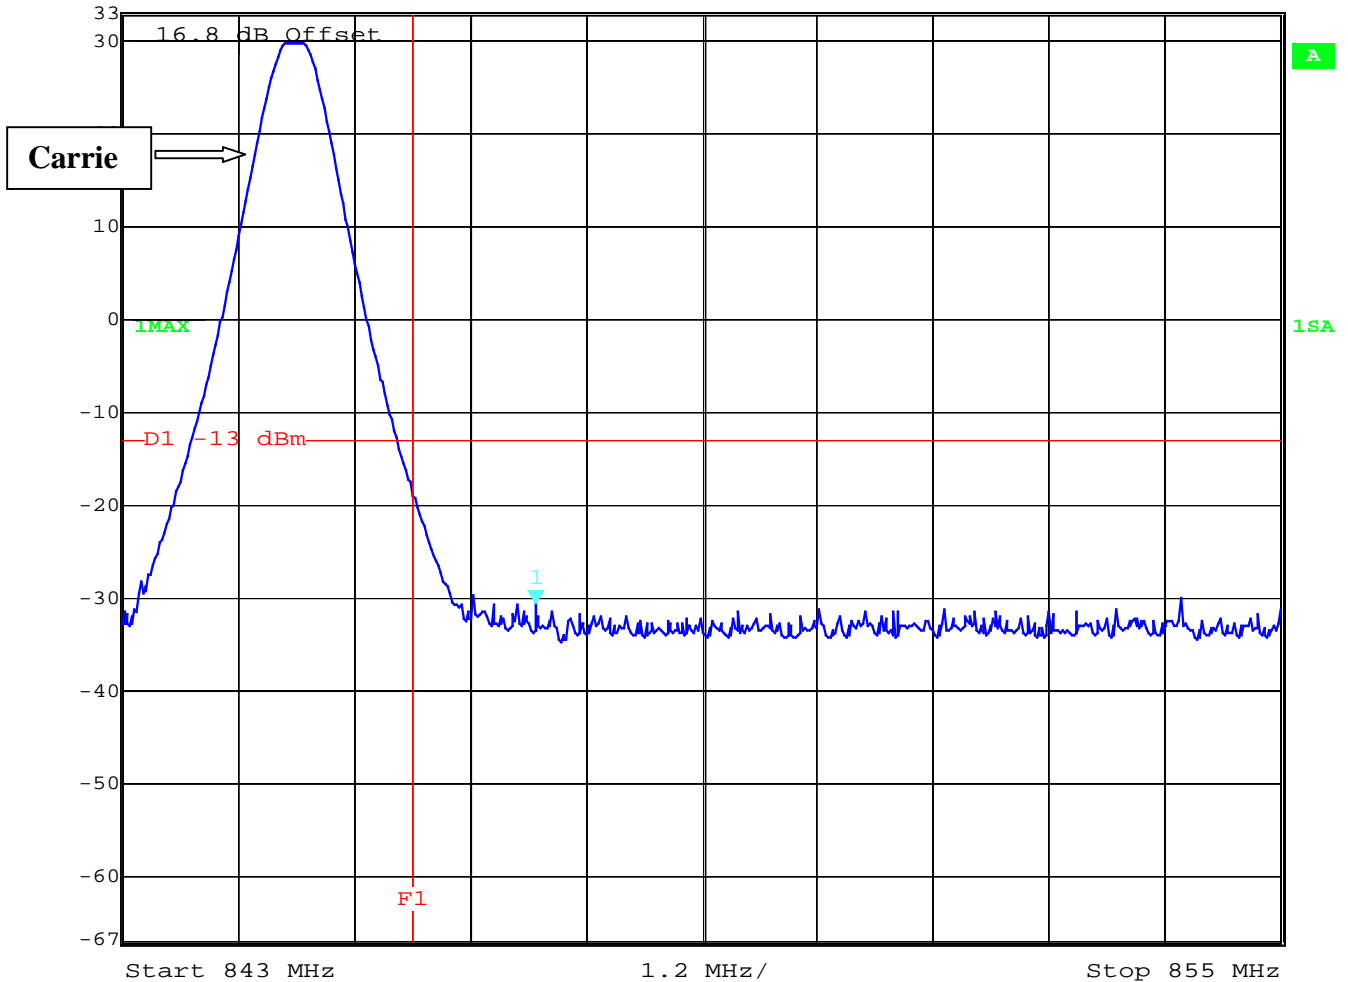

Date: 1.AUG.2003 08:36:15


Block 3 Channel 233

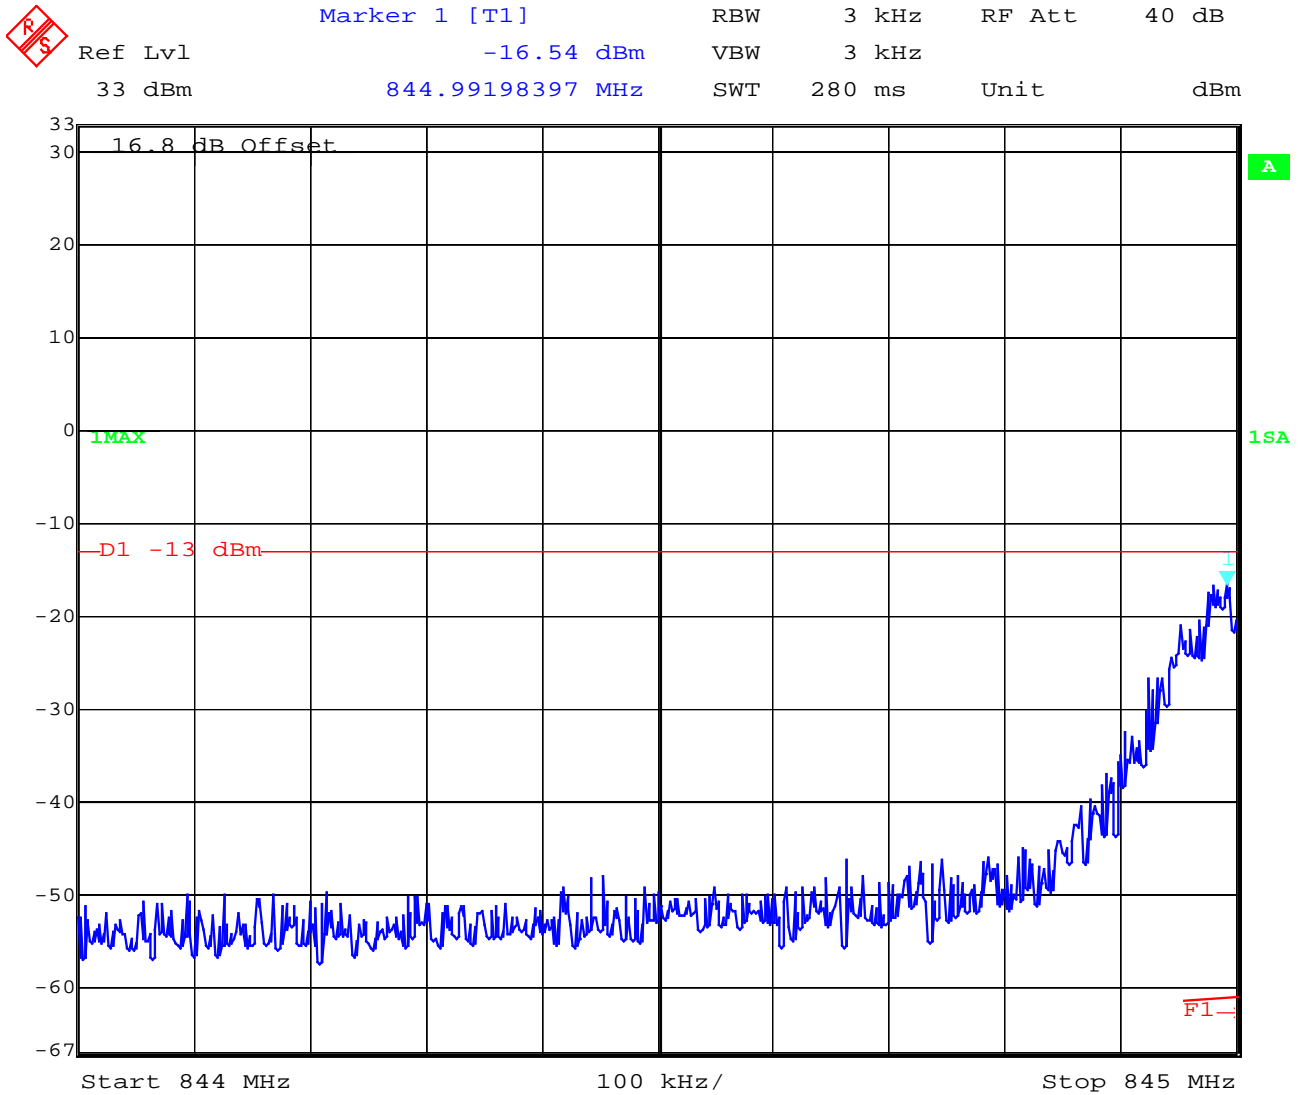

Date: 1.AUG.2003 08:38:32


Block 2 Channel 231


	Marker 1 [T1]	RBW	300 kHz	RF Att	40 dB
	Ref Lvl	-30.48 dBm	VBW	300 kHz	
	33 dBm	843.04408818 MHz	SWT	5 ms	Unit dBm

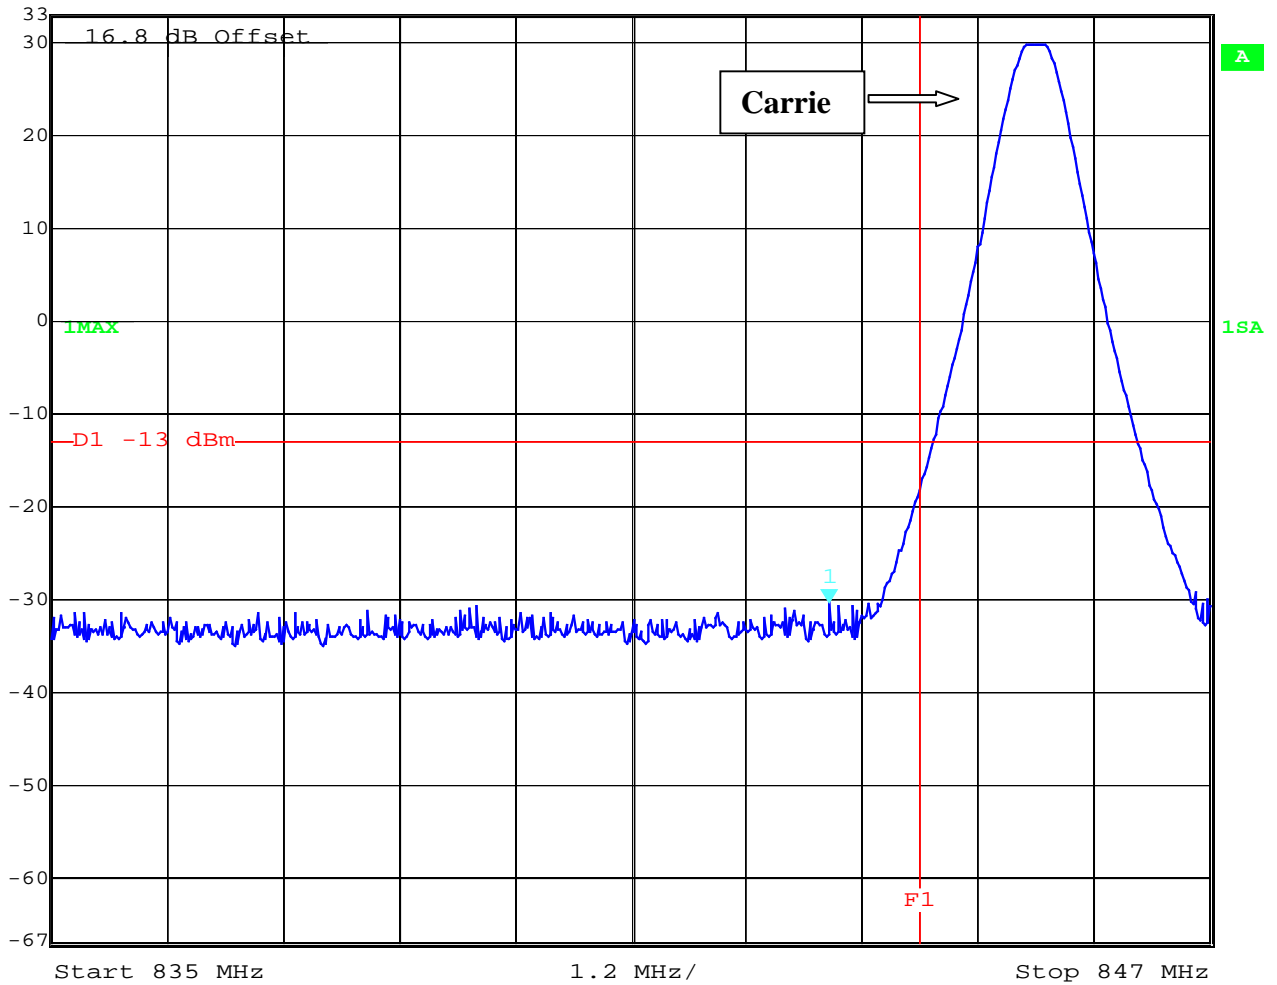

Date: 1.AUG.2003 08:41:36

Block 3 Channel 238



Marker 1 [T1]
RBW 3 kHz
RF Att 40 dB  
Ref Lvl -23.68 dBm
VBW 3 kHz  
33 dBm
846.50200401 MHz
SWT 280 ms
Unit dBm

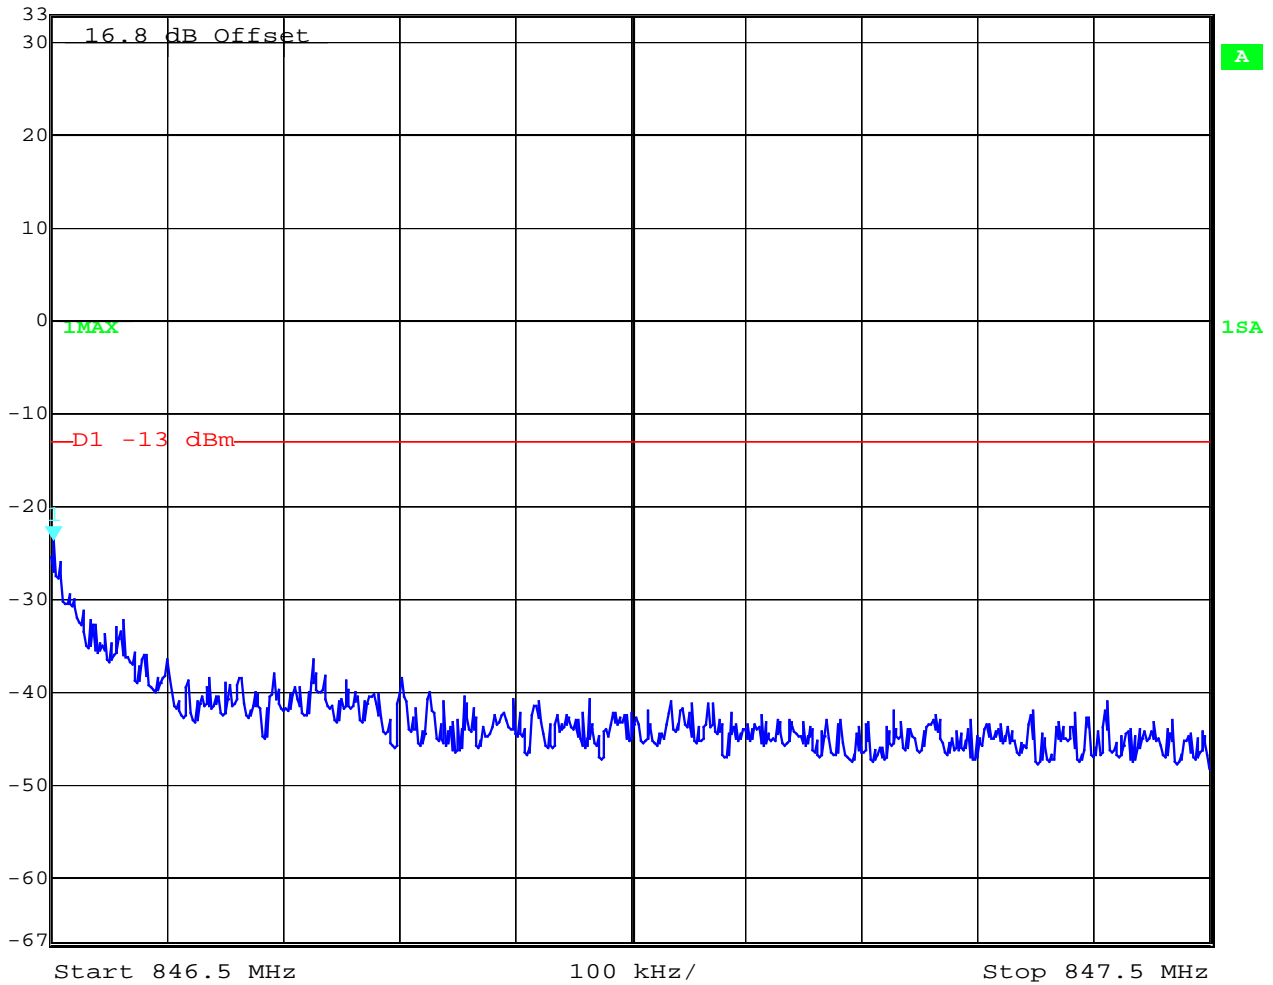

Date: 1.AUG.2003 08:44:55

Block 3 Channel 238


	Ref Lvl	33 dBm	Marker 1 [T1]	848.56412826 MHz	RBW	300 kHz	RF Att	40 dB
					VBW	300 kHz		
					SWT	5 ms	Unit	dBm

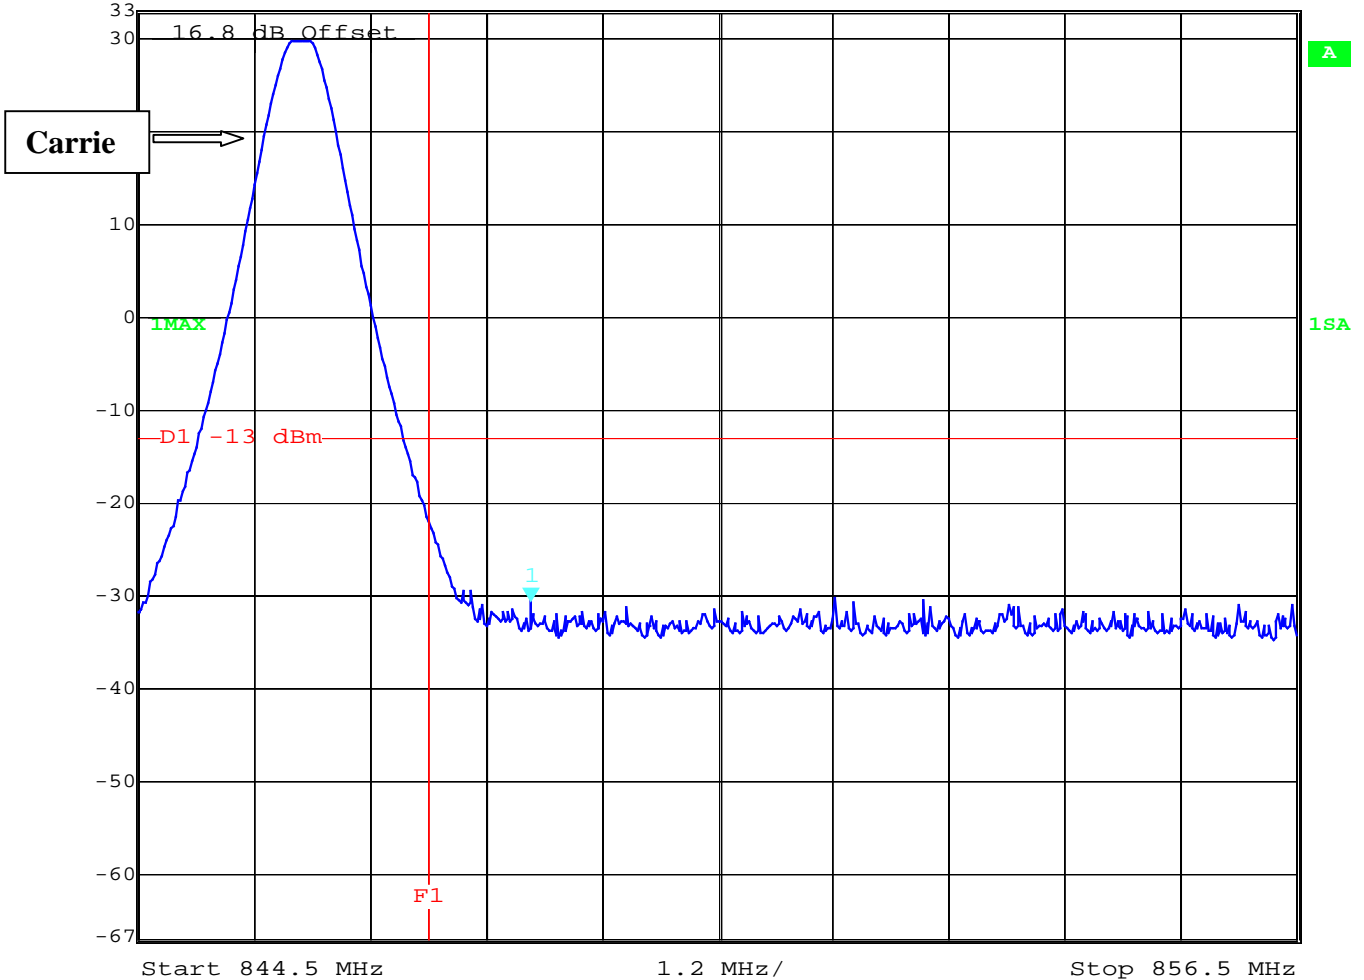

Date: 1.AUG.2003 08:44:08


Block 4 Channel 241

	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-35.53 dBm	VBW	3 kHz	
	33 dBm	846.48797595 MHz	SWT	280 ms	Unit dBm

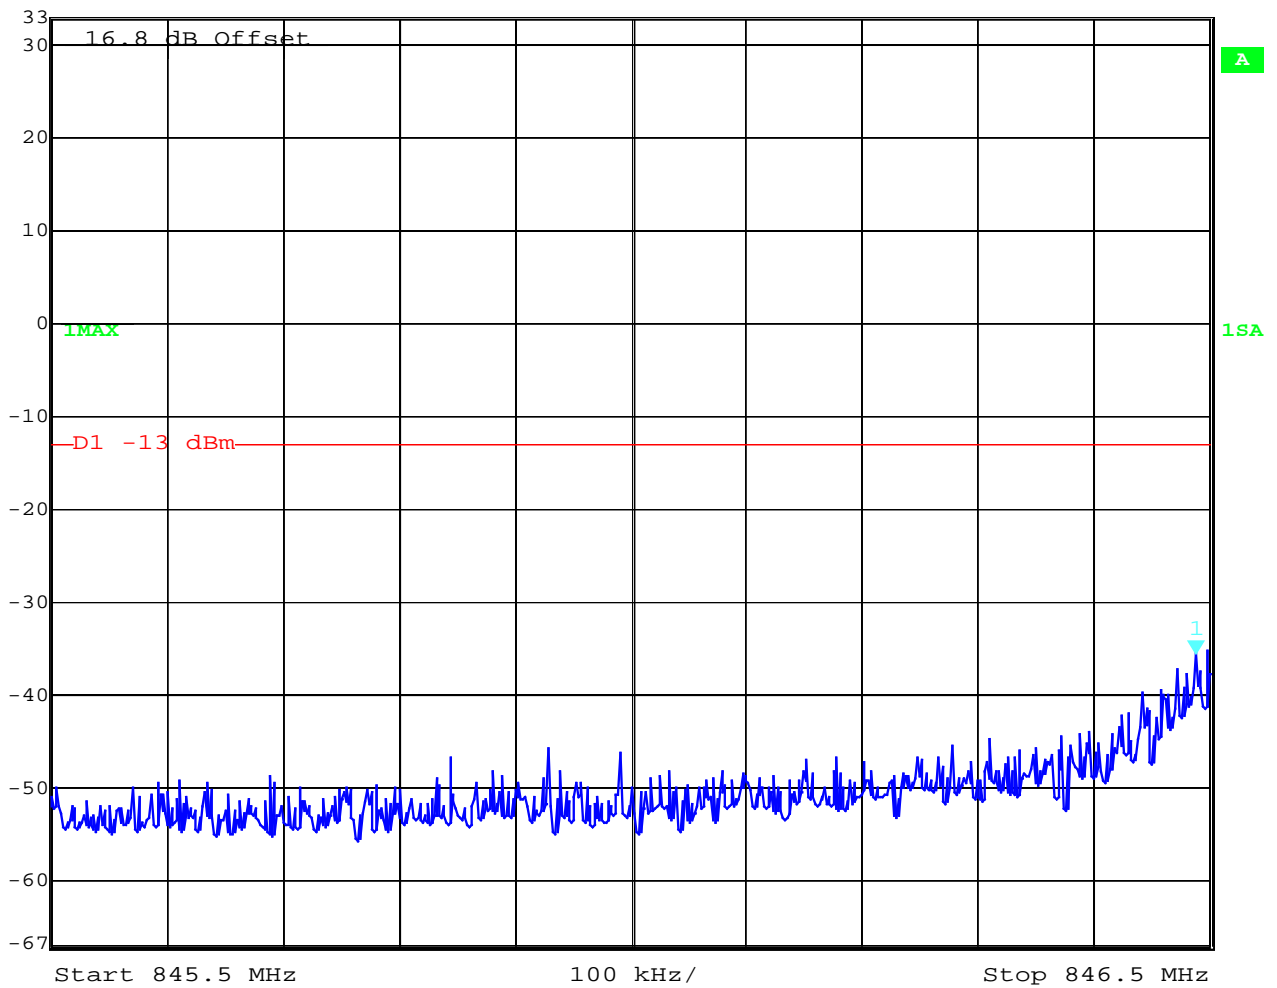

Date: 1.AUG.2003 08:46:41

Block 4 Channel 241

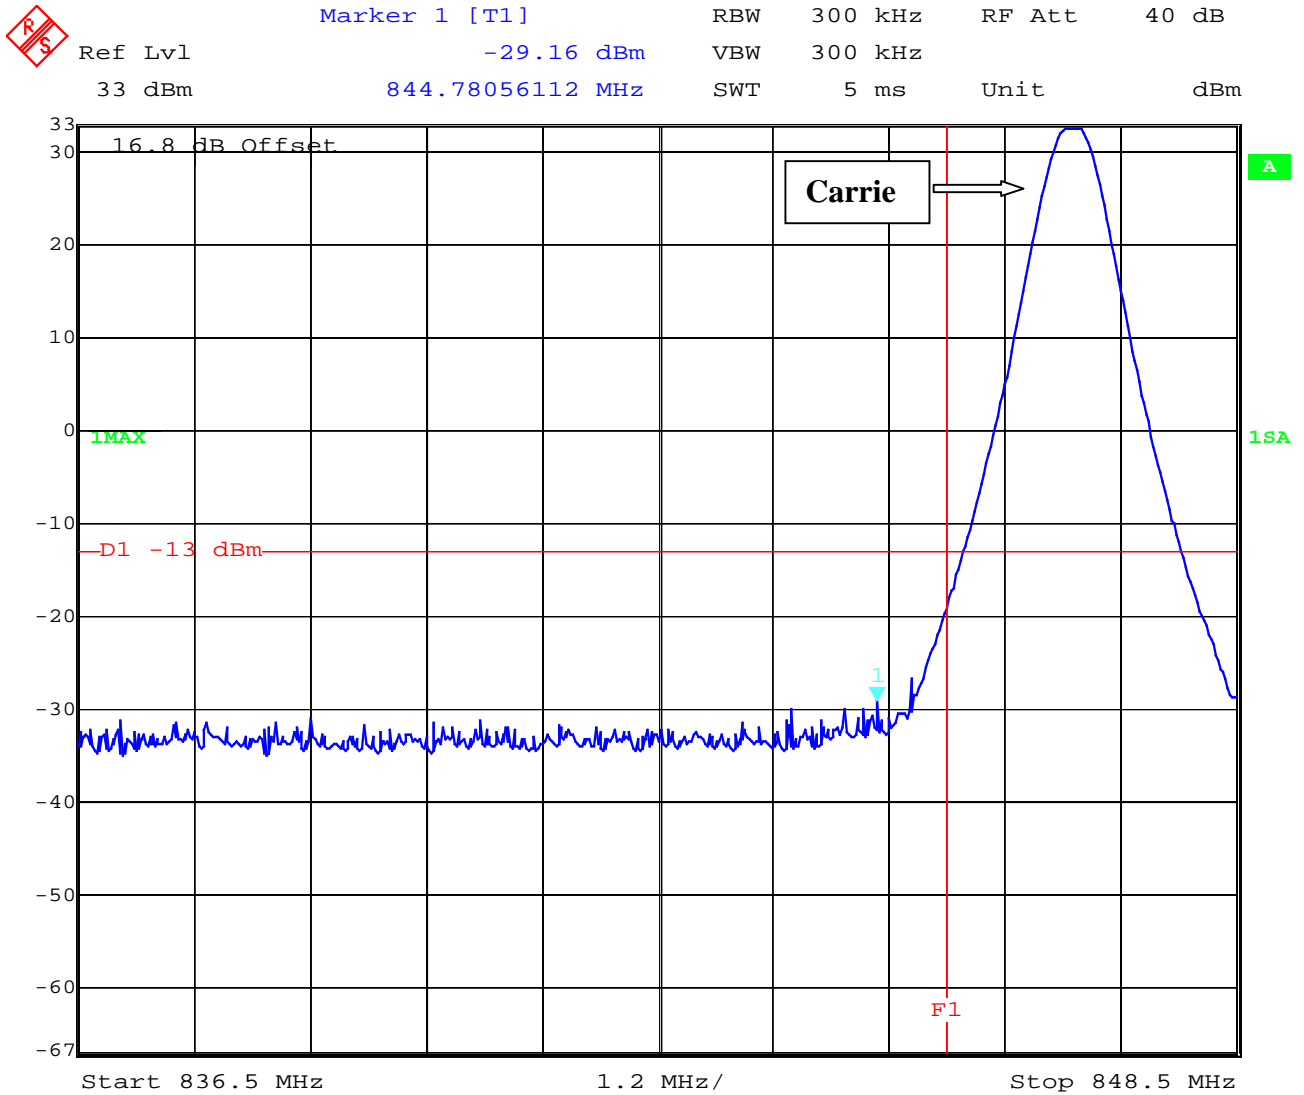


Date: 1.AUG.2003 08:48:05



Block 4 Channel 251




Ref Lvl	33 dBm	Marker 1 [T1]	849.01803607 MHz	RBW	3 kHz	RF Att	40 dB
				VBW	3 kHz		
				SWT	280 ms	Unit	dBm

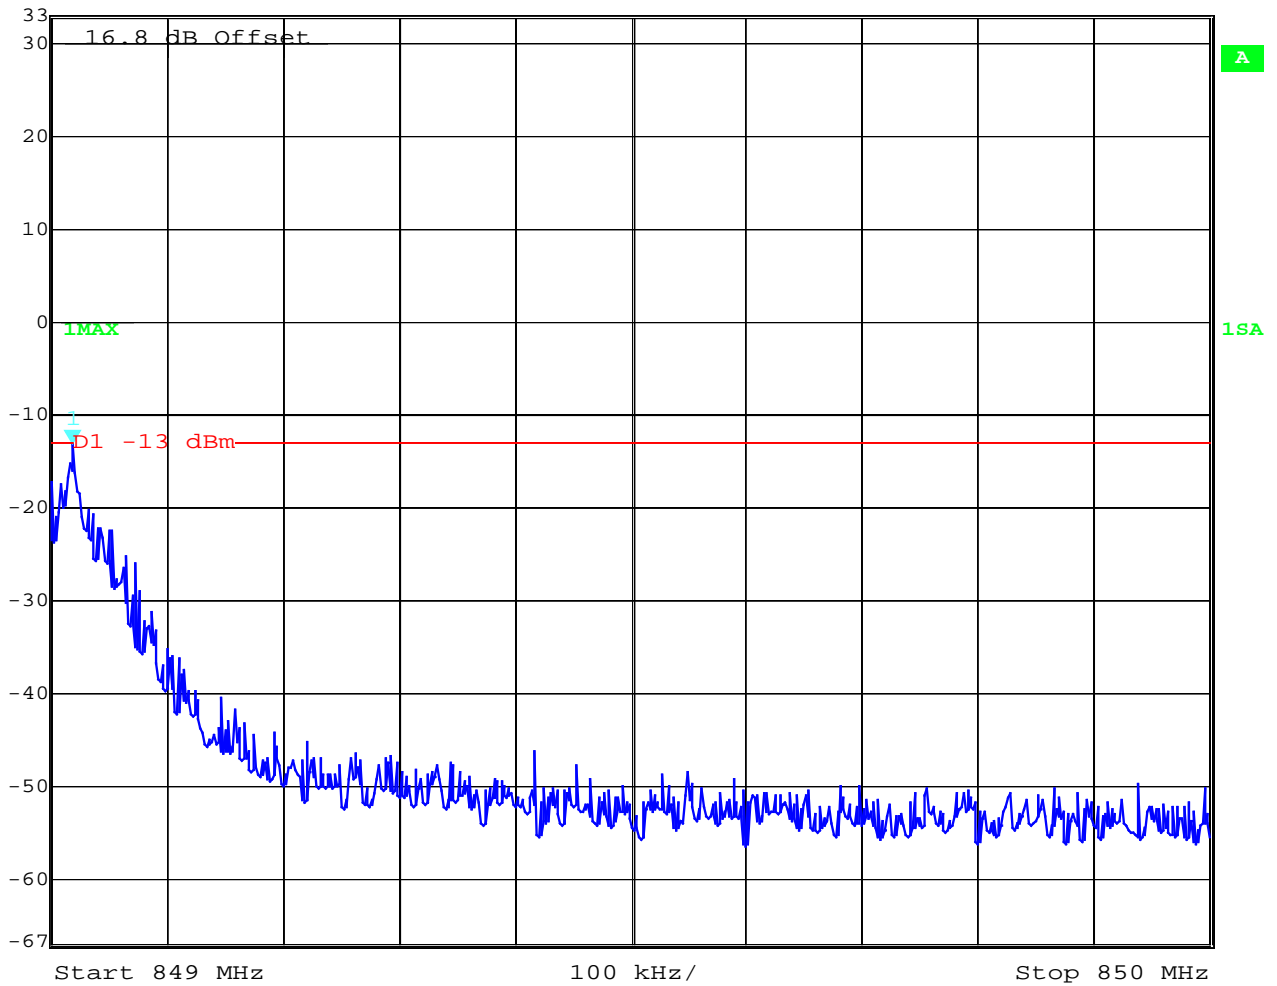

Date: 1.AUG.2003 08:51:05

Block 4 Channel 251

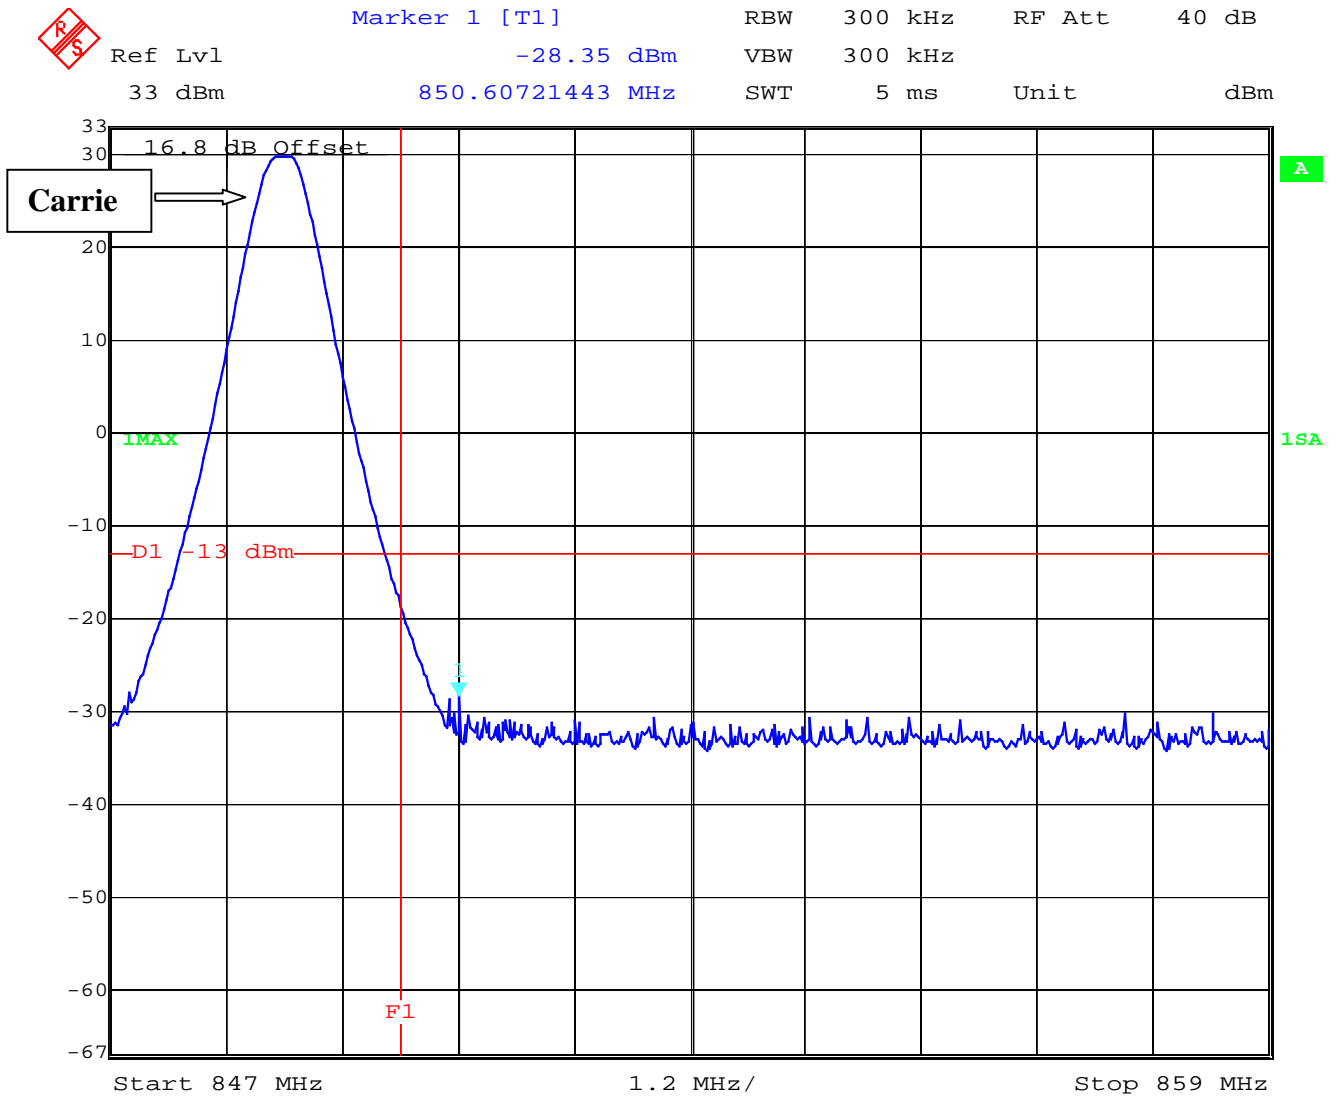

Date: 1.AUG.2003 08:50:06

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)  
 17 - 24, 64

**OCCUPIED BANDWIDTH** **§2.989**

**Occupied Bandwidth Results**


Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the USPCS frequency band. Table 8.2 below lists the measured 99% power and -26dBC occupied bandwidths. Spectrum analyzer plots are included on the following pages.

<b>Frequency</b>	<b>99% Occupied Bandwidth</b>	<b>-26 dBc Bandwidth</b>
<b>824.2 MHz</b>	<b>266.533</b>	<b>310.621</b>
<b>836.4 MHz</b>	<b>280.561</b>	<b>316.633</b>
<b>848.8 MHz</b>	<b>276.553</b>	<b>314.629</b>

Part 24.238 (a) requires a measurement bandwidth of at least 1% of the occupied bandwidth. For ca. 279 kHz, this equates to a resolution bandwidth of at least 2.8 kHz. For this testing, a resolution bandwidth 3.0 kHz was used.

**Channel 128**  
**99% Occupied Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-2.72 dB	VBW	3 kHz	
	21.4 dBm	266.53306613 kHz	SWT	280 ms	Unit dBm

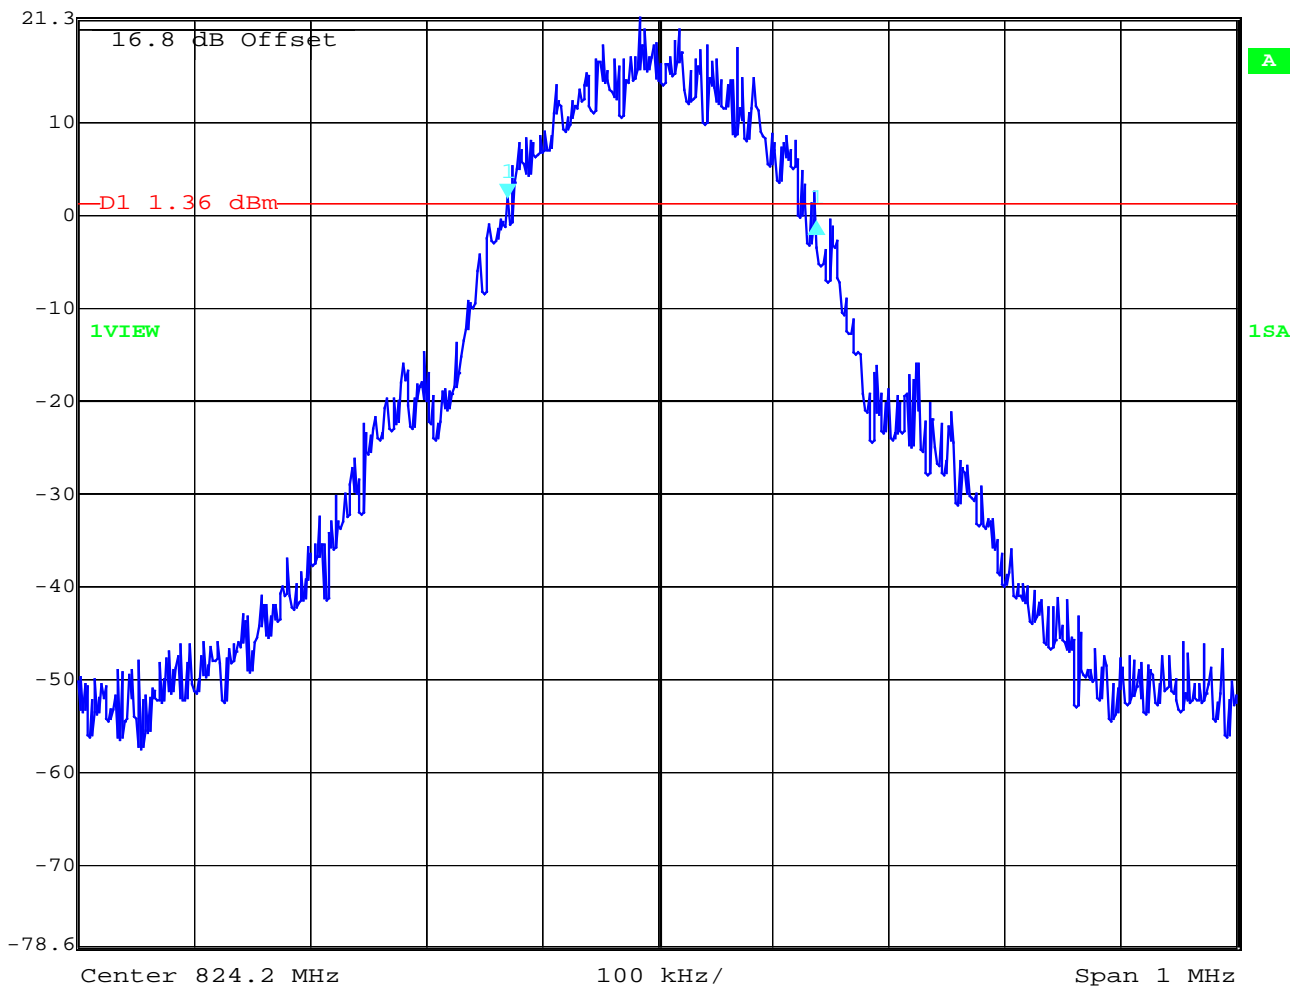


Date: 1.AUG.2003 07:31:12

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

**Channel 128**  
**-26 dBc Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-2.75 dB	VBW	3 kHz	
	21.4 dBm	310.62124248 kHz	SWT	280 ms	Unit

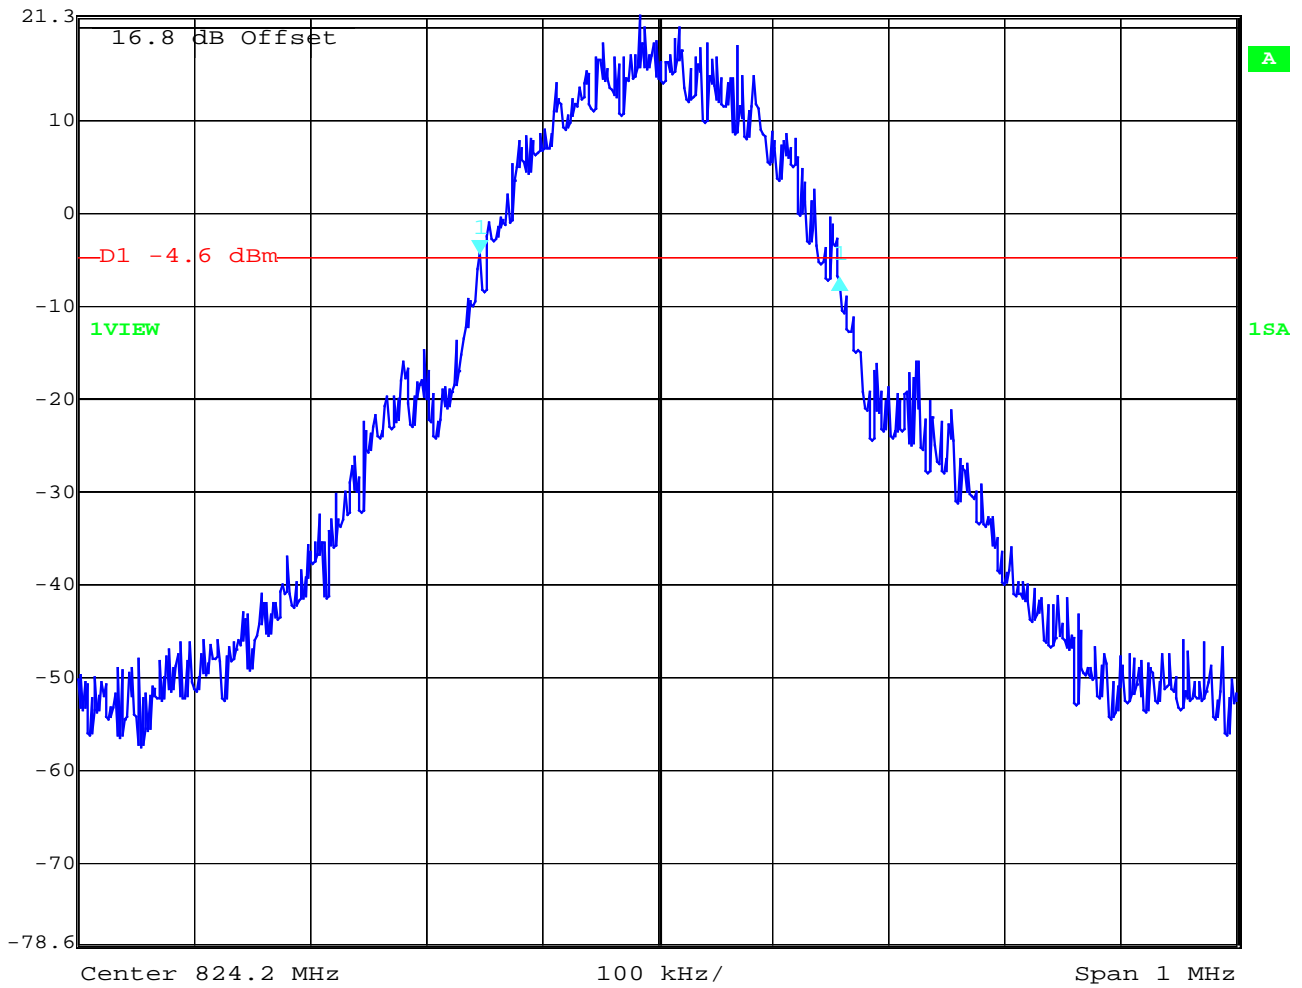


Date: 1.AUG.2003 07:31:56

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 189**  
**99% Occupied Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-4.46 dB	VBW	3 kHz	
	19.8 dBm	280.56112224 kHz	SWT	280 ms	Unit

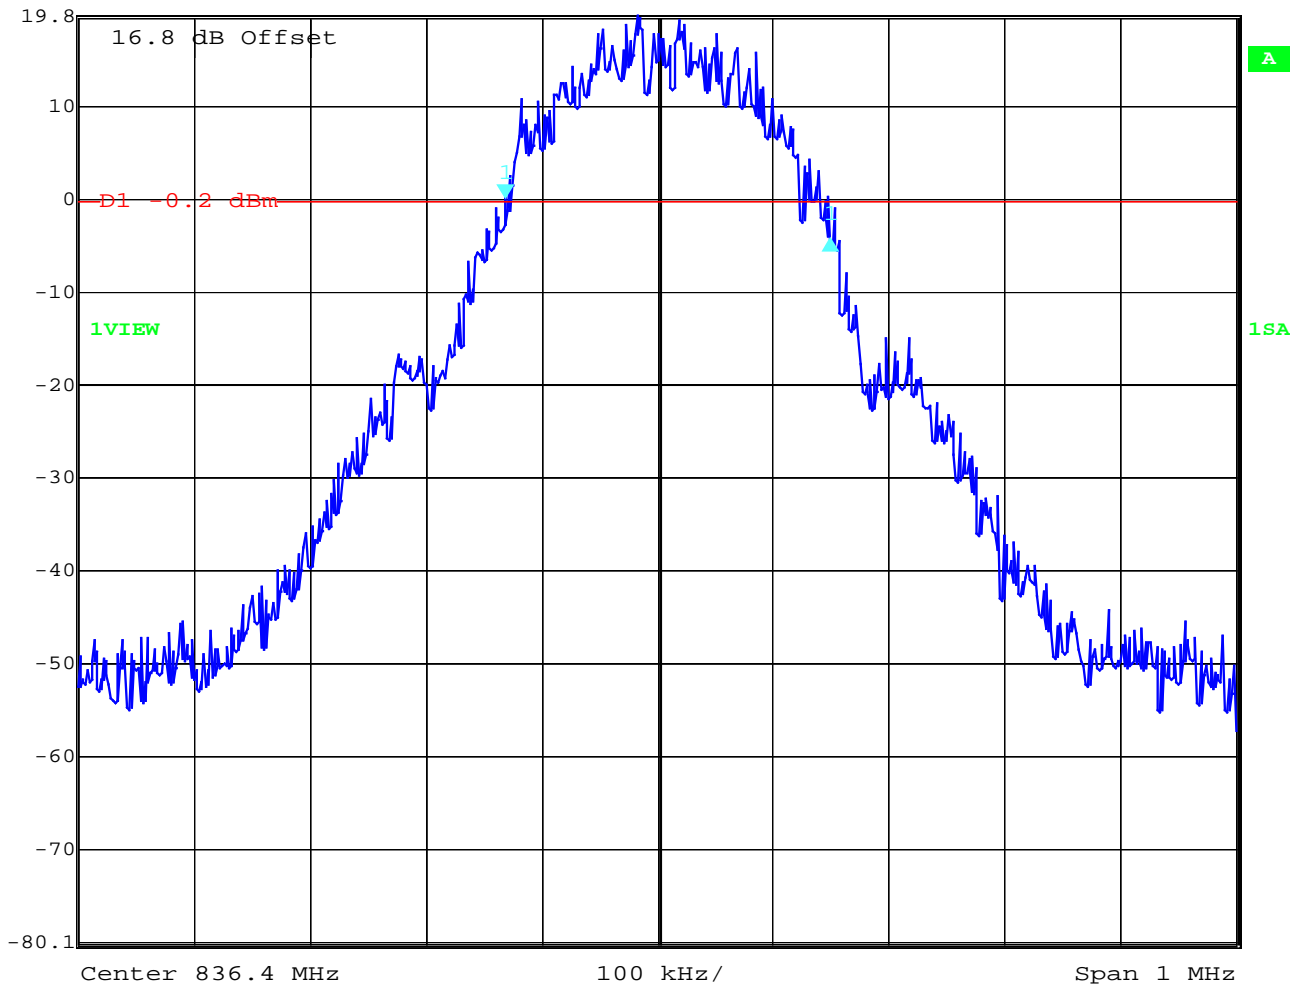


Date: 1.AUG.2003 07:34:59

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 189**  
**-26 dBc Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-6.36 dB	VBW	3 kHz	
	19.8 dBm	316.63326653 kHz	SWT	280 ms	Unit dBm

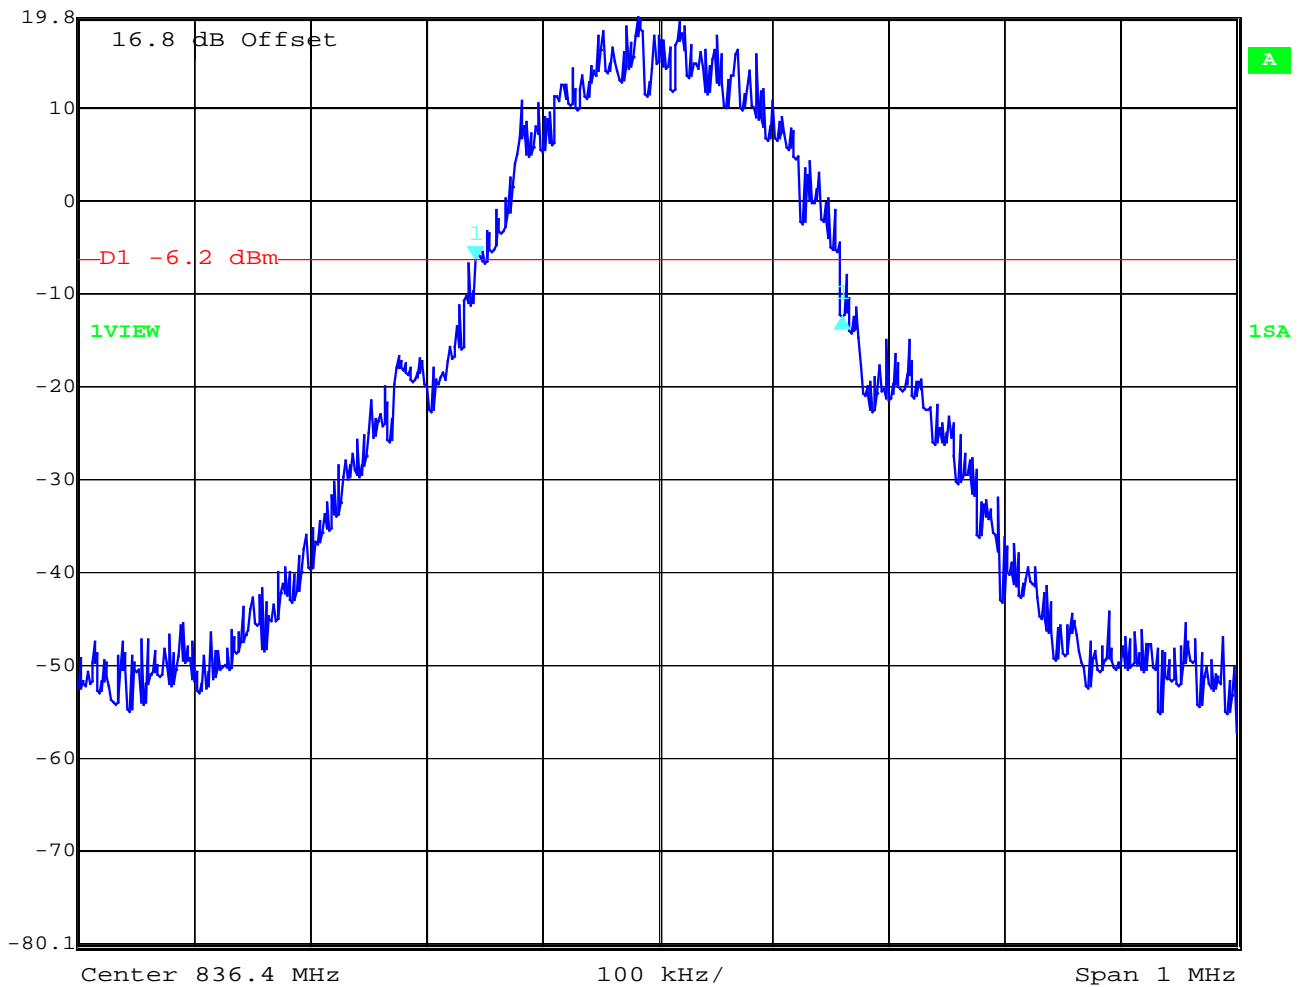


Date: 1.AUG.2003 07:35:40

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

**Channel 251**  
**99% Occupied Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
Ref Lvl	-1.50 dB	VBW	3 kHz		
20.6 dBm	276.55310621 kHz	SWT	280 ms	Unit	dBm

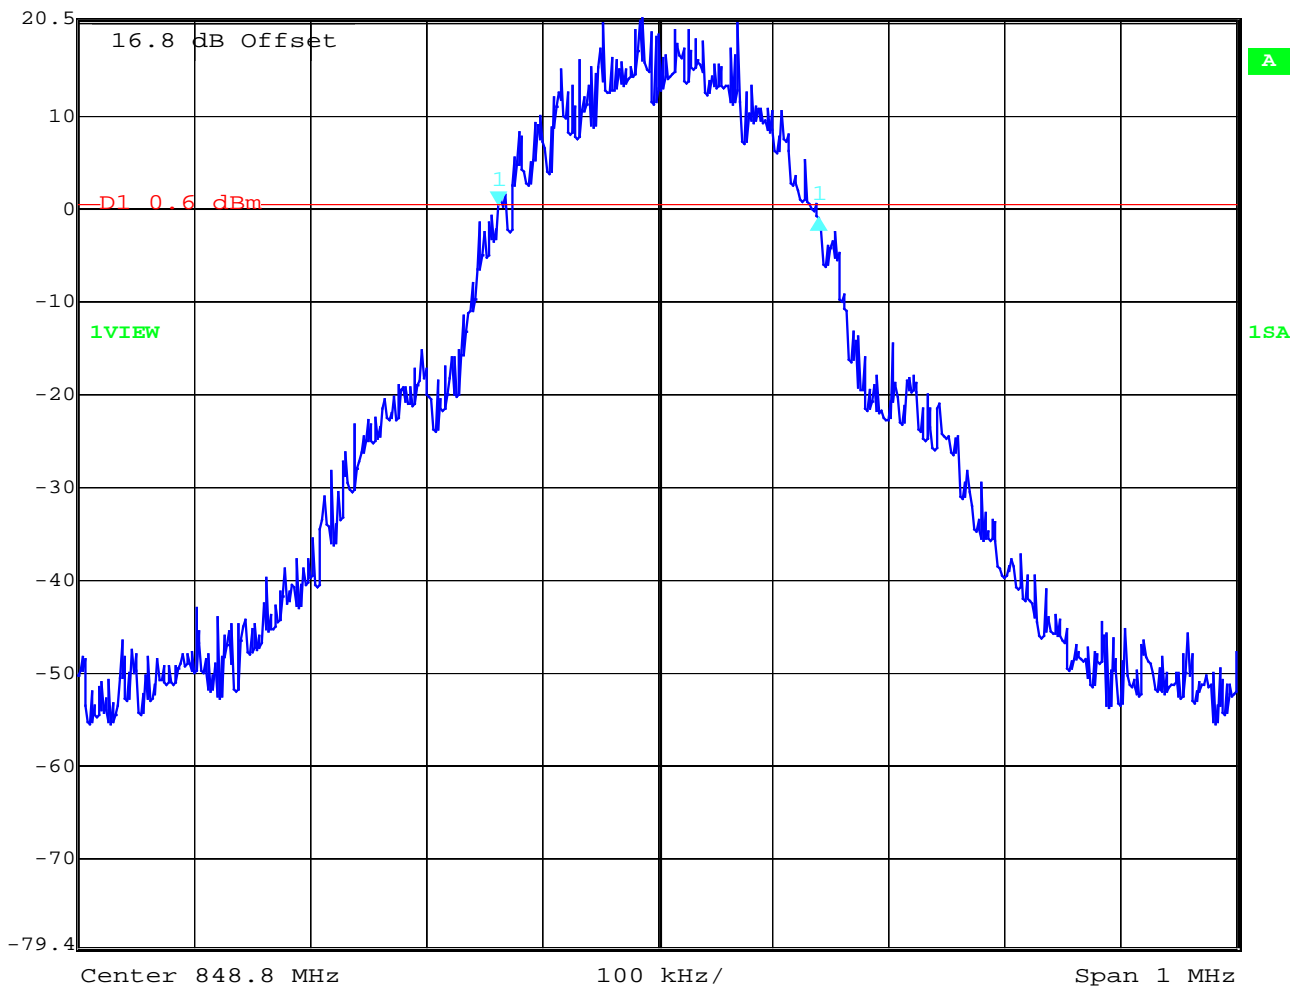


Date: 1.AUG.2003 07:37:05

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)



**Channel 251**  
**-26 dBc Bandwidth**

	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-3.66 dB	VBW	3 kHz	
	20.6 dBm	314.62925852 kHz	SWT	280 ms	Unit

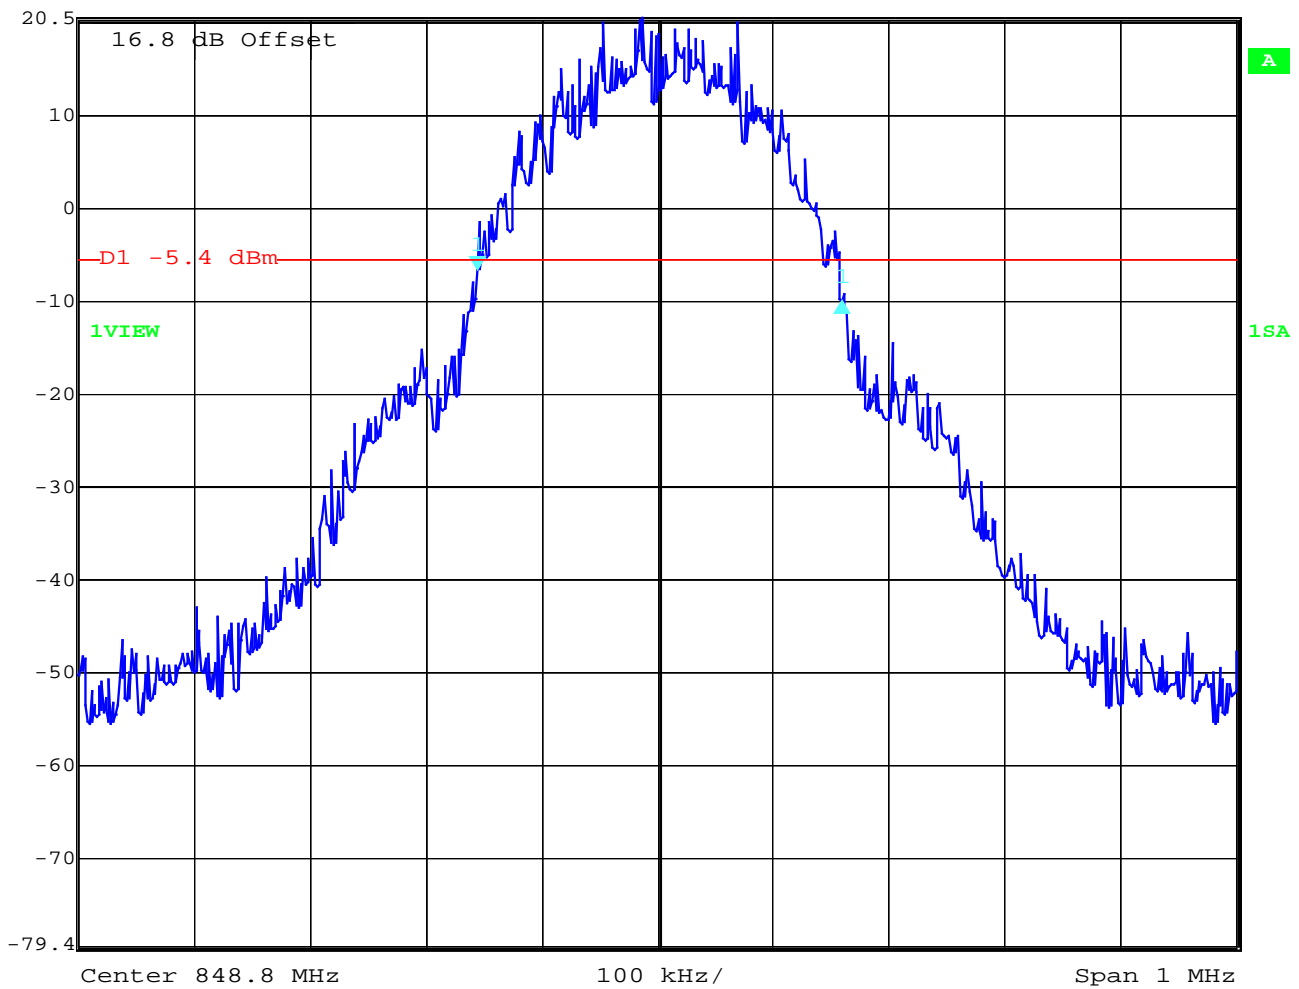

Date: 1.AUG.2003 07:37:34

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)


**EMISSION LIMITATIONS FOR CELLULAR §22.917(F)**

Mobile emissions in the base frequency range

As you can see in the following plots, all peaks are below -80 dBm in the base frequency range.

**Idle Mode base station frequency range A**

	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB	
	Ref Lvl	-88.01 dBm	VBW	3 kHz		
	-20.8 dBm	885.74148297 MHz	SWT	8.4 s	Unit	dBm

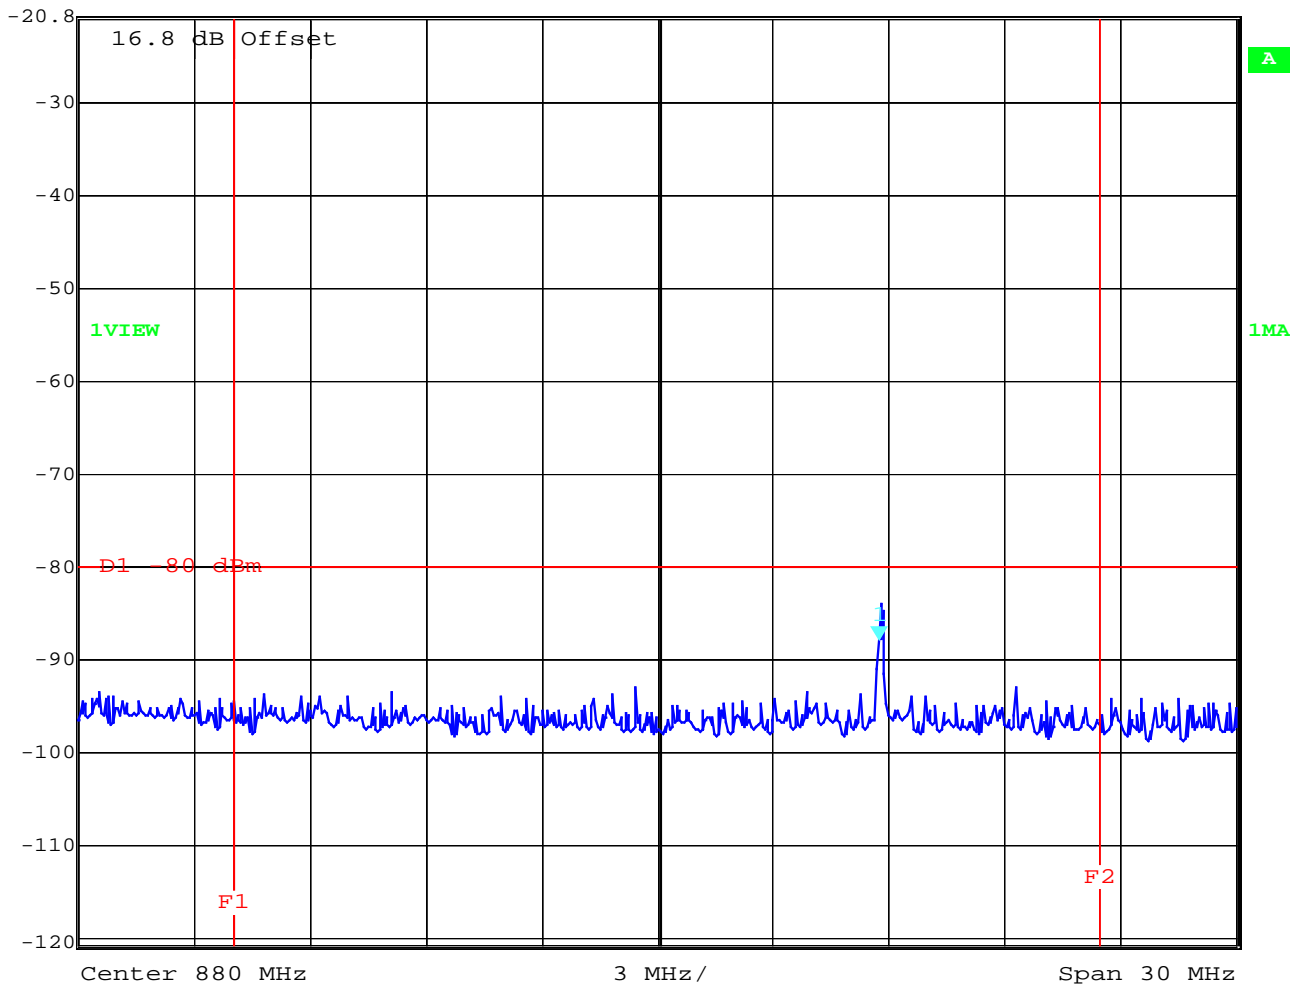


Date: 1.AUG.2003 09:13:58

**LIMITS §22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range  
**Idle Mode base station frequency range B**

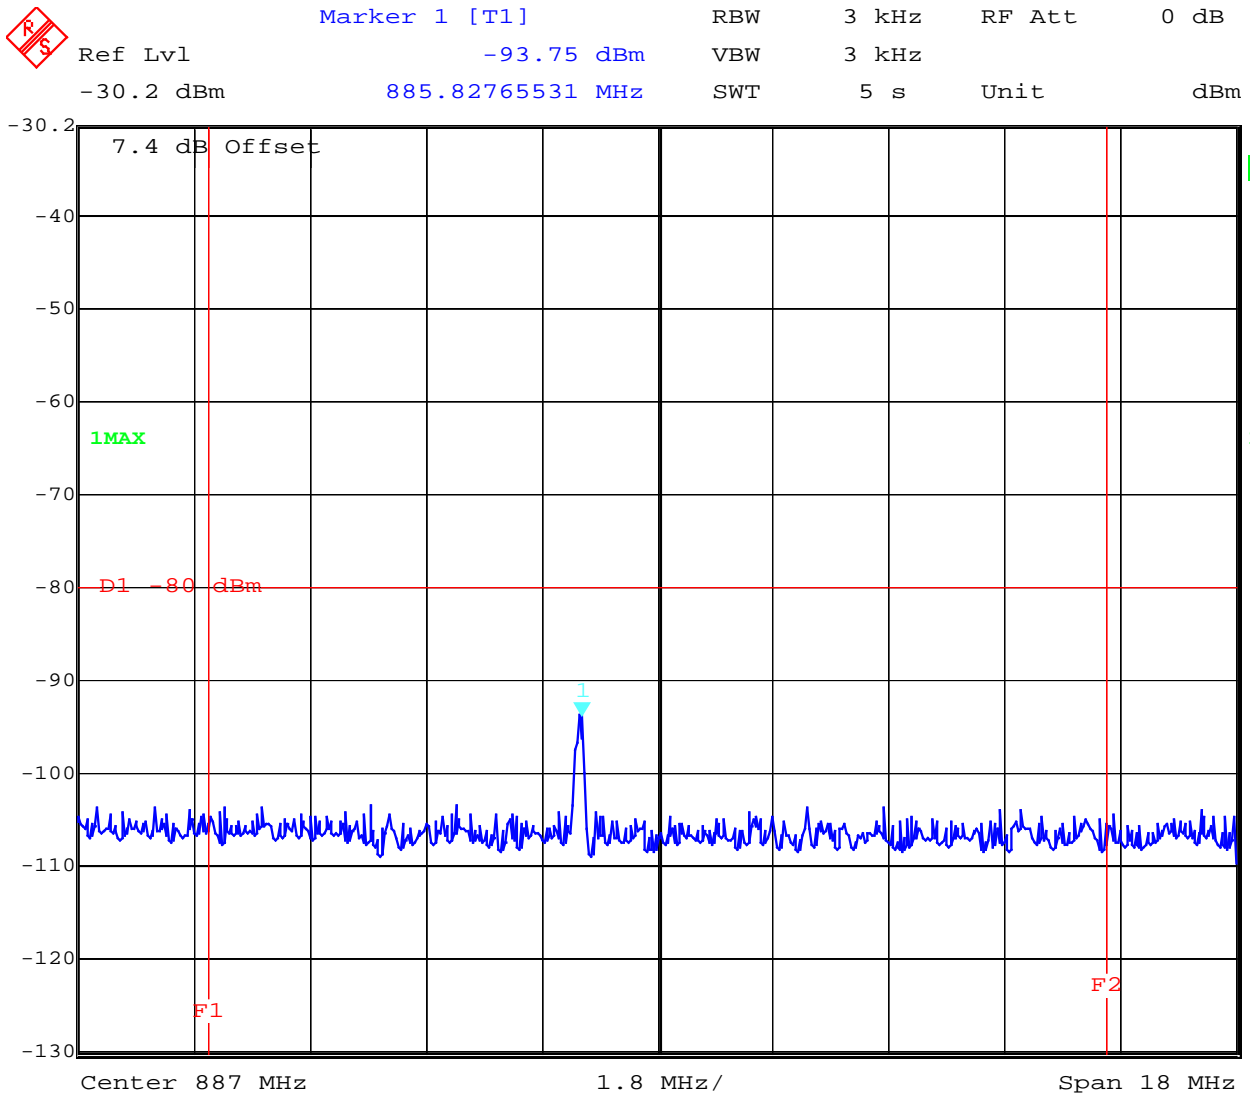

Date: 1.AUG.2003 09:15:40

**LIMITS**


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range
TX Mode CH 128 base station frequency range A

Marker 1 [T1] RBW 3 kHz RF Att 0 dB
Ref Lvl -20.8 dBm -86.89 dBm VBW 3 kHz
885.86172345 MHz SWT 8.4 s Unit dBm

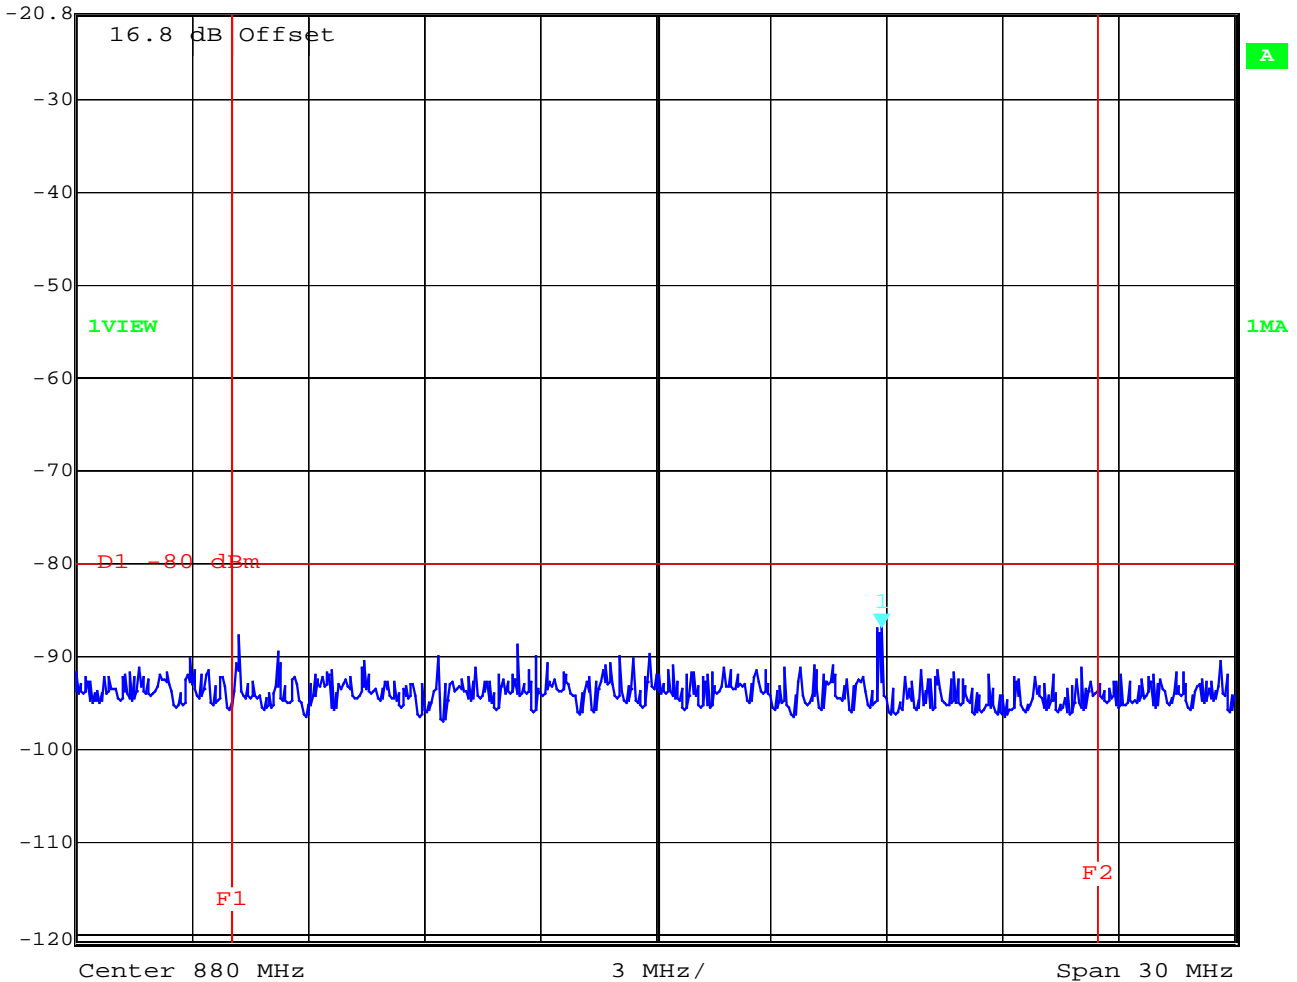

Date: 1.AUG.2003 09:11:40

LIMITS


§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)

Mobile emissions in the base frequency range  
**TX Mode CH 189 base station frequency range A**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-20.8 dBm	-87.14 dBm	VBW	3 kHz		
		885.86172345 MHz	SWT	8.4 s	Unit	dBm

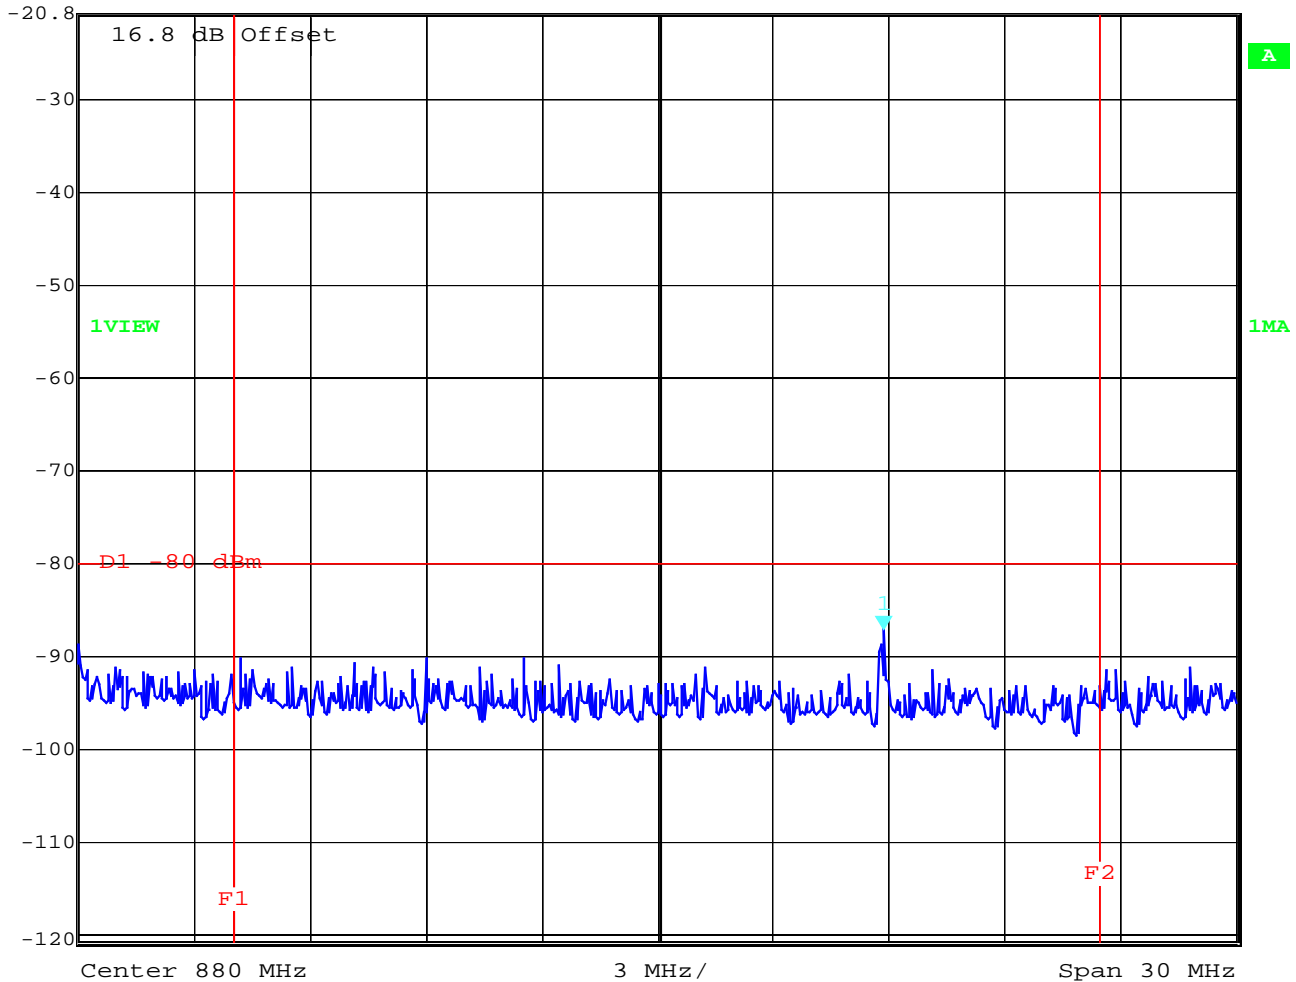

Date: 1.AUG.2003 09:10:25

**LIMITS**


**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range  
**TX Mode CH 251 base station frequency range A**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-20.8 dBm	-85.53 dBm	VBW	3 kHz		
		885.74148297 MHz	SWT	8.4 s	Unit	dBm

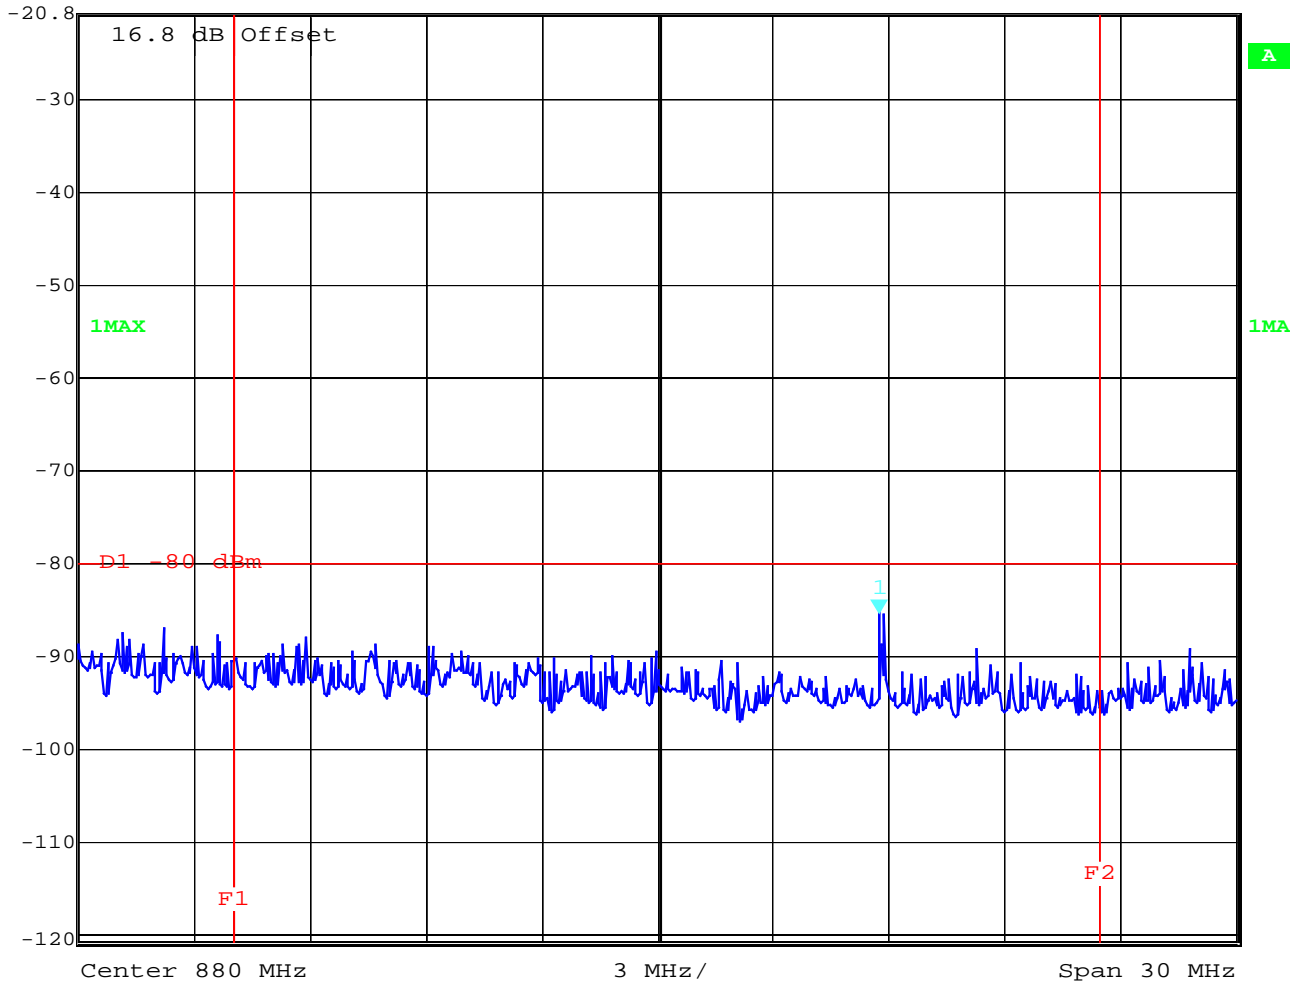

Date: 1.AUG.2003 09:13:26

**LIMITS**


**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range  
**TX Mode CH 128 base station frequency range B**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-20.8 dBm	-93.11 dBm	VBW	3 kHz		
		885.86372745 MHz	SWT	5 s	Unit	dBm

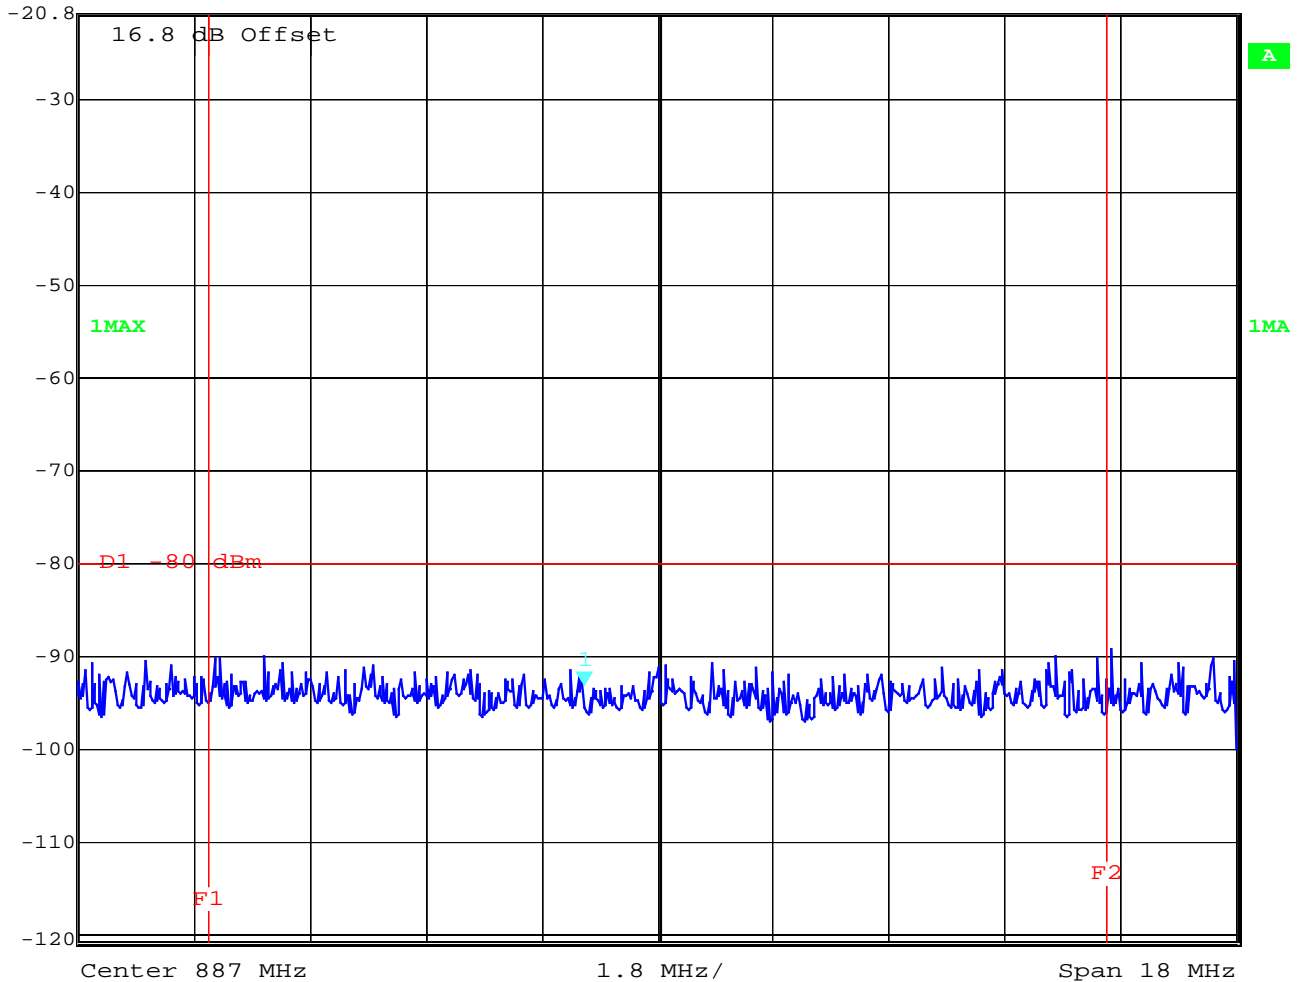

Date: 1.AUG.2003 09:26:16

**LIMITS**

§22.917(f)


The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

Mobile emissions in the base frequency range

**TX Mode CH 189 base station frequency range B**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-20.8 dBm	-87.22 dBm	VBW	3 kHz		
		892.86172345 MHz	SWT	5 s	Unit	dBm

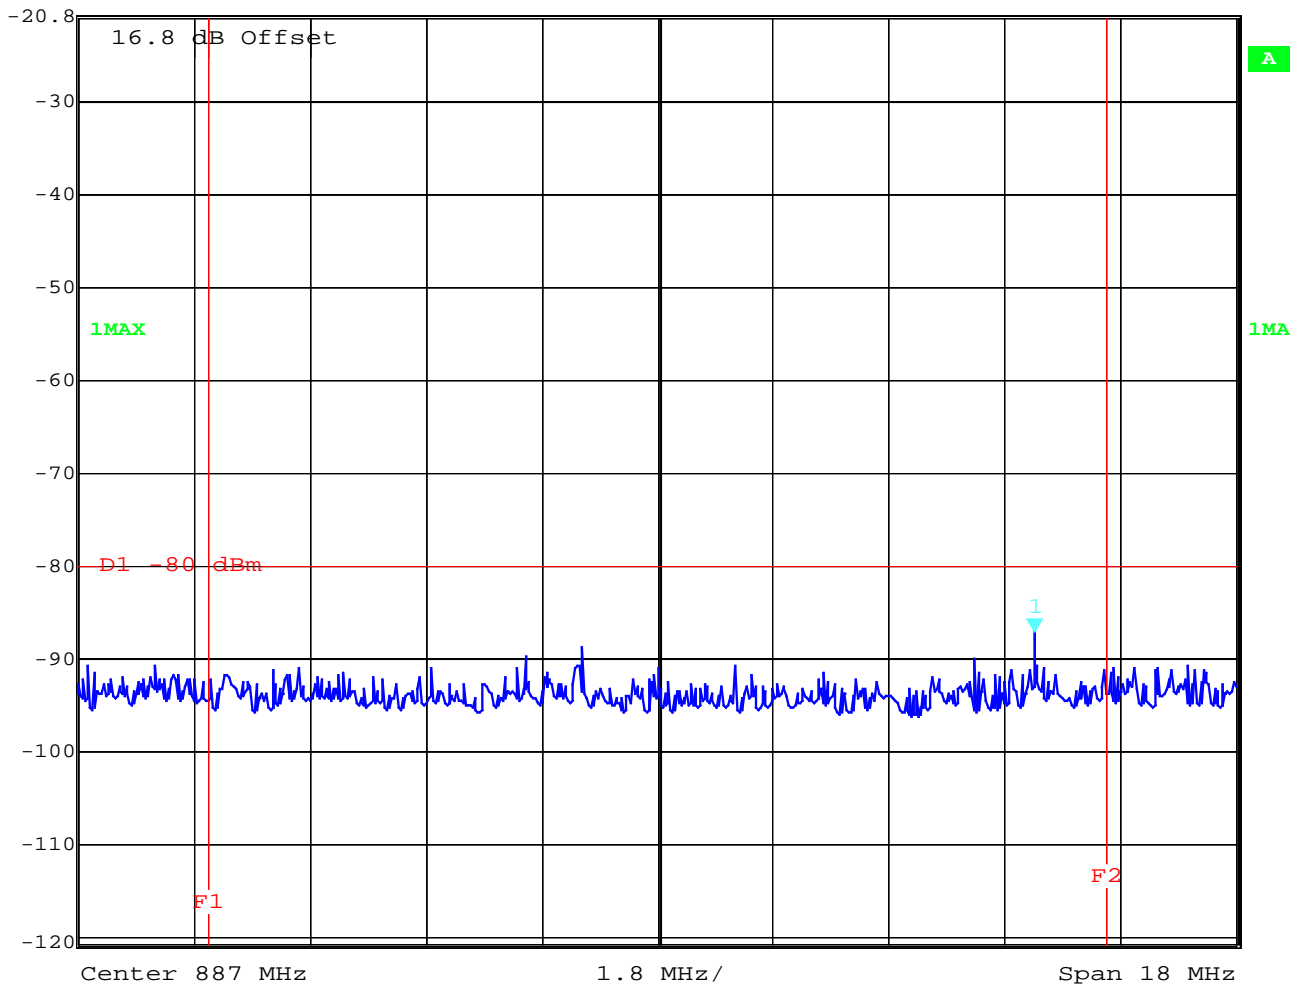

Date: 1.AUG.2003 09:23:19

**LIMITS**

**§22.917(f)**

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)



Mobile emissions in the base frequency range

**TX Mode CH 251 base station frequency range B**

	Ref Lvl	Marker 1 [T1]	RBW	3 kHz	RF Att	0 dB
	-30.2 dBm	-93.38 dBm	VBW	3 kHz		
		885.71943888 MHz	SWT	5 s	Unit	dBm

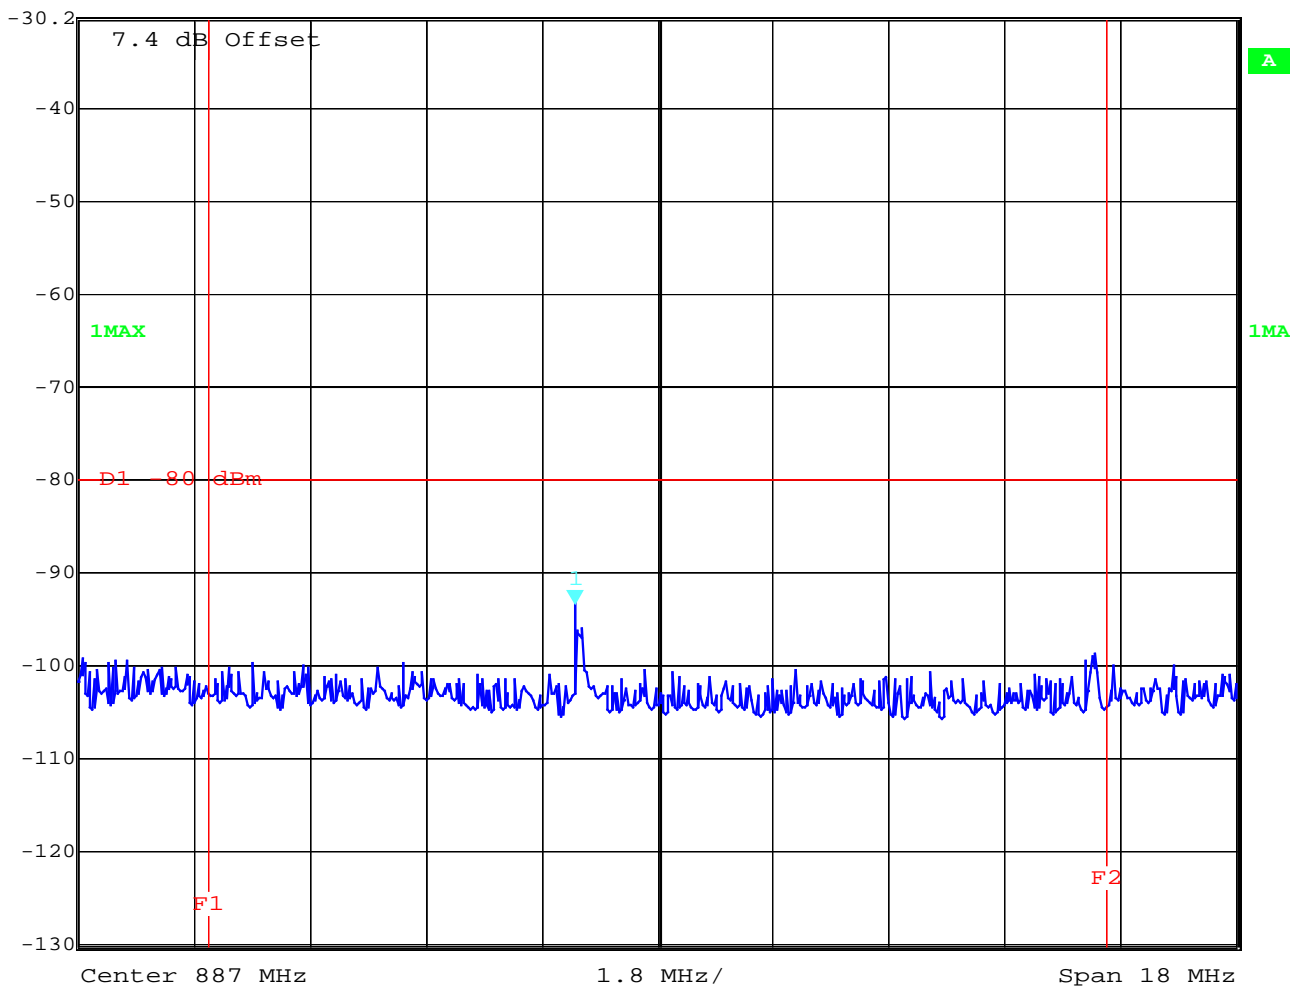

Date: 1.AUG.2003 09:16:33

**LIMITS**

§22.917(f)

The mean power of any emissions appearing in the base station frequency range from cellular mobile transmitters operated must be attenuated to a level not to exceed -80dBm at the transmitter antenna connector

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

## ADDITIONAL MEASUREMENTS FOR IDLE MODE

## PART 15.109

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-1992 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

9 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 Hz, wave-guide horn

Ancillary equipment : --

Spurious Emissions

SPURIOUS EMISSIONS LEVEL (µV/m)								
						Idle mode(850/1900)		
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
						176.89	PK	42.17
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Measurement distance see table

Limits

SUBCLAUSE § 15.109


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	500 / 54 dBµV/m	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

**SPURIOUS RADIATION 9kHz – 30 MHz**

**§ 15.109**

EUT: MC-46  
 Manufacturer: Siemens AG  
 Operating Condition: Traffic mode  
 Test Site: Cetecom, Room 6  
 Operator: Berg  
 Test Specification:  
 Comment:  
 Start of Test: 01.08.03 / 07:13:05

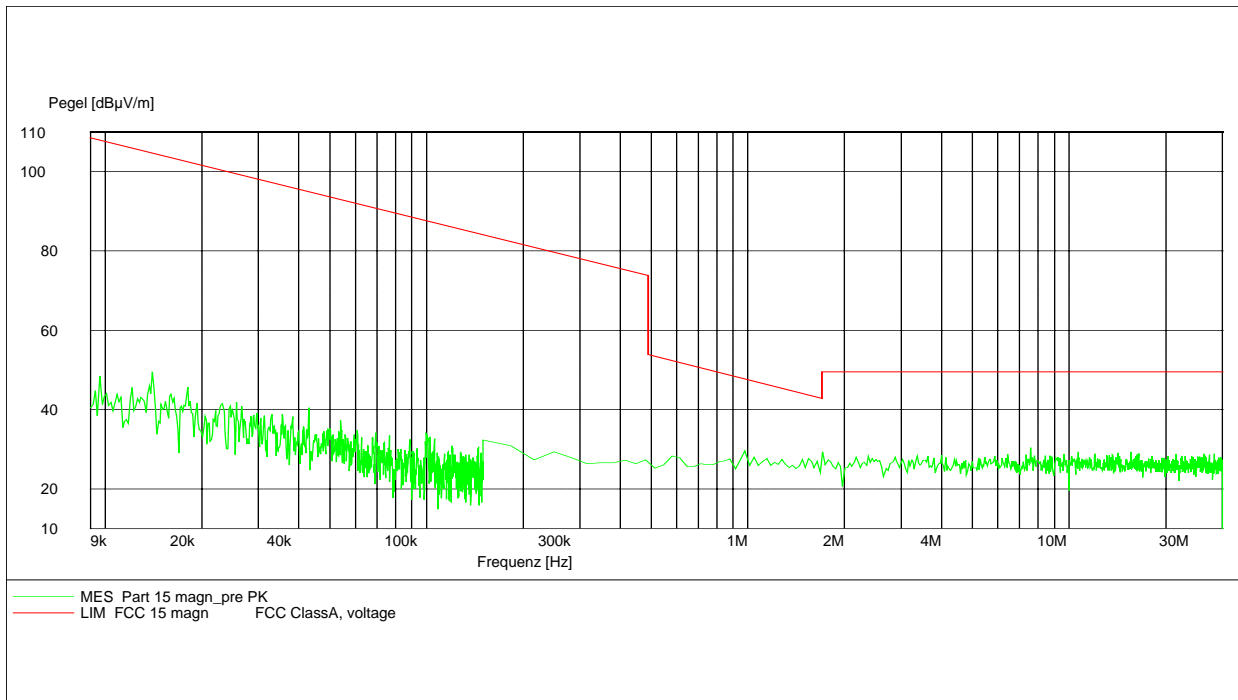

**Limits**

**SUBCLAUSE § 15.109**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30


**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

**SPURIOUS RADIATION**

**§ 15.109**

**Idle mode up to 30 MHz (valid for Idle 850 and 1900 MHz )**

EUT: MC-46  
 Manufacturer: Siemens AG  
 Operating Condition: Idle mode  
 Test Site: Cetecom, Room 6  
 Operator: Berg  
 Test Specification:  
 Comment: 110V / 60 Hz  
 Start of Test: 01.08.03 / 07:19:56

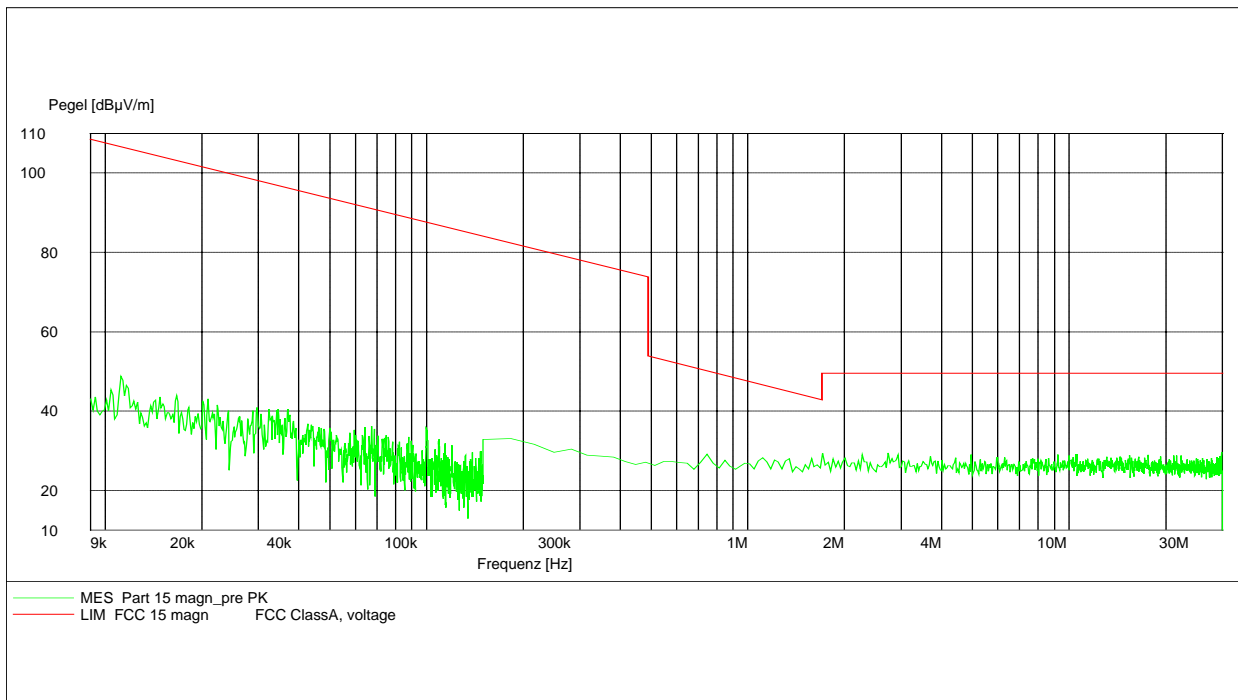

**Limits**

**SUBCLAUSE § 15.109**



Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
 (for reference numbers see test equipment listing)

**SPURIOUS RADIATION**

**§ 15.109**

**Idle mode up to 4 GHz**

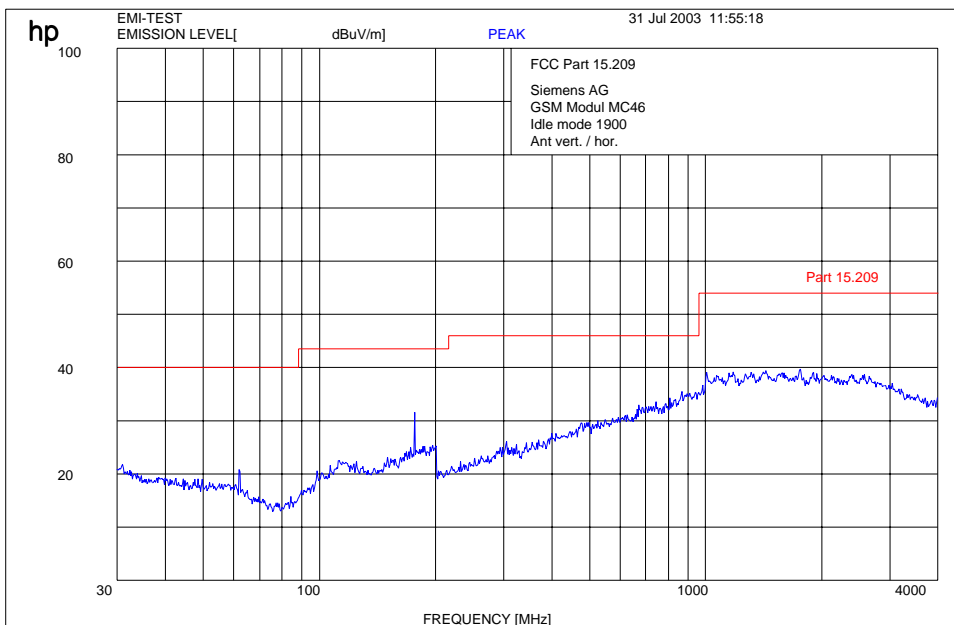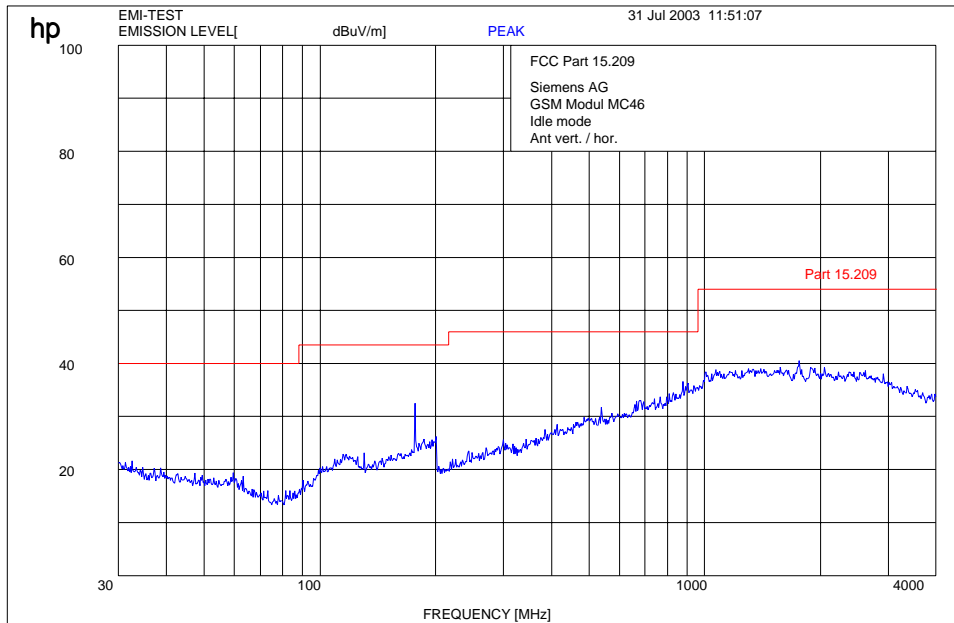

**f < 1 GHz : RBW/VBW: 100 kHz**



**f ≥ 1GHz : RBW/VBW 1 MHz**

**REFERENCE NUMBER(S) OF TEST EQUIPMENT USED**  
(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 12 GHz

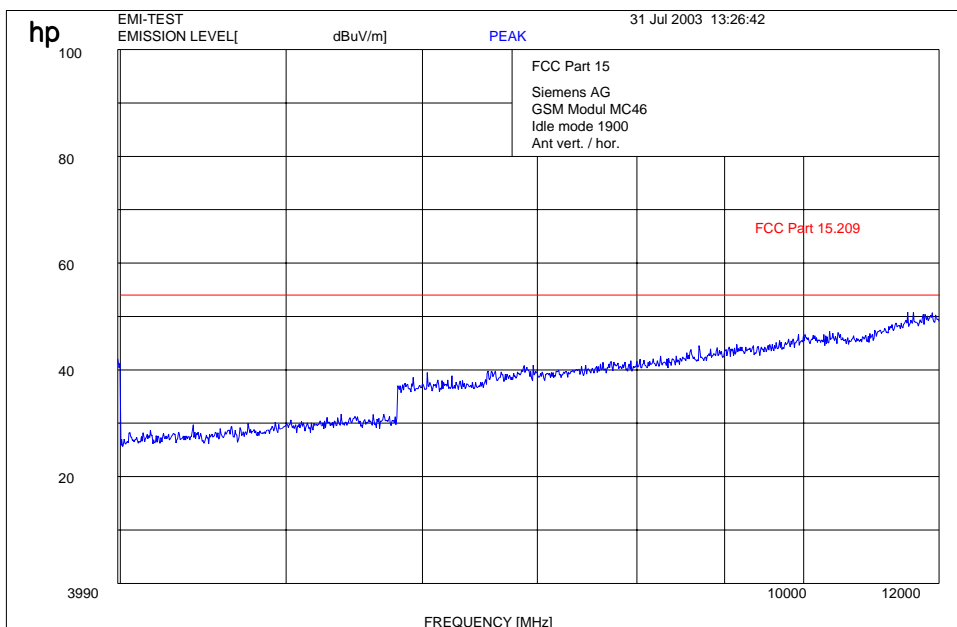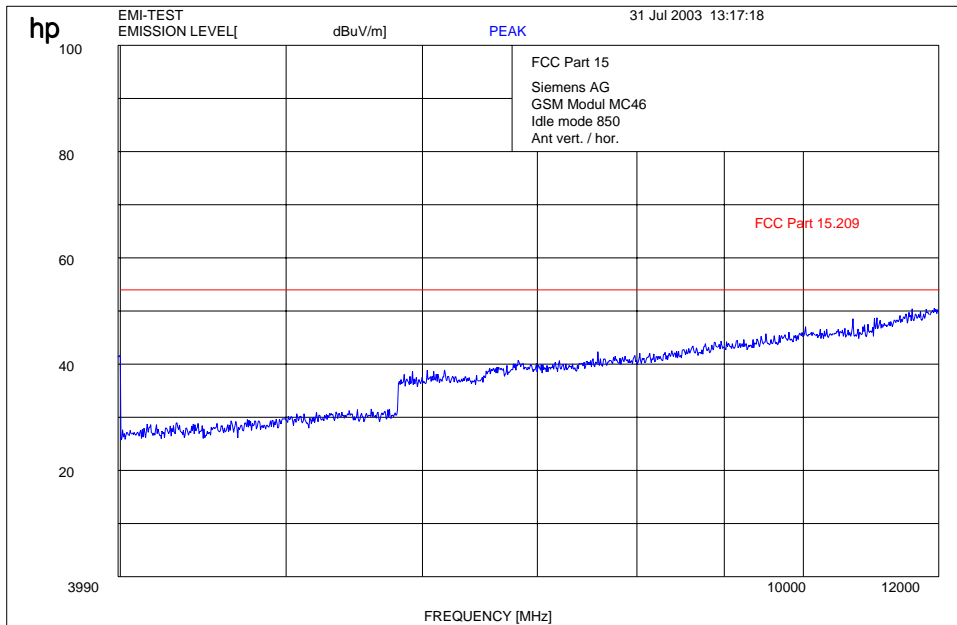

$f < 1 \text{ GHz}$  : RBW/VBW: 100 kHz

$f \geq 1 \text{ GHz}$  : RBW/VBW 1 MHz


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED  
(for reference numbers see test equipment listing)

SPURIOUS RADIATION

§ 15.109

Idle mode up to 25 GHz (850 MHz)

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	33.88 dB $\mu$ V/m	VBW	1 MHz	
	89.3 dB*	17.80360721 GHz	SWT	46 ms	Unit dB $\mu$ V/m

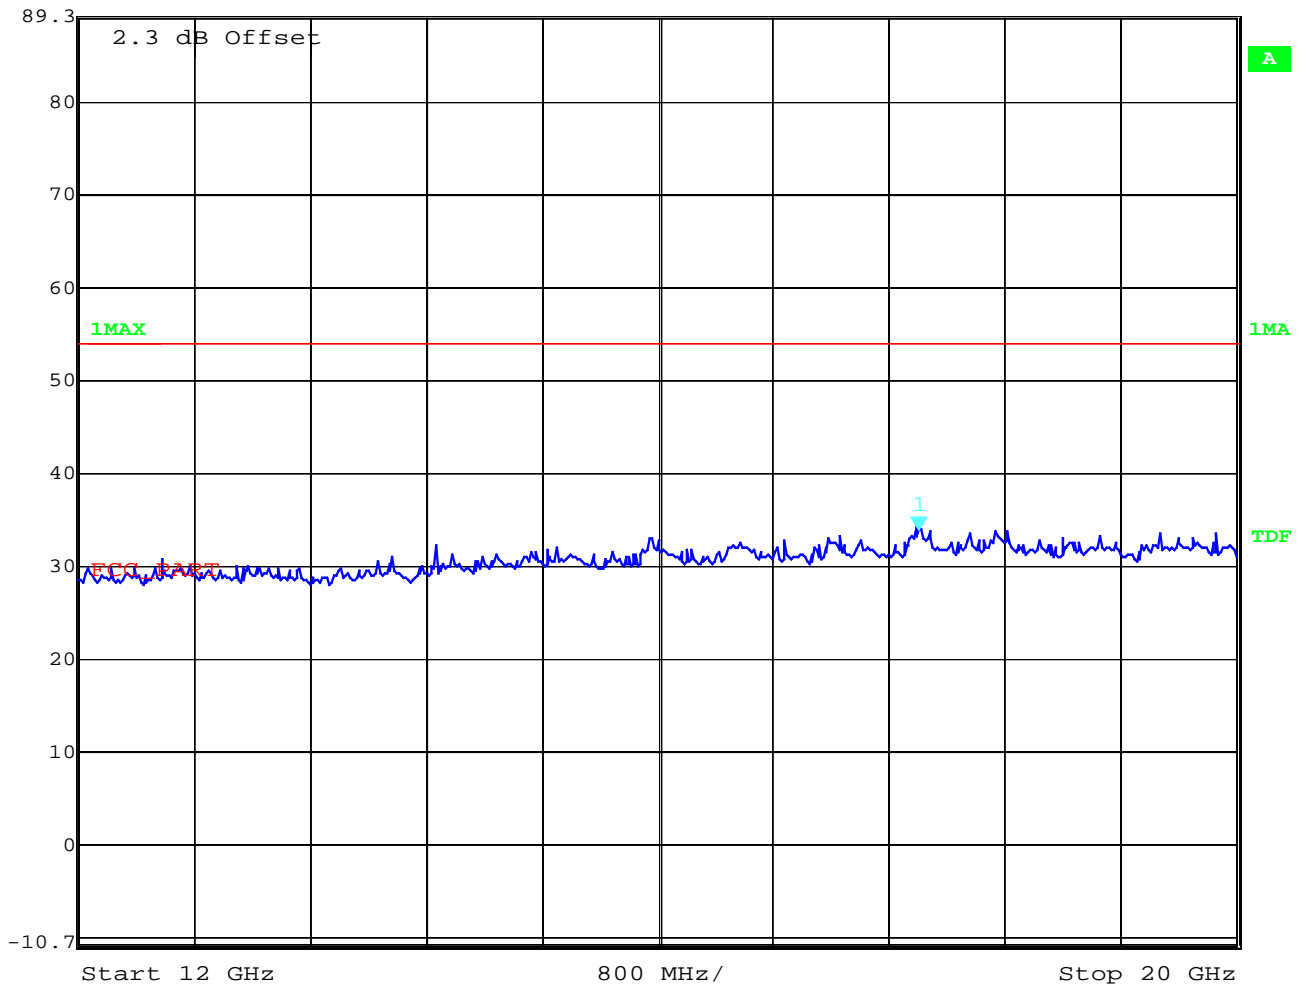

Date: 31.JUL.2003 14:08:21



SPURIOUS RADIATION


§ 15.109

Idle mode up to 25 GHz (1900 MHz)



Ref Lvl  
89.3 dB\*

RBW	1 MHz	RF Att	0 dB
VBW	1 MHz		
SWT	46 ms	Unit	dBµV/m

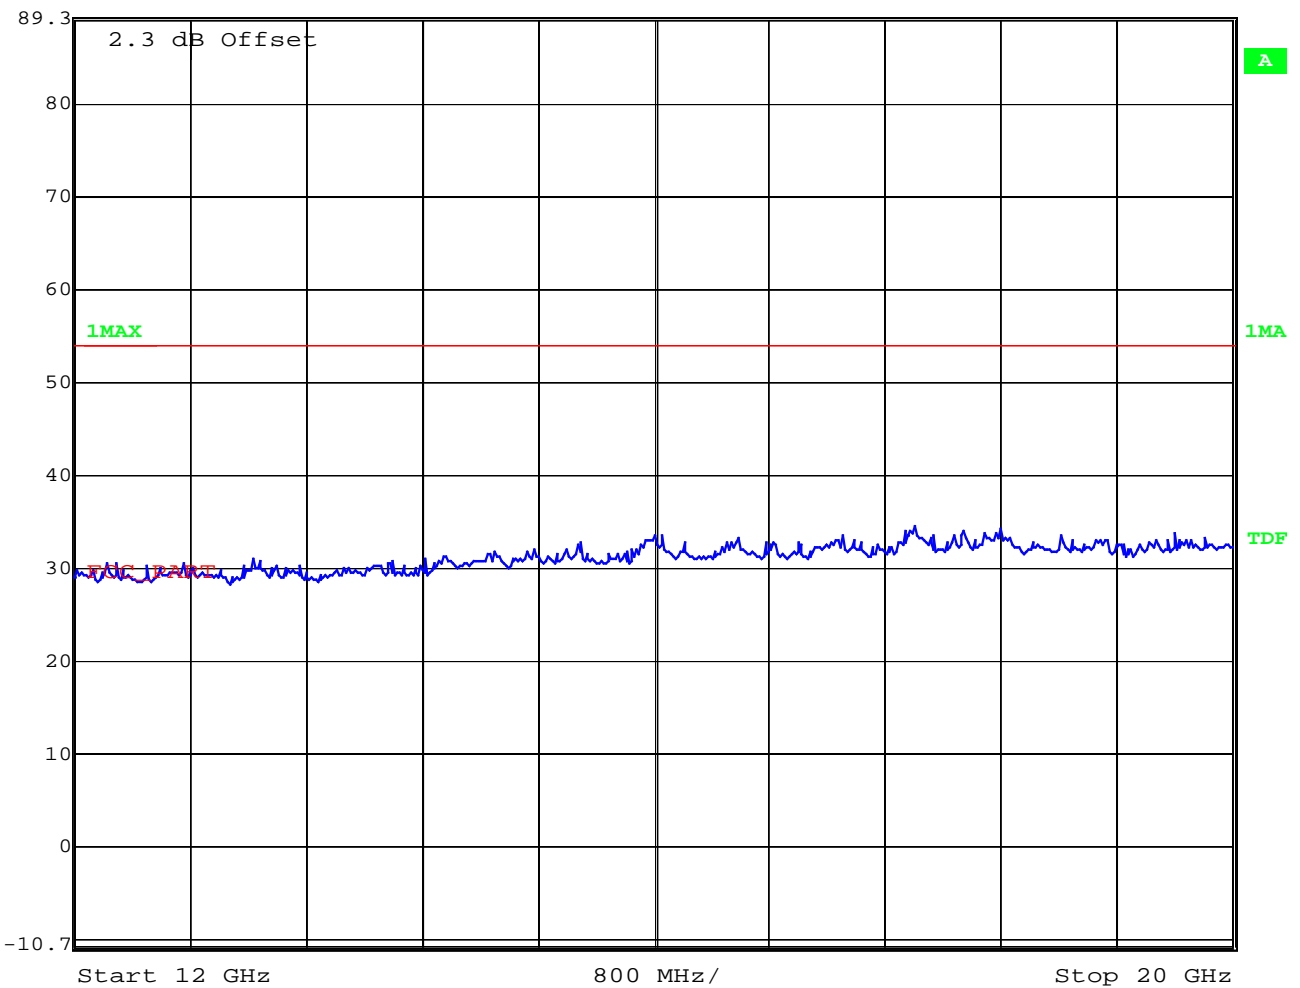

Date: 31.JUL.2003 14:04:51

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

52-63

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Communication Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Function Generator	AFGU	Rohde & Schwarz	862 480/032
09	Regulating Transformer	MPL	Erfi	91350
10	LISN	NNLA 8120	Schwarzbeck	8120331
11	Relay-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulation Meter	9008	Racal-Dana	2647
16	Frequency Counter	5340 A	Hewlett-Packard	1532A03899
17	Anechoic Chamber	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenna	3104	Emco	3758
23	Log. Per. Antenna	3146	Emco	2130
24	Double Ridged Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenna	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenna	HL 223	Rohde & Schwarz	825 584/002
29	Relay-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Anechoic Chamber		Frankonia	
33	Control Computer	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Receiver	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Control Computer	HD 100	Deisel	100/322/93
37	Relay Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relay Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spectrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Measuring Receiver	ESH 3	Rohde & Schwarz	890 174/002
43	Measuring Receiver	ESVP	Rohde & Schwarz	891 752/005
44	Bicon Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisation Network	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridged Horn Antenna 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Controler	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Network	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Network	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phase V-Network	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phase V-Network	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Power Supply	6032A	Rohde & Schwarz	2933A05441
59	RF-Test Receiver	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	RF-Test Receiver	ESH3	Rohde & Schwarz	881 515/002
62	Relay Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relay Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				
67				
68				


Test site

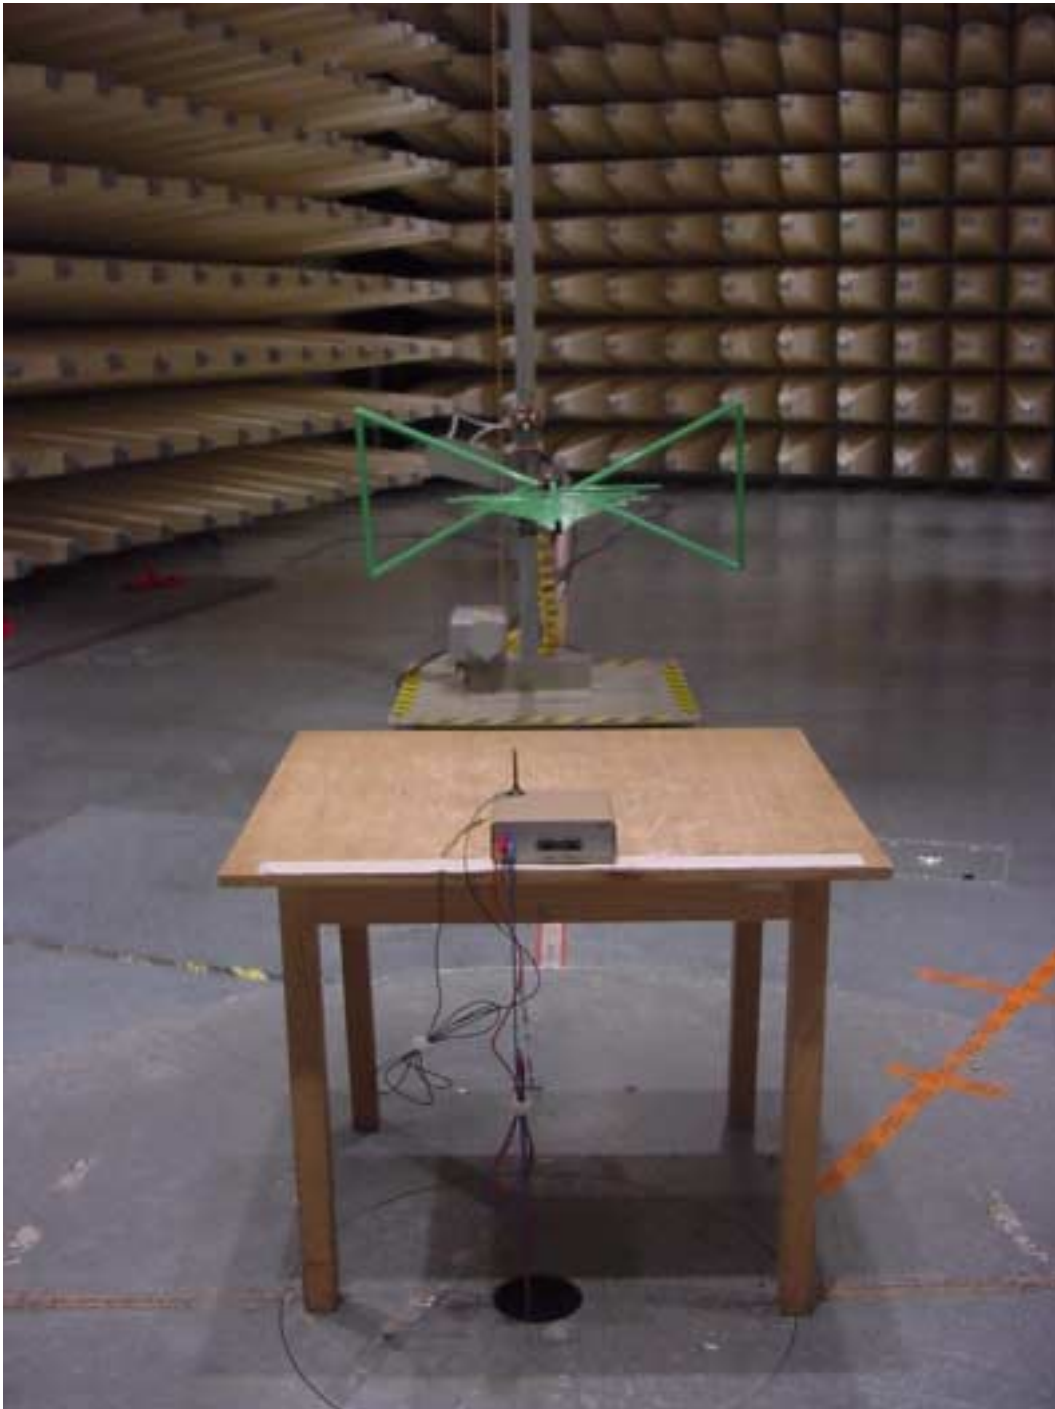

**Test site**

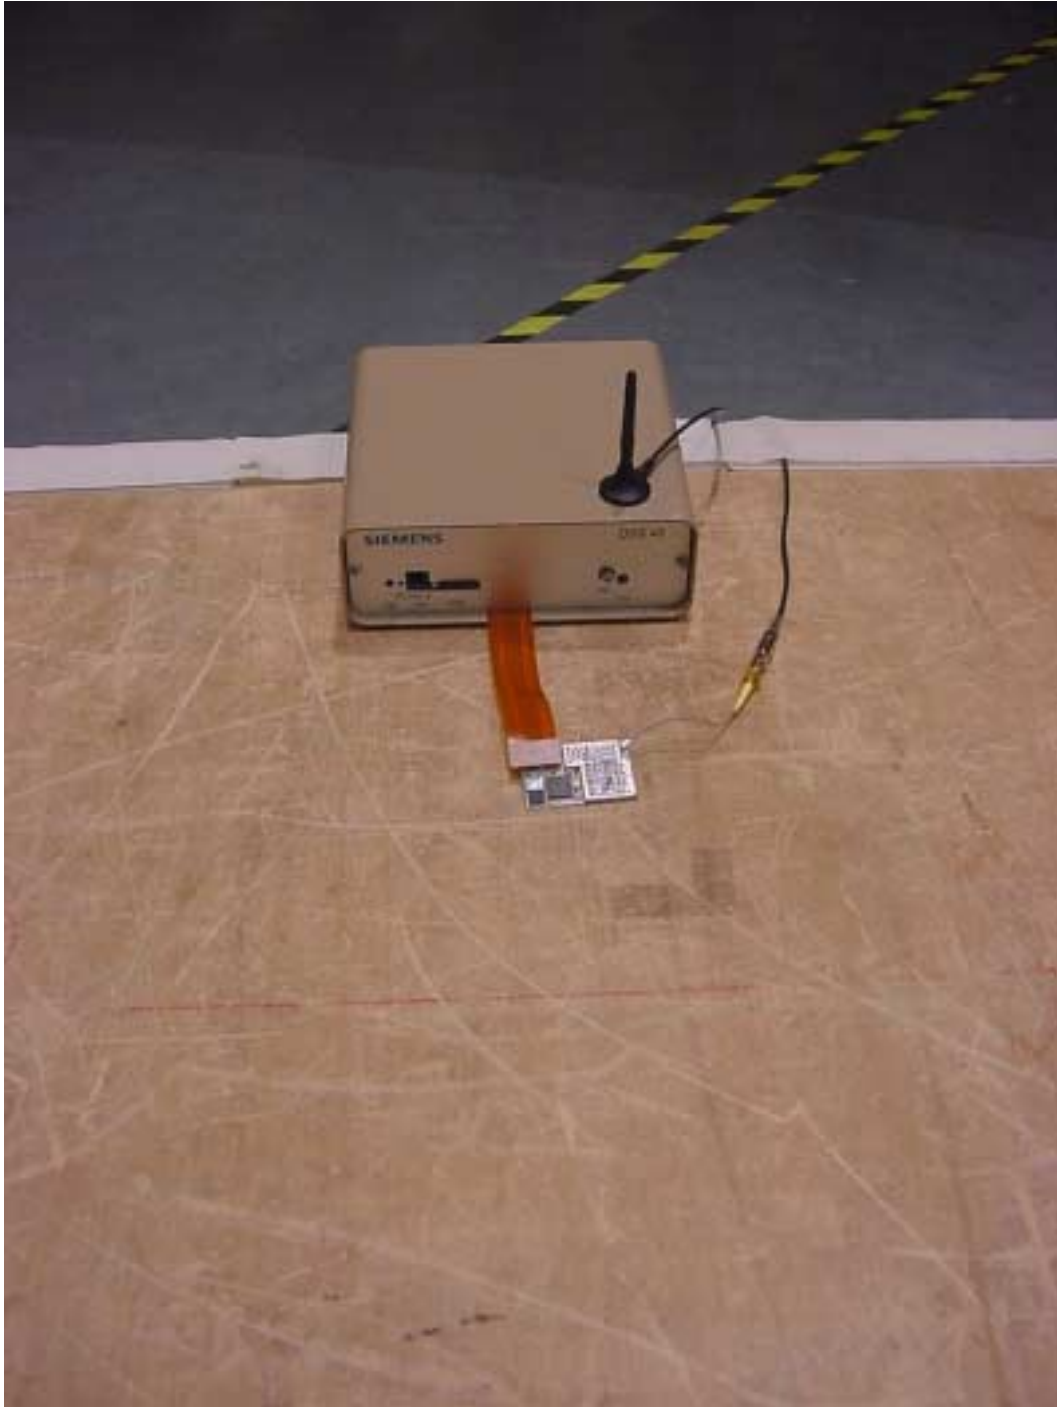

**Photographs of the equipment**

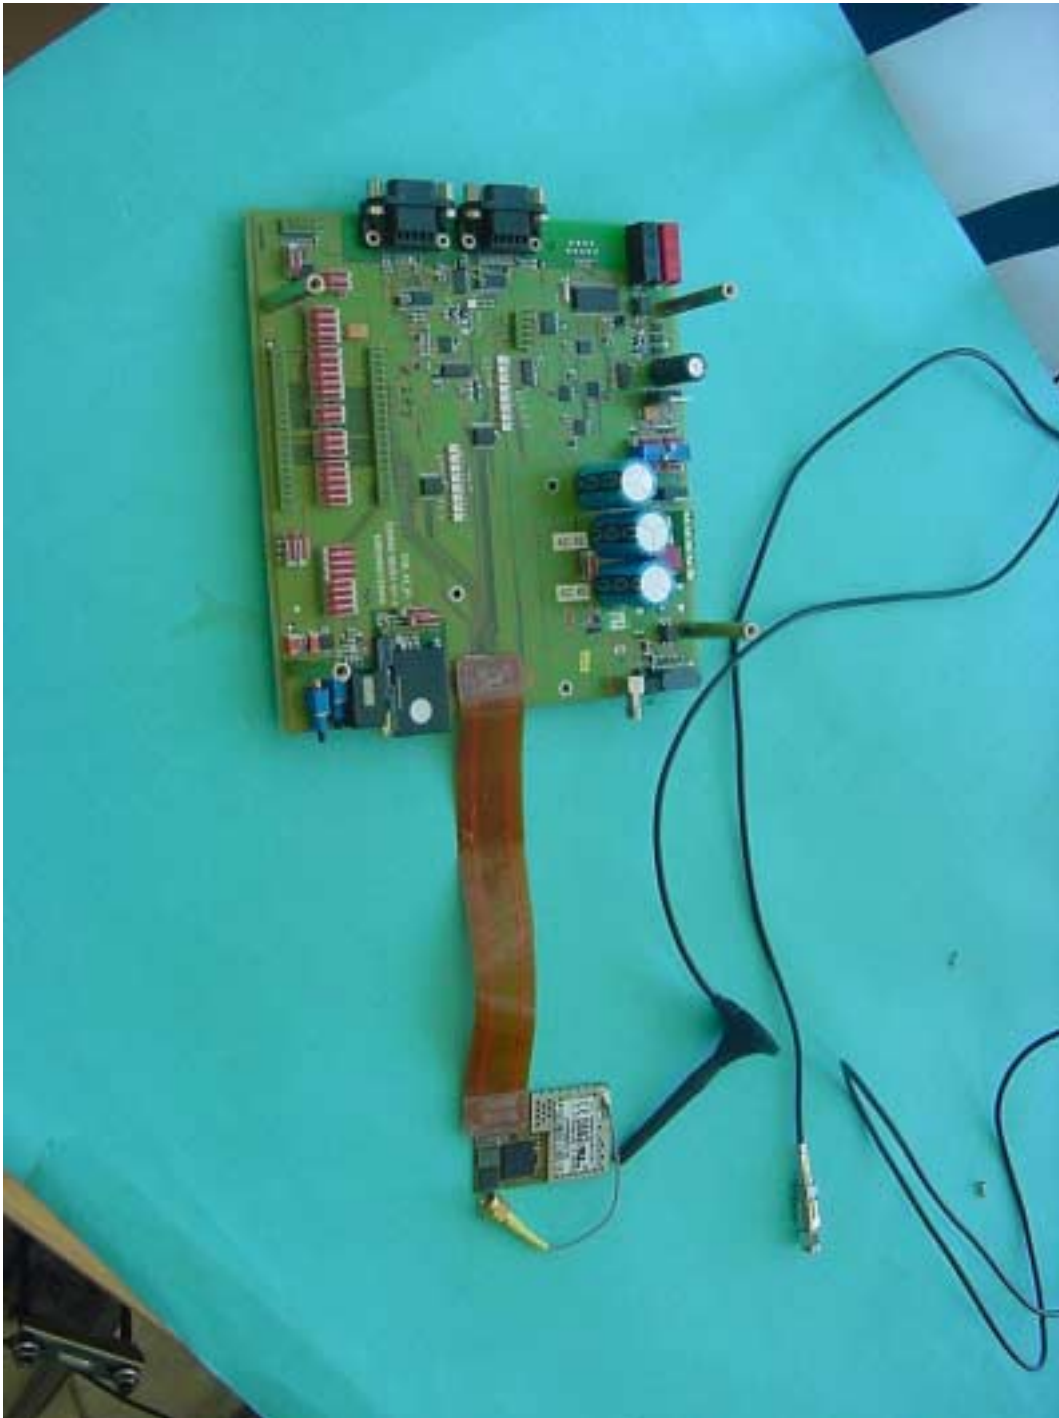



Photographs of the equipment



Photographs of the equipment





Photographs of the equipment



Photographs of the equipment

