

FCC Report

Application Purpose : Original grant

Applicant Name: : Klip Xtreme LLC

FCC ID : AMT-KXTKMDR05

Equipment Type : KlipX Nano Wless USB Presenter w- Integrated Laser Pointer

Model Name : ID600KLX03, KPS-006

Report Number : FCC15113318

Standard(S) : FCC Part 15 Subpart C Section 15.249

Date Of Receipt : December 3, 2015

Date Of Issue : December 10, 2015

Test By :



(Fall Ma)

Reviewed By :



(Robie Chen)

Authorized by :



(Michal Ling)

Prepared by :

Shenzhen WST Testing Technology Co., Ltd.

1F, No.9 Building, TGK Science & Technology Park Yangtian Rd., NO.72 Bao'an Dist., GuangDong, China

REPORT REVISE RECORD


Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	December 10, 2015	Valid	Original Report

Table of Contents	Page
1. GENERAL INFORMATION	5
2. TEST DESCRIPTION	7
2.1 MEASUREMENT UNCERTAINTY	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 CONFIGURATION OF SYSTEM UNDER TEST	9
2.4 DESCRIPTION OF SUPPORT UNITS	9
3. SUMMARY OF TEST RESULTS	10
4. MEASUREMENT INSTRUMENTS	11
5. ANTENNA REQUIREMENTS	12
5.1 STANDARD APPLICABLE	12
5.2 TEST RESULT	12
6. CONDUCTED EMISSIONS MEASUREMENT	13
6.1 POWER LINE CONDUCTED EMISSION LIMITS	13
6.2 TEST PROCEDURE	14
6.3 TEST SETUP	14
6.4 ENVIRONMENTAL CONDITIONS	14
6.5 TEST RESULTS	14
7. RADIATED EMISSION MEASUREMENT	15
7.1 RADIATED EMISSION LIMITS	15
7.2 TEST EQUIPMENT SETUP	16
7.3 TEST PROCEDURE	16
7.4 TEST SETUP	17
7.5 ENVIRONMENTAL CONDITIONS	18
7.6 TEST RESULTS	19
8. 20DB OCCUPIED BANDWIDTH	25
8.1 STANDARD APPLICABLE	25
8.2 TEST PROCEDURE	25
8.3 TEST SETUP	25
8.4 ENVIRONMENTAL CONDITIONS	25
8.5 TEST RESULTS	26

Table of Contents	Page
9. PHOTOGRAPHS OF TEST SETUP	28
10. PHOTOGRAPHS OF EUT	30

1. GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Equipment Type	KlipX Nano Wless USB Presenter w- Integrated Laser Pointer
Test Model	ID600KLX03
Derivative Model Name	KPS-006
Model difference	All models are identical in circuitry and electrical, mechanical and physical construction, only different on model name. All tests are carried out on ID600KLX03
Brand Name	
Applicant	Klip Xtreme LLC
Address	454 Holiday Drive Hallandale, FL 33009
Manufacturer	Klip Xtreme LLC
Address	3505 N.W. 107 th Ave, Doral., Florida, 33178
Hardware version:	N/A
Software version:	N/A
Operating Voltage	DC 3V
Operating Frequency	2425-2465MHz
Channels	4
Modulation Type	FSK
Antenna Type:	PCB Antenna
Antenna gain:	0dBi
Data of receipt	December 3, 2015
Date of test	December 3, 2015 to December 10, 2015
Deviation	None
Condition of Test Sample	Normal

We hereby certify that:

The above equipment was tested by Shenzhen WST Testing Technology Co., Ltd.

Registration Number: 939433

The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2009. The sample tested as described in this report is in compliance with the FCC Rules Part15 Subpart C.

The test results of this report relate only to the tested sample identified in this report.

2. TEST DESCRIPTION

2.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2.2 DESCRIPTION OF TEST MODES

The system was configured for testing in engineering mode, which was provided by the manufacturer. The engineering mode was configured under maximum power output and switched the channels by keys.

4 channels were provided by the manufacturer.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2425	01	2443	02	2455	03	2465

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2425MHz
TM2	Middle Channel	2443MHz
TM3	High Channel	2465MHz

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) Record the worst case of each test item in this report.

2.3 CONFIGURATION OF SYSTEM UNDER TEST

EUT

(EUT: KlipX Nano Wless USB Presenter w- Integrated Laser Pointer)

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model No.	ID or Specification	Remark
1	/	/	/	/

Note:

- (1) *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- (2) *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

3. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
§15.203	Antenna Requirement	PASS	
§15.207	Conducted Emission	N/A	
§15.249 (a)	Field Strength of Fundamental	PASS	
§15.249 (a) (d)/ §15.209	Spurious Emissions	PASS	
§15.249 (d)/ §15.205	Band Edge	PASS	
§15.215 (c)	20dB Occupied Bandwidth	PASS	

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

4. MEASUREMENT INSTRUMENTS

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibrated	Calibrated until
EMI Test Receiver	R&S	ESCI	100005	2015-08-19	2016-08-18
LISN	Mestec	AN3016	04/10040	2015-08-19	2016-08-18
Coaxial cable	Megalon	LMR400	C001	2015-08-19	2016-08-18
System Controller	CT	SC100	011208	2015-08-19	2016-08-18
Bi-log Antenna	SUNOL Sciences	JB3	A021907	2015-09-13	2016-09-12
Spectrum Analyzer	R&S	FSU	100114	2015-08-19	2016-08-18
Horn Antenna	SCHWARZBECK	9120D	1141	2015-08-19	2016-08-18
Loop Antenna	EMCO	6502	00042960	2015-08-19	2016-08-18
Pre Amplifier	H.P.	HP8447E	2945A02715	2015-10-13	2016-10-12
Pre-Amplifier	CDSI	PAP-1G18-38	7621	2015-10-13	2016-10-12
9*6*6 Anechoic	SAEMC	L×W×H 9×6×6	A002	2015-08-21	2016-08-20
RF cable	H+S	SUCOFLEX 102	R002	2015-08-19	2016-08-18
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	2015-08-19	2016-08-18

5. ANTENNA REQUIREMENTS

5.1 STANDARD APPLICABLE

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

5.2 TEST RESULT

This product has an PCB antenna, fulfill the requirement of this section.

6. CONDUCTED EMISSIONS MEASUREMENT

6.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

The specification used was with the FCC Part 15.207 Limit.

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

6.2 TEST PROCEDURE

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

6.3 TEST SETUP

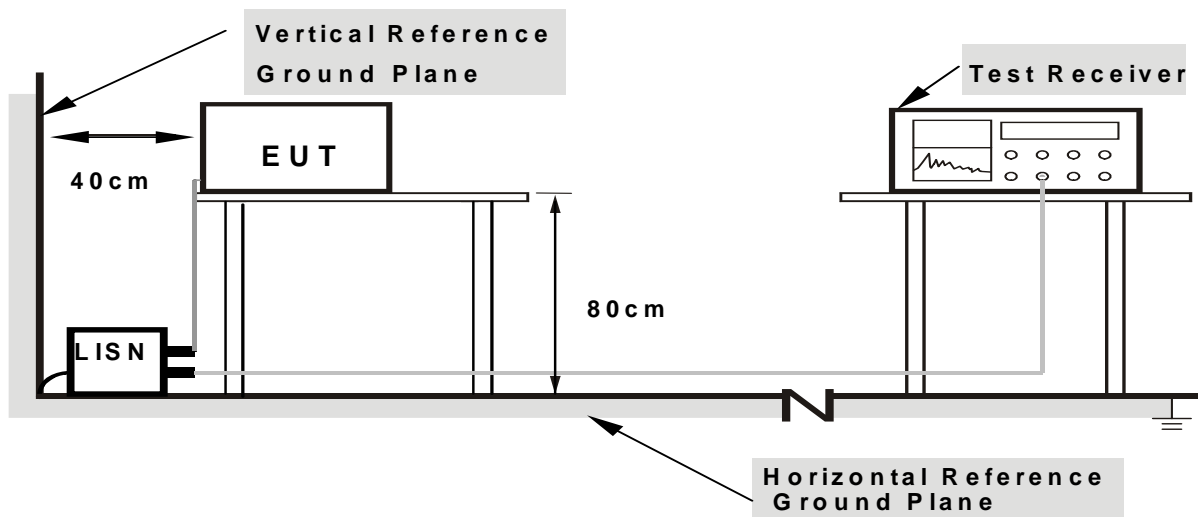

Note: 1.Support units were connected to second LISN .
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

6.4 ENVIRONMENTAL CONDITIONS

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

6.5 TEST RESULTS

The EUT is supplied by 3.0V from LITHIUM battery, so Conducted Emission is not applicable.

7. RADIATED EMISSION MEASUREMENT

7.1 RADIATED EMISSION LIMITS

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

7.2 TEST EQUIPMENT SETUP

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.3 TEST PROCEDURE


- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

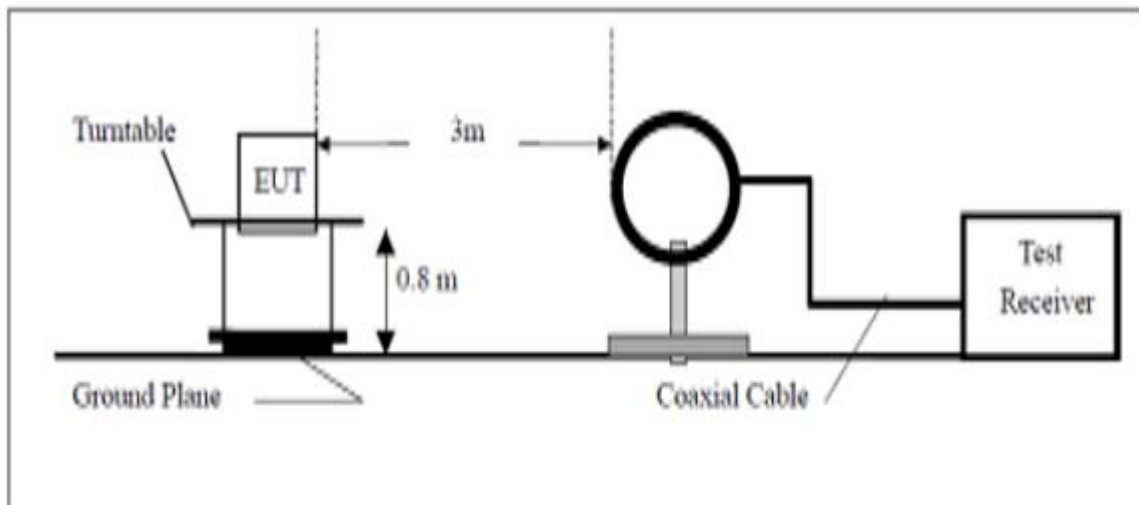

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

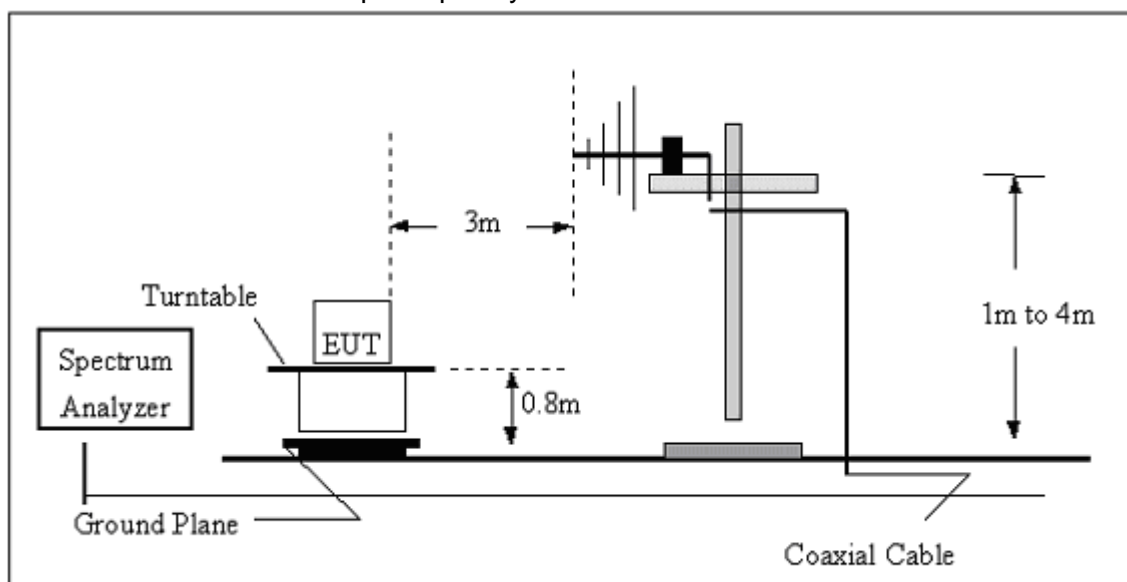

(C) Radiated Emission Test-Up Frequency Above 1GHz

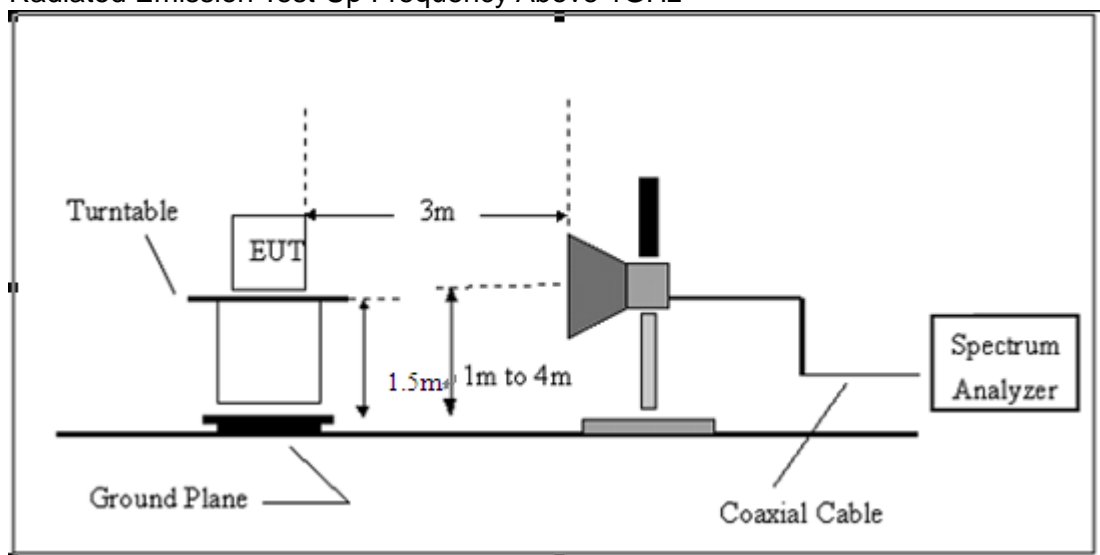

7.5 ENVIRONMENTAL CONDITIONS

Temperature:	25 °C
Relative Humidity:	57 %
ATM Pressure:	1012 mbar

7.6 TEST RESULTS

Field Strength of Fundamental

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
2425	92.81	-8.67	84.14	114	-29.86	H	PK
2425	89.16	-8.67	80.49	94	-13.51	H	AV
2443	95.19	-8.4	86.79	114	-27.21	H	PK
2443	89.23	-8.4	80.83	94	-13.17	H	AV
2465	94.15	-8.25	85.90	114	-28.10	H	PK
2465	89.88	-8.25	81.63	94	-12.37	H	AV
2425	94.48	-8.67	85.81	114	-28.19	V	PK
2425	91.86	-8.67	83.19	94	-10.81	V	AV
2443	93.44	-8.4	85.04	114	-28.96	V	PK
2443	92.18	-8.4	83.78	94	-10.22	V	AV
2465	92.76	-8.25	84.51	114	-29.49	V	PK
2465	92.60	-8.25	84.35	94	-9.65	V	AV

Note:

1. Correction Factor= Antenna Factor + Cable loss - Pre-amplifier; Emission Level=Peak Reading + Correction Factor; Margin=Emission Level - Limit.

Spurious Emissions

Frequency Range (9 kHz-30MHz)


Freq.	Emission Level	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

Note:

1. *Emission Level=Reading+ Cable loss-Antenna factor-Amp factor*
2. *The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.*


Frequency Range (30MHz-1000MHz)

Horizontal:

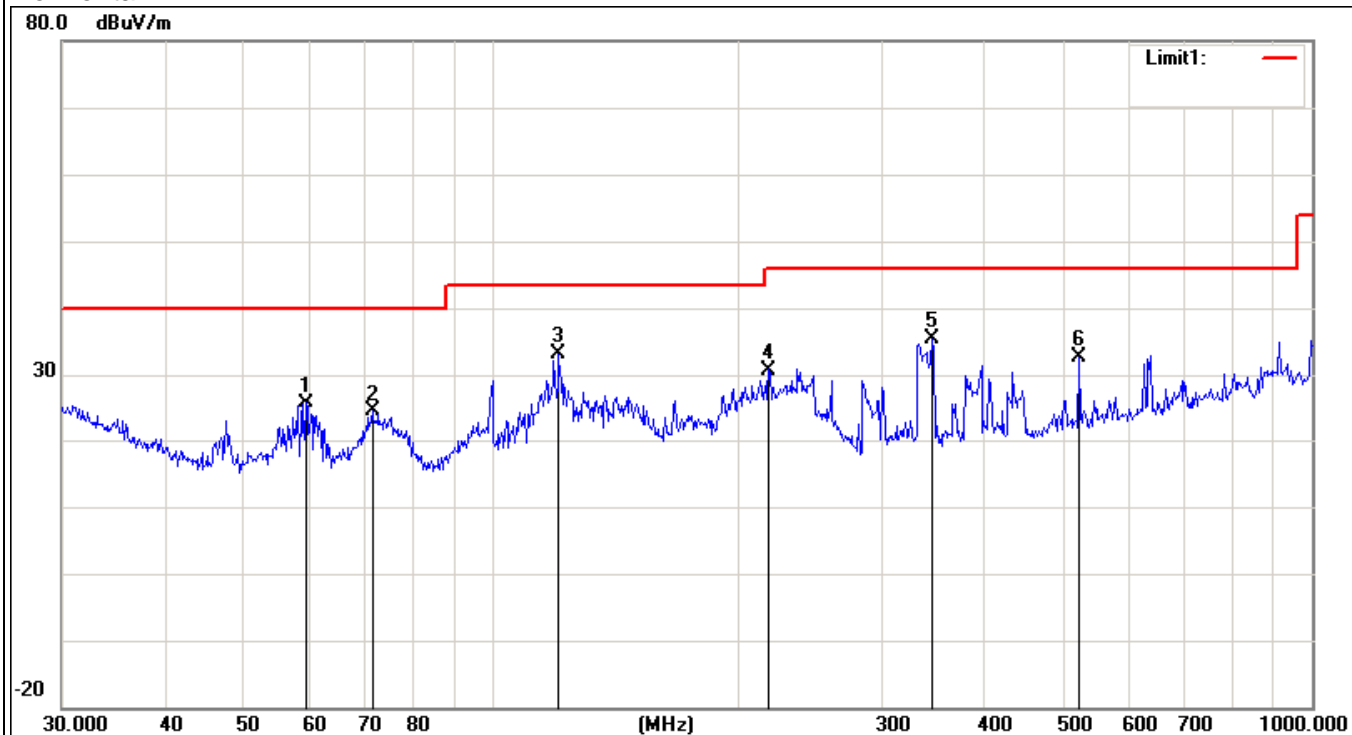

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		59.4405	34.92	-9.40	25.52	40.00	-14.48	peak
2		71.5806	32.12	-7.73	24.39	40.00	-15.61	peak
3	*	120.6991	35.50	-2.29	33.21	43.50	-10.29	peak
4		218.3085	36.23	-5.48	30.75	46.00	-15.25	peak
5		344.3855	39.75	-4.41	35.34	46.00	-10.66	peak
6		520.8882	33.36	-0.63	32.73	46.00	-13.27	peak

Vertical:

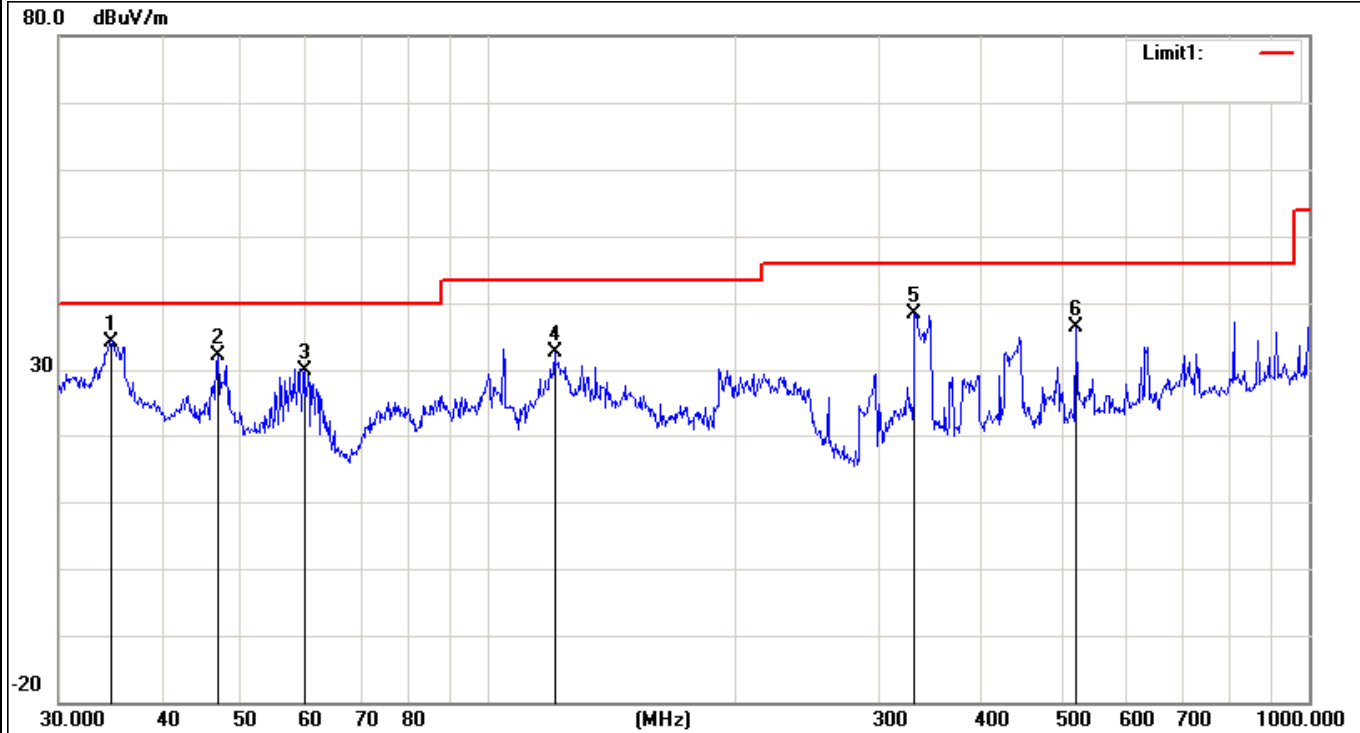

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	34.7602	33.96	0.29	34.25	40.00	-5.75	peak
2		46.8303	39.65	-7.56	32.09	40.00	-7.91	peak
3		59.6493	39.30	-9.40	29.90	40.00	-10.10	peak
4		120.2766	34.95	-2.31	32.64	43.50	-10.86	peak
5		331.3546	43.18	-4.74	38.44	46.00	-7.56	peak
6		520.8882	36.94	-0.63	36.31	46.00	-9.69	peak

Note:

Measurements were conducted in all channels (high, middle, low), and the worst case (low channel) was submitted only.

Frequency Range (Above 1G)

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2425MHz							
4850	56.23	-1.29	54.94	74	-19.06	H	PK
4810	42.63	-1.29	41.34	54	-12.66	H	AV
7275	49.77	6.51	56.28	74	-17.72	H	PK
7275	31.32	6.51	37.83	54	-16.17	H	AV
4850	57.82	-1.29	56.53	74	-17.47	V	PK
4810	41.67	-1.29	40.38	54	-13.62	V	AV
7275	43.07	6.51	49.58	74	-24.42	V	PK
7275	30.23	6.51	36.74	54	-17.26	V	AV
Middle Channel-2443MHz							
4886	61.89	-0.98	60.91	74	-13.09	H	PK
4886	43.42	-0.98	42.44	54	-11.56	H	AV
7329	44.64	6.83	51.47	74	-22.53	H	PK
7329	31.15	6.83	37.98	54	-16.02	H	AV
4886	56.49	-0.98	55.51	74	-18.49	V	PK
4886	41.32	-0.98	40.34	54	-13.66	V	AV
7329	43.02	6.83	49.85	74	-24.15	V	PK
7329	32.47	6.83	39.30	54	-14.70	V	AV
High Channel-2465MHz							
4930	59.21	-0.8	58.41	74	-15.59	H	PK
4930	42.58	-0.8	41.78	54	-12.22	H	AV
7395	44.20	6.94	51.14	74	-22.86	H	PK
7395	33.56	6.94	40.50	54	-13.50	H	AV
4930	56.26	-0.8	55.46	74	-18.54	V	PK
4930	40.91	-0.8	40.11	54	-13.89	V	AV
7395	43.05	6.94	49.99	74	-24.01	V	PK
7395	33.23	6.94	40.17	54	-13.83	V	AV

Note:

1. Correction Factor= Antenna Factor + Cable loss - Pre-amplifier; Emission Level=Peak Reading + Correction Factor; Margin=Emission Level - Limit.

2. The emission levels of other frequencies are very lower than the limit and not show in test report.

3. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

OUT OF BAND EMISSION

Frequency	Reading	Correct Factor	Emission Level	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2425MHz							
2390	66.36	-8.73	57.63	74	-16.37	H	PK
2390	48.09	-8.73	39.36	54	-14.64	H	AV
2390	69.44	-8.73	60.71	74	-13.29	V	PK
2390	49.41	-8.73	40.68	54	-13.32	V	AV
High Channel-2465MHz							
2483.5	69.11	-8.17	60.94	74	-13.06	H	PK
2483.5	47.95	-8.17	39.78	54	-14.22	H	AV
2483.5	65.76	-8.17	57.59	74	-16.41	V	PK
2483.5	46.47	-8.17	38.30	54	-15.70	V	AV

Note:

1. Correction Factor= Antenna Factor + Cable loss - Pre-amplifier; Emission Level=Peak Reading + Correction Factor; Margin=Emission Level - Limit.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.

8. 20DB OCCUPIED BANDWIDTH

8.1 STANDARD APPLICABLE

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

8.2 TEST PROCEDURE

According to the ANSI 63.4-2009, the emission bandwidth test method as follows.

1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT.

2. Set to the maximum power setting and enable the EUT transmit continuously.

3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel;

RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.

4. Measure and record the results in the test report.

8.3 TEST SETUP




8.4 ENVIRONMENTAL CONDITIONS

Temperature:	22 °C
Relative Humidity:	58 %
ATM Pressure:	1012 mbar

8.5 TEST RESULTS


Frequency	20dB Bandwidth (kHz)	Result
2425 MHz	3277	PASS
2443 MHz	2837	PASS
2465 MHz	3365	PASS

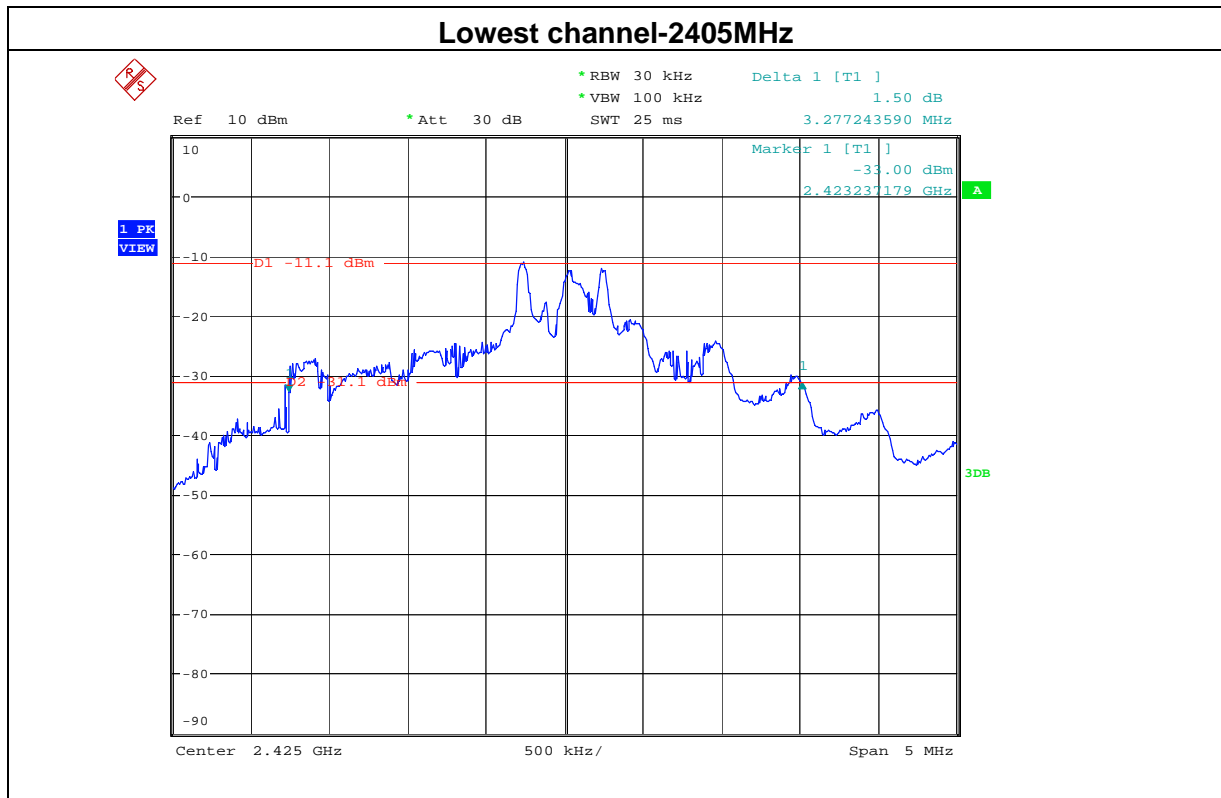

Middle channel-2448MHz




Highest channel-2472MHz

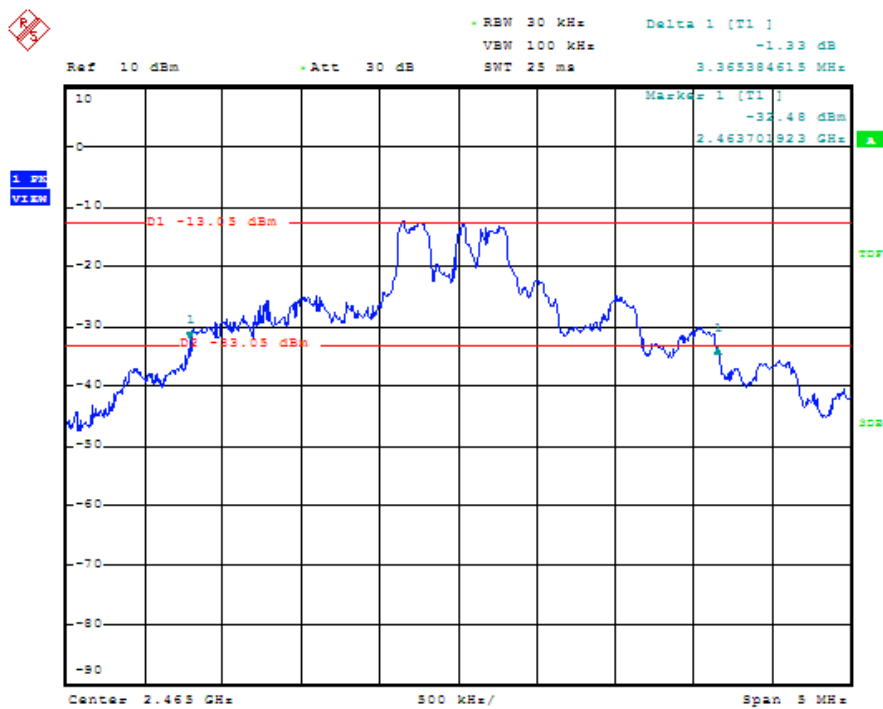


9. PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST

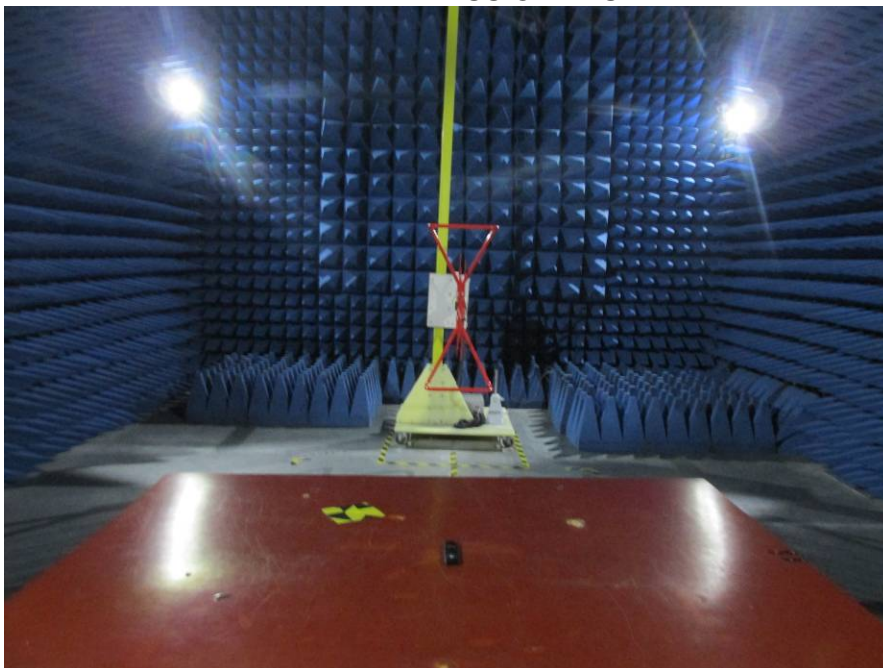

RADIATED EMISSION TEST

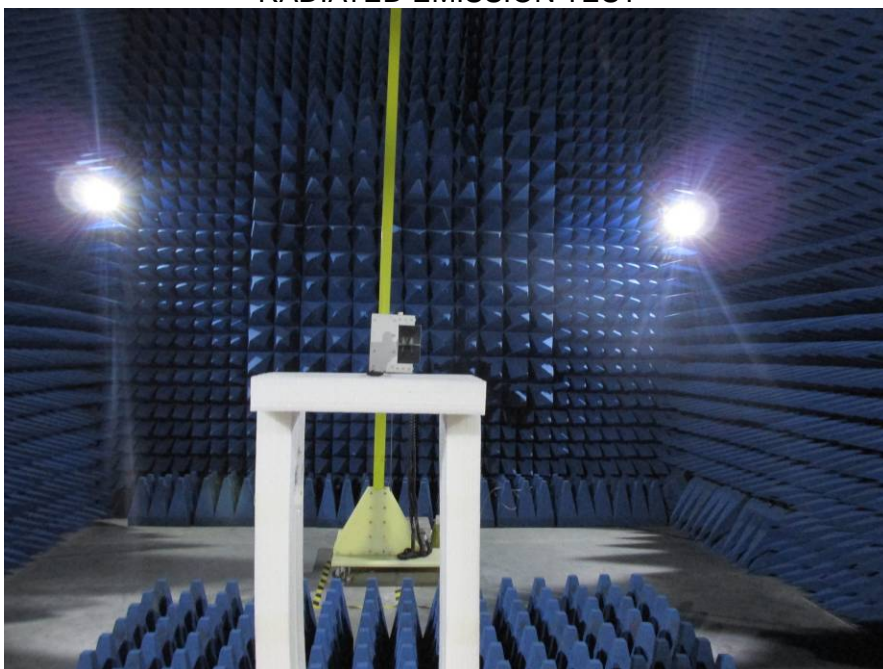

RF TEST



10. PHOTOGRAPHS OF EUT


Appearance photograph of EUT



Appearance photograph of EUT



Appearance photograph of EUT

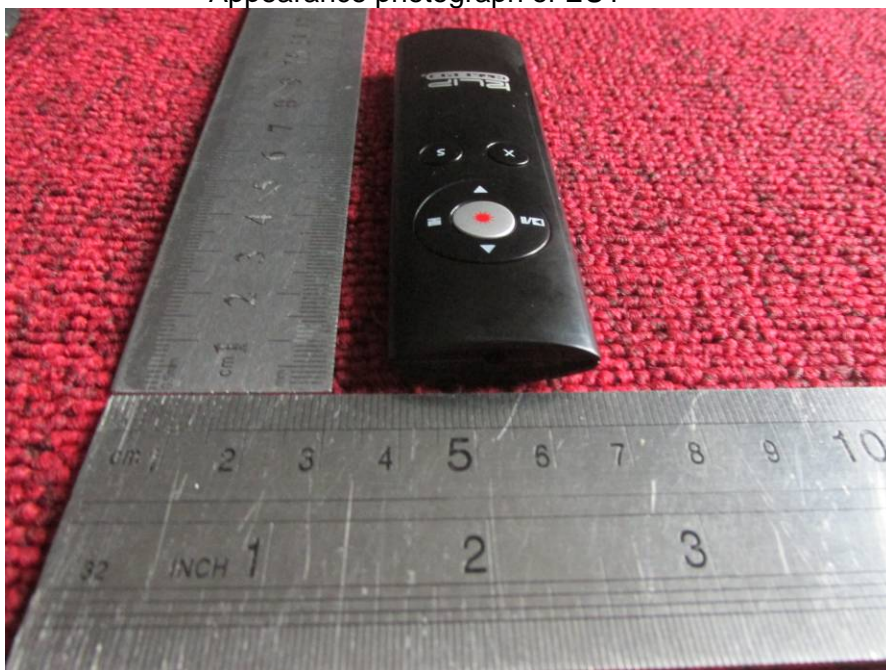


Appearance photograph of EUT




Internal photograph of EUT




Internal photograph of EUT

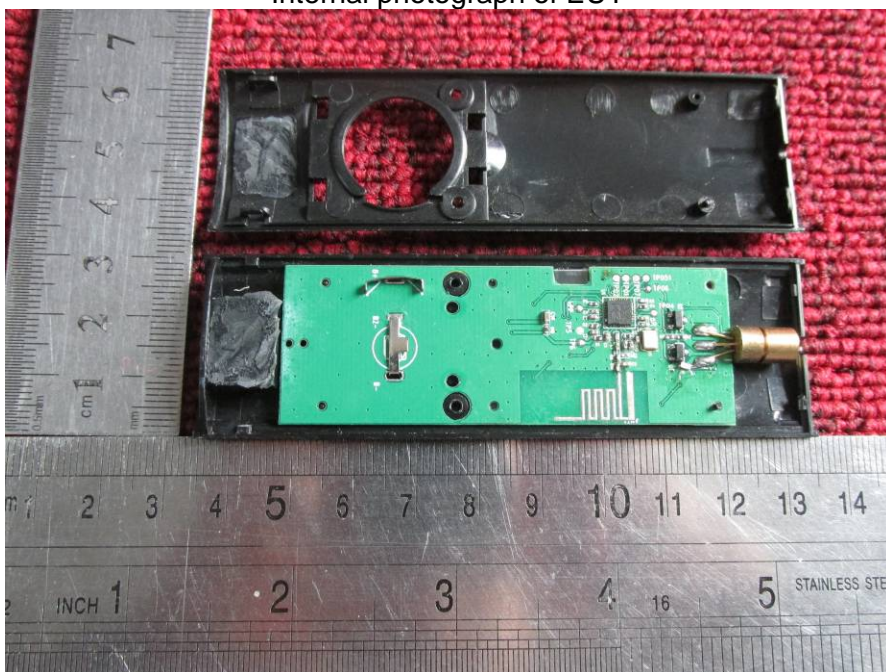


Internal photograph of EUT

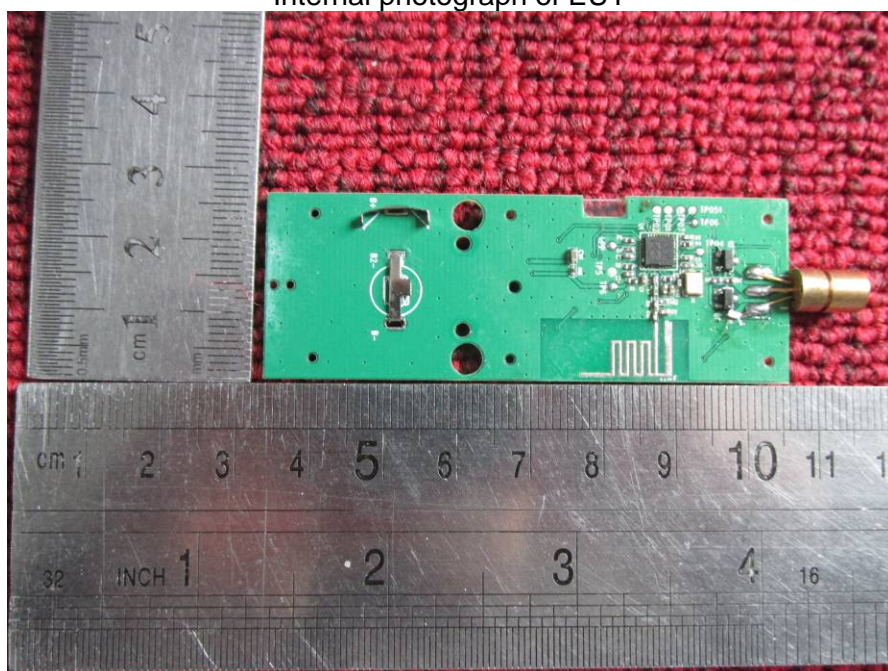

Internal photograph of EUT

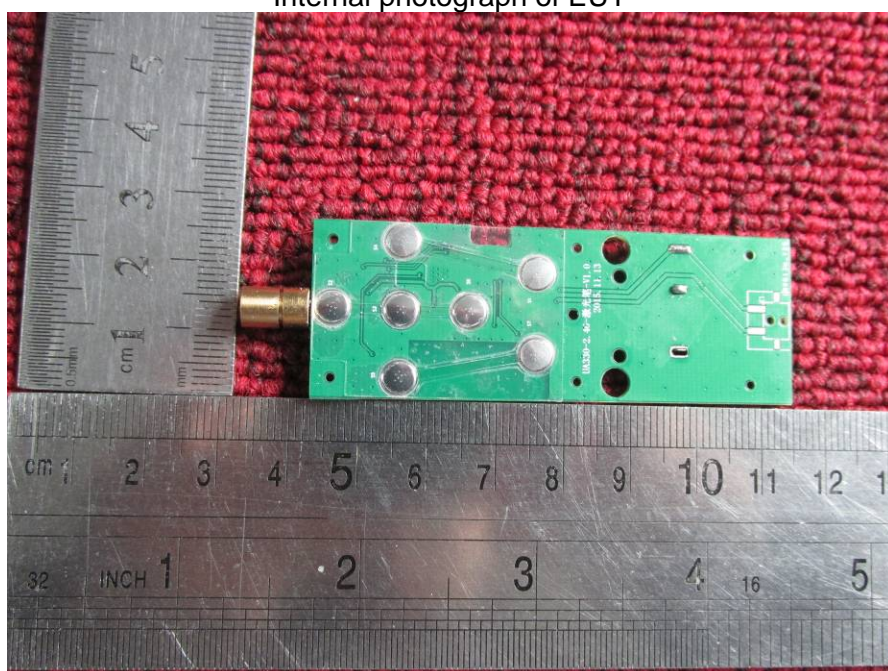

Internal photograph of EUT

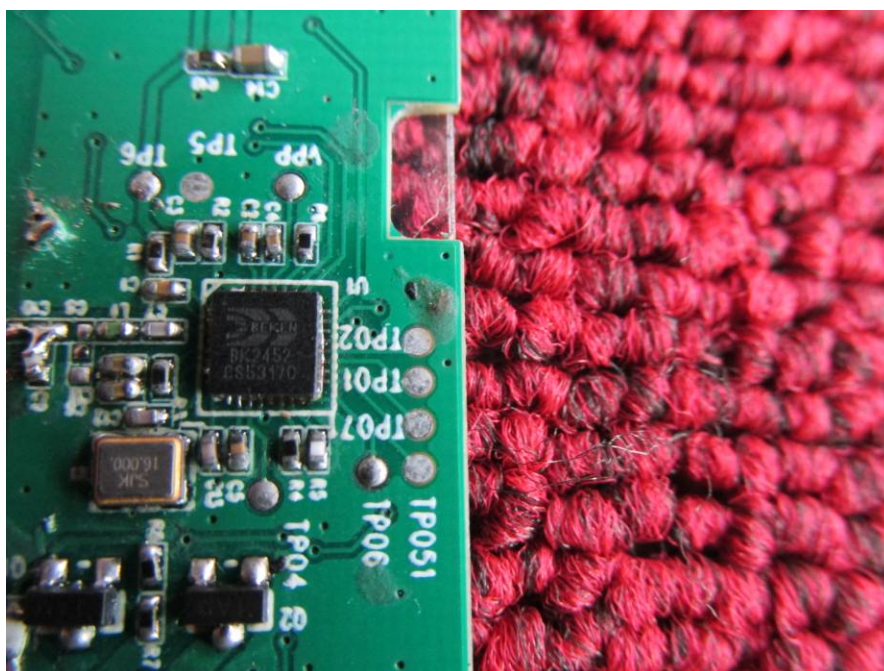

—END OF REPORT—