



ENGINEERING TEST RECORD
REPORT OF MEASUREMENTS (MICROWAVE OVEN TEST DATA SHEET)

FCC ID : APYDMR0132
Tested Product : Household Microwave Oven, VK Chassis
Input Power Rating : 120 V ac, 60 Hz
Output Power Rating : 900 W (IEC method)
Nominal Frequency : 2450 MHz
Magnetron Type No. : 2M253H(L), mfd by Toshiba
Test Date : December 18 - 21, 2000

Tested by;

Tested/Reviewed by;


T. Miyamoto
Microwave Oven Engineering Dept.
Kitchen Appliance Systems Div.
Sharp Corp. (Yao Factory)


Y. Honkawa
Microwave Oven Engineering Dept.
Kitchen Appliance Systems Div.
Sharp Corp. (Yao Factory)

DATA SUMMARY (FCC Measurement Procedure MP-5)

1. Frequency Measurements : See attached data sheet.
2. Radiated Field Strength : See attached data sheet.

Measurement Test Site : Sharp Corporation
Kitchen Appliance Systems Div.
Yao Factory, EMI Anechoic Chamber

Note: For further details of Test Site, refer to the attached "Description of Measurement Facilities".

Total Power Input to Oven : 1352 W
Power Developed in Dummy Load : 644 W
(by calorimetric method with 1000 ml water load,
well heated microwave oven.)
Supply Voltage : 120 V ac, 60 Hz
PERMISSIBLE : **28.37 uV/m at 300 m**

1. FREQUENCY MEASUREMENTS

FCC ID : APYDMR0132
TESTED UNIT : Household Microwave Oven, VK Chassis
Magnetron Type No. : 2M253H(L), mfd by Toshiba
Tested : December 21, 2000

(1) Frequency VS Line Voltage Variation Test

Test Result (Room Temperature: 20 degC)
Load: 1000 cc water in the glass beaker

Line Voltage Variation (V)	Frequency	Allowed Tolerance for the ISM Band (2450 MHz)
96 (80%)	Upper: 2462 MHz Lower: 2437 MHz	Upper: 2500 MHz Lower: 2400 MHz
108 (90%)	Upper: 2476 MHz Lower: 2437 MHz	
120 (Nominal)	Upper: 2480 MHz Lower: 2441 MHz	
132 (110%)	Upper: 2478 MHz Lower: 2437 MHz	
150 (125%)	Upper: 2477 MHz Lower: 2443 MHz	

(2) Frequency VS Load Variation Test

Test Results (Room Temperature: 20 degC)
Initial Load: 1000 cc water in the glass beaker.

Volume of Water (cc)	Frequency	Allowed Tolerance for the ISM Band (2450 MHz)
1000	Upper: 2480 MHz Lower: 2441 MHz	Upper: 2500 MHz Lower: 2400 MHz
800	Upper: 2471 MHz Lower: 2438 MHz	
600	Upper: 2474 MHz Lower: 2437 MHz	
400	Upper: 2474 MHz Lower: 2436 MHz	
200	Upper: 2476 MHz Lower: 2436 MHz	

2. RADIATED FIELD STRENGTH

DATA SHEET (FCC Measurement Procedure MP-5)

FCC ID: APYDMR0132

VK Chassis

Magnetron: 2M253H(L), mfd by Toshiba

Date: December 18 - 20, 2000

	Frequency (MHz)	Load (ml)	Place of the load	Antenna Factor (dB)	Cable Loss (dB)	Reading Data (dBuV @:3m)		Radiated Field Strength (uV/m @:300m)	
						Vertical	Horizen	Vertical	Horizen
Fundamental	2446	1000	Center	20.70	1.03	76	80	486.83	771.57
2nd Harmonic	4905	700	Center	20.50	1.58	33	29	5.68	3.58
	4901	700	R.F.Corner	20.50	1.58	32	27	5.06	2.84
	4913	300	Center	20.50	1.58	33	32	5.68	5.06
	4916	300	R.F.Corner	20.50	1.58	35	32	7.15	5.06
3rd Harmonic	7340	700	Center	22.00	2.10	15	12	0.90	0.64
	7360	700	R.F.Corner	22.00	2.10	18	17	1.27	1.14
	7366	300	Center	22.00	2.10	18	15	1.27	0.90
	7360	300	R.F.Corner	22.00	2.10	15	16	0.90	1.01
4th Harmonic	9840	700	Center	20.00	2.65	22	23	1.71	1.92
Sprious	5248	700	Center	20.70	1.60	14	14	0.65	0.65
	6134	700	Center	21.20	1.84	17	29	1.00	4.00
	6830	700	Center	21.60	2.00	17	23	1.07	2.14
	17225	700	Center	18.80	4.22	18	17	1.12	1.00
Emission Sideband	2400	1000	Center	20.70	1.01	18	22	0.60	0.95
	2415	1000	Center	20.70	1.02	24	25	1.21	1.35
	2485	1000	Center	20.70	1.03	10	10	0.25	0.25
	2500	1000	Center	20.80	1.04	10	10	0.25	0.25

Emission observed from 100 MHz through 18 GHz by spectrum analyzer. No significant emission was detected except for above data.

Microwave Leakage at 5 cm on fundamental : 0.25 mW/cm²

DESCRIPTION OF THE MEASUREMENT FACILITIES


SHARP CORPORATION, KITCHEN APPLIANCE SYSTEMS DIVISION
EMI ANECHOIC CHAMBER

PHOTOGRAPH OF TEST EQUIPMENT #1

Spectrum Analyzer
8566B

Field Strength Meter
NM-67

Horn Antenna

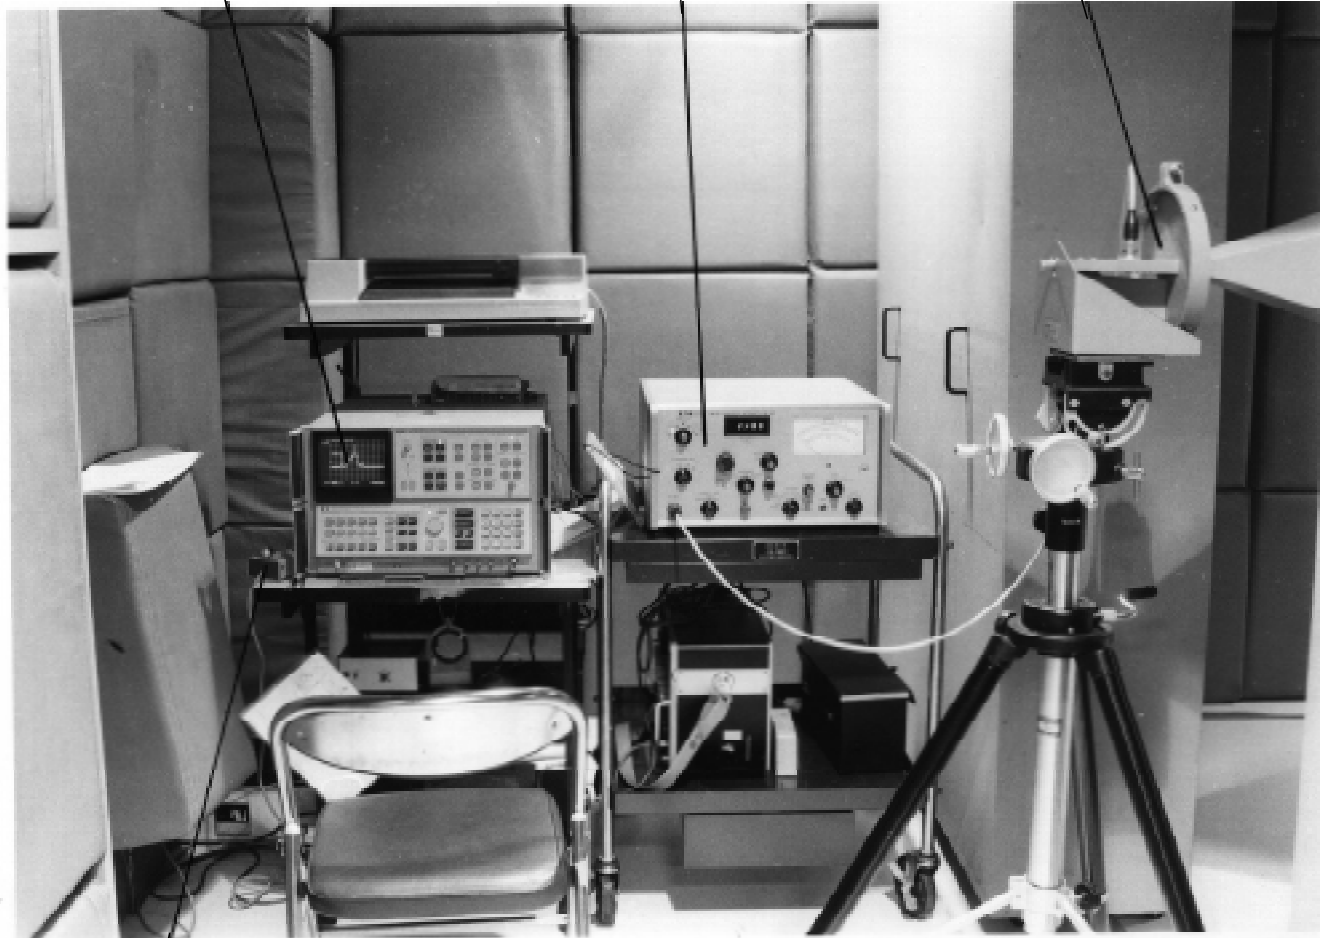

Turn Table Controller

PHOTOGRAPH OF TEST EQUIPMENT #2

Horn Antenna




Field Strength Meter
NM-67

PHOTOGRAPH OF TEST EQUIPMENT #3


Microwave Oven
Test Sample

Wooden Table

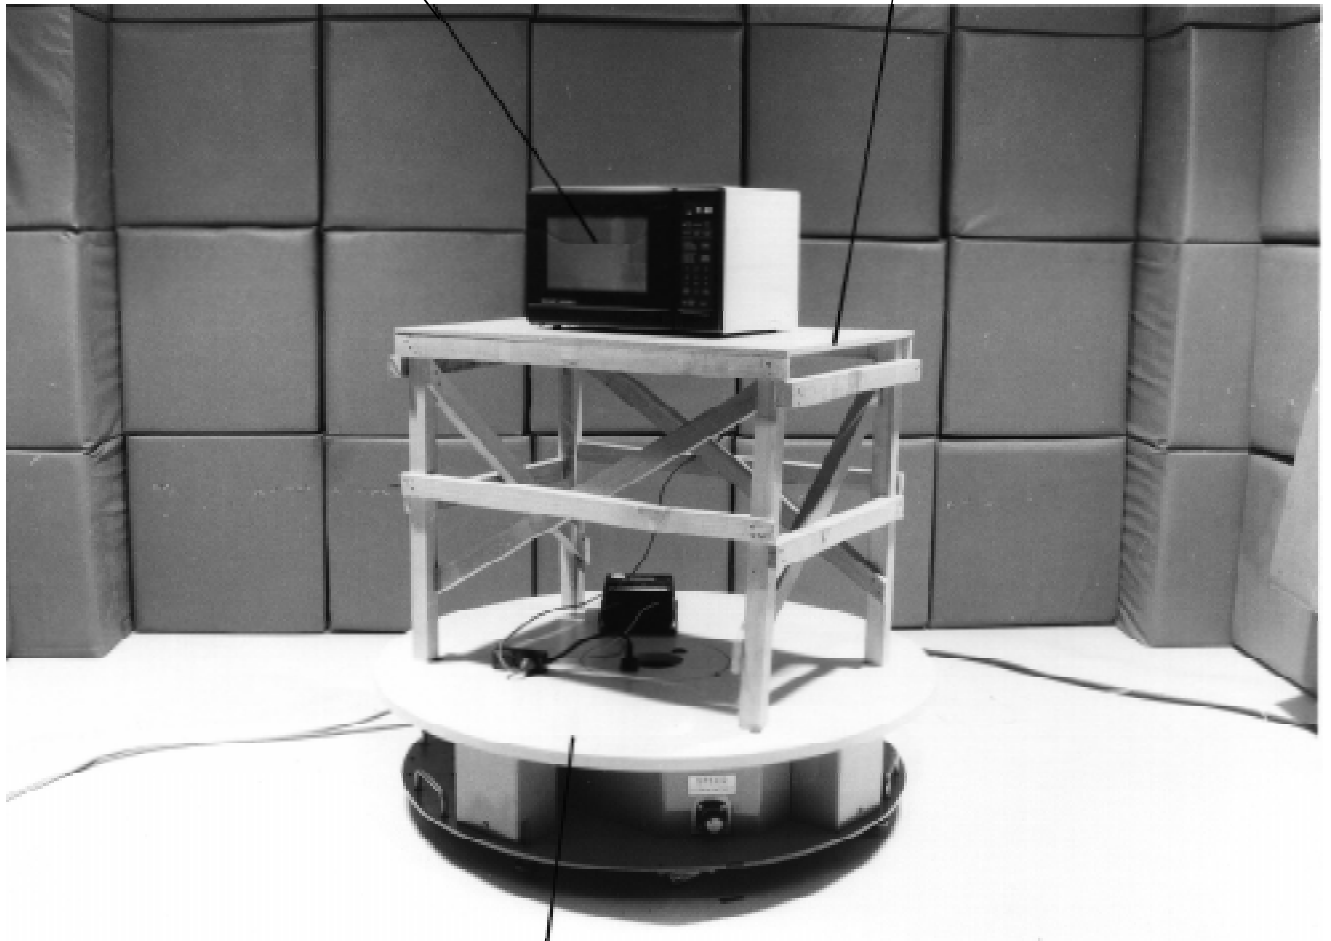


Transparent Turn Table

4. DIMENSIONS OF TEST SITE

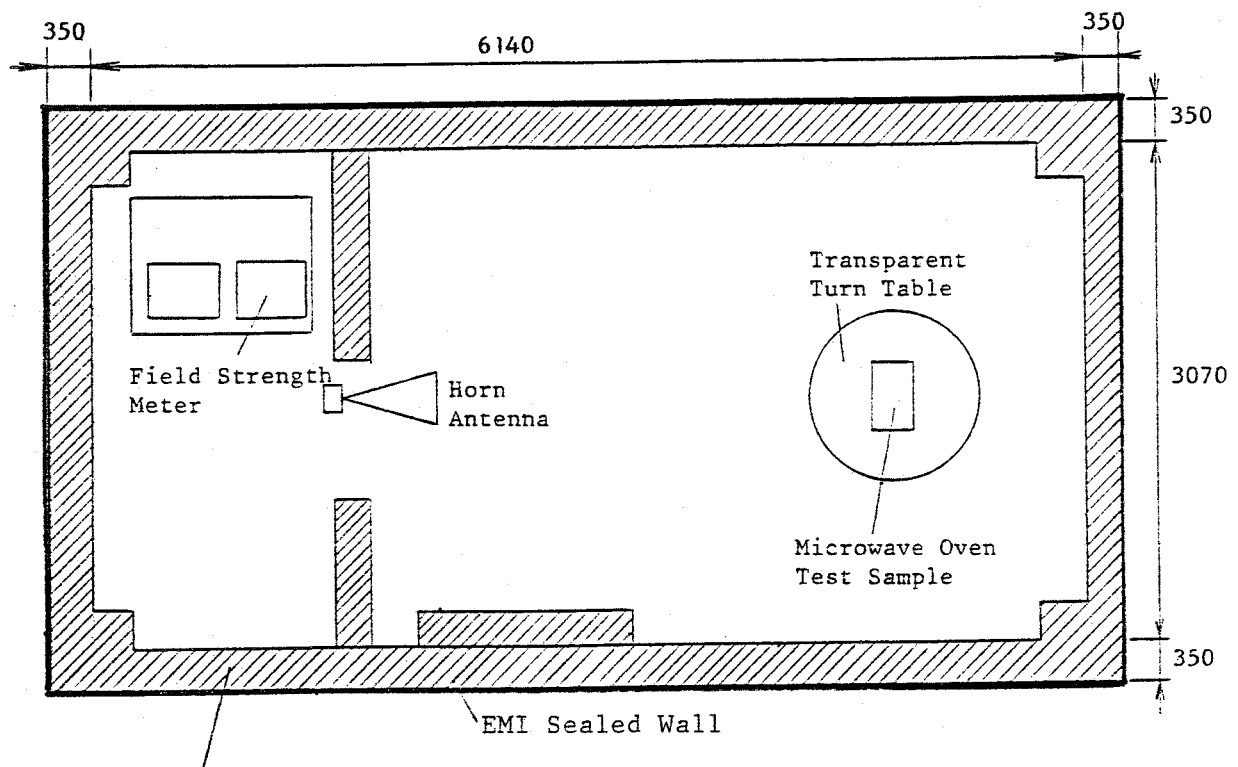


Electric Magnetic Wave Absorber: Cat. No. AEP-12EM WP
Mfd by Advanced ElectroMagnetic, Inc.

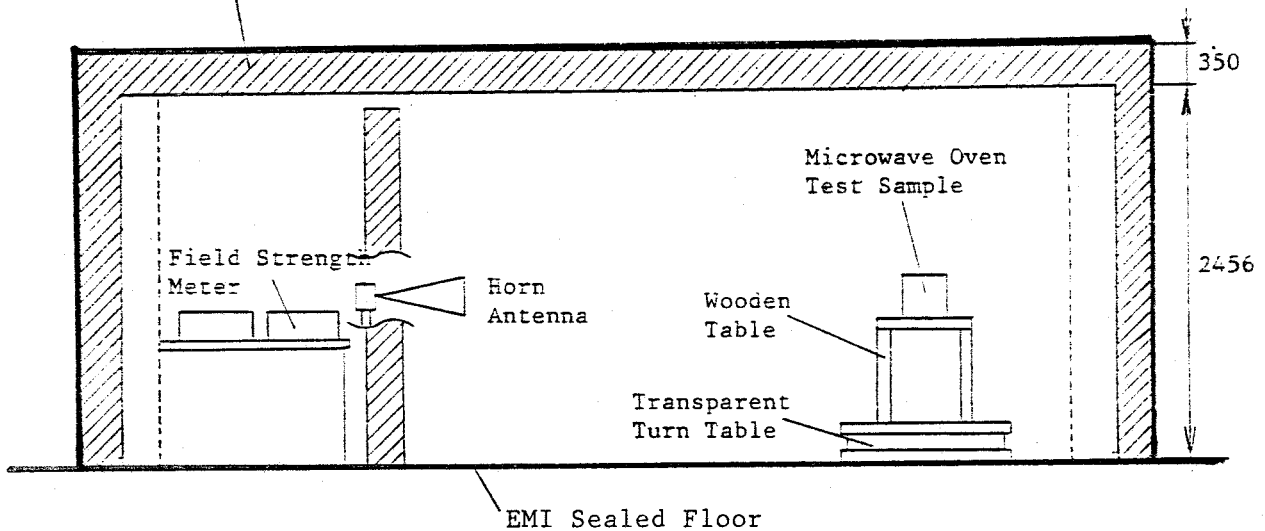

(mm)

EMI Anechoic Chamber equipped by Akzo Kashima Ltd.

5. ARRANGEMENT OF INSTRUMENTATION

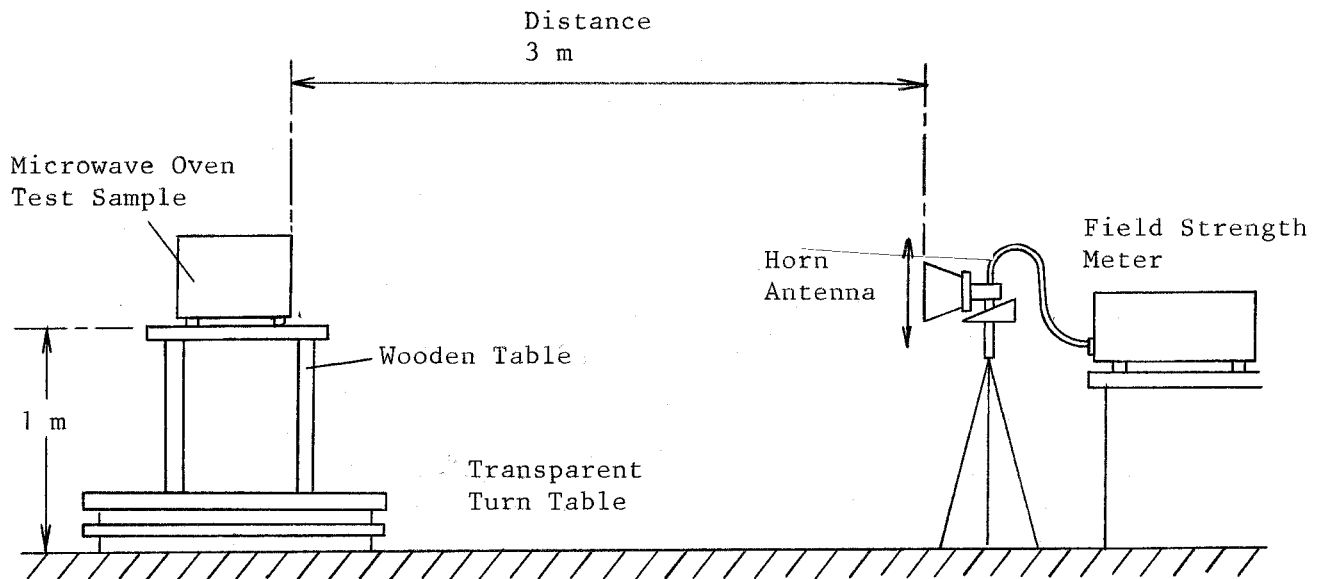

6. DESCRIPTION OF MEASUREMENT EQUIPMENTS

6-1. FIELD STRENGTH METER

- a) #UHR4000, Mfd by CHASE (100 MHz through 1.0 GHz)

BANDWIDTH	120 kHz
DETECTOR FUNCTION	Linear average value; AVERAGE 1: 1 ms averaging AVERAGE 2: 600 ms averaging
CALIBRATION DATE	July 2000

- b) #NM-67, Mfd by EATON (1.0 GHz through 18 GHz)

BANDWIDTH	1 MHz
DETECTOR FUNCTION	Linear average value; Field Intensity
CALIBRATION DATE	July 2000

6-2. RADIATED FREQUENCY OBSERVATION SUB-EQUIPMENT

SPECTRUM ANALYZER	#8566B, Mfd by HEWLETT. PACKARD
-------------------	---------------------------------

6-3. ANTENNA

<u>RANGE FOR FREQUENCY</u>	<u>ANTENNA</u>
From 100 MHz to 140 MHz	#DM-105A-T1, Mfd by SINGER
From 140 MHz to 400 MHz	#DM-105A-T2, Mfd by SINGER
From 400 MHz to 1.0 GHz	#DM-105A-T3, Mfd by SINGER
From 1.0 GHz to 2.0 GHz	#91888-2, Mfd by EATON
From 2.0 GHz to 3.6 GHz	#91889-2, Mfd by EATON
From 3.6 GHz to 7.3 GHz	#94613-1 with Reflector #91892-1 Mfd by EATON
From 7.3 GHz to 12.0 GHz	#91891-2 with Reflector #91892-1 Mfd by EATON
From 12.0 GHz to 18.0 GHz	#94614-1 with Reflector #91892-1 Mfd by EATON

6-4. CABLE

<u>RANGE FOR FREQUENCY</u>	<u>CABLE</u>
From 100 MHz to 1.0 GHz	#RG-55/U
From 1.0 GHz to 18.0 GHz	#94615-1

6.5. PERTINENT DETAILS

a) Calculation Formula	(See Attachment 1)
b) Antenna Correction Factor	(See Attachment 2)
c) Cable Loss	(See Attachment 3)
d) Calibration Curve	(See Attachment 4)

6-6. TEST CONDITION

a) Antenna height variation	From <u>1.1 m</u> to <u>2.1 m</u>
b) Antenna to test unit distance	<u>3 m</u>

CALCULATION OF RADIATED FIELD STRENGTH (uV/m)

$$E_f = 10^{\left(\frac{F_a + F_c + D}{20}\right)} * K$$

E_f : Radiated Field Strength at 300 m (uV/m)
 F_a : Antenna Factor (dB)
 F_c : Cable Factor (dB)
 D : Reading Data of the Field Strength Meter (dBuV at 3 m)
 K : Conversion Factor

$K = 0.0137 * \log F - 0.0401$ (if $F < 4575$ MHz)
 $K = 0.01$ (if $F \geq 4574$ MHz)
 F : Emission Frequency

Emission Frequency (MHz)	K
1830	0.0046
2745	0.0070
3660	0.0090
4575 and above	0.0100

In case of emission frequency less than 1.0 GHz, conversion factor $K=0.01$ is used for the measurement of 3 m distance.

ANTENNA FACTOR (dB)

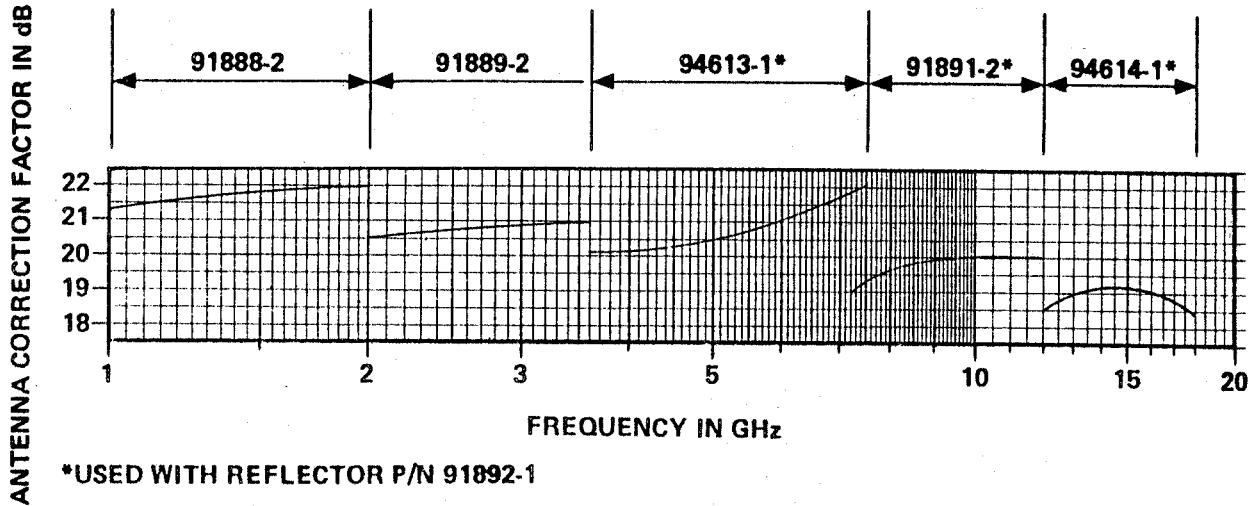


Figure 5-3. Antenna Correction Factors, 1-18 GHz Horn Antennas

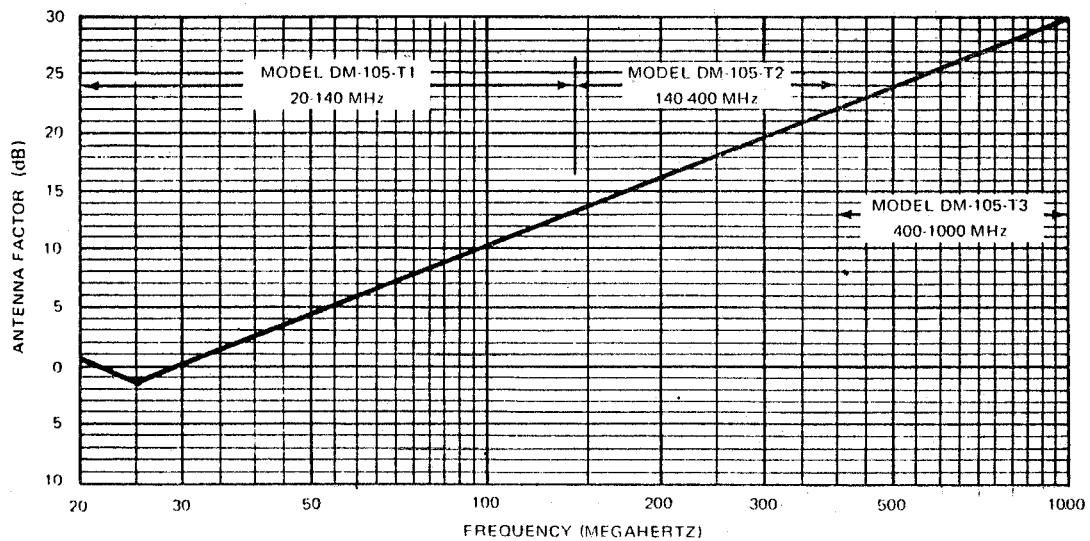


Figure 2-18. Antenna Factor Versus Frequency Characteristics, Models DM-105-T1, DM-105-T2 and DM-105-T3 Dipole Antennas

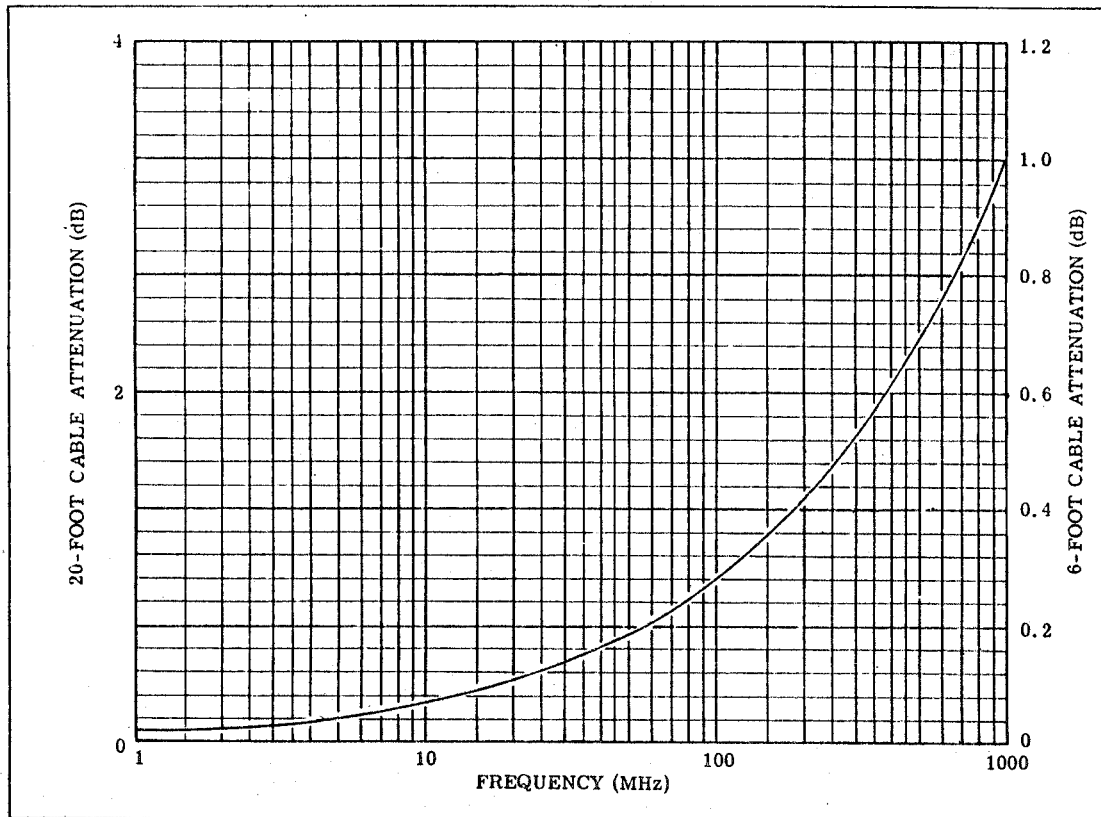


Figure 2-10. Attenuation Vs. Frequency for RG-55/U Coaxial Cable

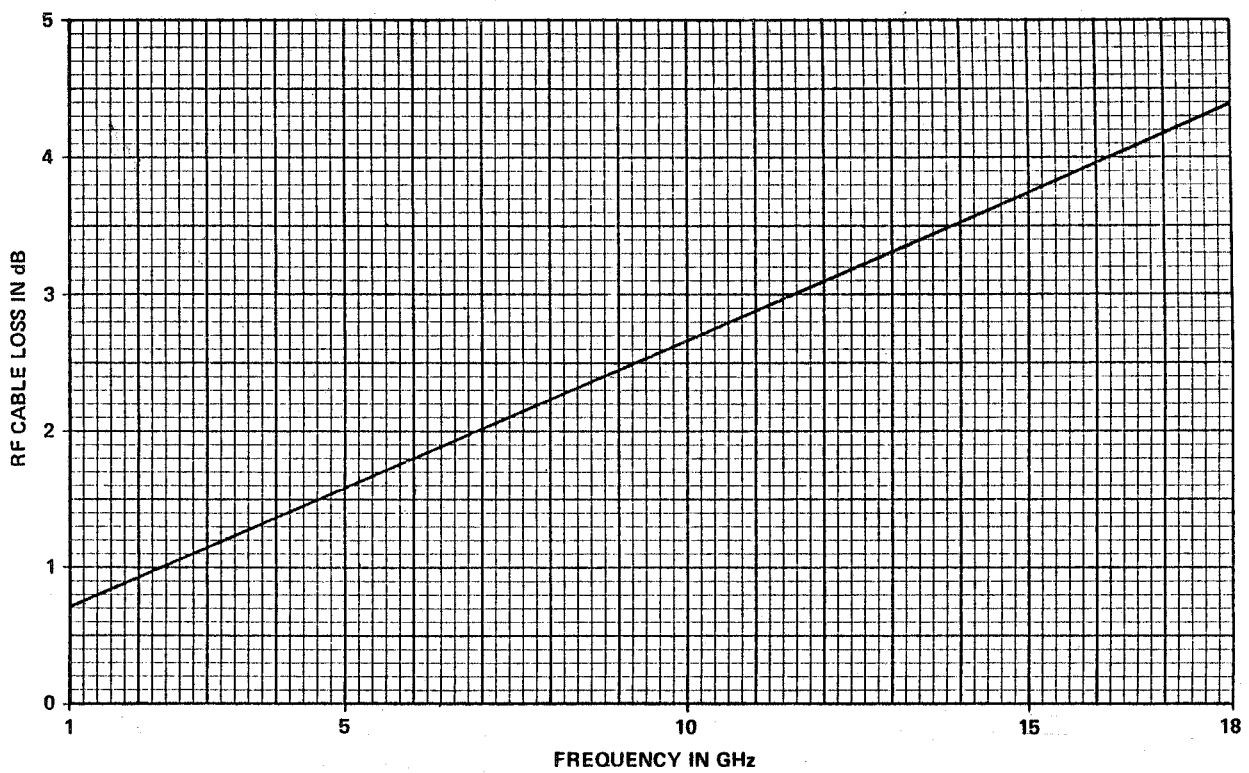


Figure 5-1. Model 94615-1 RF Cable Loss Chart

CALIBRATION CURVE

For Model NM-67

