



FCC RADIO TEST REPORT

FCC ID : B94-C09CWLM
Equipment : Wireless Module
Brand Name : HP
Model Name : LBEE58D1VF
Applicant : HP Inc.
1501 Page Mill Road, Palo Alto CA 94304 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 21, 2020 and testing was started from Sep. 19, 2020 and completed on Oct. 07, 2020. We, SPORTON INTERNATIONAL INC., EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	36
4 List of Measuring Equipment.....	37
5 Uncertainty of Evaluation	39
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR000919C	01	Initial issue of report	Oct. 20, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 0.37 dB at 2483.960 MHz
3.6	15.207	AC Conducted Emission	Pass	Under limit 6.41 dB at 0.166 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Amy Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and GNSS.

Product Specification subjective to this standard	
Installed into host	Brand Name: HP Model Name: HSN-C09C
Antenna Type	WLAN <Ant. 1>: Couple Antenna <Ant. 2>: Couple Antenna Bluetooth: Couple Antenna GPS / Glonass / Galileo : PIFA Antenna

Antenna Information						
NB Mode	Ant. Type	Couple		Ant. Type	Couple	
	Part No.	260-24315 (DC33002FX20)	TX1 Antenna	Part No.	260-24315 (DC33002FX20)	TX2 Antenna
	Peak Gain (dBi)	WLAN(2.4G): -2.40		WLAN(2.4G): -3.14		
TB Mode	Ant. Type	Couple		Ant. Type	Couple	
	Part No.	260-24315 (DC33002FX20)	TX1 Antenna	Part No.	260-24315 (DC33002FX20)	TX2 Antenna
	Peak Gain (dBi)	WLAN(2.4G): -0.27		WLAN(2.4G): 0.00		

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH15-HY	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW0007

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z and Notebook Mode. The worst cases (Notebook Mode) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + Earphone + Data Link with HD + Adapter

Remark: Data Link with HD means data application transferred mode between EUT and HD.

Ch. #	2400-2483.5 MHz			
	802.11b	802.11g	802.11ax HE20	802.11ax HE40
Low	01	01	01	03
Middle	06	06	-	-
High	11	11	11	09

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
4.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	HD	Lenovo	F310S	FCC DoC	Shielded, 1.0m	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.0.00156.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

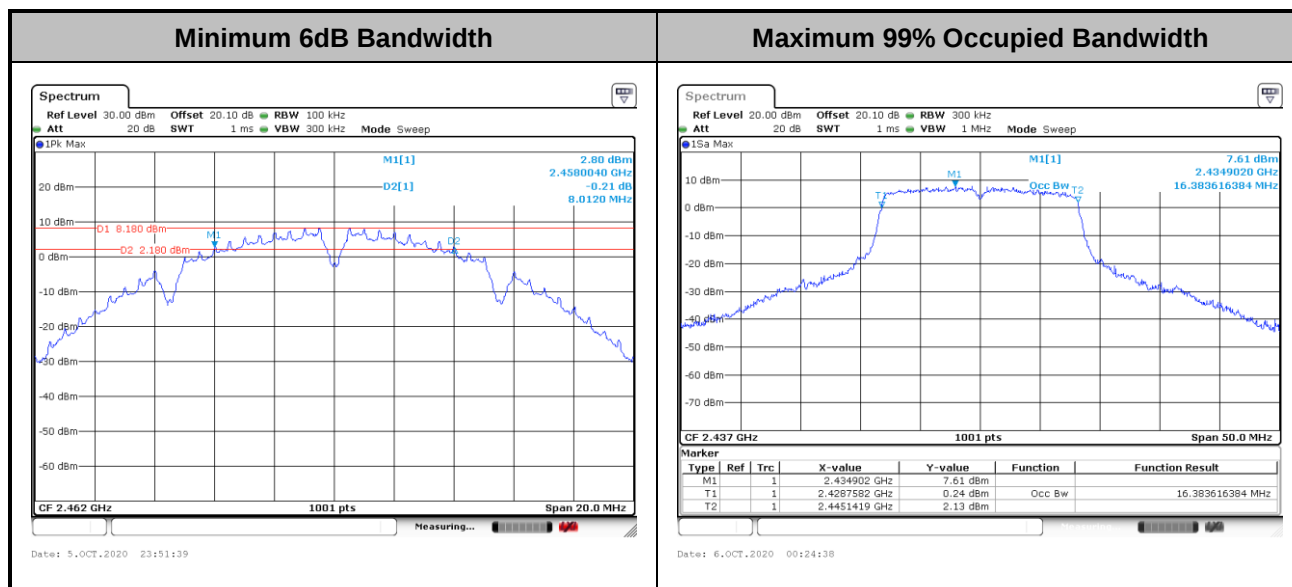
3.1.4 Test Setup





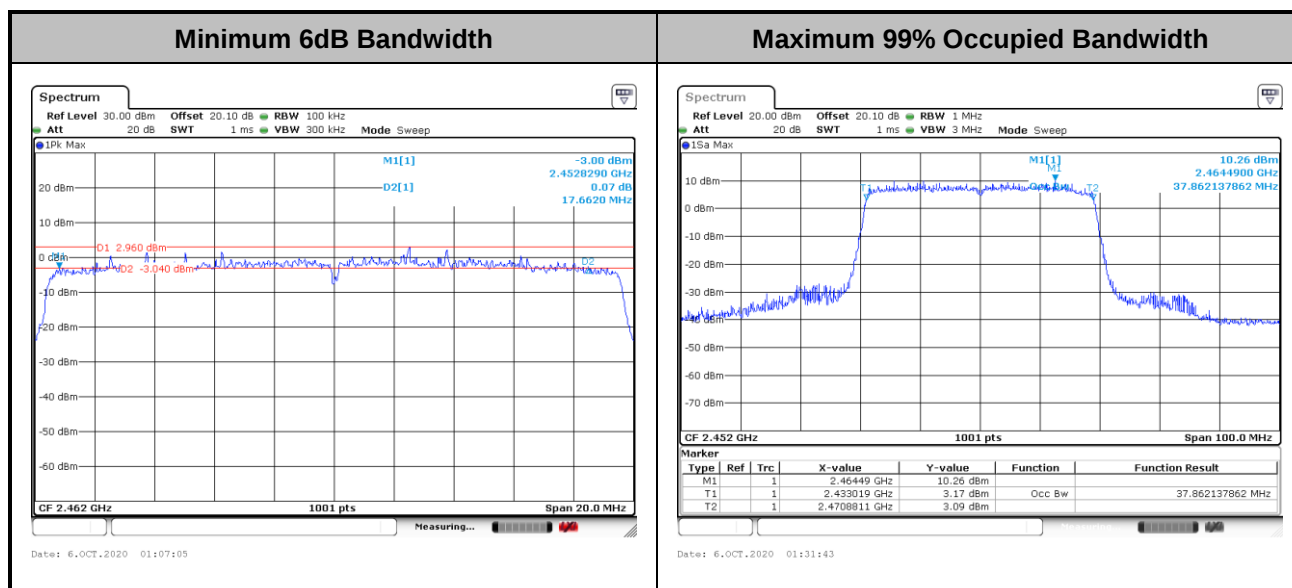
3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

<For 802.11ax Mode>



Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

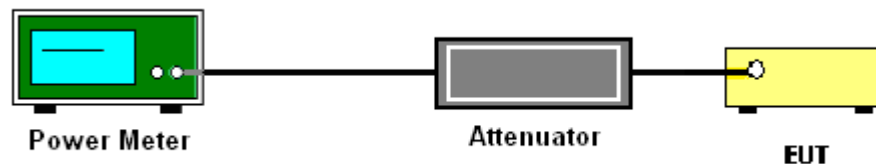
3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

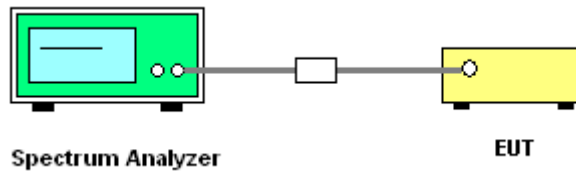
If measurements performed using method (2) plus $10 \log(N)$ exceeds the emission limit, the test should choose method (1) before declaring that the device fails the emission limit.

Method (1): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

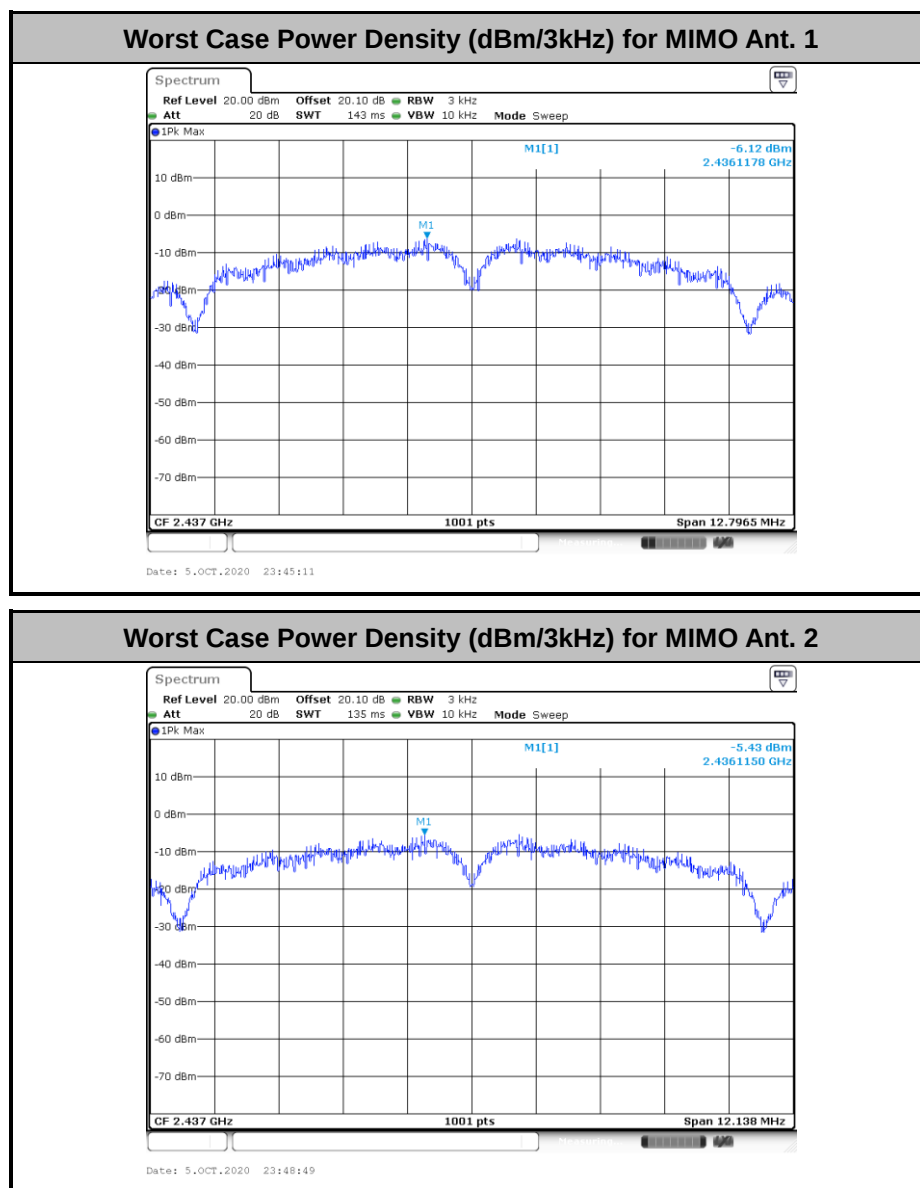
Method (2): Measure and add $10 \log(N)$ dB, where N is the number of outputs. (N=2)

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

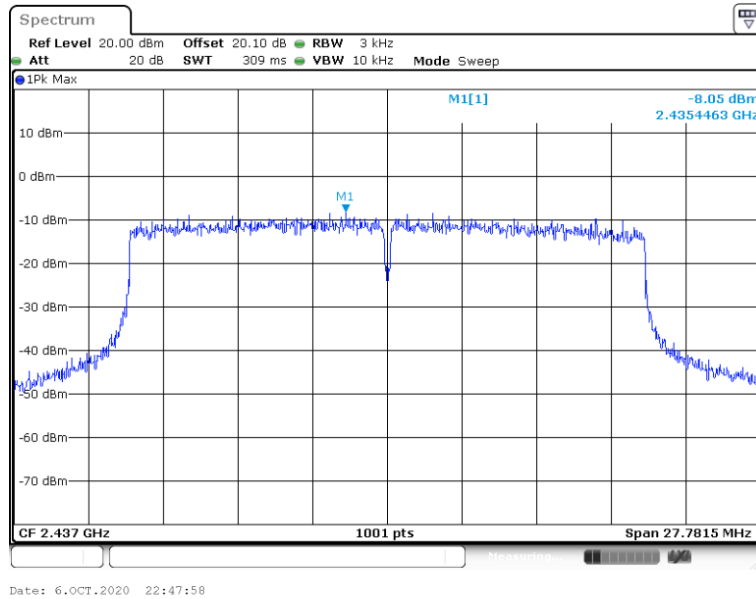
Please refer to Appendix A.



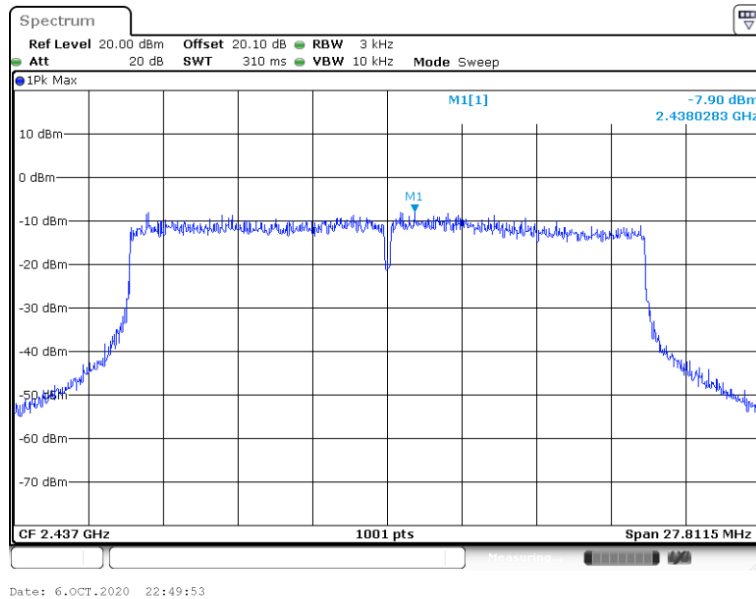


<For 802.11ax Mode>

Worst Case Power Density (dBm/3kHz) for MIMO Ant. 1



Worst Case Power Density (dBm/3kHz) for MIMO Ant. 2



3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

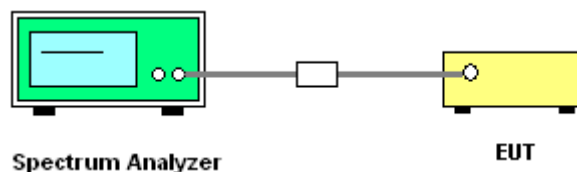
3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



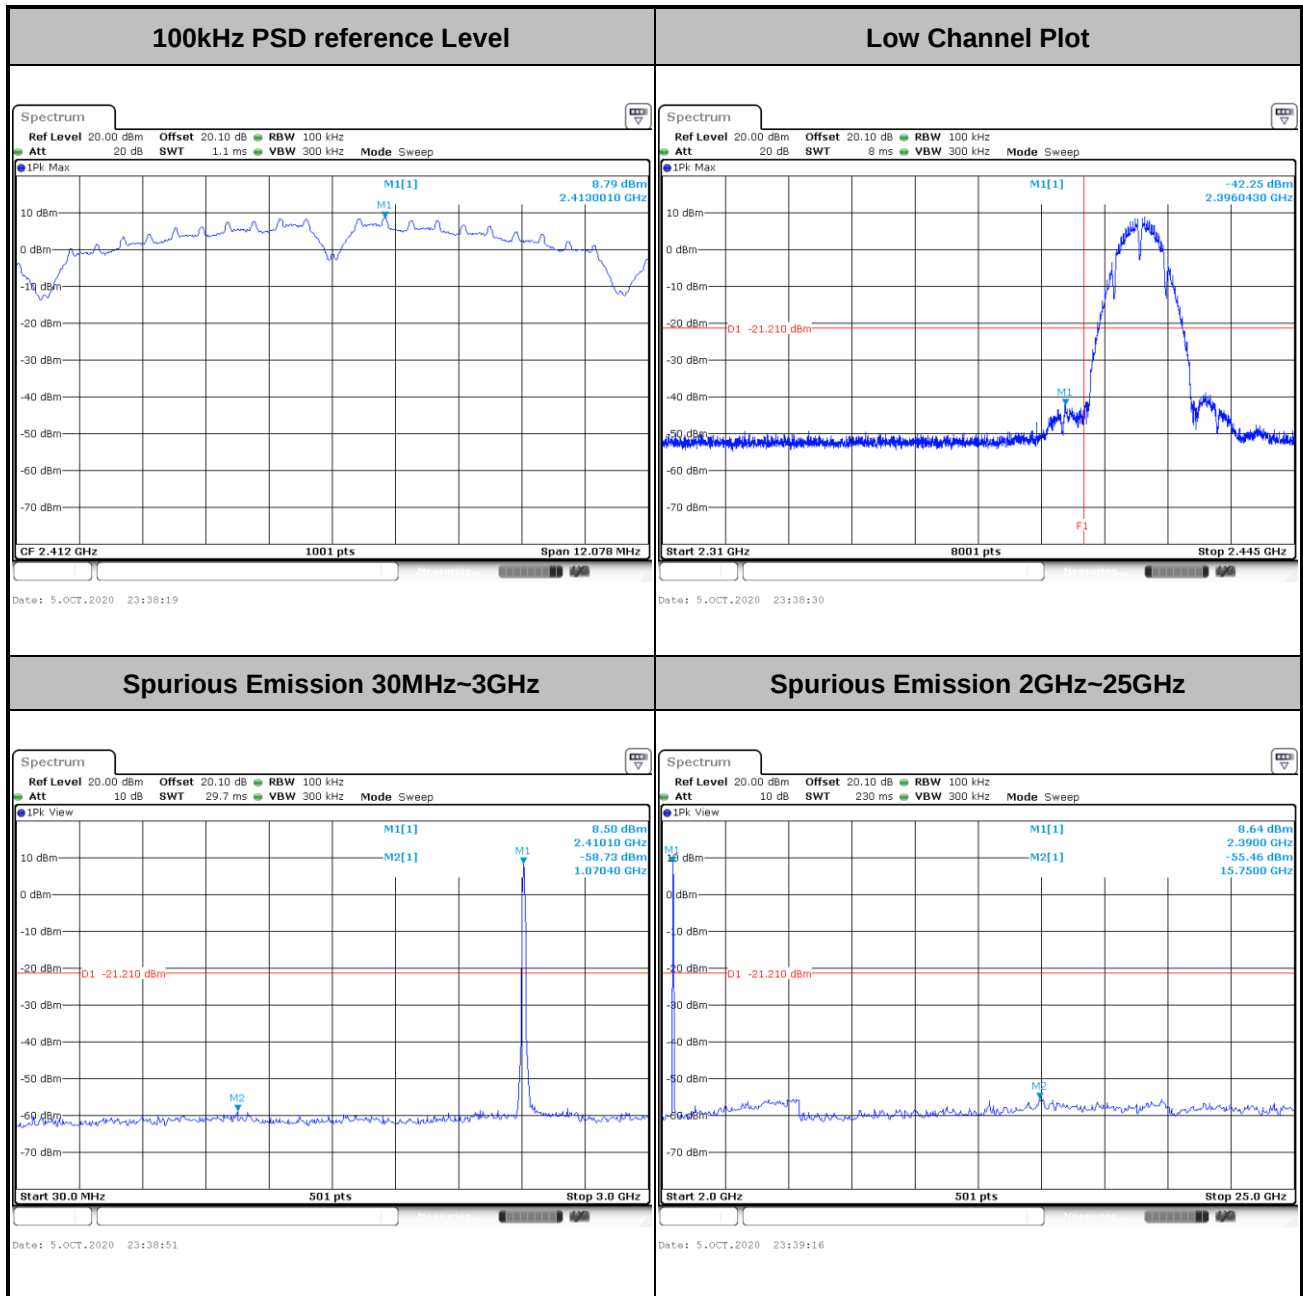


3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Engineer :	Jacob Yu and Hank Hsu	Temperature :	21~25°C
		Relative Humidity :	51~54%

Number of TX = 2, Ant. 1 (Measured)

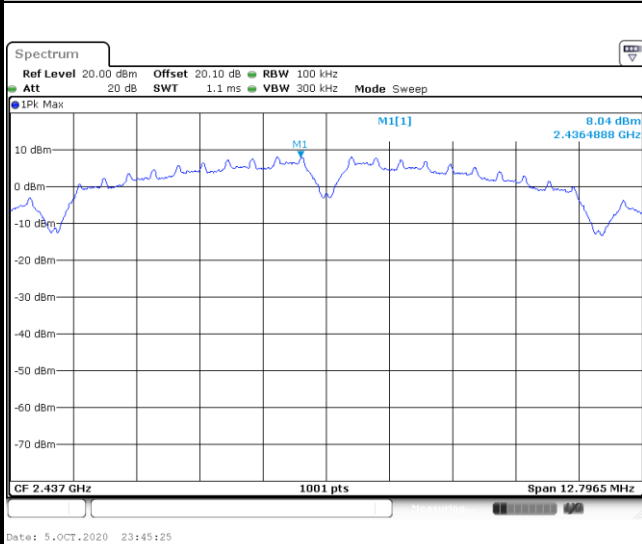
Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----





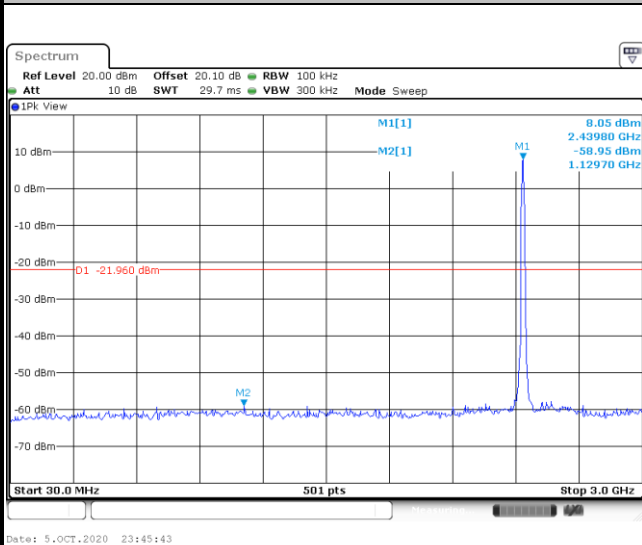
Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

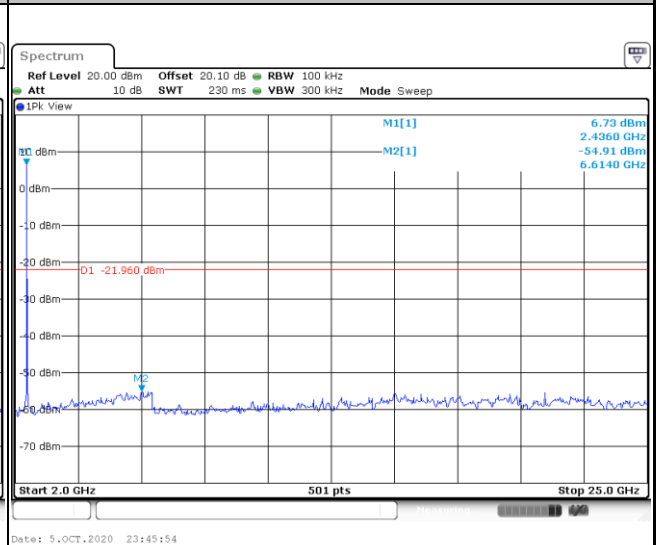


Mid Channel Plot

Spurious Emission 30MHz~3GHz

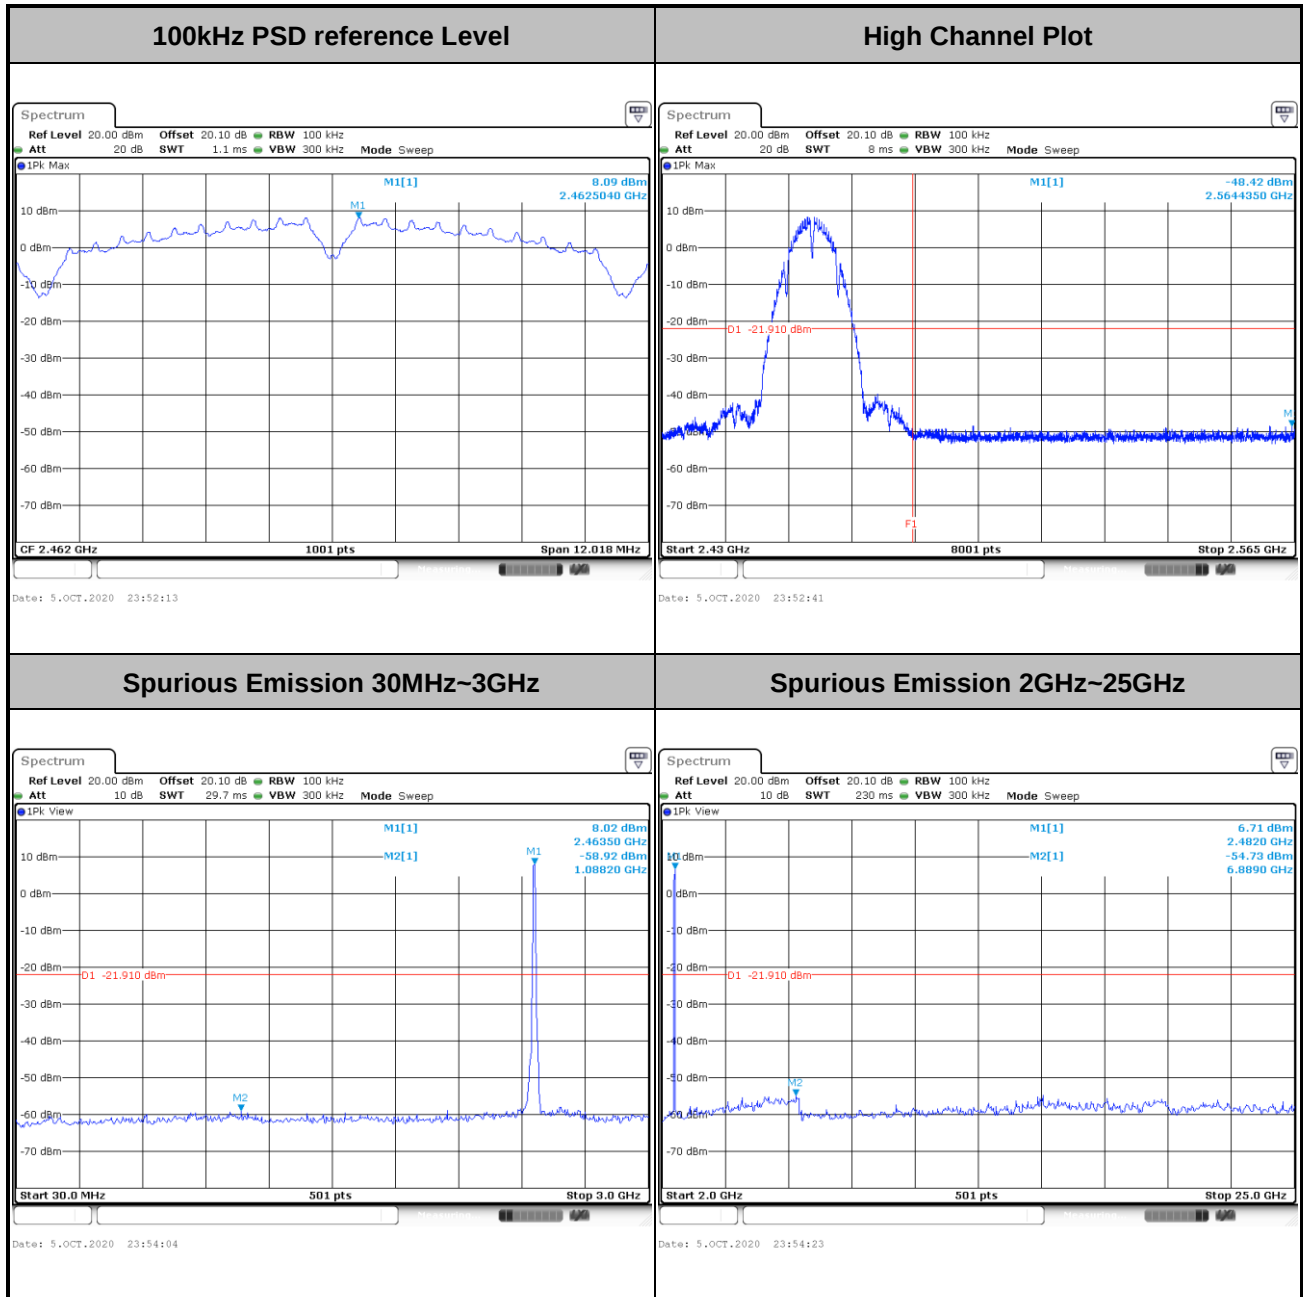


Spurious Emission 2GHz~25GHz



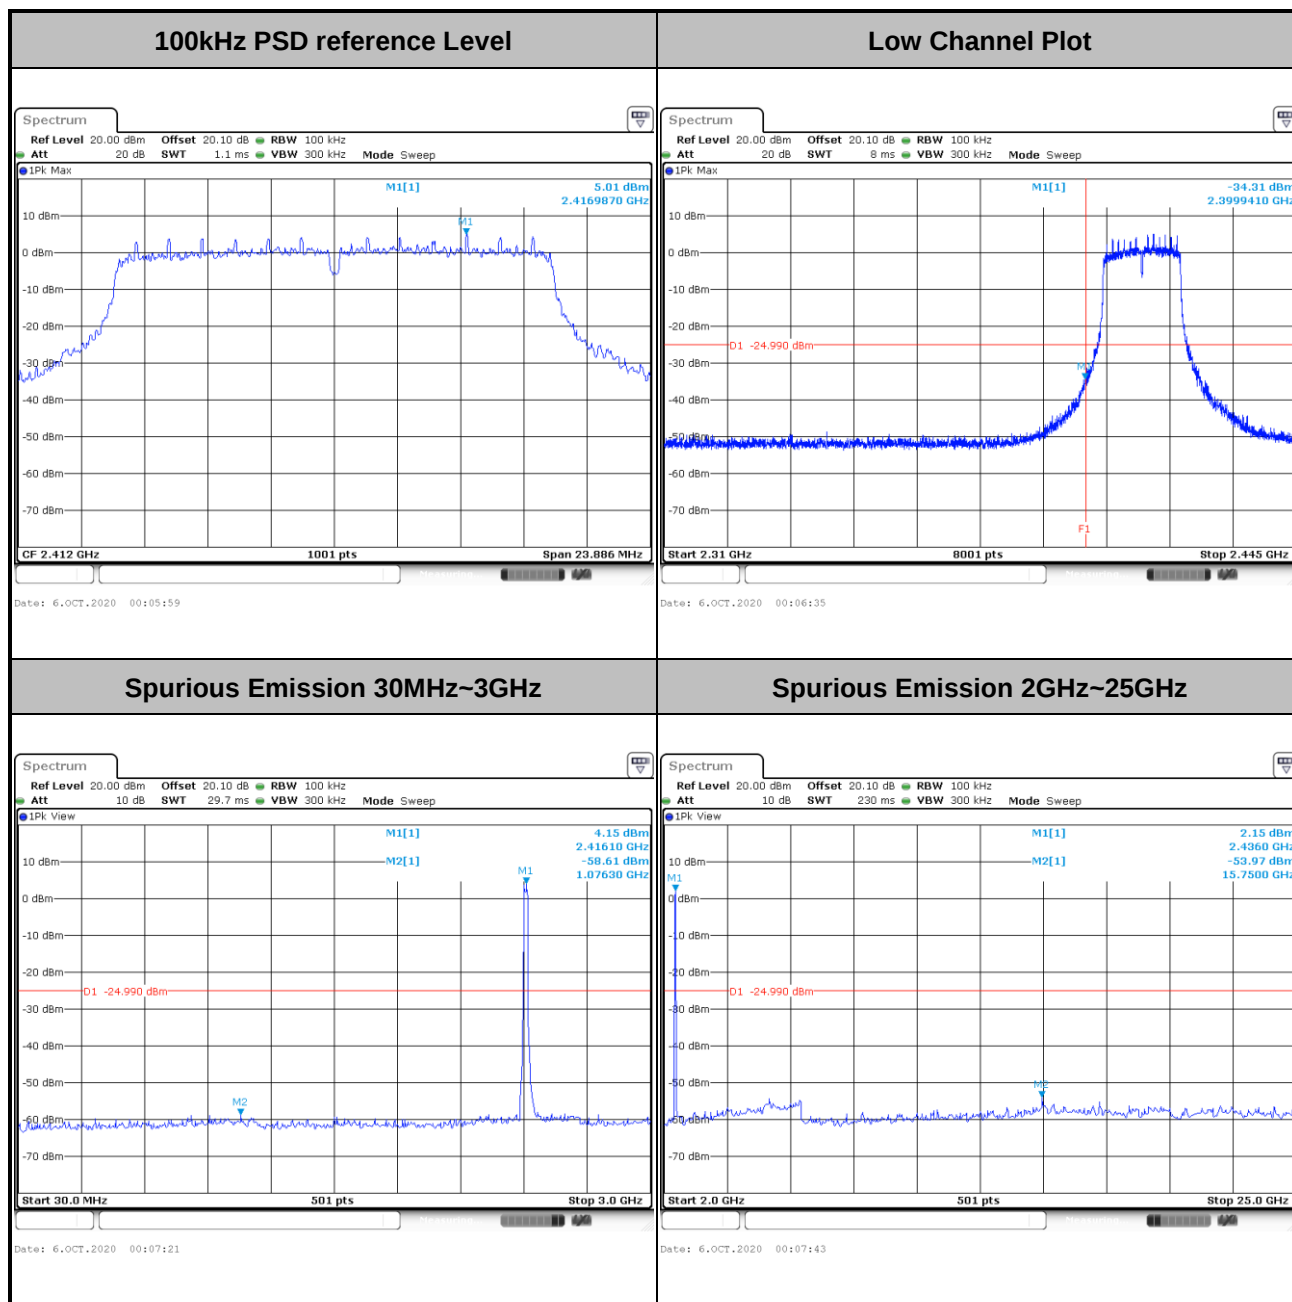


Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----





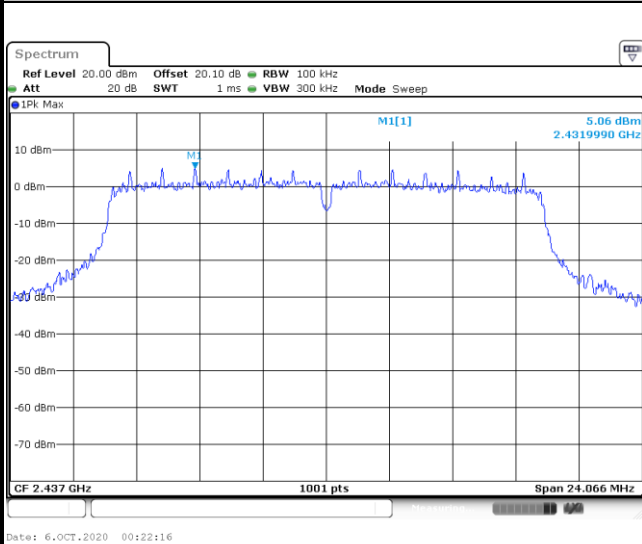
Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----





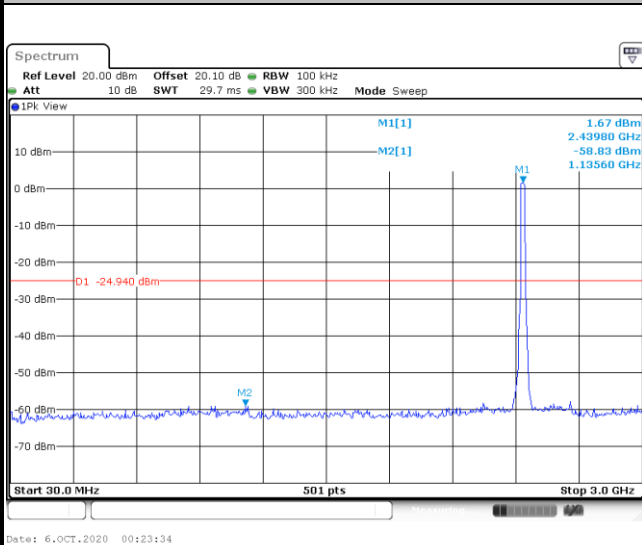
Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

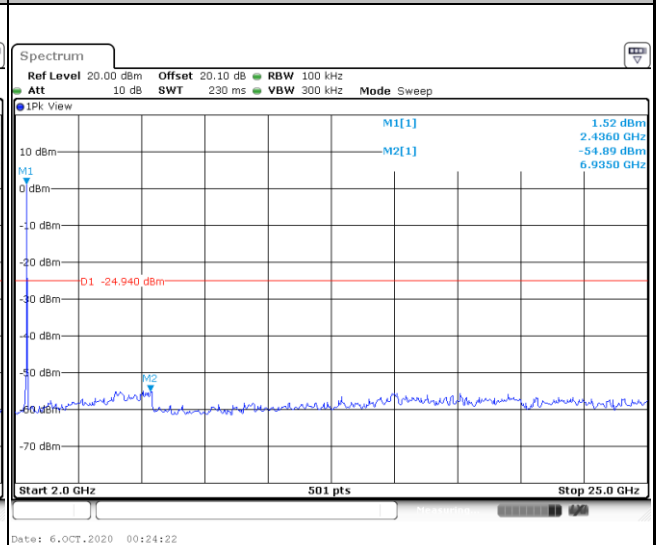


Mid Channel Plot

Spurious Emission 30MHz~3GHz

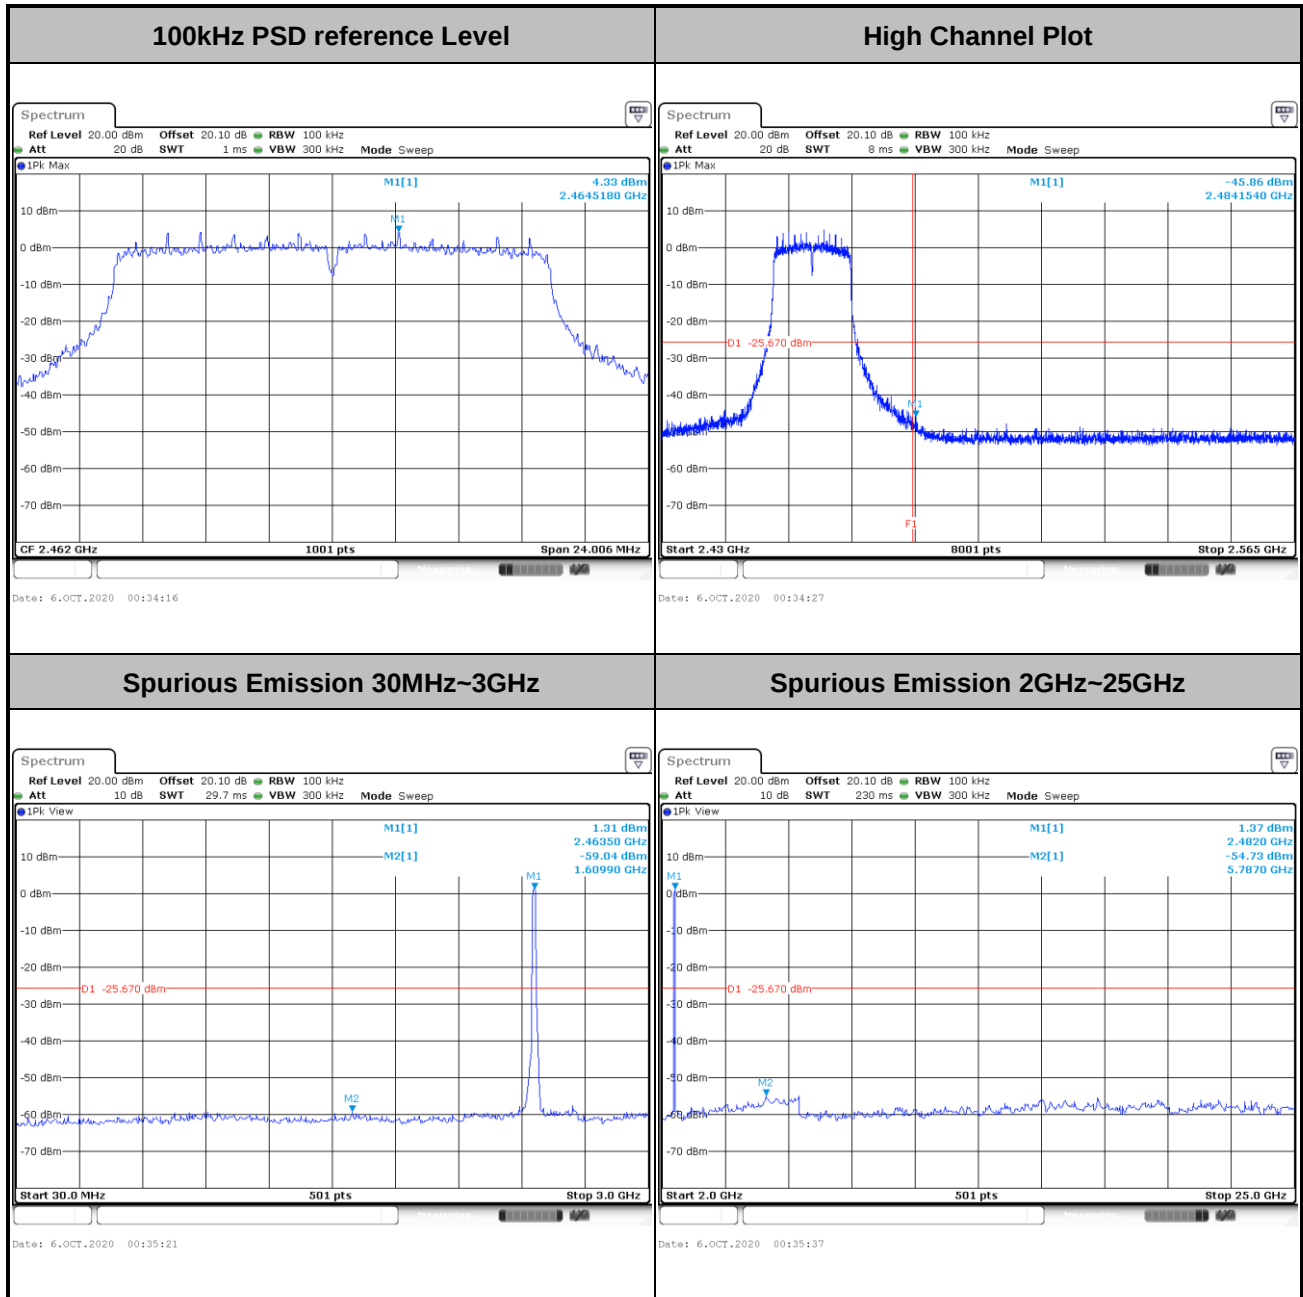


Spurious Emission 2GHz~25GHz





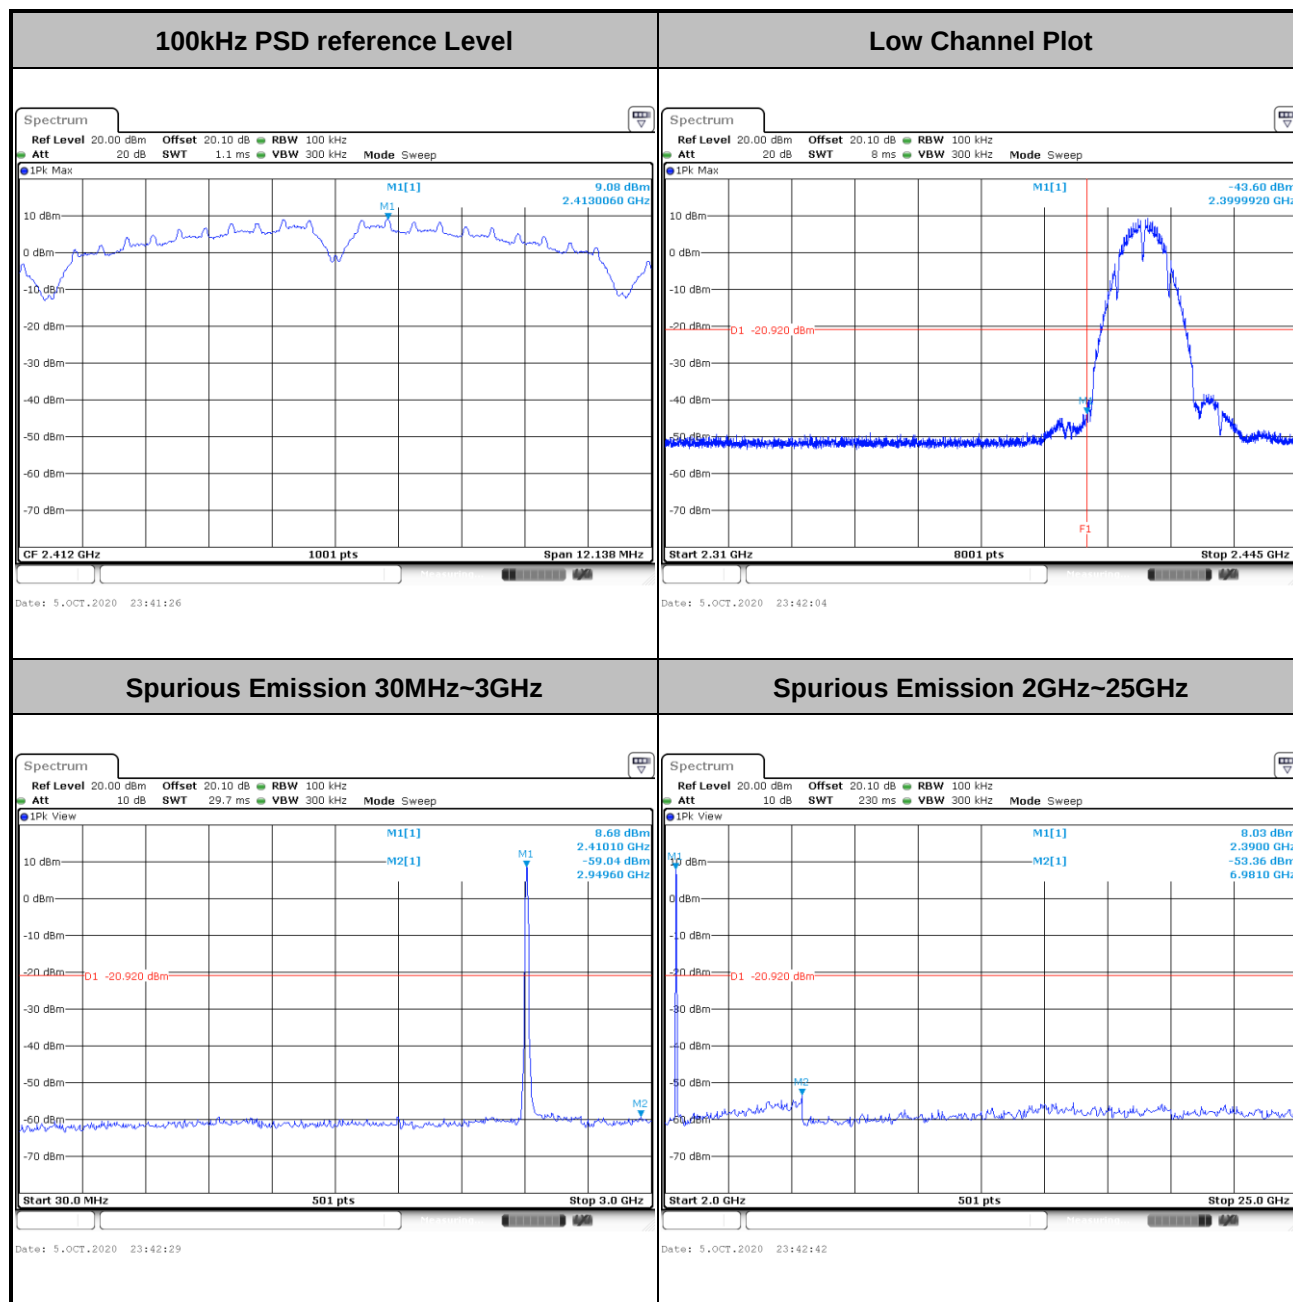
Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----





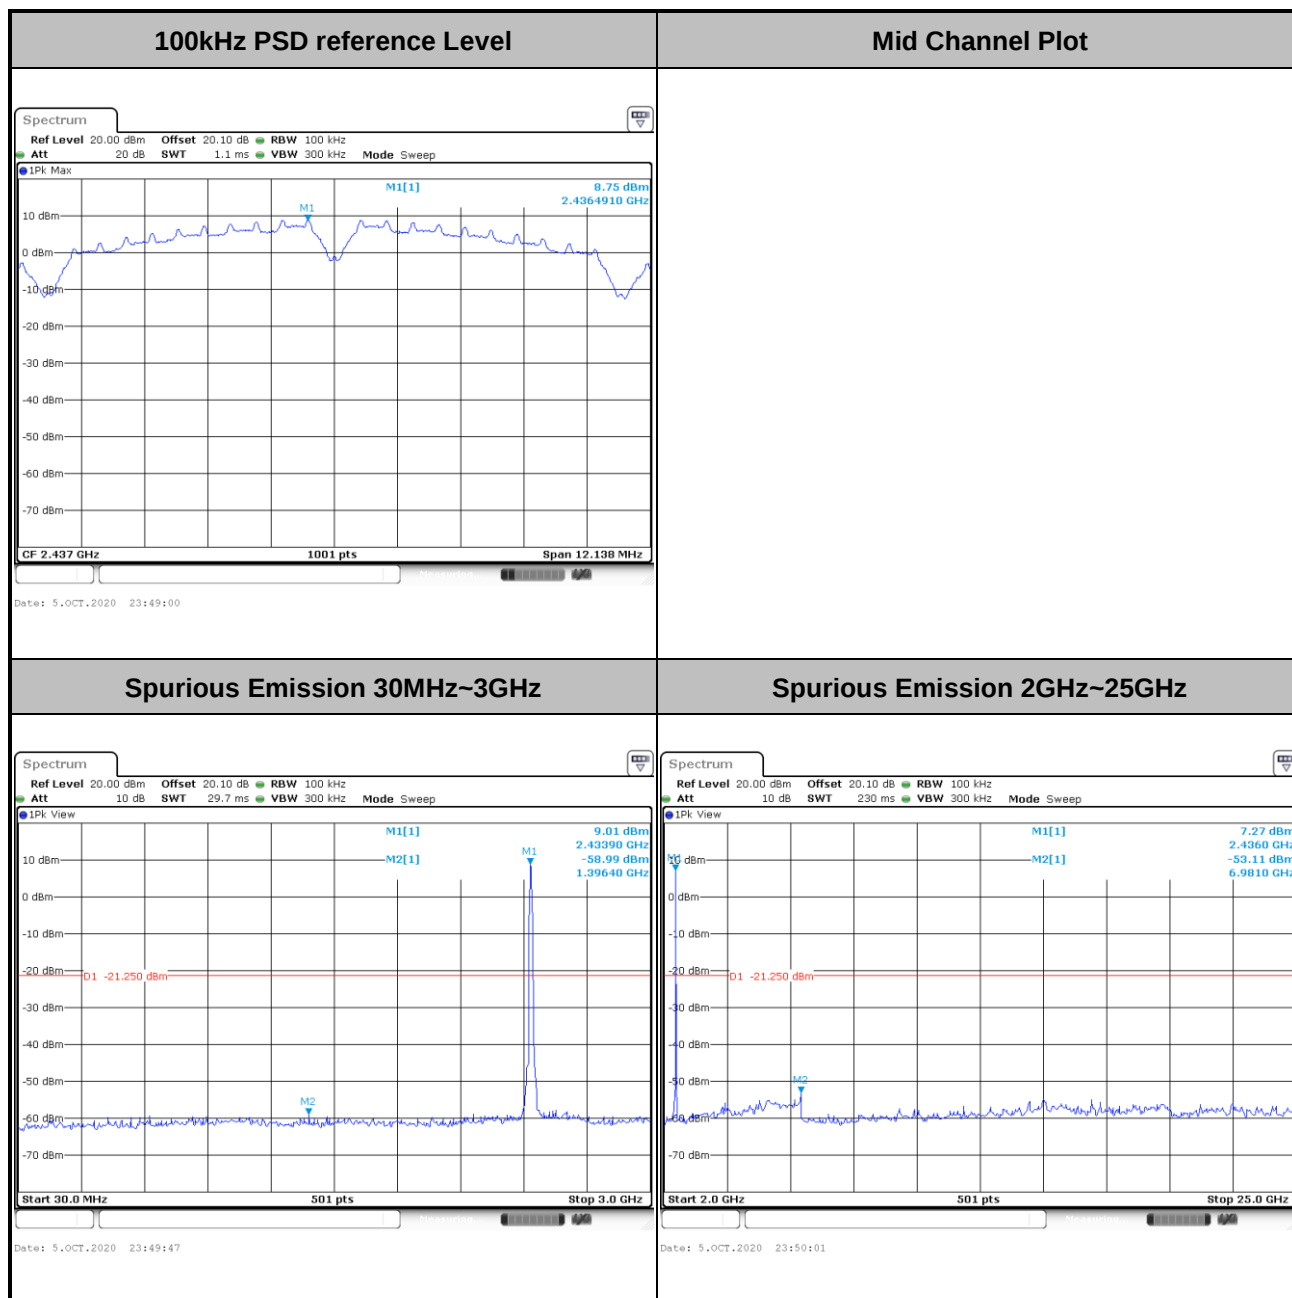
Number of TX = 2, Ant. 2 (Measured)

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----



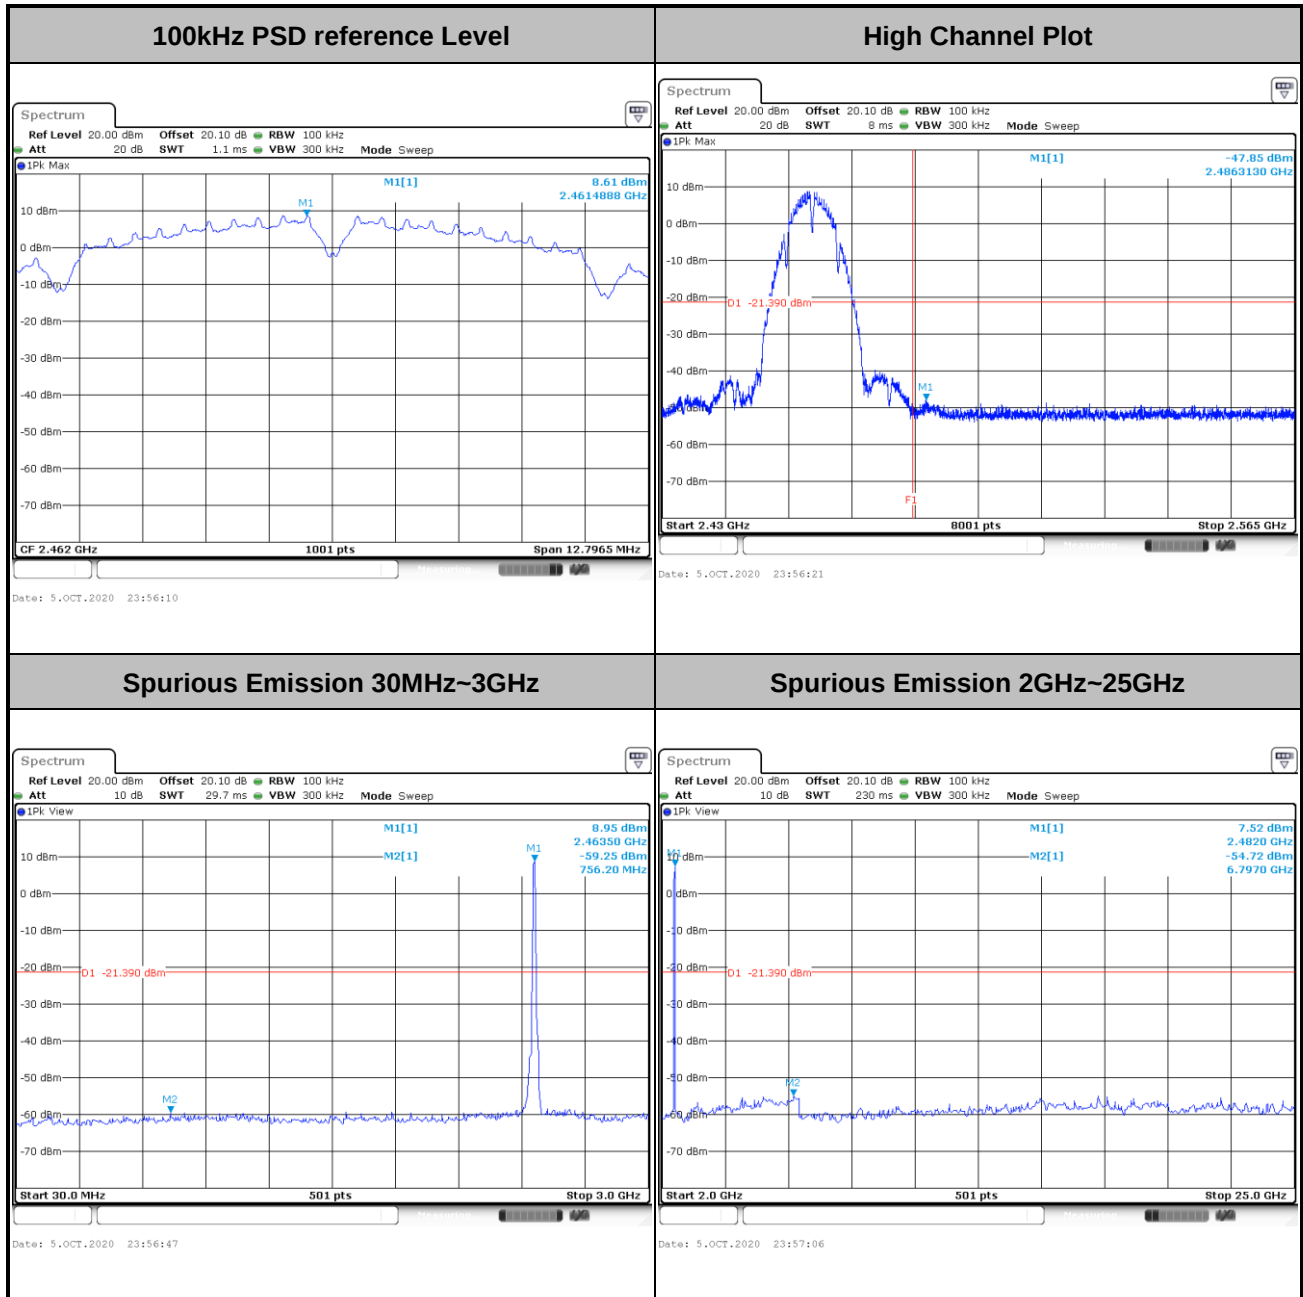


Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----



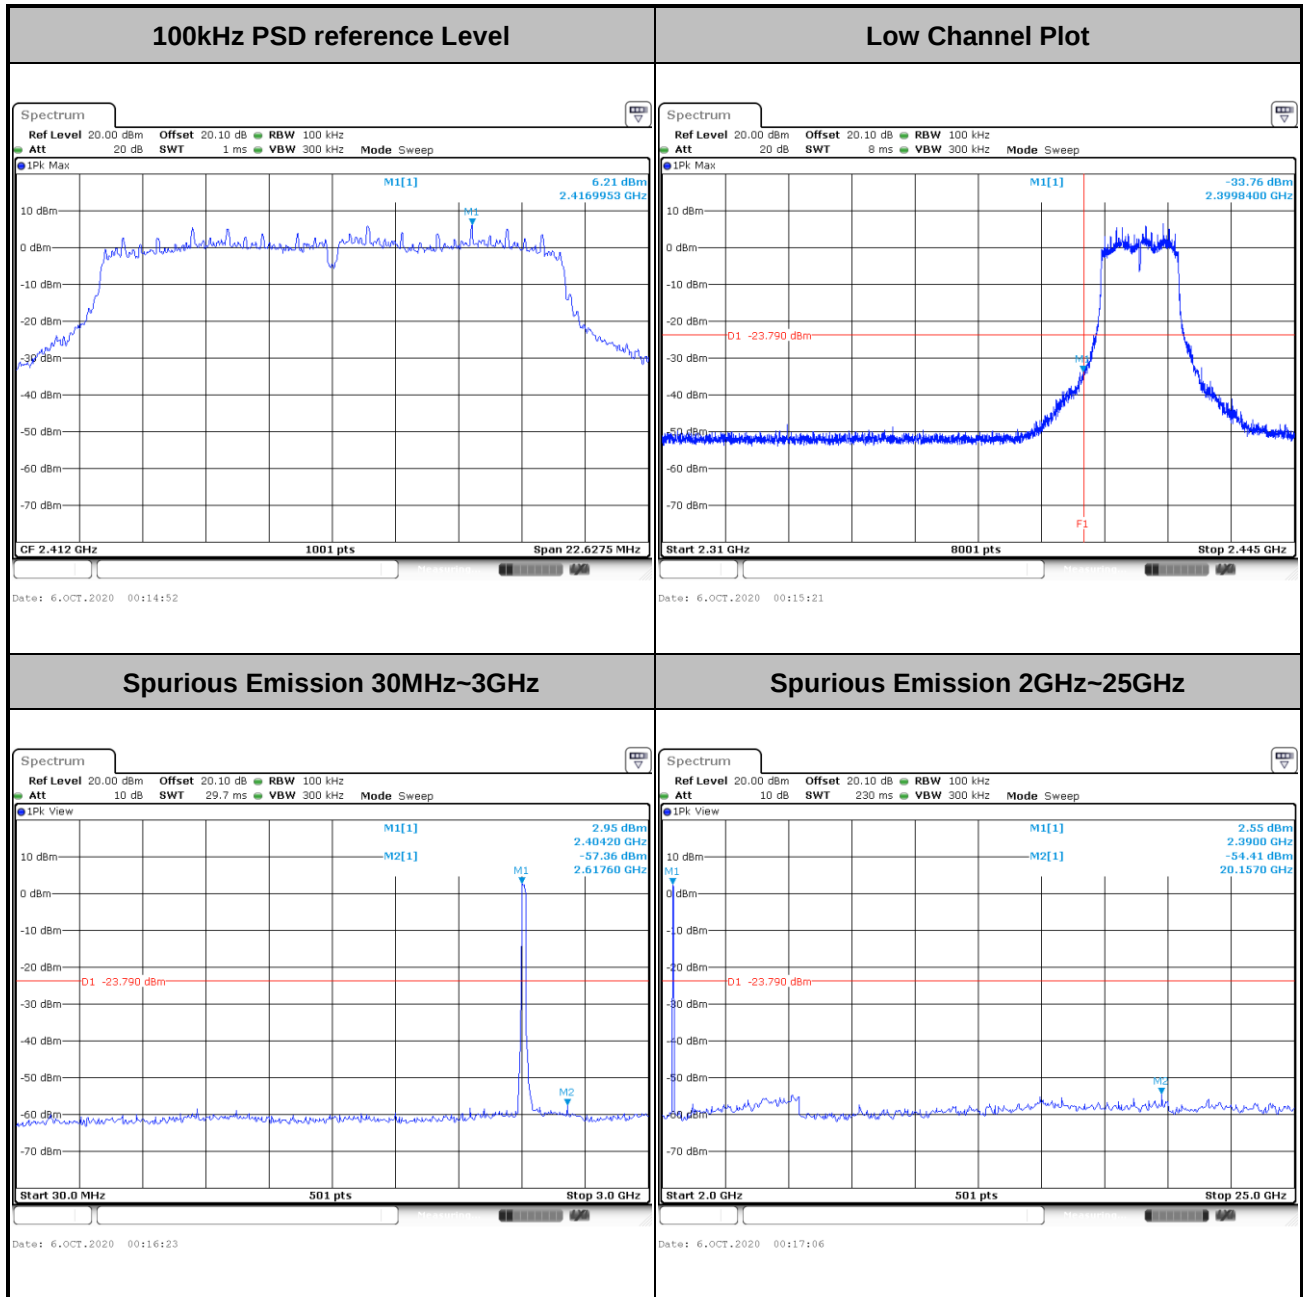


Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----



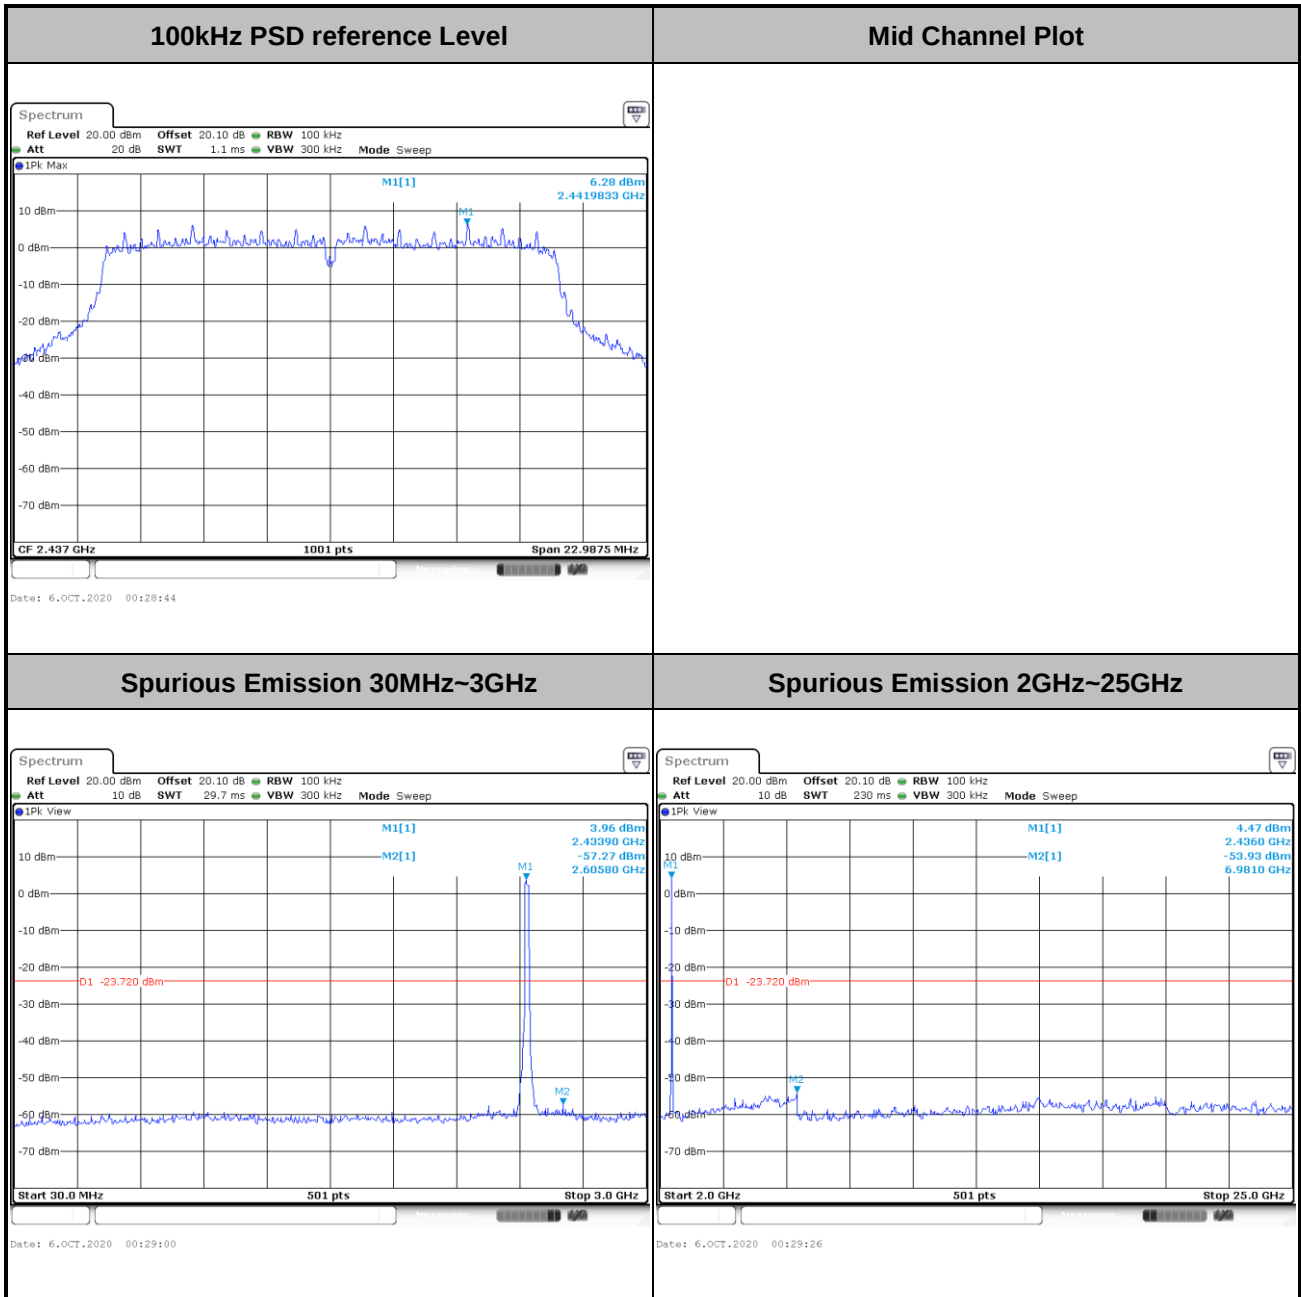


Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----



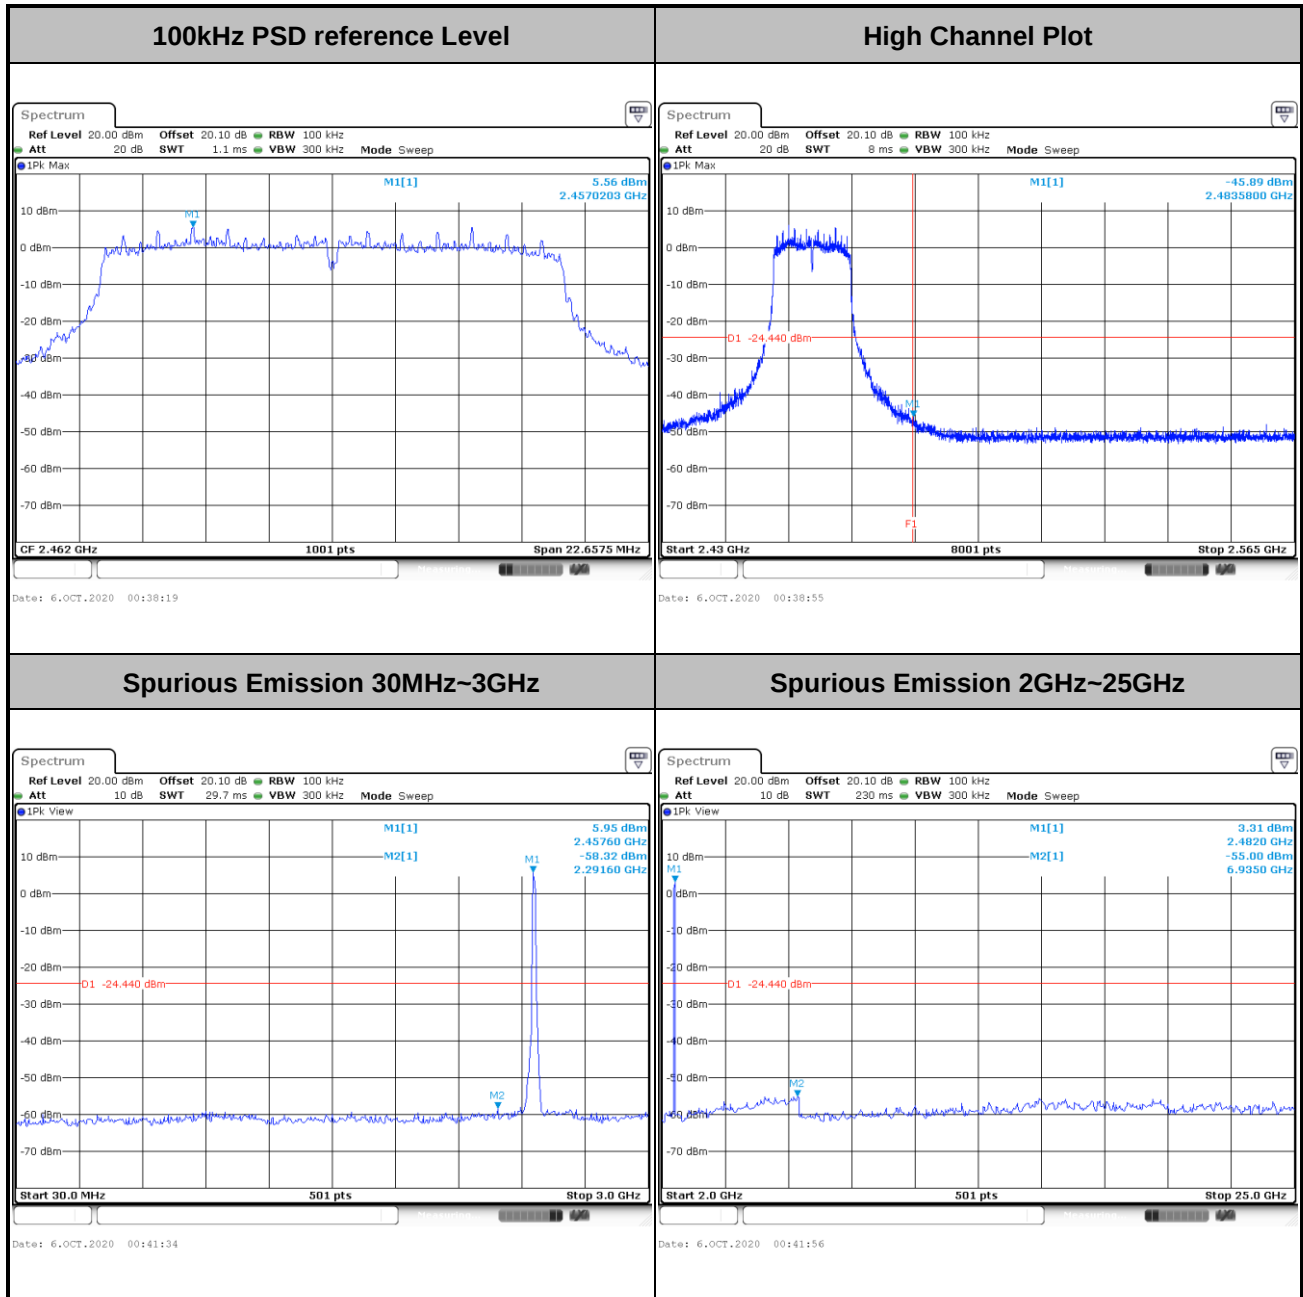


Test Mode :	802.11g	Test Channel :	06
--------------------	---------	-----------------------	----





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----





3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

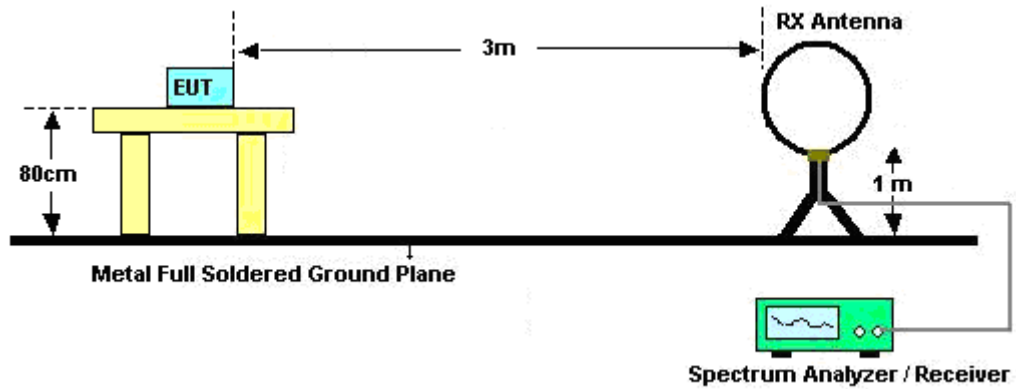
See list of measuring equipment of this test report.

3.5.3 Test Procedures

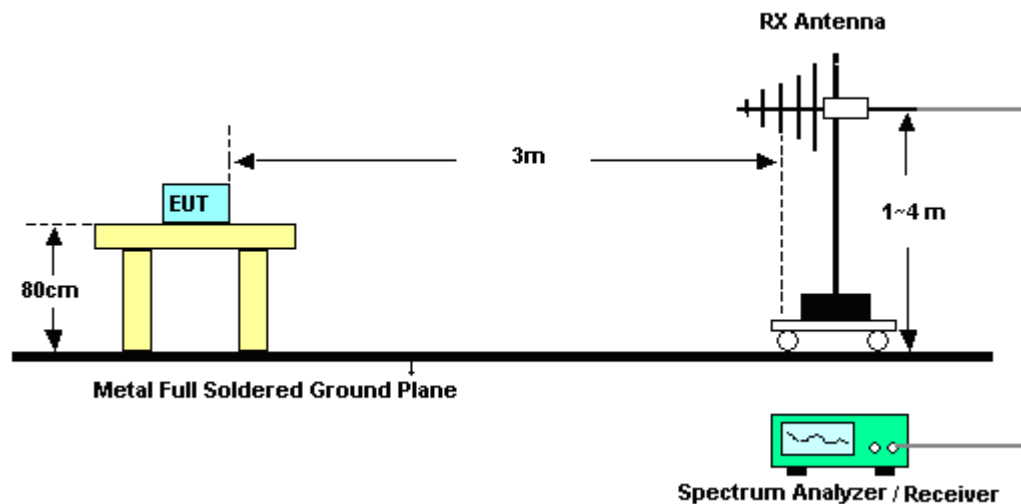
1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

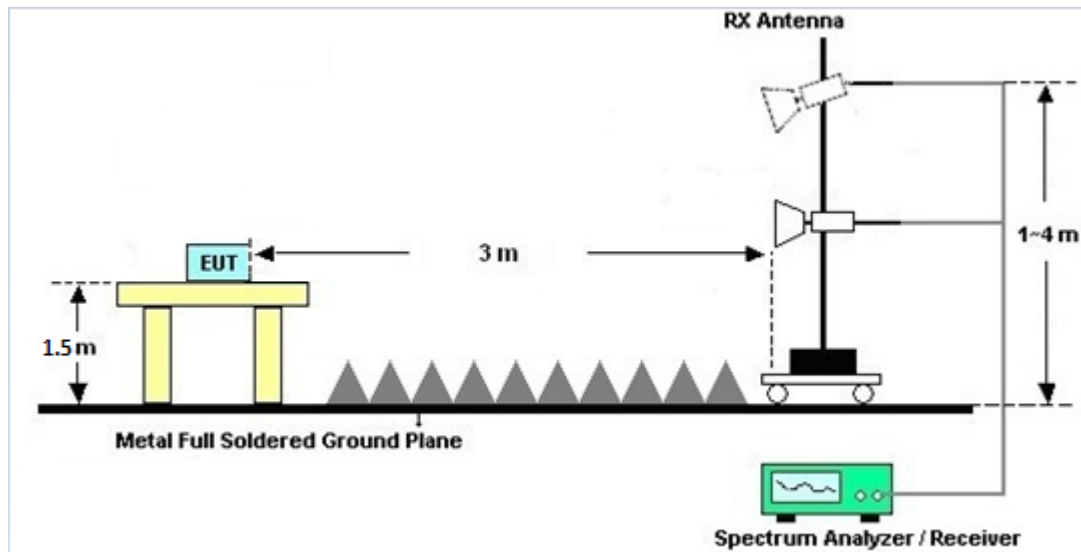
For radiated emissions below 30MHz



For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

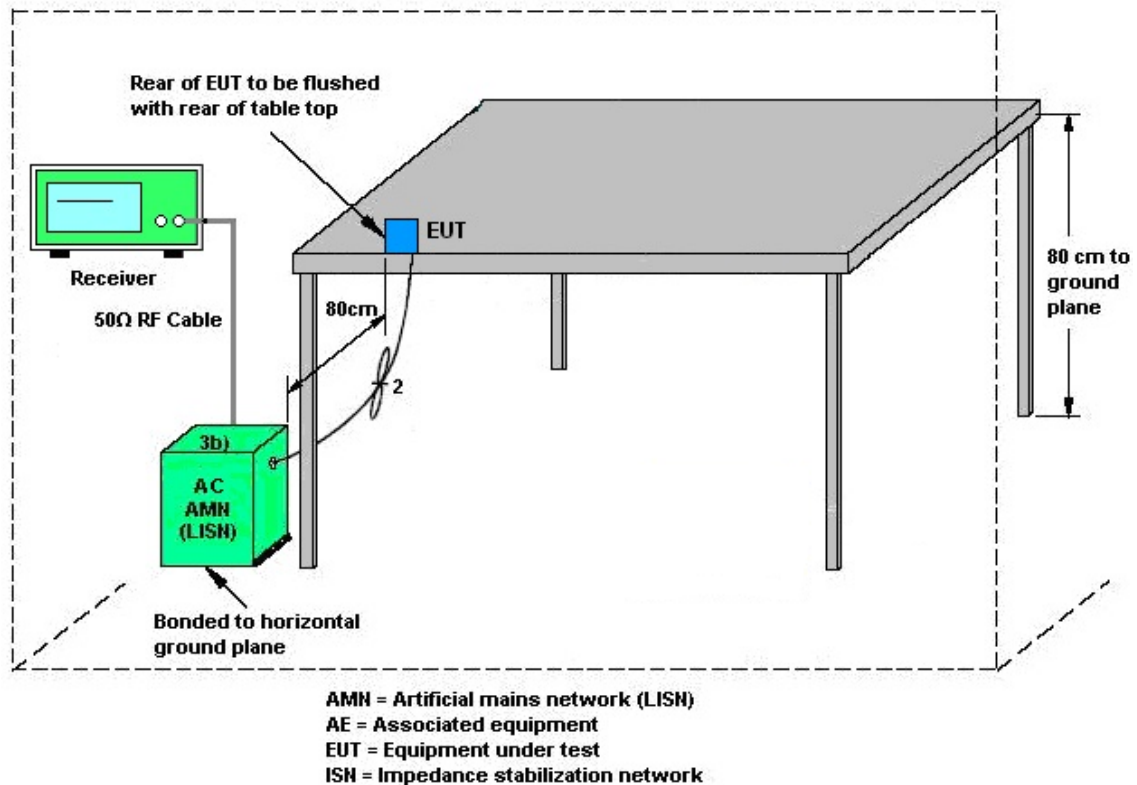
3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup



3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant. 1	Ant. 2	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4 GHz	-0.27	0.00	0.00	2.88	0.00	0.00

Power Limit Reduction = $DG(\text{Power}) - 6\text{dBi}$, (min = 0)

PSD Limit Reduction = $DG(\text{PSD}) - 6\text{dBi}$, (min = 0)



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Oct. 02, 2020~ Oct. 06, 2020	Jan. 08, 2021	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00 800N1D01N-0 6	41912&05	30MHz to 1GHz	Feb. 09, 2020	Oct. 02, 2020~ Oct. 06, 2020	Feb. 08, 2021	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 27, 2019	Oct. 02, 2020~ Oct. 06, 2020	Dec. 26, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1620	1-18GHz	Oct. 28, 2019	Oct. 02, 2020~ Oct. 06, 2020	Oct. 27, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Dec. 10, 2019	Oct. 02, 2020~ Oct. 06, 2020	Dec. 09, 2020	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	1710001800 055006	1GHz~18GHz	May 07, 2020	Oct. 02, 2020~ Oct. 06, 2020	May 06, 2021	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 21, 2020	Oct. 02, 2020~ Oct. 06, 2020	Aug. 20, 2021	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Oct. 02, 2020~ Oct. 06, 2020	Dec. 12, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Nov. 01, 2019	Oct. 02, 2020~ Oct. 06, 2020	Oct. 31, 2020	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	May 04, 2020	Oct. 02, 2020~ Oct. 06, 2020	May 03, 2021	Radiation (03CH15-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Oct. 02, 2020~ Oct. 06, 2020	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Oct. 02, 2020~ Oct. 06, 2020	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24 (k5)	RK-000451	N/A	N/A	Oct. 02, 2020~ Oct. 06, 2020	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 14, 2020	Oct. 02, 2020~ Oct. 06, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4PE	30M-18G	Apr. 14, 2020	Oct. 02, 2020~ Oct. 06, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY37710/4	30M-18G	Apr. 17, 2020	Oct. 02, 2020~ Oct. 06, 2020	Apr. 16, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz-40GHz	Feb. 25, 2020	Oct. 02, 2020~ Oct. 06, 2020	Feb. 24, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz-40GHz	Feb. 25, 2020	Oct. 02, 2020~ Oct. 06, 2020	Feb. 24, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz~30MHz	Mar. 12, 2020	Oct. 02, 2020~ Oct. 06, 2020	Mar. 11, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN4	1.53G Low Pass	Jul. 03, 2020	Oct. 02, 2020~ Oct. 06, 2020	Jul. 02, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN4	3GHz High Pass Filter	Sep. 16, 2020	Oct. 02, 2020~ Oct. 06, 2020	Sep. 15, 2021	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 02, 2020	Sep. 19, 2020~ Oct. 07, 2020	Mar. 01, 2021	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SN O10	10MHz~6GHz	Dec. 23, 2019	Sep. 19, 2020~ Oct. 07, 2020	Dec. 22, 2020	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Nov. 15, 2019	Sep. 19, 2020~ Oct. 07, 2020	Nov. 14, 2020	Conducted (TH05-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2020	Sep. 19, 2020~ Oct. 07, 2020	Mar. 16, 2021	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 23, 2020	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 15, 2019	Sep. 23, 2020	Nov. 14, 2020	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 15, 2019	Sep. 23, 2020	Nov. 14, 2020	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Sep. 23, 2020	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2020	Sep. 23, 2020	Jan. 01, 2021	Conduction (CO05-HY)
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100851	N/A	Jan. 02, 2020	Sep. 23, 2020	Jan. 01, 2021	Conduction (CO05-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3
---	-----

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0.
---	------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.4
---	-----

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0
---	-----

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jacob Yu/Hank Hsu	Temperature:	21~25	°C
Test Date:	2020/9/19~10/7	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	2	1	2412	13.09	13.09	8.05	8.09	0.50	Pass
11b	1Mbps	2	6	2437	13.39	13.19	8.53	8.09	0.50	Pass
11b	1Mbps	2	11	2462	12.99	12.99	8.01	8.53	0.50	Pass
11g	6Mbps	2	1	2412	16.33	16.28	15.92	15.09	0.50	Pass
11g	6Mbps	2	6	2437	16.38	16.28	16.04	15.33	0.50	Pass
11g	6Mbps	2	11	2462	16.33	16.33	16.00	15.11	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	19.20	19.70		30.00	30.00	-0.27	0.00	18.93	19.70	36.00	36.00	Pass
11b	1Mbps	1	6	2437	19.00	19.60		30.00	30.00	-0.27	0.00	18.73	19.60	36.00	36.00	Pass
11b	1Mbps	1	11	2462	19.10	19.50		30.00	30.00	-0.27	0.00	18.83	19.50	36.00	36.00	Pass
11g	6Mbps	1	1	2412	17.00	17.20		30.00	30.00	-0.27	0.00	16.73	17.20	36.00	36.00	Pass
11g	6Mbps	1	6	2437	17.00	17.70		30.00	30.00	-0.27	0.00	16.73	17.70	36.00	36.00	Pass
11g	6Mbps	1	11	2462	16.90	17.20		30.00	30.00	-0.27	0.00	16.63	17.20	36.00	36.00	Pass
HT20	MCS0	1	1	2412	17.30	17.60		30.00	30.00	-0.27	0.00	17.03	17.60	36.00	36.00	Pass
HT20	MCS0	1	6	2437	17.30	17.70		30.00	30.00	-0.27	0.00	17.03	17.70	36.00	36.00	Pass
HT20	MCS0	1	11	2462	14.60	14.90		30.00	30.00	-0.27	0.00	14.33	14.90	36.00	36.00	Pass
HT40	MCS0	1	3	2422	14.80	14.90		30.00	30.00	-0.27	0.00	14.53	14.90	36.00	36.00	Pass
HT40	MCS0	1	6	2437	16.80	17.60		30.00	30.00	-0.27	0.00	16.53	17.60	36.00	36.00	Pass
HT40	MCS0	1	9	2452	14.40	14.90		30.00	30.00	-0.27	0.00	14.13	14.90	36.00	36.00	Pass
VHT20	MCS0	1	1	2412	17.30	17.60		30.00	30.00	-0.27	0.00	17.03	17.60	36.00	36.00	Pass
VHT20	MCS0	1	6	2437	17.30	17.70		30.00	30.00	-0.27	0.00	17.03	17.70	36.00	36.00	Pass
VHT20	MCS0	1	11	2462	14.60	14.90		30.00	30.00	-0.27	0.00	14.33	14.90	36.00	36.00	Pass
VHT40	MCS0	1	3	2422	14.80	14.90		30.00	30.00	-0.27	0.00	14.53	14.90	36.00	36.00	Pass
VHT40	MCS0	1	6	2437	16.80	17.60		30.00	30.00	-0.27	0.00	16.53	17.60	36.00	36.00	Pass
VHT40	MCS0	1	9	2452	14.40	14.90		30.00	30.00	-0.27	0.00	14.13	14.90	36.00	36.00	Pass

2.4GHz Band MIMO																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	19.50	20.00	22.77	30.00		0.00		22.77		36.00		Pass
11b	1Mbps	2	6	2437	19.20	19.90	22.57	30.00		0.00		22.57		36.00		Pass
11b	1Mbps	2	11	2462	19.50	19.90	22.71	30.00		0.00		22.71		36.00		Pass
11g	6Mbps	2	1	2412	17.40	17.70	20.56	30.00		0.00		20.56		36.00		Pass
11g	6Mbps	2	6	2437	17.30	18.00	20.67	30.00		0.00		20.67		36.00		Pass
11g	6Mbps	2	11	2462	17.00	17.60	20.32	30.00		0.00		20.32		36.00		Pass
HT20	MCS0	2	1	2412	17.60	17.90	20.76	30.00		0.00		20.76		36.00		Pass
HT20	MCS0	2	6	2437	17.50	17.80	20.66	30.00		0.00		20.66		36.00		Pass
HT20	MCS0	2	11	2462	14.80	15.40	18.12	30.00		0.00		18.12		36.00		Pass
HT40	MCS0	2	3	2422	15.10	15.20	18.16	30.00		0.00		18.16		36.00		Pass
HT40	MCS0	2	6	2437	17.10	17.90	20.53	30.00		0.00		20.53		36.00		Pass
HT40	MCS0	2	9	2452	14.80	15.20	18.01	30.00		0.00		18.01		36.00		Pass
VHT20	MCS0	2	1	2412	17.60	17.90	20.76	30.00		0.00		20.76		36.00		Pass
VHT20	MCS0	2	6	2437	17.50	17.80	20.66	30.00		0.00		20.66		36.00		Pass
VHT20	MCS0	2	11	2462	14.80	15.40	18.12	30.00		0.00		18.12		36.00		Pass
VHT40	MCS0	2	3	2422	15.10	15.20	18.16	30.00		0.00		18.16		36.00		Pass
VHT40	MCS0	2	6	2437	17.10	17.90	20.53	30.00		0.00		20.53		36.00		Pass
VHT40	MCS0	2	9	2452	14.80	15.20	18.01	30.00		0.00		18.01		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	2	1	2412	-5.77	-5.47	-2.46	2.88		8.00		Pass
11b	1Mbps	2	6	2437	-6.12	-5.43	-2.42	2.88		8.00		Pass
11b	1Mbps	2	11	2462	-5.95	-5.58	-2.57	2.88		8.00		Pass
11g	6Mbps	2	1	2412	-10.44	-9.75	-6.74	2.88		8.00		Pass
11g	6Mbps	2	6	2437	-10.59	-9.21	-6.20	2.88		8.00		Pass
11g	6Mbps	2	11	2462	-10.36	-9.40	-6.39	2.88		8.00		Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band MIMO											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	2	1	2412	Full	18.93	18.93	18.70	17.84	0.50	Pass
HE20	MCS0	2	6	2437	Full	18.88	18.93	18.52	18.54	0.50	Pass
HE20	MCS0	2	11	2462	Full	18.83	18.88	17.66	18.62	0.50	Pass
HE40	MCS0	2	3	2422	Full	37.66	37.76	37.04	36.04	0.50	Pass
HE40	MCS0	2	6	2437	Full	37.76	37.86	36.96	34.77	0.50	Pass
HE40	MCS0	2	9	2452	Full	37.86	37.76	37.68	36.36	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	17.40	17.70		30.00	30.00	-0.27	0.00	17.13	17.70	36.00	36.00	Pass
HE20	MCS0	1	1	2412	26/0	8.20	8.20		30.00	30.00	-0.27	0.00	7.93	8.20	36.00	36.00	Pass
HE20	MCS0	1	1	2412	52/37	8.40	8.20		30.00	30.00	-0.27	0.00	8.13	8.20	36.00	36.00	Pass
HE20	MCS0	1	1	2412	106/53	8.70	8.70		30.00	30.00	-0.27	0.00	8.43	8.70	36.00	36.00	Pass
HE20	MCS0	1	6	2437	Full	17.40	17.80		30.00	30.00	-0.27	0.00	17.13	17.80	36.00	36.00	Pass
HE20	MCS0	1	6	2437	26/4	7.90	8.00		30.00	30.00	-0.27	0.00	7.63	8.00	36.00	36.00	Pass
HE20	MCS0	1	6	2437	52/39	7.90	8.00		30.00	30.00	-0.27	0.00	7.63	8.00	36.00	36.00	Pass
HE20	MCS0	1	6	2437	106/53	8.90	8.50		30.00	30.00	-0.27	0.00	8.63	8.50	36.00	36.00	Pass
HE20	MCS0	1	11	2462	Full	14.70	15.00		30.00	30.00	-0.27	0.00	14.43	15.00	36.00	36.00	Pass
HE20	MCS0	1	11	2462	26/8	4.30	4.50		30.00	30.00	-0.27	0.00	4.03	4.50	36.00	36.00	Pass
HE20	MCS0	1	11	2462	52/40	4.50	4.80		30.00	30.00	-0.27	0.00	4.23	4.80	36.00	36.00	Pass
HE20	MCS0	1	11	2462	106/54	5.10	5.20		30.00	30.00	-0.27	0.00	4.83	5.20	36.00	36.00	Pass
HE40	MCS0	1	3	2422	Full	14.90	15.00		30.00	30.00	-0.27	0.00	14.63	15.00	36.00	36.00	Pass
HE40	MCS0	1	3	2422	242/61	11.70	12.30		30.00	30.00	-0.27	0.00	11.43	12.30	36.00	36.00	Pass
HE40	MCS0	1	6	2437	Full	16.90	17.70		30.00	30.00	-0.27	0.00	16.63	17.70	36.00	36.00	Pass
HE40	MCS0	1	6	2437	242/61	14.20	14.90		30.00	30.00	-0.27	0.00	13.93	14.90	36.00	36.00	Pass
HE40	MCS0	1	9	2452	Full	14.50	15.00		30.00	30.00	-0.27	0.00	14.23	15.00	36.00	36.00	Pass
HE40	MCS0	1	9	2452	242/62	11.90	12.40		30.00	30.00	-0.27	0.00	11.63	12.40	36.00	36.00	Pass

2.4GHz Band MIMO																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	17.70	18.00	20.86	30.00		0.00		20.86		36.00		Pass
HE20	MCS0	2	1	2412	26/0	8.40	8.50	11.46	30.00		0.00		11.46		36.00		Pass
HE20	MCS0	2	1	2412	52/37	8.60	8.80	11.71	30.00		0.00		11.71		36.00		Pass
HE20	MCS0	2	1	2412	106/53	8.90	9.30	12.11	30.00		0.00		12.11		36.00		Pass
HE20	MCS0	2	6	2437	Full	17.60	17.90	20.76	30.00		0.00		20.76		36.00		Pass
HE20	MCS0	2	6	2437	26/4	8.20	8.40	11.31	30.00		0.00		11.31		36.00		Pass
HE20	MCS0	2	6	2437	52/39	8.10	8.50	11.31	30.00		0.00		11.31		36.00		Pass
HE20	MCS0	2	6	2437	106/53	9.00	9.00	12.01	30.00		0.00		12.01		36.00		Pass
HE20	MCS0	2	11	2462	Full	14.90	15.50	18.22	30.00		0.00		18.22		36.00		Pass
HE20	MCS0	2	11	2462	26/8	4.50	4.90	7.71	30.00		0.00		7.71		36.00		Pass
HE20	MCS0	2	11	2462	52/40	4.80	5.30	8.07	30.00		0.00		8.07		36.00		Pass
HE20	MCS0	2	11	2462	106/54	5.20	5.70	8.47	30.00		0.00		8.47		36.00		Pass
HE40	MCS0	2	3	2422	Full	15.20	15.30	18.26	30.00		0.00		18.26		36.00		Pass
HE40	MCS0	2	3	2422	242/61	12.00	12.60	15.32	30.00		0.00		15.32		36.00		Pass
HE40	MCS0	2	6	2437	Full	17.20	18.00	20.63	30.00		0.00		20.63		36.00		Pass
HE40	MCS0	2	6	2437	242/61	14.50	15.20	17.87	30.00		0.00		17.87		36.00		Pass
HE40	MCS0	2	9	2452	Full	14.80	15.30	18.07	30.00		0.00		18.07		36.00		Pass
HE40	MCS0	2	9	2452	242/62	12.20	12.70	15.47	30.00		0.00		15.47		36.00		Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band MIMO													
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	2	1	2412	Full	-8.51	-8.18	-5.17	2.88		8.00		Pass
HE20	MCS0	2	1	2412	26/0	-8.59	-8.55	-5.54	2.88		8.00		Pass
HE20	MCS0	2	6	2437	Full	-8.05	-7.90	-4.89	2.88		8.00		Pass
HE20	MCS0	2	6	2437	26/4	-8.14	-8.20	-5.13	2.88		8.00		Pass
HE20	MCS0	2	11	2462	Full	-11.12	-10.60	-7.59	2.88		8.00		Pass
HE20	MCS0	2	11	2462	26/8	-11.26	-11.05	-8.04	2.88		8.00		Pass
HE40	MCS0	2	3	2422	Full	-13.07	-13.25	-10.06	2.88		8.00		Pass
HE40	MCS0	2	3	2422	242/61	-13.34	-13.58	-10.33	2.88		8.00		Pass
HE40	MCS0	2	6	2437	Full	-11.05	-10.58	-7.57	2.88		8.00		Pass
HE40	MCS0	2	6	2437	242/61	-11.24	-10.89	-7.88	2.88		8.00		Pass
HE40	MCS0	2	9	2452	Full	-13.60	-13.08	-10.07	2.88		8.00		Pass
HE40	MCS0	2	9	2452	242/62	-13.78	-13.33	-10.32	2.88		8.00		Pass

Measured power density (dBm) has offset with cable loss.



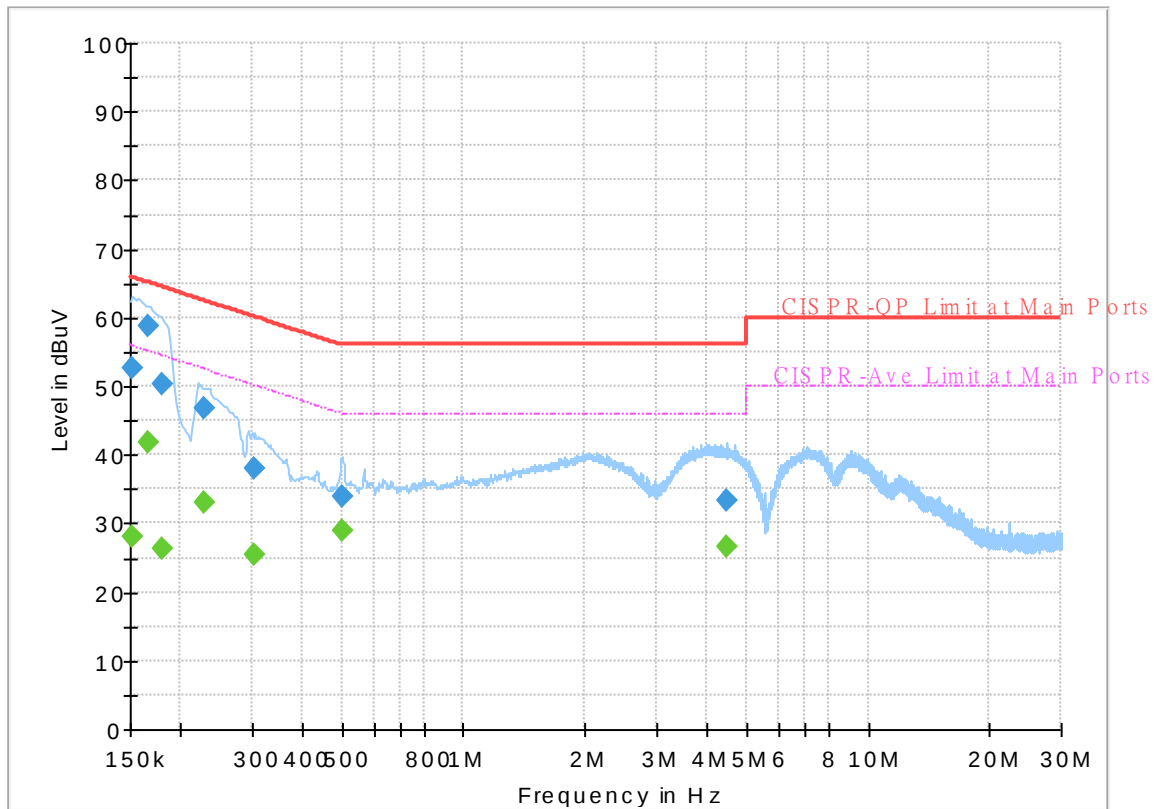
Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	24~26℃
		Relative Humidity :	42~50%

EUT Information

Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum



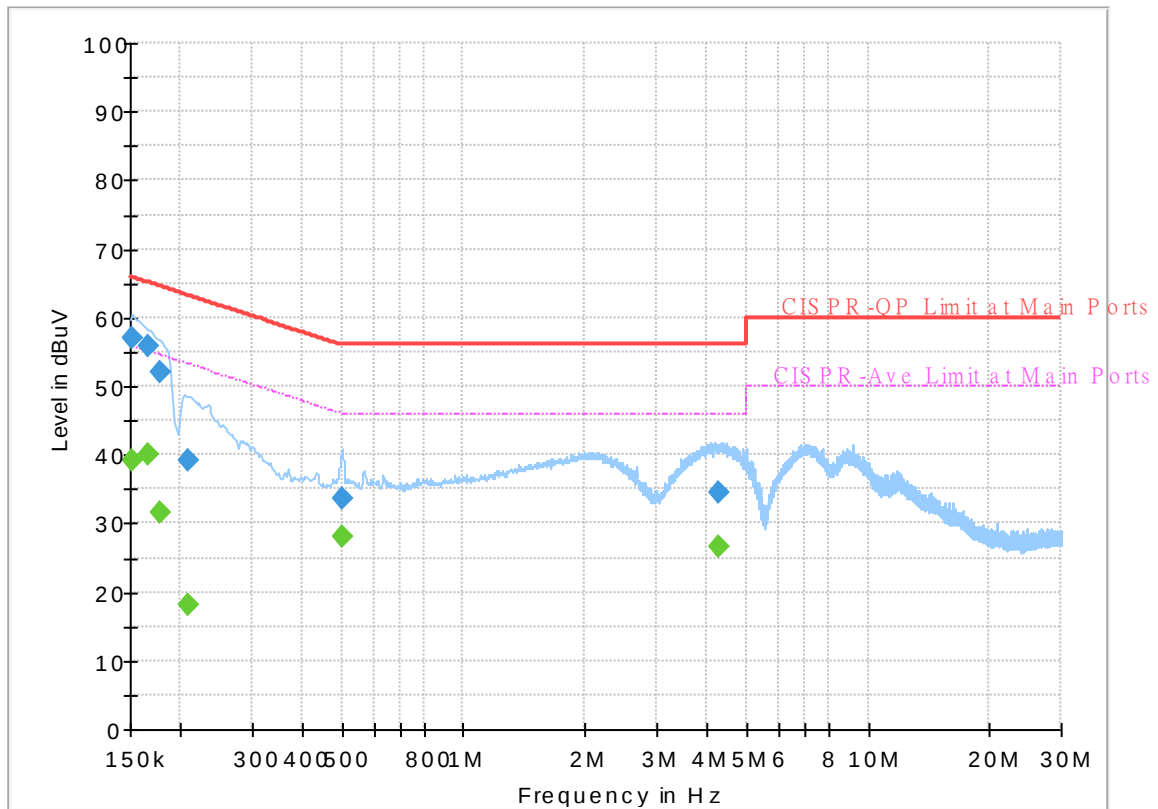
Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	28.14	55.88	27.74	L1	OFF	19.5
0.152250	52.51	---	65.88	13.37	L1	OFF	19.5
0.165750	---	41.81	55.17	13.36	L1	OFF	19.5
0.165750	58.76	---	65.17	6.41	L1	OFF	19.5
0.178980	---	26.42	54.53	28.11	L1	OFF	19.5
0.178980	50.28	---	64.53	14.25	L1	OFF	19.5
0.228750	---	32.94	52.50	19.56	L1	OFF	19.5
0.228750	46.64	---	62.50	15.86	L1	OFF	19.5
0.305250	---	25.39	50.10	24.71	L1	OFF	19.5
0.305250	38.14	---	60.10	21.96	L1	OFF	19.5
0.501810	---	29.03	46.00	16.97	L1	OFF	19.5
0.501810	33.85	---	56.00	22.15	L1	OFF	19.5
4.461000	---	26.55	46.00	19.45	L1	OFF	19.6
4.461000	33.29	---	56.00	22.71	L1	OFF	19.6

EUT Information

Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	39.04	55.88	16.84	N	OFF	19.5
0.152250	56.88	---	65.88	9.00	N	OFF	19.5
0.165750	---	40.10	55.17	15.07	N	OFF	19.5
0.165750	55.84	---	65.17	9.33	N	OFF	19.5
0.178260	---	31.58	54.57	22.99	N	OFF	19.5
0.178260	52.06	---	64.57	12.51	N	OFF	19.5
0.208680	---	18.27	53.26	34.99	N	OFF	19.5
0.208680	39.07	---	63.26	24.19	N	OFF	19.5
0.503160	---	28.05	46.00	17.95	N	OFF	19.5
0.503160	33.49	---	56.00	22.51	N	OFF	19.5
4.298190	---	26.57	46.00	19.43	N	OFF	19.6
4.298190	34.40	---	56.00	21.60	N	OFF	19.6



Appendix C. Radiated Spurious Emission

Test Engineer :	Leo Lee, Mancy Chou, and Bigshow Wang	Temperature :	22.7~24.2°C
		Relative Humidity :	47~57%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2389.485	57.56	-16.44	74	43.37	27.76	17.35	30.92	386	302	P	H
		2388.75	48.61	-5.39	54	34.42	27.77	17.34	30.92	386	302	A	H
	*	2412	115.59	-	-	101.43	27.68	17.39	30.91	386	302	P	H
	*	2412	112.51	-	-	98.35	27.68	17.39	30.91	386	302	A	H
													H
													H
		2325.75	57.25	-16.75	74	42.92	28.05	17.22	30.94	317	152	P	V
		2389.065	48.53	-5.47	54	34.33	27.77	17.35	30.92	317	152	A	V
	*	2412	114.73	-	-	100.57	27.68	17.39	30.91	317	152	P	V
	*	2412	111.6	-	-	97.44	27.68	17.39	30.91	317	152	A	V
													V
													V
802.11b CH 06 2437MHz		2372.88	56.26	-17.74	74	42.01	27.86	17.31	30.92	375	304	P	H
		2336.24	46.84	-7.16	54	32.51	28.03	17.24	30.94	375	304	A	H
	*	2437	114.09	-	-	99.93	27.63	17.43	30.9	375	304	P	H
	*	2437	110.94	-	-	96.78	27.63	17.43	30.9	375	304	A	H
		2490.01	55.89	-18.11	74	41.71	27.52	17.53	30.87	375	304	P	H
		2495.95	46.64	-7.36	54	32.46	27.51	17.54	30.87	375	304	A	H
		2316.24	56.35	-17.65	74	42.03	28.07	17.2	30.95	288	151	P	V
		2315.44	46.96	-7.04	54	32.64	28.07	17.2	30.95	288	151	A	V
	*	2437	115.4	-	-	101.24	27.63	17.43	30.9	288	151	P	V
	*	2437	112.22	-	-	98.06	27.63	17.43	30.9	288	151	A	V
		2483.71	55.65	-18.35	74	41.48	27.53	17.52	30.88	288	151	P	V
		2484.97	46.53	-7.47	54	32.36	27.53	17.52	30.88	288	151	A	V



802.11b CH 11 2462MHz	*	2462	113.37	-	-	99.2	27.58	17.48	30.89	359	299	P	H
	*	2462	110.04	-	-	95.87	27.58	17.48	30.89	359	299	A	H
		2484.6	57.16	-16.84	74	42.99	27.53	17.52	30.88	359	299	P	H
		2486	48.41	-5.59	54	34.24	27.53	17.52	30.88	359	299	A	H
													H
													H
	*	2462	114.39	-	-	100.22	27.58	17.48	30.89	314	152	P	V
	*	2462	111.22	-	-	97.05	27.58	17.48	30.89	314	152	A	V
		2487.68	56.3	-17.7	74	42.14	27.52	17.52	30.88	314	152	P	V
		2486.28	48.56	-5.44	54	34.39	27.53	17.52	30.88	314	152	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	42.37	-31.63	74	59.6	31.25	10.61	59.09	100	0	P	H
													H
													H
													H
		4824	41.45	-32.55	74	58.68	31.25	10.61	59.09	100	0	P	V
													V
													V
													V
802.11b CH 06 2437MHz		4874	43.26	-30.74	74	60.51	31.25	10.62	59.12	100	0	P	H
		7311	53.21	-20.79	74	62.66	36.52	12.59	58.56	338	327	P	H
		7311	47.47	-6.53	54	56.92	36.52	12.59	58.56	338	327	A	H
													H
		4874	41.97	-32.03	74	59.22	31.25	10.62	59.12	100	0	P	V
		7311	47.29	-26.71	74	56.74	36.52	12.59	58.56	100	0	P	V
													V
													V
802.11b CH 11 2462MHz		4924	46.1	-27.9	74	63.29	31.34	10.62	59.15	100	0	P	H
		7386	53.08	-20.92	74	62.37	36.46	12.71	58.46	379	2	P	H
		7386	45.83	-8.17	54	55.12	36.46	12.71	58.46	379	2	A	H
													H
		4924	45.17	-28.83	74	62.36	31.34	10.62	59.15	100	0	P	V
		7386	47.78	-26.22	74	57.07	36.46	12.71	58.46	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.485	61.63	-12.37	74	47.44	27.76	17.35	30.92	386	237	P	H
		2389.59	50.25	-3.75	54	36.06	27.76	17.35	30.92	386	237	A	H
	*	2412	116.11	-	-	101.95	27.68	17.39	30.91	386	237	P	H
	*	2412	108.17	-	-	94.01	27.68	17.39	30.91	386	237	A	H
													H
													H
		2389.485	63.39	-10.61	74	49.2	27.76	17.35	30.92	394	227	P	V
		2390	52.25	-1.75	54	38.06	27.76	17.35	30.92	394	227	A	V
	*	2412	117.28	-	-	103.12	27.68	17.39	30.91	394	227	P	V
	*	2412	109.49	-	-	95.33	27.68	17.39	30.91	394	227	A	V
													V
													V
802.11g CH 06 2437MHz		2353.69	56.88	-17.12	74	42.56	27.98	17.27	30.93	373	236	P	H
		2389.9	45.26	-8.74	54	31.07	27.76	17.35	30.92	373	236	A	H
	*	2437	116	-	-	101.84	27.63	17.43	30.9	373	236	P	H
	*	2437	108.37	-	-	94.21	27.63	17.43	30.9	373	236	A	H
		2485.06	55.69	-18.31	74	41.52	27.53	17.52	30.88	373	236	P	H
		2483.98	45.09	-8.91	54	30.92	27.53	17.52	30.88	373	236	A	H
		2365.42	56.62	-17.38	74	42.34	27.91	17.3	30.93	382	227	P	V
		2389.9	45.45	-8.55	54	31.26	27.76	17.35	30.92	382	227	A	V
	*	2437	117.9	-	-	103.74	27.63	17.43	30.9	382	227	P	V
	*	2437	110.28	-	-	96.12	27.63	17.43	30.9	382	227	A	V
		2485.87	56.09	-17.91	74	41.92	27.53	17.52	30.88	382	227	P	V
		2483.53	45.28	-8.72	54	31.11	27.53	17.52	30.88	382	227	A	V



802.11g CH 11 2462MHz	*	2462	115.12	-	-	100.95	27.58	17.48	30.89	368	244	P	H
	*	2462	107.59	-	-	93.42	27.58	17.48	30.89	368	244	A	H
		2483.52	63.24	-10.76	74	49.07	27.53	17.52	30.88	368	244	P	H
		2483.52	51.64	-2.36	54	37.47	27.53	17.52	30.88	368	244	A	H
													H
													H
	*	2462	117.93	-	-	103.76	27.58	17.48	30.89	376	229	P	V
	*	2462	110.18	-	-	96.01	27.58	17.48	30.89	376	229	A	V
		2483.64	65.14	-8.86	74	50.97	27.53	17.52	30.88	376	229	P	V
		2483.52	53.55	-0.45	54	39.38	27.53	17.52	30.88	376	229	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	40.6	-33.4	74	57.83	31.25	10.61	59.09	100	0	P	H
													H
													H
													H
		4824	40.04	-33.96	74	57.27	31.25	10.61	59.09	100	0	P	V
													V
													V
													V
802.11g CH 06 2437MHz		4874	40.26	-33.74	74	57.51	31.25	10.62	59.12	100	0	P	H
		7311	48.96	-25.04	74	58.41	36.52	12.59	58.56	100	0	P	H
													H
													H
		4874	40.45	-33.55	74	57.7	31.25	10.62	59.12	100	0	P	V
		7311	46.09	-27.91	74	55.54	36.52	12.59	58.56	100	0	P	V
													V
													V
802.11g CH 11 2462MHz		4924	41.85	-32.15	74	59.04	31.34	10.62	59.15	100	0	P	H
		7386	46.9	-27.1	74	56.19	36.46	12.71	58.46	100	0	P	H
													H
													H
		4924	41.55	-32.45	74	58.74	31.34	10.62	59.15	100	0	P	V
		7386	46.23	-27.77	74	55.52	36.46	12.71	58.46	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 01 2412MHz		2389.905	60.7	-13.3	74	46.51	27.76	17.35	30.92	301	240	P	H
		2390	49.7	-4.3	54	35.51	27.76	17.35	30.92	301	240	A	H
	*	2412	115.39	-	-	101.23	27.68	17.39	30.91	301	240	P	H
	*	2412	106.96	-	-	92.8	27.68	17.39	30.91	301	240	A	H
													H
													H
		2389.275	63.21	-10.79	74	49.02	27.76	17.35	30.92	339	228	P	V
		2390	52.42	-1.58	54	38.23	27.76	17.35	30.92	339	228	A	V
	*	2412	117.1	-	-	102.94	27.68	17.39	30.91	339	228	P	V
	*	2412	109.03	-	-	94.87	27.68	17.39	30.91	339	228	A	V
													V
													V
8802.11ax HE20 Full CH 11 2462MHz	*	2462	113.47	-	-	99.3	27.58	17.48	30.89	324	244	P	H
	*	2462	104.8	-	-	90.63	27.58	17.48	30.89	324	244	A	H
		2485.24	63.98	-10.02	74	49.81	27.53	17.52	30.88	324	244	P	H
		2484.12	51.76	-2.24	54	37.59	27.53	17.52	30.88	324	244	A	H
													H
													H
	*	2462	115.41	-	-	101.24	27.58	17.48	30.89	354	232	P	V
	*	2462	107.07	-	-	92.9	27.58	17.48	30.89	354	232	A	V
		2484.32	65.72	-8.28	74	51.55	27.53	17.52	30.88	354	232	P	V
		2483.96	53.63	-0.37	54	39.46	27.53	17.52	30.88	354	232	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/8 CH 11 2462MHz	*	2462	117.79	-	-	103.62	27.58	17.48	30.89	364	301	P	H
	*	2462	109.65	-	-	95.48	27.58	17.48	30.89	364	301	A	H
		2483.52	64.64	-9.36	74	50.47	27.53	17.52	30.88	364	301	P	H
		2483.64	45.34	-8.66	54	31.17	27.53	17.52	30.88	364	301	A	H
													H
													H
	*	2462	119.91	-	-	105.74	27.58	17.48	30.89	277	153	P	V
	*	2462	111.53	-	-	97.36	27.58	17.48	30.89	277	153	A	V
		2485.64	64.93	-9.07	74	50.76	27.53	17.52	30.88	277	153	P	V
		2483.52	45.57	-8.43	54	31.4	27.53	17.52	30.88	277	153	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 03 2422MHz		2390	62.45	-11.55	74	48.26	27.76	17.35	30.92	335	240	P	H
		2390	50.43	-3.57	54	36.24	27.76	17.35	30.92	335	240	A	H
	*	2422	112.14	-	-	97.97	27.66	17.41	30.9	335	240	P	H
	*	2422	103.81	-	-	89.64	27.66	17.41	30.9	335	240	A	H
		2486.41	55.66	-18.34	74	41.49	27.53	17.52	30.88	335	240	P	H
		2484.43	45.9	-8.1	54	31.73	27.53	17.52	30.88	335	240	A	H
		2389.68	68.21	-5.79	74	54.02	27.76	17.35	30.92	346	231	P	V
		2390	52.63	-1.37	54	38.44	27.76	17.35	30.92	346	231	A	V
	*	2422	114.65	-	-	100.48	27.66	17.41	30.9	346	231	P	V
	*	2422	104.81	-	-	90.64	27.66	17.41	30.9	346	231	A	V
		2484.52	56.17	-17.83	74	42	27.53	17.52	30.88	346	231	P	V
		2484.34	46.14	-7.86	54	31.97	27.53	17.52	30.88	346	231	A	V
802.11ax HE40 Full CH 09 2452MHz		2350.32	56.17	-17.83	74	41.83	28	17.27	30.93	335	241	P	H
		2388.24	45.47	-8.53	54	31.28	27.77	17.34	30.92	335	241	A	H
	*	2452	111.82	-	-	97.65	27.6	17.46	30.89	335	241	P	H
	*	2452	102.7	-	-	88.53	27.6	17.46	30.89	335	241	A	H
		2484.79	64.16	-9.84	74	49.99	27.53	17.52	30.88	335	241	P	H
		2484.61	51.59	-2.41	54	37.42	27.53	17.52	30.88	335	241	A	H
		2319.12	56.98	-17.02	74	42.66	28.06	17.21	30.95	380	230	P	V
		2389.04	45.54	-8.46	54	31.34	27.77	17.35	30.92	380	230	A	V
	*	2452	113.08	-	-	98.91	27.6	17.46	30.89	380	230	P	V
	*	2452	103.68	-	-	89.51	27.6	17.46	30.89	380	230	A	V
		2484.43	64.73	-9.27	74	50.56	27.53	17.52	30.88	380	230	P	V
		2484.7	53.21	-0.79	54	39.04	27.53	17.52	30.88	380	230	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11ax HE20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11ax HE20 LF		87.23	27.05	-12.95	40	43.64	14.53	1.27	32.39	-	-	P	H
		264.74	29.5	-16.5	46	40.05	19.59	2.3	32.44	-	-	P	H
		274.44	30.12	-15.88	46	41.72	18.54	2.32	32.46	-	-	P	H
		715.79	38.45	-7.55	46	40.47	26.67	3.73	32.42	100	0	P	H
		734.22	38.04	-7.96	46	39.16	27.54	3.78	32.44	-	-	P	H
		741.98	37.52	-8.48	46	38.55	27.62	3.81	32.46	-	-	P	H
													H
													H
													H
													H
													H
													H
		42.61	24.7	-15.3	40	38.01	18.2	0.82	32.33	-	-	P	V
		89.17	27.07	-16.43	43.5	43.33	14.83	1.27	32.36	-	-	P	V
		258.92	29.33	-16.67	46	39.98	19.49	2.29	32.43	-	-	P	V
		715.79	37.73	-8.27	46	39.75	26.67	3.73	32.42	-	-	P	V
		734.22	38.35	-7.65	46	39.47	27.54	3.78	32.44	-	-	P	V
		745.86	38.46	-7.54	46	39.45	27.65	3.82	32.46	100	0	P	V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



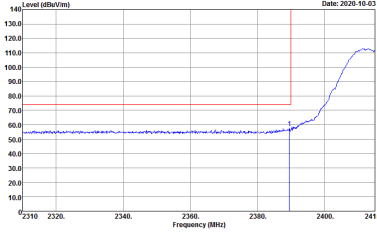
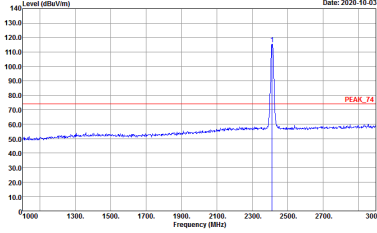
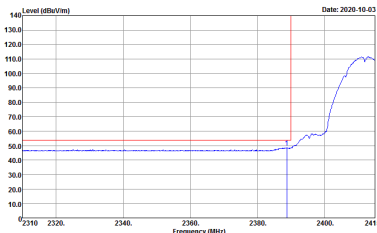
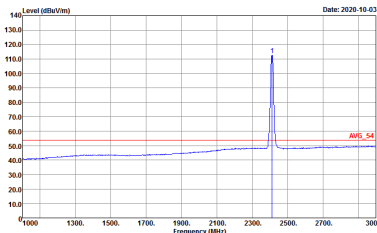
Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Leo Lee, Mancy Chou, and Bigshow Wang	Temperature :	22.7~24.2°C
		Relative Humidity :	47~57%

Note symbol

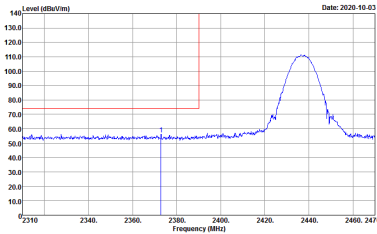
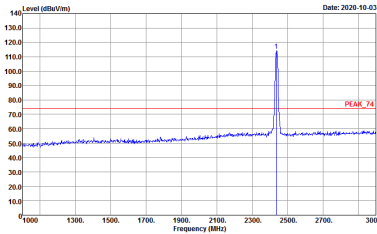
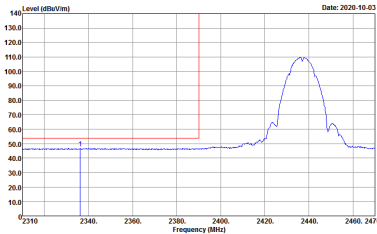
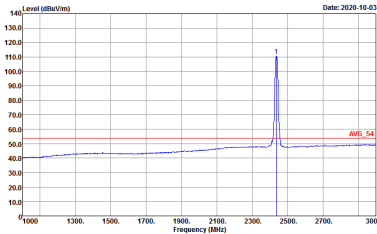
-L	Low channel location
-R	High channel location

2.4GHz 2400~2483.5MHz
WIFI 802.11b (Band Edge @ 3m)

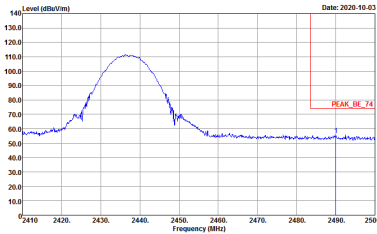
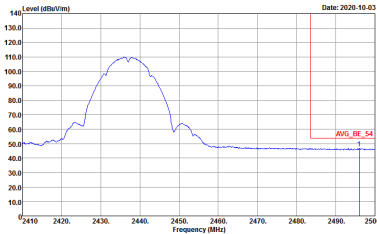
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto

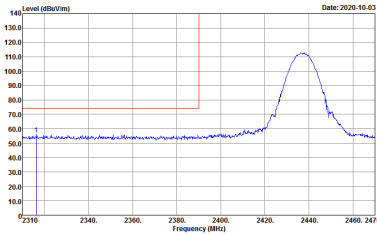
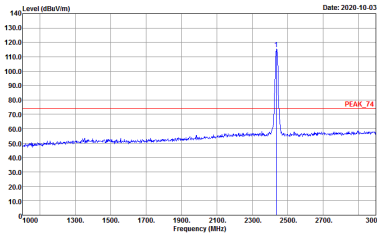
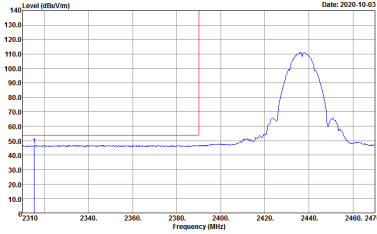
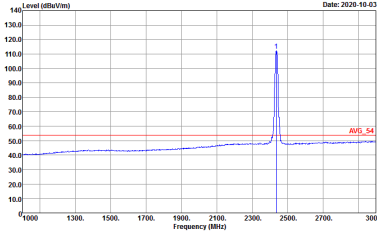


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto

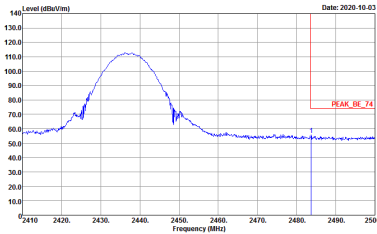
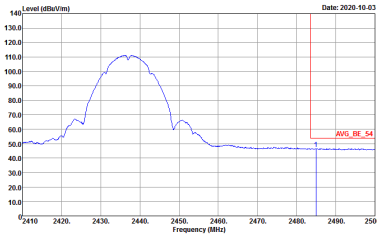
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SWT:Auto
Avg.		

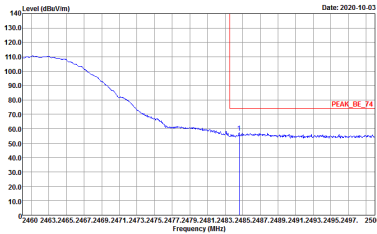
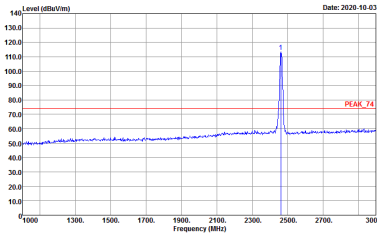
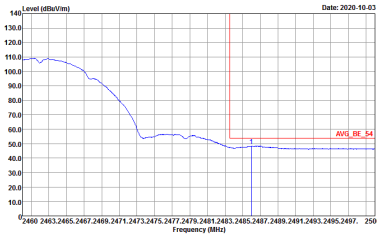
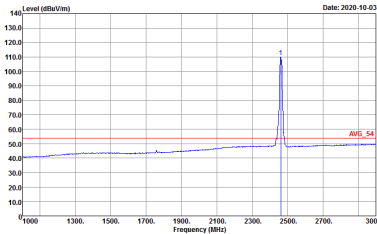


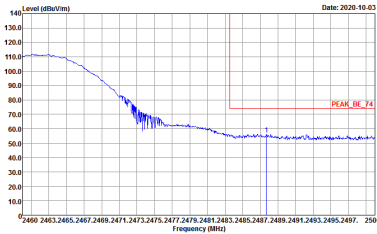
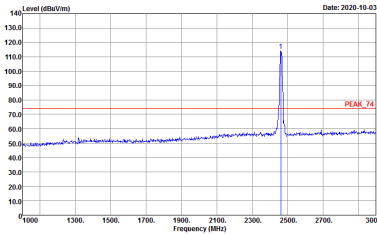
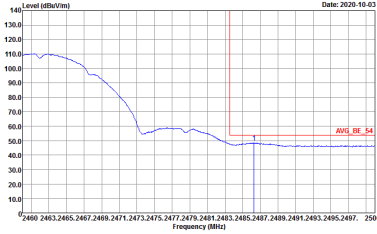
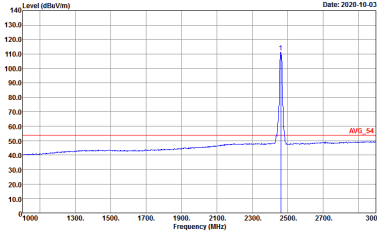
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL RBW:1000.000kHz VBW:3.000kHz SWT:Auto
Avg.		

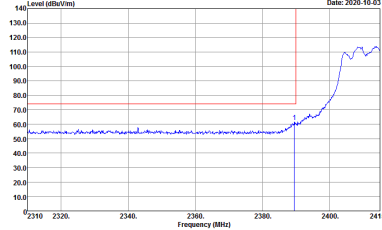
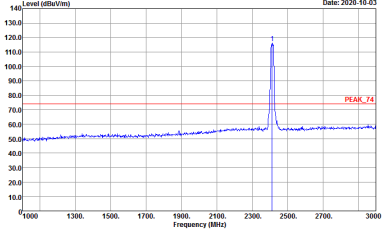
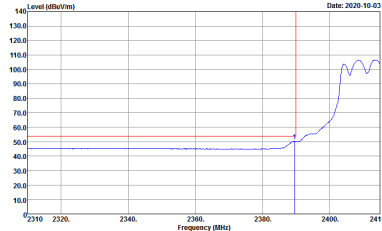
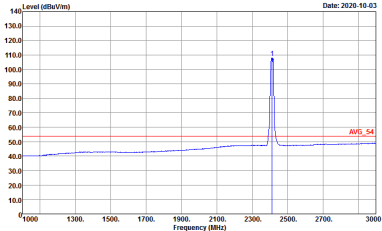


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank

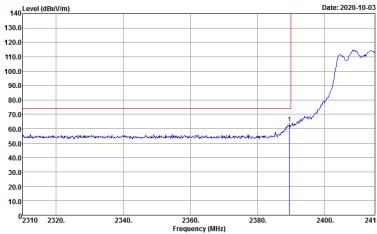
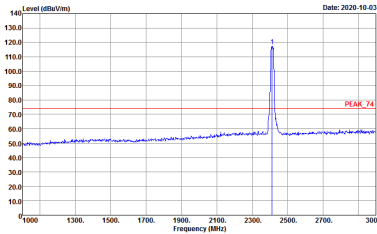
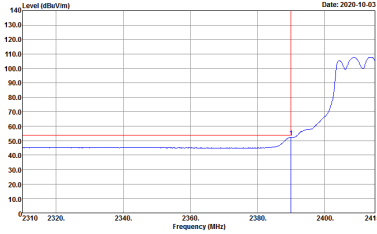
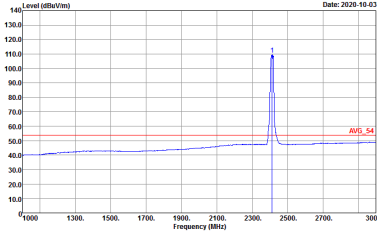
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto
Avg.		

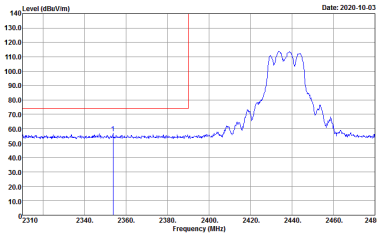
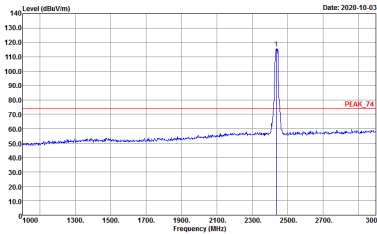
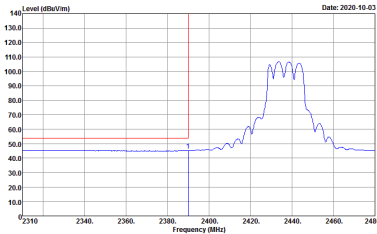
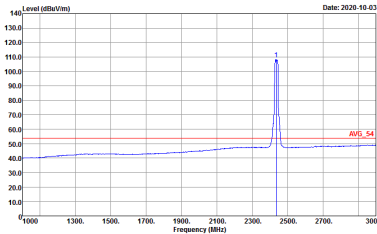
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3.000KHz SWT:Auto
Avg.		

2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

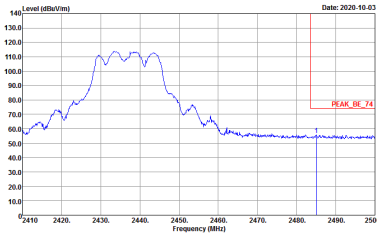
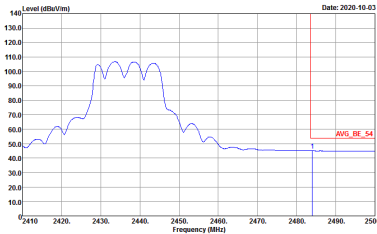
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

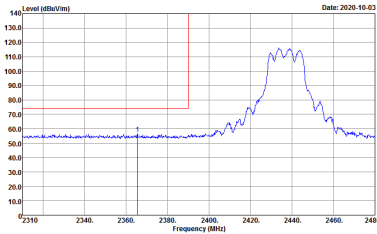
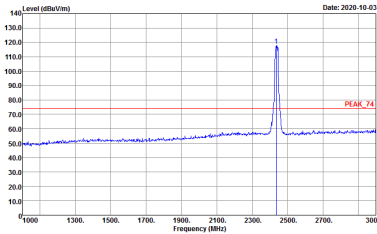
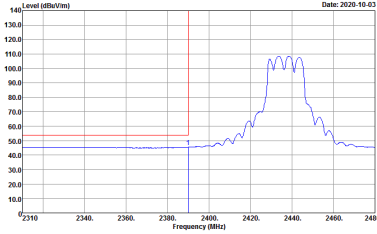
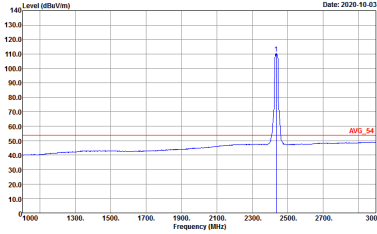


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

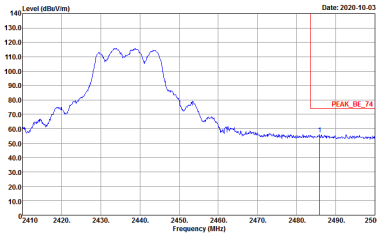
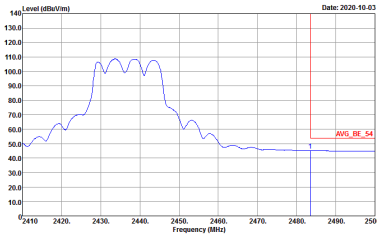
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

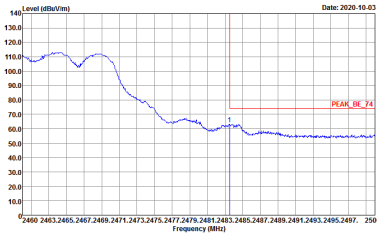
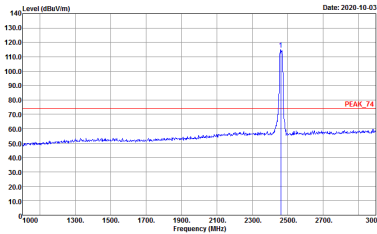
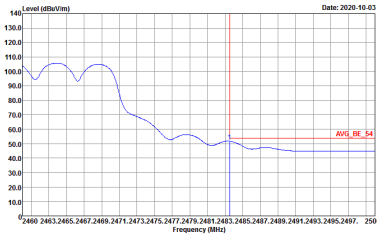
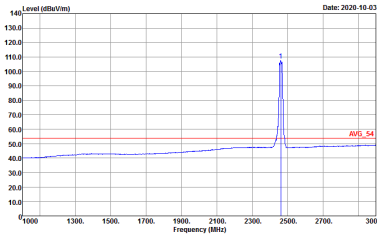


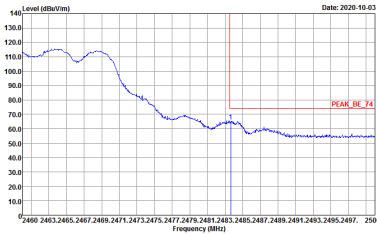
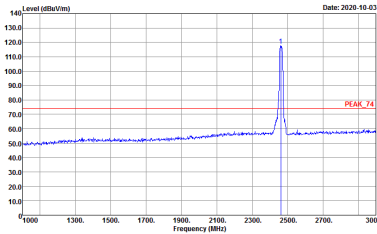
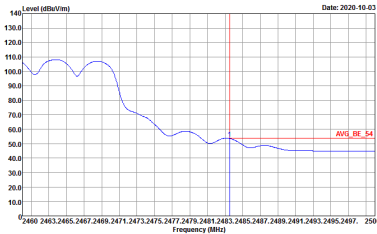
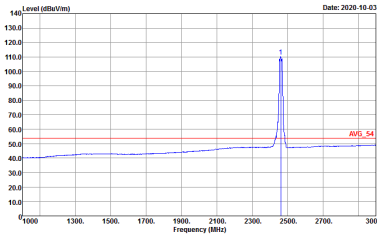
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

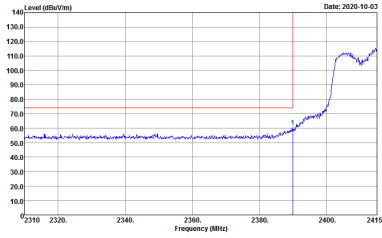
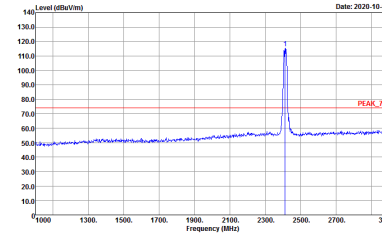
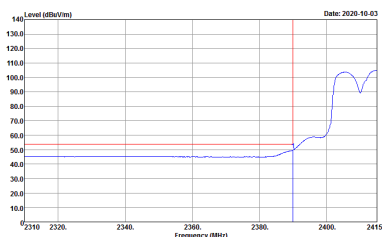
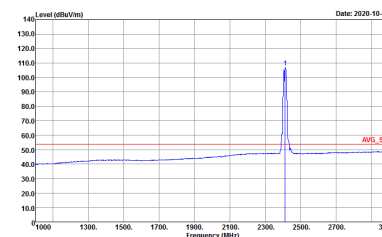


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left Blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left Blank

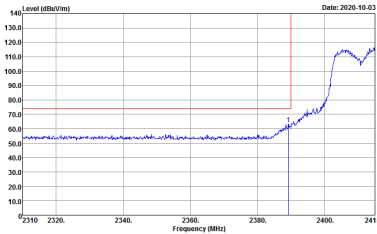
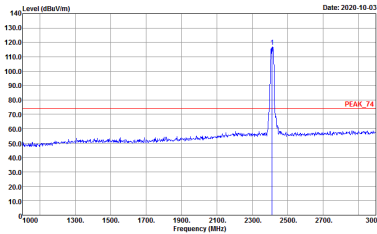
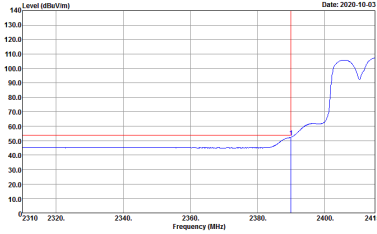
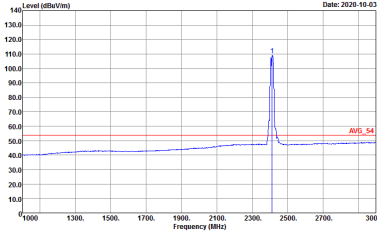
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

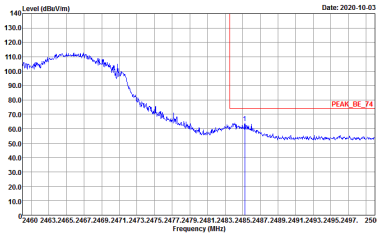
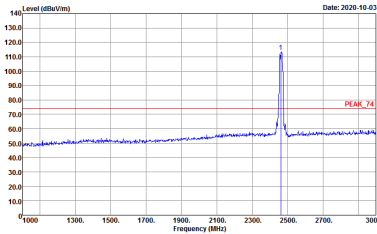
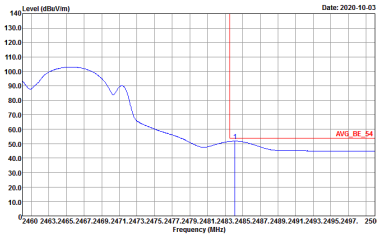
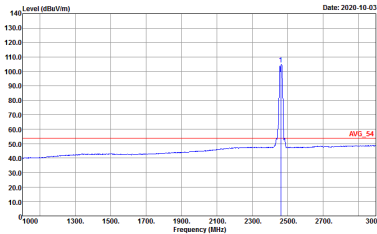
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

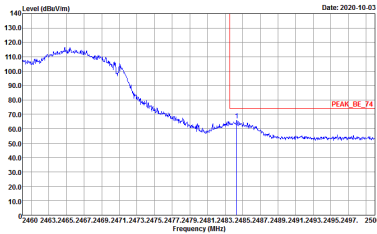
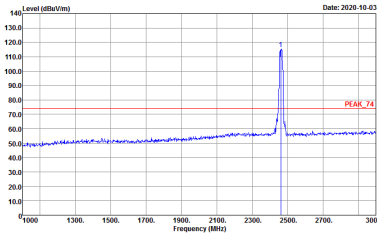
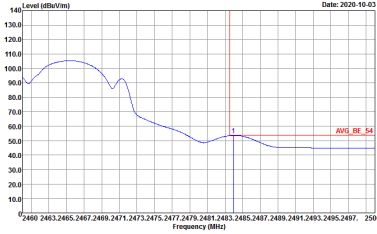
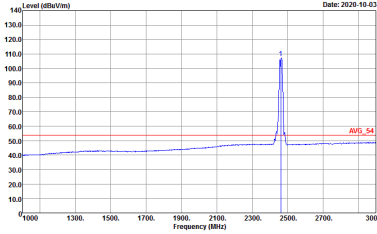
2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH01 2412MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



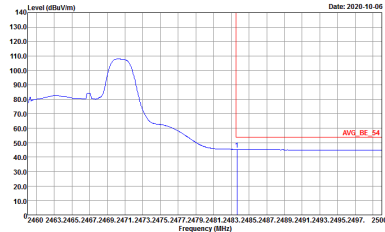
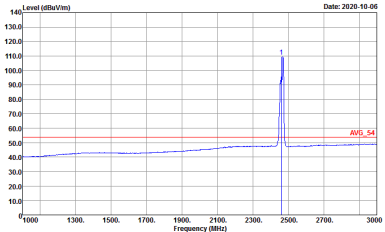






WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH01 2412MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto

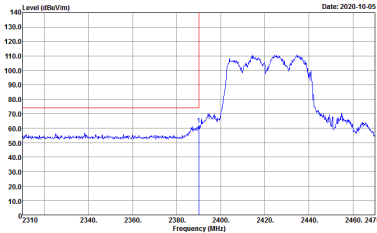
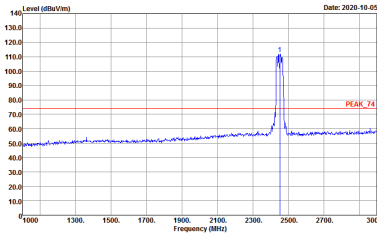
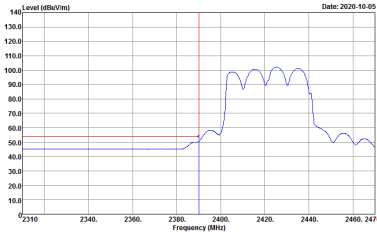
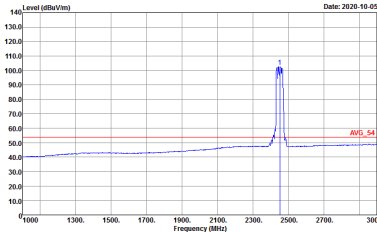
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Full CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

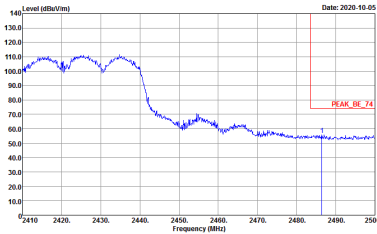
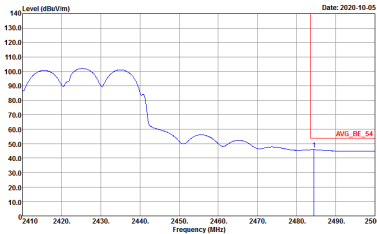
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/8 CH11 2462MHz	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

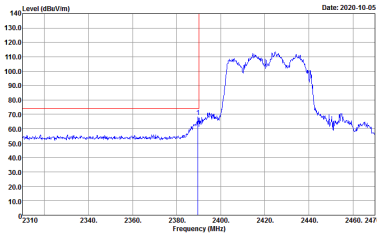
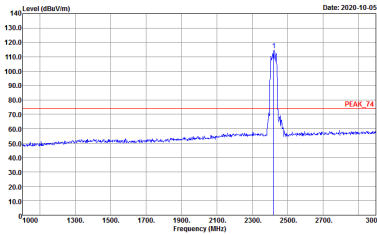
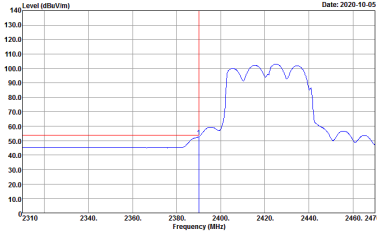
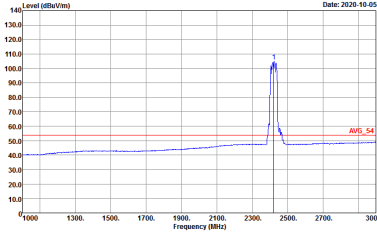
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE20 Partial 26/8 CH11 2462MHz	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AV6_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AV6_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto

2.4GHz 2400~2483.5MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

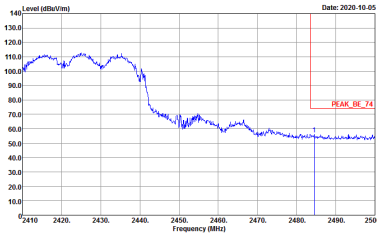
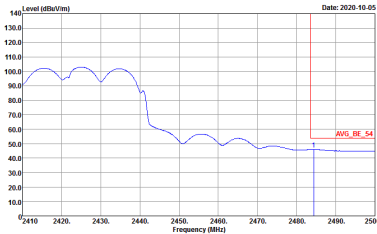
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

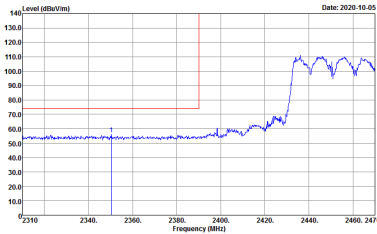
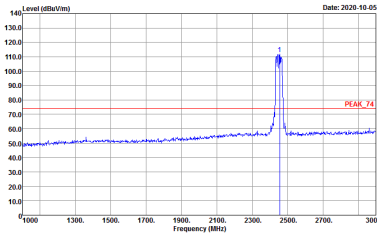
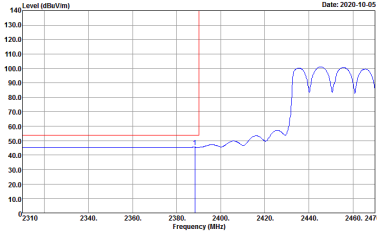
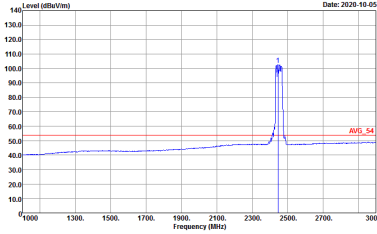


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

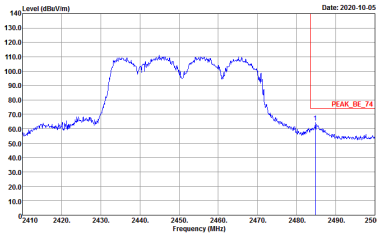
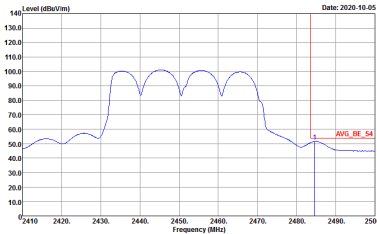
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		

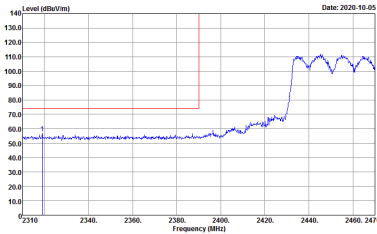
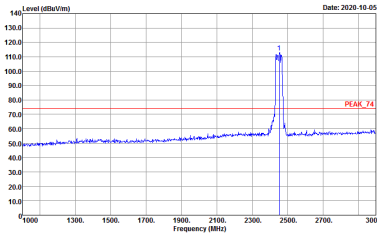
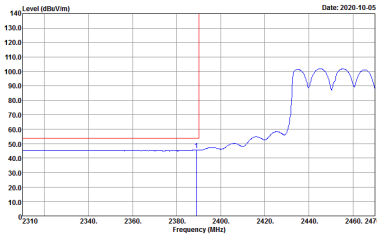
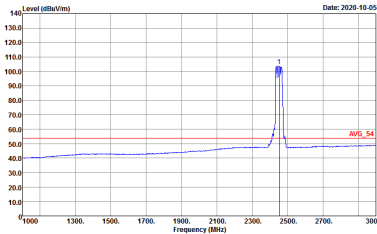


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH03 2422MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

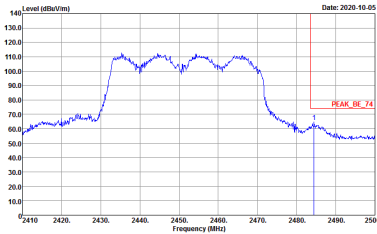
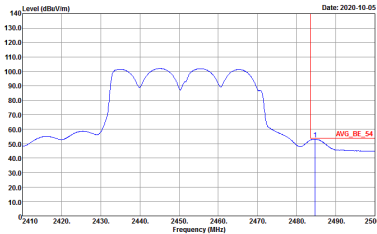
WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH09 2452MHz - L	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH09 2452MHz - R	
1+2	Horizontal	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH09 2452MHz - L	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH15-HY Condition : AVG_54 3m 91200_15_1620 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11ax HE40 Full CH09 2452MHz - R	
1+2	Vertical	Fundamental
Peak	 Site : 03CH15-HY Condition : PEAK_BE_74 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH15-HY Condition : AVG_BE_54 3m 91200_15_1620 VERTICAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-10-05 Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	Level (dBuV/m) Date: 2020-10-05 Site : 03CH15-14Y Condition : PEAK_74 3m 91200_15_1620 VERTICAL



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBu/V/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	Level (dBu/V/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	Level (dBuV/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL

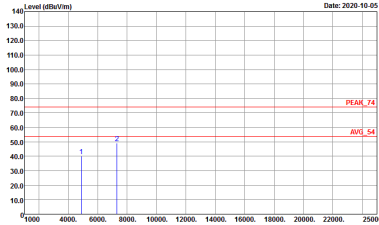
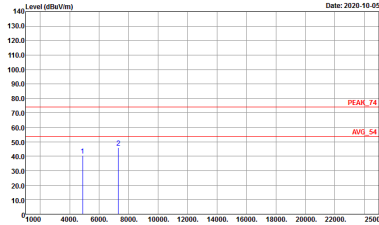


2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBm/5m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	Level (dBm/5m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL



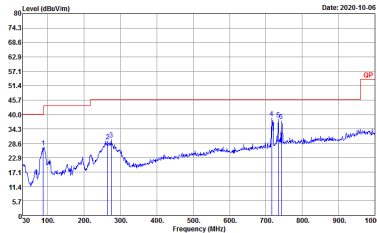
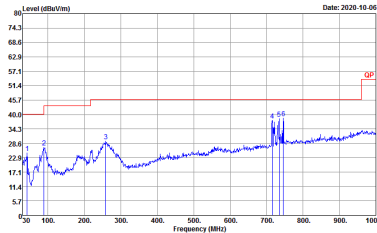
WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1+2	Horizontal	Vertical
Peak Avg.	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1+2	Horizontal	Vertical
Peak Avg.	Level (dBu/V/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 HORIZONTAL	Level (dBu/V/m) Date: 2020-10-05 Site : 03CH15-HY Condition : PEAK_74 3m 91200_15_1620 VERTICAL



Emission below 1GHz
2.4GHz WIFI 802.11ax HE20 Full (LF)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11ax HE20 Full LF	
1+2	Horizontal	Vertical
QP / Peak	 Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 HORIZONTAL	 Site : 03CH15-HY Condition : QP 3m B1LOG_15_41912 VERTICAL



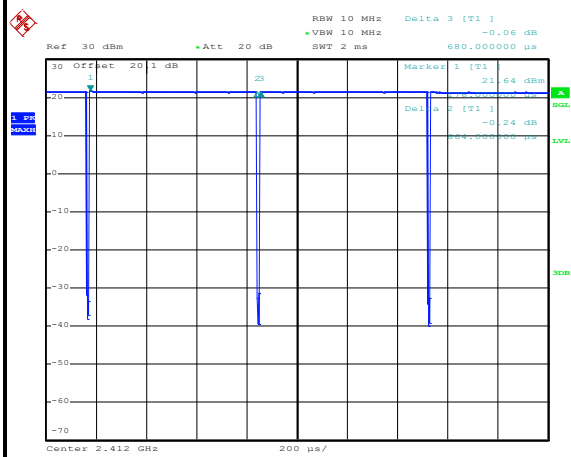
Appendix E. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting	Duty Factor(dB)
1+2	802.11b for Ant. 1	97.65	664	1.51	3kHz	0.10
1+2	802.11b for Ant. 2	97.65	664	1.51	3kHz	0.10
1+2	802.11g for Ant. 1	98.75	-	-	10Hz	0.05
1+2	802.11g for Ant. 2	99.00	-	-	10Hz	0.04
1+2	802.11ax20 Full RU for Ant. 1	100.00	-	-	10Hz	0.00
1+2	802.11ax20 Full RU for Ant. 2	100.00	-	-	10Hz	0.00
1+2	802.11ax20 26 RU for Ant. 1	100.00	-	-	10Hz	0.00
1+2	802.11ax20 26 RU for Ant. 1	100.00	-	-	10Hz	0.00
1+2	802.11ax40 Full RU for Ant. 1	100.00	-	-	10Hz	0.00
1+2	802.11ax40 Full RU for Ant. 2	100.00	-	-	10Hz	0.00



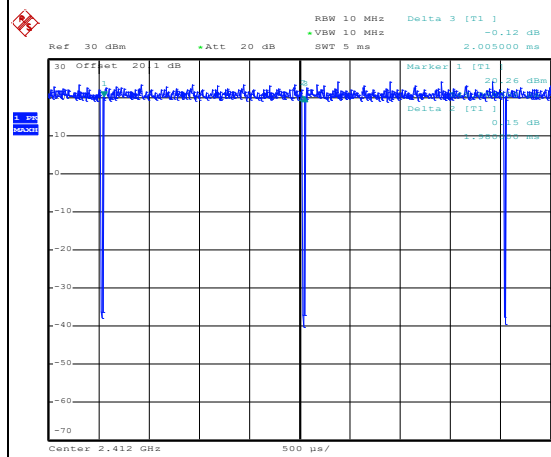
MIMO <Ant. 1>

802.11b



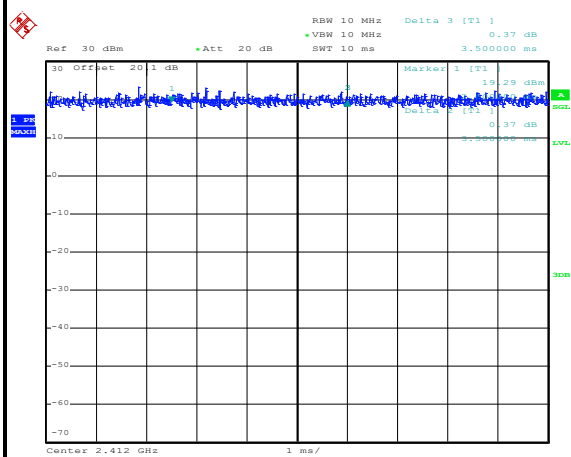
Date: 19.SEP.2020 11:05:01

802.11g



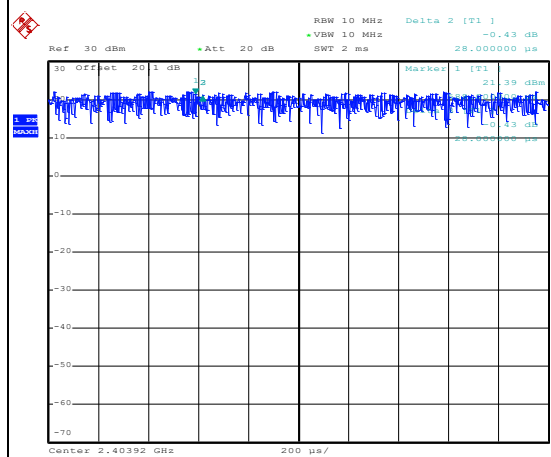
Date: 19.SEP.2020 11:20:36

802.11ax HE20 Full RU



Date: 19.SEP.2020 12:05:24

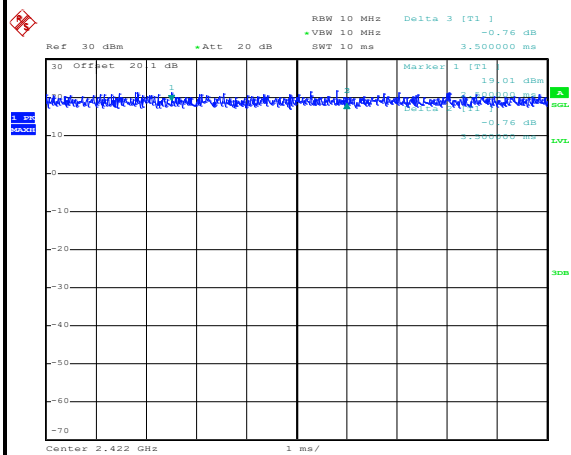
802.11ax HE20 26 RU



Date: 23.SEP.2020 23:51:15



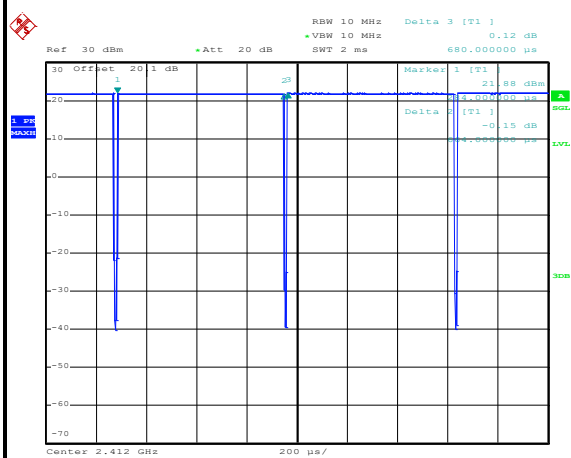
802.11ax HE40 Full RU



Date: 19.SEP.2020 12:30:03

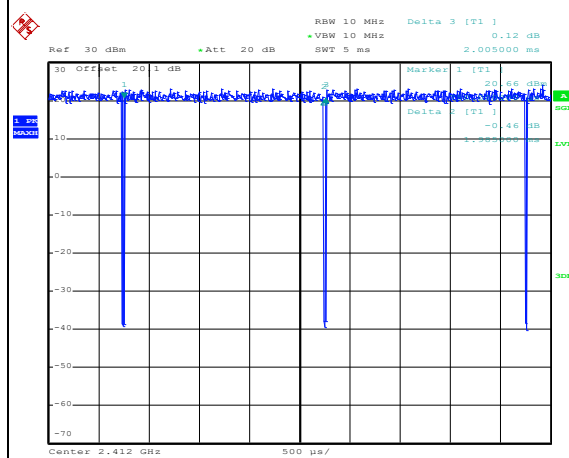
MIMO <Ant. 2>

802.11b



Date: 19.SEP.2020 11:06:03

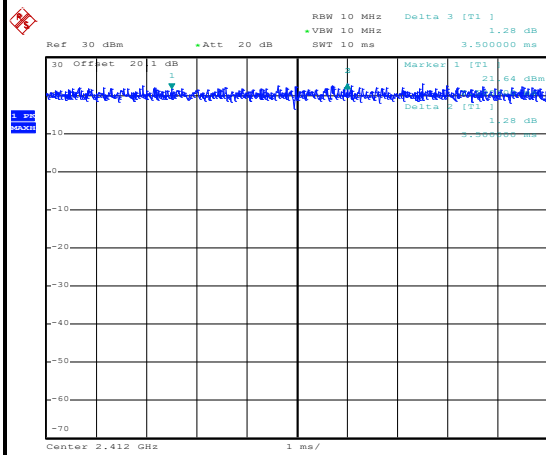
802.11g



Date: 19.SEP.2020 11:21:18

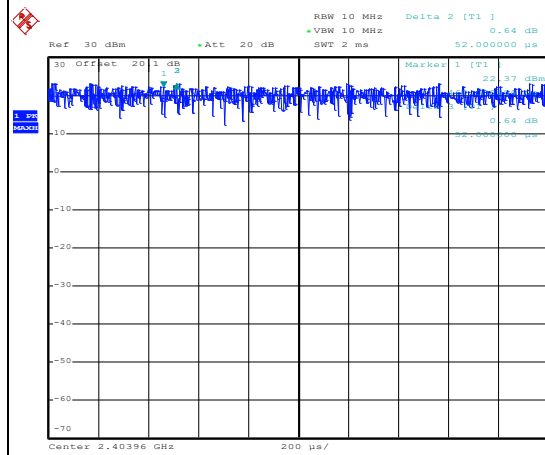


802.11ax HE20 Full RU



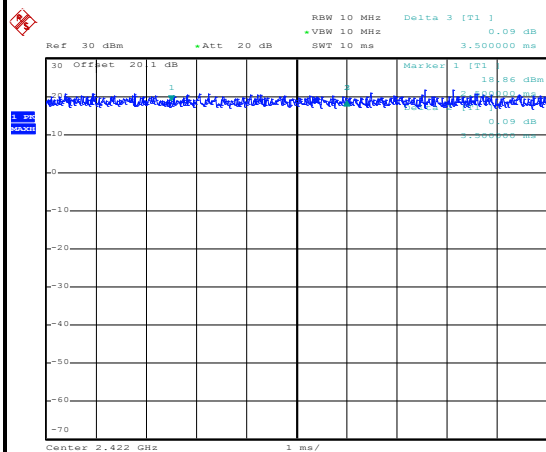
Date: 19.SEP.2020 12:06:04

802.11ax HE20 26 RU



Date: 23.SEP.2020 23:54:12

802.11ax HE40 Full RU



Date: 19.SEP.2020 12:30:42