



# FCC RADIO TEST REPORT

**FCC ID** : B94HNC05C4TKR  
**Equipment** : Convertible PC  
**Brand Name** : HP  
**Model Name** : HSN-C05C-4  
**Applicant** : HP Inc.  
3390 East Harmony Road, Fort Collins,  
Colorado, United States 80528  
**Standard** : FCC 47 CFR Part 2, Part 27(D)

The product was received on Mar. 31, 2020 and testing was started from Apr. 27, 2020 and completed on May 16, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	6
1.3 Testing Site.....	7
1.4 Applied Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system .....	9
2.4 Frequency List of Low/Middle/High Channels .....	9
<b>3 Radiated Test Items .....</b>	<b>10</b>
3.1 Measuring Instruments .....	10
3.2 Radiated Spurious Emission Measurement .....	12
<b>4 List of Measuring Equipment.....</b>	<b>13</b>
<b>5 Uncertainty of Evaluation .....</b>	<b>14</b>

### Appendix A. Test Results of Radiated Test



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	§2.1046	Conducted Output Power and Effective Isotropic Radiated Power	-	See Note
-	-	Peak-to-Average Ratio	-	See Note
-	§27.50 (a)(3)	EIRP Power Density	-	See Note
-	§2.1049	Occupied Bandwidth	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	-	See Note
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	-	See Note
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	-	See Note
3.2	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	Pass	Under limit 4.33 dB at 6918.000 MHz

**Note:** The module (Model: T99W175) makes no difference after verifying output power, this report reuses test data from the module report.

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Tina Chuang



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, and GNSS.

Product Specification subjective to this standard	
<b>WWAN Module</b>	Brand Name: FOXCONN Model Name: T99W175
<b>Antenna Type</b>	WWAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna (Rx only) <Ant. 3>: PIFA Antenna <Ant. 4>: PIFA Antenna (Rx only) WLAN <Ant. 1>: PIFA Antenna <Ant. 2>: PIFA Antenna Bluetooth: PIFA Antenna GPS/Glonass/BDS/Galileo: PIFA Antenna NFC: Loop Antenna

WWAN Antenna Information NB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna AUP6Y-100015 (DC33002DS00)	AWAN	PIFA	824-849MHz -1.42 dBi (peak)
			880-915MHz -1.89 dBi (peak)
			1710-1785MHz -1.67 dBi (peak)
			1850-1910MHz -2.43 dBi (peak)
			1920-1980MHz -1.44 dBi (peak)
			704-716MHz -1.25 dBi (peak)
			746-756MHz -2.26 dBi (peak)
			777-787MHz -1.63 dBi (peak)
			832-862MHz -1.45 dBi (peak)
			1710-1755MHz -1.54 dBi (peak)
			2305-2315MHz -2.12 dBi (peak)
			2570-2620MHz -3.68 dBi (peak)
			2300-2400MHz -0.94 dBi (peak)
			2500-2570MHz -2.12 dBi (peak)
			3400-3600MHz -2.05 dBi (peak)
MIMO3 Antenna AXP6Y-100004 (DC33002DS30)	AWAN	PIFA	3600-3800MHz -2.99 dBi (peak)
			5150-5925MHz -0.62 dBi (peak)
			1710-1785MHz 0.95 dBi (peak)
			1805-1880MHz 0.34 dBi (peak)
			1850-1915MHz 1.39 dBi (peak)
			1920-1980MHz 0.13 dBi (peak)
			1930-1995MHz 0.18 dBi (peak)
			2110-2200MHz -0.91 dBi (peak)
			2300-2400MHz -0.40 dBi (peak)
			2496-2690MHz -1.10 dBi (peak)
			3300-4200MHz -1.9 dBi (peak)



WWAN Antenna Information TB Mode			
Antenna Part Number	Manufacture	Antenna Type	Peak Gain (dBi)
Tx1 Main Antenna AUP6Y-100015 (DC33002DS00)	AWAN	PIFA	824-849MHz -4.39 dBi (peak)
			880-915MHz -4.51 dBi (peak)
			1710-1785MHz -2.98 dBi (peak)
			1850-1910MHz -1.38 dBi (peak)
			1920-1980MHz 0.48 dBi (peak)
			704-716MHz -4.33 dBi (peak)
			746-756MHz -4.97 dBi (peak)
			777-787MHz -2.02 dBi (peak)
			832-862MHz -4.63 dBi (peak)
			1710-1755MHz -2.76 dBi (peak)
			2305-2315MHz -2.14 dBi (peak)
			2570-2620MHz -3.23 dBi (peak)
			2300-2400MHz -1.13dBi (peak)
			2500-2570MHz -2.04 dBi (peak)
			3400-3600MHz -1.46 dBi (peak)
			3600-3800MHz -2.45 dBi (peak)
			5150-5925MHz 1.39 dBi (peak)
MIMO3 Antenna AXP6Y-100004 (DC33002DS30)	AWAN	PIFA	1710-1785MHz -0.49 dBi (peak)
			1805-1880MHz -2.07 dBi (peak)
			1850-1915MHz -1.56 dBi (peak)
			1920-1980MHz -3.04 dBi (peak)
			1930-1995MHz -3.52 dBi (peak)
			2110-2200MHz -4.53 dBi (peak)
			2300-2400MHz -0.83 dBi (peak)
			2496-2690MHz -2.22 dBi (peak)
			3300-4200MHz -4.87 dBi (peak)

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> 03CH12-HY
<b>Test Engineer</b>	Jack Cheng, Lance Chiang and Chuan Chu
<b>Temperature</b>	19~22°C
<b>Relative Humidity</b>	52~60%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No. TW0007

### 1.4 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA-603-E
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168

D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in Tablet Mode (three orthogonal panels, X, Y, Z) and Notebook Mode. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Radiated Spurious Emission	30			<b>V</b>	<b>V</b>		-	<b>V</b>			<b>V</b>			<b>V</b>	<b>V</b>	<b>V</b>
<b>Remark</b> 1. The mark "V" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.																

### 2.2 Connection Diagram of Test System

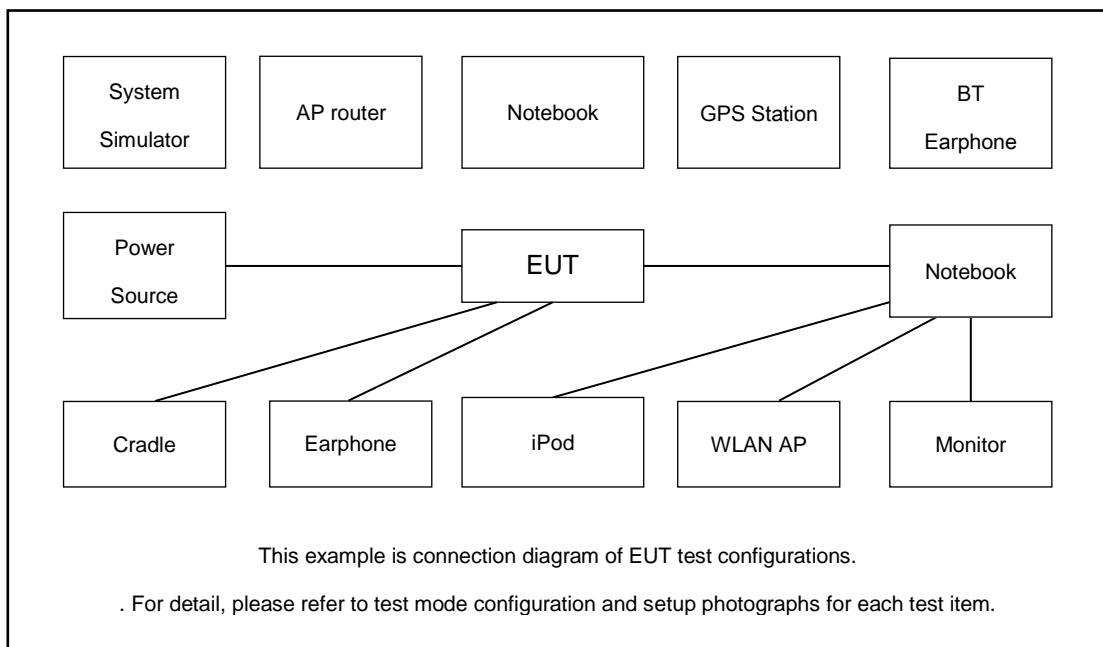



## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

## 2.4 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)		Lowest	Middle	Highest
10	Channel		-	27710	-
	Frequency		-	2310	-
5	Channel		27685	27710	27735
	Frequency		2307.5	2310	2312.5


### 3 Radiated Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


For radiated emissions below 30MHz

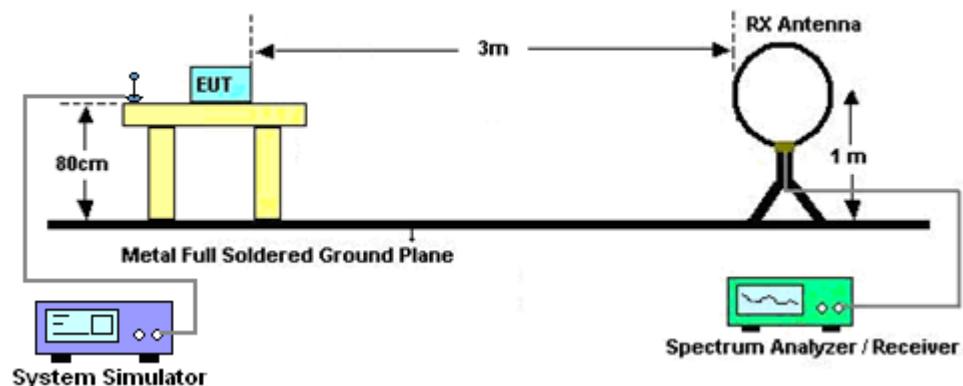

For radiated test from 30MHz to 1GHz

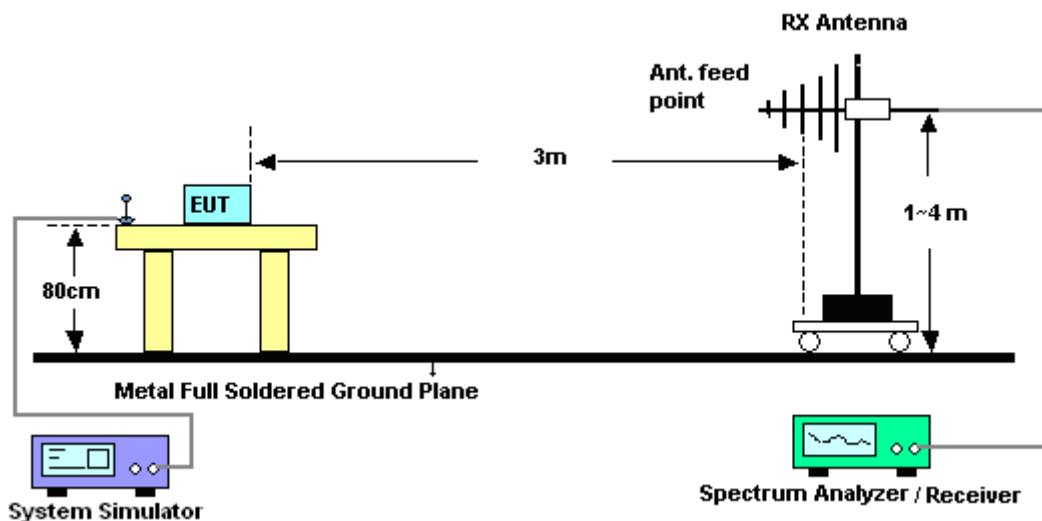

## For radiated test above 1GHz

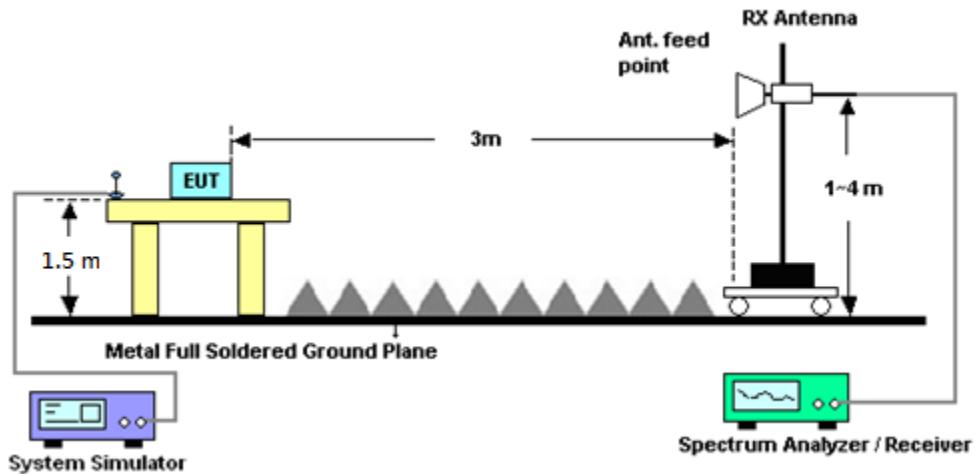

### 3.1.2 Test Result of Radiated Test

Please refer to Appendix A.

**Note:**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



## 3.2 Radiated Spurious Emission Measurement

### 3.2.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $70 + 10 \log(P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 3.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

1. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $70 + 10\log(P)$  dB below the transmitter power P(Watts)

$$= P(\text{W}) - [70 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$

$$= -40 \text{ dBm.}$$



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Dec. 26, 2019	Apr. 27, 2020~May 16, 2020	Dec. 25, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01 N-06	37059 & 01	30MHz~1GHz	Oct. 12, 2019	Apr. 27, 2020~May 16, 2020	Oct 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 14, 2019	Apr. 27, 2020~May 16, 2020	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1522	1GHz ~ 18GHz	Sep. 19, 2019	Apr. 27, 2020~May 16, 2020	Sep. 18, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 584	18GHz ~ 40GHz	Dec. 10, 2019	Apr. 27, 2020~May 16, 2020	Dec. 09, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 980	18GHz ~ 40GHz	Jan. 10, 2019	Apr. 27, 2020~May 16, 2020	Jan. 09, 2021	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2020	Apr. 27, 2020~May 16, 2020	Mar. 24, 2021	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800 -30-10P	1601180002	1GHz~18GHz	Feb. 07, 2020	Apr. 27, 2020~May 16, 2020	Feb. 06, 2021	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Apr. 27, 2020~May 16, 2020	Dec. 12, 2020	Radiation (03CH12-HY)
Preamplifier	Keysight	83017A	MY532701 48	1GHz~26.5GHz	Dec. 20, 2019	Apr. 27, 2020~May 16, 2020	Dec. 19, 2020	Radiation (03CH12-HY)
Signal Analyzer	Agilent	N9010A	MY534701 18	10Hz~44GHz	Mar. 12, 2020	Apr. 27, 2020~May 16, 2020	Mar. 11, 2021	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Apr. 27, 2020~May 16, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Dec. 12, 2019	Apr. 27, 2020~May 16, 2020	Dec. 11, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 25, 2020	Apr. 27, 2020~May 16, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 25, 2020	Apr. 27, 2020~May 16, 2020	Feb. 24, 2021	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 27, 2020~May 16, 2020	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 27, 2020~May 16, 2020	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 27, 2020~May 16, 2020	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Apr. 27, 2020~May 16, 2020	N/A	Radiation (03CH12-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.24
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.62
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.06
---	------



## Appendix A. Test Results of Radiated Test

### LTE Band 30

LTE Band 30 / 5MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4611	-53.18	-40	-13.18	-46.7	-64.40	1.45	12.68	H
	6916	-48.61	-40	-8.61	-48.83	-58.90	1.73	12.02	H
	9221	-59.15	-40	-19.15	-61.98	-68.77	2.16	11.78	H
	11527	-56.03	-40	-16.03	-59.45	-65.16	2.45	11.58	H
	4611	-56.83	-40	-16.83	-49.57	-68.05	1.45	12.68	V
	6916	-51.70	-40	-11.70	-51.48	-61.99	1.73	12.02	V
	9221	-58.08	-40	-18.08	-61.9	-67.70	2.16	11.78	V
	11527	-58.41	-40	-18.41	-61.72	-67.54	2.45	11.58	V
Middle	4616	-55.97	-40	-15.97	-49.5	-67.19	1.46	12.68	H
	6924	-49.37	-40	-9.37	-49.64	-59.65	1.73	12.01	H
	9231	-59.15	-40	-19.15	-61.96	-68.76	2.16	11.77	H
	11539	-52.43	-40	-12.43	-55.86	-61.59	2.45	11.61	H
	4616	-60.10	-40	-20.10	-52.85	-71.32	1.46	12.68	V
	6924	-52.92	-40	-12.92	-52.74	-63.20	1.73	12.01	V
	9231	-57.82	-40	-17.82	-61.64	-67.43	2.16	11.77	V
	11539	-54.31	-40	-14.31	-57.66	-63.47	2.45	11.61	V
Highest	4621	-59.40	-40	-19.40	-52.96	-70.62	1.46	12.68	H
	6931	-49.62	-40	-9.62	-49.94	-59.89	1.73	12.00	H
	9241	-59.15	-40	-19.15	-61.93	-68.75	2.16	11.76	H
	11552	-50.21	-40	-10.21	-53.66	-59.40	2.46	11.65	H
	4621	-62.02	-40	-22.02	-54.8	-73.24	1.46	12.68	V
	6931	-51.92	-40	-11.92	-51.78	-62.19	1.73	12.00	V
	9241	-57.73	-40	-17.73	-61.54	-67.33	2.16	11.76	V
	11552	-53.54	-40	-13.54	-56.93	-62.73	2.46	11.65	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611	-49.00	-40	-9.00	-42.52	-60.22	1.45	12.68	H
	6917	-52.08	-40	-12.08	-52.3	-62.36	1.73	12.02	H
	9222	-59.28	-40	-19.28	-62.11	-68.90	2.16	11.78	H
	4614	-53.16	-40	-13.16	-45.9	-64.38	1.46	12.68	V
	6918	-44.33	-40	-4.33	-44.1	-54.61	1.73	12.01	V
	9222	-58.12	-40	-18.12	-61.94	-67.74	2.16	11.78	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————