

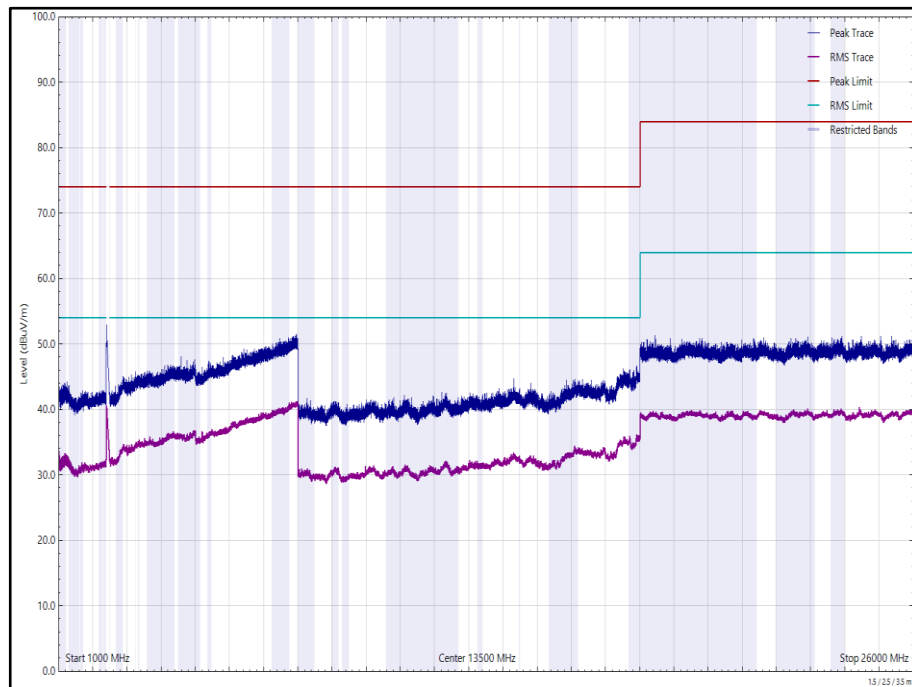


Figure 139 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

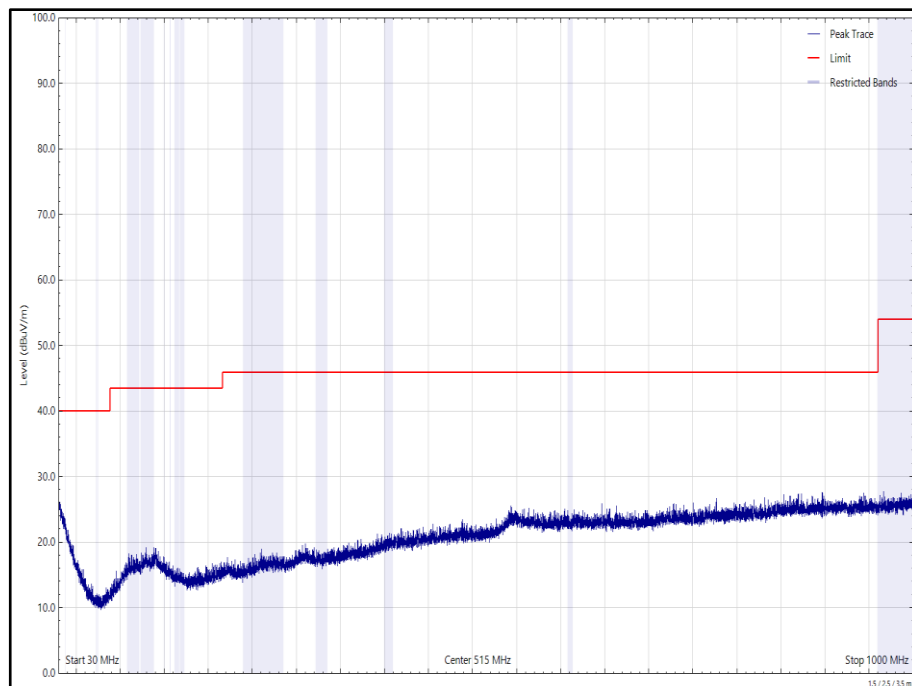


Figure 140 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

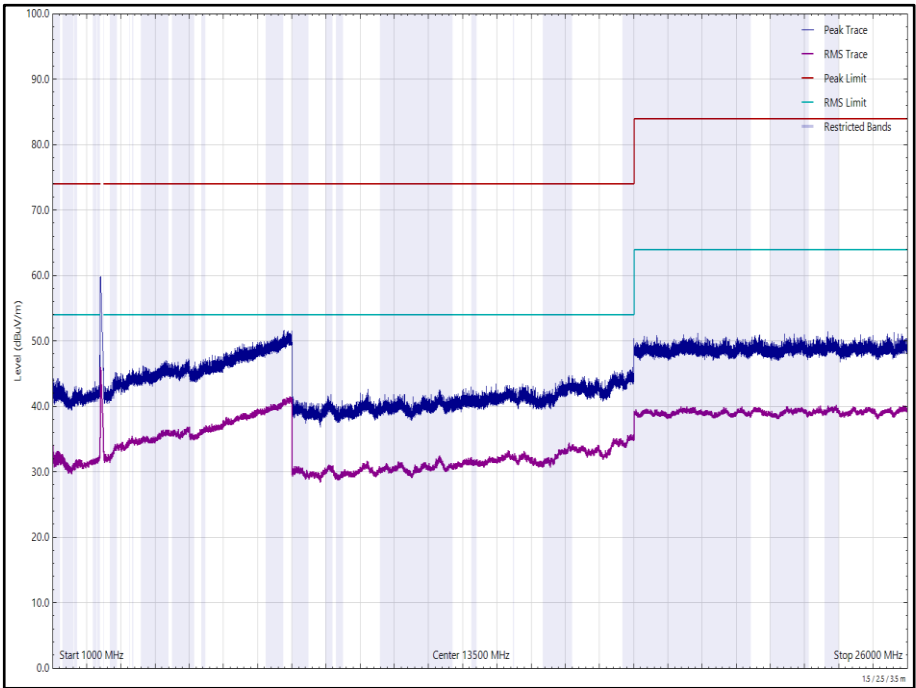


Figure 141 - 2437 MHz (CH6), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 63 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

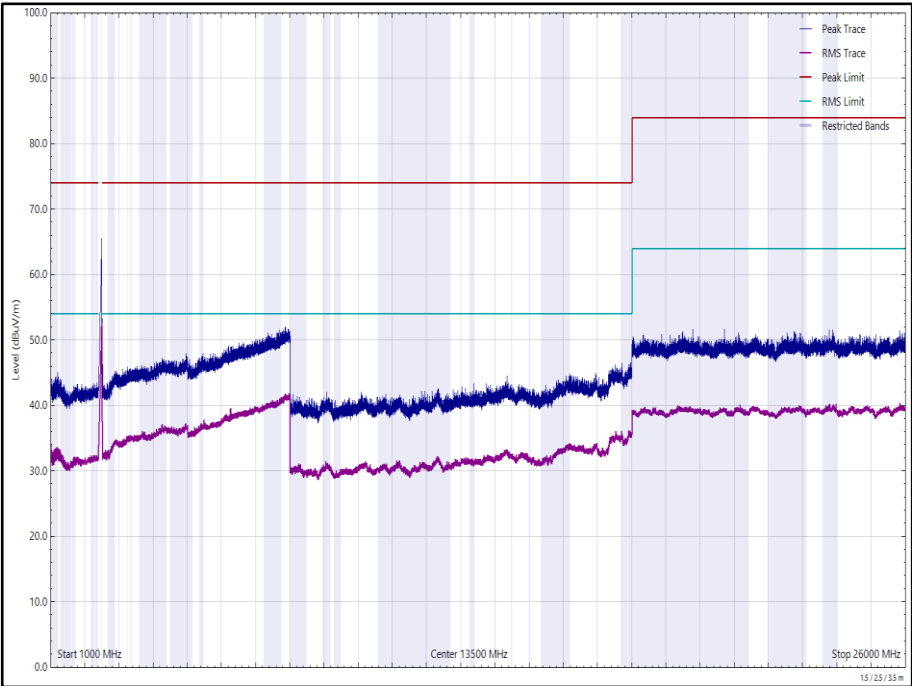


Figure 142 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

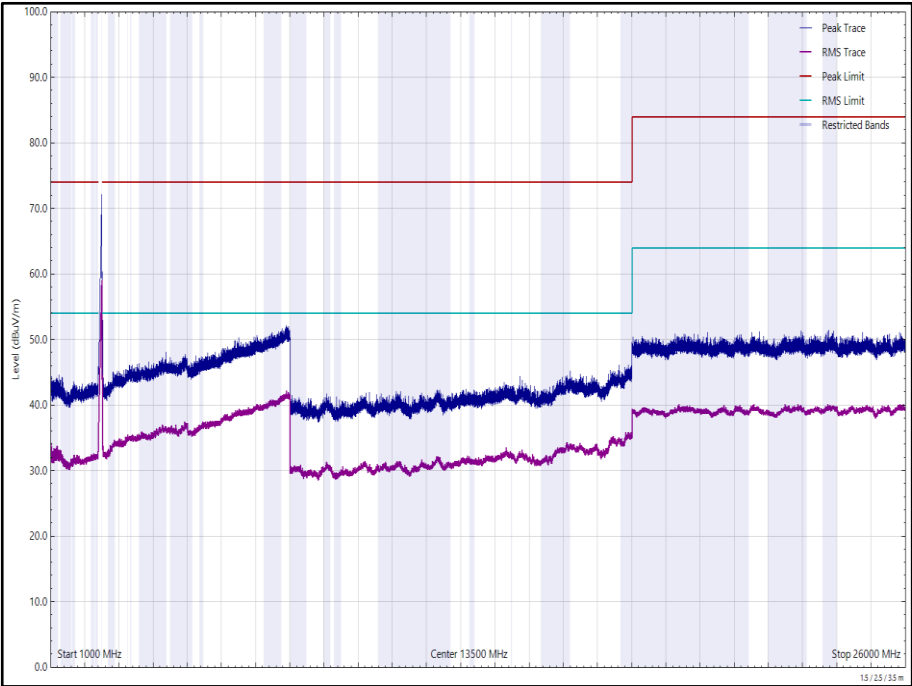


Figure 143 - 2472 MHz (CH13), HT20, CDD, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 64 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

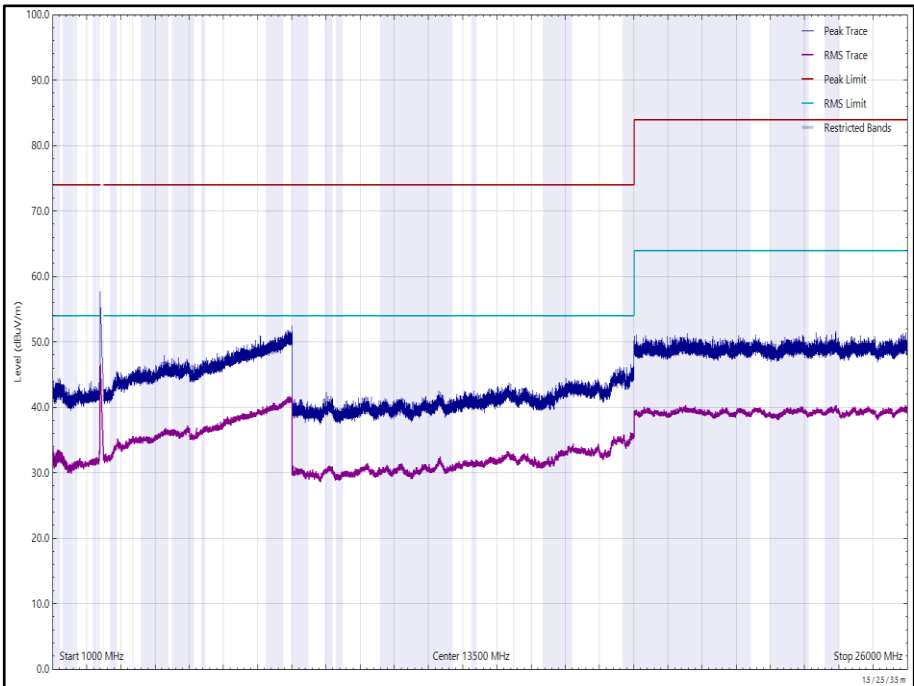


Figure 144 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

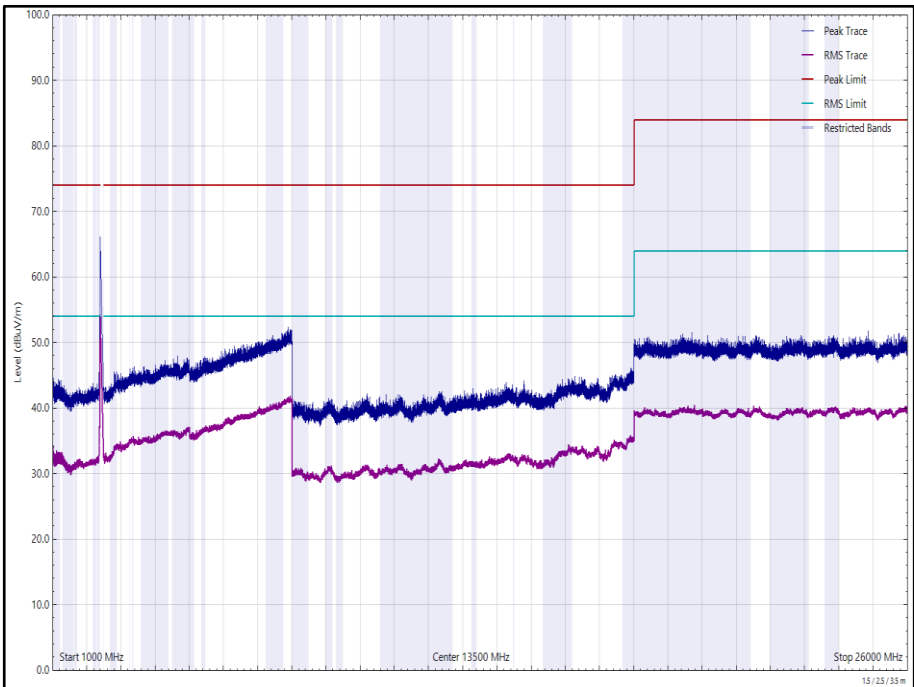


Figure 145 - 2412 MHz (CH1), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 65 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 26 GHz

*No emissions found within 6 dB of the limit.

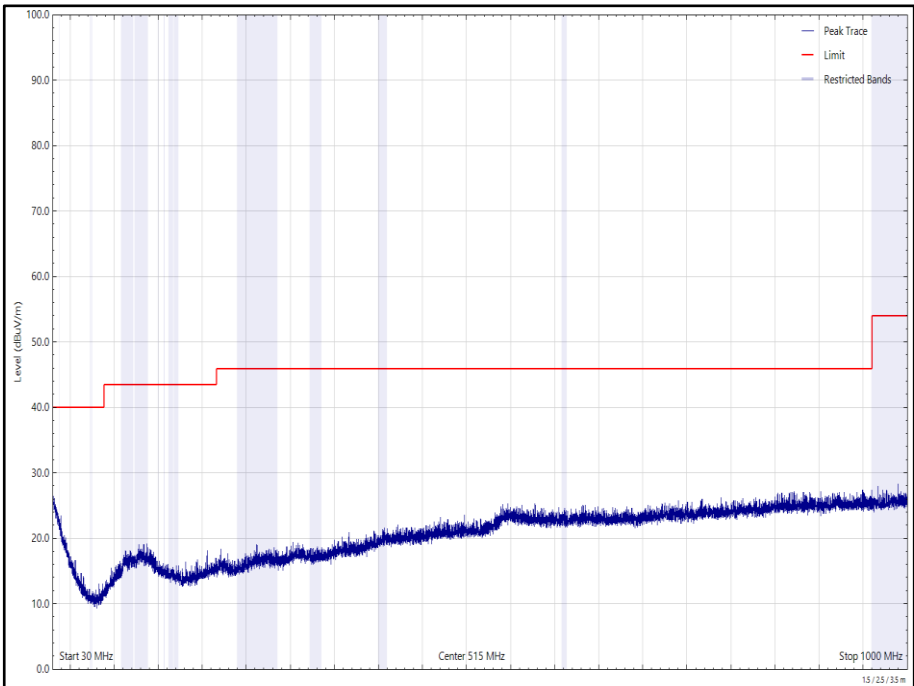


Figure 146 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

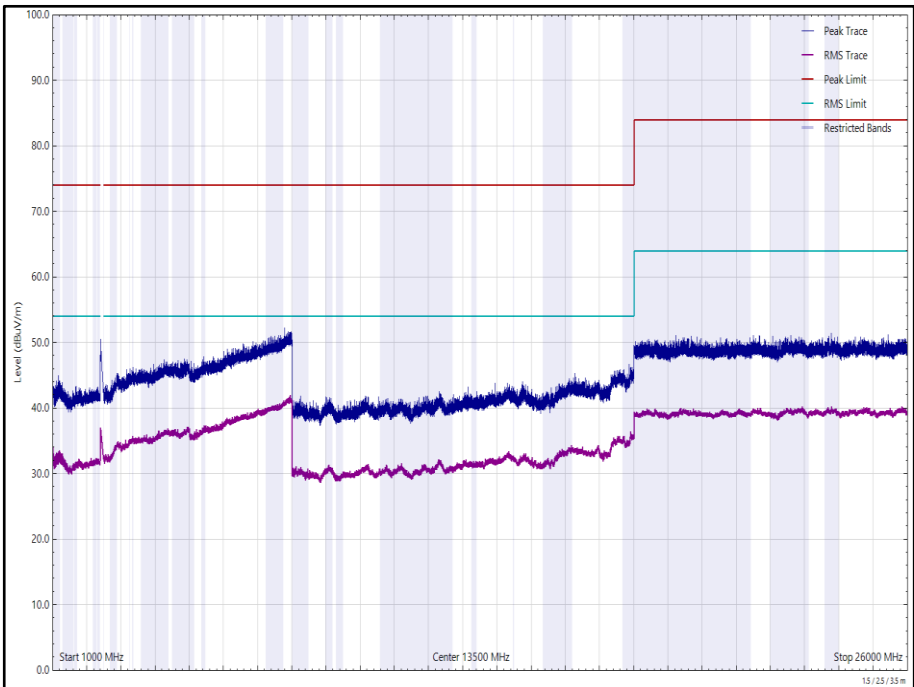


Figure 147 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

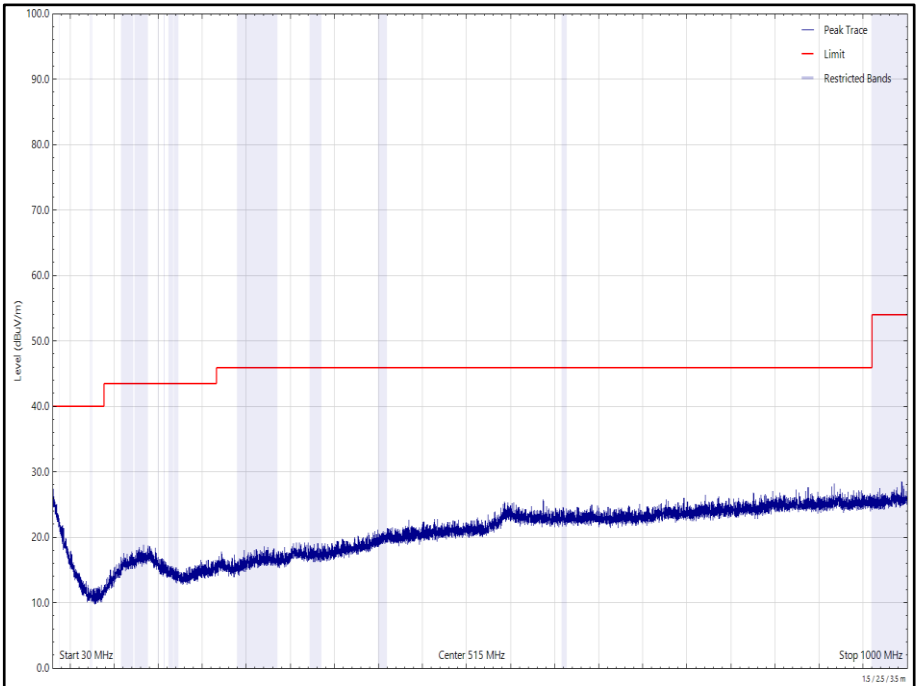


Figure 148 - 2437 MHz (CH6), 802.11g, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

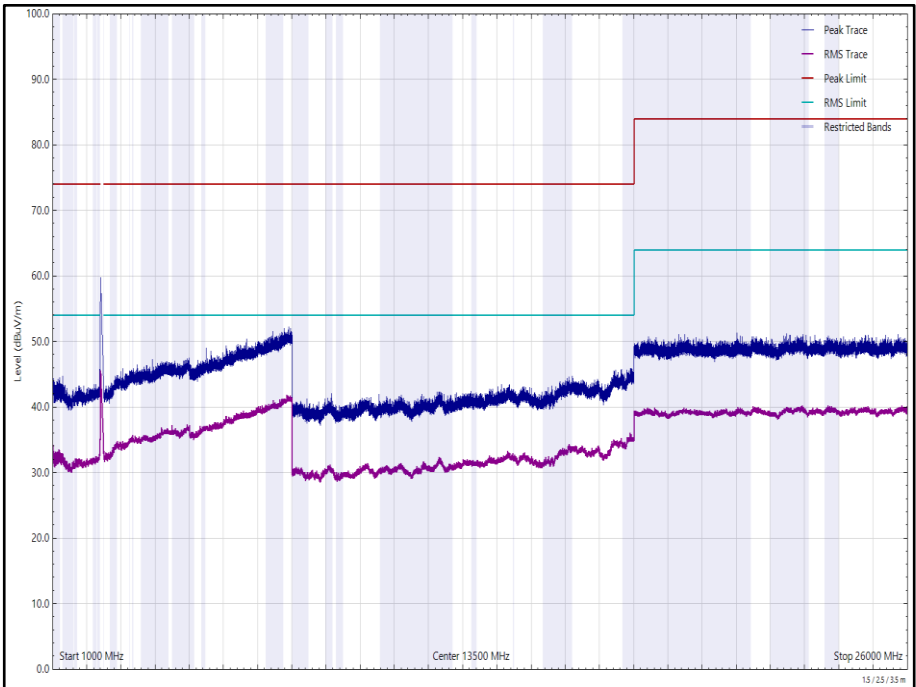


Figure 149 - 2437 MHz (CH6), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 66 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

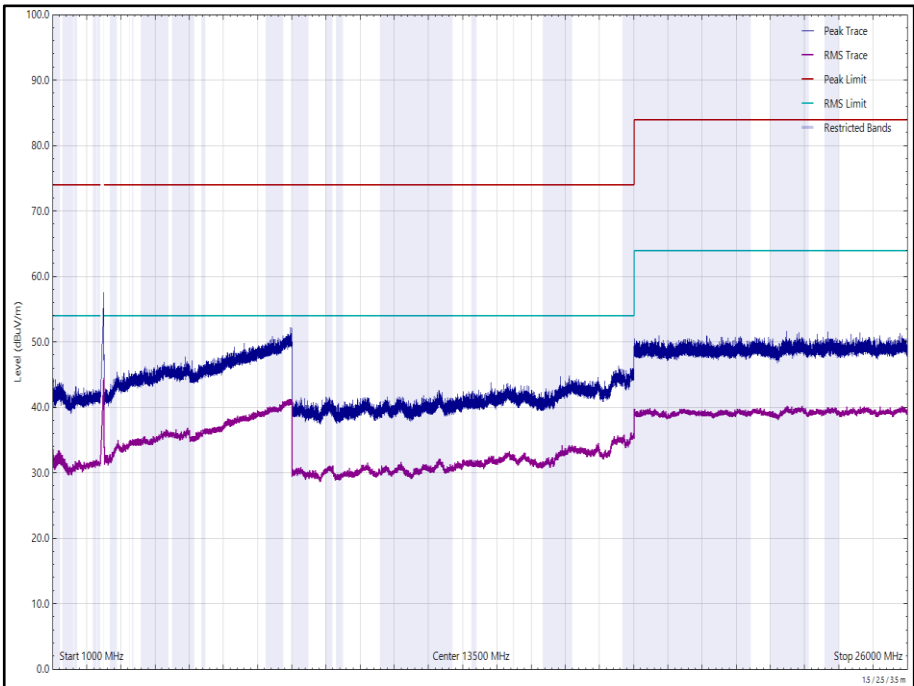


Figure 150 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Horizontal

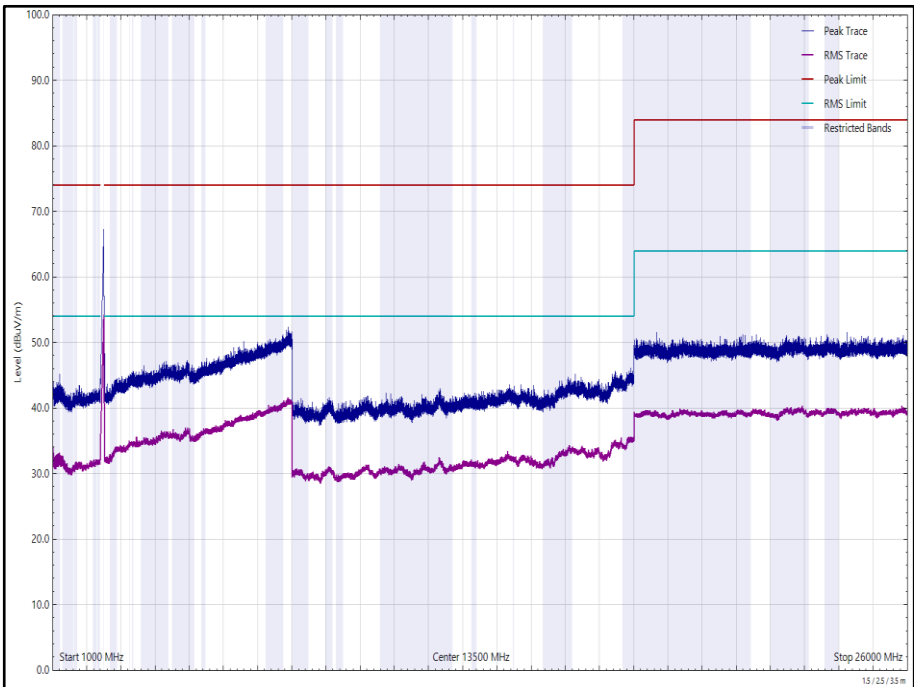


Figure 151 - 2472 MHz (CH13), 802.11g, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 67 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

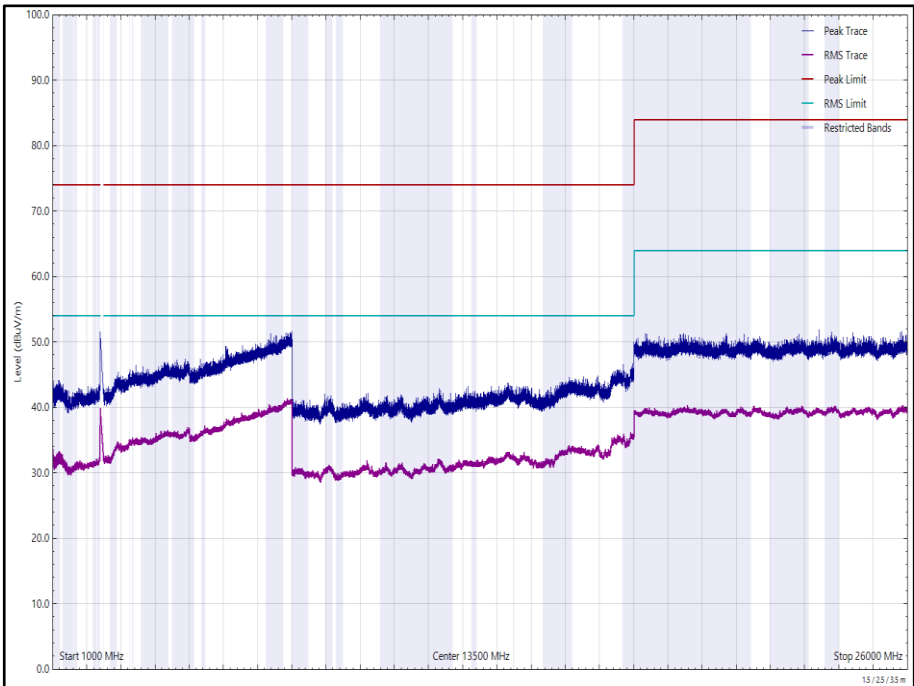


Figure 152 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

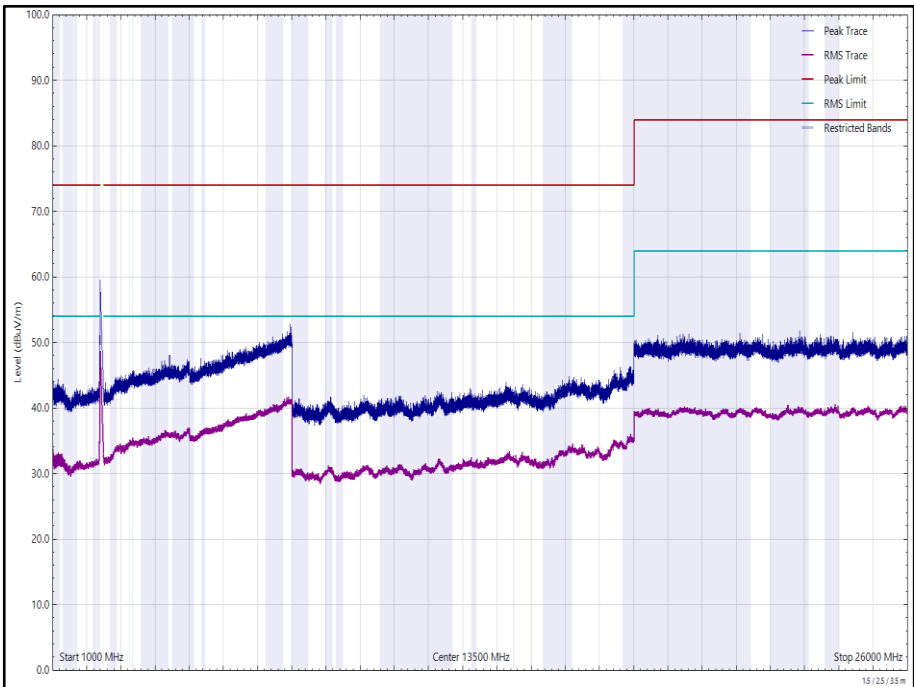


Figure 153 - 2412 MHz (CH1), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 68 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 26 GHz

*No emissions found within 6 dB of the limit.

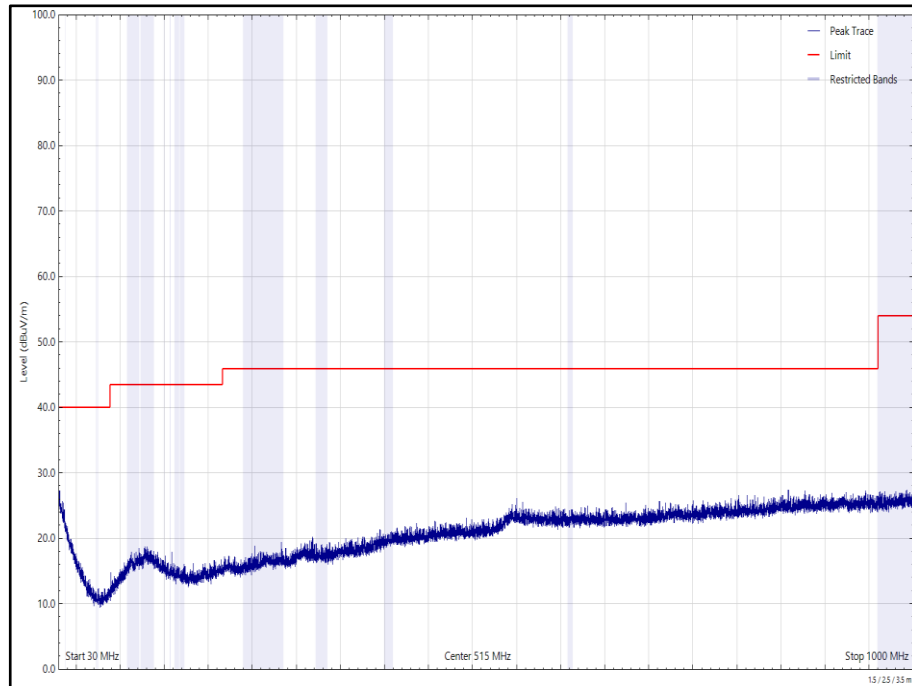


Figure 154 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

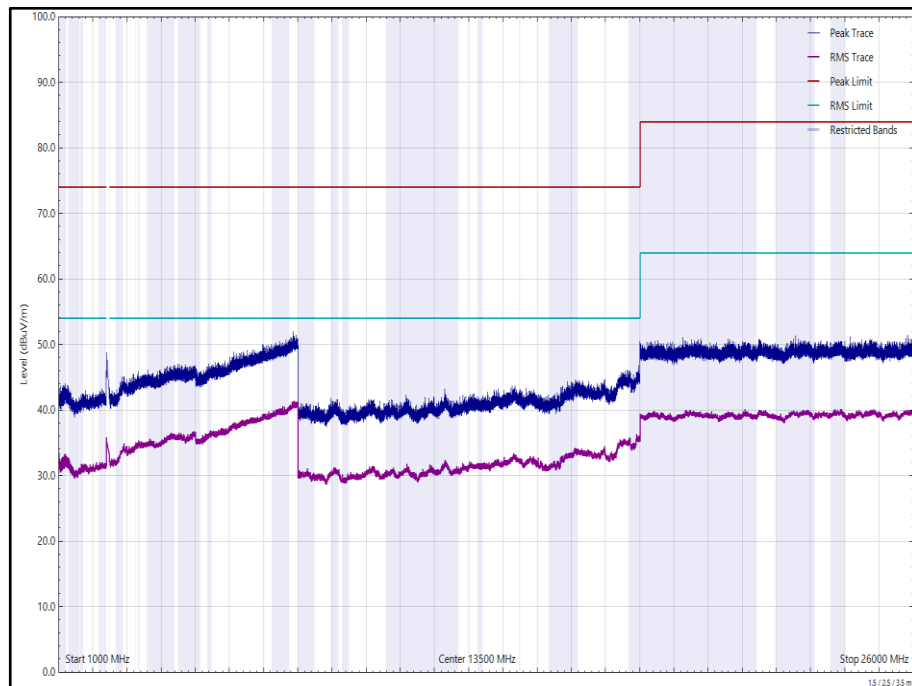


Figure 155 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

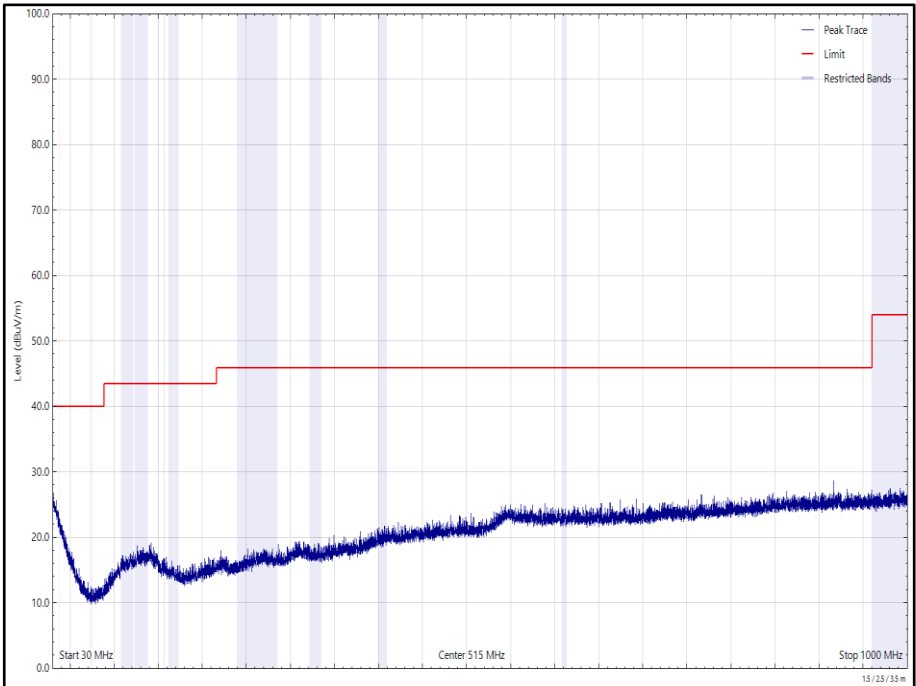


Figure 156 - 2437 MHz (CH6), 802.11g, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

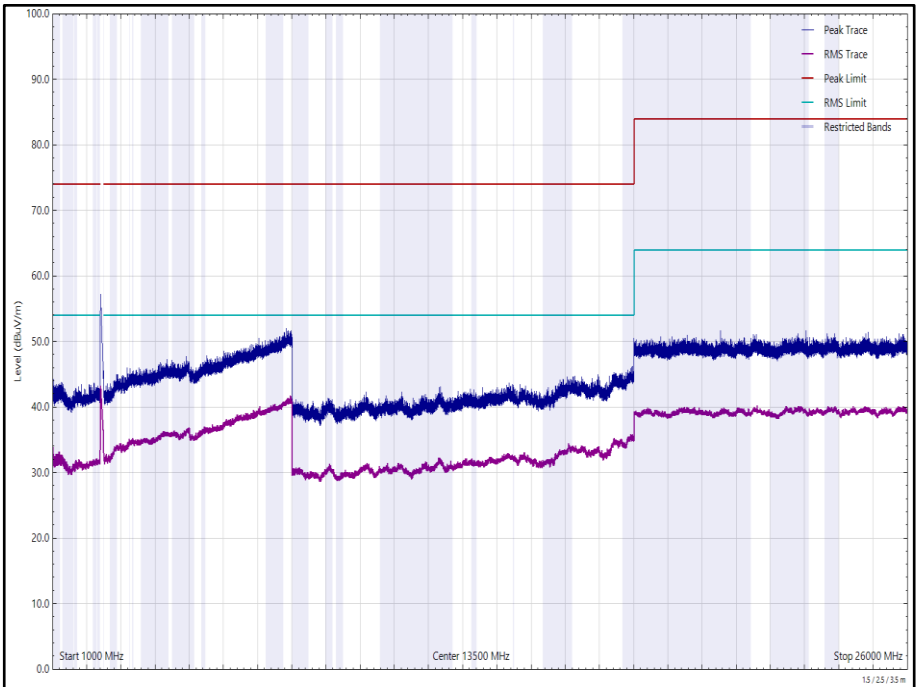


Figure 157 - 2437 MHz (CH6), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 69 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

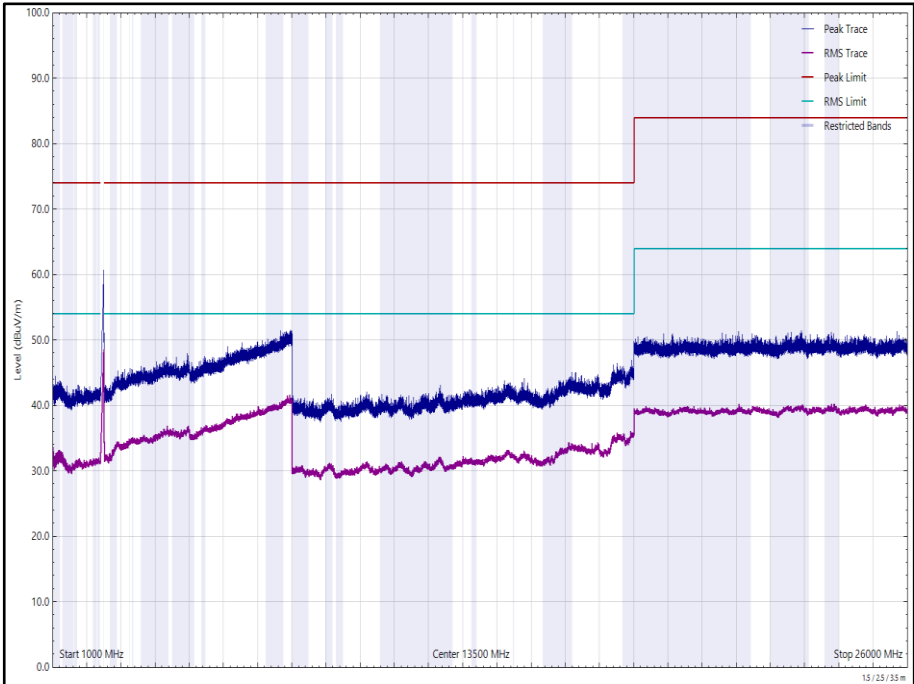


Figure 158 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Horizontal

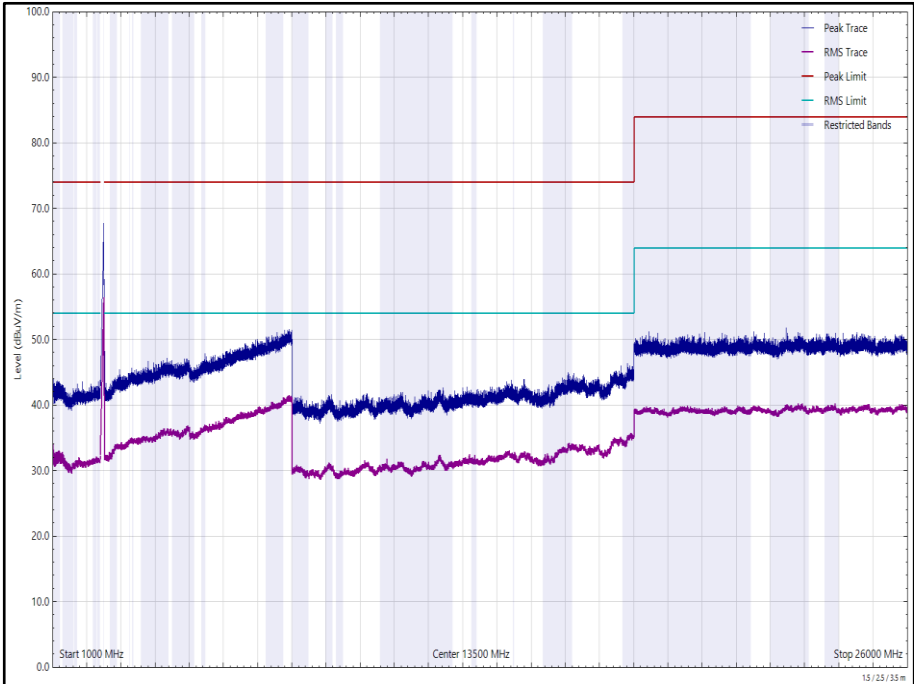


Figure 159 - 2472 MHz (CH13), 802.11g, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 70 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

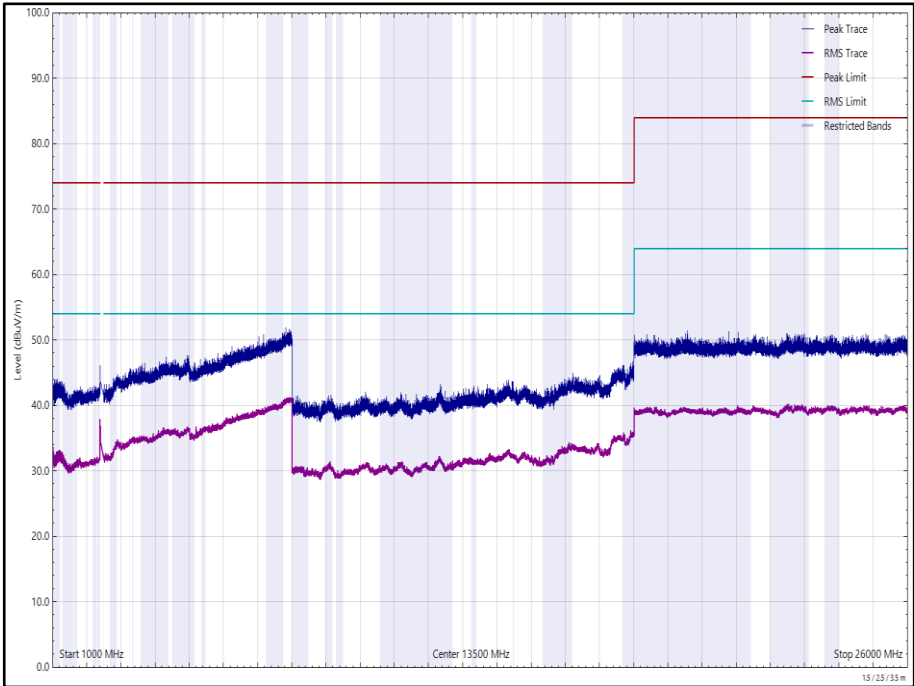


Figure 160 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal

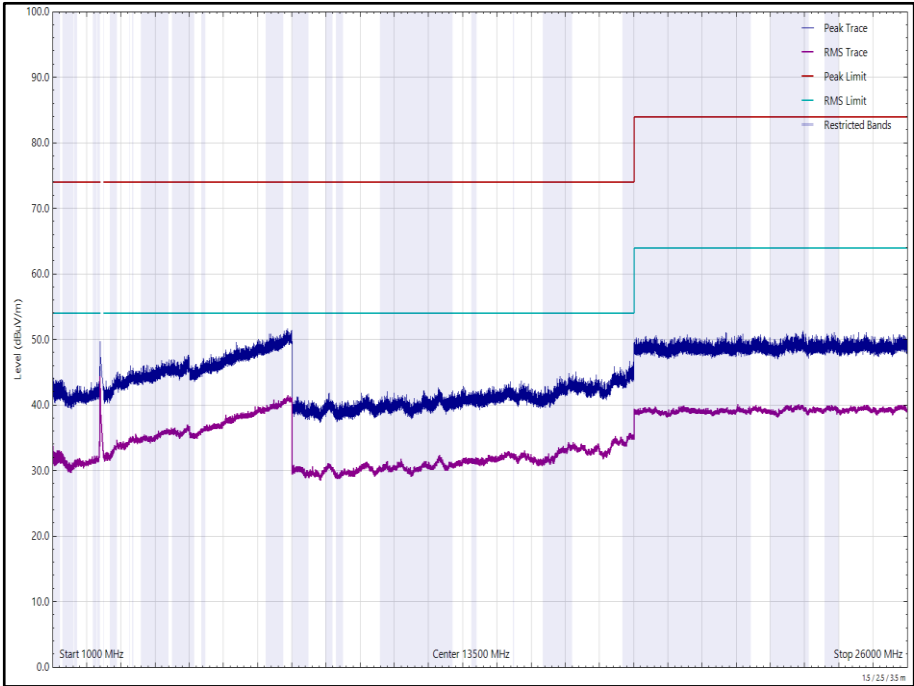


Figure 161 - 2412 MHz (CH1), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 71 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 26 GHz

*No emissions found within 6 dB of the limit.

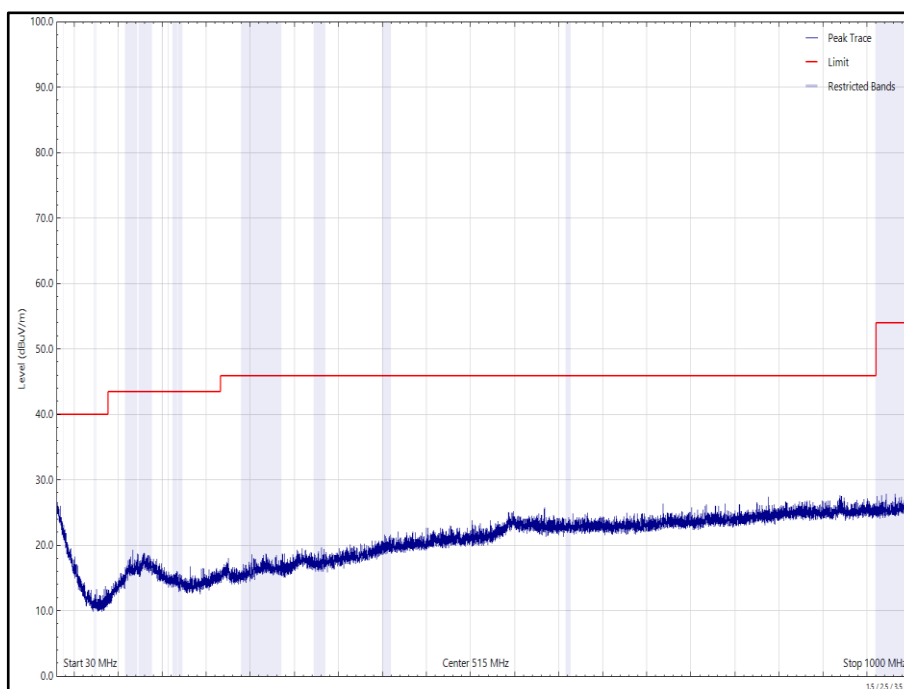


Figure 162 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 1 GHz, Horizontal (Peak)

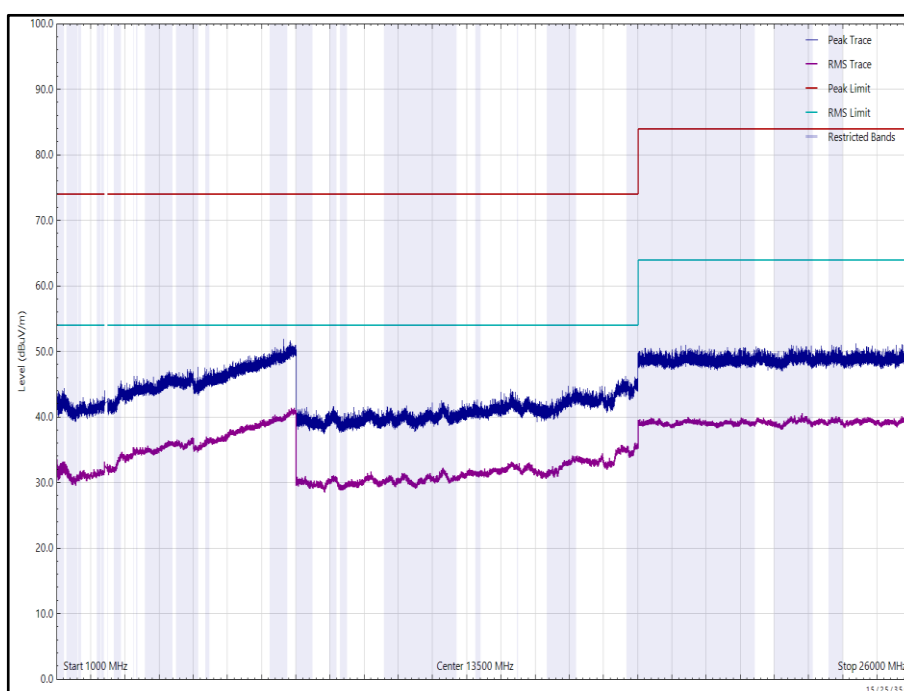


Figure 163 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal

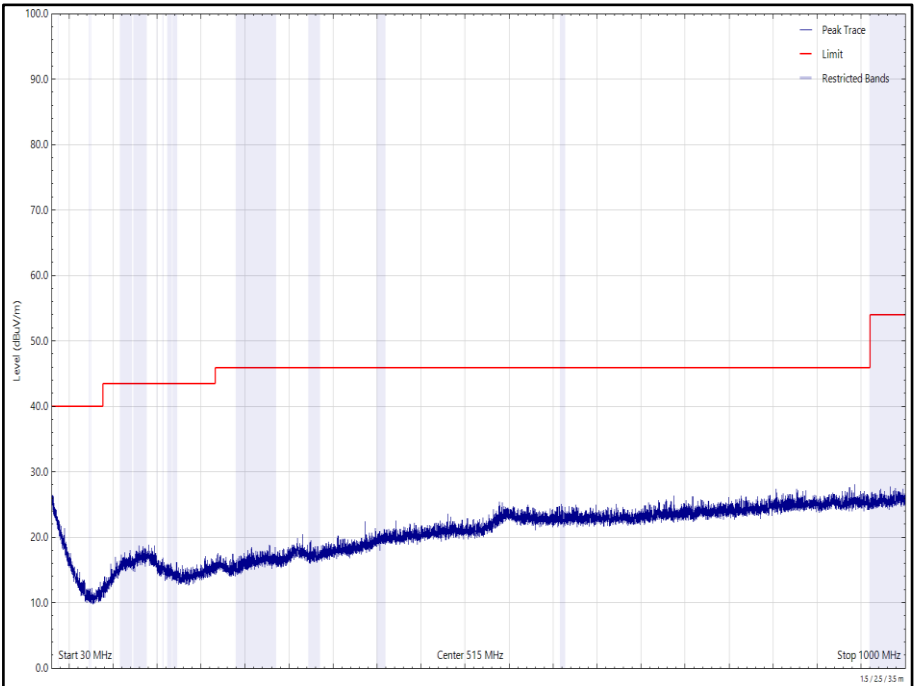


Figure 164 - 2437 MHz (CH6), 802.11b, Core 0, 30 MHz to 1 GHz, Vertical (Peak)

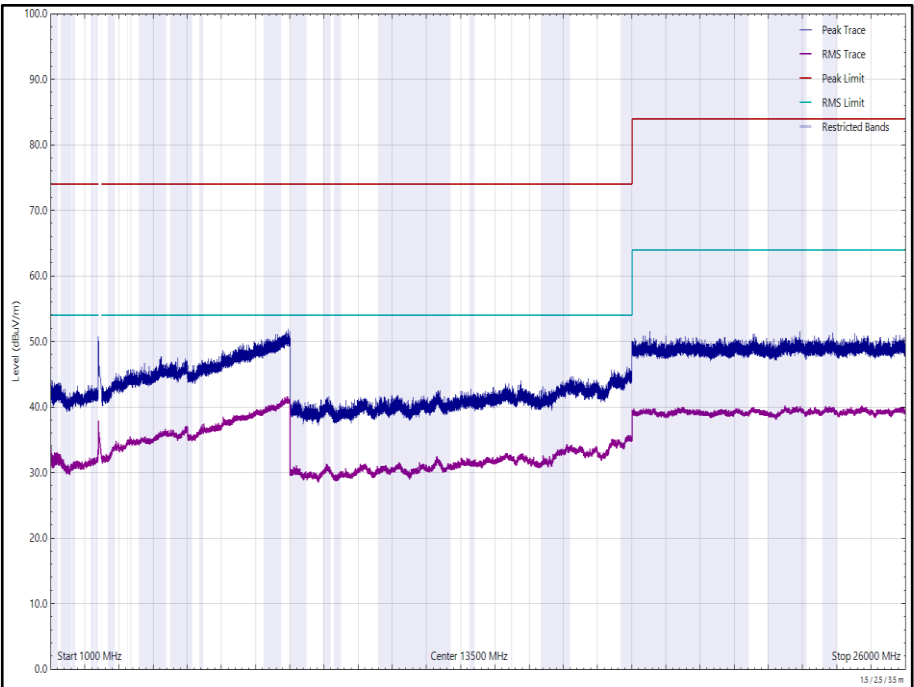


Figure 165 - 2437 MHz (CH6), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 72 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

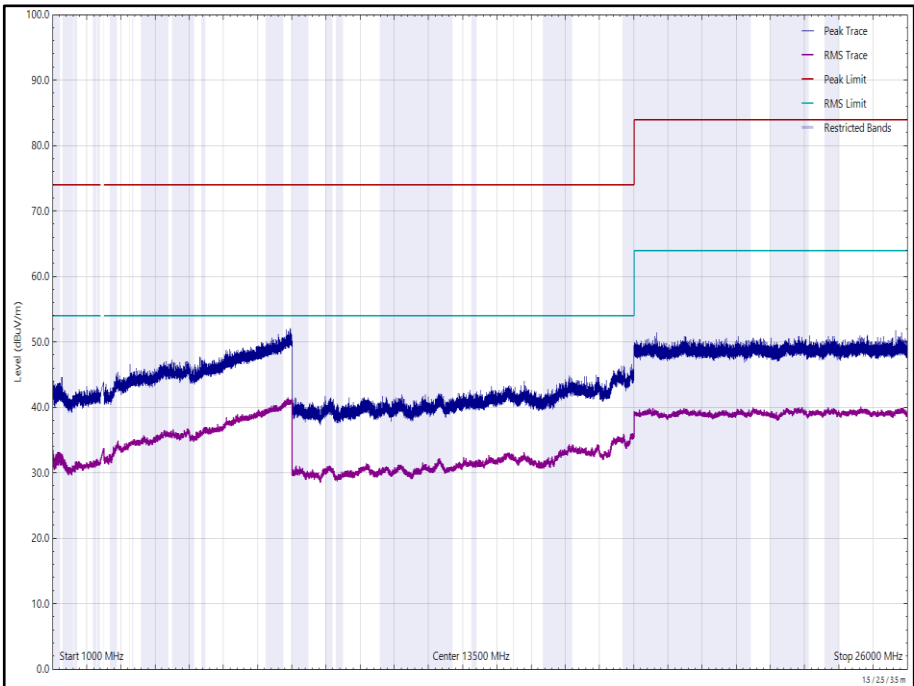


Figure 166 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Horizontal

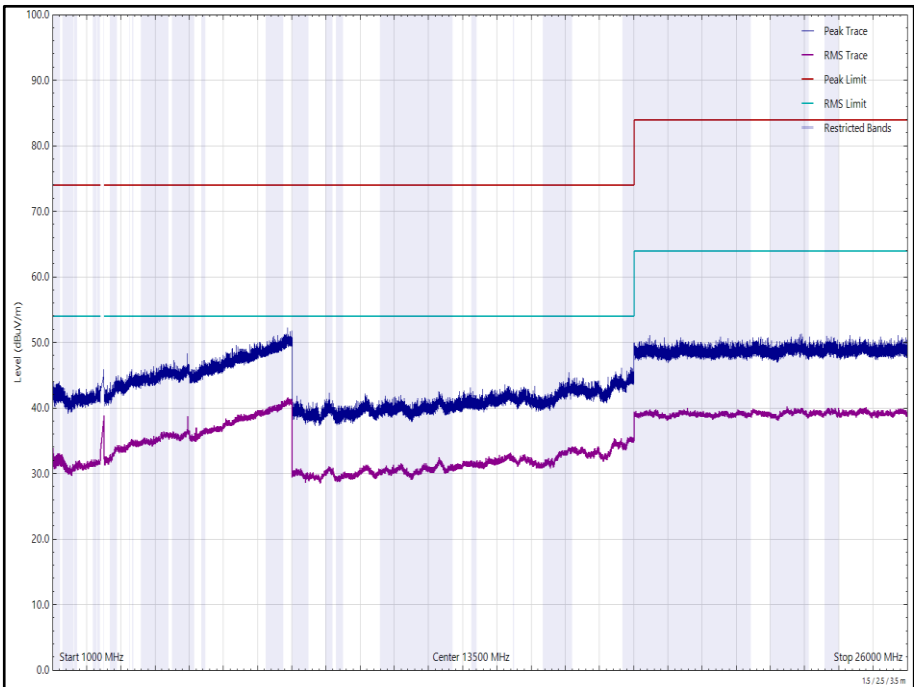


Figure 167 - 2472 MHz (CH13), 802.11b, Core 0, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 73 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

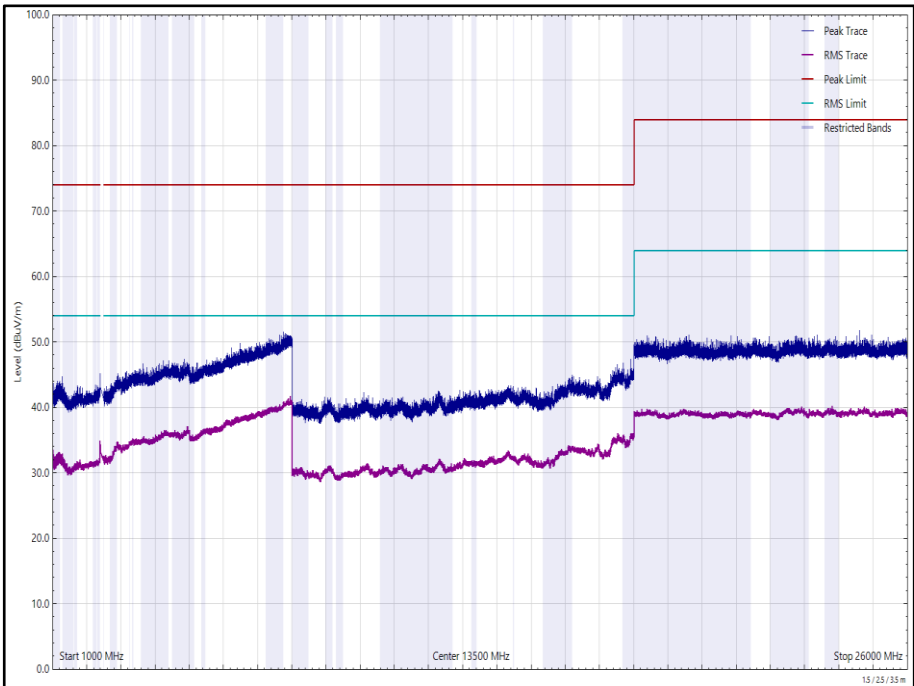


Figure 168 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

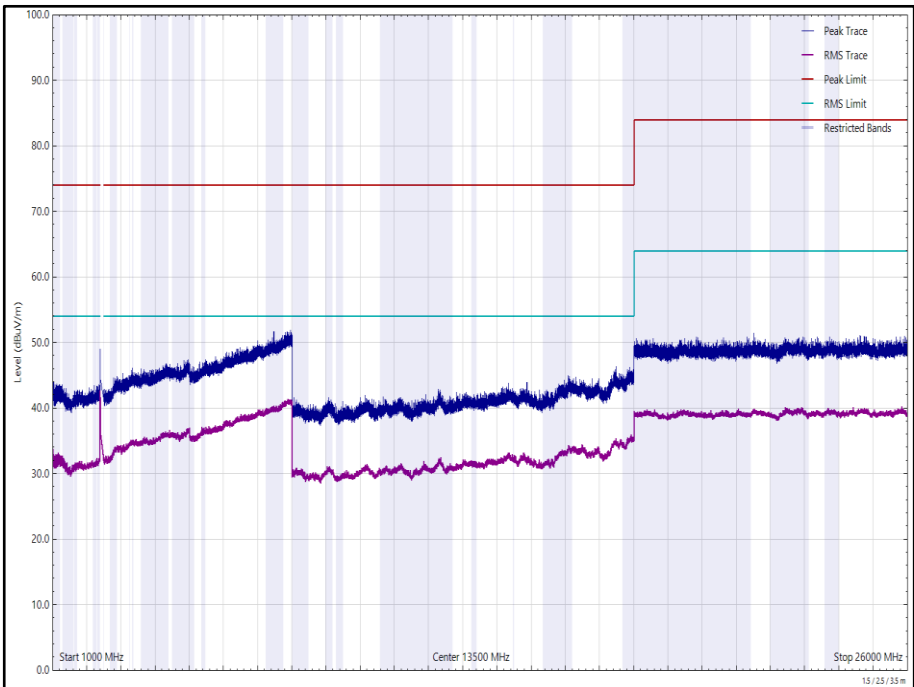


Figure 169 - 2412 MHz (CH1), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 74 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 26 GHz

*No emissions found within 6 dB of the limit.

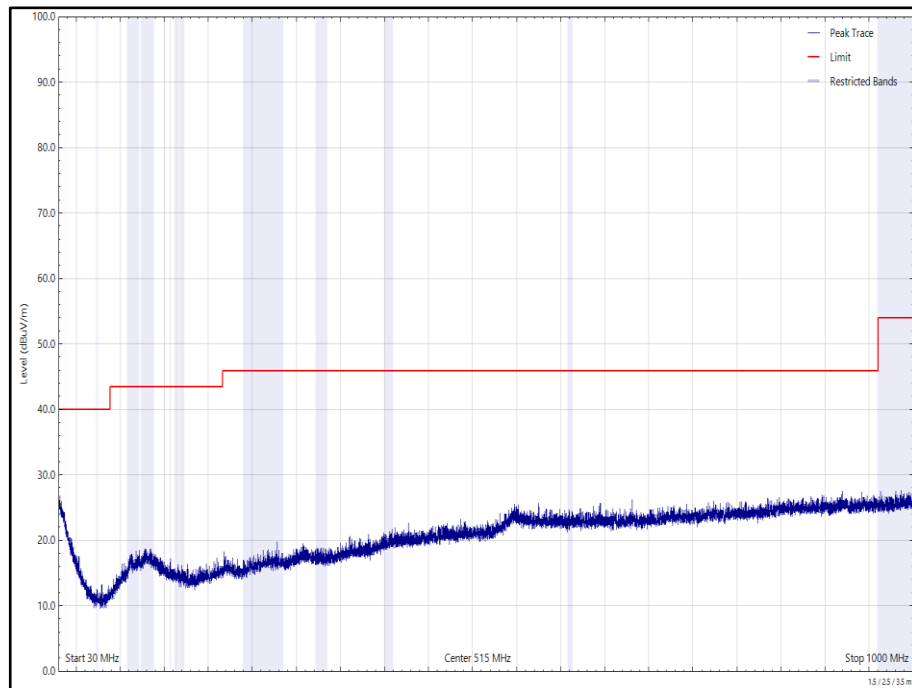


Figure 170 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

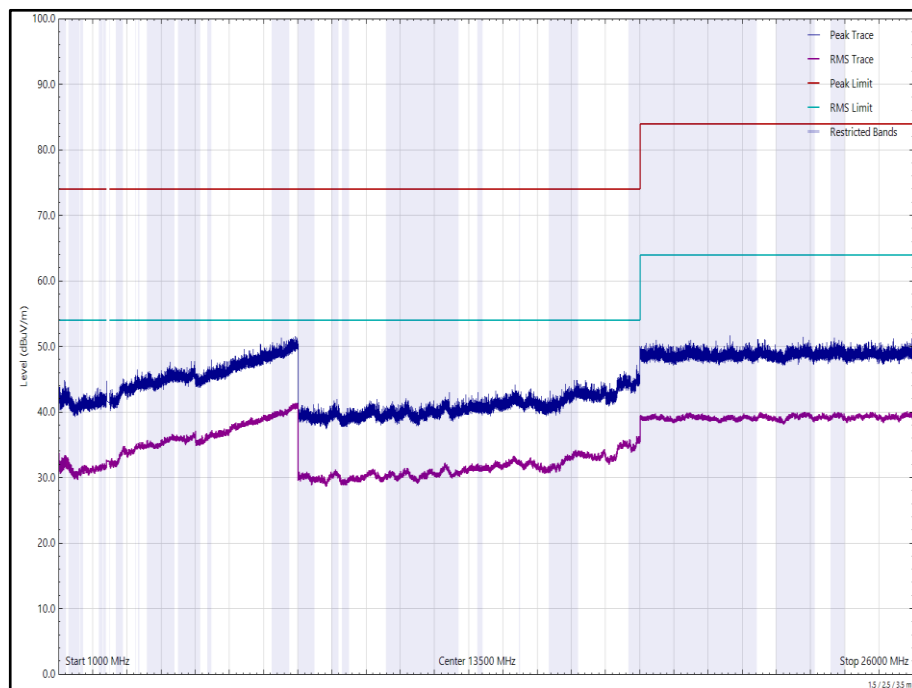


Figure 171 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

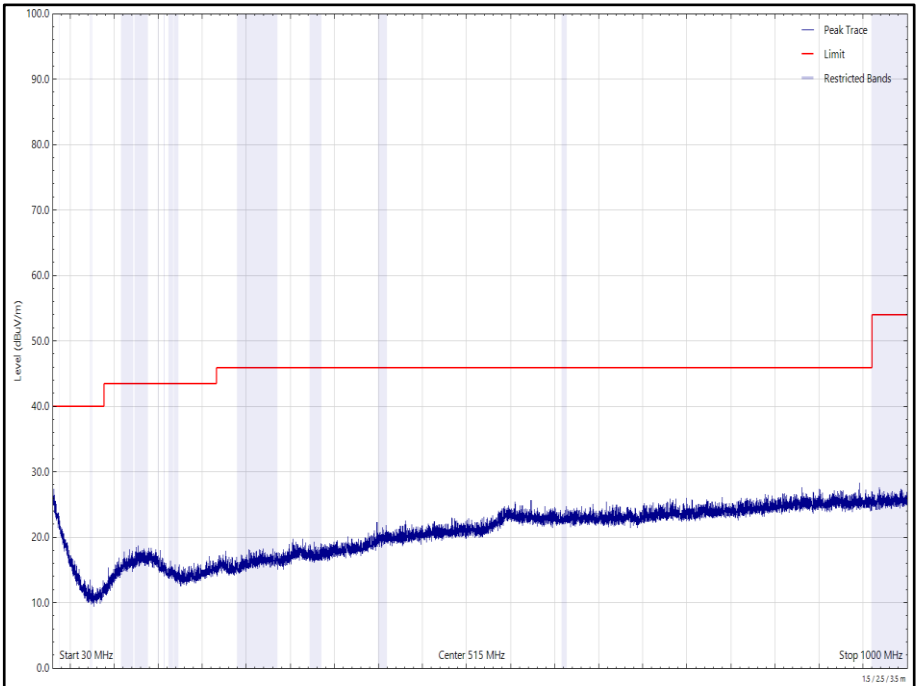


Figure 172 - 2437 MHz (CH6), 802.11b, Core 1, 30 MHz to 1 GHz, Vertical (Peak)

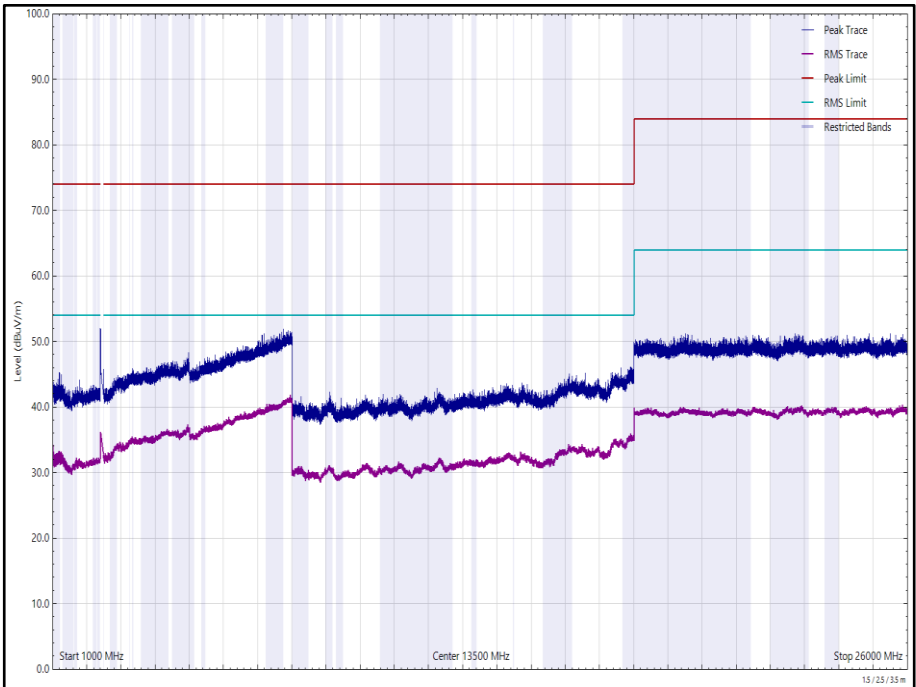


Figure 173 - 2437 MHz (CH6), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 75 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

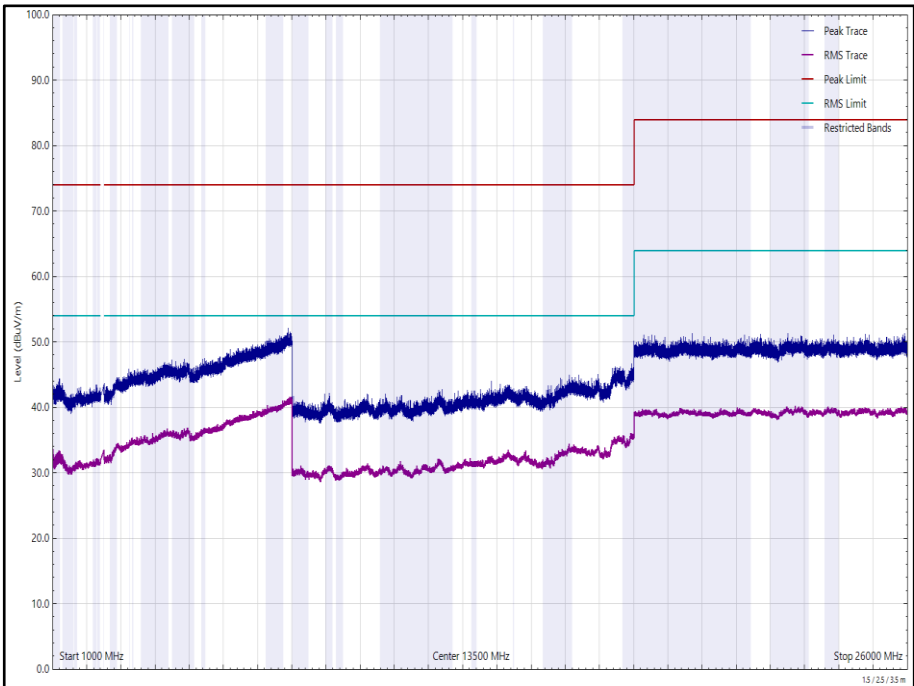


Figure 174 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Horizontal

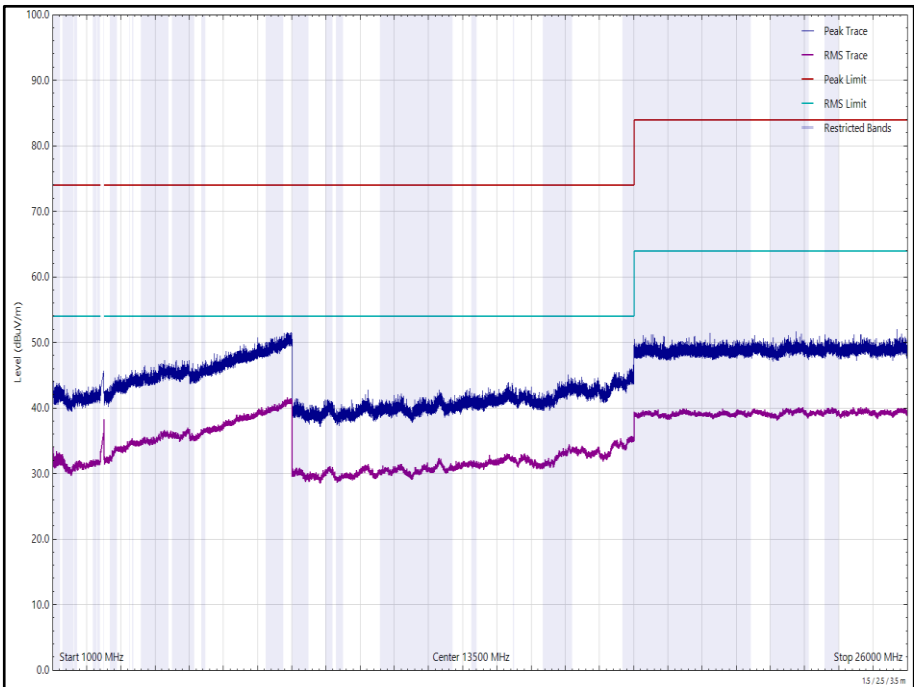


Figure 175 - 2472 MHz (CH13), 802.11b, Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 76 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

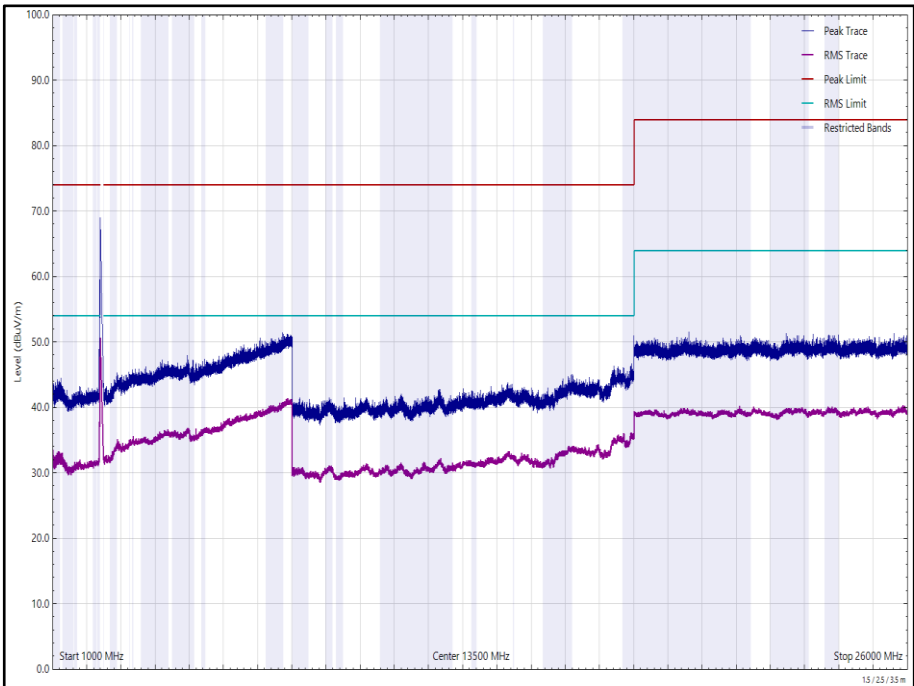


Figure 176 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

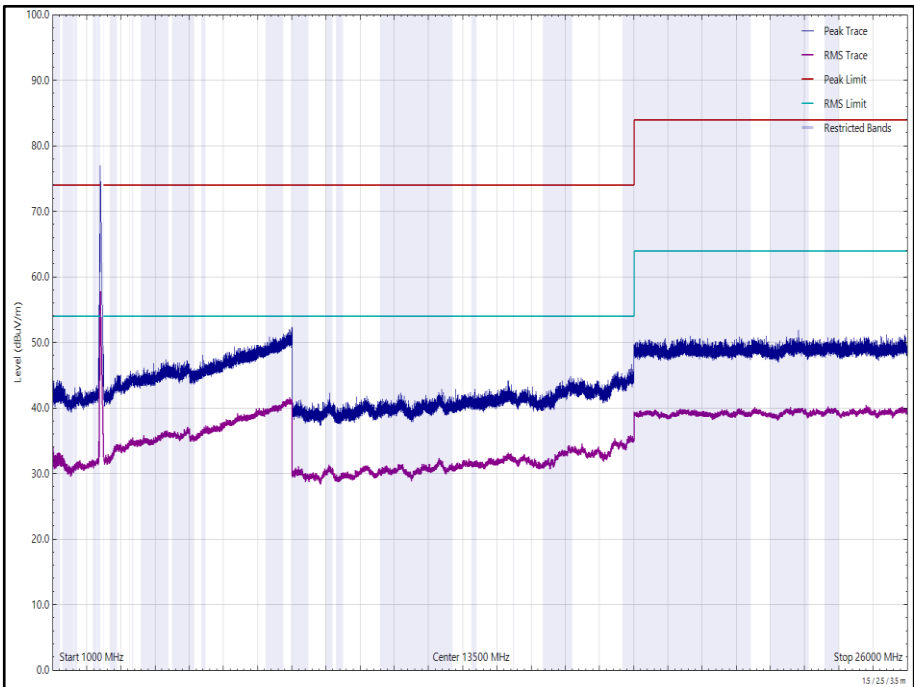


Figure 177 - 2412 MHz (CH1), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 77 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 26 GHz

*No emissions found within 6 dB of the limit.

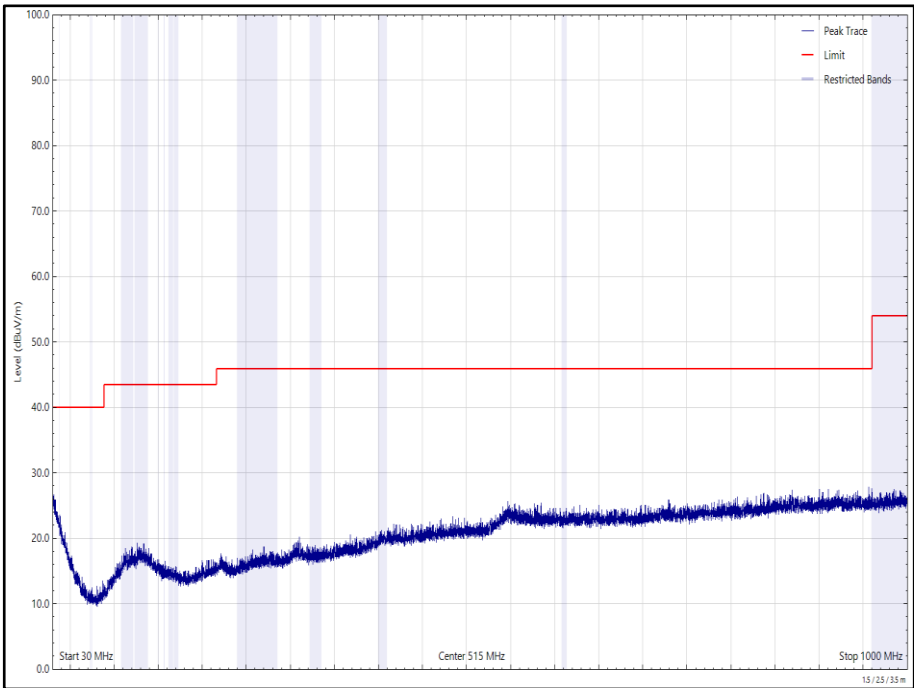


Figure 178 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 1 GHz, Horizontal (Peak)

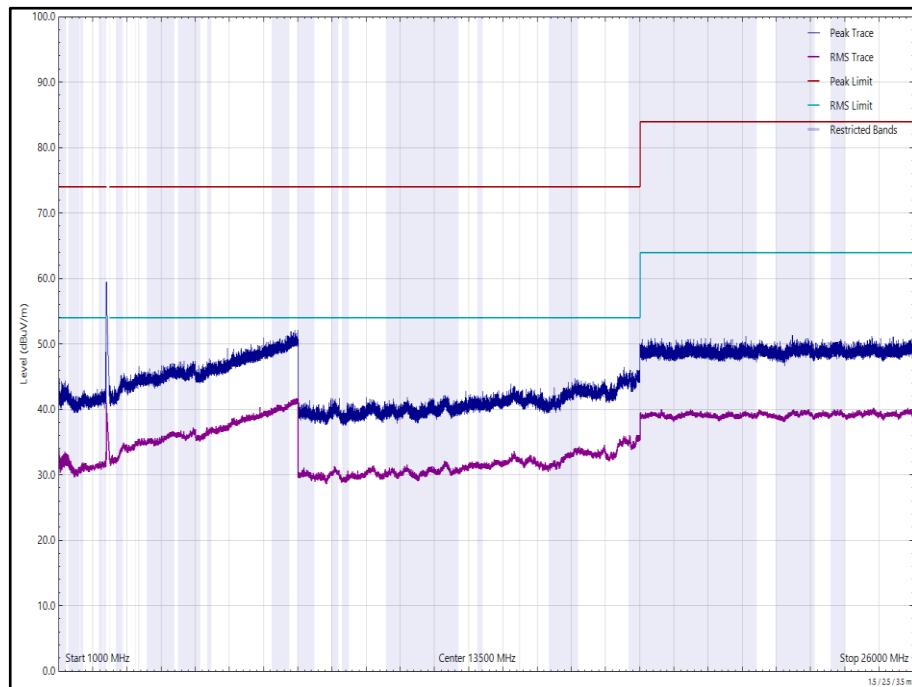


Figure 179 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

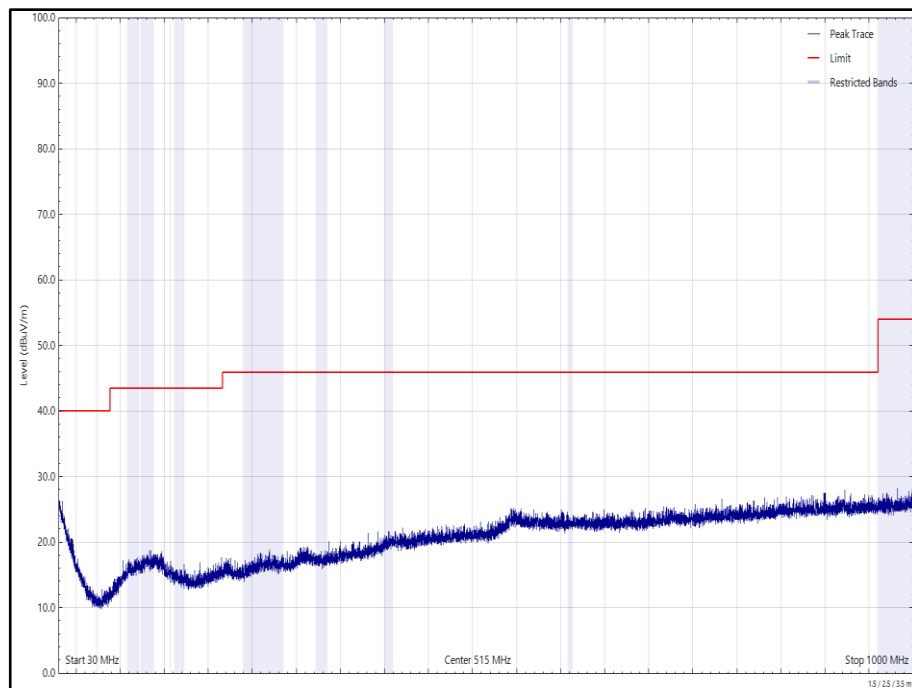


Figure 180 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 30 MHz to 1 GHz, Vertical (Peak)

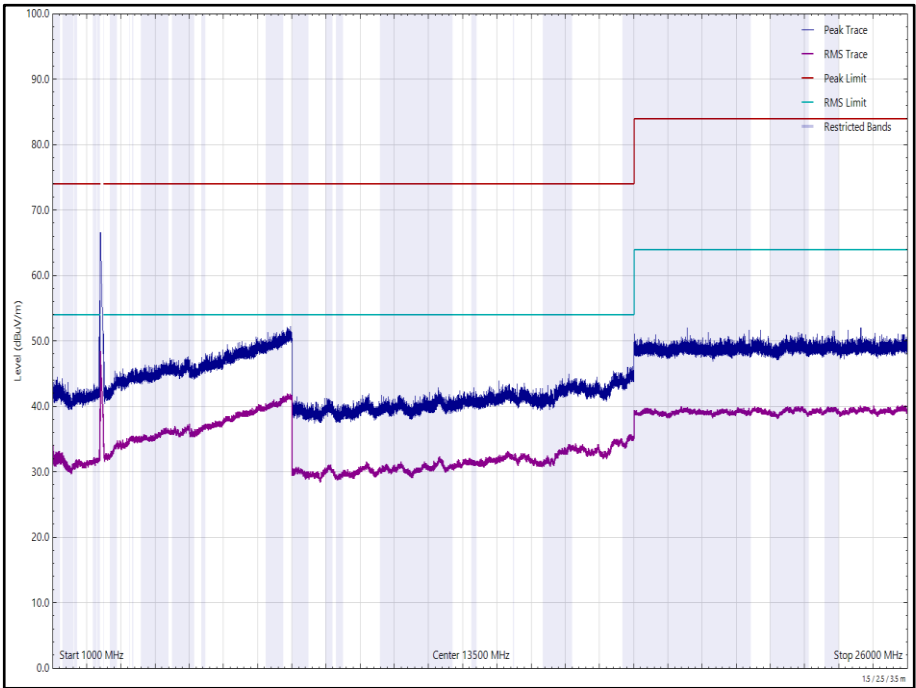


Figure 181 - 2437 MHz (CH6), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Table 78 - 2472 MHz (CH13), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz

*No emissions found within 6 dB of the limit.

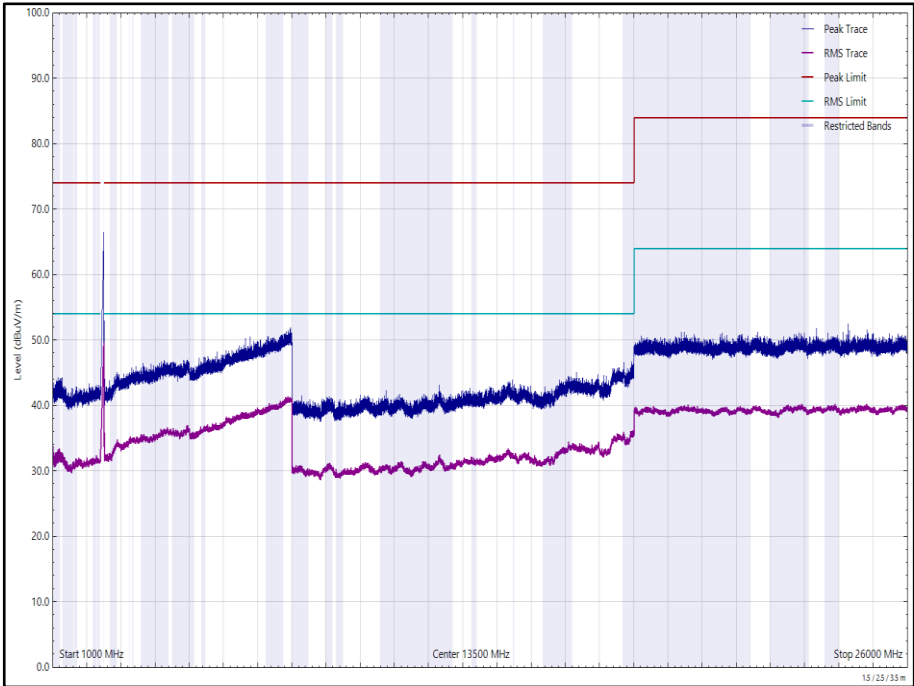


Figure 182 - 2472 MHz (CH13), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Horizontal

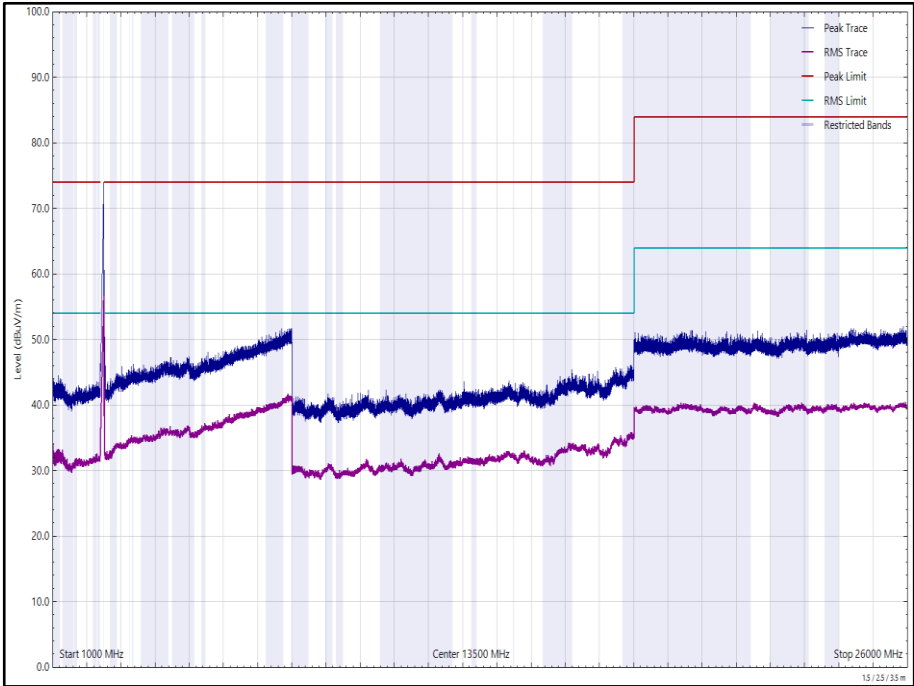


Figure 183 - 2472 MHz (CH13), HE20, RU26-0, Core 0 + Core 1, 1 GHz to 26 GHz, Vertical



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-GEN, clause 8.10, must also comply with the radiated emission limits specified in RSS-GEN clause 8.9.

2.4.8 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Antenna (DRG, 18 GHz to 40 GHz)	Link Microtek Ltd	AM180HA-K-TU2	230	24	27-Jul-2022
Antenna with attenuator (Bilog, 30 MHz to 3 GHz)	Schaffner	CBL6143	287	24	14-Oct-2022
Pre-Amplifier (18 GHz to 40 GHz)	Phase One	PSO4-0087	1534	12	02-Aug-2022
Multimeter	Iso-tech	IDM101	2421	12	28-Oct-2022
Band Reject Filter - 2.425 GHz	Wainwright	WRCGV14-2390-2400-2450-2460-50SS	5066	12	11-Oct-2022
Band Reject Filter - 2.4585 GHz	Wainwright	WRCGV14-2423.5-2433.5-2483.5-2493.5-50SS	5068	12	11-Oct-2022
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	08-Mar-2022
Cable (18 GHz)	Rosenberger	LU7-071-1000	5102	12	20-Oct-2022
Cable (18 GHz)	Rosenberger	LU7-071-1000	5103	12	17-Nov-2022



Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Cable (18 GHz)	Rosenberger	LU7-071-1000	5104	12	13-Dec-2022
Cable (18 GHz)	Rosenberger	LU7-071-2000	5107	12	13-Dec-2022
Emissions Software	TUV SUD	EmX V2.1.11	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	24-Nov-2024
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	01-Apr-2022
Pre Amp 1 - 26.5 GHz	Agilent Technologies	8449B	5445	12	06-May-2022
Cable (K-Type to K-Type, 1 m)	Junkosha	MWX241-01000KMSKMS/A	5511	12	09-Apr-2022
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	09-Apr-2022
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2022
2m K Type Cable	Junkosha	MWX241-02000KMSKMS/A	5524	12	24-Mar-2022
3 GHz High pass Filter	Wainwright	WHKX12-2580-3000-18000-80SS	5547	12	07-May-2022
8 - 18 GHz Amplifier	Wright Technologies	APS06-0061	5595	12	24-Aug-2022
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5604	12	22-Sep-2022

Table 79

TU - Traceability Unscheduled



2.5 Authorised Band Edges

2.5.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)
ISED RSS-247, Clause 5.5

2.5.2 Equipment Under Test and Modification State

A2615, S/N: P1F4F29DL4 - Modification State 0

2.5.3 Date of Test

14-October-2021 to 24-October-2021

2.5.4 Test Method

2.4 GHz WLAN

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

Authorised band edge measurements were performed with the device operating in SISO and MIMO configurations across the various modes supported by the device.

Since compliance with the power limits in section 2.1 was shown by RMS averaging across all symbols in the signaling alphabet, a 30 dBc limit rather than 20 dBc limit was applied in accordance with FCC 47 CFR Part 15.247(d) and RSS-247 clause 5.5.

The measurements displayed within this report, have in some cases been limited to those modes which have been shown to be worst case. Further measurements are held on file by TÜV SÜD and are available if required.

2.5.5 Environmental Conditions

Ambient Temperature	19.4 - 24.5 °C
Relative Humidity	40.9 - 58.3 %



2.5.6 Test Results

2.4 GHz WLAN

Mode	Data Rate /MCS	Resource size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11b, Core 0	1 Mbps	-	-	2412	2400	-46.46
802.11g, Core 0	54 Mbps	-	-	2412	2400	-35.62
802.11n HT20, Core 0	MCS7	-	-	2412	2400	-35.67
802.11ax HE20, Core 0	MCS9	SU	-	2412	2400	-35.25
802.11ax HE20, Core 0	MCS9	26	0	2412	2400	-49.06

Table 80 - SISO Authorised Band Edge Results

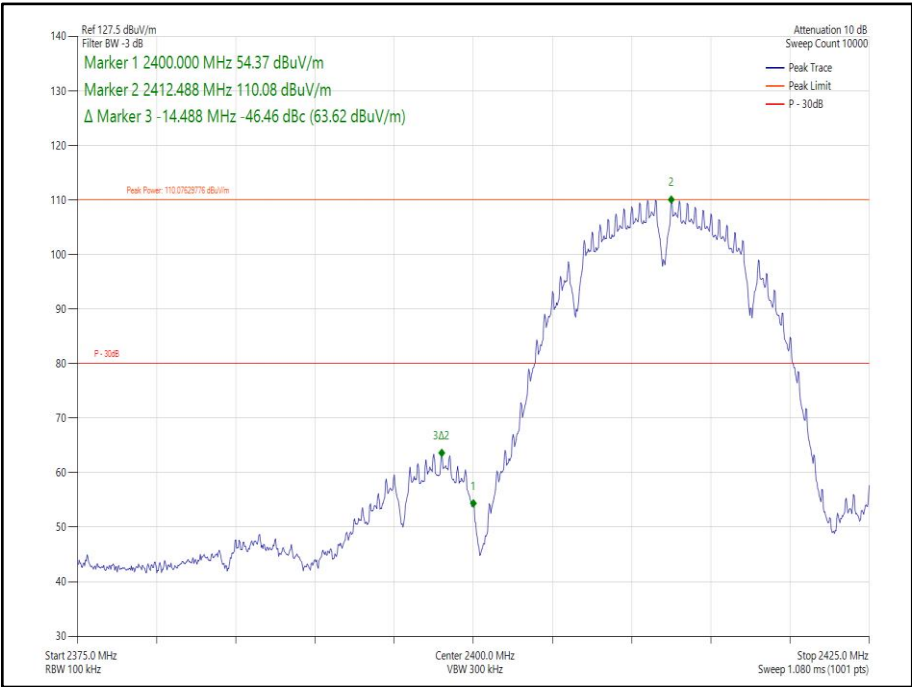


Figure 184 - 802.11b, Core 0 - 2412 MHz
Band Edge Frequency 2400 MHz

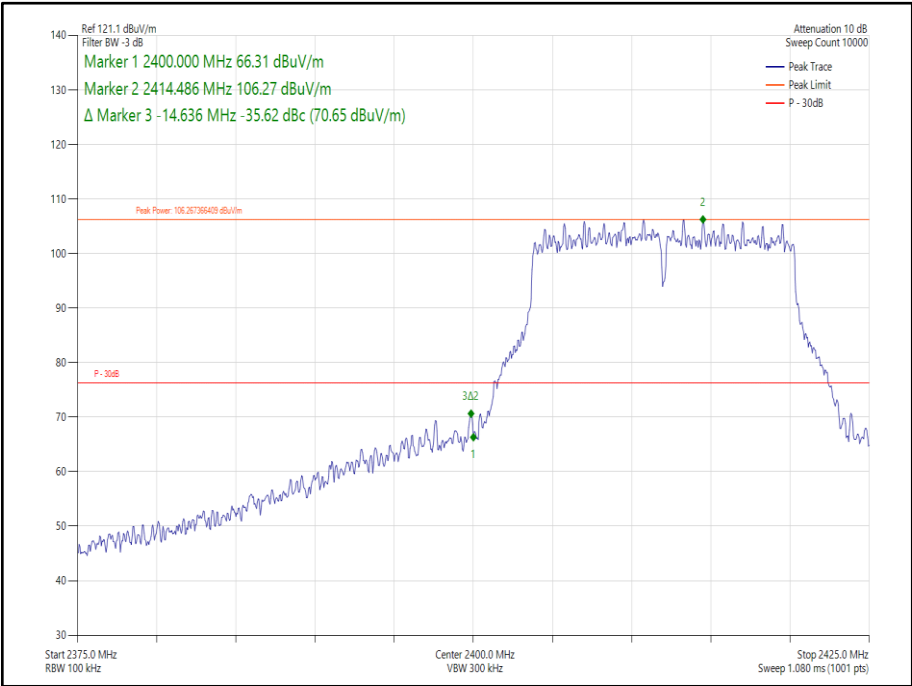


Figure 185- 802.11g, Core 0 - 2412 MHz
Band Edge Frequency 2400 MHz

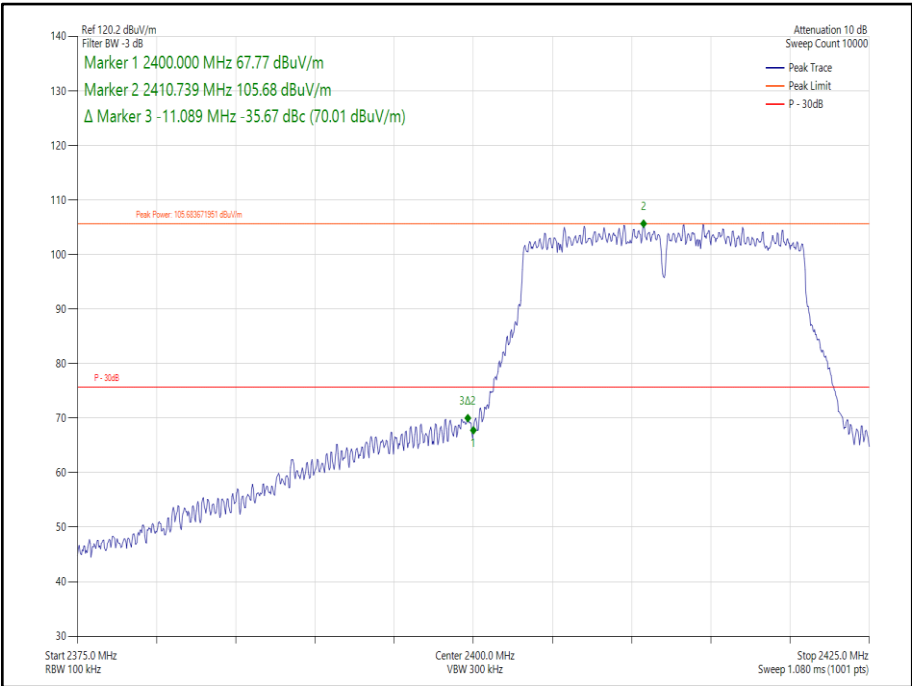


Figure 186- 802.11n HT20, Core 0 - 2412 MHz
Band Edge Frequency 2400 MHz

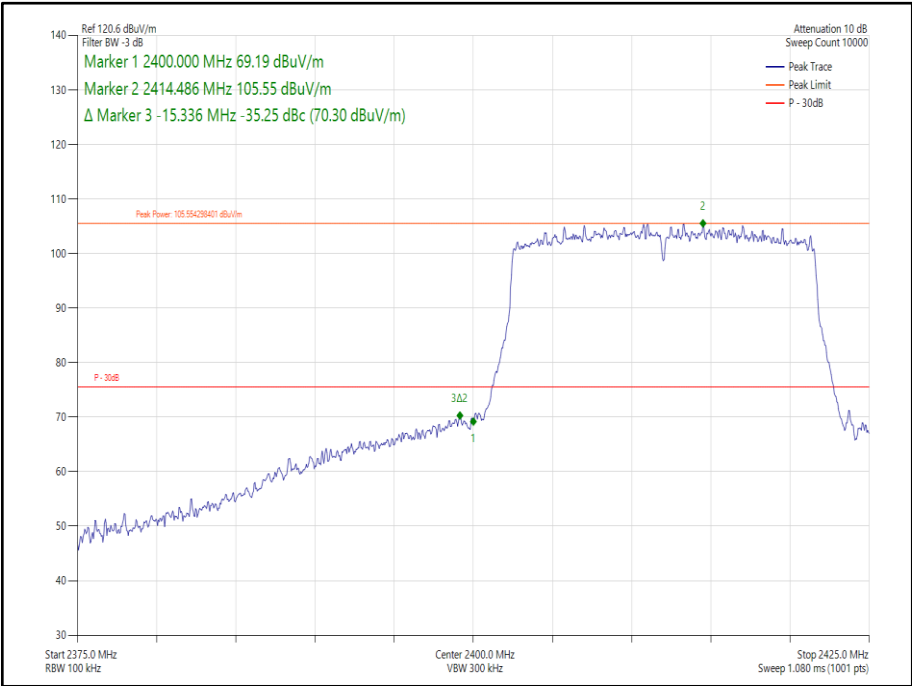


Figure 187- 802.11ax HE20, Core 0, SU - 2412 MHz
Band Edge Frequency 2400 MHz


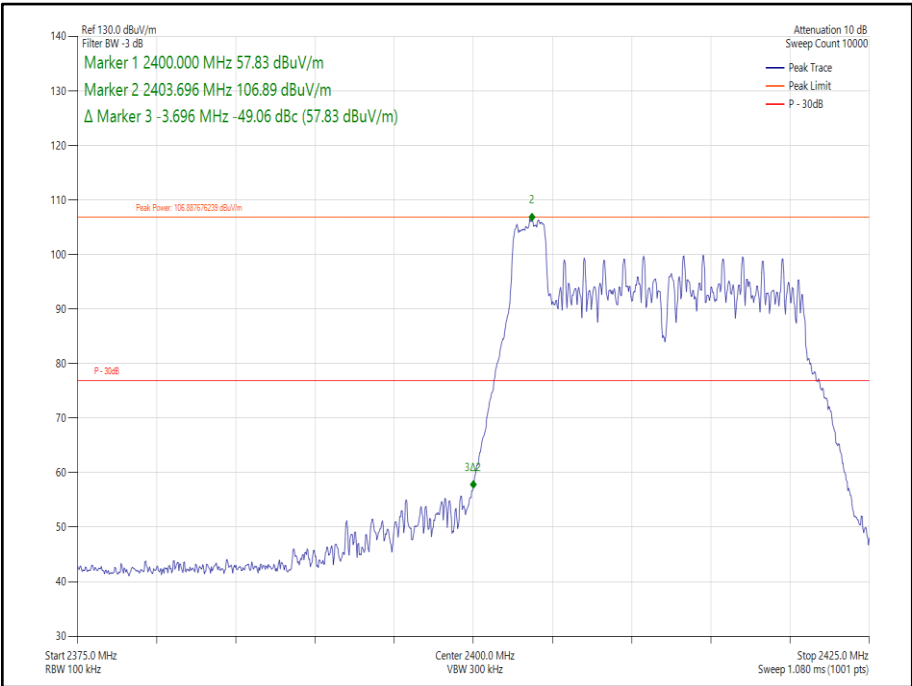


Figure 188- 802.11ax HE20, Core 0, 26-0 - 2412 MHz
Band Edge Frequency 2400 MHz

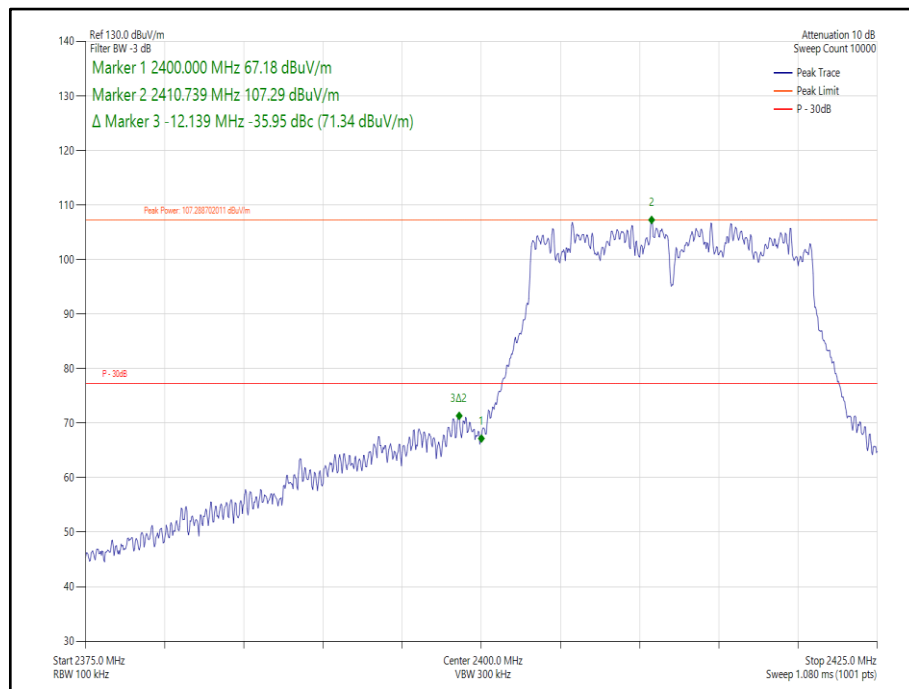

Mode	Data Rate /MCS	Resource size	Resource Index	TX Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
802.11n HT20, Cores 0-1	MCS7	-	-	2412	2400	-35.95
802.11ax HE20, Cores 0 -1	MCS9	SU	-	2412	2400	-35.00
802.11ax HE20, Cores 0 -1	MCS0	26	0	2412	2400	-50.43

Table 81 - MIMO 2TX Authorised Band Edge Results



**Figure 189 - 802.11n HT20, Cores 0-1 - 2412 MHz
Band Edge Frequency 2400 MHz**

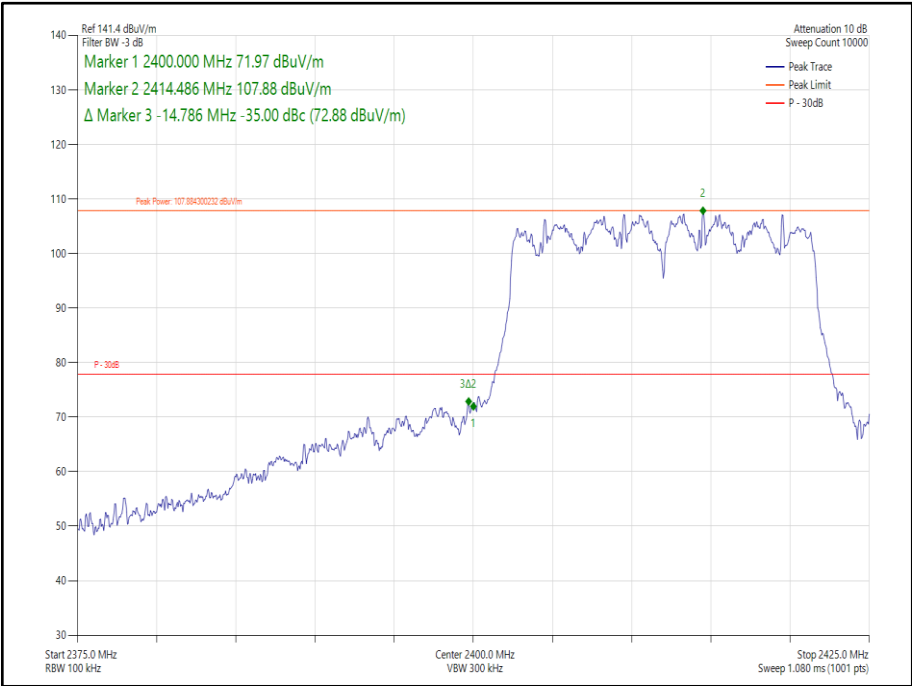


Figure 190- 802.11ax HE20, Cores 0-1, SU - 2412 MHz
Band Edge Frequency 2400 MHz

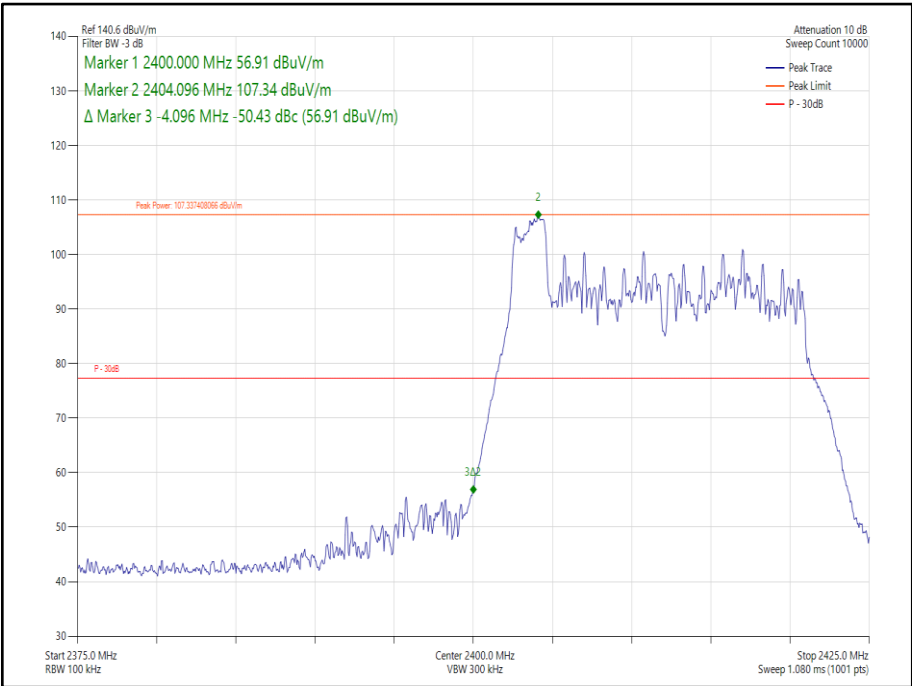


Figure 191- 802.11ax HE20, Cores 0-1, 26-0 - 2412 MHz
Band Edge Frequency 2400 MHz



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

2.5.7 Test Location and Test Equipment Used

This test was carried out in RF Chamber 11.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Iso-tech	IDM101	2421	12	28-Oct-2021
EMI Test Receiver	Rohde & Schwarz	ESW44	5084	12	08-Mar-2022
Emissions Software	TUV SUD	EmX V2.1.11	5125	-	Software
Screened Room (11)	Rainford	Rainford	5136	36	01-Nov-2021
Mast	Maturo	TAM 4.0-P	5158	-	TU
Mast and Turntable Controller	Maturo	Maturo NCD	5159	-	TU
Turntable	Maturo	TT 15WF	5160	-	TU
Horn Antenna (1-10GHz)	Schwarzbeck	BBHA 9120 B	5215	12	01-Apr-2022
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5518	12	09-Apr-2022
8m N Type Cable	Junkosha	MWX221-08000NMSNMS/B	5522	12	24-Mar-2022
Thermo-Hygro-Barometer	PCE Instruments	PCE-THB 40	5604	12	22-Sep-2022

Table 82

TU - Traceability Unscheduled



2.6 Power Spectral Density

2.6.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)
ISED RSS-247, Clause 5.2
ISED RSS-GEN, Clause 6.12

2.6.2 Equipment Under Test and Modification State

A2615, S/N: PVW2DY4LFY - Modification State 0

2.6.3 Date of Test

28-January-2022

2.6.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.5 (AVGPSD-2).

Where the EUT duty cycle was < 98 % and repeatable within 2 %, the spectrum analyser was set to trace (power) averaging and a duty cycle correction was added as calculated in the result tables below (Method AVGPSD-2).

MIMO output port summing was performed in accordance with KDB 662911 D01 E)2)b).

2.6.5 Environmental Conditions

Ambient Temperature	23.5 °C
Relative Humidity	23.3 %



2.6.6 Test Results

2.4 GHz WLAN

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11b	Duty Cycle (%):	98.8
Data Rate:	1 Mbps	DCCF (dB):	0.05
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-7.63	-	-	-	-	8.00	-15.63
2442	3.0	-8.03	-	-	-	-	8.00	-16.03
2472	3.0	-13.24	-	-	-	-	8.00	-21.24

Table 83 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11g	Duty Cycle (%):	97.5
Data Rate:	12 Mbps	DCCF (dB):	0.11
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-7.71	-	-	-	-	8.00	-15.71
2442	3.0	-6.49	-	-	-	-	8.00	-14.49
2472	3.0	-18.77	-	-	-	-	8.00	-26.77

Table 84 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-11.26	-	-	-	-	8.00	-19.26
2442	3.0	-7.89	-	-	-	-	8.00	-15.89
2472	3.0	-22.15	-	-	-	-	8.00	-30.15

Table 85 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11n HT20	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-15.19	-13.73	-	-	-11.39	8.00	-19.39
2442	3.0	-9.17	-9.00	-	-	-6.07	8.00	-14.07
2472	3.0	-26.04	-25.57	-	-	-22.79	8.00	-30.79

Table 86 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.7
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-12.34	-	-	-	-	8.00	-20.34
2442	3.0	-8.46	-	-	-	-	8.00	-16.46
2472	3.0	-23.04	-	-	-	-	8.00	-31.04

Table 87 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 SU	Duty Cycle (%):	95.6
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.19
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-15.74	-15.50	-	-	-12.61	8.00	-20.61
2442	3.0	-9.44	-9.93	-	-	-6.67	8.00	-14.67
2472	3.0	-26.22	-26.48	-	-	-23.34	8.00	-31.34

Table 88 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-10.52	-	-	-	-	8.00	-18.52
2442	3.0	-11.04	-	-	-	-	8.00	-19.04
2472	3.0	-23.47	-	-	-	-	8.00	-31.47

Table 89 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU26	Duty Cycle (%):	96.5
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-10.54	-11.08	-	-	-7.79	8.00	-15.79
2442	3.0	-10.34	-11.19	-	-	-7.73	8.00	-15.73
2472	3.0	-29.59	-29.27	-	-	-26.42	8.00	-34.42

Table 90 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.3
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-8.06	-	-	-	-	8.00	-16.06
2442	3.0	-8.26	-	-	-	-	8.00	-16.26
2472	3.0	-21.88	-	-	-	-	8.00	-29.88

Table 91 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU52	Duty Cycle (%):	96.4
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.16
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-9.07	-8.06	-	-	-5.52	8.00	-13.52
2442	3.0	-8.58	-8.95	-	-	-5.75	8.00	-13.75
2472	3.0	-26.24	-26.08	-	-	-23.15	8.00	-31.15

Table 92 - Maximum Power Spectral Density Results



Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	-		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	SISO	Peak Antenna Gain (dBi):	-
Active Port(s):	A (Core 0)	Active Chain(s):	0

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-9.58	-	-	-	-	8.00	-17.58
2442	3.0	-9.51	-	-	-	-	8.00	-17.51
2472	3.0	-22.82	-	-	-	-	8.00	-30.82

Table 93 - Maximum Power Spectral Density Results

Test Configuration			
Frequency Range:	2400-2483.5 MHz	Band:	2.4 GHz
Limit Clause(s):	15.247 (e) RSS-247 5.2 b)	Test Method(s):	C63.10 11.10.5
Additional Reference(s):	662911 D01 v02r01 E)2)b)		
Note(s):	DCCF was added to the spectrum analyser reference level offset.		

DUT Configuration			
Mode:	802.11ax HE20 RU106	Duty Cycle (%):	97.8
Modulation Coding Scheme:	MCS2x1	DCCF (dB):	0.10
Antenna Configuration:	MIMO CDD	Peak Antenna Gain (dBi):	-
Active Port(s):	A+B (Core 0 + Core 1)	Active Chain(s):	0+1

Test Frequency (MHz)	RBW (kHz)	PSD (dBm/RBW)					Limit (dBm/3 kHz)	Margin (dB)
		A	B	C	D	Σ		
2412	3.0	-12.21	-11.11	-	-	-8.62	8.00	-16.62
2442	3.0	-9.62	-9.92	-	-	-6.76	8.00	-14.76
2472	3.0	-27.71	-27.07	-	-	-24.37	8.00	-32.37

Table 94 - Maximum Power Spectral Density Results



FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Expires
Multimeter	Fluke	79 Series II	3057	12	23-Aug-2022
Hygrometer	Rotronic	I-1000	3220	12	05-Nov-2022
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	03-Jan-2022
AC Programmable Power Supply	iTech	IT7324	5226	-	O/P Mon
MXA Signal Analyser	Keysight Technologies	N9020B	5529	24	04-Mar-2022
Signal Commissioning Unit	TUV SUD	SCU002	5759	12	30-Jun-2022

Table 95

O/P Mon – Output Monitored using calibrated equipment



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 271.42 kHz
Maximum Conducted Output Power	± 3.2 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Power Spectral Density	± 3.2 dB

Table 96

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115:2007, Clause 4.4.3 and 4.5.1. (Procedure 2). The measurement results are directly compared with the test limit to determine conformance with the requirements of the standard.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8.