



DATA REFERENCE REPORT PART 24

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

4/6/2022 - 8/12/2022

Test Site/Location:

Element Washington DC LLC, Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090043-02.BCG

FCC ID:

BCG-A2684

Applicant Name:

Apple Inc.

Reference Model:

A2622

Variant Model:

A2684 (A2859)

EUT Type:

Watch

FCC Classification:

PCS Licensed Transmitter Worn on Body (PCT)

FCC Rule Part:

24

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President




FCC ID: BCG-A2684	 PART 24 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 1 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

TABLE OF CONTENTS

1.0	INTRODUCTION	3
1.1	Scope	3
1.2	Element Washington DC LLC Test Location	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description	4
2.2	Device Capabilities.....	4
2.3	Antenna Description	4
2.4	Test Support Equipment.....	4
2.5	Test Configuration	5
2.6	Software and Firmware	5
2.7	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS (SPOT-CHECK DATA)	10
7.1	Summary	10
7.2	Radiated Spurious Emissions	11
7.3	Antenna BCM – ERP/EIRP	13
8.0	CONCLUSION.....	14
9.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	15

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 2 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Per manufacturer declaration, there are two watch device models, A2622 and A2684 (A2859), with high degree of similarity, reference model FCC ID: BCG-A2622 and variant model **FCC ID: BCG-A2684**. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCG-A2622, while radiated and conducted spot-check verification has been performed on variant model FCC ID: BCG-A2684. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID	Reference Report	Report Title
PCT	BCG-A2622	1C2205090042-02.BCG	RF Part 24 Test Report

Table 1-1. Reference Model Details


Reference model FCC ID: BCG-A2622 test report has been included in Appendix A

1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 3 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2684**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: FN622250N6617WR4H, T7M2G97WC1, K96W0JGXNP

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.


Band	Antenna Gain [dBi]
	Antenna FCM
LTE Band 25/2	-8.4
WCDMA 1900	-8.4

Table 2-1. Highest Antenna Gain

2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	LF09D601GH
	w/ Cradle	Model:	LE1-POR-P1	S/N:	CYV1427015UE1EN01MP1J
3	Apple Magnetic Charger	Model:	A2515	S/N:	DLC217300381NR111
4	Pathfinder Falcon	Model:	920-11647-01	S/N:	HV007825
	SiP Socket	Model:	N/A	S/N:	X2920 P1 PF 142
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

Table 2-2. Test Support Equipment

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch		Page 4 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated emissions tests.

The worst case configuration was investigated for all combinations of various types of non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device only supports 27RBs or less for 16-QAM uplink.

Per FCC Approved Data Referencing Test Plan, Antenna C spot-check measurements have been conducted and reported. Spot-check Test Plan can be referred to below Table 2-3.

Technology	Test Case	FCC ID: BCG-A2684	
		Mode	Channel
WCDMA, LTE	Radiated Spurious Emissions (>1GHz)	LTE Band 5, 2, 7 Max BW, 1RB, QPSK	Low, Mid, High
WCDMA, LTE	Conducted Power	All Certified Bands: Highest BW only, 1 RB, Modulation with the highest power	Mid

Table 2-3. FCC Approved Spot-Check Test Plan


Output powers were measured and confirmed to be consistent between Reference and Variant models prior to testing.

2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 5 of 15

Version 2.1 11/9/2021

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[\text{dB}\mu\text{V/m}]} = \text{Measured amplitude level}_{[\text{dBm}]} + 107 + \text{Cable Loss}_{[\text{dB}]} + \text{Antenna Factor}_{[\text{dB/m}]}$$

And


$$\text{EIRP}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20\log D - 104.8;$$

Where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 6 of 15


Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2684	 PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch
		Page 7 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	ENV216	Two-Line V-Network	1/14/2022	Annual	1/14/2023	101364
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 8 of 15

Version 2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 SAMPLE CALCULATIONS

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 9 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS (SPOT-CHECK DATA)


7.1 Summary

Company Name: Apple Inc.
 FCC ID: BCG-A2684
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
 Mode(s): WCDMA/LTE

Technology	Test Configurations					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCG-A2622	FCC ID: BCG-A2684	
						Average [dBm]	Average [dBm]	Average [dB]
LTE B2	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	L	3720.0	-63.56	-62.70	0.86
LTE B2	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	M	3765.0	-62.87	-62.44	0.37
LTE B2	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	H	3810.0	-63.33	-62.46	0.87
LTE Band 2	Conducted Powers	QPSK	20MHz / 1/99 RB	M	1882.5	24.31	24.17	0.14
LTE Band 25	Conducted Powers	QPSK	20MHz / 1/99 RB	M	1882.5	24.26	24.42	0.16
WCDMA B2	Conducted Powers	QPSK	5MHz	M	1880.0	24.00	23.95	0.05

Table 7-1. Worst Case Spot-Check Results

Spot-checks were conducted, all measurements were investigated and found to be within acceptable tolerance in accordance with FCC Approved Data Referencing Test Plan.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 10 of 15


Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.2 Radiated Spurious Emissions

§2.1053, 24.238(a)

LTE Band 2

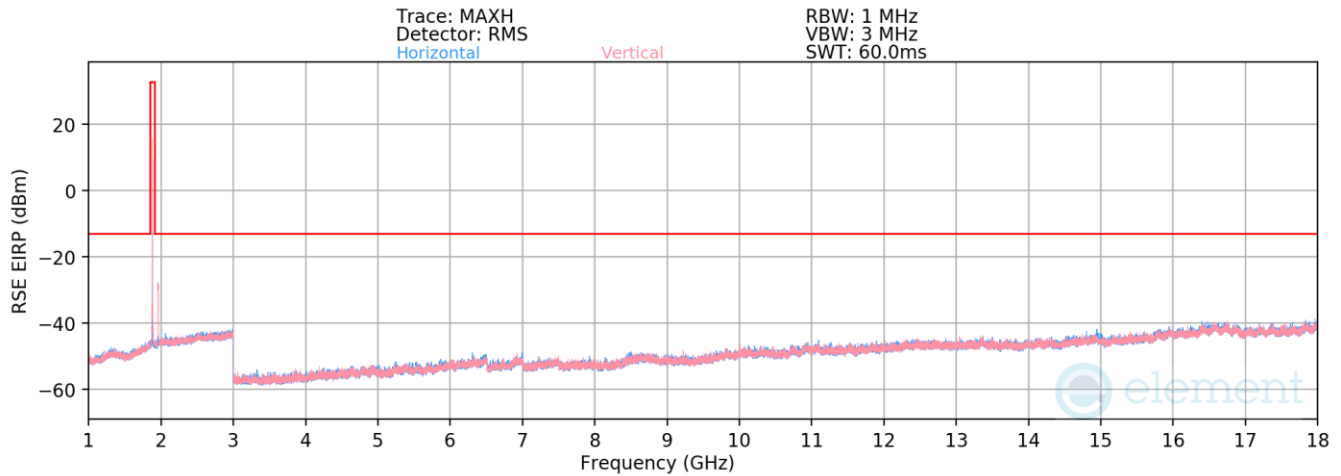

Plot 7-1. Radiated Spurious Emission above 1GHz (LTE Band 2)

Bandwidth (MHz):	20
Frequency (MHz):	1860.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3720.0	V	-	-	-79.91	5.47	32.56	-62.70	-13.00	-49.70
5580.0	V	-	-	-80.38	7.95	34.57	-60.69	-13.00	-47.69
7440.0	V	-	-	-80.96	10.78	36.82	-58.44	-13.00	-45.44

Table 7-2. Radiated Spurious Data (LTE Band 2 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	1882.5
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3765.0	V	-	-	-79.75	5.57	32.82	-62.44	-13.00	-49.44
5647.5	V	-	-	-80.31	8.00	34.69	-60.57	-13.00	-47.57
7530.0	V	-	-	-81.37	10.88	36.51	-58.75	-13.00	-45.75

Table 7-3. Radiated Spurious Data (LTE Band 2 – Mid Channel)

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 11 of 15


Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Bandwidth (MHz):	20
Frequency (MHz):	1905.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
3810.00	V	-	-	-80.11	5.91	32.80	-62.46	-13.00	-49.46
5715.00	V	-	-	-80.32	8.29	34.97	-60.29	-13.00	-47.29
7620.00	V	-	-	-81.14	10.91	36.77	-58.49	-13.00	-45.49

Table 7-4. Radiated Spurious Data (LTE Band 2 – High Channel)

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 12 of 15

Version 2.1 11/9/2021

7.3 Antenna FCM – ERP/EIRP

LTE-B2

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1880.0	-8.40	1 / 99	24.17	15.77	37.757	33.01	-17.24

Table 7-5. Antenna FCM ERP/EIRP Data (LTE Band 2)

LTE-B25


Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	ERP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	1882.5	-8.40	1 / 99	24.42	16.02	39.994	33.01	-16.99

Table 7-6. Antenna FCM ERP/EIRP Data (LTE Band 25)

WCDMA B2

Frequency [MHz]	Mode	Conducted Power [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
1880.00	WCDMA1900	23.95	-8.40	15.55	35.892	33.01	-17.46

Table 7-7. Antenna FCM ERP/EIRP Data (WCDMA Band 2)


FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch		Page 13 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

8.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCG-A2684** is in tolerance with reference model FCC ID: BCG-A2622 per FCC Approved Data Referencing Test Plan.


FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 14 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.


9.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090042-02.BCG) from reference model FCC ID: BCG-A2622, which includes referenced data results.

FCC ID: BCG-A2684		PART 24 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-02.BCG	Test Dates: 5/4/2022 - 8/10/2022	EUT Type: Watch	Page 15 of 15

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.



PART 24 MEASUREMENT REPORT

Applicant Name:

Apple Inc.
One Apple Park Way
Cupertino, CA 95014
United States

Date of Testing:

6/7/2022 - 8/12/2022

Test Site/Location:

Element Washington DC LLC. Morgan Hill, CA, USA

Test Report Serial No.:

1C2205090042-02.BCG

FCC ID:

BCG-A2622

Applicant Name:

Apple Inc.

Application Type:

Certification

Model:

A2622

EUT Type:

Watch

FCC Classification:

PCS Licensed Transmitter Worn on Body (PCT)

FCC Rule Part:

24

Test Procedure(s):

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President




FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch
		Page 1 of 90

V2.1 11/9/2021


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Washington DC LLC Test Location	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Antenna Description	6
2.4	Test Support Equipment.....	6
2.5	Test Configuration	7
2.6	Software and Firmware	7
2.7	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal	21
7.4	Band Edge Emissions at Antenna Terminal	33
7.5	Peak-Average Ratio	61
7.6	Radiated Power (EIRP).....	75
7.7	Radiated Spurious Emissions	79
7.8	Frequency Stability / Temperature Variation	86
8.0	CONCLUSION.....	89
9.0	APPENDIX A	90


FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 2 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




PART 24 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	EIRP		Emission Designator
						Max. Power [mW]	Max. Power [dBm]	
WCDMA1900	5 MHz	Spread Spectrum	1852.4 - 1907.6	4.0800	3.25	36.308	15.60	4M08F9W
Band 2	1.4 MHz	QPSK	1850.7 - 1914.3	1.1055	5.71	40.738	16.10	1M11G7W
		16QAM	1850.7 - 1914.3	1.1053	6.41	34.594	15.39	1M11D7W
	3 MHz	QPSK	1851.5 - 1913.5	2.7300	5.85	38.994	15.91	2M73G7W
		16QAM	1851.5 - 1913.5	2.7367	6.51	35.237	15.47	2M74D7W
	5 MHz	QPSK	1852.5 - 1912.5	4.5779	5.85	40.272	16.05	4M58G7W
		16QAM	1852.5 - 1912.5	4.5593	6.46	34.674	15.40	4M56D7W
	10MHz	QPSK	1855 - 1910	9.1312	5.69	39.719	15.99	9M13G7W
		16QAM	1855 - 1910	5.4788	6.35	36.058	15.57	5M48D7W
	15 MHz	QPSK	1857.5 - 1907.5	13.6753	5.95	40.738	16.10	13M7G7W
		16QAM	1857.5 - 1907.5	6.5095	6.37	36.058	15.57	6M51D7W
	20 MHz	QPSK	1860 - 1905	18.2883	5.56	40.738	16.10	18M3G7W
		16QAM	1860 - 1905	8.3337	6.38	35.400	15.49	8M33D7W
Band 25	1.4 MHz	QPSK	1850.7 - 1914.3	1.1055	5.73	39.174	15.93	1M11G7W
		16QAM	1850.7 - 1914.3	1.1053	6.41	34.995	15.44	1M11D7W
	3 MHz	QPSK	1851.5 - 1913.5	2.7300	5.86	38.994	15.91	2M73G7W
		16QAM	1851.5 - 1913.5	2.7367	6.54	35.237	15.47	2M74D7W
	5 MHz	QPSK	1852.5 - 1912.5	4.5779	5.87	40.644	16.09	4M58G7W
		16QAM	1852.5 - 1912.5	4.5593	6.46	35.075	15.45	4M56D7W
	10 MHz	QPSK	1855 - 1910	9.1312	5.71	39.719	15.99	9M13G7W
		16QAM	1855 - 1910	5.4788	6.34	35.318	15.48	5M48D7W
	15 MHz	QPSK	1857.5 - 1907.5	13.6753	6.03	40.738	16.10	13M7G7W
		16QAM	1857.5 - 1907.5	6.5095	6.33	35.645	15.52	6M51D7W
	20 MHz	QPSK	1860 - 1905	18.2883	5.70	40.365	16.06	18M3G7W
		16QAM	1860 - 1905	8.3337	6.37	35.318	15.48	8M33D7W

EUT Overview

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 3 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 4 of 90

V2.1 11/9/2021

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID:BCG-A2622**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 24.

Test Device Serial No.: N4F4NXRFX1, D60XJGQ37M, FN622240J7C17WQ4E

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.


Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	Mid band/High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be config 10 and reported in RF UNII, RF Bluetooth and RF Part 27b test reports.

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 5 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)
	Antenna FCM
LTE Band 25/2	-8.4
WCDMA 1900	-8.4


Table 2-2. Highest Antenna Gain

Note: Antenna Specifications has been attached to Appendix A

2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	DQ812910CU008V22F
	w/ Cradle	Model:	LA2-BD-LG-P1	S/N:	N-0017525-02
3	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035200UJMFR0AJ
	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035202KRMFR0A2
4	Pathfinder Falcon	Model:	920-098626-01	S/N:	DLC03770065Q6PM1W
	SiP Socket	Model:	N/A	S/N:	P1 X2539B PF096
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

Table 2-3. Test Support Equipment

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 6 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The worst case configuration was investigated for all combinations of various types of non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.


This device only supports 27RBs or less for 16-QAM uplink.

2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 7 of 90

V2.1 11/9/2021

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[dB\mu V/m]} = \text{Measured amplitude level}_{[dBm]} + 107 + \text{Cable Loss}_{[dB]} + \text{Antenna Factor}_{[dB/m]}$$


And

$$\text{EIRP}_{[dBm]} = E_{[dB\mu V/m]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.


FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 8 of 90

V2.1 11/9/2021

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch
		Page 9 of 90

V2.1 11/9/2021

5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/26/2021	Annual	10/26/2022	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 10 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

6.0 SAMPLE CALCULATIONS

Emission Designator

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 8M62G7W

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W

BW = 8.45 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 11 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

7.0 TEST RESULTS

7.1 Summary


Company Name: Apple Inc.
 FCC ID: BCG-A2622
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)
 Mode(s): WCDMA/LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions	2.1051, 24.238(a)	-13 dBm at Band Edge and for all out-of-band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio	24.232(d)	< 13 dB	PASS	Section 7.5
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Frequency Stability	2.1055, 24.235	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
	Effective Radiated Power / Equivalent Isotropic Radiated Power	24.232(c)	< 2 Watts max. EIRP	PASS	Section 7.6
RADIATED	Radiated Spurious Emissions	2.1053, 24.238(a)	-13 dBm for all out-of-band emissions	PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is Element EMC Software Tool v1.1.

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 12 of 90

V2.1 11/9/2021

7.2 Occupied Bandwidth

\$2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

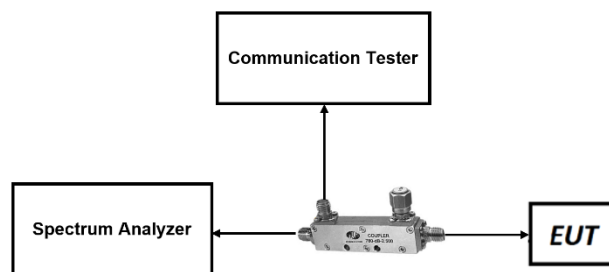



Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.


FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 13 of 90

V2.1 11/9/2021


LTE Band 25/2

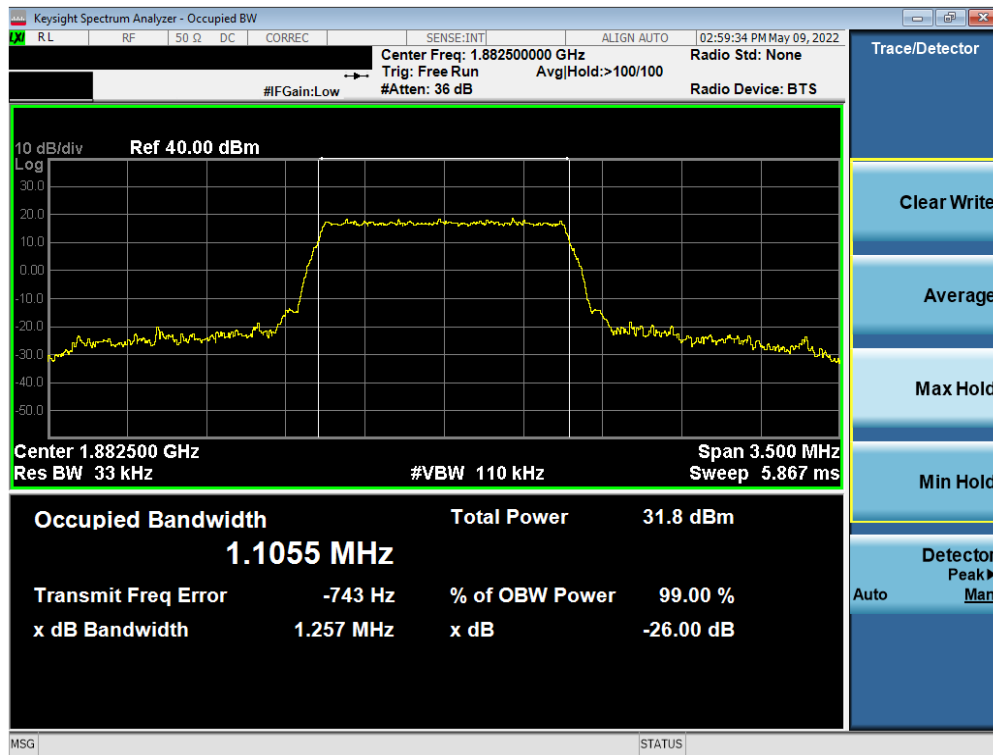


Plot 7-1. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz QPSK - Full RB Configuration)

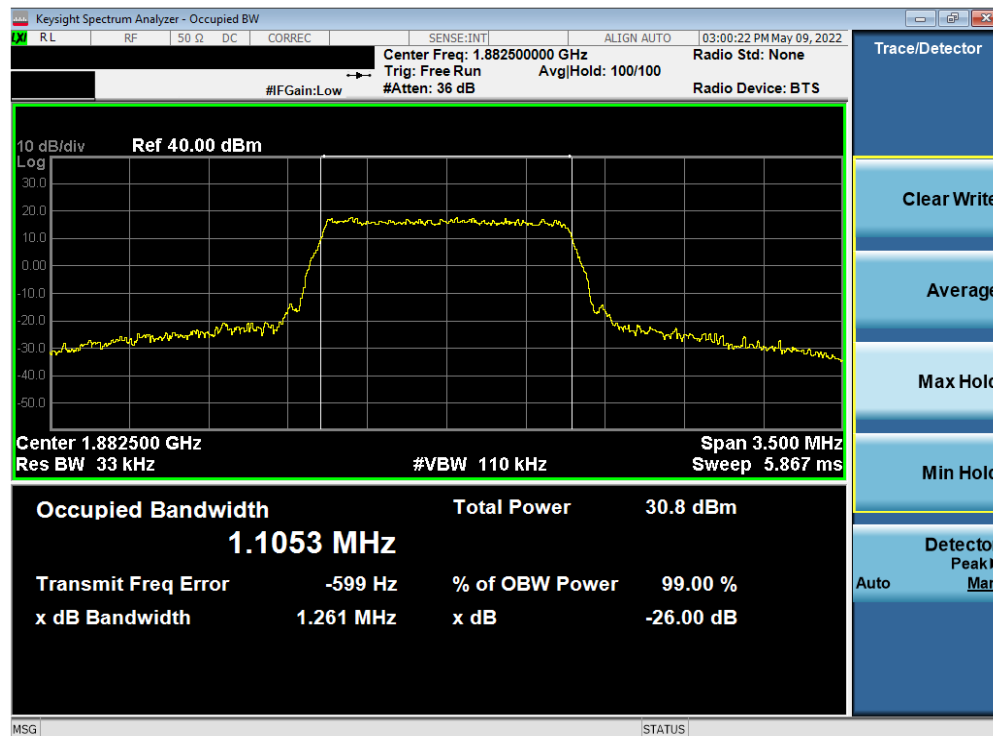


Plot 7-2. Occupied Bandwidth Plot (LTE Band 25/2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 14 of 90


V2.1 11/9/2021

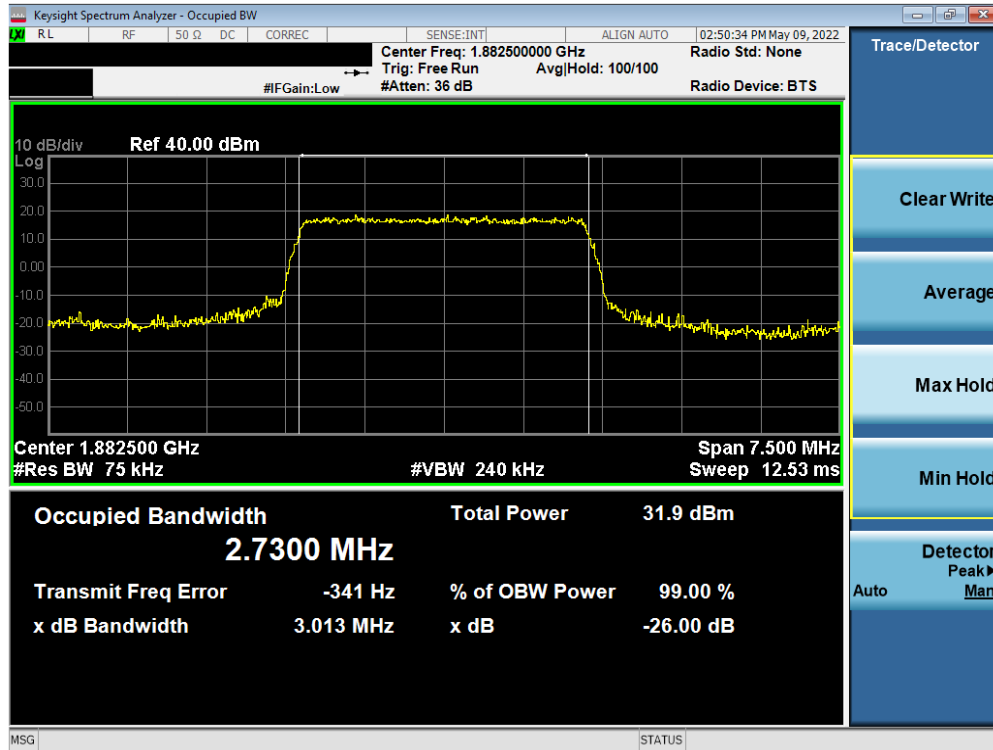


Plot 7-3. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz QPSK - Full RB Configuration)

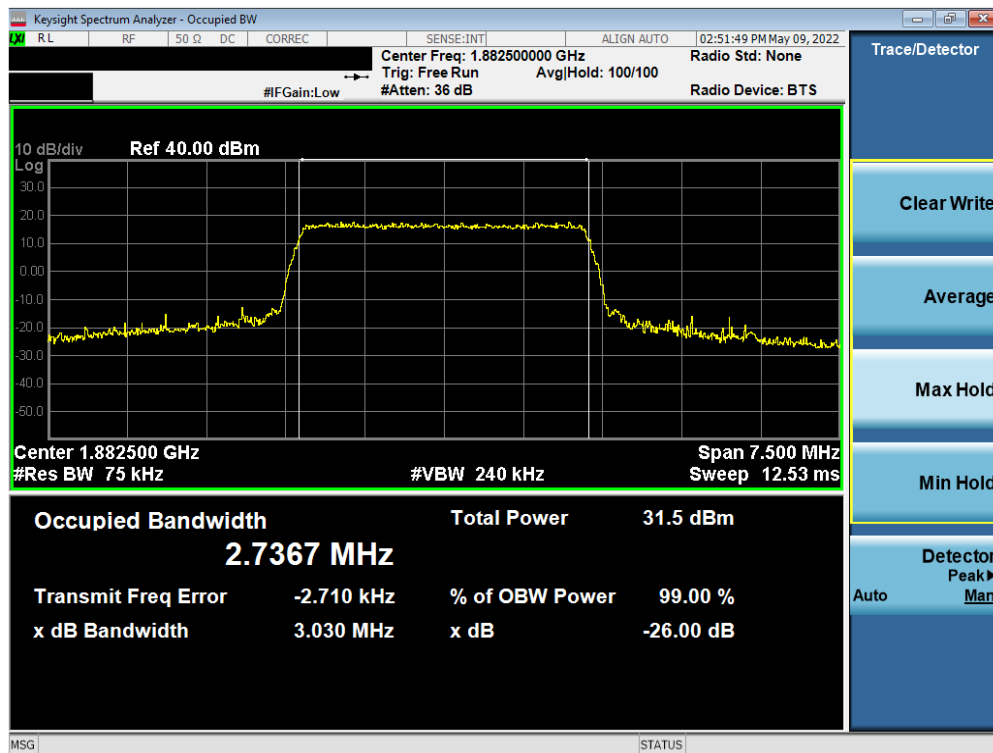


Plot 7-4. Occupied Bandwidth Plot (LTE Band 25/2 - 3MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 15 of 90


V2.1 11/9/2021

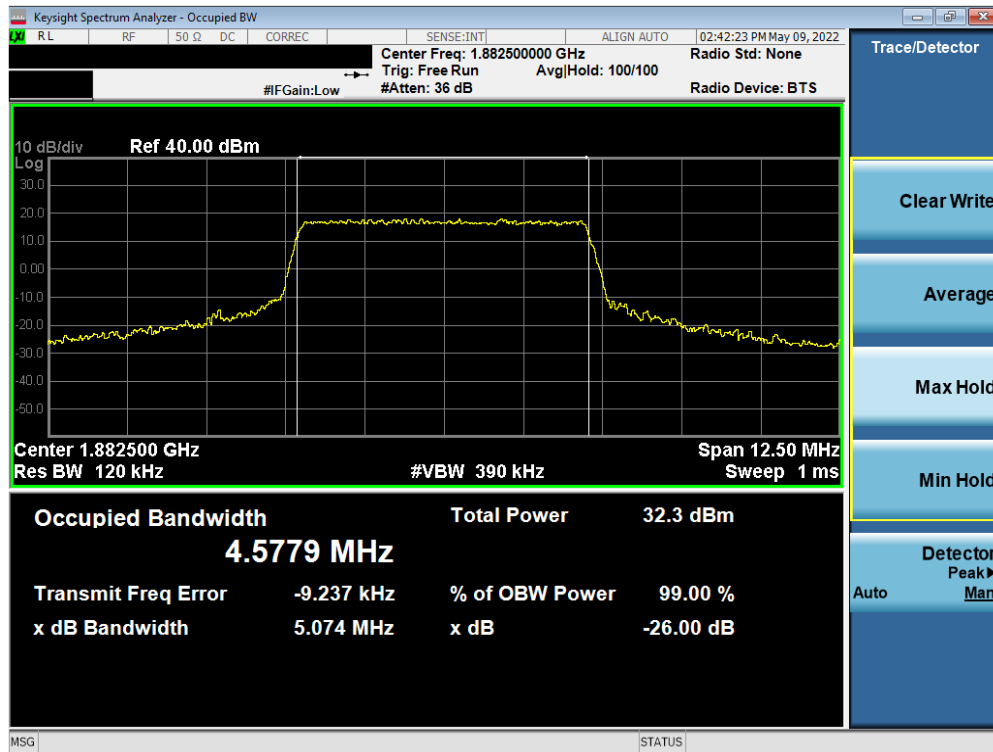


Plot 7-5. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz QPSK - Full RB Configuration)

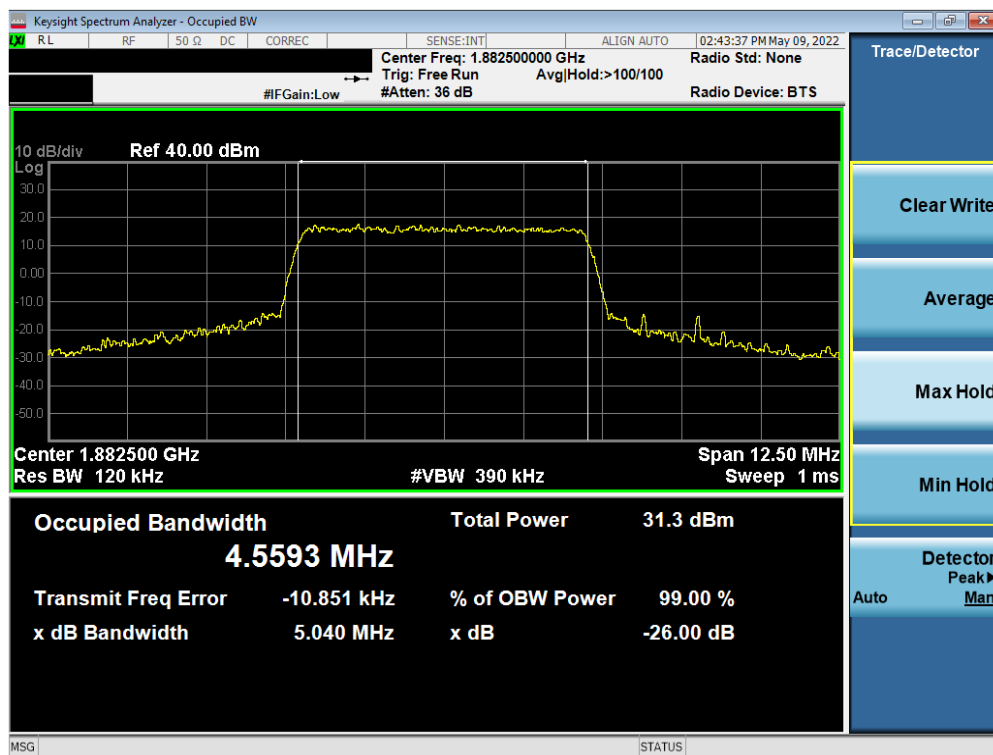


Plot 7-6. Occupied Bandwidth Plot (LTE Band 25/2 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 16 of 90


V2.1 11/9/2021

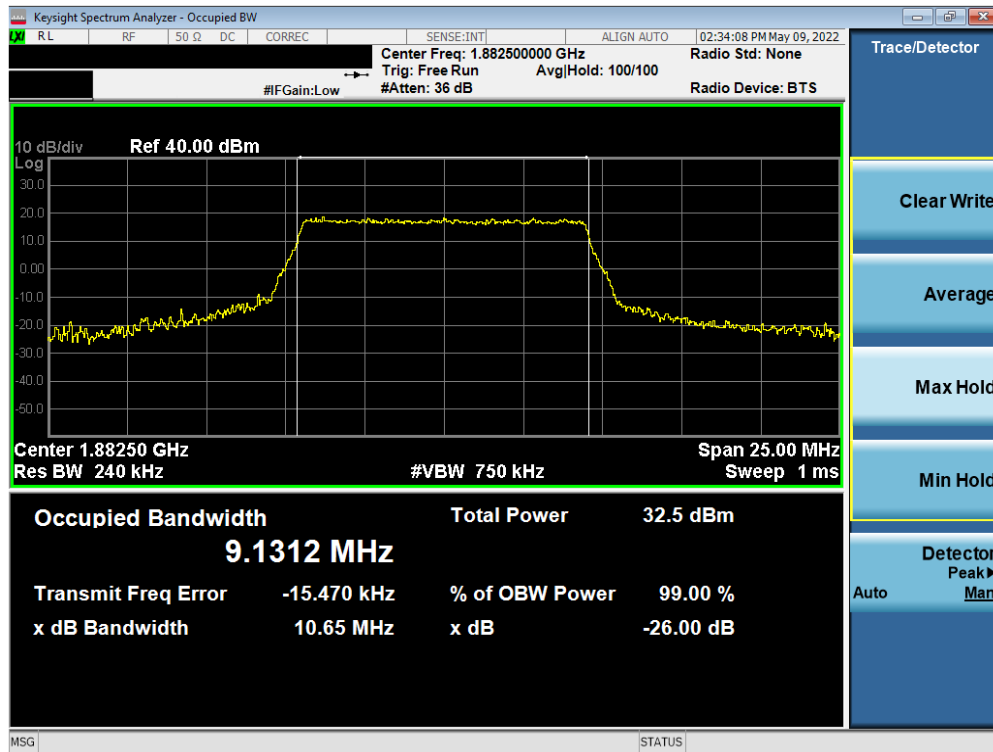


Plot 7-7. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz QPSK - Full RB Configuration)

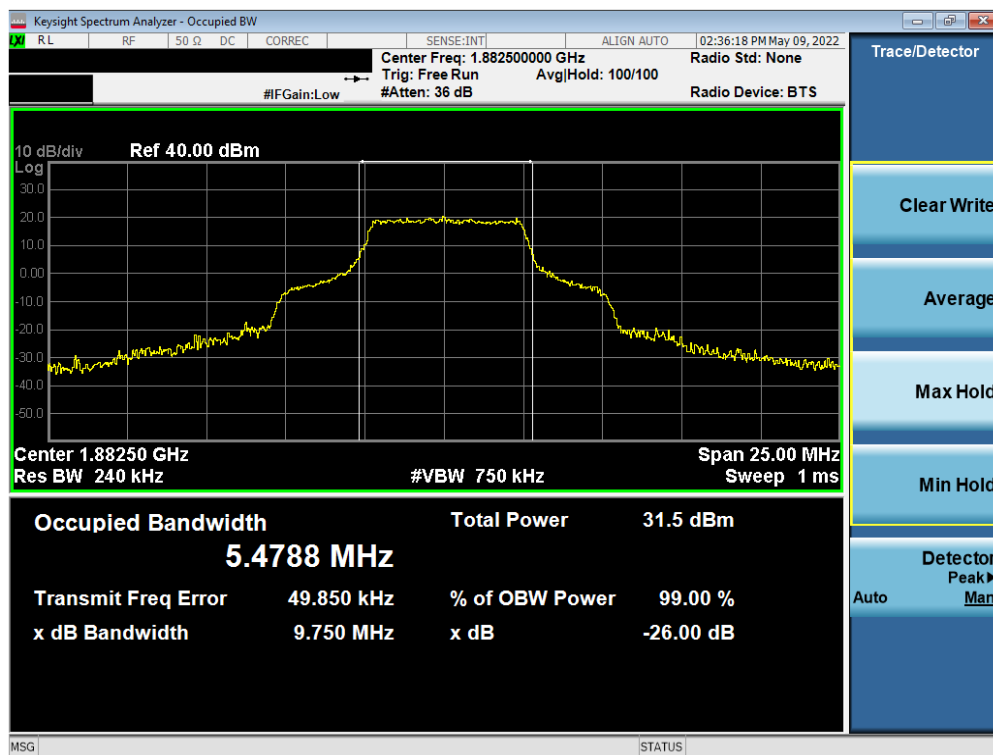


Plot 7-8. Occupied Bandwidth Plot (LTE Band 25/2 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 17 of 90


V2.1 11/9/2021

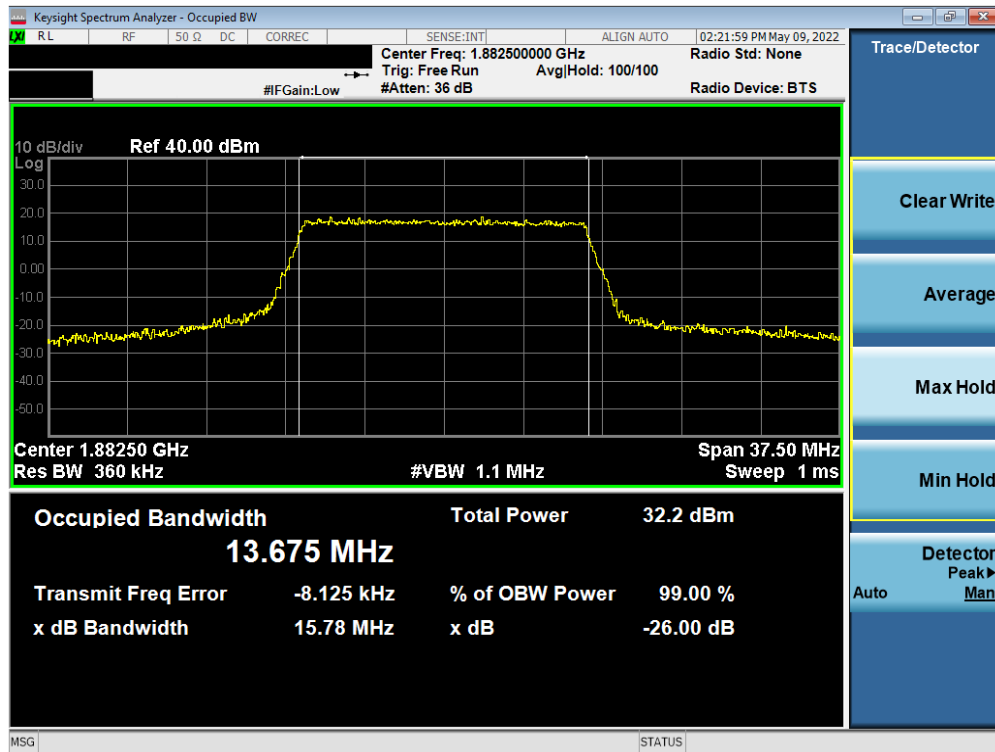

Plot 7-9. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz QPSK - Full RB Configuration)

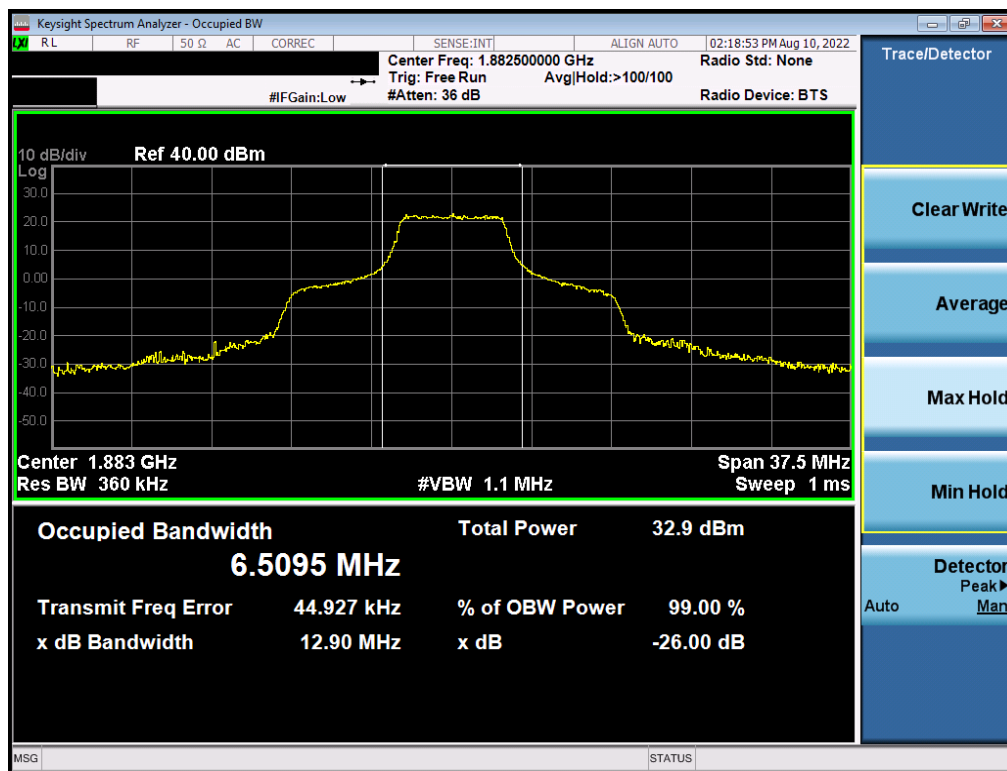

Plot 7-10. Occupied Bandwidth Plot (LTE Band 25/2 - 15MHz 16-QAM - Full RB Configuration)


FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 18 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




Plot 7-11. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz QPSK - Full RB Configuration)

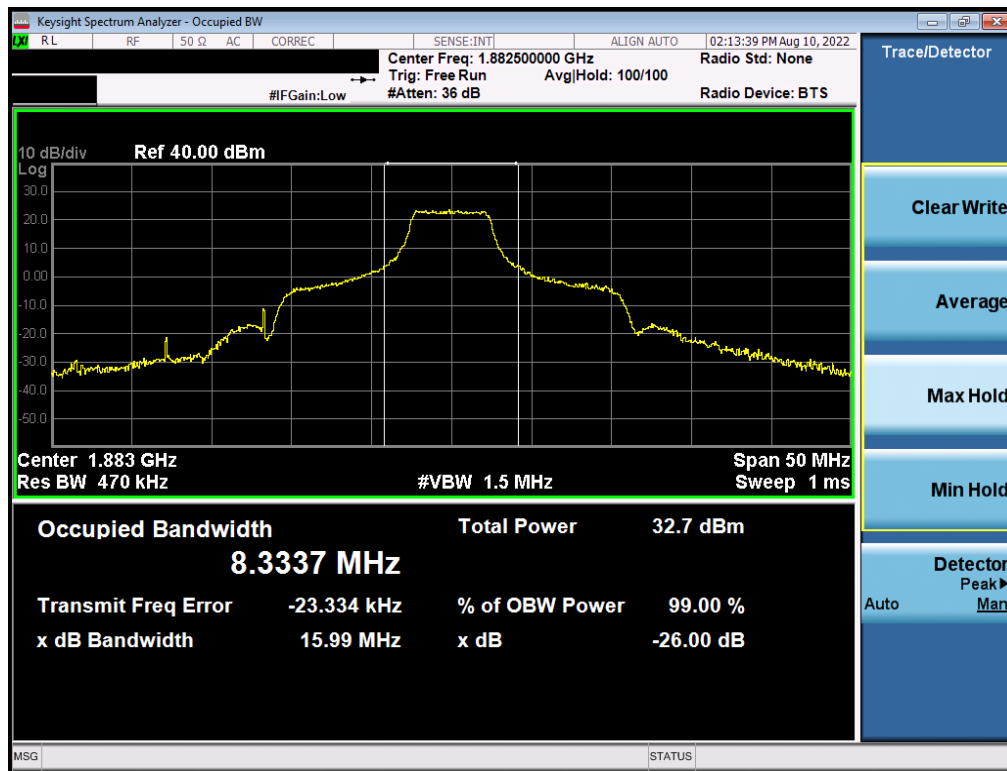


Plot 7-12. Occupied Bandwidth Plot (LTE Band 25/2 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 19 of 90

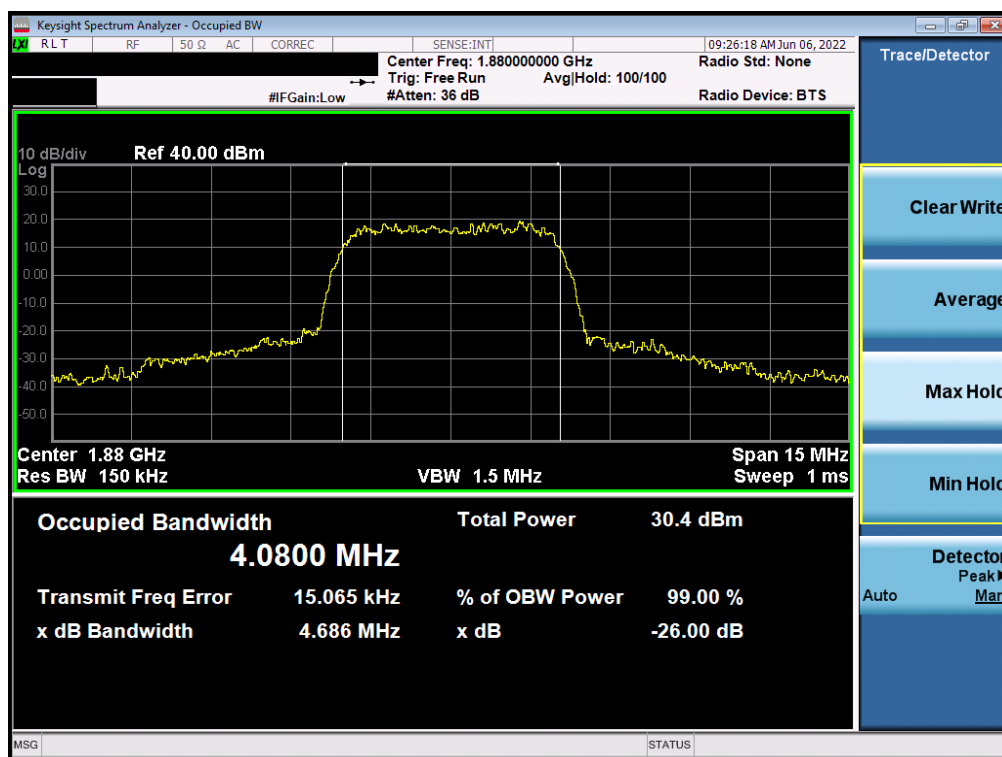

Plot 7-13. Occupied Bandwidth Plot (WCDMA, Ch. 9400)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 20 of 90

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §24.238(a)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 20GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

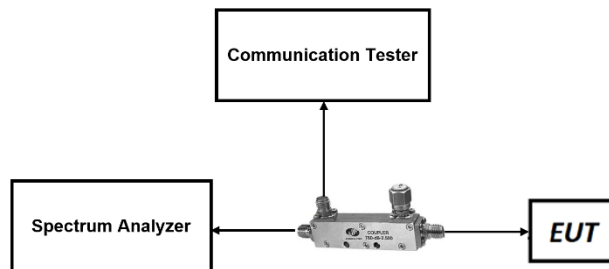




Figure 7-2. Test Instrument & Measurement Setup

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 21 of 90

V2.1 11/9/2021


Test Notes

1. Per Part 24, compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch
		Page 22 of 90

V2.1 11/9/2021


LTE Band 25/2

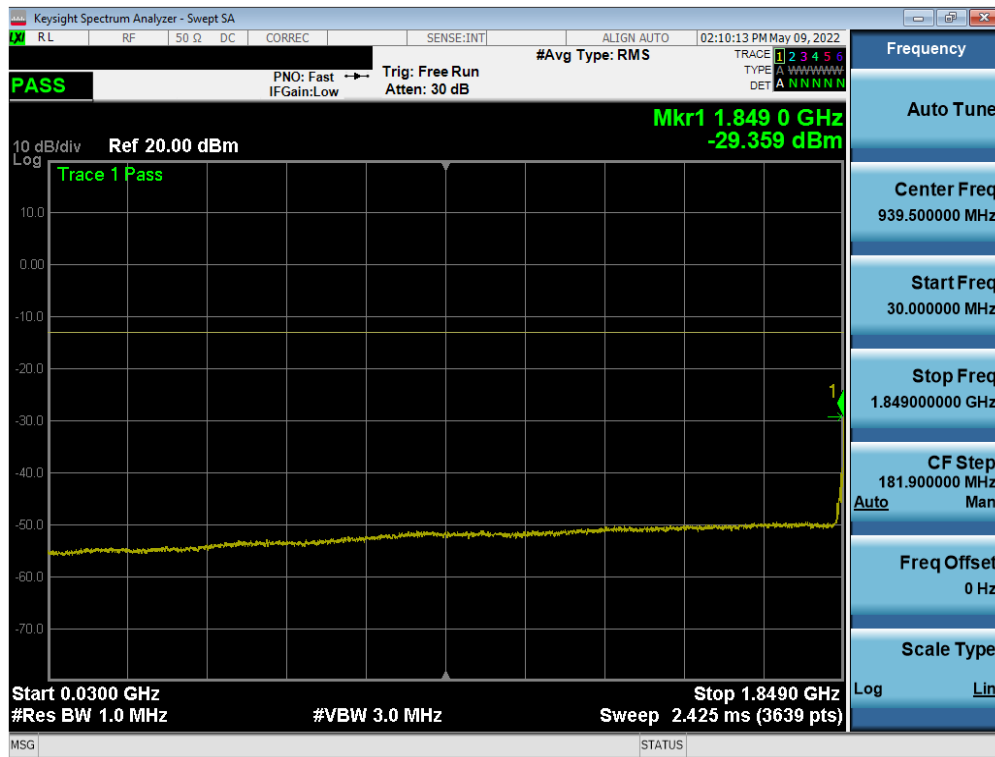


Plot 7-14. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

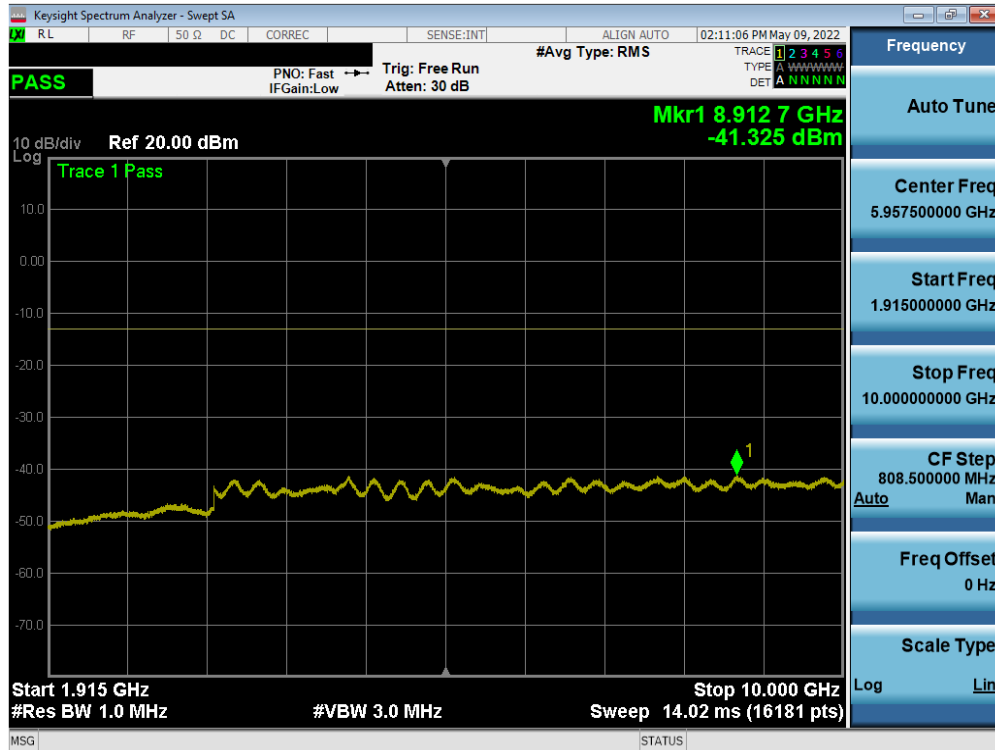


Plot 7-15. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 23 of 90

V2.1 11/9/2021

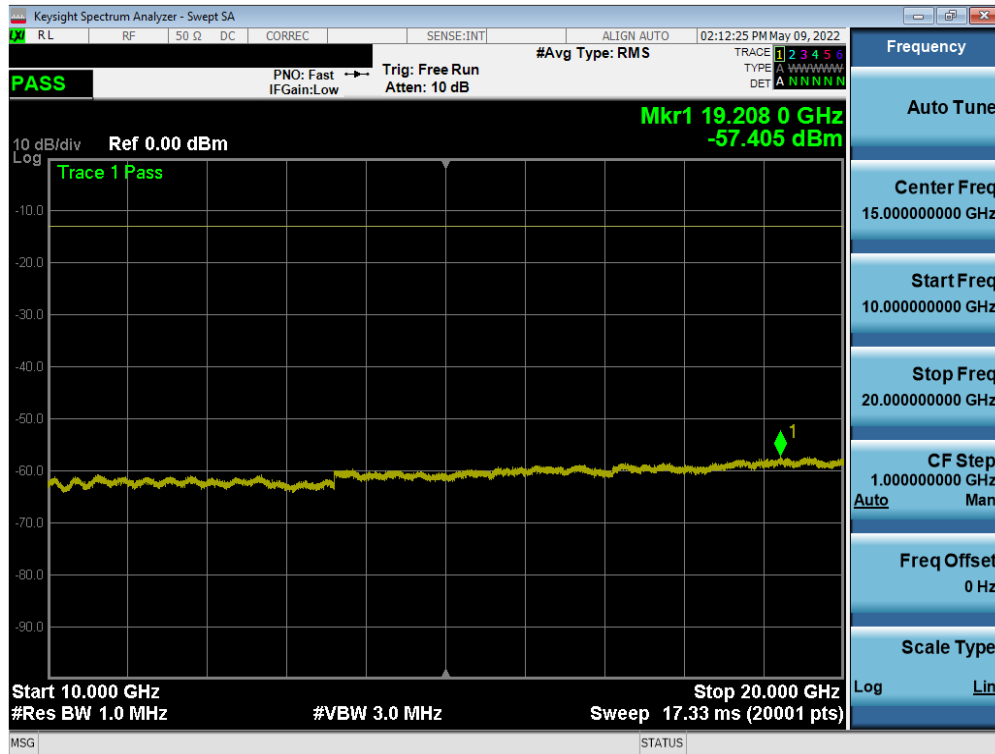


Plot 7-16. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

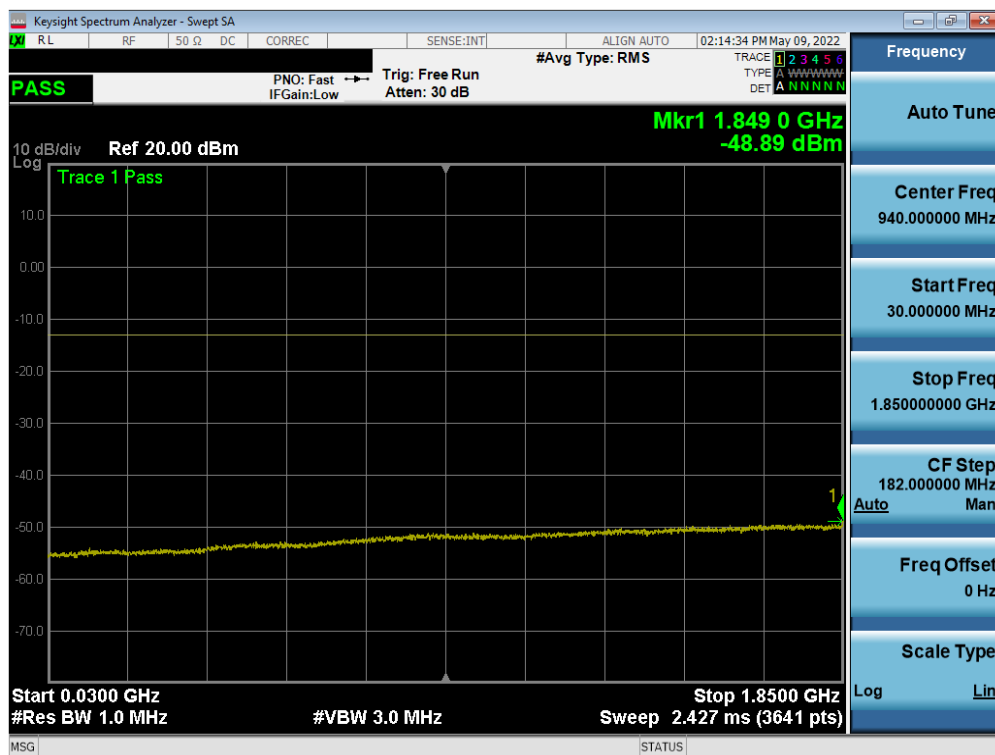


Plot 7-17. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 24 of 90

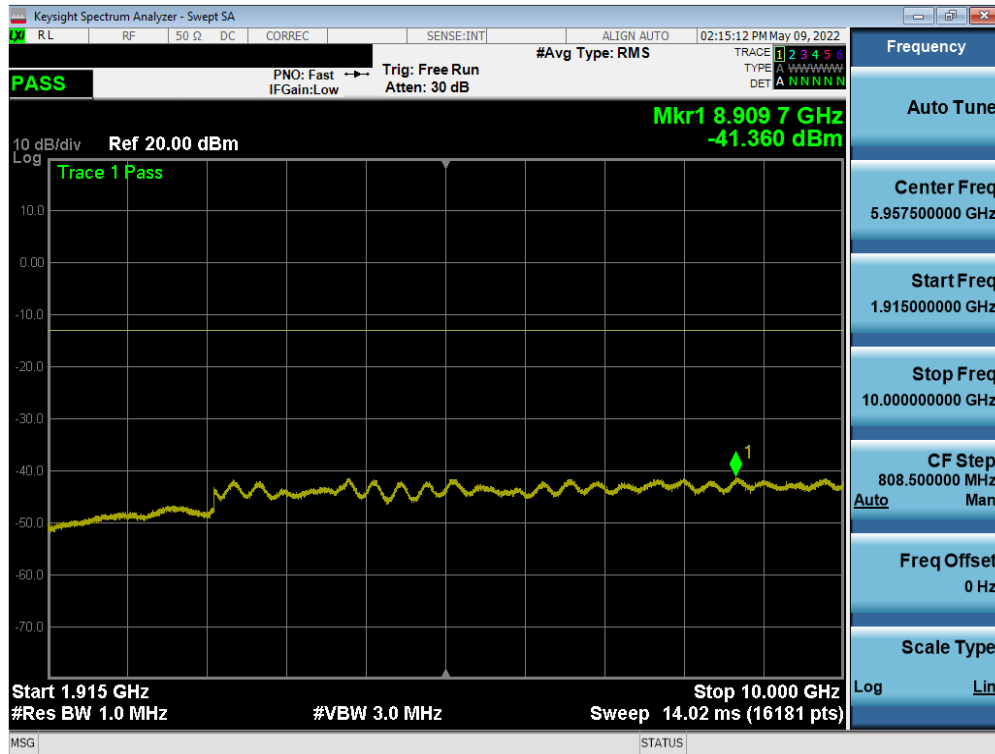

Plot 7-18. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

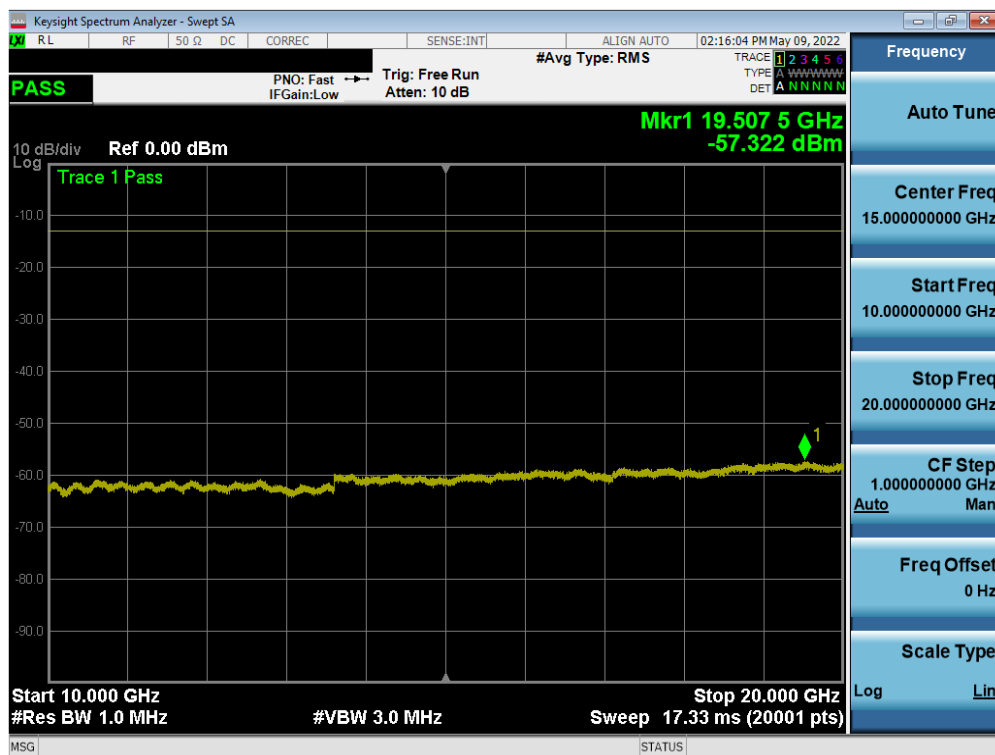

Plot 7-19. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 25 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




Plot 7-20. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

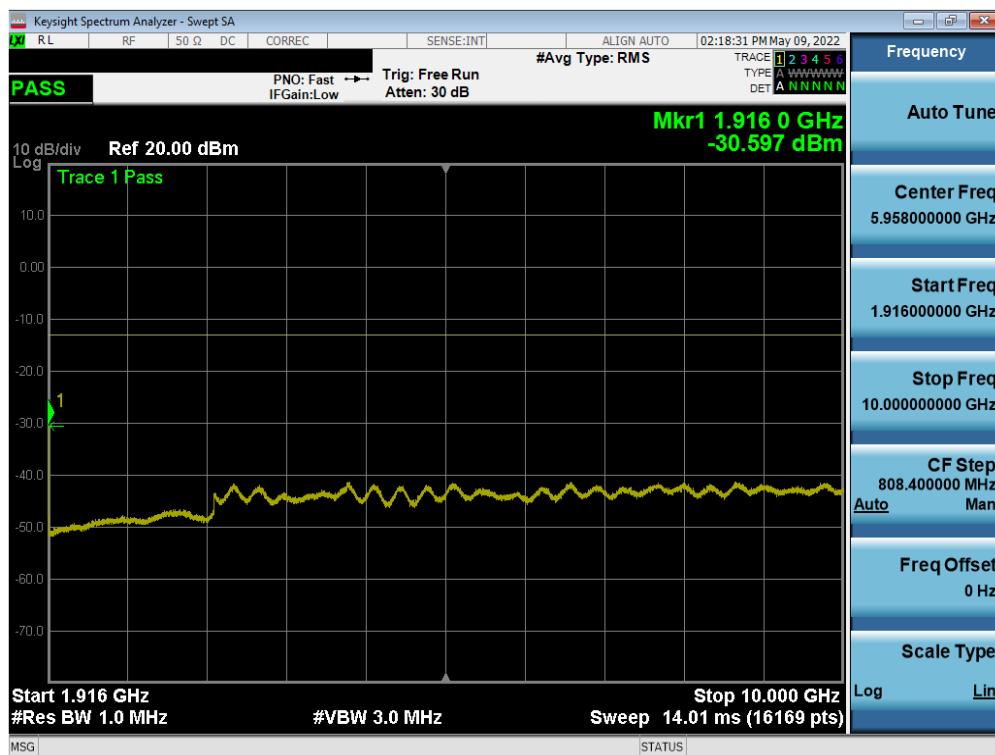


Plot 7-21. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 26 of 90

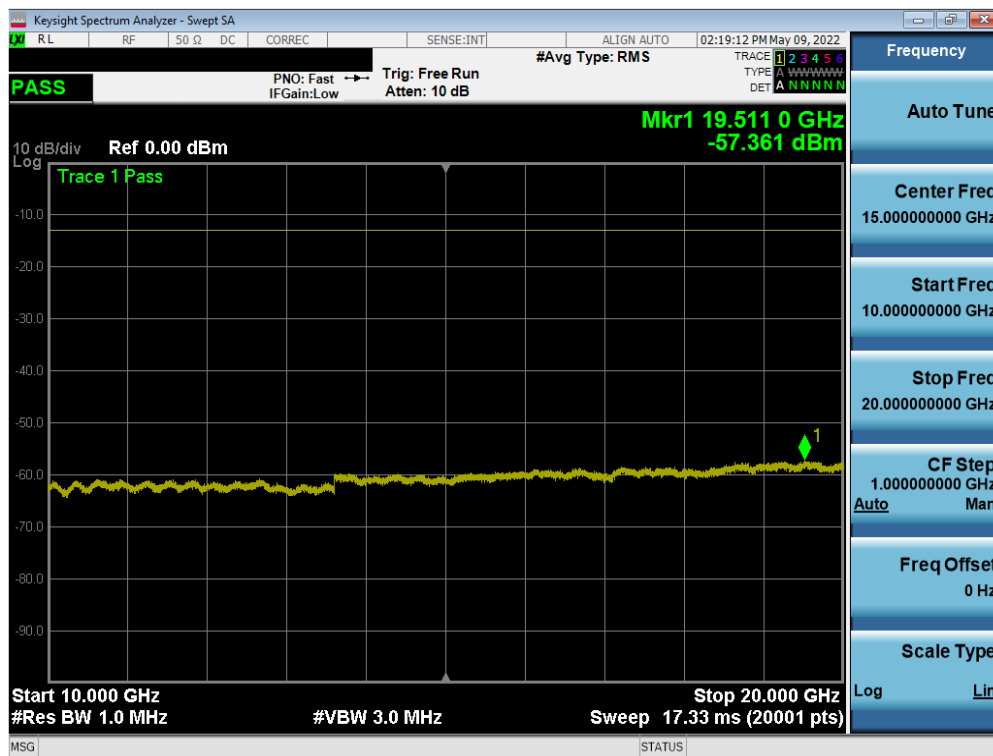


Plot 7-22. Conducted Spurious Plot (LTE Band 25/2 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 27 of 90


V2.1 11/9/2021

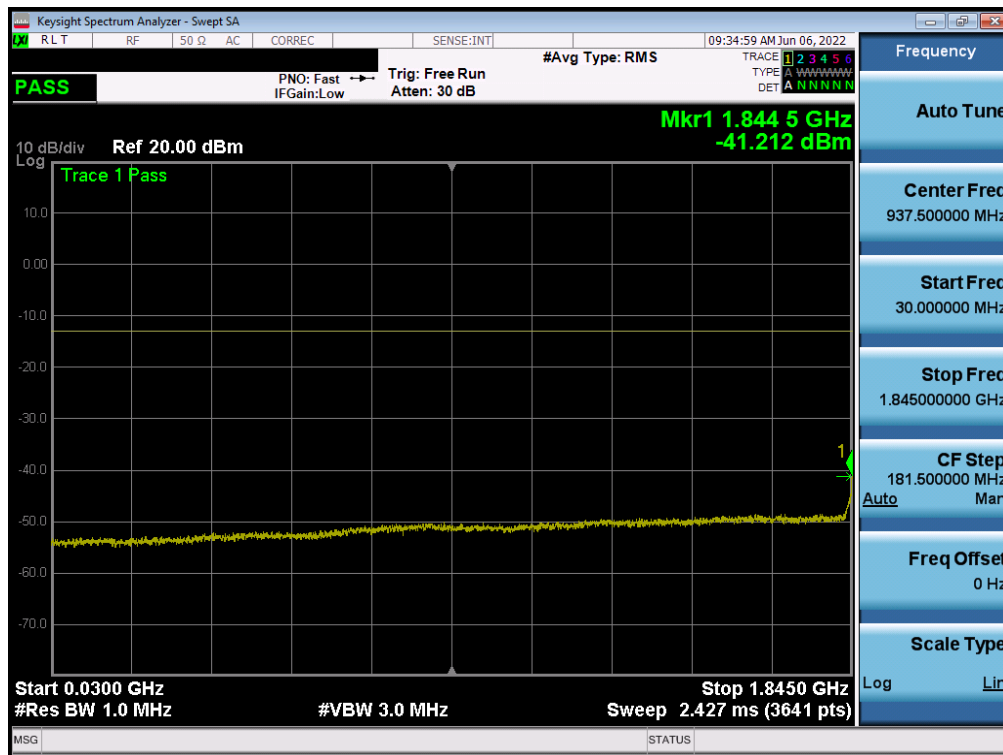


Plot 7-23. Conducted Spurious Plot (WCDMA Ch. 9262)

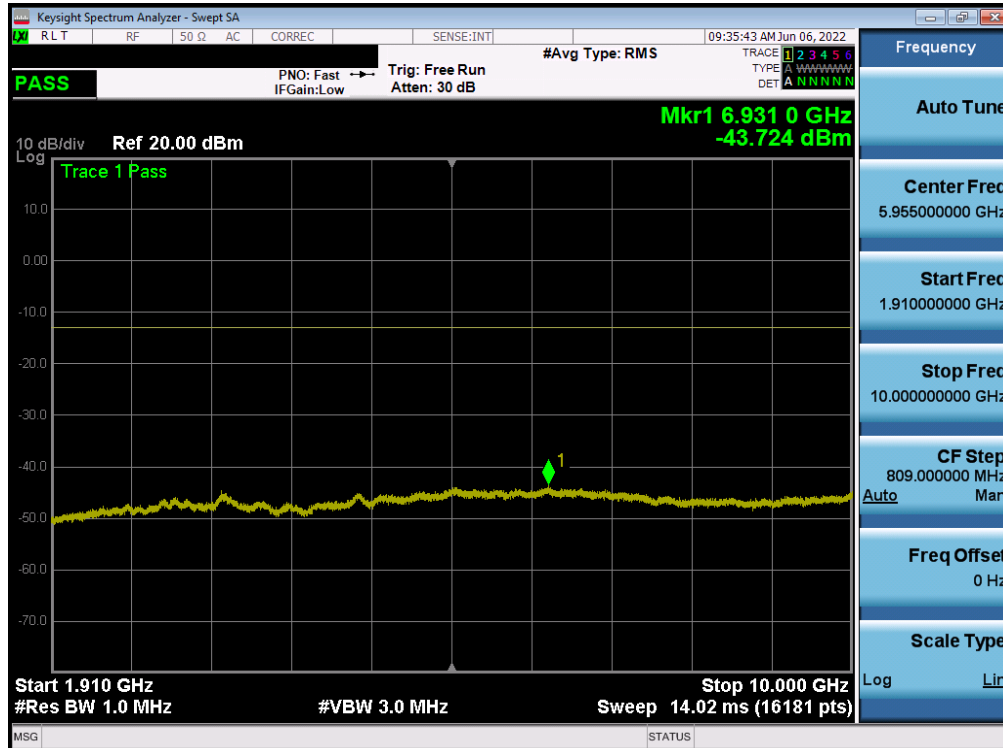


Plot 7-24. Conducted Spurious Plot (WCDMA Ch. 9262)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 28 of 90

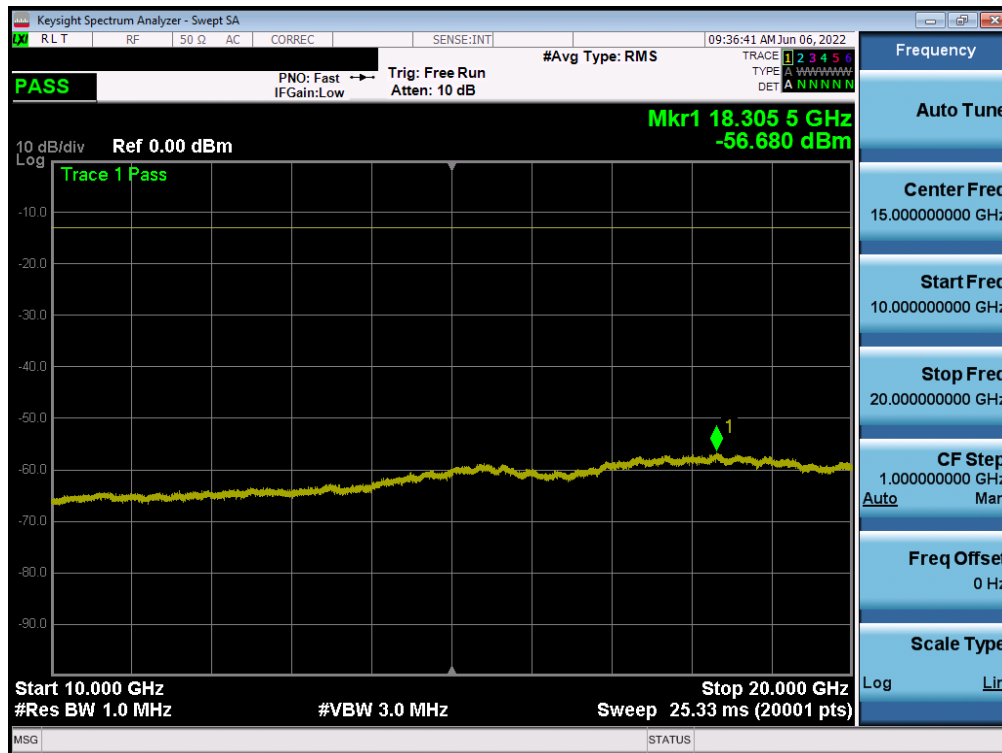


Plot 7-25. Conducted Spurious Plot (WCDMA Ch. 9262)

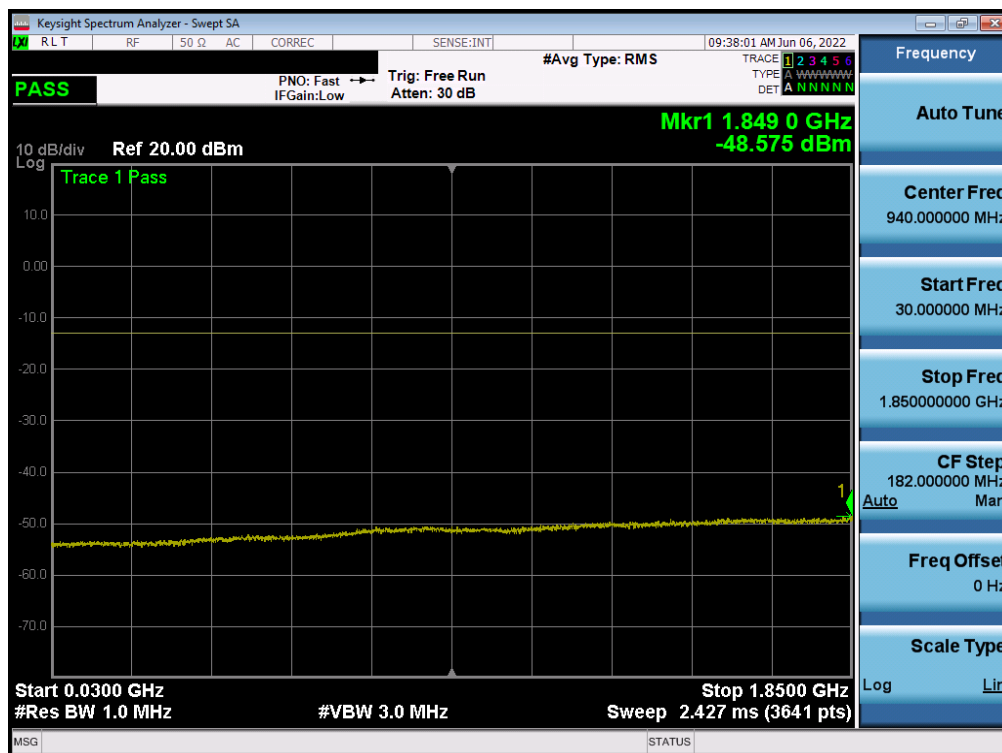


Plot 7-26. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCG-A2622	<p>element</p> <p>PART 24 MEASUREMENT REPORT</p>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 29 of 90

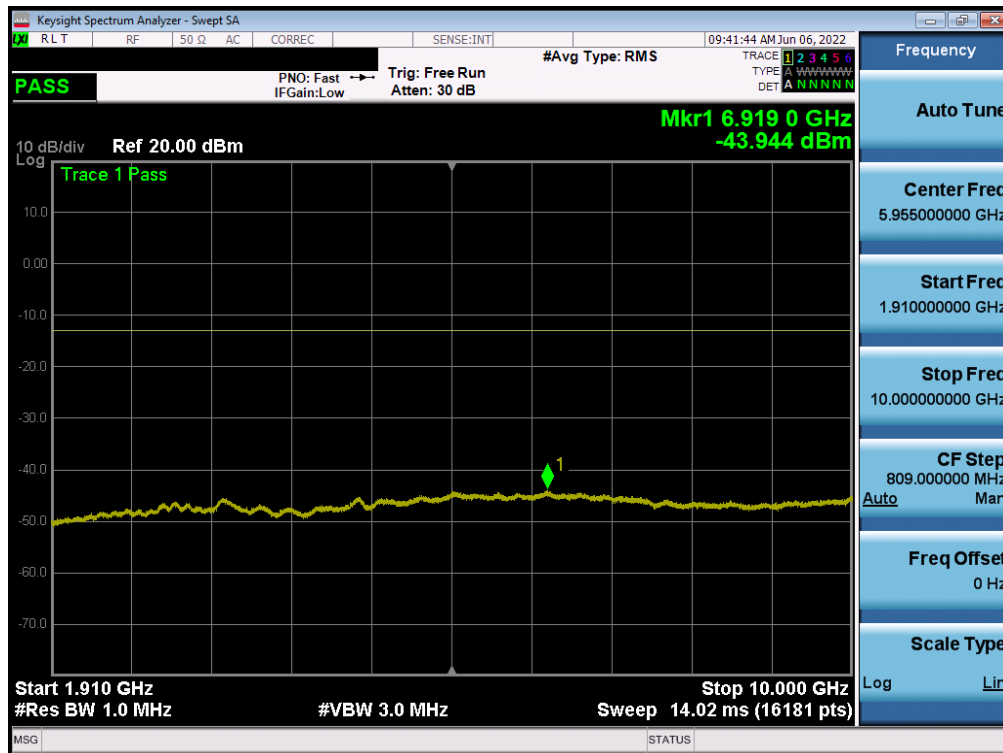


Plot 7-27. Conducted Spurious Plot (WCDMA Ch. 9400)

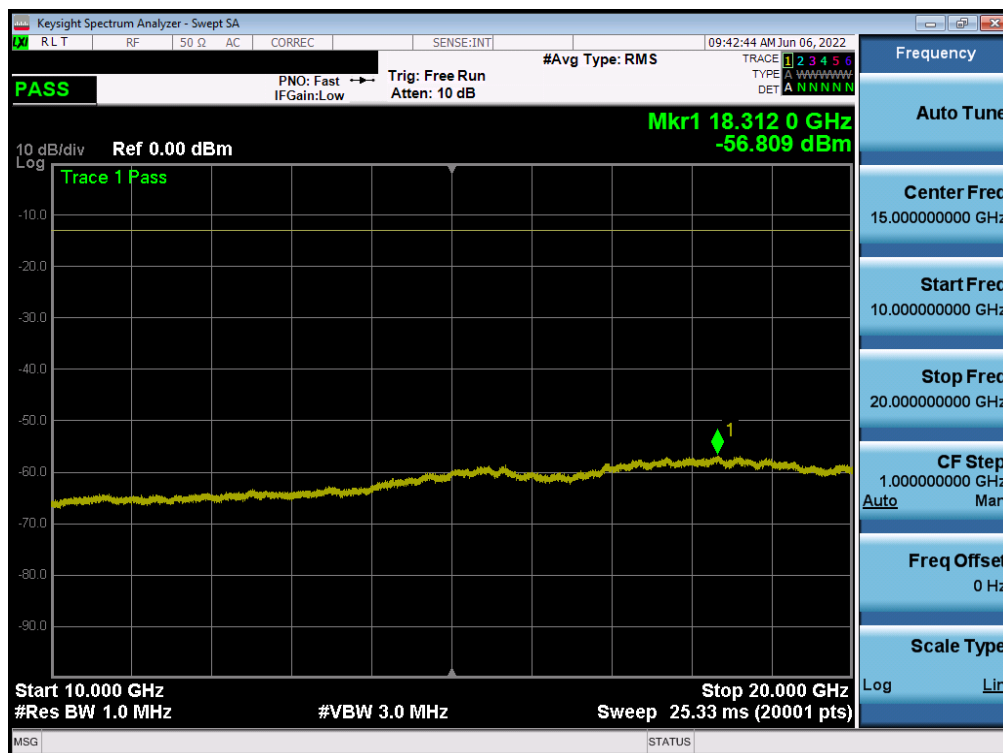


Plot 7-28. Conducted Spurious Plot (WCDMA Ch. 9400)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 30 of 90

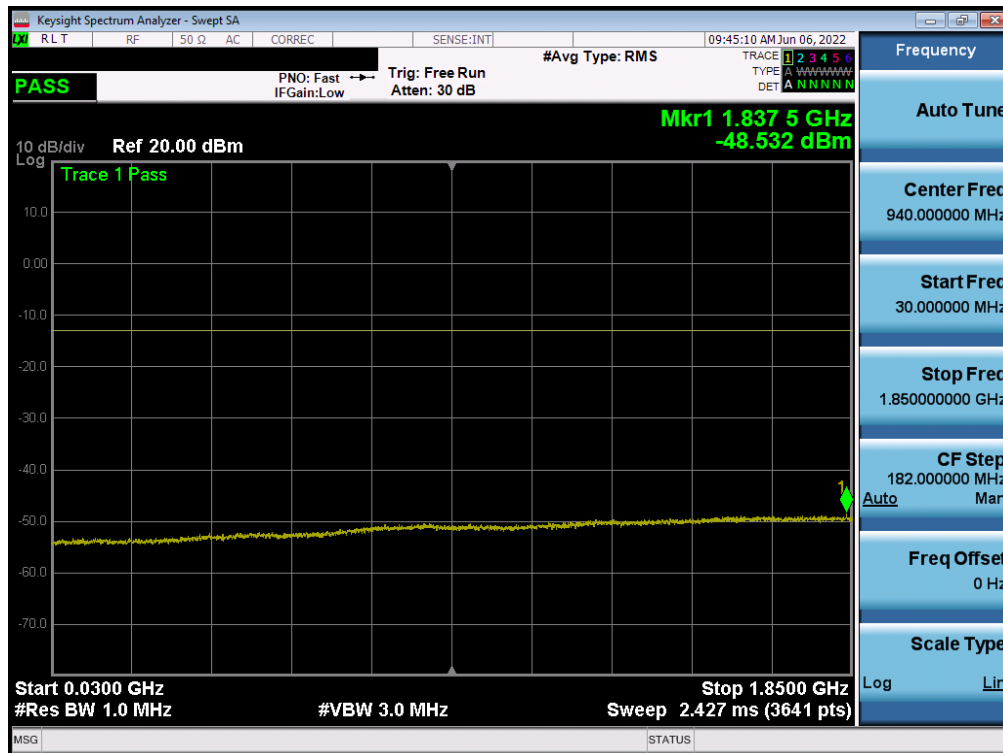


Plot 7-29. Conducted Spurious Plot (WCDMA Ch. 9538)

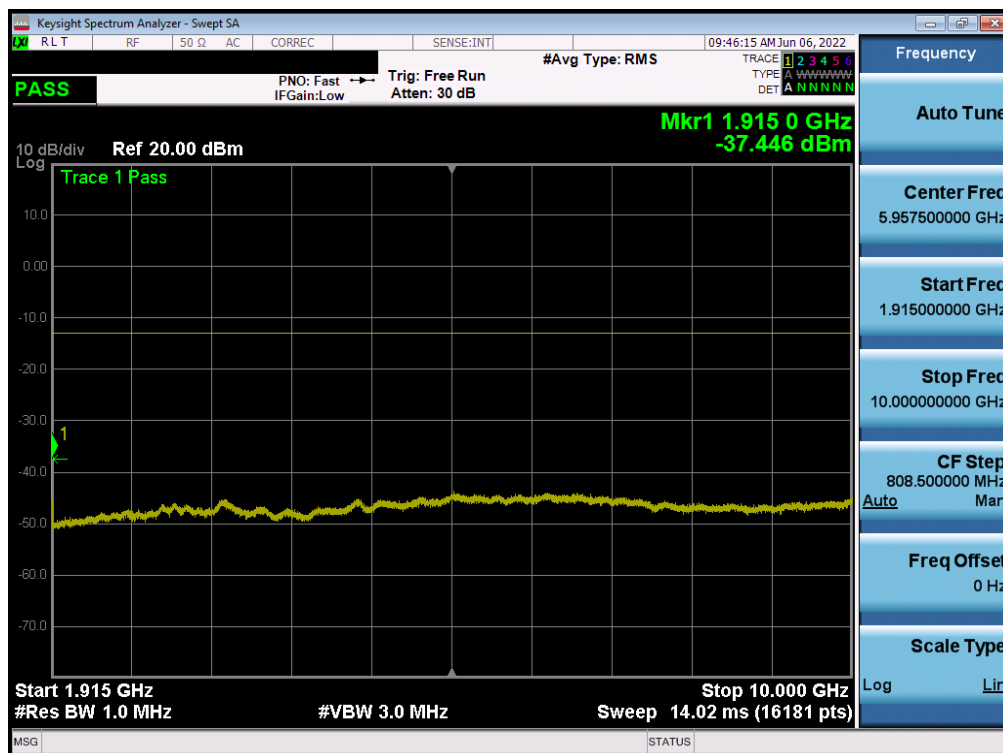

Plot 7-30. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 31 of 90

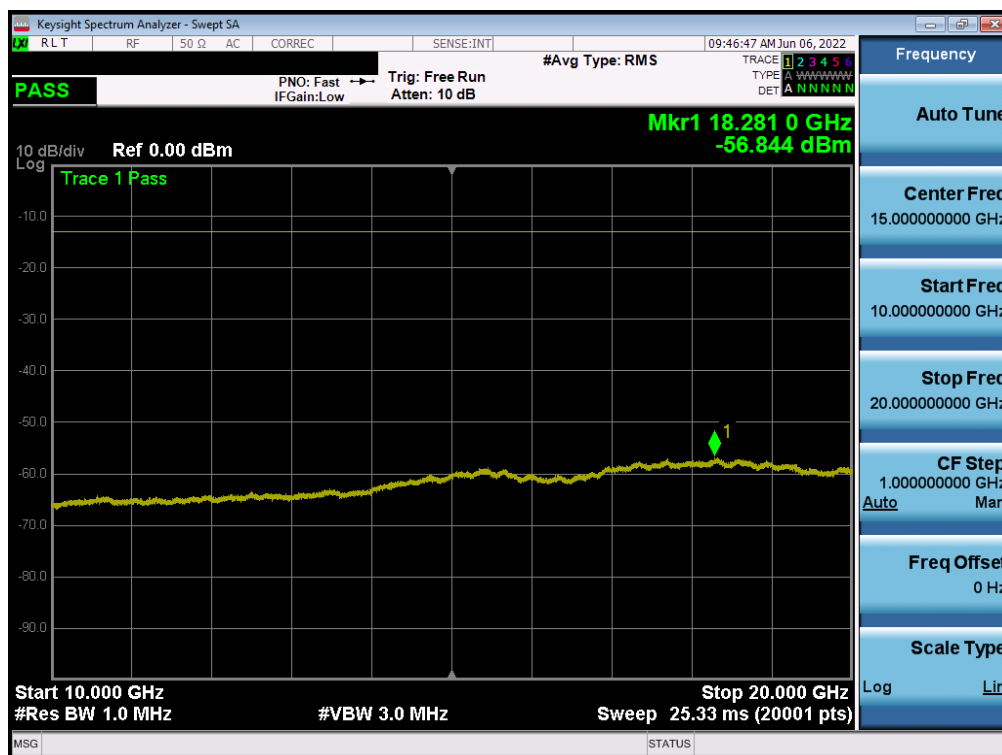

Plot 7-31. Conducted Spurious Plot (WCDMA Ch. 9538)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 32 of 90

V2.1 11/9/2021

7.4 Band Edge Emissions at Antenna Terminal

§2.1051, §24.238(a)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

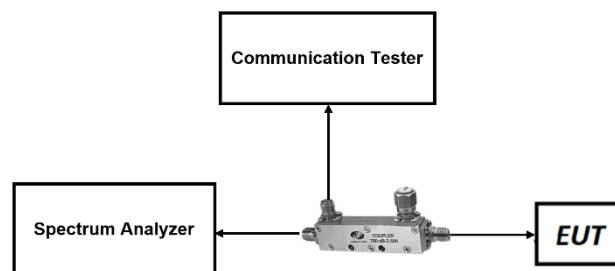




Figure 7-3. Test Instrument & Measurement Setup

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 33 of 90

V2.1 11/9/2021


Test Notes

1. Per 24.238(a), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 34 of 90

V2.1 11/9/2021


LTE Band 25

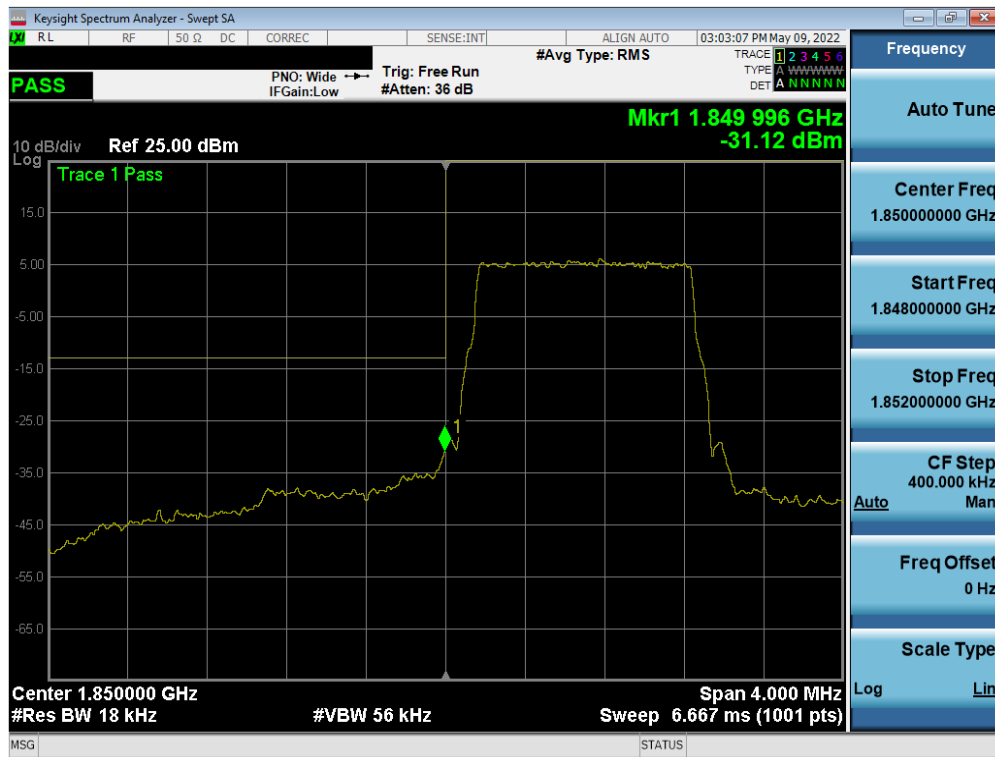

Plot 7-32. Lower Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

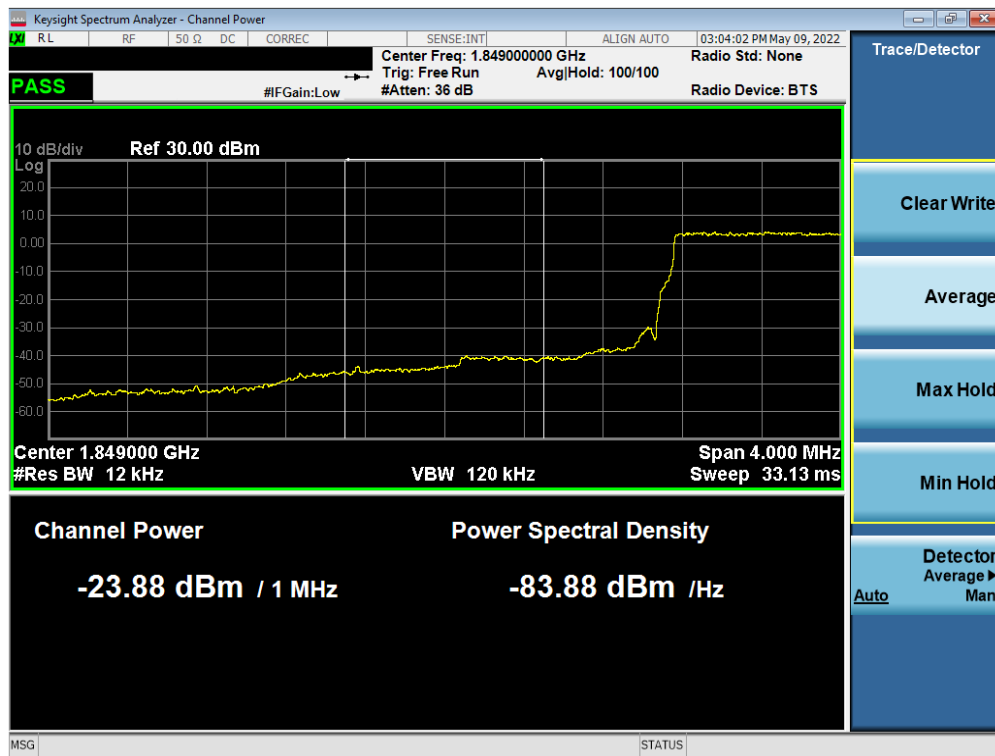

Plot 7-33. Extended Lower Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 35 of 90

V2.1 11/9/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.




Plot 7-34. Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

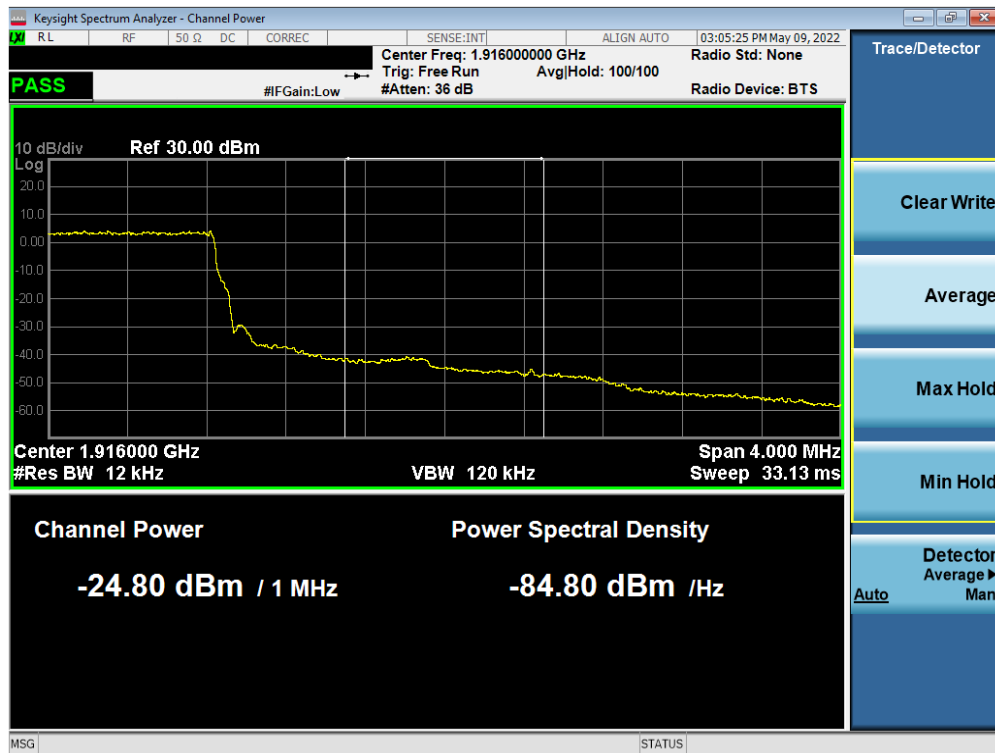


Plot 7-35. Extended Upper Band Edge Plot (LTE Band 25 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622		PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 36 of 90

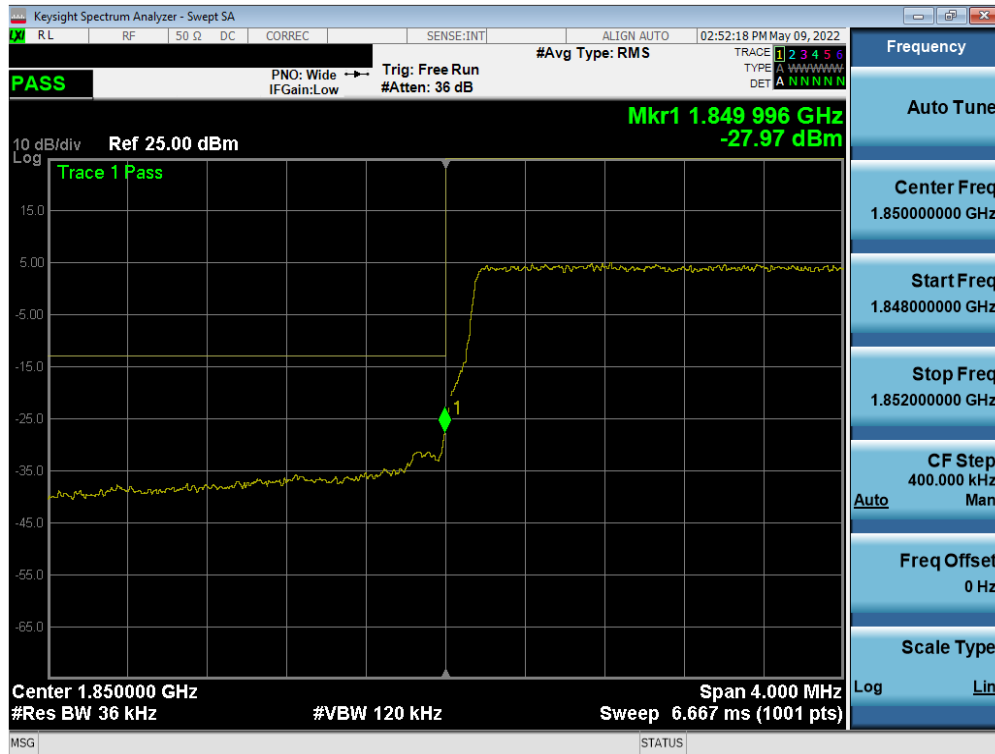

Plot 7-36. Lower Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

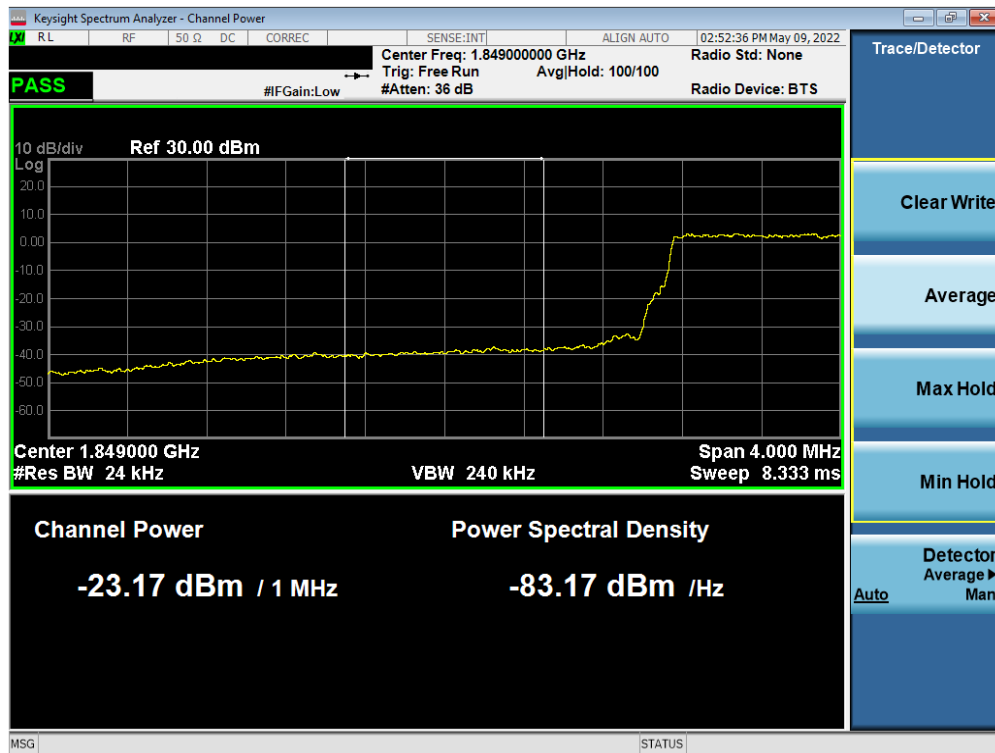


Plot 7-37. Extended Lower Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 37 of 90




Plot 7-38. Upper Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

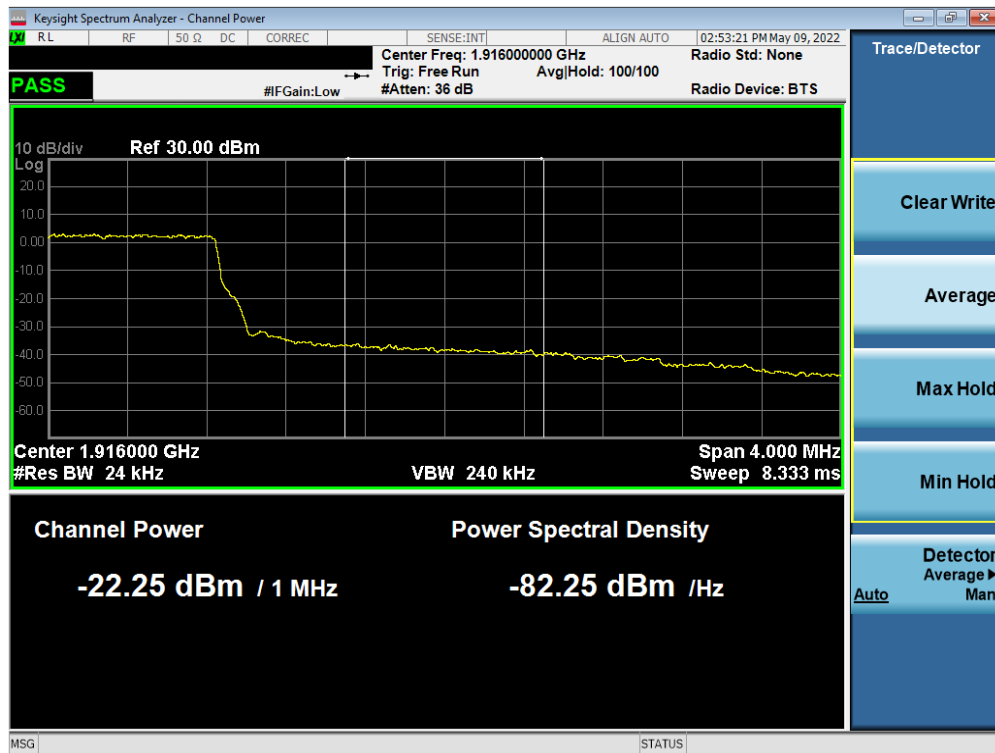


Plot 7-39. Extended Upper Band Edge Plot (LTE Band 25 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 38 of 90

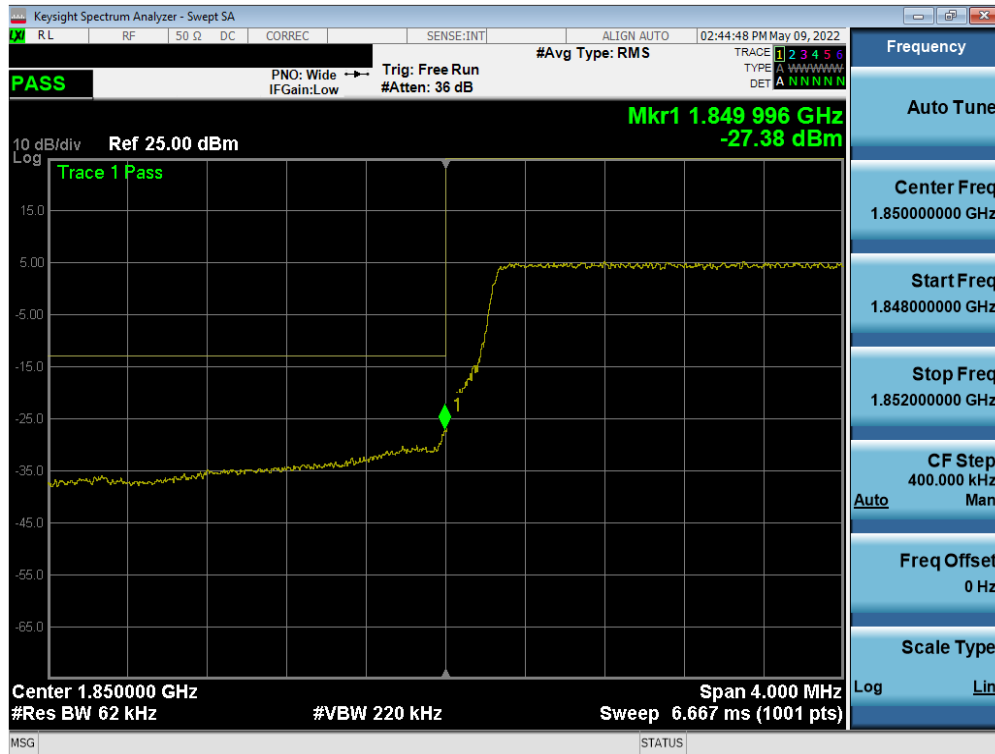

Plot 7-40. Lower Band Edge Plot (LTE Band 25 – 5MHz QPSK – Full RB Configuration)

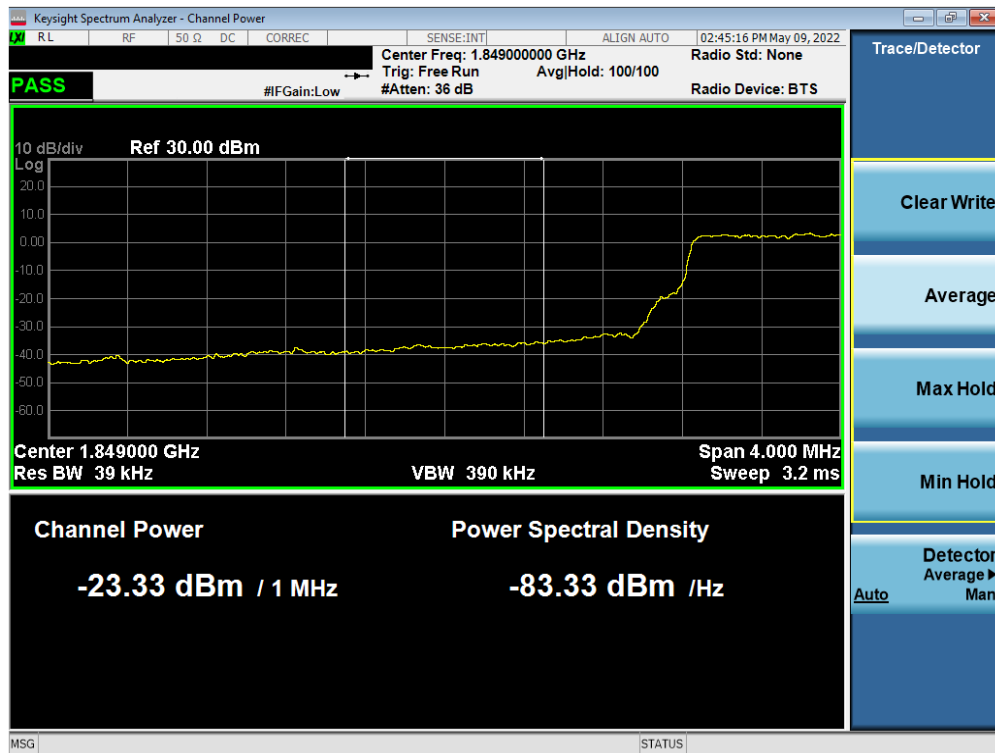


Plot 7-41. Extended Lower Band Edge Plot (LTE Band 25 – 5MHz QPSK – Full RB Configuration)


FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 39 of 90




Plot 7-42. Upper Band Edge Plot (LTE Band 25 – 5MHz QPSK – Full RB Configuration)

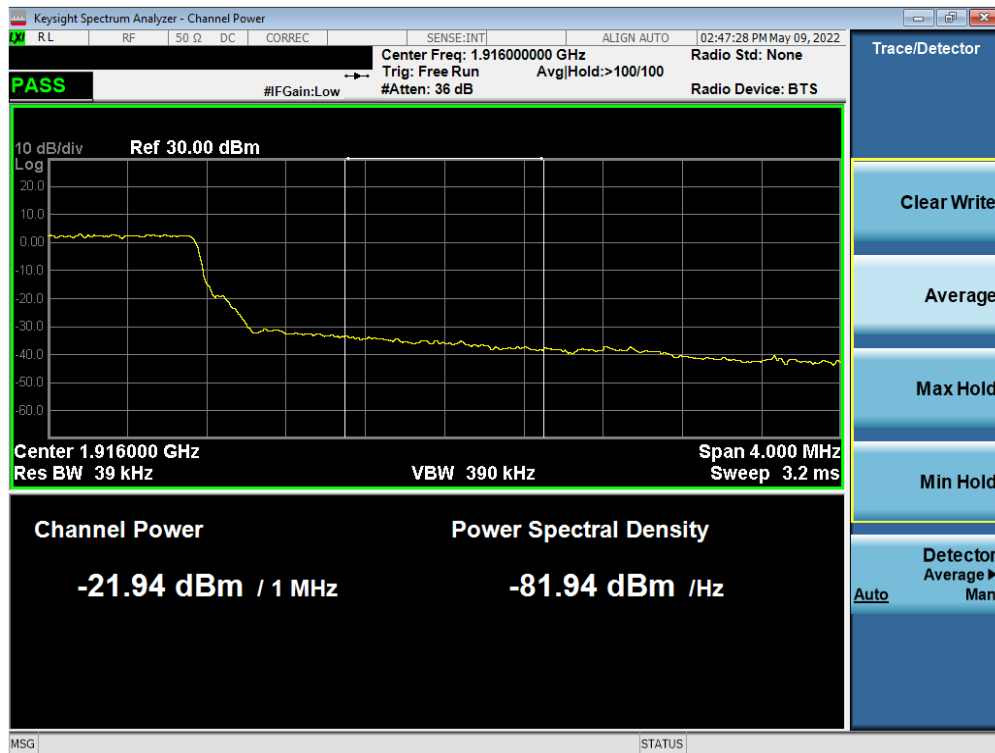


Plot 7-43. Extended Upper Band Edge Plot (LTE Band 25 – 5MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 40 of 90

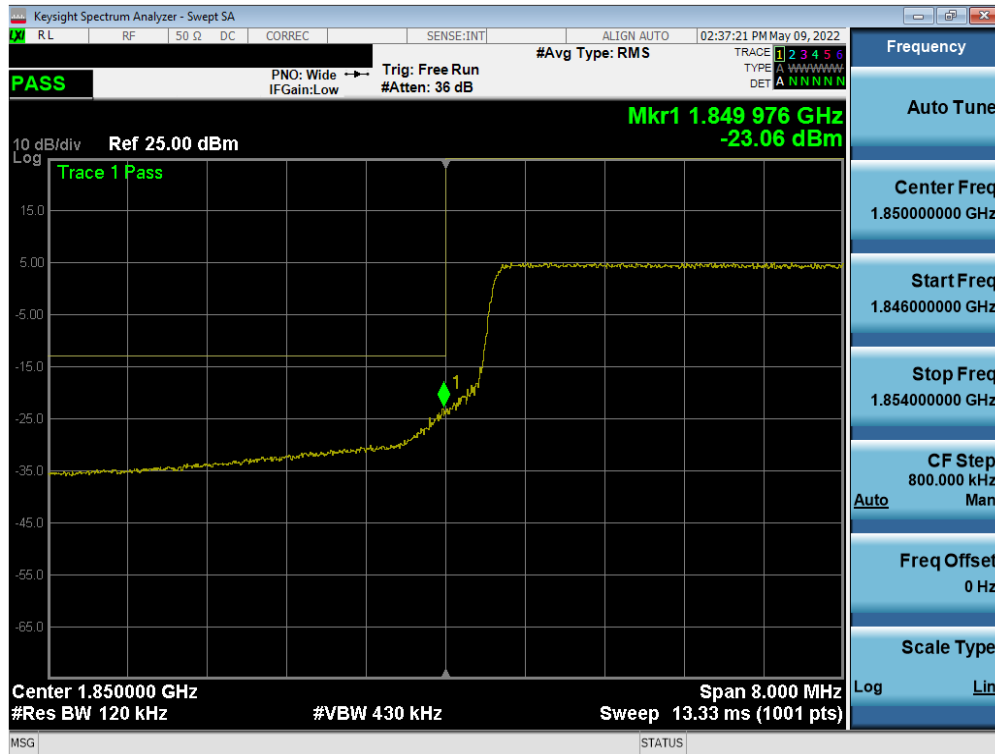

Plot 7-44. Lower Band Edge Plot (LTE Band 25 – 10MHz QPSK – Full RB Configuration)

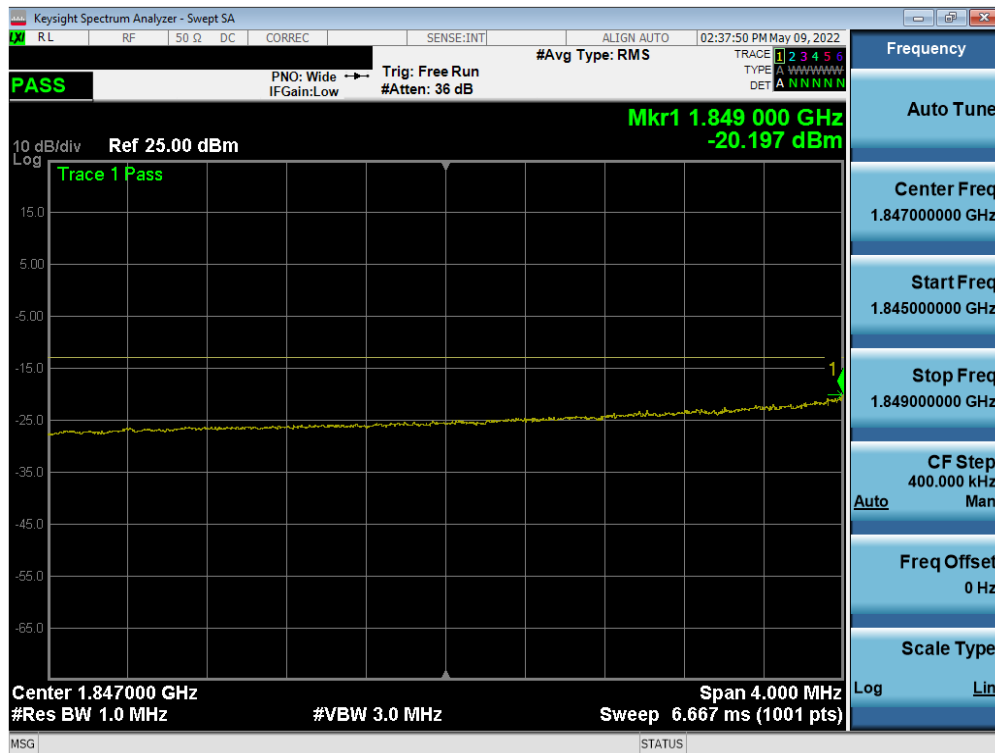


Plot 7-45. Extended Lower Band Edge Plot (LTE Band 25 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 41 of 90

V2.1 11/9/2021




Plot 7-46. Upper Band Edge Plot (LTE Band 25 – 10MHz QPSK – Full RB Configuration)

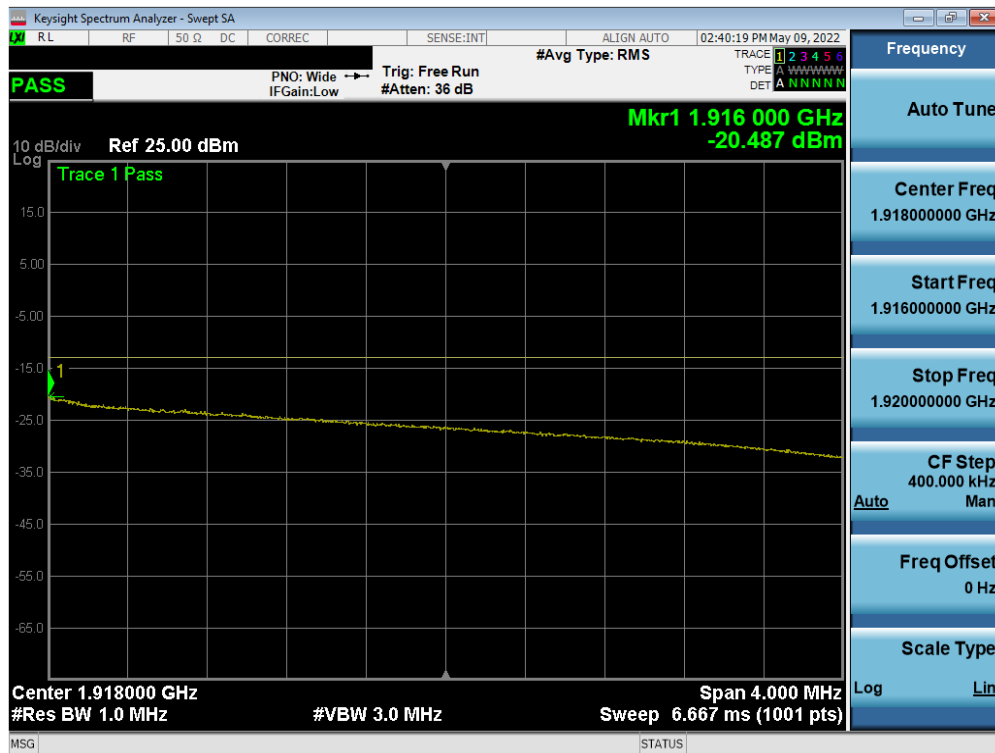


Plot 7-47. Extended Upper Band Edge Plot (LTE Band 25 – 10MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 42 of 90

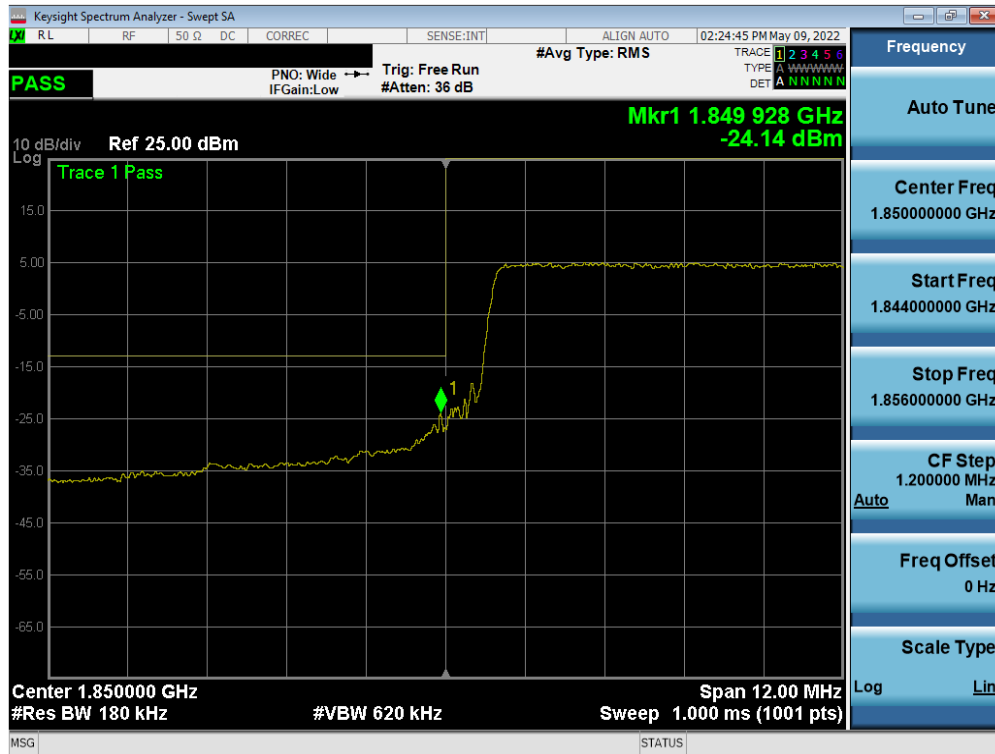

Plot 7-48. Lower Band Edge Plot (LTE Band 25 – 15MHz QPSK – Full RB Configuration)

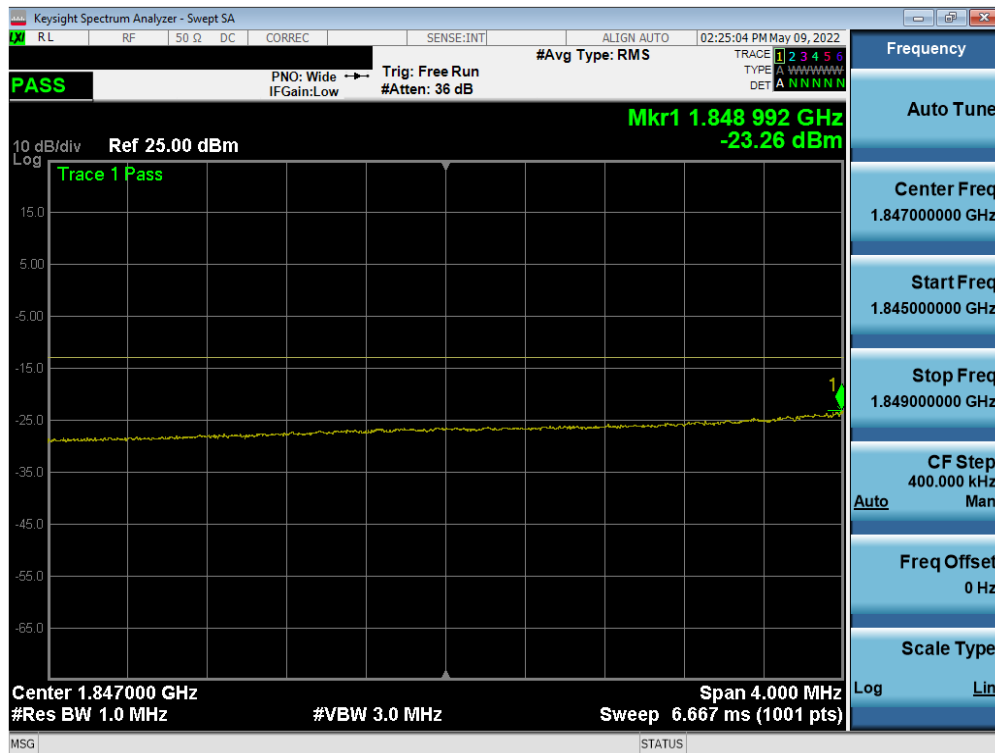


Plot 7-49. Extended Lower Band Edge Plot (LTE Band 25 – 15MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 43 of 90




Plot 7-50. Upper Band Edge Plot (LTE Band 25 – 15MHz QPSK – Full RB Configuration)

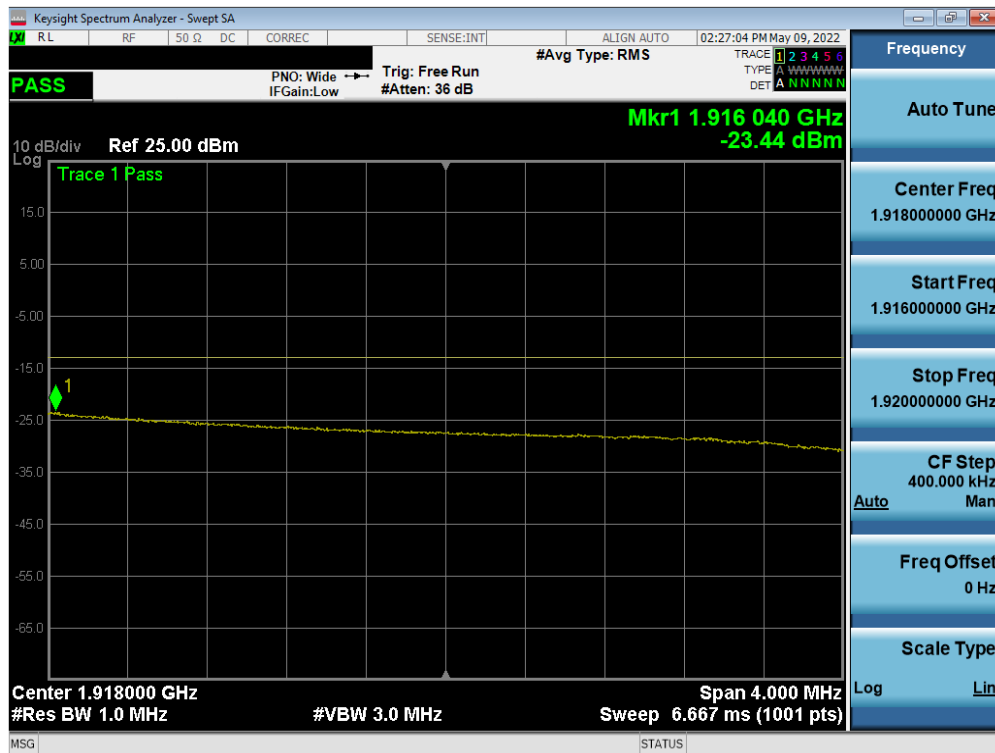

Plot 7-51. Extended Upper Band Edge Plot (LTE Band 25 – 15MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 44 of 90

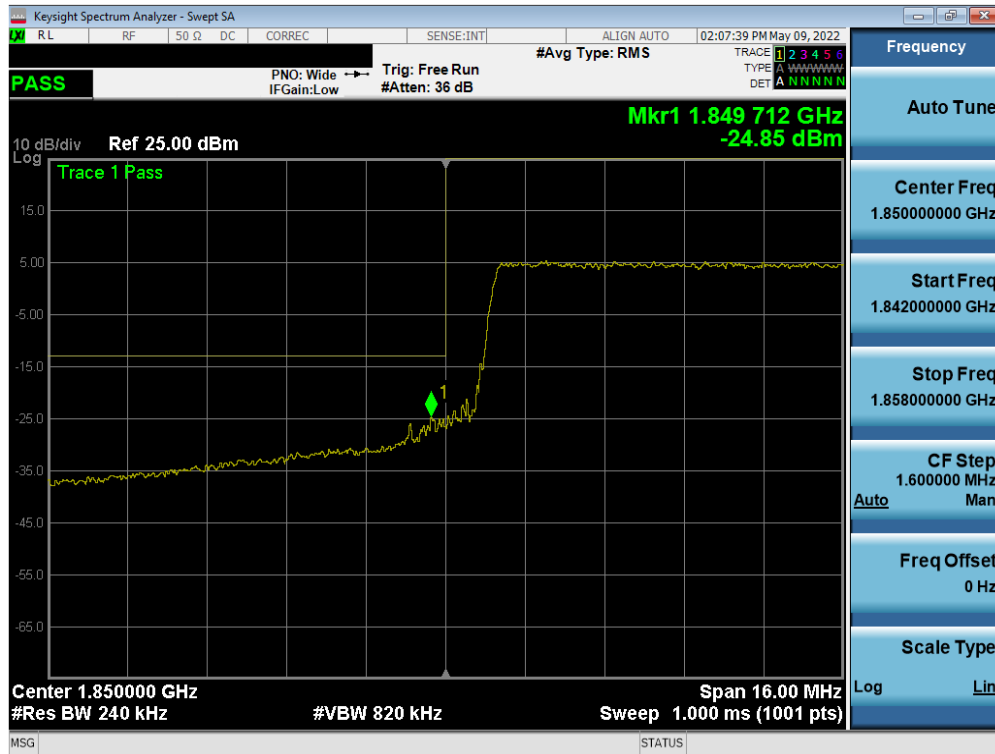

Plot 7-52. Lower Band Edge Plot (LTE Band 25 – 20MHz QPSK – Full RB Configuration)



Plot 7-53. Extended Lower Band Edge Plot (LTE Band 25 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 45 of 90

V2.1 11/9/2021




Plot 7-54. Upper Band Edge Plot (LTE Band 25 – 20MHz QPSK – Full RB Configuration)




Plot 7-55. Extended Upper Band Edge Plot (LTE Band 25 – 20MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 46 of 90


LTE Band 2

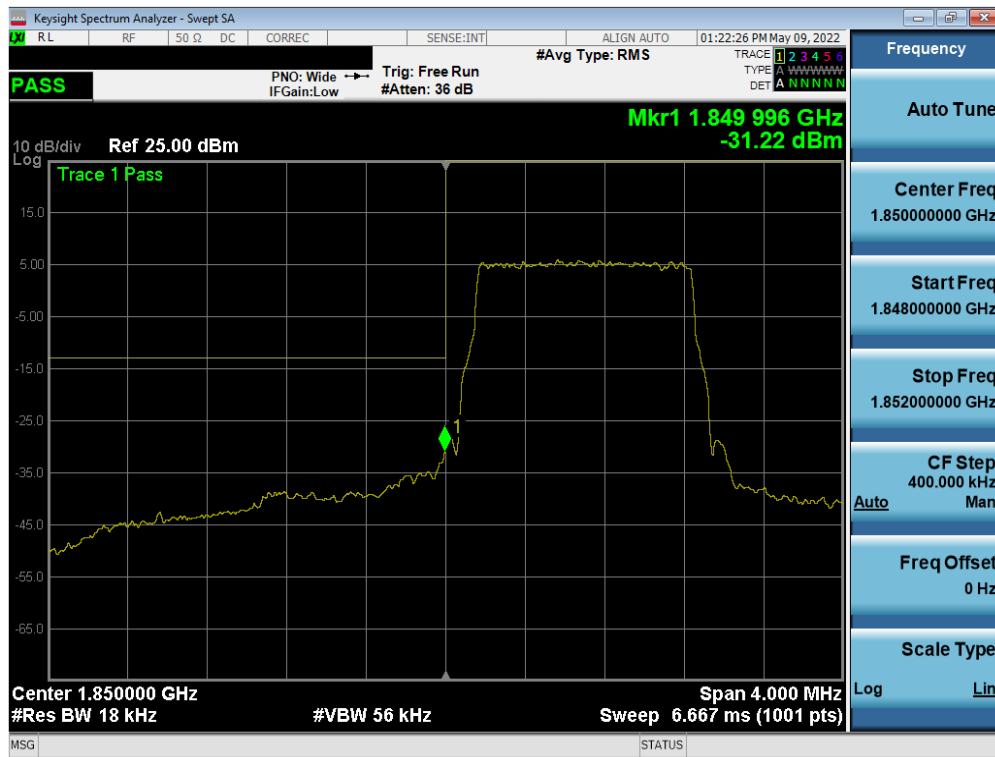

Plot 7-56. Lower Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

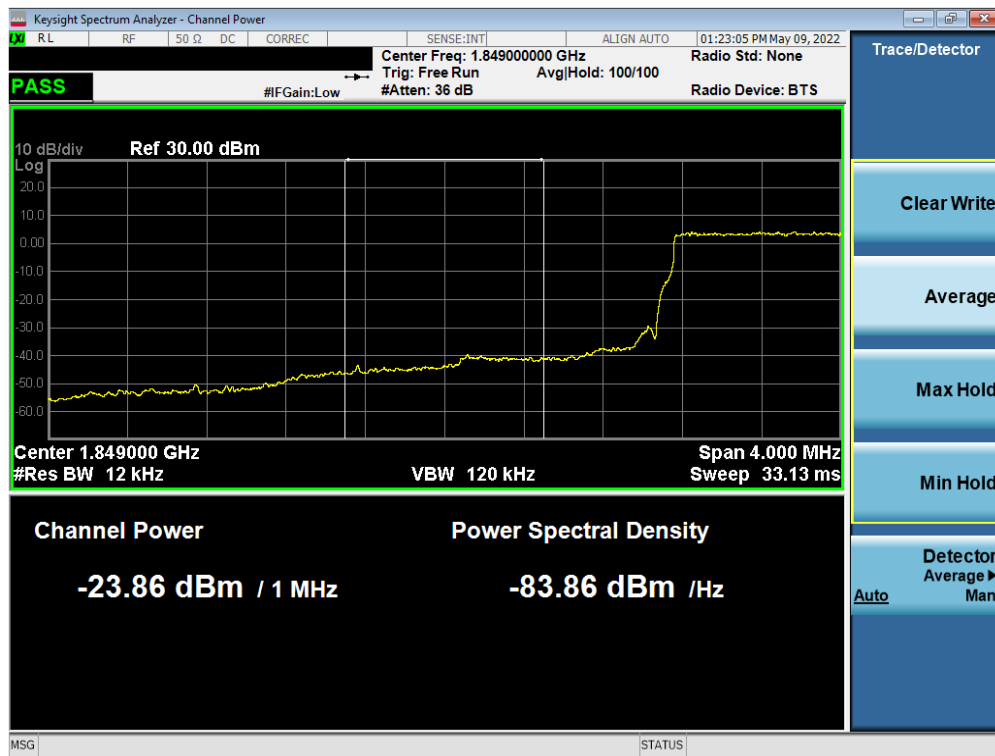


Plot 7-57. Extended Lower Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)


FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 47 of 90

V2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

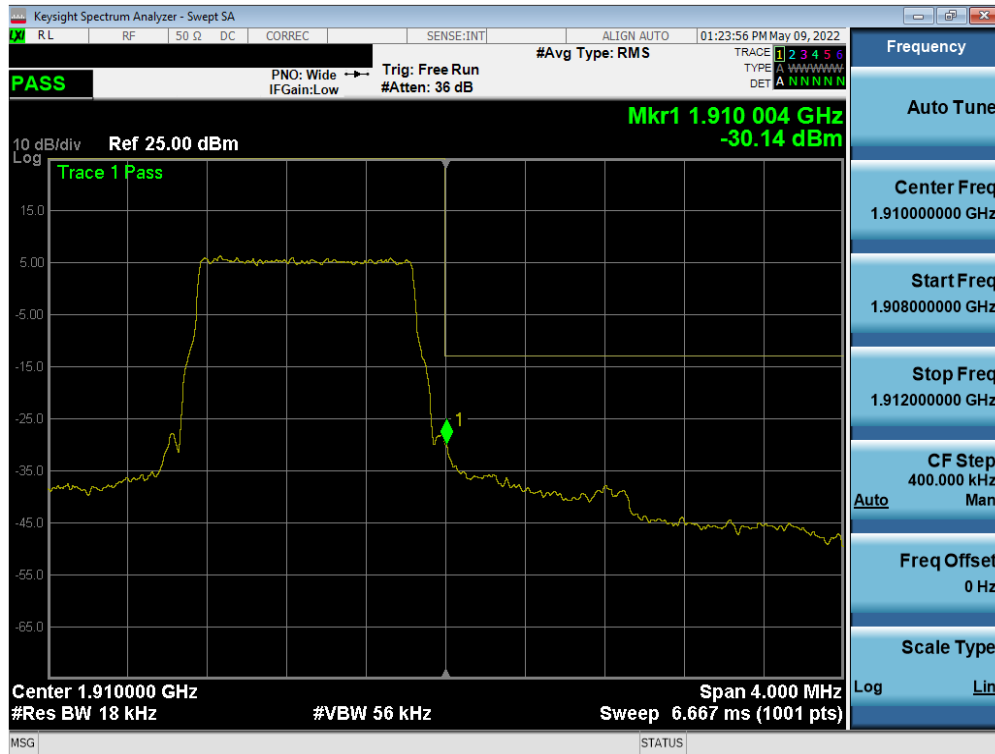


Plot 7-58. Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

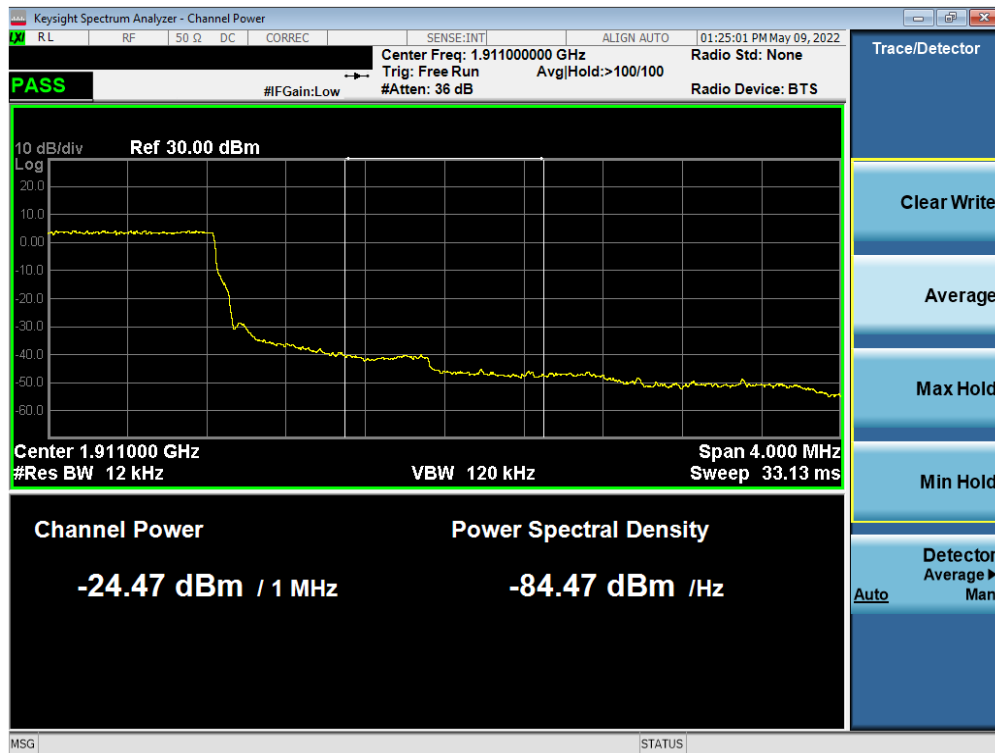


Plot 7-59. Extended Upper Band Edge Plot (LTE Band 2 – 1.4MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 48 of 90

V2.1 11/9/2021

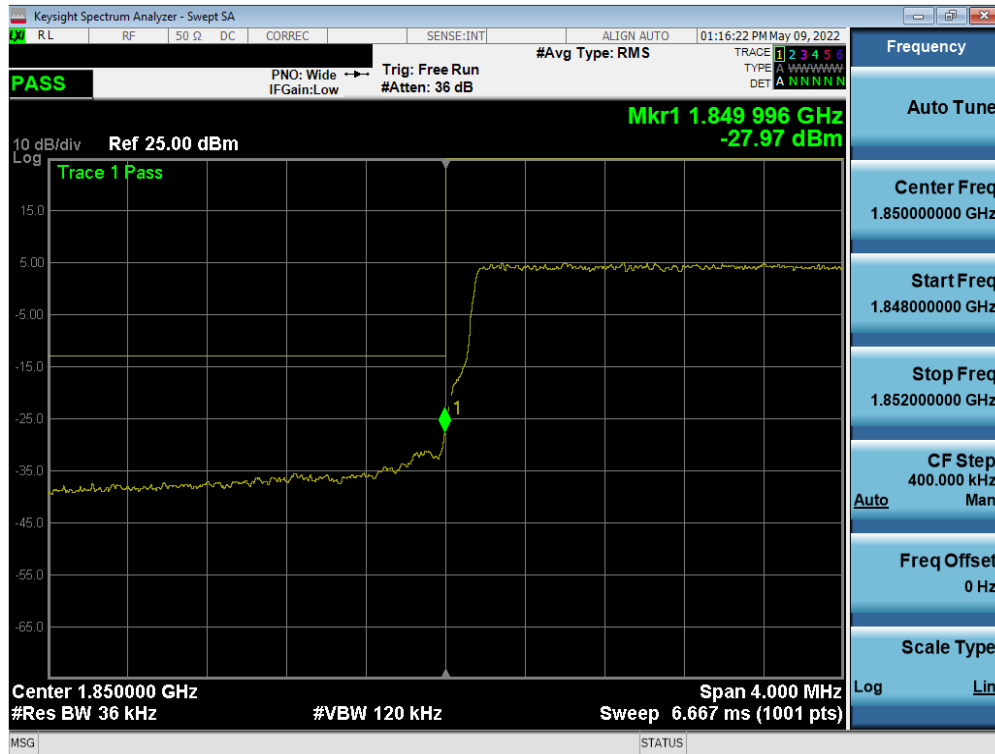


Plot 7-60. Lower Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

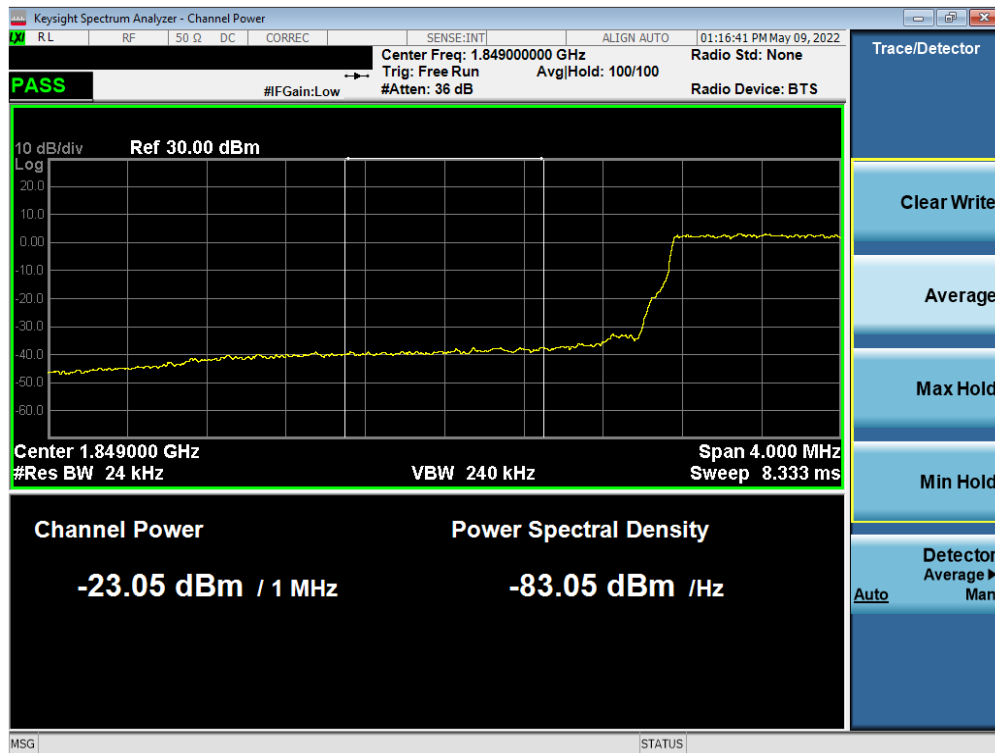


Plot 7-61. Extended Lower Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)


FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 49 of 90

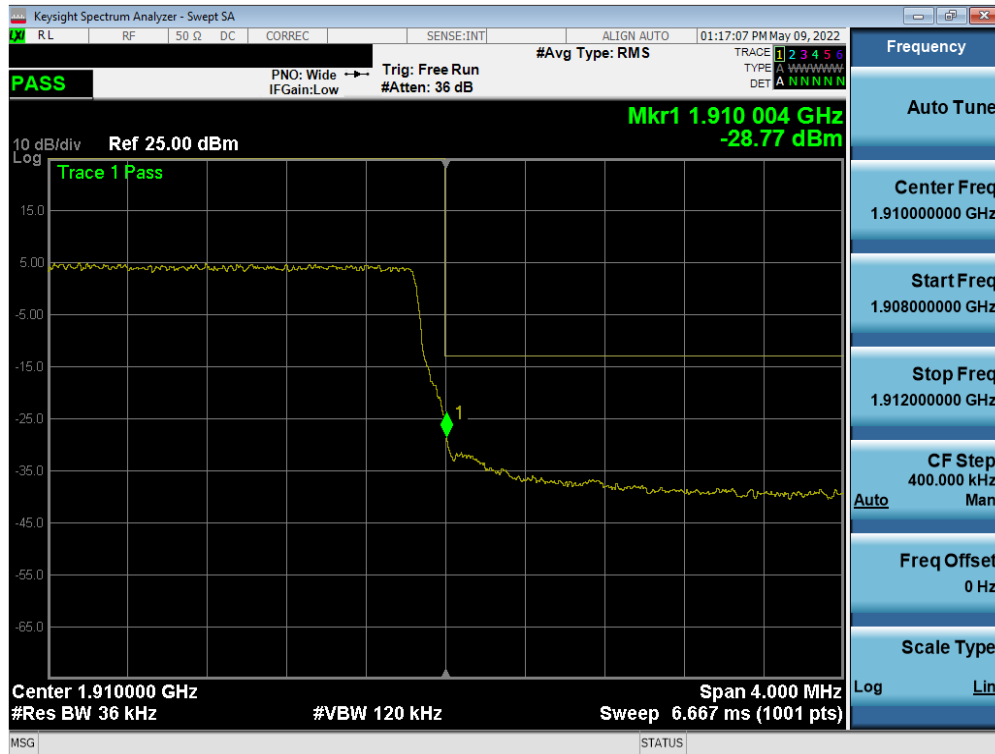


Plot 7-62. Upper Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

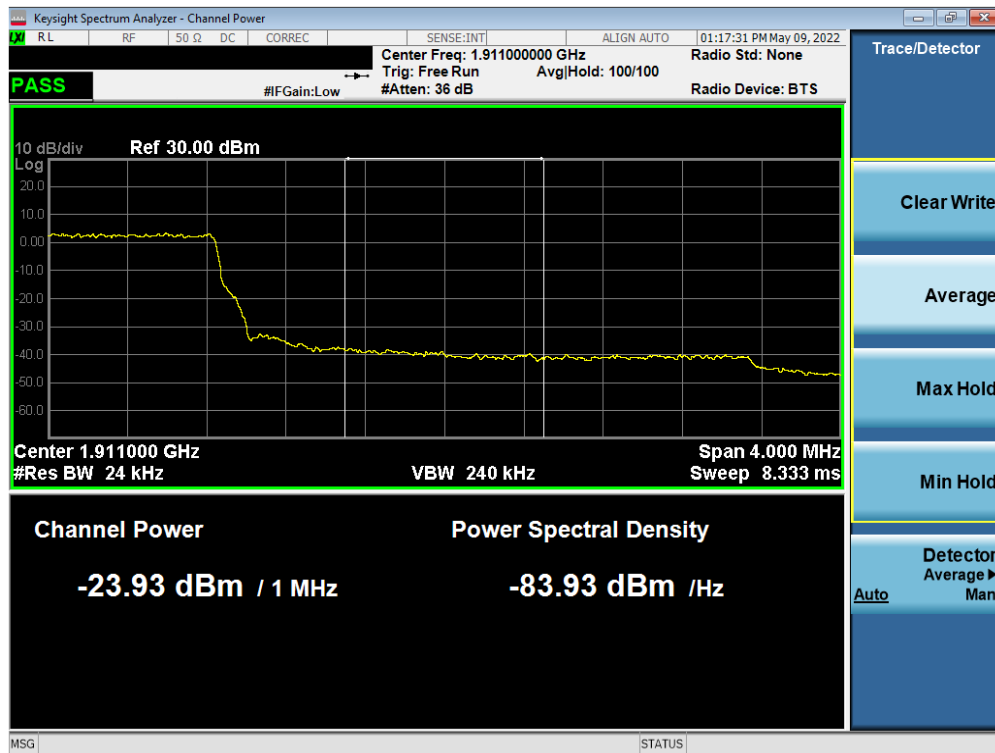


Plot 7-63. Extended Upper Band Edge Plot (LTE Band 2 – 3MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	 PART 24 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 50 of 90

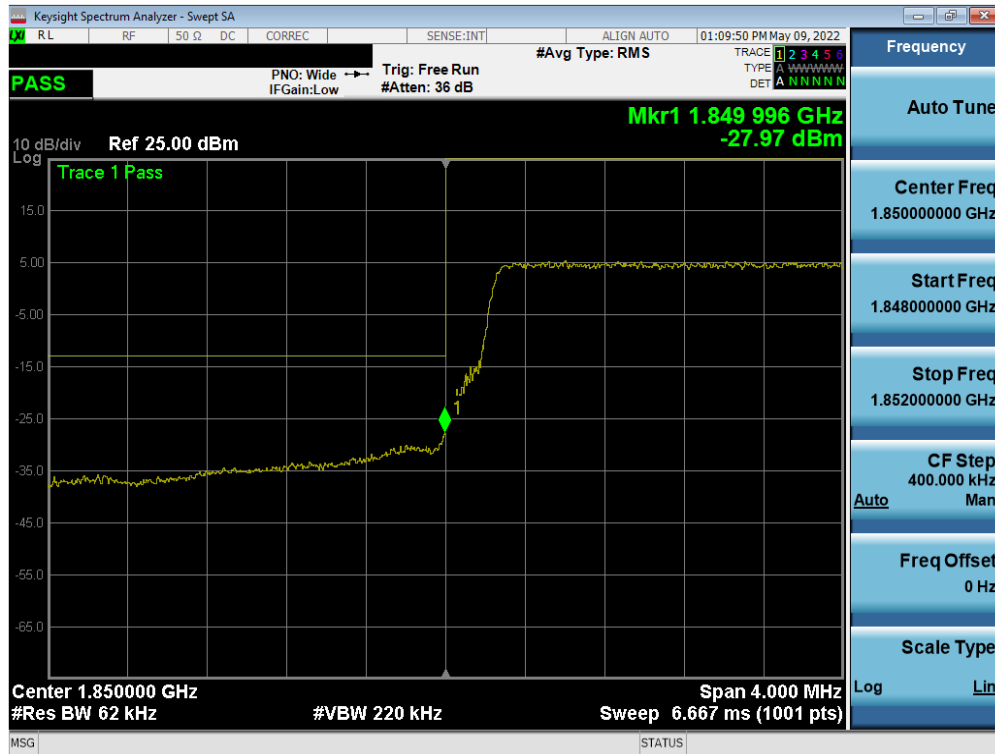

Plot 7-64. Lower Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

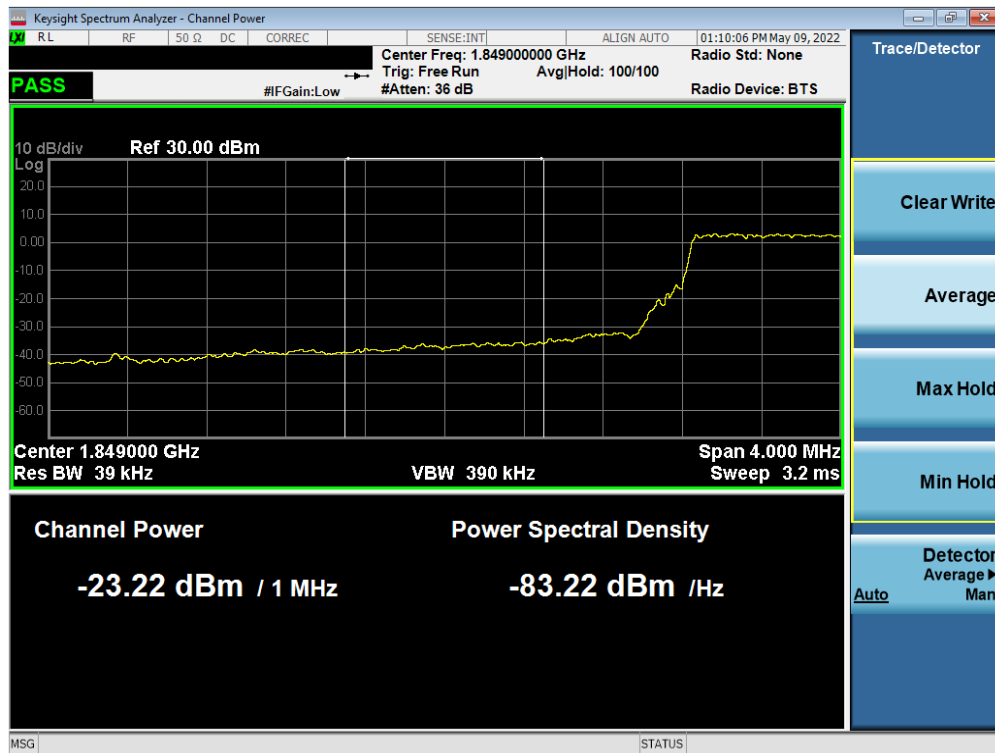


Plot 7-65. Extended Lower Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 51 of 90



Plot 7-66. Upper Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

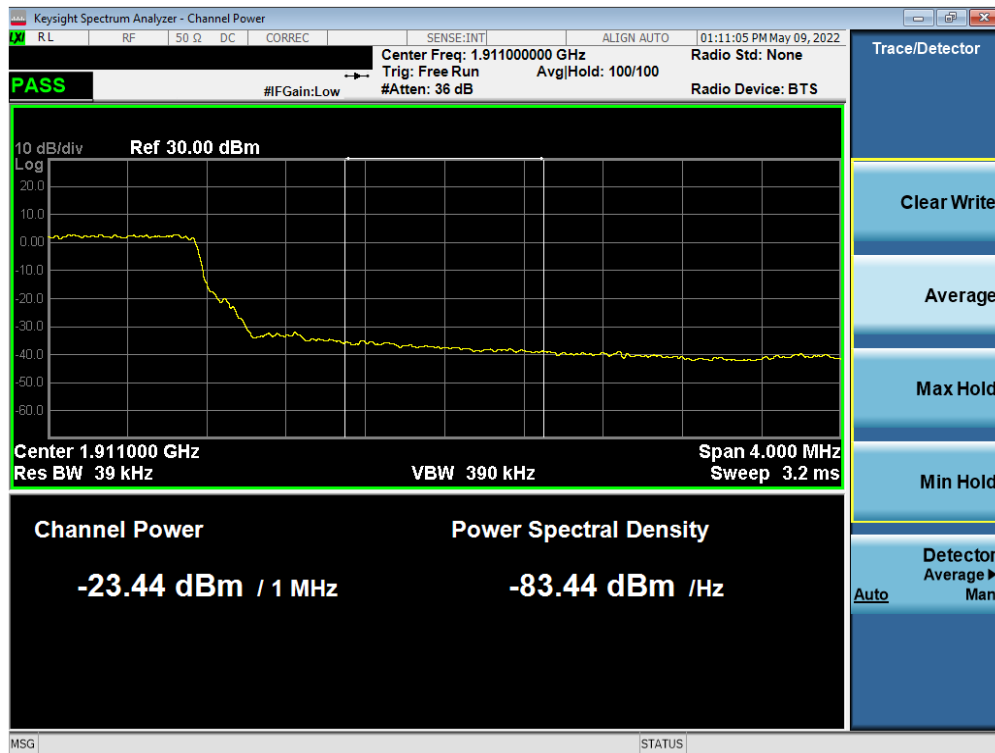

Plot 7-67. Extended Upper Band Edge Plot (LTE Band 2 – 5MHz QPSK – Full RB Configuration)

FCC ID: BCG-A2622	element	PART 24 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-02.BCG	Test Dates: 6/7/2022 - 8/12/2022	EUT Type: Watch	Page 52 of 90