



## DATA REFERENCE REPORT PART 27

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

5/1/2022 - 8/15/2022

**Test Site/Location:**

Element Washington DC LLC, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090043-04.BCG

**FCC ID:**

BCG-A2684

**Applicant Name:**

Apple Inc.

**Reference Model:**

A2622

**Variant Model:**

A2684 (A2859)

**EUT Type:**

Watch

**FCC Classification:**

PCS Licensed Transmitter Worn on Body (PCT)

**FCC Rule Part:**

27

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01


This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez  
Executive Vice President




FCC ID: BCG-A2684	 PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 1 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	Element Washington DC LLC Test Location .....	3
1.3	Test Facility / Accreditations.....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities.....	4
2.3	Antenna Description .....	4
2.4	Test Support Equipment.....	4
2.5	Test Configuration .....	5
2.6	Software and Firmware .....	5
2.7	EMI Suppression Device(s)/Modifications .....	5
3.0	DESCRIPTION OF TESTS .....	6
3.1	Measurement Procedure.....	6
3.2	Radiated Spurious Emissions .....	6
4.0	MEASUREMENT UNCERTAINTY .....	7
5.0	TEST EQUIPMENT CALIBRATION DATA .....	8
6.0	TEST RESULTS (SPOT-CHECK DATA) .....	9
6.1	Summary.....	9
6.2	Radiated Spurious Emissions .....	10
6.3	Antenna FCM – ERP/EIRP .....	12
7.0	CONCLUSION.....	13
8.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	14

<b>FCC ID:</b> BCG-A2684	 <b>PART 27 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-04.BCG	<b>Test Dates:</b> 4/6/2022 - 8/15/2022	<b>EUT Type:</b> Watch
		Page 2 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 1.0 INTRODUCTION

### 1.1 Scope

Per manufacturer declaration, there are two tablet device models, A2622 and A2684 (A2859), with high degree of similarity, reference model FCC ID: BCG-A2622 and variant model **FCC ID: BCG-A2684**. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCG-A2622, while conducted and radiated spot-check verification has been performed on variant model **FCC ID: BCG-A2684**. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID	Reference Report	Report Title
PCT	BCG-A2622	1C2205090042-04.BCG	RF Part 27b Test Report

**Table 1-1. Reference Model Details**


Reference model FCC ID: BCG-A2622 test report has been included in Appendix A

### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC. facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2684	 <b>PART 27 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 3 of 14

Version 2.1 11/9/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2684**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

**Test Device Serial No.:** WWPJWNMVMV, V3VPXC33VY, FN622250N6617WR4H

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

### 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for the testing.


Band	Antenna Gain [dBi]
	Antenna FCM
LTE Band 7	-6.9
LTE Band 41	-6.9

**Table 2-1. Highest Antenna Gain**

### 2.4 Test Support Equipment

1	Apple Macbook	Model:	A2141	S/N:	C02DV7VGMD6T
	w/ AD/DC Adapter	Model:	A2164	S/N:	N/A
2	Apple USB-C Cable	Model:	N/A	S/N:	N/A
	w/ AD/DC Adapter	Model:	A2305	S/N:	C4H0106004QPF4FAD
	w/ Charging Dock	Model:	N/A	S/N:	DQ8137601CH08V22P
	w/ Cradle	Model:	X241	S/N:	N/A
3	Apple Magnatic Charger	Model:	N/A	S/N:	DLC217304R81NR11Z
	Apple Magnatic Charger	Model:	N/A	S/N:	DLC217304HD1NR11J
4	Path Finder Provolone	Model:	920-11647-01	S/N:	DLC134700DH1FWD1G
	SiP Socket	Model:	920-11792-02	S/N:	X2920 P2 PF 115
5	Store Sample Wrisband	Model:	N/A	S/N:	DLC219400361YDQ2W

**Table 2-2. Test Support Equipment**

<b>FCC ID:</b> BCG-A2684		<b>PART 27 DATA REFERENCE REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-04.BCG	<b>Test Dates:</b> 4/6/2022 - 8/15/2022	<b>EUT Type:</b> Watch		Page 4 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 6.0 of this test report for a description of the radiated emissions tests.

The worst case configuration was investigated for all combinations of various types of non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device only supports 27RBs or less for 16-QAM uplink.

Per FCC Approved Data Referencing Test Plan, Antenna C spot-check measurements have been conducted and reported. Spot-check Test Plan can be referred to below Table 2-3.

Technology	Test Case	FCC ID: BCG-A2684	
		Mode	Channel
WCDMA, LTE	Radiated Spurious Emissions (>1GHz)	LTE Band 5, 2, 7 Max BW, 1RB, QPSK	Low, Mid, High
WCDMA, LTE	Conducted Power	All Certified Bands: Highest BW only, 1 RB, Modulation with the highest power	Mid

**Table 2-3. FCC Approved Spot-Check Test Plan**


Output powers were measured and confirmed to be consistent between Reference and Variant models prior to testing.

## 2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCG-A2684	 <b>PART 27 DATA REFERENCE REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 5 of 14

Version 2.1 11/9/2021

## 3.0 DESCRIPTION OF TESTS

### 3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI C63.26-2015/TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[\text{dB}\mu\text{V/m}]} = \text{Measured amplitude level}_{[\text{dBm}]} + 107 + \text{Cable Loss}_{[\text{dB}]} + \text{Antenna Factor}_{[\text{dB/m}]}$$

And


$$\text{EIRP}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20\log D - 104.8;$$

Where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26 and TIA-603-E-2016.

FCC ID: BCG-A2684		PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch	Page 6 of 14


Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2684	 PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 7 of 14

Version 2.1 11/9/2021

## 5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/26/2021	Annual	10/26/2022	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

**Table 5-1. Test Equipment**

### Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2684		PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch	Page 8 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 6.0 TEST RESULTS (SPOT-CHECK DATA)


### 6.1 Summary

Company Name: Apple Inc.  
 FCC ID: BCG-A2684  
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)  
 Mode(s): LTE

Technology	Test Configurations					Reference Model	Variant Model	Delta
	Test Description	Modulation	BW / RB Config	Channel	Measurement Frequency [MHz]	FCC ID: BCG-A2622	FCC ID: BCG-A2684	Average [dB]
						Average [dBm]	Average [dBm]	
LTE-B7	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	L	7530.0	-55.35	-55.56	0.21
LTE-B7	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	M	7605.0	-57.06	-56.30	0.76
LTE-B7	Radiated Spurious Emissions	QPSK	20MHz / 1/50 RB	H	7680.0	-56.66	-56.50	0.16
LTE-B7	Conducted Powers	QPSK	20MHz / 1/99 RB	M	2535.0	22.87	23.03	0.16
LTE-B41	Conducted Powers	QPSK	20MHz / 1/99 RB	M	2510.0	23.20	23.00	0.20

**Table 6-1. Worst Case Spot-Check Results**

Spot-checks were conducted, all measurements were investigated and found to be within acceptable tolerance in accordance with FCC Approved Data Referencing Test Plan.


FCC ID: BCG-A2684	 PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 9 of 14

Version 2.1 11/9/2021

## 6.2 Radiated Spurious Emissions

### \$2.1053, 22.917(a)

#### LTE

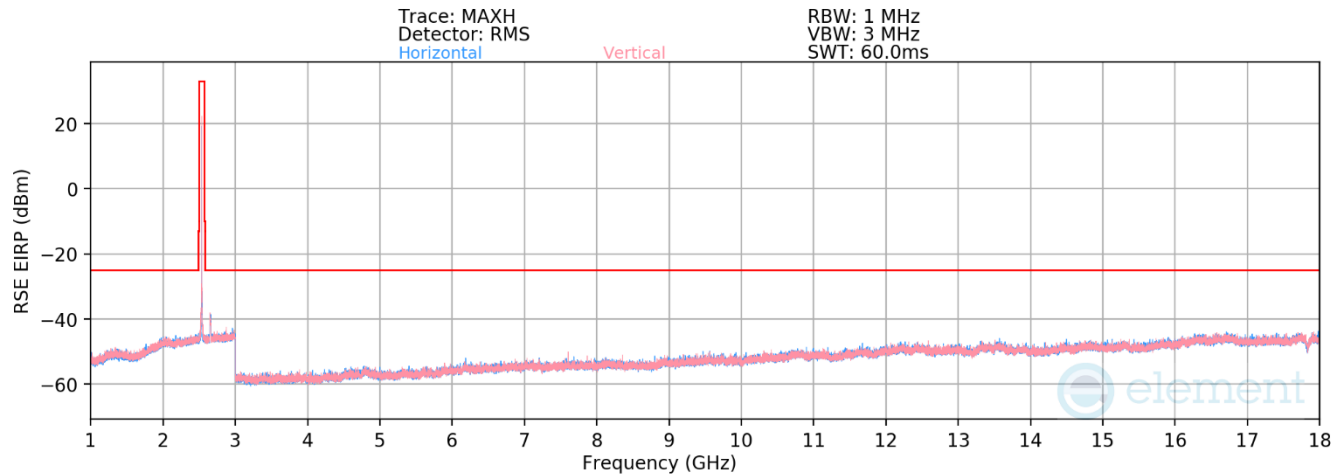

Plot 6-1. Radiated Spurious Emission above 1GHz (LTE-B7)

Bandwidth (MHz):	20
Frequency (MHz):	2510.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	V	-	-	-80.01	7.60	34.59	-60.67	-25.00	-35.67
7530.0	V	232	344	-78.26	10.96	39.70	-55.56	-25.00	-30.56
10040.0	V	-	-	-82.39	13.87	38.48	-56.77	-25.00	-31.77
12550.0	V	-	-	-83.90	18.96	42.06	-53.20	-25.00	-28.20
15060.0	V	-	-	-84.37	20.94	43.57	-51.69	-25.00	-26.69

Table 6-2. Radiated Spurious Data (LTE-B7 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	2535.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	V	-	-	-80.53	7.42	33.89	-61.37	-25.00	-36.37
7605.0	V	132	50	-78.97	10.93	38.96	-56.30	-25.00	-31.30
10140.0	V	-	-	-82.80	14.68	38.88	-56.37	-25.00	-31.37
12675.0	V	-	-	-84.13	18.68	41.55	-53.71	-25.00	-28.71
15210.0	V	-	-	-84.87	21.36	43.49	-51.76	-25.00	-26.76

Table 6-3. Radiated Spurious Data (LTE-B7 – Mid Channel)


FCC ID: BCG-A2684		PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch	Page 10 of 14

Version 2.1 11/9/2021

Bandwidth (MHz):	20
Frequency (MHz):	2560.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.00	V	-	-	-80.30	7.72	34.42	-60.84	-25.00	-35.84
7680.00	V	105	27	-78.56	10.32	38.76	-56.50	-25.00	-31.50
10240.00	V	-	-	-82.25	14.11	38.86	-56.40	-25.00	-31.40
12800.00	V	-	-	-83.83	19.17	42.34	-52.92	-25.00	-27.92
15360.00	V	-	-	-84.96	21.13	43.17	-52.09	-25.00	-27.09

**Table 6-4. Radiated Spurious Data (LTE-B7 – High Channel)**

FCC ID: BCG-A2684	 PART 27 DATA REFERENCE REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch
		Page 11 of 14

Version 2.1 11/9/2021

## 6.3 Antenna FCM – EIRP

### LTE-B7


Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2535.0	-6.90	1 / 99	23.03	16.13	41.020	33.01	-16.88

Table 6-5. Antenna FCM EIRP Data (LTE Band 7)

### LTE-B41

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
20 MHz	QPSK	2593.0	-6.90	1 / 99	23.00	16.10	40.738	33.01	-16.91


Table 6-6. Antenna FCM EIRP Data (LTE Band 41)

FCC ID: BCG-A2684		PART 27 DATA REFERENCE REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090043-04.BCG	Test Dates: 4/6/2022 - 8/15/2022	EUT Type: Watch		Page 12 of 14

Version 2.1 11/9/2021

## 7.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCG-A2684** is in tolerance with reference model FCC ID: BCG-A2622 per FCC Approved Data Referencing Test Plan.


<b>FCC ID:</b> BCG-A2684	 <b>PART 27 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-04.BCG	<b>Test Dates:</b> 4/6/2022 - 8/15/2022	<b>EUT Type:</b> Watch
		Page 13 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## 8.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090042-04.BCG) from reference model FCC ID: BCG-A2622, which includes referenced data results.

<b>FCC ID:</b> BCG-A2684	 <b>PART 27 DATA REFERENCE REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-04.BCG	<b>Test Dates:</b> 4/6/2022 - 8/15/2022	<b>EUT Type:</b> Watch
		Page 14 of 14

Version 2.1 11/9/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## PART 27 MEASUREMENT REPORT

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

5/1/2022 - 8/13/2022

**Test Site/Location:**

Element Washington DC LLC, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090042-04.BCG

**FCC ID:**

BCG-A2622

**Applicant Name:**

Apple Inc.

**Application Type:**

Certification

**Model:**

A2622

**EUT Type:**

Watch

**FCC Classification:**

PCS Licensed Transmitter Worn on Body (PCT)

**FCC Rule Part:**

27

**Test Procedure(s):**

ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.


I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President




<b>FCC ID:</b> BCG-A2622		<b>PART 27 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 1 of 66

V2.2 2/15/2022

## TABLE OF CONTENTS


1.0	INTRODUCTION .....	4
1.1	Scope .....	4
1.2	Element Washington DC LLC Test Location .....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description .....	5
2.2	Device Capabilities.....	5
2.3	Antenna Description .....	5
2.4	Test Support Equipment.....	6
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	7
2.7	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	Radiated Spurious Emissions .....	8
4.0	MEASUREMENT UNCERTAINTY .....	9
5.0	TEST EQUIPMENT CALIBRATION DATA .....	10
6.0	SAMPLE CALCULATIONS .....	11
7.0	TEST RESULTS.....	12
7.1	Summary.....	12
7.2	Occupied Bandwidth .....	13
7.3	Spurious and Harmonic Emissions at Antenna Terminal .....	22
7.4	Band Edge Emissions at Antenna Terminal .....	34
7.5	Radiated Power (EIRP).....	48
7.6	Radiated Spurious Emissions .....	51
7.7	Frequency Stability / Temperature Variation .....	63
8.0	CONCLUSION.....	65
9.0	APPENDIX A .....	66

<b>FCC ID:</b> BCG-A2622		<b>PART 27 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 2 of 66


V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).






## PART 27 MEASUREMENT REPORT



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	EIRP		Emission Designator
					Max. Power [mW]	Max. Power [dBm]	
LTE Band 7	5 MHz	QPSK	2502.5 - 2567.5	4.5723	43.152	16.35	4M57G7W
		16QAM	2502.5 - 2567.5	4.5623	38.107	15.81	4M56D7W
	10 MHz	QPSK	2505 - 2565	9.1622	43.152	16.35	9M16G7W
		16QAM	2505 - 2565	5.4740	37.239	15.71	5M47D7W
	15 MHz	QPSK	2507.5 - 2562.5	13.6858	45.082	16.54	13M7G7W
		16QAM	2507.5 - 2562.5	6.5498	37.411	15.73	6M55D7W
	20 MHz	QPSK	2510 - 2560	18.3572	43.752	16.41	18M4G7W
		16QAM	2510 - 2560	8.7188	38.371	15.84	8M72D7W
LTE Band 41	5 MHz	QPSK	2498.5 - 2687.5	4.5849	45.709	16.60	4M58G7W
		16QAM	2498.5 - 2687.5	4.5526	36.898	15.67	4M55D7W
	10 MHz	QPSK	2501 - 2685	9.1289	45.709	16.60	9M13G7W
		16QAM	2501 - 2685	5.4961	36.983	15.68	5M50D7W
	15 MHz	QPSK	2503.5 - 2682.5	13.6154	45.709	16.60	13M6G7W
		16QAM	2503.5 - 2682.5	6.2291	35.400	15.49	6M23D7W
	20 MHz	QPSK	2506 - 2680	18.3141	44.978	16.53	18M3G7W
		16QAM	2506 - 2680	8.0125	35.156	15.46	8M01D7W

### EUT Overview

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 3 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISSED.

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch
		Page 4 of 66

V2.2 2/15/2022

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID:BCG-A2622**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

**Test Device Serial No.:** CGXT979P3W, V09L43KXK4, D60XJGQ37M, TG95334DJ6, FN622240PG017WQ4U

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE1/2M	Mid band/High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

Table 2-1. Simultaneous Transmission Configurations

✓ = Support; ✗ = Not Support


### 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Band	Antenna Gain (dBi)
	Antenna FCM
LTE Band 7	-6.9
LTE Band 41	-6.9

Table 2-2. Highest Antenna Gain

**Note:** Antenna Specifications has been attached to Appendix A

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 5 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
	Apple iPhone	Model:	993-89846LL/A	S/N:	QHLHY57CJ9
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	LF09D601GH
	w/ Cradle	Model:	LE1-POR-P1	S/N:	CYV1427015UE1EN01MP1J
3	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035200UJMFROAJ
4	Pathfinder Falcon	Model:	920-11647-01	S/N:	HV007825
	SiP Socket	Model:	N/A	S/N:	X2920 P1 PF 142
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

**Table 2-3. Test Support Equipment**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

The worst case configuration was investigated for all combinations of various types of non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.


The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

This device only supports 27RBs or less for 16-QAM uplink.

All possible simultaneous transmission configurations have been investigated and the worst case config has been reported.

Description	Bluetooth	LTE	UNII
Antenna	FCM	FCM	FCM
Channel	78	40620	36
Operating Frequency (MHz)	2480	2593	5180
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz	11n

**Table 2-4. Worst Case Simultaneous Transmission Configuration**

FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch		Page 6 of 66


V2.2 2/15/2022

## 2.6 Software and Firmware

The test was conducted with firmware watchOS 9.0 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

<b>FCC ID:</b> BCG-A2622		<b>PART 27 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 7 of 66

V2.2 2/15/2022

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI C63.26 2015, TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

### 3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

$$E_{[\text{dB}\mu\text{V}/\text{m}]} = \text{Measured amplitude level}_{[\text{dBm}]} + 107 + \text{Cable Loss}_{[\text{dB}]} + \text{Antenna Factor}_{[\text{dB}/\text{m}]}$$


And

$$\text{EIRP}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V}/\text{m}]} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.


FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 8 of 66

V2.2 2/15/2022

## 4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (30MHz-1GHz)	4.75
Radiated Disturbance (1-18GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch
		Page 9 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 5.0 TEST EQUIPMENT CALIBRATION DATA


Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/26/2021	Annual	10/26/2022	92009574
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/11/2021	Annual	10/11/2022	161616
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	11/4/2021	Annual	11/4/2022	151888
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

**Table 5-1. Test Equipment**

### Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 10 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 6.0 SAMPLE CALCULATIONS

### Emission Designator

#### QPSK Modulation

**Emission Designator = 8M62G7W**

BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination of Any

#### QAM Modulation

**Emission Designator = 8M45D7W**

BW = 8.45 MHz

D = Amplitude/Angle Modulated


7 = Quantized/Digital Info

W = Combination of Any

### Spurious Radiated Emission

#### **Example: Spurious emission at 3700.40 MHz**

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was  $-81.0$  dBm. The gain of the substituted antenna is  $8.1$  dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of  $-81.0$  dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is  $2.0$  dB at  $3700.40$  MHz. So  $6.1$  dB is added to the signal generator reading of  $-30.9$  dBm yielding  $-24.80$  dBm. The fundamental EIRP was  $25.50$  dBm so this harmonic was  $25.50$  dBm  $- (-24.80) = 50.3$  dBc.

FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 11 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.0 TEST RESULTS

### 7.1 Summary


Company Name: Apple Inc.  
 FCC ID: BCG-A2622  
 FCC Classification: PCS Licensed Transmitter Worn on Body (PCT)  
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions (LTE Band 7)	2.1051, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (LTE Band 41)			PASS	Sections 7.3, 7.4
	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 7)	27.50(h)(2)	< 2 Watts max. EIRP	PASS	Section 7.6
	Effective Radiated Power / Equivalent Isotropic Radiated Power (LTE Band 41)			PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block over the temperature and voltage range as tested	PASS	Section 7.8
RADIATED	Radiated Spurious Emissions (LTE Band 7)	2.1053, 27.53(m)	Undesirable emissions must meet the limits detailed in 27.53(m)	PASS	Section 7.7
	Radiated Spurious Emissions (LTE Band 41)			PASS	Section 7.7

Table 7-1. Summary of Test Results

#### Notes:

1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized was Element EMC Software Tool v1.1.

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 12 of 66

V2.2 2/15/2022

## 7.2 Occupied Bandwidth

§2.1049

### Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### Test Setup


The EUT and measurement equipment were set up as shown in the diagram below.

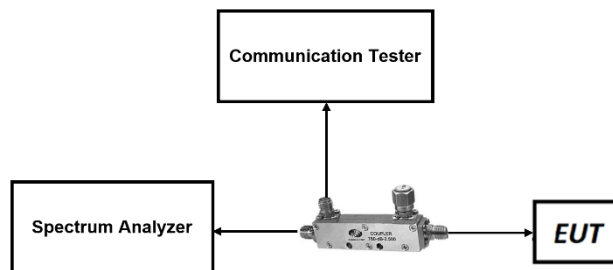

**Figure 7-1. Test Instrument & Measurement Setup**


### Test Notes

None.


FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 13 of 66

V2.2 2/15/2022


## LTE Band 7

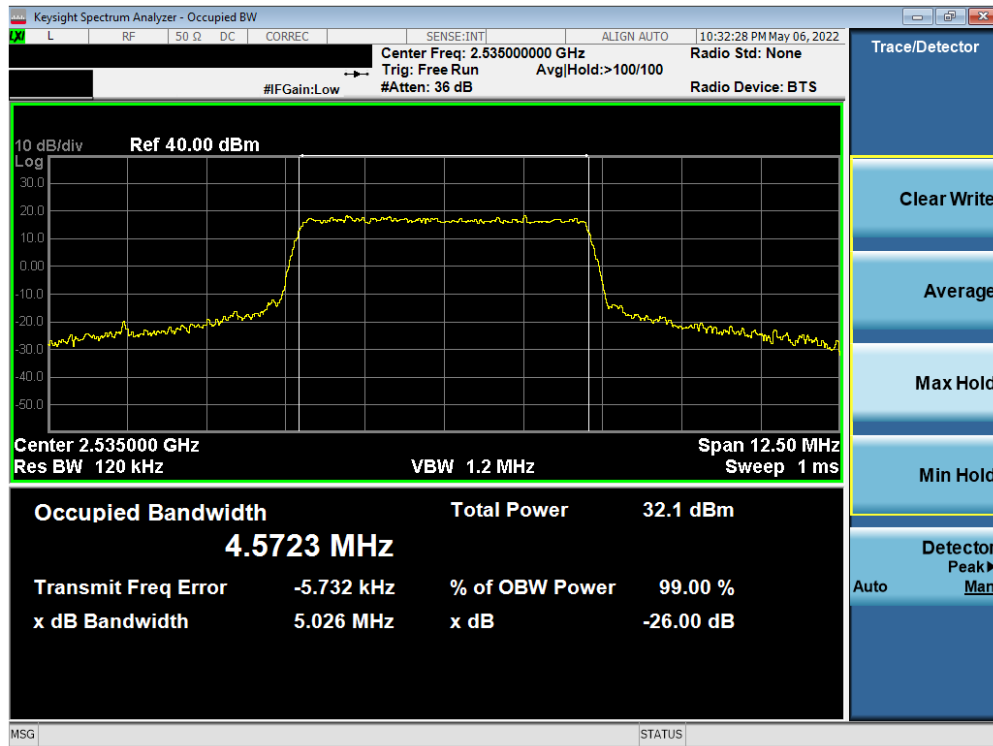


Plot 7-1. Occupied Bandwidth Plot (LTE Band 7 - 5MHz QPSK - Full RB)

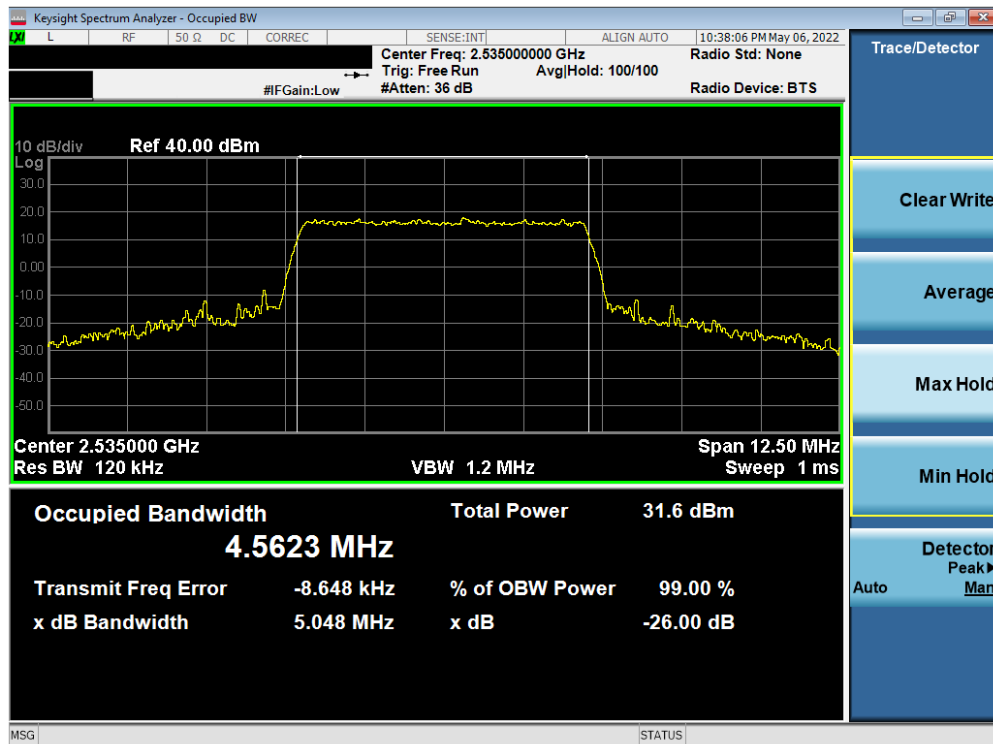


Plot 7-2. Occupied Bandwidth Plot (LTE Band 7 - 5MHz 16-QAM - Full RB)

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 14 of 66


V2.2 2/15/2022

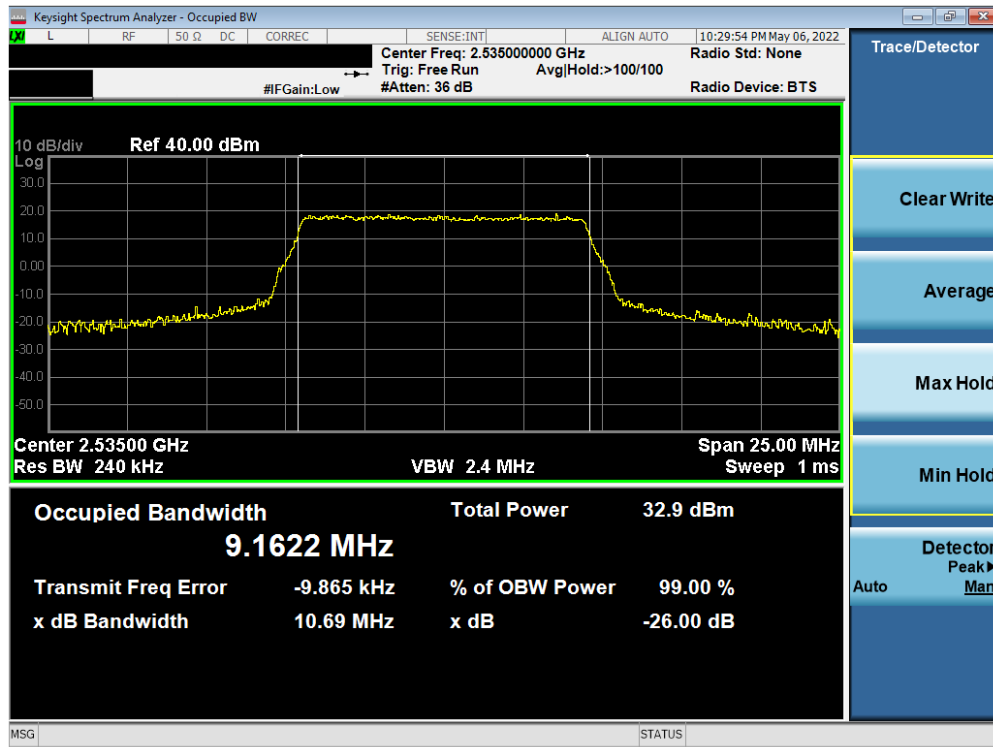


Plot 7-3. Occupied Bandwidth Plot (LTE Band 7 - 10MHz QPSK - Full RB)

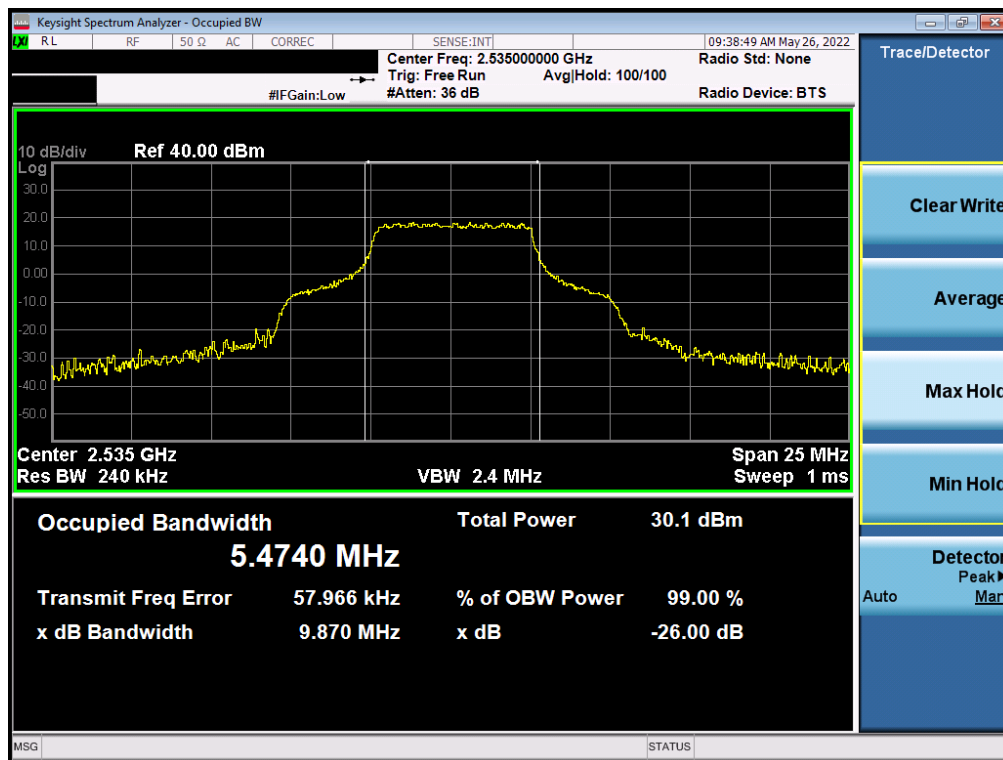


Plot 7-4. Occupied Bandwidth Plot (LTE Band 7 - 10MHz 16-QAM - Full RB)

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 15 of 66

V2.2 2/15/2022

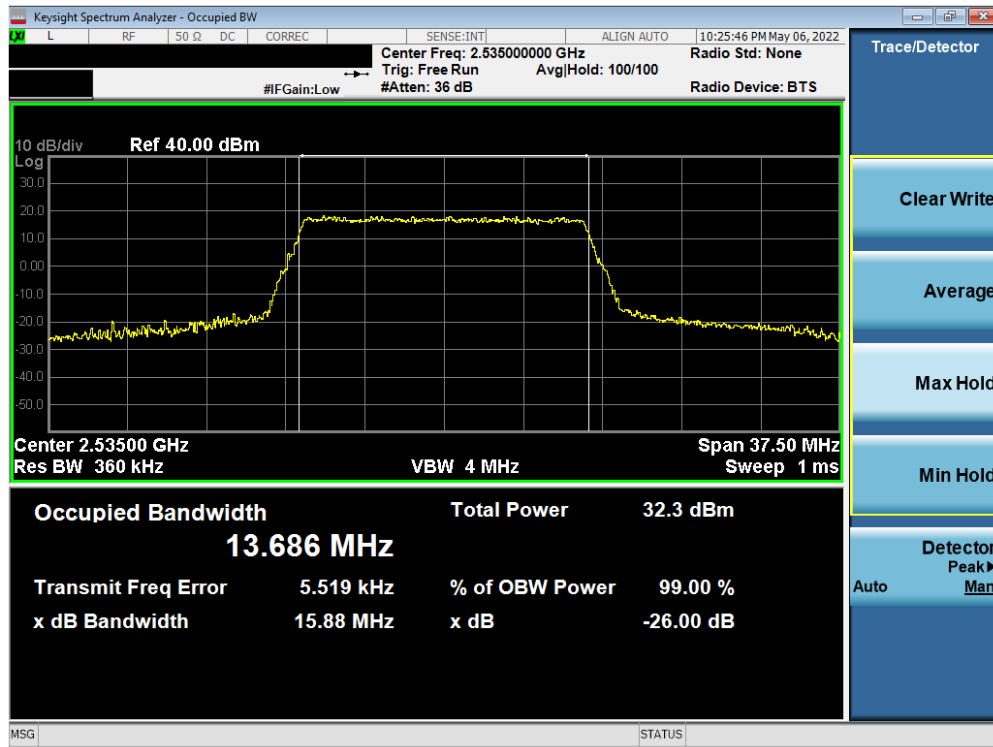


Plot 7-5. Occupied Bandwidth Plot (LTE Band 7 - 15MHz QPSK - Full RB)

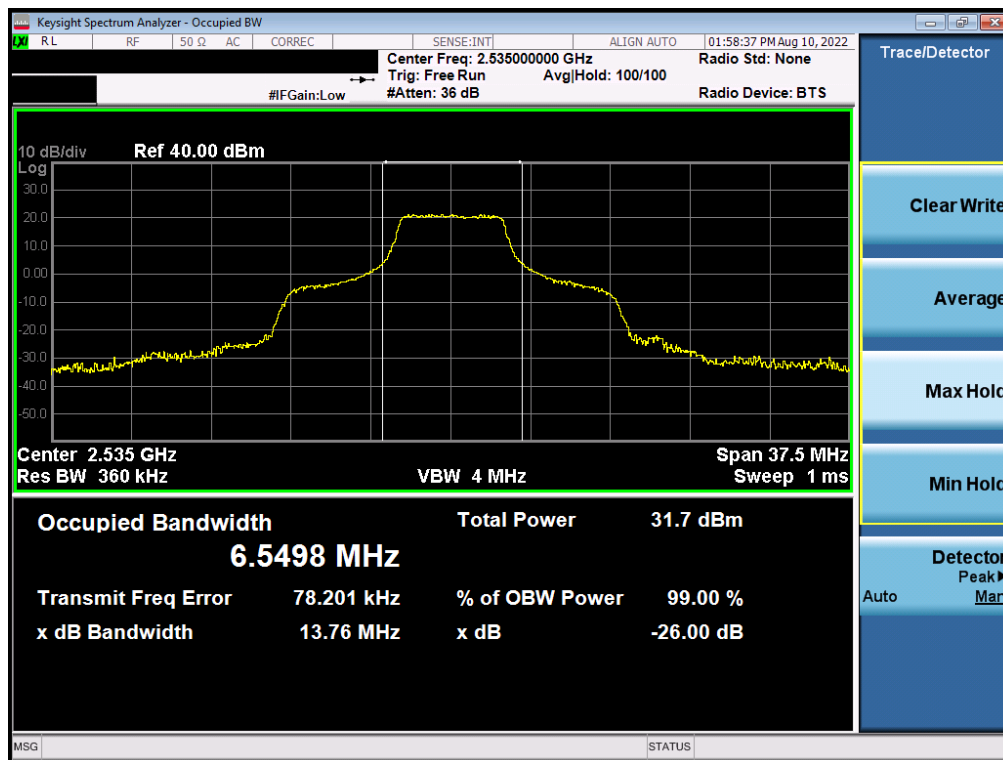


Plot 7-6. Occupied Bandwidth Plot (LTE Band 7 - 15MHz 16-QAM - Full RB)


FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 16 of 66

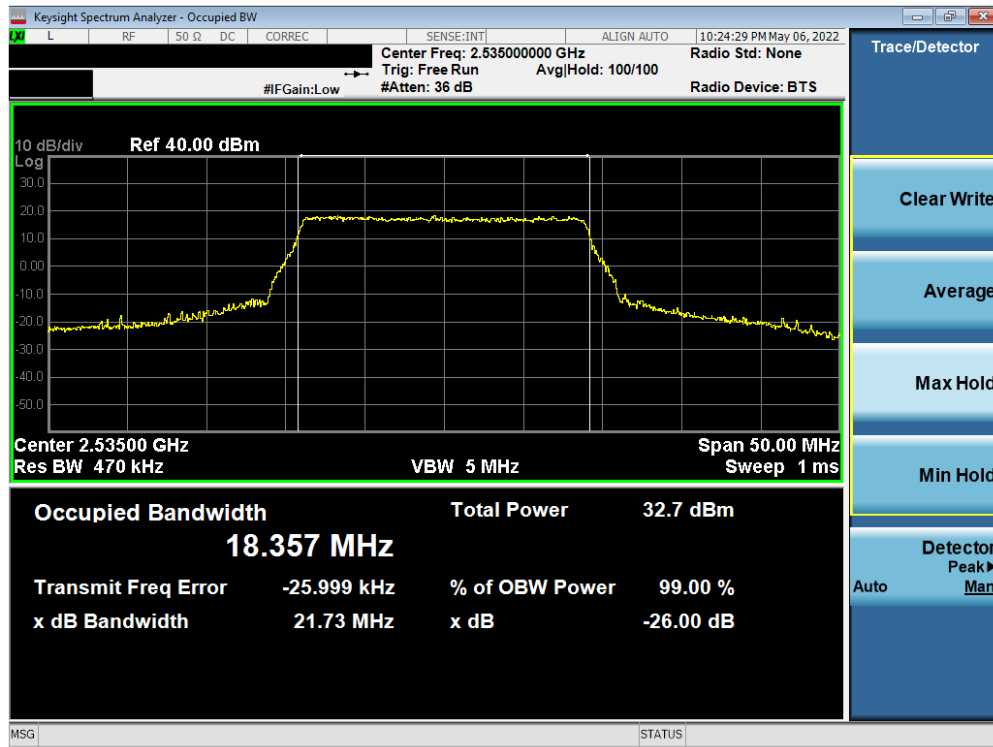

Plot 7-7. Occupied Bandwidth Plot (LTE Band 7 - 20MHz QPSK - Full RB)

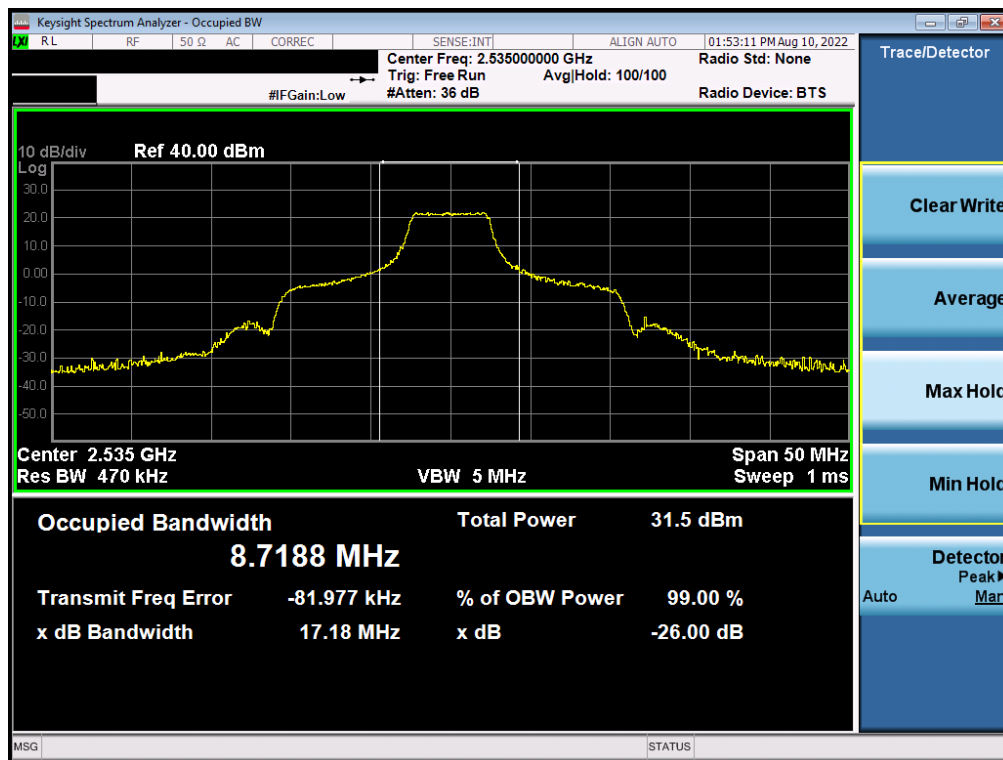


Plot 7-8. Occupied Bandwidth Plot (LTE Band 7 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 17 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## LTE Band 41

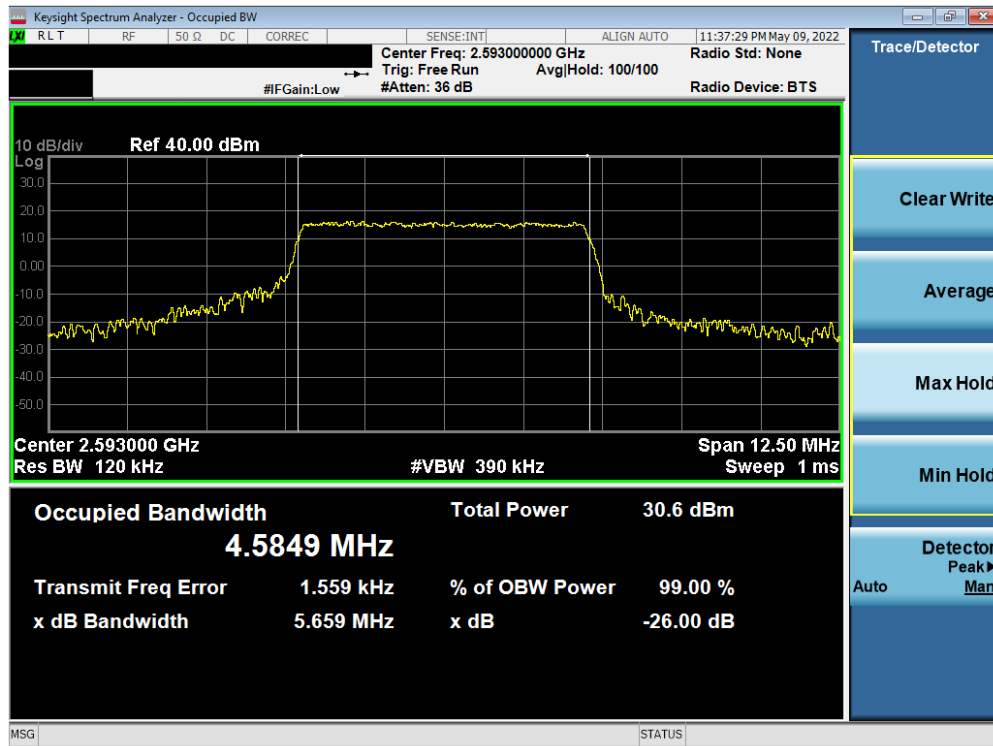

Plot 7-9. Occupied Bandwidth Plot (LTE Band 41 - 5MHz QPSK - Full RB)




Plot 7-10. Occupied Bandwidth Plot (LTE Band 41 - 5MHz 16-QAM - Full RB)


FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 18 of 66

V2.2 2/15/2022



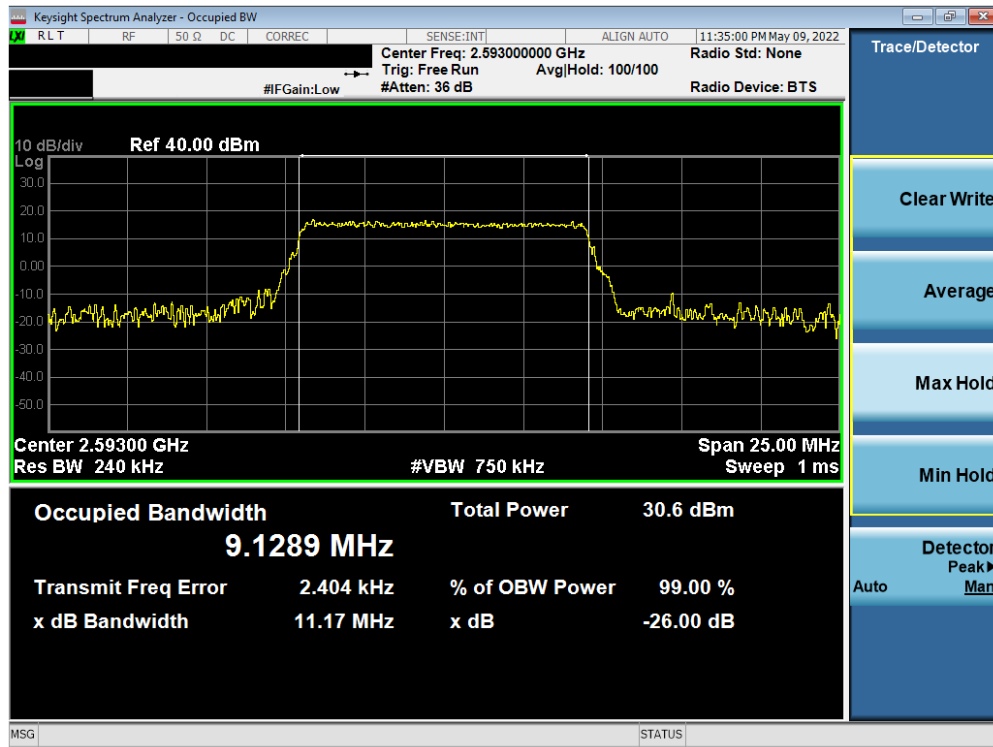


Plot 7-11. Occupied Bandwidth Plot (LTE Band 41 - 10MHz QPSK - Full RB)

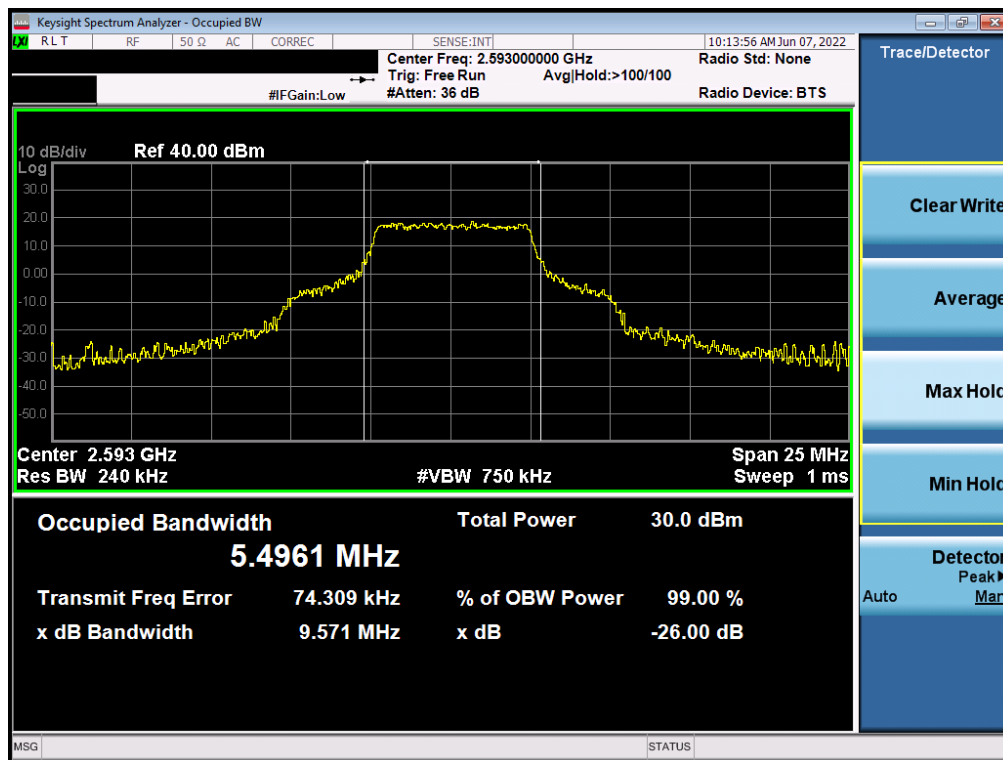


Plot 7-12. Occupied Bandwidth Plot (LTE Band 41 - 10MHz 16-QAM - Full RB)


FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 19 of 66

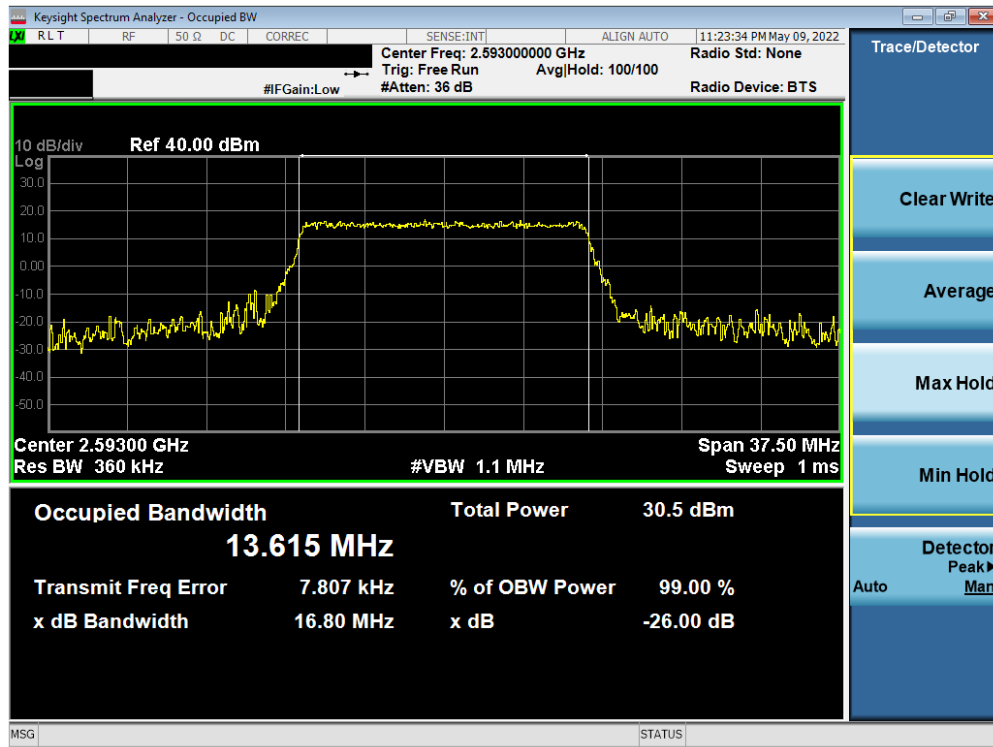

Plot 7-13. Occupied Bandwidth Plot (LTE Band 41 - 15MHz QPSK - Full RB)

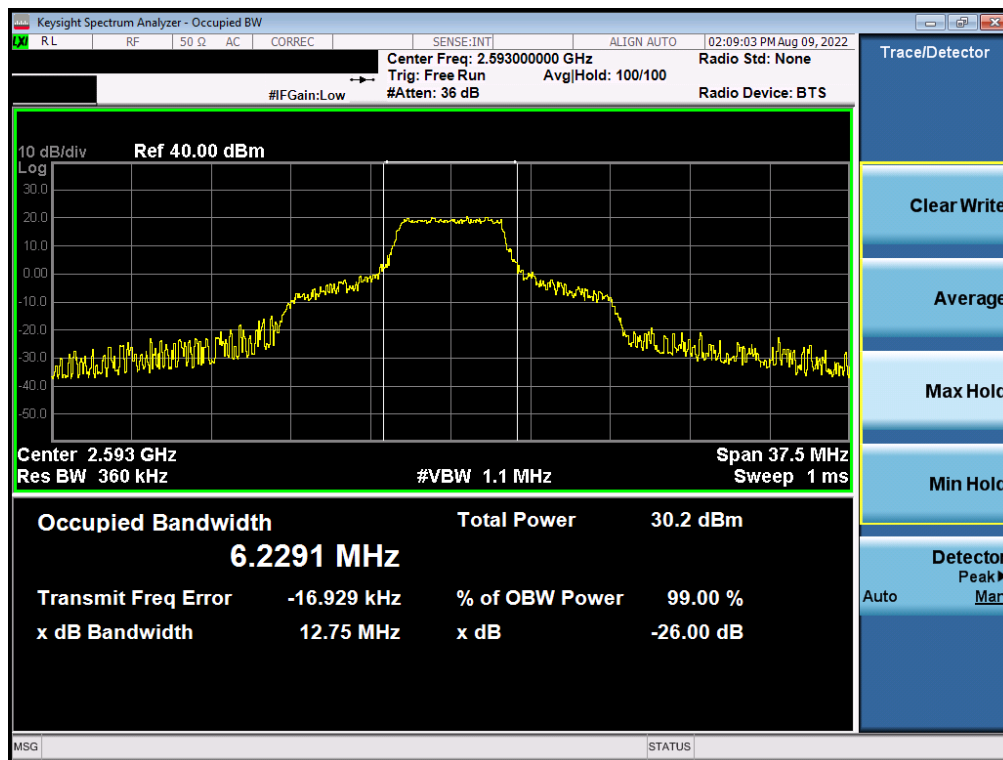


Plot 7-14. Occupied Bandwidth Plot (LTE Band 41 - 15MHz 16-QAM - Full RB)


FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 20 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

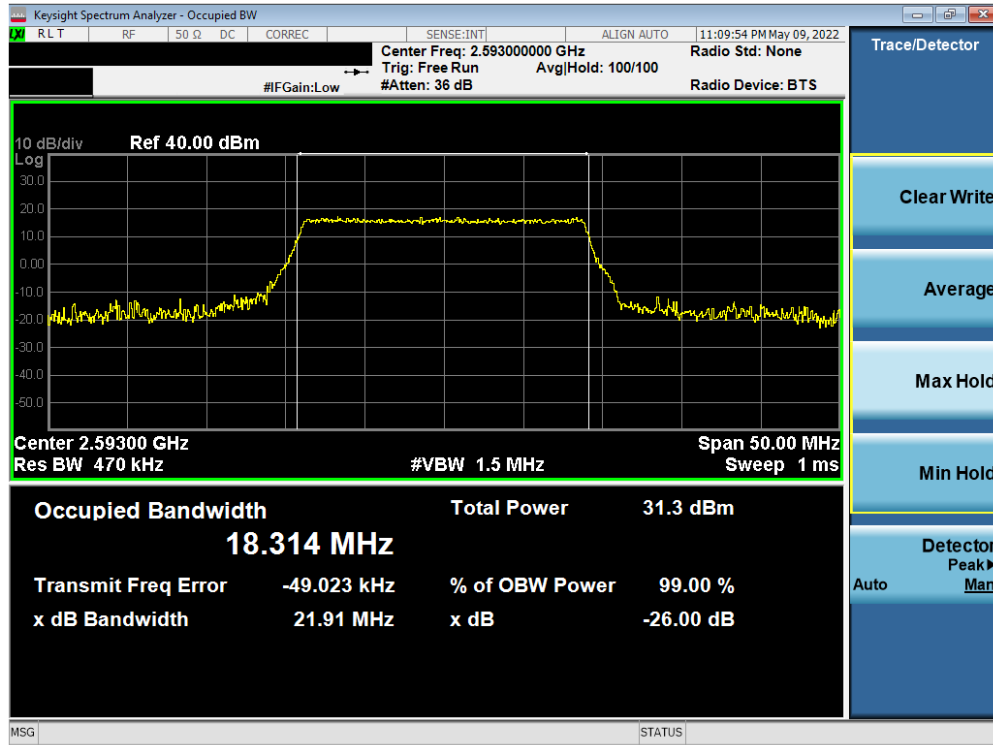

Plot 7-15. Occupied Bandwidth Plot (LTE Band 41 - 20MHz QPSK - Full RB)

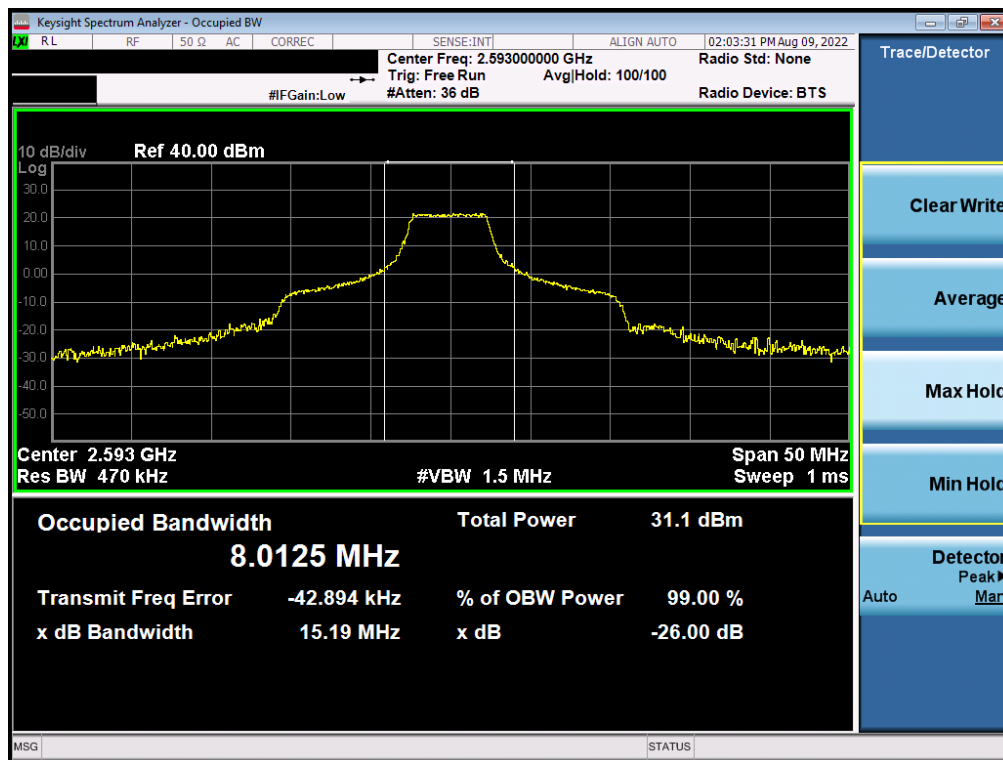

Plot 7-16. Occupied Bandwidth Plot (LTE Band 41 - 20MHz 16-QAM - Full RB)

FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 21 of 66

V2.2 2/15/2022

### 7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051, §27.53(m)

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***For LTE Bands 7 and 41, the minimum permissible attenuation level of any spurious emission is  $55 + 10\log_{10}(P_{[Watts]})$ .***

#### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

#### Test Settings


1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

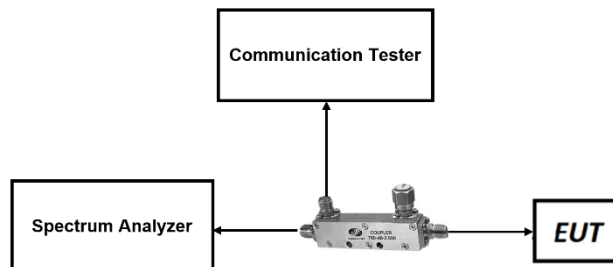


**Figure 7-2. Test Instrument & Measurement Setup**

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch
		Page 22 of 66

V2.2 2/15/2022


## **Test Notes**

1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth 100 kHz or greater for measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.


<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 23 of 66

V2.2 2/15/2022


## LTE Band 7

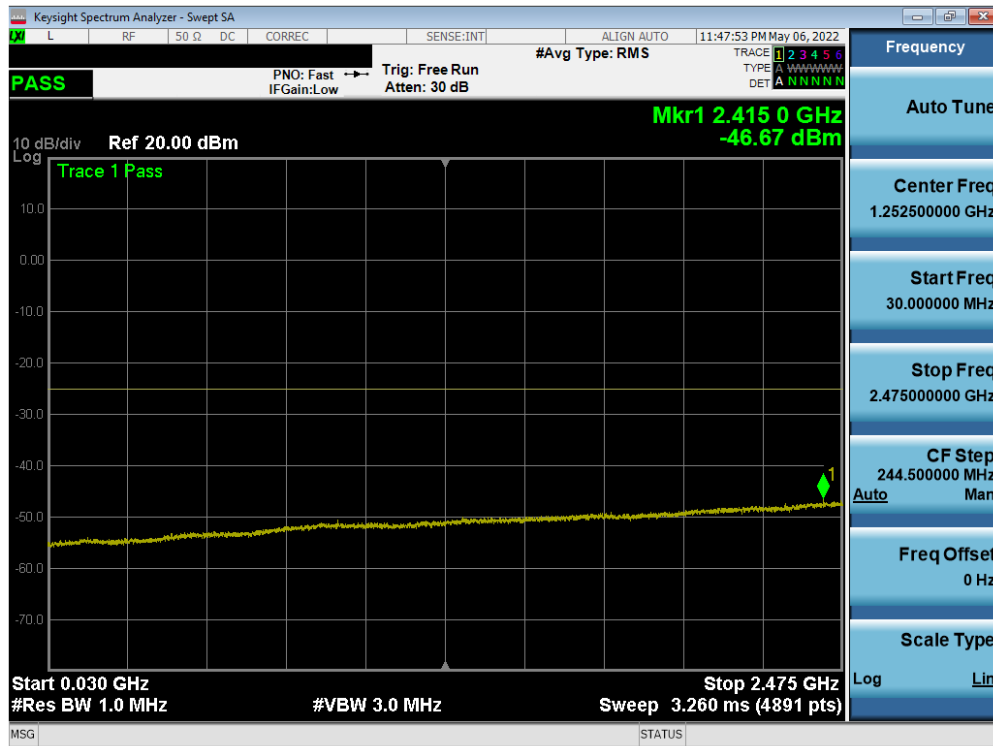

Plot 7-17. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

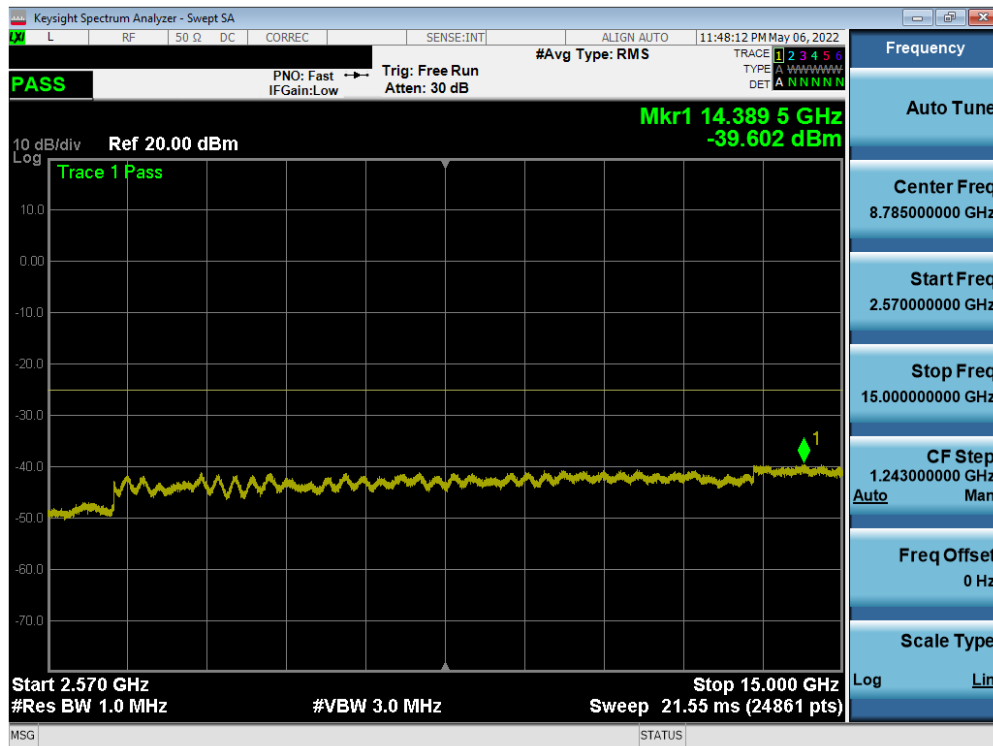

Plot 7-18. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)


FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 24 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



Plot 7-19. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

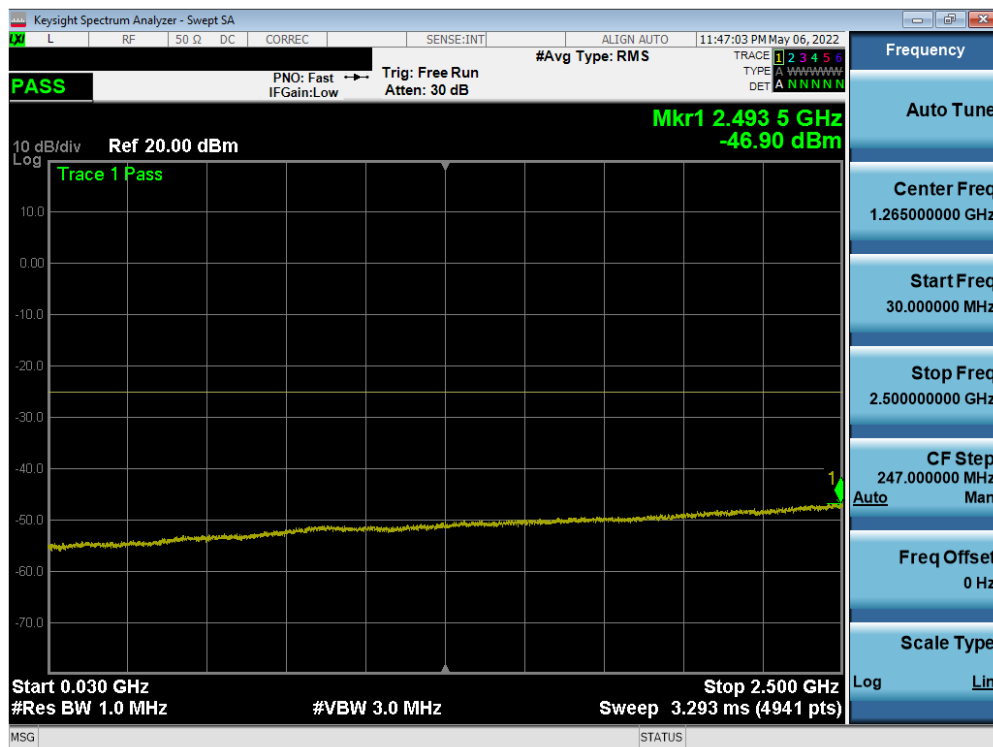


Plot 7-20. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)


FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 25 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

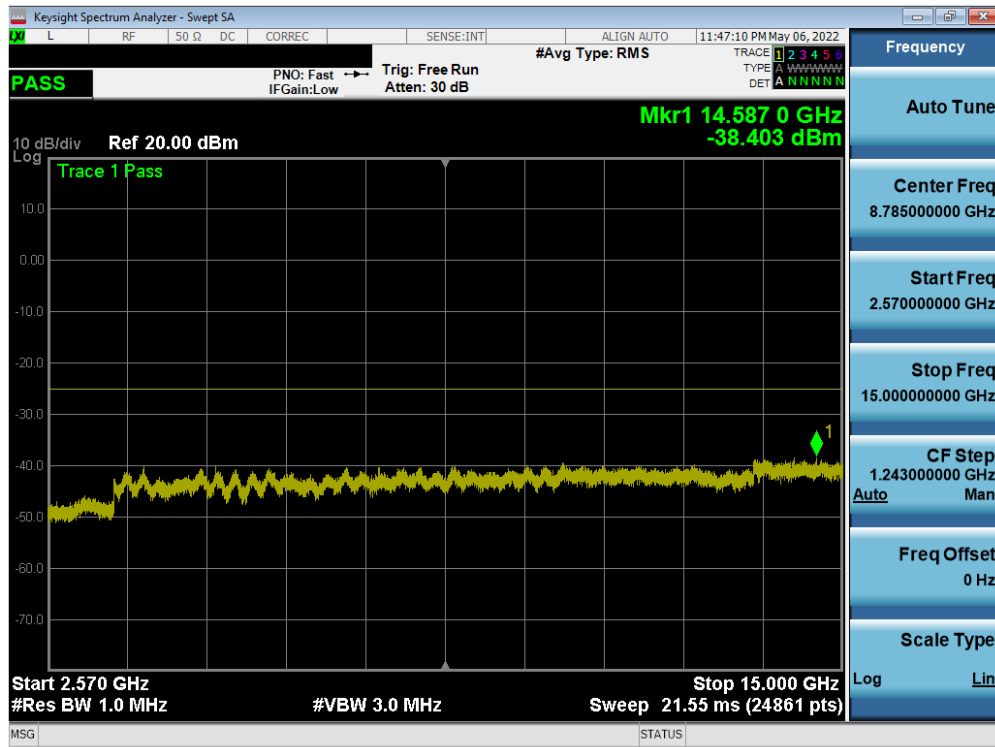

Plot 7-21. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

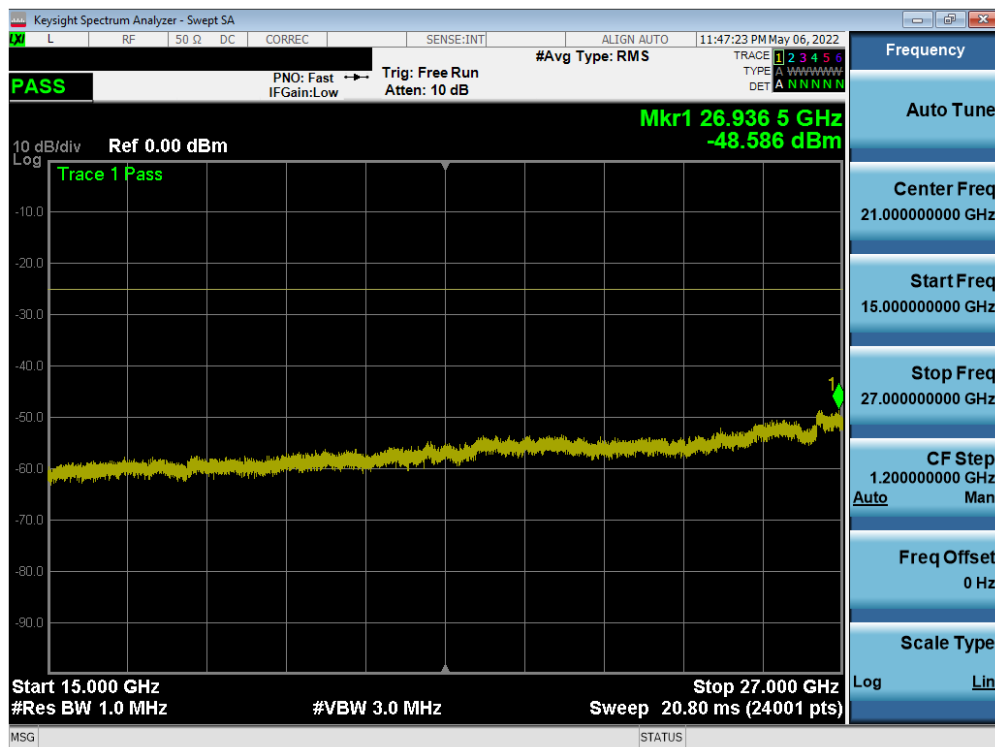


Plot 7-22. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 26 of 66


V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



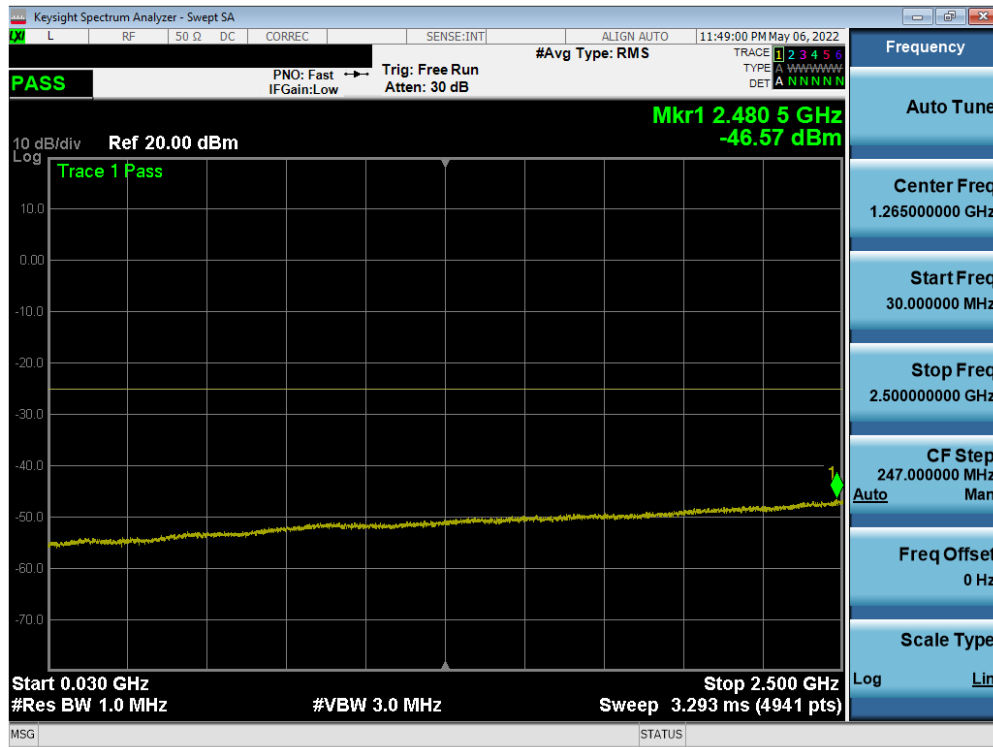

Plot 7-23. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

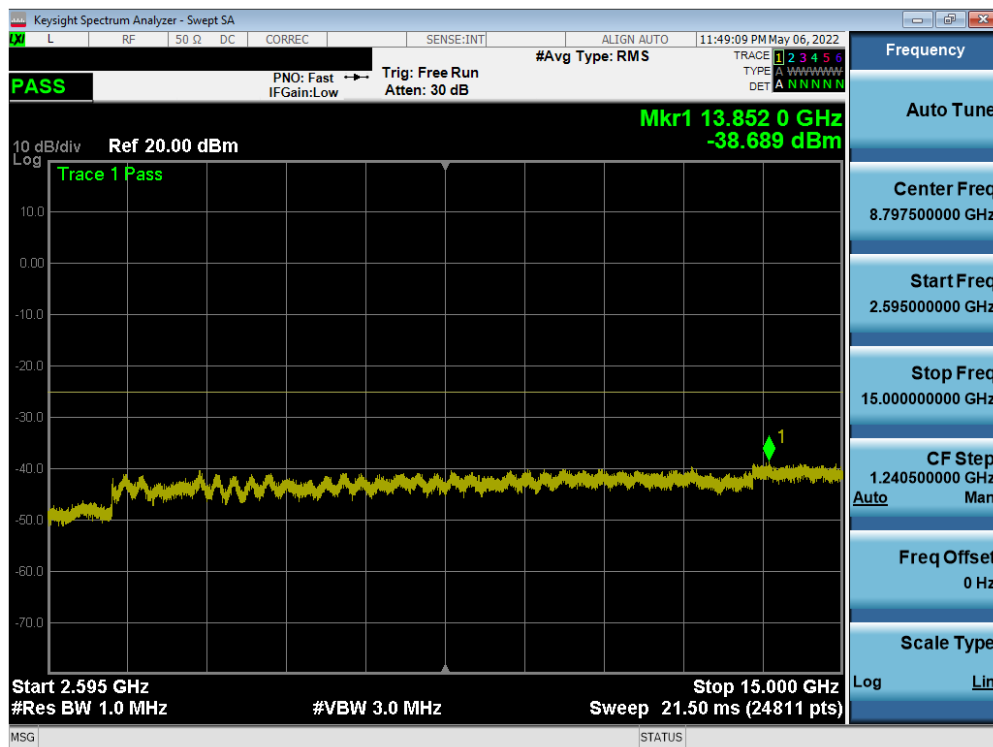


Plot 7-24. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 27 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

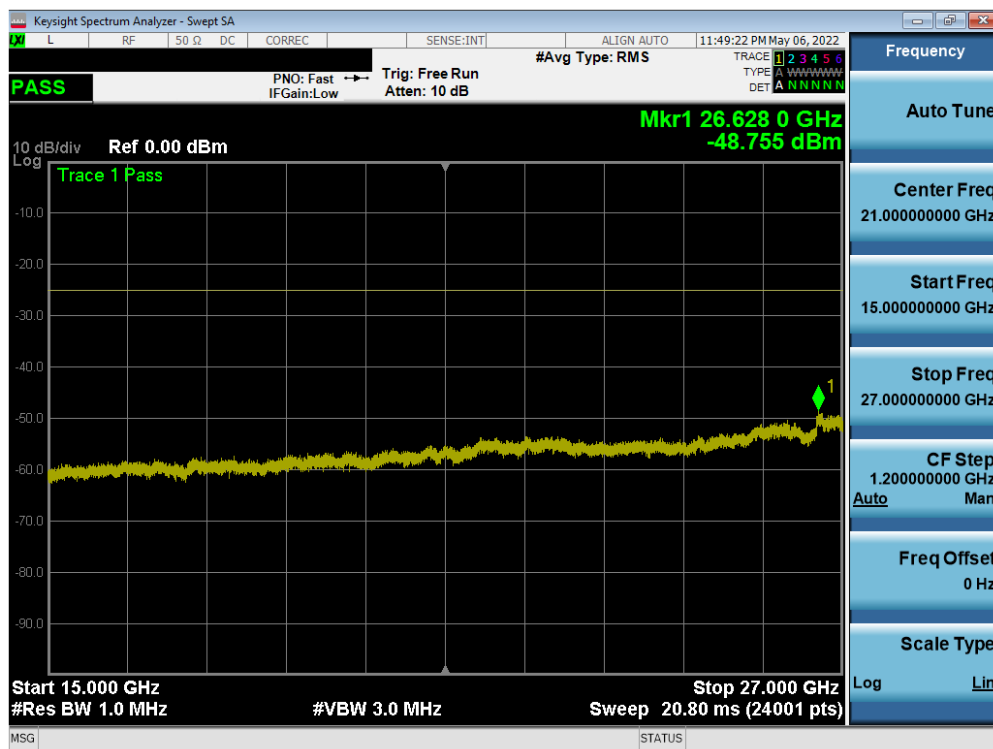


Plot 7-25. Conducted Spurious Plot (LTE Band 7 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)


FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 28 of 66

V2.2 2/15/2022

## LTE Band 41

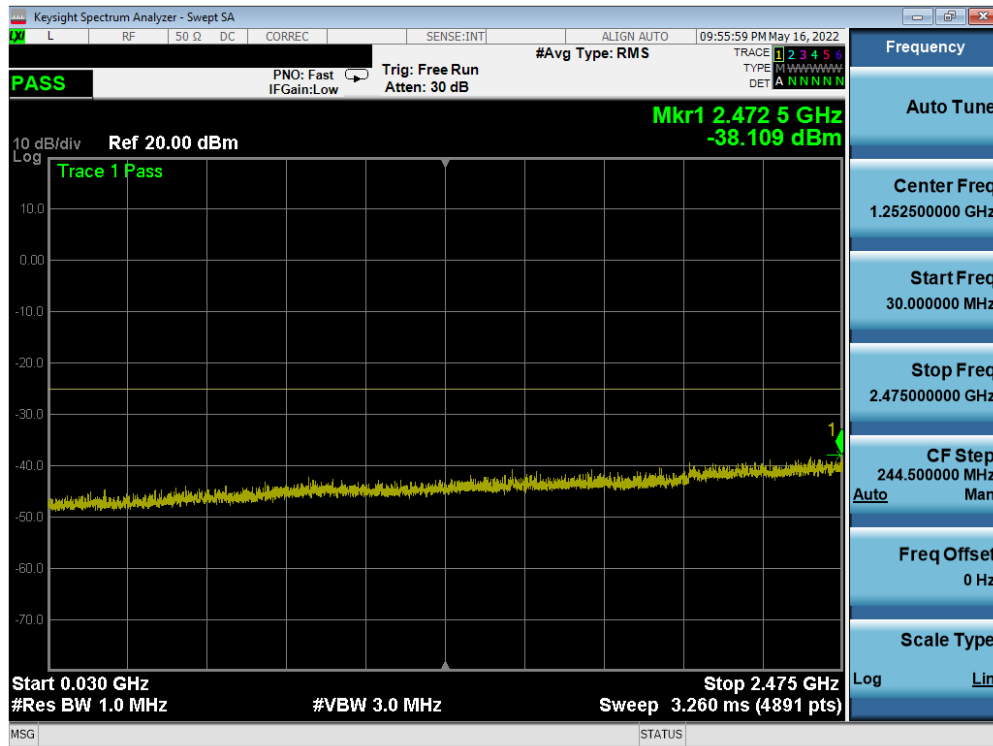


Plot 7-26. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

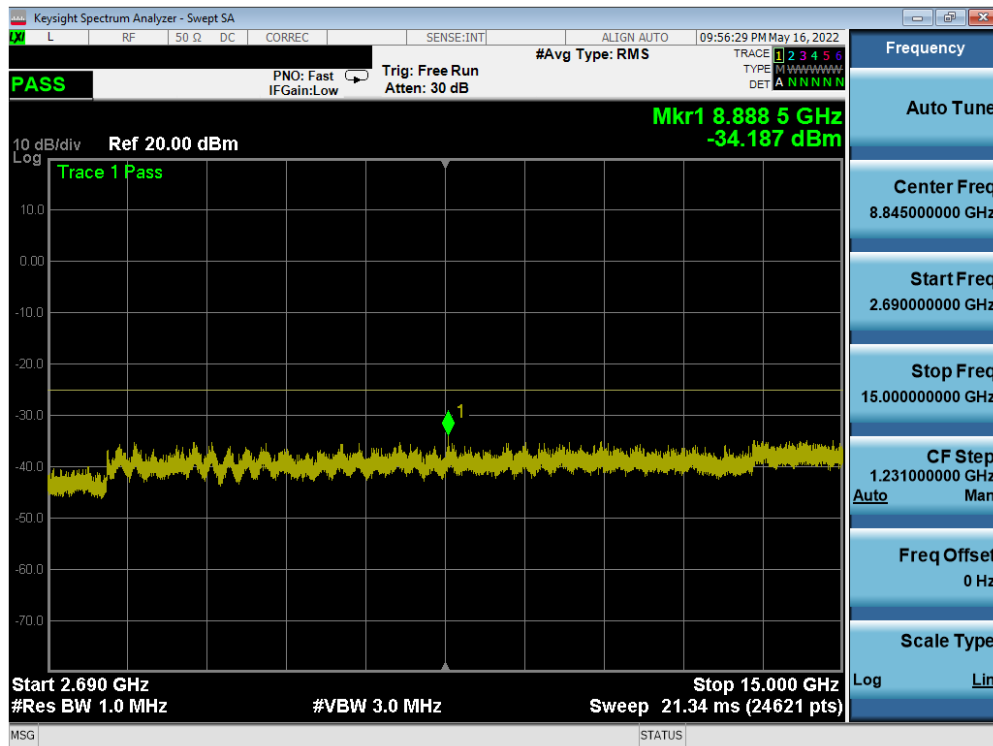


Plot 7-27. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

FCC ID: BCG-A2622	<p>element</p> <p>PART 27 MEASUREMENT REPORT</p>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 29 of 66

V2.2 2/15/2022

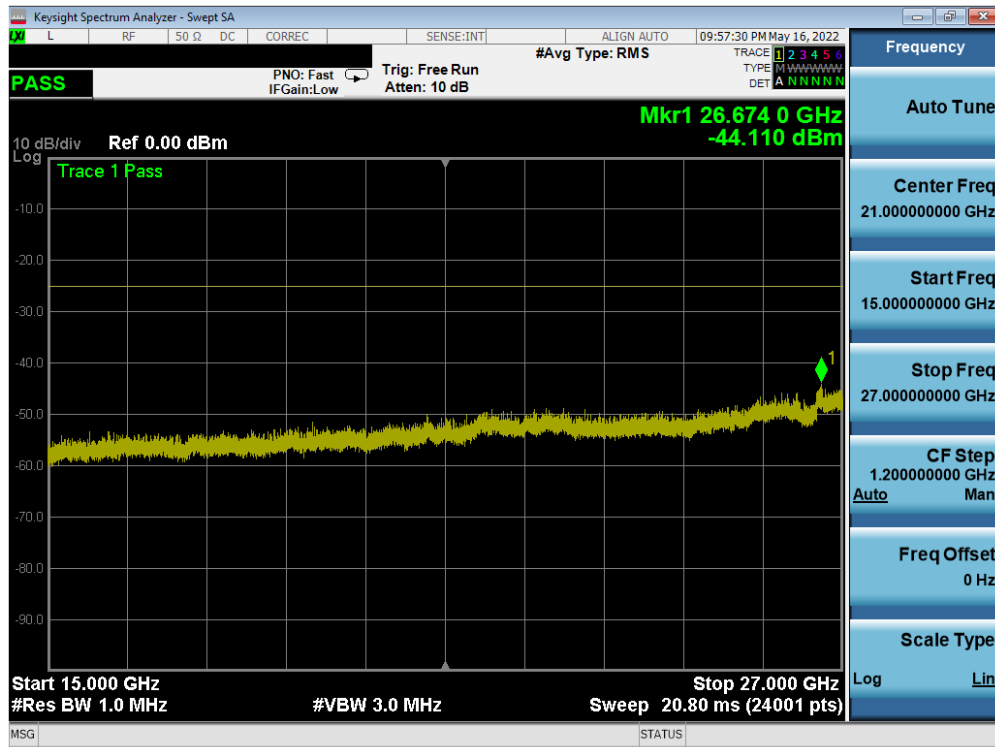


Plot 7-28. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

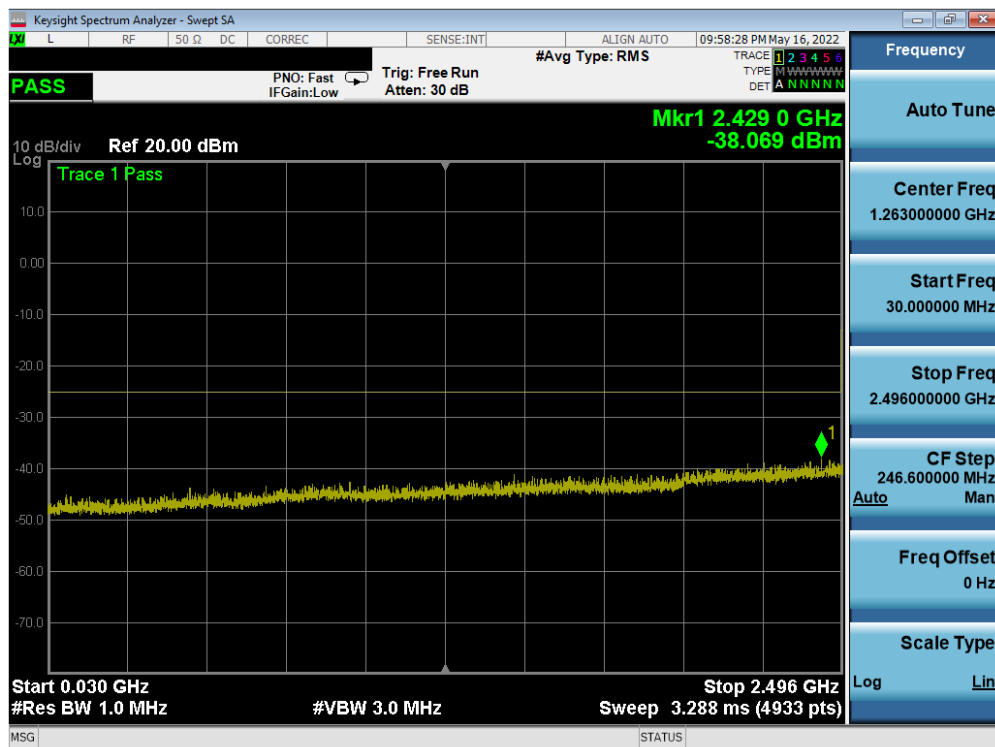


Plot 7-29. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 30 of 66

V2.2 2/15/2022

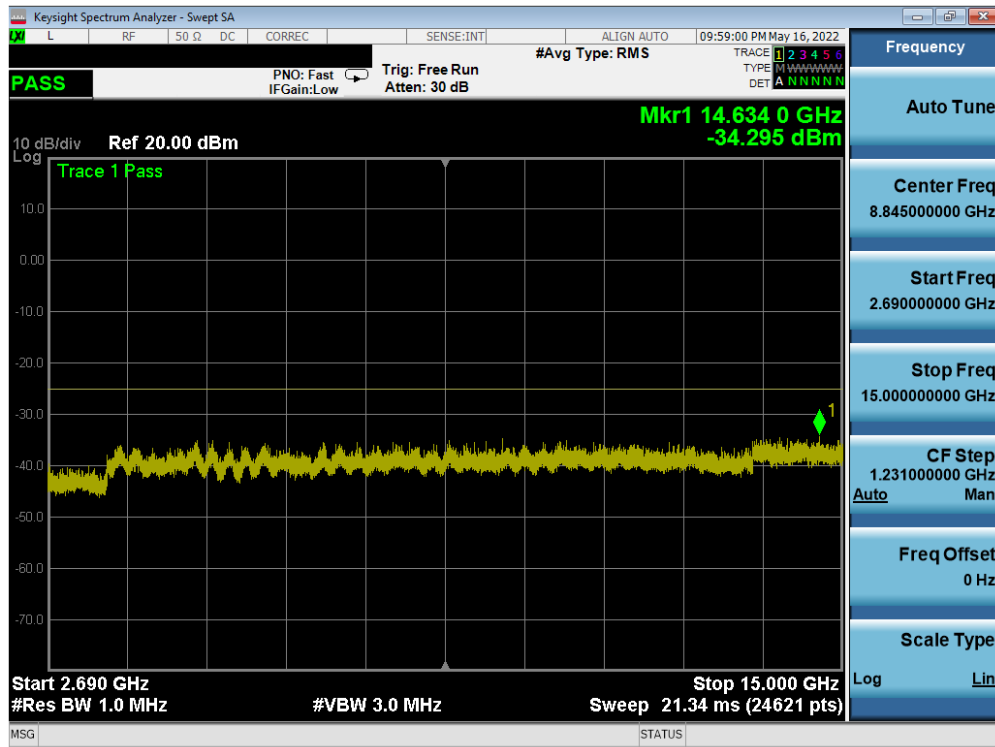


Plot 7-30. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

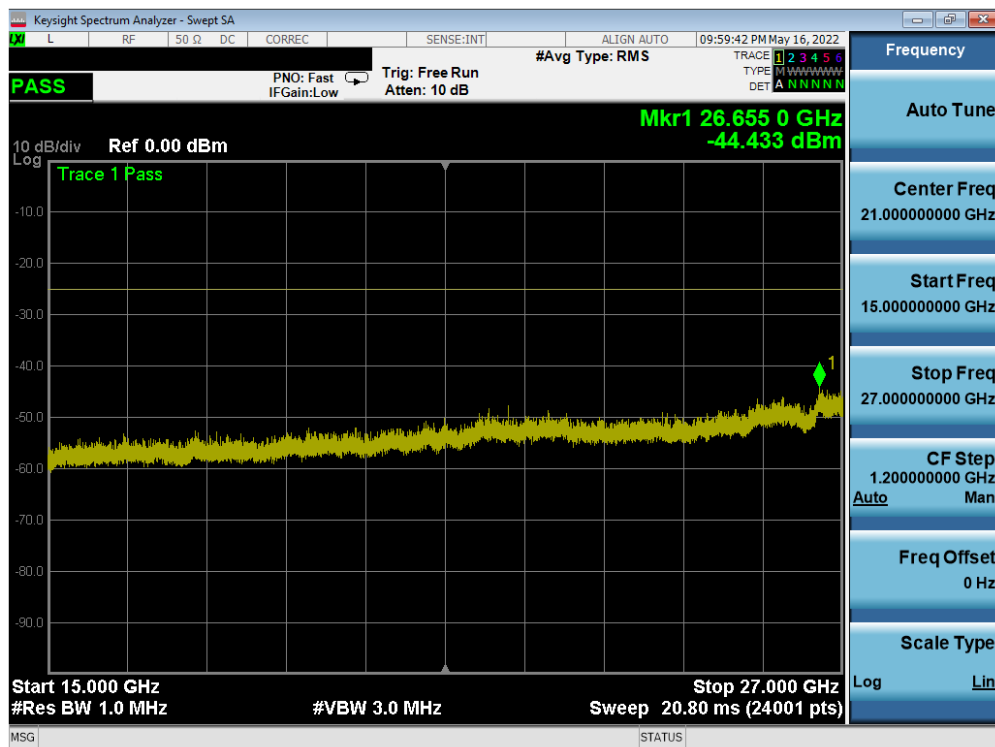


Plot 7-31. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 31 of 66

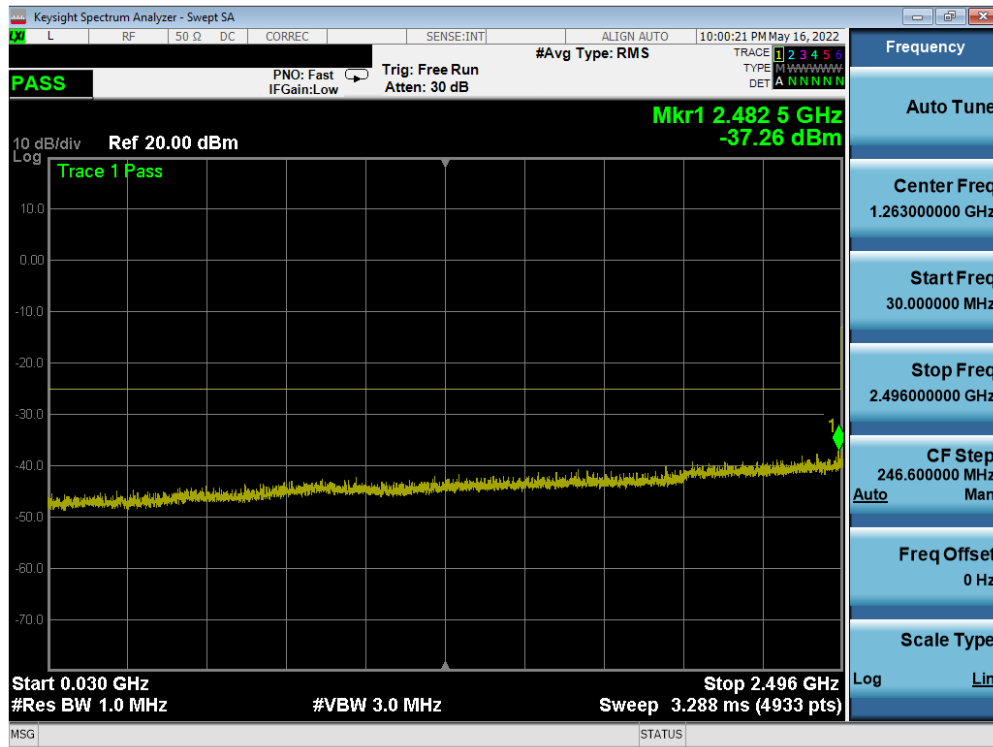


Plot 7-32. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

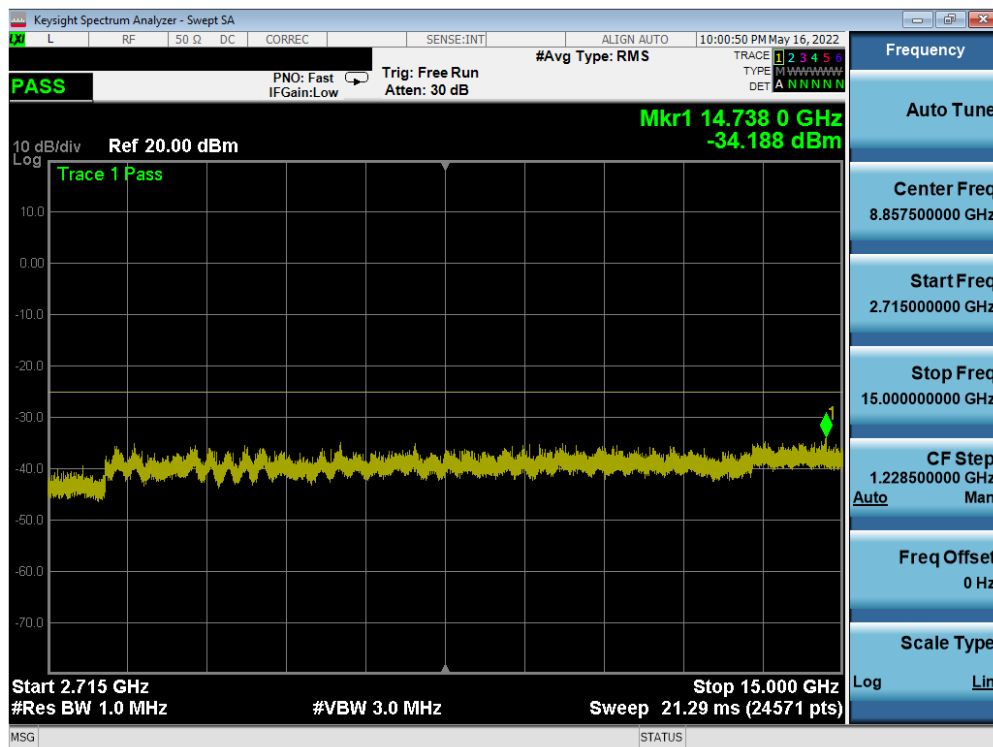

Plot 7-33. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 32 of 66

V2.2 2/15/2022

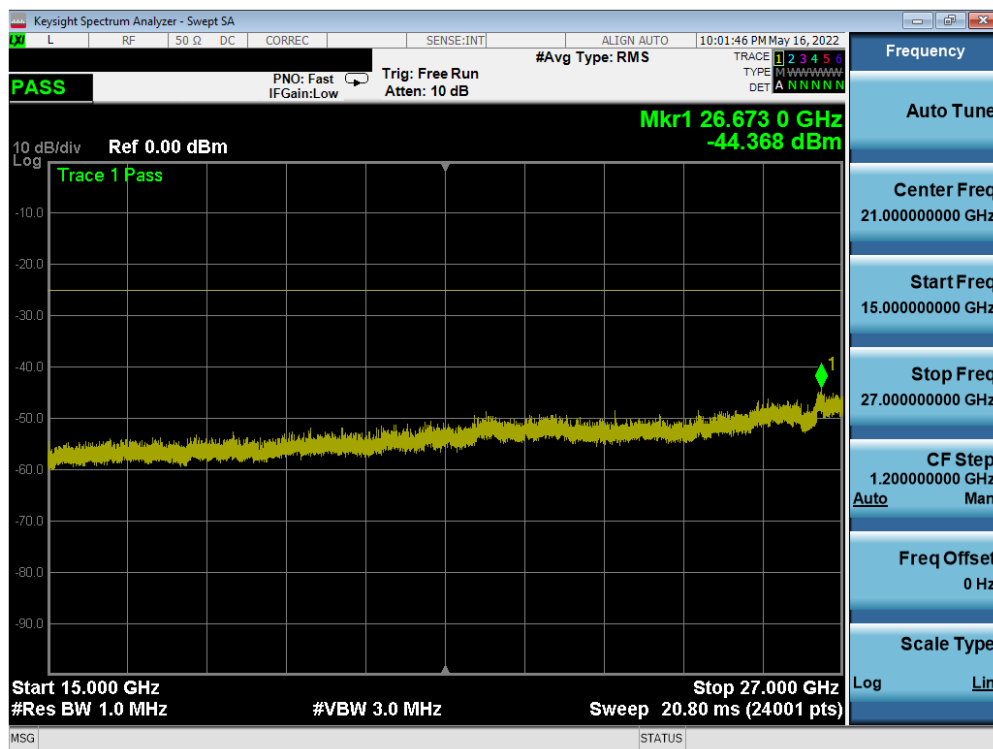

Plot 7-34. Conducted Spurious Plot (LTE Band 41 - 20MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 33 of 66

V2.2 2/15/2022

## 7.4 Band Edge Emissions at Antenna Terminal

\$2.1051, \$27.53(m)

### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

***For LTE Bands 7 and 41, the minimum permissible attenuation level is noted in the Test Notes on the following page.***

### Test Procedure Used


KDB 971168 D01 v03r01 – Section 6.0

### Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW  $\geq$  1% of the emission bandwidth
4. VBW  $\geq$  3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq$  2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

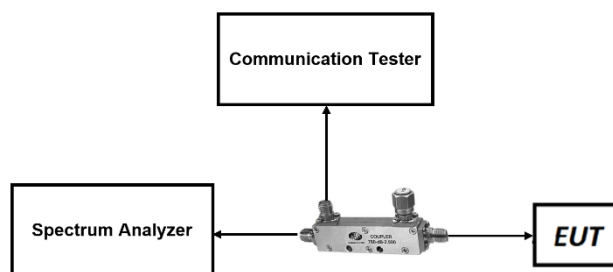

**Figure 7-3. Test Instrument & Measurement Setup**


FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 34 of 66

V2.2 2/15/2022




## Test Notes

1. Per 27.53(h), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
2. Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.


FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 35 of 66

V2.2 2/15/2022

## LTE Band 7

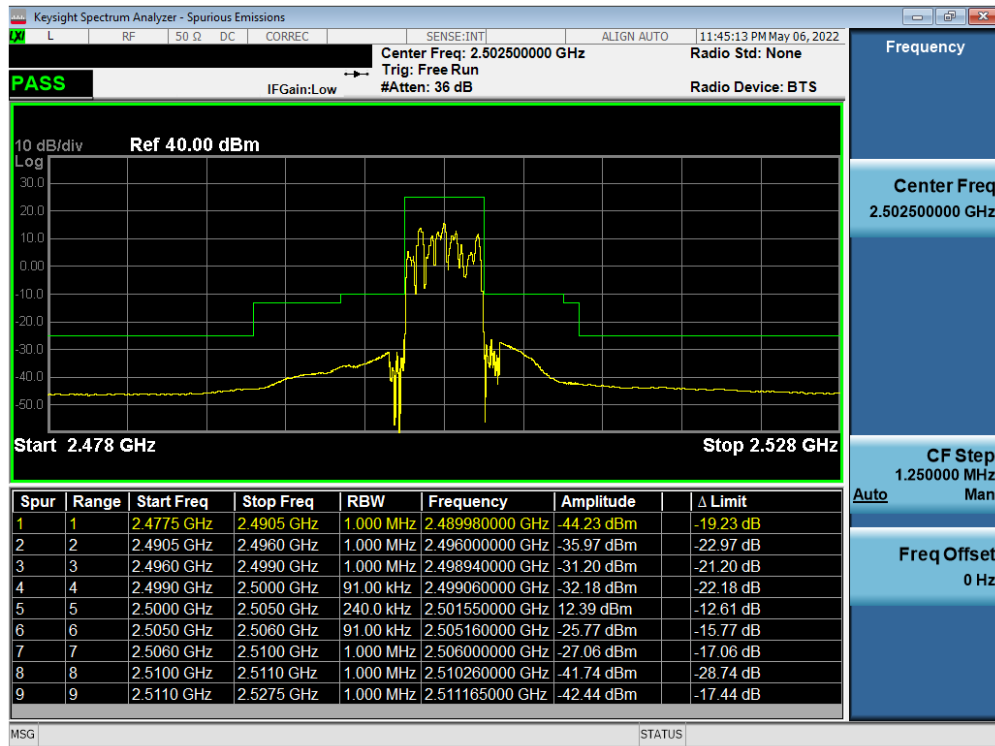


Plot 7-35. Lower ACP Plot (LTE Band 7 - 5MHz QPSK – Full RB)

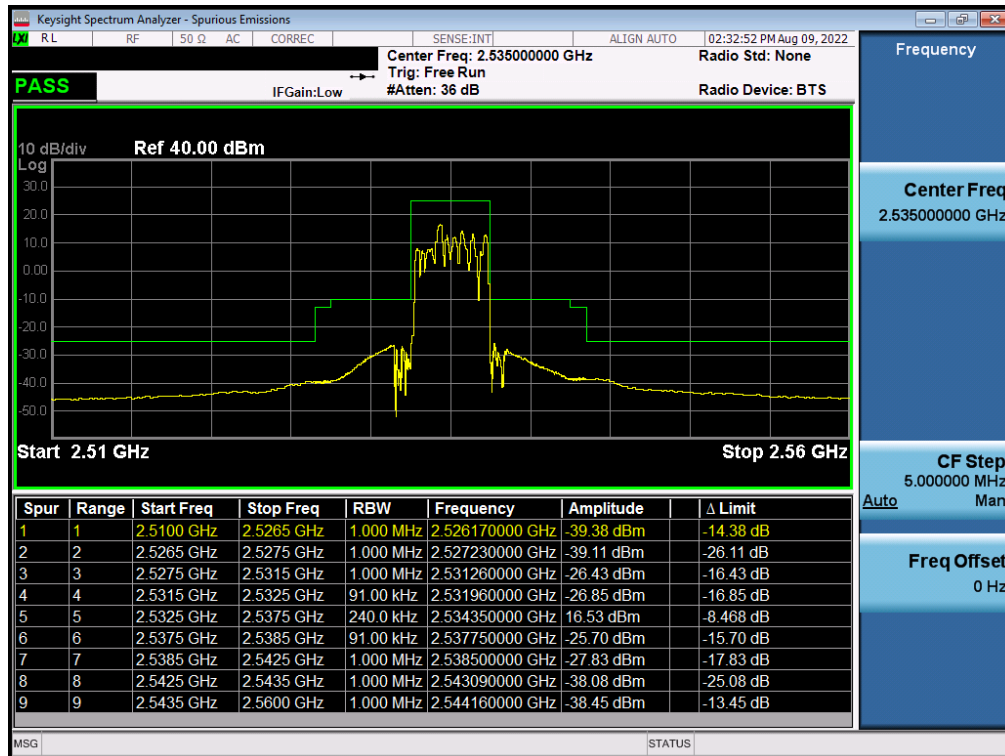


Plot 7-36. Middle ACP Plot (LTE Band 7 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 36 of 66

V2.2 2/15/2022

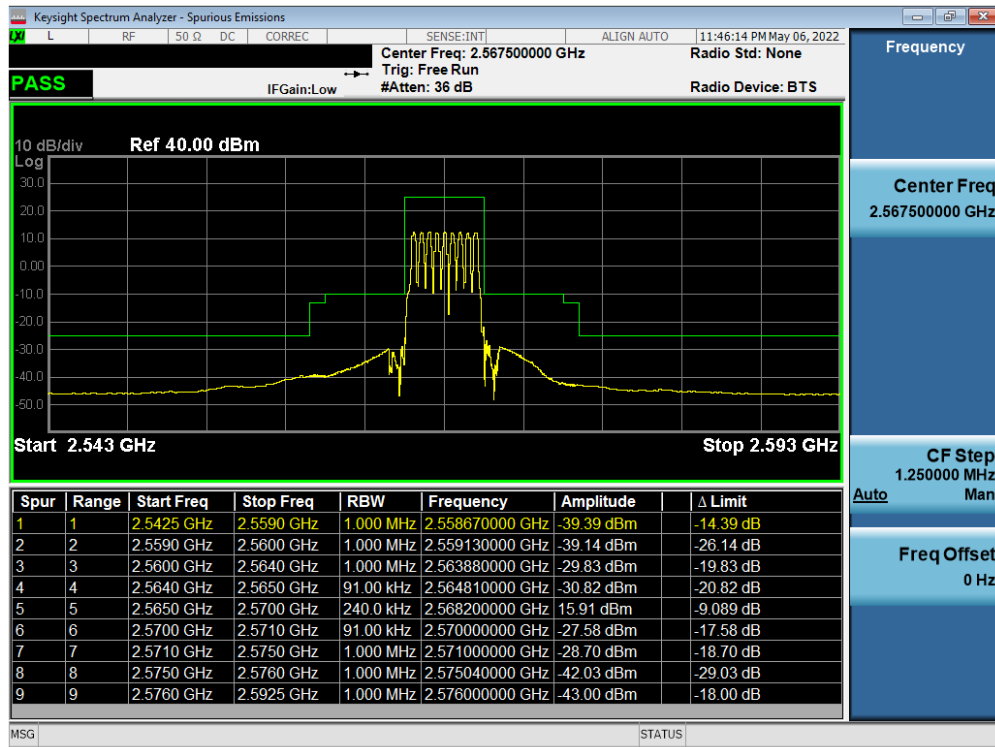


Plot 7-37. Upper ACP Plot (LTE Band 7 - 5MHz QPSK – Full RB)

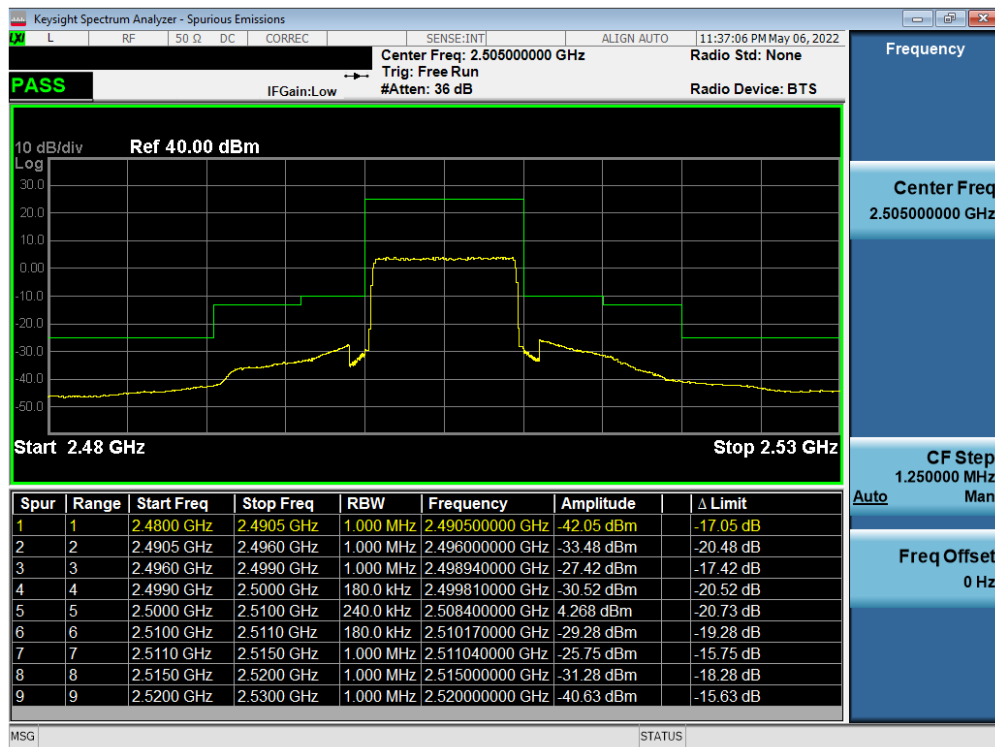


Plot 7-38. Lower ACP Plot (LTE Band 7 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 37 of 66

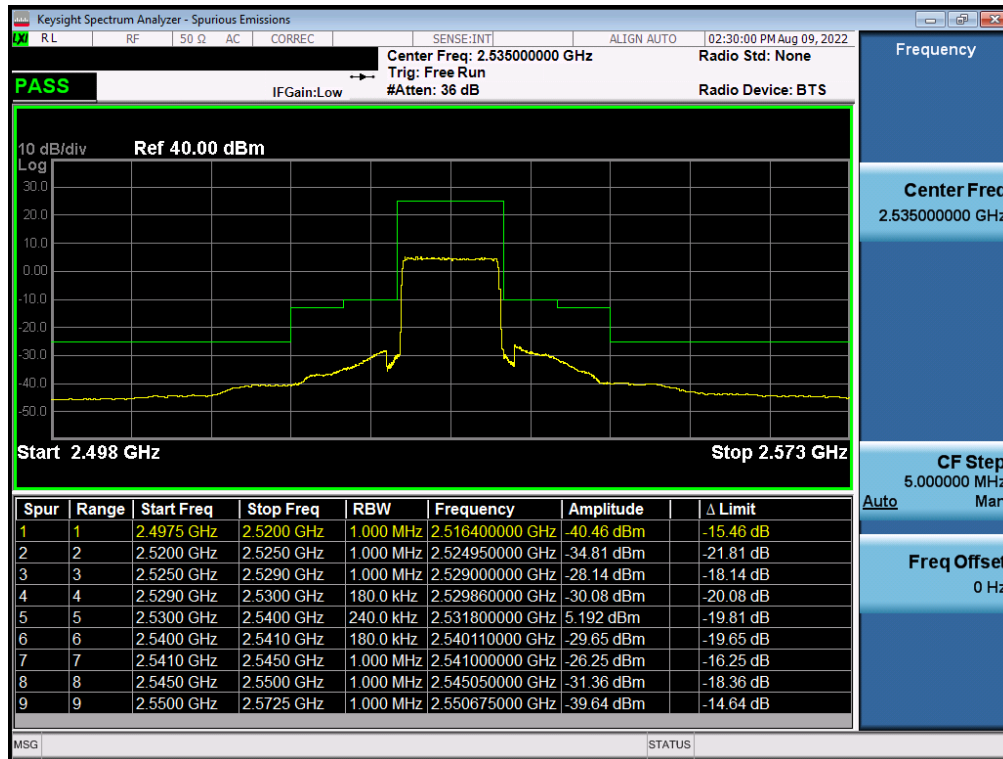

Plot 7-39. Middle ACP Plot (LTE Band 7 - 10MHz QPSK – Full RB)

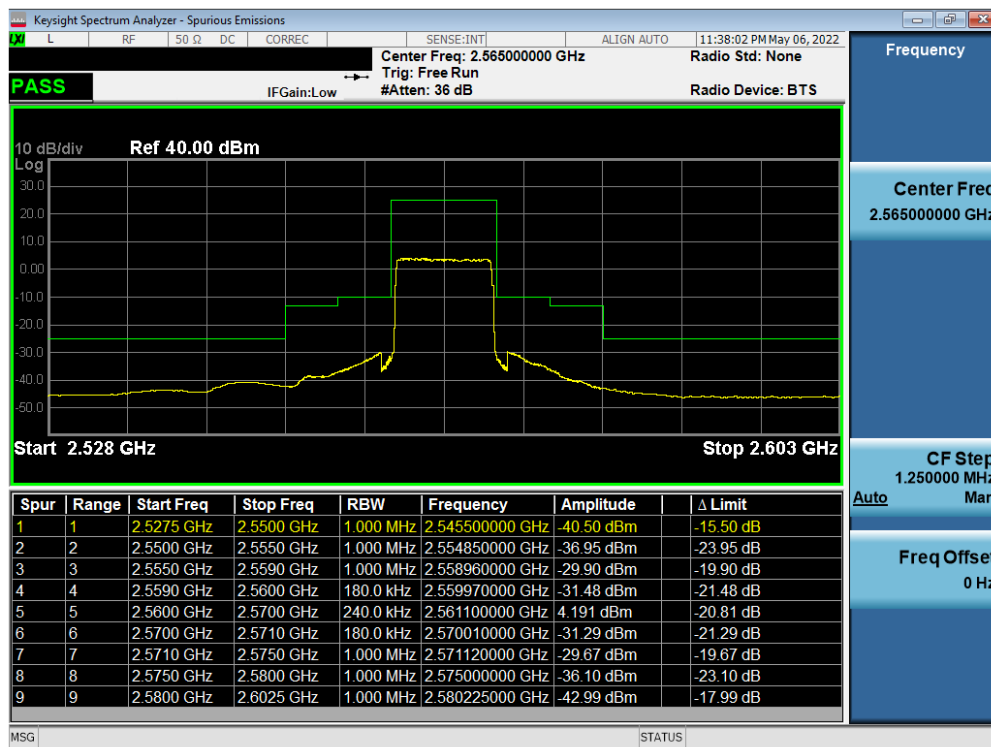


Plot 7-40. Upper ACP Plot (LTE Band 7 - 10MHz QPSK – Full RB)


FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 38 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

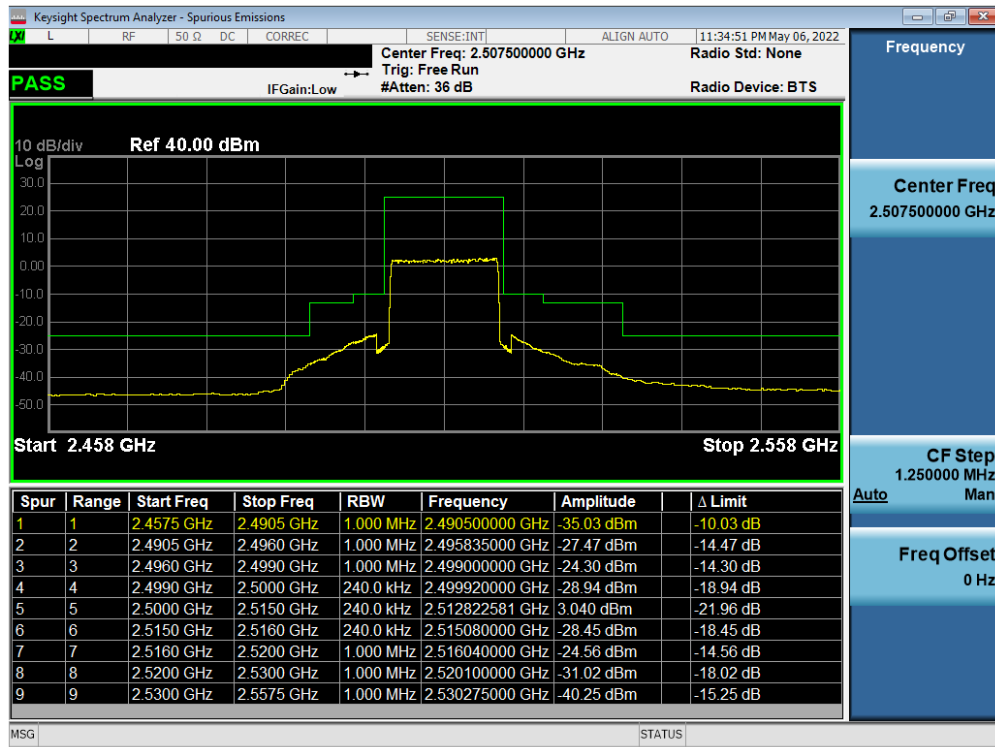

Plot 7-41. Lower ACP Plot (LTE Band 7 - 15MHz QPSK – Full RB)

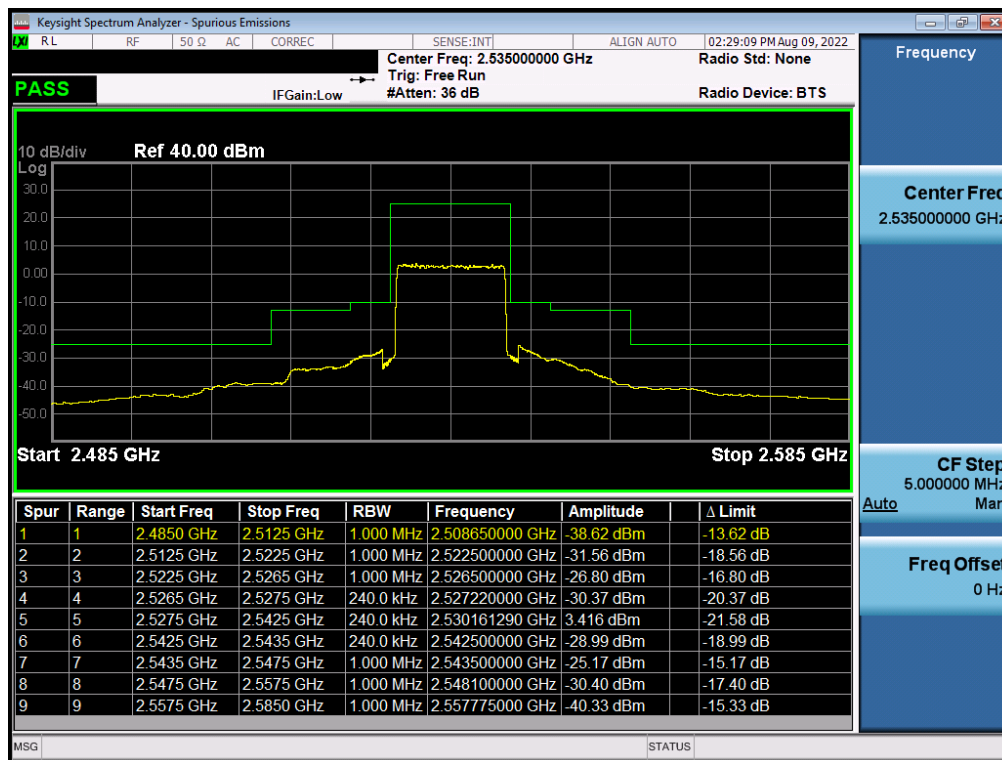


Plot 7-42. Middle ACP Plot (LTE Band 7 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 39 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

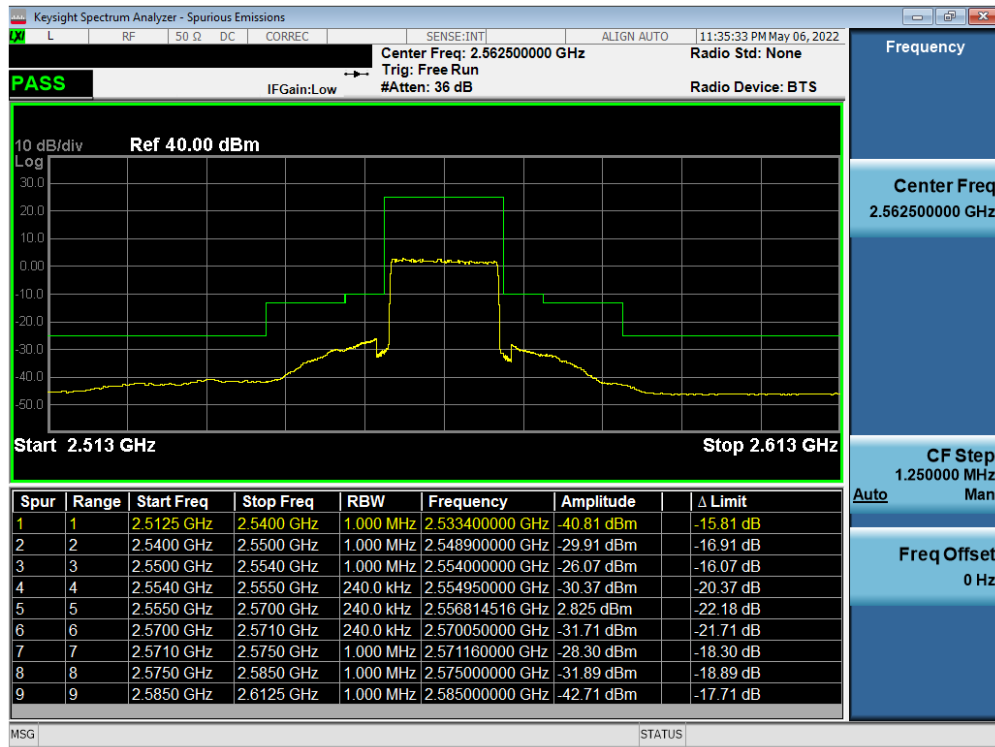

Plot 7-43. Upper ACP Plot (LTE Band 7 - 15MHz QPSK – Full RB)




Plot 7-44. Lower ACP Plot (LTE Band 7 - 20MHz QPSK – Full RB)


FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 40 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

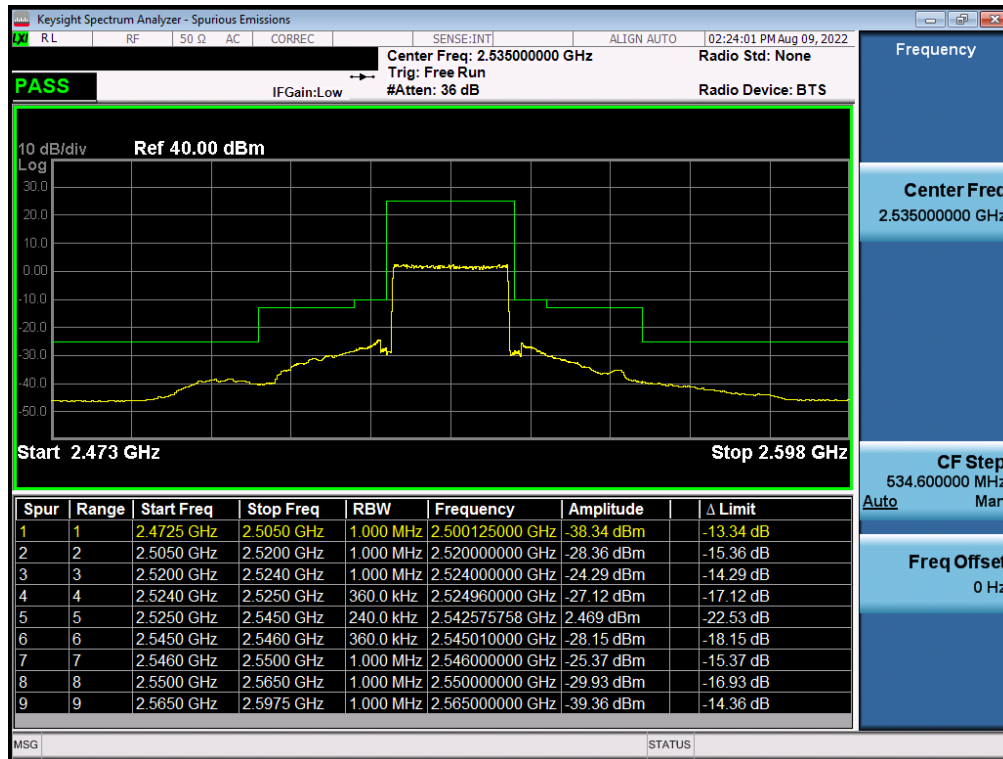

Plot 7-45. Middle ACP Plot (LTE Band 7 - 20MHz QPSK – Full RB)

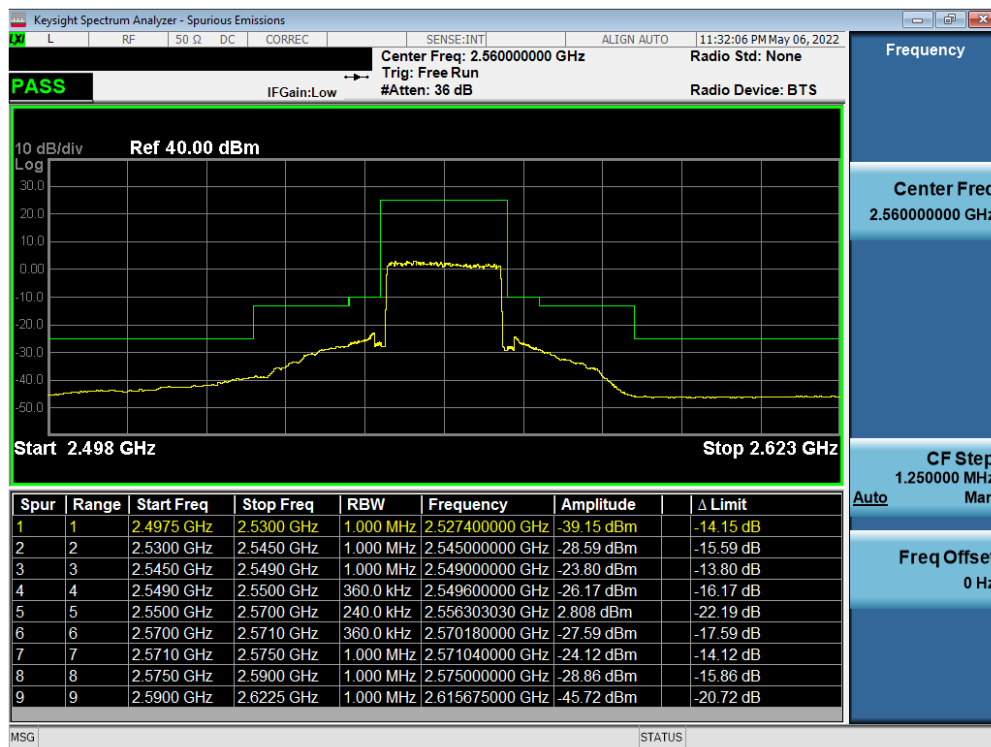

Plot 7-46. Upper ACP Plot (LTE Band 7 - 20MHz QPSK – Full RB)


FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 41 of 66

V2.2 2/15/2022


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## LTE Band 41

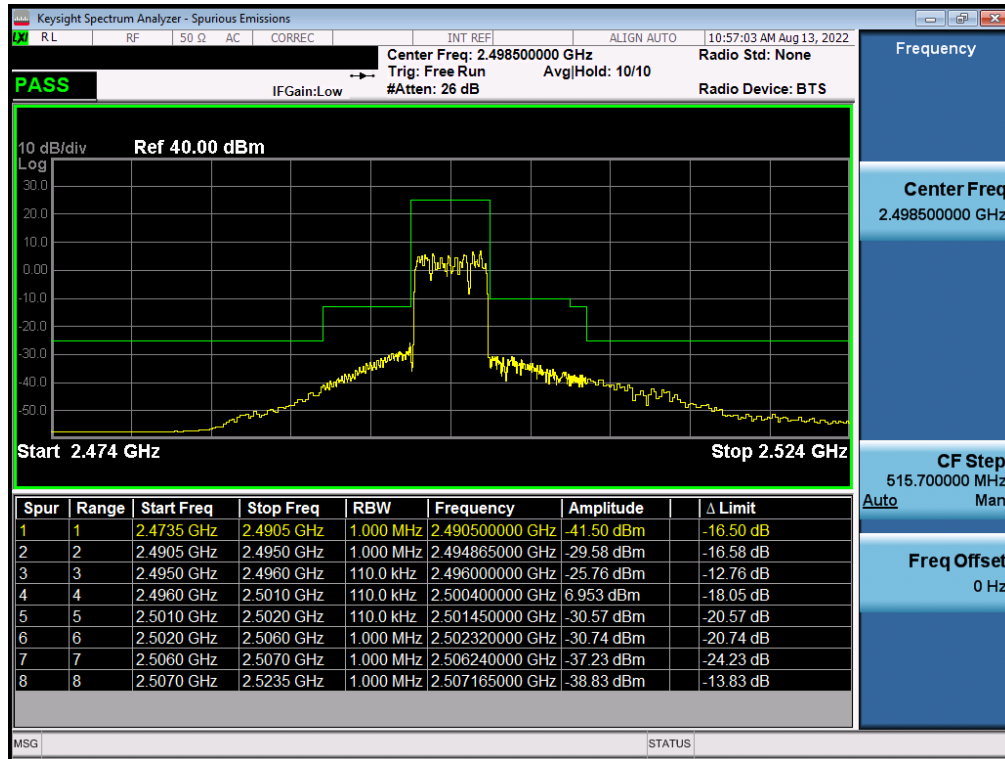

Plot 7-47. Lower ACP Plot (LTE Band 41 - 5MHz QPSK – Full RB)

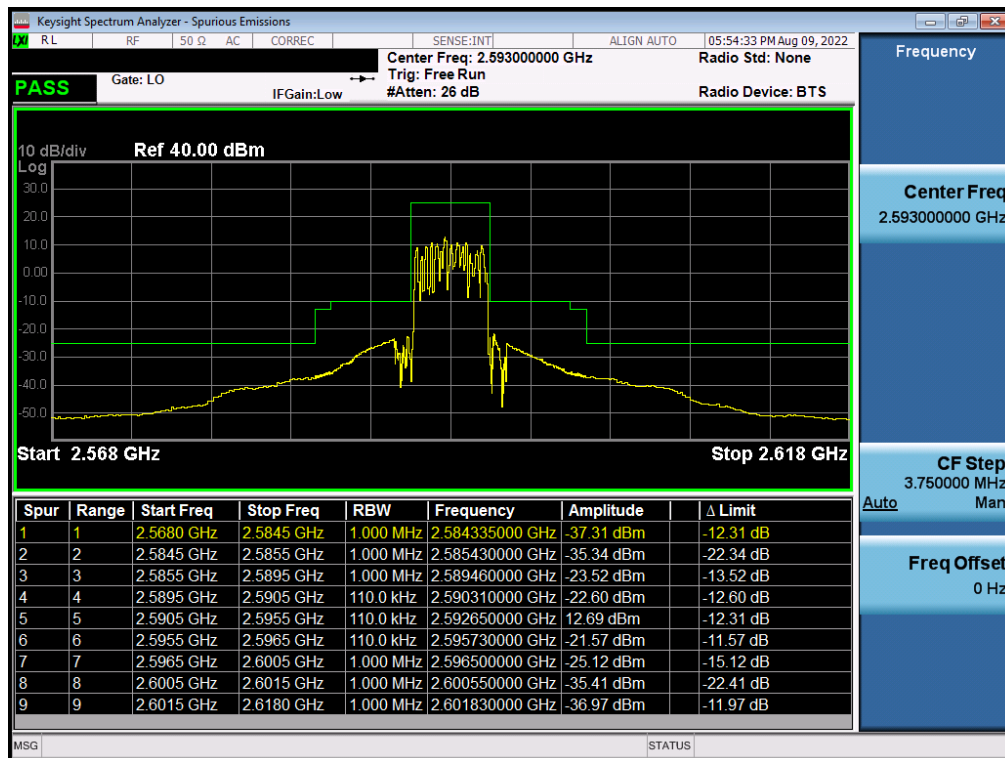


Plot 7-48. Middle ACP Plot (LTE Band 41 - 5MHz QPSK – Full RB)

FCC ID: BCG-A2622	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 42 of 66


V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



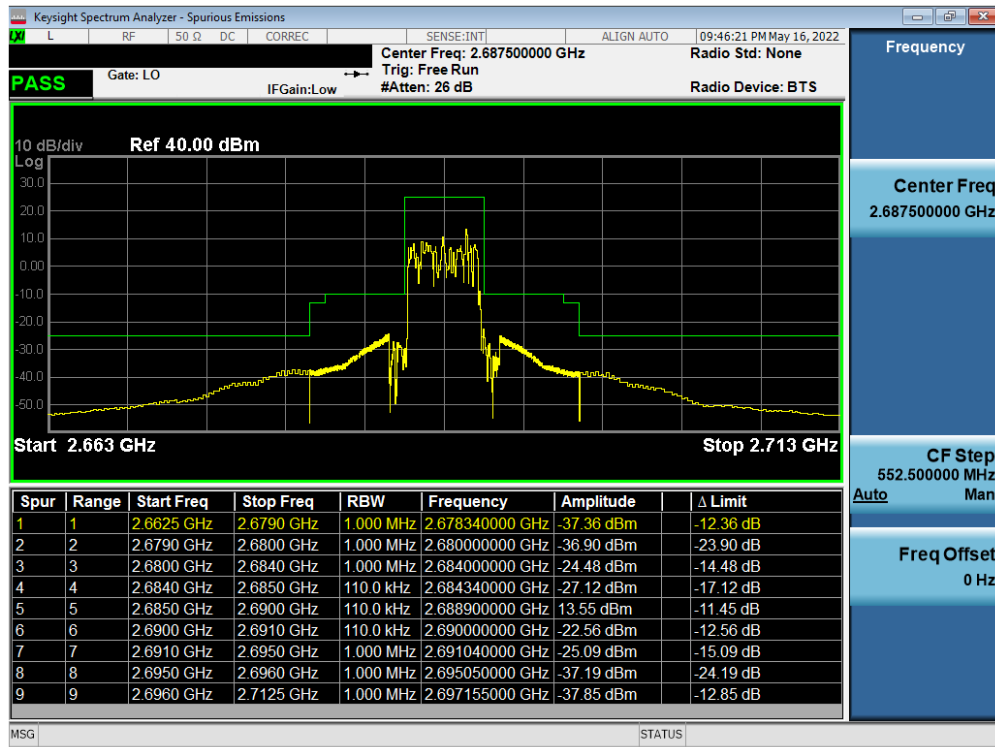


Plot 7-49. Upper ACP Plot (LTE Band 41 - 5MHz QPSK – Full RB)

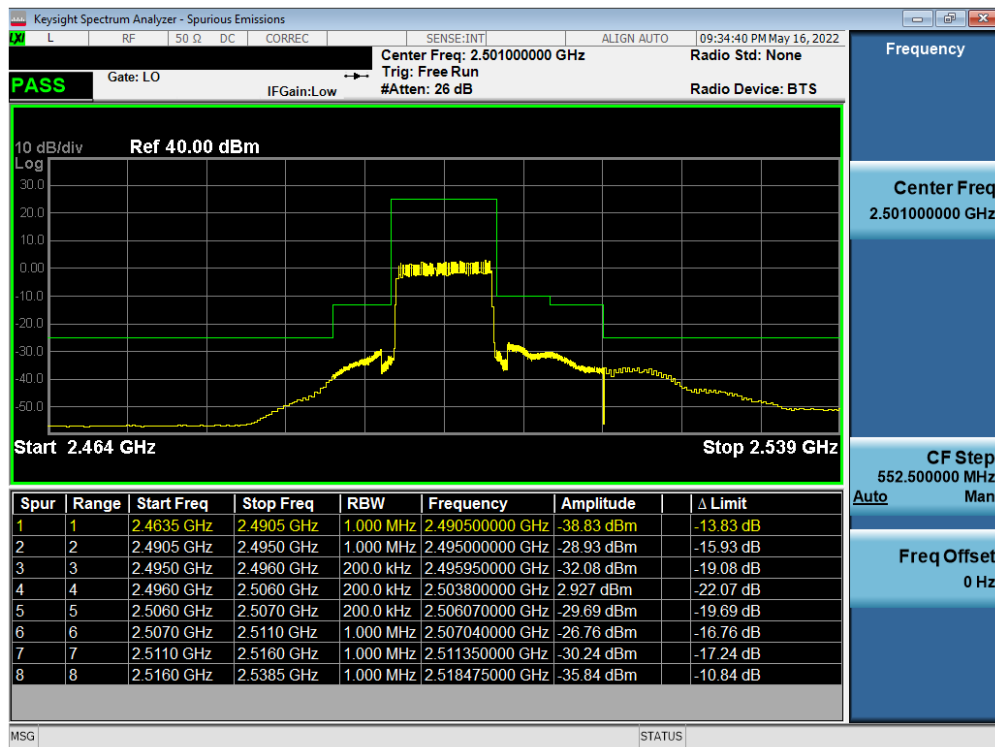


Plot 7-50. Lower ACP Plot (LTE Band 41 - 10MHz QPSK – Full RB)

FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 43 of 66

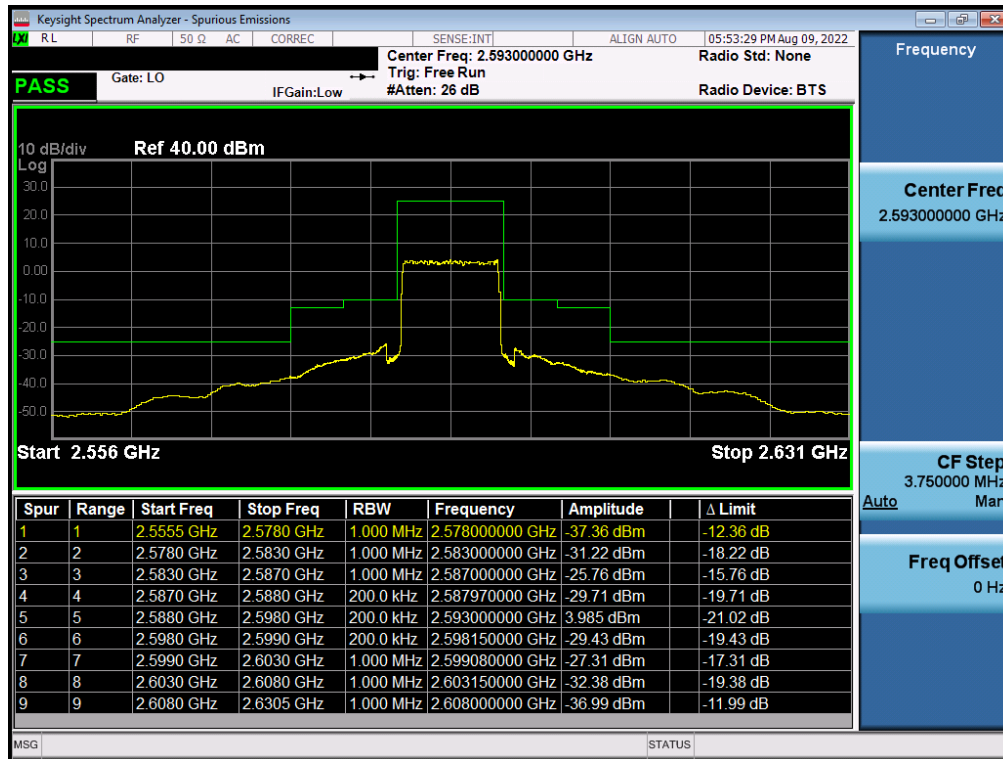

Plot 7-51. Middle ACP Plot (LTE Band 41 - 10MHz QPSK – Full RB)

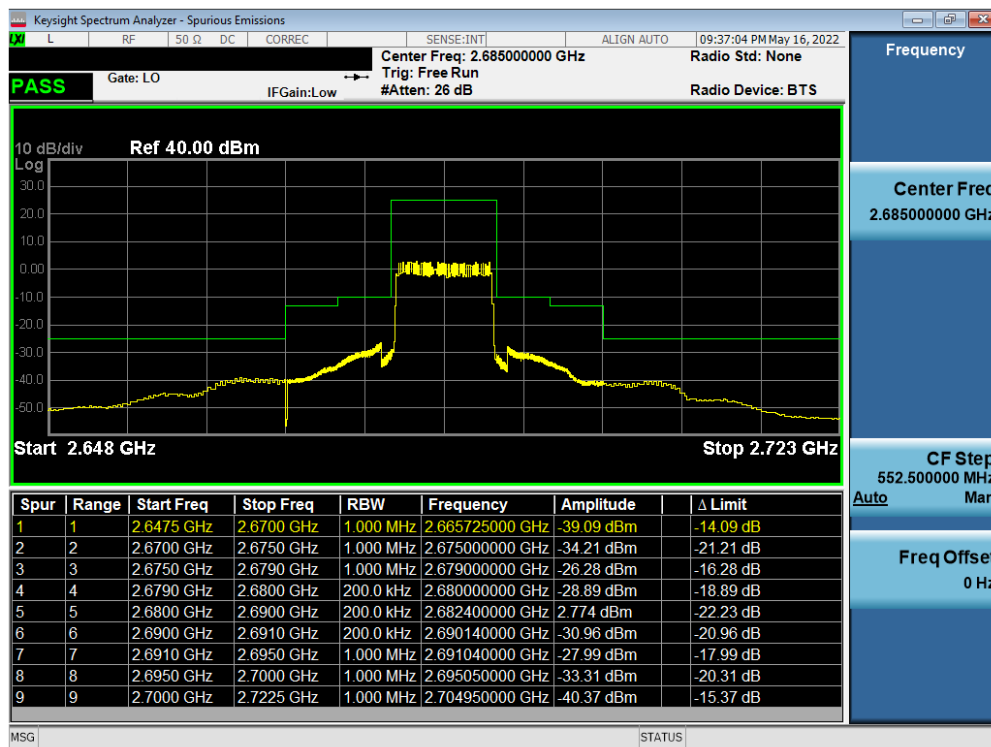


Plot 7-52. Upper ACP Plot (LTE Band 41 - 10MHz QPSK – Full RB)


FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 44 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

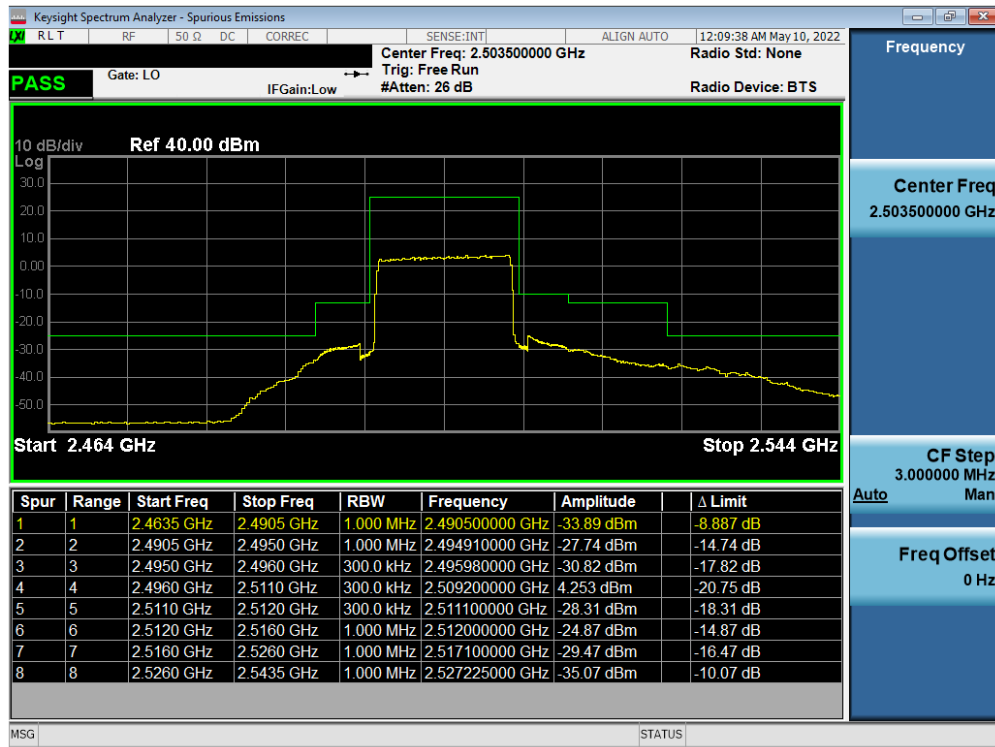


Plot 7-53. Lower ACP Plot (LTE Band 41 - 15MHz QPSK – Full RB)

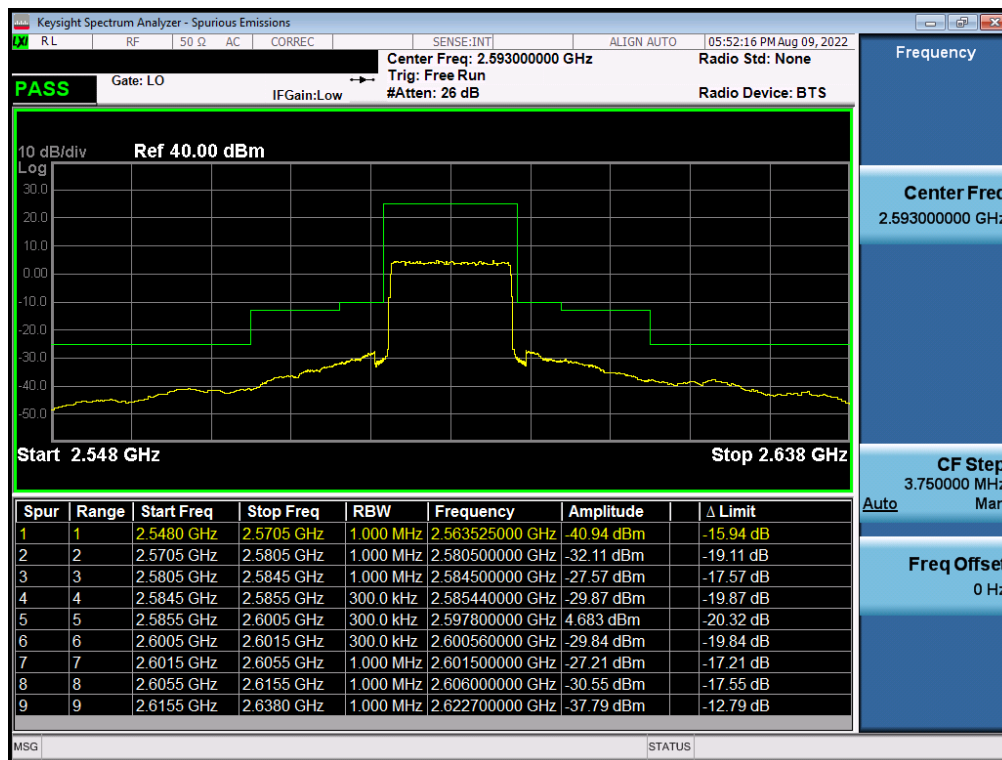


Plot 7-54. Middle ACP Plot (LTE Band 41 - 15MHz QPSK – Full RB)

FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 45 of 66

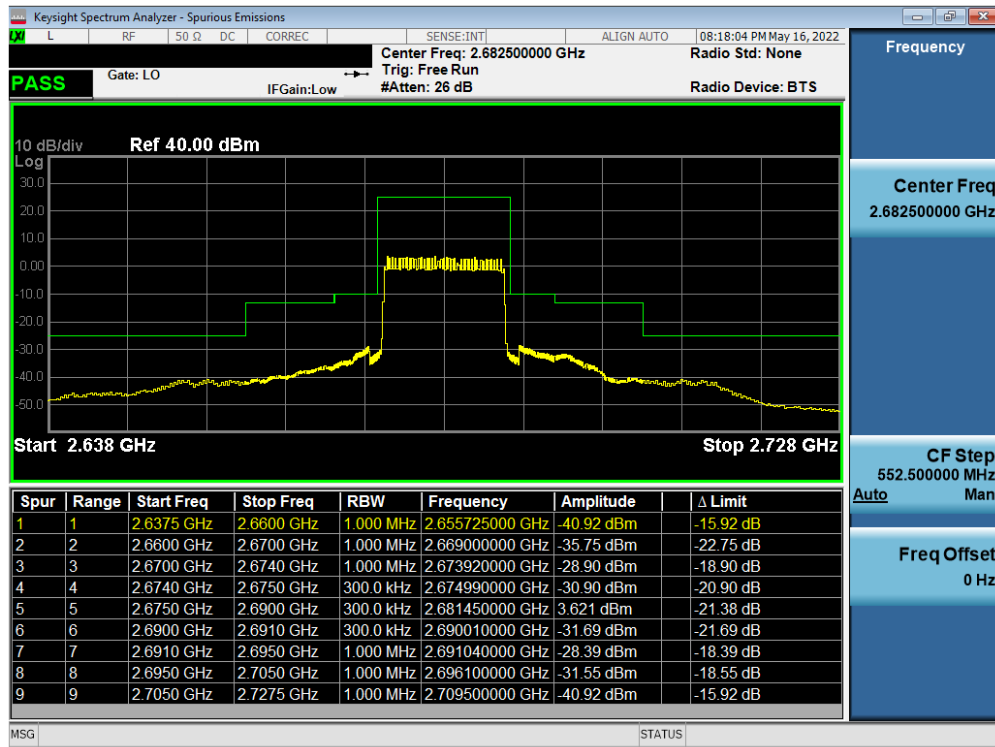

Plot 7-55. Upper ACP Plot (LTE Band 41 - 15MHz QPSK – Full RB)

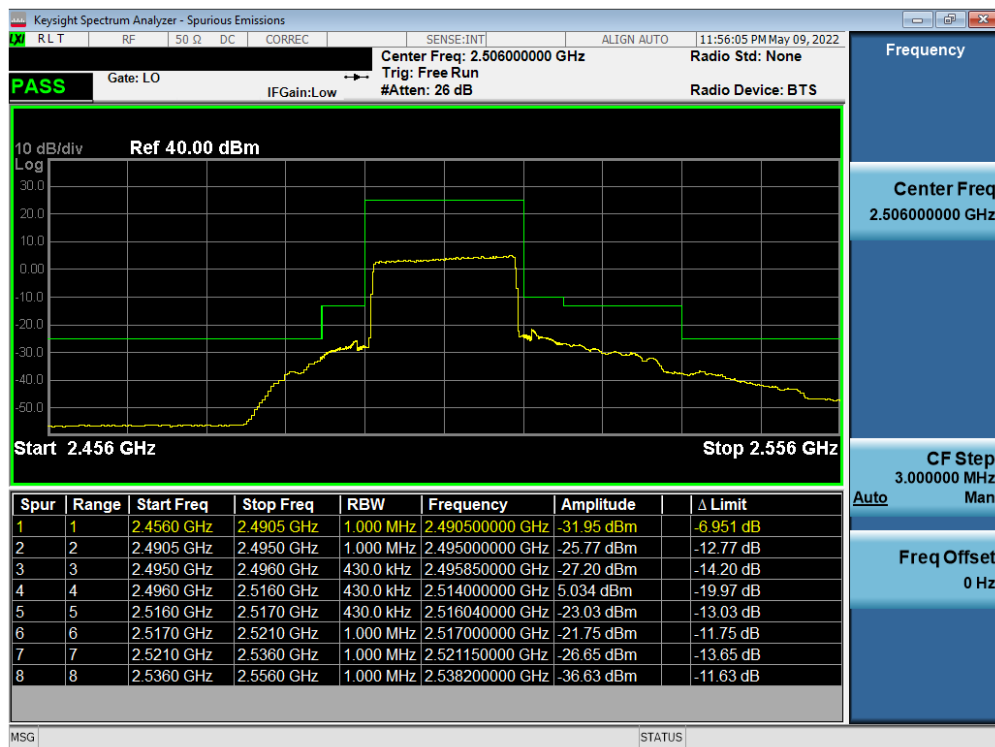


Plot 7-56. Lower ACP Plot (LTE Band 41 - 20MHz QPSK – Full RB)


FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 46 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

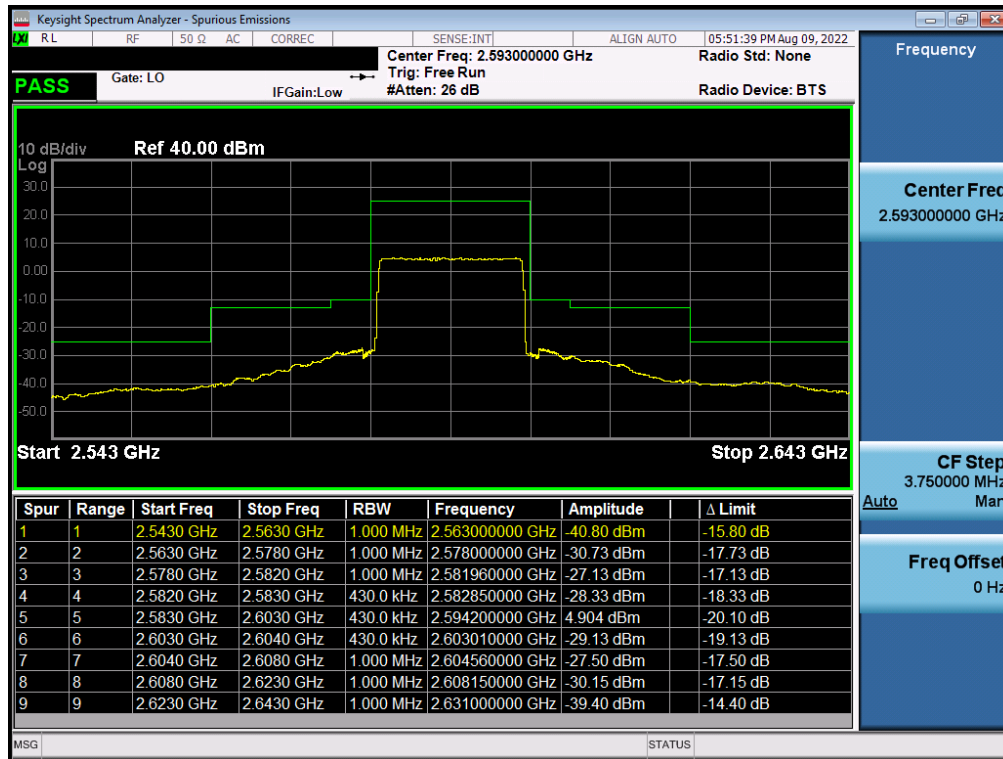

Plot 7-57. Middle ACP Plot (LTE Band 41 - 20MHz QPSK – Full RB)

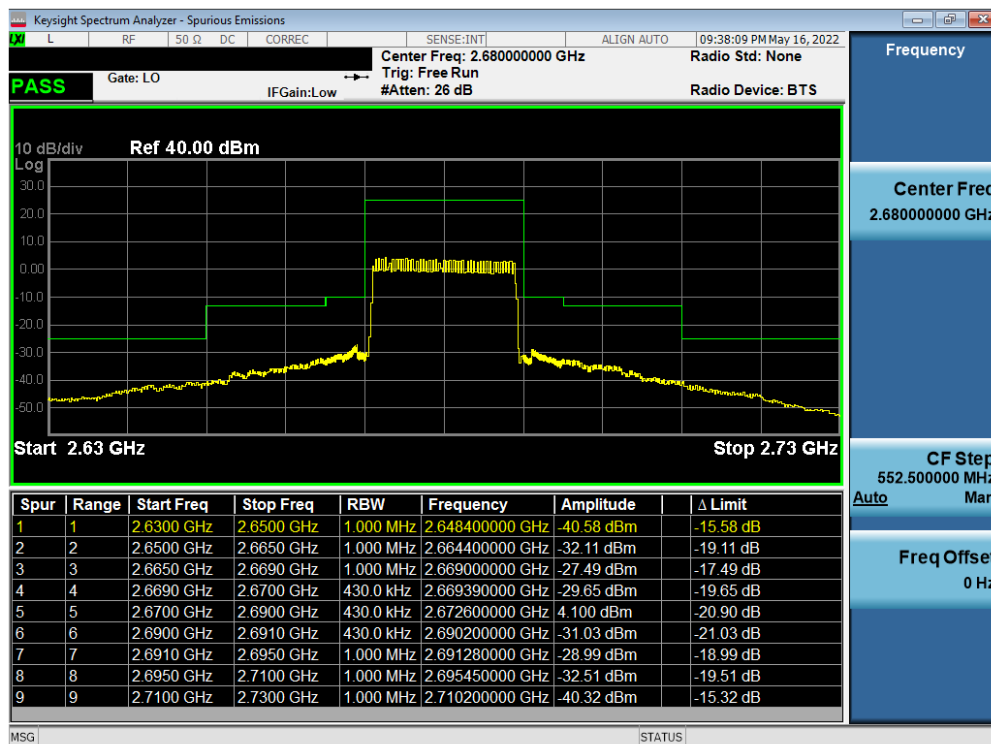

Plot 7-58. Upper ACP Plot (LTE Band 41 - 20MHz QPSK – Full RB)

FCC ID: BCG-A2622	<b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 47 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.5 Radiated Power (EIRP)

§27.50(a)(3), §27.50(h)(2)

### Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are calculated by adding highest antenna gain to maximum measured conducted output power. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI C63.26-2015 – Section 5.2.5.5

### Test Settings

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

EIRP = Equivalent Isotropic Radiated Power (expressed in the same units as PMeas, typically dBW or dBm)


PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB


GT = gain of the transmitting antenna, in dBi (EIRP)

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 7-4. EIRP Measurement Setup**

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 48 of 66

V2.2 2/15/2022

### **Test Notes**

1. The EUT was tested in all possible test configurations. The worst case emissions are reported with the EUT modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
2. This unit was tested with its standard battery.
3. The Level (dBm) readings in the table were taken with a correction table loaded into the base station simulator. The correction table was used to account for the signal attenuation in the connecting cable between the transmitter and antenna.

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 49 of 66

V2.2 2/15/2022

## LTE Band 7


Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	QPSK	2502.5	-6.90	1 / 24	23.25	<b>16.35</b>	43.152	33.01	-16.66
		2535.0	-6.90	1 / 24	22.80	15.90	38.905	33.01	-17.11
		2567.5	-6.90	1 / 24	23.00	<b>16.10</b>	40.738	33.01	-16.91
	16-QAM	2502.5	-6.90	1 / 24	22.71	15.81	38.107	33.01	-17.20
10 MHz	QPSK	2505.0	-6.90	1 / 49	23.25	<b>16.35</b>	43.152	33.01	-16.66
		2535.0	-6.90	1 / 49	22.84	15.94	39.264	33.01	-17.07
		2565.0	-6.90	1 / 49	23.02	16.12	40.926	33.01	-16.89
	16-QAM	2565.0	-6.90	1 / 49	22.61	15.71	37.239	33.01	-17.30
15 MHz	QPSK	2507.5	-6.90	1 / 74	23.44	<b>16.54</b>	45.082	33.01	-16.47
		2535.0	-6.90	1 / 74	22.89	15.99	39.719	33.01	-17.02
		2562.5	-6.90	1 / 74	22.99	16.09	40.644	33.01	-16.92
	16-QAM	2507.5	-6.90	1 / 74	22.63	15.73	37.411	33.01	-17.28
20 MHz	QPSK	2510.0	-6.90	1 / 50	23.31	<b>16.41</b>	43.752	33.01	-16.60
		2535.0	-6.90	1 / 99	22.87	15.97	39.537	33.01	-17.04
		2560.0	-6.90	1 / 99	23.13	16.23	41.976	33.01	-16.78
	16-QAM	2510.0	-6.90	1 / 99	22.74	15.84	38.371	33.01	-17.17

Table 7-2. Antenna FCM EIRP Data (LTE Band 7)

## LTE Band 41

Bandwidth	Mod.	Frequency [MHz]	Ant. Gain [dBi]	RB Size/Offset	Conducted Power [dBm]	EIRP [dBm]	EIRP [mW]	EIRP Limit [dBm]	Margin [dB]
5 MHz	QPSK	2498.5	-6.90	1 / 24	23.50	<b>16.60</b>	45.709	33.01	-16.41
		2593.0	-6.90	1 / 12	23.19	16.29	42.560	33.01	-16.72
		2687.5	-6.90	1 / 24	23.38	<b>16.48</b>	44.463	33.01	-16.53
	16-QAM	2687.5	-6.90	1 / 12	22.57	15.67	36.898	33.01	-17.34
10 MHz	QPSK	2501.0	-6.90	1 / 49	23.50	<b>16.60</b>	45.709	33.01	-16.41
		2593.0	-6.90	1 / 25	23.23	16.33	42.954	33.01	-16.68
		2685.0	-6.90	1 / 49	23.50	<b>16.60</b>	45.709	33.01	-16.41
	16-QAM	2501.0	-6.90	1 / 25	22.58	15.68	36.983	33.01	-17.33
15 MHz	QPSK	2503.5	-6.90	1 / 37	23.33	16.43	43.954	33.01	-16.58
		2593.0	-6.90	1 / 74	23.22	16.32	42.855	33.01	-16.69
		2682.5	-6.90	1 / 74	23.50	<b>16.60</b>	45.709	33.01	-16.41
	16-QAM	2682.5	-6.90	1 / 74	22.39	15.49	35.400	33.01	-17.52
20 MHz	QPSK	2506.0	-6.90	1 / 50	23.43	<b>16.53</b>	44.978	33.01	-16.48
		2593.0	-6.90	1 / 99	23.20	16.30	42.658	33.01	-16.71
		2680.0	-6.90	1 / 0	23.33	16.43	43.954	33.01	-16.58
	16-QAM	2680.0	-6.90	1 / 0	22.36	15.46	35.156	33.01	-17.55

Table 7-3. Antenna FCM EIRP Data (LTE Band 41)

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 50 of 66

V2.2 2/15/2022



## 7.6 Radiated Spurious Emissions

§2.1053, 27.53(m)

### Test Overview


Radiated spurious emissions measurements are performed using the field strength conversion method described in KDB 971168 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized broadband hybrid antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed while the EUT is operating at maximum power and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

### Test Settings


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq 2 \times$  span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 51 of 66


V2.2 2/15/2022

**Test Setup**


The EUT and measurement equipment were set up as shown in the diagram below.

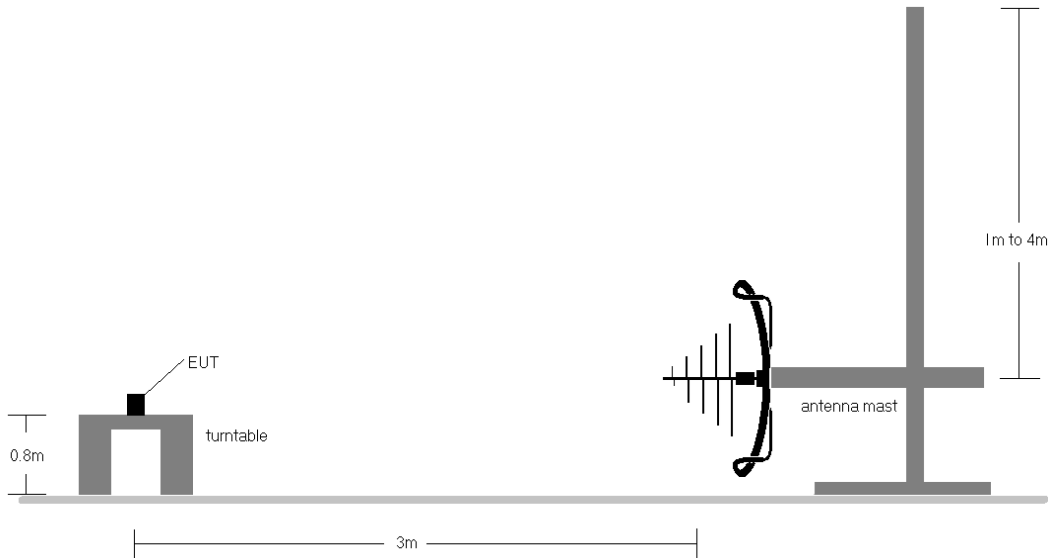

**Figure 7-5. Test Instrument & Measurement Setup < 1GHz**

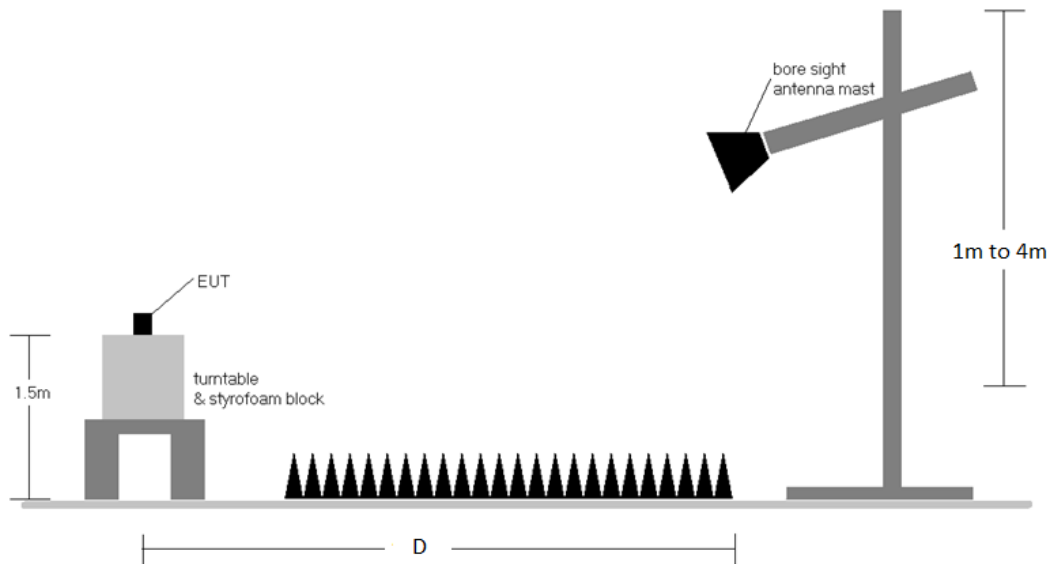


**Figure 7-6. Test Instrument & Measurement Setup >1 GHz**

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 52 of 66

## Test Notes


1. Field strengths are calculated using the Measurement quantity conversions in KDB 971168 Section 5.8.4.
  - a.  $E(\text{dB}\mu\text{V/m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
  - b.  $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V/m}) + 20\log D - 104.8$ ; where D is the measurement distance in meters.
2. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
3. This unit was tested with its standard battery.
4. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
5. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
6. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 53 of 66


V2.2 2/15/2022

## 7.6.1 Antenna FCM – Radiated Spurious Emission Measurements


### LTE Band 7

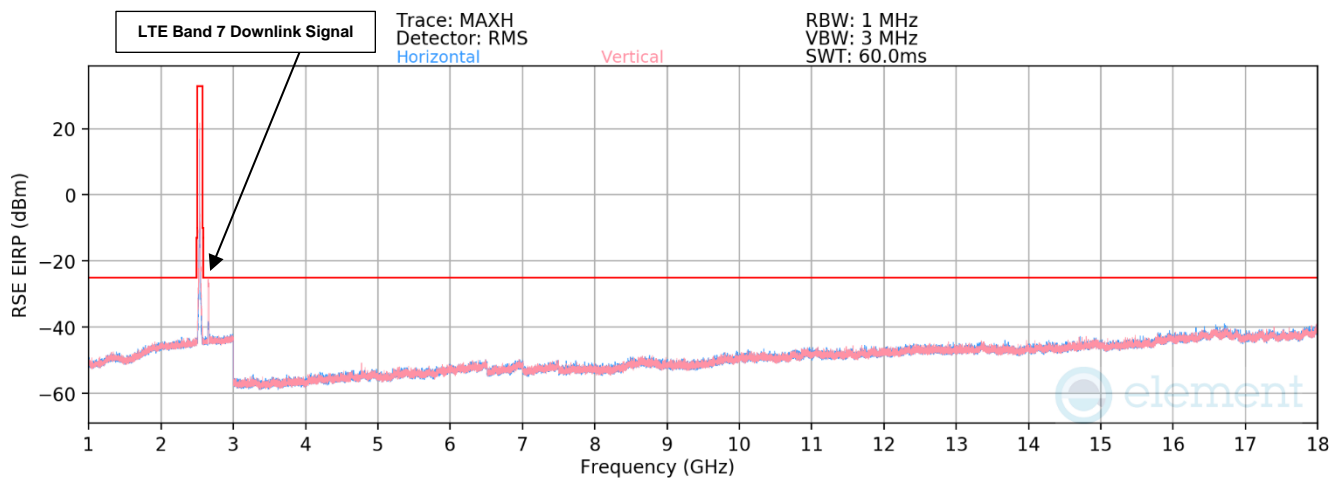

Plot 7-59. Antenna FCM Radiated Spurious Plot 1GHz – 18GHz (LTE Band 7)

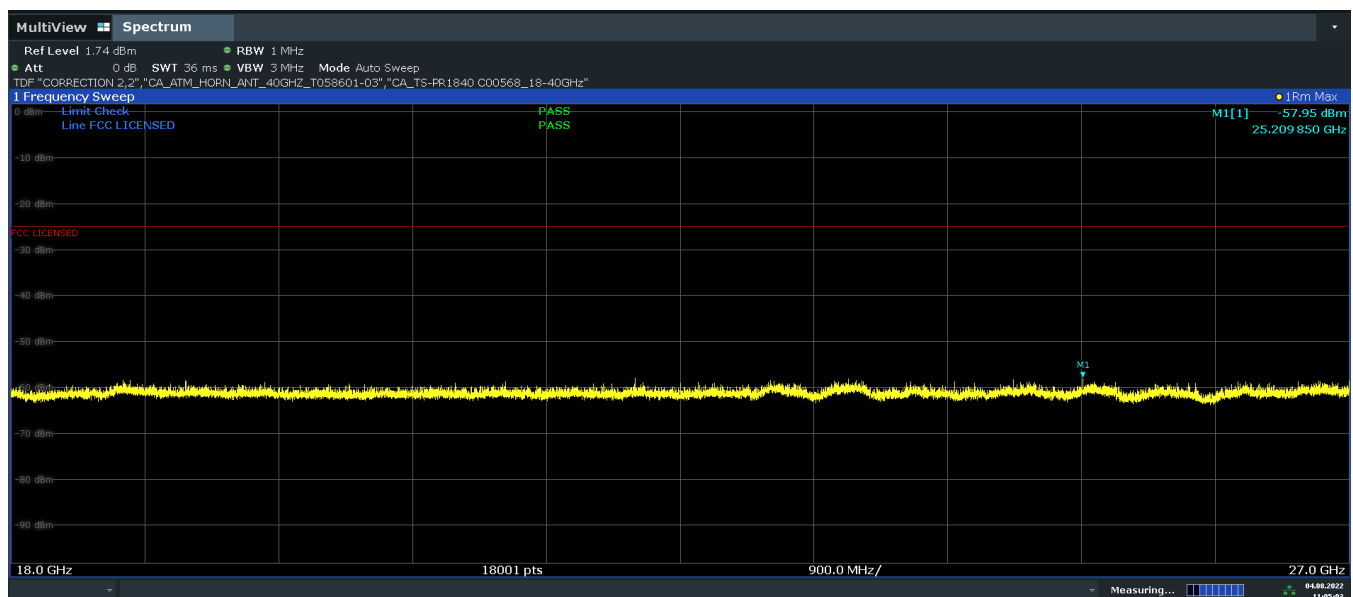


Plot 7-60. Antenna FCM Radiated Spurious Emission above 18GHz (LTE Band 7, Pol. H)

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch
		Page 54 of 66


V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

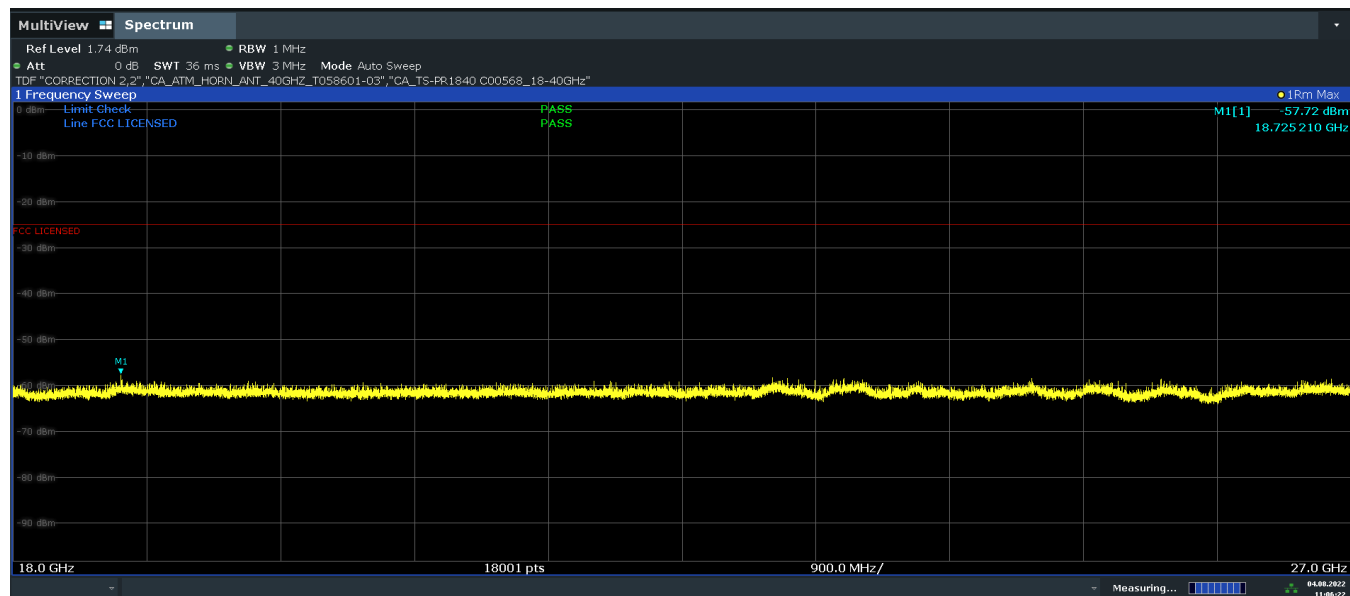

11/06/23 04:00:2022

**Plot 7-61. Antenna FCM Radiated Spurious Emission above 18GHz (LTE Band 7, Pol. V)**

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 55 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Bandwidth (MHz):	20
Frequency (MHz):	2510.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5020.0	H	-	-	-79.18	5.86	33.68	-61.58	-25.00	-36.58
7530.0	H	368	356	-77.36	10.27	39.91	-55.35	-25.00	-30.35
10040.0	H	-	-	-81.48	13.30	38.82	-56.44	-25.00	-31.44
12550.0	H	-	-	-82.39	16.68	41.29	-53.96	-25.00	-28.96
15060.0	H	-	-	-82.57	18.49	42.92	-52.34	-25.00	-27.34

**Table 7-4. Antenna FCM Radiated Spurious Data (LTE Band 7 – Low Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	2535.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5070.0	H	-	-	-79.50	7.00	34.50	-60.75	-25.00	-35.75
7605.0	H	298	77	-78.32	9.52	38.20	-57.06	-25.00	-32.06
10140.0	H	-	-	-82.10	14.07	38.97	-56.29	-25.00	-31.29
12675.0	H	-	-	-82.11	16.83	41.72	-53.54	-25.00	-28.54
15210.0	H	-	-	-82.89	18.71	42.82	-52.44	-25.00	-27.44

**Table 7-5. Antenna FCM Radiated Spurious Data (LTE Band 7 – Mid Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	2560.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5120.00	H	-	-	-79.60	7.16	34.56	-60.70	-25.00	-35.70
7680.00	H	257	137	-78.52	10.12	38.60	-56.66	-25.00	-31.66
10240.00	H	-	-	-81.90	13.39	38.49	-56.77	-25.00	-31.77
12800.00	H	-	-	-82.34	16.99	41.65	-53.61	-25.00	-28.61
15360.00	H	-	-	-83.02	19.00	42.98	-52.28	-25.00	-27.28


**Table 7-6. Antenna FCM Radiated Spurious Data (LTE Band 7 – High Channel)**

FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 56 of 66


V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## LTE Band 41

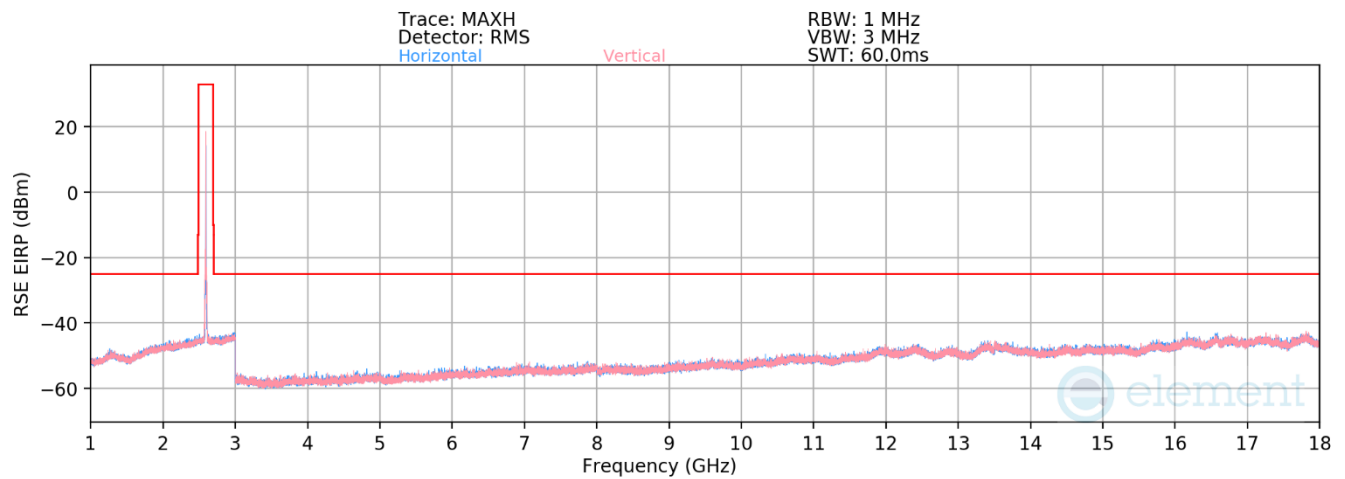


Plot 7-62. Antenna FCM Radiated Spurious Plot 1GHz – 18GHz (LTE Band 41)

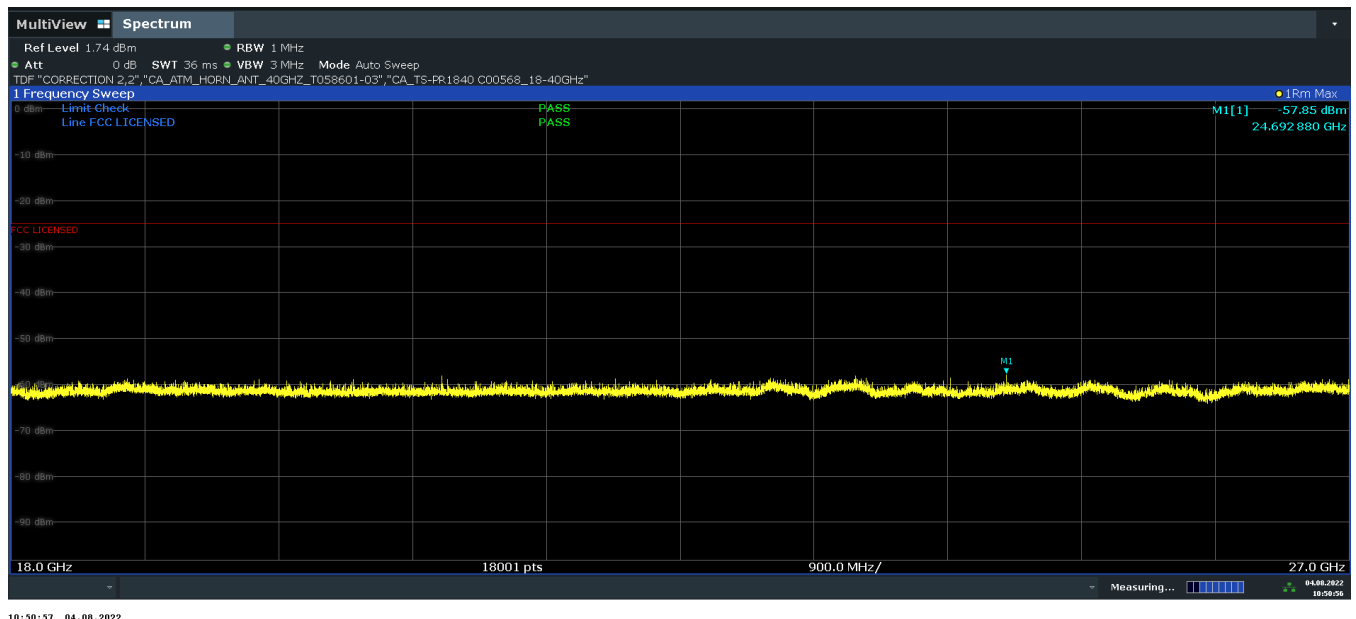

Plot 7-63. Antenna FCM Radiated Spurious Emission above 18GHz (LTE Band 41, Pol. H)


FCC ID: BCG-A2622	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 57 of 66

V2.2 2/15/2022

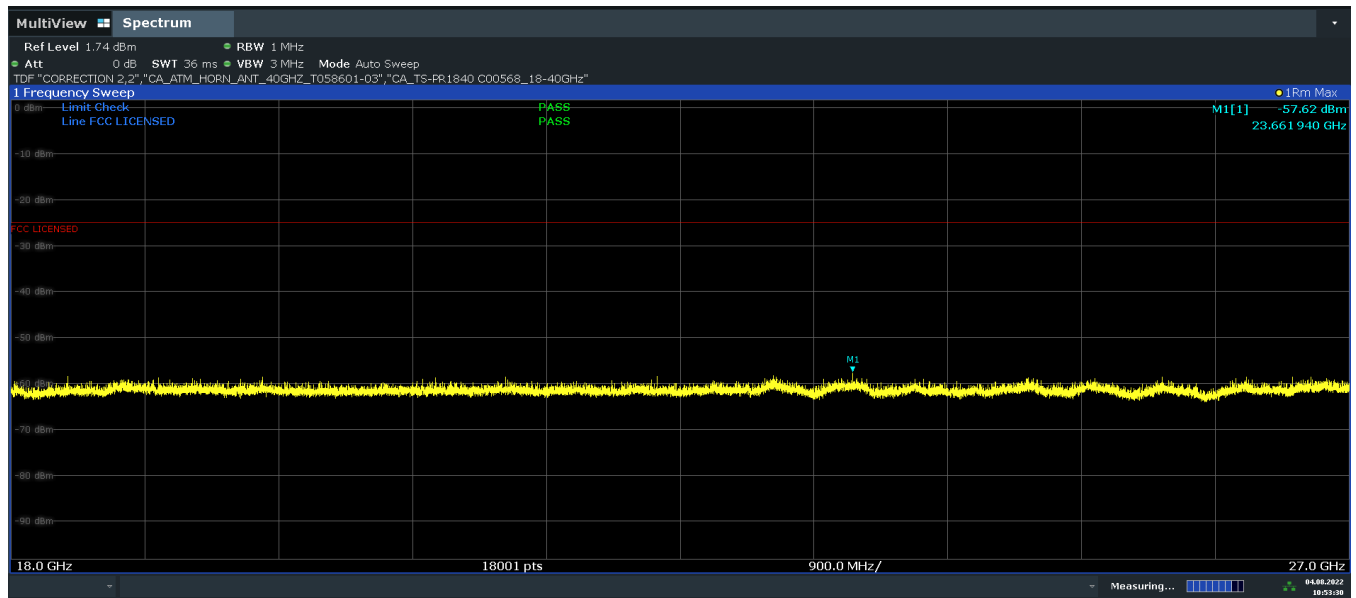

10/53/30 04.00.2022

**Plot 7-64. Antenna FCM Radiated Spurious Emission above 18GHz (LTE Band 41, Pol. V)**

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 58 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



Bandwidth (MHz):	20
Frequency (MHz):	2506.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5012.0	-	-	-	-80.28	6.97	33.69	-61.56	-25.00	-36.56
7518.0	H	274	27	-77.78	10.48	39.70	-55.55	-25.00	-30.55
10024.0	-	-	-	-82.93	12.98	37.05	-58.21	-25.00	-33.21
12530.0	-	-	-	-82.56	16.05	40.49	-54.77	-25.00	-29.77
15036.0	-	-	-	-82.82	17.81	41.99	-53.27	-25.00	-28.27

**Table 7-7. Antenna FCM Radiated Spurious Data (LTE Band 41 – Low Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	2593.0
RB / Offset:	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5186.0	-	-	-	-82.52	6.59	31.07	-64.19	-25.00	-39.19
7779.0	H	270	13	-73.37	10.35	43.98	-51.28	-25.00	-26.28
10372.0	-	-	-	-82.45	13.53	38.08	-57.18	-25.00	-32.18
12965.0	-	-	-	-83.28	16.42	40.14	-55.12	-25.00	-30.12
15558.0	-	-	-	-83.32	17.97	41.65	-53.61	-25.00	-28.61

**Table 7-8. Antenna FCM Radiated Spurious Data (LTE Band 41 – Mid Channel)**

Bandwidth (MHz):	20
Frequency (MHz):	2680.0
RB / Offset:	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
5360.0	-	-	-	-81.02	7.97	33.95	-61.31	-25.00	-36.31
8040.0	H	266	98	-81.23	10.94	36.71	-58.55	-25.00	-33.55
10720.0	-	-	-	-82.52	14.51	38.99	-56.27	-25.00	-31.27
13400.0	-	-	-	-82.88	16.64	40.76	-54.49	-25.00	-29.49
16080.0	-	-	-	-83.16	18.74	42.58	-52.68	-25.00	-27.68

**Table 7-9. Antenna FCM Radiated Spurious Data (LTE Band 41 – High Channel)**


FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch		Page 59 of 66

V2.2 2/15/2022


## 7.6.2 Simultaneous Tx Radiated Spurious Emissions Measurements

Description	Bluetooth	LTE	UNII
Antenna	FCM	FCM	FCM
Channel	78	40620	36
Operating Frequency (MHz)	2480	2593	5180
Mode/Modulation	GFSK ePA	QPSK/1RB/20MHz	11n


**Table 7-10. Worst Case Simultaneous Transmission Configuration**

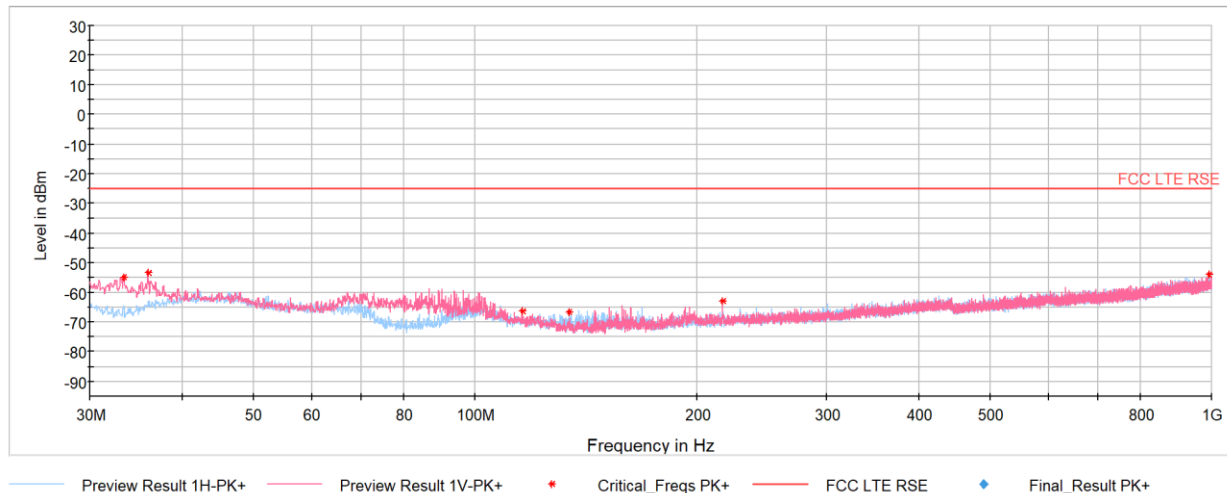


**Plot 7-65. Antenna FCM Radiated Spurious Emissions -Simultaneous Transmission 30MHz – 1GHz**

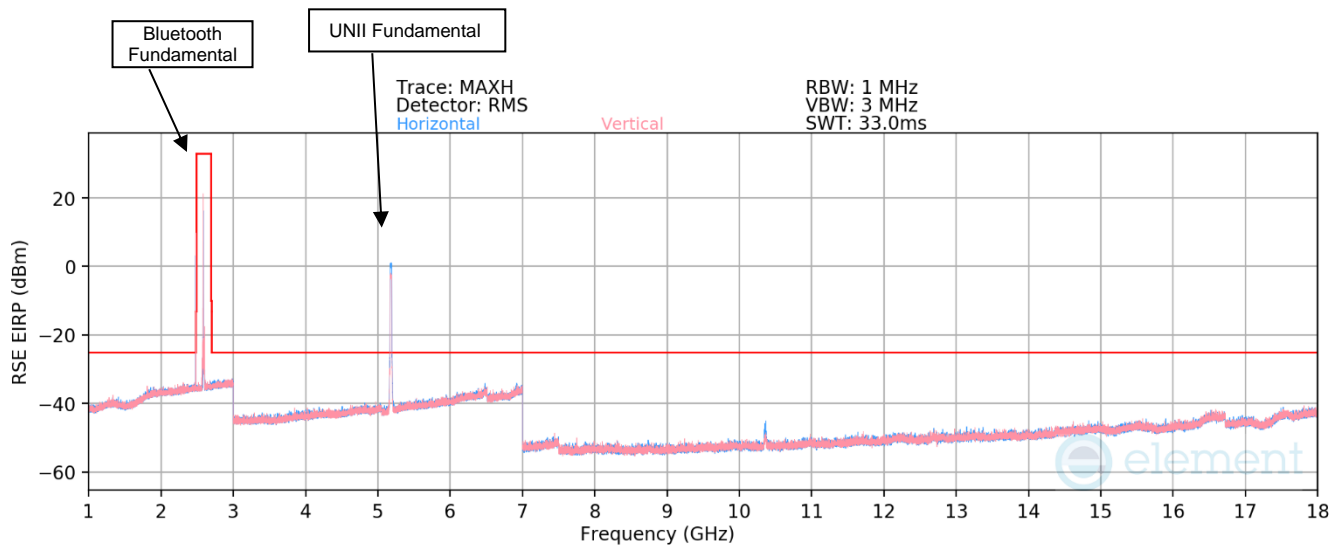


**Plot 7-66. Antenna FCM Radiated Spurious Emissions -Simultaneous Transmission 1GHz – 18GHz**

FCC ID: BCG-A2622	 PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch
		Page 60 of 66

V2.2 2/15/2022

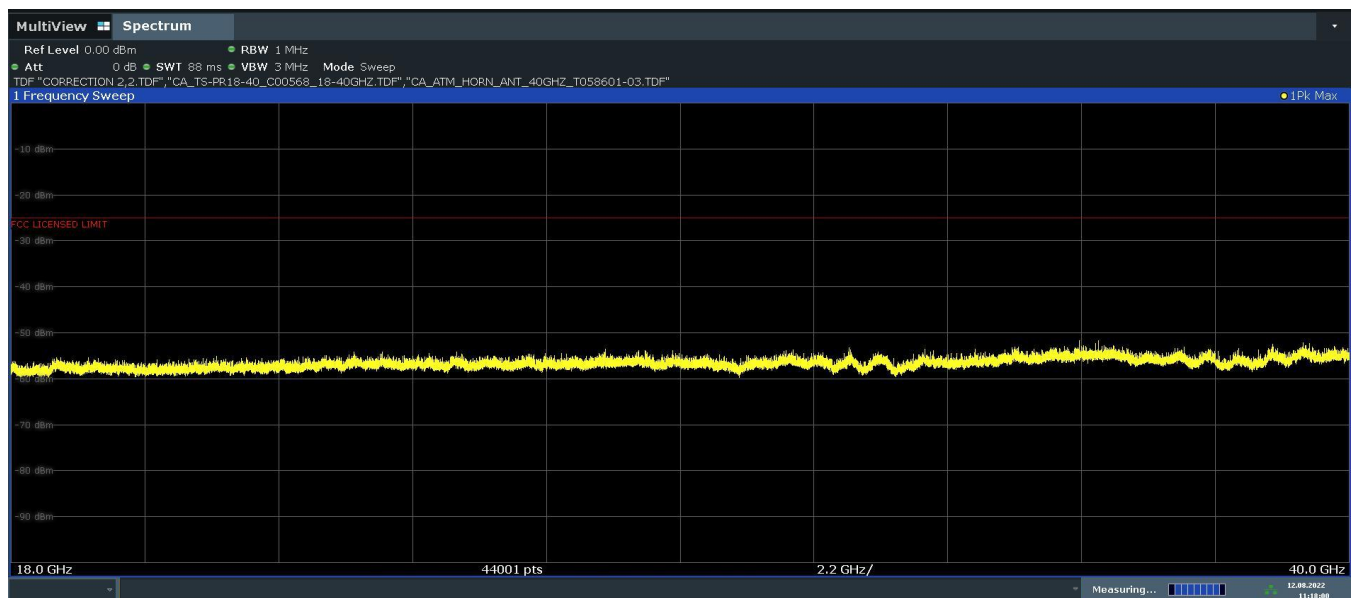


**Plot 7-67. Antenna FCM Radiated Spurious Emissions -Simultaneous Transmission 18GHz-40GHz Pol. H**

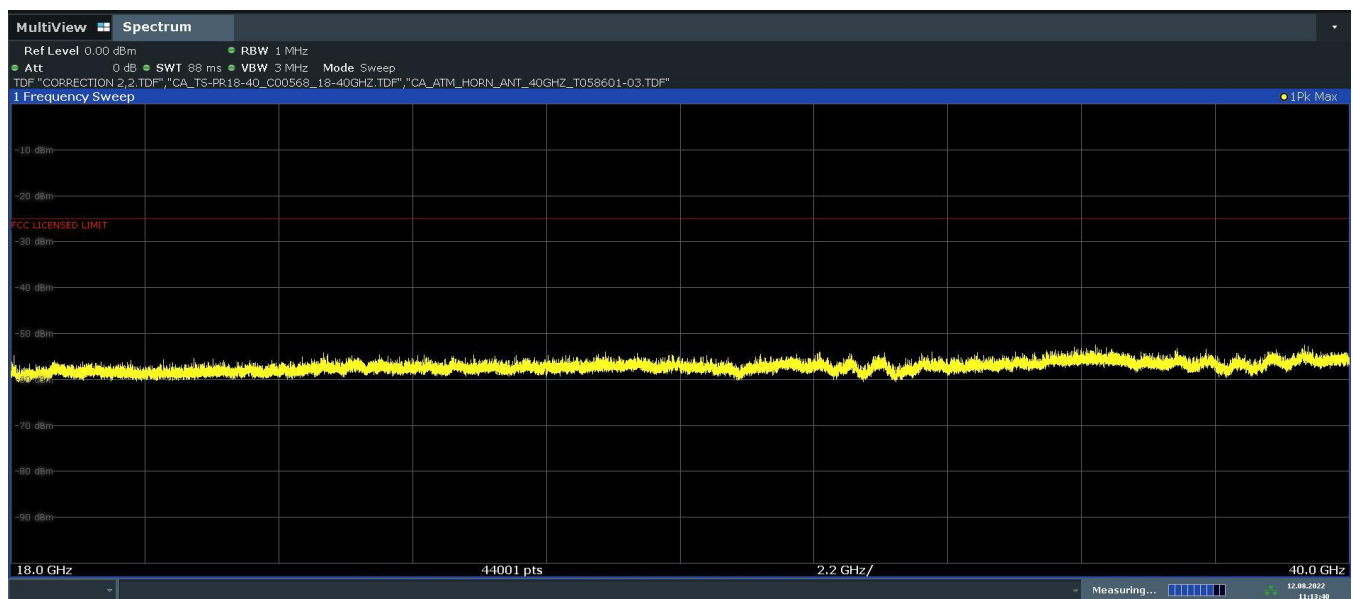

11:13:41 12.00.2022

**Plot 7-68. Antenna FCM Radiated Spurious Emissions -Simultaneous Transmission 18GHz-40GHz Pol. V**

<b>FCC ID:</b> BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 61 of 66

V2.2 2/15/2022


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
4960.00	Peak	-	-	-	-68.21	16.14	54.93	73.98	-19.05
7440.00	Peak	-	-	-	-68.79	10.08	48.29	73.98	-25.69
12400.00	Peak	-	-	-	-70.88	16.30	52.42	73.98	-21.56
10360.00	Peak	H	257	45	-66.80	13.87	54.07	68.20	-14.13
15540.00	Avg	-	-	-	-82.50	19.14	43.64	53.98	-10.34
15540.00	Peak	-	-	-	-70.74	19.14	55.40	73.98	-18.58

**Table 7-11. Antenna FCM BT and UNII Harmonics Emissions Measurement in Simultaneous Transmission Mode**

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Field Strength [dBμV/m]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7752.00	MAXH_RMS	V	229	7	-78.67	10.17	38.50	-56.72	-25.00	-31.72
10336.00	MAXH_RMS	-	-	-	-80.52	13.52	40.00	-55.21	-25.00	-30.21
12920.00	MAXH_RMS	-	-	-	-82.32	17.42	42.10	-53.12	-25.00	-28.12
15504.00	MAXH_RMS	-	-	-	-82.42	19.12	43.70	-51.50	-25.00	-26.50
2376.00	MAXH_RMS	-	-	-	-77.50	17.50	47.00	-48.24	-25.00	-23.24
2688.00	MAXH_RMS	V	215	177	-73.82	18.22	51.40	-43.87	-25.00	-18.87

**Table 7-12. Antenna FCM LTE Harmonics and Intermodulation Emissions Measurement in Simultaneous Transmission Mode**

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 62 of 66

V2.2 2/15/2022

## 7.7 Frequency Stability / Temperature Variation

\$2.1055, \$27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015 and TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

***For Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.***

### Test Procedure Used


ANSI C63.26 – 2015

TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.


### Test Setup

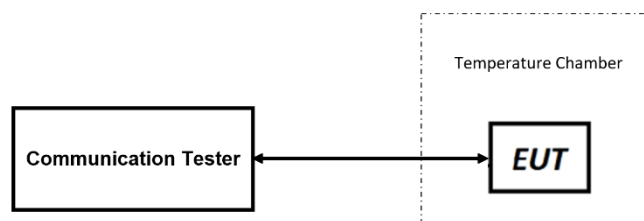

**Figure 7-7. Test Instrument & Measurement Setup**

### Test Notes

None

FCC ID: BCG-A2622		PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 63 of 66

V2.2 2/15/2022

## LTE Band 7


LTE Band 7							
			Low Channel Frequency (Hz):		2,510,000,000		
			High Channel Frequency (Hz):		2,560,000,000		
			Ref. Voltage (VDC):		3.8		
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	2,510,000,002	2,560,000,002	1.65	2.10	0.0000001
		- 20	2,510,000,001	2,560,000,002	1.19	1.72	0.0000001
		- 10	2,510,000,002	2,560,000,005	2.47	5.28	0.0000002
		0	2,510,000,001	2,560,000,007	1.14	7.05	0.0000003
		+ 10	2,510,000,006	2,560,000,008	5.52	7.64	0.0000003
		+ 20 (Ref)	2,510,000,000	2,560,000,000	0.00	0.00	0.0000000
		+ 30	2,510,000,003	2,560,000,004	2.58	3.95	0.0000002
		+ 40	2,510,000,004	2,560,000,009	3.65	8.62	0.0000003
		+ 50	2,510,000,006	2,560,000,010	5.77	9.80	0.0000004
Battery Endpoint	3.40	+ 20	2,510,000,002	2,559,999,999	1.75	-0.73	0.0000001

Table 7-13. LTE Band 7 Frequency Stability Data

## LTE Band 41

LTE Band 41							
			Low Channel Frequency (Hz):		2,506,000,000		
			High Channel Frequency (Hz):		2,580,000,000		
			Ref. Voltage (VDC):		3.8		
Voltage (%)	Power (VDC)	Temp (°C)	Low Freq. (Hz)	High Freq. (Hz)	Low Freq. Dev. (Hz)	High Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	2,506,000,007	2,580,000,008	7.28	8.15	0.0000003
		- 20	2,506,000,007	2,580,000,009	6.52	8.55	0.0000003
		- 10	2,506,000,008	2,580,000,010	7.97	9.70	0.0000004
		0	2,506,000,008	2,580,000,008	8.18	7.79	0.0000003
		+ 10	2,506,000,007	2,580,000,006	7.05	5.95	0.0000003
		+ 20 (Ref)	2,506,000,000	2,580,000,000	0.00	0.00	0.0000000
		+ 30	2,506,000,007	2,580,000,008	7.35	8.48	0.0000003
		+ 40	2,506,000,007	2,580,000,008	7.48	8.18	0.0000003
		+ 50	2,506,000,005	2,580,000,008	5.38	8.17	0.0000003
Battery Endpoint	3.40	+ 20	2,506,000,005	2,580,000,006	5.36	6.44	0.0000002

Table 7-14. LTE Band 41 Frequency Stability Data


FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 64 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the Apple **Watch** **FCC ID: BCG-A2622** complies with all the requirements of Part 27 of the FCC rules.

<b>FCC ID:</b> BCG-A2622		<b>PART 27 MEASUREMENT REPORT</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-04.BCG	<b>Test Dates:</b> 5/1/2022 - 8/13/2022	<b>EUT Type:</b> Watch	Page 65 of 66

V2.2 2/15/2022


## 9.0 APPENDIX A

Antenna gains provided by the manufacturer:

### A2622 Antenna Specifications

Cellular Antenna Gain (FCM), Type: IFA			
Band	Frequency (MHz)	Horizontal (dBi)	VerFcal (dBi)
1	1921.6	-8.4	-7.9
1	1950.0	-8.0	-7.2
1	1978.4	-8.0	-6.9
3	1711.6	-13.3	-11.7
3	1747.5	-13.4	-11.8
3	1783.4	-13.0	-11.5
7	2502.6	-8.9	-8.3
7	2535.0	-7.1	-7.2
7	2567.4	-6.9	-7.8
25	1851.0	-10.5	-9.7
25	1882.4	-9.2	-8.4
25	1914.0	-8.7	-8.4
39	1882.6	-9.1	-8.1
39	1900.0	-8.7	-8.2
39	1917.4	-8.4	-7.9
40	2302.6	-3.2	-3.3
40	2350.0	-4.8	-4.2
41	2498.6	-8.1	-7.9
41	2593.0	-7.2	-6.9
41	2687.4	-9.6	-8.8

Table 9-1. Antenna Gains

FCC ID: BCG-A2622	 <b>PART 27 MEASUREMENT REPORT</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-04.BCG	Test Dates: 5/1/2022 - 8/13/2022	EUT Type: Watch	Page 66 of 66

V2.2 2/15/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).