



TEST REPORT

Test Report No. : UL-RPT-RP11241886JD07F V5.0

Manufacturer : Apple Inc.
Model No. : A1779
FCC ID : BCG-E3086A
Technology : WLAN
Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.407

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. The sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 5.0 supersedes all previous versions.

Date of Issue: 03 August 2016

Checked by:

Steven White
Service Lead, Radio Laboratory

Company Signatory:

Sarah Williams
Senior Engineer, Radio Laboratory
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its terms
of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	6
Summary of Test Results (continued)	7
2.3. Methods and Procedures	7
2.4. Deviations from the Test Specification	7
3. Equipment Under Test (EUT)	8
3.1. Identification of Equipment Under Test (EUT)	8
3.2. Description of EUT	8
3.3. Modifications Incorporated in the EUT	8
3.4. Additional Information Related to Testing	9
3.5. Support Equipment	13
4. Operation and Monitoring of the EUT during Testing	14
4.1. Operating Modes	14
4.2. Configuration and Peripherals	14
5. Measurements, Examinations and Derived Results.....	15
5.1. General Comments	15
5.2. Test Results	16
5.2.1. Transmitter 26 dB Emission Bandwidth	16
5.2.2. Transmitter Minimum 6 dB Bandwidth	66
5.2.3. Transmitter Duty Cycle	82
5.2.4. Transmitter Maximum Conducted Output Power	88
5.2.5. Transmitter Maximum Power Spectral Density	141
5.2.6. Transmitter Out of Band Radiated Emissions	157
5.2.7. Transmitter Band Edge Radiated Emissions	162
6. Measurement Uncertainty	208
7. Report Revision History	209

1. Customer Information

Company Name:	Apple Inc.
Address:	1 Infinite Loop Cupertino, CA 95014 U.S.A.

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.407 and 47CFR15.403
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart E (Unlicensed National Information Infrastructure Devices) – Sections 15.403 and 15.407
Site Registration:	209735
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom
Test Dates:	14 June 2016 to 21 July 2016

2.2. Summary of Test Results

FCC Reference (47CFR)	Measurement	Result
Part 15.403(i)	Transmitter 26 dB Emission Bandwidth	Complied
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (5.725-5.85 GHz band)	Complied
Part 15.407(e)	Transmitter Minimum 6 dB Bandwidth (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.35(c)	Transmitter Duty Cycle	Note 1
Part 15.407(a)(1)(iv)	Transmitter Maximum Conducted Output Power (5.15-5.25 GHz band)	Complied
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Complied
Part 15.407(a)(2)	Transmitter Maximum Conducted Output Power (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.407(a)(3)	Transmitter Maximum Conducted Output Power (5.725-5.85 GHz band)	Complied
Part 15.407(a)(1)(iv)	Transmitter Peak Power Spectral Density (5.15-5.25 GHz band)	Complied
Part 15.407(a)(2)	Transmitter Peak Power Spectral Density (5.25-5.35 GHz & 5.47-5.725 GHz bands)	Complied
Part 15.407(a)(2)	Transmitter Peak Power Spectral Density (Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz)	Complied
Part 15.407(a)(3)	Transmitter Peak Power Spectral Density (5.725-5.85 GHz band)	Complied
Part 15.407(b)/15.209(a)	Transmitter Out of Band Radiated Emissions	Complied
Part 15.407(b)/15.209(a)	Transmitter Band Edge Radiated Emissions	Complied
Part 15.407(g)	Transmitter Frequency Stability (Temperature & Voltage Variation)	Note 2
Part 15.407(h)(1)	Transmitter Power Control	Note 3

Note(s):

1. The measurement was performed to assist in the calculation of the level of average output power, power spectral density and emissions as the EUT employs pulsed operation.
2. Frequency stability is better than 20 ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.
3. Transmit Power Control was not tested as the maximum EIRP is less than 500 mW (27 dBm).
4. There are two vendors of the WiFi/Bluetooth radio modules, Vendor 1 and Vendor 2.
5. The WiFi/Bluetooth radio modules have the same mechanical outline (e.g. the same packaging dimension and pin layout), use the same on-board antenna matching circuit, have an identical antenna structure and are built and tested to conform to the same specification and to operate within the same tolerances.
Baseline testing was performed on the two vendors to determine the worst case.

Summary of Test Results (continued)

2.3. Methods and Procedures

Reference:	ANSI C63.10-2013
Title:	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
Reference:	KDB 789033 D02 General UNII Test Procedures New Rules v01r02 April 8, 2016
Title:	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E
Reference:	KDB662911 D01 Multiple Transmitter Output v02r01 October 31, 2013
Title:	Emissions Testing of Transmitter with Multiple Outputs in the Same Band

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specifications identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample Serial Number:	C7CRR00BHCPX (<i>Radiated sample #1</i>)
Test Sample IMEI:	358640070063996
Hardware Version:	REV1.0
Firmware Version:	9.44.11.27
Test Utility Software:	wl 1.359 RC65.0
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample Serial Number:	C7CRR00GHCPX (<i>Radiated sample #2</i>)
Test Sample IMEI:	358640070066106
Hardware Version:	REV1.0
Firmware Version:	9.44.11.27
Test Utility Software:	wl 1.359 RC65.0
FCC ID:	BCG-E3086A

Brand Name:	Apple
Model Name or Number:	A1779
Test Sample Serial Number:	C7CRR02HHCPX (<i>Conducted sample</i>)
Test Sample IMEI:	358640070098109
Hardware Version:	REV1.0
Firmware Version:	9.15.225.19
Test Utility Software:	wl 1.359 RC65.0
FCC ID:	BCG-E3086A

3.2. Description of EUT

The Equipment Under Test was a mobile phone with GSM/GPRS/EGPRS/UMTS/LTE/TD-SCDMA and CDMA technologies. It also supports IEEE 802.11a/b/g/n/ac, Bluetooth®, GPS and NFC. The rechargeable battery is not user accessible.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	WLAN (IEEE 802.11a,n,ac) / U-NII			
Type of Unit:	Transceiver			
Modulation:	BPSK, QPSK, 16QAM, 64QAM & 256QAM			
Data rates:	802.11a	6, 9, 12, 18, 24, 36, 48 & 54 Mbps		
	802.11n HT20	MCS0 to MCS7 (1 spatial stream) with or without CDD / (SISO, or MIMO with CDD/STBC) MCS8 to MCS15 (2 spatial streams) (MIMO SDM)		
	802.11n HT40	MCS0 to MCS7 (1 spatial stream) with or without CDD / (SISO, or MIMO with CDD/STBC) MCS8 to MCS15 (2 spatial streams) (MIMO SDM)		
	802.11ac VHT20	MCS0 to MCS8 (1 spatial stream) with or without CDD / (SISO, or MIMO with CDD/STBC) MCS0 to MCS8 (2 spatial streams) (MIMO SDM)		
	802.11ac VHT40	MCS0 to MCS9 (1 spatial stream) with or without CDD / (SISO, or MIMO with CDD/STBC) MCS0 to MCS9 (2 spatial streams) (MIMO SDM)		
	802.11ac VHT80	MCS0 to MCS9 (1 spatial stream) with or without CDD / (SISO, or MIMO with CDD/STBC) MCS0 to MCS9 (2 spatial streams) (MIMO SDM)		
Power Supply Requirement(s):	Nominal	3.8 VDC via 120 VAC 60 Hz adaptor		
Antenna Gains:	Frequency (GHz)	Antenna 1	Antenna 2	Directional Gain
	5.15 to 5.25	-4.7 dBi	-6.0 dBi	-2.3 dBi
	5.25 to 5.35	-5.0 dBi	-4.6 dBi	-1.8 dBi
	5.47 to 5.725 GHz	-3.6 dBi	-3.1 dBi	-0.3 dBi
	5.725 to 5.85 GHz	-2.7 dBi	-5.3 dBi	-0.9 dBi
Maximum Conducted Output Power:	20 MHz	21.7 dBm		
	40 MHz	21.3 dBm		
	80 MHz	21.3 dBm		

Additional Information Related to Testing (continued)

Channel Spacing:	20 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	36	5180
	Middle	40	5200
	Top	48	5240
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	52	5260
	Middle	56	5280
	Top	64	5320
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	100	5500
	Middle	116	5580
	Top	140	5700
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	144	5720
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	149	5745
	Middle	157	5785
	Top	165	5825

Additional Information Related to Testing (continued)

Channel Spacing:	40 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	38	5190
	Top	46	5230
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	54	5270
	Top	62	5310
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	102	5510
	Middle	110	5550
	Top	134	5670
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	142	5710
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	151	5755
	Top	159	5795

Additional Information Related to Testing (continued)

Channel Spacing:	80 MHz		
Transmit Frequency Band:	5150 MHz to 5250 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	42	5210
Transmit Frequency Band:	5250 MHz to 5350 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	58	5290
Transmit Frequency Band:	5470 MHz to 5725 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	106	5530
	Top	122	5610
Transmit Frequency Band:	Channels that straddle the U-NII-2C and U-NII-3 bands at 5725 MHz		
Transmit Channel Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	138	5690
Transmit Frequency Band:	5725 MHz to 5850 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Single	155	5775

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Lenovo
Model Name or Number:	ThinkPad L440
Serial Number:	R9-019E92

Description:	Apple
Brand Name:	Test Laptop
Model Name or Number:	MacBook Pro
Serial Number:	C2QH700QDY20

Description:	USB Power Adapter
Brand Name:	Apple
Model Name or Number:	A1357
Serial Number:	Not stated

Description:	USB diagnostic cable
Brand Name:	Not stated
Model Name or Number:	Kong
Serial Number:	202D5E

Description:	Personal Hands Free (PHF)
Brand Name:	Apple
Model Name or Number:	Apple Ear Plugs
Serial Number:	Not stated

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuously transmitting with a modulated carrier at maximum power on the bottom, middle and top channels as required using the supported data rates/modulation types.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- For radiated measurements: Controlled using a bespoke application on the laptop PC supplied by the customer. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required.
- For conducted measurements: Controlled using software *RePlay v.2.6.0.7* on a laptop PC. The application was used to enable a continuous transmission mode and to select the test channels, data rates and modulation schemes as required. The customer supplied documents with test instructions, titled *Power_Tables_for_conducted_testing_v9* and *FCC_BE_Commands_v9*.
- The customer declared the following data rates to be used for all measurements as:
 - 802.11a – BPSK / 6 Mbps / Port 1
 - 802.11n HT20 SISO – BPSK / 6.5 Mbps / MCS0 / Port 1
 - 802.11n HT40 SISO – BPSK / 13.5 Mbps / MCS0 / Port 1
 - 802.11ac VHT80 SISO – BPSK / 29.3 Mbps / MCS0 / Port 1
 - 802.11n HT20 MIMO – BPSK / 6.5 Mbps / MCS0
 - 802.11n HT40 MIMO – BPSK / 13.5 Mbps / MCS0
 - 802.11ac VHT80 MIMO – BPSK / 29.3 Mbps / MCS0x1
- The EUT has two separate antennas which correspond to two separate antenna ports. Port 1 and Port 2 correspond to antenna 1 (UAT) and antenna 2 (LAT) respectively.
- RF cables and attenuators connecting the test equipment to the EUT were calibrated before use and the calibration data incorporated into the conducted measurement results.
- The EUT was placed in three orthogonal orientations X, Y and Z to determine the worst case orientation for radiated spurious emissions. The worst case orientation was X.
- Transmitter spurious emissions were performed with the EUT transmitting with a data rate of MCS0 / MIMO (802.11n HT20). This was found to be the worst case modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest transmit output power level, it was deemed to be the worst case.
- Transmitter radiated spurious emissions tests were performed with the PHF connected to the EUT.
- The worst-case radiated emission among all accessories is determined by the manufacturer to be with the headset connected. The compliance lab performed final testing only with the headset.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6 Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter 26 dB Emission Bandwidth

Test Summary:

Test Engineer:	Georgios Vrezas	Test Date:	28 June 2016
Test Sample IMEI:	358640070098109		

FCC Reference:	Part 15.403(i)
Test Method Used:	KDB 789033 D02 Section II.C.1.

Environmental Conditions:


Temperature (°C):	24
Relative Humidity (%):	45

Note(s):

1. The customer declared the following data rates to be used for all measurements as:
 - 802.11a – BPSK / 6 Mbps / Port 1
 - 802.11n HT20 SISO – BPSK / 6.5 Mbps / MCS0 / Port 1
 - 802.11n HT40 SISO – BPSK / 13.5 Mbps / MCS0 / Port 1
 - 802.11ac VHT80 SISO – BPSK / 29.3 Mbps / MCS0 / Port 1
 - 802.11n HT20 MIMO – BPSK / 6.5 Mbps / MCS0
 - 802.11n HT40 MIMO – BPSK / 13.5 Mbps / MCS0
 - 802.11ac VHT80 MIMO – BPSK / 29.3 Mbps / MCS0x1
2. The signal analyser's resolution bandwidth was set to 1 – 5% of the measured 26 dB emission bandwidth.
3. Final measurements were performed in each supported operating band using the above configurations on the relevant channels.
4. The signal analyser was connected to the RF port on the EUT using an RF switch, suitable attenuation and RF cables. An RF level offset was entered on the signal analyser to compensate for the loss of the switch, attenuators and RF cables.

Transmitter 26 dB Emission Bandwidth (continued)


Test setup:

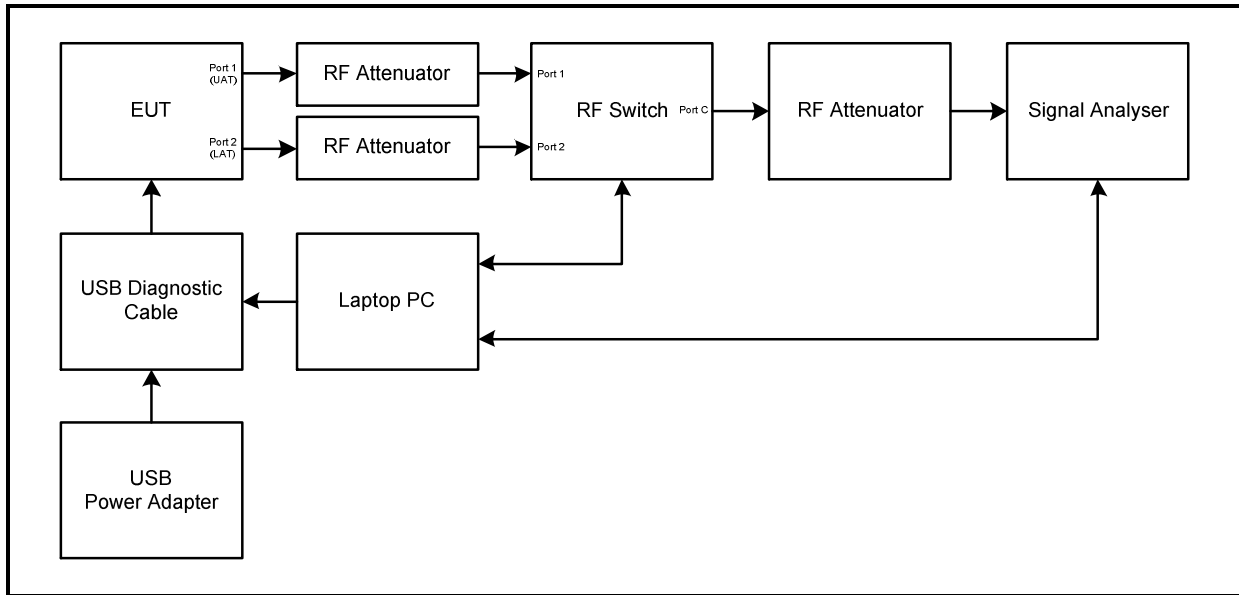

Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.15-5.25 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	6	22.576
Middle	5200	BPSK	6	30.825
Top	5240	BPSK	6	32.041

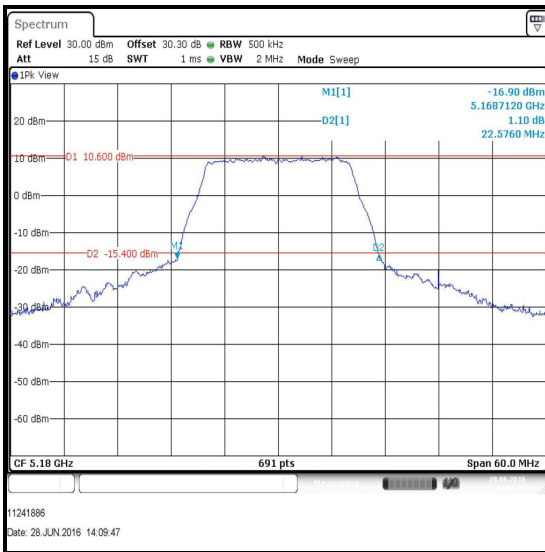

Bottom Channel



Middle Channel

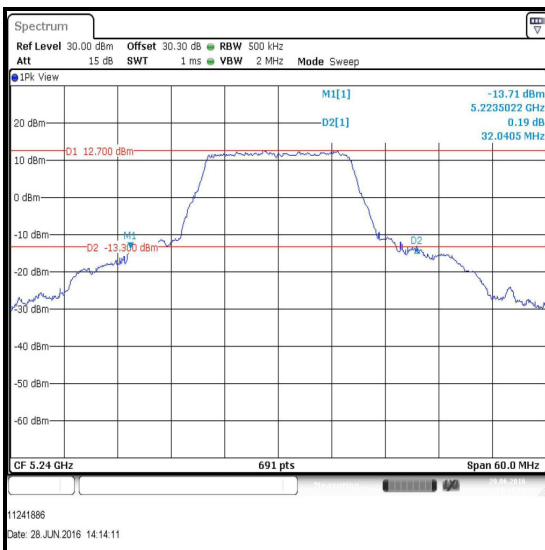


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / SISO / 5.15-5.25 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	6.5 / 0	23.965
Middle	5200	BPSK	6.5 / 0	39.769
Top	5240	BPSK	6.5 / 0	35.514

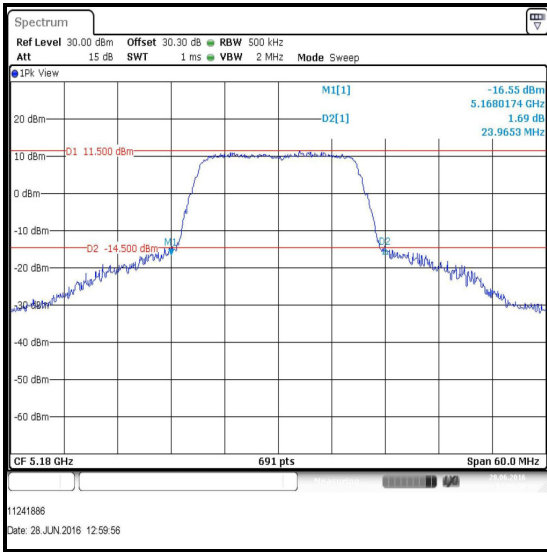

Bottom Channel

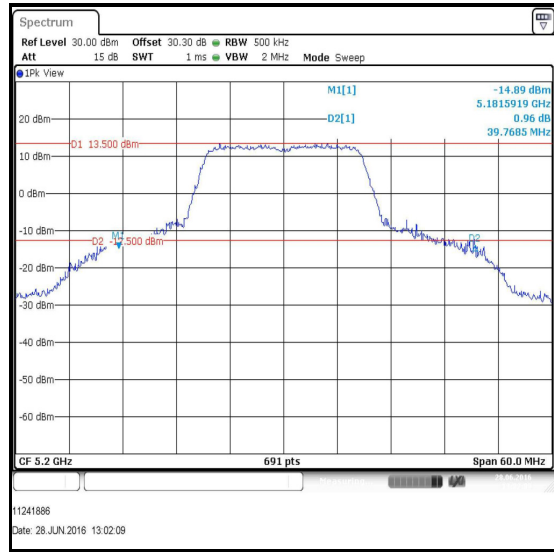

Middle Channel

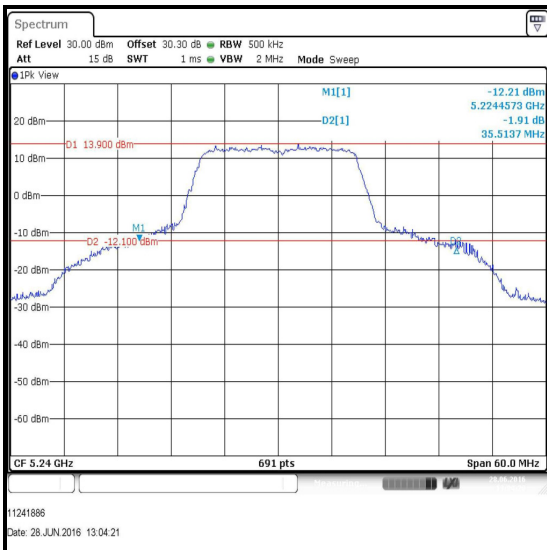


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / SISO / 5.15-5.25 GHz band

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5190	BPSK	13.5 / 0	41.679
Top	5230	BPSK	13.5 / 0	73.632

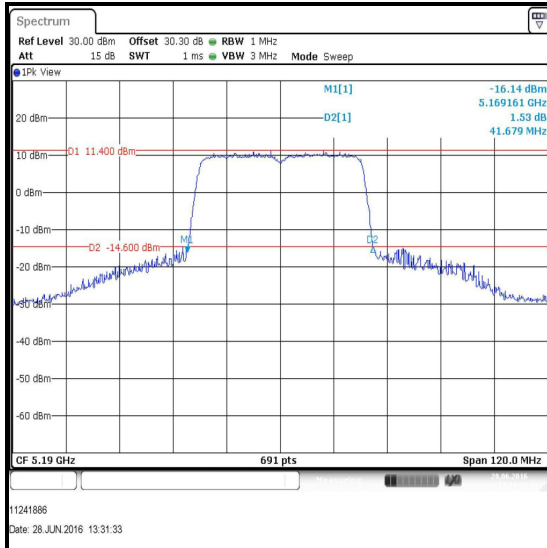

Bottom Channel

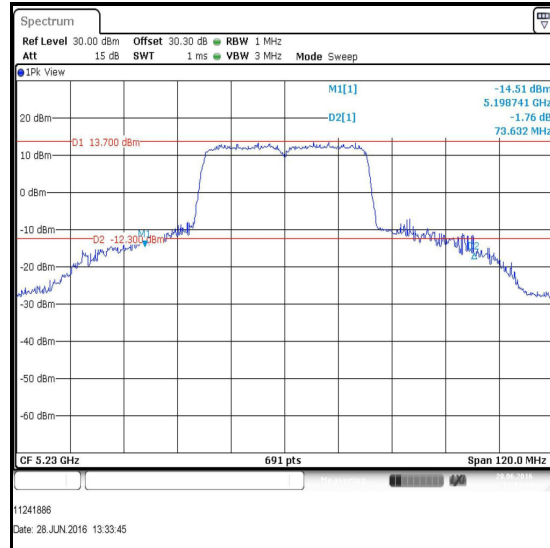


Top Channel

Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11ac / 80 MHz / SISO / 5.15-5.25 GHz band

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Single	5210	BPSK	29.3 / 0	84.747

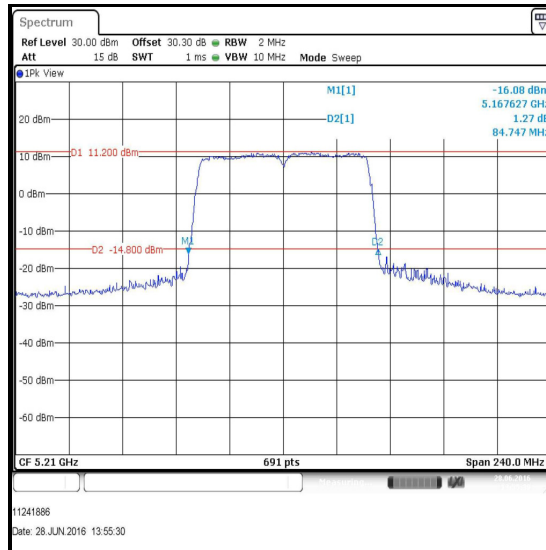


Single Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / MIMO / 5.15-5.25 GHz band / Port 1


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	6.5 / 0	22.402
Middle	5200	BPSK	6.5 / 0	23.531
Top	5240	BPSK	6.5 / 0	24.573

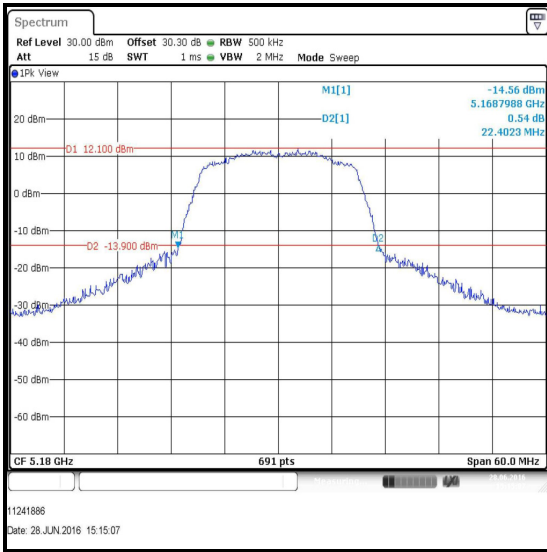

Bottom Channel

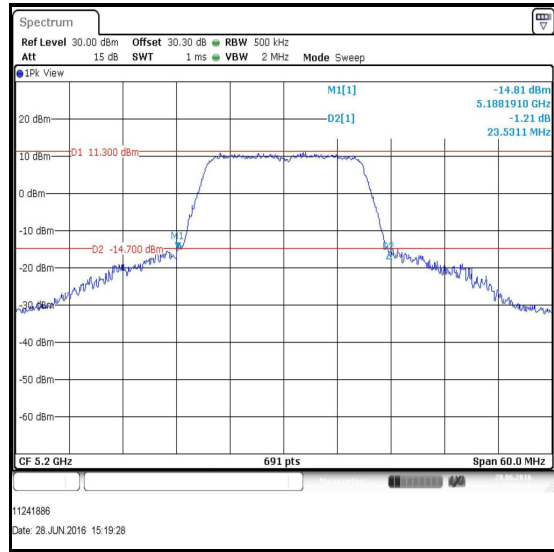

Middle Channel

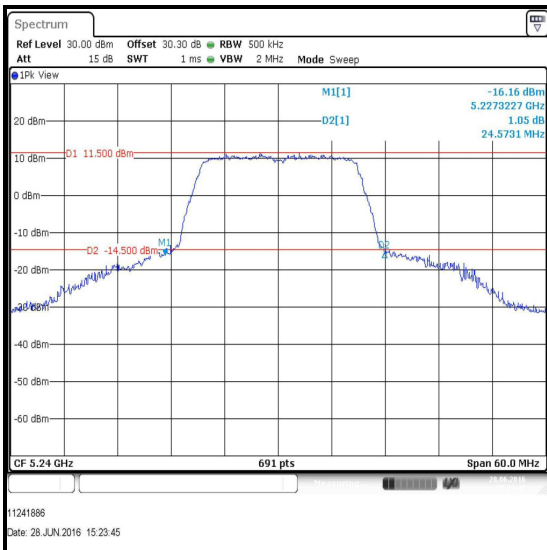


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / MIMO / 5.15-5.25 GHz band / Port 2


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5180	BPSK	6.5 / 0	21.968
Middle	5200	BPSK	6.5 / 0	22.663
Top	5240	BPSK	6.5 / 0	24.313

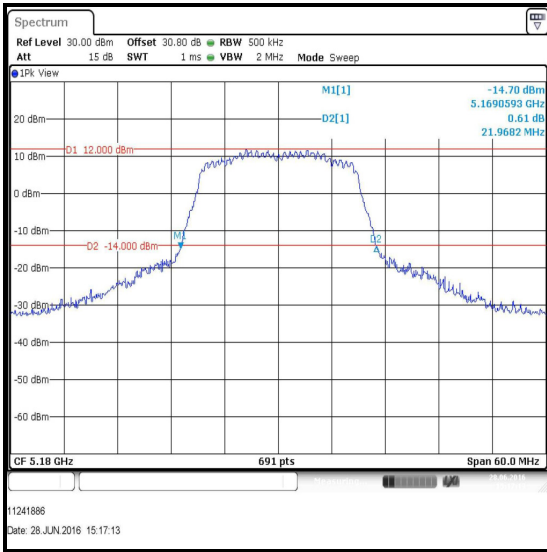

Bottom Channel

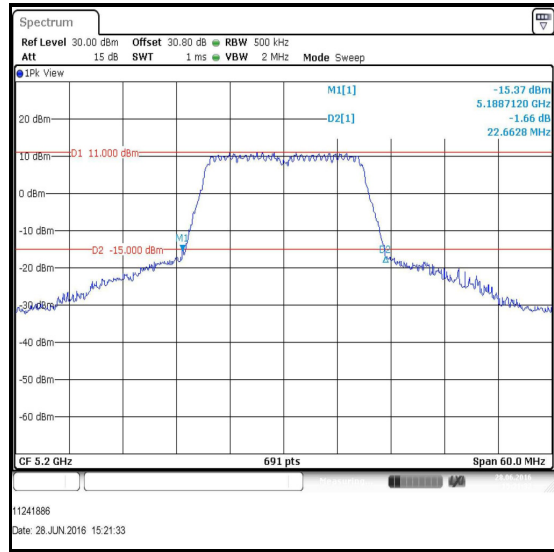

Middle Channel

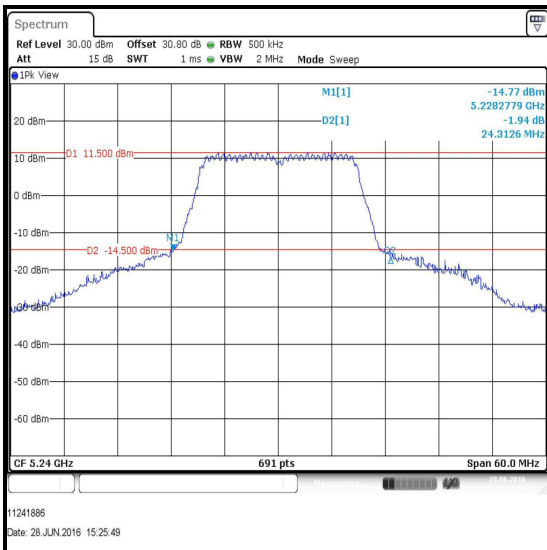


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / MIMO / 5.15-5.25 GHz band / Port 1

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5190	BPSK	13.5 / 0	41.679
Top	5230	BPSK	13.5 / 0	79.016

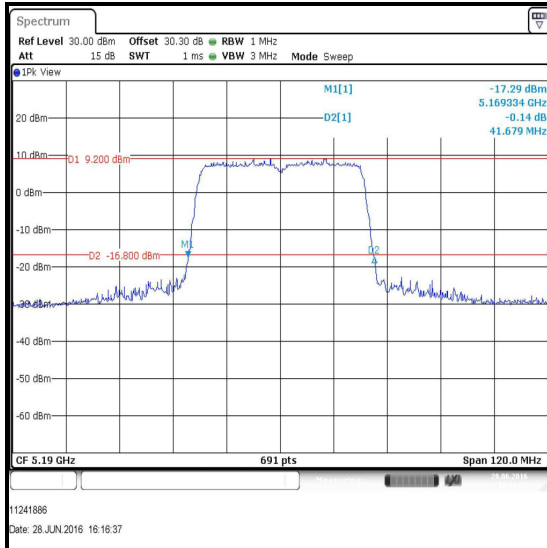

Bottom Channel

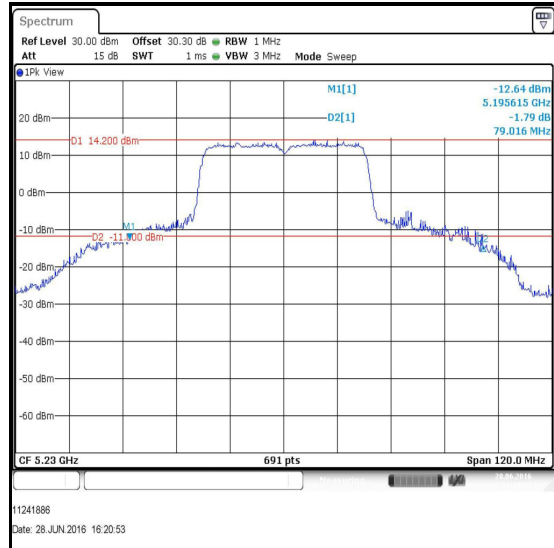


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / MIMO / 5.15-5.25 GHz band / Port 2

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5190	BPSK	13.5 / 0	41.331
Top	5230	BPSK	13.5 / 0	76.932

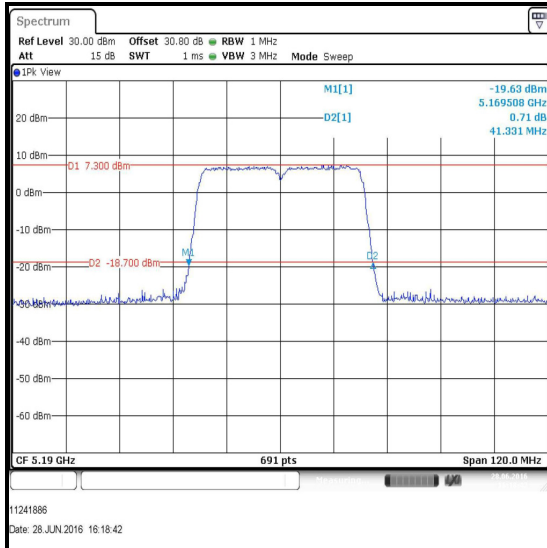

Bottom Channel

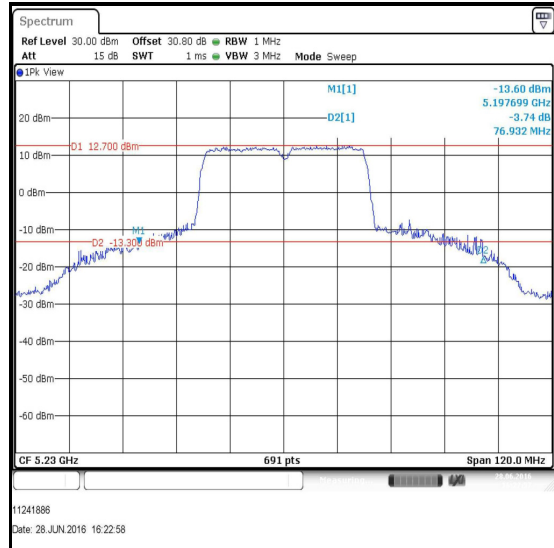


Top Channel

Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11ac / 80 MHz / MIMO / 5.15-5.25 GHz band / Port 1


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Single	5210	BPSK	29.3 / 0x1	84.747

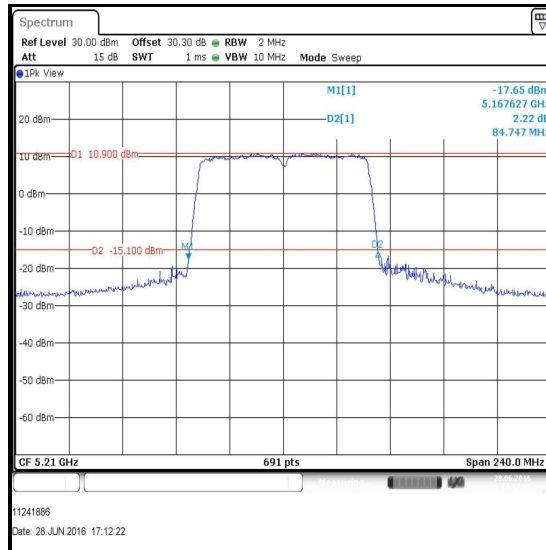

Single Channel

Results: 802.11ac / 80 MHz / MIMO / 5.15-5.25 GHz band / Port 2

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Single	5210	BPSK	29.3 / 0x1	84.747

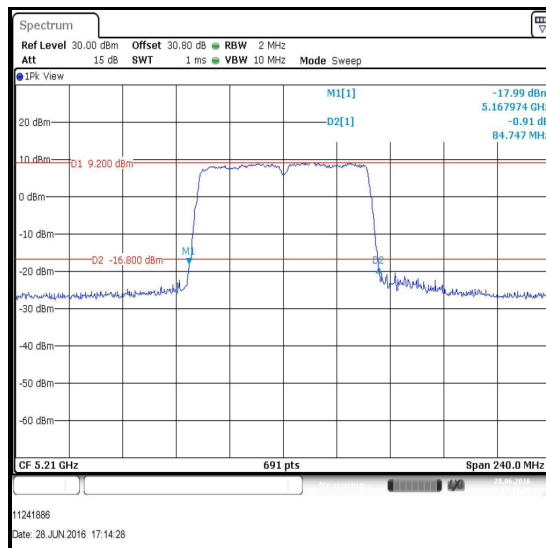


Single Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11a / 20 MHz / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps	26 dB Emission Bandwidth (MHz)
Bottom	5260	BPSK	6	30.651
Middle	5280	BPSK	6	30.912
Top	5320	BPSK	6	22.576

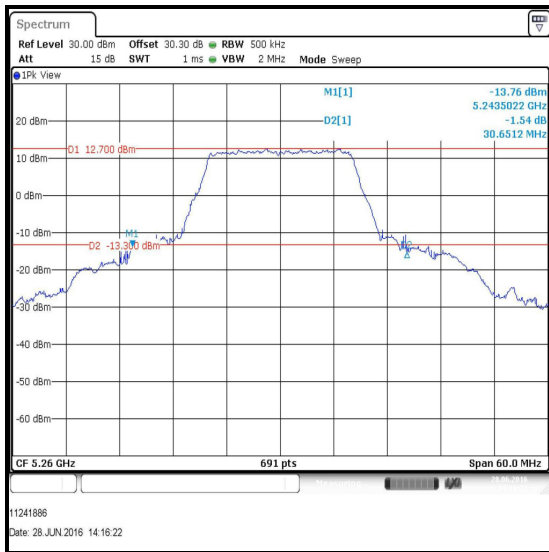

Bottom Channel

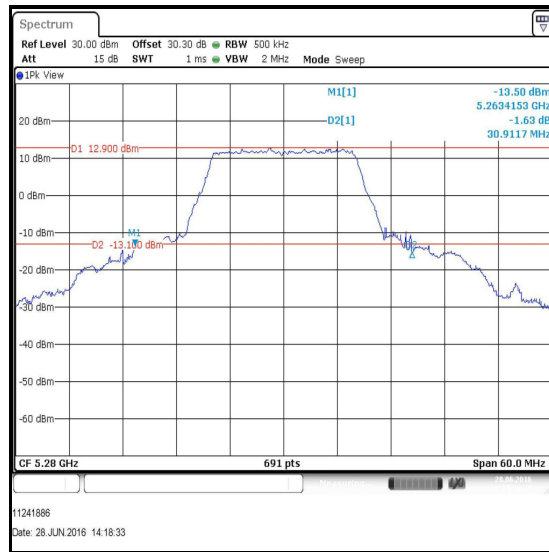

Middle Channel

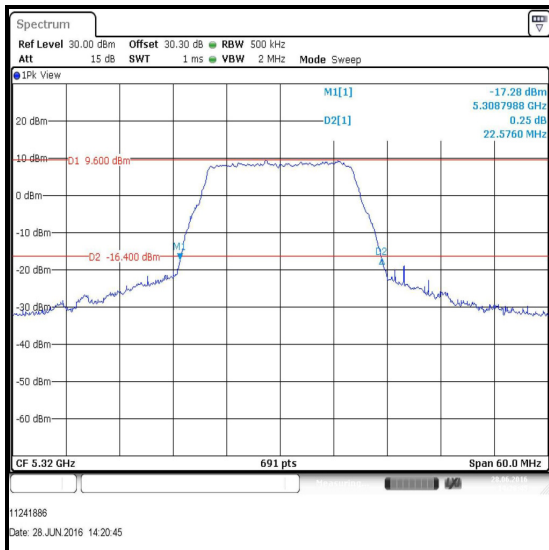


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 20 MHz / SISO / 5.25-5.35 GHz band


Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5260	BPSK	6.5 / 0	34.906
Middle	5280	BPSK	6.5 / 0	32.822
Top	5320	BPSK	6.5 / 0	22.837

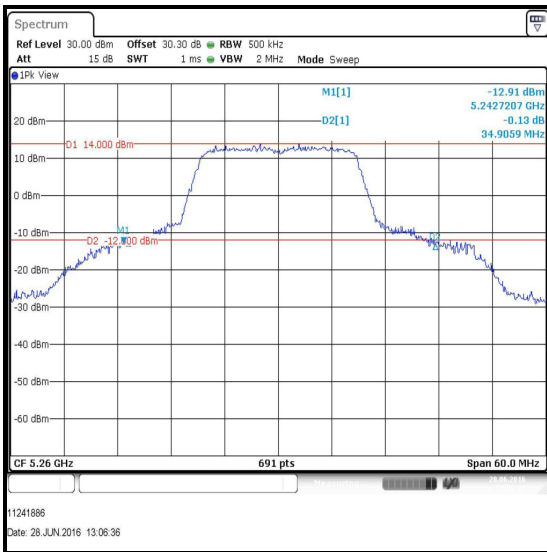

Bottom Channel

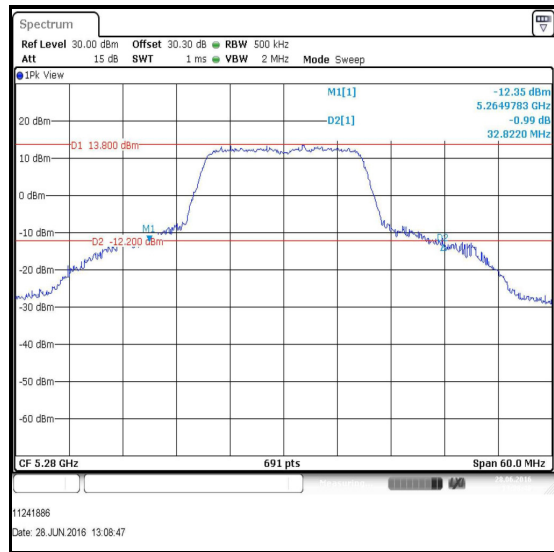

Middle Channel

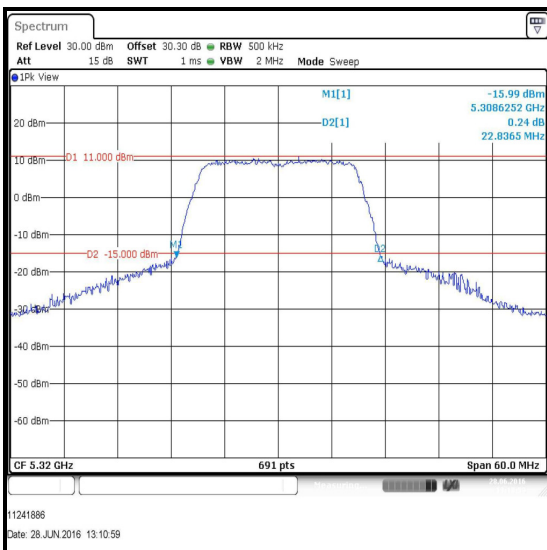


Top Channel


Transmitter 26 dB Emission Bandwidth (continued)

Results: 802.11n / 40 MHz / SISO / 5.25-5.35 GHz band

Channel	Frequency (MHz)	Modulation scheme	Data Rate Mbps / MCS	26 dB Emission Bandwidth (MHz)
Bottom	5270	BPSK	13.5 / 0	70.854
Top	5310	BPSK	13.5 / 0	41.505

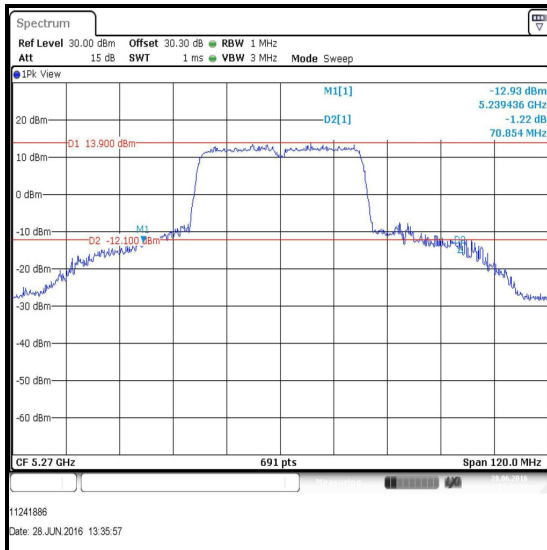

Bottom Channel

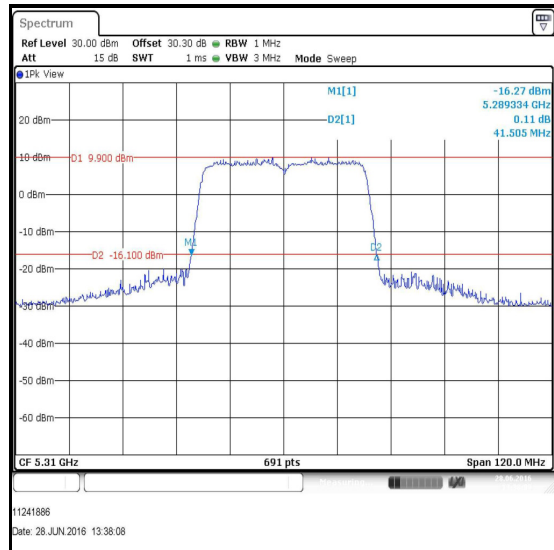

Top Channel