

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 1963 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	1.8869	42.48	PK-U	26.5	-35.5	33.48	-	-	-	-	68.2	-34.72	218	243	H
2	3.08399	42.57	PK-U	30.7	-34.4	38.87	-	-	-	-	68.2	-29.33	169	159	V
3	* 8.13929	36.7	PK-U	37.6	-26.9	47.4	-	-	74	-26.6	-	-	263	200	H
	* 8.13743	26.59	ADR	37.6	-26.9	37.29	54	-16.71	-	-	-	-	263	200	H
4	10.34414	39.62	PK-U	39.3	-25	53.92	-	-	-	-	68.2	-14.28	143	101	H
5	6.80142	38.5	PK-U	36.3	-27.9	46.9	-	-	-	-	68.2	-21.3	328	200	V
6	* 12.56538	32.28	PK-U	40	-22	50.28	-	-	74	-23.72	-	-	277	101	V
	* 12.56496	22.47	ADR	40	-22	40.47	54	-13.53	-	-	-	-	277	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

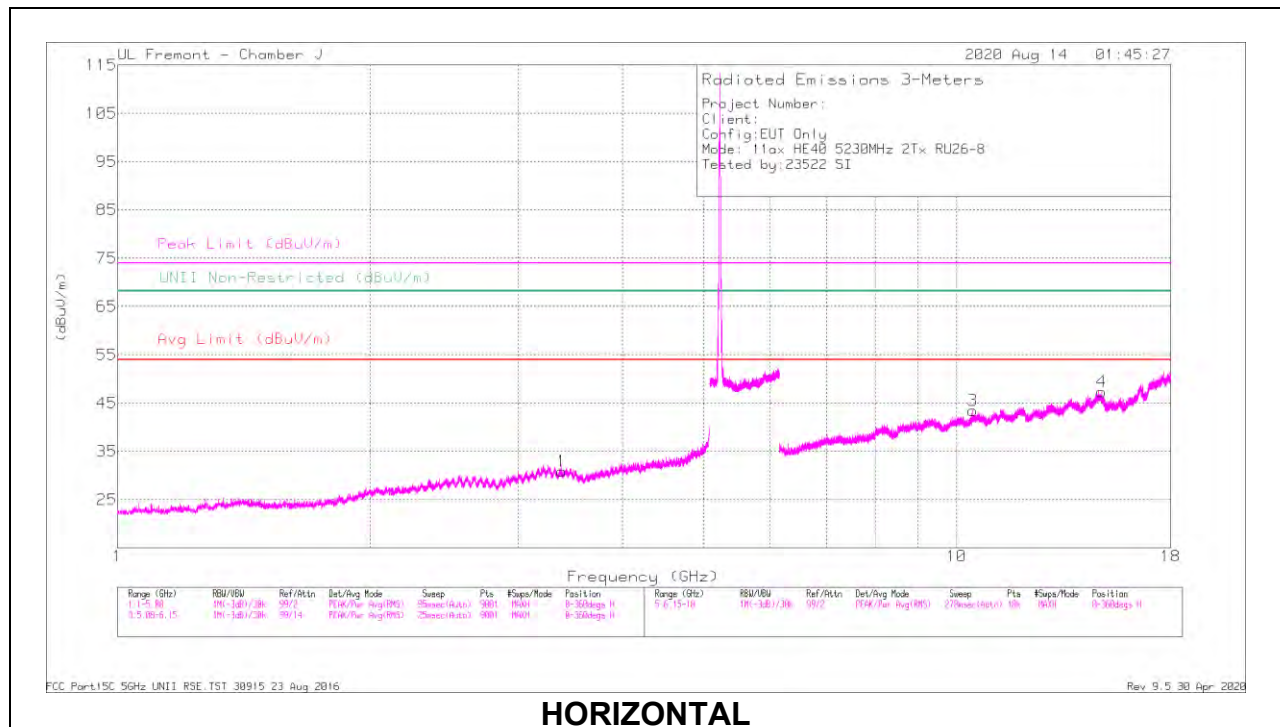

HORIZONTAL

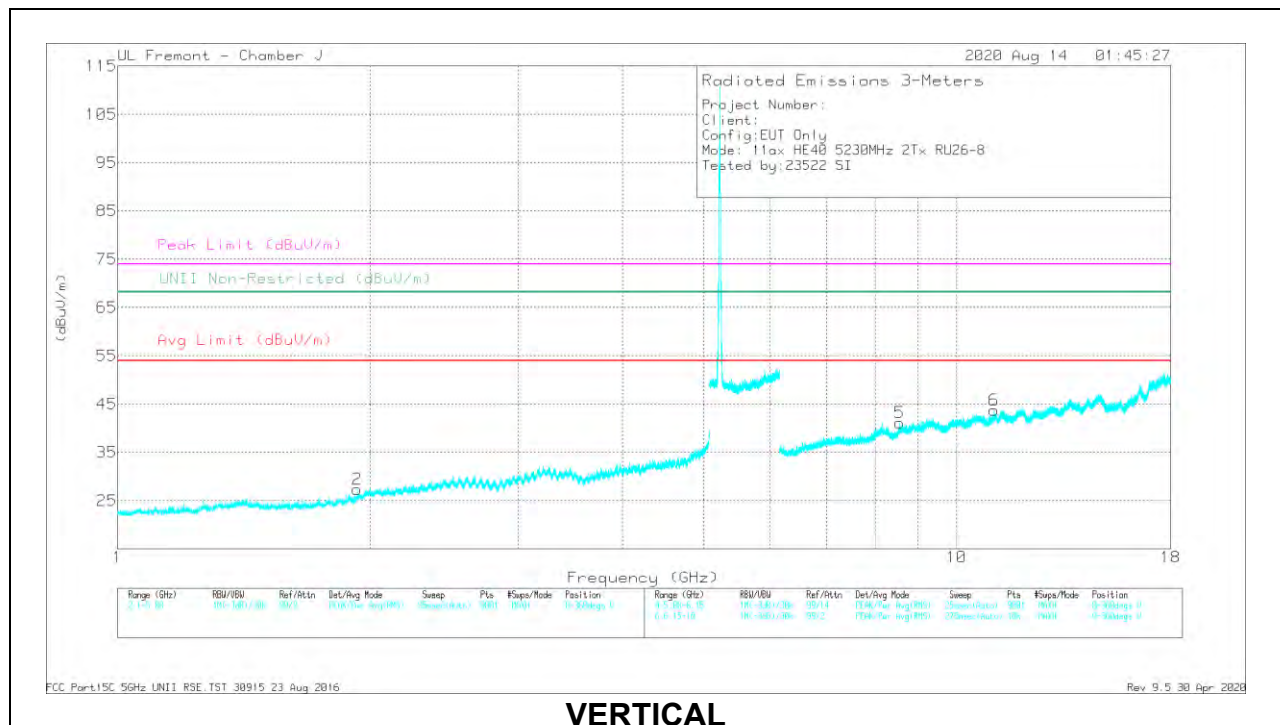

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF 1963 (dBm)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	3.38272	41.07	PK-U	31.1	-33.8	39.27	-	-	-	-	68.2	-28.93	12	170	H
2	1.9288	43.03	PK-U	26.8	-35.5	34.33	-	-	-	-	68.2	-33.87	355	148	V
3	10.45833	36.83	PK-U	39.5	-24.7	51.63	-	-	-	-	68.2	-16.57	136	101	H
4	14.89806	32.55	PK-U	42	-20.3	54.25	-	-	-	-	68.2	-13.95	203	200	H
5	8.55284	36.71	PK-U	37.6	-25.5	48.81	-	-	-	-	68.2	-19.39	317	101	V
6	* 11.0882	34.99	PK-U	39.6	-23.6	50.99	-	-	74	-23.01	-	-	210	199	V
	* 11.08831	24.09	ADR	39.6	-23.6	40.09	54	-13.91	-	-	-	-	210	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.6. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.2 GHz BAND

1TX ANTENNA 6 – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

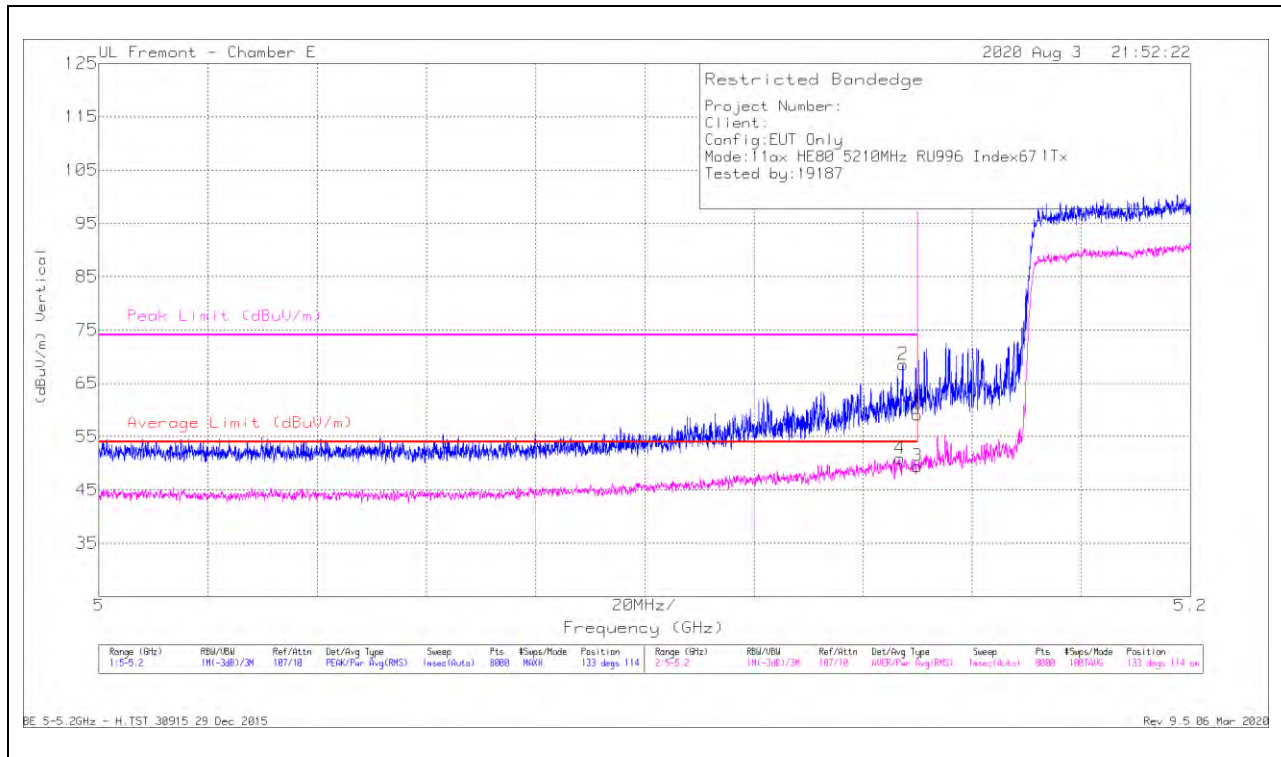


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.14999	47.13	Pk	34.3	-22.3	59.13	-	-	74	-14.87	133	114	H
2	* 5.14729	56.52	Pk	34.3	-22.3	68.52	-	-	74	-5.48	133	114	H
3	* 5.14999	37.48	RMS	34.3	-22.3	49.48	54	-4.52	-	-	133	114	H
4	* 5.14672	38.9	RMS	34.3	-22.3	50.9	54	-3.1	-	-	133	114	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

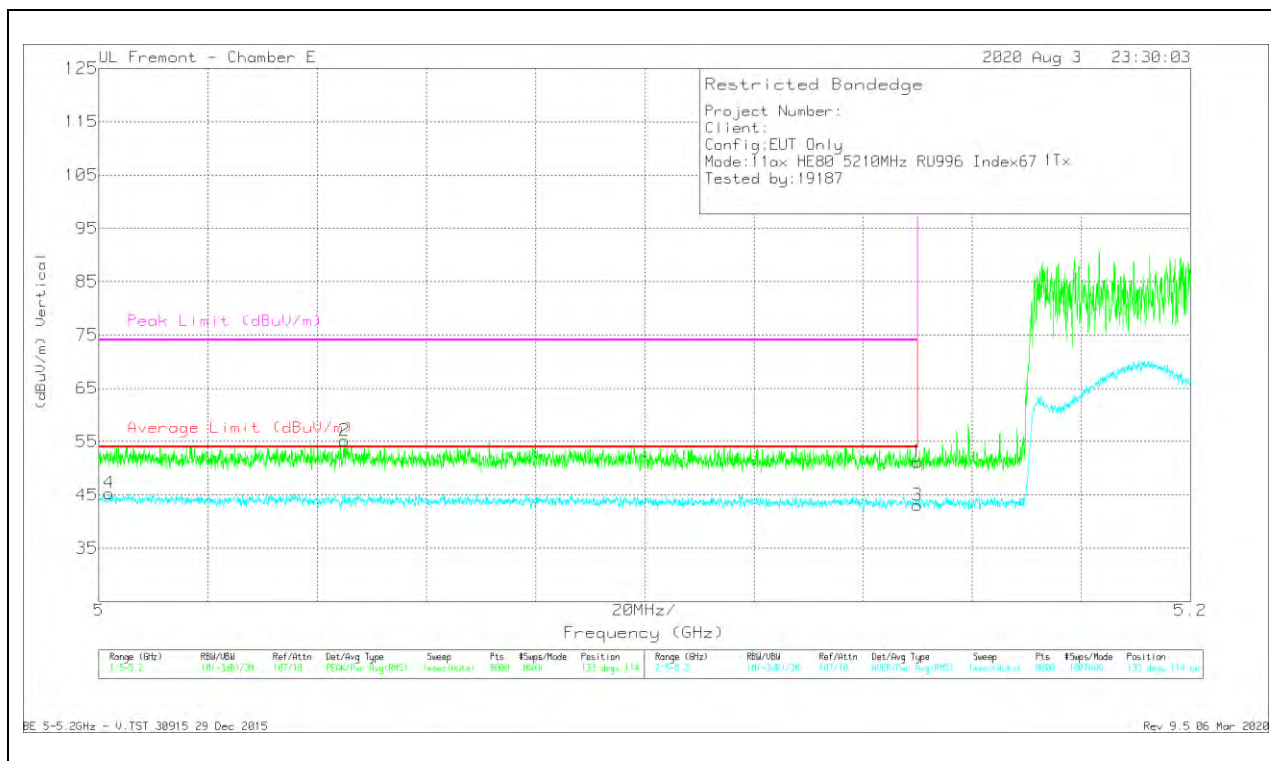

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.14999	39.19	Pk	34.3	-22.3	51.19	-	-	74	-22.81	133	114	V
2	* 5.04503	43.07	Pk	34.3	-22.2	55.17	-	-	74	-18.83	133	114	V
3	* 5.14999	31.06	RMS	34.3	-22.3	43.06	54	-10.94	-	-	133	114	V
4	* 5.0019	33.23	RMS	34.2	-22.1	45.33	54	-8.67	-	-	133	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 6 – 26 Tones, RU Index 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

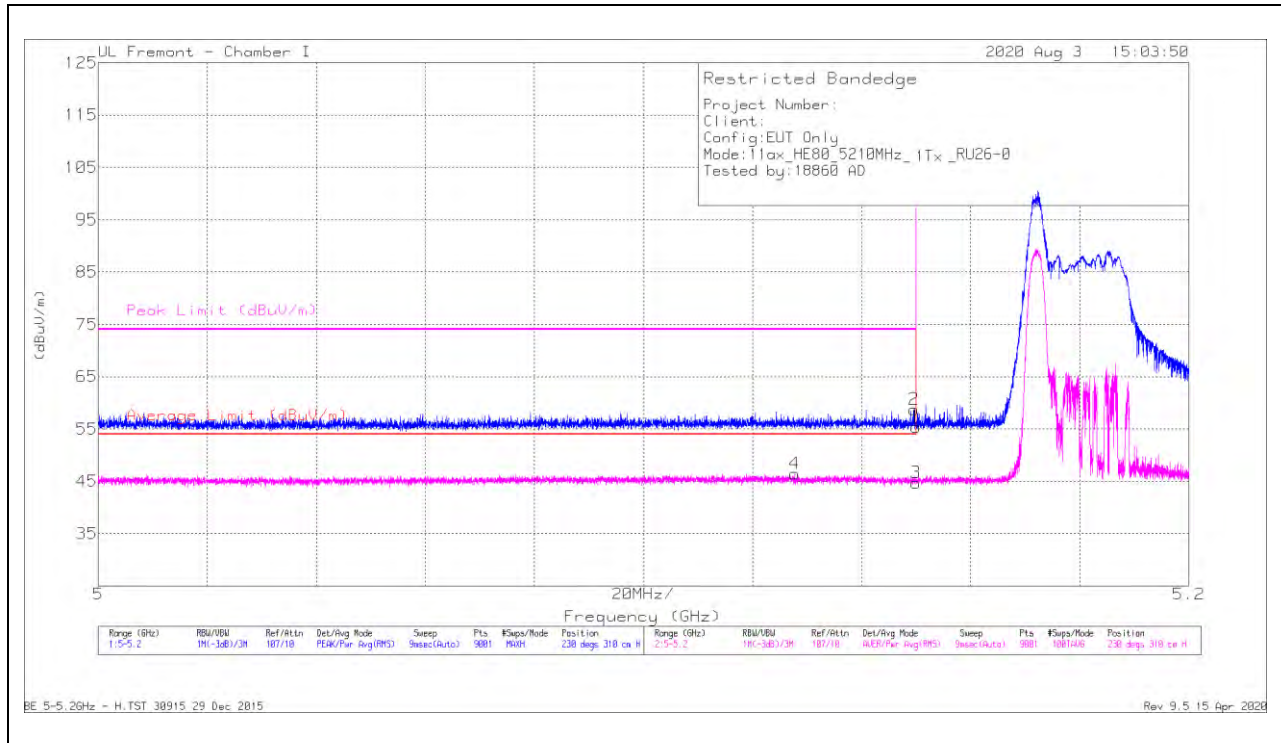


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T662 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	35.84	Pk	34.4	-14.8	55.44	-	-	74	-18.56	230	310	H
2	* 5.14955	39.16	Pk	34.4	-14.8	58.76	-	-	74	-15.24	230	310	H
3	* 5.15	25.15	RMS	34.4	-14.8	44.75	54	-9.25	-	-	230	310	H
4	* 5.12771	26.7	RMS	34.4	-14.7	46.4	54	-7.6	-	-	230	310	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

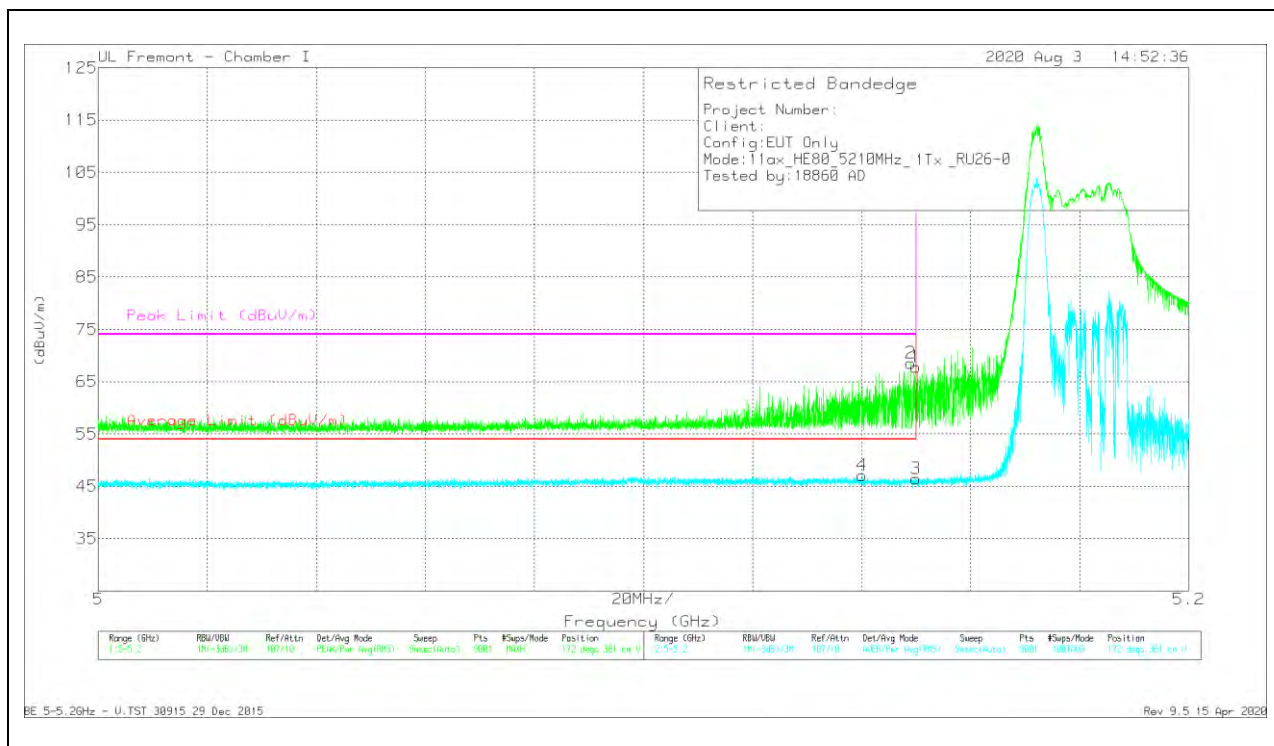


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	48.15	Pk	34.4	-14.8	67.75	-	-	74	-6.25	172	361	V
2	* 5.14902	48.97	Pk	34.4	-14.8	68.57	-	-	74	-5.43	172	361	V
3	* 5.15	26.85	RMS	34.4	-14.8	46.45	54	-7.55	-	-	172	361	V
4	* 5.14015	27.37	RMS	34.5	-14.8	47.07	54	-6.93	-	-	172	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1TX ANTENNA 5 – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

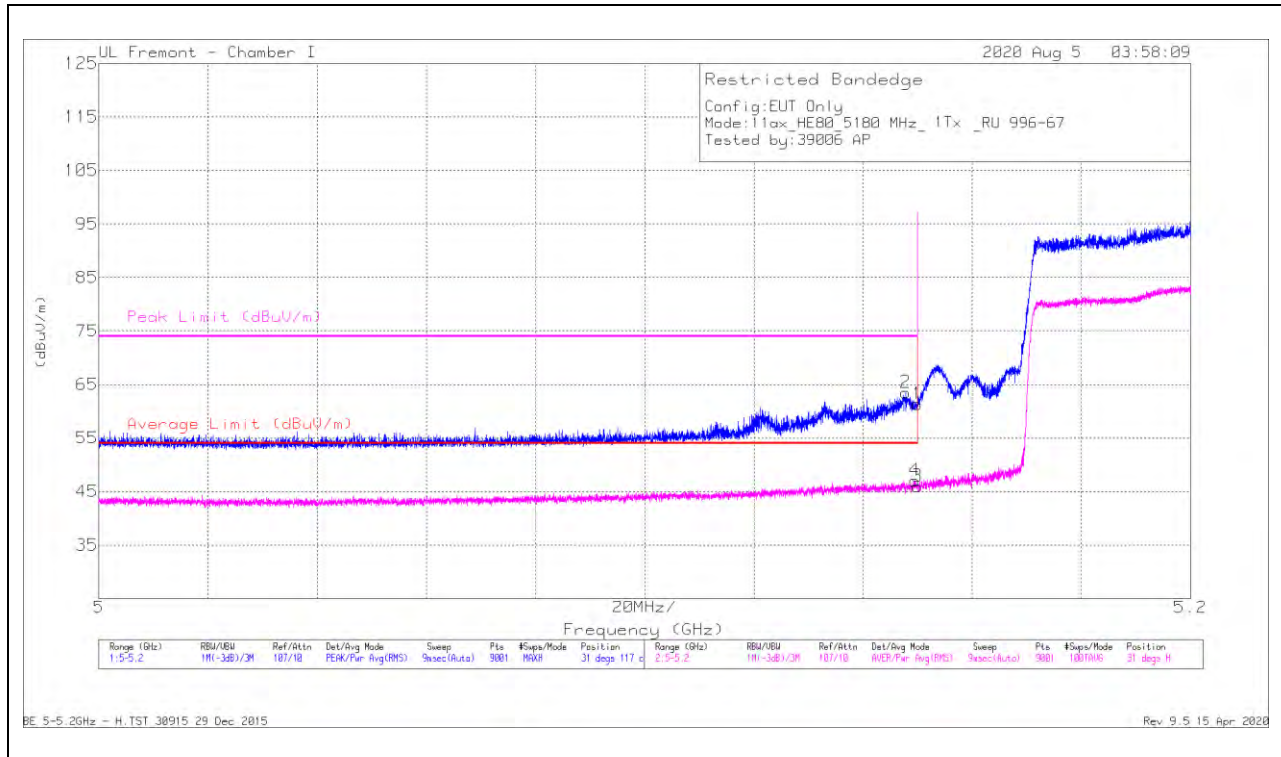


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	41.76	Pk	34.4	-14.8	61.36	-	-	74	-12.64	31	117	H
2	* 5.1478	43.9	Pk	34.4	-14.8	63.5	-	-	74	-10.5	31	117	H
3	* 5.15	26.36	RMS	34.4	-14.8	45.96	54	-8.04	-	-	31	117	H
4	* 5.14949	27.46	RMS	34.4	-14.8	47.06	54	-6.94	-	-	31	117	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

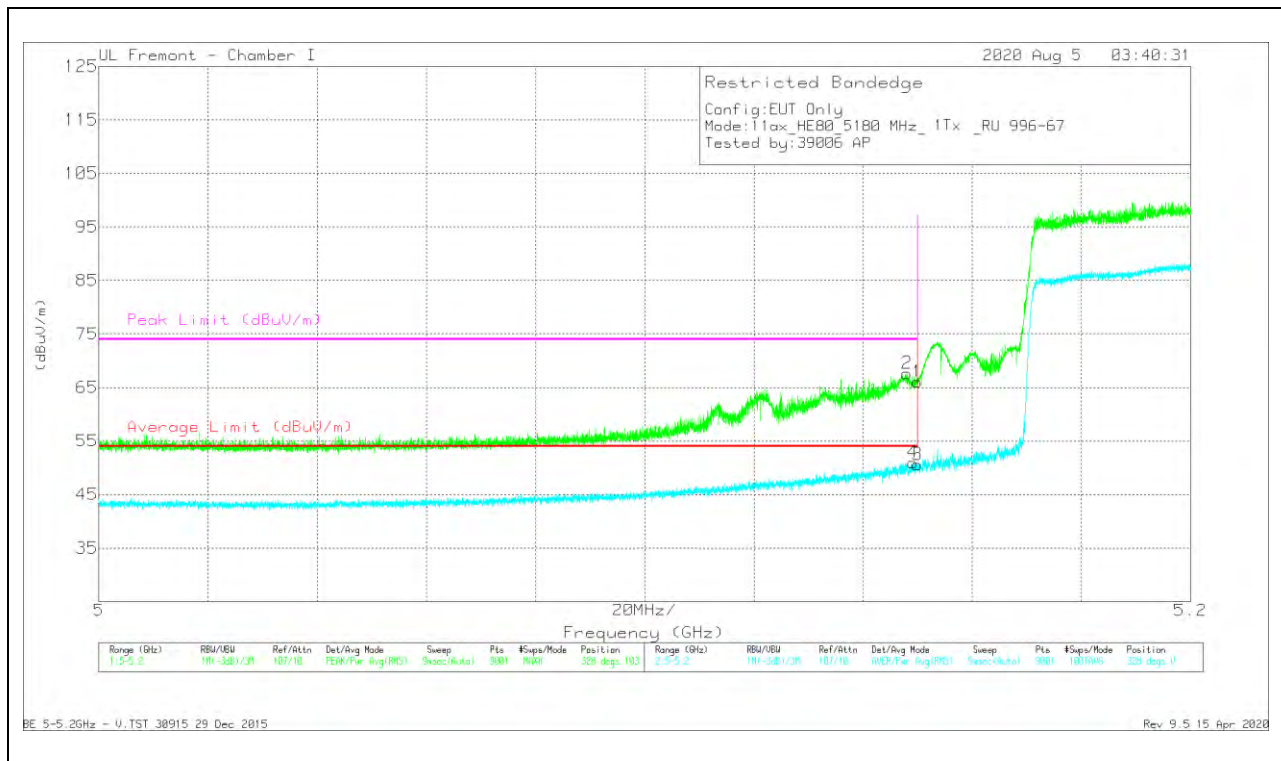

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Filtr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.42	Pk	34.4	-14.8	66.02	-	-	74	-7.98	328	103	V
2	* 5.14804	48.02	Pk	34.4	-14.8	67.62	-	-	74	-6.38	328	103	V
3	* 5.15	30.99	RMS	34.4	-14.8	50.59	54	-3.41	-	-	328	103	V
4	* 5.14915	31.34	RMS	34.4	-14.8	50.94	54	-3.06	-	-	328	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 5 – 26 Tones, RU Index 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

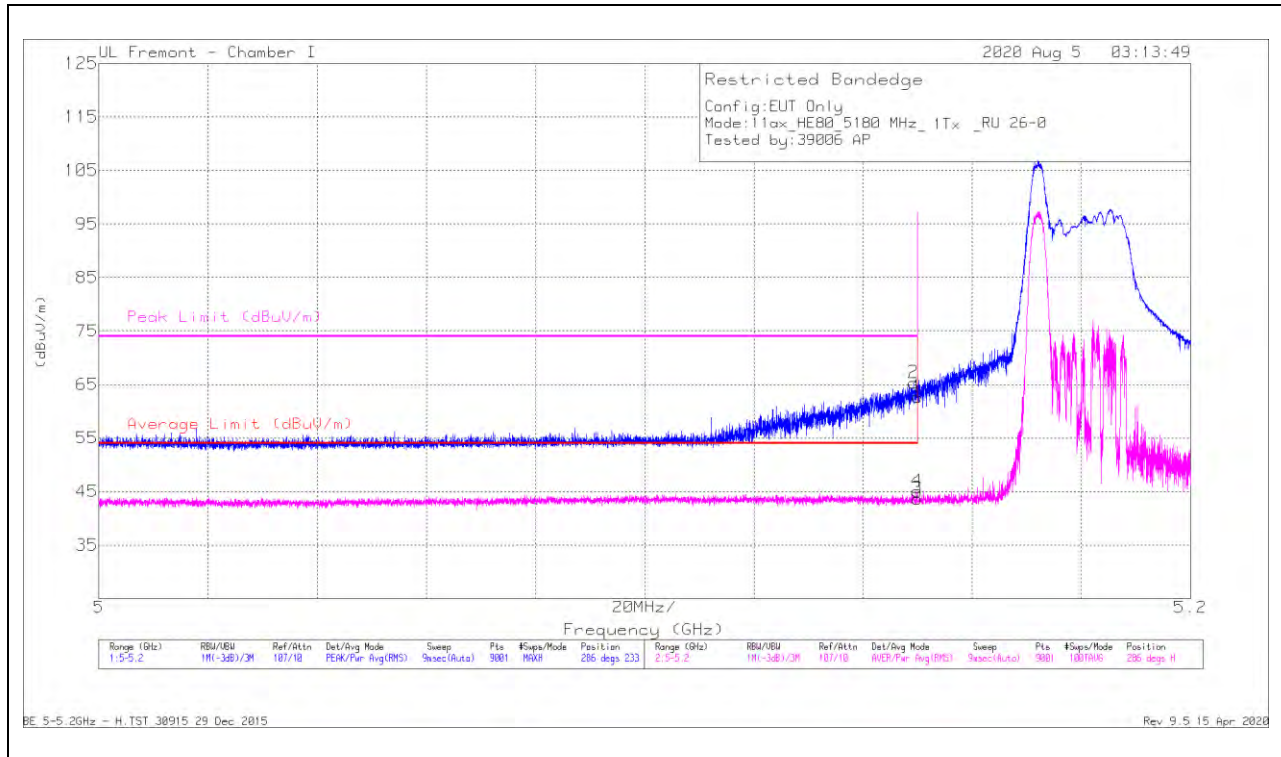


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Fitr/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.04	Pk	34.4	-14.8	62.64	-	-	74	-11.36	286	233	H
2	* 5.1492	45.74	Pk	34.4	-14.8	65.34	-	-	74	-8.66	286	233	H
3	* 5.15	24.07	RMS	34.4	-14.8	43.67	54	-10.33	-	-	286	233	H
4	* 5.14991	25.47	RMS	34.4	-14.8	45.07	54	-8.93	-	-	286	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

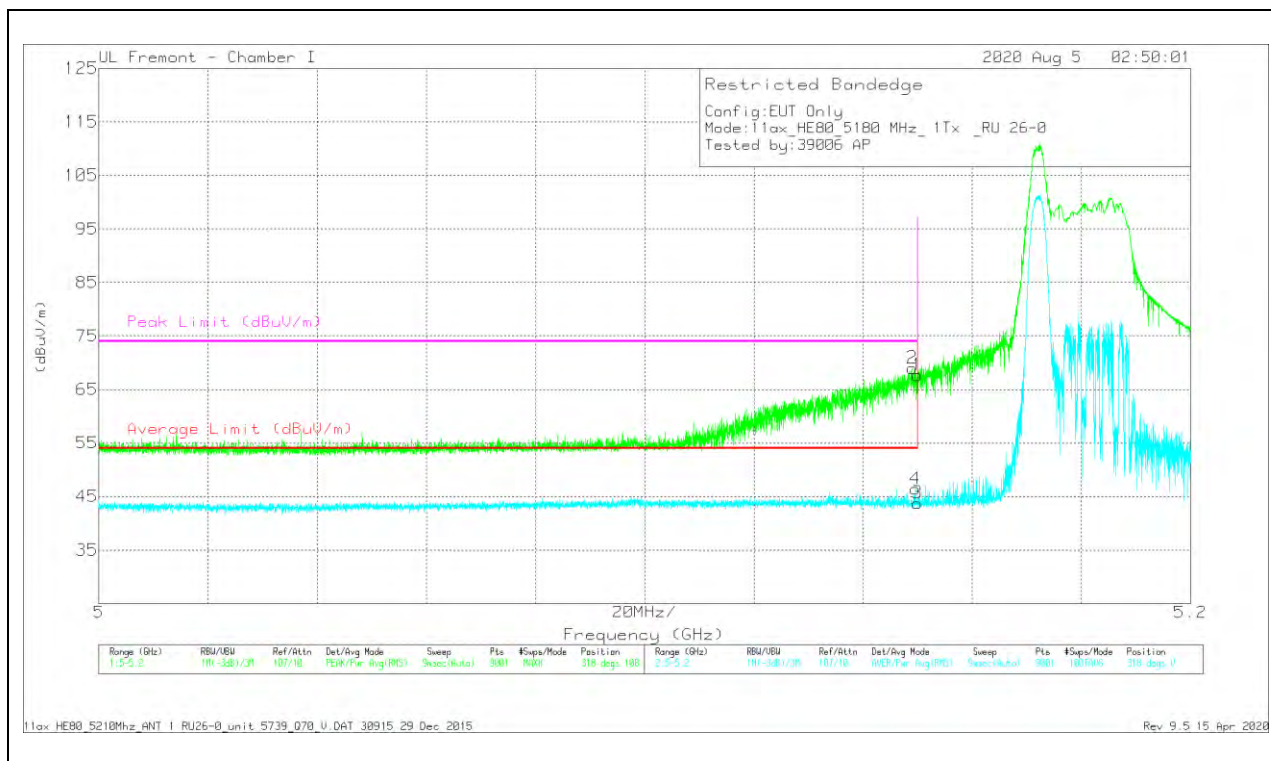

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	48.09	Pk	34.4	-14.8	67.69	-	-	74	-6.31	318	108	V
2	* 5.14902	49.37	Pk	34.4	-14.8	68.97	-	-	74	-5.03	318	108	V
3	* 5.15	24.16	RMS	34.4	-14.8	43.76	54	-10.24	-	-	318	108	V
4	* 5.14962	26.8	RMS	34.4	-14.8	46.4	54	-7.6	-	-	318	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 996 Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

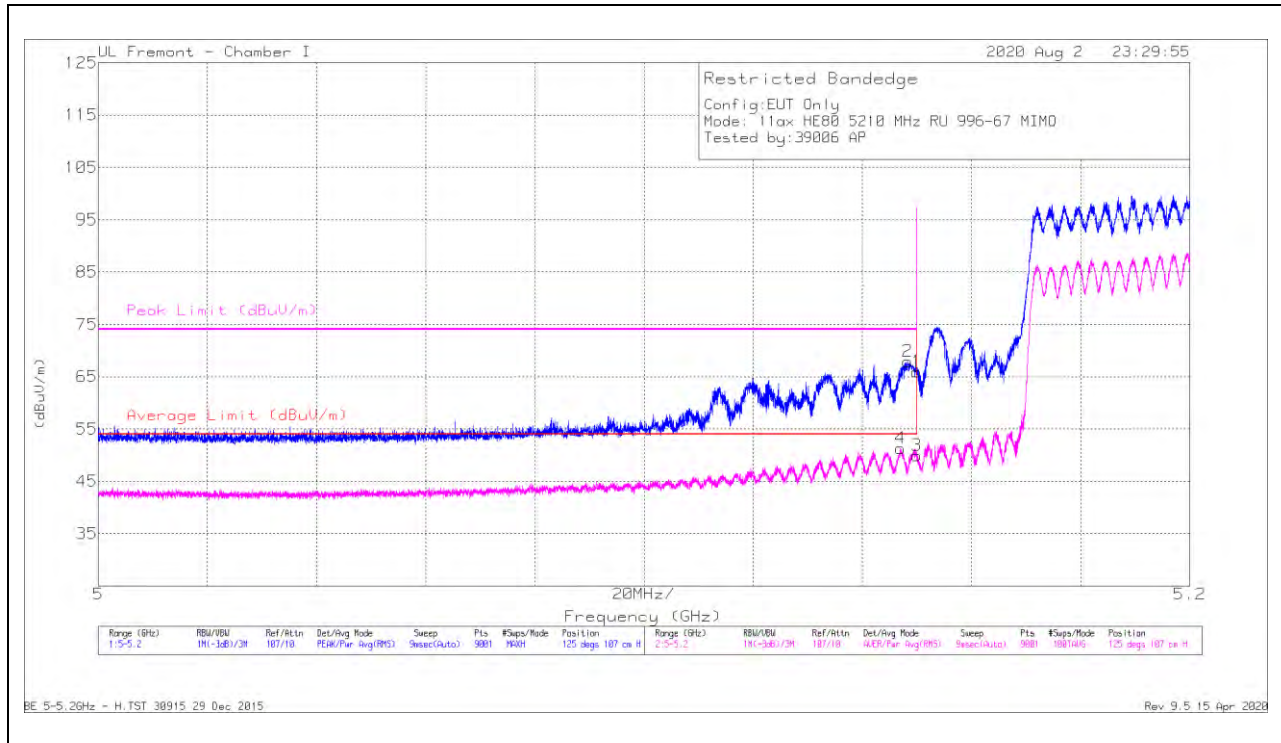


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbl/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	46.38	Pk	34.4	-14.8	65.98	-	-	74	-8.02	125	107	H
2	* 5.14824	48.35	Pk	34.4	-14.8	67.95	-	-	74	-6.05	125	107	H
3	* 5.15	30.34	RMS	34.4	-14.8	49.94	54	-4.06	-	-	125	107	H
4	* 5.14702	31.74	RMS	34.3	-14.8	51.24	54	-2.76	-	-	125	107	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

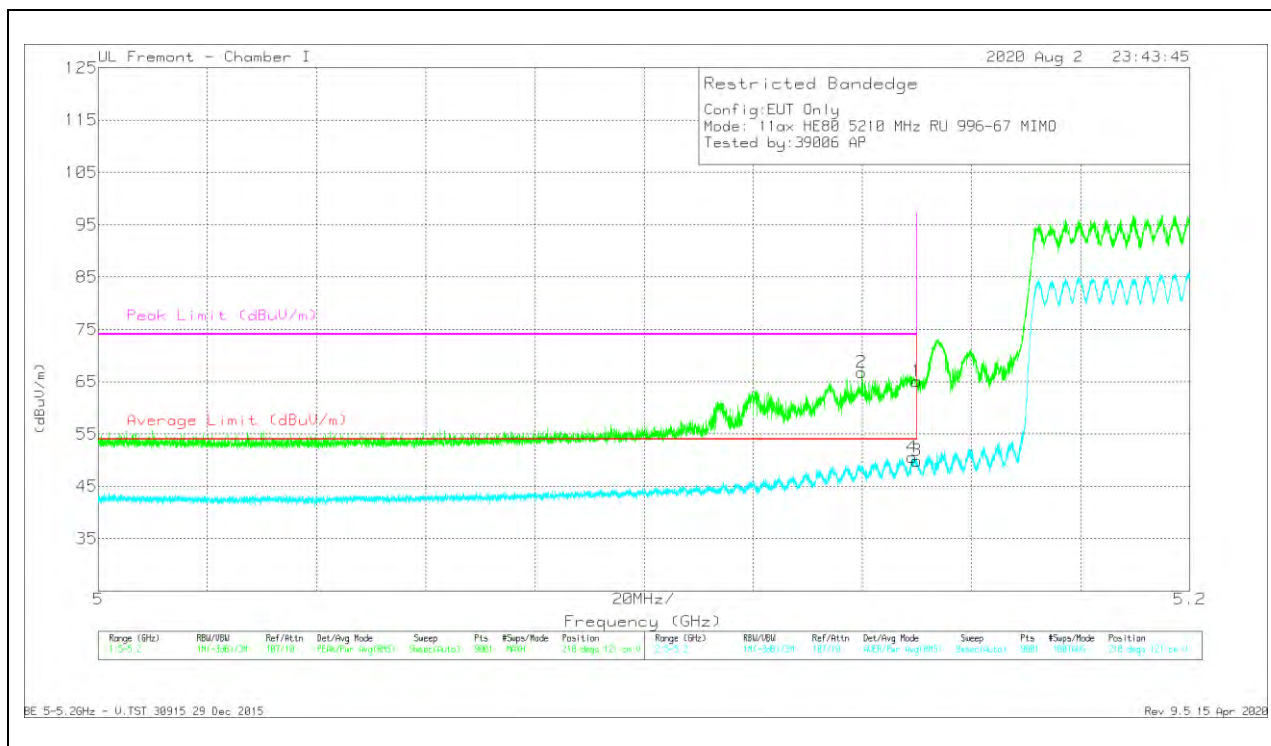

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cbll/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	45.48	Pk	34.4	-14.8	65.08	-	-	74	-8.92	218	121	V
2	* 5.13987	47.09	Pk	34.5	-14.8	66.79	-	-	74	-7.21	218	121	V
3	* 5.15	30.26	RMS	34.4	-14.8	49.86	54	-4.14	-	-	218	121	V
4	* 5.14918	30.96	RMS	34.4	-14.8	50.56	54	-3.44	-	-	218	121	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

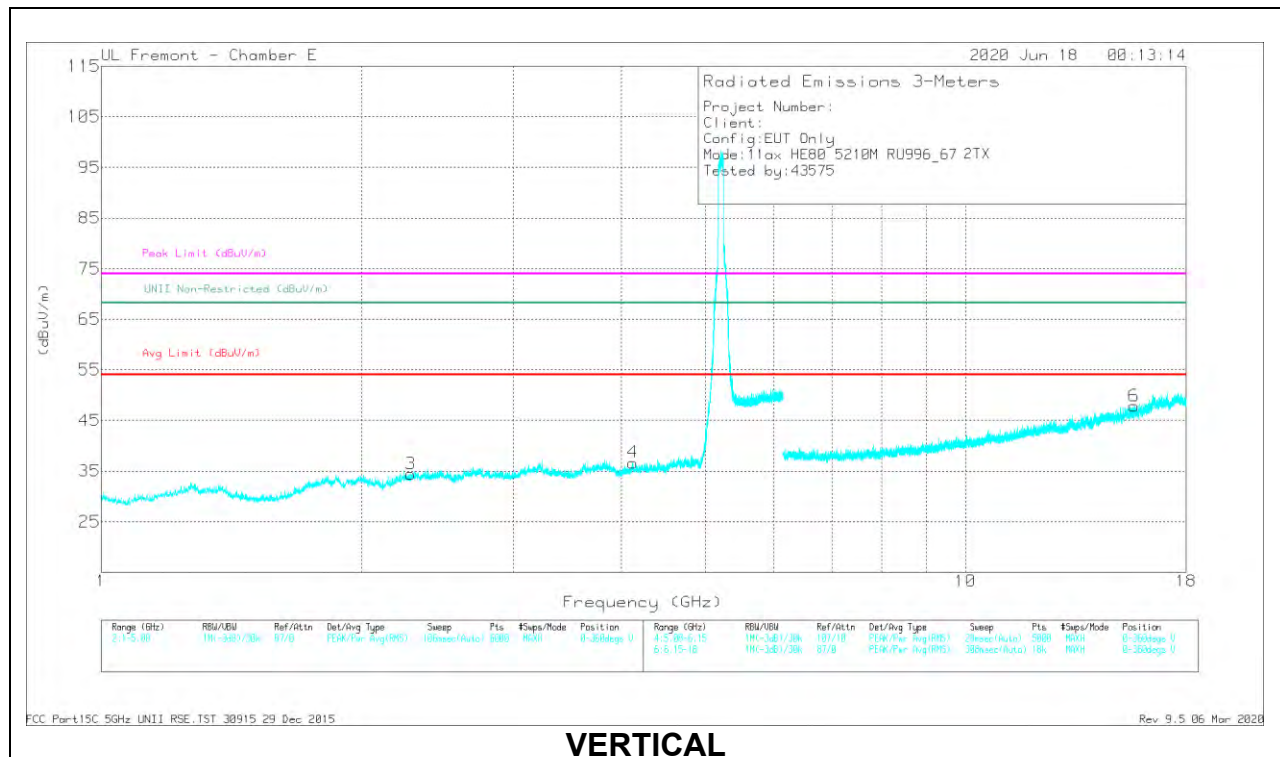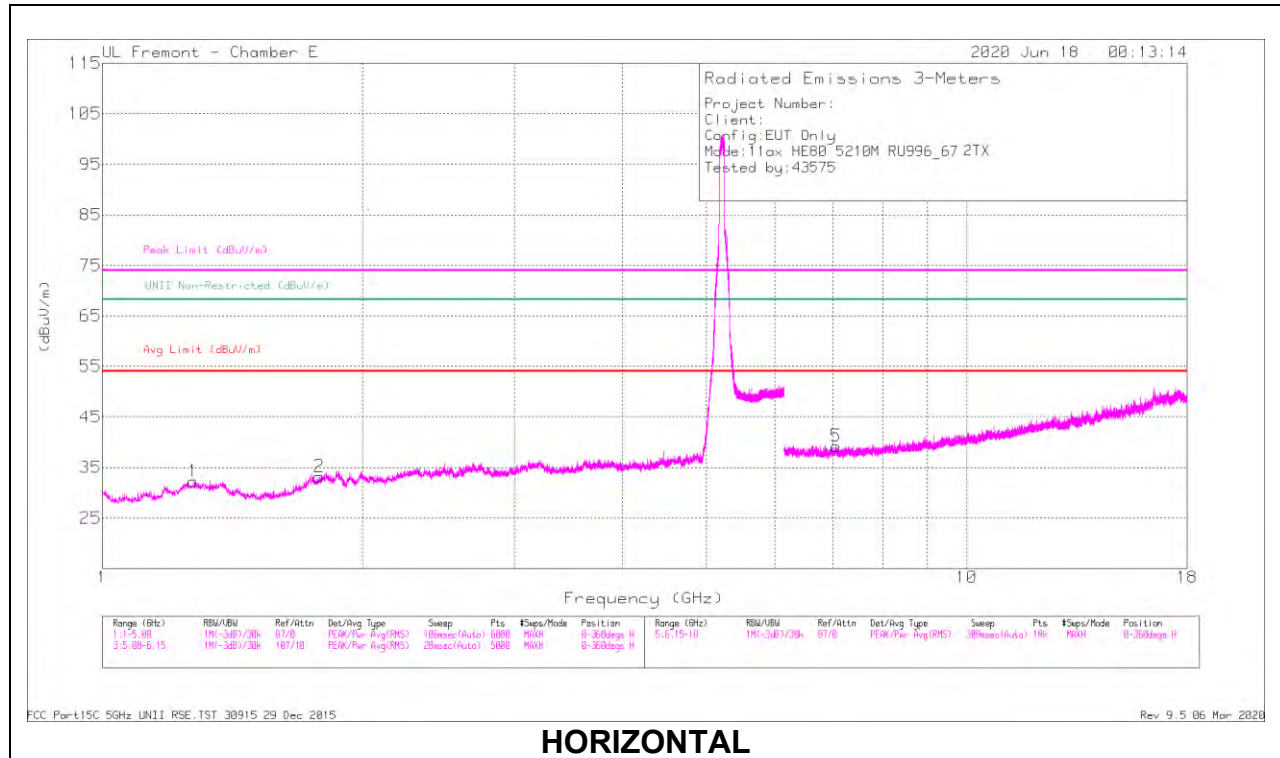

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 1.27342	45.07	PK-U	29.7	-34.8	39.97	-	-	74	-34.03	-	-	0	199	H
	* 1.27465	33.49	ADR	29.7	-34.8	28.39	54	-25.61	-	-	-	-	0	199	H
3	* 2.28009	45.38	PK-U	31.9	-35.7	41.58	-	-	74	-32.42	-	-	0	199	V
	* 2.28137	33.81	ADR	32	-35.7	30.11	54	-23.89	-	-	-	-	0	199	V
4	* 4.12223	42.21	PK-U	33.6	-32.4	43.41	-	-	74	-30.59	-	-	0	101	V
	* 4.12266	30.78	ADR	33.6	-32.4	31.98	54	-22.02	-	-	-	-	0	101	V
6	* 15.67084	35.25	PK-U	40.3	-21.2	54.35	-	-	74	-19.65	-	-	0	199	V
	* 15.66945	24.62	ADR	40.3	-21.2	43.72	54	-10.28	-	-	-	-	0	199	V
2	1.78403	45.41	PK-U	30.5	-35.2	40.71	-	-	-	-	68.2	-27.49	0	199	H
5	7.07109	38.73	PK-U	35.7	-28.5	45.93	-	-	-	-	68.2	-22.27	0	199	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 0

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

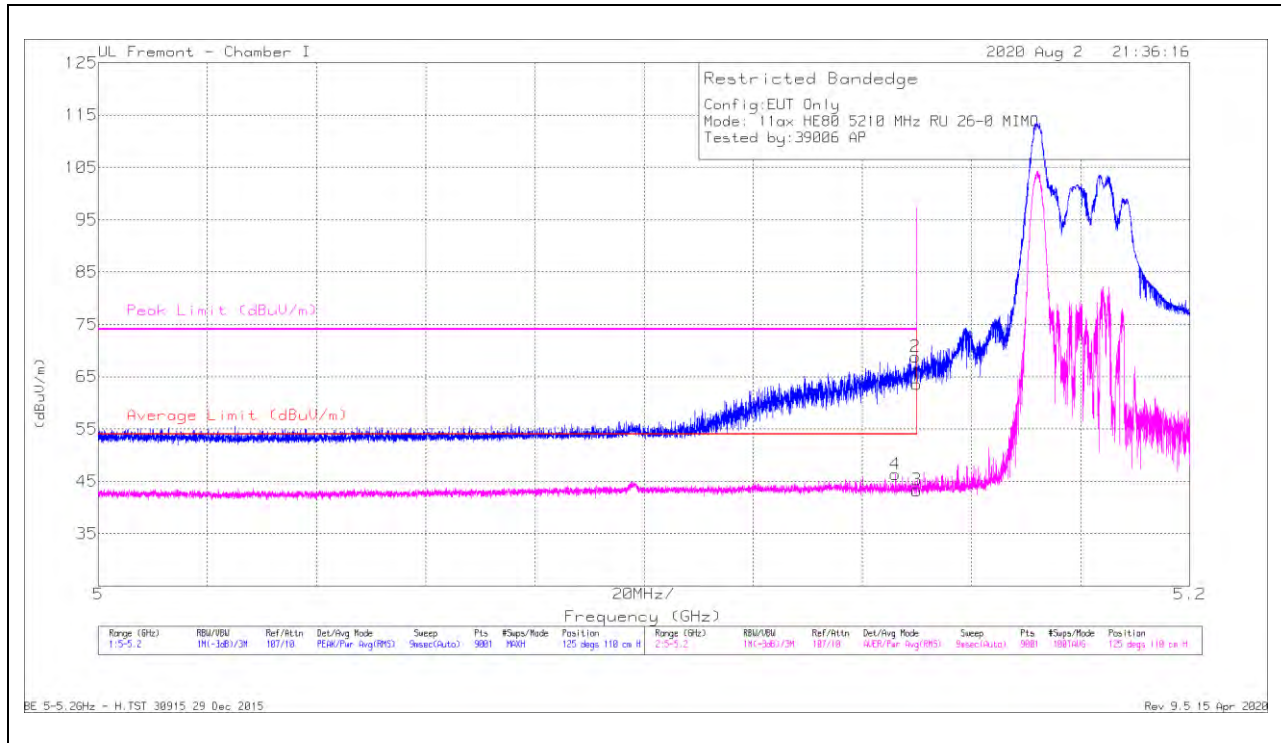


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	43.97	Pk	34.4	-14.8	63.57	-	-	74	-10.43	125	110	H
2	* 5.14978	49.19	Pk	34.4	-14.8	68.79	-	-	74	-5.21	125	110	H
3	* 5.15	23.68	RMS	34.4	-14.8	43.28	54	-10.72	-	-	125	110	H
4	* 5.14607	26.85	RMS	34.3	-14.8	46.35	54	-7.65	-	-	125	110	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

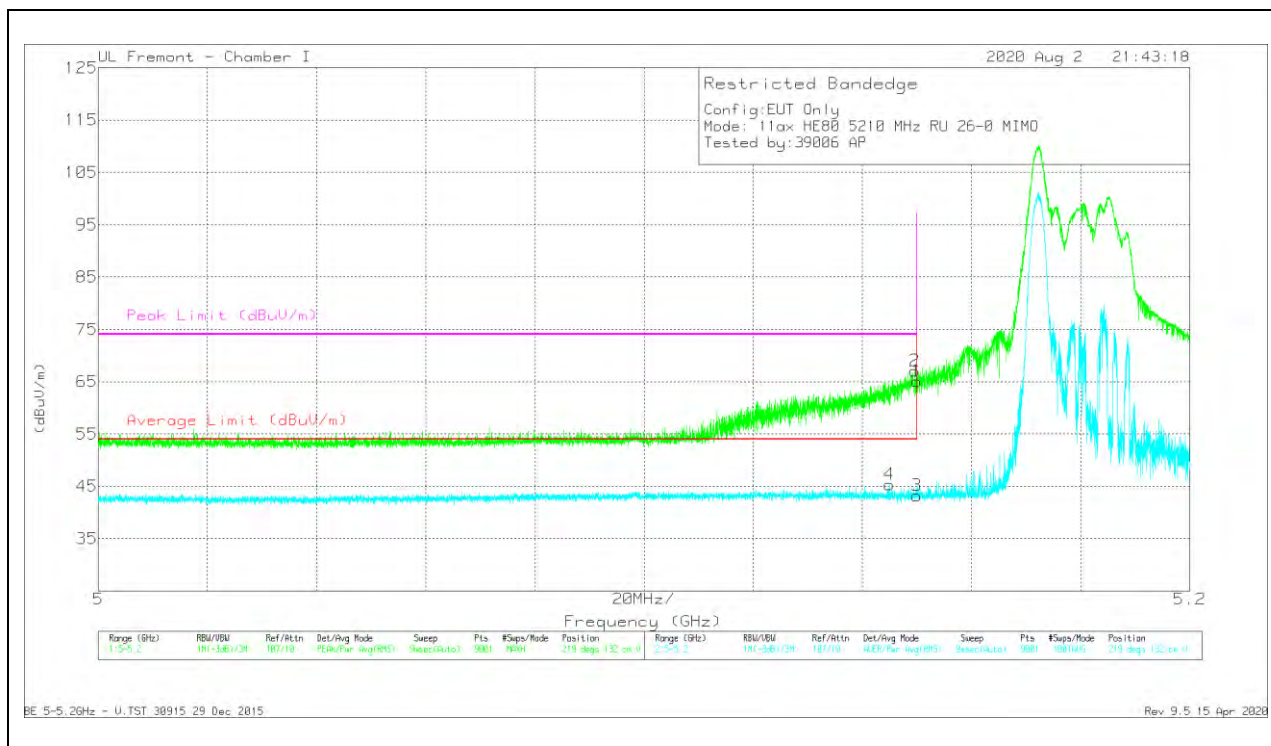

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dB/m)	Amp/Cb/Filt/Pa d (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	45.5	Pk	34.4	-14.8	65.1	-	-	74	-8.9	219	132	V
2	* 5.14958	47.5	Pk	34.4	-14.8	67.1	-	-	74	-6.9	219	132	V
3	* 5.15	23.61	RMS	34.4	-14.8	43.21	54	-10.79	-	-	219	132	V
4	* 5.14493	25.68	RMS	34.4	-14.8	45.28	54	-8.72	-	-	219	132	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

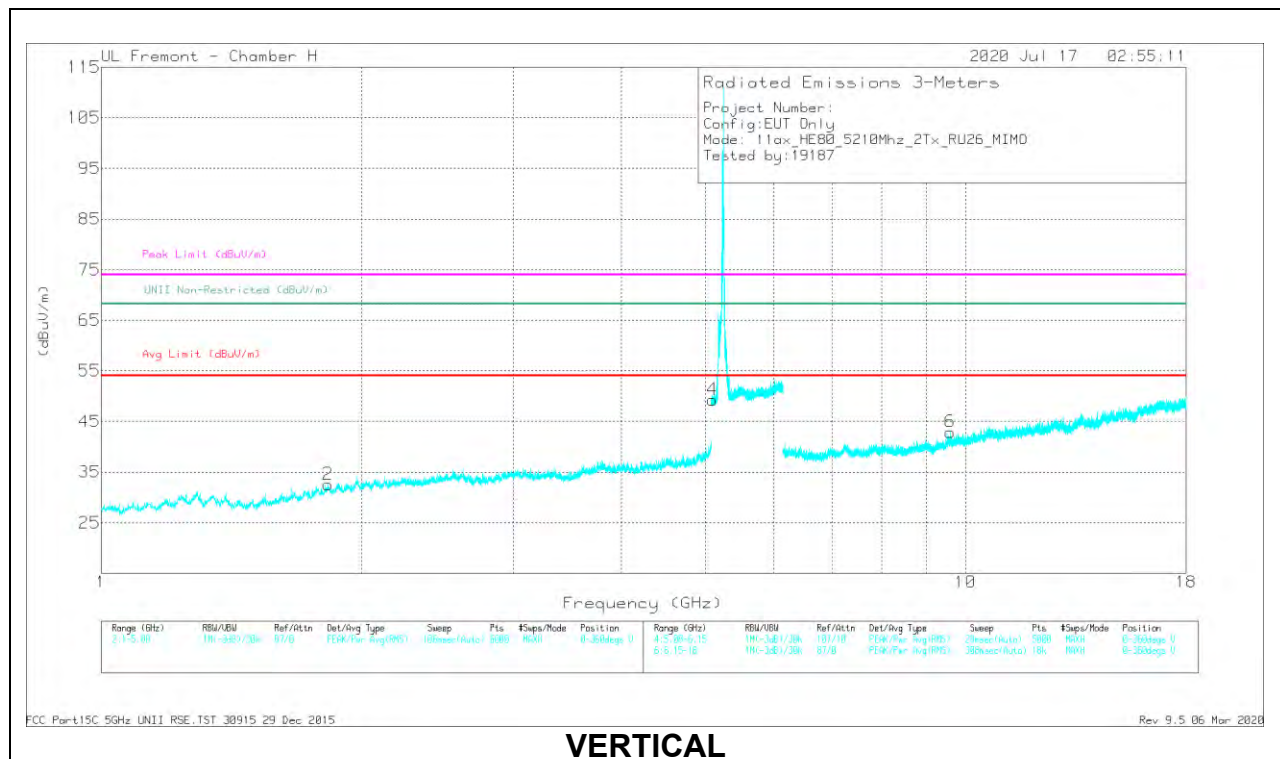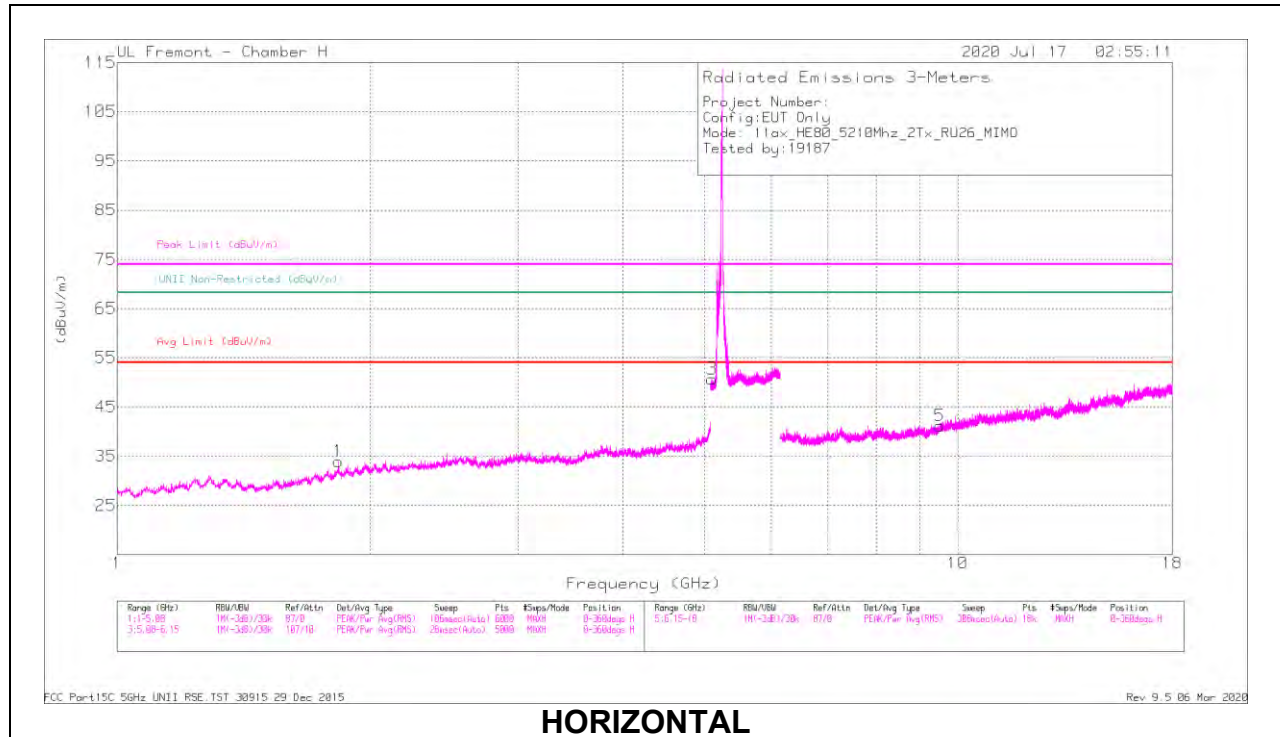

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 5.09739	43.95	PK-U	34.3	-21.3	56.95	-	-	74	-17.05	-	-	360	101	H
	* 5.09831	32.59	ADR	34.3	-21.3	45.59	54	-8.41	-	-	-	-	360	101	H
4	* 5.09669	44.61	PK-U	34.3	-21.3	57.61	-	-	74	-16.39	-	-	360	199	V
	* 5.09653	32.66	ADR	34.3	-21.3	45.66	54	-8.34	-	-	-	-	360	199	V
2	1.82983	43.46	PK-U	30.8	-34.5	39.76	-	-	-	-	68.2	-28.44	360	101	V
1	1.8331	43.86	PK-U	30.8	-34.5	40.16	-	-	-	-	68.2	-28.04	360	200	H
5	9.52036	37.53	PK-U	36.7	-25.6	48.63	-	-	-	-	68.2	-19.57	360	200	H
6	9.602	36.9	PK-U	36.8	-25.1	48.6	-	-	-	-	68.2	-19.6	360	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.7. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

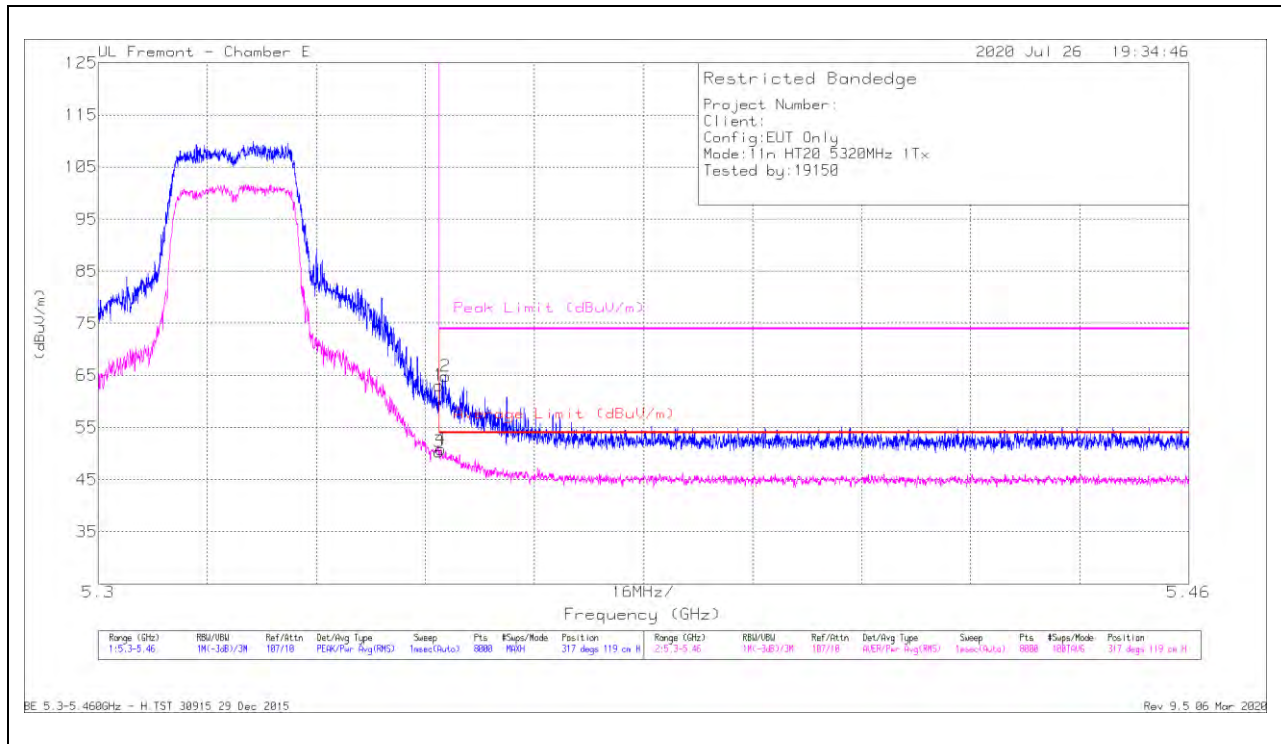

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	50.37	Pk	34.5	-21.8	0	63.07	-	-	74	-10.93	317	119	H
2	* 5.35093	52.11	Pk	34.5	-21.8	0	64.81	-	-	74	-9.19	317	119	H
3	* 5.35001	37.07	RMS	34.5	-21.8	-35	50.12	54	-3.88	-	-	317	119	H
4	* 5.35033	37.62	RMS	34.5	-21.8	-35	50.67	54	-3.33	-	-	317	119	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

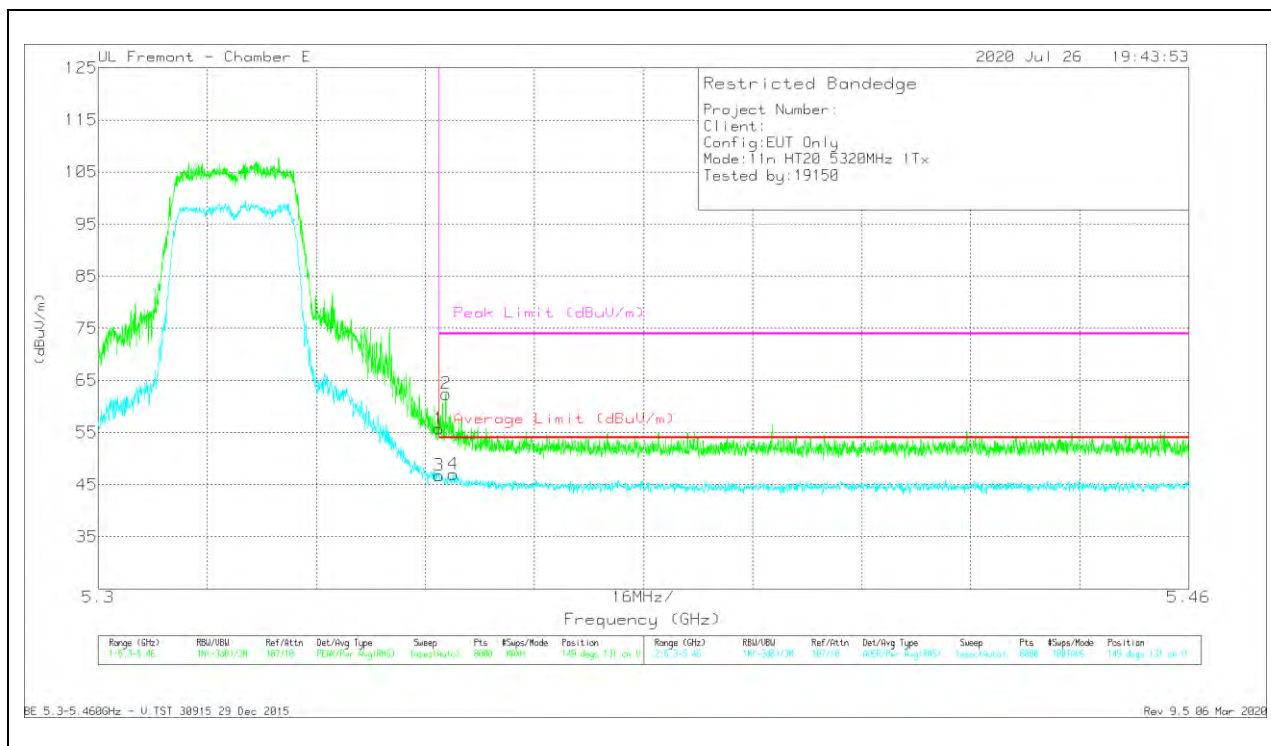

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
1	*5.35001	43.05	PK	34.5	-21.8	0	55.75	-	-	74	-18.25	149	131	V
2	*5.35101	49.71	PK	34.5	-21.8	0	62.41	-	-	74	-11.59	149	131	V
3	*5.35001	33.53	RMS	34.5	-21.8	-35	46.58	54	-7.42	-	-	149	131	V
4	*5.35213	33.7	RMS	34.5	-21.7	-35	46.85	54	-7.15	-	-	149	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

1TX ANTENNA 5

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

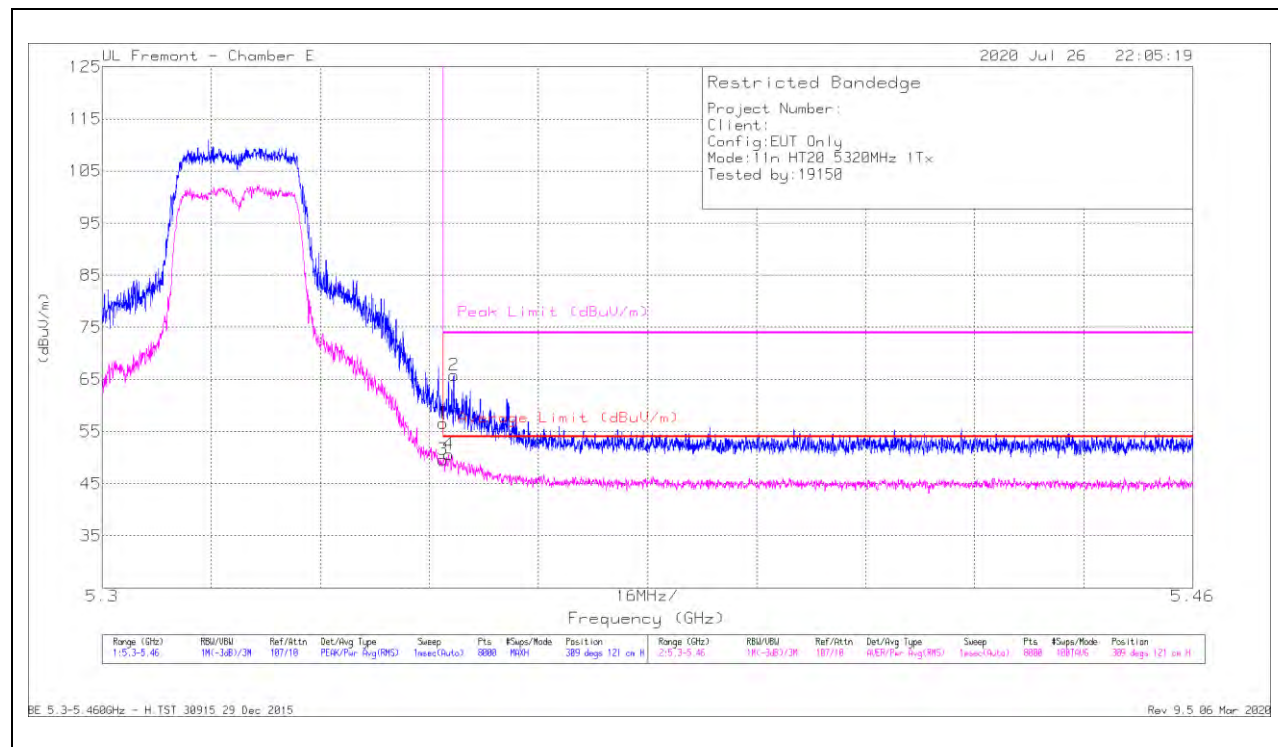

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	43.87	PK	34.5	-21.8	0	56.57	-	-	74	-17.43	309	121	H
2	* 5.35157	53.03	PK	34.5	-21.7	0	65.83	-	-	74	-8.17	309	121	H
3	* 5.35001	36.31	RMS	34.5	-21.8	-35	49.36	54	-4.64	-	-	309	121	H
4	* 5.35081	37.34	RMS	34.5	-21.8	-35	50.39	54	-3.61	-	-	309	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

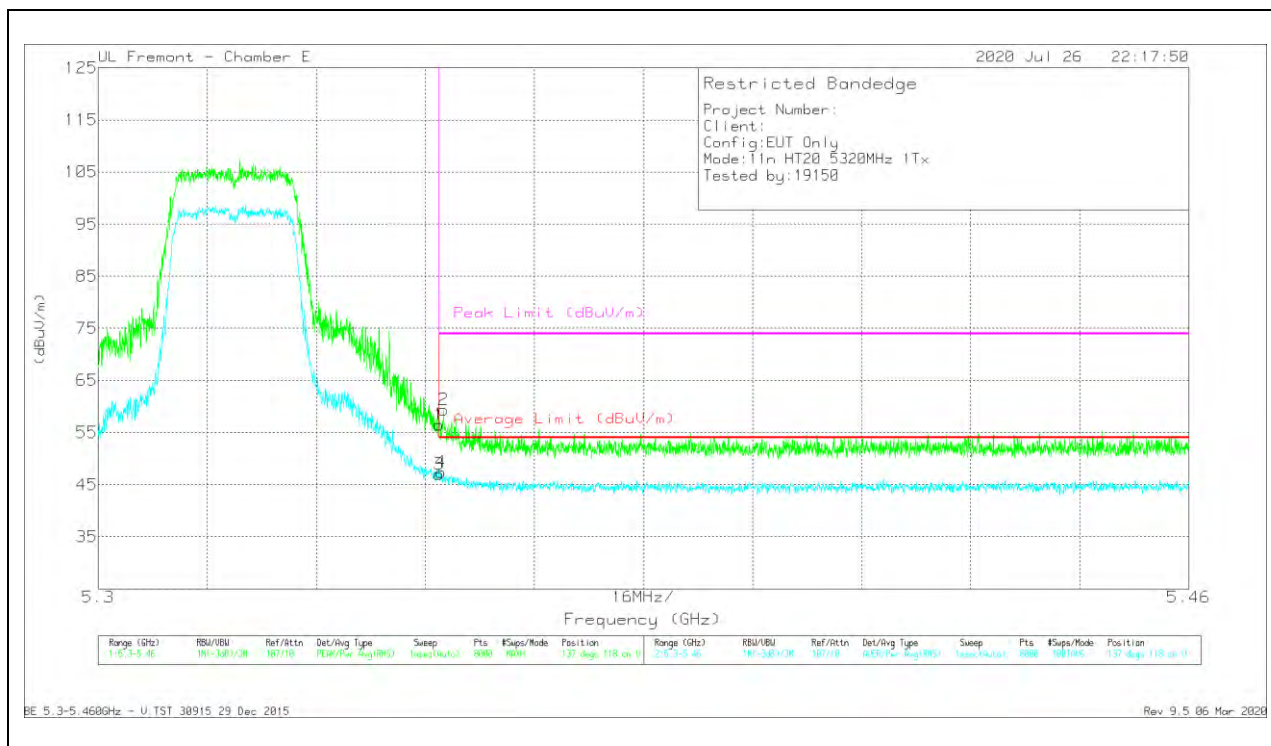


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
1	*5.35001	43.74	PK	34.5	-21.8	0	56.44	-	-	74	-17.56	137	118	V
2	*5.35067	46.85	PK	34.5	-21.8	0	59.35	-	-	74	-14.65	137	118	V
3	*5.35001	33.69	RMS	34.5	-21.8	-35	46.74	54	-7.26	-	-	137	118	V
4	*5.35027	34.11	RMS	34.5	-21.8	-35	47.16	54	-8.84	-	-	137	118	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

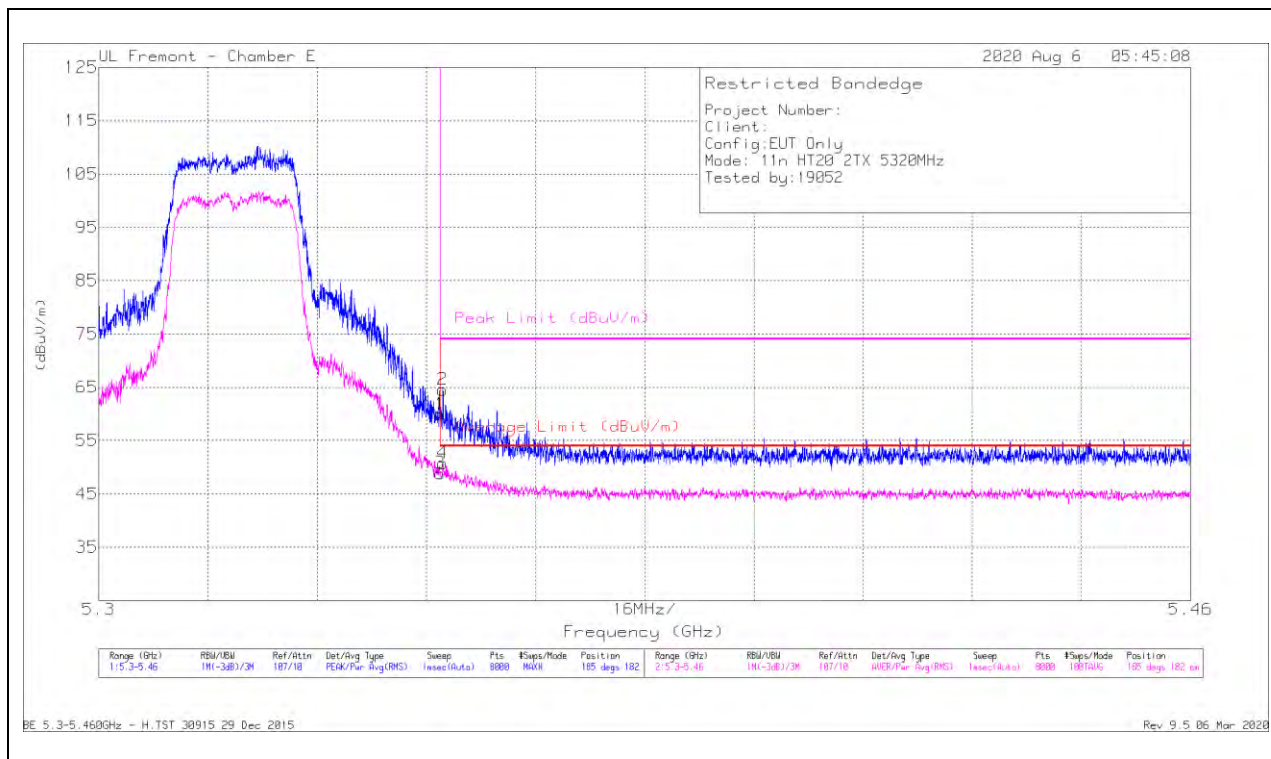

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.19	PK	34.5	-21.8	0	59.89	-	-	74	-14.11	185	182	H
2	* 5.35043	51.85	PK	34.5	-21.8	0	64.55	-	-	74	-9.45	185	182	H
3	* 5.35001	35.6	RMS	34.5	-21.8	-58	48.88	54	-5.12	-	-	185	182	H
4	* 5.35037	37.46	RMS	34.5	-21.8	-58	50.74	54	-3.26	-	-	185	182	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT


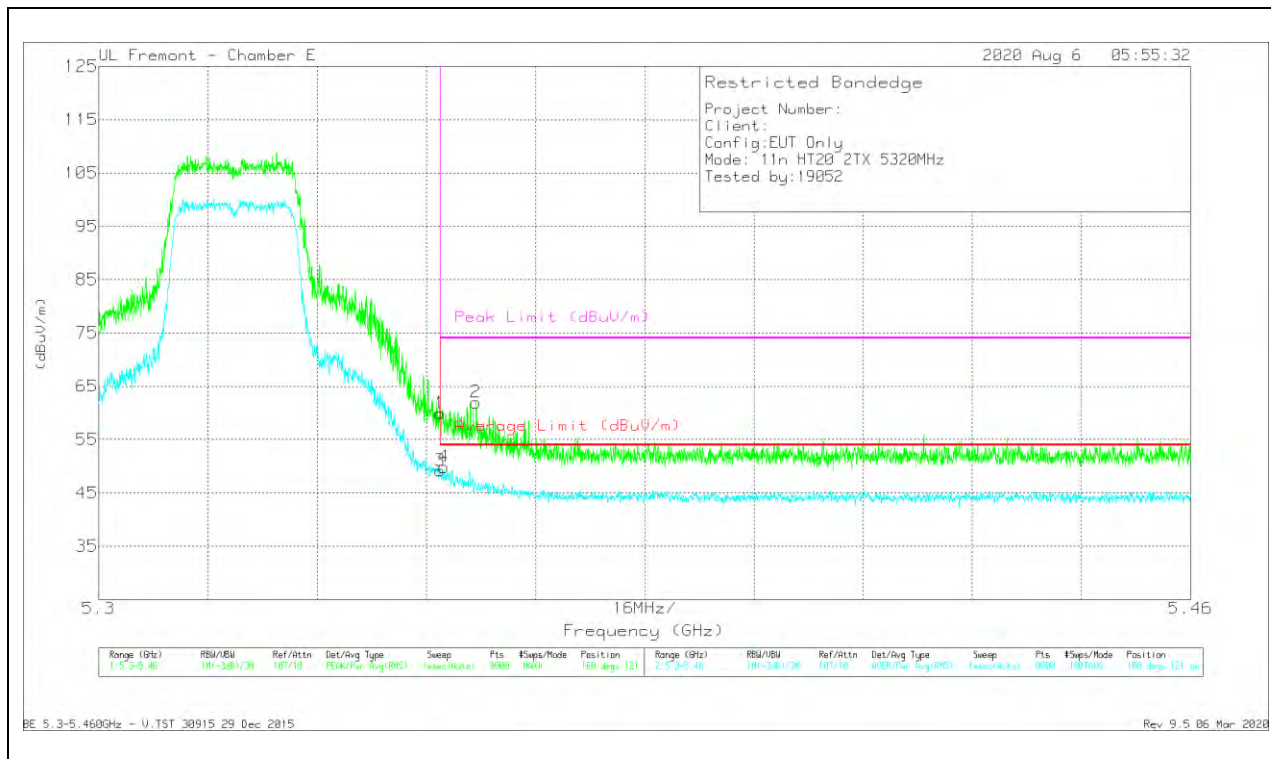


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.22	Pk	34.5	-21.8	0	59.92	-	-	74	-14.08	160	121	V
2	* 5.35527	49.28	Pk	34.5	-21.8	0	61.98	-	-	74	-12.02	160	121	V
3	* 5.35001	35.9	RMS	34.5	-21.8	-58	49.19	54	-4.82	-	-	160	121	V
4	* 5.35001	36.6	RMS	34.5	-21.8	-58	49.88	54	-4.12	-	-	160	121	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

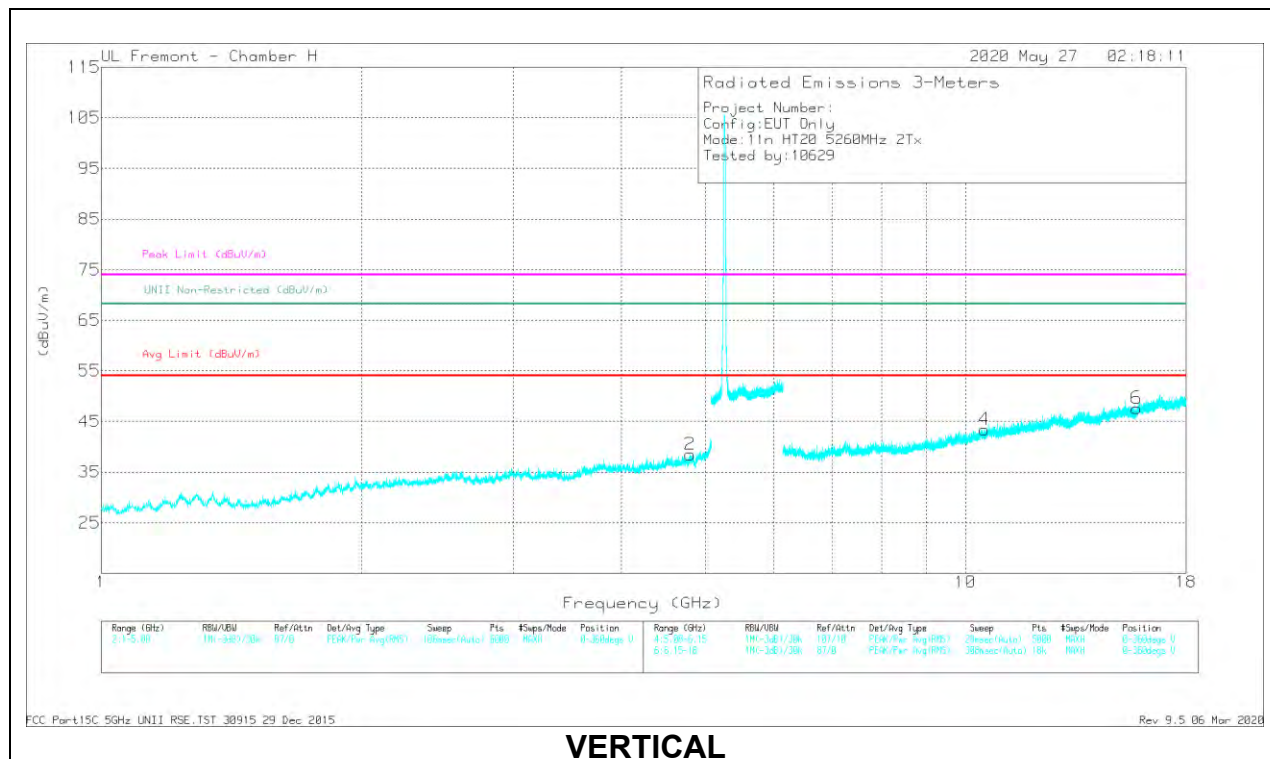
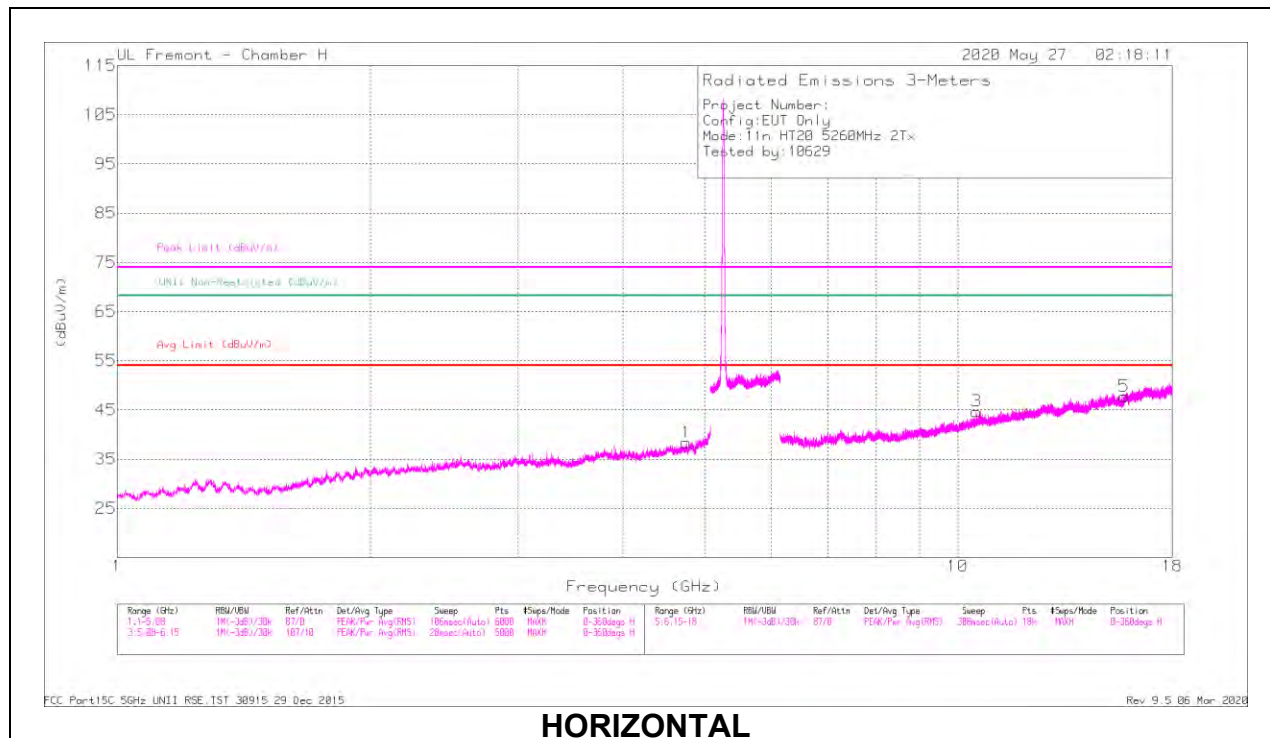


RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.75307	42.1	PK-U	34.2	-30.7	45.6	-	-	74	-28.4	-	-	212	331	H
	* 4.75282	30.63	ADR	34.2	-30.7	34.13	54	-19.87	-	-	-	-	212	331	H
2	* 4.79993	42.11	PK-U	34.4	-30.9	45.61	-	-	74	-28.39	-	-	344	131	V
	* 4.80081	30.9	ADR	34.4	-30.9	34.4	54	-19.6	-	-	-	-	344	131	V
5	* 15.76997	36.09	PK-U	40.7	-23.2	53.59	-	-	74	-20.41	-	-	57	189	H
	* 15.77067	25.53	ADR	40.7	-23.2	43.03	54	-10.97	-	-	-	-	57	189	H
6	* 15.7809	37.1	PK-U	40.9	-23.1	54.9	-	-	74	-19.1	-	-	65	201	V
	* 15.76865	26	ADR	40.8	-23.2	43.6	54	-10.4	-	-	-	-	65	201	V
4	10.52393	38.33	PK-U	37.5	-24.6	51.23	-	-	-	-	68.2	-16.97	46	263	V
3	10.52531	39.92	PK-U	37.5	-24.5	52.92	-	-	-	-	68.2	-15.28	62	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK-U - U-NII: Maximum Peak
ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

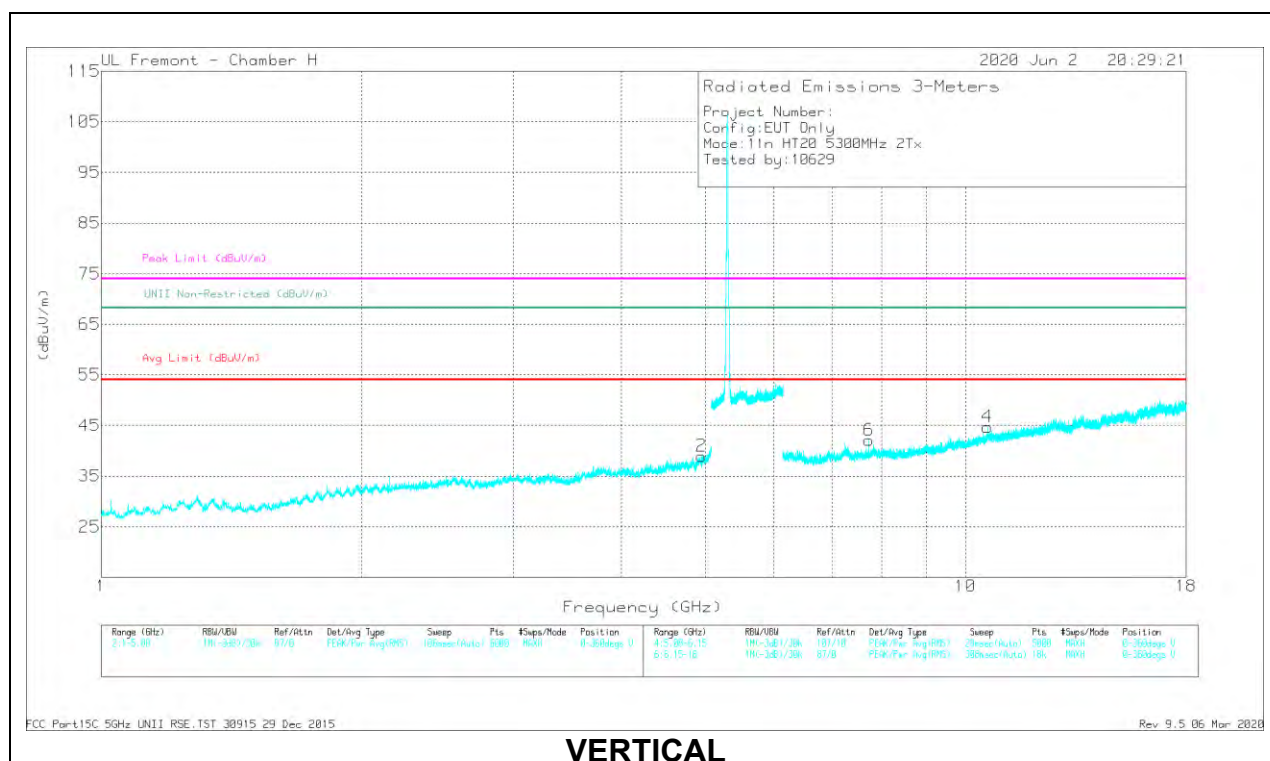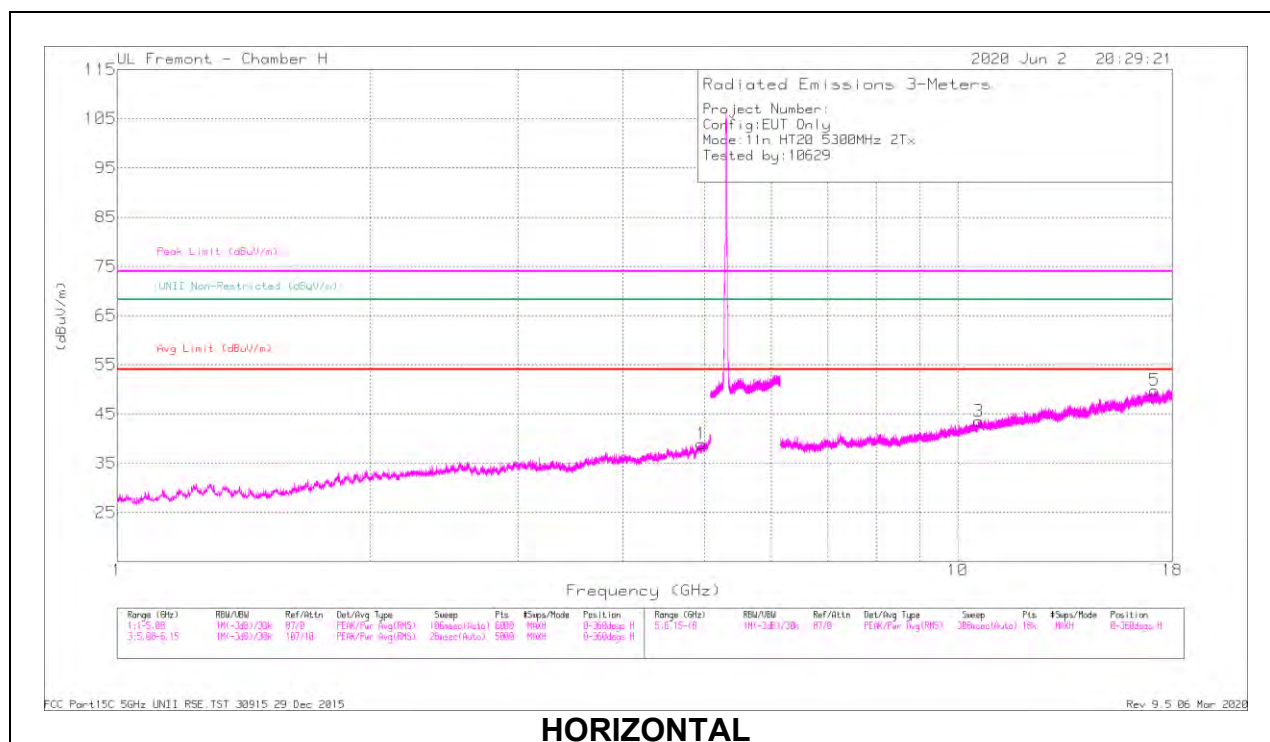

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.95331	40.6	PK-U	34.2	-30.1	44.7	-	-	74	-29.3	-	-	19	350	H
	* 4.95545	29.73	ADR	34.2	-30.1	33.63	54	-20.17	-	-	-	-	19	350	H
2	* 4.9507	41.1	PK-U	34.2	-30.2	45.1	-	-	74	-28.9	-	-	229	251	V
	* 4.95055	29.98	ADR	34.2	-30.2	33.98	54	-20.02	-	-	-	-	229	251	V
3	* 10.6075	37.86	PK-U	37.6	-24.4	51.06	-	-	74	-22.94	-	-	155	213	H
	* 10.60605	26.38	ADR	37.6	-24.4	39.58	54	-14.42	-	-	-	-	155	213	H
4	* 10.60608	37.72	PK-U	37.6	-24.4	50.92	-	-	74	-23.08	-	-	57	336	V
	* 10.60427	26.35	ADR	37.6	-24.4	39.55	54	-14.45	-	-	-	-	57	336	V
6	* 7.7152	38.71	PK-U	36.2	-28.1	46.81	-	-	74	-27.19	-	-	204	135	V
	* 7.71662	27.36	ADR	36.2	-28.1	35.46	54	-18.54	-	-	-	-	204	135	V
5	17.13856	36.37	PK-U	41.8	-21.7	56.47	-	-	-	-	68.2	-11.73	71	281	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

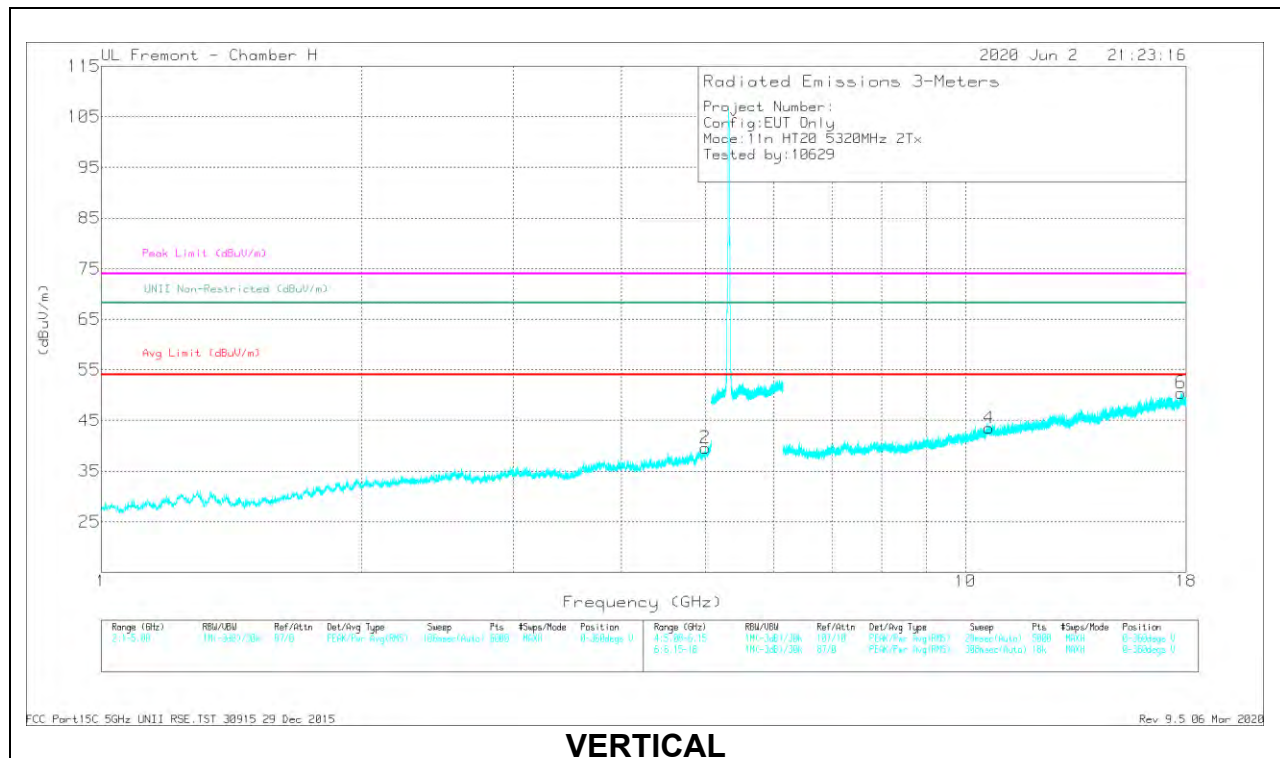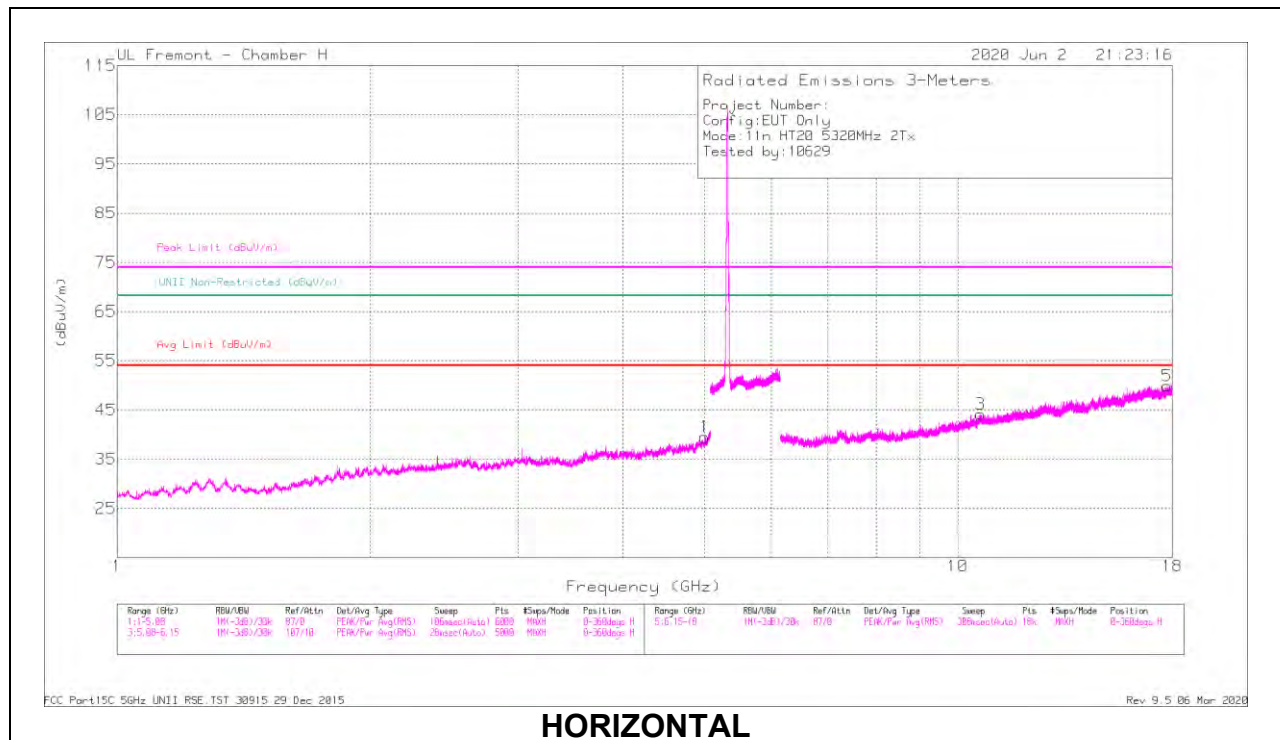

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fittr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.00266	41.26	PK-U	34.3	-29.3	46.26	-	-	74	-27.74	250	290	H
	* 5.00258	29.88	ADR	34.3	-29.3	34.88	54	-19.12	-	-	250	290	H
2	* 5.00118	41.89	PK-U	34.3	-29.4	46.79	-	-	74	-27.21	147	342	V
	* 4.99912	29.82	ADR	34.2	-29.4	34.62	54	-19.38	-	-	147	342	V
3	* 10.64591	37.83	PK-U	37.6	-24.1	51.33	-	-	74	-22.67	34	190	H
	* 10.6348	26.31	ADR	37.6	-24	39.91	54	-14.09	-	-	34	190	H
5	* 17.74872	36.3	PK-U	41.4	-20.7	57	-	-	74	-17	129	246	H
	* 17.74779	25.3	ADR	41.4	-20.7	46	54	-8	-	-	129	246	H
4	* 10.63403	37.63	PK-U	37.6	-24	51.23	-	-	74	-22.77	60	149	V
	* 10.64382	26.18	ADR	37.6	-24	39.78	54	-14.22	-	-	60	149	V
6	* 17.74499	36.14	PK-U	41.4	-20.8	56.74	-	-	74	-17.26	337	309	V
	* 17.74705	25.43	ADR	41.4	-20.7	46.13	54	-7.87	-	-	337	309	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.8. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

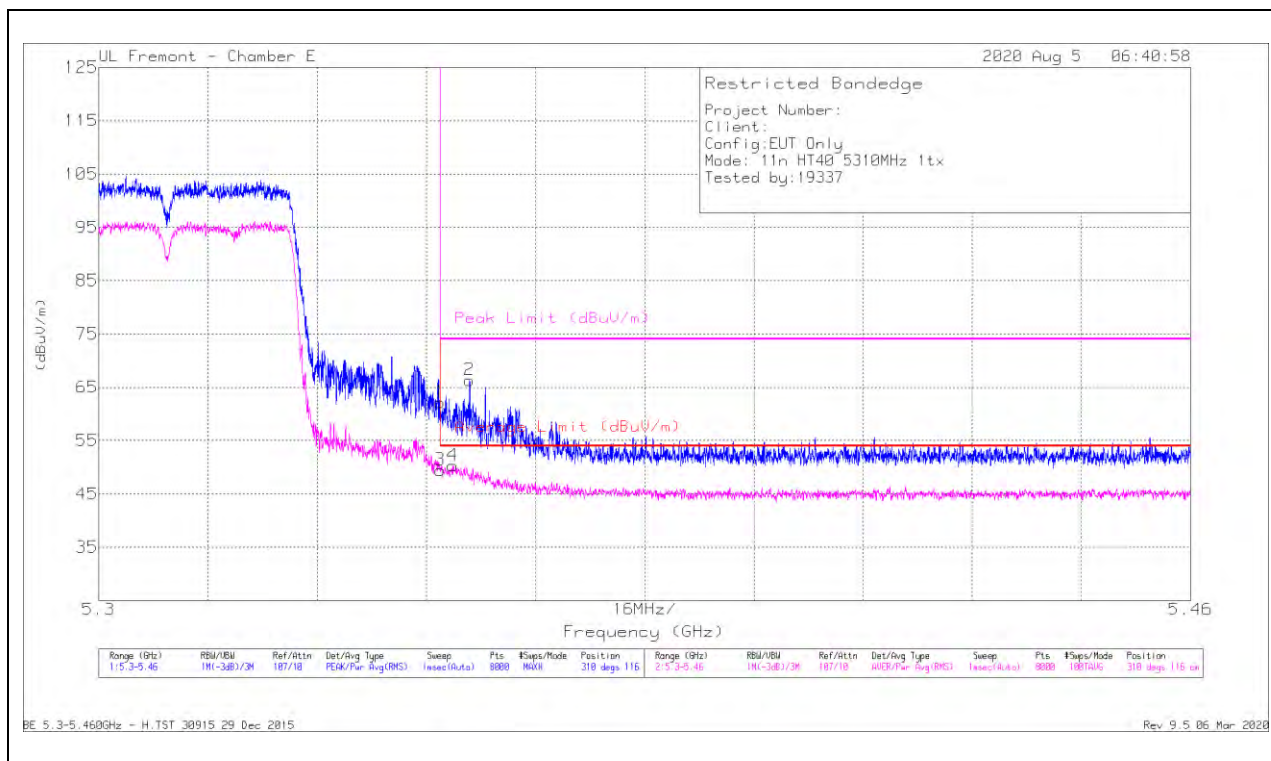

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T112 (dBm)	Amp/CS/Filt/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35001	49.48	Pk	34.5	-21.8	0	62.18	-	-	74	-11.82	310	116	H
3	* 5.35001	36.14	RMS	34.5	-21.8	.65	49.49	54	-4.51	-	-	310	116	H
4	* 5.35187	36.9	RMS	34.5	-21.7	.65	50.35	54	-3.65	-	-	310	116	H
2	* 5.35433	53.56	Pk	34.5	-21.7	0	66.36	-	-	74	-7.64	310	116	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

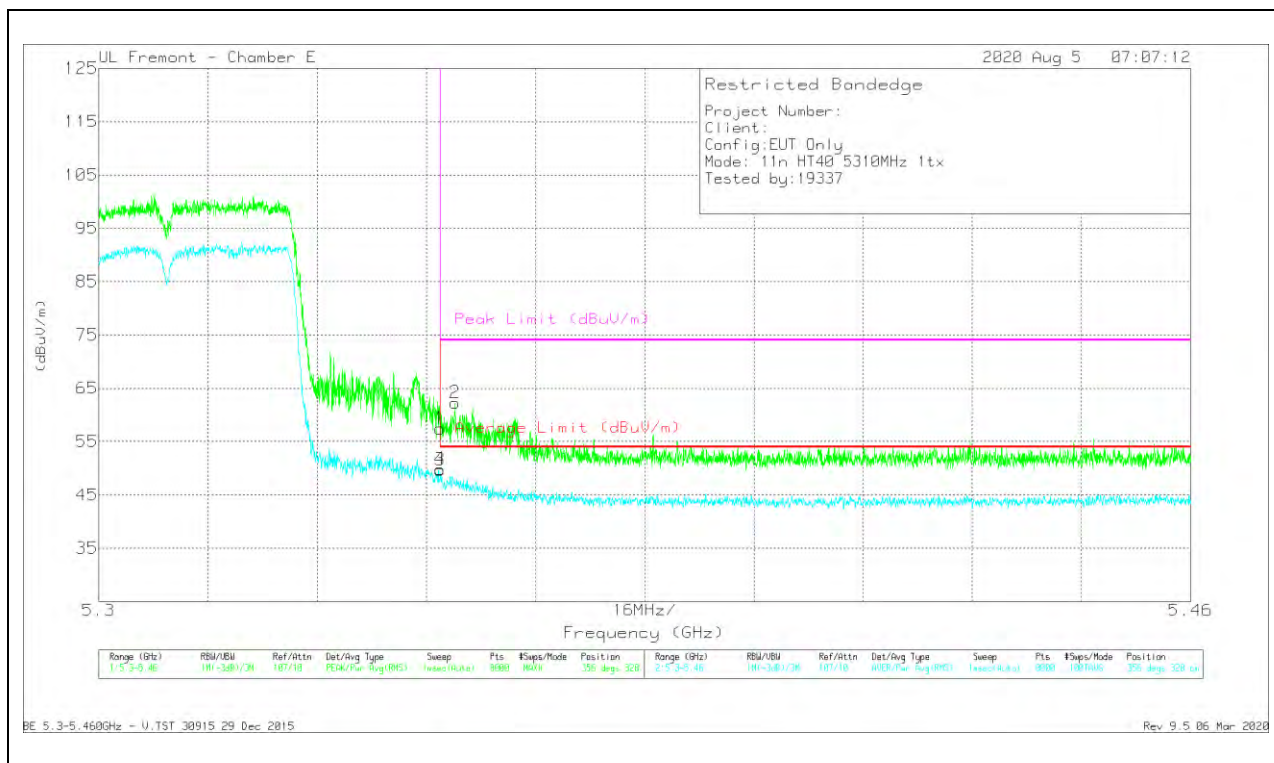

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 1712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (ft)	Height (m)	Polarity
1	* 5.35001	44.76	PK	34.5	-21.8	0	57.46	-	-	74	-16.54	356	328	V
3	* 5.35001	36.38	RMS	34.5	-21.8	.65	49.73	54	-4.27	-	-	356	328	V
4	* 5.35003	36.49	RMS	34.5	-21.8	.65	49.84	54	-4.16	-	-	356	328	V
2	* 5.35219	49.47	PK	34.5	-21.7	0	62.27	-	-	74	-11.73	356	328	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

1TX ANTENNA 5

BANEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

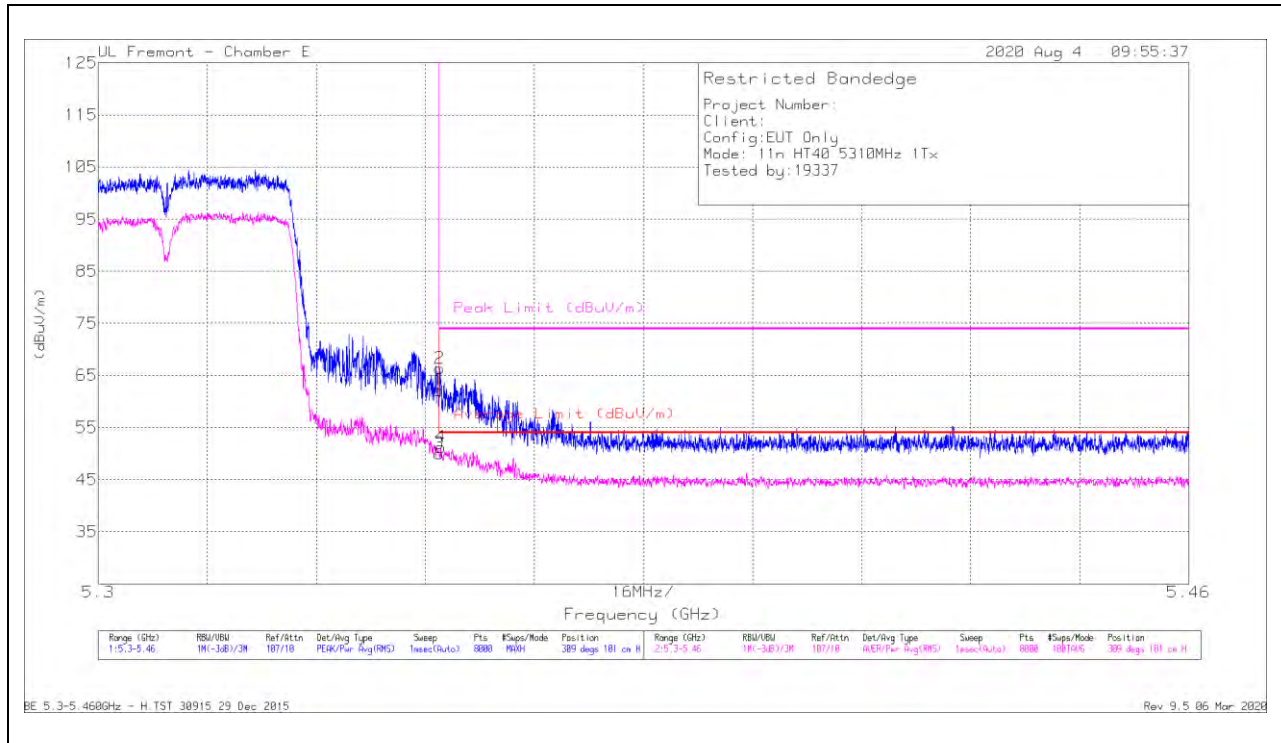

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35001	49.46	PK	34.5	-21.8	0	62.16	-	-	74	-11.84	309	101	H
2	* 5.35011	53.58	PK	34.5	-21.8	0	66.28	-	-	74	-7.72	309	101	H
3	* 5.35001	36.65	RMS	34.5	-21.8	.65	50.00	54	-4.00	-	-	309	101	H
4	* 5.35025	37.98	RMS	34.5	-21.8	.65	51.33	54	-2.67	-	-	309	101	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

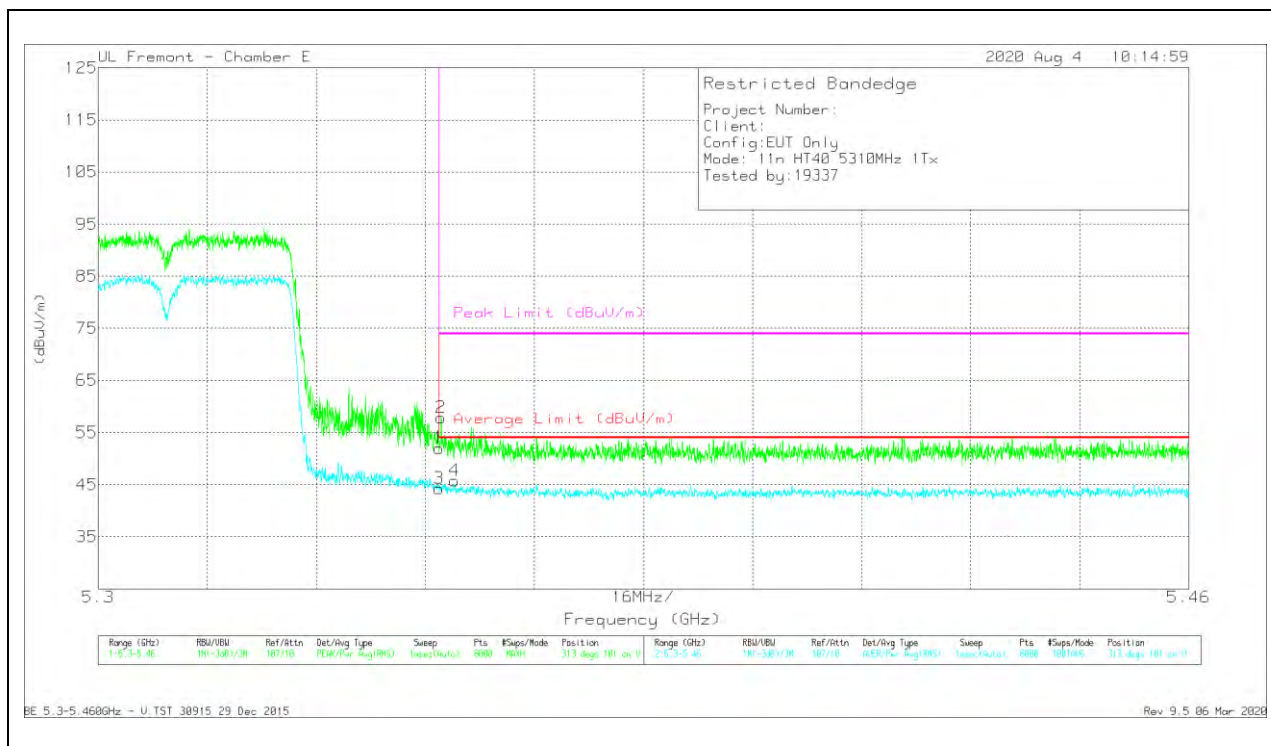


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Feet)	Height (m)	Polarity
1	* 5.35001	39.28	Pk	34.5	-21.8	0	51.98	-	-	74	-22.02	313	101	V
2	* 5.35033	45.2	Pk	34.5	-21.8	0	57.9	-	-	74	-16.1	313	101	V
3	* 5.35001	30.97	RMS	34.5	-21.8	.65	44.32	54	-9.68	-	-	313	101	V
4	* 5.35229	32.4	RMS	34.5	-21.7	.65	45.85	54	-8.15	-	-	313	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

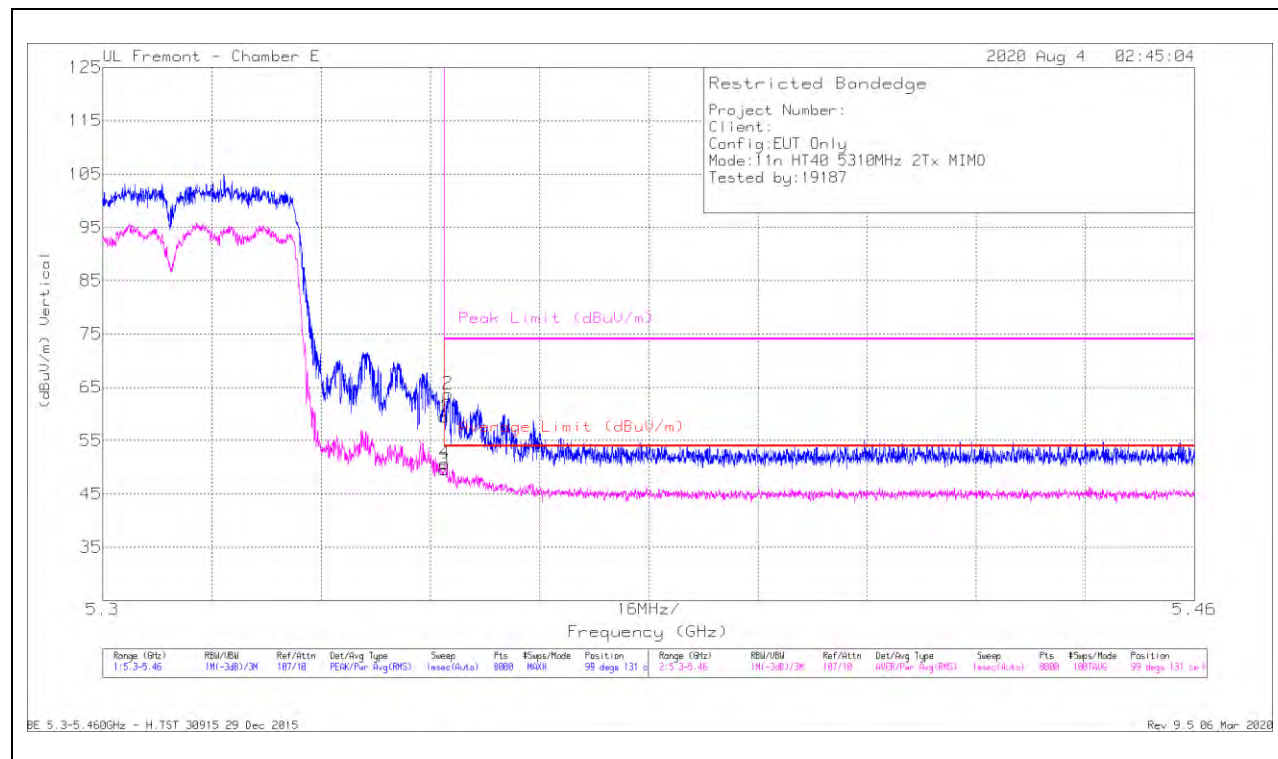

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 5.35001	46.76	PK	34.5	-21.8	0	59.46	-	-	74	-14.54	99	131	H
2	* 5.35061	51.08	PK	34.5	-21.8	0	63.78	-	-	74	-10.22	99	131	H
3	* 5.35001	35.94	RMS	34.5	-21.8	.88	49.52	54	-4.48	-	-	99	131	H
4	* 5.35011	37.11	RMS	34.5	-21.8	.88	50.69	54	-3.31	-	-	99	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT


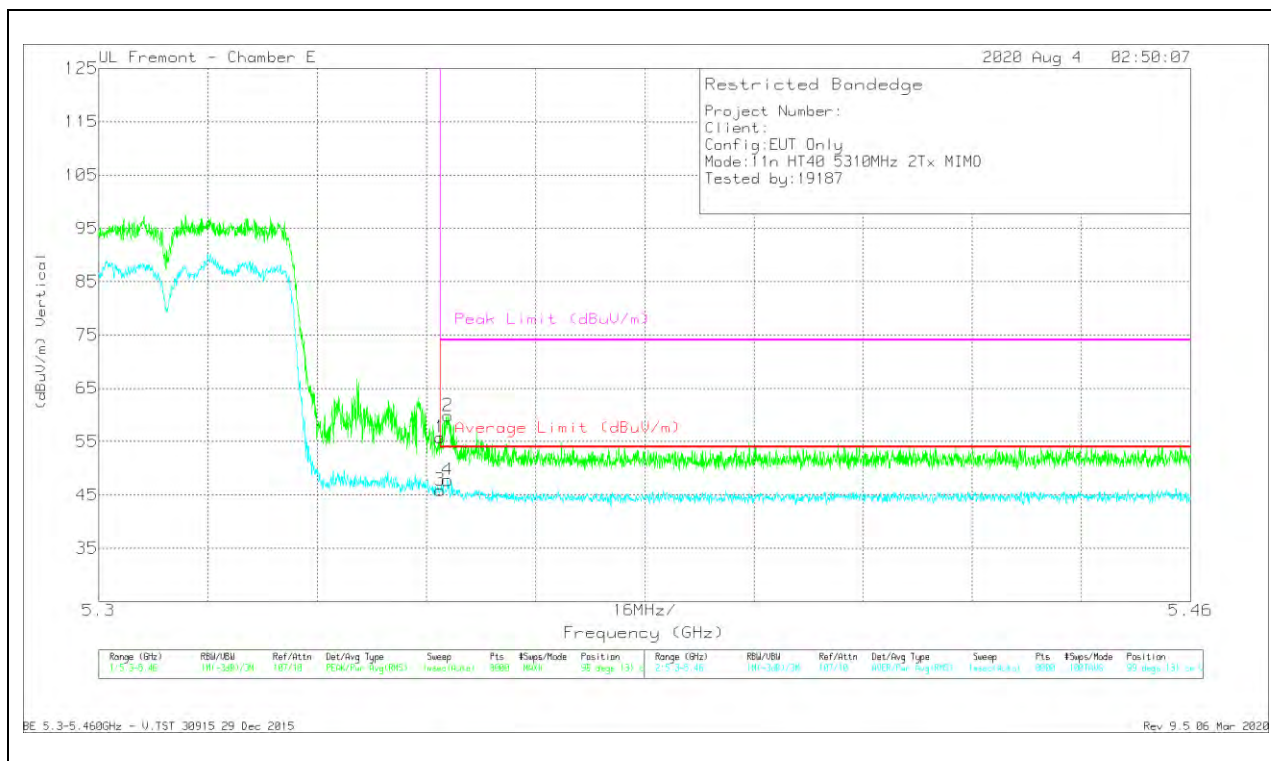


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	43.09	Pk	34.5	-21.8	0	55.79	-	-	74	-18.21	99	131	V
2	* 5.35117	47.14	Pk	34.5	-21.8	0	59.84	-	-	74	-14.16	99	131	V
3	* 5.35001	32.34	RMS	34.5	-21.8	88	45.92	54	-8.08	-	-	99	131	V
4	* 5.35111	34.21	RMS	34.5	-21.8	88	47.79	54	-6.21	-	-	99	131	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

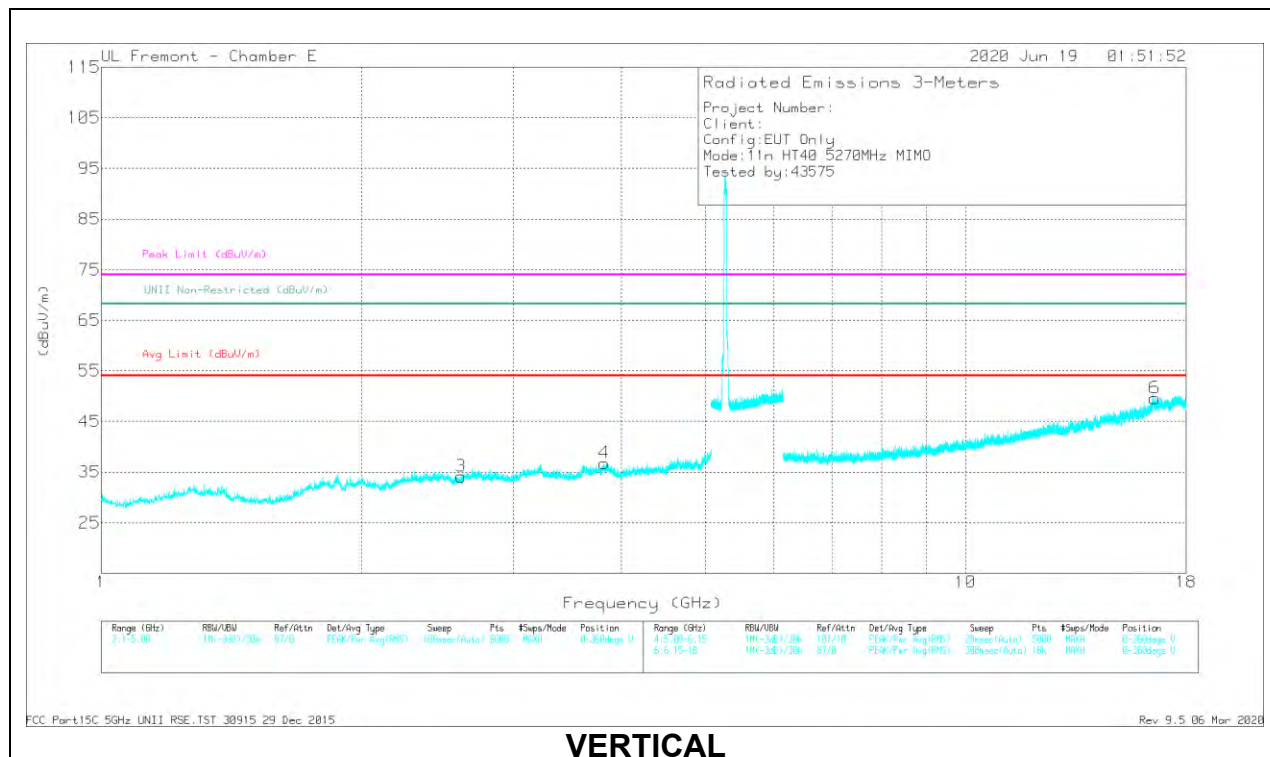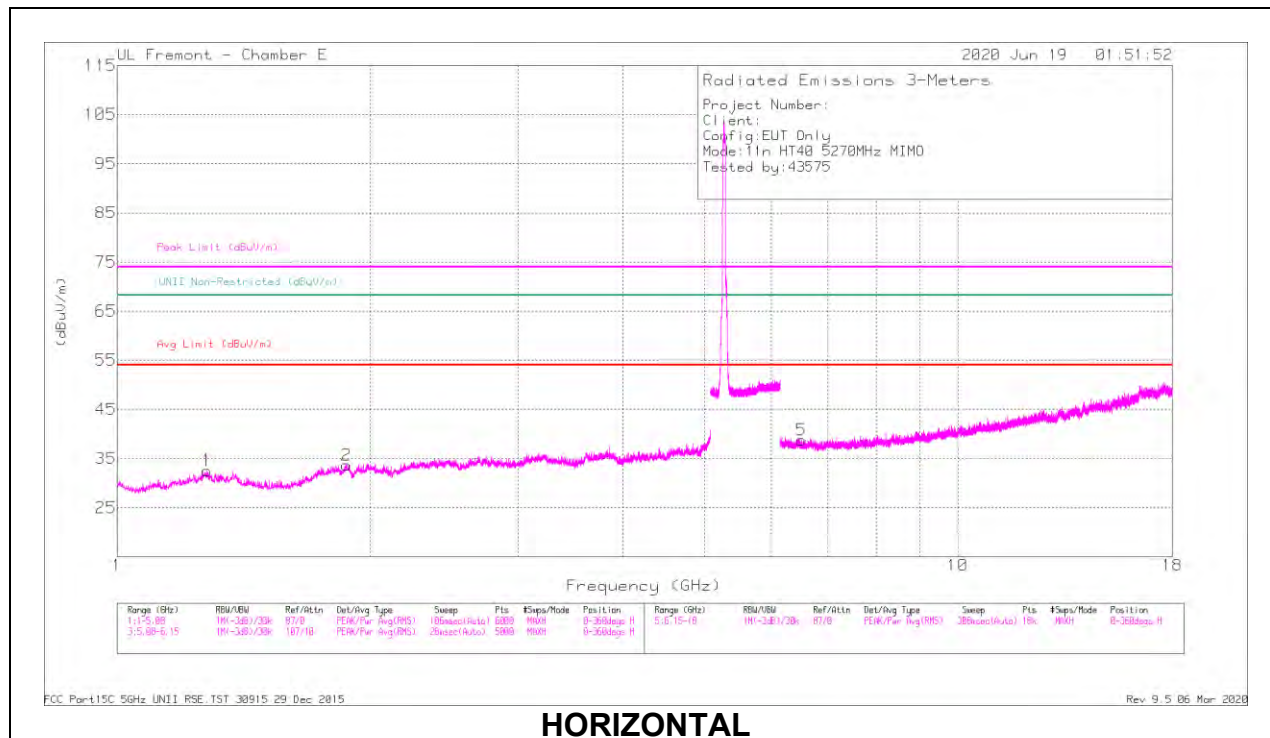

RADIATED EMISSIONS



Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.27955	45.07	PK-U	29.7	-34.9		39.87	-	-	74	-34.13	-	-	0	101	H
	* 1.28033	32.93	ADR	29.7	-34.9	.17	27.90	54	-26.10	-	-	-	-	0	101	H
4	* 3.81984	42.14	PK-U	33.6	-32.6		43.14	-	-	74	-30.86	-	-	0	200	V
	* 3.81994	31.08	ADR	33.6	-32.6	.17	32.25	54	-21.75	-	-	-	-	0	200	V
2	1.87252	45.13	PK-U	31.2	-35.1		41.23	-	-	-	-	68.2	-26.97	0	101	H
3	2.60578	45.33	PK-U	32.5	-35.8		42.03	-	-	-	-	68.2	-26.17	0	101	V
5	6.5131	39.02	PK-U	35.7	-29.1		45.62	-	-	-	-	68.2	-22.58	0	101	H
6	16.55788	35.78	PK-U	41.6	-20.2		57.18	-	-	-	-	68.2	-11.02	0	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

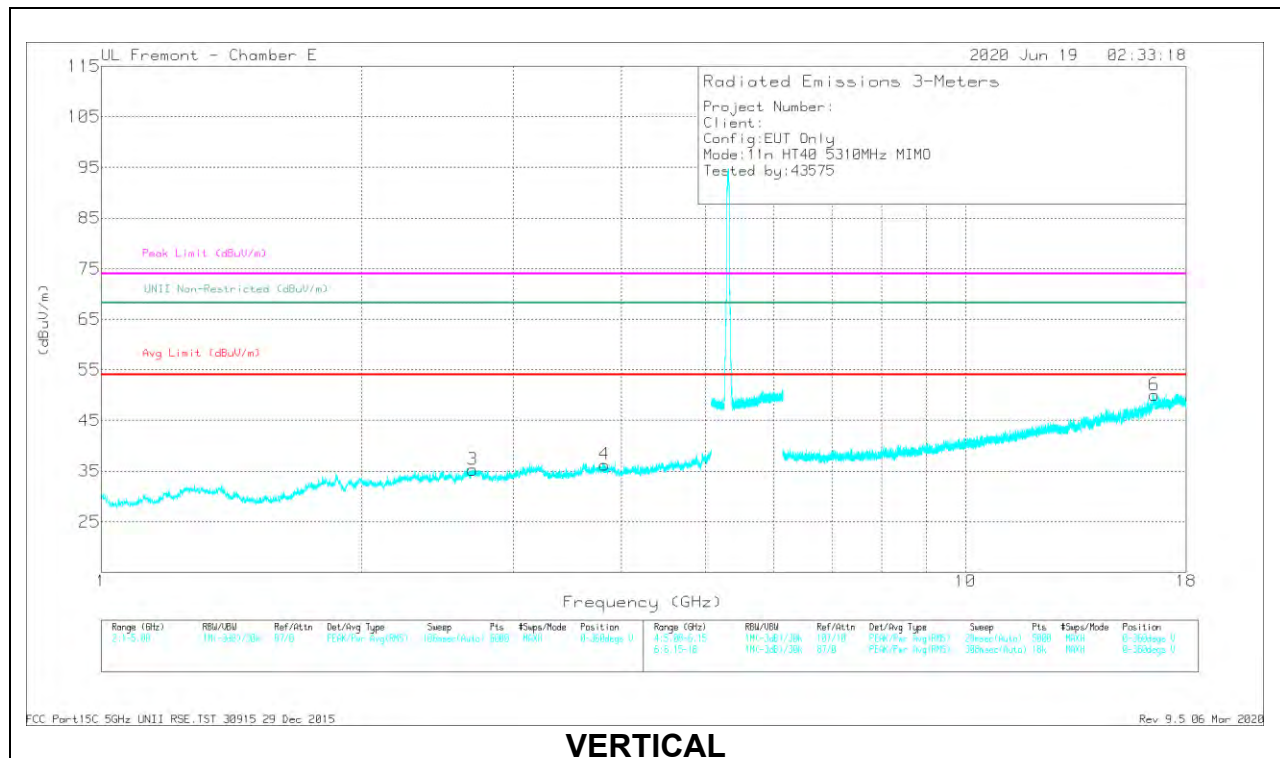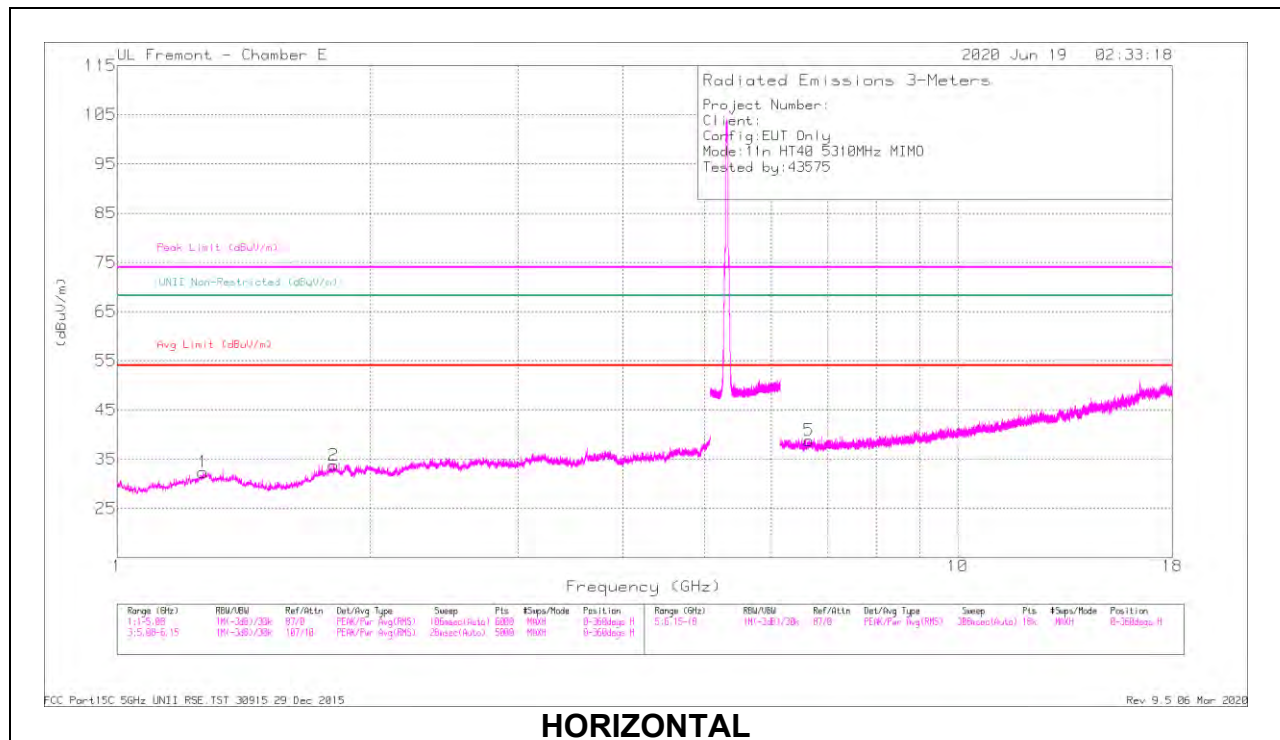

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26341	44.65	PK-U	29.4	-34.8		39.25	-	-	74	-34.75	-	-	0	101	H
	* 1.26357	32.84	ADR	29.4	-34.8	.17	27.61	54	-26.39	-	-	-	-	0	101	H
3	* 3.82583	42.82	PK-U	33.6	-32.7		43.72	-	-	74	-30.28	-	-	0	200	V
	* 3.82572	31.5	ADR	33.6	-32.7	.17	32.54	54	-21.43	-	-	-	-	0	200	V
4	* 2.69006	46.07	PK-U	32.6	-35.6		43.07	-	-	74	-30.93	-	-	0	101	V
	* 2.69011	34.16	ADR	32.6	-35.6	.17	31.33	54	-22.67	-	-	-	-	0	101	V
2	1.81022	45	PK-U	30.6	-35		40.6	-	-	-	-	68.2	-27.6	0	200	H
5	6.65633	38.43	PK-U	35.7	-28.6		45.53	-	-	-	-	68.2	-22.67	0	200	H
6	16.53437	34.8	PK-U	41.5	-19.6		56.7	-	-	-	-	68.2	-11.5	0	200	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.9. TX ABOVE 1 GHz 802.11ac VHT80 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

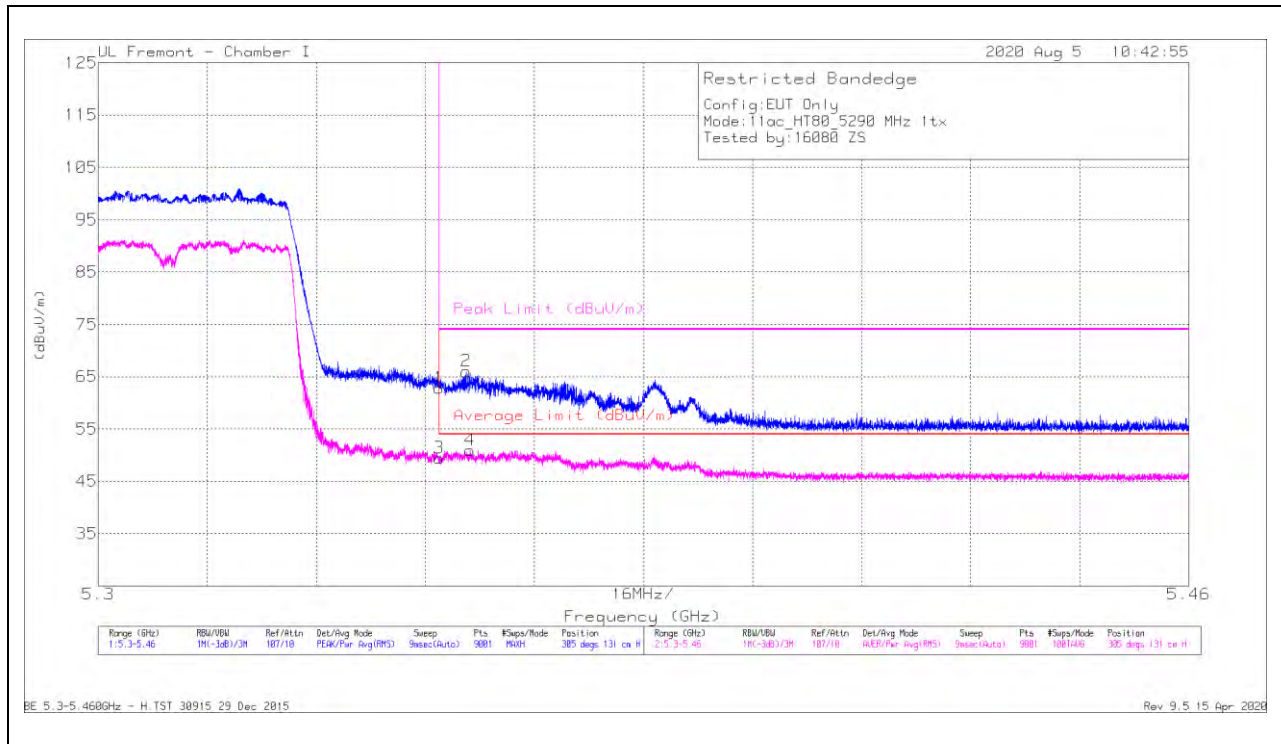

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T602 (dBm)	Amp/CalFiltInPad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	* 5.35001	42.25	PK	34.6	-14	0	62.85	-	-	74	-11.15	305	131	H
2	* 5.35397	45.4	PK	34.6	-14	0	66	-	-	74	-8	305	131	H
3	* 5.35001	27.61	RMS	34.6	-14	1.06	49.27	54	-4.73	-	-	305	131	H
4	* 5.35453	29.1	RMS	34.6	-14	1.06	50.76	54	-3.24	-	-	305	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

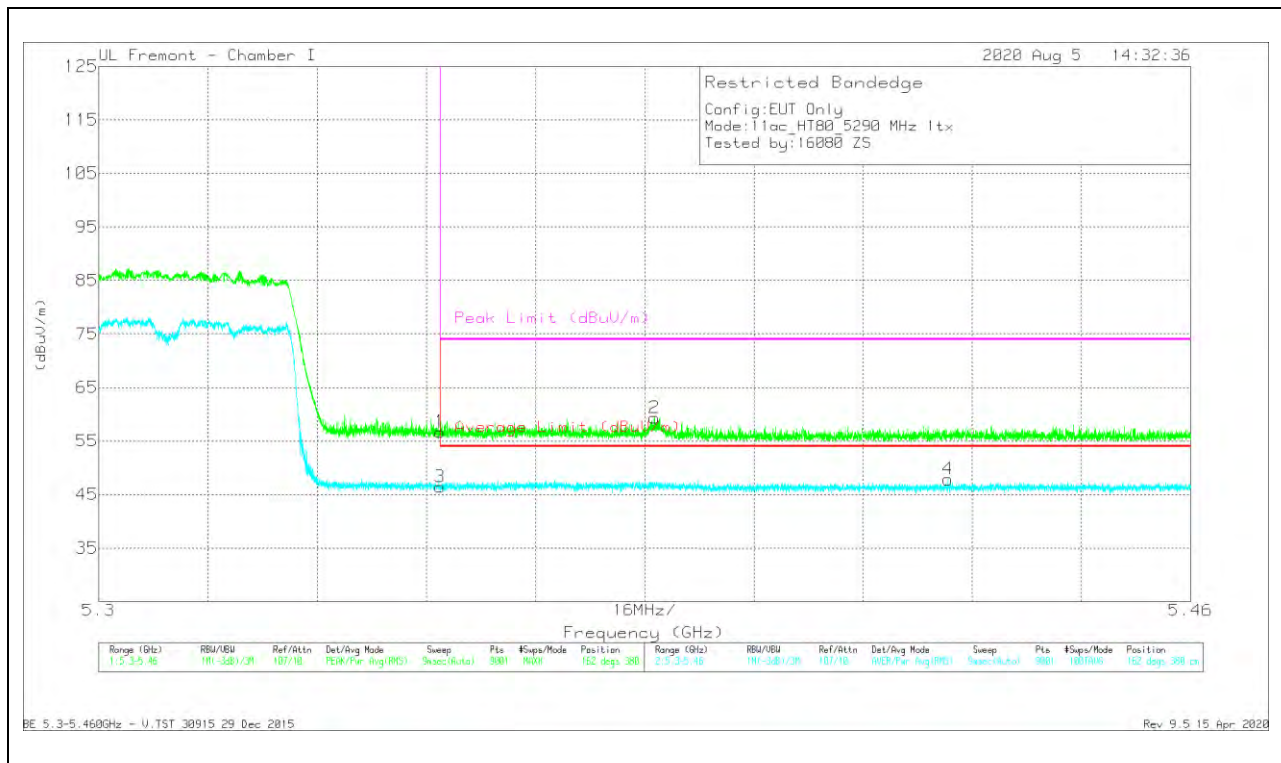


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T862 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (deg)	Height (cm)	Polarity
1	* 5.35001	36.09	Pk	34.6	-14	0	56.69	-	-	74	-17.31	162	380	V
2	* 5.38142	36.53	Pk	34.7	-13.9	0	59.33	-	-	74	-14.67	162	380	V
3	* 5.35001	24.55	RMS	34.6	-14	1.06	46.21	54	-7.79	-	-	162	380	V
4	* 5.42445	25.6	RMS	34.8	-13.8	1.06	47.66	54	-6.34	-	-	162	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

1TX ANTENNA 5

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

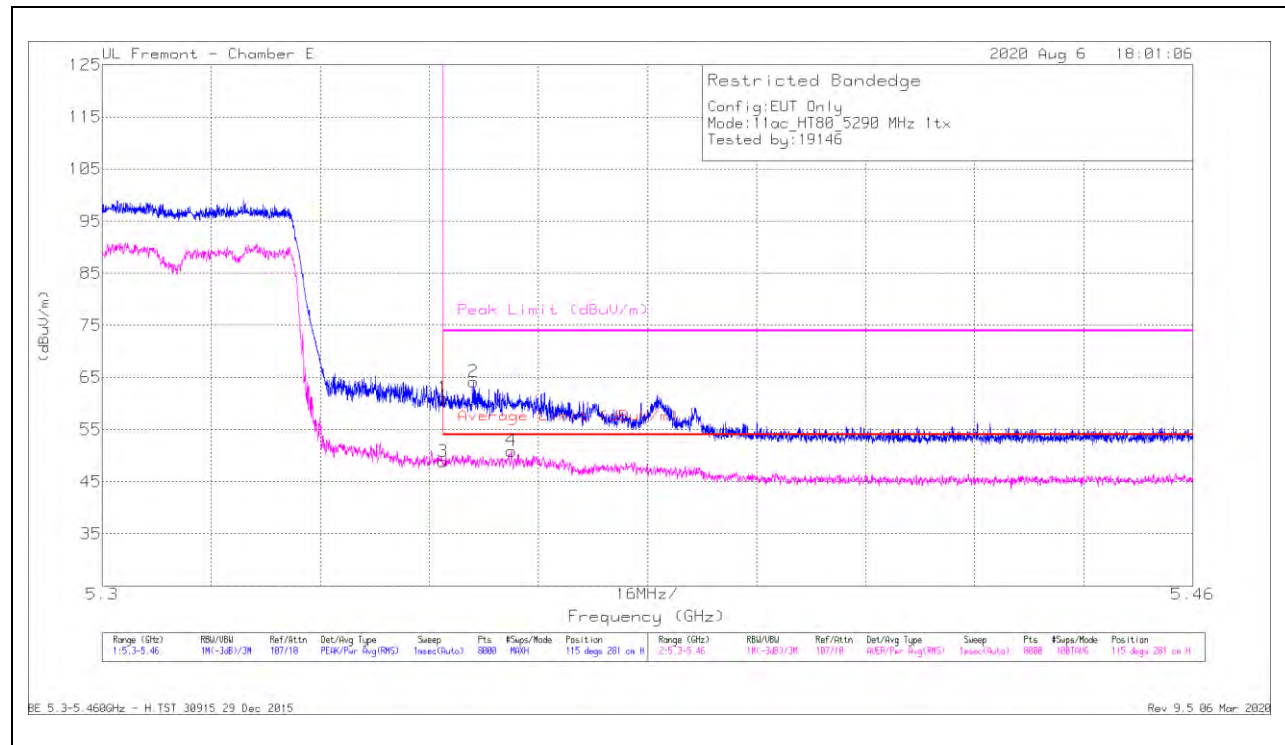

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degree)	Height (cm)	Polarity
1	* 5.35001	48.34	PK	34.5	-21.8	0	61.04	-	-	74	-12.96	115	281	H
2	* 5.35447	51.47	PK	34.5	-21.7	0	64.27	-	-	74	-9.73	115	281	H
3	* 5.35001	34.97	RMS	34.5	-21.8	1.06	48.73	54	-5.27	-	-	115	281	H
4	* 5.36003	36.99	RMS	34.5	-21.8	1.06	50.75	54	-3.25	-	-	115	281	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

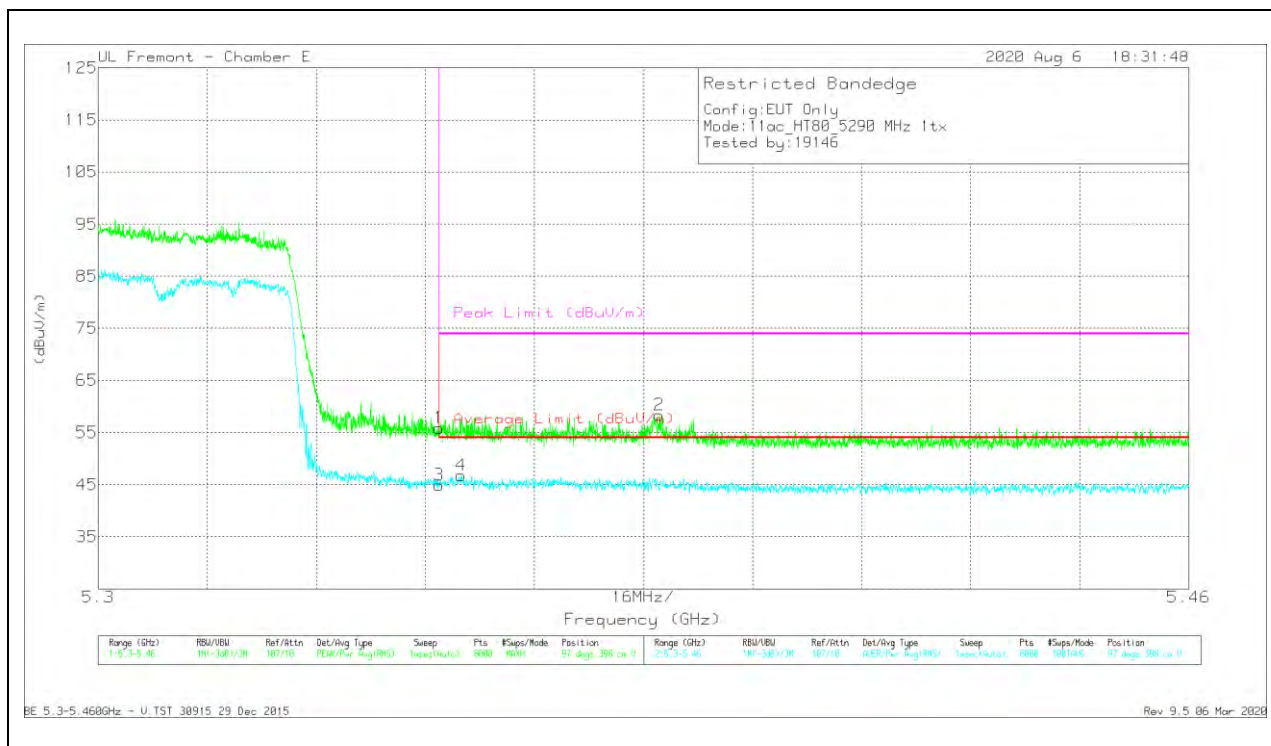

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	43.14	Pk	34.5	-21.8		55.84	-	-	74	-18.16	97	398	V
3	* 5.35001	32.15	RMS	34.5	-21.8	1.06	45.91	54	-8.09	-	-	97	398	V
4	* 5.35327	33.97	RMS	34.5	-21.7	1.06	47.83	54	-6.17	-	-	97	398	V
2	* 5.38235	45.59	Pk	34.5	-21.7		58.39	-	-	74	-15.61	97	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 CDD MODE

BANDEDGE (MID CHANNEL)


HORIZONTAL RESULT

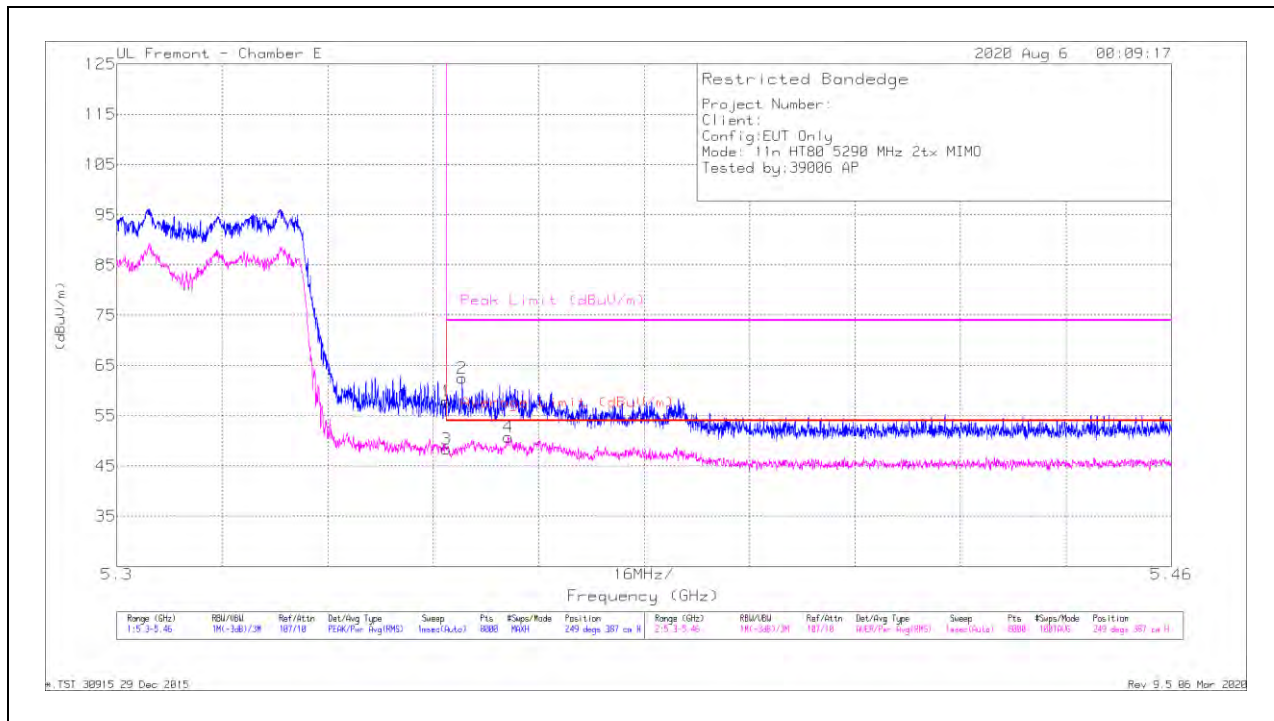

Marker	Frequency (GHz)	Meter Reading (dBμV)	Det	Af 1712 (dBm)	Amp/Cbl/Pwr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBμV/m)	Average Limit (dBμV/m)	Margin (dB)	Peak Limit (dBμV/m)	PK Margin (dB)	Altitude (ft)	Height (m)	Polarity
1	* 5.35001	45.21	PK	34.5	-21.8	0	57.91	-	-	74	-16.09	249	387	H
2	* 5.35239	49.65	PK	34.5	-21.7	0	62.45	-	-	74	-11.55	249	387	H
3	* 5.35001	34.48	RMS	34.5	-21.8	1.25	48.43	54	-5.57	-	-	249	387	H
4	* 5.35945	36.76	RMS	34.5	-21.8	1.25	50.71	54	-3.29	-	-	249	387	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT


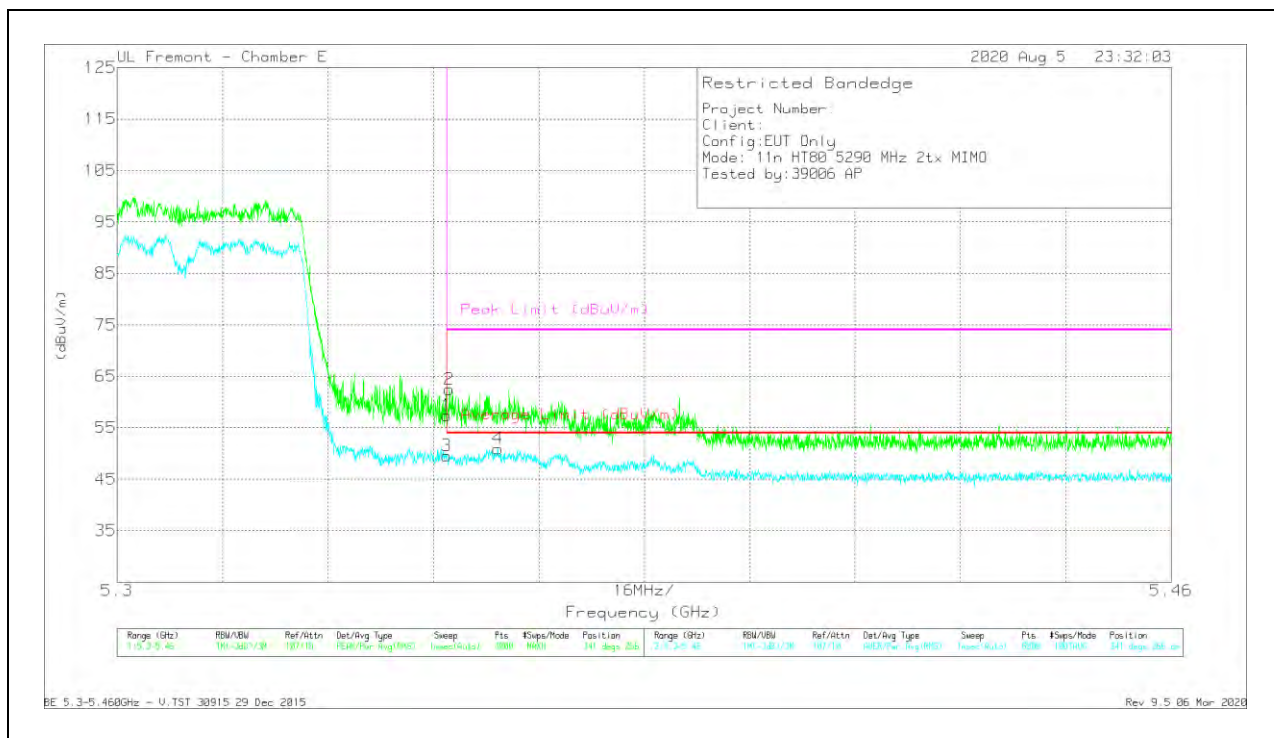


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dBm)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Altitude (m)	Height (cm)	Polarity
1	* 5.35001	44.69	Pk	34.5	-21.8	0	67.39	-	-	74	-16.61	341	266	V
2	* 5.35041	49.76	Pk	34.5	-21.8	0	62.46	-	-	74	-11.54	341	266	V
3	* 5.35001	35.62	RMS	34.5	-21.8	1.25	49.57	54	-4.43	-	-	341	266	V
4	* 5.35779	36.99	RMS	34.5	-21.8	1.25	50.94	54	-3.06	-	-	341	266	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL RESULTS

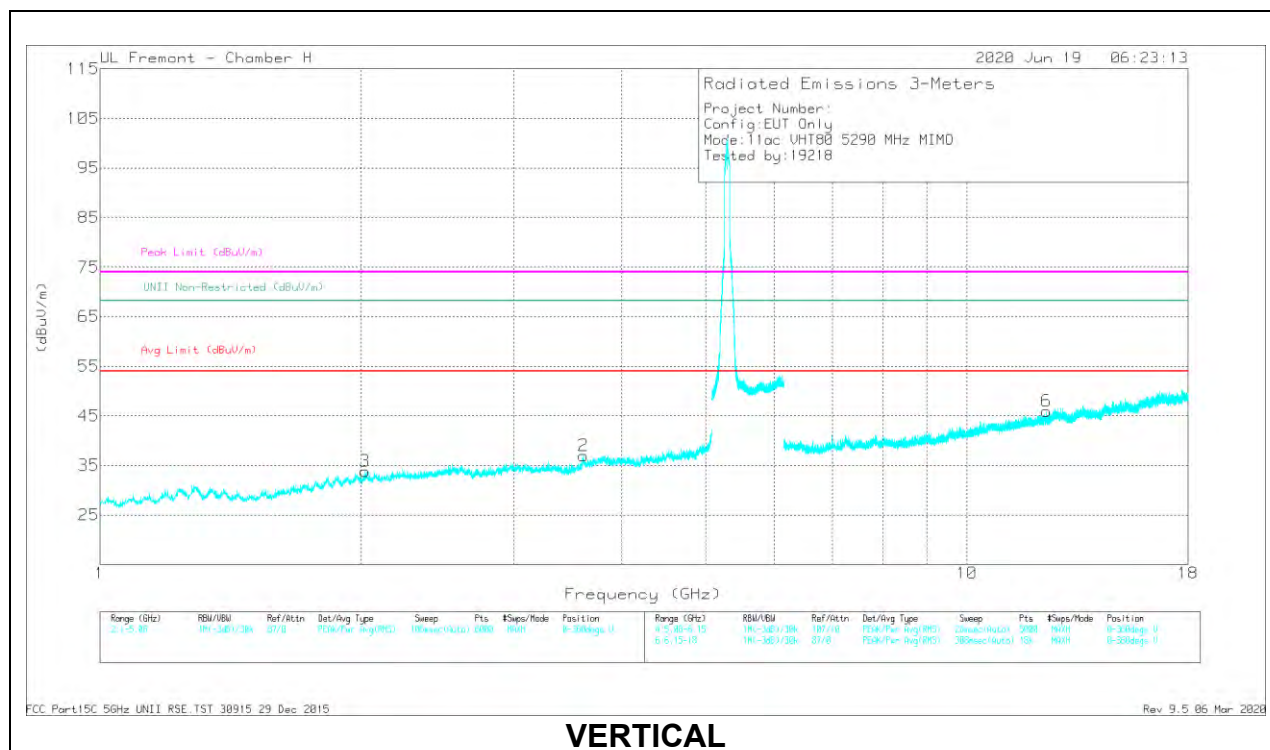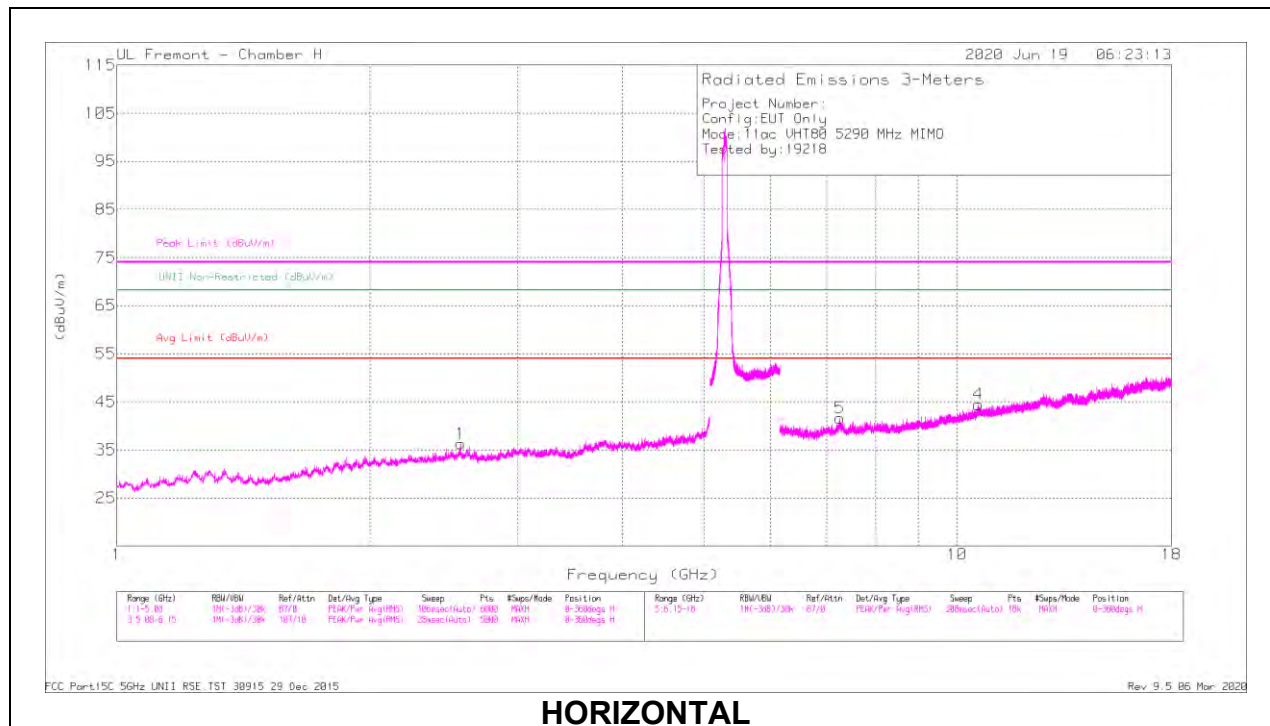

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T863 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarit y
2	* 3.61647	43.1	PK-U	33.1	-32.4		43.8	-	-	74	-30.2	-	-	69	161	V
	* 3.61646	31.56	ADR	33.1	-32.4	.33	32.69	54	-21.41	-	-	-	-	69	161	V
5	* 7.25586	38.93	PK-U	36	-26.7		48.23	-	-	74	-25.77	-	-	217	252	H
	* 7.25589	27.61	ADR	36	-26.7	.33	37.24	54	-16.76	-	-	-	-	217	252	H
6	* 12.36274	37.34	PK-U	39	-24.1		52.24	-	-	74	-21.76	-	-	287	307	V
	* 12.36022	26.12	ADR	38.9	-23.9	.33	41.45	54	-12.55	-	-	-	-	287	307	V
3	2.02203	43.51	PK-U	31.5	-34.3		40.71	-	-	-	-	68.2	-27.49	112	188	V
	2.56792	42.28	PK-U	32.5	-32.3		42.48	-	-	-	-	68.2	-25.72	36	128	H
4	10.59806	37.18	PK-U	37.6	-24.2		50.58	-	-	-	-	68.2	-17.62	169	218	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.10. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6 – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

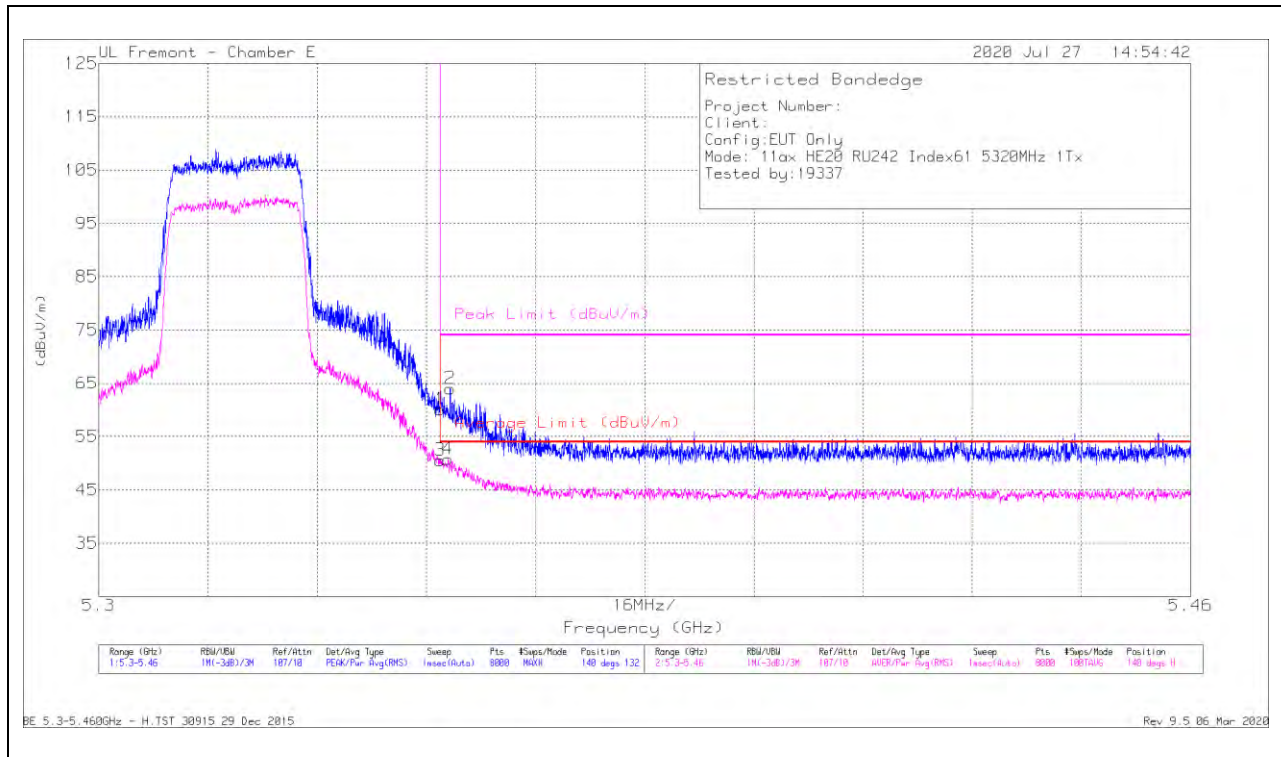


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.4	Pk	34.5	-21.8	60.1	-	-	74	-13.9	140	132	H
2	* 5.35149	51.19	Pk	34.5	-21.7	63.99	-	-	74	-10.01	140	132	H
3	* 5.35001	37.85	RMS	34.5	-21.8	50.55	54	-3.45	-	-	140	132	H
4	* 5.35119	38.1	RMS	34.5	-21.8	50.8	54	-3.2	-	-	140	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

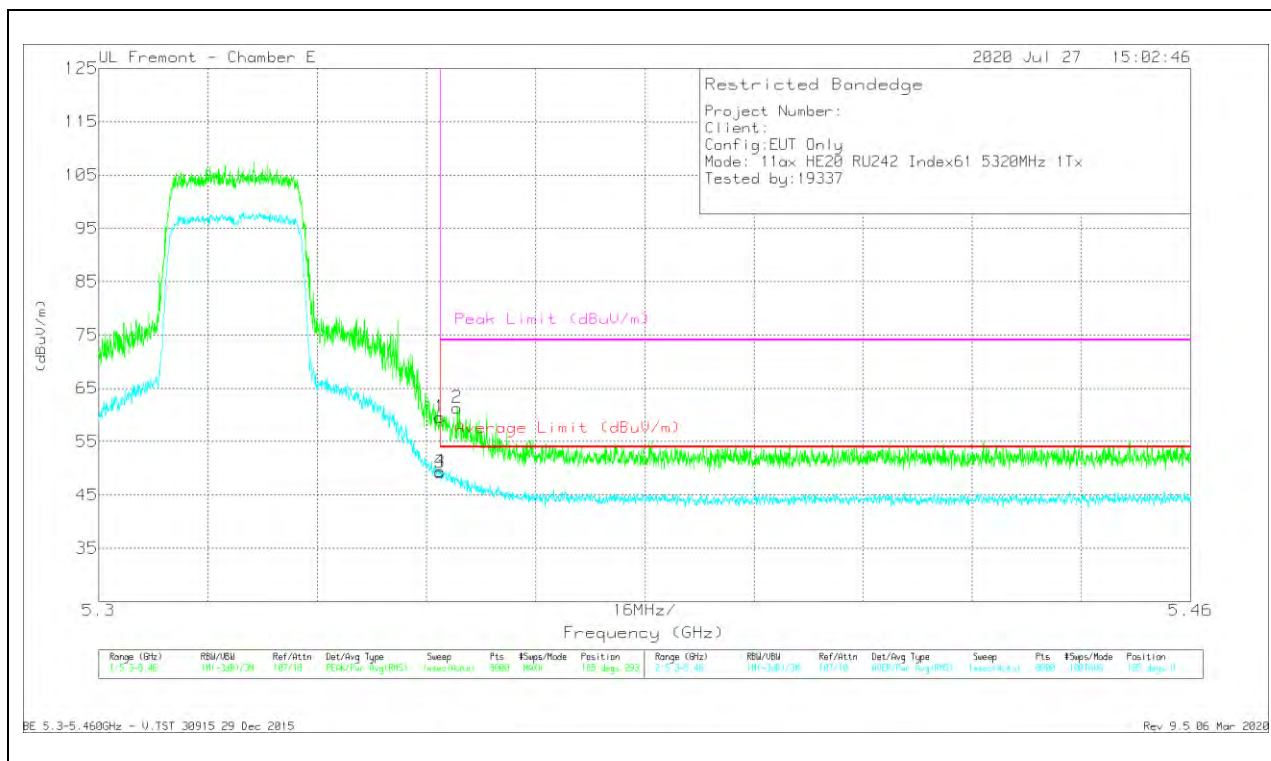

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	46.89	Pk	34.5	-21.8	59.59	-	-	74	-14.41	185	293	V
2	* 5.35253	48.55	Pk	34.5	-21.7	61.35	-	-	74	-12.65	185	293	V
3	* 5.35001	36.53	RMS	34.5	-21.8	49.23	54	-4.77	-	-	185	293	V
4	* 5.35005	36.73	RMS	34.5	-21.8	49.43	54	-4.57	-	-	185	293	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 6 – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

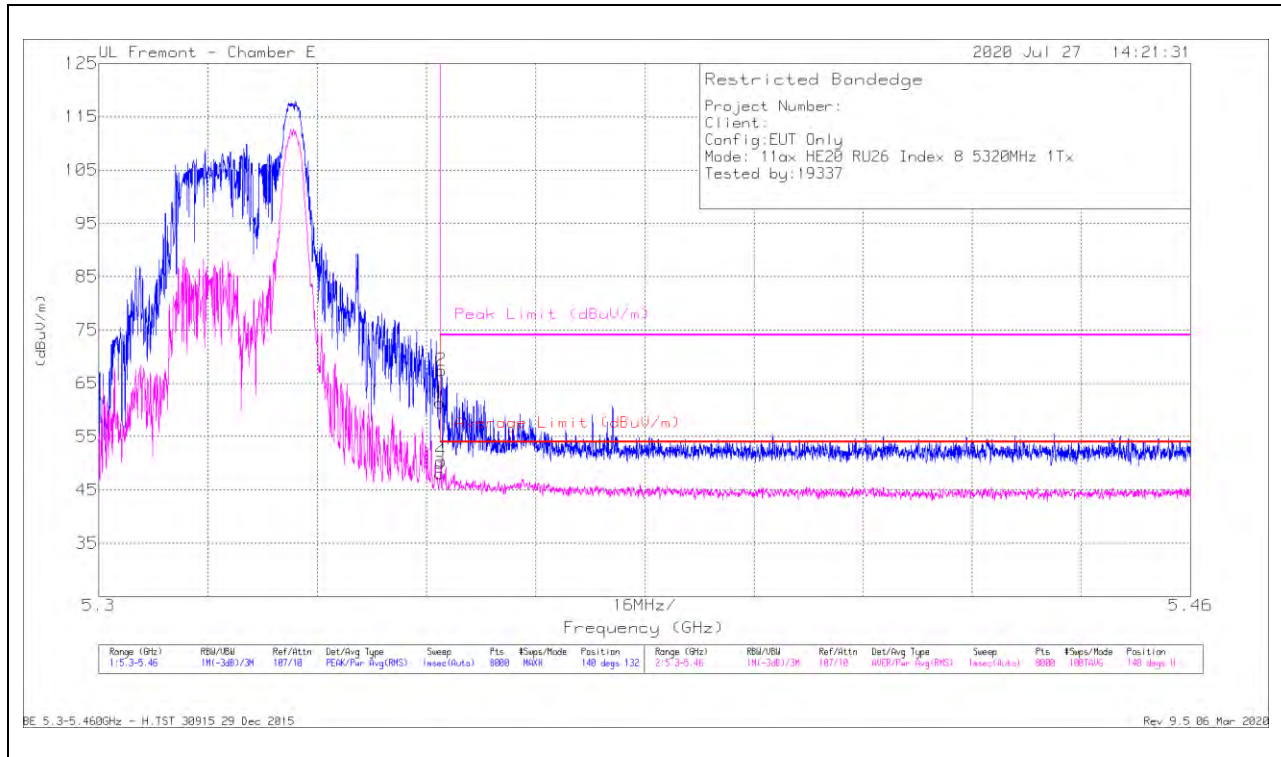

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	48.63	Pk	34.5	-21.8	61.33	-	-	74	-12.67	140	132	H
2	* 5.35023	54.74	Pk	34.5	-21.8	67.44	-	-	74	-6.56	140	132	H
3	* 5.35001	35.36	RMS	34.5	-21.8	48.06	54	-5.94	-	-	140	132	H
4	* 5.35017	37.75	RMS	34.5	-21.8	50.45	54	-3.55	-	-	140	132	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

UL Fremont - Chamber E

2020 Jul 27 15:26:18

Restricted Bandedge

Project Number:

Client:

Config: EUT Only

Mode: 11ax HE20 RU26 Index8 5320MHz 1Tx

Tested by: 19337

Peak Limit (dBuV/m)

Average Limit (dBuV/m)

15MHz/

Frequency (GHz)

Range (GHz)	RBW/VBW	Ref/Att	Det/Avg Type	Sweep	Pls	#Sps/Mode	Position	Range (GHz)	RBW/VBW	Ref/Att	Det/Avg Type	Sweep	Pls	#Sps/Mode	Position
5.3-5.46	100/30	107/10	Peak/Max Avg (RMS)	100kHz/Hz	3000	100%	1/8 Jags: 293	5.3-5.46	100/30	107/10	Max/Max Avg (RMS)	100kHz/Hz	3000	100%	1/8 Jags: 1

BE 5.3-5.46GHz - U.TST 30915 29 Dec 2015

Rev 9.5.06 Mar 2020


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	44.05	Pk	34.5	-21.8	56.75	-	-	74	-17.25	185	293	V
2	* 5.35131	55.01	Pk	34.5	-21.8	67.71	-	-	74	-6.29	185	293	V
3	* 5.35001	33.4	RMS	34.5	-21.8	46.1	54	-7.9	-	-	185	293	V
4	* 5.35129	37.08	RMS	34.5	-21.8	49.78	54	-4.22	-	-	185	293	V

This report shall not be reproduced except in full, without the written approval of UL Verification Services Inc.

1TX ANTENNA 5 – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)


HORIZONTAL RESULT

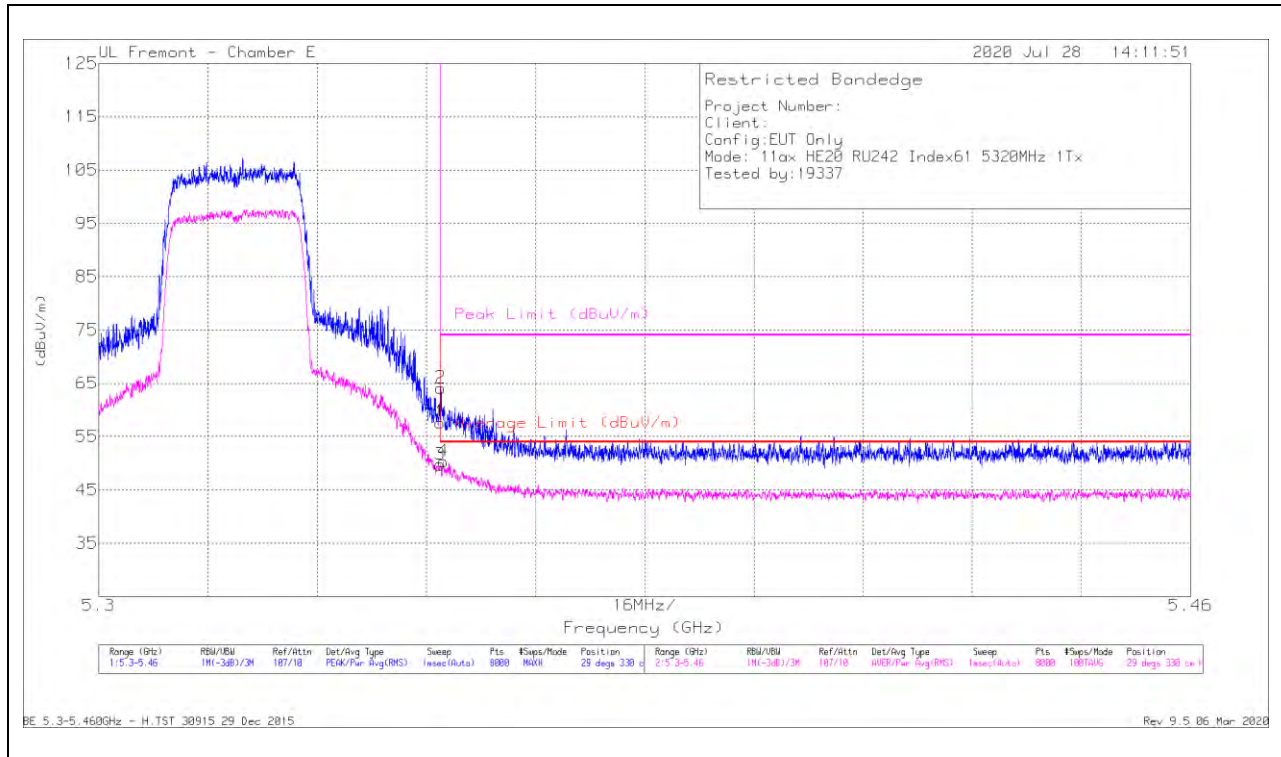

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filt/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	44.95	Pk	34.5	-21.8	57.65	-	-	74	-16.35	29	330	H
2	* 5.35013	51.42	Pk	34.5	-21.8	64.12	-	-	74	-9.88	29	330	H
3	* 5.35001	37.04	RMS	34.5	-21.8	49.74	54	-4.26	-	-	29	330	H
4	* 5.35047	37.65	RMS	34.5	-21.8	50.35	54	-3.65	-	-	29	330	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

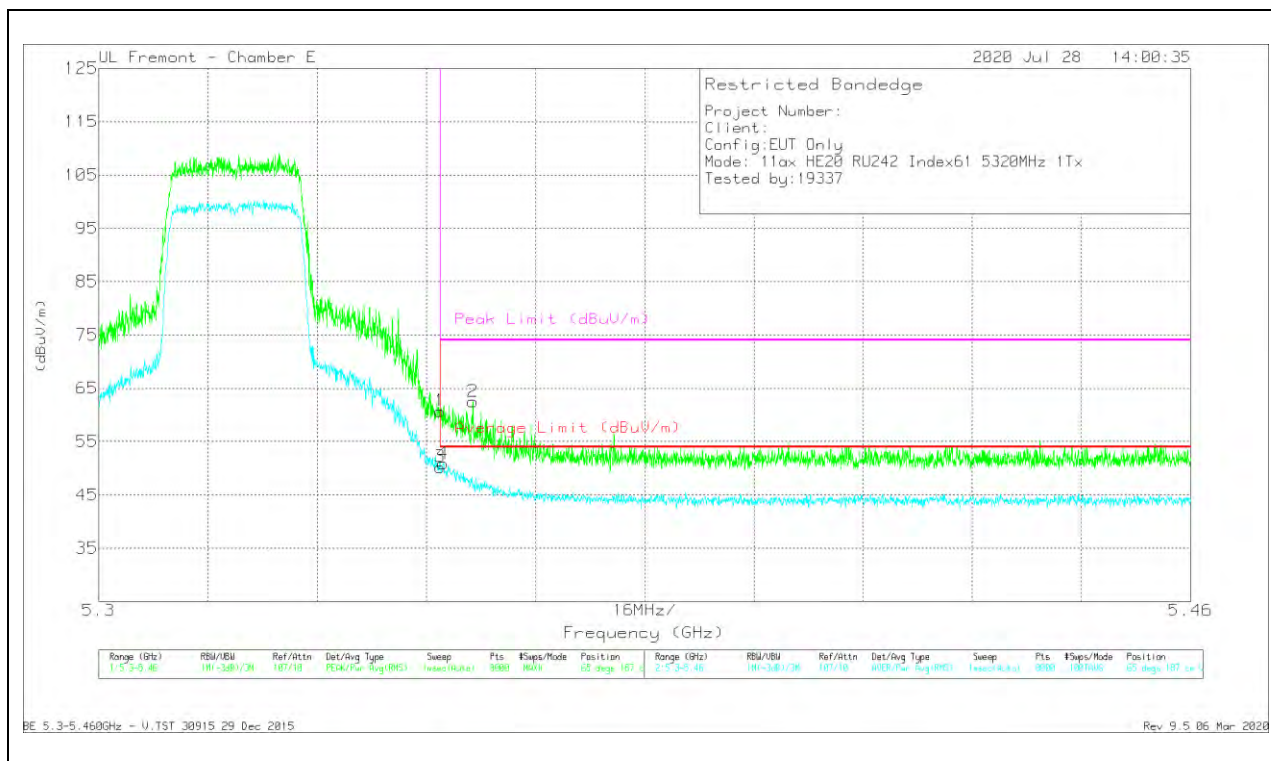

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	48.03	Pk	34.5	-21.8	60.73	-	-	74	-13.27	65	187	V
2	* 5.35483	49.68	Pk	34.5	-21.7	62.48	-	-	74	-11.52	65	187	V
3	* 5.35001	37.52	RMS	34.5	-21.8	50.22	54	-3.78	-	-	65	187	V
4	* 5.35045	38.19	RMS	34.5	-21.8	50.89	54	-3.11	-	-	65	187	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 5 – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

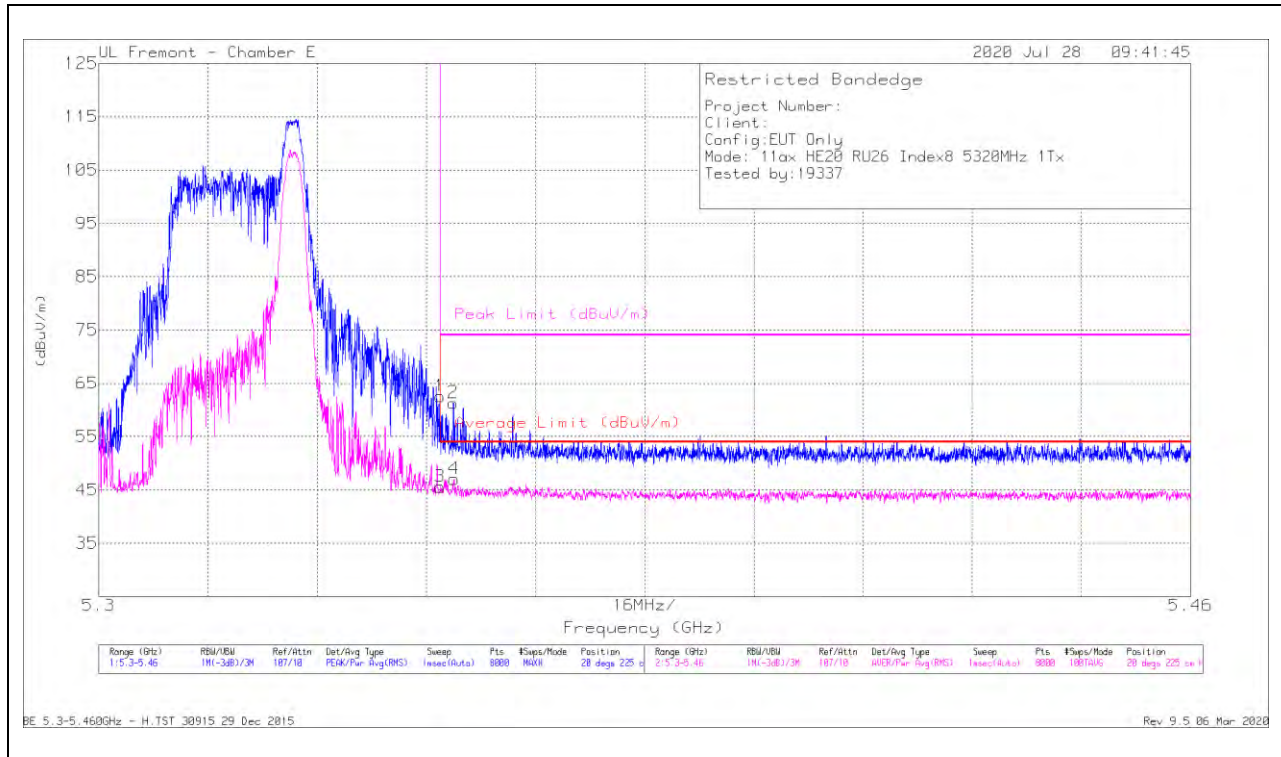


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	49.88	Pk	34.5	-21.8	62.58	-	-	74	-11.42	20	225	H
2	* 5.35195	48.52	Pk	34.5	-21.7	61.32	-	-	74	-12.68	20	225	H
3	* 5.35001	32.89	RMS	34.5	-21.8	45.59	54	-8.41	-	-	20	225	H
4	* 5.35207	34.25	RMS	34.5	-21.7	47.05	54	-6.95	-	-	20	225	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

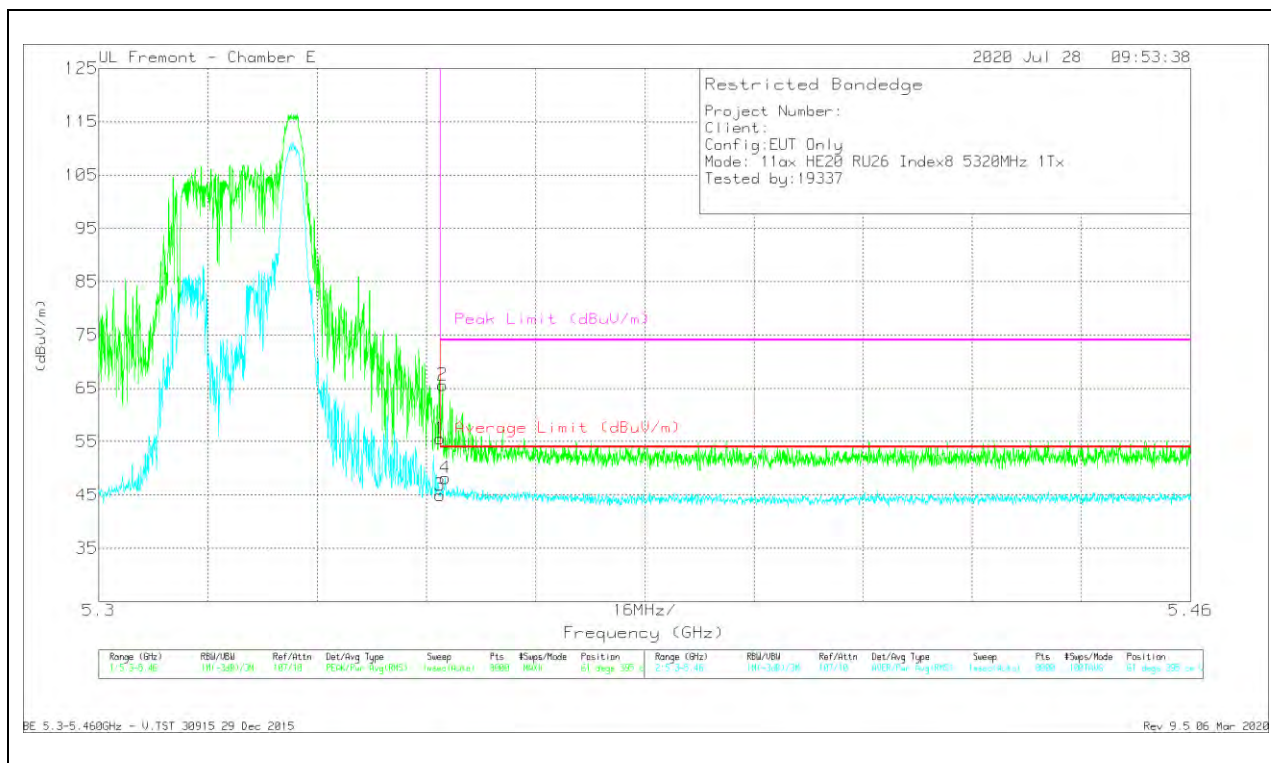

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	42.85	Pk	34.5	-21.8	55.55	-	-	74	-18.45	61	395	V
2	* 5.35037	52.91	Pk	34.5	-21.8	65.61	-	-	74	-8.39	61	395	V
3	* 5.35001	32.25	RMS	34.5	-21.8	44.95	54	-9.05	-	-	61	395	V
4	* 5.35075	35.47	RMS	34.5	-21.8	48.17	54	-5.83	-	-	61	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 242 Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

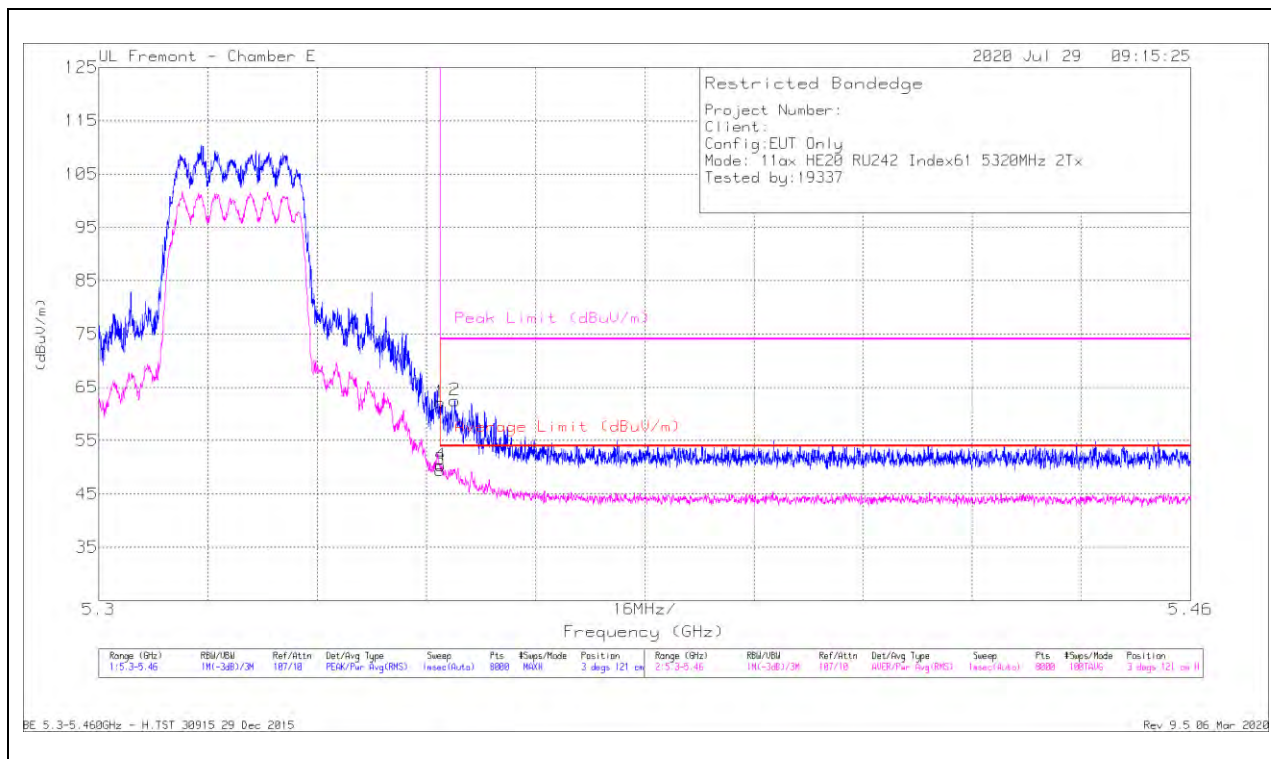


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	49.47	Pk	34.5	-21.8	62.17	-	-	74	-11.83	3	121	H
2	* 5.35217	49.77	Pk	34.5	-21.7	62.57	-	-	74	-11.43	3	121	H
3	* 5.35001	36.79	RMS	34.5	-21.8	49.49	54	-4.51	-	-	3	121	H
4	* 5.35011	37.67	RMS	34.5	-21.8	50.37	54	-3.63	-	-	3	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

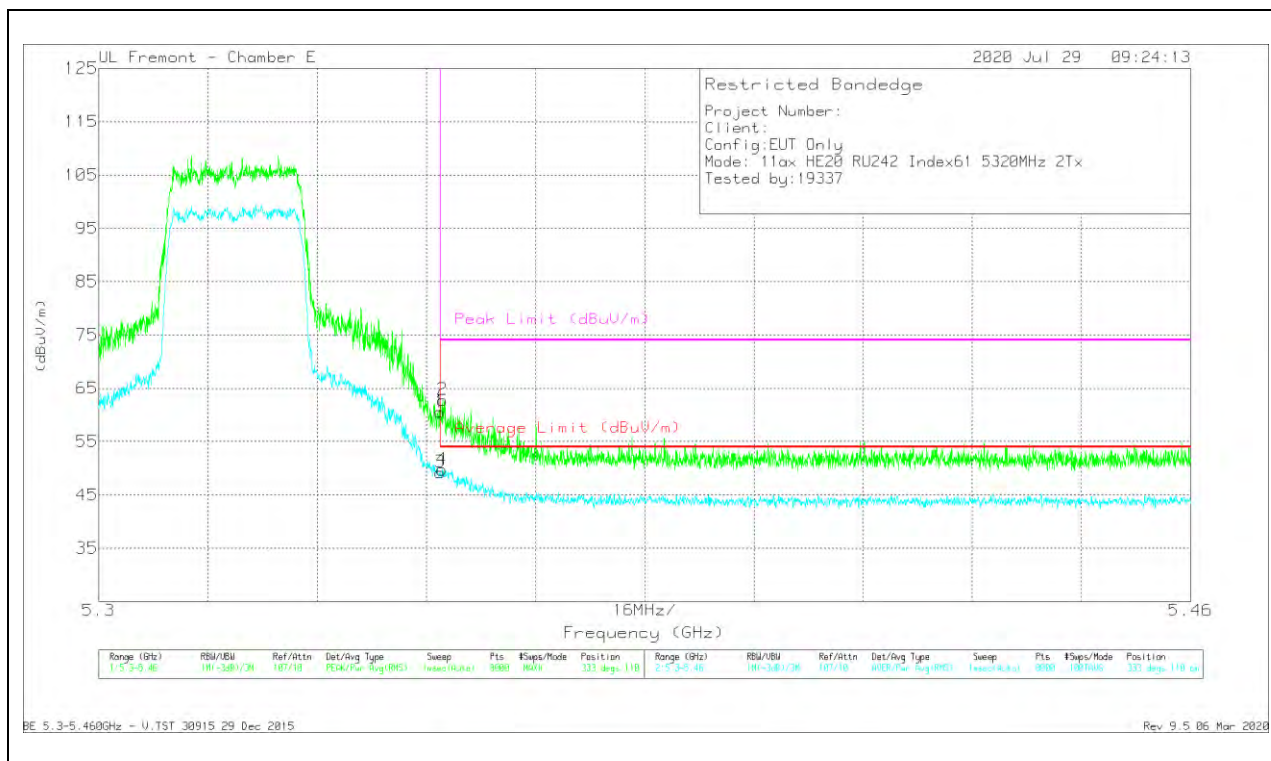

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.88	Pk	34.5	-21.8	60.58	-	-	74	-13.42	333	110	V
2	* 5.35037	50.11	Pk	34.5	-21.8	62.81	-	-	74	-11.19	333	110	V
3	* 5.35001	36.54	RMS	34.5	-21.8	49.24	54	-4.76	-	-	333	110	V
4	* 5.35033	37.06	RMS	34.5	-21.8	49.76	54	-4.24	-	-	333	110	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

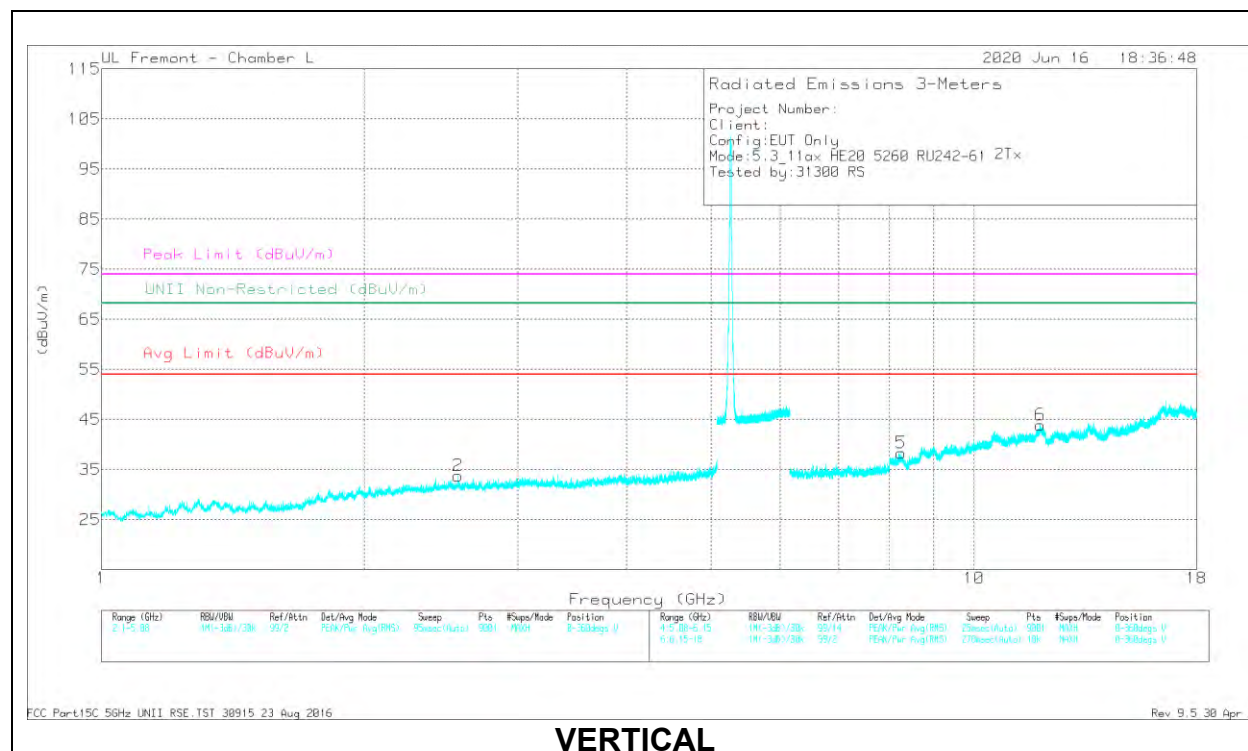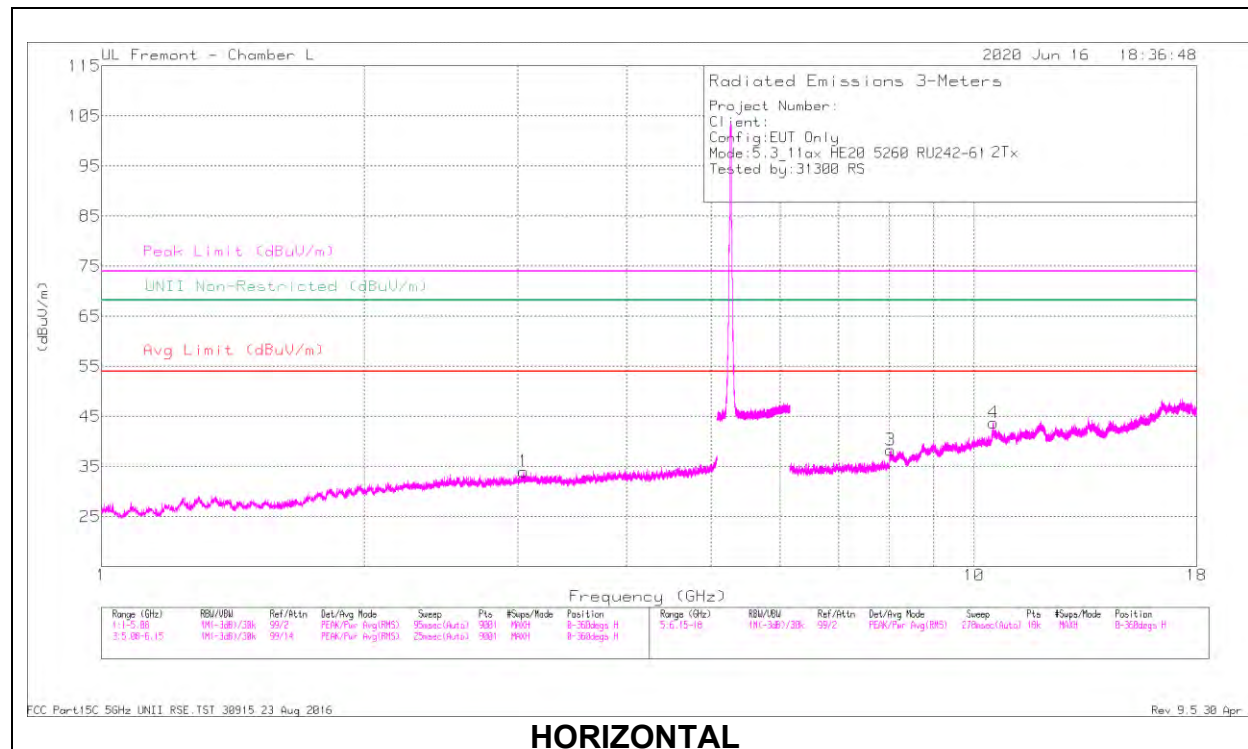

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.04562	37.17	PK-U	32.9	-29.4	40.67	-	-	-	-	68.2	-27.53	0	200	H
2	2.56352	38.32	PK-U	32.3	-30.2	40.42	-	-	-	-	68.2	-27.78	67	200	V
3	10.53047	30.5	PK-U	37.8	-19.5	48.8	-	-	-	-	68.2	-19.4	215	200	H
3	* 8.03473	31.25	PK-U	35.8	-22.2	44.85	-	-	74	-29.15	-	-	306	101	H
	* 8.03337	20.3	ADR	35.8	-22.2	33.9	54	-20.1	-	-	-	-	306	101	H
5	* 8.25756	30.67	PK-U	35.8	-21.5	44.97	-	-	74	-29.03	-	-	115	101	V
	* 8.25656	20.41	ADR	35.8	-21.5	34.71	54	-19.29	-	-	-	-	115	101	V
6	* 11.92807	31.5	PK-U	38.6	-19.6	50.5	-	-	74	-23.5	-	-	214	101	V
	* 11.92687	20.06	ADR	38.6	-19.6	39.06	54	-14.94	-	-	-	-	214	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

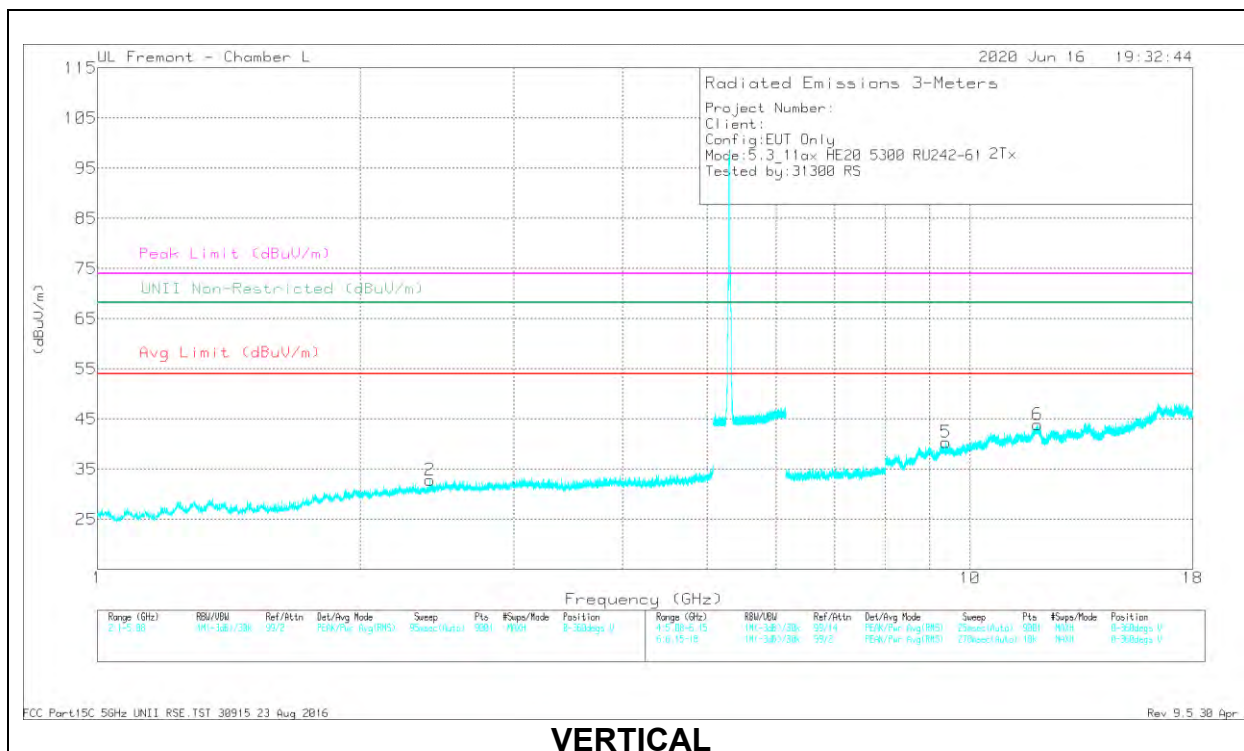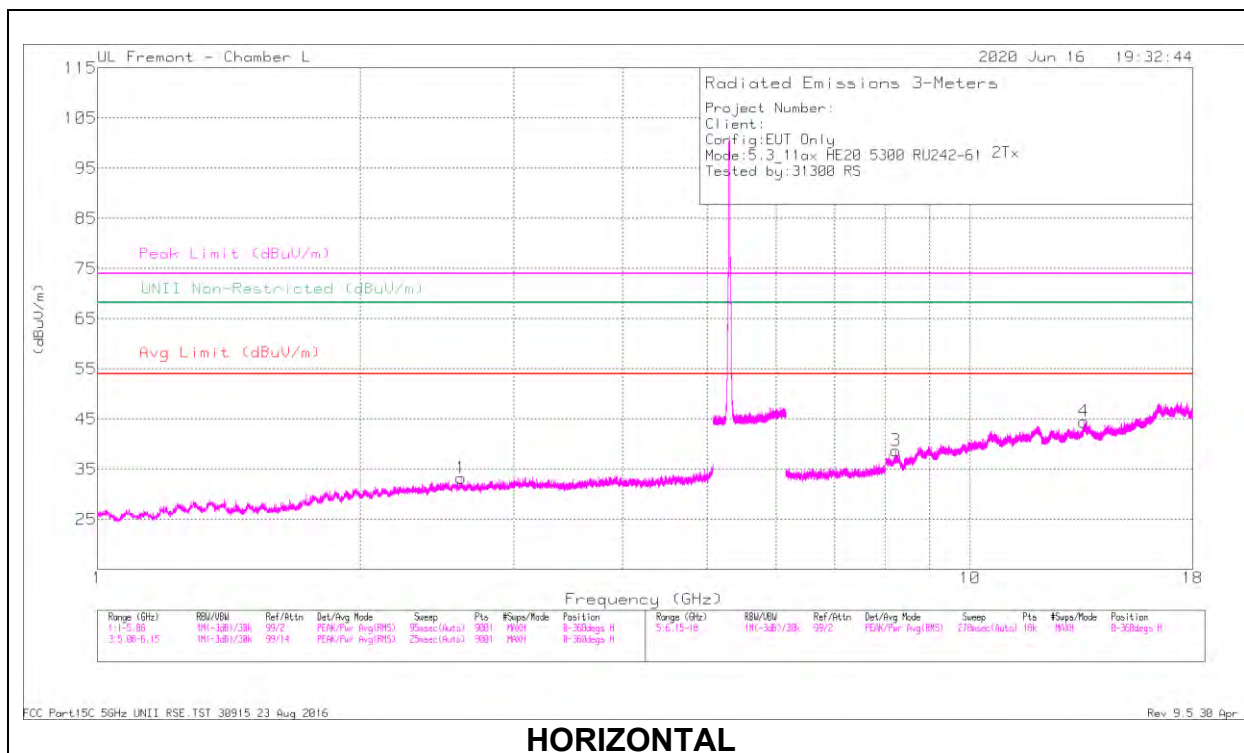

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	2.611111	38.62	PK-U	32.3	-30.3	40.62	-	-	-	-	68.2	-27.58	323	101	H
2	2.40686	38.35	PK-U	31.9	-30.9	39.35	-	-	-	-	68.2	-28.85	189	101	V
4	13.5027	31.99	PK-U	39	-19.4	51.59	-	-	-	-	68.2	-16.61	274	101	H
3	* 8.22288	30.99	PK-U	35.8	-21.6	45.19	-	-	74	-28.81	-	-	355	101	H
	* 8.22257	20.42	ADR	35.8	-21.6	34.62	54	-19.38	-	-	-	-	355	101	H
5	* 9.38027	30.41	PK-U	36.5	-21.2	45.71	-	-	74	-28.29	-	-	171	199	V
	* 9.38208	19.86	ADR	36.5	-21.2	35.16	54	-18.84	-	-	-	-	171	199	V
6	* 11.96916	30.65	PK-U	38.7	-19.5	49.85	-	-	74	-24.15	-	-	91	101	V
	* 11.96932	20.6	ADR	38.7	-19.5	39.8	54	-14.2	-	-	-	-	91	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

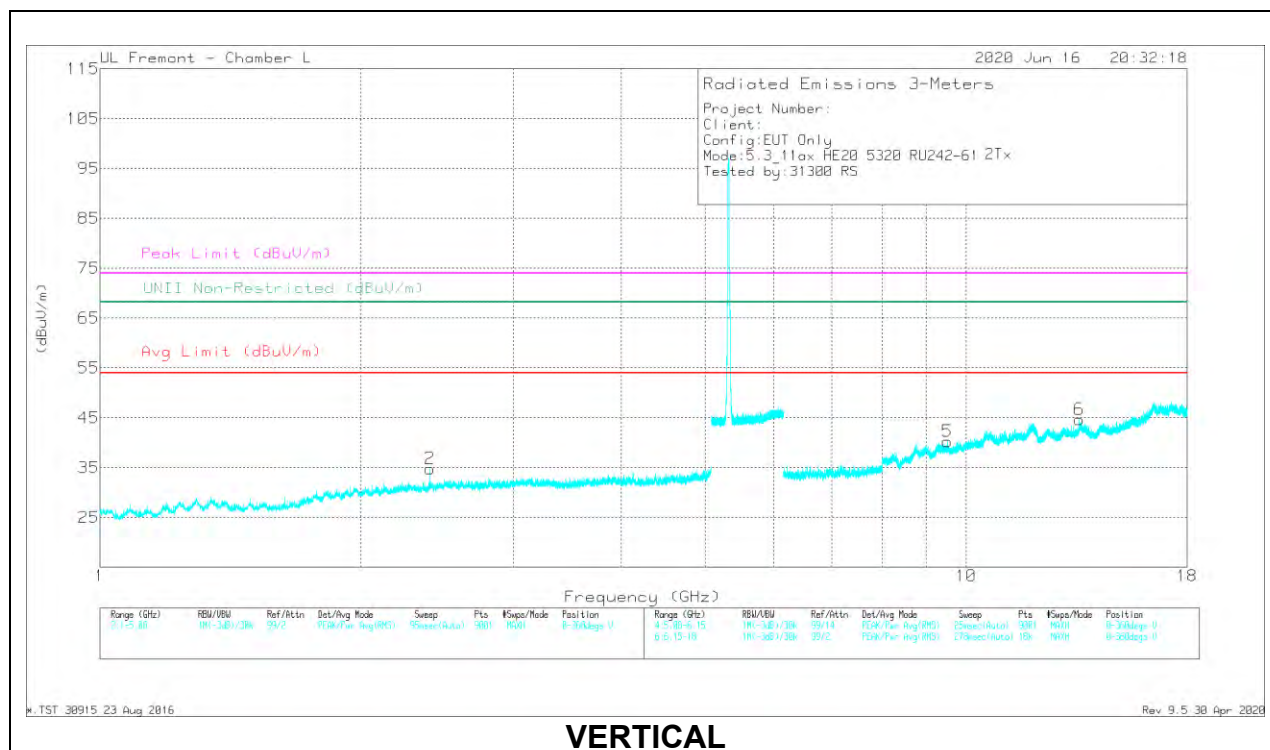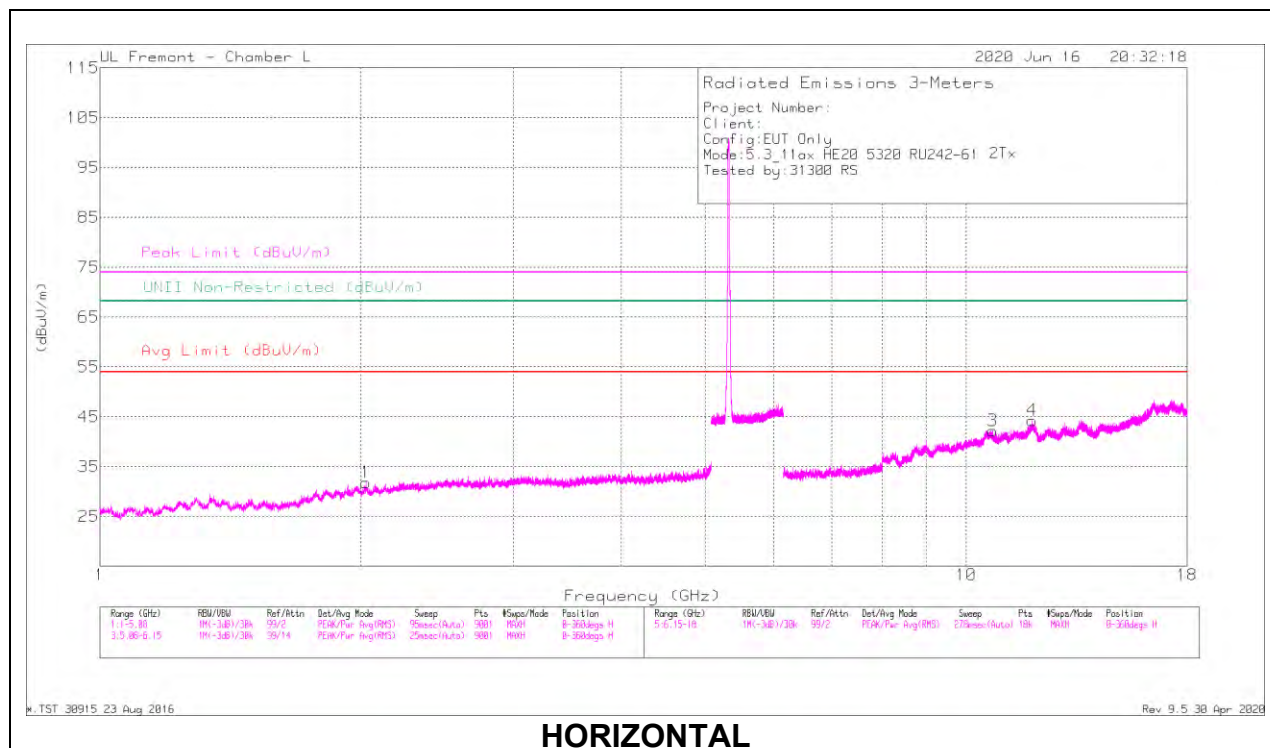

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.02991	38.95	PK-U	30.8	-31.4	38.35	-	-	-	-	68.2	-29.85	360	101	H
2	2.41013	40.12	PK-U	32	-30.9	41.22	-	-	-	-	68.2	-26.98	285	316	V
3	* 10.73567	30.74	PK-U	38	-19.5	49.24	-	-	74	-24.76	-	-	261	200	H
	* 10.73459	19.65	ADR	38	-19.5	38.15	54	-15.85	-	-	-	-	261	200	H
4	* 11.91468	31.7	PK-U	38.6	-19.7	50.6	-	-	74	-23.4	-	-	146	101	H
	* 11.91662	20.99	ADR	38.6	-19.7	39.89	54	-14.11	-	-	-	-	146	101	H
5	9.51637	30.7	PK-U	36.7	-20.3	47.1	-	-	-	-	68.2	-21.1	285	101	V
6	13.51829	32.69	PK-U	38.9	-19.4	52.19	-	-	-	-	68.2	-16.01	88	101	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 8

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

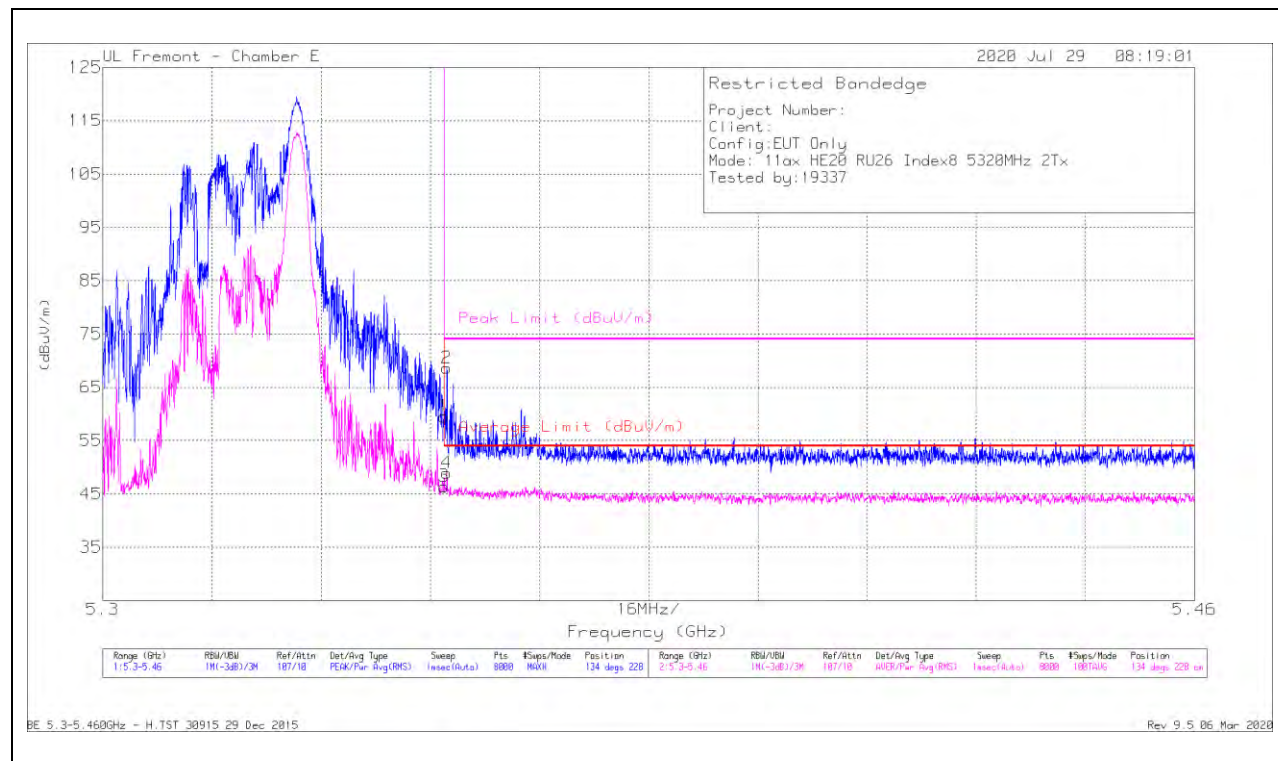


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	46.83	Pk	34.5	-21.8	59.53	-	-	74	-14.47	134	228	H
2	* 5.35043	55.92	Pk	34.5	-21.8	68.62	-	-	74	-5.38	134	228	H
3	* 5.35001	33.7	RMS	34.5	-21.8	46.4	54	-7.6	-	-	134	228	H
4	* 5.35041	36.23	RMS	34.5	-21.8	48.93	54	-5.07	-	-	134	228	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

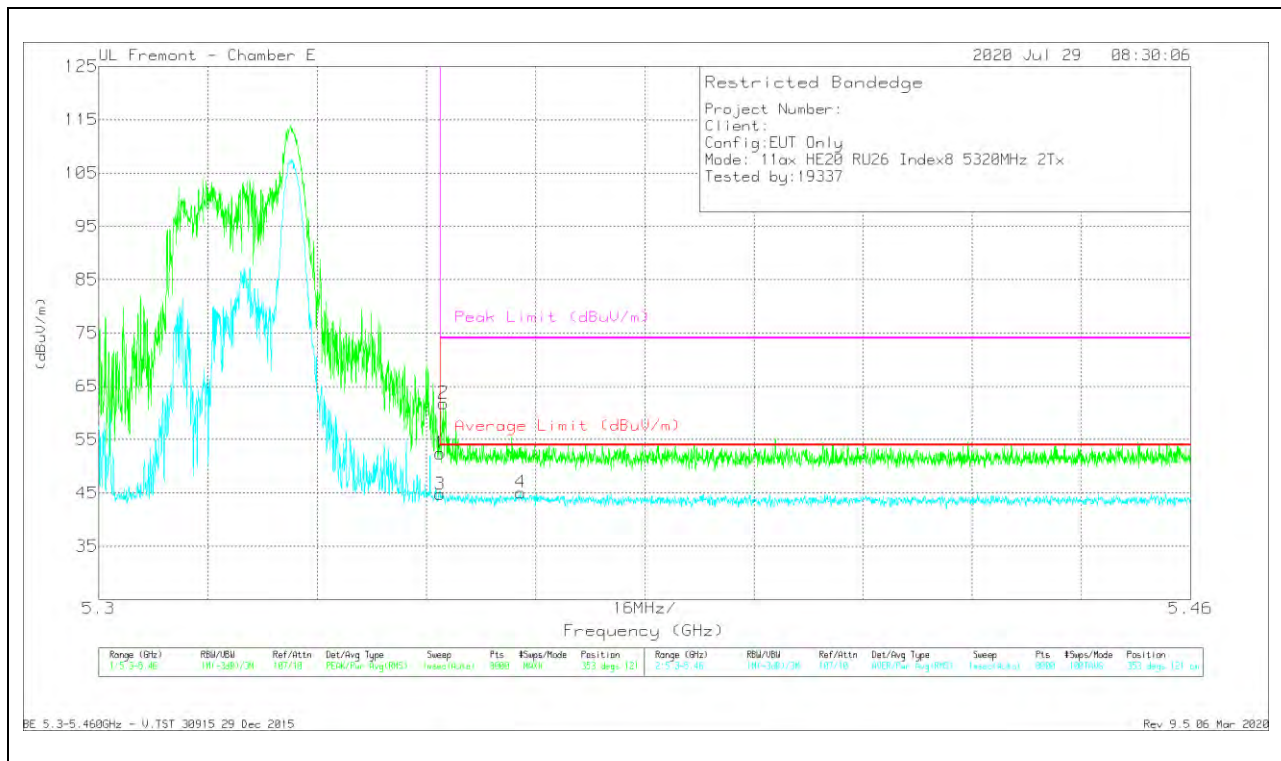

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	39.73	Pk	34.5	-21.8	52.43	-	-	74	-21.57	353	121	V
3	* 5.35001	32.08	RMS	34.5	-21.8	44.78	54	-9.22	-	-	353	121	V
2	* 5.35049	49.11	Pk	34.5	-21.8	61.81	-	-	74	-12.19	353	121	V
4	* 5.36181	32.38	RMS	34.5	-21.8	45.08	54	-8.92	-	-	353	121	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

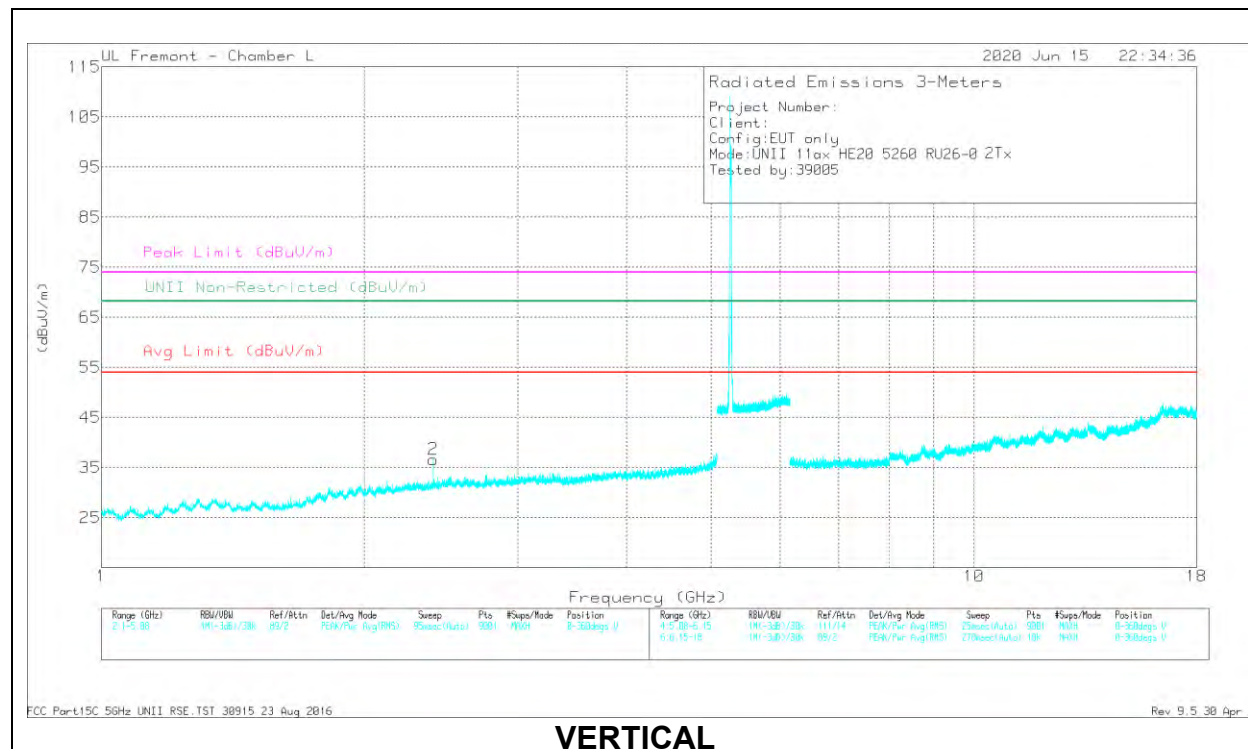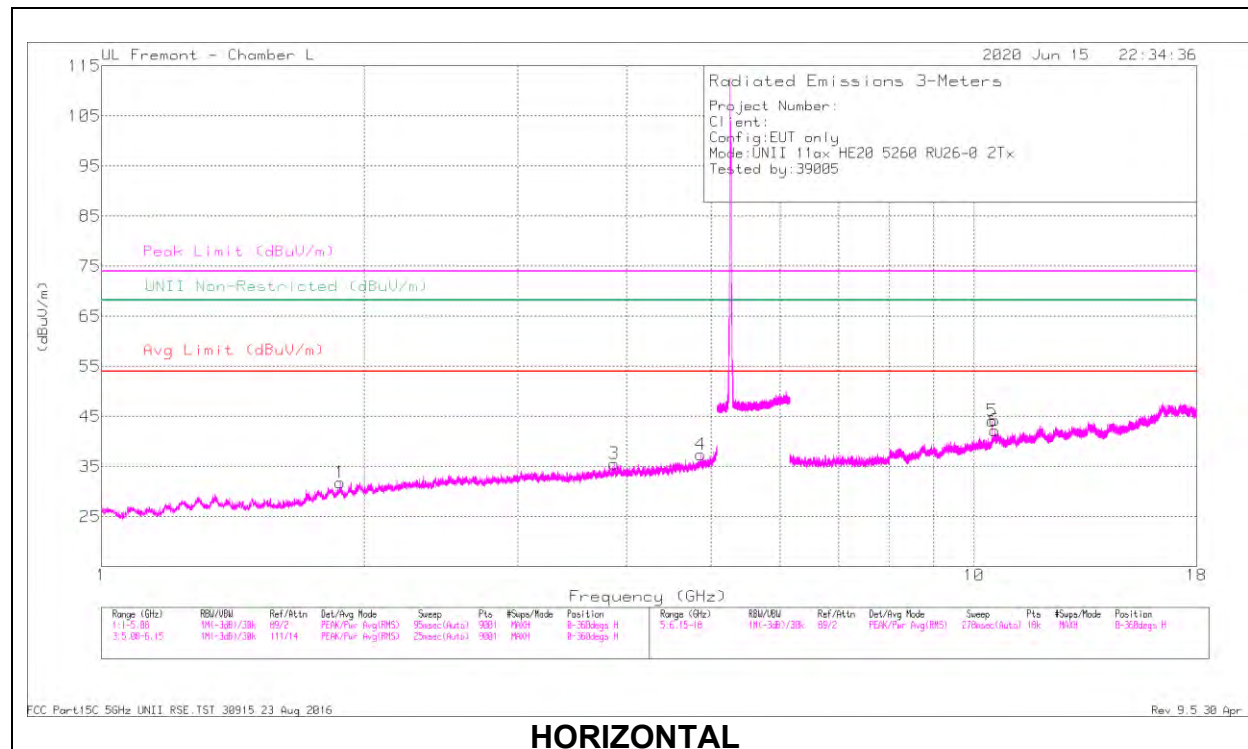

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 4.86247	36.66	PK-U	34.2	-26.3	44.56	-	-	74	-29.44	-	-	139	134	H
	* 4.85954	26.53	ADR	34.2	-26.4	34.33	54	-19.67	-	-	-	-	139	134	H
3	* 3.86888	37	PK-U	33.5	-28.2	42.3	-	-	74	-31.7	-	-	144	122	H
	* 3.86637	27.19	ADR	33.5	-28.2	32.49	54	-21.51	-	-	-	-	144	122	H
1	1.87743	40.74	PK-U	30.7	-32.3	39.14	-	-	-	-	68.2	-29.06	149	156	H
2	2.40105	38.64	PK-U	31.9	-30.9	39.64	-	-	-	-	68.2	-28.56	147	200	V
5	10.50389	33.76	PK-U	37.7	-19.3	52.16	-	-	-	-	68.2	-16.04	147	138	H
6	10.56899	30.8	PK-U	37.9	-19.3	49.4	-	-	-	-	68.2	-18.8	154	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL RESULTS

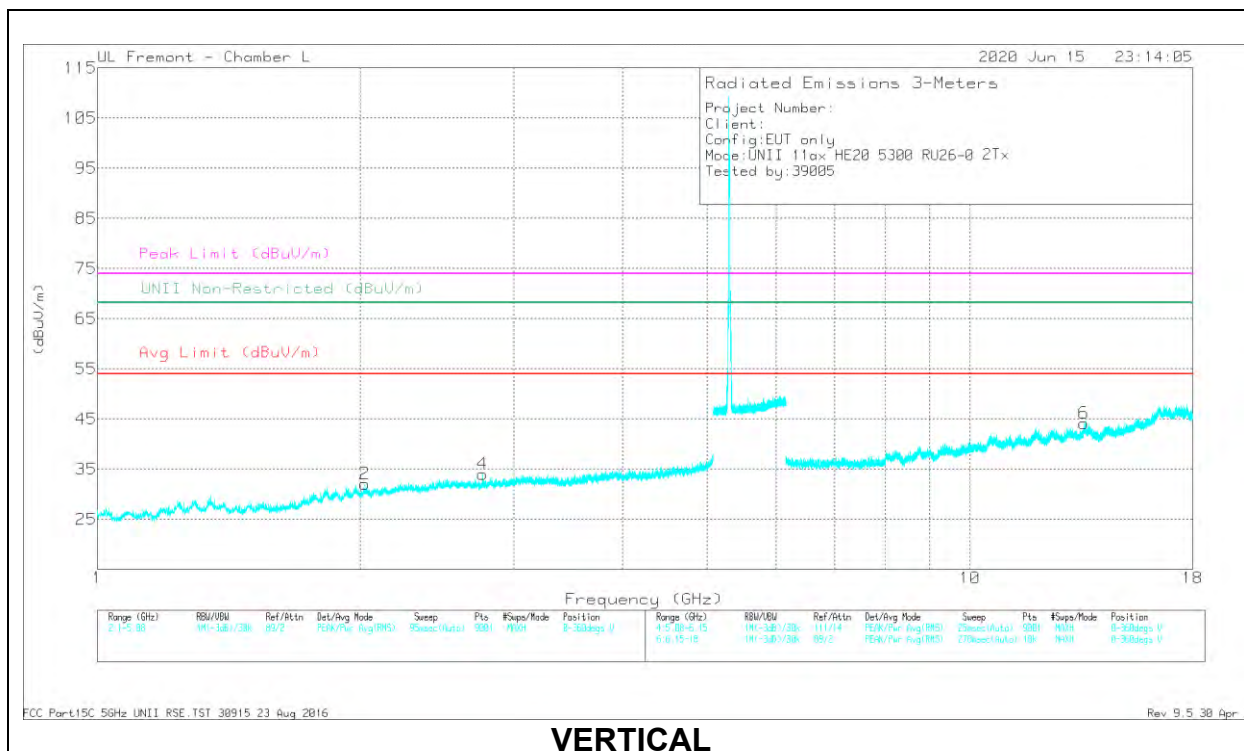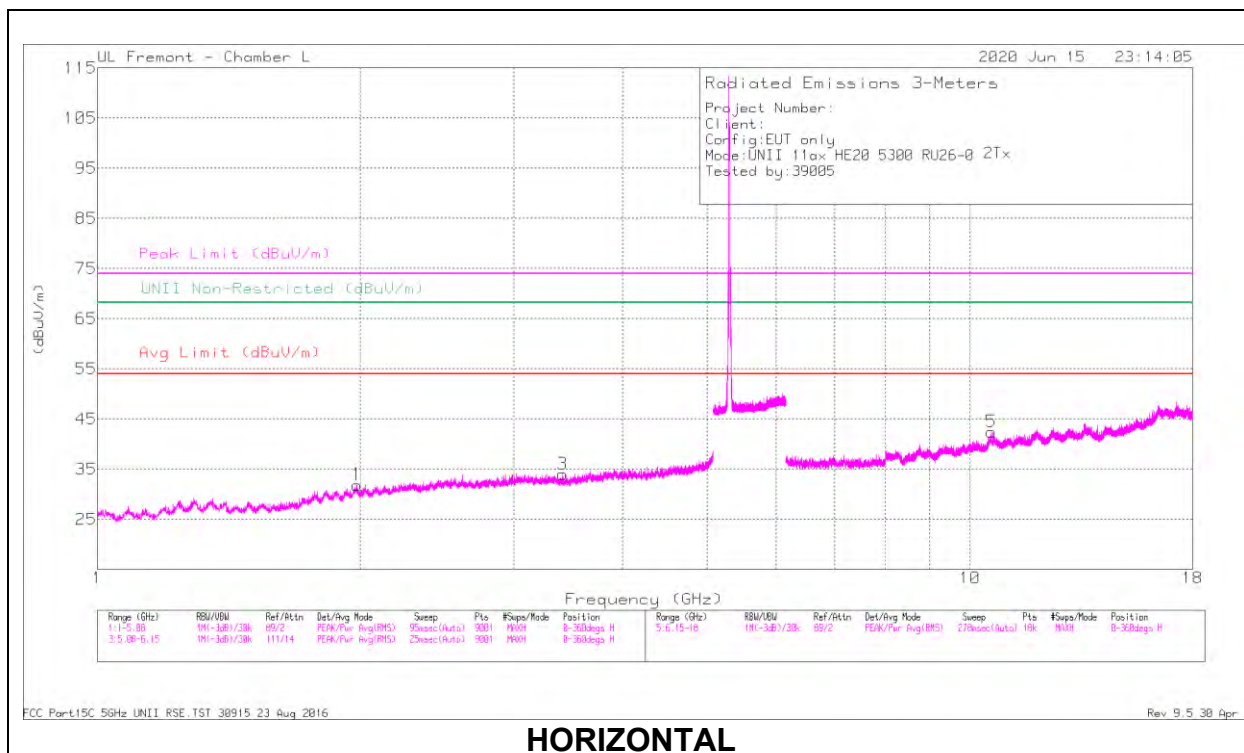

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	3.40952	37.05	PK-U	32.7	-29.2	40.55	-	-	-	-	68.2	-27.65	156	166	H
1	1.98268	38.82	PK-U	31	-31.4	38.42	-	-	-	-	68.2	-29.78	36	308	H
4	* 2.76518	38.52	PK-U	32.2	-30.3	40.42	-	-	74	-33.58	-	-	38	188	V
	* 2.76407	27.91	ADR	32.2	-30.3	29.61	54	-24.19	-	-	-	-	38	188	V
2	2.02738	39.56	PK-U	30.9	-31.3	39.16	-	-	-	-	68.2	-29.04	135	166	V
5	10.5829	31.23	PK-U	37.9	-19.7	49.43	-	-	-	-	68.2	-18.77	89	148	H
6	13.50298	32.67	PK-U	39	-19.4	52.27	-	-	-	-	68.2	-15.93	37	173	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

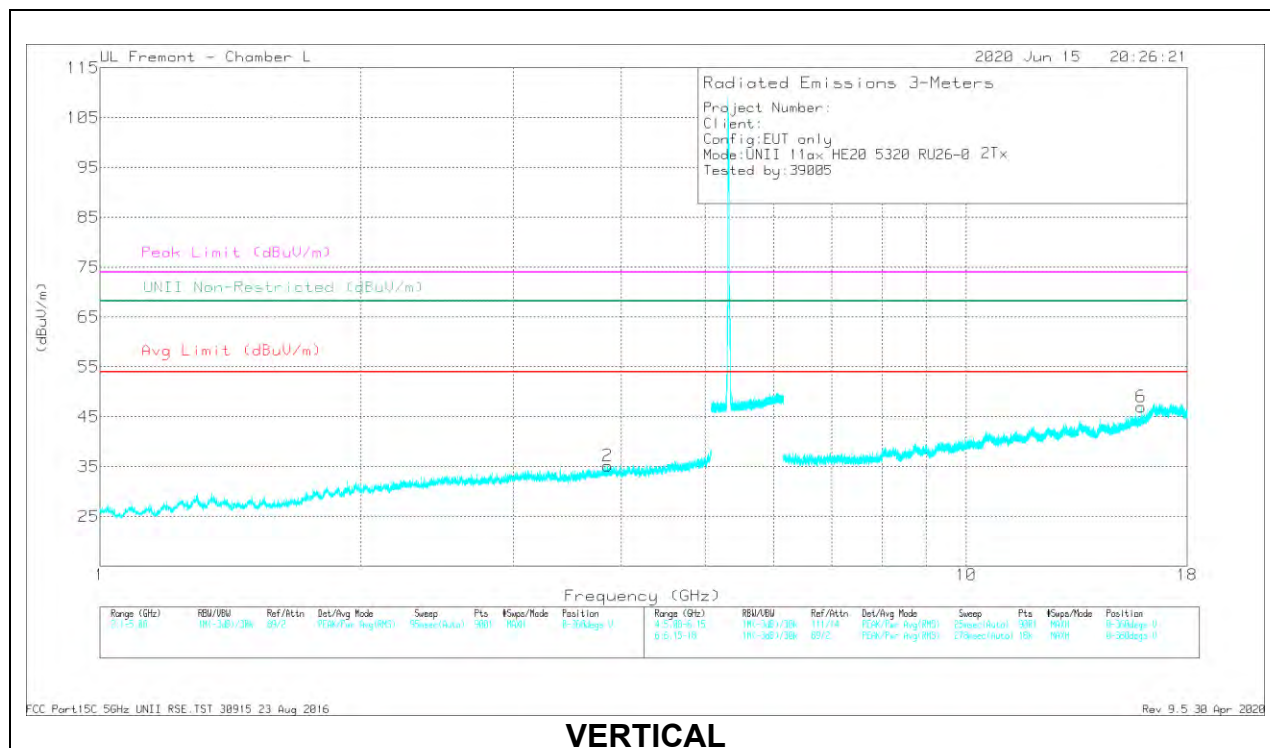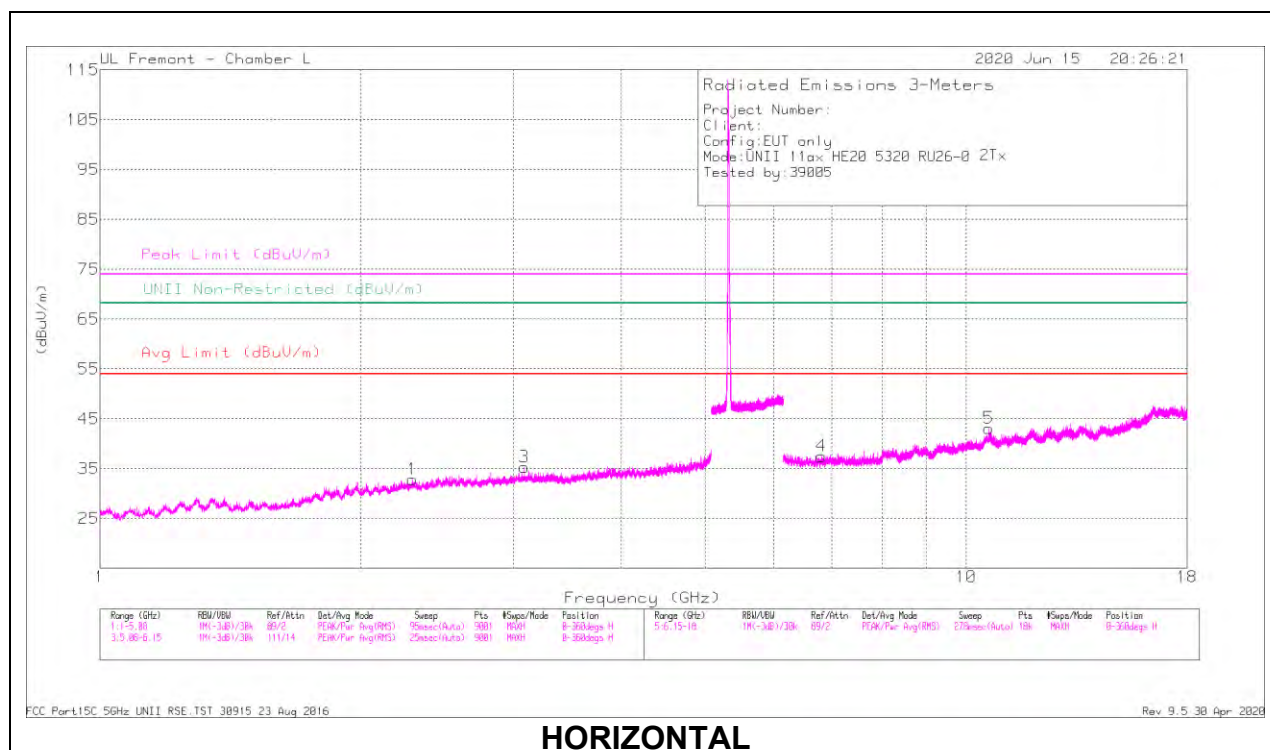

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.2952	39.46	PK-U	31.8	-30.9	40.36	-	-	74	-33.64	-	-	39	341	H
	* 2.29491	28.76	ADR	31.8	-30.9	29.66	54	-24.34	-	-	-	-	39	341	H
3	3.08832	37.25	PK-U	33	-29.4	40.85	-	-	-	-	68.2	-27.35	130	119	H
2	* 3.85372	35.96	PK-U	33.6	-28.4	41.16	-	-	74	-32.84	-	-	136	117	V
	* 3.85614	26.03	ADR	33.6	-28.3	31.33	54	-22.67	-	-	-	-	136	117	V
5	* 10.62372	33.64	PK-U	37.9	-20.1	51.44	-	-	74	-22.56	-	-	124	169	H
	* 10.62327	21.38	ADR	37.9	-20.1	39.18	54	-14.82	-	-	-	-	124	169	H
4	6.8106	32.96	PK-U	35.5	-24.3	44.16	-	-	-	-	68.2	-24.04	125	140	H
6	* 15.93605	30.47	PK-U	41.1	-18.8	52.77	-	-	74	-21.23	-	-	144	199	V
	* 15.93527	20.24	ADR	41.1	-18.8	42.54	54	-11.46	-	-	-	-	144	199	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

6.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3 GHz BAND

1TX ANTENNA 6 – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

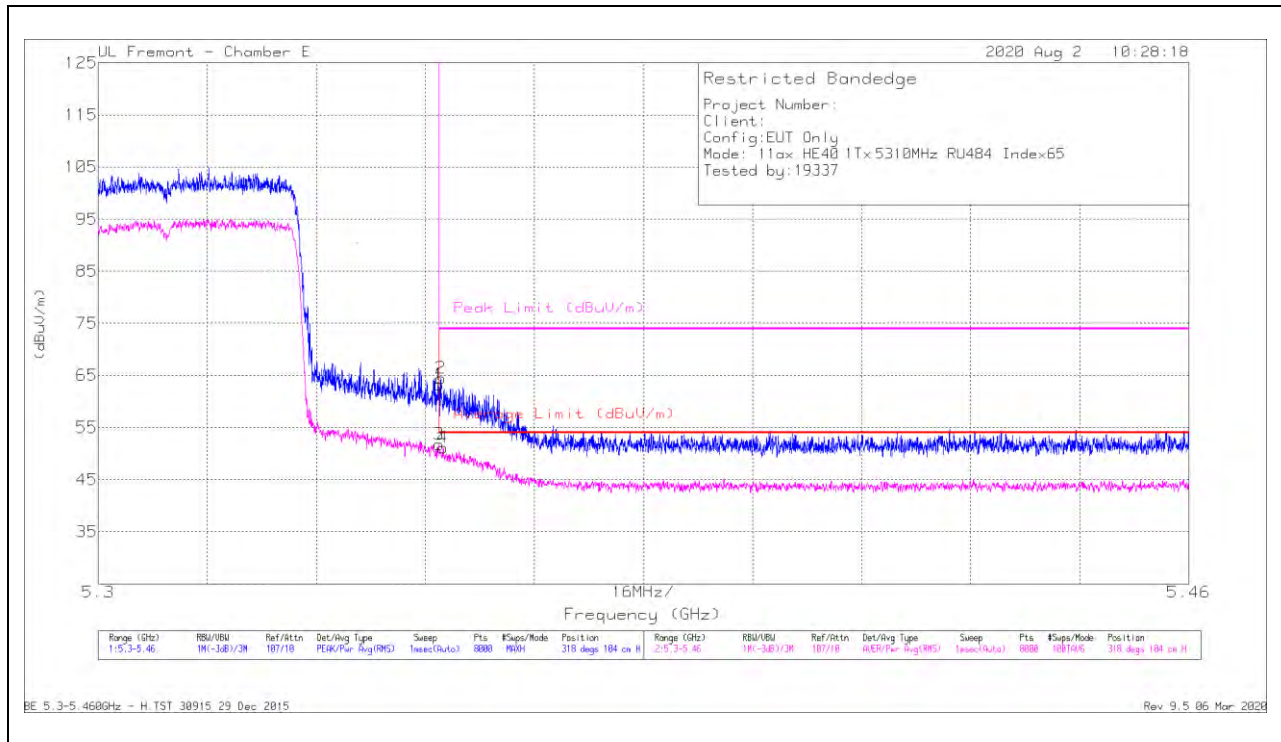


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	50.51	Pk	34.5	-21.8	63.21	-	-	74	-10.79	318	104	H
2	* 5.35025	51.82	Pk	34.5	-21.8	64.52	-	-	74	-9.48	318	104	H
3	* 5.35001	39.07	RMS	34.5	-21.8	51.77	54	-2.23	-	-	318	104	H
4	* 5.35061	38.38	RMS	34.5	-21.8	51.08	54	-2.92	-	-	318	104	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

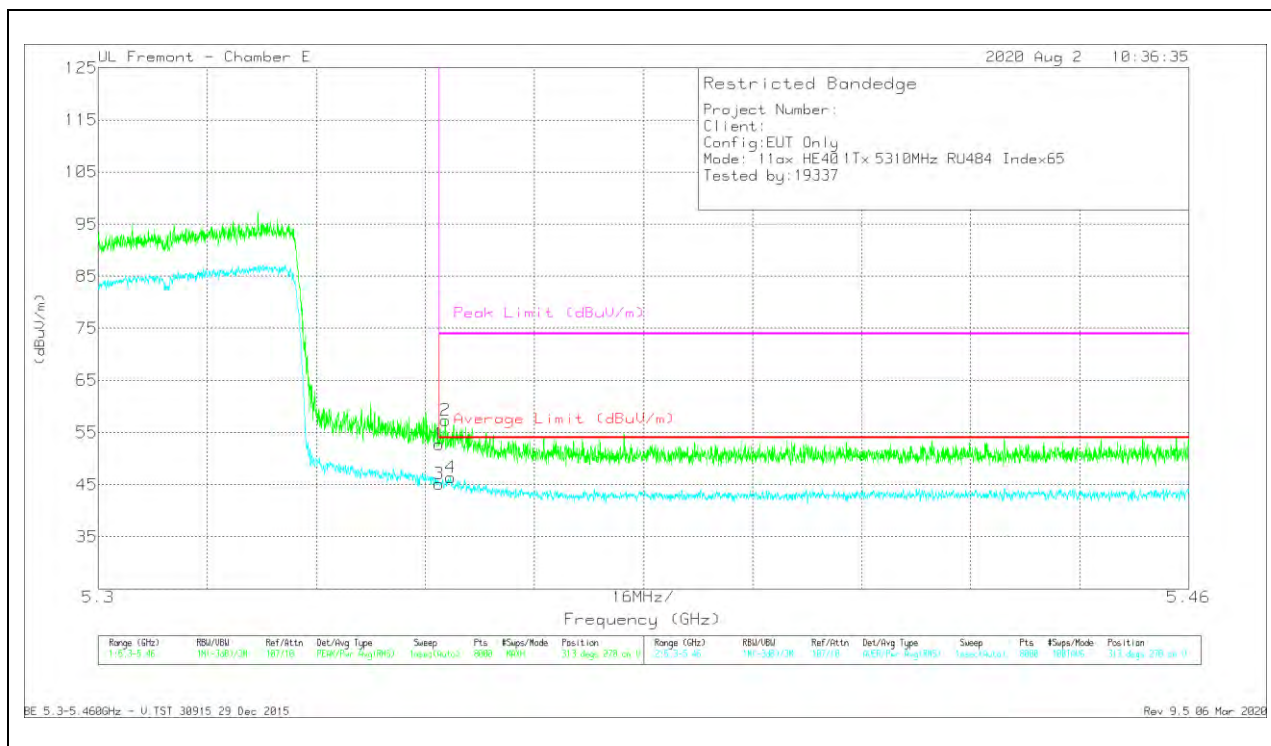

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	40.1	Pk	34.5	-21.8	52.8	-	-	74	-21.2	313	270	V
2	* 5.35091	44.71	Pk	34.5	-21.8	57.41	-	-	74	-16.59	313	270	V
3	* 5.35001	32.46	RMS	34.5	-21.8	45.16	54	-8.84	-	-	313	270	V
4	* 5.35167	33.63	RMS	34.5	-21.7	46.43	54	-7.57	-	-	313	270	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 6 – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

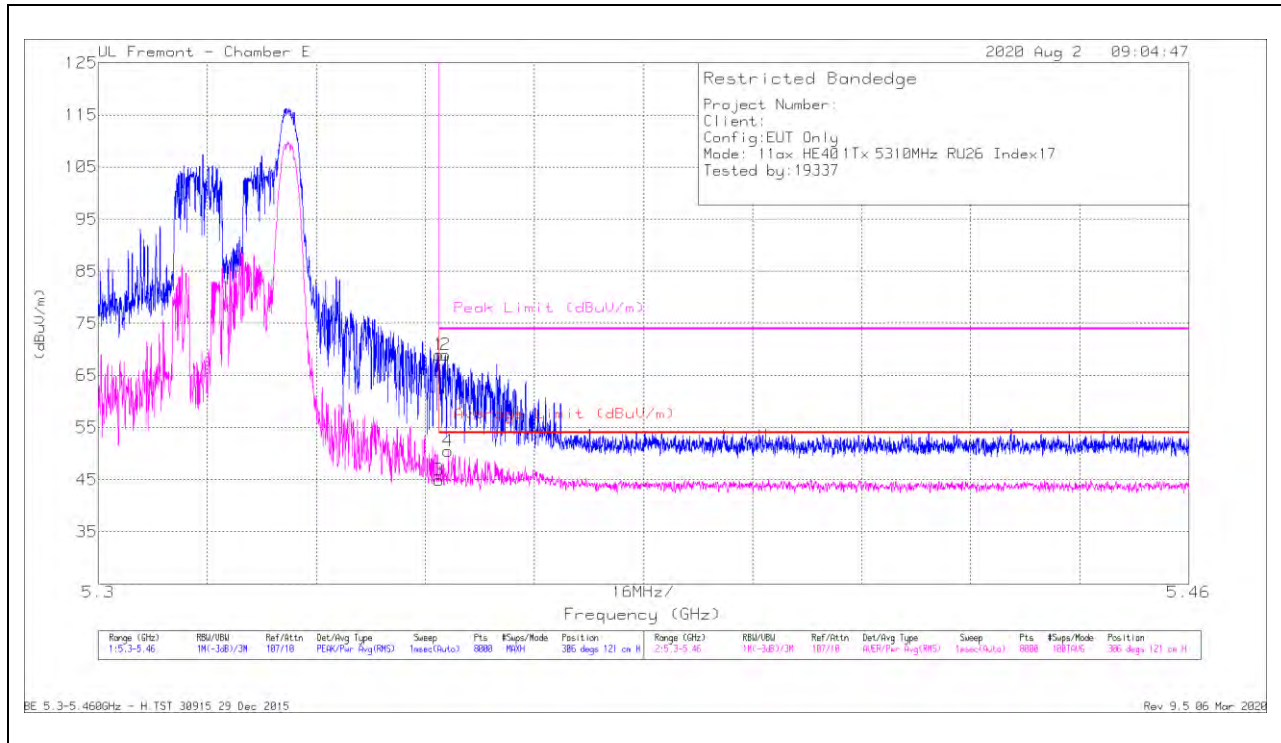


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	56.27	Pk	34.5	-21.8	68.97	-	-	74	-5.03	306	121	H
2	* 5.35091	56.3	Pk	34.5	-21.8	69	-	-	74	-5	306	121	H
3	* 5.35001	32.23	RMS	34.5	-21.8	44.93	54	-9.07	-	-	306	121	H
4	* 5.35135	37.81	RMS	34.5	-21.8	50.51	54	-3.49	-	-	306	121	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

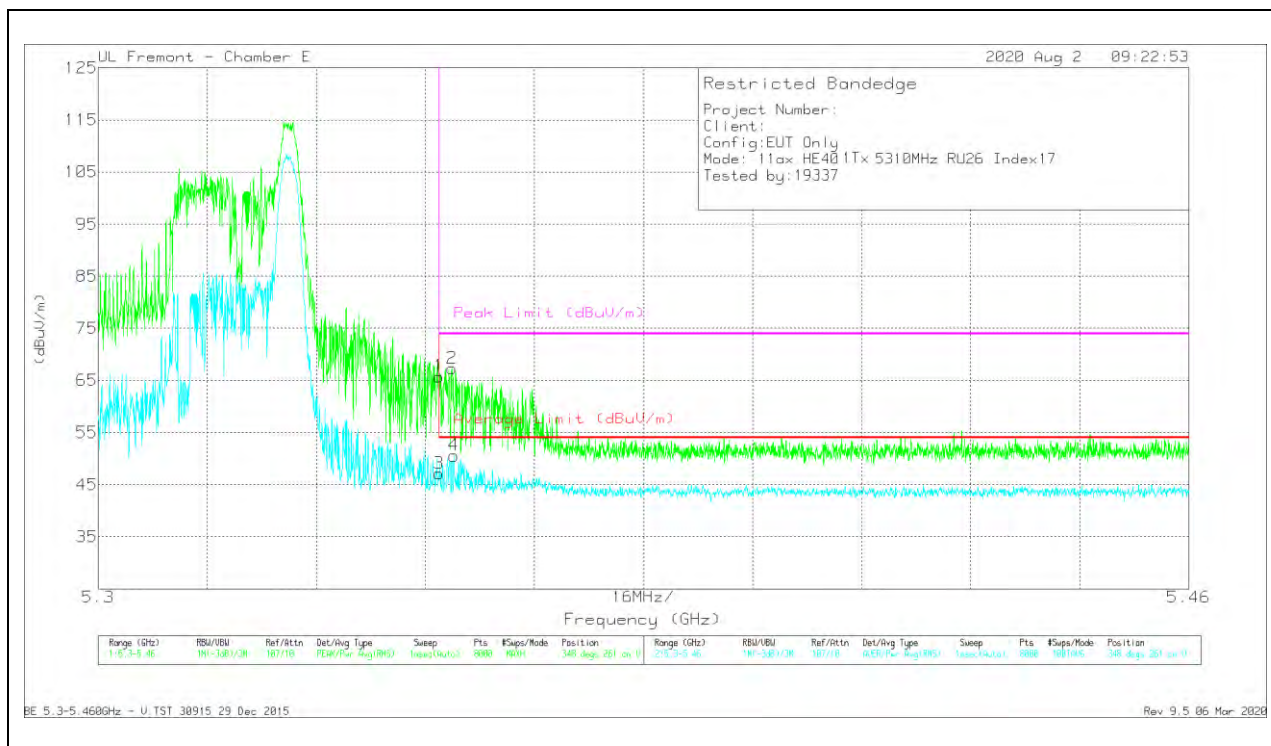

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	53.07	Pk	34.5	-21.8	65.77	-	-	74	-8.23	348	261	V
2	* 5.35187	54.51	Pk	34.5	-21.7	67.31	-	-	74	-6.69	348	261	V
3	* 5.35001	34.44	RMS	34.5	-21.8	47.14	54	-6.86	-	-	348	261	V
4	* 5.35217	37.77	RMS	34.5	-21.7	50.57	54	-3.43	-	-	348	261	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK - Peak detector

RMS - RMS detection

1TX ANTENNA 5 – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

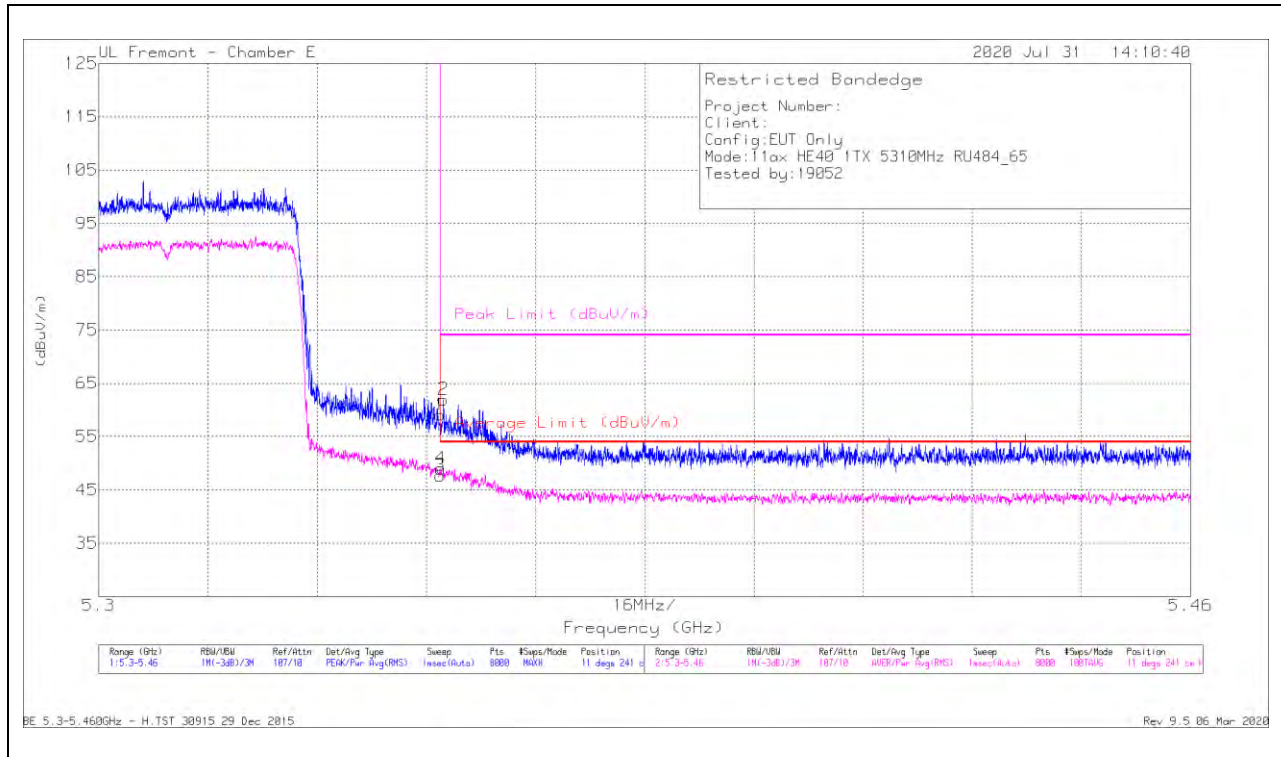


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	46.38	Pk	34.5	-21.8	59.08	-	-	74	-14.92	11	241	H
2	* 5.35051	49.21	Pk	34.5	-21.8	61.91	-	-	74	-12.09	11	241	H
3	* 5.35001	34.98	RMS	34.5	-21.8	47.68	54	-6.32	-	-	11	241	H
4	* 5.35009	36.32	RMS	34.5	-21.8	49.02	54	-4.98	-	-	11	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

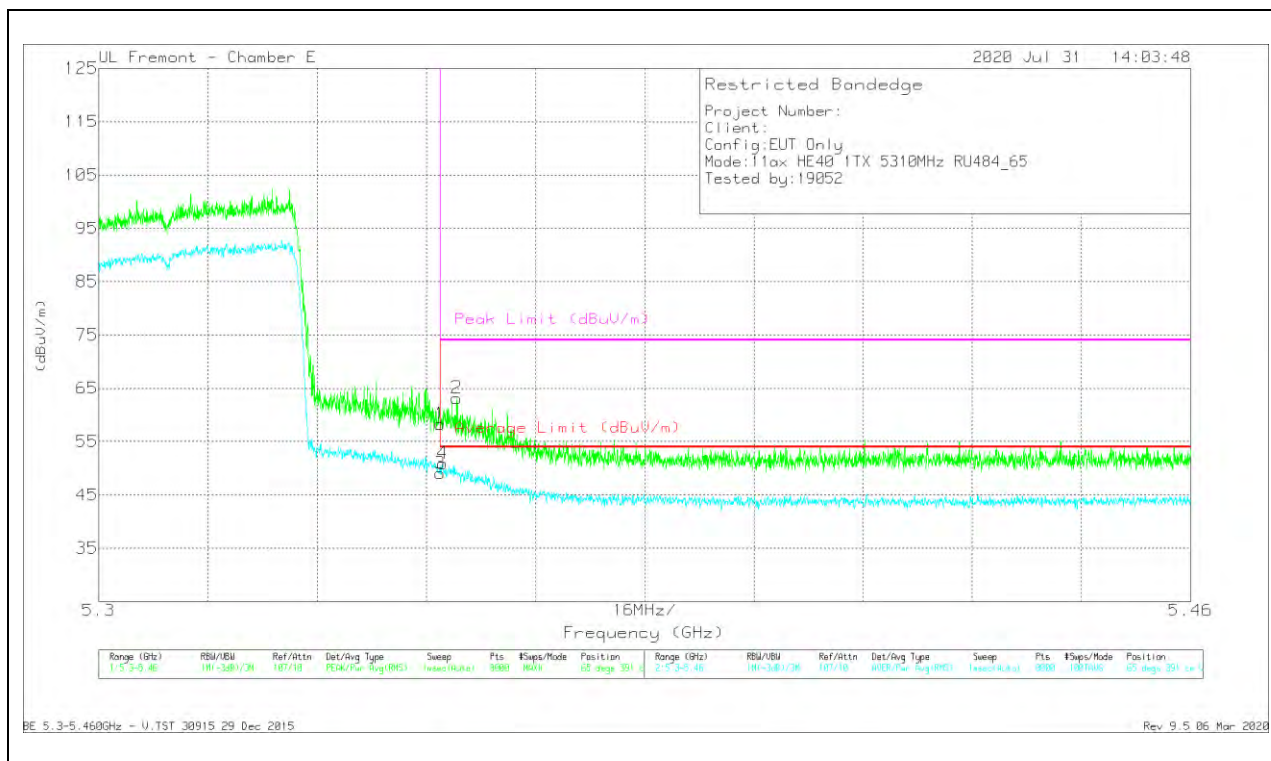

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	45.61	Pk	34.5	-21.8	58.31	-	-	74	-15.69	65	391	V
2	* 5.35245	50.34	Pk	34.5	-21.7	63.14	-	-	74	-10.86	65	391	V
3	* 5.35001	36.33	RMS	34.5	-21.8	49.03	54	-4.97	-	-	65	391	V
4	* 5.35037	38.2	RMS	34.5	-21.8	50.9	54	-3.1	-	-	65	391	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

1TX ANTENNA 5 – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

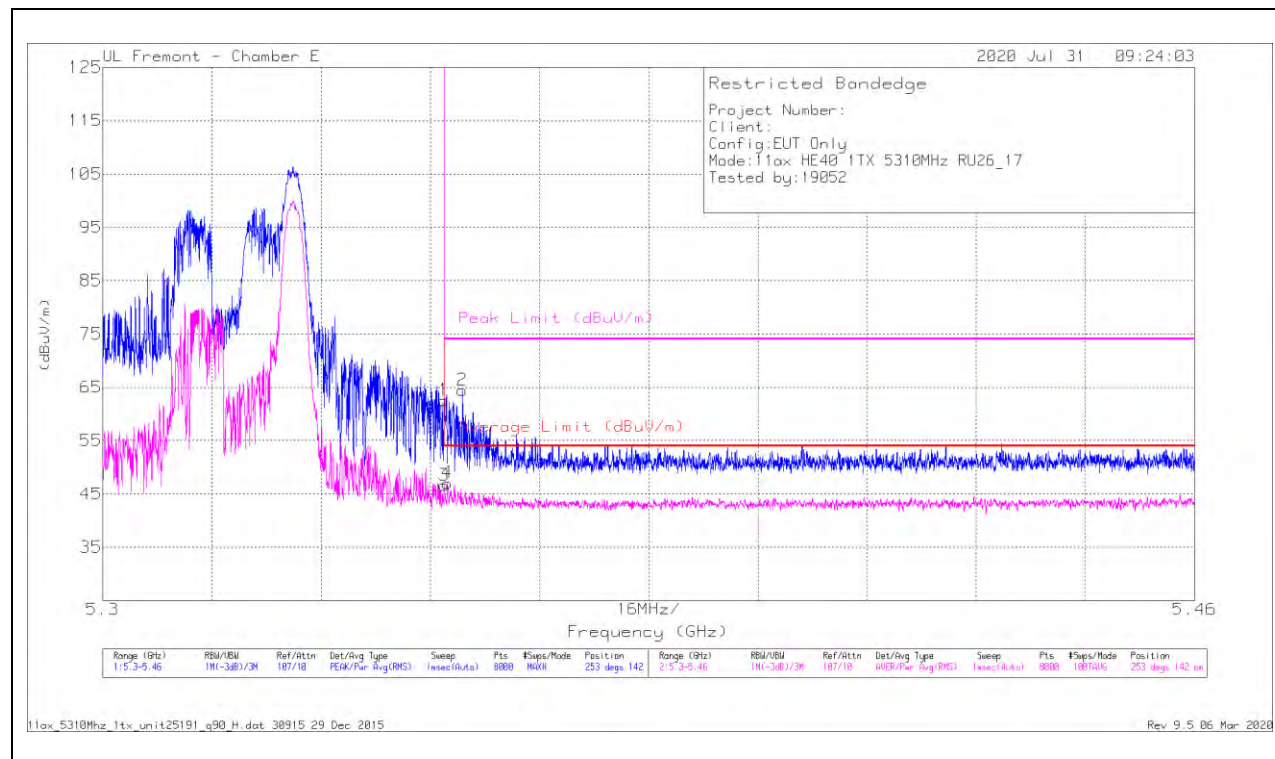


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	49.83	Pk	34.5	-21.8	62.53	-	-	74	-11.47	253	142	H
2	* 5.35271	51.64	Pk	34.5	-21.7	64.44	-	-	74	-9.56	253	142	H
3	* 5.35001	33.92	RMS	34.5	-21.8	46.62	54	-7.38	-	-	253	142	H
4	* 5.35051	34.32	RMS	34.5	-21.8	47.02	54	-6.98	-	-	253	142	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

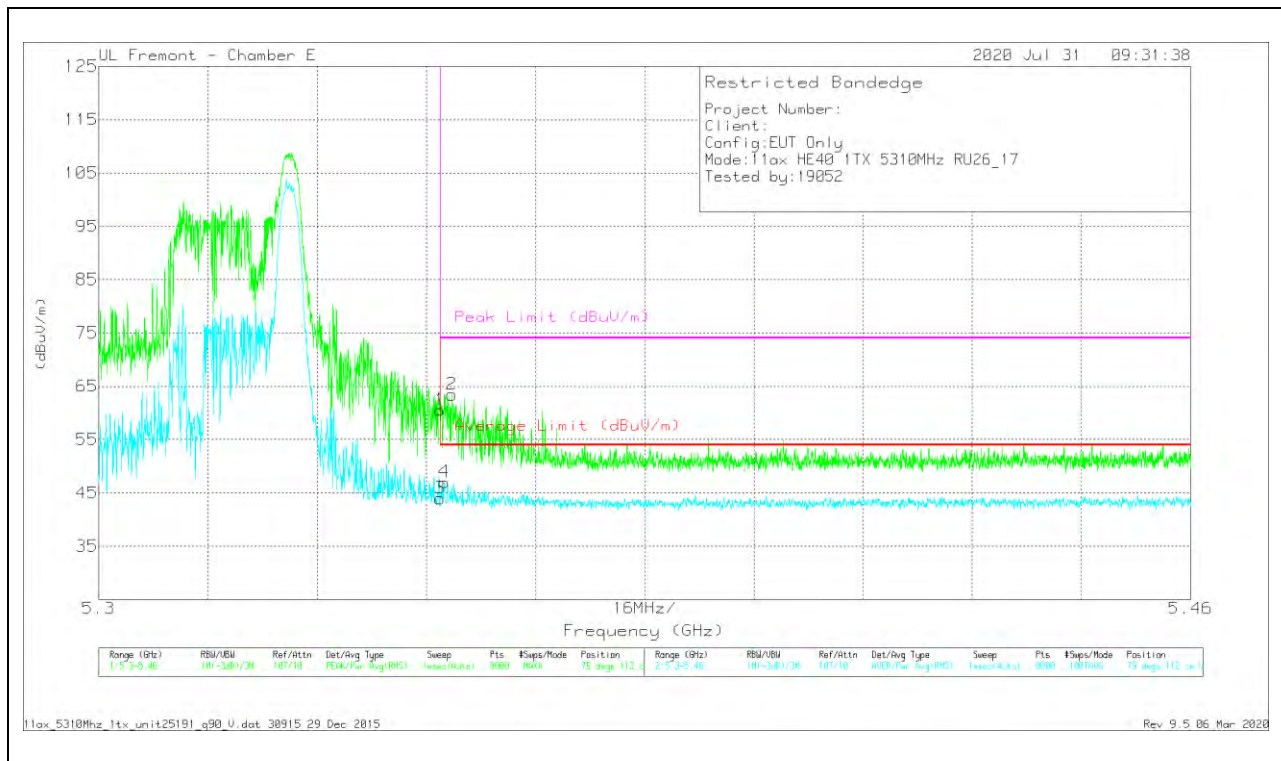


Marker	Frequency (GHz)	Meter Reading (dBUV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.86	Pk	34.5	-21.8	60.56	-	-	74	-13.44	79	112	V
2	* 5.35173	50.64	Pk	34.5	-21.7	63.44	-	-	74	-10.56	79	112	V
3	* 5.35001	31.3	RMS	34.5	-21.8	44	54	-10	-	-	79	112	V
4	* 5.35065	34.32	RMS	34.5	-21.8	47.02	54	-6.98	-	-	79	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 484 Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

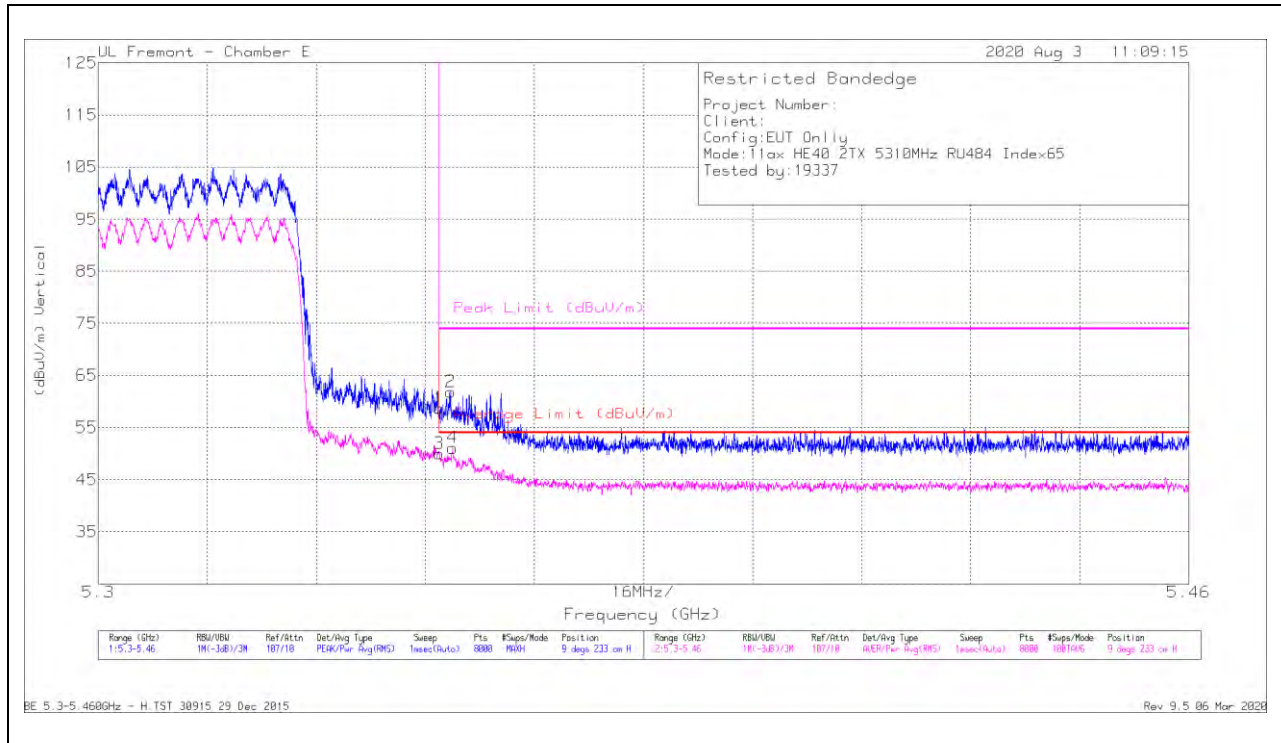


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	46.05	Pk	34.5	-21.8	58.75	-	-	74	-15.25	9	233	H
2	* 5.35171	49.07	Pk	34.5	-21.7	61.87	-	-	74	-12.13	9	233	H
3	* 5.35001	37.36	RMS	34.5	-21.8	50.06	54	-3.94	-	-	9	233	H
4	* 5.35199	38.27	RMS	34.5	-21.7	51.07	54	-2.93	-	-	9	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

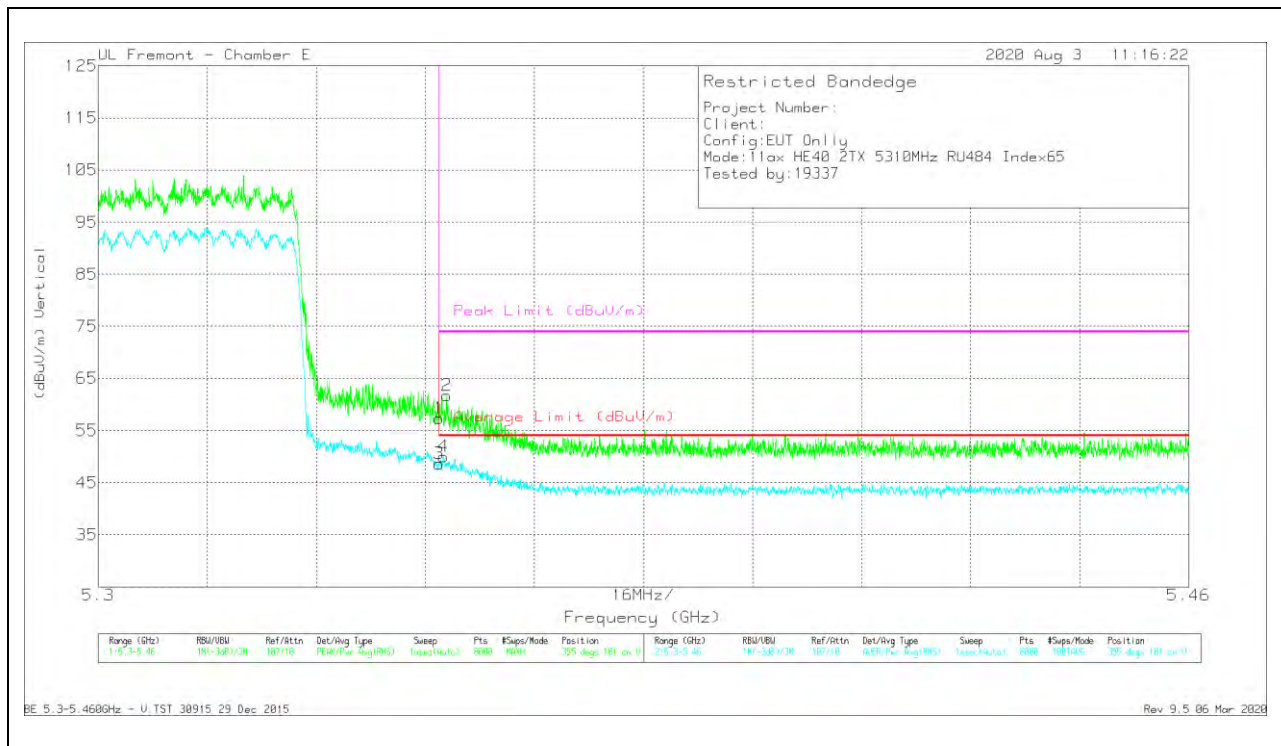

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	44.68	Pk	34.5	-21.8	57.38	-	-	74	-16.62	355	101	V
2	* 5.35113	48.99	Pk	34.5	-21.8	61.69	-	-	74	-12.31	355	101	V
3	* 5.35001	35.92	RMS	34.5	-21.8	48.62	54	-5.38	-	-	355	101	V
4	* 5.35063	37.25	RMS	34.5	-21.8	49.95	54	-4.05	-	-	355	101	V



* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

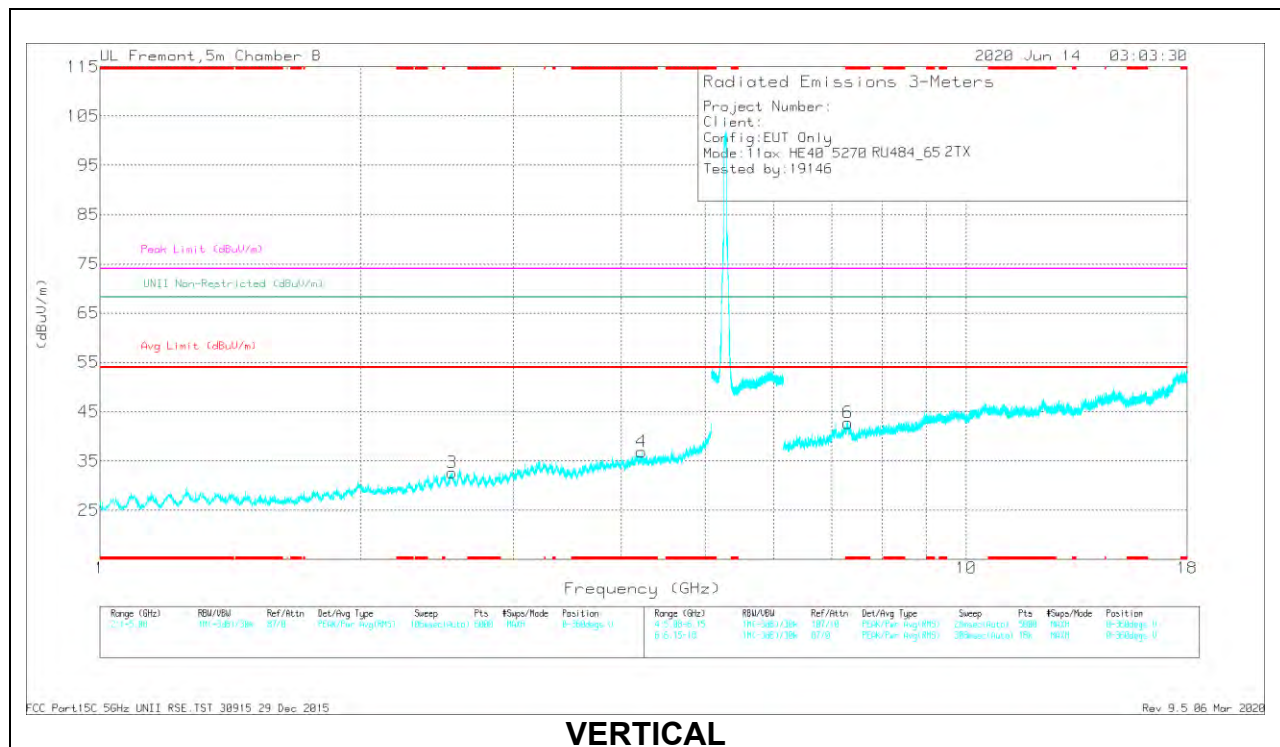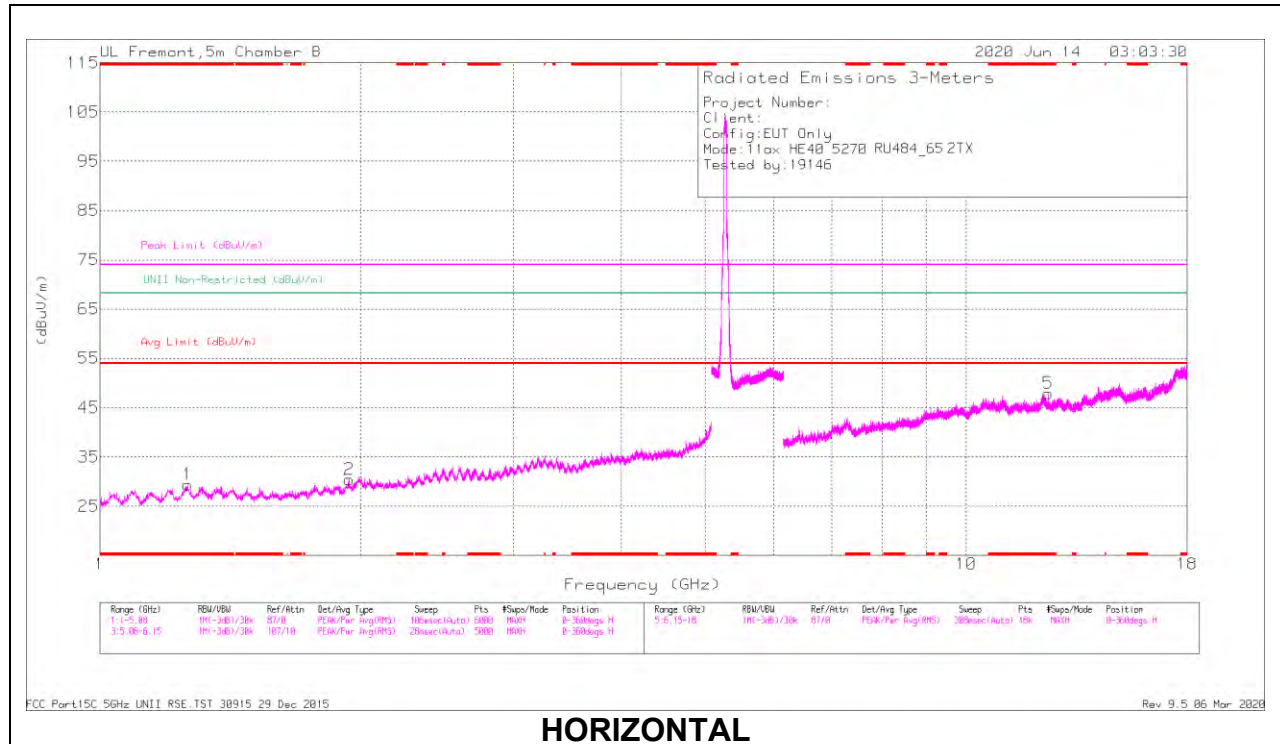

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T962 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.26249	42.13	PK-U	25.5	-31.2	36.43	-	-	74	-37.57	-	-	11	147	H
	* 1.26068	30.03	ADR	25.5	-31.2	24.33	54	-29.67	-	-	-	-	11	147	H
4	* 4.221	36.45	PK-U	31.7	-25.9	42.25	-	-	74	-31.75	-	-	122	287	V
	* 4.2195	24.97	ADR	31.7	-25.9	30.77	54	-23.23	-	-	-	-	122	287	V
5	* 12.44951	33.02	PK-U	40.1	-19.5	53.62	-	-	74	-20.38	-	-	156	330	H
	* 12.44984	21.26	ADR	40.1	-19.5	41.86	54	-12.14	-	-	-	-	156	330	H
6	* 7.30417	34.13	PK-U	37.1	-21.1	50.13	-	-	74	-23.87	-	-	255	212	V
	* 7.30439	22.1	ADR	37.1	-21.1	38.1	54	-15.9	-	-	-	-	255	212	V
2	1.93732	39.48	PK-U	26.5	-29.1	36.88	-	-	-	-	68.2	-31.32	65	257	H
3	2.54967	39.8	PK-U	29.3	-29	40.1	-	-	-	-	68.2	-28.1	324	361	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL RESULTS

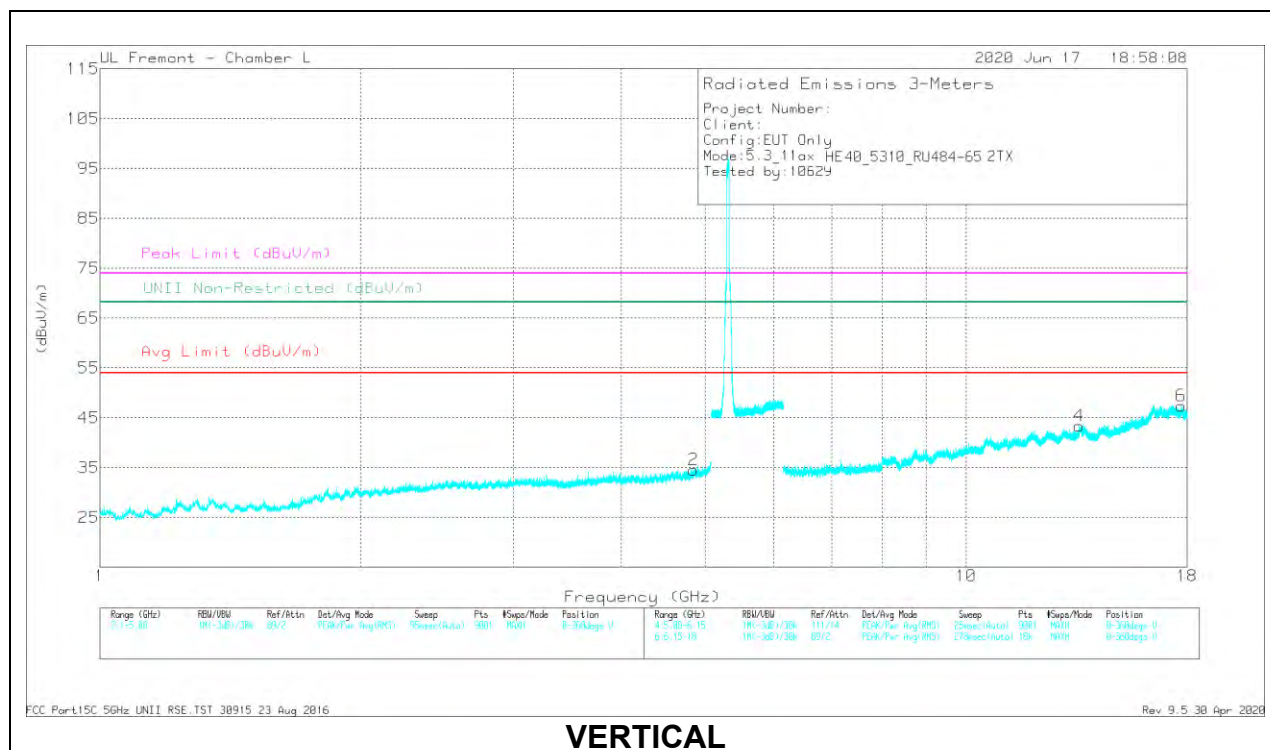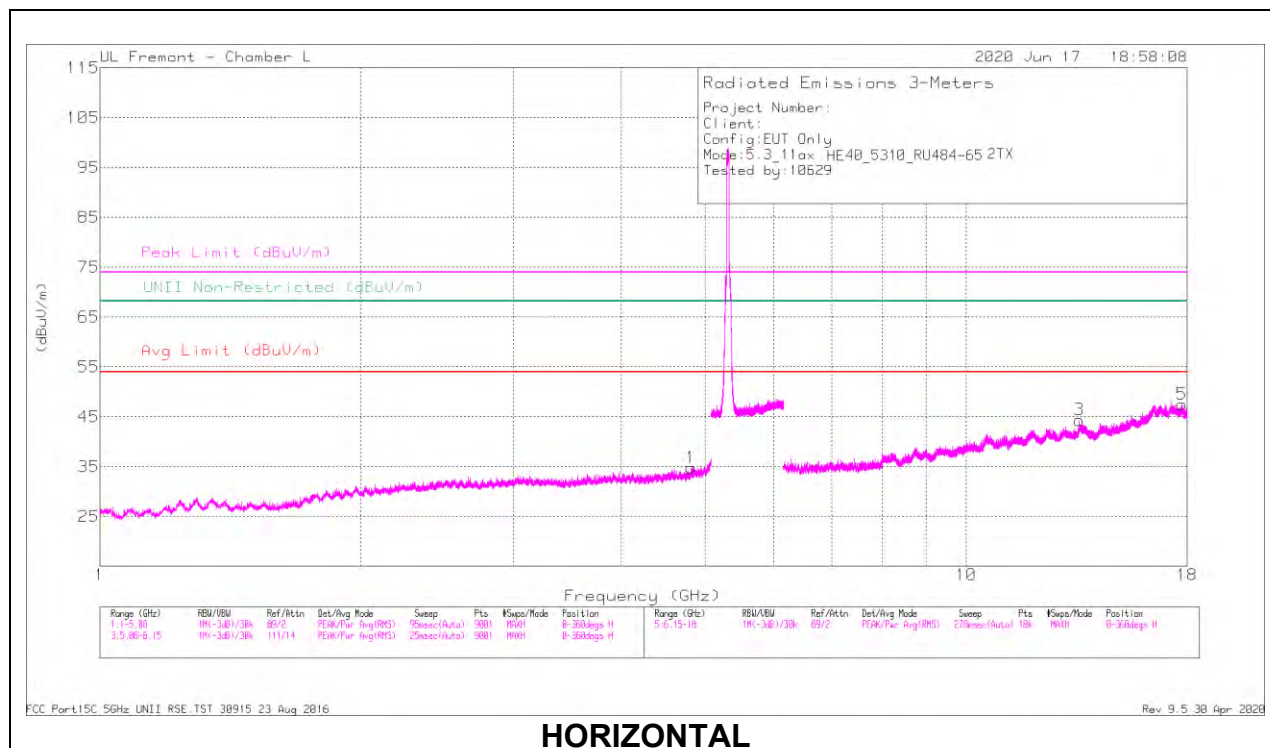

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF 344 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	* 4.81524	36.81	PK-U	34.2	-27.2	43.81	-	-	74	-30.19	-	-	234	223	H
	* 4.81532	26.41	ADR	34.2	-27.2	33.41	54	-20.59	-	-	-	-	234	223	H
2	* 4.84702	34.44	PK-U	34.2	-26.8	41.84	-	-	74	-32.16	-	-	106	138	V
	* 4.84717	24.66	ADR	34.2	-26.8	32.06	54	-21.94	-	-	-	-	106	138	V
3	13.51012	33.71	PK-U	39	-19.3	53.41	-	-	-	-	68.2	-14.79	324	325	H
5	* 17.74458	30.38	PK-U	41.6	-16.6	55.38	-	-	74	-18.62	-	-	165	319	H
	* 17.74149	20.02	ADR	41.6	-16.6	45.02	54	-8.98	-	-	-	-	165	319	H
4	13.50309	31.99	PK-U	39	-19.3	51.69	-	-	-	-	68.2	-16.51	233	257	V
6	* 17.73264	30.95	PK-U	41.6	-16.6	55.95	-	-	74	-18.05	-	-	348	231	V
	* 17.73161	19.91	ADR	41.6	-16.6	44.91	54	-9.09	-	-	-	-	348	231	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

2TX ANTENNA 6 + ANTENNA 5 OFDMA MODE – 26 Tones, RU Index 17

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

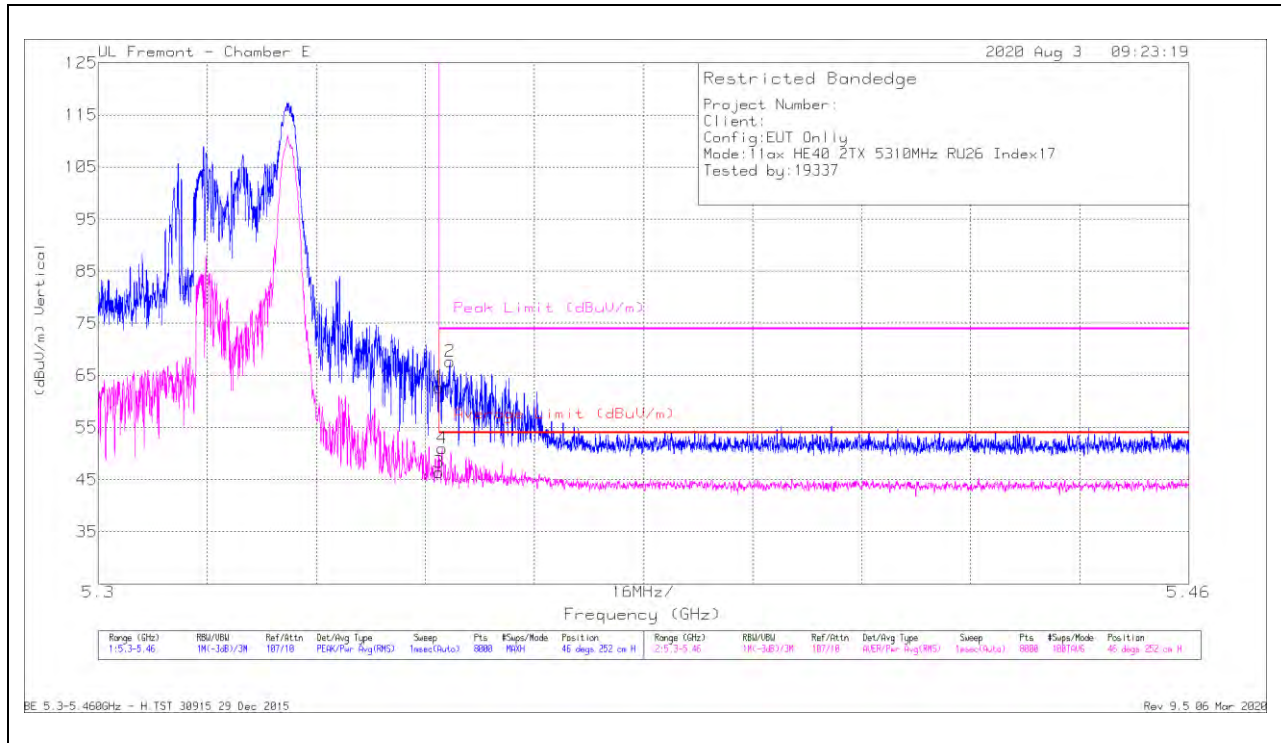


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	49.99	Pk	34.5	-21.8	62.69	-	-	74	-11.31	46	252	H
2	* 5.35159	54.91	Pk	34.5	-21.7	67.71	-	-	74	-6.29	46	252	H
3	* 5.35001	33.67	RMS	34.5	-21.8	46.37	54	-7.63	-	-	46	252	H
4	* 5.35045	38.36	RMS	34.5	-21.8	51.06	54	-2.94	-	-	46	252	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

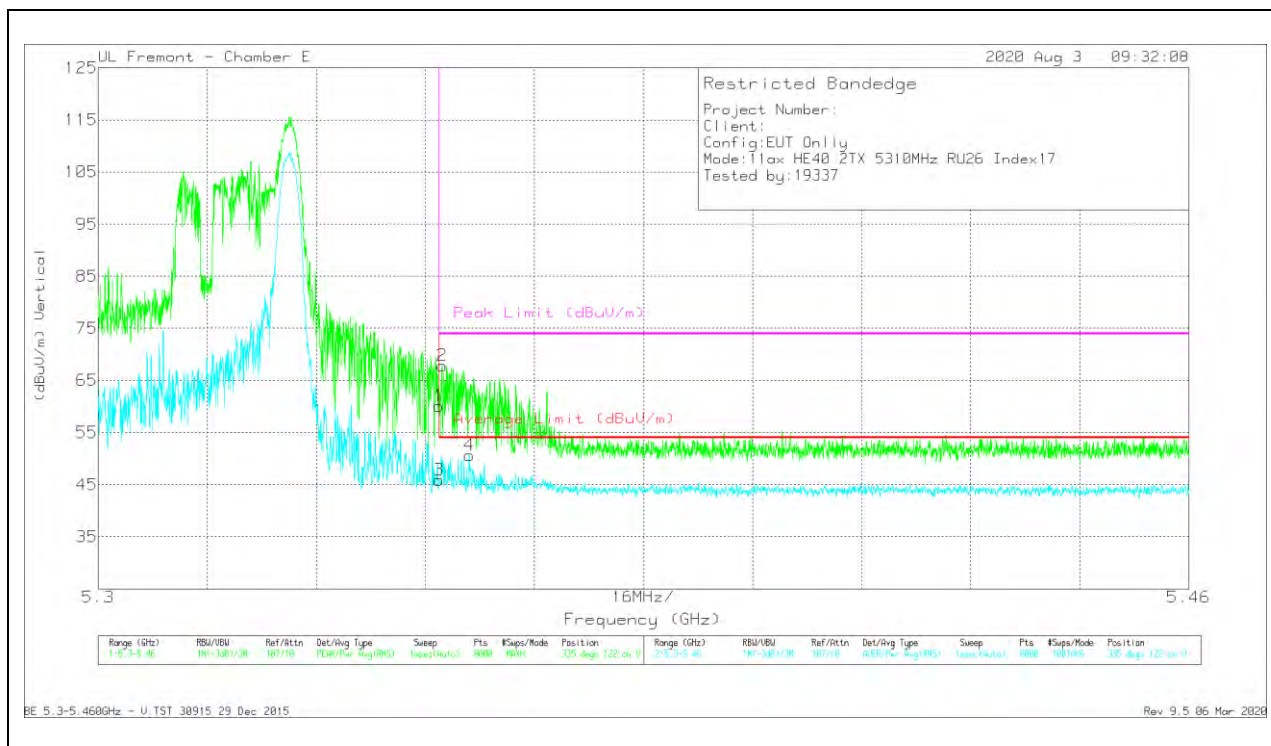

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T712 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35001	47.42	Pk	34.5	-21.8	60.12	-	-	74	-13.88	335	122	V
2	* 5.35043	55.18	Pk	34.5	-21.8	67.88	-	-	74	-6.12	335	122	V
3	* 5.35001	33.16	RMS	34.5	-21.8	45.86	54	-8.14	-	-	335	122	V
4	* 5.35443	37.78	RMS	34.5	-21.7	50.58	54	-3.42	-	-	335	122	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL RESULTS

