

EMC TEST REPORT

Test item : LED LCD TV Monitor
Model No. : 26LT560C-UA
Order No. : 1202-00229
Date of receipt : 2012-02-15
Test duration : 2012-02-21 ~ 2012-02-25
Use of report : FCC CoC Marking
Date of Issue : 2012-02-27

Applicant : LG Electronics Inc.

9-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Test laboratory : Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003
FCC Part 15 Subpart B
(Type of Device : Class B Personal Computers
and Peripherals (JBP))

Test environment : Temperature : (19 ~ 22) °C,
Humidity : (29 ~ 35) % R.H.

Test result : Comply Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:

Reviewed by:



Manager
H.S.KO



General Manager
C.H.LEE

The above test report is the accredited test results by Korea Laboratory Accreditation Scheme, which signed the ILAC-MRA.

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	7
6. Test Results : Emission	8
6.1 Conducted Disturbance	8
6.2 Radiated Disturbance	15
Appendix 1	35
List of Test and Measurement Instruments	35

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. Has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1124C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	26LT560C-UA
EUT Type	LED LCD TV Monitor
Serial No	NONE
FCC ID	BEJ26LT560CUA
Type of Sample Tested	Pre-Production
High Frequency	667 MHz
Rating	DC 24 V, 1.8 A
Supplied Power for Test	AC 120 V, 60 Hz
Applicant	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
Manufacturer	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
720x400	31.469	70.08
640x480	31.469	59.94
800x600	37.879	60.31
1024x768	48.363	60.00
1360x768	47.712	60.015

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	C
Radiated Disturbance	ANSI C63.4:2003	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)	Pressure (hPa)
Conducted Disturbance	02-21	19	29	-
Radiated Disturbance	02-25	22	35	

4.3 Test result Summary

(1) Conducted Emission(HDMI MODE)

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
0.18725	N	45.0	Quasi-Peak	64.2	19.2

(2) Radiated Emission(USB MODE)

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
513.048	V	41.9	Quasi-Peak	46.0	4.1

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

5.2 Test Operation Mode

- DSUB MODE – Resolution : 1360 x 768 Resolution (Worst Case)
- HDMI MODE – Resolution : 1360 x 768 Resolution (Worst Case)
- USB MODE

EUT is the following operational conditions apply:

- a) Set the contrast control to maximum.
- b) Set the brightness control to maximum or at raster extinction if raster extinction occurs at less than maximum brightness.
- c) For color monitors, use white letters on a black background to represent all colors.
- d) Select the worse case of positive or negative video if both alternatives are available.
- e) Set character size and number of characters per line so that the typical maximum number of characters per screen is displayed.
- f) For a monitor that has no graphics capabilities, regardless of the video card used, a pattern consisting of random text shall be displayed. For a monitor with graphics capability, even though another videocard may be needed to accomplish a graphic display, a screen pattern consisting of lines of scrolling H's should be displayed. For a monitor that has no text capabilities, use a typical display. That pattern should be used for the remainder of the tests.

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE				Backshell	FCC ID
				Connect type	Length (m)	ferrite core	shield		
PC	VOSTRO 430	9K77SBX	DELL	POWER	1.8	Not use	Non-shield	Plastic	DOC
				HDMI	1.8	Not use	Shield		
				DSUB	1.6	Use	Shield		
				STEREO	1.8	Not use	Non-shield		
				PS/2	1.6	Not use	Non-shield		
PS/2	1.8	Not use	Non-shield						
KEYBOARD	SKG-210PB	TAKSB24503Y	MONITEREY INTERNATIONAL CORP	PS/2	1.6	Not use	Non-shield	Plastic	DOC
MOUSE	SML-510PB	TAKS903519Z	MONITEREY INTERNATIONAL CORP	PS/2	1.8	Not use	Non-shield	Plastic	DOC
CD/DVD PLAYER	DVP-NS92V	2000407	SONY EMCS	POWER AV	1.8 1.6	Not use	Non-shield	Plastic	DOC
USB MEMORY	CRVZER	N/A	SANDISK	USB	-	-	-	-	DOC

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15MHz to 30MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 0.4m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Test Result

< DSUB MODE >





Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No.	: 26LT560C-UA	Reference No.	:
Type	:	Power Supply	: 120V 60Hz
Serial No.	:	Temp/Humi.	: 19 °C 29 % R.H.
Test Condition	: DSUB	Operator	:

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

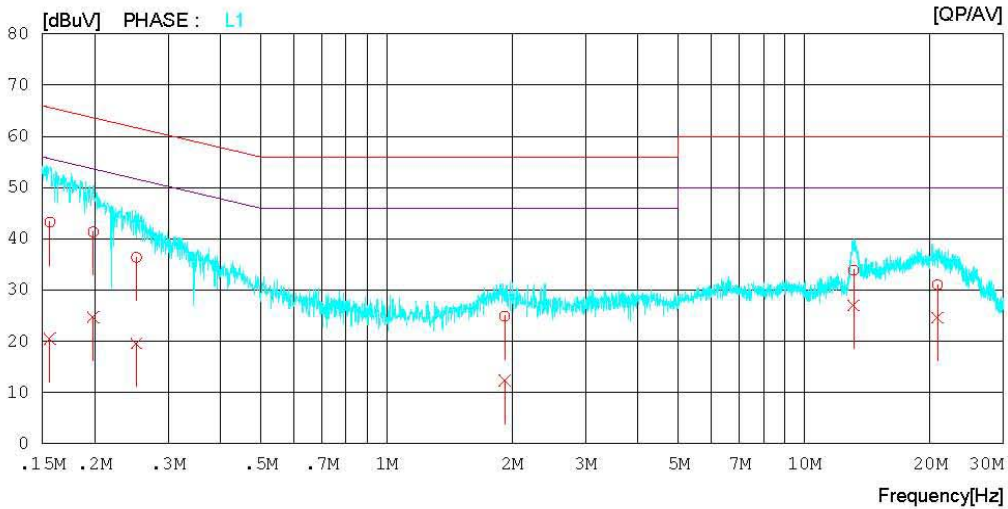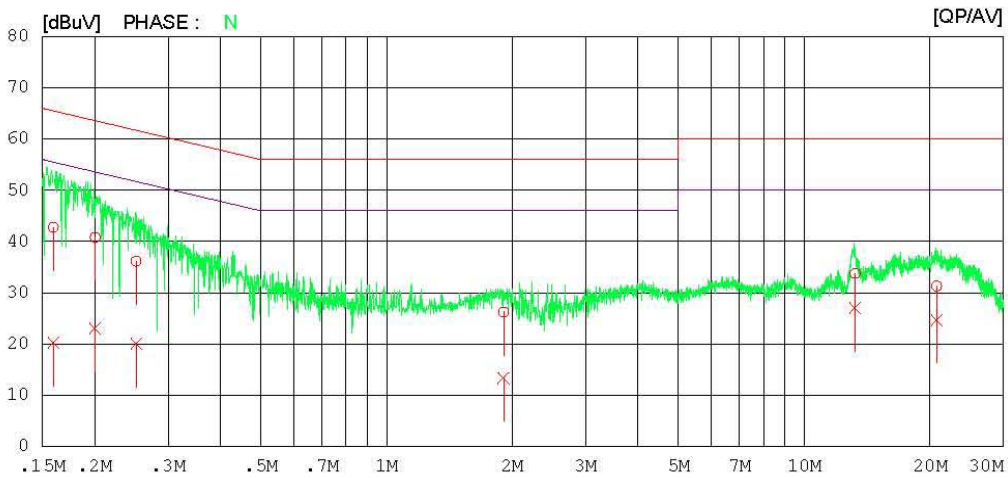

Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No. : 26LT560C-UA
 Type :
 Serial No. :
 Test Condition : DSUB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 19 °C 29 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15951	42.5	19.9	0.3	42.8	20.2	65.5	55.5	22.7	35.3	N
2	0.20064	40.6	22.8	0.2	40.8	23.0	63.6	53.6	22.8	30.6	N
3	0.25150	35.9	19.8	0.2	36.1	20.0	61.7	51.7	25.6	31.7	N
4	1.90650	25.9	13.0	0.3	26.2	13.3	56.0	46.0	29.8	32.7	N
5	13.24650	32.8	26.1	0.9	33.7	27.0	60.0	50.0	26.3	23.0	N
6	20.76550	30.2	23.6	1.1	31.3	24.7	60.0	50.0	28.7	25.3	N
7	0.15631	43.0	20.2	0.3	43.3	20.5	65.7	55.7	22.4	35.2	L1
8	0.19859	41.2	24.5	0.2	41.4	24.7	63.7	53.7	22.3	29.0	L1
9	0.25203	36.2	19.4	0.2	36.4	19.6	61.7	51.7	25.3	32.1	L1
10	1.91900	24.6	12.1	0.3	24.9	12.4	56.0	46.0	31.1	33.6	L1
11	13.12800	33.0	26.1	0.9	33.9	27.0	60.0	50.0	26.1	23.0	L1
12	20.85300	29.9	23.5	1.1	31.0	24.6	60.0	50.0	29.0	25.4	L1

< HDMI MODE >





Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No.	: 26LT560C-UA	Reference No.	:
Type	:	Power Supply	: 120V 60Hz
Serial No.	:	Temp/Humi.	: 19 °C 29 % R.H.
Test Condition	: HDMI	Operator	:

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

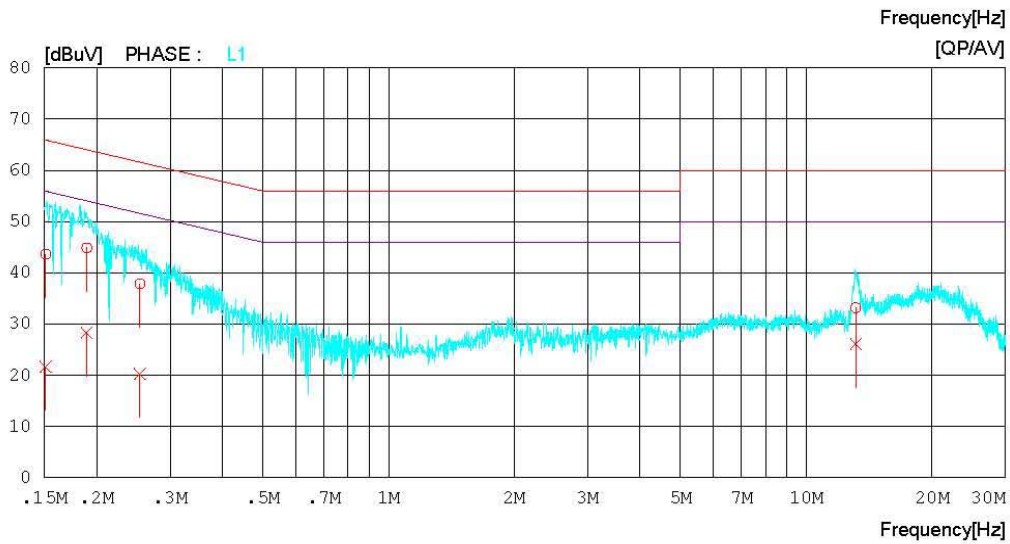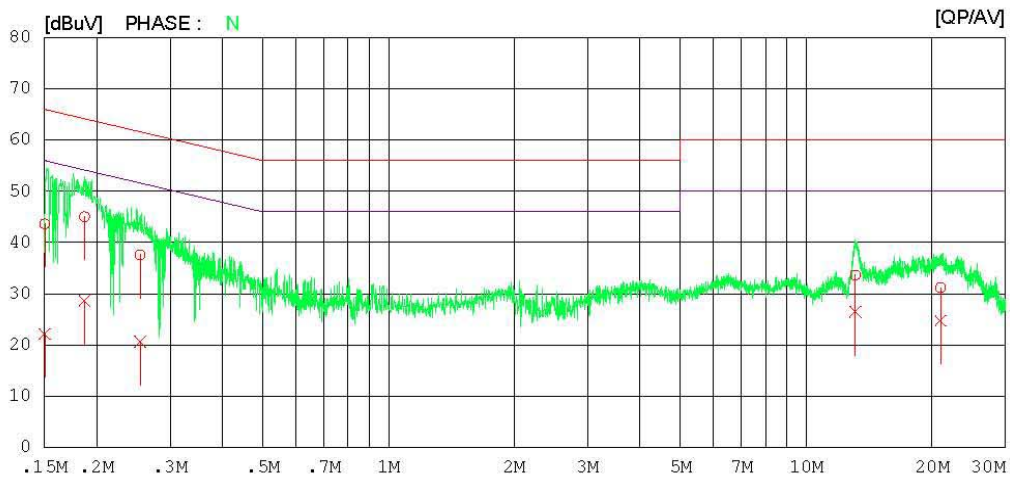

Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No. : 26LT560C-UA
 Type :
 Serial No. :
 Test Condition : HDMI

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 19 °C 29 % R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15039	43.3	21.8	0.3	43.6	22.1	66.0	56.0	22.4	33.9	N
2	0.18725	44.8	28.4	0.2	45.0	28.6	64.2	54.2	19.2	25.6	N
3	0.25446	37.4	20.4	0.2	37.6	20.6	61.6	51.6	24.0	31.0	N
4	13.10800	32.7	25.6	0.9	33.6	26.5	60.0	50.0	26.4	23.5	N
5	20.99050	30.1	23.6	1.1	31.2	24.7	60.0	50.0	28.8	25.3	N
6	0.15111	43.4	21.4	0.3	43.7	21.7	65.9	55.9	22.2	34.2	L1
7	0.18953	44.7	28.1	0.2	44.9	28.3	64.1	54.1	19.2	25.8	L1
8	0.25398	37.7	20.1	0.2	37.9	20.3	61.6	51.6	23.7	31.3	L1
9	13.14400	32.3	25.3	0.9	33.2	26.2	60.0	50.0	26.8	23.8	L1

< USB MODE >





Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No.	: 26LT560C-UA	Reference No.	:
Type	:	Power Supply	: 120V 60Hz
Serial No.	:	Temp/Humi.	: 19°C 29% R.H.
Test Condition	: USB	Operator	:

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

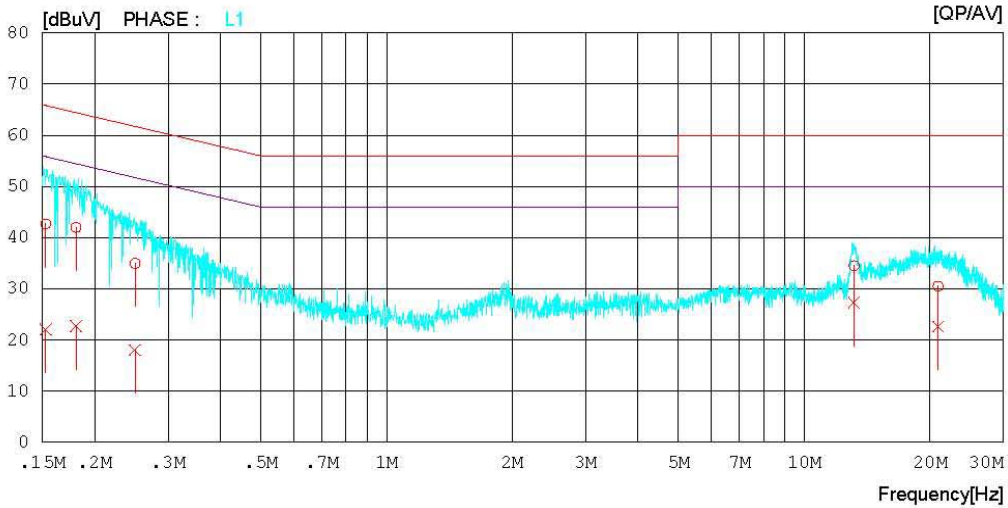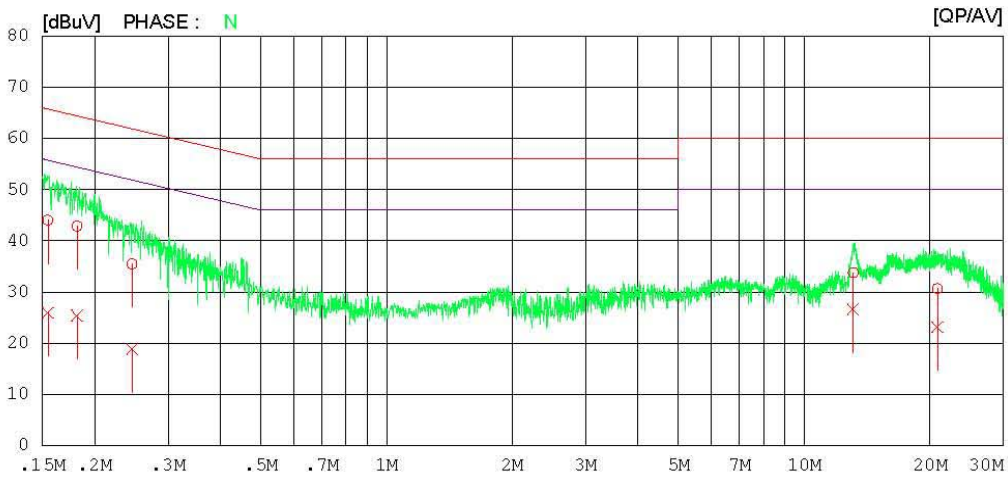

Results of Conducted Emission

Digital EMC
 Date : 2012-02-21

Model No. : 26LT560C-UA
 Type :
 Serial No. :
 Test Condition : USB

Reference No. :
 Power Supply : 120V 60Hz
 Temp/Humi. : 19°C 29% R.H.
 Operator :

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15475	43.7	25.6	0.3	44.0	25.9	65.7	55.7	21.7	29.8	N
2	0.18153	42.7	25.2	0.2	42.9	25.4	64.4	54.4	21.5	29.0	N
3	0.24609	35.3	18.7	0.2	35.5	18.9	61.9	51.9	26.4	33.0	N
4	13.10300	32.9	25.8	0.9	33.8	26.7	60.0	50.0	26.2	23.3	N
5	20.84200	29.6	22.0	1.1	30.7	23.1	60.0	50.0	29.3	26.9	N
6	0.15284	42.4	21.8	0.3	42.7	22.1	65.8	55.8	23.1	33.7	L1
7	0.18065	41.8	22.5	0.2	42.0	22.7	64.5	54.5	22.5	31.8	L1
8	0.25004	34.8	17.9	0.2	35.0	18.1	61.8	51.8	26.8	33.7	L1
9	13.16450	33.7	26.4	0.9	34.6	27.3	60.0	50.0	25.4	22.7	L1
10	20.91750	29.4	21.5	1.1	30.5	22.6	60.0	50.0	29.5	27.4	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8m above the reference ground plane and 3m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15m above the reference ground plane.

Rotate the EUT from 0° to 360° and position the receiving antenna at heights from 1 to 4m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1GHz frequency range, Quasi-Peak detector with 120kHz RBW was used.

Also Peak and Average detector with 1MHz RBW were used for above 1GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40GHz, whichever is lower

(1) Limit for Radiated Emission below 1000MHz

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (3m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10m distance)	Class B Equipment (10m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 230	40	30
230 to 1000	47	37

(2) Limits for Radiated Emission above 1000MHz at a measuring distance of 3m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Test Result

< DSUB MODE_30 MHz ~ 1 GHz >



RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : DUSB	Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
 MARGIN: 3 dB

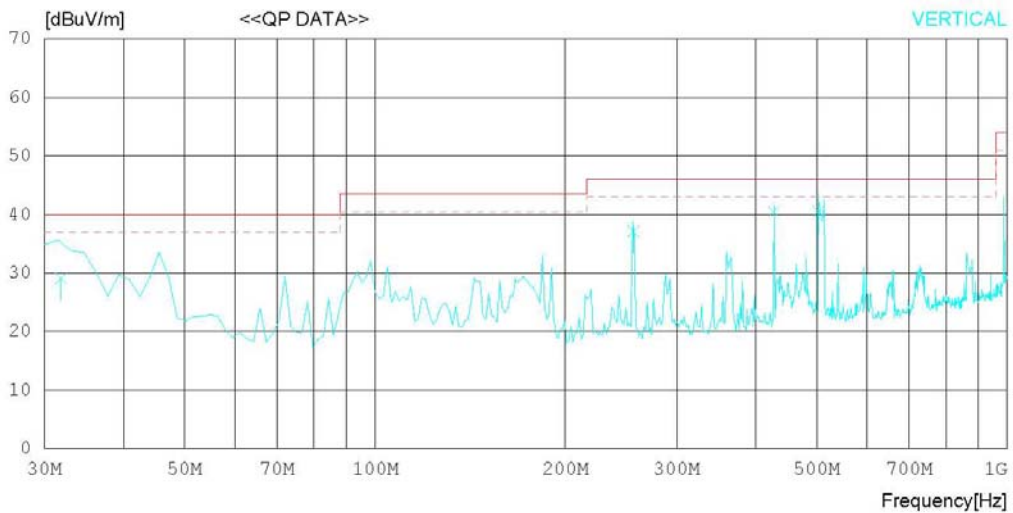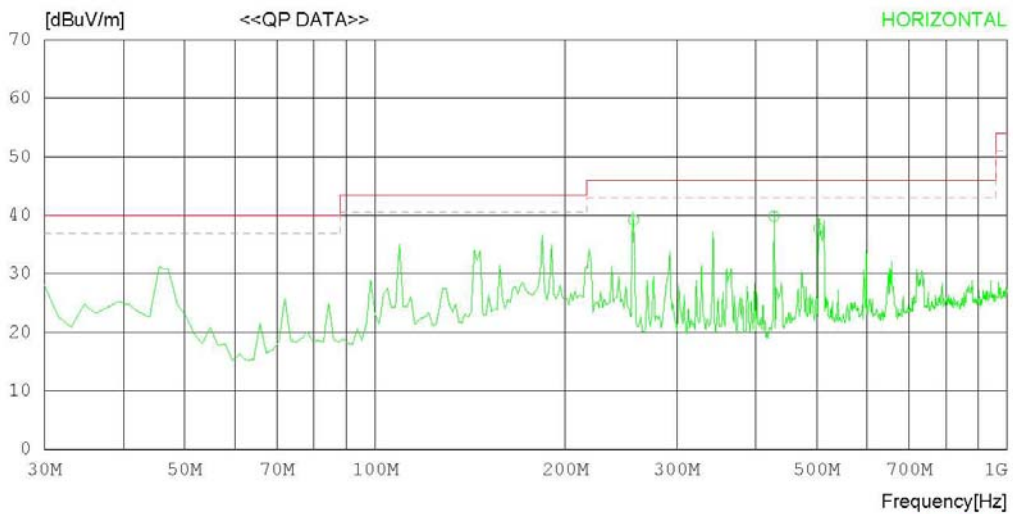

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : DUSB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	256.506	47.2	13.2	2.4	23.6	39.2	46.0	6.8	120	211
2	427.508	44.9	16.4	3.1	24.6	39.8	46.0	6.2	111	165
3	503.144	41.3	17.7	3.4	24.7	37.7	46.0	8.3	185	200
----- Vertical -----										
4	31.836	34.2	17.2	0.9	23.2	29.1	40.0	10.9	103	262
5	256.522	45.1	13.2	2.4	23.6	37.1	46.0	8.9	100	65
6	427.517	45.6	16.4	3.1	24.6	40.5	46.0	5.5	100	189
7	503.081	44.2	17.7	3.4	24.7	40.6	46.0	5.4	100	165

RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: DSUB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1737.179	61.8	27.0	2.6	38.2	53.2	74.0	20.8	100	220
2	1809.295	64.5	27.3	2.6	38.1	56.3	74.0	17.7	100	358
3	1937.500	63.9	27.7	2.7	38.0	56.3	74.0	17.7	100	180
4	3139.439	56.9	30.3	3.5	35.8	54.9	74.0	19.1	100	231
5	3251.620	59.4	30.5	3.5	35.9	57.5	74.0	16.5	100	241
----- Vertical -----										
6	1416.667	61.0	25.8	2.4	38.6	50.6	74.0	23.4	100	189
7	1817.307	67.9	27.3	2.6	38.1	59.7	74.0	14.3	100	197
8	1929.487	63.9	27.7	2.7	38.0	56.3	74.0	17.7	100	197
9	3259.633	58.2	30.6	3.5	35.9	56.4	74.0	17.6	100	185
10	4509.639	53.0	32.8	4.3	35.9	54.2	74.0	19.8	100	1

< DSUB MODE_1 GHz ~ 6 GHz_Average >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: DSUB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

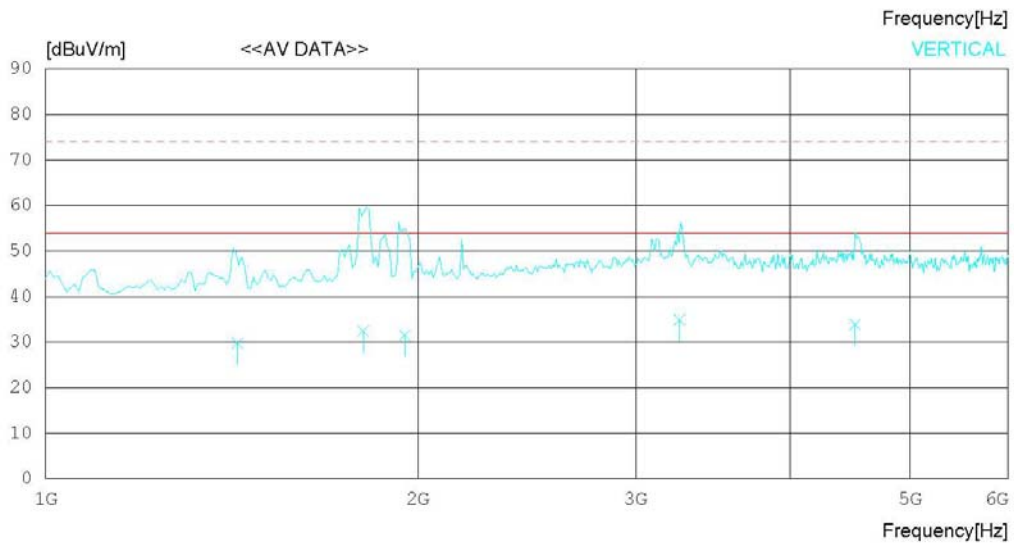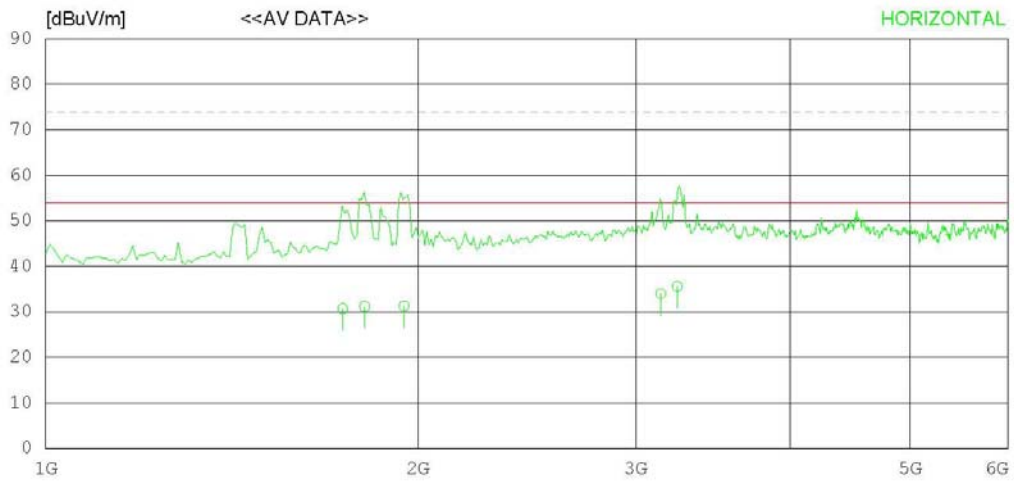

RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: DSUB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1738.602	40.7	25.2	6.5	41.7	30.7	54.0	23.3	100	195
2	1810.743	41.2	25.2	6.6	41.8	31.2	54.0	22.8	100	333
3	1949.435	40.9	25.2	6.9	41.7	31.3	54.0	22.7	100	209
4	3142.855	37.9	28.9	9.0	41.8	34.0	54.0	20.0	100	321
5	3239.160	39.3	29.0	9.1	41.8	35.6	54.0	18.4	100	152
----- Vertical -----										
6	1428.935	40.7	24.9	5.8	41.6	29.8	54.0	24.2	100	152
7	1806.583	42.4	25.2	6.6	41.8	32.4	54.0	21.6	100	124
8	1952.416	41.1	25.2	6.9	41.7	31.5	54.0	22.5	100	168
9	3252.217	38.6	29.0	9.1	41.8	34.9	54.0	19.1	100	194
10	4511.019	34.4	30.8	10.7	42.0	33.9	54.0	20.1	100	346

< HDMI MODE_30 MHz ~ 1 GHz >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: HDMI	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
 MARGIN: 3 dB

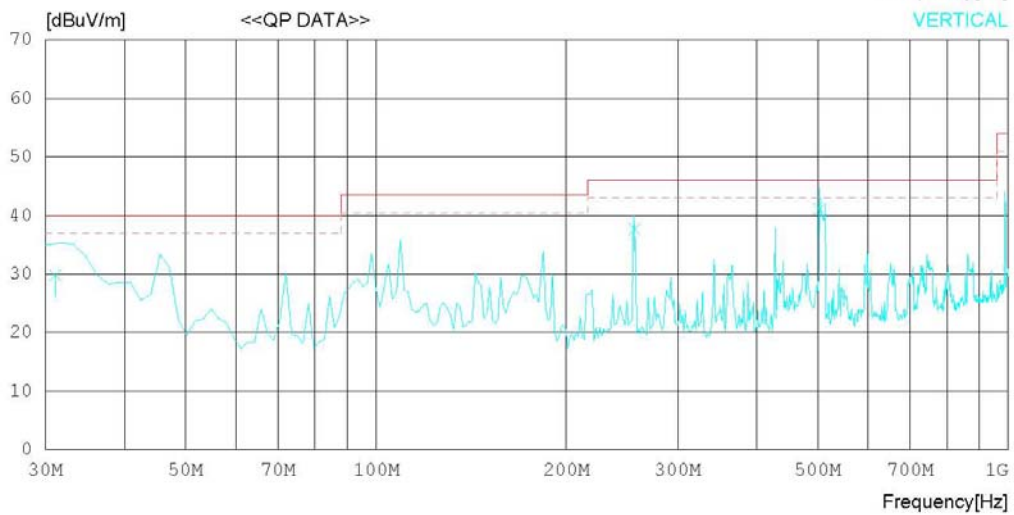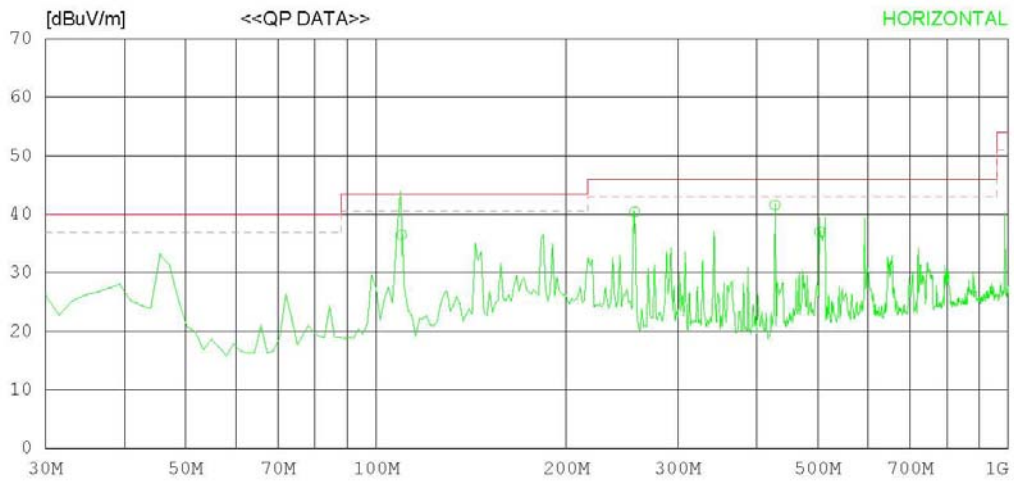

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	109.692	46.6	11.2	1.5	22.8	36.5	43.5	7.0	301	88
2	256.500	48.4	13.2	2.4	23.6	40.4	46.0	5.6	100	156
3	427.512	46.7	16.4	3.1	24.6	41.6	46.0	4.4	100	160
4	503.083	40.6	17.7	3.4	24.7	37.0	46.0	9.0	100	230
----- Vertical -----										
5	31.099	34.9	17.3	0.8	23.2	29.8	40.0	10.2	100	197
6	256.506	45.7	13.2	2.4	23.6	37.7	46.0	8.3	100	226
7	503.121	44.7	17.7	3.4	24.7	41.1	46.0	4.9	100	265

< HDMI MODE_1 GHz ~ 6 GHz_Peak >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: HDMI	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

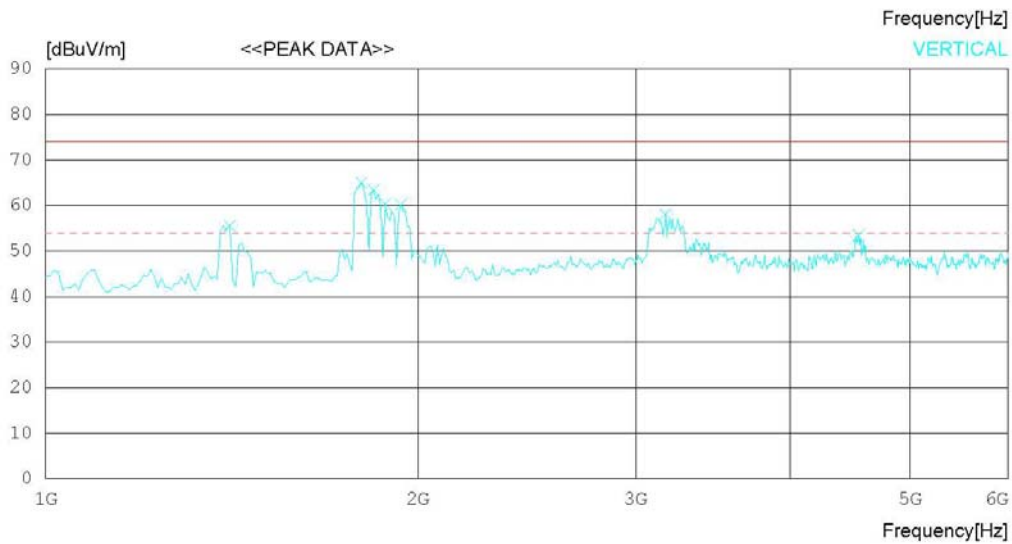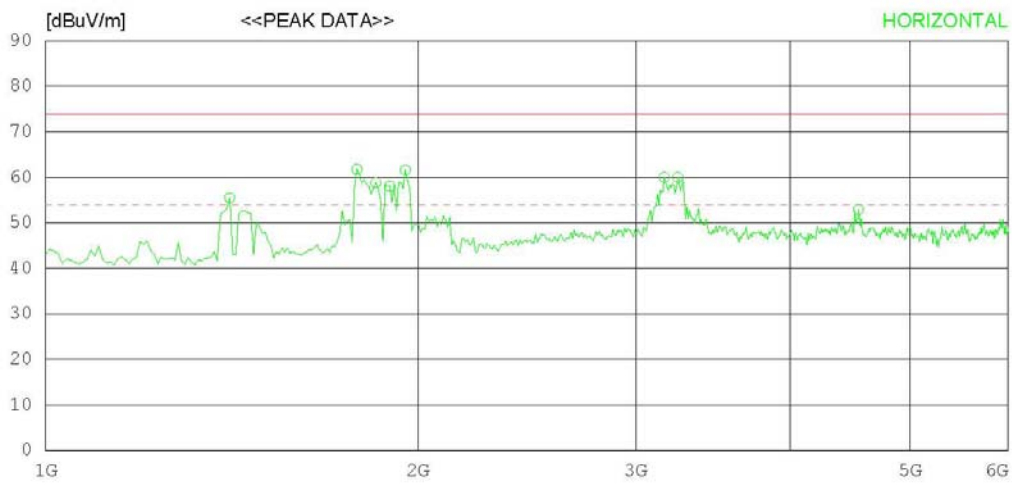

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : HDMI	Operator :

Memo :

 LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1408.654	66.6	24.9	5.7	41.7	55.5	74.0	18.5	100	226
2	1785.256	71.8	25.2	6.6	41.8	61.8	74.0	12.2	100	138
3	1849.359	68.7	25.2	6.7	41.8	58.8	74.0	15.2	100	1
4	1897.436	67.7	25.2	6.8	41.7	58.0	74.0	16	100	1
5	1953.525	71.2	25.2	6.9	41.7	61.6	74.0	12.4	100	178
6	3163.478	63.9	28.9	9.0	41.8	60.0	74.0	14	100	232
7	3243.607	63.7	29.0	9.1	41.8	60.0	74.0	14	100	223
8	4541.690	53.3	30.9	10.7	42.0	52.9	74.0	21.1	100	197
----- Vertical -----										
9	1408.654	66.7	24.9	5.7	41.7	55.6	74.0	18.4	100	358
10	1801.282	75.0	25.2	6.6	41.8	65.0	74.0	9	100	198
11	1841.346	73.3	25.2	6.7	41.8	63.4	74.0	10.6	100	198
12	1881.410	70.0	25.2	6.8	41.7	60.3	74.0	13.7	100	188
13	1937.500	69.8	25.2	6.9	41.7	60.2	74.0	13.8	100	358
14	3171.491	62.0	28.9	9.0	41.8	58.1	74.0	15.9	100	358
15	4541.690	53.8	30.9	10.7	42.0	53.4	74.0	20.6	100	177

< HDMI MODE_1 GHz ~ 6 GHz_Average >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: HDMI	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

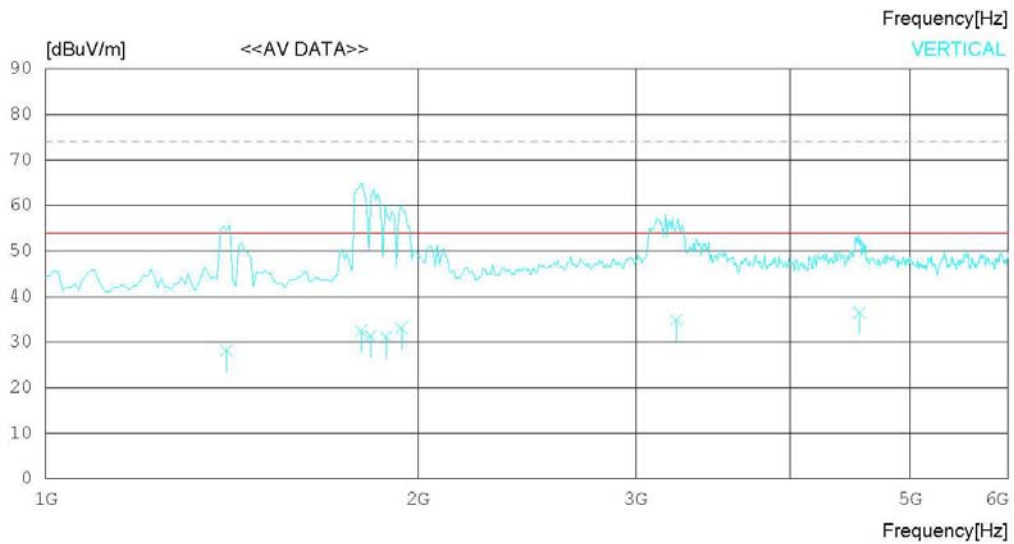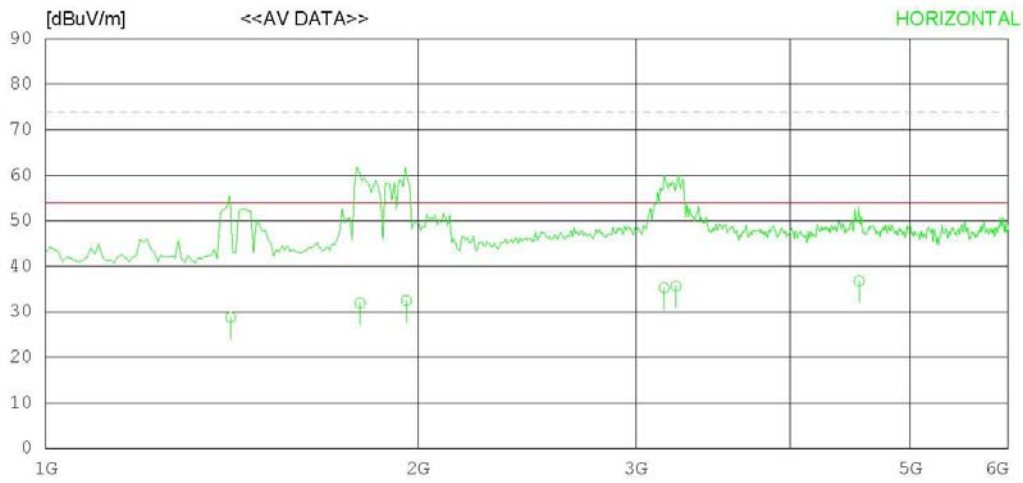

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : HDMI	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1411.403	39.9	24.9	5.7	41.7	28.8	54.0	25.2	100	226
2	1795.511	42.0	25.2	6.6	41.8	32.0	54.0	22.0	100	138
3	1957.166	42.1	25.2	6.9	41.7	32.5	54.0	21.5	100	1
4	3163.478	39.2	28.9	9.0	41.8	35.3	54.0	18.7	100	23
5	3233.032	39.4	29.0	9.1	41.8	35.7	54.0	18.3	100	178
6	4545.655	37.2	30.9	10.7	42.0	36.8	54.0	17.2	100	232
----- Vertical -----										
7	1400.641	39.4	24.8	5.7	41.7	28.2	54.0	25.8	100	358
8	1799.064	42.5	25.2	6.6	41.8	32.5	54.0	21.5	100	198
9	1831.064	41.2	25.2	6.7	41.8	31.3	54.0	22.7	100	198
10	1885.256	40.8	25.2	6.8	41.7	31.1	54.0	22.9	100	188
11	1940.064	42.7	25.2	6.9	41.7	33.1	54.0	20.9	100	358
12	3233.660	38.6	29.0	9.1	41.8	34.9	54.0	19.1	100	358
13	4550.050	37.0	30.9	10.7	42.0	36.6	54.0	17.4	100	177

< USB MODE_30 MHz ~ 1 GHz >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: USB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
 MARGIN: 3 dB

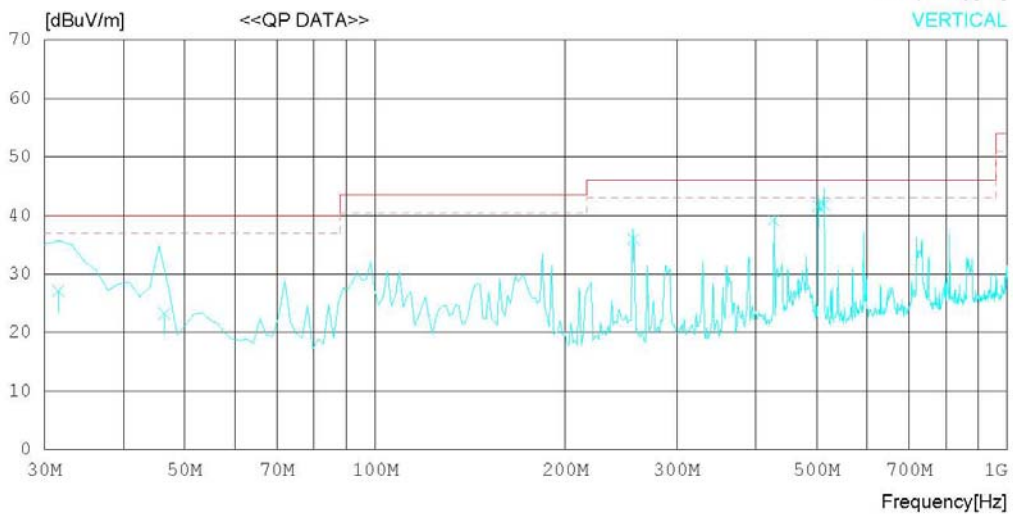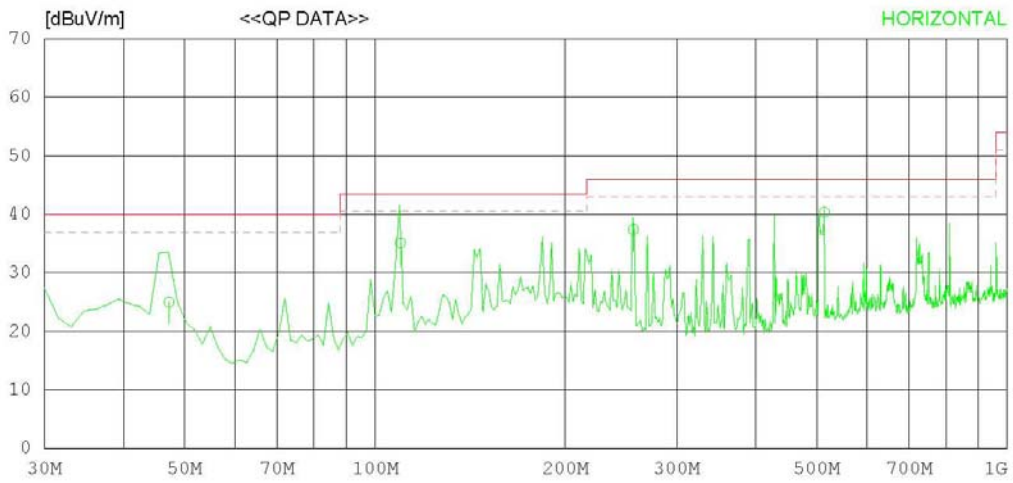

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	47.179	34.7	12.1	1.0	22.8	25.0	40.0	15.0	100	80
2	109.689	45.2	11.2	1.5	22.8	35.1	43.5	8.4	317	32
3	256.313	45.4	13.2	2.4	23.6	37.4	46.0	8.6	100	122
4	513.888	43.9	17.8	3.4	24.8	40.3	46.0	5.7	200	0
----- Vertical -----										
5	31.557	33.8	17.2	0.9	24.7	27.2	40.0	12.8	100	152
6	46.442	32.4	12.8	1.0	22.9	23.3	40.0	16.7	100	206
7	256.519	44.0	13.2	2.4	23.6	36.0	46.0	10.0	100	231
8	427.516	44.2	16.4	3.1	24.6	39.1	46.0	6.9	100	100
9	502.562	45.2	17.7	3.4	24.7	41.6	46.0	4.4	100	255
10	513.048	45.4	17.8	3.4	24.7	41.9	46.0	4.1	100	152

RADIATED EMISSION

Date : 2012-02-25

Model Name : 26LT560C-UA	Reference No. :
Model No. :	Power Supply : 120 V 60Hz
Serial No. :	Temp/Humi : 22 °C 35 % R.H.
Test Condition : USB	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1440.705	64.1	25.0	5.8	41.6	53.3	74.0	20.7	100	358
2	1801.282	60.5	25.2	6.6	41.8	50.5	74.0	23.5	100	212
3	1953.525	60.3	25.2	6.9	41.7	50.7	74.0	23.3	100	358
4	3267.646	56.1	29.0	9.1	41.8	52.4	74.0	21.6	100	358
----- Vertical -----										
5	1016.026	59.7	23.7	4.9	41.8	46.5	74.0	27.5	100	168
6	1088.141	60.1	23.9	5.0	41.8	47.2	74.0	26.8	100	1
7	1392.628	60.2	24.8	5.7	41.7	49.0	74.0	25	100	166
8	1801.282	61.3	25.2	6.6	41.8	51.3	74.0	22.7	100	1
9	1849.359	61.0	25.2	6.7	41.8	51.1	74.0	22.9	100	1
10	4509.639	54.8	30.8	10.7	42.0	54.3	74.0	19.7	100	1

< USB MODE_1 GHz ~ 6 GHz_Average >



RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: USB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

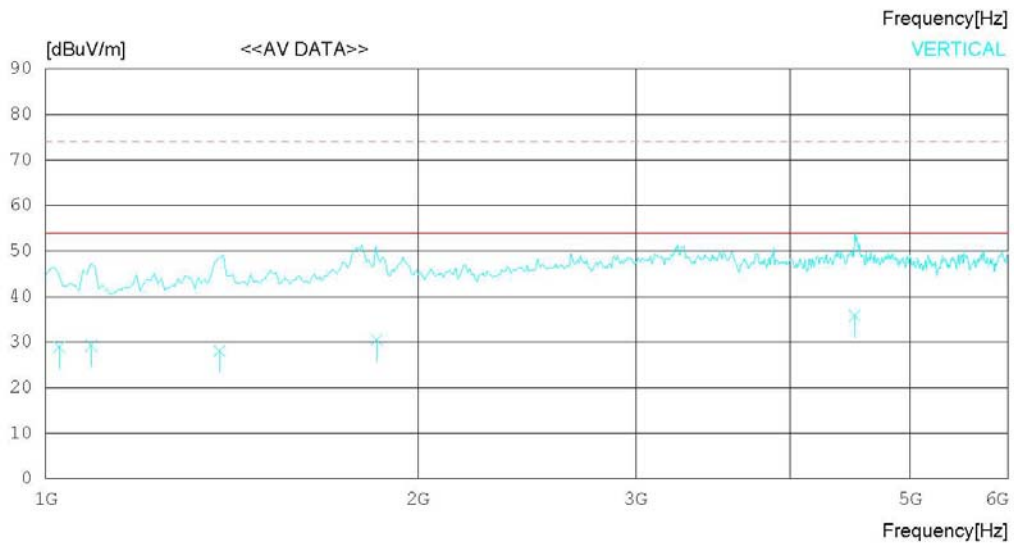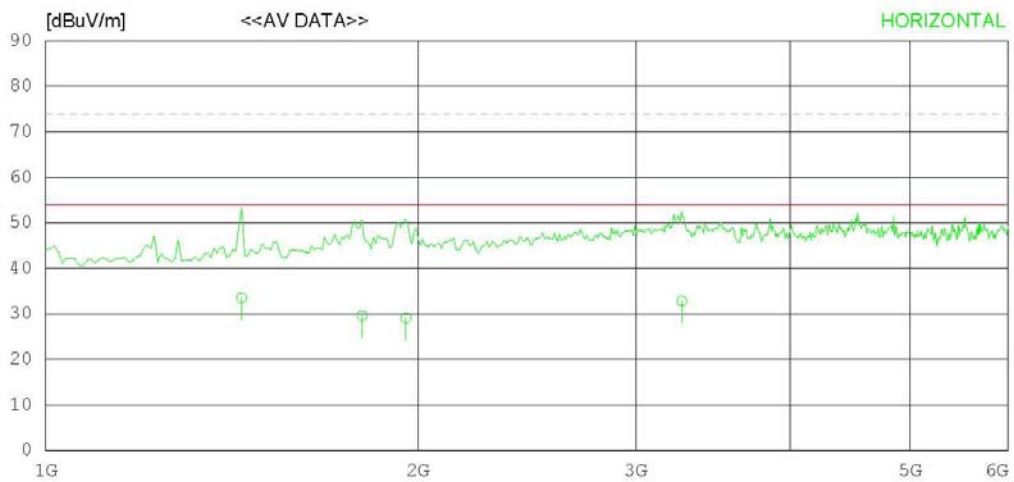

RADIATED EMISSION

Date : 2012-02-25

Model Name	: 26LT560C-UA	Reference No.	:
Model No.	:	Power Supply	: 120 V 60Hz
Serial No.	:	Temp/Humi	: 22 °C 35 % R.H.
Test Condition	: USB	Operator	:

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1440.038	44.3	25.0	5.8	41.6	33.5	54.0	20.5	100	358
2	1802.555	39.6	25.2	6.6	41.8	29.6	54.0	24.4	100	212
3	1955.625	38.7	25.2	6.9	41.7	29.1	54.0	24.9	100	179
4	3268.500	36.5	29.0	9.1	41.8	32.8	54.0	21.2	100	32
----- Vertical -----										
5	1026.256	42.1	23.7	4.9	41.8	28.9	54.0	25.1	100	168
6	1088.480	42.2	23.9	5.0	41.8	29.3	54.0	24.7	100	179
7	1383.025	39.3	24.8	5.7	41.7	28.1	54.0	25.9	100	166
8	1852.645	40.4	25.2	6.7	41.8	30.5	54.0	23.5	100	189
9	4510.487	36.3	30.8	10.7	42.0	35.8	54.0	18.2	100	45

Appendix 1

List of Test and Measurement Instruments

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2011.03.07	2012.03.07
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2011.07.02	2012.07.02
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2012.01.09	2013.01.09
<input type="checkbox"/> LISN	KNW-242	KYORITSU	8-654-15	2011.07.01	2012.07.01
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2011.03.08	2012.03.08
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2011.09.30	2012.09.30
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2011.07.02	2012.07.02
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2010.07.14	2012.07.14
<input checked="" type="checkbox"/> HORN ANTENNA	BBHA9120A	SCHWARZBECK	322	2010.04.13	2012.04.13
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> AMPLIFIER	MLA-00108-B02-36	TSJ	1518831	2012.01.09	2013.01.09
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2011.07.01	2012.07.01
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2011.07.01	2012.07.01
<input type="checkbox"/> BILOG ANTENNA	VULB9160	SCHAFFNER	3151	2010.08.25	2012.08.25
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2011.03.08	2012.03.08
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2010.11.29	2012.11.29
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2010.07.07	2012.07.07
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2010.12.21	2012.12.21
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	1098	2010.11.29	2012.11.29
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2011.03.07	2012.03.07