



FCC EVALUATION REPORT FOR CERTIFICATION

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon,

Pyeongteak-si, Gyeonggi-do, Korea.

Attn: Mr. Do-Hyung Kim, Chief research engineer

Date of Issue : November 26, 2010

Order Number: GETEC-C1-10-237

Test Report Number: GETEC-E3-10-123

Test Site: Gumi College EMC Center

FCC Registration Number: (100749, 443957)

FCC ID.: BEJ42LV3700UD

Applicant: LG Electronics Inc.

Rule Part(s)	: FCC Part 15 Subpart B
Equipment Class	: Class B computing device peripheral (JBP)
EUT Type	: LED LCD TV/Monitor
Type of Authority	: Certification
Model Name	: 42LV3700-UD
Trade Name	: LG

This equipment has been shown to be in compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003 / Canadian standard ICES-003

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by,

Reviewed by,



Soon-Hoon Jeong, Engineer
GUMI College EMC center



Jae-Hoon Jeong, Senior Engineer
GUMI College EMC center



CONTENTS

1. GENERAL INFORMATION	3
2. INTRODUCTION	4
3. PRODUCT INFORMATION	5
3.1 DESCRIPTION OF EUT.....	5
3.2 SUPPORT EQUIPMENT / CABLES USED	6
3.3 MODIFICATION ITEM(S).....	7
4. DESCRIPTION OF TESTS.....	8
4.1 TEST CONDITION.....	8
4.2 CONDUCTED EMISSION	9
4.3 RADIATED EMISSION.....	10
5. CONDUCTED EMISSION.....	11
5.1 OPERATING ENVIRONMENT	11
5.2 TEST SET-UP	11
5.3 MEASUREMENT UNCERTAINTY.....	11
5.4 LIMIT	12
5.5 TEST EQUIPMENT USED.....	12
5.6 TEST DATA FOR CONDUCTED EMISSION	12
6. RADIATED EMISSION	21
6.1 OPERATING ENVIRONMENT	21
6.2 TEST SET-UP	21
6.3 MEASUREMENT UNCERTAINTY.....	21
6.4 LIMIT	22
6.5 TEST EQUIPMENT USED.....	22
6.6 TEST DATA FOR RADIATED EMISSION.....	22
7. SAMPLE CALCULATIONS.....	27
7.1 EXAMPLE 1 :	27
7.2 EXAMPLE 2 :	27
8. RECOMMENDATION & CONCLUSION.....	28
APPENDIX A – ATTESTATION STATEMENT	
APPENDIX B – ID SAMPLE LABEL & LOCATION	
APPENDIX C – BLOCK DIAGRAM	
APPENDIX D – TEST SET-UP PHOTOGRAPHS	
APPENDIX E – EXTERNAL PHOTOGRAPHS	
APPENDIX F – INTERNAL PHOTOGRAPHS	
APPENDIX G – USER’S MANUAL	



Scope: Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and / or unintentional radiators for compliance with technical rules and regulations of the Federal Communications Commission.

1. General Information

Applicant: LG Electronics Inc.

Applicant Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Manufacturer: LG Electronics Inc.

Manufacturer Address: 19-1, Cheongho-ri, Jinwi-myeon, Pyeongteak-si, Gyeonggi-do, Korea.

Contact Person: Mr. Do-Hyung Kim, Chief research engineer

Tel Number: +82-31-610-9623

- **FCC ID.** BEJ42LV3700UD
- **EUT Type** LED LCD TV/Monitor
- **Model Name** 42LV3700-UD
- **Trade Name** LG
- **Serial Number** Prototype
- **Rule Part(s)** FCC Part 15 Subpart B
- **Type of Authority** Certification
- **Test Procedure(s)** ANSI C63.4 (2003) / Canadian standard ICES-003
- **Dates of Test** November 18 ~ 19, 2010
- **Place of Test** **Gumi College EMC Center** (FCC Registration Number: 100749, 443957)
407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.
- **Test Report Number** GETEC-E3-10-123
- **Dates of Issue** November 26, 2010




2. Introduction

The measurement procedure described in American National Standard for Methods of Measurement of Radio-Nose Emissions From Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ASNI C63.4-2003) was used in determining radiated and conducted emissions emanating from **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 42LV3700-UD)**

These measurement tests were conducted at **Gumi College EMC Center**.

The site address is 407, Bugok-dong, Gumi-si, Gyeongbuk, Korea.

This test site is one of the highest point of Gumi 1 college at about 200 km away from Seoul city and 40 km away from Daegu city. It is located in the valley surrounded by mountains in all directions where ambient radio signal conditions are quiet and a favorable area to measure the radio frequency interference on open field test site for the computing and ISM devices manufactures. The detailed description of the measurement facility was found to be in compliance with the requirements of §2.948 according to ANSI C63.4 (2003)

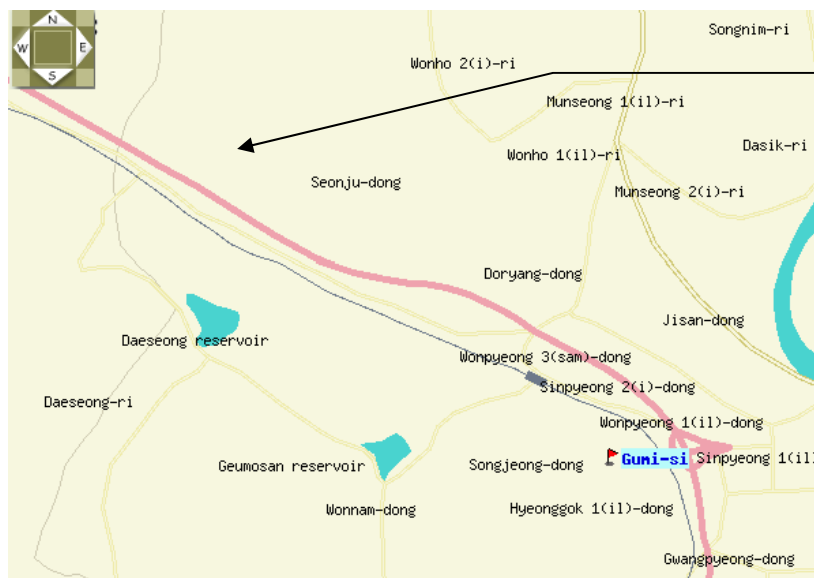

GUMI COLLEGE EMC CENTER
407, Bugok-dong, Gumi-si,
Gyeongbuk 730-711, Korea.
Tel: +82-54-440-1195
Fax: +82-54-440-1199

Fig 1. The map above shows the Gumi College in vicinity area.



3. Product Information

3.1 Description of EUT

The Equipment under Test (EUT) is the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 42LV3700-UD) FCC ID.: BEJ42LV3700UD**

MODELS		42LV3700 (42LV3700-UD)	47LV3700 (47LV3700-UD)	55LV3700 (55LV3700-UD)
Dimensions (W x H x D)	With stand	997.2 mm x 684.2 mm x 256.6 mm	1108.4 mm x 746.2 mm x 256.3 mm	1285.9 mm x 847.3 mm x 338.0 mm
	Without stand	997.2 mm x 614.7 mm x 40.1 mm	1108.4 mm x 677.2 mm x 40.1 mm	1285.9 mm x 777.8 mm x 40.1 mm
Weight	With stand	15.5 kg	20.9 kg	25.5 kg
	Without stand	13.3 kg	18.7 kg	21.4 kg
Power requirement		AC100-240V - 50/60Hz		
Power requirement		AC100 - 240 V - 50/60 Hz		
Television System		NTSC-M, ATSC, 64 & 256 QAM		
Program Coverage		VHF 2-13, UHF 14-69, CATV 1-135, DTV 2-69, CADTV 1-135		
External Antenna Impedance		75 Ω		
Environment condition	Operating Temperature	0 - 40 °C		
	Operating Humidity	Less than 80 %		
	Storage Temperature	-20 - 60 °C		
	Storage Humidity	Less than 85 %		

-. Maximum Frequency Range : 677 MHz



3.2 Support Equipment / Cables used

3.2.1 Used Support Equipment

Description	Manufacturer	Model Name	S/N & FCC ID.
PC	Hewlett Packard	D530	S/N: CNG34800PY FCC ID.: DoC
Video card	ATI	ATI RV360(9600)	S/N: SN0402017176 FCC ID.: DoC
PS2 Key board	COMPAQ	166516-AD6	S/N: B13BBOR391006D FCC ID.: AQ6-23K15
PS2 mouse	LOGITECH	M-S69	S/N: 334684-108 FCC ID.: JNZ211443
Joy stick	MICROSOFT	X05-92626	S/N: 9262600296169 FCC ID.: DoC
Printer	Hewlett Packard	970CXI	S/N: MY9B01F1FG FCC ID.: DoC
DVD player	LG Electronics Inc.	LC-954	S/N: 3850R-Z674K FCC ID.: DoC
Headset	PHILPS	SBC HL140	S/N: N/A FCC ID.: N/A
USB memory stick	LG Electronics Inc.	UM5 2GB	S/N: 003RLRZN37758 FCC ID.: N/A
TV signal generator	FLUKE	54200	S/N: 831011 FCC ID.: DoC
Wireless ready dongle	LG Electronics Inc.	N/A	S/N: N/A FCC ID.: N/A

See “Appendix D – Test Setup Photographs” for actual system test set-up

3.2.2 System configuration

Description	Manufacturer	Model Name	S/N & FCC ID.
None.	-	-	S/N: - FCC ID.: -



3.2.3 Used Cable(s)

Cable Name	Condition	Description
Power cable	Connected to the adapter	1.80 m unshielded
Adapter cable	Connected to the EUT	1.50 m shielded with a ferrite core
RGB (Analog) in cable	Connected to the EUT and PC	1.80 m shielded with two ferrite cores
HDMI/DVI (Digital) in cable	Connected to the EUT and PC	2.00 m shielded
RS-232C (Control & service) in cable	Connected to the EUT and PC	1.80 m shielded
Audio (RGB/DVI) in cable	Connected to the EUT and PC	1.80 m shielded
Headset cable	Connected to the EUT and headset	1.20 m shielded
Component in cable	Connected to the EUT and DVD player	2.00 m shielded
Component sound in cable	Connected to the EUT and DVD player	3.00 m shielded
AV in cable	Connected to the EUT and DVD player	3.00 m shielded
Wireless control cable	Connected to the EUT and wireless ready dongle	0.40 m shielded with a ferrite core
Antenna cable	Connected to the EUT and TV signal generator	10.00 m shielded
LAN cable	Connected to the EUT and network	10.00 m unshielded

3.3 Modification Item(s)

- None



4. Description of tests

4.1 Test Condition

The EUT was installed, arranged and operated in a manner that is most representative of equipment as typically used. The measurements were carried out while varying operating modes and cable positions within typically arrangement to determine maximum emission level.

The representative and worst test mode(s) were noted in the test report.

- Test Voltage / Frequency : AC 120 V / 60 Hz
- Test Mode(s)

-. Monitor mode

Radiated emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

Conducted emission: 1 920 × 1 080 / 60 Hz (RGB: Analog, HDMI/DVI: Digital)

1 024 × 768 / 60 Hz (RGB: Analog), 640 × 480 / 60 Hz (RGB: Analog)

◆ Operating test pattern

- . “H” character scrolling mode (Font size: 10)
- . Black background white character
- . Brightness and contrast was adjusted as maximum level
- . Continuous playback of 1 kHz audio file with winamp player
- . Connected to the network via LAN

“The verification report for TV/AV mode would be issued by LG Electronics Inc.”



4.2 Conducted Emission

The Line conducted emission test facility is inside a 4 m × 8 m × 2.5 m shielded enclosure. (FCC Registration No.: 100749)

The EUT was placed on a non-conducting 1.0 m by 1.5 m table, which is 0.8 m in height and 0.4 m away from the vertical wall of the shielded enclosure.

The EUT is powered from the Rohde & Schwarz LISN (ESH2-Z5) and the support equipment is powered from the Rohde & Schwarz LISN (ESH3-Z5). Powers to the LISN are filtered by high-current high insertion loss power line filter.

Sufficient time for EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

The RF output of the LISN was connected to the EMI test receiver (Rohde & Schwarz, ESCS30).

The EMI test receiver was scanned from 150 kHz to 30 MHz with 20 ms sweep time to determine the frequency producing the maximum EME from the EUT. The frequency producing the maximum level was re-examined using Quasi-Peak mode of the EMI test receiver.

The bandwidth of Quasi-peak mode was set to 9 kHz. Each emission was maximized consistent with typical applications by varying the configuration of the test sample. Interface cables were connected to the available interface ports of the test unit. The effect of varying the position of cables was investigated to find the configuration that produces maximum diagram emission. Excess cable lengths were bundled at center with 30 cm ~ 40 cm.

Each EME reported was calibrated using the R/S signal generator

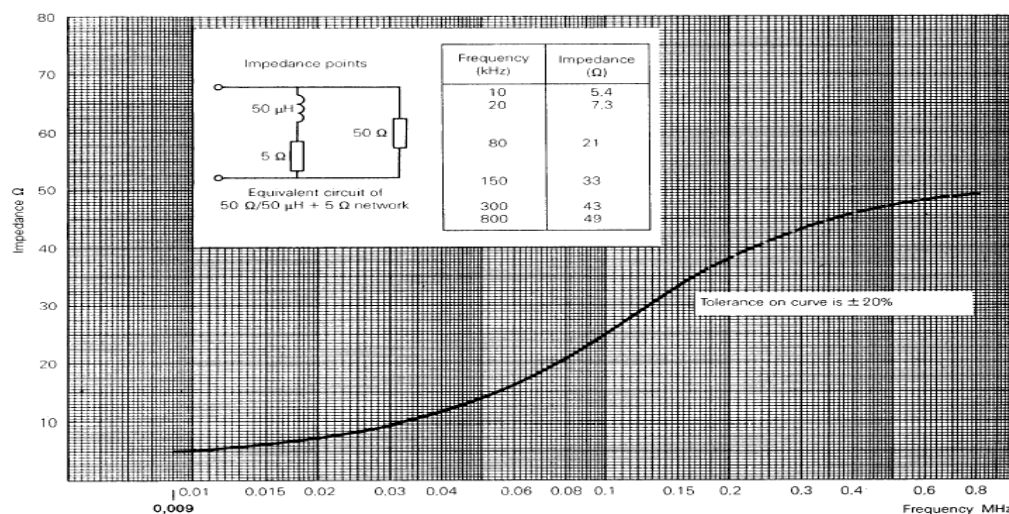


Fig 2. Impedance of LISN



4.3 Radiated Emission

Preliminary measurements were conducted 3 m semi anechoic chamber using broadband antennas to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The technology configuration, mode of operation and turntable azimuth with respect to antenna was note for each frequency found.

Final measurements were made 3 m chamber (FCC registration No.: 443957) and/or 10 m OATS (FCC registration No.: 100749).

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during pre-scan measurements was re-examined and investigated using EMI test receiver. The detector function was set to CISPR quasi-peak mode average mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency or type of signal.

The EUT, support equipment and interconnecting cables were reconfigured to the setup producing the maximum emission for the frequency and were placed on top of a 0.8 m high non-metallic 1.0 m × 1.5 m table.

The turntable containing the test sample was rotated; the antenna height was varied 1 to 4 meter and stopped at the azimuth or height producing the maximum emission.

Each EME reported was calibrated using the R/S signal generator

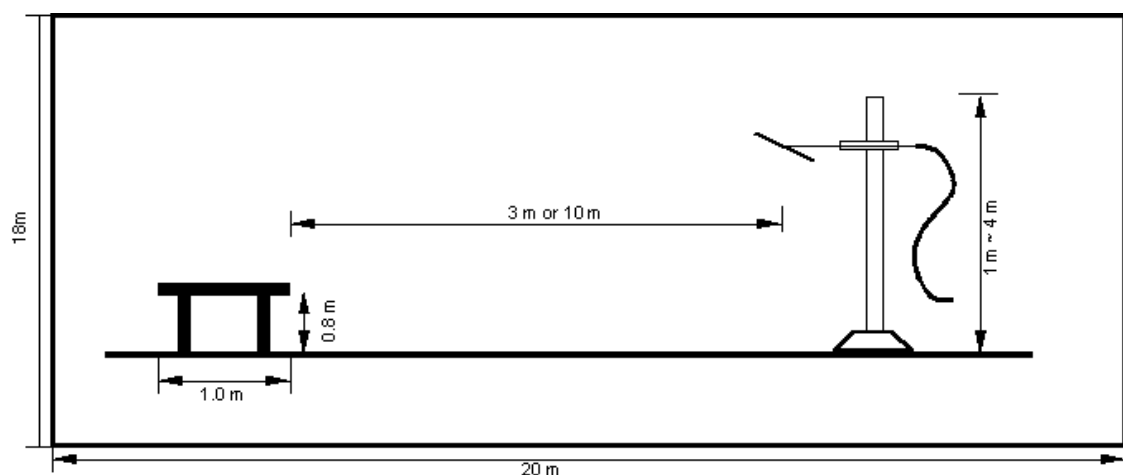


Fig 3. Dimensions of test site.



5. Conducted Emission

5.1 Operating Environment

Temperature : 24 °C
Relative Humidity : 41 % R.H.

5.2 Test Set-up

The conducted emission measurements were performed in the shielded room.

The EUT was placed on wooden table, 0.8 m heights above the floor, 0.4 m from the reference ground plane (GRP) wall and 0.8 m from AMN & ISN.

AMN is bonded on horizontal reference ground plane.

The ground plane, which was electrically bonded to the shield room, ground system and all power lines entering the shield room, were filtered.

5.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO "Guide to the expression of uncertainty in measurement."

The measurement uncertainty was given with a confidence of 95 %.

Test Items	Uncertainty	Remark
Conducted emission (9 kHz ~ 150 kHz)	± 2.69 dB	Confidence levels of 95 % ($k = 2$)
Conducted emission (150 kHz ~ 30 MHz)	± 4.16 dB	Confidence levels of 95 % ($k = 2$)



5.4 Limit

RFI Conducted	FCC Limit(dB μ V/m) Class B	
Freq. Range	Quasi-Peak	Average
150 kHz ~ 0.5 MHz	66 ~ 56*	56 ~ 46*
0.5 MHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50
*Limits decreases linearly with the logarithm of frequency.		

5.5 Test Equipment used

Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESCS30	Rohde & Schwarz	EMI Test Receiver	839809/003	12. 10. 2010
■ - ESH3-Z5	Rohde & Schwarz	LISN	838979/020	12. 10. 2010
■ - ESH2-Z5	Rohde & Schwarz	LISN	829991/009	12. 10. 2010
■ - ISN T8	TESEQ. GmbH	Impedance Network	24568	11. 09. 2010


5.6 Test data for Conducted Emission

-. Test Date : November 19, 2010
-. Resolution Bandwidth : 9 kHz
-. Frequency Range : 0.15 MHz ~ 30 MHz



◆ Operating condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

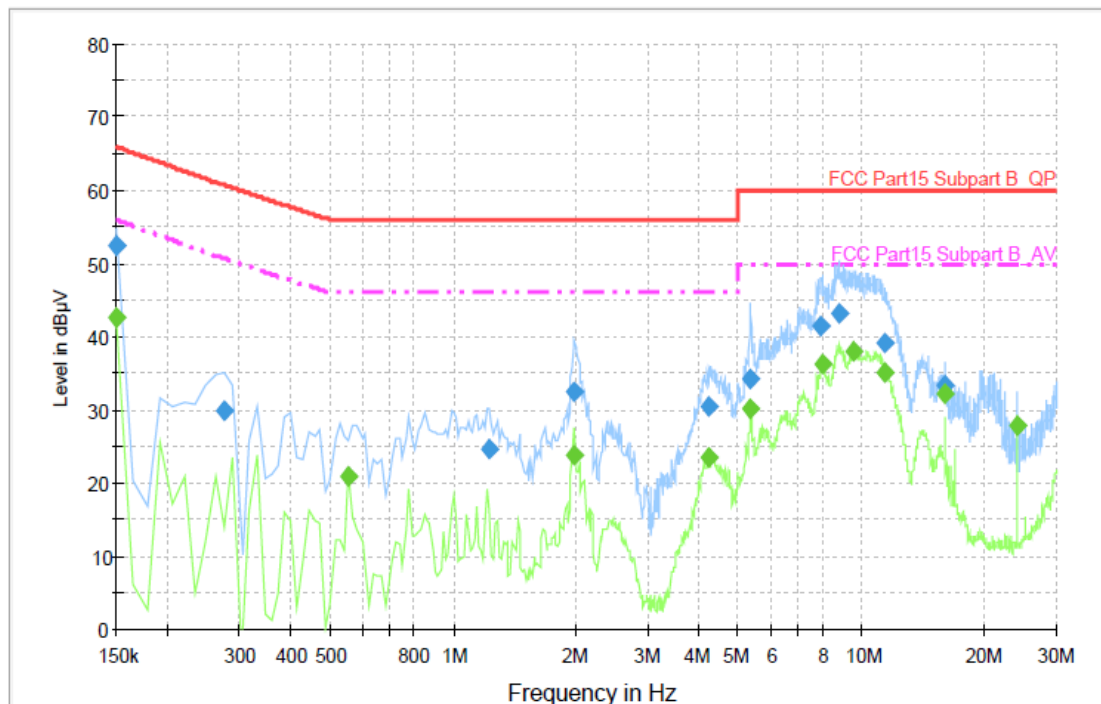

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	52.5	1000.000	9.000	GND	L1	10.1	13.5	66.0	
0.276000	29.9	1000.000	9.000	GND	L1	10.1	30.8	60.7	
1.228000	24.6	1000.000	9.000	GND	L1	10.1	31.4	56.0	
1.984000	32.3	1000.000	9.000	GND	L1	10.2	23.7	56.0	
4.238000	30.3	1000.000	9.000	GND	L1	10.3	25.7	56.0	
5.344000	34.2	1000.000	9.000	GND	L1	10.4	25.8	60.0	
7.962000	41.6	1000.000	9.000	GND	L1	10.5	18.4	60.0	
8.816000	43.2	1000.000	9.000	GND	L1	10.5	16.8	60.0	
11.392000	39.2	1000.000	9.000	GND	L1	10.7	20.8	60.0	
16.012000	33.3	1000.000	9.000	GND	L1	11.0	26.7	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	42.6	1000.000	9.000	GND	L1	10.1	13.4	56.0	
0.556000	20.8	1000.000	9.000	GND	L1	10.1	25.2	46.0	
1.984000	23.8	1000.000	9.000	GND	L1	10.2	22.2	46.0	
4.238000	23.3	1000.000	9.000	GND	L1	10.3	22.7	46.0	
5.358000	30.2	1000.000	9.000	GND	L1	10.4	19.8	50.0	
8.004000	36.2	1000.000	9.000	GND	L1	10.5	13.8	50.0	
9.544000	38.1	1000.000	9.000	GND	L1	10.5	11.9	50.0	
11.378000	35.2	1000.000	9.000	GND	L1	10.7	14.8	50.0	
16.012000	32.1	1000.000	9.000	GND	L1	11.0	17.9	50.0	
24.006000	27.9	1000.000	9.000	GND	L1	11.2	22.1	50.0	

< Fig 4. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

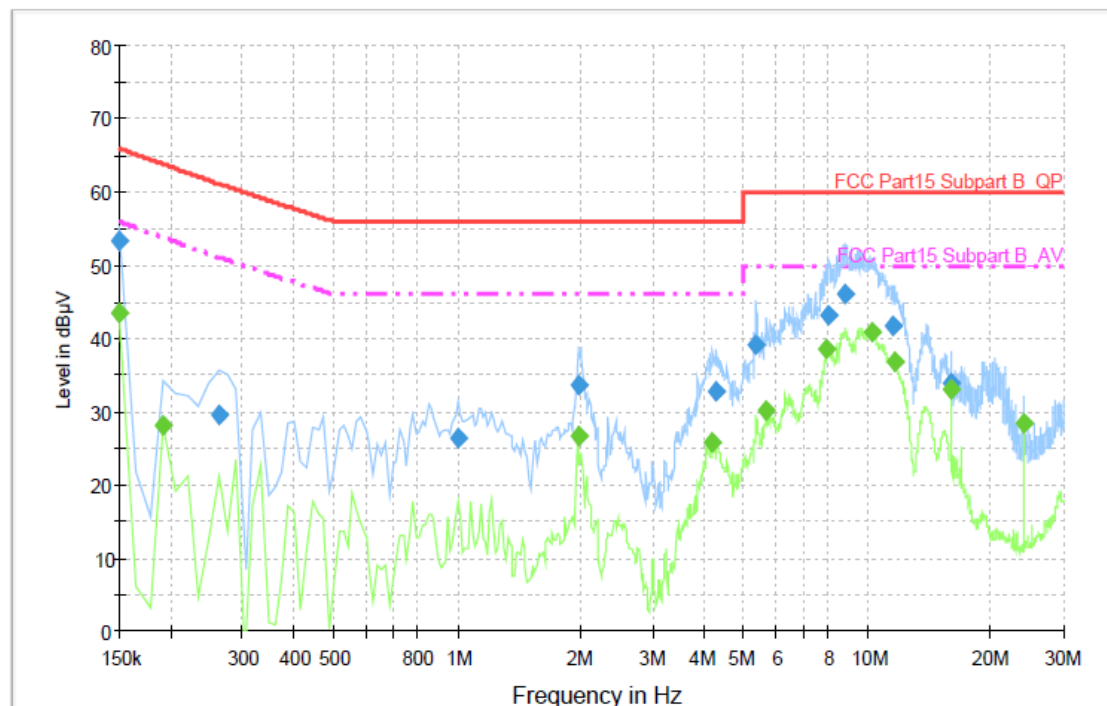

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	53.2	1000.000	9.000	GND	N	10.1	12.8	66.0	
0.262000	29.5	1000.000	9.000	GND	N	10.1	31.7	61.2	
1.004000	26.2	1000.000	9.000	GND	N	10.1	29.8	56.0	
1.970000	33.7	1000.000	9.000	GND	N	10.2	22.3	56.0	
4.266000	32.7	1000.000	9.000	GND	N	10.3	23.3	56.0	
5.358000	39.2	1000.000	9.000	GND	N	10.4	20.8	60.0	
8.060000	43.3	1000.000	9.000	GND	N	10.5	16.7	60.0	
8.802000	46.0	1000.000	9.000	GND	N	10.5	14.0	60.0	
11.546000	41.6	1000.000	9.000	GND	N	10.6	18.4	60.0	
16.012000	33.9	1000.000	9.000	GND	N	10.8	26.1	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	43.6	1000.000	9.000	GND	N	10.1	12.4	56.0	
0.192000	28.1	1000.000	9.000	GND	N	10.1	25.7	53.8	
1.970000	26.7	1000.000	9.000	GND	N	10.2	19.3	46.0	
4.168000	25.7	1000.000	9.000	GND	N	10.3	20.3	46.0	
5.680000	30.3	1000.000	9.000	GND	N	10.4	19.7	50.0	
7.948000	38.4	1000.000	9.000	GND	N	10.5	11.6	50.0	
10.286000	40.8	1000.000	9.000	GND	N	10.6	9.2	50.0	
11.616000	36.7	1000.000	9.000	GND	N	10.6	13.3	50.0	
16.012000	32.9	1000.000	9.000	GND	N	10.8	17.1	50.0	
24.006000	28.3	1000.000	9.000	GND	N	10.8	21.7	50.0	

< Fig 5. Conducted emission result (Neutral line) >



◆ Operating condition: 1 024 × 768 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

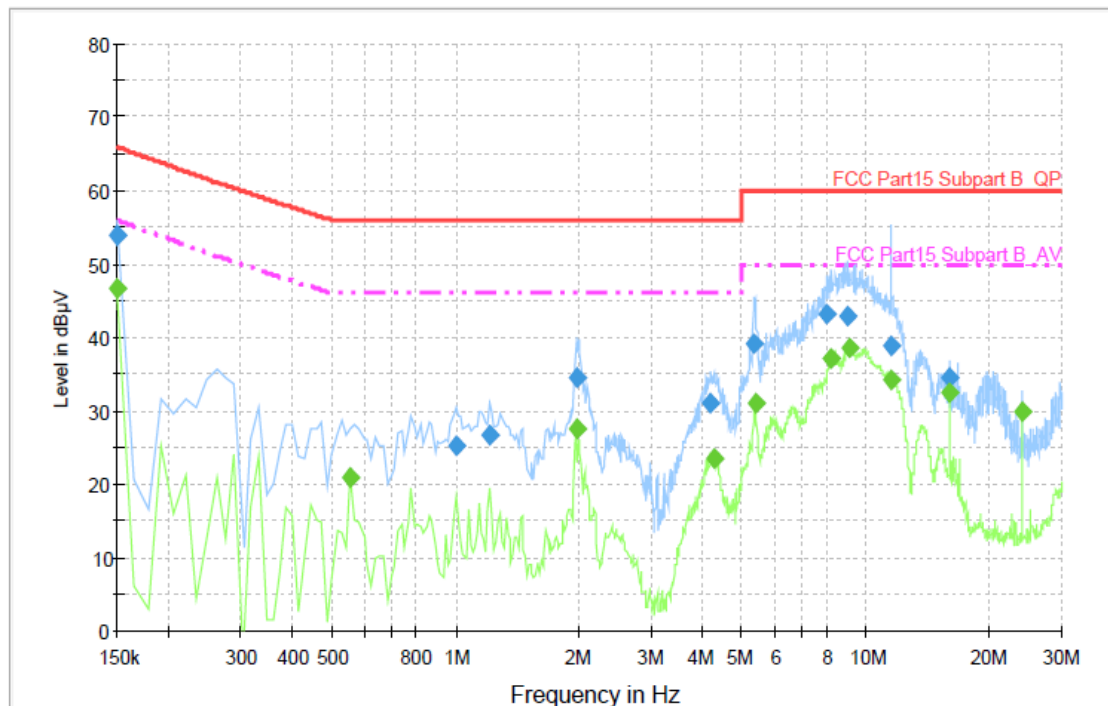

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	54.0	1000.000	9.000	GND	L1	10.1	12.0	66.0	
1.004000	25.1	1000.000	9.000	GND	L1	10.1	30.9	56.0	
1.214000	26.7	1000.000	9.000	GND	L1	10.1	29.3	56.0	
1.970000	34.6	1000.000	9.000	GND	L1	10.2	21.4	56.0	
4.196000	30.9	1000.000	9.000	GND	L1	10.3	25.1	56.0	
5.344000	39.1	1000.000	9.000	GND	L1	10.4	20.9	60.0	
8.004000	43.3	1000.000	9.000	GND	L1	10.5	16.7	60.0	
8.998000	43.0	1000.000	9.000	GND	L1	10.5	17.0	60.0	
11.546000	38.8	1000.000	9.000	GND	L1	10.7	21.2	60.0	
16.012000	34.4	1000.000	9.000	GND	L1	11.0	25.6	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	46.6	1000.000	9.000	GND	L1	10.1	9.4	56.0	
0.556000	21.0	1000.000	9.000	GND	L1	10.1	25.0	46.0	
1.970000	27.5	1000.000	9.000	GND	L1	10.2	18.5	46.0	
4.252000	23.5	1000.000	9.000	GND	L1	10.3	22.5	46.0	
5.372000	31.2	1000.000	9.000	GND	L1	10.4	18.8	50.0	
8.186000	37.1	1000.000	9.000	GND	L1	10.5	12.9	50.0	
9.138000	38.7	1000.000	9.000	GND	L1	10.5	11.3	50.0	
11.546000	34.3	1000.000	9.000	GND	L1	10.7	15.7	50.0	
16.012000	32.4	1000.000	9.000	GND	L1	11.0	17.6	50.0	
24.006000	29.8	1000.000	9.000	GND	L1	11.2	20.2	50.0	

< Fig 6. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

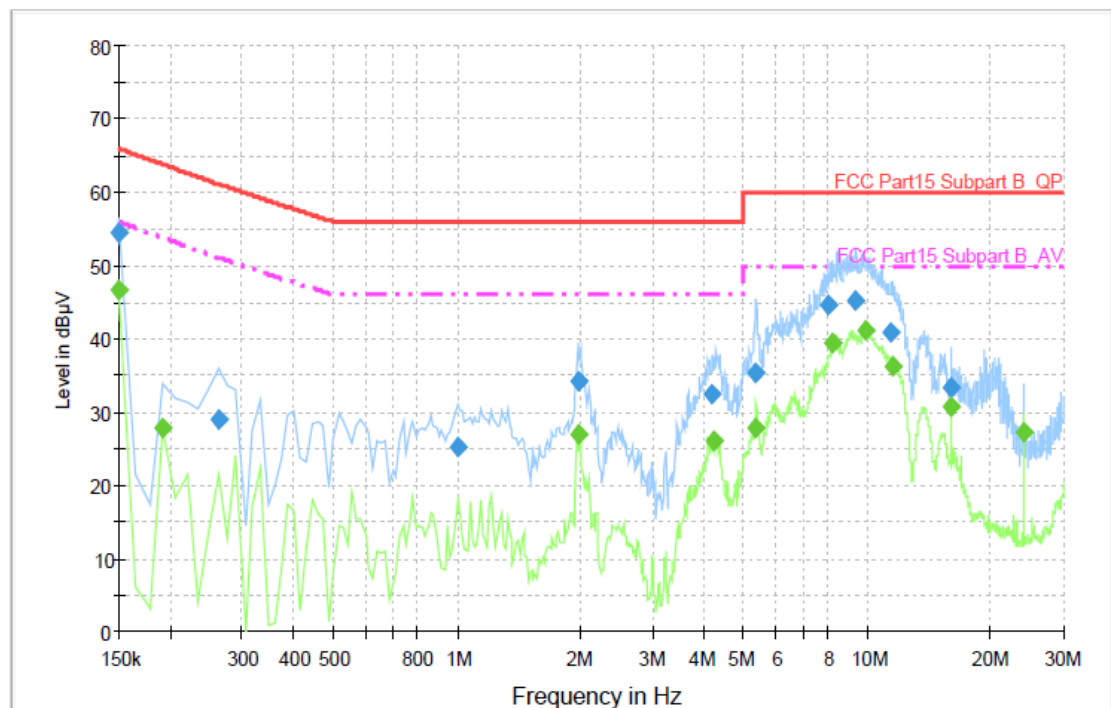

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	54.5	1000.000	9.000	GND	N	10.1	11.5	66.0	
0.262000	29.0	1000.000	9.000	GND	N	10.1	32.2	61.2	
1.004000	25.3	1000.000	9.000	GND	N	10.1	30.7	56.0	
1.970000	34.3	1000.000	9.000	GND	N	10.2	21.7	56.0	
4.196000	32.5	1000.000	9.000	GND	N	10.3	23.5	56.0	
5.358000	35.3	1000.000	9.000	GND	N	10.4	24.7	60.0	
8.004000	44.6	1000.000	9.000	GND	N	10.5	15.4	60.0	
9.390000	45.3	1000.000	9.000	GND	N	10.5	14.7	60.0	
11.364000	40.9	1000.000	9.000	GND	N	10.6	19.1	60.0	
16.012000	33.4	1000.000	9.000	GND	N	10.8	26.6	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	46.7	1000.000	9.000	GND	N	10.1	9.3	56.0	
0.192000	27.7	1000.000	9.000	GND	N	10.1	26.1	53.8	
1.970000	26.9	1000.000	9.000	GND	N	10.2	19.1	46.0	
4.224000	26.0	1000.000	9.000	GND	N	10.3	20.0	46.0	
5.358000	27.8	1000.000	9.000	GND	N	10.4	22.2	50.0	
8.186000	39.3	1000.000	9.000	GND	N	10.5	10.7	50.0	
9.936000	41.1	1000.000	9.000	GND	N	10.5	8.9	50.0	
11.490000	36.1	1000.000	9.000	GND	N	10.6	13.9	50.0	
16.012000	30.7	1000.000	9.000	GND	N	10.8	19.3	50.0	
24.006000	27.1	1000.000	9.000	GND	N	10.8	22.9	50.0	

< Fig 7. Conducted emission result (Neutral line) >



◆ Operating condition: 640 × 480 / 60 Hz (RGB: Analog)

Voltage with 4-Line-LISN_L1

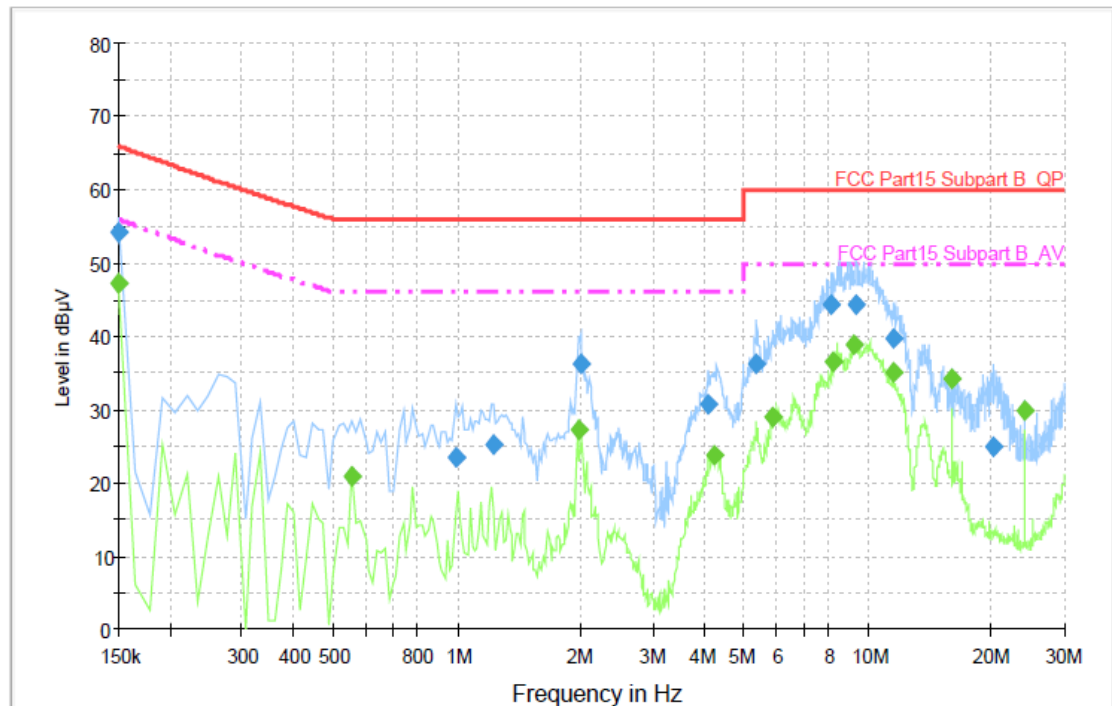

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	54.2	1000.000	9.000	GND	L1	10.1	11.8	66.0	
0.990000	23.6	1000.000	9.000	GND	L1	10.1	32.4	56.0	
1.228000	25.1	1000.000	9.000	GND	L1	10.1	30.9	56.0	
1.998000	36.1	1000.000	9.000	GND	L1	10.2	19.9	56.0	
4.098000	30.8	1000.000	9.000	GND	L1	10.3	25.2	56.0	
5.344000	36.3	1000.000	9.000	GND	L1	10.4	23.7	60.0	
8.130000	44.2	1000.000	9.000	GND	L1	10.5	15.8	60.0	
9.334000	44.4	1000.000	9.000	GND	L1	10.5	15.6	60.0	
11.532000	39.6	1000.000	9.000	GND	L1	10.7	20.4	60.0	
20.254000	25.0	1000.000	9.000	GND	L1	11.3	35.0	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	47.3	1000.000	9.000	GND	L1	10.1	8.7	56.0	
0.556000	20.9	1000.000	9.000	GND	L1	10.1	25.1	46.0	
1.970000	27.3	1000.000	9.000	GND	L1	10.2	18.7	46.0	
4.224000	23.7	1000.000	9.000	GND	L1	10.3	22.3	46.0	
5.862000	28.9	1000.000	9.000	GND	L1	10.4	21.1	50.0	
8.186000	36.5	1000.000	9.000	GND	L1	10.5	13.5	50.0	
9.264000	38.9	1000.000	9.000	GND	L1	10.5	11.1	50.0	
11.476000	35.2	1000.000	9.000	GND	L1	10.7	14.8	50.0	
16.012000	34.1	1000.000	9.000	GND	L1	11.0	15.9	50.0	
24.006000	29.8	1000.000	9.000	GND	L1	11.2	20.2	50.0	

< Fig 8. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

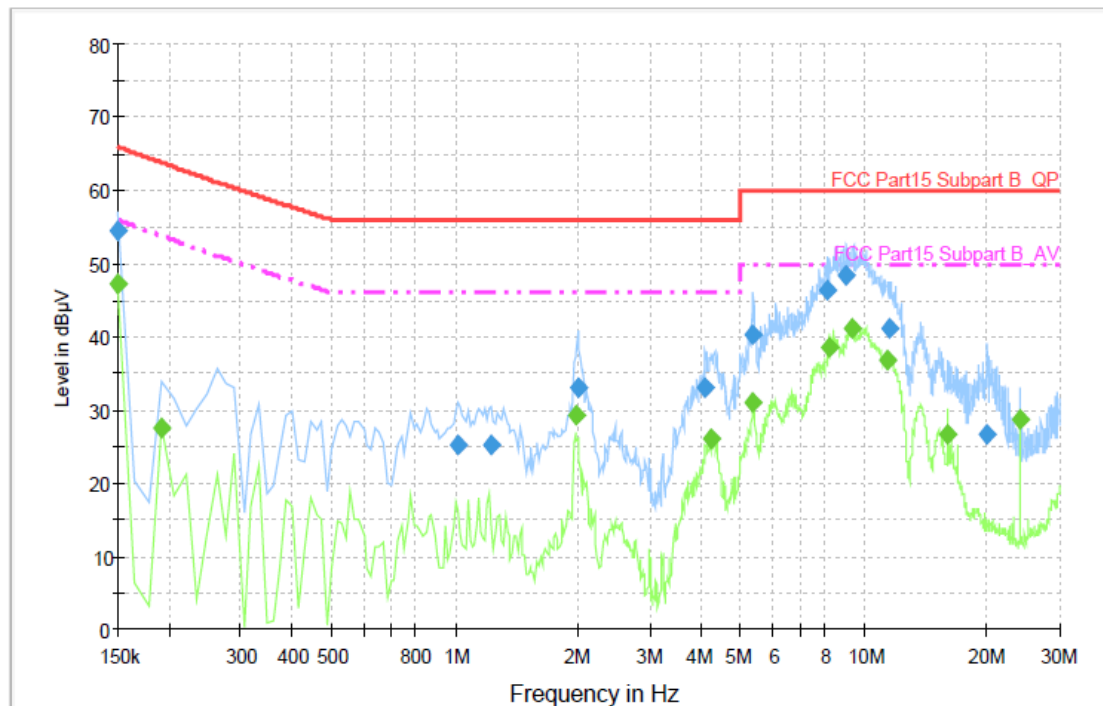

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	54.6	1000.000	9.000	GND	N	10.1	11.4	66.0	
1.018000	25.3	1000.000	9.000	GND	N	10.1	30.7	56.0	
1.228000	25.2	1000.000	9.000	GND	N	10.1	30.8	56.0	
1.998000	33.0	1000.000	9.000	GND	N	10.2	23.0	56.0	
4.098000	33.1	1000.000	9.000	GND	N	10.3	22.9	56.0	
5.358000	40.4	1000.000	9.000	GND	N	10.4	19.6	60.0	
8.130000	46.4	1000.000	9.000	GND	N	10.5	13.6	60.0	
9.012000	48.3	1000.000	9.000	GND	N	10.5	11.7	60.0	
11.574000	41.3	1000.000	9.000	GND	N	10.6	18.7	60.0	
20.044000	26.6	1000.000	9.000	GND	N	11.0	33.4	60.0	

Final Measurement Detector 2


Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	47.2	1000.000	9.000	GND	N	10.1	8.8	56.0	
0.192000	27.6	1000.000	9.000	GND	N	10.1	26.2	53.8	
1.970000	29.4	1000.000	9.000	GND	N	10.2	16.6	46.0	
4.224000	26.0	1000.000	9.000	GND	N	10.3	20.0	46.0	
5.358000	31.1	1000.000	9.000	GND	N	10.4	18.9	50.0	
8.186000	38.5	1000.000	9.000	GND	N	10.5	11.5	50.0	
9.334000	41.1	1000.000	9.000	GND	N	10.5	8.9	50.0	
11.350000	36.7	1000.000	9.000	GND	N	10.6	13.3	50.0	
16.012000	26.8	1000.000	9.000	GND	N	10.8	23.2	50.0	
24.006000	28.6	1000.000	9.000	GND	N	10.8	21.4	50.0	

< Fig 9. Conducted emission result (Neutral line) >



◆ Operating condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)

Voltage with 4-Line-LISN_L1

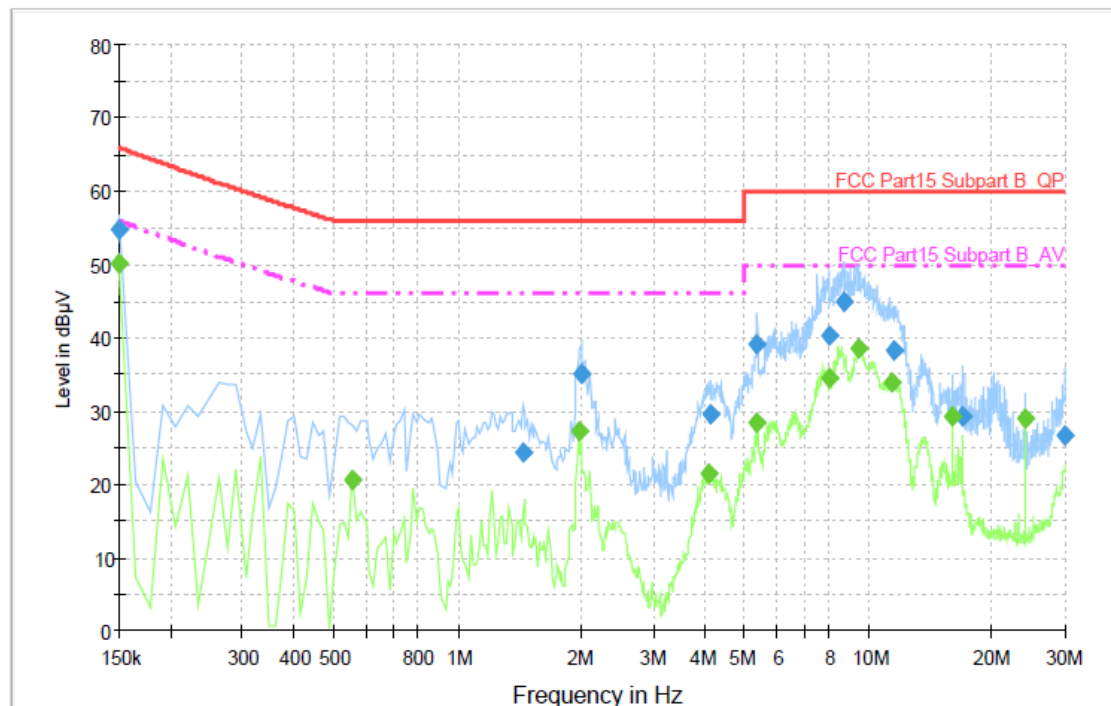

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	54.7	1000.000	9.000	GND	L1	10.1	11.3	66.0	
1.438000	24.5	1000.000	9.000	GND	L1	10.1	31.5	56.0	
1.998000	35.0	1000.000	9.000	GND	L1	10.2	21.0	56.0	
4.126000	29.7	1000.000	9.000	GND	L1	10.3	26.3	56.0	
5.358000	39.1	1000.000	9.000	GND	L1	10.4	21.0	60.0	
8.018000	40.3	1000.000	9.000	GND	L1	10.5	19.7	60.0	
8.662000	44.8	1000.000	9.000	GND	L1	10.5	15.2	60.0	
11.532000	38.2	1000.000	9.000	GND	L1	10.7	21.8	60.0	
16.852000	29.3	1000.000	9.000	GND	L1	11.1	30.7	60.0	
29.900000	26.6	1000.000	9.000	GND	L1	11.4	33.4	60.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	50.3	1000.000	9.000	GND	L1	10.1	5.8	56.0	
0.556000	20.7	1000.000	9.000	GND	L1	10.1	25.3	46.0	
1.970000	27.4	1000.000	9.000	GND	L1	10.2	18.6	46.0	
4.098000	21.5	1000.000	9.000	GND	L1	10.3	24.5	46.0	
5.344000	28.4	1000.000	9.000	GND	L1	10.4	21.6	50.0	
8.004000	34.6	1000.000	9.000	GND	L1	10.5	15.4	50.0	
9.460000	38.6	1000.000	9.000	GND	L1	10.5	11.4	50.0	
11.448000	33.8	1000.000	9.000	GND	L1	10.7	16.2	50.0	
16.012000	29.4	1000.000	9.000	GND	L1	11.0	20.6	50.0	
24.006000	29.1	1000.000	9.000	GND	L1	11.2	20.9	50.0	

< Fig 10. Conducted emission result (Live line) >



Voltage with 4-Line-LISN_N

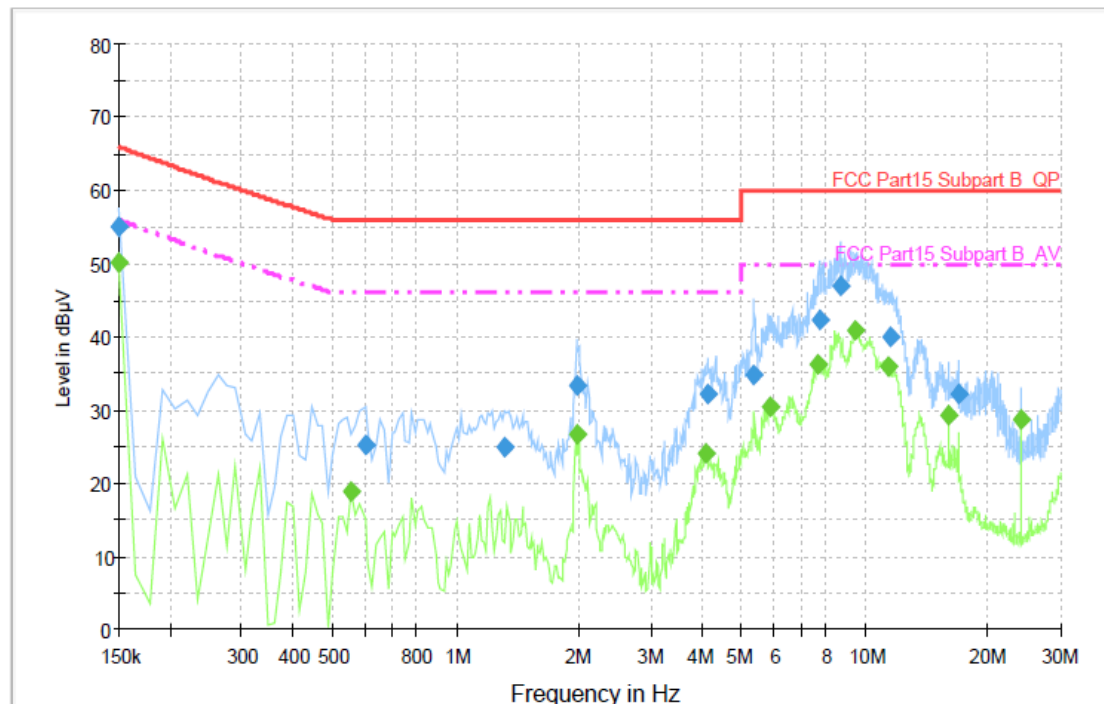

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	55.2	1000.000	9.000	GND	N	10.1	10.8	66.0	
0.598000	25.1	1000.000	9.000	GND	N	10.1	30.9	56.0	
1.312000	24.8	1000.000	9.000	GND	N	10.1	31.2	56.0	
1.970000	33.4	1000.000	9.000	GND	N	10.2	22.6	56.0	
4.126000	32.3	1000.000	9.000	GND	N	10.3	23.7	56.0	
5.344000	34.7	1000.000	9.000	GND	N	10.4	25.3	60.0	
7.710000	42.3	1000.000	9.000	GND	N	10.5	17.7	60.0	
8.662000	47.0	1000.000	9.000	GND	N	10.5	13.0	60.0	
11.560000	39.9	1000.000	9.000	GND	N	10.6	20.1	60.0	
16.866000	32.1	1000.000	9.000	GND	N	10.9	27.9	60.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	50.3	1000.000	9.000	GND	N	10.1	5.8	56.0	
0.556000	19.0	1000.000	9.000	GND	N	10.1	27.0	46.0	
1.970000	26.6	1000.000	9.000	GND	N	10.2	19.4	46.0	
4.098000	24.0	1000.000	9.000	GND	N	10.3	22.0	46.0	
5.862000	30.4	1000.000	9.000	GND	N	10.4	19.6	50.0	
7.696000	36.3	1000.000	9.000	GND	N	10.5	13.7	50.0	
9.460000	40.9	1000.000	9.000	GND	N	10.5	9.1	50.0	
11.350000	35.8	1000.000	9.000	GND	N	10.6	14.2	50.0	
16.012000	29.2	1000.000	9.000	GND	N	10.8	20.8	50.0	
24.006000	28.8	1000.000	9.000	GND	N	10.8	21.2	50.0	

< Fig 11. Conducted emission result (Neutral line) >



6. Radiated Emission

6.1 Operating Environment

Temperature : 24 °C
Relative Humidity : 43 % R.H.

6.2 Test Set-up

A preliminary and final measurement was at 3 m anechoic chamber.

The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The turntable with EUT was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels.

This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

6.3 Measurement Uncertainty

The measurement uncertainty was calculated in accordance with ISO “Guide to the expression of uncertainty in measurement”.

The measurement uncertainty was given with a confidence of 95 %.

Test Items(Anechoic Chamber)	Uncertainty	Remark
Radiated emission (30 MHz ~ 300 MHz, 3 m, Vertical)	± 4.32 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (30 MHz ~ 300 MHz, 3 m, Horizontal)	± 4.21 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Vertical)	± 3.96 dB	Confidence levels of 95 % ($k = 2$)
Radiated emission (300 MHz ~ 1 000 MHz, 3 m, Horizontal)	± 3.97 dB	Confidence levels of 95 % ($k = 2$)



6.4 Limit

Frequency (MHz)	FCC Limit @ 3 m. dB μ V/m	CISPR Limit @ 10 m. dB μ V/m
30 ~ 88	40.0	30.0
88 ~ 216	43.5	30.0
216 ~ 230	46.0	30.0
230 ~ 960	46.0	37.0
960 ~ 1 000	54.0	37.0
> 1 000	54.0	No Specified limit

6.5 Test Equipment used


Model Name	Manufacturer	Description	Serial Number	Due to Calibration
■ - ESIB26	Rohde & Schwarz	EMI Test Receiver	830482/010	12. 11. 2010
■ - VULB9160	Schwarzbeck	Broadband Test Antenna	3193	03. 15. 2012
■ - BBHA9120D	Schwarzbeck	Horn ANT	207	12. 22. 2011
■ - MCU066	maturo GmbH	Position Controller	1390306	N/A
■ - TT2.5SI	maturo GmbH	Turntable	1390307	N/A
■ - AM 4.0	maturo GmbH	Antenna Mast	1390308	N/A
■ - AFS 44 00101800-25-10P-44	MITEQ	Preamplifier	1258943	11. 12. 2011

6.6 Test data for Radiated Emission

- Test Date : November 18, 2010
- Resolution Bandwidth : 120 kHz/1 MHz
- Frequency Range : 30 MHz ~ 5 000 MHz
- Measurement Distance : 3 m
- Note : The highest frequency of the internal source of the EUT is between 500 MHz and 1 000 MHz (677 MHz). The measurement was made up to 5 000 MHz



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

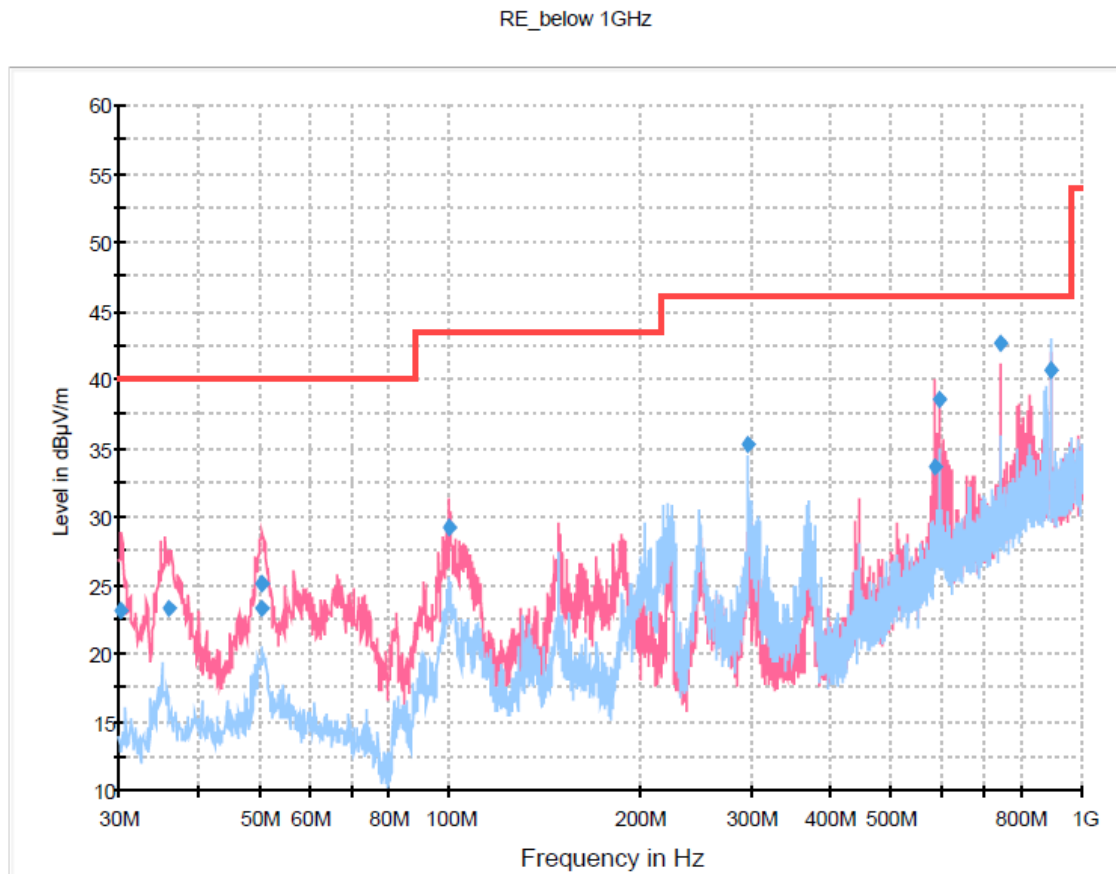


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.200000	23.1	1000.0	120.000	102.0	V	224.0	11.2	16.90	40.00
36.042500	23.2	1000.0	120.000	102.0	V	127.0	11.8	16.80	40.00
50.312500	23.3	1000.0	120.000	102.0	V	83.0	13.3	16.70	40.00
50.596250	25.1	1000.0	120.000	102.0	V	148.0	13.3	14.90	40.00
99.981250	29.2	1000.0	120.000	102.0	V	159.0	11.3	14.30	43.50
297.012500	35.3	1000.0	120.000	102.0	H	341.0	16.7	10.70	46.00
586.237500	33.7	1000.0	120.000	102.0	V	19.0	24.6	12.30	46.00
594.035000	38.5	1000.0	120.000	102.0	V	159.0	24.9	7.50	46.00
742.526250	42.6	1000.0	120.000	102.0	V	32.0	27.6	3.40	46.00
891.017500	40.6	1000.0	120.000	102.0	H	204.0	29.6	5.40	46.00

< Fig 12. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Red trace: Vertical polarization, Blue trace: Horizontal polarization

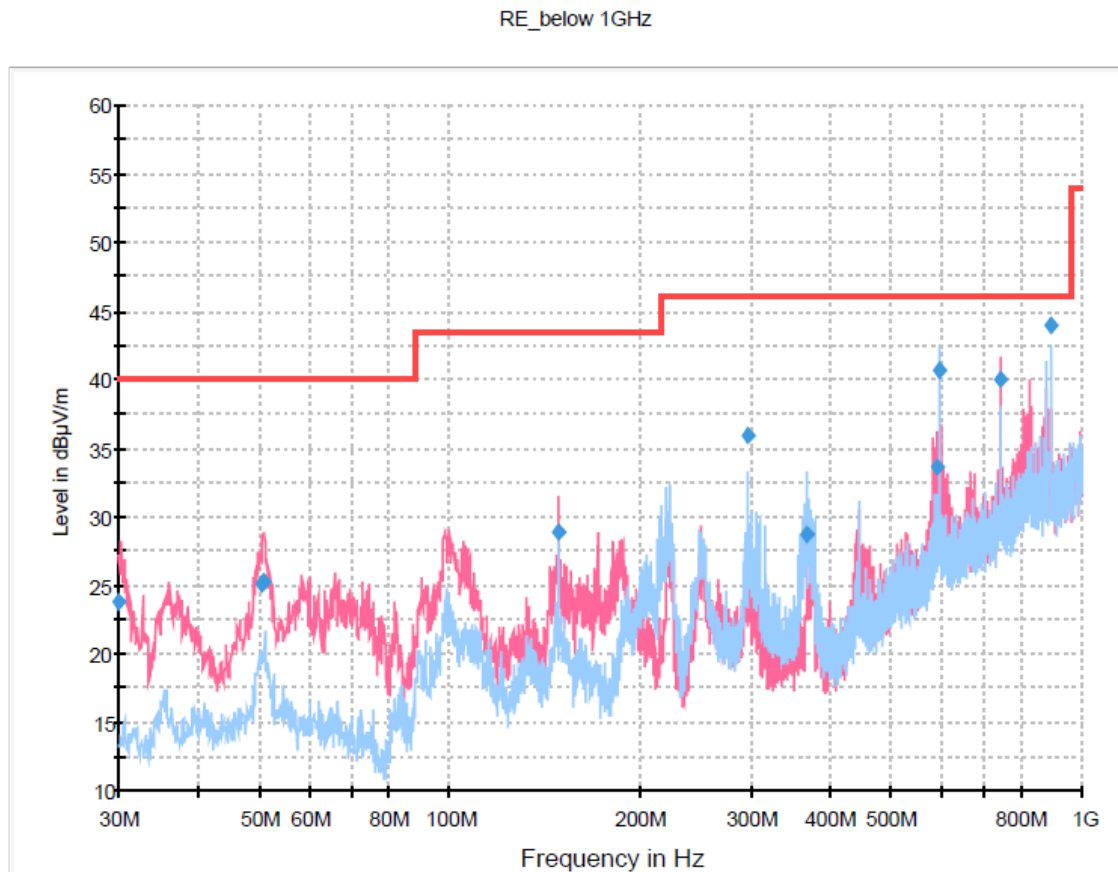


Final Result 1

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
30.080000	23.8	1000.0	120.000	102.0	V	224.0	11.2	16.20	40.00
50.593750	25.2	1000.0	120.000	102.0	V	114.0	13.3	14.80	40.00
50.716250	25.2	1000.0	120.000	102.0	V	148.0	13.3	14.80	40.00
148.481250	28.9	1000.0	120.000	102.0	V	33.0	14.9	14.60	43.50
297.012500	35.9	1000.0	120.000	102.0	H	209.0	16.7	10.10	46.00
366.330000	28.6	1000.0	120.000	102.0	H	59.0	17.6	17.40	46.00
590.031250	33.6	1000.0	120.000	102.0	V	20.0	24.8	12.40	46.00
594.035000	40.7	1000.0	120.000	102.0	H	281.0	24.9	5.30	46.00
742.526250	40.1	1000.0	120.000	102.0	V	224.0	27.6	5.90	46.00
891.017500	44.0	1000.0	120.000	102.0	H	209.0	29.6	2.00	46.00

< Fig 13. Radiated emission result (30 MHz ~ 1 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (RGB: Analog)
Green trace: Average detector, Blue trace: Peak detector

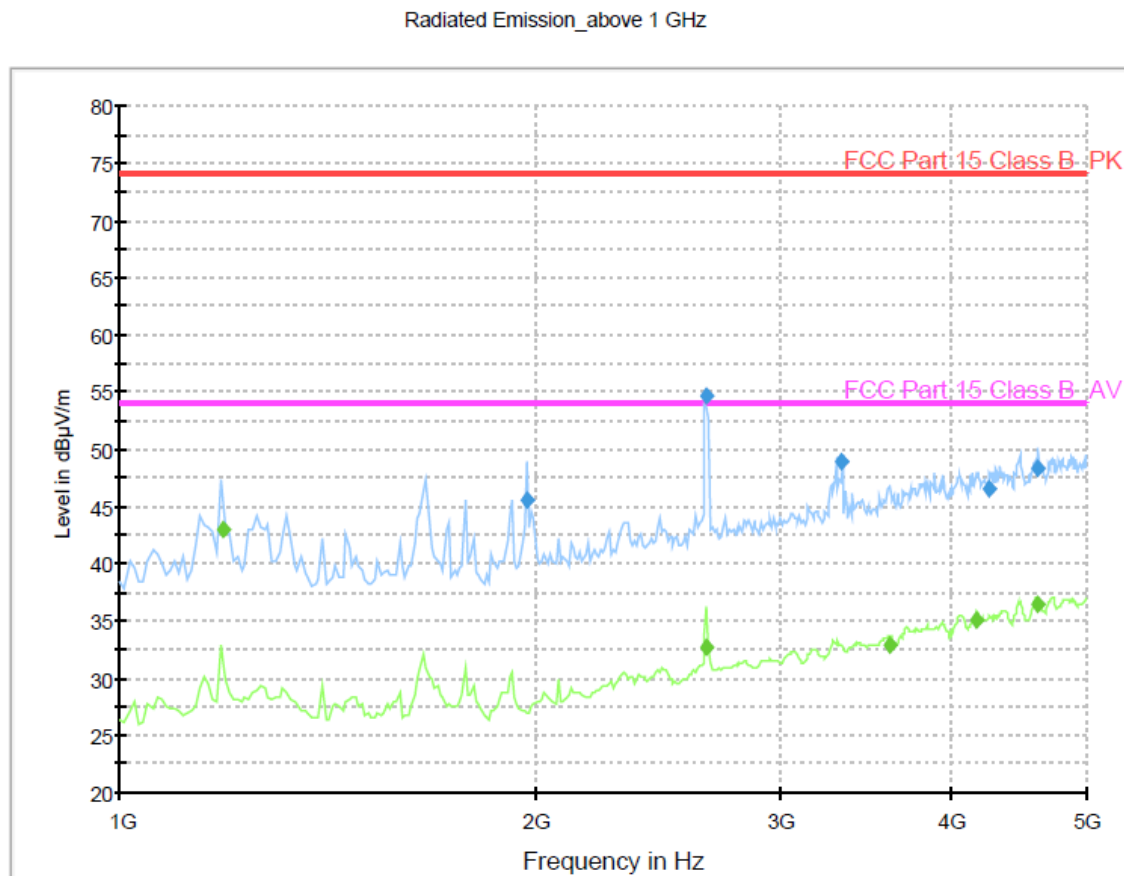

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1969.339880	45.5	100.0	1000.000	200.0	V	325.0	-11.8	28.5	74.0
2653.902605	54.7	100.0	1000.000	100.0	H	126.0	-8.7	19.3	74.0
3328.065331	49.0	100.0	1000.000	201.0	H	228.0	-6.1	25.0	74.0
4253.909018	46.5	100.0	1000.000	334.0	V	33.0	-2.8	27.5	74.0
4614.630461	48.4	100.0	1000.000	300.0	H	106.0	-2.1	25.6	74.0


Final Result 2

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1188.168738	42.9	100.0	1000.000	100.0	V	180.0	-13.7	11.1	54.0
2654.318637	32.6	100.0	1000.000	100.0	H	133.0	-8.7	21.4	54.0
3605.410421	32.8	100.0	1000.000	237.0	V	257.0	-5.0	21.2	54.0
4168.532665	35.0	100.0	1000.000	291.0	V	239.0	-3.0	19.0	54.0
4604.614429	36.3	100.0	1000.000	356.0	H	68.0	-2.1	17.7	54.0

< Fig 14. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



- ◆ Operating Condition: 1 920 × 1 080 / 60 Hz (HDMI/DVI: Digital)
Green trace: Average detector, Blue trace: Peak detector

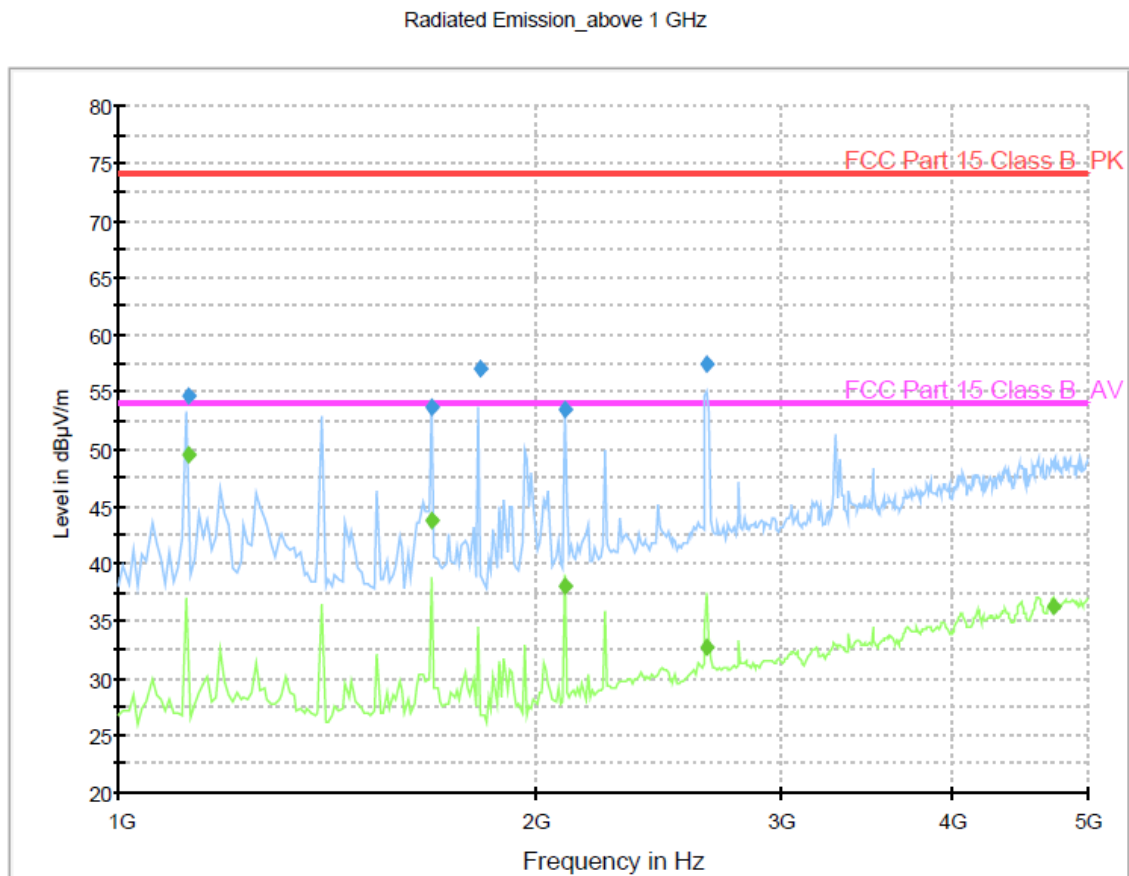

Final Result 1

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1121.240481	54.6	100.0	1000.000	100.0	V	165.0	-14.0	19.4	74.0
1681.962726	53.6	100.0	1000.000	137.0	H	179.0	-12.6	20.4	74.0
1821.835271	57.1	100.0	1000.000	100.0	V	186.0	-12.1	16.9	74.0
2102.396393	53.4	100.0	1000.000	100.0	V	232.0	-11.2	20.6	74.0
2654.718637	57.5	100.0	1000.000	100.0	H	199.0	-8.7	16.5	74.0

Final Result 2

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1121.240481	49.5	100.0	1000.000	100.0	V	165.0	-14.0	4.5	54.0
1681.562726	43.8	100.0	1000.000	100.0	H	179.0	-12.6	10.2	54.0
2101.996393	38.0	100.0	1000.000	100.0	V	232.0	-11.2	16.0	54.0
2654.318637	32.6	100.0	1000.000	100.0	H	199.0	-8.7	21.4	54.0
4718.838878	36.3	100.0	1000.000	279.0	V	326.0	-1.8	17.7	54.0

< Fig 15. Radiated emission result (1 000 MHz ~ 5 000 MHz) >



7. Sample Calculations

$$\begin{aligned} \text{dB}\mu\text{V} &= 20 \text{ Log}_{10}(\mu\text{V}/\text{m}) \\ \text{dB}\mu\text{V} &= \text{dBm} + 107 \\ \mu\text{V} &= 10^{(\text{dB}\mu\text{V}/20)} \end{aligned}$$

7.1 Example 1 :

■ 20.3 MHz

Class B Limit	= 250 μV = 48 dB μV
Reading	= 39.2 dB μV
$10^{(39.2\text{dB}\mu\text{V}/20)}$	= 91.2 μV
Margin	= 48 dB μV - 39.2 dB μV = 8.8 dB

7.2 Example 2 :

■ 66.7 MHz

Class B Limit	= 100 $\mu\text{V}/\text{m}$ = 40.0 dB $\mu\text{V}/\text{m}$
Reading	= 31.0 dB μV
Antenna Factor + Cable Loss = 5.8 dB	
Total	= 36.8 dB $\mu\text{V}/\text{m}$
Margin	= 40.0 dB $\mu\text{V}/\text{m}$ – 36.8 dB $\mu\text{V}/\text{m}$ = 3.2 dB



8. Recommendation & Conclusion

The data collected shows that the **LG Electronics Inc. LED LCD TV/Monitor (Model Name: 42LV3700-UD)** was complies with §15.107 and 15.109 of the FCC Rules.