

# EMC TEST REPORT

Test item : LED TV Monitor  
Model No. : 47LN5400-UA  
Order No. : 1211-02635  
Date of receipt : 2012-11-22  
Test duration : 2012-11-26 ~ 2012-11-27  
Use of report : FCC CoC Marking  
Date of Issue : 2012-11-28

Applicant : LG Electronics Inc.

19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

Test laboratory : Digital EMC Co., Ltd.

683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : ANSI C 63.4:2003  
FCC Part 15 Subpart B  
(Type of Device : Class B Personal Computers  
and Peripherals (JBP))

Test environment : Temperature : 23 °C,  
Humidity : (34 ~ 45) % R.H.

Test result :  Comply  Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer  
SangWon Lee

Reviewed by:



General Manager  
ChangHo Lee

**PRESIDENT OF DIGITAL EMC CO., LTD.**

## CONTENTS

<b>1. General Remarks</b> .....	3
<b>2. Test Laboratory</b> .....	3
<b>3. General Information of EUT</b> .....	4
<b>4. Test Summary</b> .....	5
4.1 Applied standards and test results .....	5
4.2 Test environment and conditions .....	5
4.3 Test result Summary .....	5
<b>5. Test Set-up and operation mode</b> .....	6
5.1 Principle of Configuration Selection .....	6
5.2 Test Operation Mode .....	6
5.3 Support Equipment Used .....	6
<b>6. Test Results : Emission</b> .....	7
6.1 Conducted Disturbance .....	7
6.2 Radiated Disturbance .....	12
<b>Appendix 1</b> .....	26
<b>List of Test and Measurement Instruments</b> .....	26

## 1. General Remarks

This report contains the result of tests performed by:

**DIGITAL EMC CO., LTD.**

Address : 683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

<http://www.digitalemc.com>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

## 2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	101842 678747	Test Facility list & NSA Data
	Canada	IC	5740A-1 5740A-2	Test Facility list & NSA Data
	Japan	VCCI	C-1427 R-1364, R-3385 T-1442, G-338	Test Facility list & NSA Data
Certification	Korea	KC	KR0034	Test Facility list & NSA Data
	Germany	TUV	ROK1124C	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

### 3. General Information of EUT

Model No.	47LN5400-UA
EUT Type	LED TV Monitor
Serial No	NONE
FCC ID	BEJ47LN5400UA
Type of Sample Tested	Pre-Production
High Frequency	Max 800 MHz
Rating	AC 100-240 V~ 50/60 Hz, 1.5 A
Supplied Power for Test	AC 120 V, 60 Hz
Applicant	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea
Manufacturer	LG Electronics Inc. 19-1, Cheongho-ri, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

#### Component supported mode

Resolution	Horizontal Frequency (KHz)	Vertical Frequency (Hz)
720 x 480i	15.73	59.94
	15.73	60.00
720 x 480p	31.47	59.94
	31.50	60.00
1280 x 720p	44.96	59.94
	45.00	60.00
1920 x 1080i	33.72	59.94
	33.75	60.00
1920 x 1080p	26.97	23.976
	27.00	24.00
	33.71	29.97
	33.75	30.00
	67.432	59.94
	67.500	60.00

## 4. Test Summary

### 4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2003	C
Radiated Disturbance	ANSI C63.4:2003	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

### 4.2 Test environment and conditions

Test Items	Test date (MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	11-27	23	45
Radiated Disturbance	11-26	23	34

### 4.3 Test result Summary

#### (1) Conducted Emission (USB MODE)

Frequency [MHz]	Phase	Result [dB $\mu$ V]	Detector	Limit [dB $\mu$ V]	Margin [dB]
0.15150	L1	61.7	Quasi-Peak	65.9	4.2

#### (2) Radiated Emission (HDMI MODE)

Frequency [MHz]	Pol.	Result [dB( $\mu$ V/m)]	Detector	Limit [dB( $\mu$ V/m)]	Margin [dB]
85.962	V	32.1	Quasi-Peak	40.0	7.9

## 5. Test Set-up and operation mode

### 5.1 Principle of Configuration Selection

**Emission** : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 5.2 Test Operation Mode

- HDMI MODE – Resolution : 1920x1080 Resolution (Worst Case)
- USB MODE

### 5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE				Backshell	FCC ID
				Connect type	Length (m)	ferrite core	shield		
PC	D11M	X0G62	DELL	Power HDMI	1.8 2.0	Not use Not use	Non-shield Shield	Plastic	DOC
KEYBOARD	SKG- 2500UW	TAKZ125009J	MONITREY INTERNATIONAL CORP	USB	1.7	Not use	Shield	Plastic	DOC
MOUSE	1094	X817158-002	MICROSOFT CORPORATION	USB	1.8	Not use	Shield	Plastic	DOC
CD/DVD PLAYER	DVP- NS92V	2001499	SONY EMCS	POWER COMPONENT	1.8 2.0	Not use Not use	Non-shield Non-shield	Plastic	VER
PRINTER	M1200	LWTZ181070	EPSON	Power USB	1.8 2.0	Not use Not use	Non-shield Shield	Plastic	DOC

## 6. Test Results : Emission

### 6.1 Conducted Disturbance

#### 6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the appropriate power mains / peripherals through the LISN. All the other peripherals are connected to the 2<sup>nd</sup> LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

#### 6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.  
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

- Note) 1. Emission Level = Reading Value + Correction Factor.  
 2. Correction Factor = Cable Loss + Insertion Loss of LISN  
 3. Margin = Limit - Emission level

Test Result

< HDMI MODE >



Results of Conducted Emission



Digital EMC  
Date : 2012-11-27

Model No. : 47LN5400-UA  
Type :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi. : 23 °C 45 % R.H.  
Operator :

Memo : HDMI MODE

LIMIT : CISPR22\_B QP  
CISPR22\_B AV

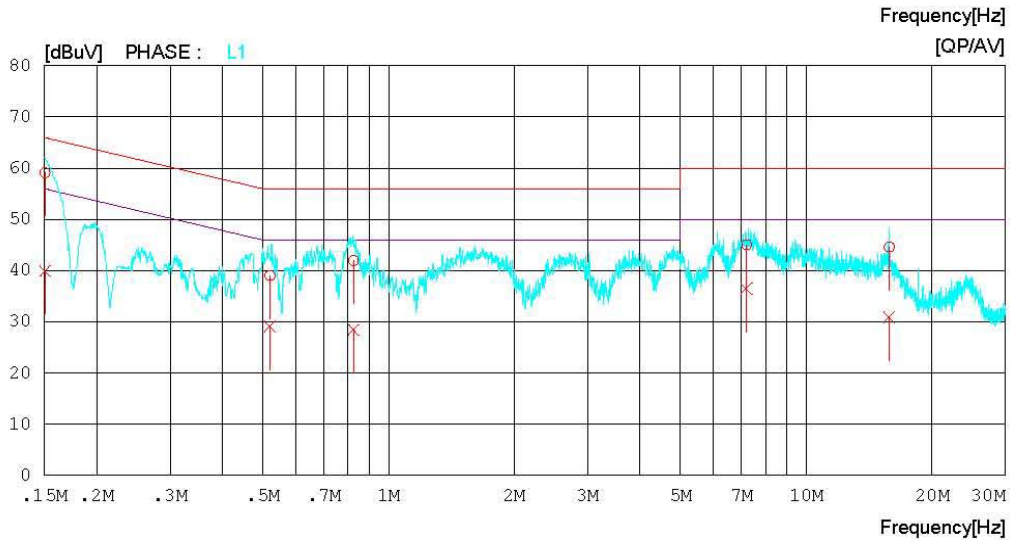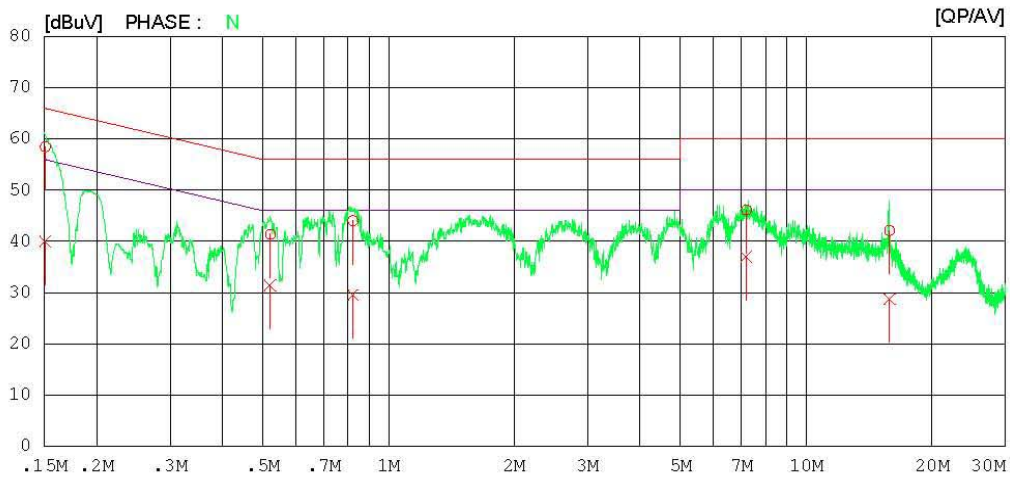

## Results of Conducted Emission

Digital EMC  
 Date : 2012-11-27

Model No. : 47LN5400-UA  
 Type :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi. : 23 °C 45 % R.H.  
 Operator :

Memo : HDMI MODE

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15085	58.2	39.8	0.2	58.4	40.0	66.0	56.0	7.6	16.0	N
2	0.52134	41.2	31.2	0.2	41.4	31.4	56.0	46.0	14.6	14.6	N
3	0.82173	43.8	29.3	0.2	44.0	29.5	56.0	46.0	12.0	16.5	N
4	7.19450	45.6	36.5	0.5	46.1	37.0	60.0	50.0	13.9	13.0	N
5	15.82000	41.3	27.9	0.8	42.1	28.7	60.0	50.0	17.9	21.3	N
6	0.15061	58.9	39.8	0.2	59.1	40.0	66.0	56.0	6.9	16.0	L1
7	0.52024	38.8	28.9	0.2	39.0	29.1	56.0	46.0	17.0	16.9	L1
8	0.82558	41.8	28.2	0.2	42.0	28.4	56.0	46.0	14.0	17.6	L1
9	7.19550	44.6	36.0	0.5	45.1	36.5	60.0	50.0	14.9	13.5	L1
10	15.80900	43.8	30.1	0.8	44.6	30.9	60.0	50.0	15.4	19.1	L1

< USB MODE >



Results of Conducted Emission



Digital EMC  
Date : 2012-11-27

Model No. : 47LN5400-UA  
Type :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi. : 23 °C 45 % R.H.  
Operator :

Memo : USB MODE

LIMIT : CISPR22\_B QP  
CISPR22\_B AV

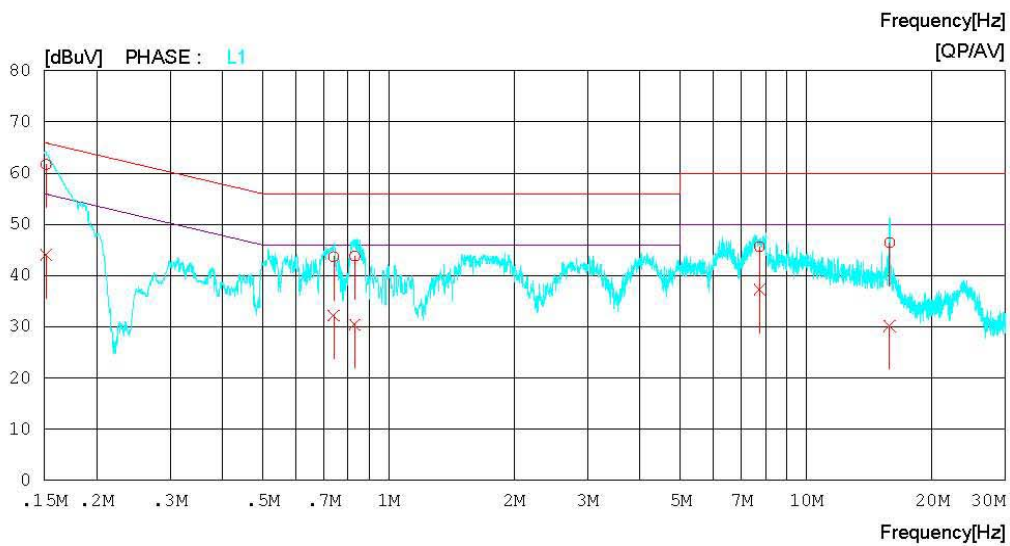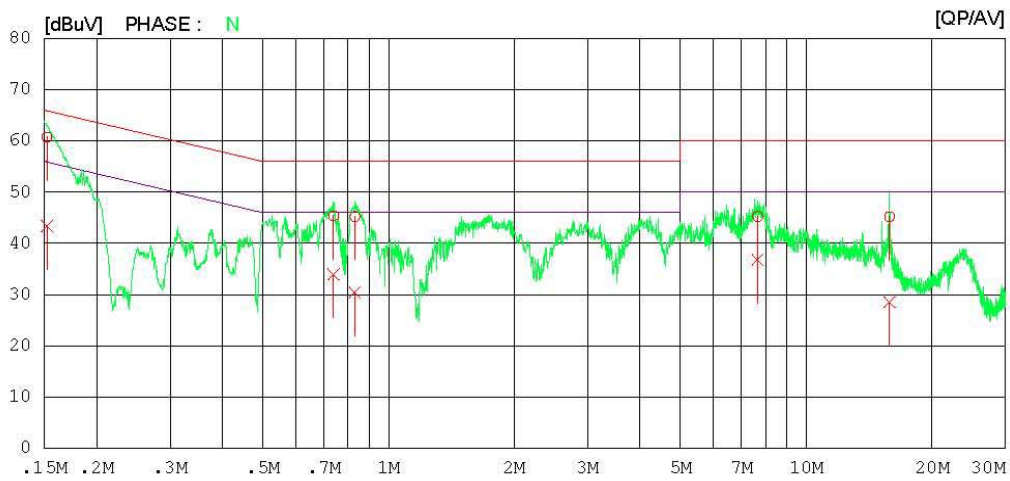

## Results of Conducted Emission

Digital EMC  
 Date : 2012-11-27

Model No. : 47LN5400-UA  
 Type :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi. : 23 °C 45 % R.H.  
 Operator :

Memo : USB MODE

LIMIT : CISPR22\_B QP  
 CISPR22\_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15226	60.5	43.1	0.2	60.7	43.3	65.9	55.9	5.2	12.6	N
2	0.73871	45.2	33.8	0.2	45.4	34.0	56.0	46.0	10.6	12.0	N
3	0.83085	45.0	30.2	0.2	45.2	30.4	56.0	46.0	10.8	15.6	N
4	7.66100	44.7	36.3	0.5	45.2	36.8	60.0	50.0	14.8	13.2	N
5	15.83150	44.4	27.7	0.8	45.2	28.5	60.0	50.0	14.8	21.5	N
6	0.15150	61.5	43.9	0.2	61.7	44.1	65.9	55.9	4.2	11.8	L1
7	0.73941	43.5	32.0	0.2	43.7	32.2	56.0	46.0	12.3	13.8	L1
8	0.83050	43.6	30.2	0.2	43.8	30.4	56.0	46.0	12.2	15.6	L1
9	7.72750	45.1	36.8	0.5	45.6	37.3	60.0	50.0	14.4	12.7	L1
10	15.83350	45.6	29.4	0.8	46.4	30.2	60.0	50.0	13.6	19.8	L1

## 6.2 Radiated Disturbance

### 6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10 m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Also Peak and Average detector with 1 MHz RBW were used for above 1 GHz frequency range.

For further description of the configuration refer to the picture of the test set-up.

## 6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

### (1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (3 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB $\mu$ V/m)	Quasi-peak (dB $\mu$ V/m)
30 to 230	40	30
230 to 1 000	47	37

### (2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Peak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)
1 to 40	80	60	74	54

Note) 1. Emission Level = Reading Value + Correction Factor.

2. Correction Factor = Cable loss - Amp gain + Antenna Factor

3. Margin = Limit - Emission level

Test Result

< HDMI MODE\_30 MHz ~ 1 GHz >

RADIATED EMISSION



Date : 2012-11-26

Model Name : 47LN5400-UA  
Model No. :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi : 23 °C 34 % R.H.  
Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart.B Class B (3m)  
MARGIN: 3 dB

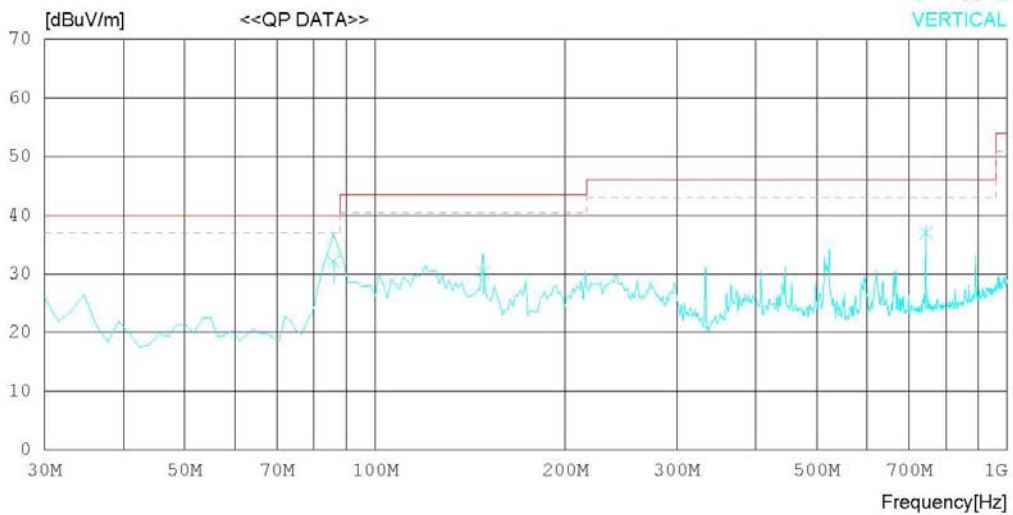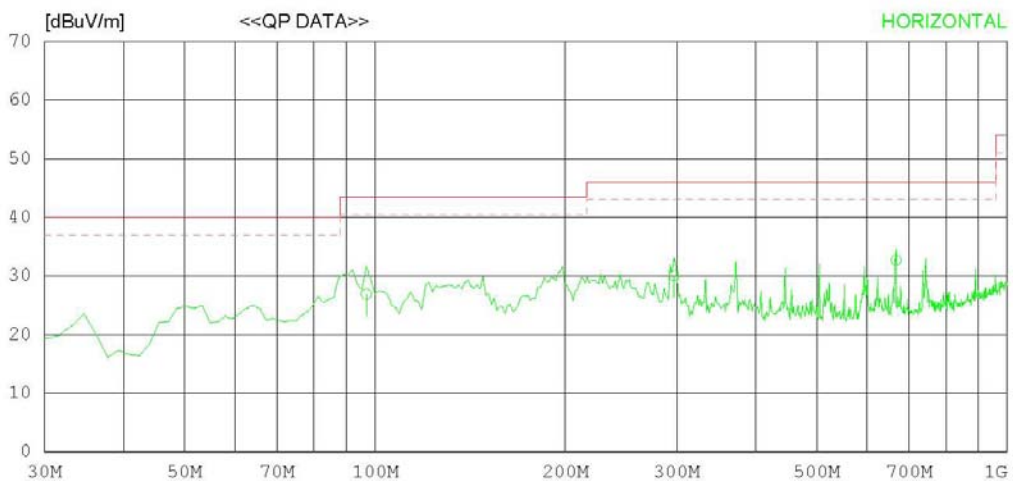

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 34 % R.H.
Test Condition :	Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart.B Class B (3m)  
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	96.843	38.0	10.3	1.4	22.8	26.9	43.5	16.6	300	340
2	297.372	38.0	13.1	2.8	23.9	30.0	46.0	16.0	100	358
3	667.340	34.0	18.8	4.3	24.4	32.7	46.0	13.3	100	358
----- Vertical -----										
4	85.962	45.1	8.3	1.5	22.8	32.1	40.0	7.9	100	1
5	148.141	41.0	10.7	1.7	23.1	30.3	43.5	13.2	100	359
6	743.510	37.0	19.4	4.6	24.0	37.0	46.0	9.0	100	314

< HDMI MODE \_ (1 ~ 6) GHz \_ Peak >

**RADIATED EMISSION**



Date : 2012-11-26

Model Name : 47LN5400-UA  
Model No. :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi : 23 °C 34 % R.H.  
Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)  
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

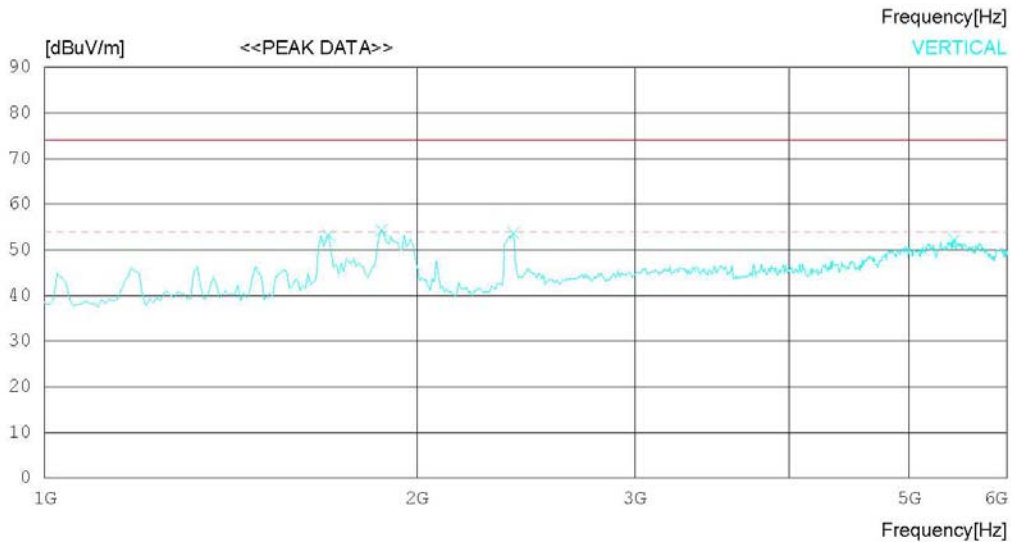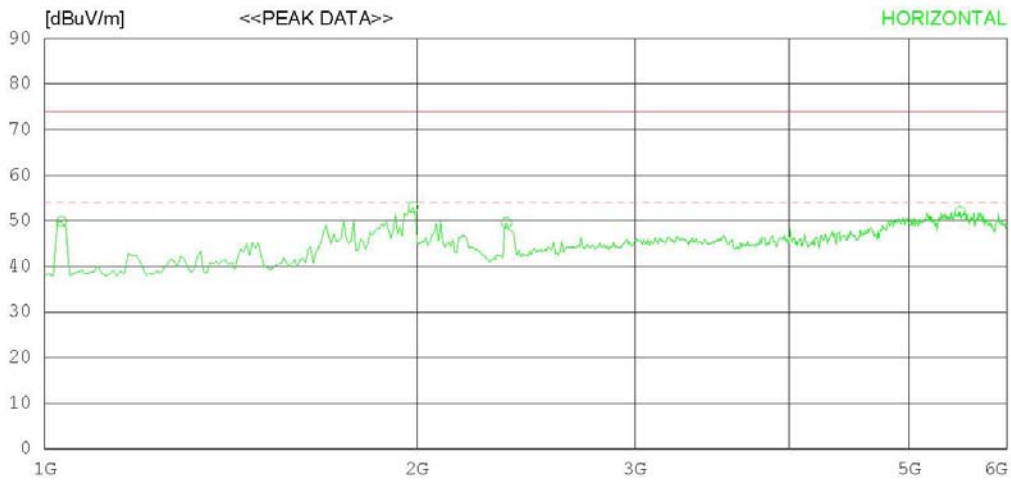

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 34 % R.H.
Test Condition :	Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)  
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1032.051	61.8	23.9	5.9	41.8	49.8	74.0	24.2	100	358
2	1985.577	61.7	24.6	8.4	41.7	53.0	74.0	21	100	358
3	2362.184	55.6	26.7	9.2	41.9	49.6	74.0	24.4	100	230
4	5495.201	44.7	35.1	14.9	42.7	52.0	74.0	22	100	169
----- Vertical -----										
5	1697.115	62.4	24.6	7.9	41.7	53.2	74.0	20.8	100	189
6	1873.397	63.2	24.6	8.2	41.7	54.3	74.0	19.7	100	1
7	2394.236	59.5	26.8	9.3	41.9	53.7	74.0	20.3	100	234
8	5439.112	45.1	34.8	14.9	42.6	52.2	74.0	21.8	100	359

< HDMI MODE \_ (1 ~ 6) GHz \_ Average >

**RADIATED EMISSION**



Date : 2012-11-26

Model Name : 47LN5400-UA  
Model No. :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi : 23 °C 34 % R.H.  
Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

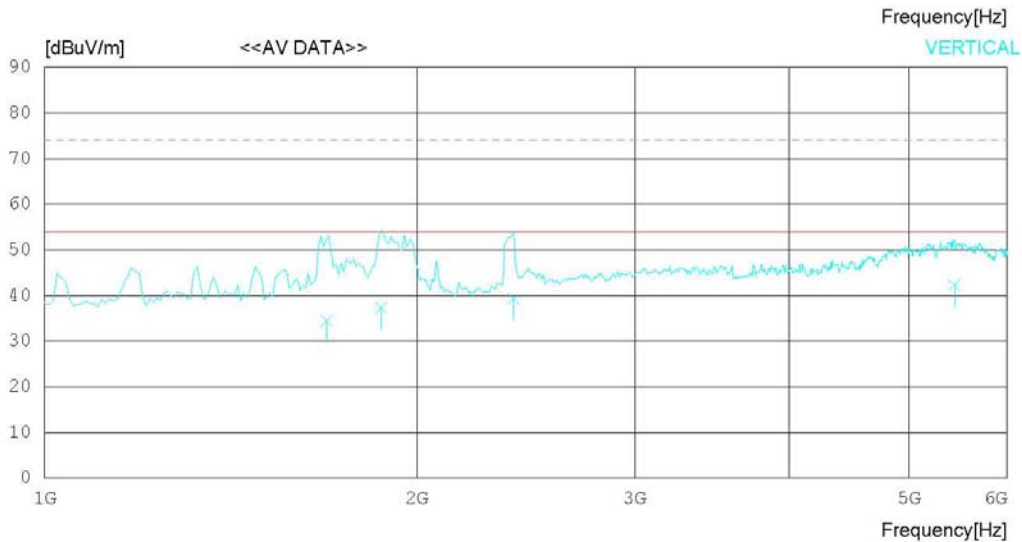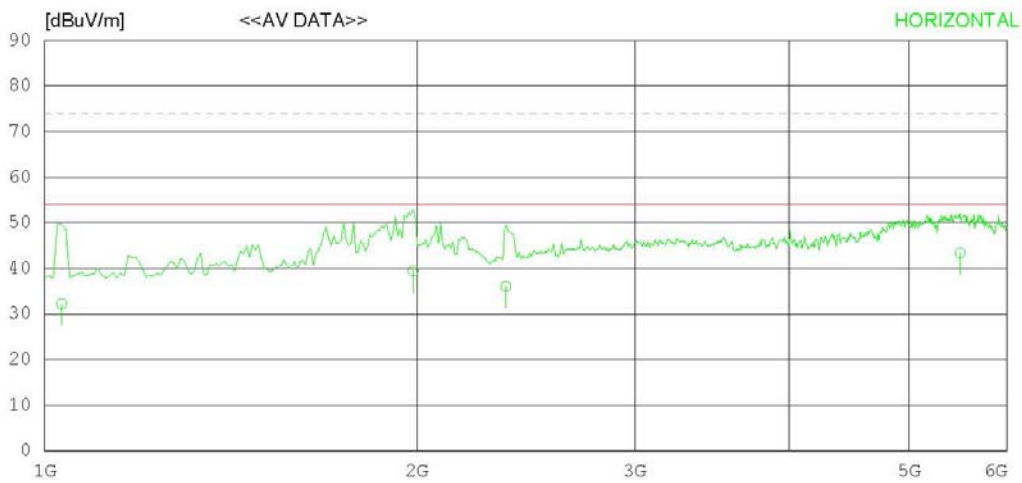

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 'C 34 % R.H.
Test Condition :	Operator :

Memo : HDMI MODE

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1032.051	44.2	23.9	5.9	41.8	32.2	54.0	21.8	100	358
2	1985.240	48.2	24.6	8.4	41.7	39.5	54.0	14.5	100	358
3	2360.149	42.2	26.6	9.2	41.9	36.1	54.0	17.9	100	230
4	5499.270	36.2	35.1	14.9	42.8	43.4	54.0	10.6	100	169
----- Vertical -----										
5	1690.470	43.6	24.6	7.9	41.7	34.4	54.0	19.6	100	189
6	1871.257	46.2	24.6	8.2	41.7	37.3	54.0	16.7	100	1
7	2394.236	45.1	26.8	9.3	41.9	39.3	54.0	14.7	100	234
8	5440.287	35.2	34.8	14.9	42.6	42.3	54.0	11.7	100	359

< USB MODE\_30 MHz ~ 1 GHz >

**RADIATED EMISSION**



Date : 2012-11-26

Model Name : 47LN5400-UA  
Model No. :  
Serial No. :  
Test Condition :

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi : 23 °C 34 % R.H.  
Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart.B Class B (3m)  
MARGIN: 3 dB

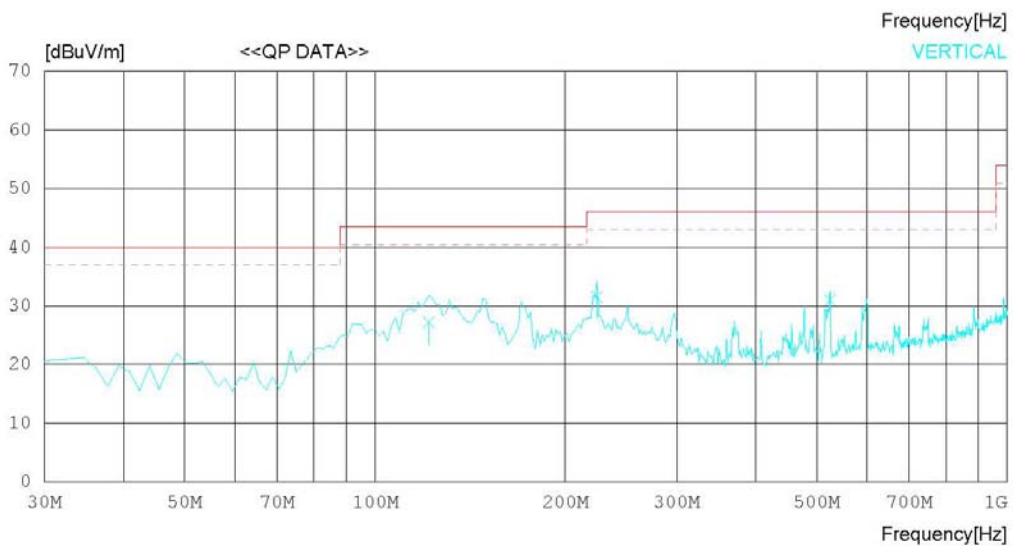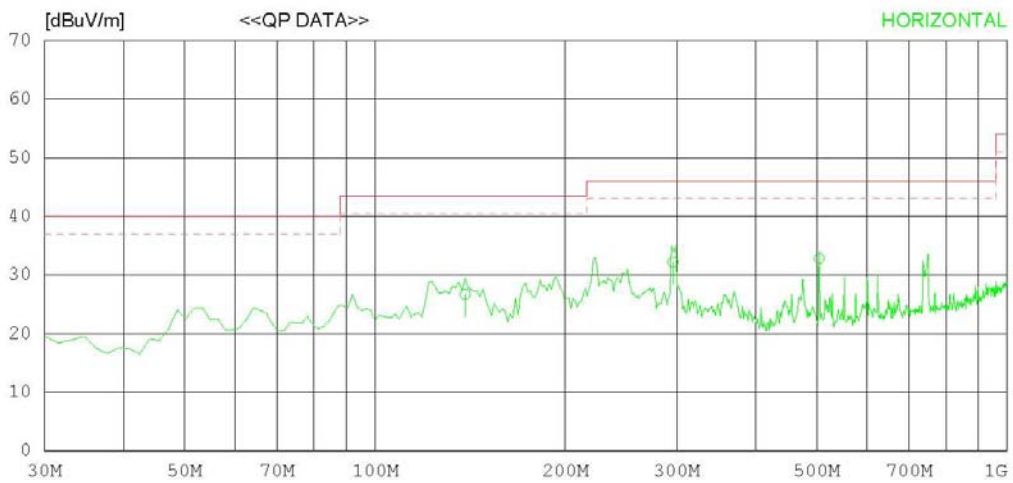

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 34 % R.H.
Test Condition :	Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart.B Class B (3m)  
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	138.814	36.7	11.3	1.7	23.0	26.7	43.5	16.8	201	3
2	295.800	40.2	13.1	2.8	23.9	32.2	46.0	13.8	100	1
3	504.117	36.0	17.6	3.9	24.7	32.8	46.0	13.2	100	228
----- Vertical -----										
4	121.715	36.0	12.5	1.6	22.9	27.2	43.5	16.3	100	351
5	224.311	42.0	10.7	2.4	23.5	31.6	46.0	14.4	199	1
6	524.325	34.1	17.8	3.9	24.8	31.0	46.0	15.0	100	152

< USB MODE \_ (1 ~ 6) GHz \_ Peak >

## RADIATED EMISSION



Date : 2012-11-26

Model Name : 47LN5400-UA  
 Model No. :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi : 23 °C 34 % R.H.  
 Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

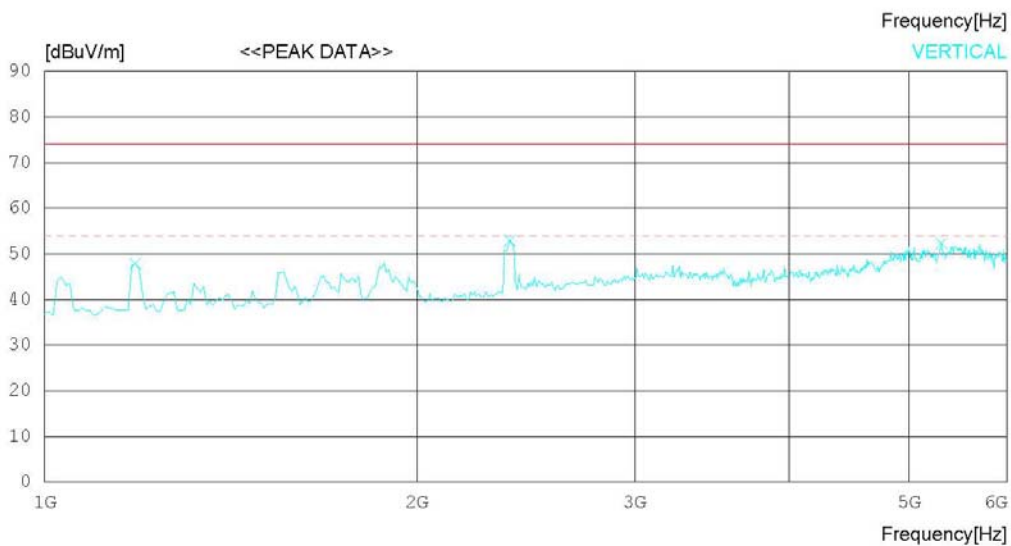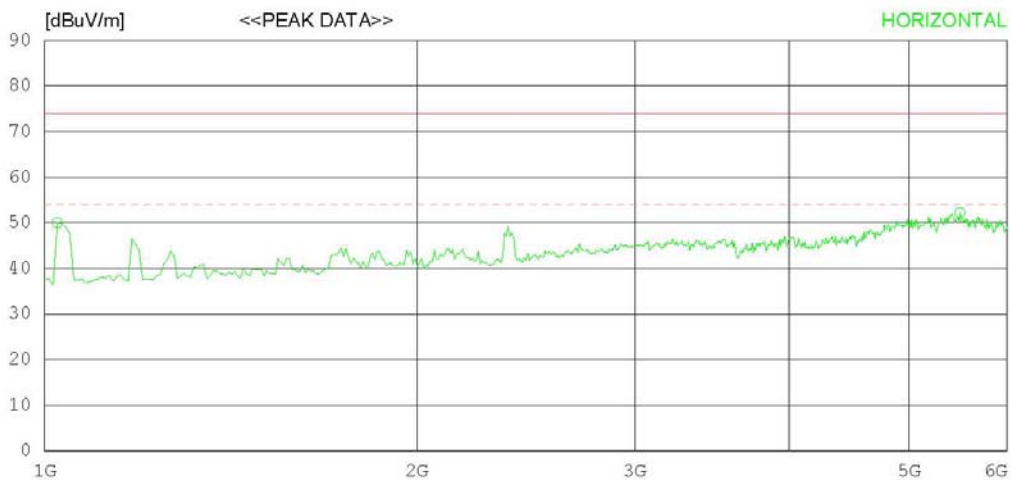

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 34 % R.H.
Test Condition :	Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)  
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1024.038	62.1	23.9	5.8	41.8	50.0	74.0	24	100	358
2	5495.201	44.9	35.1	14.9	42.7	52.2	74.0	21.8	100	227
----- Vertical -----										
3	1184.295	59.2	24.2	6.4	41.9	47.9	74.0	26.1	100	1
4	2378.210	58.8	26.7	9.3	41.9	52.9	74.0	21.1	100	1
5	5310.909	45.3	34.1	15.1	42.2	52.3	74.0	21.7	100	304

< USB MODE \_ (1 ~ 6) GHz \_ Average >

## RADIATED EMISSION



Date : 2012-11-26

Model Name : 47LN5400-UA  
 Model No. :  
 Serial No. :  
 Test Condition :

Reference No. :  
 Power Supply : 120 V 60 Hz  
 Temp/Humi : 23 °C 34 % R.H.  
 Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

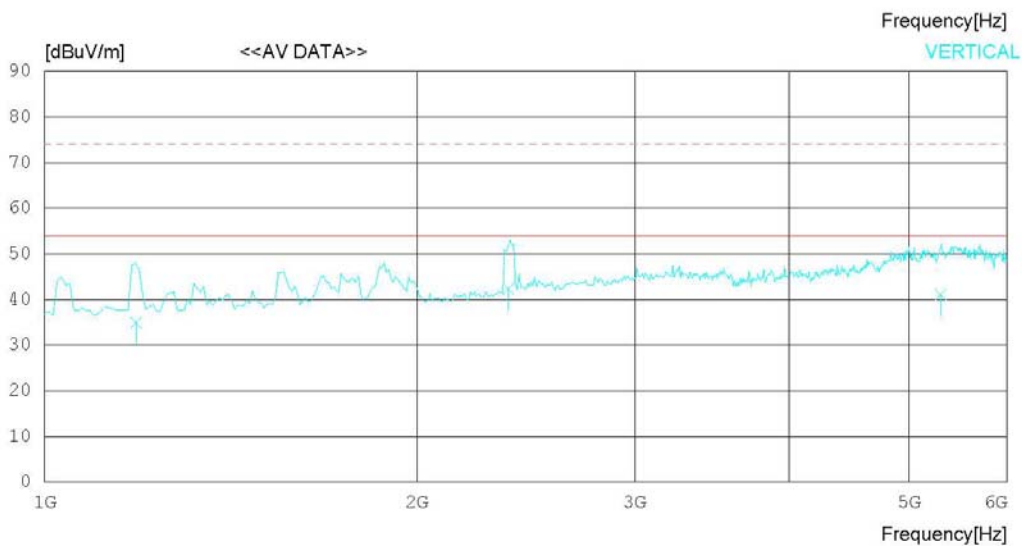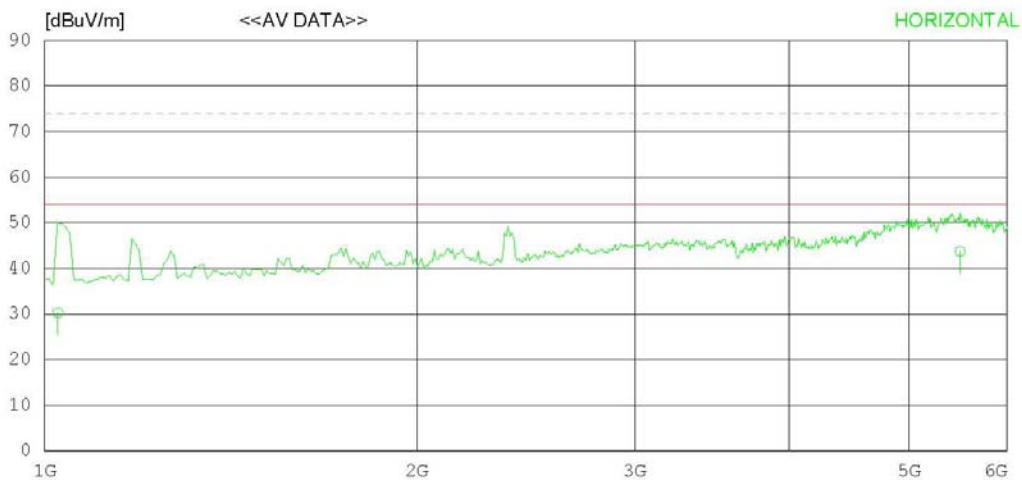

## RADIATED EMISSION

Date : 2012-11-26

Model Name : 47LN5400-UA	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 34 % R.H.
Test Condition :	Operator :

Memo : USB MODE

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)  
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1025.217	42.4	23.9	5.8	41.8	30.3	54.0	23.7	100	358
2	5496.250	36.4	35.1	14.9	42.7	43.7	54.0	10.3	100	227
----- Vertical -----										
3	1185.470	46.2	24.2	6.4	41.9	34.9	54.0	19.1	100	1
4	2370.245	48.2	26.7	9.3	41.9	42.3	54.0	11.7	100	1
5	5300.400	34.2	34.0	15.1	42.2	41.1	54.0	12.9	100	304

---

---

## Appendix 1

---

---

### List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

### 1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2012.03.05	2013.03.05
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2012.07.02	2013.07.02
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2012.01.09	2013.01.09
<input type="checkbox"/> LISN	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2012.07.25	2013.07.25
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2012.09.18	2013.09.18
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2012.07.02	2013.07.02
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2012.01.09	2013.01.09

### 2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100014	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112D	SCHAFFNER	22609	2011.12.21	2012.12.21
<input checked="" type="checkbox"/> HORN ANTENNA	BBHA9120A	SCHWARZBECK	322	2012.05.15	2014.05.15
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2012.01.09	2013.01.09
<input checked="" type="checkbox"/> AMPLIFIER	MLA-100M18-B01-25	TSJ	1719458	2012.06.04	2013.06.04
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2012.07.11	2013.07.11
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2012.07.01	2013.07.01
<input type="checkbox"/> BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2012.03.22	2014.03.22
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2012.03.06	2013.03.06
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2012.04.10	2014.04.10
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2012.04.10	2014.04.10
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91031946	2012.03.12	2014.03.12
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108-A1	SCHWARZBECK	1098	2012.03.12	2014.03.12
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2012.03.05	2013.03.05