

## REPORT FOR A TV INTERFACE DEVICE

---

*Scope - Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.*

### RF MODULATOR

Manufacturer : LG Electro-Components Ltd.

Model No. : TADC-H002F

LG Electronics Co., Ltd. Pyungtaek research Laboratory

19-1, Cheongho-Ri, Jinwuy-Myon, Pyungtaek-Shi, Kyunggi-Do, 451-713 Korea  
Tel. : (0333) 610-5354, FAX : (0333) 610-5355, TLX : GSVTRK29493

# CONTENTS

---

## CONTENTS

### PART I

### INTRODUCTION

	Page
1. GENERAL INFORMATION .....	5
1 . 1 DESCRIPTION OF EQUIPMENT UNDER TEST	
1 . 2 REGULATIONS APPLIED TO THE EUT	
1 . 3 MEASUREMENT PROCEDURE	
1 . 4 MEASUREMENT SITE	
2. TEST CONDITIONS .....	6
2 . 1 OPERATING CONDITIONS OF EUT	
2 . 2 STABILIZATION OF EUT OPERATING	
2 . 3 TEMPERATURE	
3. TEST SITE .....	7
3 . 1 OPEN AREA TEST SITE	
3 . 2 A SHIELDED ENCLOSURE	
4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS .....	7
5. DESCRIPTION OF TEST CONDITION .....	7
5.1 POWER LINE CONDUCTED EMISSIONS .....	7
5.2 RADIATED EMISSIONS .....	9
5.3 OUTPUT SIGNAL MEASUREMENTS .....	10
5.3.1 OUTPUT SIGNAL LEVEL MEASUREMENTS	
5.3.2 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENTS	
5.4 TRANSFER SWITCH ISOLATION MEASUREMENTS .....	11
6. MEASURING INSTRUMENTS AND SET-UP .....	12
6.1 POWER LINE CONDUCTED EMISSIONS .....	12
6.2 RADIATED EMISSIONS .....	12
6.3 OUTPUT SIGNAL MEASUREMENTS .....	13
6.4 TRANSFER SWITCH ISOLATION MEASUREMENTS .....	13

## CONTENTS

---

### PART II TEST DATA

	page
1. CONDUCTED EMISSIONS .....	16
2.. RADIATED EMISSIONS .....	19
3. OUTPUT SIGNAL LEVEL MEASUREMENTS .....	21
4. OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENTS .....	22
5 TRANSFER SWITCH ISOLATION MEASUREMENTS .....	23
APPENDIX A PHOTOGRAPHS OF TEST SET-UP .....	24
APPENDIX B LIST OF TEST EQUIPMENT .....	26
APPENDIX C LIST OF SUPPORT DEVICE & .....	27
ACCESSORIES IN THE TEST	
APPENDIX D LABELLING REQUIREMENTS .....	28
CERTIFICATE .....	at the END of the REPORT

Part I  
INTRODUCTION

# INTRODUCTION

---

## 1. GENERAL INFORMATION

### 1 . 1 DESCRIPTIONS OF EQUIPMENT UNDER TEST (EUT)

- 1 . 1 . 1 Manufacture . . . . . LG Electronics Inc. ; 19-1, Cheongho-Ri,  
Jinwuy-Myun, Pyungtaek-Shi, Kyunggi-Do,  
451-713, KOREA
- 1 . 2 . 1 Applicant . . . . . LG Electronics Inc. ; 20, Yoido-Dong,  
Youngdungpo-Gu, Seoul, 150-721, KOREA.
- 1 . 1 . 3 Model No. . . . . **ALGB420**
- 1 . 1 . 4 Serial No. . . . . Not attached
- 1 . 1 . 5 Trade Name . . . . . ZENITH
- 1 . 1 . 6 FCC ID No. . . . . **BEJ9QKE4910**
- 1 . 1 . 7 Descriptions
  - a) Product Type . . . . . Video Cassette Recorder
  - b) RF-Output Channel(s) . . . . . Channel 3 and 4
  - c) RF IN/OUT Terminal Impedance . . . . . 75 ohms (Unbalanced F-type coaxial)
  - d) Number of RF IN/OUT terminal . . . . . 1 EA at each
  - e) Terminal(s) for signal . . . . . Video/Audio in/out with RCA-type jacks
  - f) Power Supply . . . . . 120 Vac / 60 Hz
- 1 . 1 . 8 Accessories connected to the EUT.
  - a) Video Coaxial cable for RF-OUT terminal provided by manufacture
  - b) Video/Audio cables

### 1 . 2 REGULATIONS APPLIED TO THE EUT . . FCC Part 15.115

### 1 . 3 MEASUREMENT PROCEDURE . . . . MP-3 ; ANSI C63.4

### 1 . 4 MEASUREMENT SITE DESCRIPTION

- \* Location of measurement facility
  - LG Electronics Inc. Pyungtaek plant
  - Multimedia Research Lab. Multimedia Standards Team OPEN SITE
  - 19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtaek-Shi, 451-713, KOREA

Note;

The detailed description of measuring facility was found to be in compliance with Federal Communications Commission requirements of § 2.948 according to ANSI C63.4 on August 21, 1997.

# INTRODUCTION

---

## 2. GENERAL TEST CONDITIONS

The test data contained in this report was obtained by use of the measurement method recommended in FCC Rules, 47 C.F.R. § 15.31(a)(3), with equipments and at the test site filed by the Federal Communications Commission (FCC). The technical standard for a TV interface device are set forth in Subpart B of Part 15 of FCC Rules and regulation. The measurement for Radiated Emissions, Powerline Conducted Emissions, Output signal levels, Output Terminal Conducted Spurious Emissions and Transfer Switch Isolation were performed in accordance with the procedures described in MP-3 and ANSI C63.4-1992.

### 2 . 1 OPERATING CONDITIONS OF THE EUT

According to the requirements in Subpart B of Part 15, the measurement is made at each function of the EUT being connected with appropriate cables and loads.

The model **ALGB420** has either a video/audio output terminal or a video/audio input terminal in RCA-type plugs and antenna input terminal. Therefore, every measurement was investigated in the operation modes, (1) Playing VITS1Vp-p recorded tape, (2) Recording 1 & 5 Vp-p VITS signal supplied through the video input terminal, and (3) Recording NTSC TV signal supplied through the at antenna input terminal at each Ch. 3 or/and 4 for each mode applicable.

### 2 . 2 STABILIZATION OF EUT OPERATION

The EUT was operated for sufficient minutes before testing to make it stabilized in a normal operating condition. The power supplied to the EUT was filtered to meet the requirements.

### 2 . 3 TEMPERATURE

Measurement procedure recommended by FCC requires the test to be performed at the site with ambient temperature within 10 to 40 °C (50 to 104 °F). The specification for operating temperature of EUT is from 5 to 35 °C (41 to 95 °F) as described in owner's manual. The measurement data in this report was obtained at the temperature in the range of 15°C ~ 19°C.

# INTRODUCTION

---

## 3. TEST SITE

### 3 . 1 OPEN AREA TEST SITE

Measurement of radiated emissions from EUT was made at open area test site, a description of which has been submitted to the FCC pursuant to Part 15 of 47 C.F.R., §2.948.

### 3 . 2 A SHIELDED ENCLOSURE.

All other measurements, including power line conducted emissions, output signal levels, and transfer switch isolation, and transfer switch isolation were made in a shielded enclosure providing sufficient shielding effectiveness.

## 4. MEASURING INSTRUMENTATIONS AND CALIBRATIONS.

Measurements of output signal level, output terminal conducted spurious emissions, and transfer switch isolation (if applicable) were made with instruments calibrated according to the recommendation by manufacturer. Measurement of radiated emissions and power line conducted emissions were made with instruments conforming to American National Standard Specification, ANSI C63.4 (1992). The calibration of measuring instrument, including any accessories that may affect test results, was performed according to the recommendation by manufactures.

## 5. DESCRIPTION OF TEST CONDITION.

### 5 . 1 POWERLINE CONDUCTED EMISSION MEASUREMENT.

#### 5 . 1 . 1 SHIELDED ENCLOSURE.

The measurement for powerline emissions from EUT was made in shielded enclosure which provides sufficient shielding effectiveness enough not to affect test results.

#### 5 . 1 . 2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.

During conducted emission measurement, a radio noise meter (ESH-3, Rohde & Schwarz) that has a CISPR quasi-peak detector with 9 KHZ IF bandwidth of 6 dB was utilized.

# INTRODUCTION

---

## 5 . 1 . 3 FREQUENCY RANGE TO BE SCANNED.

For conducted emissions measurement, frequency range of 450 KHz to 30 MHz, included, was investigated.

## 5 . 1 . 4 UNIT OF MEASUREMENT.

Test results for conducted emissions are reported in micro-volts.

## 5 . 1 . 5 LINE IMPEDANCE STABILIZATION NETWORK (LISN).

A LISN with characteristics that conform to the requirements of Part 15 of FCC Rules was used for the measurement of conducted powerline radio noise; (50 micro-henries / 50 ohms). Chassis and earth-points for grounding of the LISN were earth-grounded.

## 5 . 1 . 6 TEST CONDITIONS AND CONFIGURATION OF EUT.

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The EUT has designed to use the public AC lines with rated AC voltage as specified in OWNER's MANUAL of EUT and filtered to meet the requirement. AC power was supplied to the EUT through LISN with characteristics described in 5.1.5 of part I of this report.

The EUT was placed on a 1 m. × 1.5 m. 80 Cm. high wooden table which is place on the earth-grounded conducting surface larger than 2 square-meter. The vertical conducting surface was located 40 Cm to the EUT. Length of the power lead in excess of 80 Cm horizontally separating the EUT from LISN was folded back-and-forth form at the center of the power cord not exceeding 40 Cm in length.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

# INTRODUCTION

---

## 5 . 2 RADIATED EMISSIONS MEASUREMENT.

### 5 . 2 . 1 TEST SITE.

Preliminary measurements were performed in the shielded enclosure to determine the emissions characteristics of the EUT. Final measurements were made in outdoors as described at 3.1 of Part I in this report.

### 5 . 2 . 2 DETECTOR FUNCTION SELECTION AND BANDWIDTH.

In radiated emissions measurement, a field strength meter (ESVP, Rohde & Schwarz) that has a CISPR quasi-peak detector was used. The 6 dB bandwidth of the detector of instrument is 120 KHz over frequency range of 30 to 1000 MHz. Emissions to be scanned above 1000 MHz may be detected in peak mode.

### 5 . 2 . 3 UNIT OF MEASUREMENT.

Test results of radiated emissions measurement are reported in micro-volts per meter at the specific distance. Using the unit of dB $\mu$ V on the test instrument, the indication unit was converted to field strength unit of  $\mu$ V/m as following method:

$$F(\mu V/m) = 10^{(R+CL+AF)/20}(\mu V/m)$$

here, F : Field Strength in  $\mu$ V/m,  
R : Meter Reading Level in dB( $\mu$ V),  
CL : Cable Loss from antenna to meter in dB,  
AF : Antenna Factor of receiving antenna in dB(/m)

### 5 . 2 . 4 ANTENNAS.

Measurements were made using calibrated half-wave tuned Bi-log antenna in range of 30 to 1000 MHz that are correctable to levels obtained with a tuned dipole antenna. For emissions above 1000MHz, horn antenna may be used. Measurements were also made for both horizontal and vertical polarization.

The horizontal distance between the receiving antenna and the closest periphery of the EUT was 3 meters as described in 8.2.3 of ANSI C63.4-1992.

# INTRODUCTION

---

## 5 . 2 . 5 FREQUENCY RANGE TO BE SCANNED.

For radiated emissions measurements, the spectrum in the range of 30 to 1000 MHz and above, if found, was investigated.

The measurement for powerline emissions from EUT was made in shielded enclosure which provides

## 5 . 2 . 6 TEST CONDITIONS AND CONFIGURATION OF EUT.

The EUT was configured and operated in all modes of operation so as to find the maximum emanation of emissions from EUT.

The power was furnished with rated (normal) AC 120 volts, as specified in the OWNER's MANUAL of EUT. The EUT was placed on a 80 Cm high non metallic 1 × 1.5 m table. The turn table containing the system was rotated and the antenna height was varied 4 m to find the maximum emanation of emissions from EUT.

Each type of accessory provided by manufacturer or typically used and support equipment were connected to the EUT during measurement to the typical usage and applicable as nearly as practicable.

## 5 . 3 OUTPUT SIGNAL MEASUREMENT.

During measurements for output signal levels as the RF-out terminal, a spectrum analyzer was used with characteristics described at 4. and 9.3 of part I in this report.

### 5 . 3 . 1 OUTPUT SIGNAL LEVEL MEASUREMENT.

RF-out terminal of EUT is designed to feed modulated signals to a TV broadcast receiver via coaxial cable with 75  $\Omega$  of rated output impedance.

The output voltage of video carrier frequency at the RF-output terminal of the EUT was measured at each channel (CH. 3 & 4) connecting directly to a spectrum analyzer with 50  $\Omega$  input impedance via 75-to-50  $\Omega$  matching pad. Indicated voltage on screen of measuring instrument was converted to the voltage of 75  $\Omega$  system.

## INTRODUCTION

---

\* Data conversion method.

$$V_{75}[\mu V] = 10^{(V_r + CF)/20}[\mu V]$$

here,  $V_{75}$  : Voltage at the RF-out terminal of 75  $\Omega$  in  $\mu V$ ,

$V_r$  : Voltage read at analyzer with 50  $\Omega$  input-impedance in dB $\mu V$ ,

CF : Conversion Factor of the matching pad in dB.

### 5 . 3 . 2 OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSION MEASUREMENT.

Any other spectrum at RF-output terminal appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was searched at each channel.

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized.

The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

\* Data conversion method.

$$V_{75}[\mu V] = 10^{(V_r + CF - PG + AT)/20}[\mu V]$$

Where,  $V_{75}$  : Voltage at the RF-out terminal of 75  $\Omega$  in  $\mu V$ ,

$V_r$  : Voltage read at analyzer with 50  $\Omega$  input-impedance in dB $\mu V$ ,

CF : Conversion Factor of the matching pad in dB,

PG : Gain of pre-amplifier in dB,

AT : Attenuation of attenuator in dB.

### 5 . 4 TRANSFER SWITCH ISOLATION MEASUREMENT.

As a transfer switch was equipped with EUT as an antenna-in, measurement of isolation were made at RF-input terminal with rated input impedance.

The maximum voltage of video carrier frequency of the EUT at the antenna input (RF-in) terminal of the switch was measured for both channels.

# INTRODUCTION

---

To clarify the emissions emanated from RF output terminal of the EUT, RF pre-amplifier was utilized.

The gain of pre-amplifier at each frequency measured from EUT were obtained after sufficient warm-up for stabilization of gain.

\* DATA CONVERSION METHOD.

$$V_{75}[\mu V] = 10^{(Vr + CF - PG + AT)/20}[\mu V]$$

where,  $V_{75}$  : Voltage at the RF-out terminal of 75  $\Omega$  in  $\mu V$ ,

Vr : Voltage read at analyzer with 50  $\Omega$  input-impedance in dB $\mu V$ ,

CF : Conversion Factor of the matching pad in dB,

PG : Gain of pre-amplifier in dB,

AT : Attenuation of attenuator in dB.

## 6. MEASURING INSTRUMENTS AND SET-UP.

### 6 . 1 POWERLINE CONDUCTED EMISSIONS.

#### 6 . 1 . 1 Radio Noise Meter.

Rohde & Schwarz, Model ESH-3{ 9 KHz to 30 MHz }

Detector function : CISPR Quasi-Peak

IF Bandwidth : 10 KHz

#### 6 . 1 . 2 Line Impedance Stabilization Network (LISN).

Kyoritsu, Model KNW-407

Impedance Characteristic : 50  $\mu H$  / 50  $\Omega$

### 6 . 2 RADIATED EMISSIONS.

#### 6 . 2 . 1 Field Strength Meter.

Rohde & Schwarz, Model ESVP { 20 MHz to 1300 MHz }

ESMI { 20 Hz to 26.5 GHz }

Detector function : CISPR Quasi-Peak

IF Bandwidth : 120 KHz

# INTRODUCTION

---

## 6 . 2 . 2 Receiving Antennas.

- a) Chase, Model CBL611A : Bilog antenna { 30 to 1000 MHz }
- b) Schwarzbeck, Model BBA9102-B : Horn antenna { 1 GHz to 2 GHz }

## 6 . 3 OUTPUT SIGNAL MEASUREMENTS.

### 6 . 3 . 1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B  
Span : 10 MHz SWP : 20 msec.  
RBW : 100 KHz VBW : 300 KHz

### 6 . 3 . 2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : 25 dB (typical gain)

### 6 . 3 . 3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 $\Omega$  to 50  $\Omega$

### 6 . 3 . 4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

## 6 . 4 TRANSFER SWITCH ISOLATION MEASUREMENTS.

### 6 . 4 . 1 Spectrum Analyzer.

Hewlett-Packard, Model HP8568B  
Span : 1 MHz SWP : 30 msec.  
RBW : 10 KHz VBW : 30 KHz

### 6 . 4 . 2 RF Pre-amplifier.

Hewlett-Packard, Model HP8447F : 25 dB (typical gain)

### 6 . 4 . 3 Impedance matching pad.

Rohde & Schwarz, Model RAM : 7.5 dB loss , from 75 $\Omega$  to 50  $\Omega$

### 6 . 4 . 4 Attenuator.

Rohde & Schwarz, Model DNF (N type) : 3 dB attenuation

## INTRODUCTION

---

### 6 . 5 VITS SIGNAL GENERATOR ; COMMONLY USED.

Anritsu, Model MG-318A : VITS 1 Vp-p, 5 Vp-p Generator.

[NOTE] 1) The list of instruments and accessories used the measurements are attached at the end of the report, Appendix A and B

2) In every test results, the margins against the limits are shown.  
The margins are calculated as following;

$$MARGIN[ dB ] = 20 \log ( R / L )$$

where, R : Corrected Results, [ $\mu V$ ] or [ $\mu V/m$ ],  
L : Corresponding Limit, [ $\mu V$ ] or [ $\mu V/m$ ]

3) The tight limit is applied at the edge of two frequency band.

Part II  
TEST DATA

# TEST DATA

## 1. POWER LINE CONDUCTED EMISSIONS ( § 15.107)

### LGEC Modulator

PRODUCT : VCR  
MODEL : ALGB420  
Modulator type : TADC - H002F  
TEST DATE : October 21, 1998


<i>FREQ.</i> <i>(MHz)</i>	<i>Reading</i> <i>(dBuV)</i>	<i>RF Voltage</i> <i>(uV)</i>	<i>Phase</i> <i>(A/B)</i>	<i>Limit</i> <i>(uV)</i>	<i>Margin</i> <i>(dB)</i>
0.450	31.8	39.0	A	250	-16.2
0.5318	30.5	33.5	B		-17.5
1.1013	32.6	42.7	A		-15.4
2.4072	35.5	59.6	B		-12.5
14.086	25.5	18.8	A		-22.5
22.924	39.5	94.4	B		-8.5

\* Sample Calculation at 2.4072 MHz =  $10^{(35.5/20)} = 59.6\mu V$

#### NOTES:


- 1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported*
- 2. All other emissions are non-significant.*
- 3. Phase A = Hot                      Phase B = Neutral*

TEST DATA

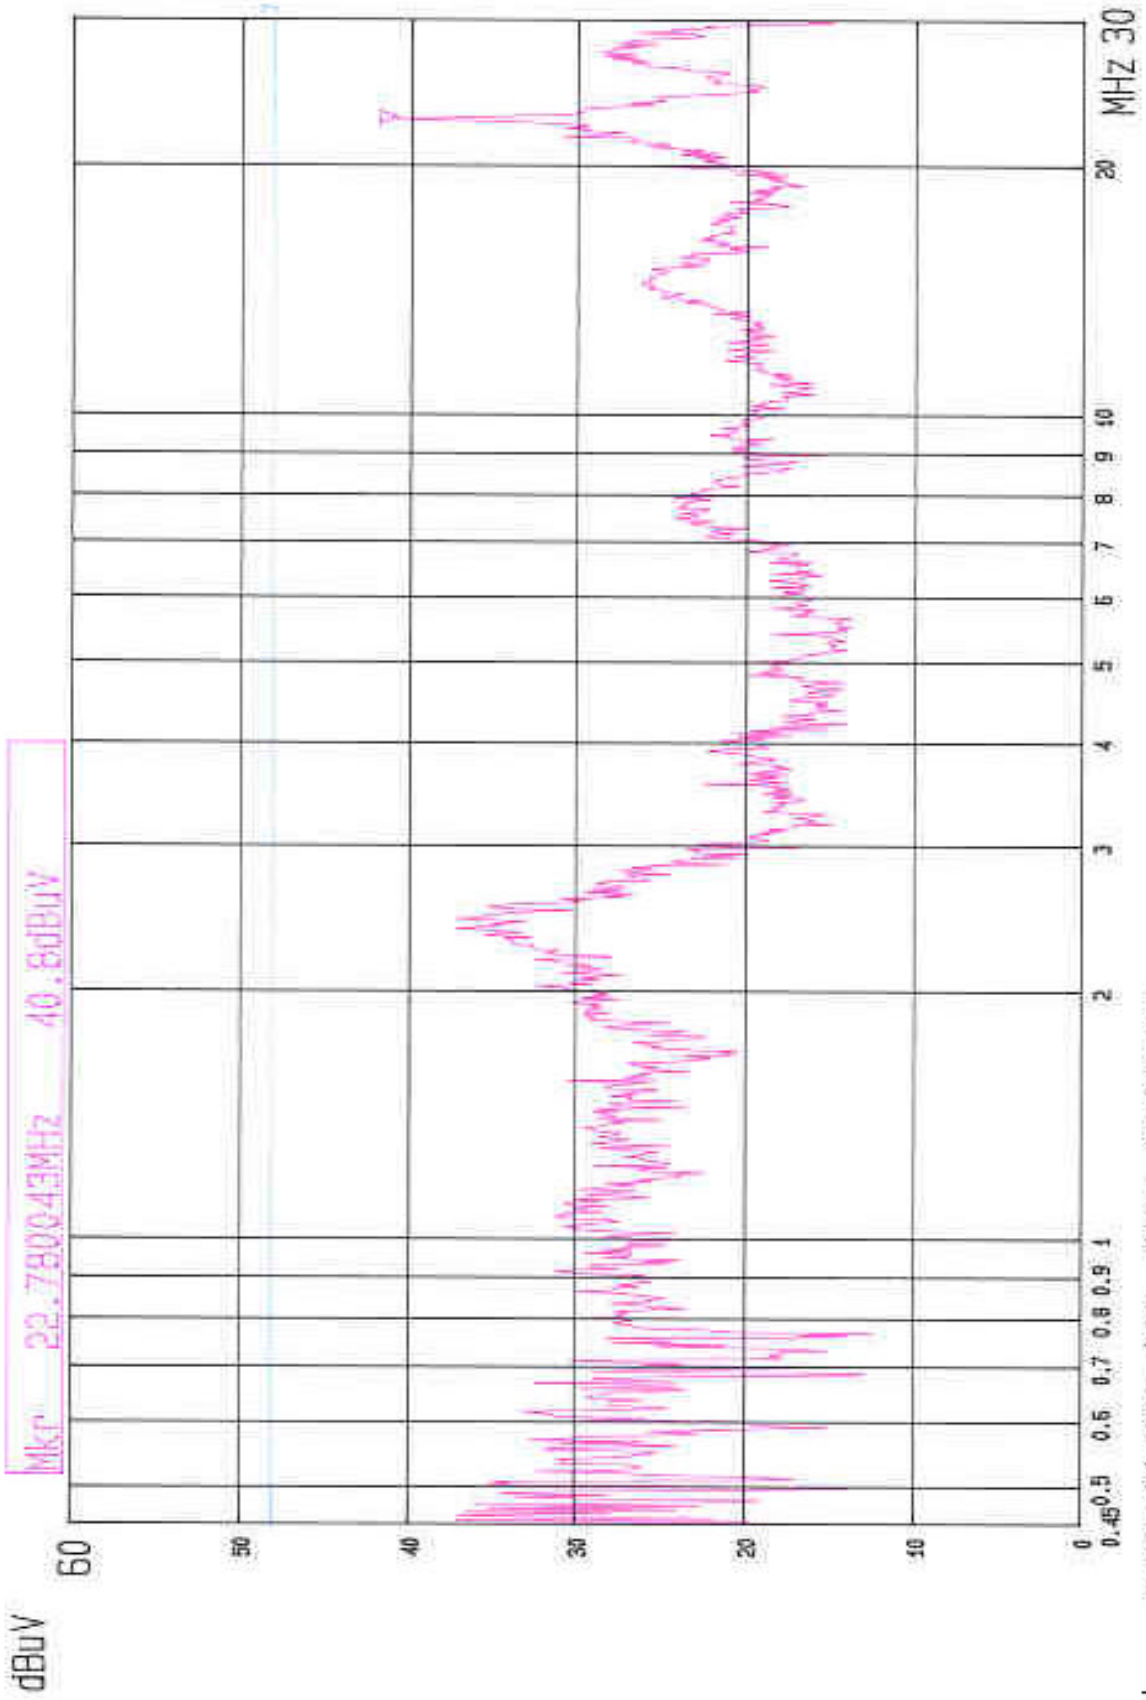

----- Date 21.OCT '98 Time 10:25:18  
CONDUCTED EMISSIONS  
FCC ID : BEJ9QKE4910  
MODEL: ALGB420  
TUNER : LGEC  
LINE: HOT

TEST DATA

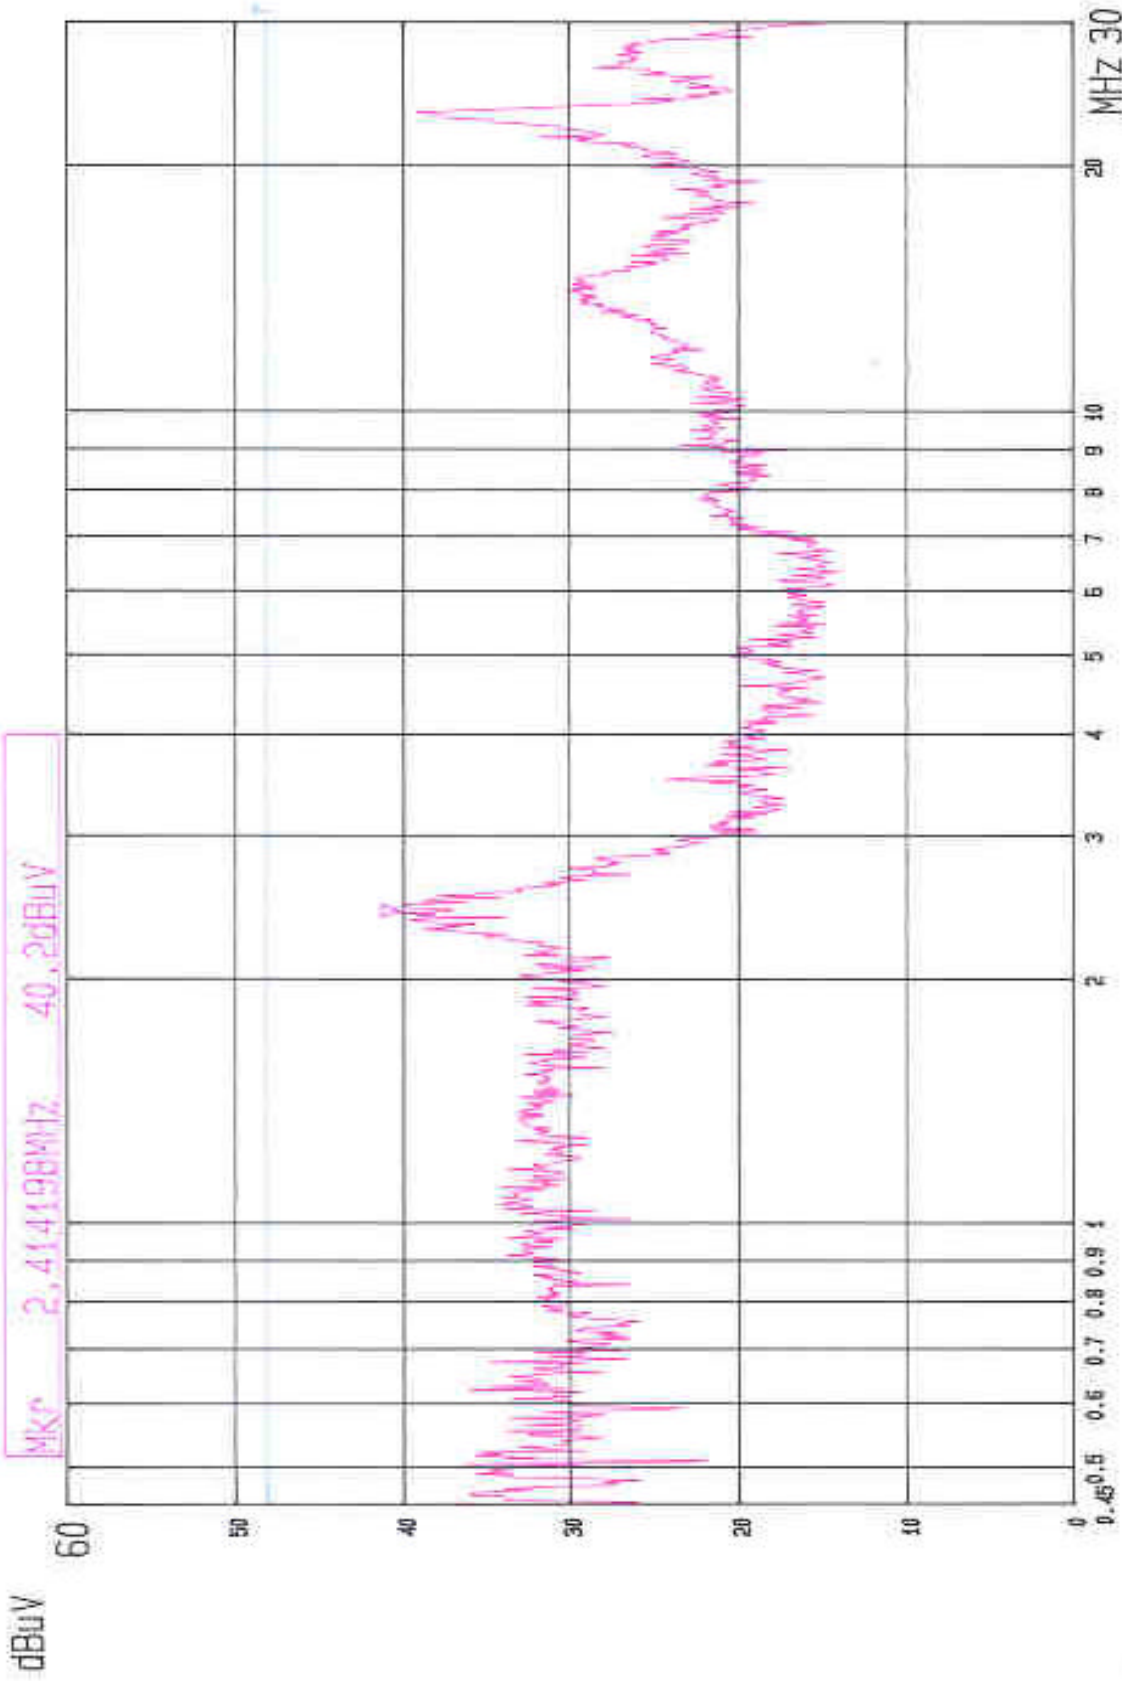

----- Date 21.OCT '98 Time 11:15:55  
CONDUCTED EMISSIONS MODEL: AL68420 TUNER : LGEC LINE: NEUTRAL  
FCC ID : BEJ90KE4910

## TEST DATA

---

### 2. RADIATED EMISSIONS ( § 15.109)

#### LGEC Modulator

PRODUCT : VCR  
 MODEL : ALGB420  
 Modulator Type : TADC - H002F  
 TEST DATE : October 24, 1998


<i>FREQ.</i> (MHz)	<i>Reading</i> (dBuV)	<i>AF</i> (dB/m)	<i>CL</i> (dB)	<i>Pol.</i>	<i>F/S</i> (uV/m)	<i>Limit</i> (uV)	<i>Margin</i> (dB)
30.24	18.4	12.8	1.2	V	41.7	100	-7.6
36.34	18.6	11.6	1.4	V	38.0	100	-8.4
40.15	17.5	11.1	1.6	V	32.4	100	-9.8
94.83	18.2	10.4	2.1	V	34.3	150	-12.8
150.6	17.1	13.9	2.6	H	47.9	150	-9.9
159.8	14.6	14.9	2.7	V	40.7	150	-11.3
164.8	15.7	15.0	2.7	H	46.8	150	-10.1
292.5	16.4	14.4	3.2	V	50.1	200	-12.0

\* Sample Calculation at 164.8 MHz =  $10^{[(15.7+15.0+2.7)/20]}$  = 46.8  $\mu\text{V}/\text{m}$

#### NOTES:

1. All modes of operation were investigated. The RF modulator was switched to Channel 3 or 4 and worst-case emissions are reported.
2. All other emissions are non-significant.
3. AF = Antenna factor      CL = Cable loss      F/S = Field Strength

TEST DATA

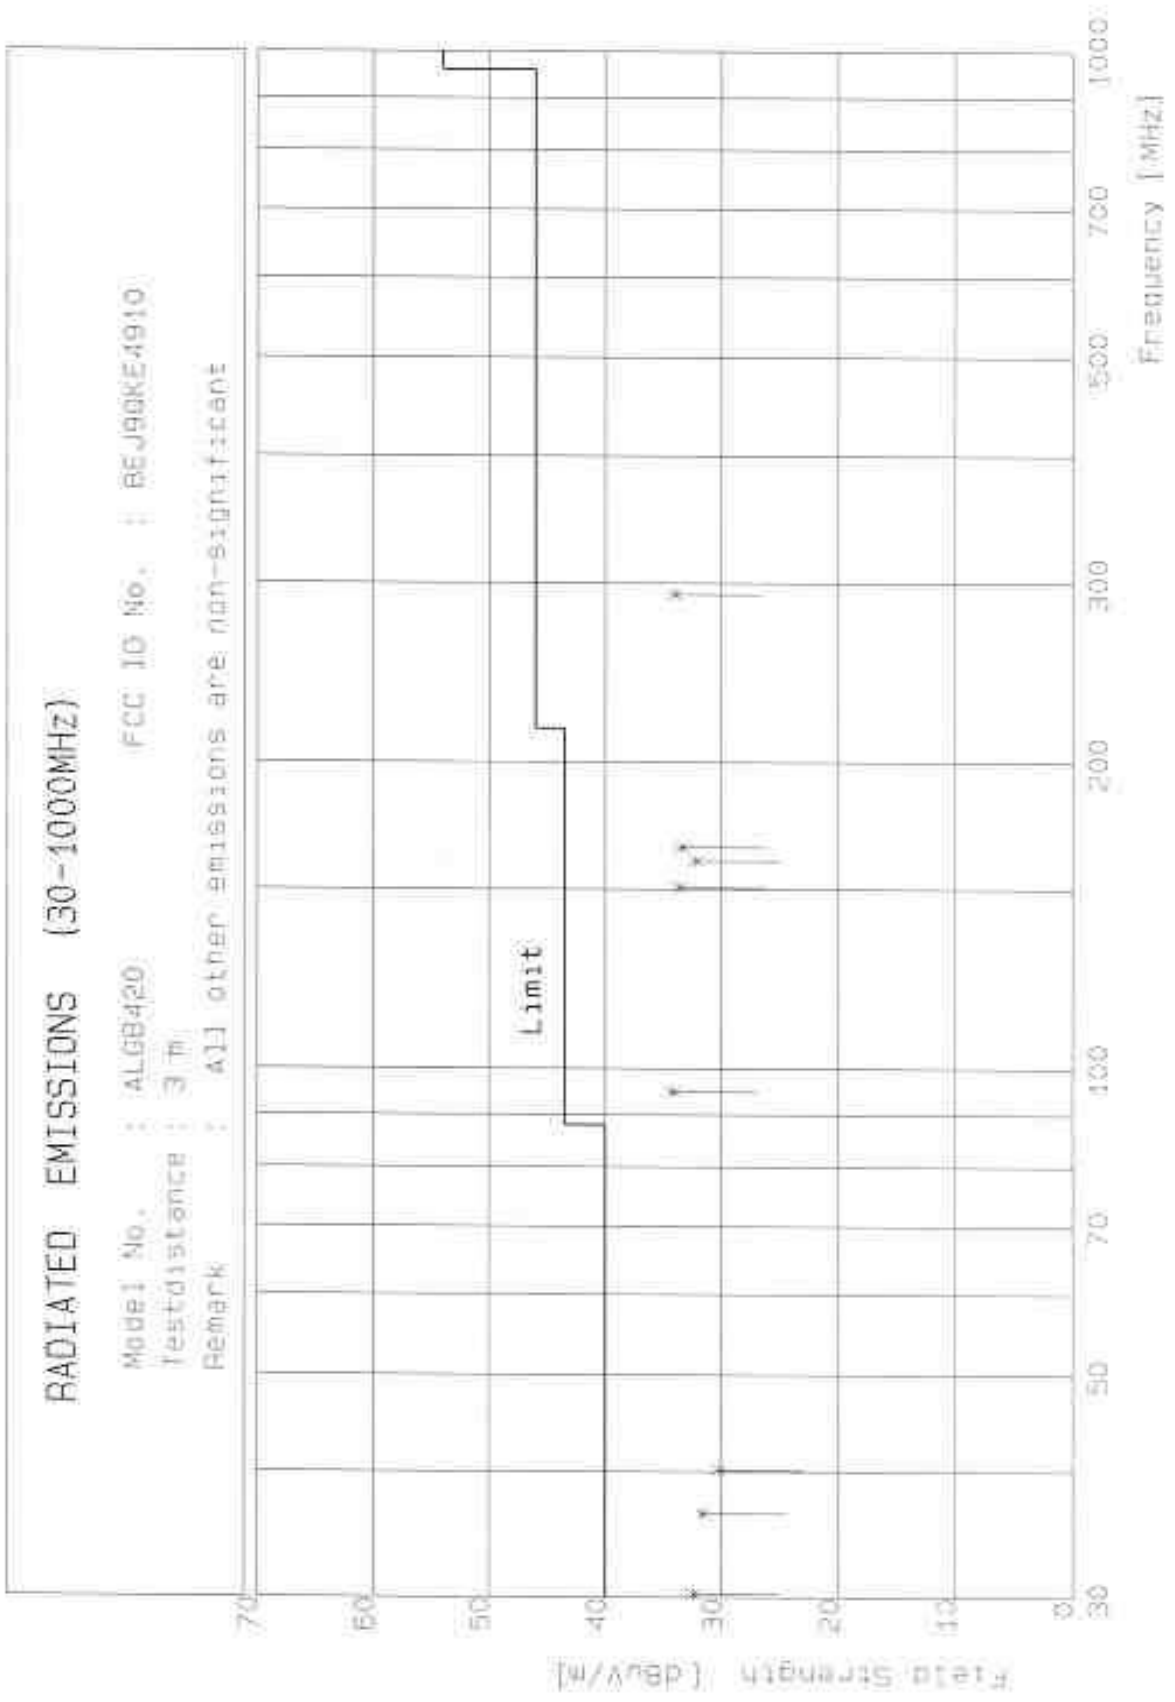

## TEST DATA

### 3. OUTPUT TERMINAL SIGNAL LEVEL ( § 15.115)

#### LGEC Modulator

PRODUCT : VCR  
MODEL : ALGB420  
Modulator Type : TADC - H002F  
TEST DATE : October 24, 1998

<i>CH</i>	<i>Freq.</i> <i>(MHz)</i>	<i>Reading</i> <i>(dBuV)</i>	<i>M/P</i> <i>loss</i> <i>(dB)</i>	<i>Signal</i> <i>Level</i> <i>(uV)</i>	<i>Limit</i> <i>(uV)</i>	<i>Margin</i> <i>(dB)</i>
3 (Visual)	61.20	58.30	7.5	1950	3000	-3.7
3 (Aural)	65.75	43.30	7.5	347	671	-5.7
4 (Visual)	67.20	58.10	7.5	1905	3000	-3.9
4 (Aural)	71.73	43.00	7.5	335	671	-6.0

\* Sample Calculation at 61.20 MHz =  $10^{[(58.30+7.5)/20]} = 1950 \mu V$

#### NOTES:

- 1. All modes of operation were investigated and worst -case emissions are reported.*
- 2. Output Impedance of RF-Output Terminal : 75  $\Omega$*
- 3. MP = Impedance Matching Pad*

## TEST DATA

### 4. OUTPUT TERMINAL CONDUCTED SPURIOUS EMISSIONS

#### LGEC Modulator

PRODUCT : VCR  
 MODEL : ALGB420  
 Modulator Type : TADC - H002F  
 TEST DATE : October 24, 1998

CH	Freq. (MHz)	Reading (dBUV)	M/P loss (dB)	PreAmp Gain (dB)	Attn. (dB)	Output Level (uV)	Limit (uV)	Margin (dB)
3	48.8	37.8	7.5	26.0	3.0	13.0	95	-17.2
	75.8	35.8		25.5		11.0		-18.7
	124.0	38.3		25.6		14.5		-16.3
	185.1	41.4		25.7		20.4		-13.3
	307.3	33.5		25.5		8.4		-21.0
	368.4	30.4		25.2		6.1		-23.8
4	54.7	36.8	7.5	26.0	3.0	11.6	95	-18.2
	81.7	34.0		25.8		8.6		-20.8
	135.8	32.6		26.0		7.2		-22.4
	202.7	38.2		25.6		14.3		-16.4
	336.7	34.4		25.7		9.1		-20.3
	403.7	31.4		25.6		6.5		-23.2

\* Sample Calculation at 185.1 MHz =  $10^{[(41.4+7.5-25.7+3.0)/20]}$  = 20.4  $\mu$ V

#### NOTES:

1. Frequency range of 30 MHz to 1000 MHz removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency of EUT was investigated at each channel.
2. All other emissions are not significant.

## TEST DATA

---

### 5. TRANSFER SWITCH ISOLATION ( § 15.115)

#### LGEC Modulator

PRODUCT : VCR

MODEL : ALGB420

Modulator Type : TADC - H002F

TEST DATE : October 22, 1998

<i>CH</i>	<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>M/P loss (dB)</i>	<i>PreAmp Gain (dB)</i>	<i>Attn. (dB)</i>	<i>Signal Level (uV)</i>	<i>Limit (uV)</i>	<i>Margin (dB)</i>
3	61.23	19.92	7.5	25.6	3.0	1.7	3.0	-4.7
4	67.20	16.28	7.5	25.5	3.0	1.2	3.0	-7.9

\* Sample Calculation at 61.23 MHz =  $10^{[(19.92+7.5-25.6+3.0)/20]} = 1.7 \mu V$

#### NOTES:

1. The transfer switch is internal to the device and is access automatically.
2. The transfer isolation switch provides automatic selection of either antenna/TV or VCR.

# TEST SET-UP

---

## Appendix A

Photographs of Test Set-up ( Powerline conducted emissions)



## TEST SET-UP

---

Photographs of Test Set-up ( Radiated emissions)



# TEST EQUIPMENT

## Appendix B

### LIST OF TEST EQUIPMENT

Type	Model	Cal. Due Date	S / N
EMI measurenet system	R&S, ESM1	09/04/99	846064/004
Test receiver	R&S, ESVP	07/05/99	860688/020
Test receiver	R&S, ESH-3	07/05/99	860950/013
Spectrum monitor	R&S, EZM	07/05/99	862304/008
Spectrum monitor	R&S, EZM	07/05/99	862304/006
Spectrum Analyzer	HP8568B	07/03/99	3107A01571
Quasi-peak Adaptor	HP85650A	07/03/99	3107A01237
RF Pre-selector	HP85685A	07/03/99	3107A01237
Pre-Amplifier	HP8447F (BNC-type)	07/03/99	2805A02879
Pre-Amplifier	HP8447F (N-type)	07/01/99	3113A05259
Pre-Amplifier	HP8447C (N-type)	07/03/99	1937A00732
RF Signal Generator	Fluk, 6060B	07/03/99	5655209
IRE STD. signal Generator	Shibasoku, VG 40A	03/05/99	M-56221002
TV CH. Signal Generator	Shibasoku, 363US	03/05/99	M-14817005
TV CH. Signal Generator	Shibasoku, 363VS	03/05/99	M-12762002
NTSC Pattern Generator	Leader, LCG-400	01/14/99	705008
VITS Generator	Anritsu, MG318A	10/03/99	M11122
VITS Generator	Anritsu, MG318A	02/23/99	M10478
Tuned Dipole Antenna	EMCO, 3121C		9160-620
Tuned Dipole Antenna	EMCO, 3121C		9160-621
VHF Dipole Antenna	S/B, VHA9103		N/A
UHF Dipole Antenna	S/B, UHA9105		N/A
Bilog Antenna	Chase, CBL611A	09/25/99	1838
Biconical Antenna	R&S, HUF-Z2	09/25/99	N/A
Biconical Antenna	S/B, BBA9106	07/21/99	N/A
Biconical Antenna	S/B, BBA9106	07/21/99	N/A
LOg-periodic Antenna	S/B, UHAL9107	09/25/99	N/A
LOg-periodic Antenna	S/B, UHAL9107	07/21/99	N/A
LOg-periodic Antenna	EMCO, 3146	07/21/99	1583
Horn Antenna	S/B, BBA 9102-B	09/25/99	106
Laurel Antenna		07/21/99	
IEC 106 Antenna	HFU2-Z4		N/A
Absorbing Clamp	R&S, MDS21	09/25/99	860846/004
Absorbing Clamp	R&S, MDS21	07/21/99	301116/072
Kyoritsu LISN	KNW-407	07/05/99	8-6555-4
Shibasoku LISN	563	07/03/99	55416001
R & S LISN	ESH3-Z5	07/03/99	862770/013
Schwarzbeck LISN	NSLK8126	07/05/99	8126259

## Appendix C

### List of Support Device and Accessories in the test

1. EUT :

VCR                      Model : ALGB420                      S / N : N / A

2. Accessories

1.5 m. unshielded RF coaxial cable supplied by manufacturer (1 EA)

1.5 m. unshielded RCA cable for Video/Audio L/R (2 EA)

IEC-106 Antenna

2. Goldstar TV Monitor

Model : CNR-6285                      S/N : 30600720

3. VITS Signal Generator

Anritsu, Model MG-318A : VITS 1 Vp-p, 5 Vp-p Generator.

# SAMPLE LABEL

## Appendix D

SAMPLE LABEL :

According to Labelling Requirements per §2.295 & § 15.19



→ The Label shown shall be affixed on the rear of the device.  
See the attached Photograph.

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES.  
OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE,  
AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE  
RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE  
UNDESIRED OPERATION.



The Statement is molded on the bottom of the device.

See the attached photograph.

Report of Measurements for  
TV Broadcast Receiver under FCC PART 15

Manufacture : LG Electronics Inc.  
19-1, Chongho-Ri, Chinwuy-Myon  
Pyungtaek-Shi, KyongKi-Do, 451-713, Korea

Model No. : ALGB420

Serial No. : N / A

Description of The equipment under test

Manufacturer : LG Electro-Components Ltd.  
Model No. : TADC - H002F  
Frequency range tuned by the receiver  
: 54 - 806 MHz

This receiver meets FCC Regulations covering comparable systems of VHF and UHF TV tuning.

Measurement Procedure : EIA RS-378, MP-2, ANCI C63.4

Date of Measurements : October 23, 1998

Measurements Results : The results obtained from the measuring of this device are as shown in the attached sheets.  
And comply with new rules adapted under Docket 87-389.

1. Peak Picture Sensitivity : UHF - VHF  $\leq$  8.0 dBuV
2. UHF Noise Figure : Meet noise figure of 14 dB
3. Radiation of VHF/UHF Portion : Highest ; 40.3 dBuV/m at 601MHz  
(Limit : 46 dBuV/m)
4. Antenna Power conduction : Highest ; 37.5 dBuV at 1610MHz  
(Limit : 51.8 dBuV)

*YoungKyun Kim*

Y . K . KIM  
Research engineer  
Multimedia Research Lab.  
Multimedia Standards Team

1. Peak Picture Sensitivity : \* Limit : UHF - VHF  $\leq$  8 dBuV

Result : 0.K

2. UHF Noise Figure

Channels (UHF)	Reading (dB)	Matching Loss(dB)	Noise Figures(dB)	Limit (dB)
14	10.4	1.75	8.15	14.0
19	10.2		7.95	
28	10.3		8.05	
36	10.3		8.05	
44	10.4		8.15	
53	10.3		8.05	
61	11.0		8.75	
69	11.8		9.55	
4.0dB substrated for Power splitter <0.3dB added for IF amp. contribution				

### 3. Radiated Emission Measurements

Frequency to which tuned		Frequency of the Emission (MHz)	Result at 3m (dBuV/m)	Limit at 3m (dBuV/m)
Channel	(MHz)			
2	55.25	101	<25.0	43.5
3	61.25	107	<25.0	43.5
4	67.25	113	<25.0	43.5
5	77.25	123	<25.0	43.5
6	83.25	129	<25.0	43.5
7	175.25	221	<25.0	46.0
8	181.25	227	<25.0	46.0
9	187.25	233	<30.0	46.0
10	193.25	239	<30.0	46.0
11	199.25	245	<30.0	46.0
12	205.25	251	<30.0	46.0
13	211.25	257	<30.0	46.0
14	471.25	517	39.0	46.0
		1034	34.6	54.0
19	501.25	547	40.0	46.0
		1094	36.4	54.0
28	555.25	601	40.3	46.0
		1202	35.7	54.0
36	603.25	649	39.7	46.0
		1298	36.7	54.0
44	651.25	697	39.3	46.0
		1394	38.2	54.0
53	705.25	751	38.6	46.0
		1502	37.4	54.0
61	753.25	799	39.8	46.0
		1598	38.0	54.0
69	801.25	847	38.4	46.0
		1694	39.0	54.0

4. Antenna Power Conduction Measurements

Frequency to which tuned		Frequency of the Emission (MHz)	Result (dBuV)	Limit (dBuV)
Channel	(MHz)			
2	55.25	101	<25.0	51.8
3	61.25	107	<25.0	
4	67.25	113	<25.0	
5	77.25	123	<25.0	
6	83.25	129	<25.0	
7	175.25	221	<25.0	
8	181.25	227	<25.0	
9	187.25	233	<25.0	
10	193.25	239	<25.0	
11	199.25	245	<25.0	
12	205.25	251	<25.0	
13	211.25	257	<25.0	
14	471.25	517 1034	33.70 32.50	
19	501.25	547 1094	34.10 32.80	
28	555.25	601 1202	32.70 31.50	
36	603.25	649 1298	33.00 31.70	
44	651.25	697 1394	32.60 <30.0	
53	705.25	751 1502	32.40 <30.0	
62	759.25	805 1610	33.40 37.50	
69	801.25	847 1694	34.20 35.00	

# CERTIFICATE

Issued date : October 29, 1998

Model No. : **ALGB420** Serial No. : N / A

FCC ID No. : **BEJ9QKE4910**

Manufacture : LG ELECTRONICS INC. Trade name : Zenith

Applicant & address : LG ELECTRONICS INC. ; 20, Yoido-Dong,  
Youngdungpo-Gu, Seoul, 150-721, KOREA

Regulation : Subpart B of Part 15, 47 C.F.R; FCC Rules (Docket 87-389)

Procedure : MP-3 ; ANSI C63.4

Test Location : LG Electronics Multimedia Research Lab.  
Measurement facility ( 3 & 10 m site )

I hereby certify that the measurements shown in Part II of this report were made in accordance with the procedures indicated and energy emitted by this equipment was found to be within the limits applicable.

I further certify that on the basis of the measurements, the equipment tested is capable of operation in accordance with the requirements set forth in Part 15 of the FCC rules & Regulations under normal use and maintenance.

LG Electronics Inc. hereby assumes responsibility for the certification of compliance to applicable FCC limits in every measurements.

Issued by

*Youngkyun Kim*

Y. K. Kim  
Research engineer

Reviewed by

*Jaekwang Lee*

T. K. Lee  
Team Leader

**LG Electronics Inc.**  
**Pyungtaek Research Lab. Standards Team**

19-1, Cheongho-Ri, Jinwuy-Myun, Pyungtaek-Shi, Kyunggi-Do, 451-713, KOREA  
Tel: (0333)610-5354, FAX: (0333)610-5355, TLX: GSVTRK29493