

RF TEST REPORT

Test item : Interactive Pen
Model No. : AN-IP100
Order No. : DEMC1211-02678, DEMC1211-02680
Date of receipt : 2012-11-27
Test duration : 2013-03-04 ~ 2013-03-08
Date of issue : 2013-03-20
Use of report : FCC&IC Original Grant

Applicant : LG Electronics USA.
1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, 449-080, Korea

Test specification : FCC Part 15 Subpart C 247,
ANSI C63.10-2009, KDB558074
RSS-210, RSS-Gen

Test environment : See appended test report

Test result : ☒ Pass ☐ Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:


Witnessed by:

Reviewed by:



Engineer
HyunSu Son

N/A

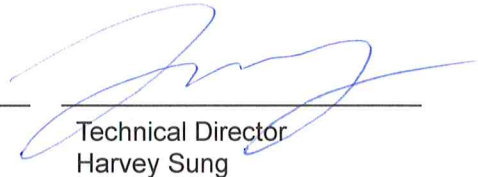

Technical Director
Harvey Sung

Test Report Version

Test Report No.	Date	Description
DRTFCC1303-0271	Mar. 20, 2013	Initial issue

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. SUMMARY OF TESTS	5
4. TEST METHODOLOGY	6
4.1 EUT CONFIGURATION	6
4.2 EUT EXERCISE	6
4.3 GENERAL TEST PROCEDURES	6
4.4 DESCRIPTION OF TEST MODES.....	6
5. INSTRUMENT CALIBRATION	7
6. FACILITIES AND ACCREDITATIONS.....	7
6.1 FACILITIES	7
6.2 EQUIPMENT	7
7. ANTENNA REQUIREMENTS.....	7
8. TEST RESULT	8
8.1 6dB Bandwidth	8
8.2 Maximum Peak Conducted Output Power	11
8.3 Maximum Power Spectral Density	13
8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions.....	16
8.5 Radiated Spurious Emissions.....	26
8.6 Power-line Conducted Emissions	29
8.7 Occupied Bandwidth.....	32
9. LIST OF TEST EQUIPMENT.....	35
APPENDIX I	36

1. GENERAL INFORMATION

Applicant : LG Electronics USA.

Address : 1000 Sylvan Avenue Englewood Cliffs, New Jersey, United States

FCC ID : BEJIP100

IC : 2703H-IP100

EUT : Interactive Pen

Model : AN-IP100

Additional Model(s) : N/A

Data of Test : 2013-03-04 ~ 2013-03-08

Contact person : Jacob Cho

2. EUT DESCRIPTION

Product	Interactive Pen
Model Name	AN-IP100
Power Supply	DC 3.7V
Frequency Range	2401.249725 ~ 2481.230438 MHz
Max. RF Output Power	-0.59 dBm
Modulation Type	MSK
Antenna Specification	Internal Antenna Max. peak gain : 3.63 dBi

3. SUMMARY OF TESTS

FCC Part Section(s)	RSS Section(s)	Parameter	Limit	Test Condition	Status Note 1
I. Transmitter Mode (TX)					
15.247(a)	RSS-210 [A8.2]	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	RSS-210 [A8.4]	Transmitter Output Power	< 1Watt		C
15.247(d)	RSS-210 [A8.5]	Out of Band Emissions / Band Edge	20dBc in any 100kHz BW		C
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz		C
-	RSS Gen 4.6.1	Occupied Bandwidth (99%)	RSS-Gen(4.6.1)		C
15.247(d) 15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	<FCC 15.209 limits	Radiated	C ^{Note2}
15.207	RSS-Gen [7.2.4]	AC Conducted Emissions	< FCC 15.207 limits	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC 15.203	-	C
Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable Note 2: This test item was performed in each axis and the worst case data was reported.					

4. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and KDB558074

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10, the EUT is placed on the turntable, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and Average detector.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10.

4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number :678747

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of antennas: loop, tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203& RSS-Gen [7.1.2]:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antenna used a unique coupling to the intentional radiator.

*Therefore this E.U.T Complies with the requirement of §15.203

8. TEST RESULT

8.1 6dB Bandwidth

Test Requirements and limit, §15.247(a)& RSS-210 [A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of KDB558074.

1. Set resolution bandwidth (RBW) = 1-5% of DTS BW, not to exceed 100 KHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
(RBW:100KHz/VBW:300KHz)
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.


■ TEST RESULTS: **Comply**

Test Mode	Frequency [MHz]	Test Results[MHz]
TX	2401.249725	0.539
	2442.239715	0.522
	2481.230438	0.540

■ RESULT PLOTS


6 dB Bandwidth

Lowest Frequency

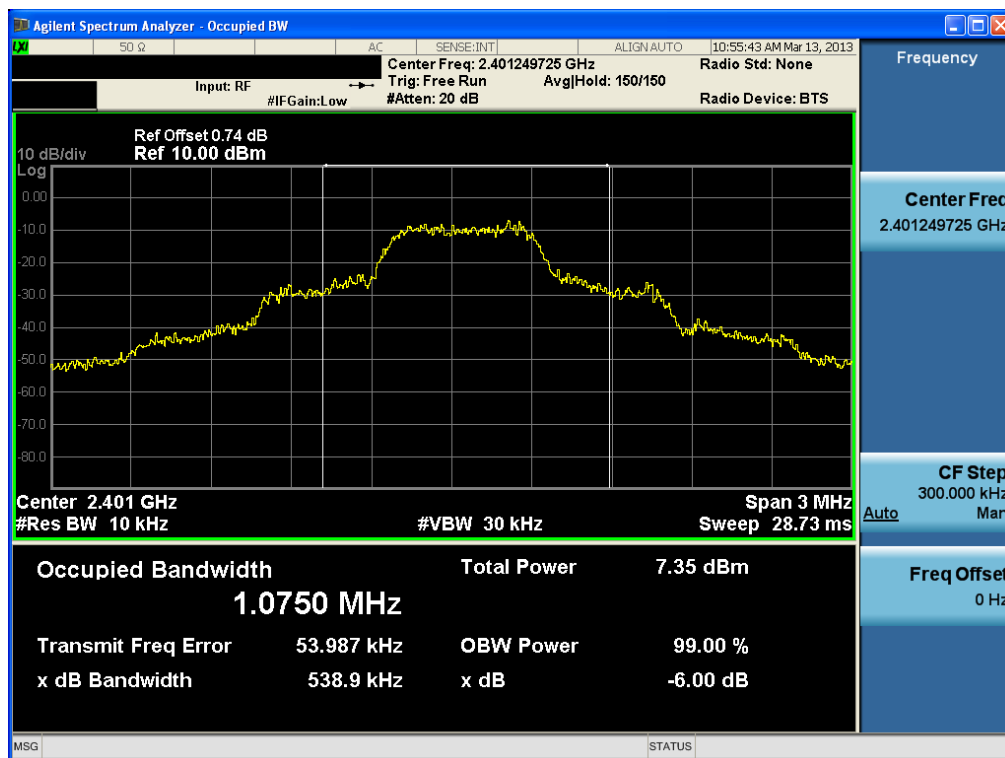

6 dB Bandwidth

Middle Frequency

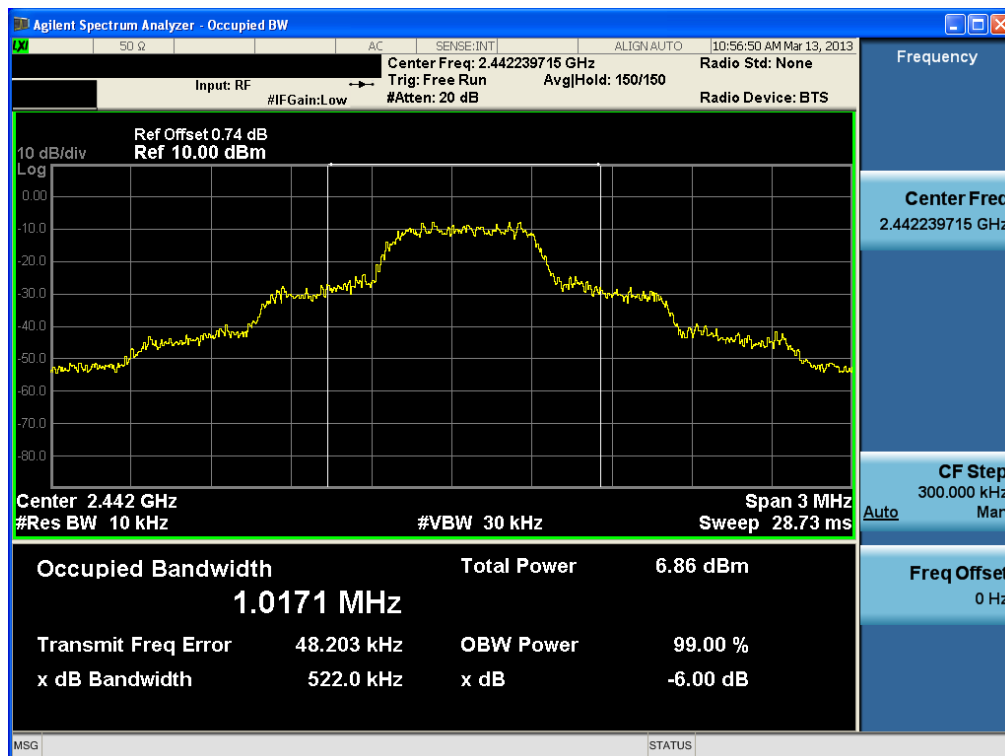

6 dB Bandwidth

Highest Frequency




8.2 Maximum Peak Conducted Output Power

Test Requirements and limit, §15.247(b)& RSS-210 [A8.4]

The maximum permissible conducted output power is **1 Watt**.

■ TEST CONFIGURATION

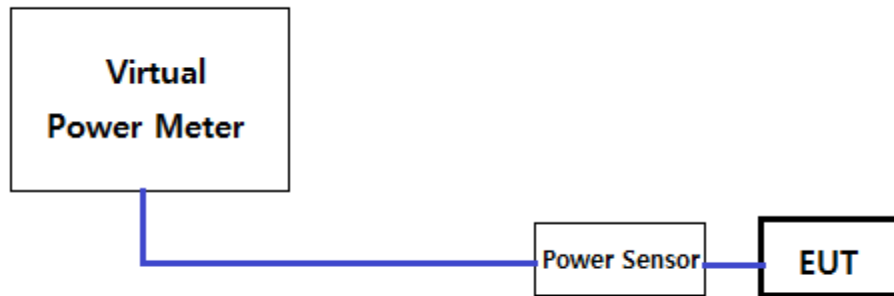

■ TEST PROCEDURE:

A transmitter antenna terminal of EUT is connected to the input of a power sensor using an appropriate cable. The total path loss between EUT and a Power Sensor was corrected on the final measurement data using a power meter's internal function.

Measurements are made with a broadband power meter capable of making peak and average measurements while the EUT is operating in transmission mode at the appropriate frequencies.

■TEST RESULTS:**Comply**

- TX mode

Mode	Frequency [MHz]	Detector	Test Result [dBm]
Tx	2401.249725	PK	-0.59
		AV	-0.70
	2442.239715	PK	-1.75
		AV	-1.87
	2481.230438	PK	-3.51
		AV	-3.43

8.3 Maximum Power Spectral Density

Test requirements and limit, §15.247(e)& RSS-210[A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz band segment within the fundamental EBW during any time interval of continuous transmission.

■TEST CONFIGURATION

Refer to the APPENDIX I.

■TEST PROCEDURE:

The Measurement Procedure **Option 1of KDB558074** is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS channel bandwidth.
3. Set the RBW $\geq$ **3 kHz**.
4. Set the VBW $\geq$ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


■TEST RESULTS: **Comply**

Test Mode	Frequency [MHz]	RBW	PKPSD [dBm]
TX	2401.249725	3 kHz	-11.52
	2442.239715	3 kHz	-12.15
	2481.230438	3 kHz	-13.96

RESULT PLOTS


Maximum PKPSD

Lowest Frequency

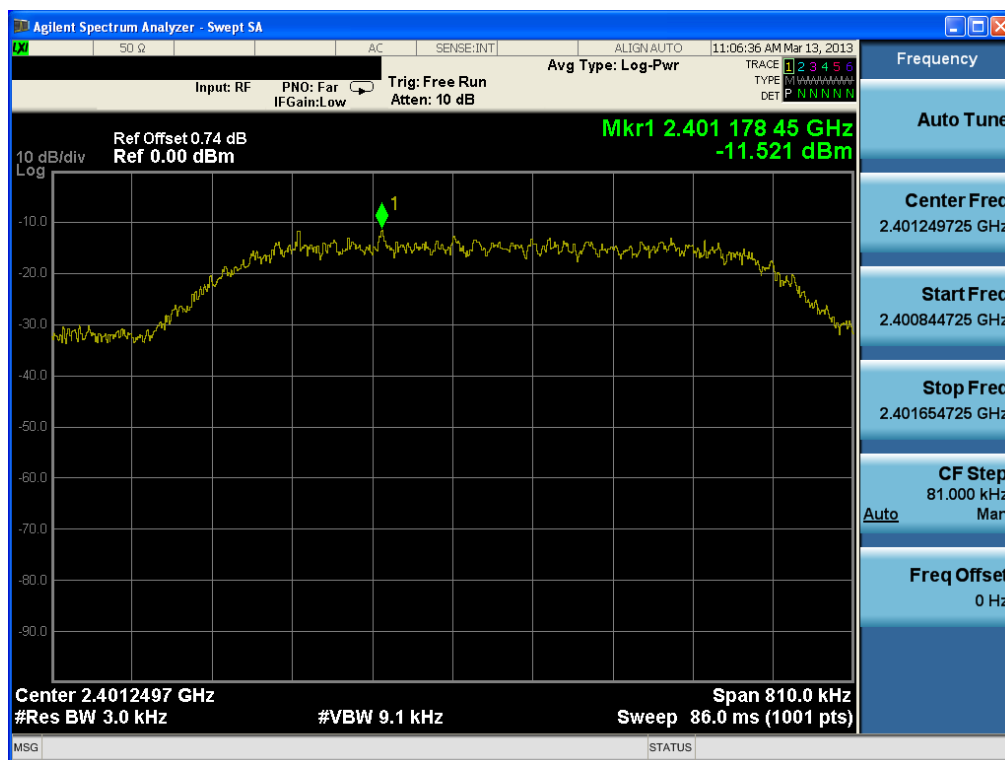


Maximum PKPSD

Middle Frequency

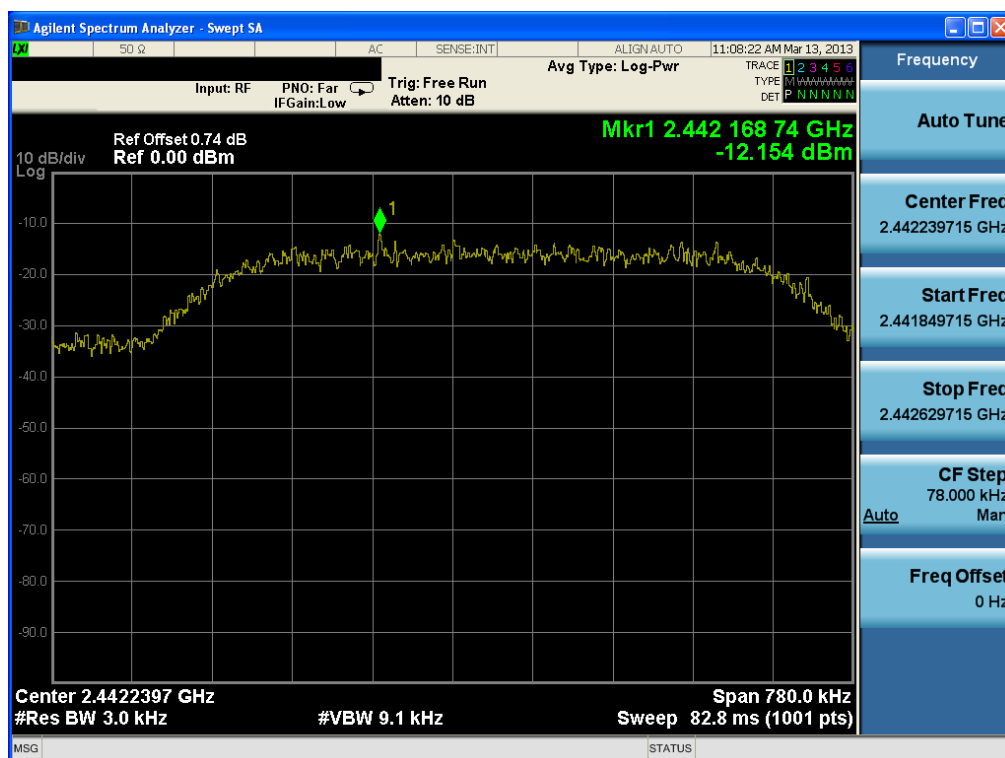

Maximum PKPSD Highest Frequency

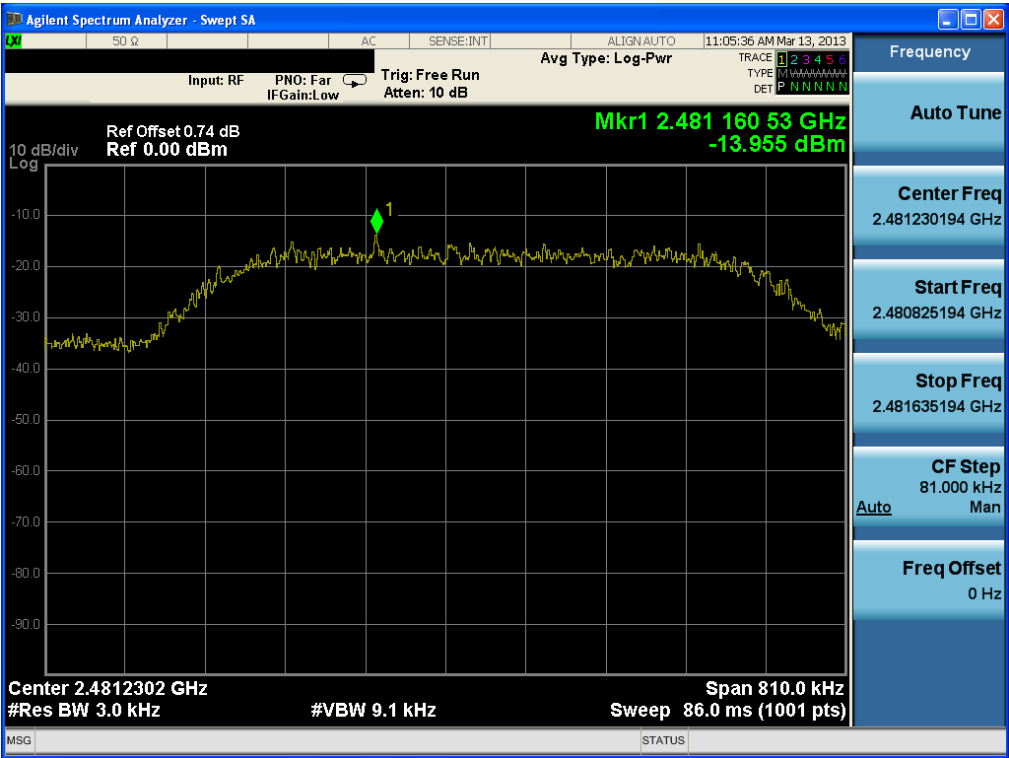

8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions

Test requirements and limit, §15.247(d)& RSS-210 [A8.5]


§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20 dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

■ TEST CONFIGURATION

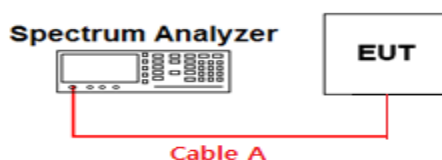

■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

- Measurement Procedure 1 – Reference Level

Establish the reference level by using the peak PSD procedure of KDB558074 to measure the PSD level in any 100 kHz bandwidth (i.e., set RBW = 100 kHz and VBW ≥ 300 kHz) within the DTS channel bandwidth (the channel found to contain the maximum PSD level can be used to establish the reference level).

- Measurement Procedure 2 - Unwanted Emissions

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = **100 kHz. (Actual 1 MHz , See below note)**
4. Set VBW ≥ **300 kHz. (Actual 3 MHz, See below note)**
5. Detector = **peak**.
6. Trace Mode = **max hold**.
7. Sweep = **auto couple**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 KHz bandwidth.

Note : The conducted unwanted emission was tested using S/A's measurement function with total 12 sub ranges.
The each sub ranges were set as below.

RBW= 1 MHz, VBW= 3 MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SPAN = MAX 3 GHz (Below 10 GHz) and MAX 5 GHz (Above 10 GHz) , BINS = 10001 (Each sub range below 10 GHz) and 20001 (Each sub range above 10 GHz)


If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300 KHz, SAPN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.

Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.


RESULT PLOTS

Lowest Frequency



Reference

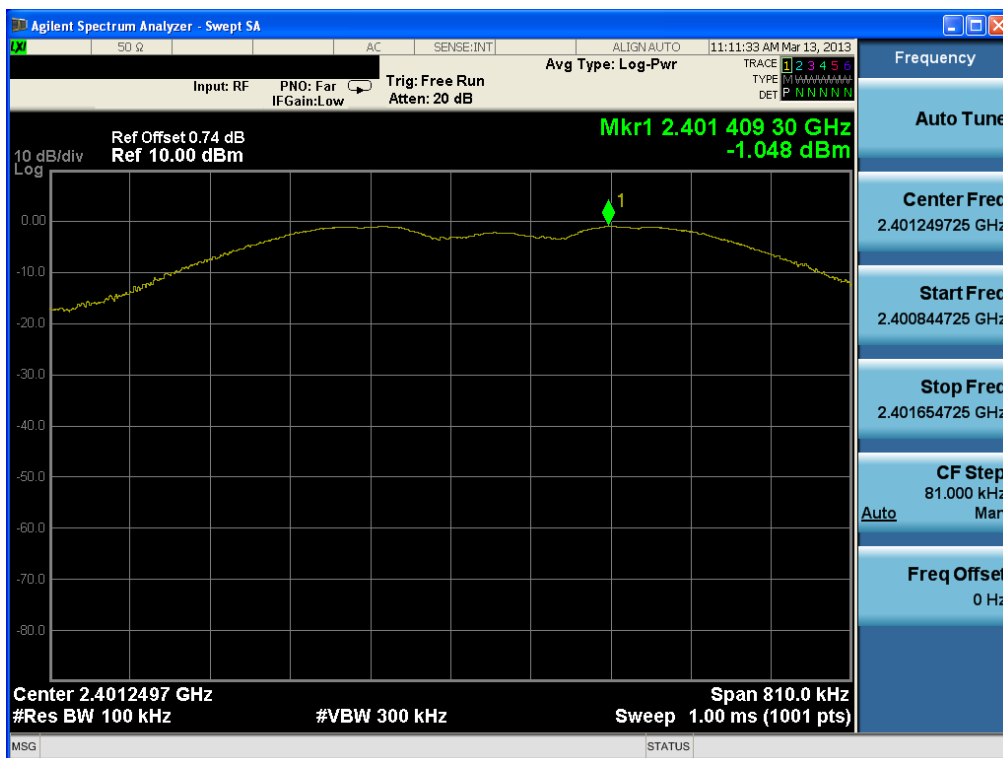

Low Band-edge

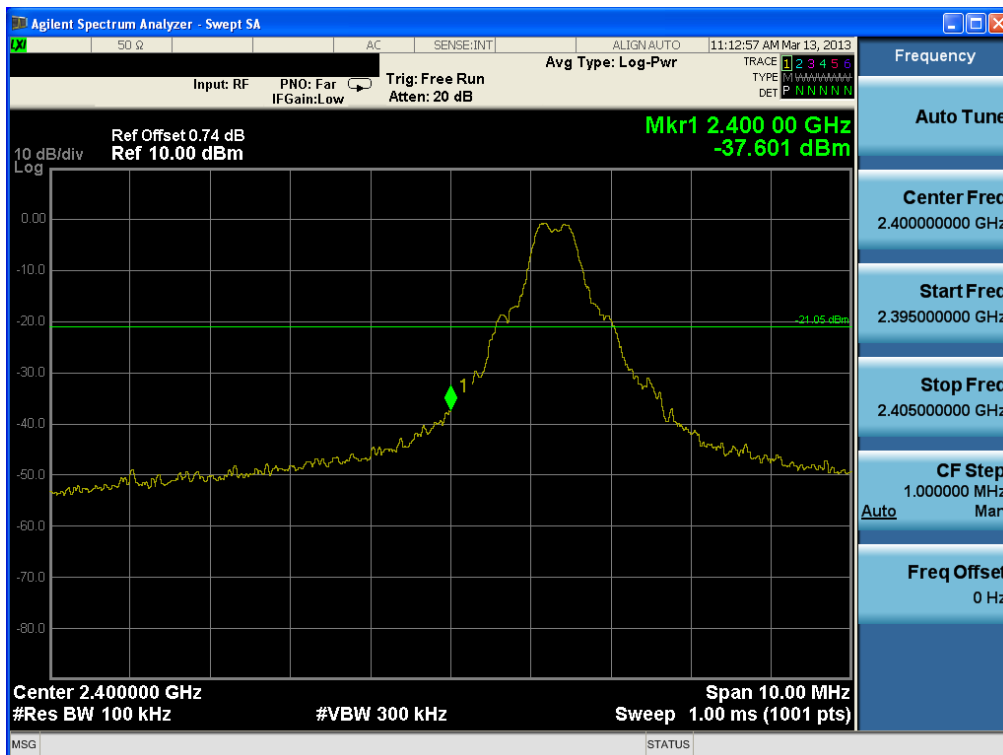


Conducted Spurious Emissions

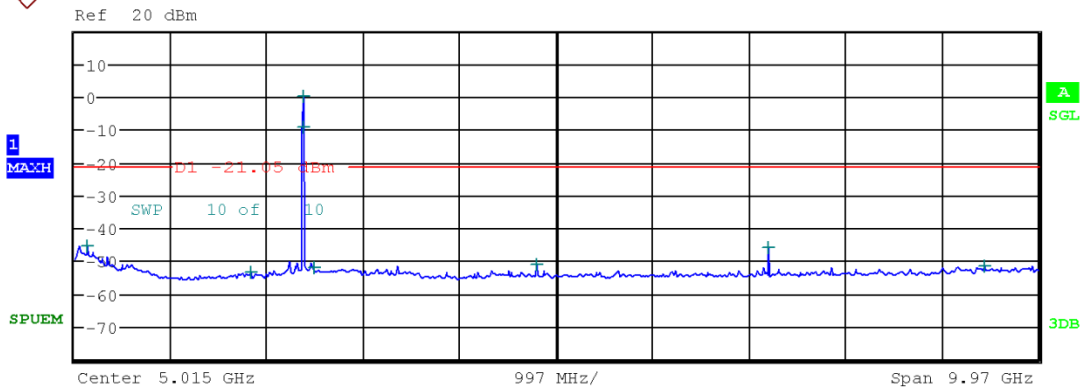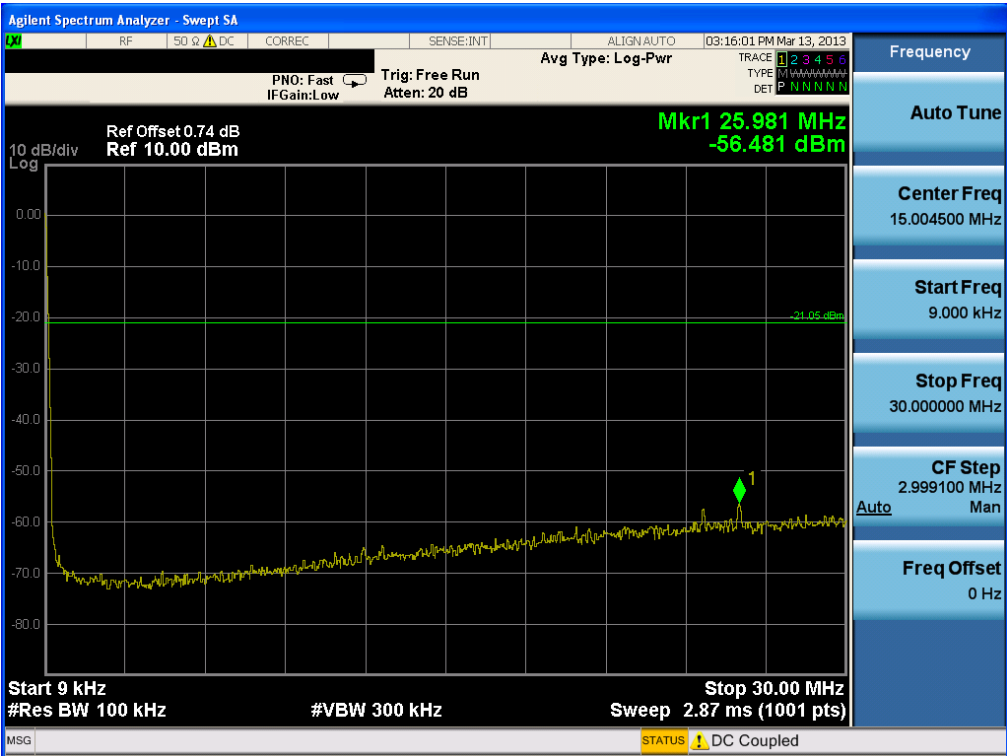



Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	156.003000 M	-45.47	-200.00
1.000 G	2.000 G	1.00 M	1.854600 G	-53.69	-200.00
2.000 G	2.400 G	1.00 M	2.400000 G	-9.13	-200.00
2.400 G	2.483 G	1.00 M	2.401052 G	0.27	-200.00
2.483 G	3.000 G	1.00 M	2.506949 G	-52.15	-200.00
3.000 G	6.000 G	1.00 M	4.803000 G	-50.91	-200.00
6.000 G	9.000 G	1.00 M	7.204500 G	-45.82	-200.00
9.000 G	10.000 G	1.00 M	9.436500 G	-51.69	-200.00

Middle Frequency

Reference

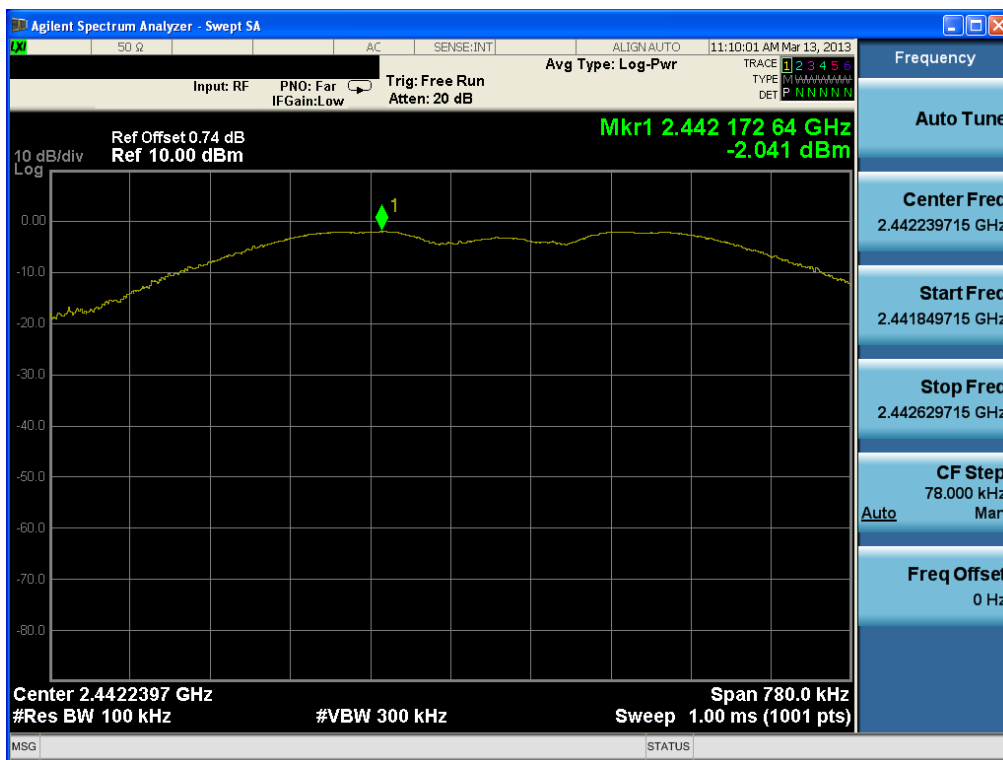


Conducted Spurious Emissions

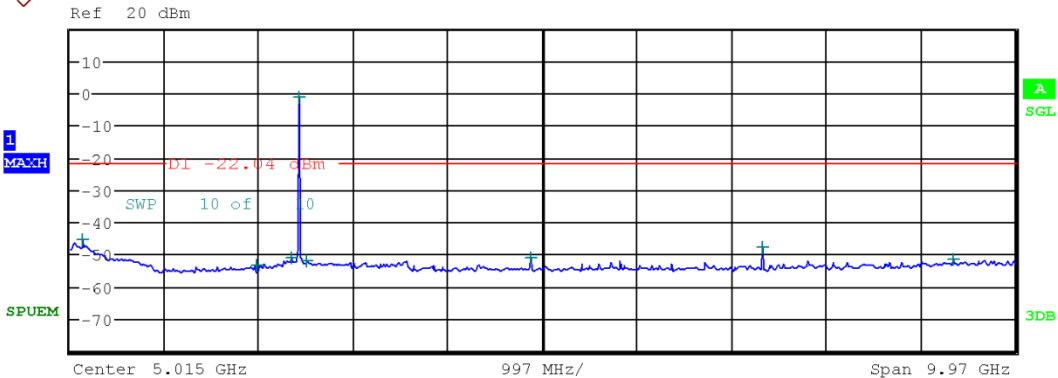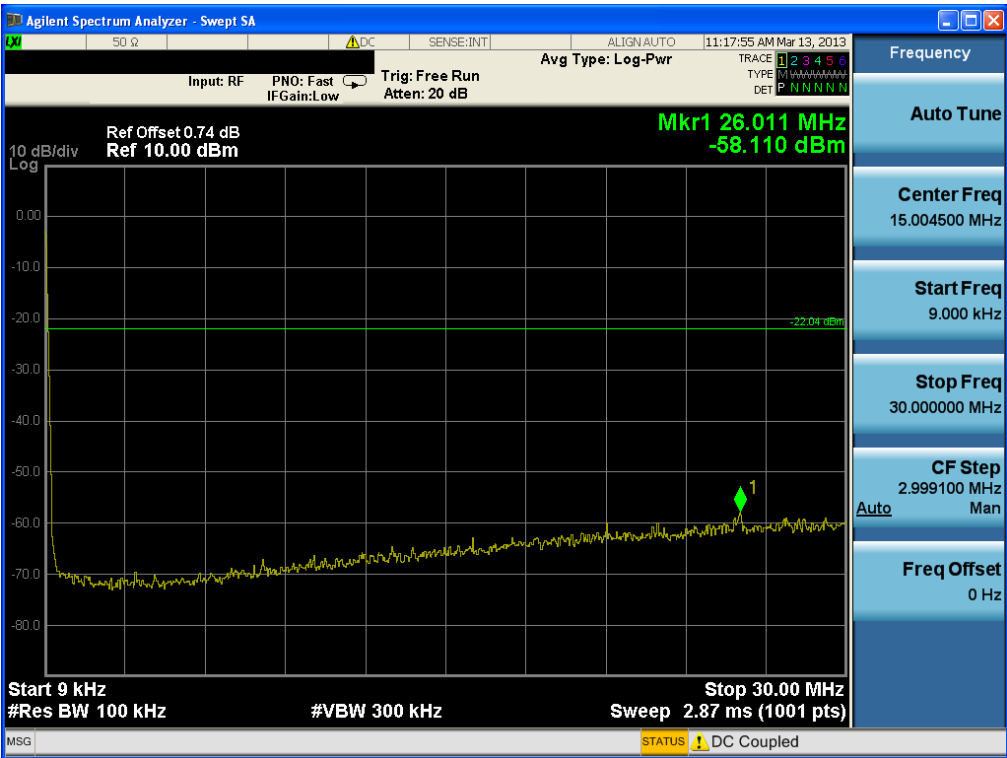


Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	155.712000 M	-45.41	-200.00
1.000 G	2.000 G	1.00 M	1.989900 G	-53.71	-200.00
2.000 G	2.400 G	1.00 M	2.364440 G	-51.07	-200.00
2.400 G	2.483 G	1.00 M	2.442134 G	-1.13	-200.00
2.483 G	3.000 G	1.00 M	2.526834 G	-52.01	-200.00
3.000 G	6.000 G	1.00 M	4.884900 G	-50.91	-200.00
6.000 G	9.000 G	1.00 M	7.327200 G	-47.66	-200.00
9.000 G	10.000 G	1.00 M	9.350700 G	-51.82	-200.00

Highest Frequency


Reference

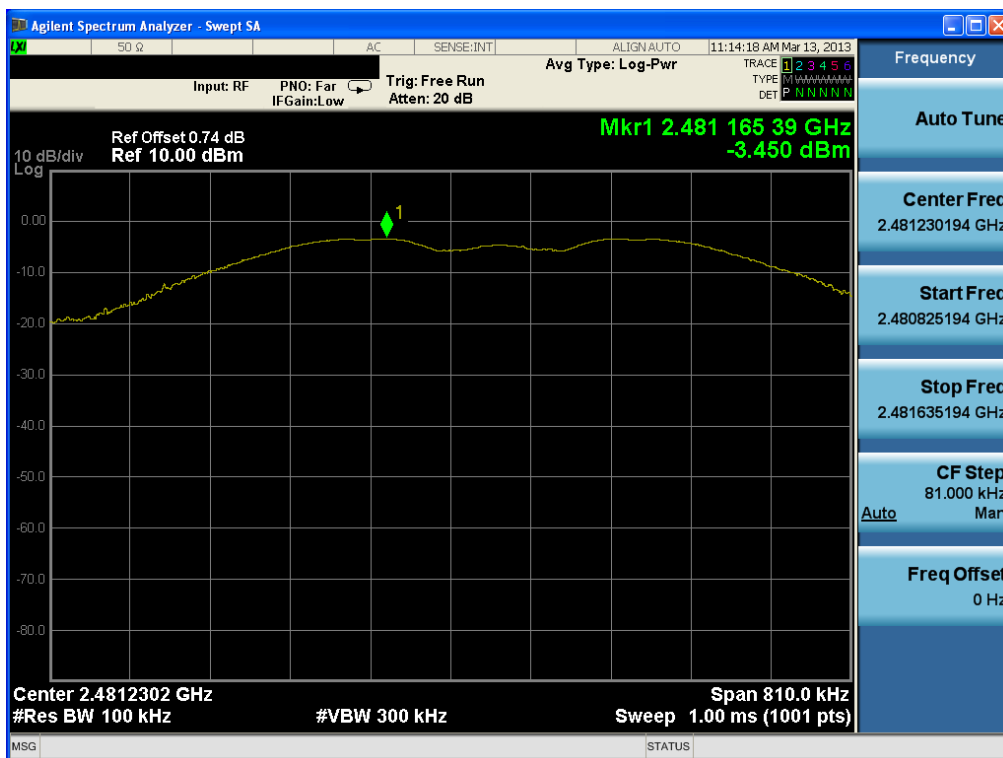


High Band-edge

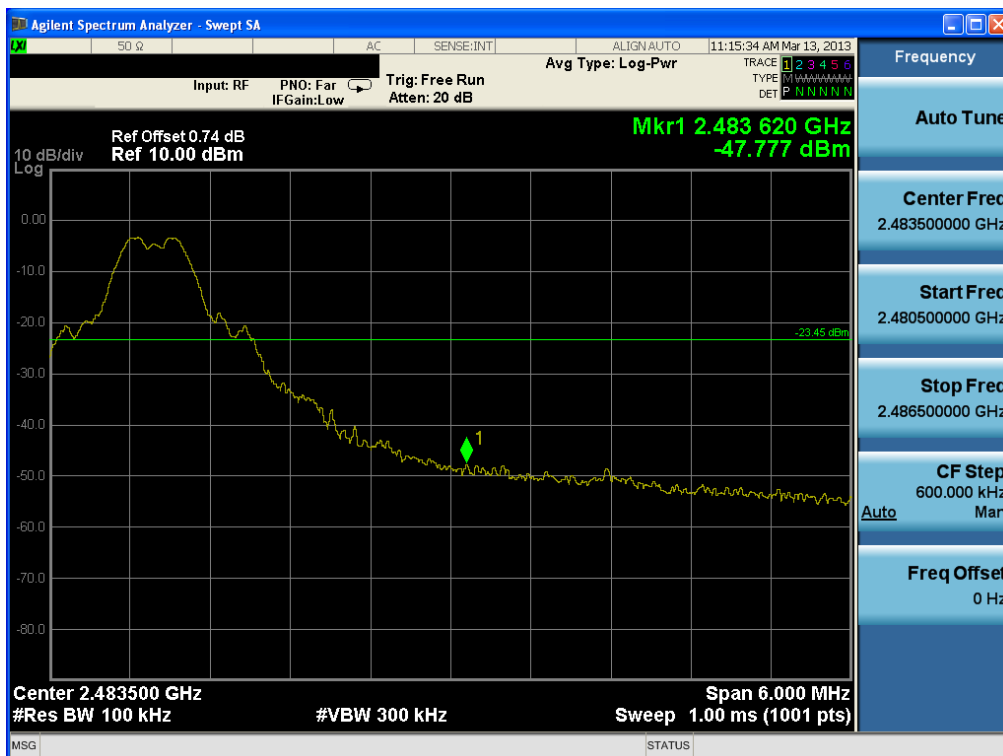

Conducted Spurious Emissions

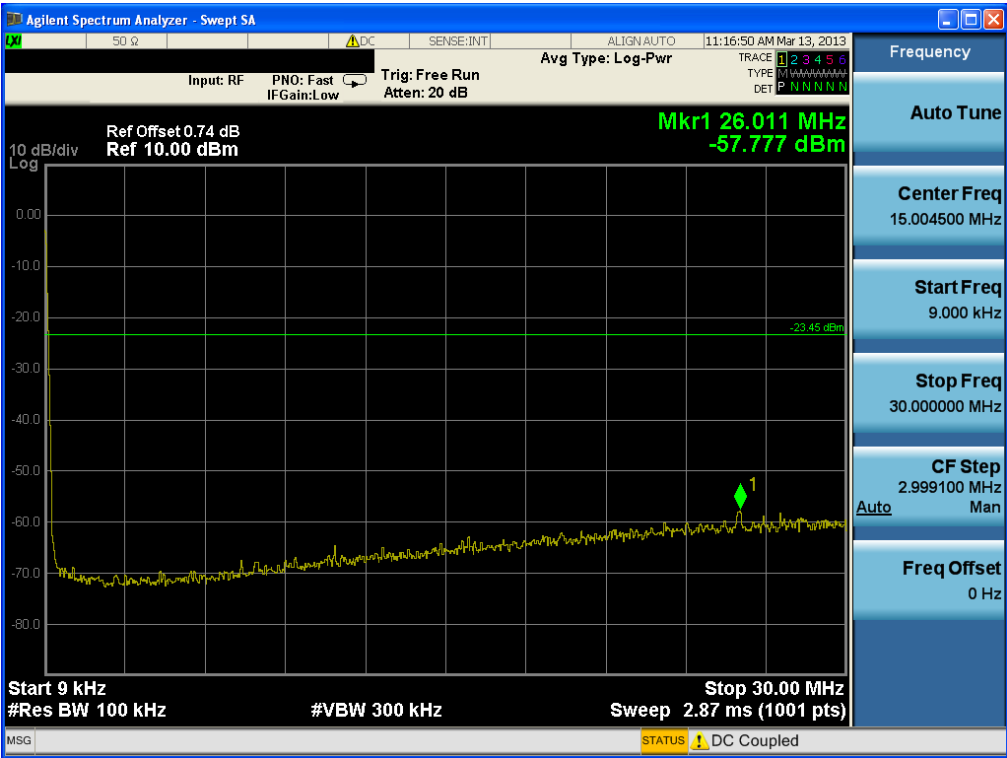

Ref 20 dBm

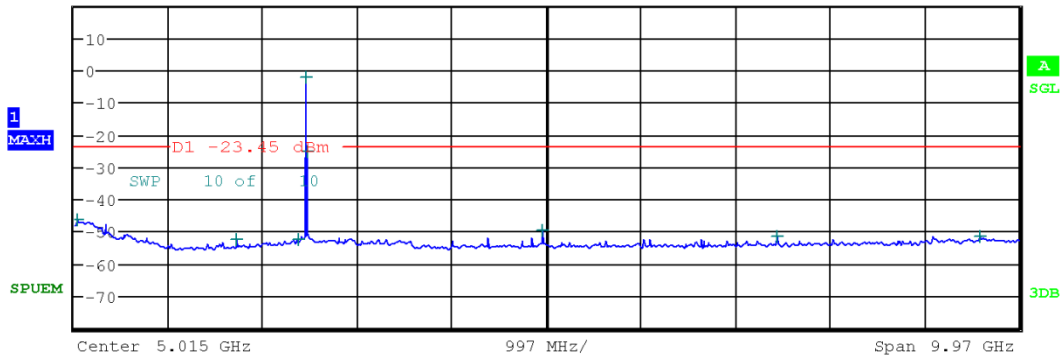

Start [Hz]	Stop [Hz]	RBW [Hz]	Freq [Hz]	PwrAbs [dBm]	Δ Limit [dB]
30.000 M	1.000 G	1.00 M	69.091000 M	-46.46	-200.00
1.000 G	2.000 G	1.00 M	1.745900 G	-52.36	-200.00
2.000 G	2.400 G	1.00 M	2.397000 G	-52.46	-200.00
2.400 G	2.483 G	1.00 M	2.481079 G	-2.18	-200.00
2.483 G	3.000 G	1.00 M	2.483707 G	-25.36	-200.00
3.000 G	6.000 G	1.00 M	4.962600 G	-49.49	-200.00
6.000 G	9.000 G	1.00 M	7.443300 G	-51.50	-200.00
9.000 G	10.000 G	1.00 M	9.592000 G	-51.69	-200.00

8.5 Radiated Spurious Emissions

Test Requirements and limit, §15.247(d), §15.205, §15.209 & RSS-210[A8.5], RSS-Gen [7.2.2]

In any 100 KHz bandwidth outside the operating frequency band. In case the emission falls within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

• FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	3600 ~ 4400	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	4.5 ~ 5.15	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	5.35 ~ 5.46	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	156.52475 ~	1660 ~ 1710	7.25 ~ 7.75	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	156.52525	1718.8 ~ 1722.2	8.025 ~ 8.5	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	156.7 ~ 156.9	2200 ~ 2300	9.0 ~ 9.2	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	9.3 ~ 9.5	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	10.6 ~ 12.7	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900	13.25 ~ 13.4	
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240			
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

• **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

Test Configuration

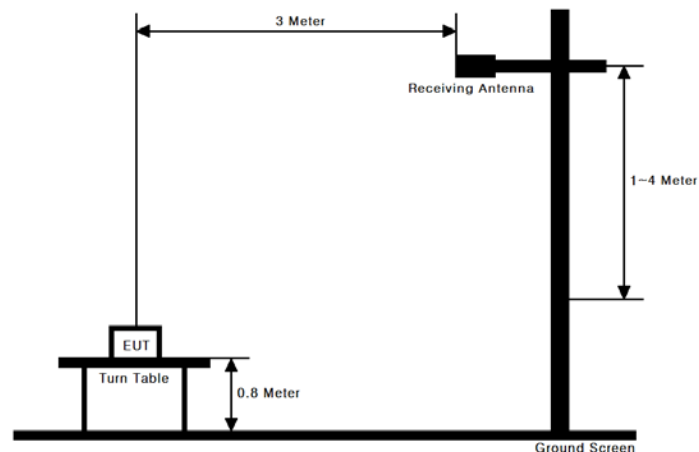

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Note : Measurement Instrument Setting for Radiated Emission Measurements.

1. Frequency Range Below 1 GHz

RBW = 100 or 120 KHz, VBW = 3 x RBW , Detector = Peak or Quasi Peak

2. Frequency Range > 1 GHz

Peak Measurement(KDB 558074 Section 10.2.3.2)

RBW = 1 MHz , VBW = 3 MHz, Detector = Peak

Average Measurement(KDB 558074 Section 10.2.3.3)

1. Set analyzer center frequency to the frequency associated with the emission.
2. Set span to at least 1 MHz.
3. RBW = 1 MHz , VBW = 3 MHz
4. Detector = Power Average (RMS)
5. The number of measurement points = 1001 ($\geq 2 \times \text{SPAN/RBW}$)
6. Sweep Time = 1 S ($\geq 10 \times (\text{The number of measurement points in sweep}) \times (\text{Transmission symbol period})$)
7. Perform the measurement over a single sweep.

9KHz ~ 25GHz Data**▪ Lowest Channel**

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2388.72	H	Z	PK	48.57	-4.73	N/A	43.84	74.00	30.16
2388.32	H	Z	AV	36.62	-4.73	N/A	31.89	54.00	22.11
4802.80	H	Z	PK	51.84	2.23	N/A	54.07	74.00	19.93
4802.68	H	Z	AV	48.74	2.23	N/A	50.97	54.00	3.03

▪ Middle Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4884.71	H	Z	PK	51.15	2.92	N/A	54.07	74.00	19.93
4884.66	H	Z	AV	47.98	2.92	N/A	50.90	54.00	3.10

▪ Highest Channel

Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.50	H	Z	PK	72.21	-4.66	N/A	67.55	74.00	6.45
2483.50	H	Z	AV	55.56	-4.66	N/A	50.90	54.00	3.10
4962.44	H	Z	PK	50.36	2.67	N/A	53.03	74.00	20.97
4962.65	H	Z	AV	46.56	2.67	N/A	49.23	54.00	4.77

Note.

1.No other spurious and harmonic emissions were found greater than listed emissions on above table.

2.Above listed point data is the worst case data.

3.Sample Calculation.

Margin = Limit – Result / Result = Reading + T.F / T.F = AF + CL – AG + DCF (if necessary)

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain, DCF = Duty Cycle Correction Factor.

8.6 Power-line Conducted Emissions

Test Requirements and limit, §15.207& RSS-Gen [7.2.2]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs for the actual connections between EUT and support equipment.

Test Mode



The all modes of EUT operation were investigated and the worst case mode was reported.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

■ **RESULT PLOTS****AC Line Conducted Emissions (Graph)****Results of Conducted Emission**Digital EMC
Date : 2013-03-08Model No. : AN-IP100
Type :
Serial No. : NONE
Test Condition : TXReference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 23 °C 39 % R.H.
Operator : H.S.SON

Memo :

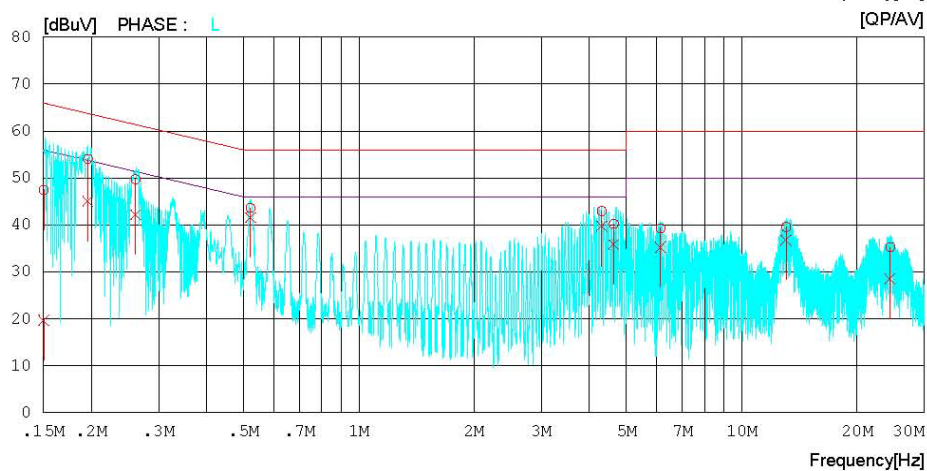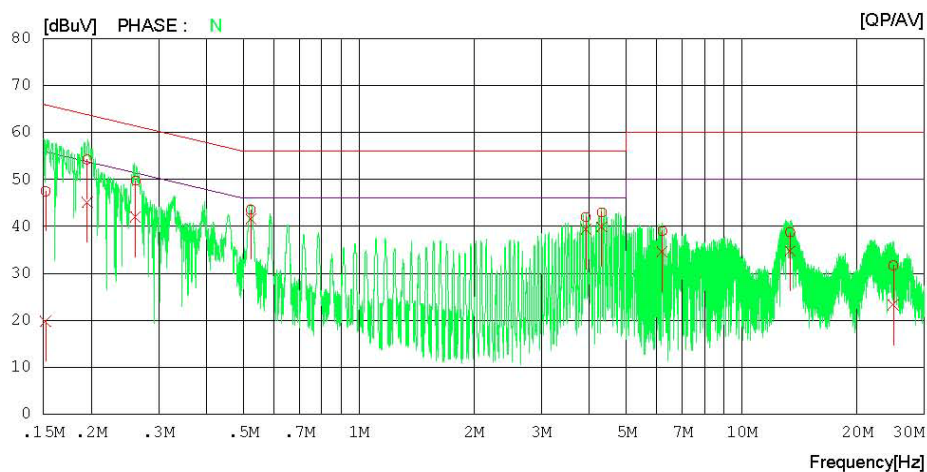LIMIT : FCC P15.207 QP
FCC P15.207 AV

AC Line Conducted Emissions (List)**Results of Conducted Emission**Digital EMC
Date : 2013-03-08Model No. : AN-IP100
Type :
Serial No. : NONE
Test Condition : TXReference No. :
Power Supply : 120 V 60 Hz
Temp/Humi. : 23 'C 39 % R.H.
Operator : H.S.SON

Memo :

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.15220	45.7	18.0	1.8	47.5	19.8	65.9	55.9	18.4	36.1	N
2	0.19519	52.9	43.8	1.3	54.2	45.1	63.8	53.8	9.6	8.7	N
3	0.26115	48.7	41.0	1.0	49.7	42.0	61.4	51.4	11.7	9.4	N
4	0.52231	42.8	40.9	0.7	43.5	41.6	56.0	46.0	12.5	4.4	N
5	3.91700	41.8	39.2	0.2	42.0	39.4	56.0	46.0	14.0	6.6	N
6	4.30900	42.8	39.7	0.2	43.0	39.9	56.0	46.0	13.0	6.1	N
7	6.20250	38.7	34.3	0.3	39.0	34.6	60.0	50.0	21.0	15.4	N
8	13.38600	38.4	34.3	0.4	38.8	34.7	60.0	50.0	21.2	15.3	N
9	24.87100	31.2	22.8	0.5	31.7	23.3	60.0	50.0	28.3	26.7	N
10	0.15039	45.7	17.9	1.8	47.5	19.7	66.0	56.0	18.5	36.3	L
11	0.19600	52.8	43.8	1.3	54.1	45.1	63.8	53.8	9.7	8.7	L
12	0.26125	48.7	41.2	1.0	49.7	42.2	61.4	51.4	11.7	9.2	L
13	0.52150	42.9	40.9	0.7	43.6	41.6	56.0	46.0	12.4	4.4	L
14	4.30950	42.8	39.5	0.2	43.0	39.7	56.0	46.0	13.0	6.3	L
15	4.63500	40.0	35.6	0.2	40.2	35.8	56.0	46.0	15.8	10.2	L
16	6.13750	39.0	34.9	0.3	39.3	35.2	60.0	50.0	20.7	14.8	L
17	13.05850	39.2	36.3	0.4	39.6	36.7	60.0	50.0	20.4	13.3	L
18	24.42000	34.8	28.0	0.5	35.3	28.5	60.0	50.0	24.7	21.5	L

8.7 Occupied Bandwidth

Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

■ TEST CONFIGURATION

Refer to the APPENDIX I.

■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.


■ TEST RESULTS: **Comply**

Test Mode	Tested Channel	Test Results (MHz)
Tx	2401.249725	1.1341
	2442.239715	1.1369
	2481.230438	1.1777

Note 1: See next pages for actual measured spectrum plots.


Occupied Bandwidth (99%)

Lowest Frequency

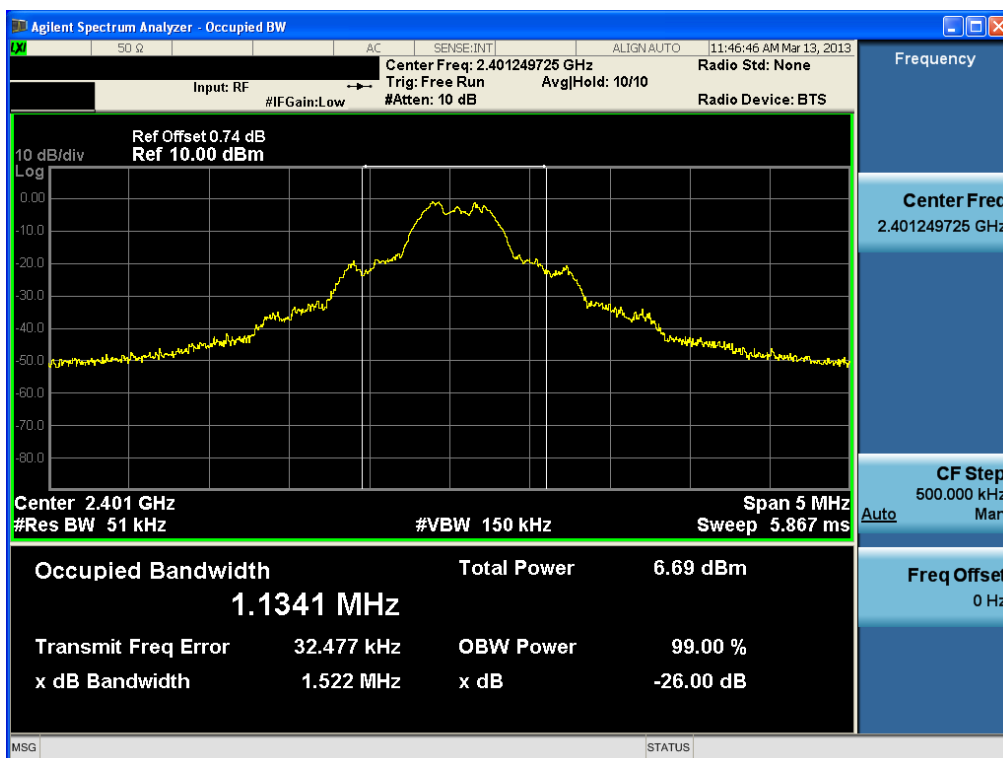


Occupied Bandwidth (99%)

Middle Frequency

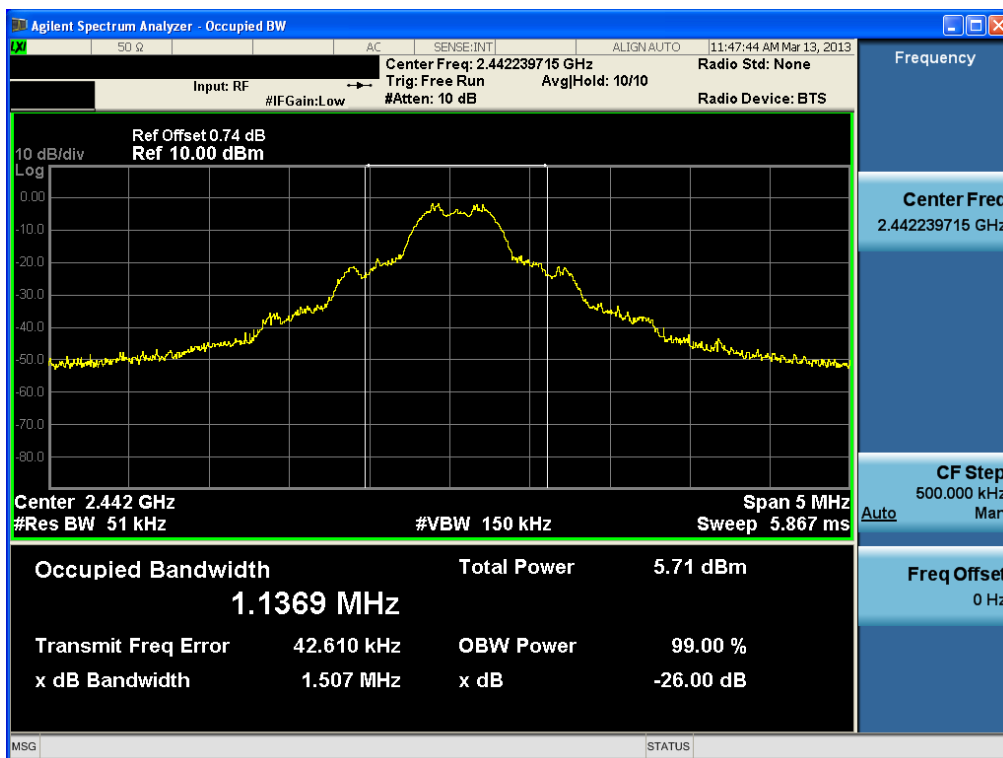

Occupied Bandwidth (99%)

Highest Frequency

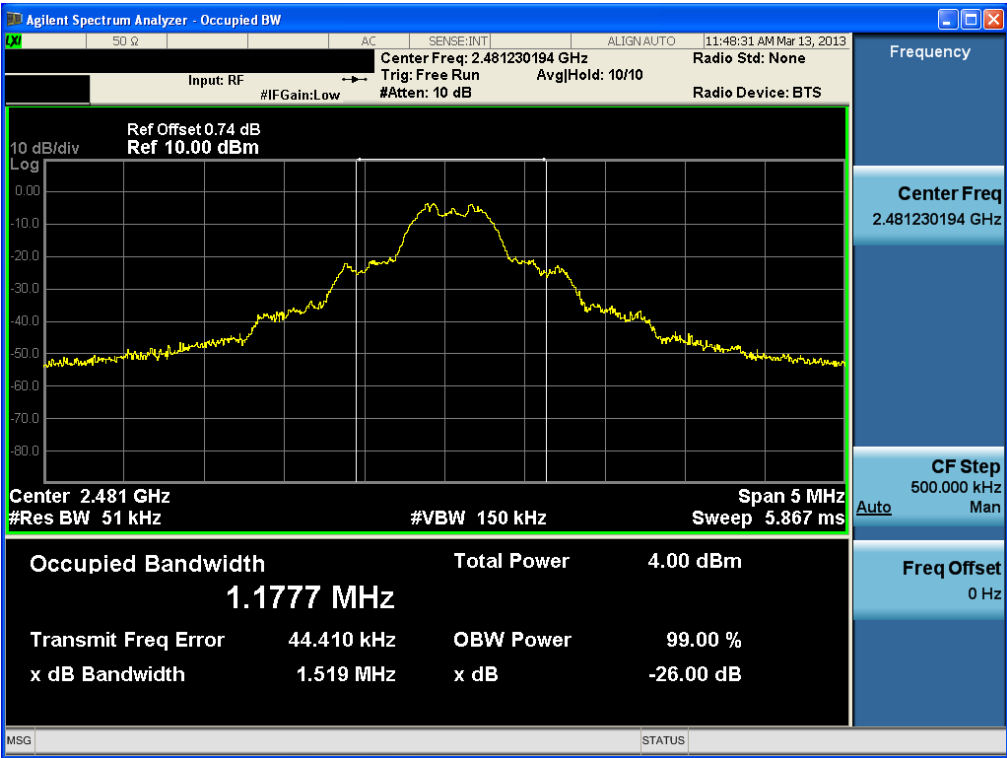


9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	12/09/18	13/09/18	MY45304199
Spectrum Analyzer	Rohde Schwarz	FSQ26	13/02/14	14/02/14	200445
MXA Signal Analyzer	Agilent Technologies, Inc	N9020A	13/01/08	14/01/08	MY49100833
Power Sensor	Rohde Schwarz	NRP-Z81	12/06/28	13/06/28	1137.9009.02-101001
Virtual Power Meter(S/W)	Rohde Schwarz	R&S Power Viewer Plus	-	-	V 4.1.0
Digital Multimeter	H.P	34401A	13/02/27	14/02/27	3146A13475
Signal Generator	Rohde Schwarz	SMR20	13/02/27	14/02/27	101251
Thermo hygrometer	BODYCOM	BJ5478	12/06/20	13/06/20	120612-2
DC Power Supply	HP	6622A	13/02/27	14/02/27	3448A03760
High-pass filter	Wainwright	WHNX3.0	12/09/17	13/09/17	9
HORN ANT	ETS	3115	12/02/20	14/02/20	6419
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
LOOP Antenna	Schwarzbeck	FMZB1513	12/09/24	13/09/24	1513-128
Amplifier (30dB)	H.P	8449B	13/02/27	14/02/27	3008A00370
EMI TEST RECEIVER	R&S	ESU	13/01/08	14/01/08	100014
BILOG ANTENNA	SCHAFFNER	CBL6112B	12/11/06	14/11/06	2737
Amplifier (22dB)	H.P	8447E	13/01/08	14/01/08	2945A02865
EMI TEST RECEIVER	R&S	ESCI	13/02/27	14/02/27	100364
CVCF	KIKUSUI	PCR1000L	12/09/15	13/09/15	14110610
LISN	Narda S.T.S. / PMM	PMM L2-16B	12/07/25	13/07/25	000WX20305

APPENDIX I

Conducted Test set up Diagram & Path loss Information

Conducted Measurement(30MHz ~ 26.5GHz)

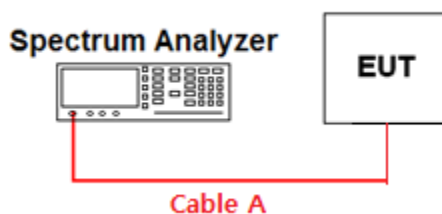

Path loss value information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	0.31	10	2.14
1	0.55	15	2.77
2.401 ~ 2.481	0.74	20	3.50
5	1.28	26.5	3.75

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (=S/A's offset value) = Cable A

Note. 2: For conducted spurious emissions, the path loss values were saved as the transducer factor on the spurious measurement function of the spectrum analyzer and the transducer factor of tested frequency is calculated and corrected automatically by the spectrum analyzer's measurement function.