



Underwriters Laboratories Inc.

www.ul.com/emc
www.ulk.co.kr

Order No.: 10468098
Report No.: 14-10468098-4-FCC
Date: August 21, 2014
Model No.: LAN2100EHDM
FCC ID.: BEJ-LAN2100EHDM

FCC Test Report
in accordance with
FCC Part 15 Subpart C §15.247
for
Car AVN with Bluetooth

LG Electronics Inc.

222, LG-ro Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713,
Republic of Korea

Copyright © 2005 Underwriters Laboratories Inc.

Underwriters Laboratories Inc. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Only those products bearing the UL Mark should be considered as being covered by UL.

Summary of Test Results:

The following tests were performed on a sample submitted for evaluation of compliance with FCC Part 15 C Section 15.247

| No | Reference Clause No. | FCC Part15 Subpart C Conformance Requirements | Verdict | Remark |
|----|----------------------------------|---|----------|--------|
| 1 | 15.205(a) 15.209 15.247(d) | Transmitter radiated spurious emissions and Conducted spurious emission | Complied | |
| 2 | 15.247(a)(1) | 20dB Bandwidth | - | Note 1 |
| 3 | 15.247(b)(1) | Maximum peak output power | Complied | |
| 4 | 15.247(a)(1) | Frequency Separation | Complied | |
| 5 | 15.247(a)(1)(iii) | Number of Hopping Channels | Complied | |
| 6 | 15.247(a)(1)(iii) | Average Time of Occupancy | Complied | |


Note 1 : No Compliance limit. Just Reporting purpose.

Conclusion:

The tests listed in the Summary of Testing section of this report have been performed and the results recorded by UL Korea Ltd. in accordance with the procedures stated in each test requirement and specification. The test list was determined by the Applicant as being applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.



Witnessed by
Changmin, Kim, WiSE Engineer
UL Verification Services – 3014ASEO
UL Korea Ltd.
August 21, 2014



Reviewed by
Jeawoon, Choi, WiSE Operations Manager
UL Verification Services- 3014ASEO
UL Korea Ltd.
August 21, 2014

Test Report Details

Tests Performed By: UL Korea Ltd.
26th FL. GFC Center, 737 Yeoksam-dong, Gangnam-gu, Seoul, 135-984, Korea

Test Site: EMC compliance Ltd.
65, Sinwon-ro, Yeongtong-gu, Suwon- si, Gyeonggi-do, 443-390, Korea

Applicant: LG Electronics Inc.
222, LG-ro Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

Applicant Contact: Yongduck Kwon
Title: Research Engineer
Phone: +82-31-610-9612
E-mail: yongduk.kwon@lge.com

Product Type: CAR AVN with Bluetooth

Model Number: LAN2100EHDM

Trademark



Sample Serial Number: N/A

Test standards: FCC Part 15 C Section 15.247
Operation within the bands 902–928 MHz, 2400–2483.5 MHz,
and 5725–5850 MHz

Sample Serial Number: N/A

Sample Receive Date: July 21, 2014

Testing Start Date: July 21, 2014

Testing Complete Date: July 31, 2014

Overall Results: **Pass**

UL Korea Ltd. reports apply only to the specific test samples and test results submitted for UL's review. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL Korea Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL Korea Ltd. issued reports. This report shall not be used to claim, constitute or imply product certification, approval, or any agency of the National Authorities. This report may contain test results that are not covered by the NVLAP or KOLAS accreditation.

Report Directory

| | |
|--|-----------|
| 1. GENERAL PRODUCT INFORMATION | 5 |
| 1.1. EQUIPMENT DESCRIPTION | 5 |
| 1.2. DETAILS OF TEST EQUIPMENT (EUT) | 5 |
| 1.3. EQUIPMENT CONFIGURATION | 5 |
| 1.4. TECHNICAL DATA..... | 6 |
| 1.5. ANTENNA INFORMATION | 6 |
| 1.6. EQUIPMENT TYPE : | 6 |
| 1.7. TECHNICAL DESCRIPTIONS AND DOCUMENTS | 6 |
| 1.8. DESCRIPTION OF ADDITIONAL MODEL NAME..... | 7 |
| 1.9. MAXIMUM OUTPUT POWER (BASELINE MEASUREMENT)..... | 7 |
| 2. TEST SPECIFICATION | 7 |
| 3. TEST CONDITIONS | 8 |
| 3.1. EQUIPMENT USED DURING TEST | 8 |
| 3.2. INPUT/OUTPUT PORTS | 8 |
| 3.3. POWER INTERFACE | 8 |
| 3.4. OPERATING FREQUENCIES | 9 |
| 3.5. OPERATION MODES | 9 |
| 3.6. ENVIRONMENT CONDITIONS..... | 9 |
| 3.7. TEST CONFIGURATIONS | 10 |
| 3.8. LIST OF TEST EQUIPMENT..... | 11 |
| 4. OVERVIEW OF TECHNICAL REQUIREMENTS | 11 |
| 5. TEST RESULTS..... | 12 |
| 5.1. 20 dB BANDWIDTH..... | 12 |
| 5.2. MAXIMUM PEAK OUTPUT POWER | 17 |
| 5.3. CARRIER FREQUENCY SEPARATION..... | 24 |
| 5.4. NUMBER OF HOPPING CHANNELS | 27 |
| 5.5. AVERAGE TIME OF OCCUPANCY..... | 31 |
| 5.6. CONDUCTED SPURIOUS EMISSION MEASUREMENT..... | 37 |
| 5.7. RADIATED SPURIOUS EMISSIONS MEASUREMENT | 46 |
| 5.8. ANTENNA REQUIREMENT | 50 |
| APPENDIX A. ACCREDITATIONS AND AUTHORIZATIONS | 51 |
| APPENDIX B _ MEASUREMENT UNCERTAINTIES..... | 52 |

1. General Product Information

1.1. Equipment Description

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate its channels selection/hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

1.2. Details of Test Equipment (EUT)

- Equipment Type : CAR AVN with Bluetooth
- Model No. : LAN2100EHDM
- Trade name : LG
- Type of test Equipment : Portable type
- Operating characteristic : Short range wireless device operating in the 2400 – 2483.5 ISM frequency band
- Manufacturer : LG Electronics Inc.
222, LG-ro Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Republic of Korea

1.3. Equipment Configuration

The EUT is consisted of the following component provided by the manufacturer.

| Use* | Product Type | Manufacturer | Model | Comments |
|---|------------------------|--------------|-------------|----------|
| EUT | CAR AVN with Bluetooth | | LAN2100EHDM | - |
| Note: Use = EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment. SIM - Simulator (Not Subjected to Test) | | | | |

1.4. Technical Data

| | |
|--------------------------------|-----------------------------------|
| Transmitter frequency range(s) | 2,402~2,480 MHz |
| Number of Channel | 79 channels |
| Receiver frequency range(s) | 2,402~2,480 MHz |
| Transmitter power | -0.22 dBm (Max 2.5 dBm) |
| Modulation | FHSS (GFSK, $\pi/4$ DQPSK, 8DPSK) |
| Power supply | Typ. 12Vdc |

Note ;

1. All the technical data described above were provided by the manufacturer.

1.5. Antenna Information

Antenna Model Name : ALA621C4
Antenna Type : Chip Antenna
Manufacturer : AMOTECH
Transmit Gain : Max. 0.7 dBi
Azimuth Beam Pattern : Linear

1.6. Equipment Type :

- Radio and ancillary equipment for fixed or semi-fixed use
 Radio and ancillary equipment for vehicular mounted use
 Radio and ancillary equipment for portable or handheld use
- Stand alone Host connected Host connected
- Self contained single unit Module with associated connection or interface

1.7. Technical descriptions and documents

The following documents was provided by the manufacturer.

| No. | Document Title and Description |
|-----|--------------------------------|
| 1 | User Manual |

1.8. Description of additional model name

| Model name | Model name Designation | Description of design |
|-------------|------------------------|-----------------------|
| LAN2100EHDM | Basic model | - |

1.9. Maximum Output Power (Baseline Measurement)

| Modulation Type | Rate | Peak Power(dBm) | | |
|-----------------|--------|-----------------|----------|----------|
| | | 2402 MHz | 2441 MHz | 2480 MHz |
| GFSK | 1 Mbps | -0.22 | -2.24 | -2.82 |
| $\pi/4$ DQPSK | 2 Mbps | -0.41 | -1.80 | -2.15 |
| 8DPSK | 3 Mbps | -0.34 | -1.77 | -2.10 |

2. Test Specification

The following test specifications and standards have been applied and used for testing.

- 1) FCC Part 15 C Section 15.247 : Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz
- 2) ANSI C63.10:2009 : American National Standard for Testing Unlicensed Wireless Devices
- 3) FCC Public Notice DA 00-705-2003
Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

3. Test Conditions

3.1. Equipment Used During Test

| Use* | Product Type | Manufacturer | Model | Comments |
|------|------------------------------------|---|----------------|----------|
| EUT | Satellite Mobile Handheld Terminal | Asia Pacific Satellite Communication Inc. | SatSleeve Data | - |
| AE | Note PC | LG | R510 | - |

Note: Use = EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment. SIM - Simulator (Not Subjected to Test)

3.2. Input/Output Ports

| Port # | Name | Type* | Cable Max. >3m | Cable Shielded | Comments |
|--------|----------------|-------|----------------|----------------|------------------------|
| 1 | DC input port | DC | 1.0 | Unshielded | Car AVN with Bluetooth |
| 2 | ANT IN | I/O | 20.0 | Shielded | |
| 3 | GPS | I/O | 1.5 | Shielded | |
| 4 | Jack Accessory | I/O | 1.0 | Unshielded | |
| 5 | C Connector | I/O | 0.4 | Unshielded | |
| 6 | A Connector | I/O | 0.4 | Unshielded | |
| 7 | AUX IN | I/O | 0.8 | Unshielded | Jack Accessory |
| 8 | USB | I/O | - | - | |

Note:
 * AC = AC Power Port DC = DC Power Port N/E = Non-Electrical
 I/O = Signal Input or Output Port (Not Involved in Process Control)
 TP = Telecommunication Ports

3.3. Power Interface

| Mode # | Voltage (V) | Current (A) | Power (W) | Frequency (DC/AC-Hz) | Phases (#) | Comments |
|--------|-------------|-------------|-----------|----------------------|------------|--------------------------|
| 1 | 12 Vdc | - | - | DC | - | Normal operating voltage |

3.4. Operating Frequencies

| Mode # | Frequency tested |
|--------|--|
| 1 | - Low : 2402 MHz / CH = 1 - Mid : 2441 MHz / CH = 39 - Top : 2480 MHz / CH= 78 |



3.5. Operation Modes

| Mode # | Description |
|---|--|
| 1 | Carrier on mode: Signal from the RF module was gene1 continuously for the representative channels (Low, Mid, High) by the test program incorpol. |
| 2 | Carrier on Hopping mode: Signal from the RF module was gene1 continuously. |
| 3 | Carrier off (Idle) mode: RF carrier was not activated by the RF module. |
| Note : - The measurements of the spurious emissions for transmitter on stand-by mode were performed as the receiver spurious emissions. - The worst-case condition is determined by the baseline measurement of RF output power out of various modulations and data rates. Therefore all applicable requirements were tested to the two type of higher output power modulation (GFSK and 8DPSK) | |

3.6. Environment Conditions

| Parameters | Normal condition |
|--|--------------------------|
| Temperature | + 15°C ~ +35°C |
| Humidity | 20% ~ 75% |
| Supply voltage | 12 Vdc (Nominal voltage) |
| Note: - The operating condition for humidity requirement has not been declared in the manufacturer's specification. | |

3.7. Test Configurations
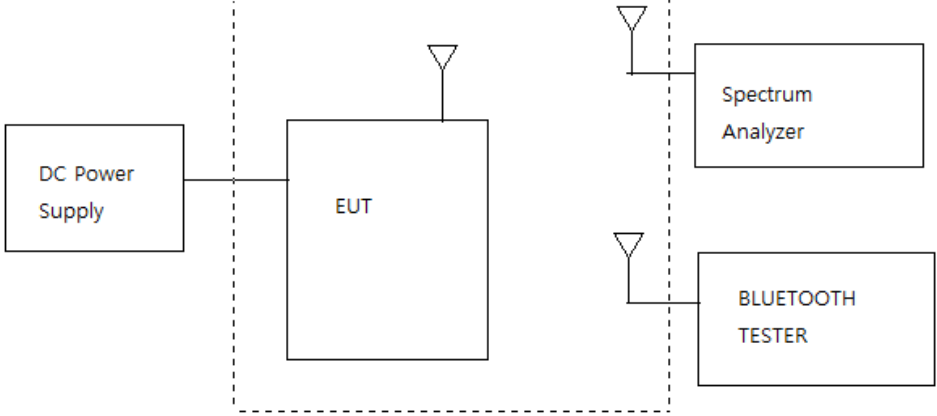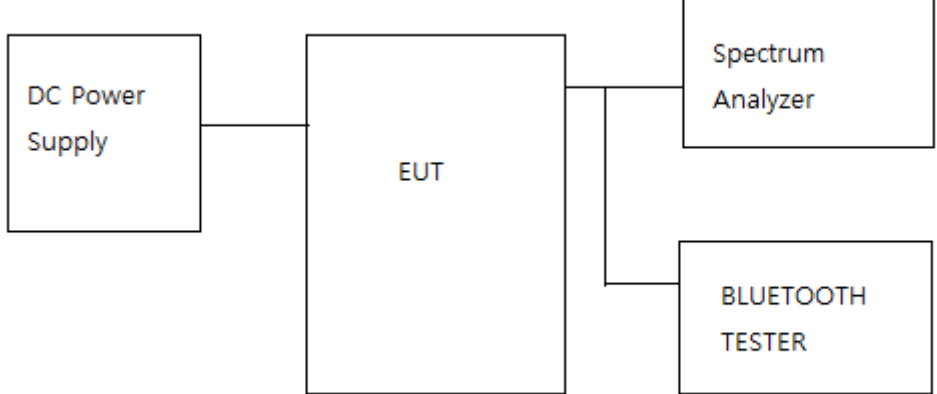
| Mode # | Description |
|--------|--|
| 1 |  <p>The diagram for Mode 1 shows a DC Power Supply connected to an EUT. The EUT has an antenna. A dashed box encloses the EUT and two antennas. One antenna is connected to a Spectrum Analyzer, and the other is connected to a BLUETOOTH TESTER.</p> |
| 2 |  <p>The diagram for Mode 2 shows a DC Power Supply connected to an EUT. The EUT is connected to both a Spectrum Analyzer and a BLUETOOTH TESTER.</p> |

3.8. List of Test Equipment

| No | Description | Manufacturer | Model | Identifier | Cal. Due |
|----|------------------------|--------------------------------|----------------------|-------------|----------|
| 1 | Spectrum Analyzer | R&S | FSV30 | 100914 | 15.08.05 |
| 2 | DC Power Supply | Agilent | E3632A | MY51220373 | 14.12.24 |
| 3 | Signal generator | R & S | SMR40 | 100007 | 15.06.10 |
| 4 | Bluetooth Tester | TESCOM | TC-3000A | 3000A310047 | 15.04.10 |
| 5 | POWER DIVIDER | Aeroflex/ Weinschel,Inc | 1580-1 | RM986 | 15.04.08 |
| 6 | Spectrum Analyzer | R & S | FSP40 | 100209 | 14.10.21 |
| 7 | Amplifier | Sonoma | 310N | 293004 | 14.10.31 |
| 8 | Broadband Preamplifier | Schwarzbeck | BBV9718 | 9718-233 | 15.04.22 |
| 9 | Broadband Preamplifier | Schwarzbeck | BBV9721 | 2 | 15.05.09 |
| 10 | Loop Antenna | R&S | HFH2-Z2 | 100355 | 15.06.19 |
| 11 | Bi-Log Antenna | Schwarzbeck | VULB9168 | 583 | 15.06.19 |
| 12 | Horn Antenna | ETS - Lindgren | 3115 | 62589 | 14.11.11 |
| 13 | Horn Antenna | ETS - Lindgren | 3116 | 86635 | 15.02.26 |
| 14 | Attenuator | HP | 8491A | 16861 | 15.07.01 |
| 15 | Highpass Filter | Wainwright Instruments GmbH | WHKX3.0/ 18G-12SS | 44 | 15.02.05 |
| 16 | Antenna Mast | Innco Systems | MA4000-EP | 303 | - |
| 17 | Turn Table | Innco Systems | DT2000S-1t | 79 | - |

4. Overview of Technical requirements

| The following essential requirements and test specifications are relevant to the presumption of conformity FCC Part 15 C Section 15.247 | | | Reported |
|---|---|------------------------------------|----------|
| Reference Clause No. | Essential technical requirements | Test method | |
| 15.205(a) 15.209 15.247(d) | Transmitter radiated spurious emissions and Conducted spurious emission | ANSI C63.10-2009 DA 00-705-2003 | [X] |
| 15.247(a)(1) | 20dB Bandwidth | ANSI C63.10-2009 DA 00-705-2003 | [X] |
| 15.247(b)(1) | Maximum peak output power | ANSI C63.10-2009 DA 00-705-2003 | [X] |
| 15.247(a)(1) | Carrier Frequency Separation | ANSI C63.10-2009 DA 00-705-2003 | [X] |
| 15.247(a)(1)(iii) | Number of Hopping Channels | ANSI C63.10-2009 DA 00-705-2003 | [X] |
| 15.247(a)(1)(iii) | Average Time of Occupancy | ANSI C63.10-2009 DA 00-705-2003 | [X] |

5. Test Results

5.1. 20 dB Bandwidth

| TEST: 20 dB Bandwidth | | |
|--|---|-------------------|
| Method | 20 dB Bandwidth from the EUT were measured according to the procedure of DA 00-705-2003 The transmitter output is connected to the Spectrum analyzer. 20 dB Bandwidth from the EUT was measured under the below setting condition. 1. Set resolution bandwidth (RBW) \geq 1 % of 20 dB Bandwidth. 2. Set the video bandwidth (VBW) \geq RBW. 3. Detector = Peak. 4. Trace mode = max hold. 5. Sweep = auto couple. 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission. | |
| Reference Clause | Part15 C Section 15.247 (a)(1) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 25.2 °C |
| | Relative Humidity | 48.1 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 2402 MHz - 2480 MHz | Antenna port |

Configuration Settings

| Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---|---|---|
| 1 | 1 | 2 |
| Supplementary information: None | | |

Limits

§15.247(a)(1) : No limit apply.


5.1.1. Measurement Results

Table 1. Data Table of 20 dB Bandwidth


| Operating Mode | Data Rate (Mbps) | Channel | Channel Frequency (MHz) | 20 dB Bandwidth (kHz) | Minimum Limit (MHz) |
|----------------|------------------|---------|-------------------------|-----------------------|---------------------|
| GFSK | 1 | Low | 2402 | 820.5 | N/A |
| | | Middle | 2441 | 820.5 | |
| | | High | 2480 | 820.5 | |
| 8DPSK | 3 | Low | 2402 | 1.2547 | |
| | | Middle | 2441 | 1.2547 | |
| | | High | 2480 | 1.2547 | |

Figure 1. Plots of 20 dB Bandwidth


GFSK
 Low

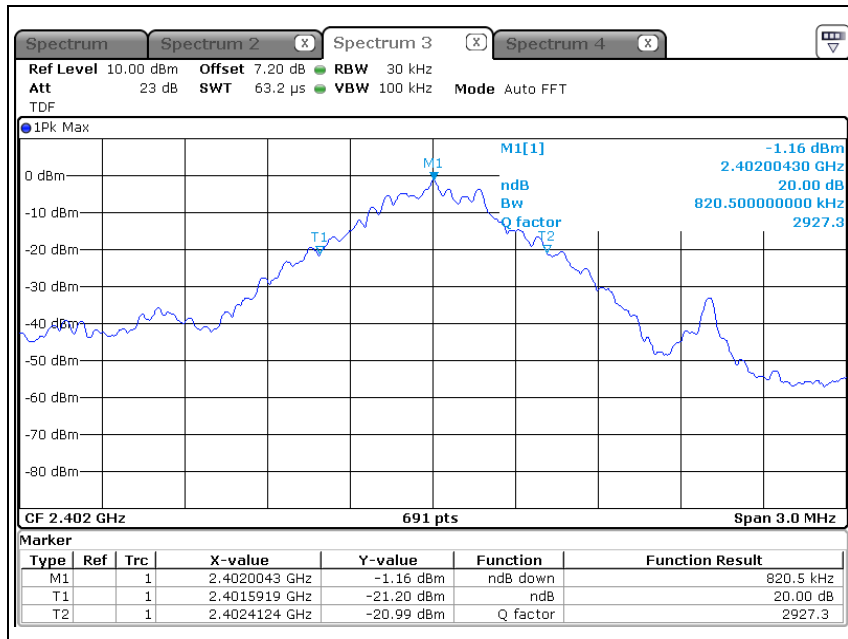


Middle

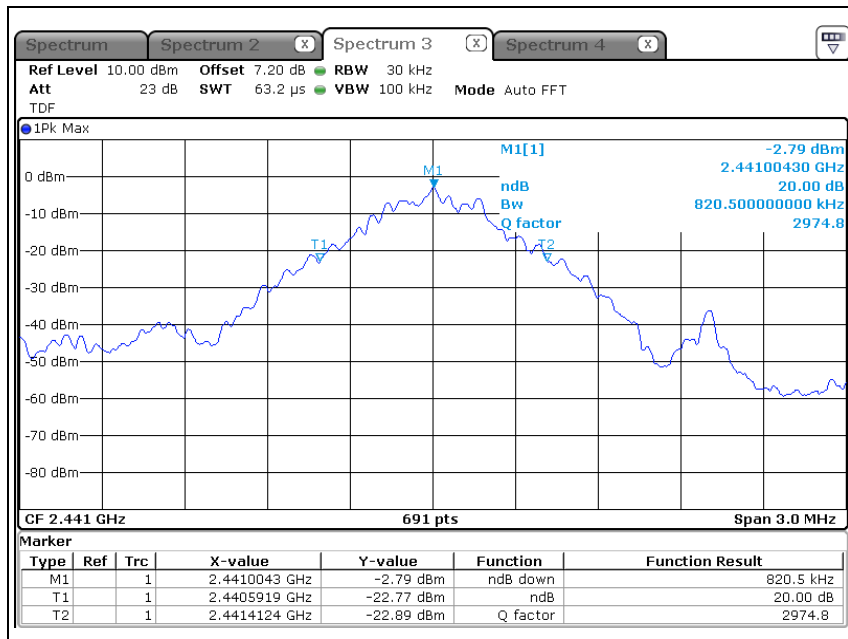


High

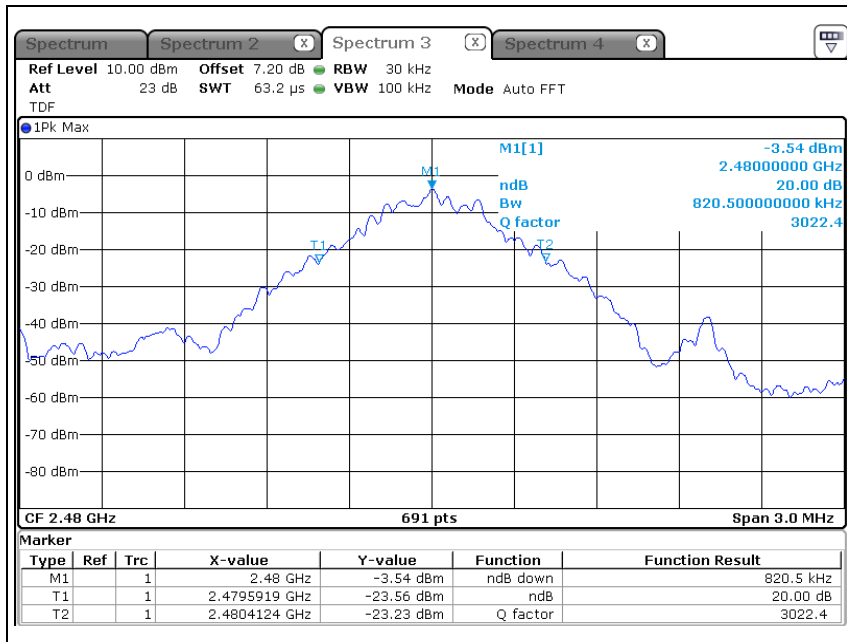


8DPSK
 Low

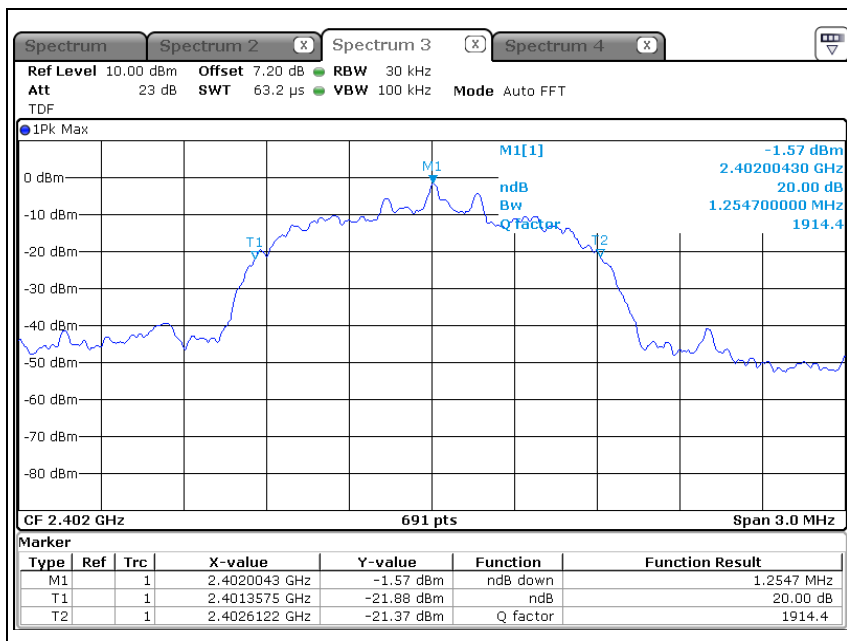

Middle

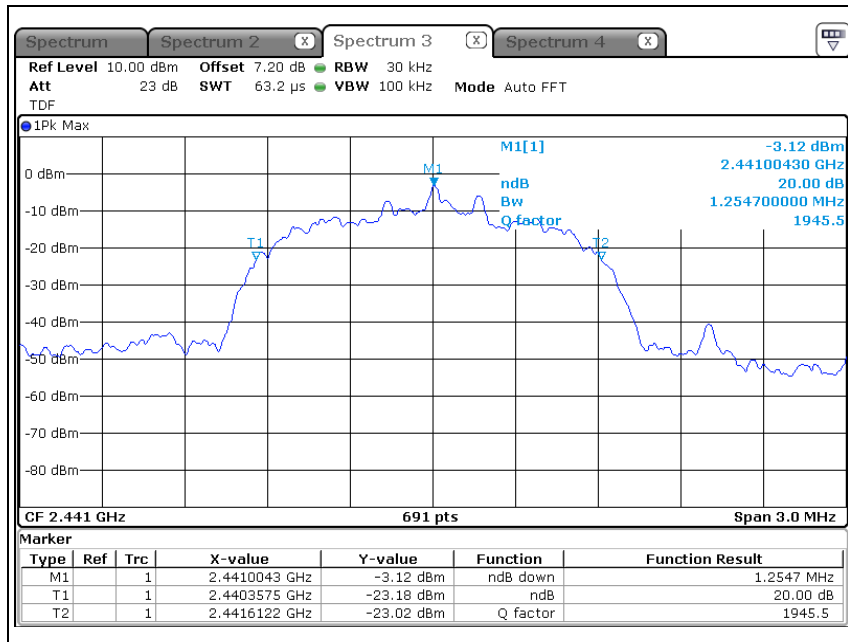

High

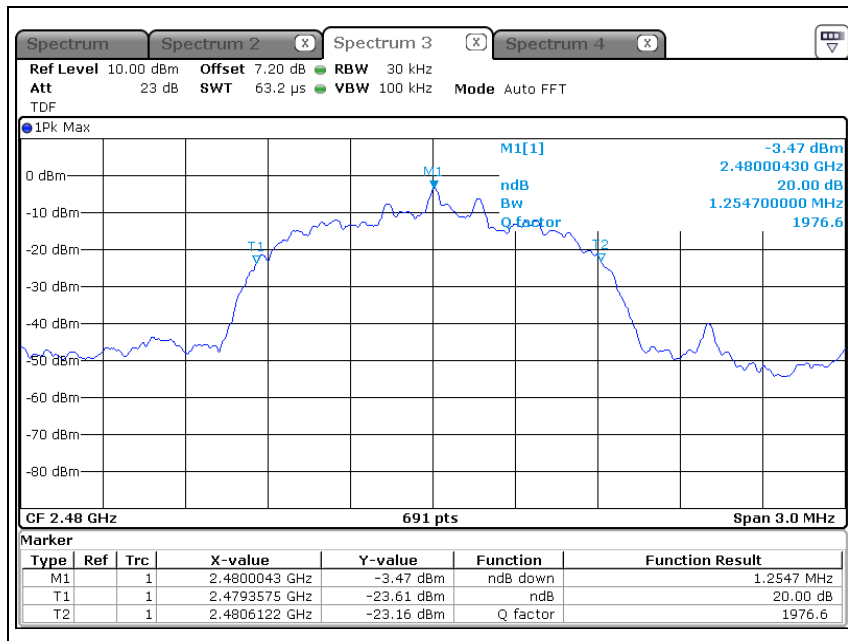

5.2. Maximum Peak Output Power

| TEST: Maximum Peak Output Power | | |
|--|--|-------------------|
| Method | Maximum Peak Output Power from the EUT were measured according to the procedure of DA 00-705-2003 1. Use the following spectrum analyzer settings: 2. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel 3. RBW > the 20 dB bandwidth of the emission being measured 4. VBW ≥ RBW. 5. Detector = peak. 6. Sweep time = auto couple. 7. Trace mode = max hold. 8. Allow trace to fully stabilize. 9. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer. | |
| Reference Clause | Part15 C Section 15.247 (b)(1) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 25.2 °C |
| | Relative Humidity | 48.1 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 2402 MHz - 2480 MHz | Antenna port |

Configuration Settings

| Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---|---|---|
| 1 | 1 | 2 |
| Supplementary information: None | | |

Limits

The maximum peak output power of the intentional radiator shall not exceed the following :

- §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

According to §15.247(b)(4), the conducted output power limit specified in paragraph(b) of this section is based on the use of antenna with directional gains that do not exceed 6 dBi. Except as shown in paragraph(c) of this section, if transmitting antenna of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Measurement Results

Table 2. Data Table of Maximum Peak Output Power


| Operating Mode | Data Rate (Mbps) | Channel | Channel Frequency (MHz) | Peak Power Result (dBm) | Limit (dBm) |
|----------------|------------------|---------|-------------------------|-------------------------|-------------|
| GFSK | 1 | Low | 2402 | -0.22 | 20.97 |
| | | Middle | 2441 | -2.24 | |
| | | High | 2480 | -2.82 | |
| $\pi/4$ DQPSK | 2 | Low | 2402 | -0.41 | 20.97 |
| | | Middle | 2441 | -1.80 | |
| | | High | 2480 | -2.15 | |
| 8DPSK | 3 | Low | 2402 | -0.34 | 20.97 |
| | | Middle | 2441 | -1.77 | |
| | | High | 2480 | -2.10 | |

Figure 2. Plots of Maximum Peak Power


GFSK
Low

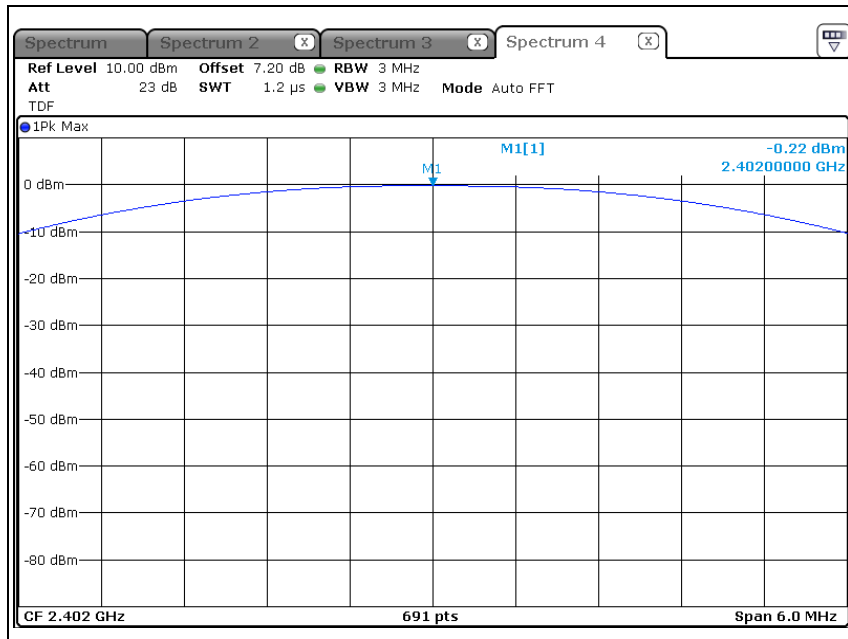


Middle

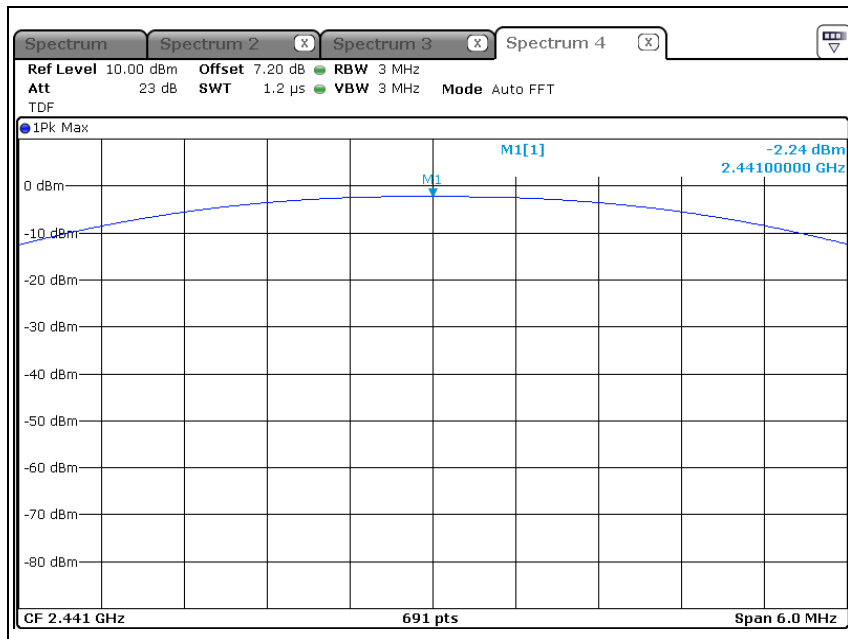


High

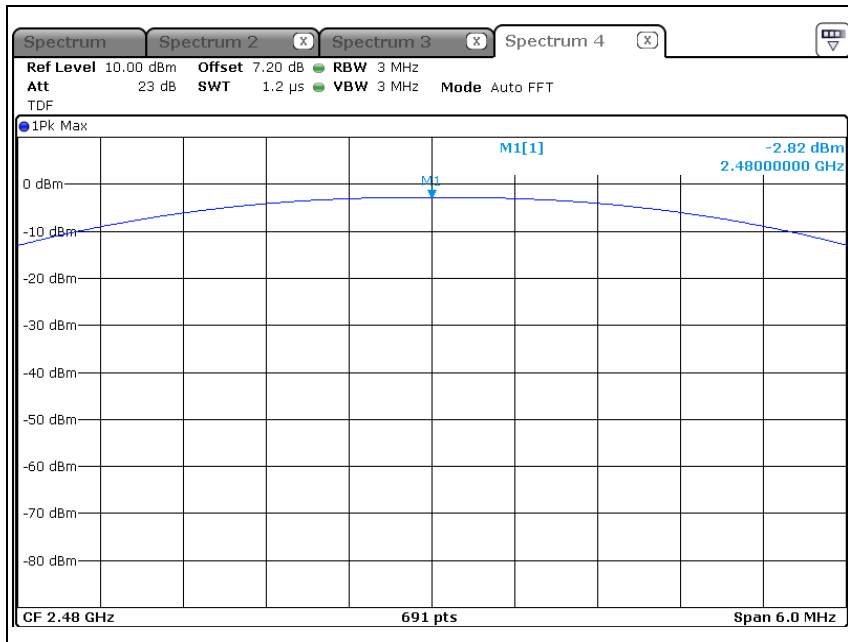


$\pi/4$ DQPSK
Low

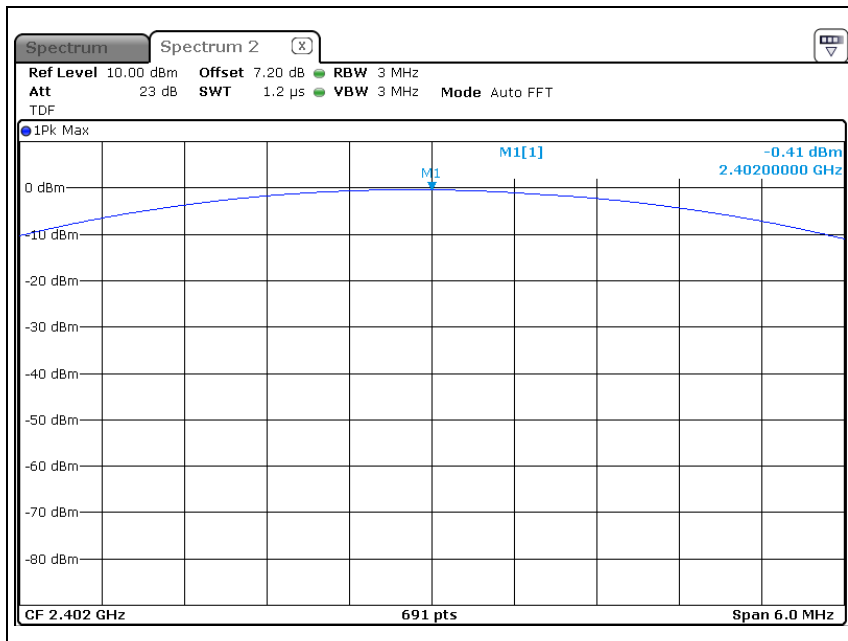


Middle

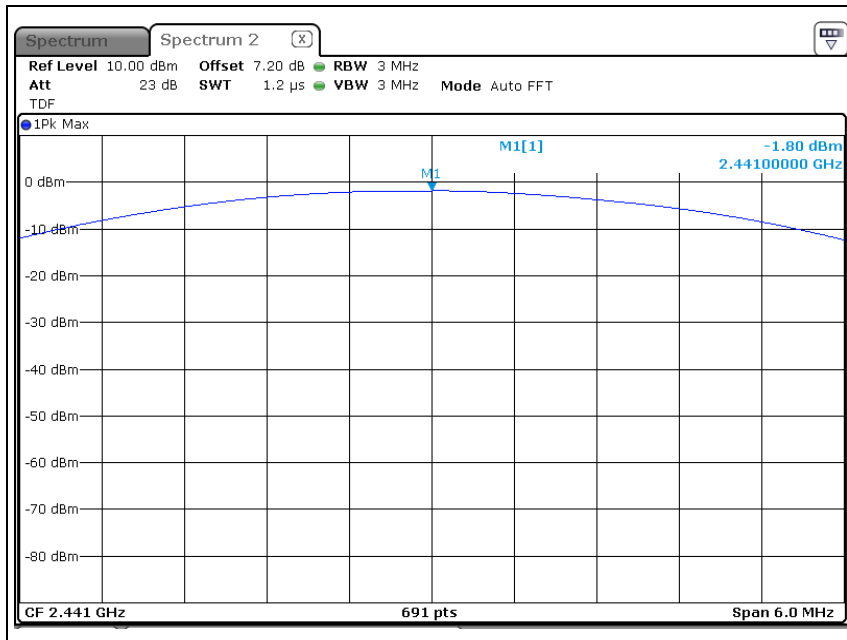


High

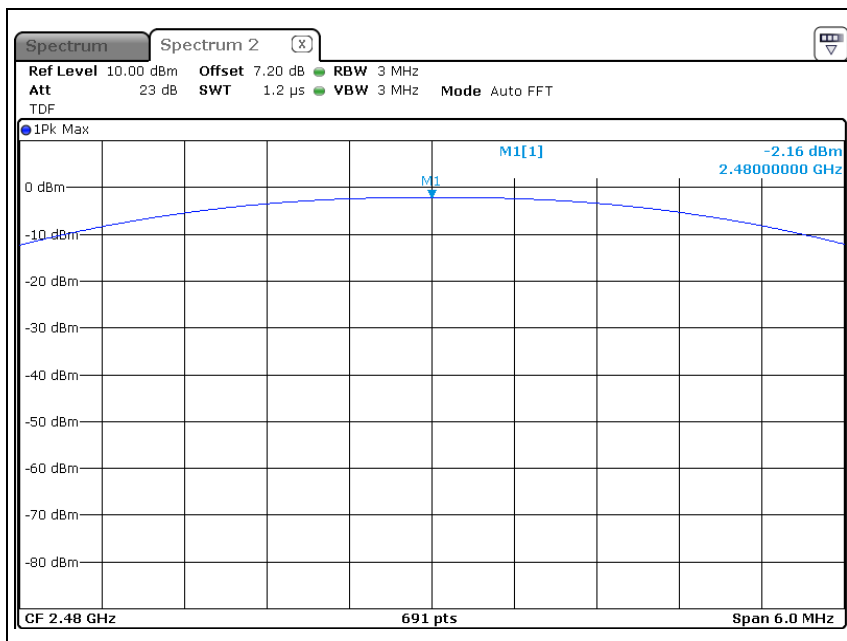


8DPSK
Low

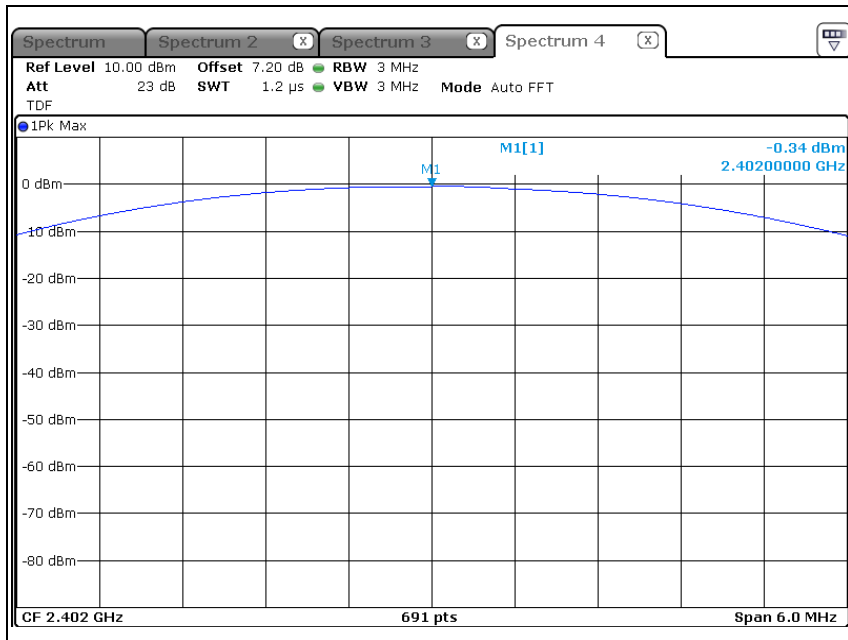

Middle

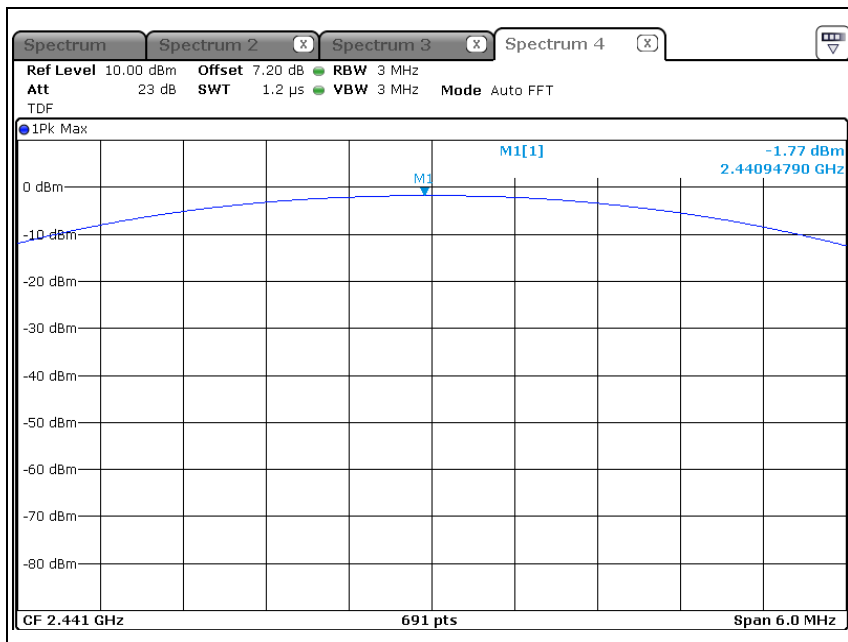

High

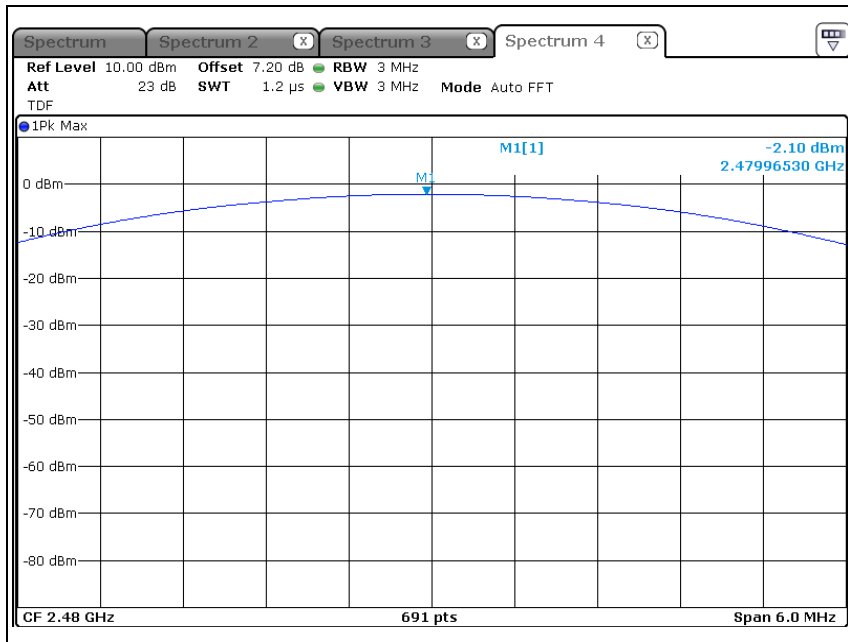

5.3. Carrier Frequency Separation

| TEST: Carrier Frequency Separation | | |
|--|---|-------------------|
| Method | Carrier Frequency Separation from the EUT were measured according to the procedure of DA 00-705-2003 The EUT must have its hopping function enabled. 1. Use the following spectrum analyzer settings: 2. Span = wide enough to capture the peaks of two adjacent channels 3. RBW \geq 1 % of Span 4. VBW \geq RBW. 5. Detector = peak. 6. Sweep time = auto couple. 7. Trace mode = max hold. 8. Allow trace to fully stabilize. 9. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. | |
| Reference Clause | Part15 C Section 15.247 (a)(1) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 25.2 °C |
| | Relative Humidity | 48.1 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 2402 MHz - 2480 MHz | Antenna port |

Configuration Settings

| Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---|---|---|
| 1 | 2 | 2 |
| Supplementary information: None | | |

Limits

§15.247(a)(1) Frequency hopping system operating in 2 400 – 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separate by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Measurement Results

Table 3. Data Table of Carrier Frequency Separation


| Operating Mode | Data Rate (Mbps) | Mark #1 (MHz) | Mark #2 (MHz) | Adjacent Hopping Channel Separation (kHz) | Two-third of 20 dB Bandwidth (kHz) | Minimum Bandwidth (kHz) |
|----------------|------------------|---------------|---------------|---|------------------------------------|-------------------------|
| GFSK | 1 | 2440 | 2441 | 1.003 | 547.0 | 25 |
| 8DPSK | 3 | 2440 | 2441 | 999 | 836.5 | |

Figure 3. Plots of Carrier Frequency Separation

GFSK

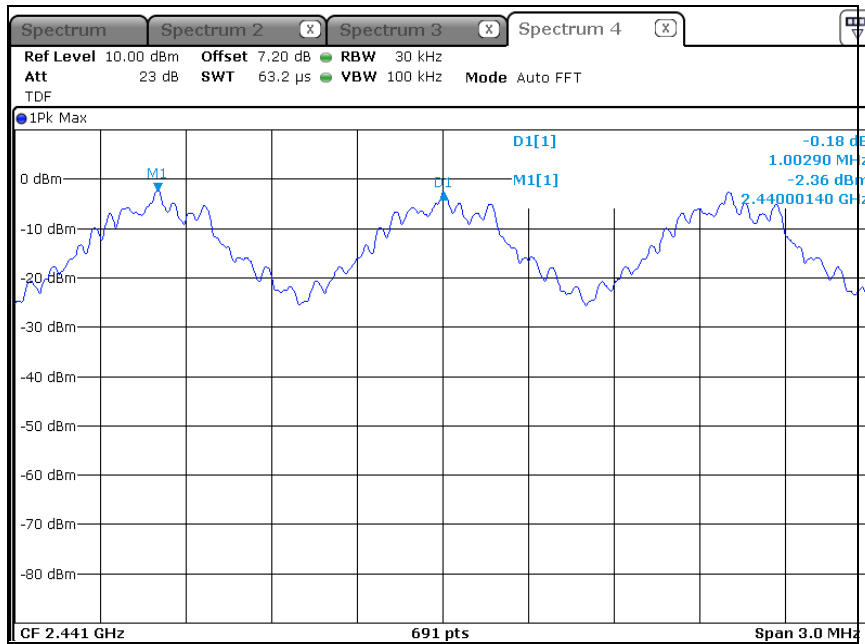

8DPSK

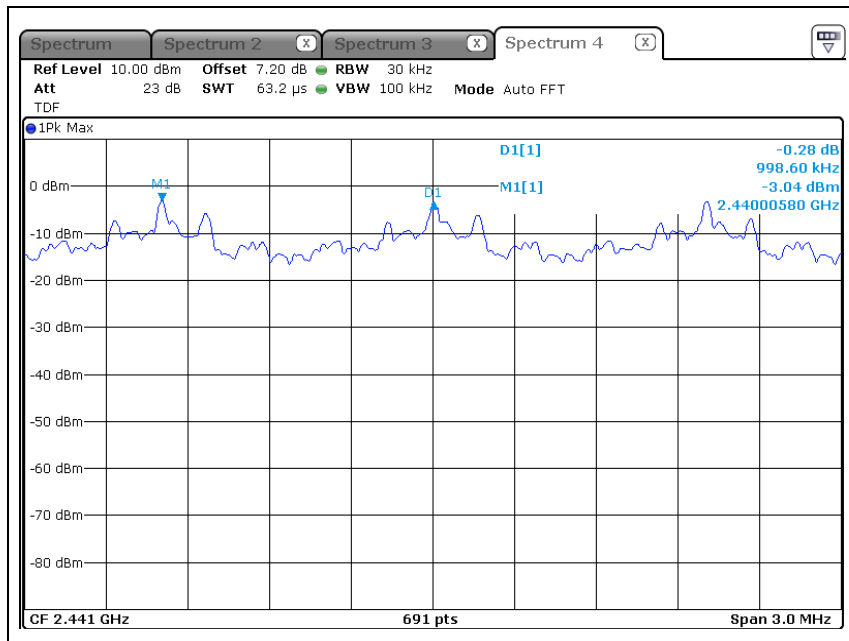

5.4. Number of Hopping Channels

| TEST: Number of Hopping Channels | | |
|--|---|-------------------|
| Method | Number of Hopping Channels from the EUT were measured according to the procedure of DA 00-705-2003 The EUT must have its hopping function enabled. 1. Use the following spectrum analyzer settings: 2. Span = the frequency band of operation 3. RBW \geq 1 % of Span 4. VBW \geq RBW. 5. Detector = peak. 6. Sweep time = auto couple. 7. Trace mode = max hold. 8. Allow trace to fully stabilize. 9. It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s) | |
| Reference Clause | Part15 C Section 15.247 (a)(1)(iii) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 25.2 °C |
| | Relative Humidity | 48.1 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 2402 MHz - 2480 MHz | Antenna port |

Configuration Settings

| Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---|---|---|
| 1 | 2 | 2 |
| Supplementary information: None | | |

Limits

§15.247(a)(1)(iii) : Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

§15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

Measurement Results

Table 4. Data Table of Number of Hopping Channels



| Operating Mode | Data Rate (Mbps) | Measurement Result | Limit |
|----------------|------------------|--------------------|-------|
| GFSK | 1 | 79 | ≥ 75 |
| 8DPSK | 3 | 79 | |

Remark:



Measurement is made with EUT operating in hopping mode between 79 channels providing a worst case scenario as compared to AFH mode hopping between 20 channels.

Plots of Number of Hopping Channels

GFSK

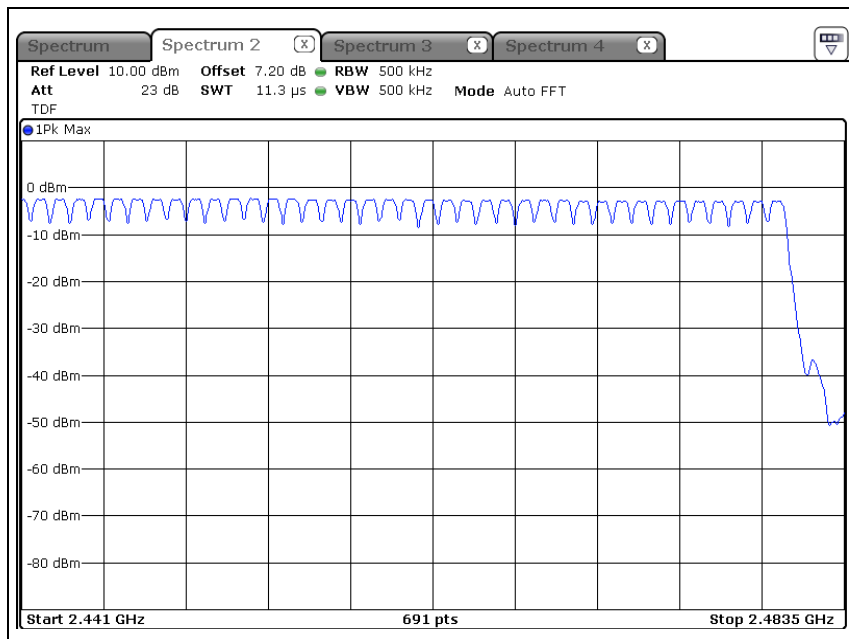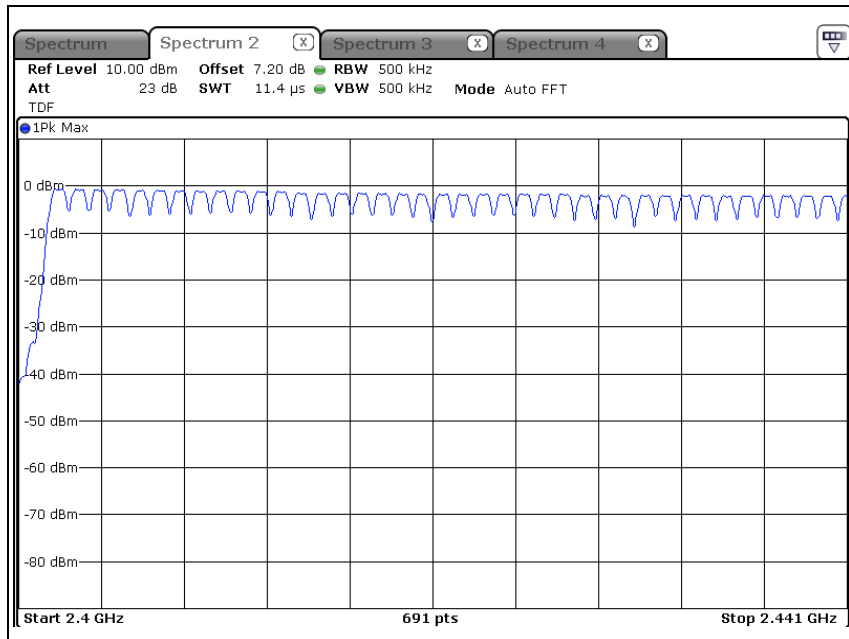

8DPSK

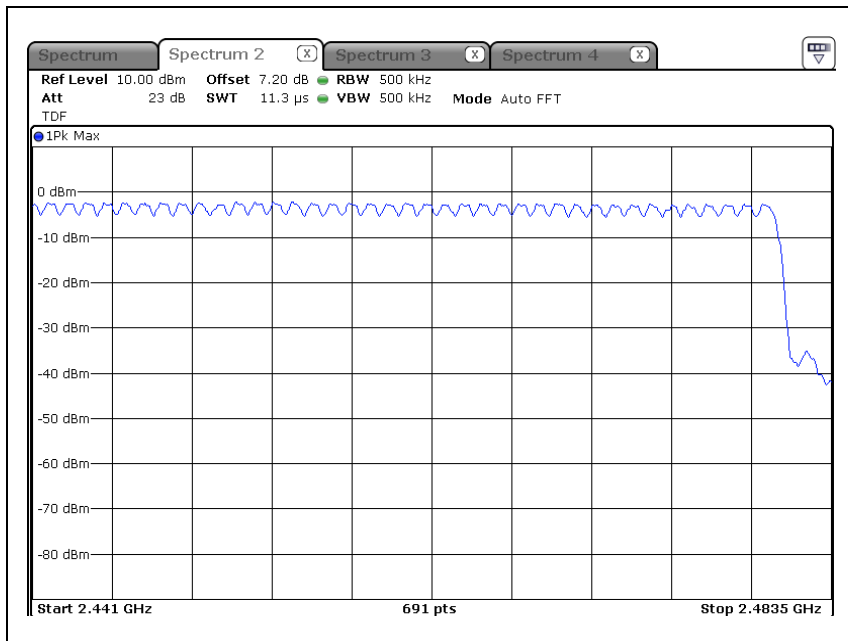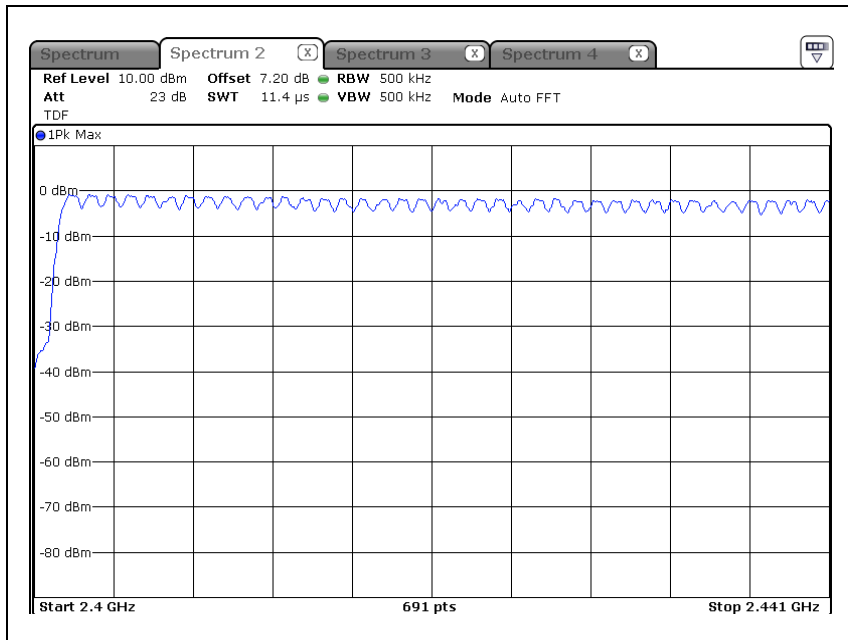

5.5. Average Time of Occupancy

| TEST: Average Time of Occupancy | | |
|--|---|-------------------|
| Method | Average Time of Occupancy from the EUT were measured according to the procedure of DA 00-705-2003 The EUT must have its hopping function enabled. 1. Use the following spectrum analyzer settings: 2. Span = zero span, centered on a hopping channel 3. RBW = 1 MHz 4. VBW \geq RBW. 5. Detector = peak. 6. Sweep time = as necessary to capture the entire dwell time per hopping channel. 7. Trace mode = max hold. 8. Allow trace to fully stabilize. 9. If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer. | |
| Reference Clause | Part15 C Section 15.247 (a)(1)(iii) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 24.5 °C |
| | Relative Humidity | 31.5 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 2441 MHz | Antenna port |

Configuration Settings

| Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---|---|---|
| 1 | 2 | 2 |
| Supplementary information: None | | |

Limits

§15.247(a)(1) (iii) : For Frequency hopping systems in the 2400–2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Measurement Results

Table 5. Data Table of Time of Occupancy

● **Non-AFH mode**

| Operating Mode | Data Rate (Mbps) | Packet Type | Burst on Time (ms/hop) | Hops per second (hop/s) | Period (s) | Dwell Time (ms) | Limit (ms) |
|----------------|------------------|-------------|------------------------|-------------------------|------------|-----------------|------------|
| GFSK | 1 | DH1 | 0.391 | 10.13 | 31.6 | 125.26 | 400 |
| | | DH3 | 1.645 | 5.06 | 31.6 | 263.02 | |
| | | DH5 | 2.899 | 3.38 | 31.6 | 309.59 | |
| 8DPSK | 3 | 3DH1 | 0.400 | 10.13 | 31.6 | 127.90 | |
| | | 3DH3 | 1.653 | 5.06 | 31.6 | 264.33 | |
| | | 3DH5 | 2.914 | 3.38 | 31.6 | 311.24 | |

Dwell time calculation

- Dwell time = Pulse time * Hops per second within channel * Period time
- Hops per second within channel = 1600 hops/slot/no of channels
- DH1 = 1600/2/79(10.13), DH3 = 1600/4/79(5.06), DH5 = 1600/6/79(3.38)
- Period time = 0.4 sec * 79 channel = 31.6 sec

● **AFH mode**


| Operating Mode | Data Rate (Mbps) | Packet Type | Burst on Time (ms/hop) | Hops per second (hop/s) | Period (s) | Dwell Time (ms) | Limit (ms) |
|----------------|------------------|-------------|------------------------|-------------------------|------------|-----------------|------------|
| GFSK | 1 | DH1 | 0.391 | 20 | 8 | 62.56 | 400 |
| | | DH3 | 1.645 | 10 | 8 | 131.60 | |
| | | DH5 | 2.899 | 6.67 | 8 | 154.61 | |
| 8DPSK | 3 | 3DH1 | 0.4 | 20 | 8 | 64.00 | |
| | | 3DH3 | 1.653 | 10 | 8 | 132.24 | |
| | | 3DH5 | 2.914 | 6.67 | 8 | 155.41 | |

Dwell time calculation


- Dwell time = Pulse time * Hops per second within channel * Period time
- Hops per second within channel = 1600 hops/slot/no of channels
- DH1 = 1600/2/20(20), DH3 = 1600/4/20(10), DH5 = 1600/6/20(6.67)
- Period time = 0.4 sec * 20 channel = 8 sec

Figure 4. Plots of Average Time of Occupancy


GFSK
 DH1

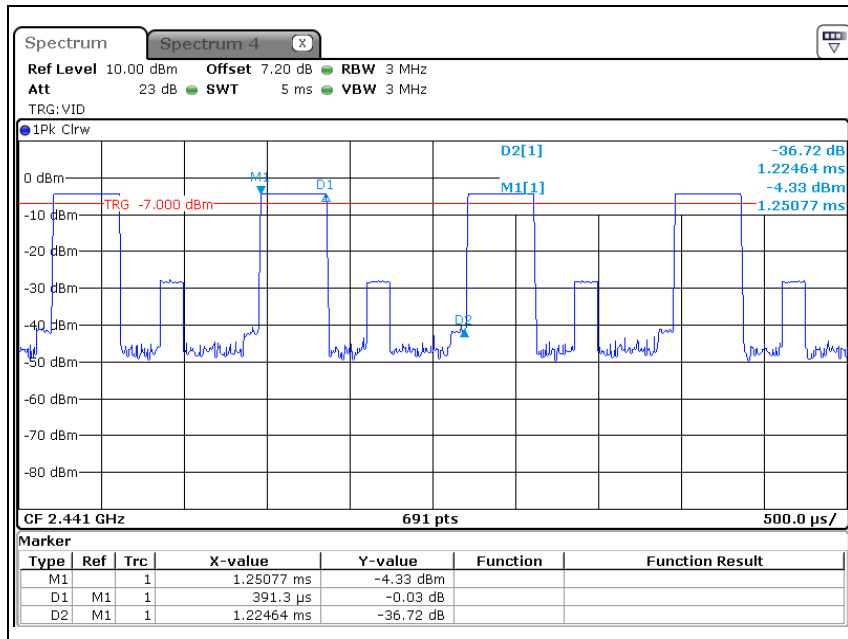


DH3

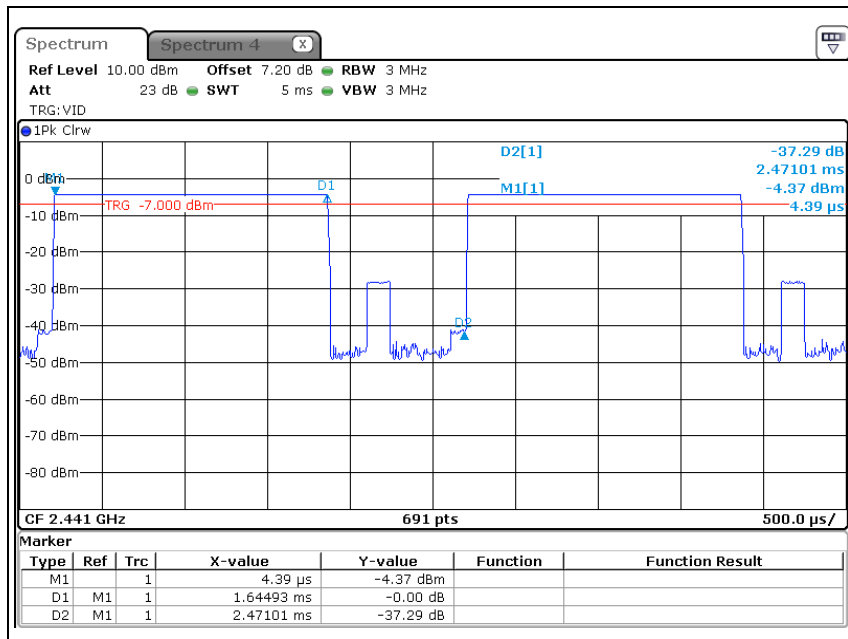


DH5

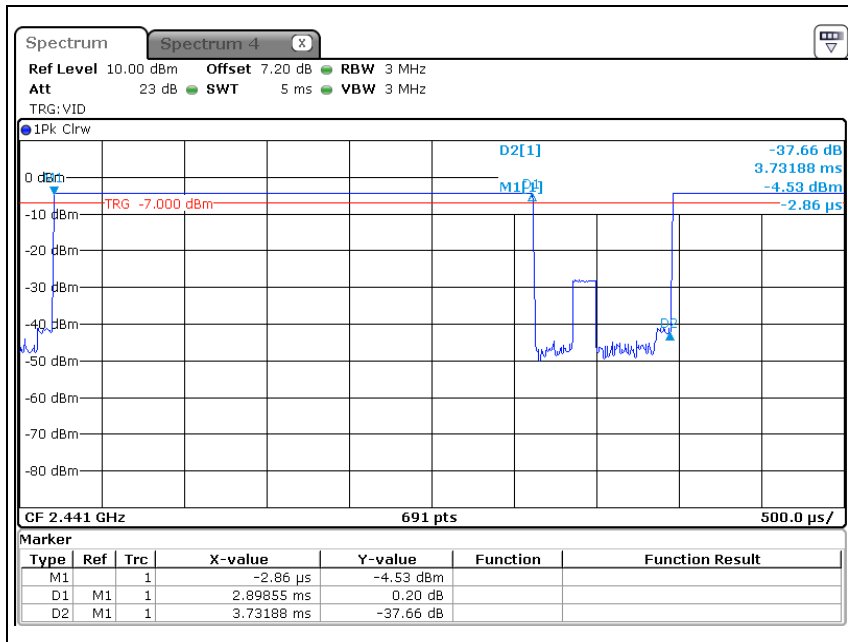


8DPSK
 DH1

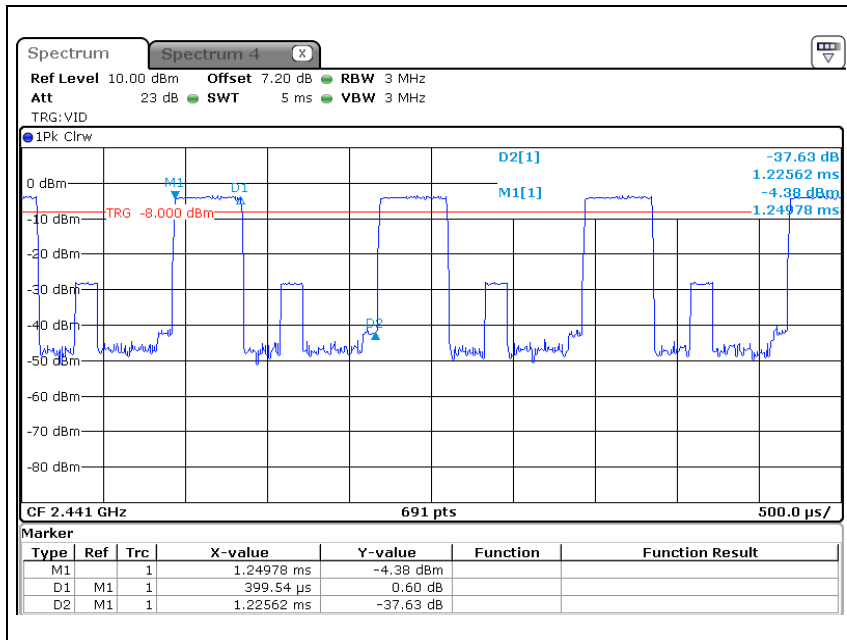

DH3

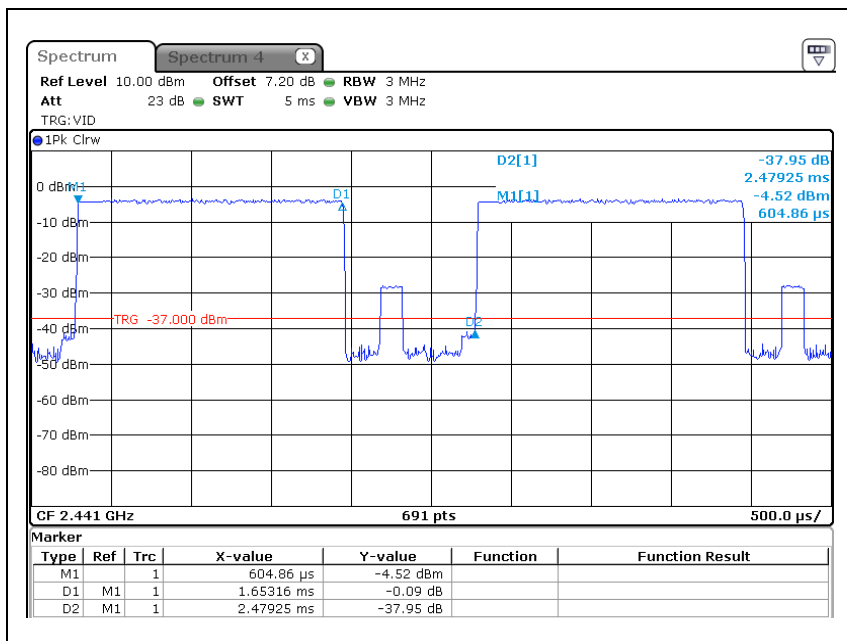

DH5

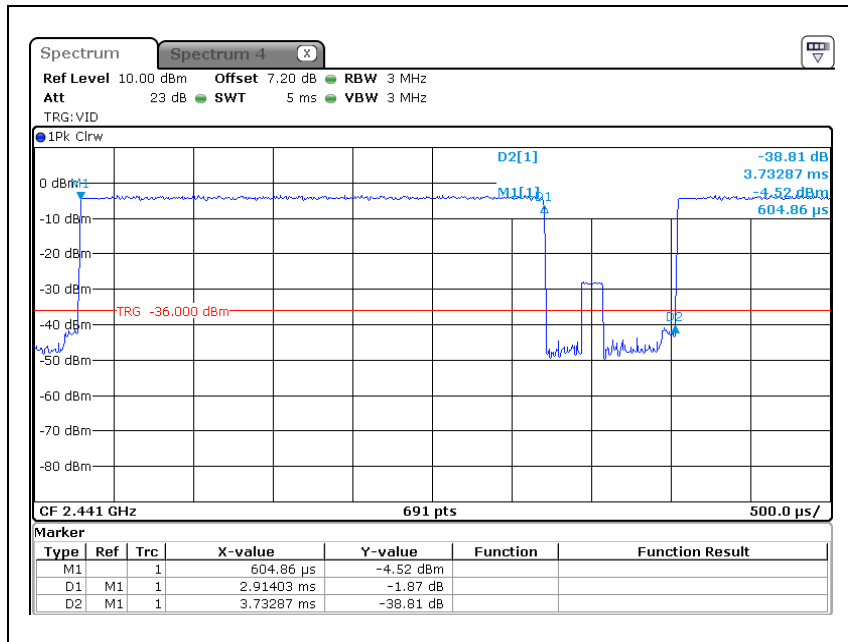

5.6. Conducted spurious emission Measurement

| TEST: Conducted spurious emission measurement | | |
|--|--|-------------------|
| Method | Conducted spurious emission from the EUT were measured according to the procedure of DA 00-705-2003 Measurement Procedure – Reference Level 1. Set the RBW = 100 kHz., VBW \geq 300 kHz. 2. Set the span to 5-30 % greater than the EBW. 4. Detector = peak. 5. Sweep time = auto couple. 6. Trace mode = max hold. 8. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW. Measurement Procedure - Unwanted Emissions 1. Set RBW, VBW, detector as same with above 2. Set span to encompass the spectrum to be examined. | |
| Reference Clause | Part15 C Section 15.247 (d) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 25.2 °C |
| | Relative Humidity | 48.1 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 30 MHz – 26.5 GHz | Antenna port |

Configuration Settings

| Test Item | Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---------------------------------|---|---|---|
| Conducted Spurious emission | 1 | 1 | 2 |
| Supplementary information: None | | | |



Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))


Measurement Results

Figure 5. Plots of Band-Edge and Restricted / Non-Restricted frequency bands



GFSK
Low

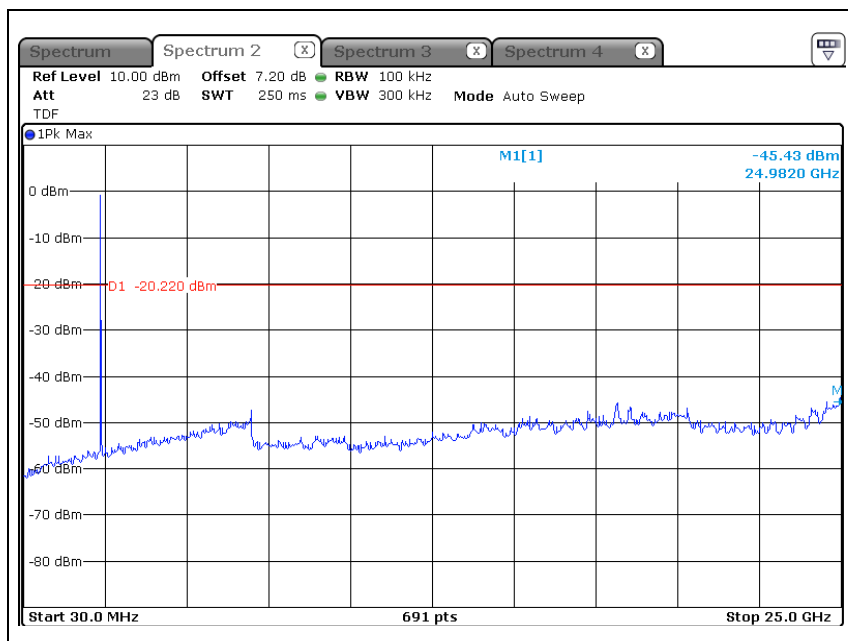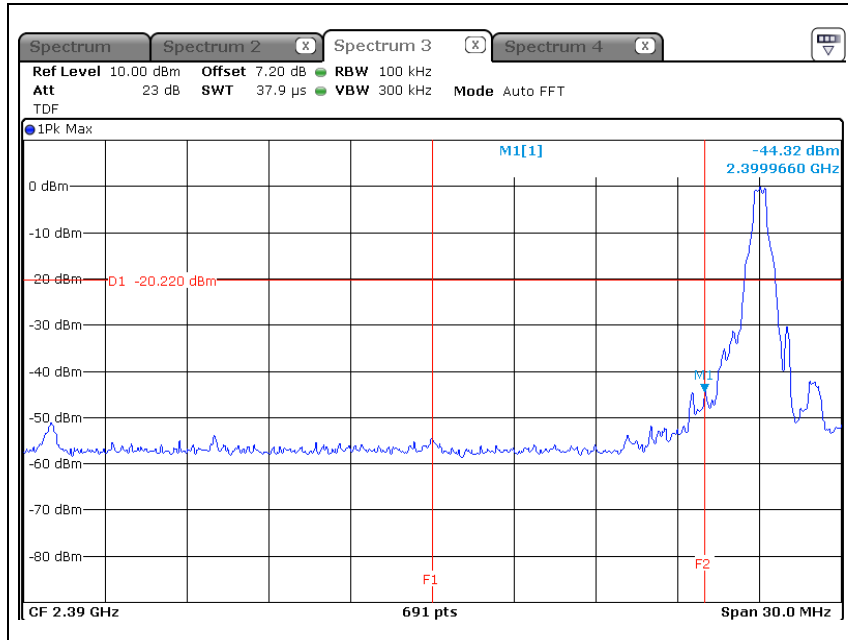



Middle

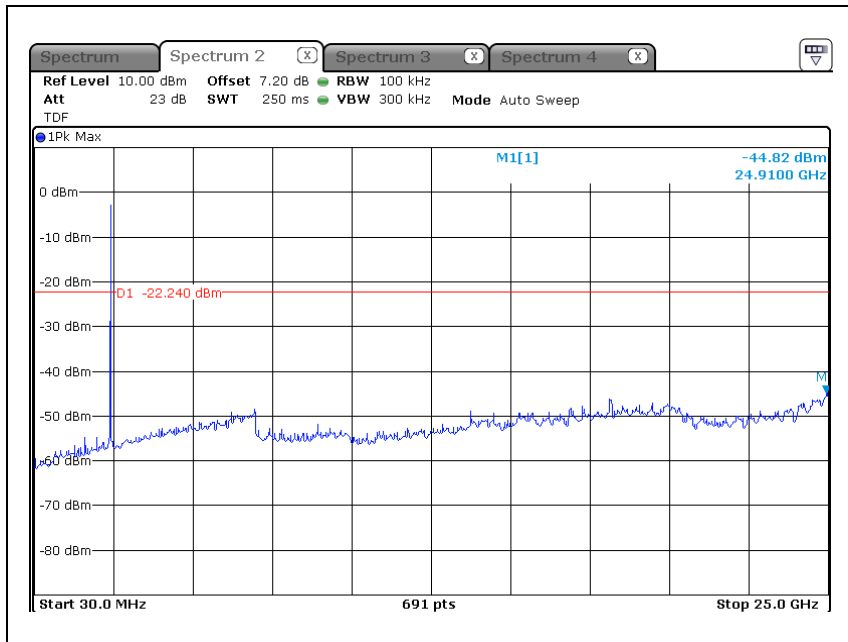



High

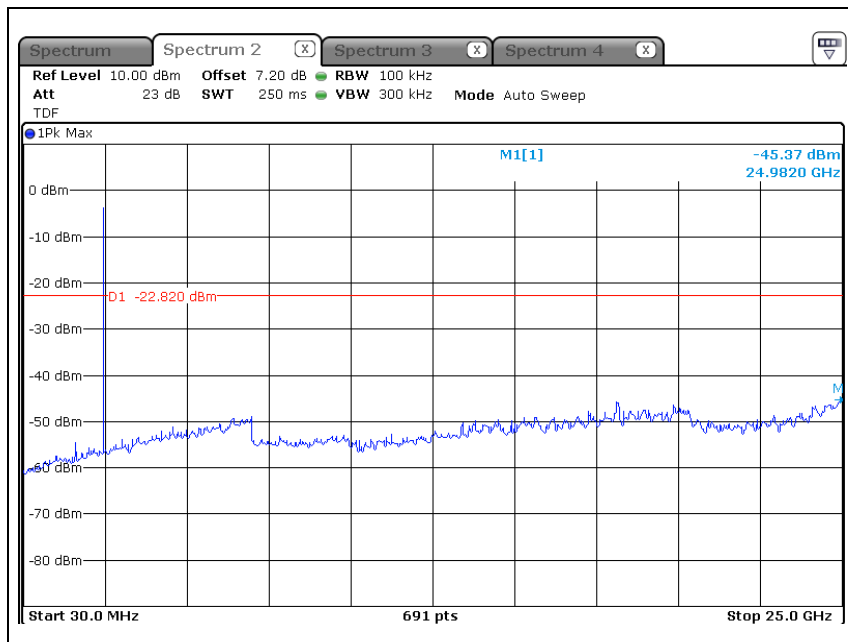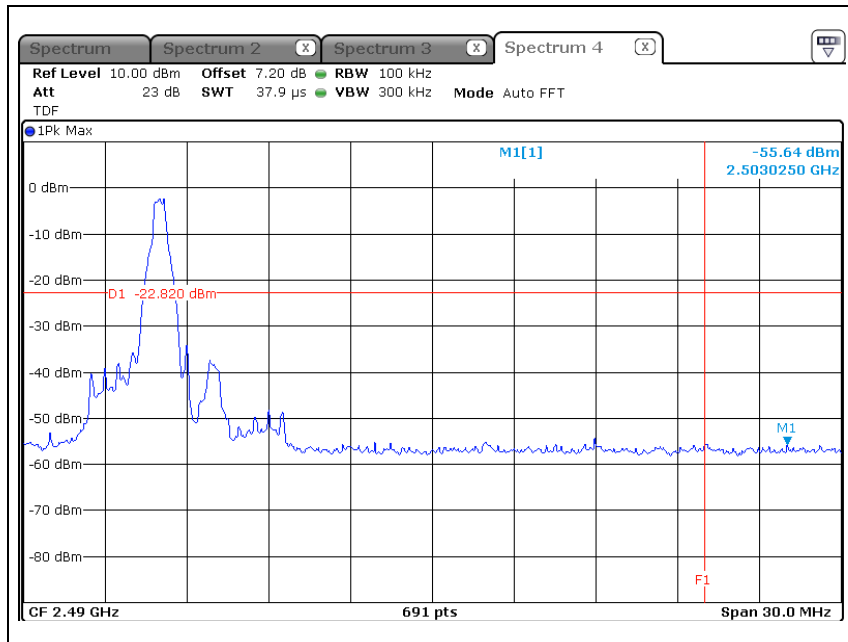


Bandedge at Hopping

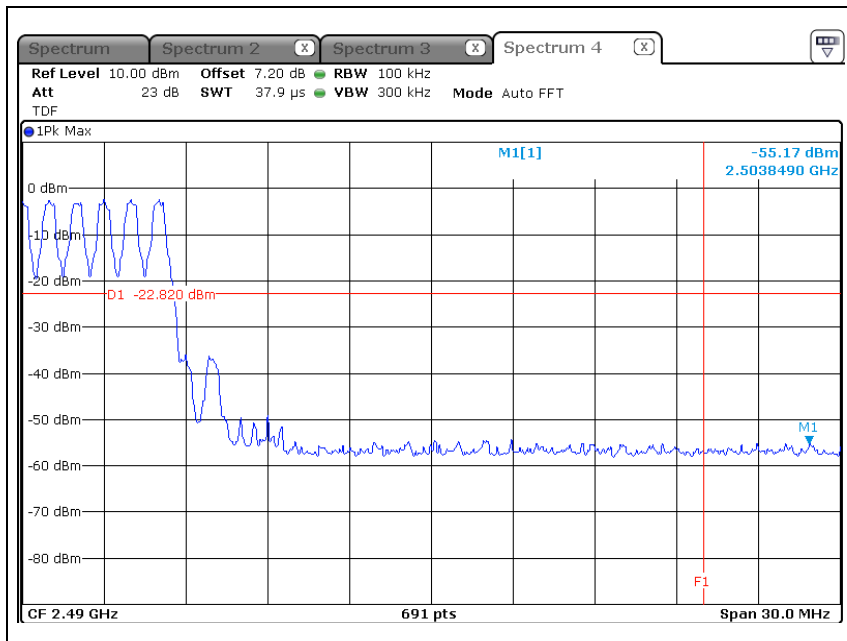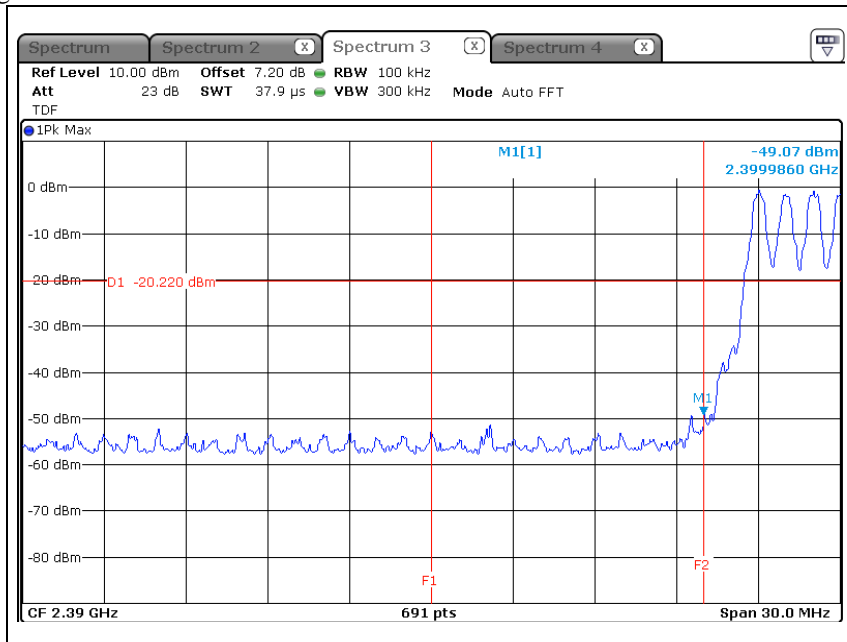



8DPSK
Low

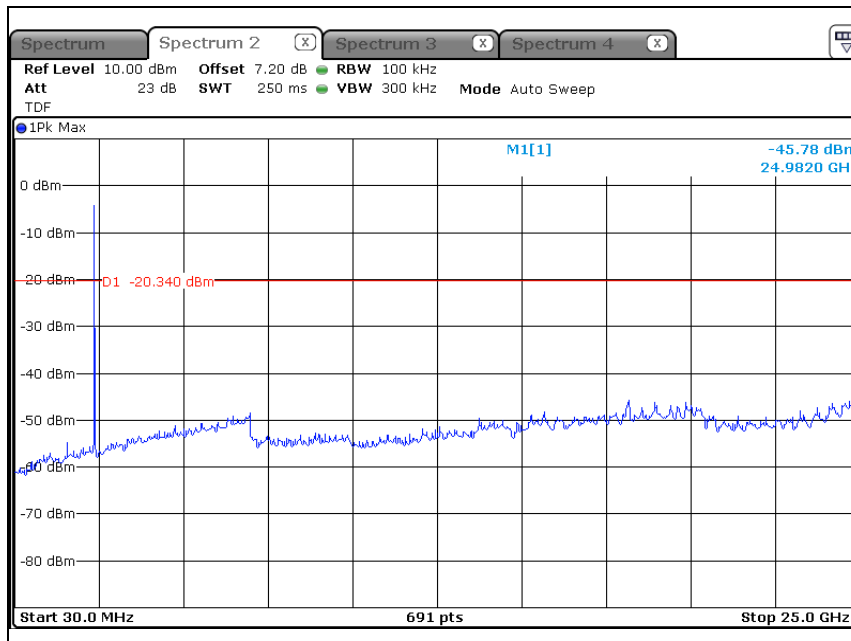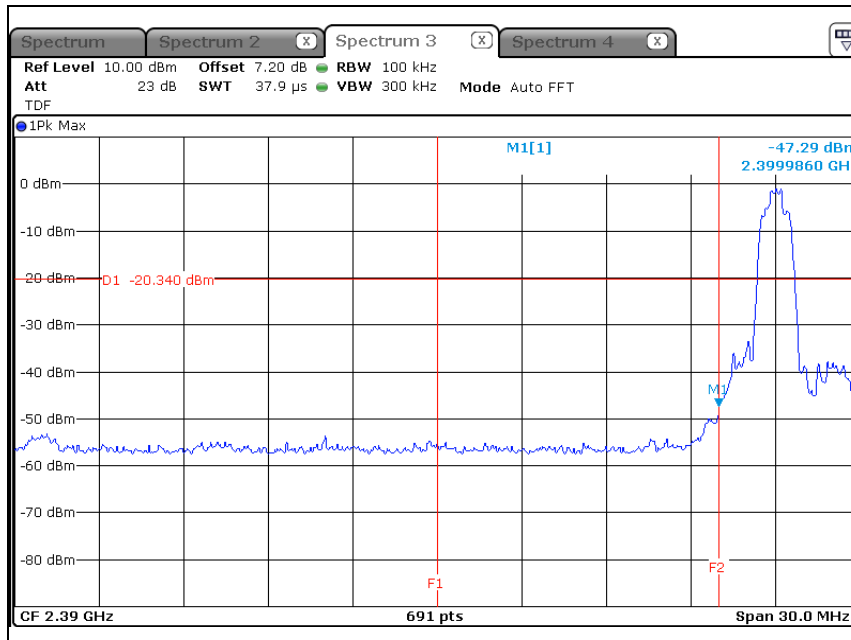



Middle

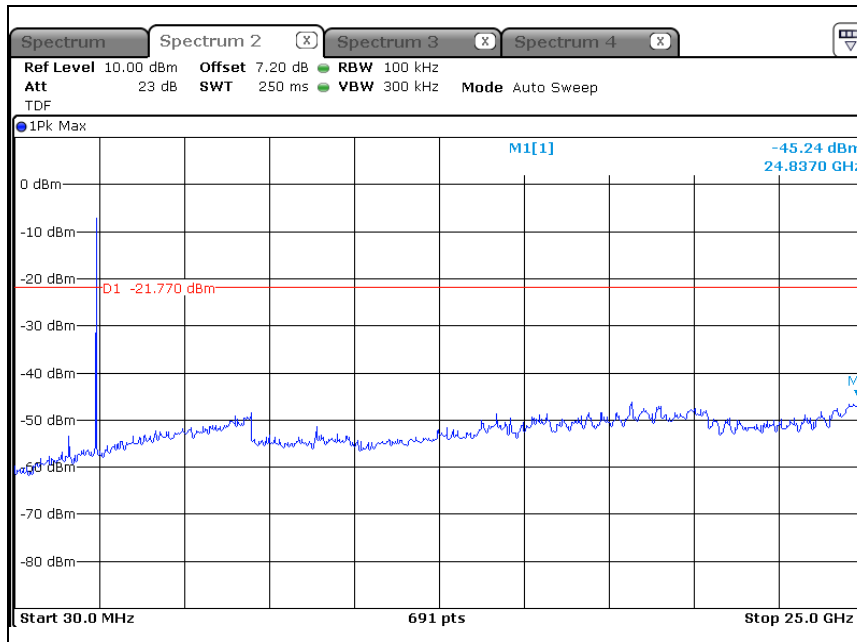

High

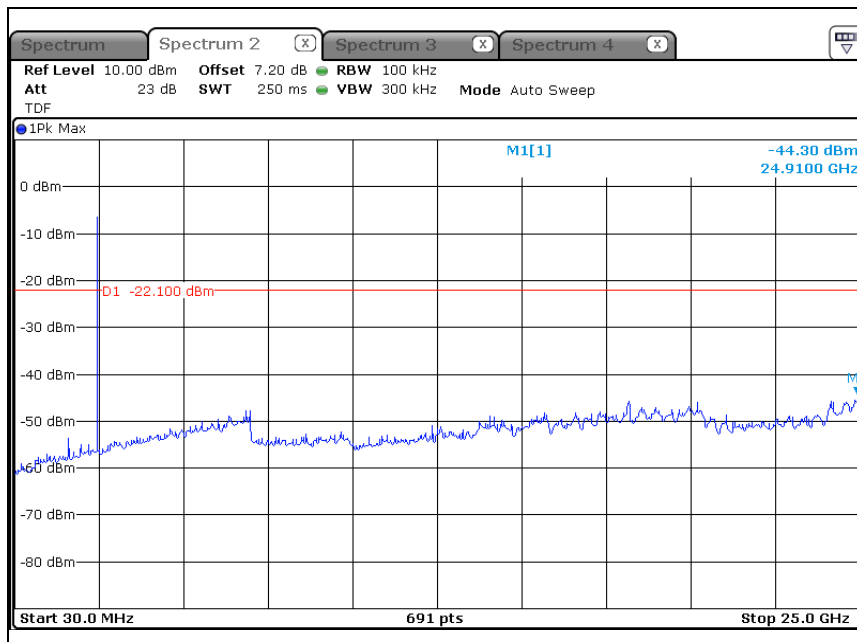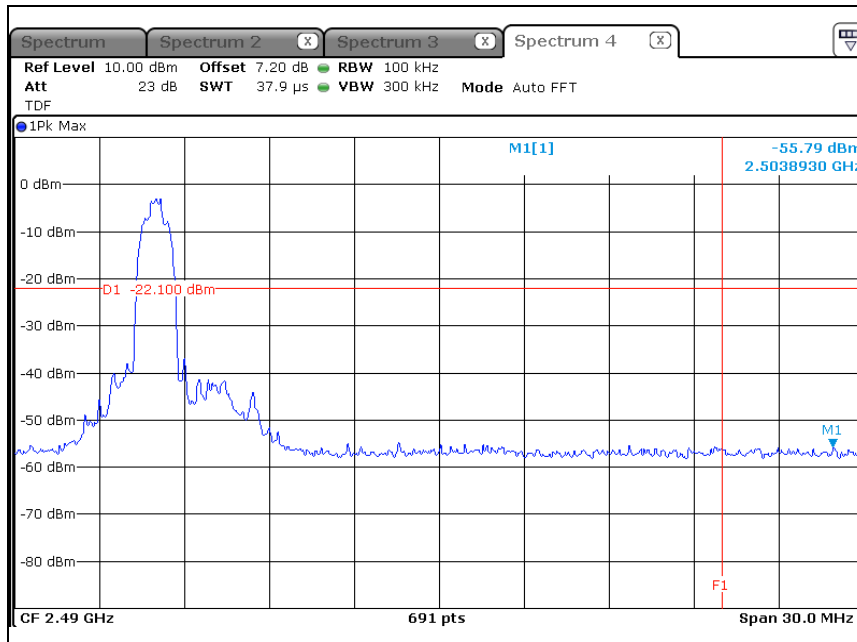

Bandedge at Hopping

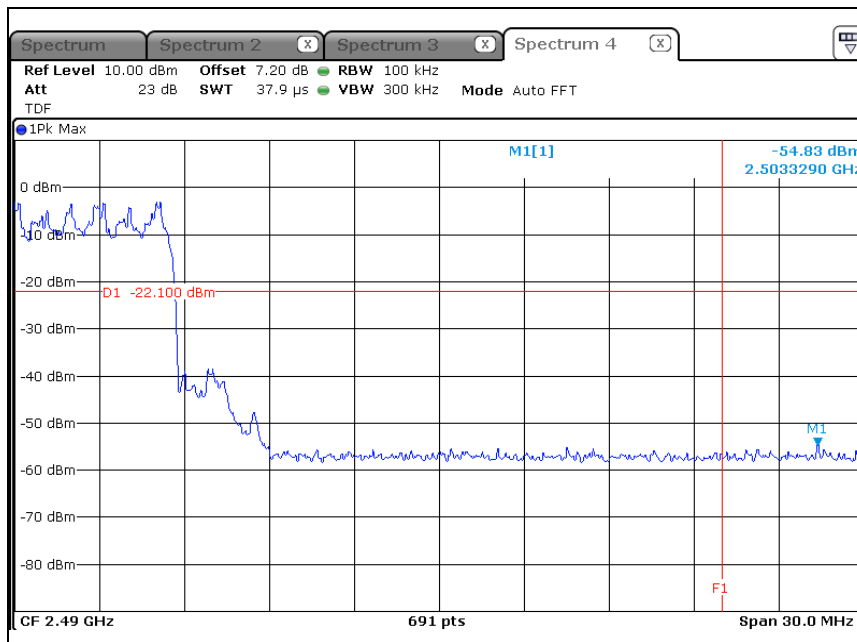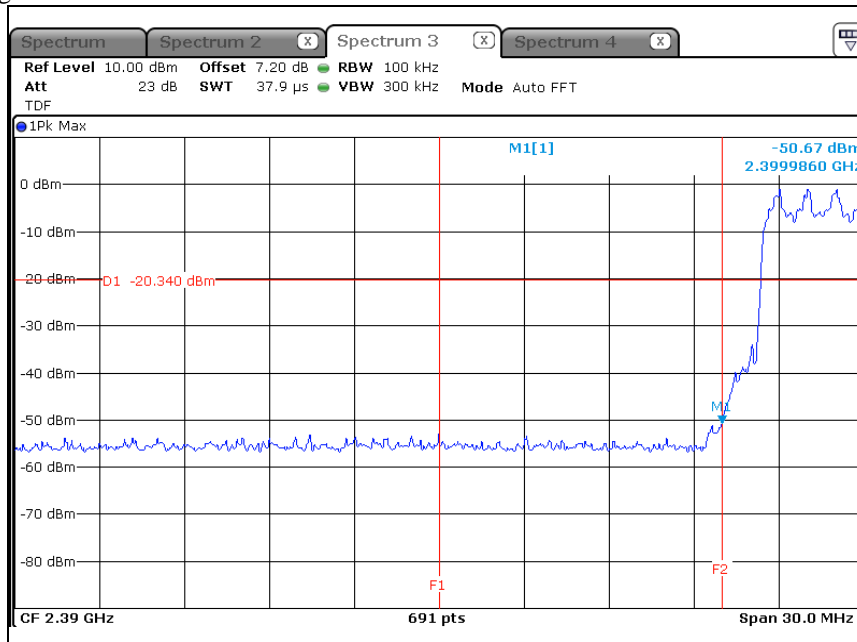

5.7. Radiated Spurious Emissions Measurement

| TEST: Radiated spurious emissions measurement | | |
|--|--|-------------------|
| Method | Radiated emissions from the EUT were measured according to ANSI C63.10 procedure. 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation. The antenna is varied from 1 to 4 meters above the ground to find the maximum field strength. Measurement are made with both horizontal and vertical polarizations For fundamental investigation, the EUT was positioned for 3 orthogonal orientations. 2. For measurement below 1GHz, the resolution bandwidth is set to 100 kHz for peak detection or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. 3. For measurement above 1GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/Ton Hz (Ton = On-time of the Pulsed emission) for Average detection (AV) at frequency above 1 GHz. VBW = 360 Hz \geq 1/Ton Hz, pulse width in seconds (Ton = 2.90 ms). Refer to the DH5, 3DH5 of Time of Occupancy (Dwell Time) test item. 4. For 2.4GHz transmitter measurement, the spectrum from 30 MHz to 26GHz is investigated for Low, Mid and High channels. 5. For 5 GHz transmitter measurement, the spectrum from 30 MHz to 40GHz is investigated for Low, Mid and High channels. | |
| Reference Clause | Part15 C Section 15.247 (d) | |
| Parameters recorded during the test | Laboratory Ambient Temperature | 23.1 °C |
| | Relative Humidity | 33.2 % |
| | Frequency range | Measurement Point |
| Fully configured sample scanned over the following frequency range | 30 MHz – 40 GHz | 3 meter chamber |

Configuration Settings

| Test Item | Power Interface Mode # (See Section 3.3) | EUT Operation Mode # (See Section 3.5) | Test Configurations Mode # (See Section 3.7) |
|---------------------------------|---|---|---|
| Radiated Spurious emission | 1 | 1 | 1 |
| Supplementary information: None | | | |

Limits

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))


According to § 15.209(a), the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Distance (meters) | Field Strength (dBuV/m) | Field Strength (uV/m) |
|-----------------|-------------------|-------------------------|-----------------------|
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

5.7.1. Radiated Spurious Emissions Below 1 GHz

Measurement method : Radiated Conducted
 Mode of operation : Continuous Wave
 Power setting : Max. Power condition declared by the manufacturer
 Worst case configuration : 8DPSK Low channel

Figure 6. Test data for Radiated emission Below 1 GHz

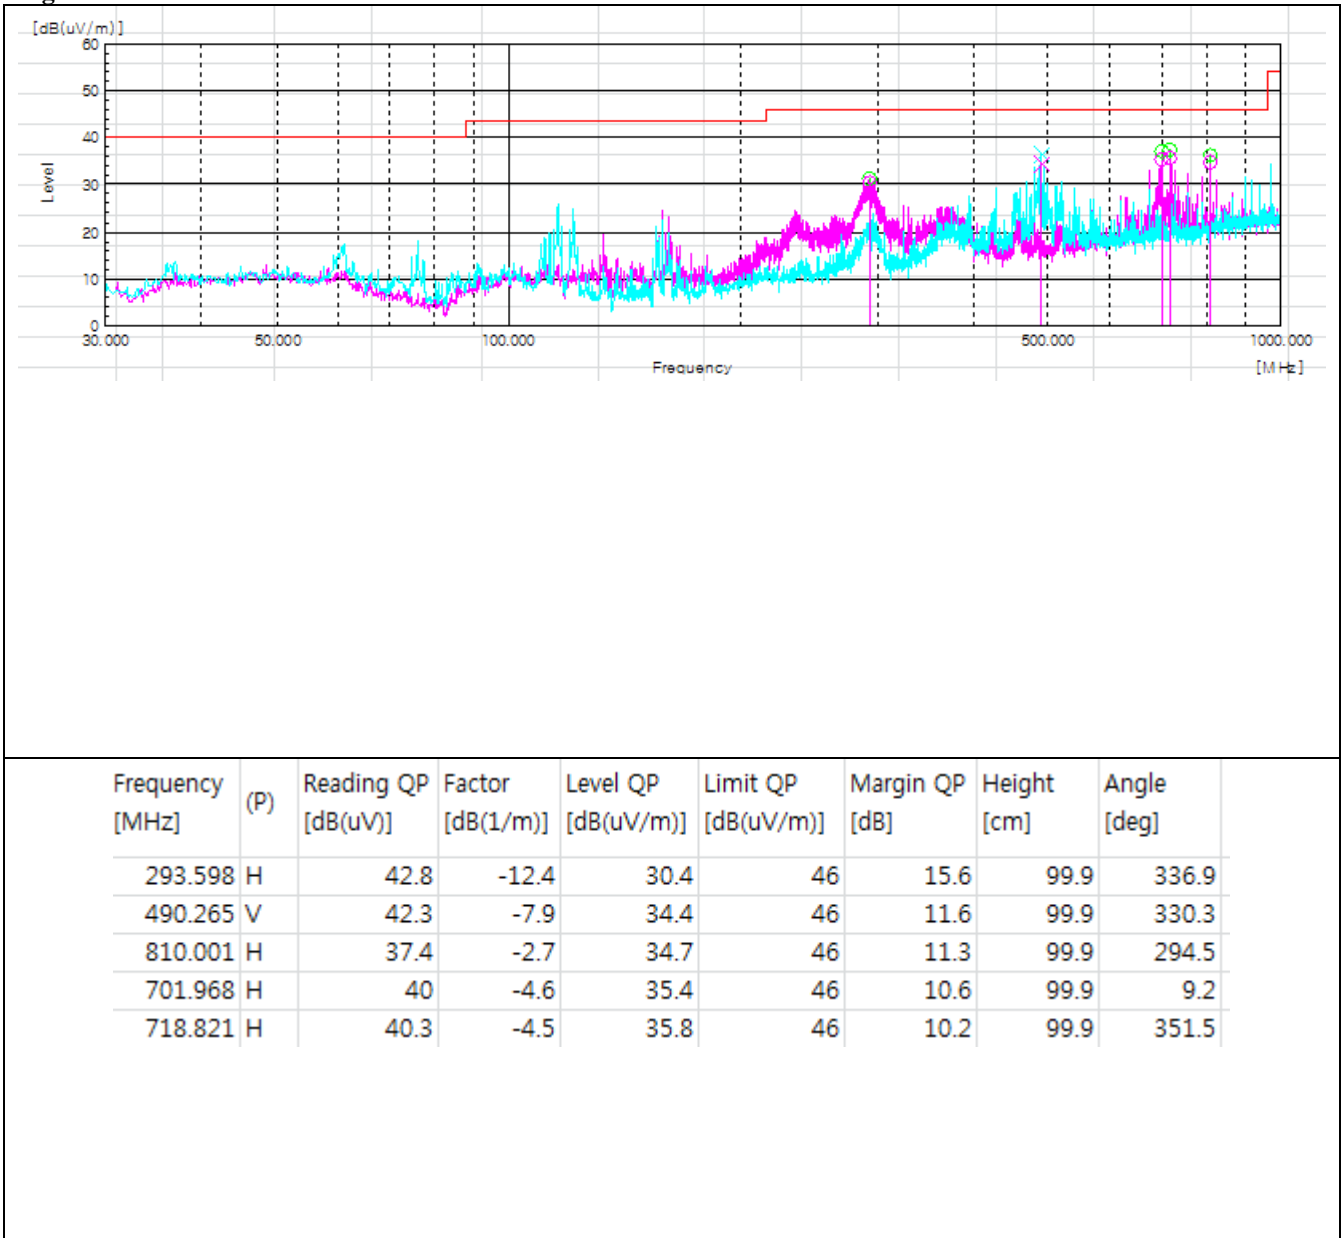

Supplementary information:

- The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels of 30 dB below than the limit is not reported.
- The worst case is x-axis and reported.
- Actual = Reading + AF + AMP + CL (AF : Antenna factor, AMP : Amp gain, CL : Cable loss)
- Margin = Limit (dBuV/m) - Actual (dBuV/m)

5.7.2. Radiated Spurious Emissions Above 1 GHz – 2.4 GHz band

Measurement method : Radiated Conducted
 Mode of operation : 2.4 GHz band Continuous Wave
 Power setting : Max. Power condition declared by the manufacturer

Table 6. GFSK Low Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|----------------|-------------|------|--------------------|---------------------|----------------|-----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1600.25 | 46.2 | Peak | V | N/A | -3.0 | 74 | 43.2 | 30.8 |
| 1600.25 | 32.4 | Average | V | N/A | -3.0 | 54 | 29.4 | 24.6 |
| *2376.25 | 47.5 | Peak | H | N/A | 0.4 | 74 | 47.9 | 26.1 |
| *2376.25 | 43.2 | Average | H | N/A | 0.4 | 54 | 43.6 | 10.4 |
| 2810.00 | 43.6 | Peak | V | N/A | 0.6 | 74 | 44.2 | 29.8 |
| 2810.00 | 28.2 | Average | V | N/A | 0.6 | 54 | 28.8 | 25.2 |

Table 7. GFSK Mid Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|----------------|-------------|------|--------------------|---------------------|----------------|-----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1628.00 | 42.3 | Peak | V | N/A | -2.8 | 74 | 39.5 | 34.5 |
| 1628.00 | 33.0 | Average | V | N/A | -2.8 | 54 | 30.2 | 23.8 |
| 2809.75 | 41.5 | Peak | V | N/A | 0.6 | 74 | 42.1 | 31.9 |
| 2809.75 | 29.7 | Average | V | N/A | 0.6 | 54 | 30.3 | 23.7 |

Table 8. GFSK High Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|----------------|-------------|------|--------------------|---------------------|----------------|-----------------|-------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1584.25 | 42.1 | Peak | V | N/A | -3.2 | 74 | 38.9 | 35.1 |
| 1584.25 | 30.3 | Average | V | N/A | -3.2 | 54 | 27.1 | 26.9 |
| 1654.00 | 43.1 | Peak | H | N/A | -2.6 | 74 | 40.5 | 33.5 |
| 1654.00 | 31.7 | Average | H | N/A | -2.6 | 54 | 29.1 | 24.9 |
| *2483.50 | 62.6 | Peak | H | N/A | 0.5 | 74 | 63.1 | 10.9 |
| *2483.50 | 48.6 | Average | H | N/A | 0.5 | 54 | 49.1 | 4.9 |
| 2809.75 | 41.6 | Peak | V | N/A | 0.6 | 74 | 42.2 | 31.8 |
| 2809.75 | 26.7 | Average | V | N/A | 0.6 | 54 | 27.3 | 26.7 |

Supplementary information:

- The frequency spectrum from 1 GHz to 26.5 GHz was investigated. Emission levels of 40 dB below than the limit is not reported.
- “*” means the restricted band.
- The worst case is x-axis and reported.
- Actual = Reading+ Amp gain + AF + CL (AF : Antenna factor, CL : Cable loss)
- Distance factor = $20\log(\text{Measurement distance} / \text{The measured distance})$
- Margin = Limit (dBuV/m) - Actual (dBuV/m)
- The resolution bandwidth of receiver/spectrum analyzer is 1MHz and the video bandwidth is 1/T Hz for Average detecting (AV) at frequency above 1GHz.
 (T=2.90ms, 1/T=344Hz, so set the VBW = 500Hz)

Table 9. 8DPSK Low Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|-------------------|----------------|------|--------------------|------------------------|-------------------|--------------------|----------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1600.25 | 46.2 | Peak | V | N/A | -3.0 | 74 | 43.2 | 30.8 |
| 1600.25 | 34.2 | Average | V | N/A | -3.0 | 54 | 31.2 | 22.8 |
| *2376.00 | 48.0 | Peak | H | N/A | 0.4 | 74 | 48.4 | 25.6 |
| *2376.00 | 46.4 | Average | H | N/A | 0.4 | 54 | 46.8 | 7.2 |
| 2810.00 | 41.2 | Peak | V | N/A | 0.6 | 74 | 41.8 | 32.2 |
| 2810.00 | 28.8 | Average | V | N/A | 0.6 | 54 | 29.4 | 24.6 |

Table 10. 8DPSK Middle Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|-------------------|----------------|------|--------------------|------------------------|-------------------|--------------------|----------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1628.00 | 45.6 | Peak | V | N/A | -2.8 | 74 | 42.8 | 31.2 |
| 1628.00 | 32.0 | Average | V | N/A | -2.8 | 54 | 29.2 | 24.8 |
| 2809.75 | 41.2 | Peak | V | N/A | 0.6 | 74 | 41.8 | 32.2 |
| 2809.75 | 28.5 | Average | V | N/A | 0.6 | 54 | 29.1 | 24.9 |

Table 11. 8DPSK High Channel

| Radiated emissions | | | Ant | Correction factors | | Limit (dBuV/m) | Total | |
|--------------------|-------------------|----------------|------|--------------------|------------------------|-------------------|--------------------|----------------|
| Frequency (MHz) | Reading (dBuV) | Detect Mode | Pol. | Distance (dB) | Amp gain+CL+AF (dB) | | Actual (dBuV/m) | Margin (dB) |
| 1652.25 | 42.3 | Peak | H | N/A | -2.6 | 74 | 39.7 | 34.3 |
| 1652.25 | 31.2 | Average | H | N/A | -2.6 | 54 | 28.6 | 25.4 |
| *2483.50 | 65.0 | Peak | H | N/A | 0.5 | 74 | 65.5 | 8.5 |
| *2483.50 | 50 | Average | H | N/A | 0.5 | 54 | 50.5 | 3.5 |
| 2809.75 | 43.3 | Peak | V | N/A | 0.6 | 74 | 43.9 | 30.1 |
| 2809.75 | 28.1 | Average | V | N/A | 0.6 | 54 | 28.7 | 25.3 |

Supplementary information:

- The frequency spectrum from 1 GHz to 26.5 GHz was investigated. Emission levels of 40 dB below than the limit is not reported.
- “*” means the restricted band.
- The worst case is x-axis and reported.
- Actual = Reading+ Amp gain + AF + CL (AF : Antenna factor, CL : Cable loss)
- Distance factor = $20\log(\text{Measurement distance} / \text{The measured distance})$
- Margin = Limit (dBuV/m) - Actual (dBuV/m)
- The resolution bandwidth of receiver/spectrum analyzer is 1MHz and the video bandwidth is 1/T Hz for Average detecting (AV) at frequency above 1GHz.
 (T=2.90ms, 1/T=344Hz, so set the VBW = 500Hz)

5.8. Antenna Requirement

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section § 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in Db that the gain of the antenna exceeds 6 dBi.

5.8.2. Antenna Connected Construction

The antenna used of this product is Metal Stamping Antenna Assembly and peak max gain of each antennas as below . :

| Band | 2402 – 2480 MHz |
|--------------------|-----------------|
| Antenna Gain (dBi) | 0.7 |

APPENDIX A. Accreditations and Authorizations



KOLAS: Accredited by Korea Laboratory Accreditation Scheme (KOLAS) as Testing Laboratory in accordance with the provisions of Article 23 of the National Standards Act. These criteria encompass the requirements of ISO/IEC 17025:2000.
KOLAS No.: 231



FCC: Details of the measurement facilities used for these tests have been filed with the Federal Communications Commission's Laboratory in Columbia, Maryland and accepted in a letter dated April 01, 2005 (FCC CAB: KR0040).



Industry Canada Industrie Canada

Industry of Canada: Accredited by Industry Canada for performance of radiated measurements.
Industry Canada Registration No.: 8035A



VCCI: Accepted as an Associate Member to the VCCI. The measurement facilities detailed in this test
VCCI Registration No.: R-3327, G-198, C-3706, T-1849

Appendix B _ Measurement Uncertainties

| Test | Uncertainty | |
|---------------------|---|---|
| Conducted Emissions | 9 kHz ~ 150 kHz = ± 3.82 dB 150 kHz ~ 30 MHz = ± 3.43 dB (* Note see) | |
| Radiated emission | 30 MHz ~ 300 MHz | 3 m: + 4.86 [dB], - 4.88 [dB] 10 m: + 4.86 [dB], - 4.86 [dB] |
| | 300 MHz ~ 1 000 MHz | 3 m: + 4.98 [dB], - 4.99 [dB] 10 m: + 4.85 [dB], - 4.87 [dB] |
| | 1 GHz ~ 6 GHz | 3 m: + 6.19 [dB], - 6.20 [dB] |