

---


---

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	92
A.2.3 Emissions in Non-restricted Frequency Bands:.....	95
<b>A.3 DTS/OCCUPIED BANDWIDTH</b> .....	<b>96</b>
A.3.1 DTS/Occupied Bandwidth Result.....	96
A.3.2 Measurement Plots .....	98
<b>A.4 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>120</b>
A.4.1 Peak Output Power .....	120
A.4.2 Average Output Power (Reporting only).....	124
A.4.3 Measurement Plots .....	128
<b>A.5 EMISSION LIMITATIONS</b> .....	<b>130</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>156</b>
A.6.1 Power Spectral Density Result .....	156
A.6.2 Measurement Plots .....	159

## A.1 CONDUCTED EMISSION

Test Date	2022/04/28	Temp./Hum.	27°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

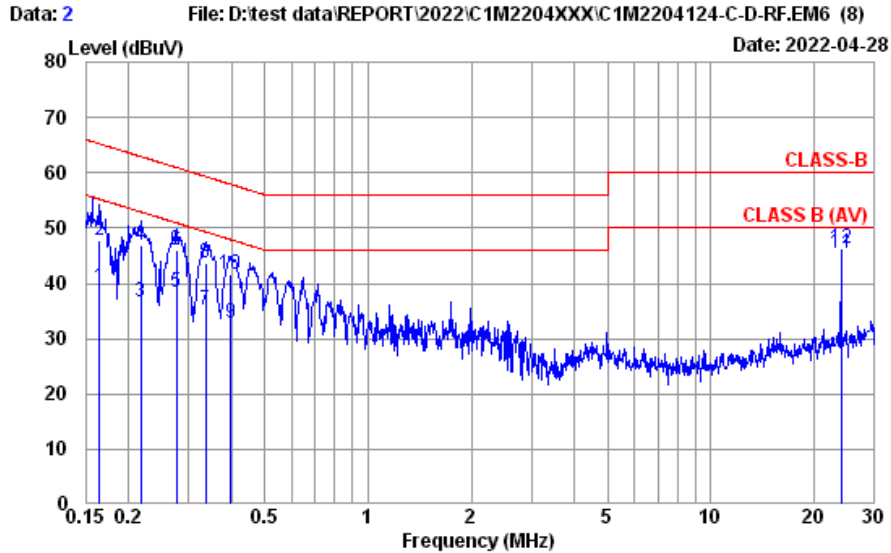

Site No.	: No.8 Shielded Room	Data No.	: 2
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV4200 (169)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 27°C / 47%	Engineer	: Chucky Chiu
EUT Model	: 14U70Q	Test Rating	: 120Vac/60Hz
Test Mode	: Normal		

#1


	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.165	10.62	0.03	9.85	18.63	39.13	55.21	16.08	Average
2	0.165	10.62	0.03	9.85	27.13	47.63	65.21	17.58	QP
3	0.217	10.55	0.03	9.85	16.13	36.56	52.92	16.36	Average
4	0.217	10.55	0.03	9.85	26.49	46.92	62.92	16.00	QP
5	0.276	10.51	0.03	9.85	18.09	38.48	50.94	12.46	Average
6	0.276	10.51	0.03	9.85	25.68	46.07	60.94	14.87	QP
7	0.336	10.47	0.03	9.85	14.79	35.14	49.31	14.17	Average
8	0.336	10.47	0.03	9.85	23.42	43.77	59.31	15.54	QP
9	0.398	10.44	0.03	9.85	12.36	32.68	47.90	15.22	Average
10	0.398	10.44	0.03	9.85	21.35	41.67	57.90	16.23	QP
11	24.034	14.85	0.21	9.96	20.28	45.30	50.00	4.70	Average
12	24.034	14.85	0.21	9.96	21.27	46.29	60.00	13.71	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.  
 No. 491, Zhongfu Rd., Linkou Dist.,  
 New Taipei City 244, Taiwan

Tel: +886 2 26099301  
 Fax: +886 2 26099303

Test Date	2022/04/28	Temp./Hum.	27°C/47%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

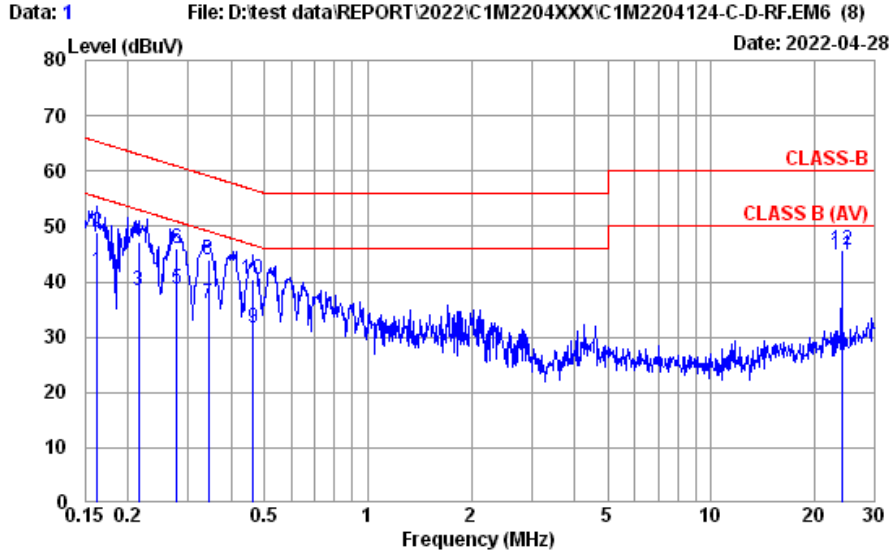

Site No. : No.8 Shielded Room Data No. : 1  
 Instrument 1 : Receiver ESR3(774)  
 Instrument 2 : EHV4200 (169)(A)|CE-08|ESH3-Z2 (354)  
 Limit : CLASS-B Phase : LINE  
 Environment : 27°C / 47% Engineer : Chucky Chiu  
 EUT Model : 14U70Q Test Rating : 120Vac/60Hz  
 Test Mode : Normal  
 #1

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.162	10.58	0.03	9.85	21.34	41.80	55.34	13.54	Average
2	0.162	10.58	0.03	9.85	28.50	48.96	65.34	16.38	QP
3	0.215	10.53	0.03	9.85	18.02	38.43	53.01	14.58	Average
4	0.215	10.53	0.03	9.85	26.78	47.19	63.01	15.82	QP
5	0.277	10.48	0.03	9.85	18.39	38.75	50.90	12.15	Average
6	0.277	10.48	0.03	9.85	25.65	46.01	60.90	14.89	QP
7	0.343	10.45	0.03	9.85	15.65	35.98	49.13	13.15	Average
8	0.343	10.45	0.03	9.85	23.61	43.94	59.13	15.19	QP
9	0.464	10.42	0.03	9.85	11.43	31.73	46.63	14.90	Average
10	0.464	10.42	0.03	9.85	20.14	40.44	56.63	16.19	QP
11	24.034	14.11	0.21	9.96	20.53	44.81	50.00	5.19	Average
12	24.034	14.11	0.21	9.96	21.50	45.78	60.00	14.22	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.  
 2. If the average limit is met when using a quasi-peak detector,  
 the EUT shall be deemed to meet both limits and measurement  
 with average detector is unnecessary.

## A.2 RADIATED EMISSION

Test Date	2022/04/25 ~ 05/18	Temp./Hum.	22 ~ 23°C/58 ~ 66%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Sam Chang

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
30.970	23.26	1.43	26.49	28.28	26.48	40.00	13.52	Peak
148.340	16.41	3.18	26.00	41.03	34.62	43.50	8.88	Peak
445.160	22.21	6.33	26.77	34.41	36.18	46.00	9.82	Peak
593.570	24.23	7.08	27.39	35.29	39.21	46.00	6.79	Peak
741.980	25.30	7.89	27.36	33.85	39.68	46.00	6.32	Peak
971.870	26.91	9.15	26.75	28.97	38.28	54.00	15.72	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
35.820	21.22	1.55	26.48	41.77	38.06	40.00	1.94	Peak
148.340	16.41	3.18	26.00	38.98	32.57	43.50	10.93	Peak
445.160	22.21	6.33	26.77	34.99	36.76	46.00	9.24	Peak
593.570	24.23	7.08	27.39	36.64	40.56	46.00	5.44	Peak
741.980	25.30	7.89	27.36	33.47	39.30	46.00	6.70	Peak
977.690	26.96	9.18	26.72	29.41	38.83	54.00	15.17	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

## Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
30.970	23.26	1.43	26.49	28.39	26.59	40.00	13.41	Peak
148.340	16.41	3.18	26.00	41.06	34.65	43.50	8.85	Peak
445.160	22.21	6.33	26.77	34.13	35.90	46.00	10.10	Peak
593.570	24.23	7.08	27.39	36.25	40.17	46.00	5.83	Peak
741.980	25.30	7.89	27.36	33.73	39.56	46.00	6.44	Peak
968.960	26.88	9.13	26.75	30.22	39.48	54.00	14.52	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
35.820	21.22	1.55	26.48	42.28	38.57	40.00	1.43	Peak
148.340	16.41	3.18	26.00	41.13	34.72	43.50	8.78	Peak
445.160	22.21	6.33	26.77	35.71	37.48	46.00	8.52	Peak
593.570	24.23	7.08	27.39	37.19	41.11	46.00	4.89	Peak
741.980	25.30	7.89	27.36	33.03	38.86	46.00	7.14	Peak
976.720	26.94	9.17	26.72	28.96	38.35	54.00	15.65	Peak


A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics

**Band Edge:**

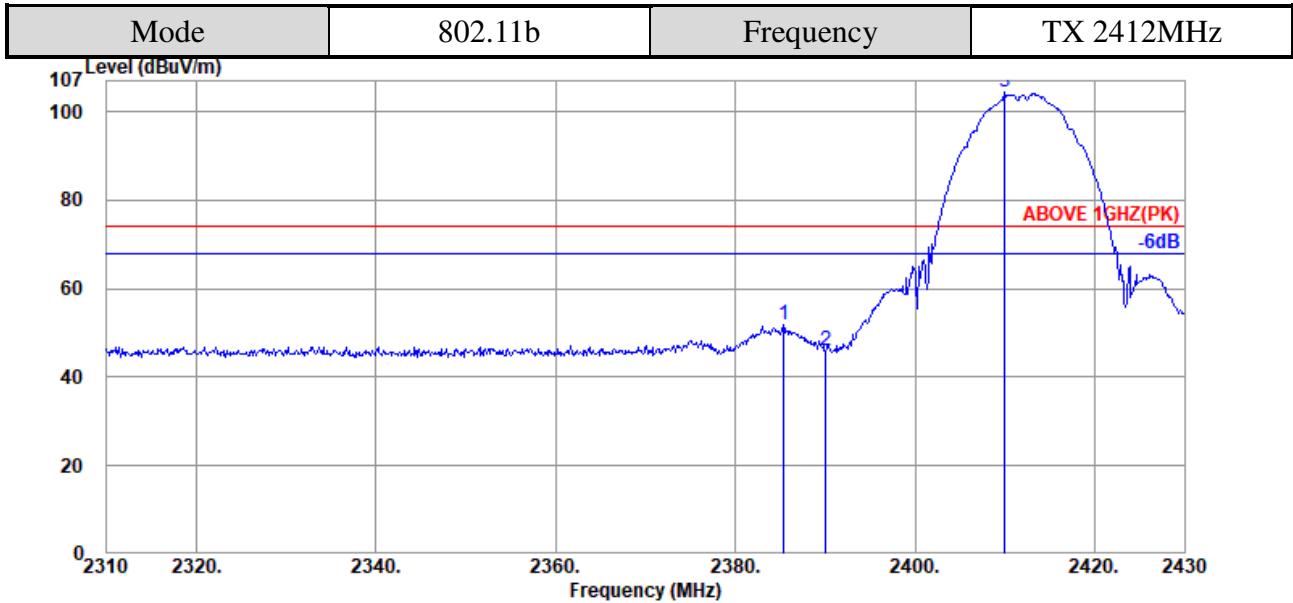

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.360	28.27	5.72	39.96	57.68	51.71	74.00	22.29	Peak
2390.040	28.27	5.72	39.95	52.03	46.07	74.00	27.93	Peak
@ 2409.960	28.33	5.75	39.95	110.26	104.39	---	---	Peak

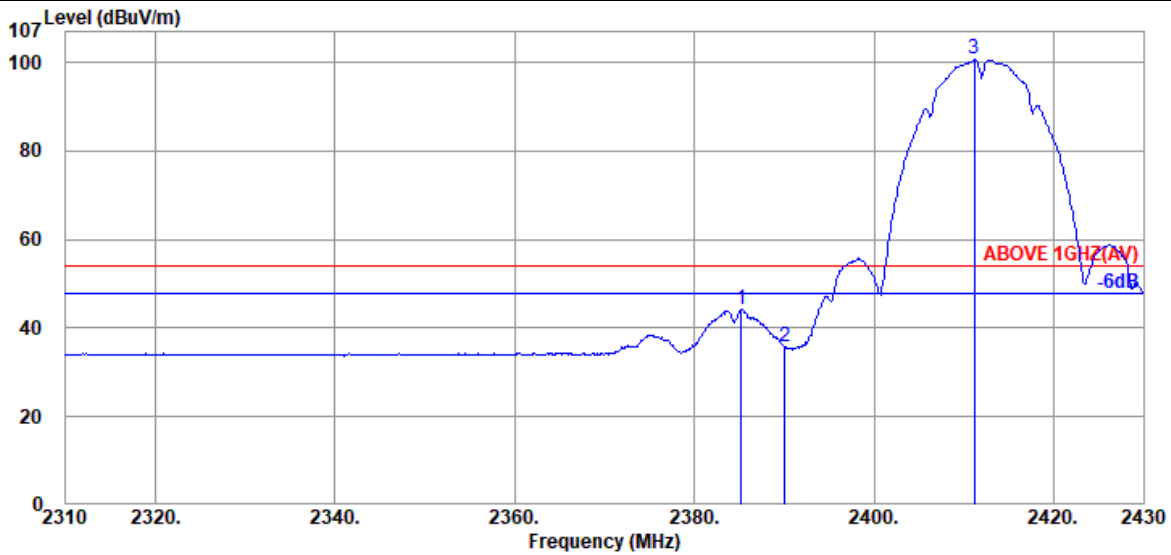


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	28.27	5.72	39.96	50.16	44.19	54.00	9.81	Average
2390.040	28.27	5.72	39.95	41.60	35.64	54.00	18.36	Average
@ 2411.160	28.33	5.75	39.95	106.50	100.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

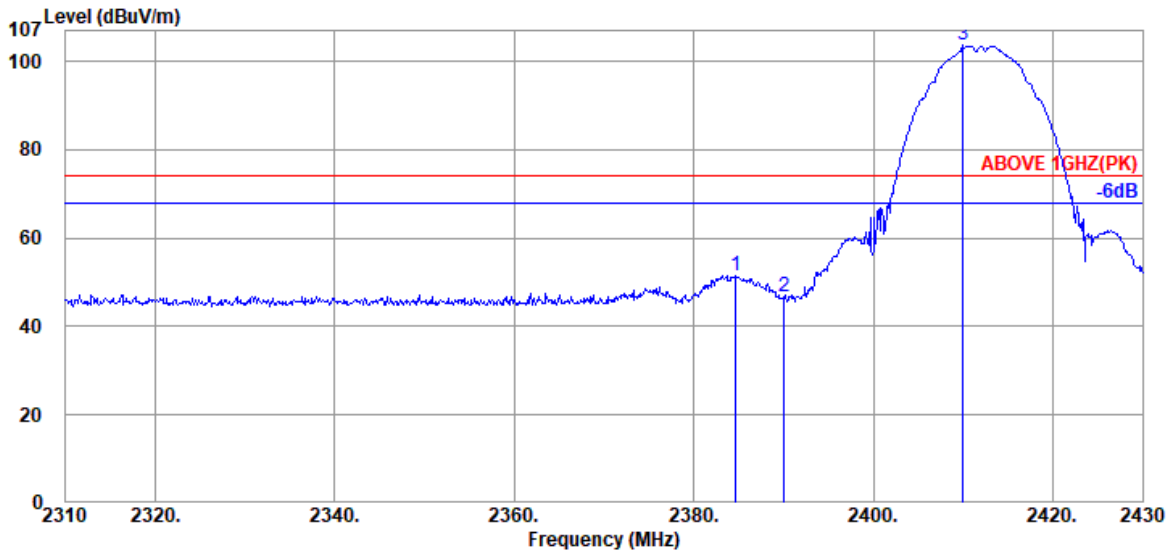

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.640	28.27	5.72	39.96	57.56	51.59	74.00	22.41	Peak
2390.040	28.27	5.72	39.95	52.77	46.81	74.00	27.19	Peak
@ 2409.960	28.33	5.75	39.95	109.53	103.66	---	---	Peak

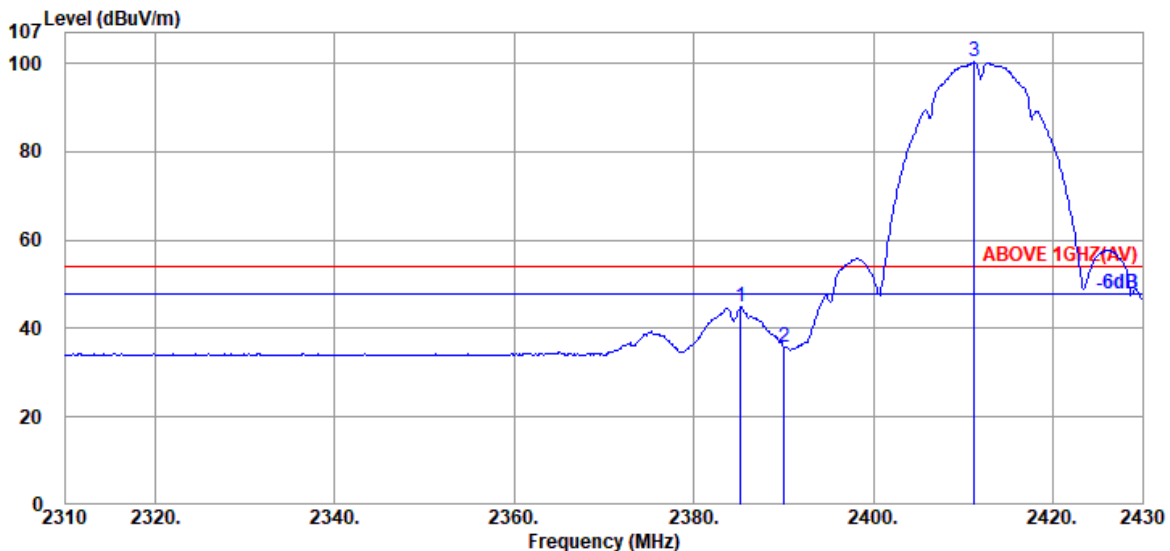


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.240	28.27	5.72	39.96	50.74	44.77	54.00	9.23	Average
2390.040	28.27	5.72	39.95	41.90	35.94	54.00	18.06	Average
@ 2411.280	28.36	5.76	39.95	106.15	100.32	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

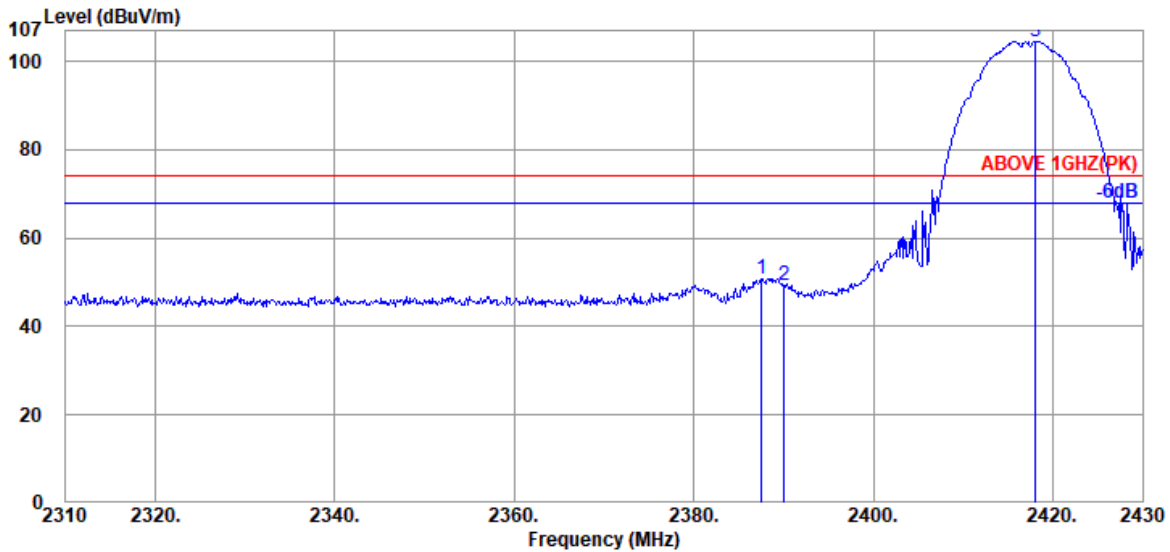

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.520	28.27	5.72	39.95	56.89	50.93	74.00	23.07	Peak
2390.040	28.27	5.72	39.95	55.10	49.14	74.00	24.86	Peak
@ 2418.120	28.36	5.76	39.95	110.40	104.57	---	---	Peak

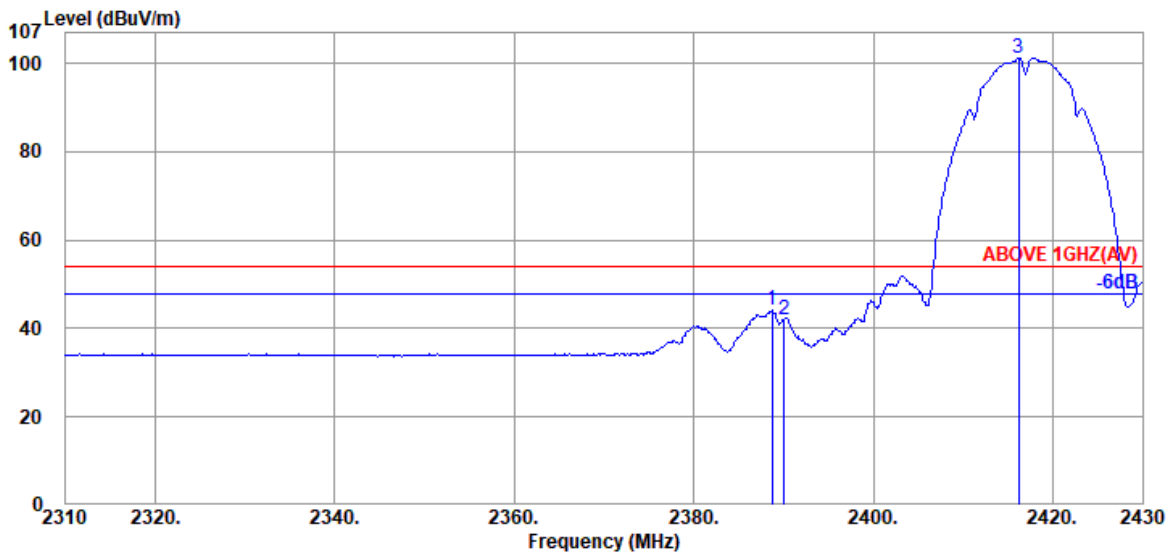


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.27	5.72	39.95	50.01	44.05	54.00	9.95	Average
2390.040	28.27	5.72	39.95	47.95	41.99	54.00	12.01	Average
@ 2416.200	28.36	5.76	39.95	107.12	101.29	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2417MHz
------	---------	-----------	------------

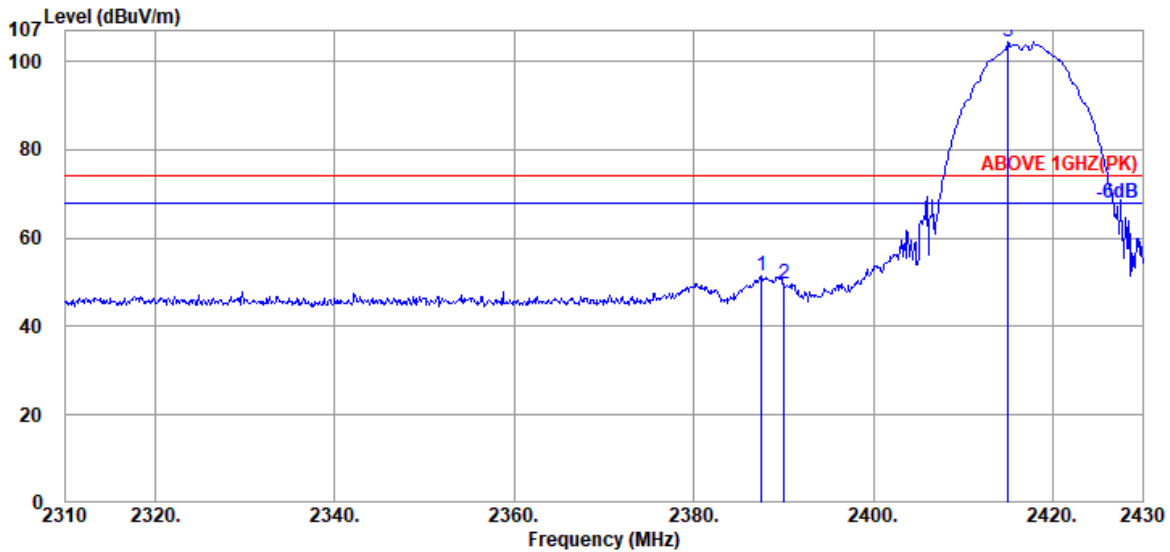

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.520	28.27	5.72	39.95	57.52	51.56	74.00	22.44	Peak
2390.040	28.27	5.72	39.95	55.74	49.78	74.00	24.22	Peak
@ 2415.000	28.36	5.76	39.95	110.25	104.42	---	---	Peak

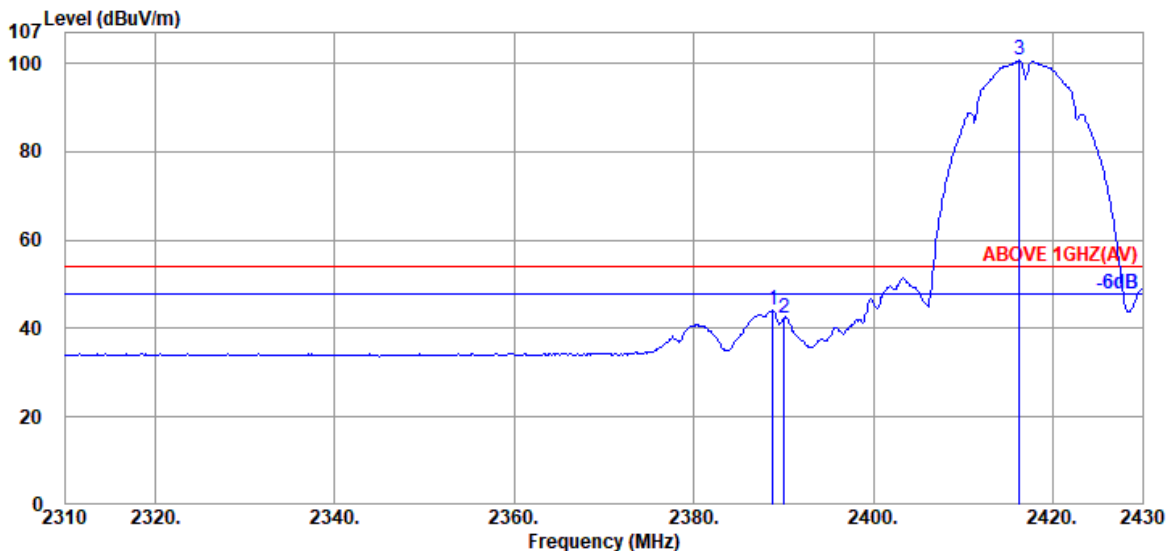


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	5.72	39.95	50.22	44.26	54.00	9.74	Average
2390.040	28.27	5.72	39.95	48.27	42.31	54.00	11.69	Average
@ 2416.320	28.36	5.76	39.95	106.51	100.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

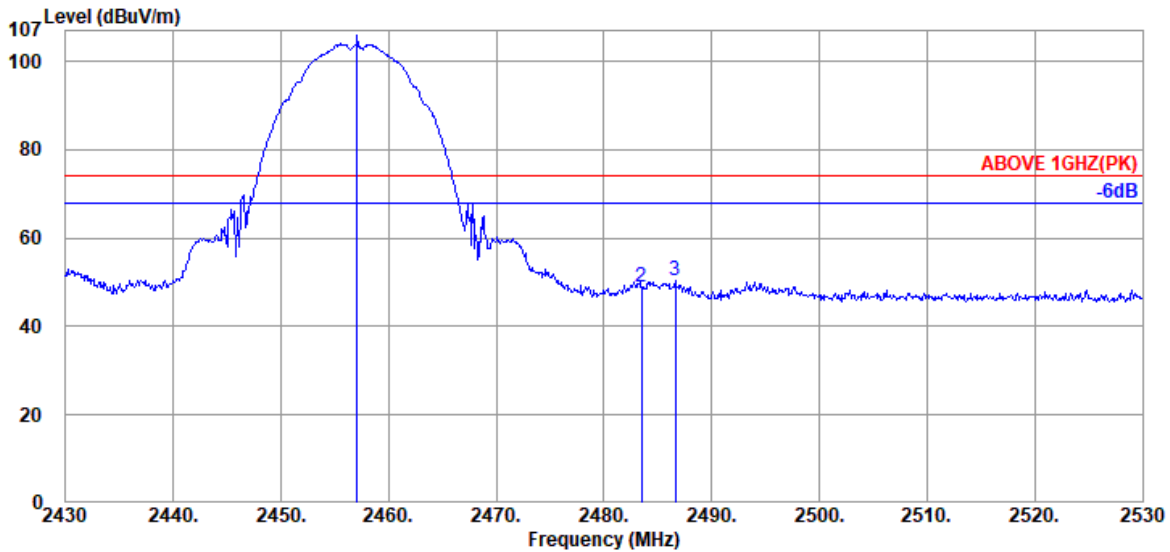

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.100	28.51	5.83	39.95	111.46	105.85	---	---	Peak
2483.500	28.57	5.87	39.94	54.40	48.90	74.00	25.10	Peak
2486.600	28.57	5.87	39.94	55.90	50.40	74.00	23.60	Peak

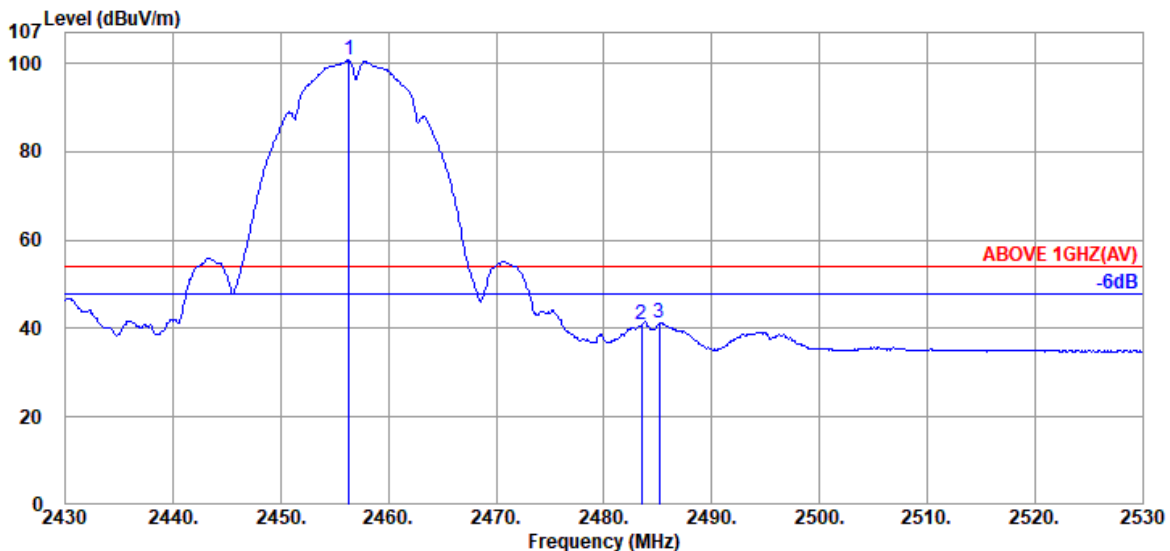


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.300	28.51	5.83	39.95	106.29	100.68	---	---	Average
2483.500	28.57	5.87	39.94	46.34	40.84	54.00	13.16	Average
2485.100	28.57	5.87	39.94	46.79	41.29	54.00	12.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2457MHz
------	---------	-----------	------------

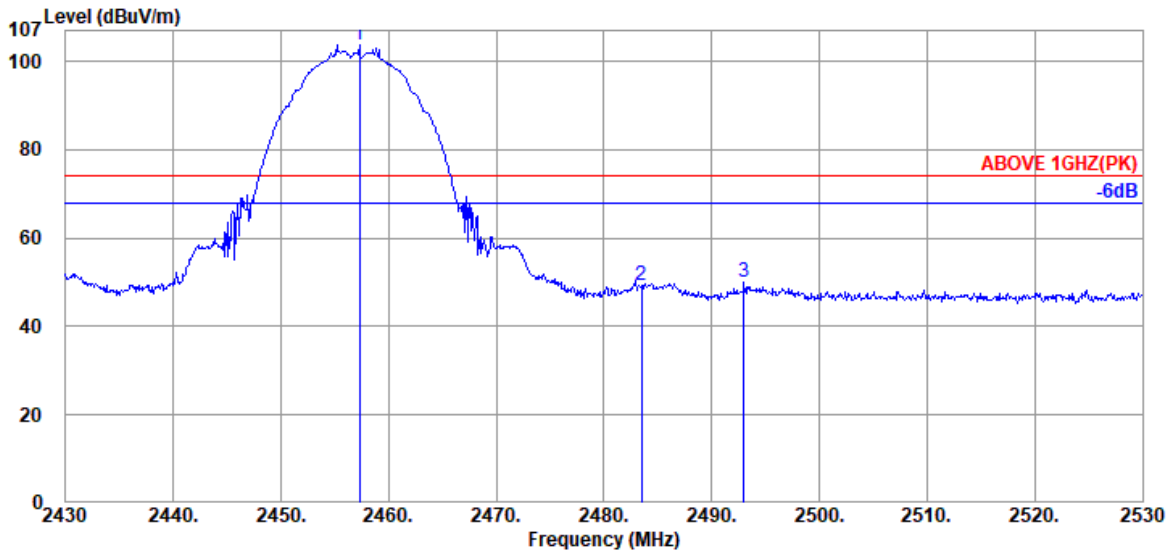

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.300	28.51	5.83	39.95	109.41	103.80	---	---	Peak
2483.500	28.57	5.87	39.94	54.66	49.16	74.00	24.84	Peak
2493.000	28.59	5.88	39.94	55.54	50.07	74.00	23.93	Peak

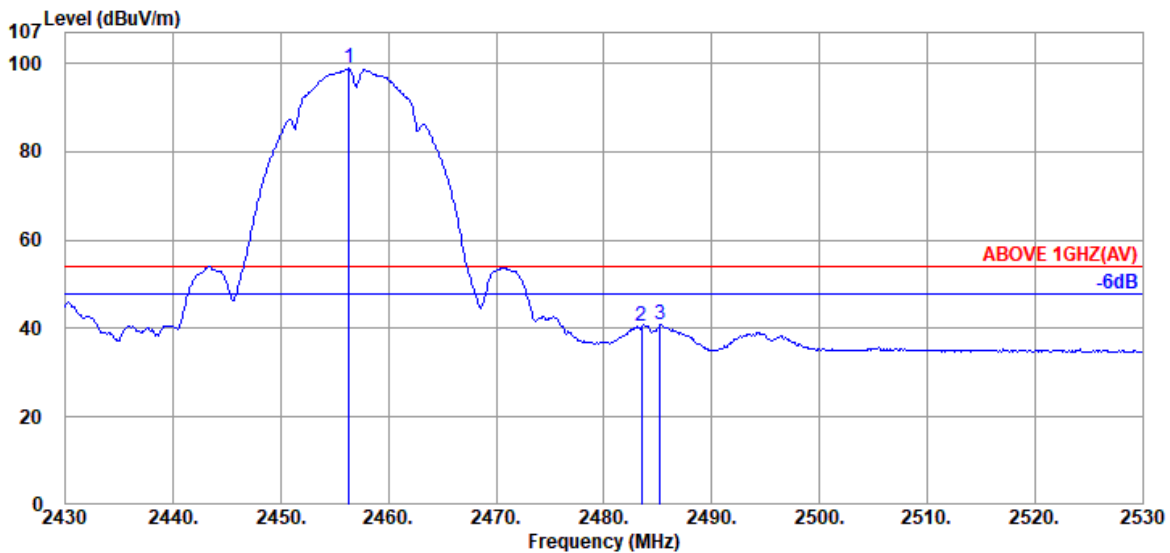


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.300	28.51	5.83	39.95	104.42	98.81	---	---	Average
2483.500	28.57	5.87	39.94	46.06	40.56	54.00	13.44	Average
2485.200	28.57	5.87	39.94	46.37	40.87	54.00	13.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

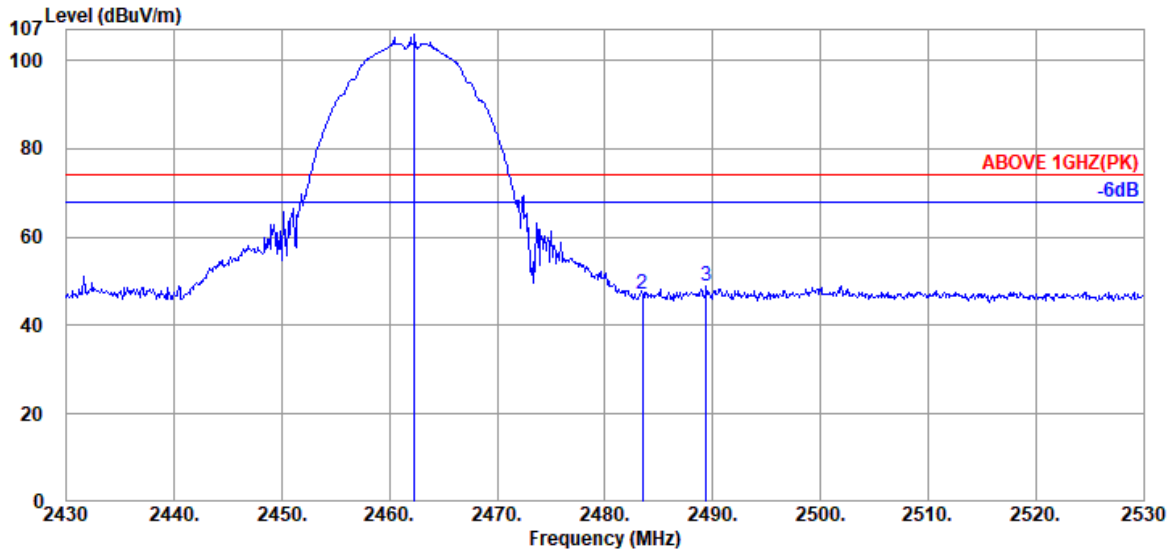

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.300	28.53	5.84	39.95	111.52	105.94	---	---	Peak
2483.500	28.57	5.87	39.94	52.45	46.95	74.00	27.05	Peak
2489.400	28.59	5.88	39.94	54.44	48.97	74.00	25.03	Peak

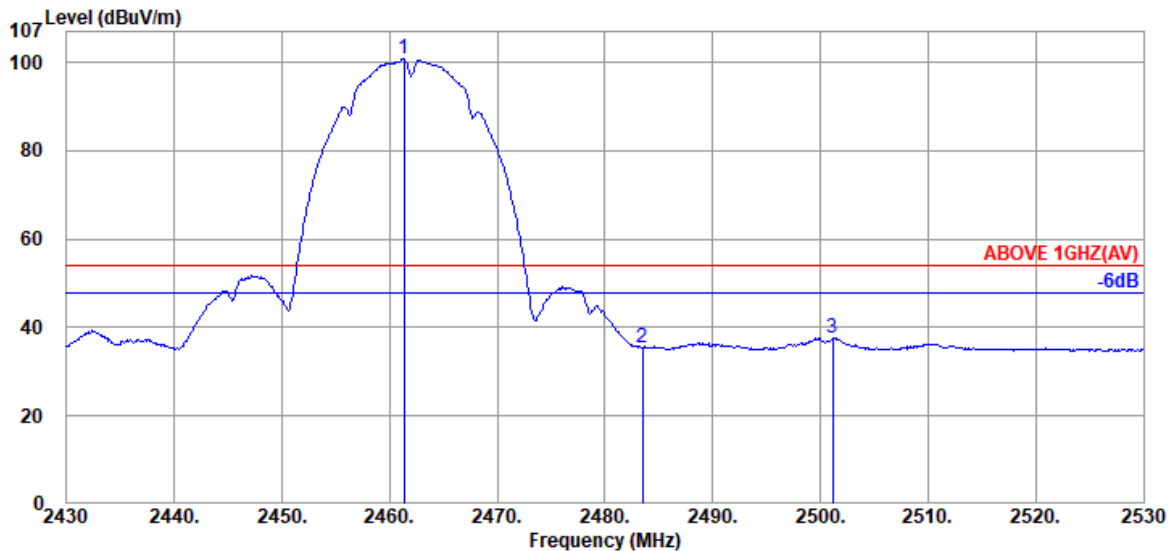


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.300	28.53	5.84	39.95	106.31	100.73	---	---	Average
2483.500	28.57	5.87	39.94	41.09	35.59	54.00	18.41	Average
2501.100	28.60	5.89	39.94	43.10	37.65	54.00	16.35	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

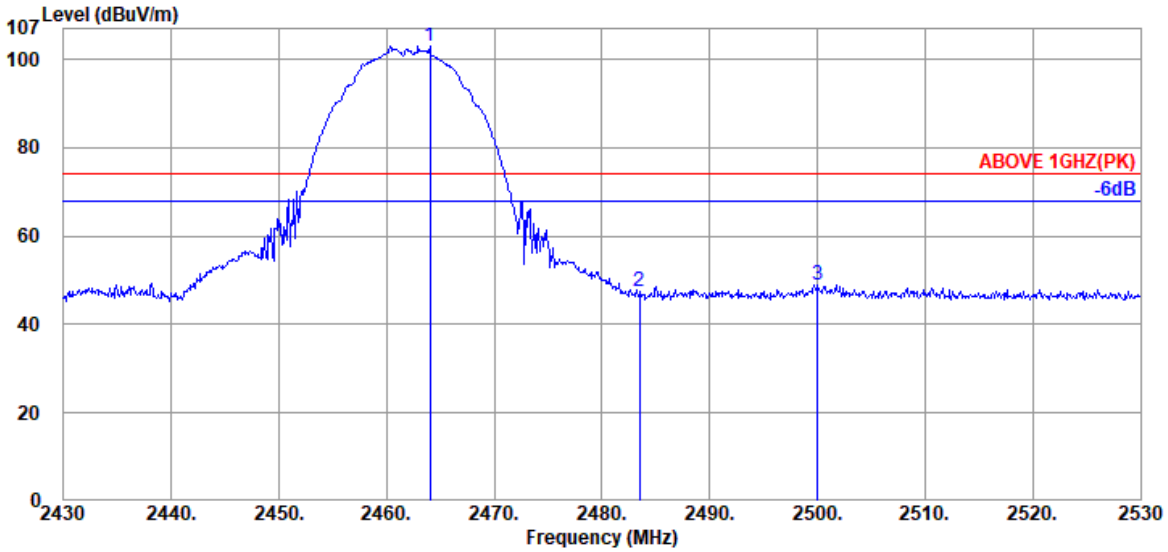

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.53	5.84	39.95	108.70	103.12	---	---	Peak
2483.500	28.57	5.87	39.94	52.82	47.32	74.00	26.68	Peak
2500.000	28.60	5.89	39.94	54.38	48.93	74.00	25.07	Peak

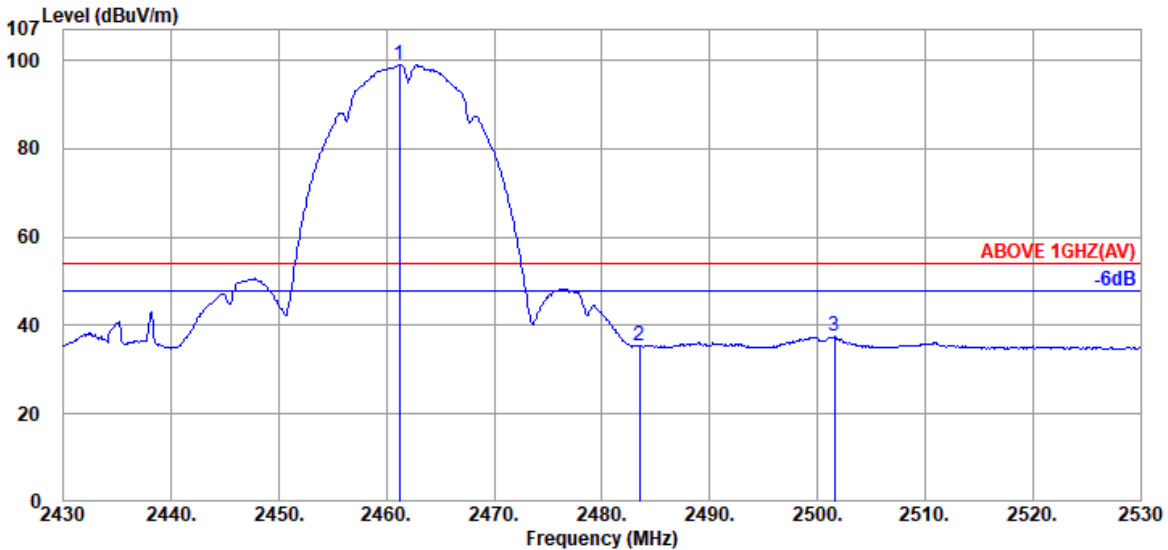


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.200	28.53	5.84	39.95	104.71	99.13	---	---	Average
2483.500	28.57	5.87	39.94	40.86	35.36	54.00	18.64	Average
2501.600	28.60	5.89	39.94	43.02	37.57	54.00	16.43	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

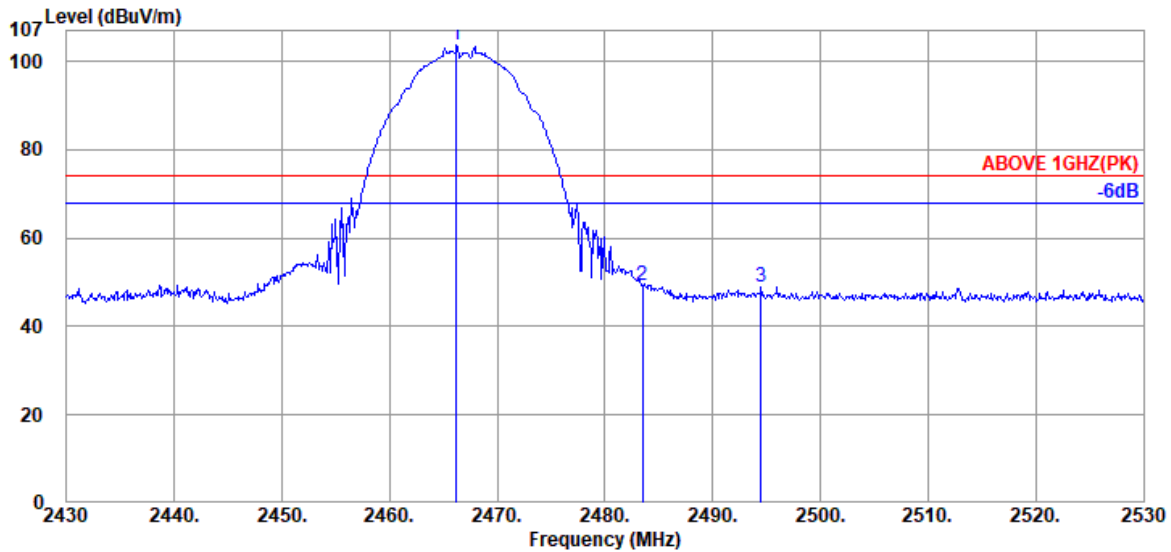

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.53	5.84	39.95	109.20	103.62	---	---	Peak
2483.500	28.57	5.87	39.94	54.90	49.40	74.00	24.60	Peak
2494.500	28.59	5.88	39.94	54.41	48.94	74.00	25.06	Peak

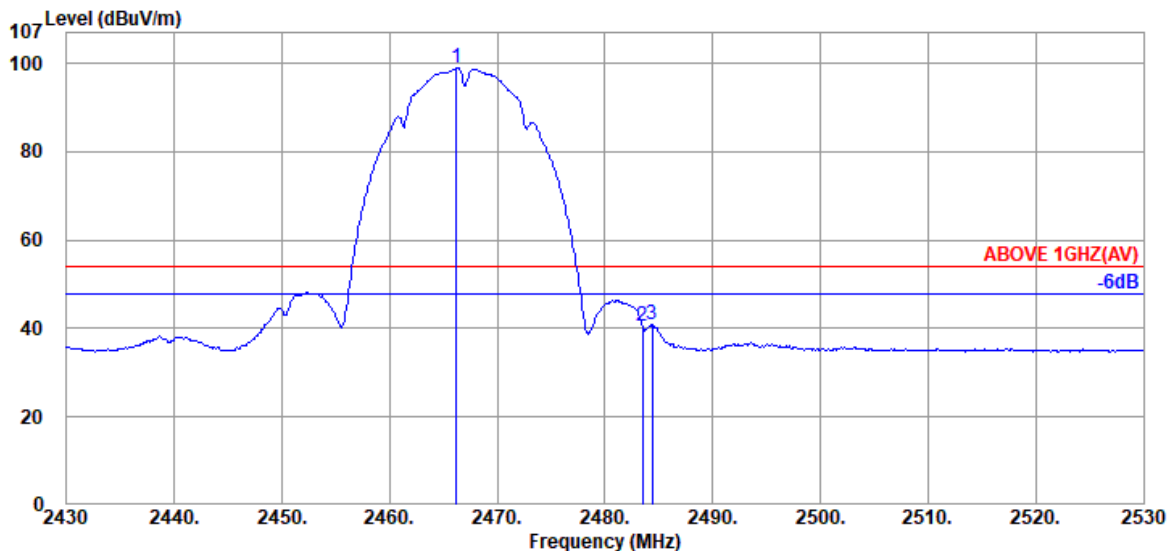


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.200	28.53	5.84	39.95	104.56	98.98	---	---	Average
2483.500	28.57	5.87	39.94	45.86	40.36	54.00	13.64	Average
2484.400	28.57	5.87	39.94	46.26	40.76	54.00	13.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

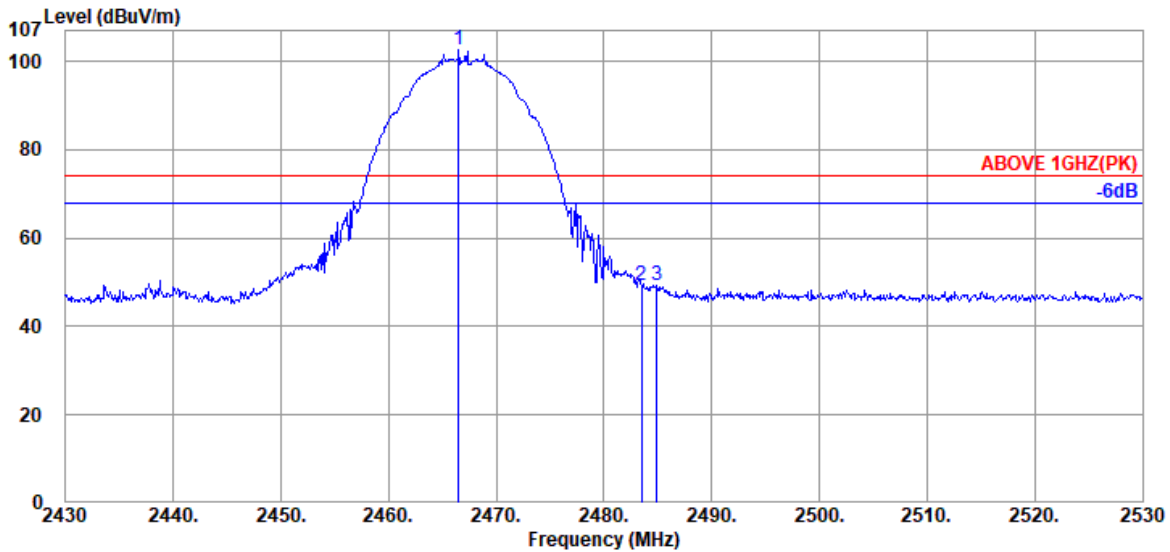

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.500	28.53	5.84	39.95	108.05	102.47	---	---	Peak
2483.500	28.57	5.87	39.94	54.95	49.45	74.00	24.55	Peak
2484.900	28.57	5.87	39.94	54.70	49.20	74.00	24.80	Peak

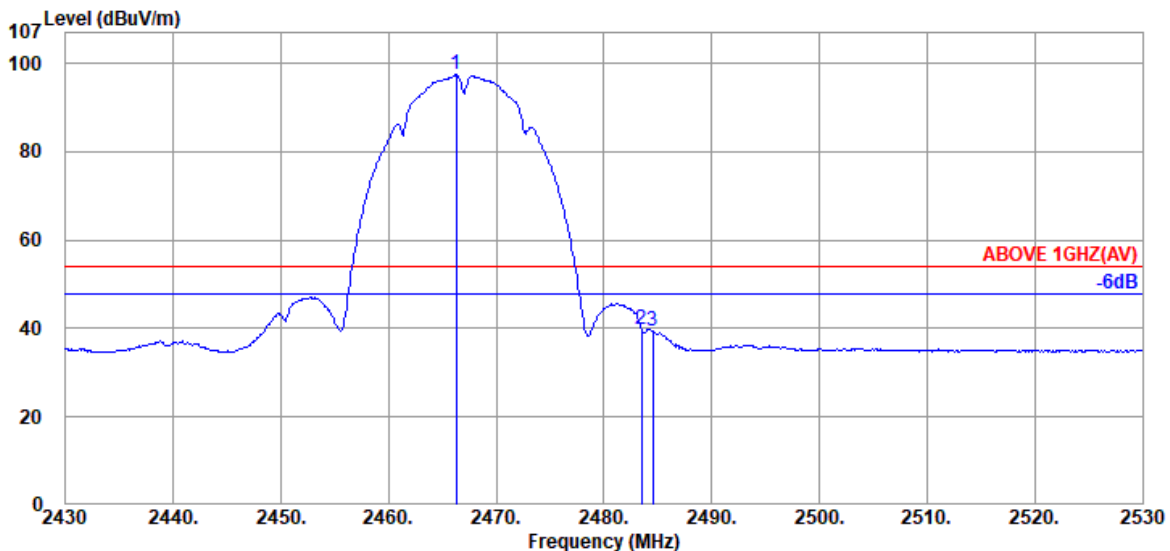


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.300	28.53	5.84	39.95	102.96	97.38	---	---	Average
2483.500	28.57	5.87	39.94	45.17	39.67	54.00	14.33	Average
2484.500	28.57	5.87	39.94	45.00	39.50	54.00	14.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

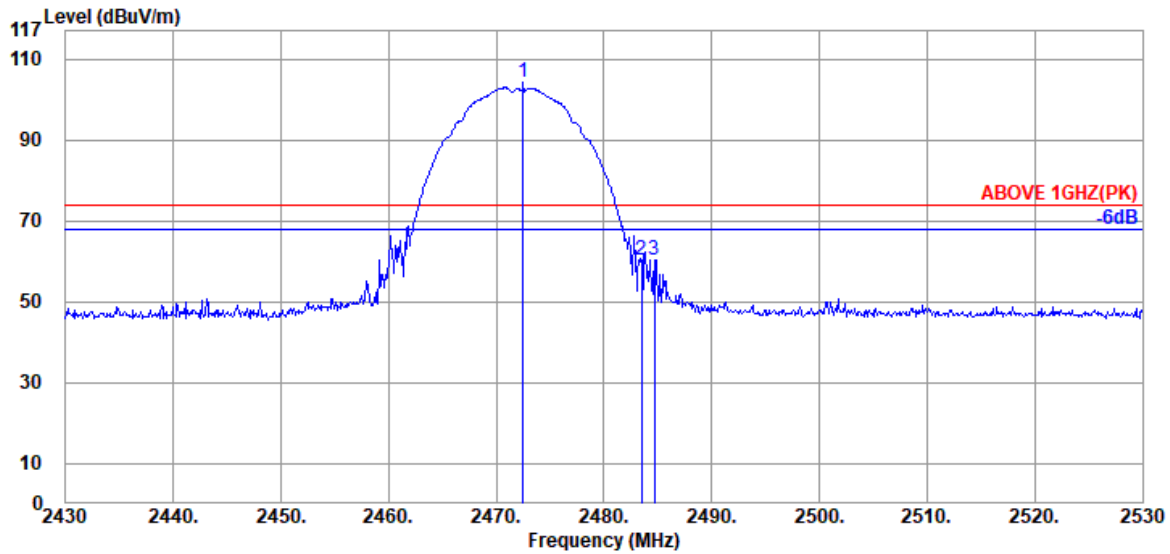

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.500	28.54	5.85	34.52	104.23	104.10	---	---	Peak
2483.500	28.57	5.87	34.53	60.27	60.18	74.00	13.82	Peak
2484.700	28.57	5.87	34.53	60.52	60.43	74.00	13.57	Peak

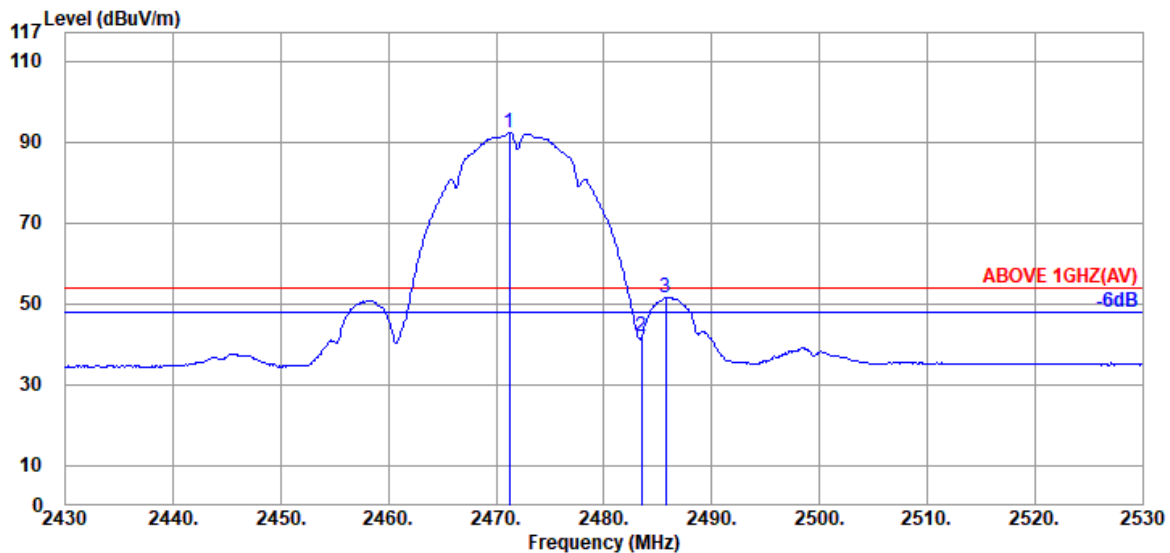


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.54	5.85	34.52	92.38	92.25	---	---	Average
2483.500	28.57	5.87	34.53	42.19	42.10	54.00	11.90	Average
2485.700	28.57	5.87	34.53	51.57	51.48	54.00	2.52	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

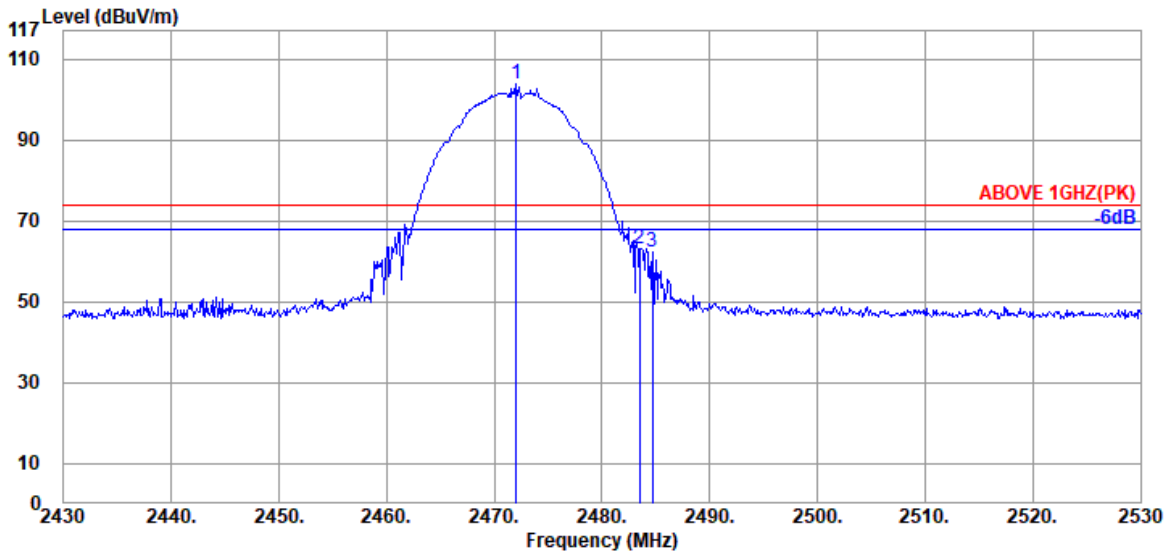

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.54	5.85	34.52	103.78	103.65	---	---	Peak
2483.500	28.57	5.87	34.53	63.17	63.08	74.00	10.92	Peak
2484.700	28.57	5.87	34.53	62.52	62.43	74.00	11.57	Peak

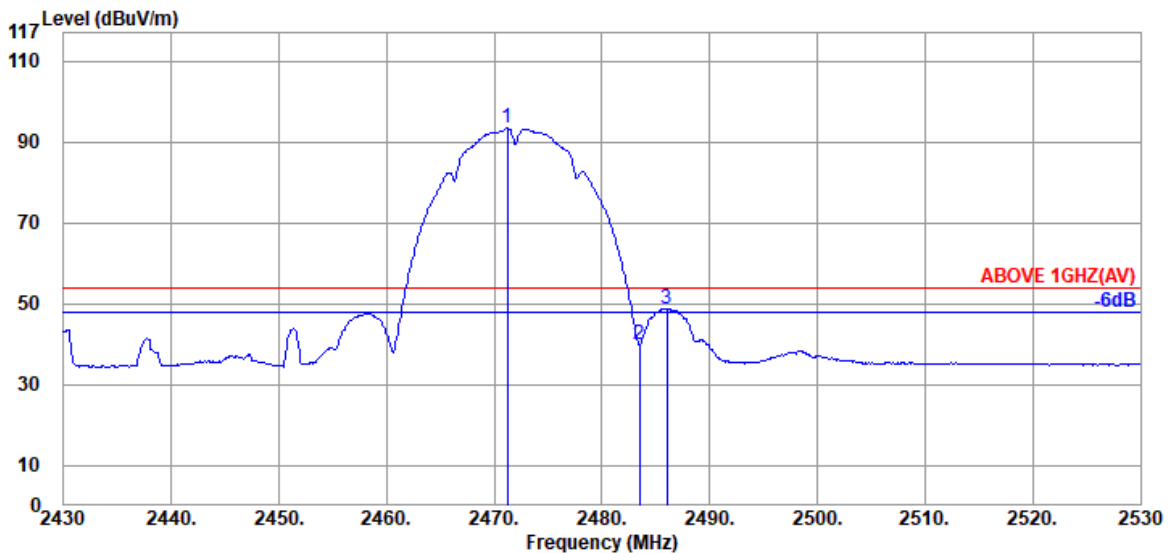


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.200	28.54	5.85	34.52	93.47	93.34	---	---	Average
2483.500	28.57	5.87	34.53	39.91	39.82	54.00	14.18	Average
2486.000	28.57	5.87	34.53	48.86	48.77	54.00	5.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

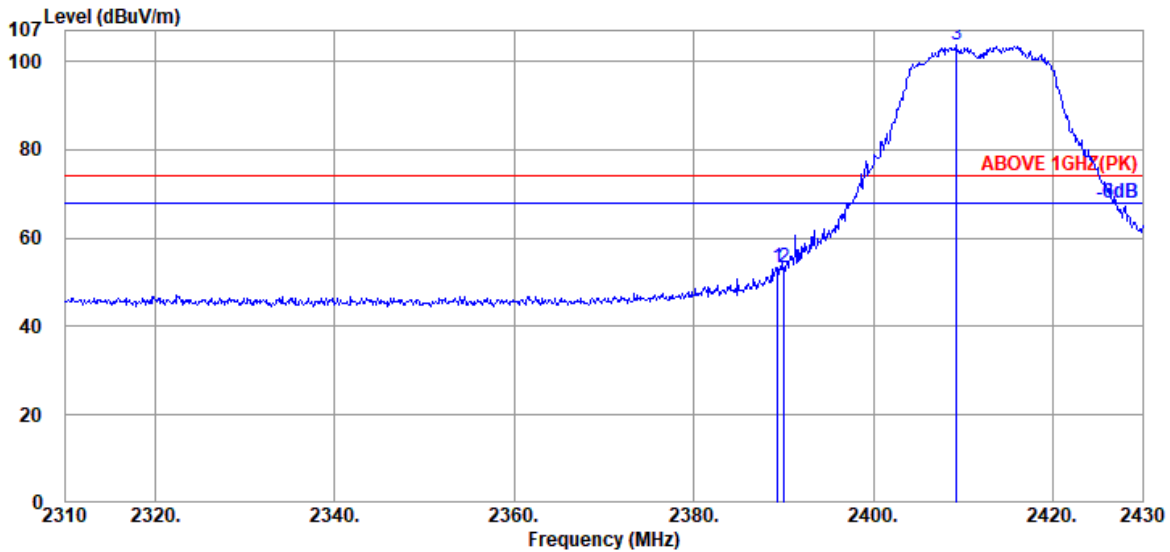

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	5.72	39.95	59.41	53.45	74.00	20.55	Peak
2390.040	28.27	5.72	39.95	59.36	53.40	74.00	20.60	Peak
@ 2409.240	28.33	5.75	39.95	109.48	103.61	---	---	Peak

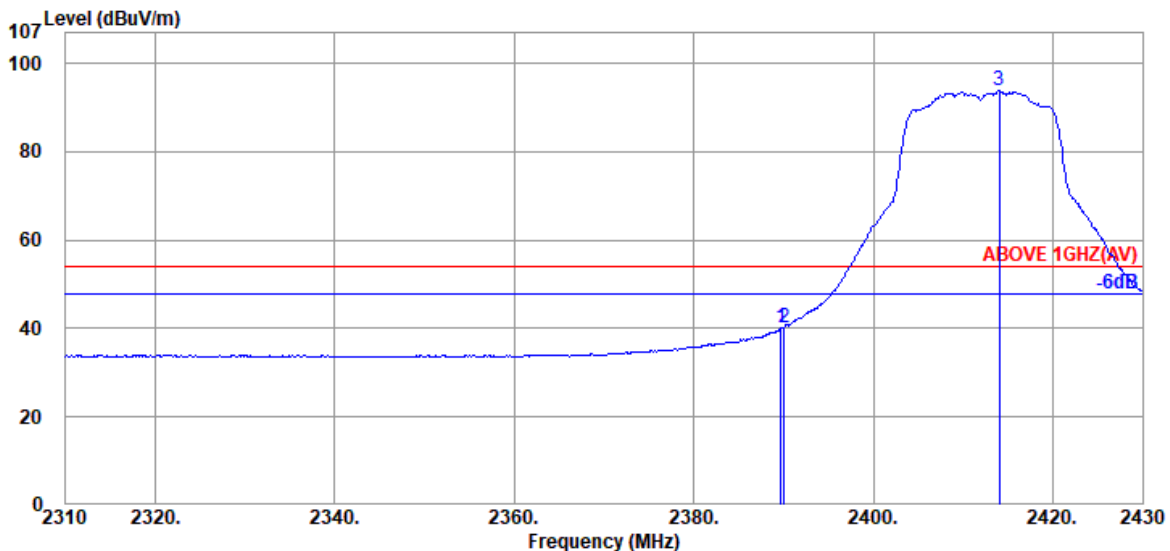


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.72	39.95	46.16	40.20	54.00	13.80	Average
2390.040	28.27	5.72	39.95	46.22	40.26	54.00	13.74	Average
@ 2414.040	28.36	5.76	39.95	99.52	93.69	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

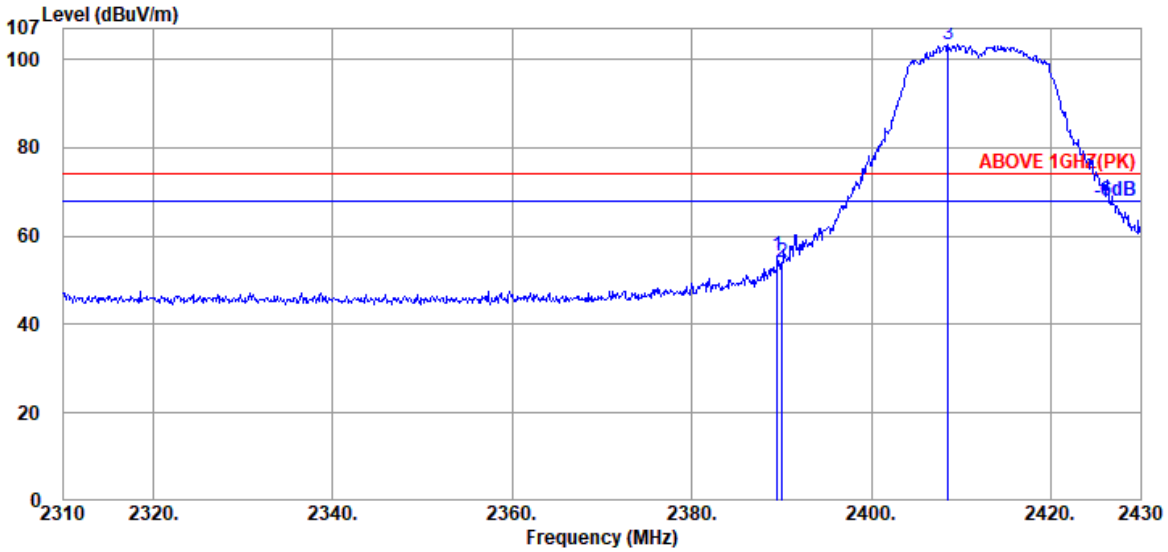

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	5.72	39.95	61.42	55.46	74.00	18.54	Peak
2390.040	28.27	5.72	39.95	60.04	54.08	74.00	19.92	Peak
@ 2408.520	28.33	5.75	39.95	109.15	103.28	---	---	Peak

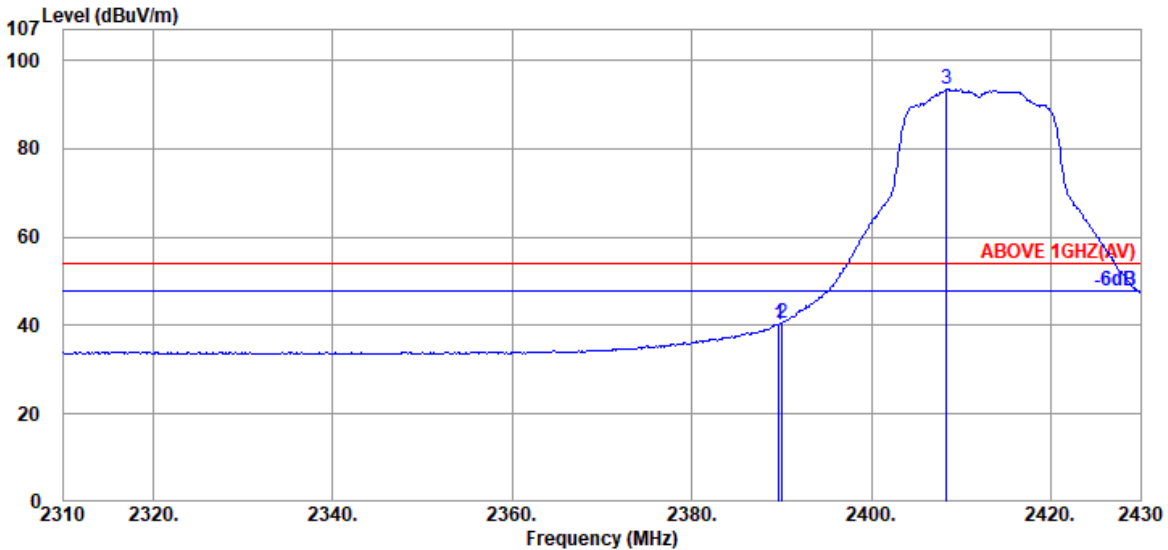


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.72	39.95	46.26	40.30	54.00	13.70	Average
2390.040	28.27	5.72	39.95	46.64	40.68	54.00	13.32	Average
@ 2408.400	28.33	5.75	39.95	99.25	93.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

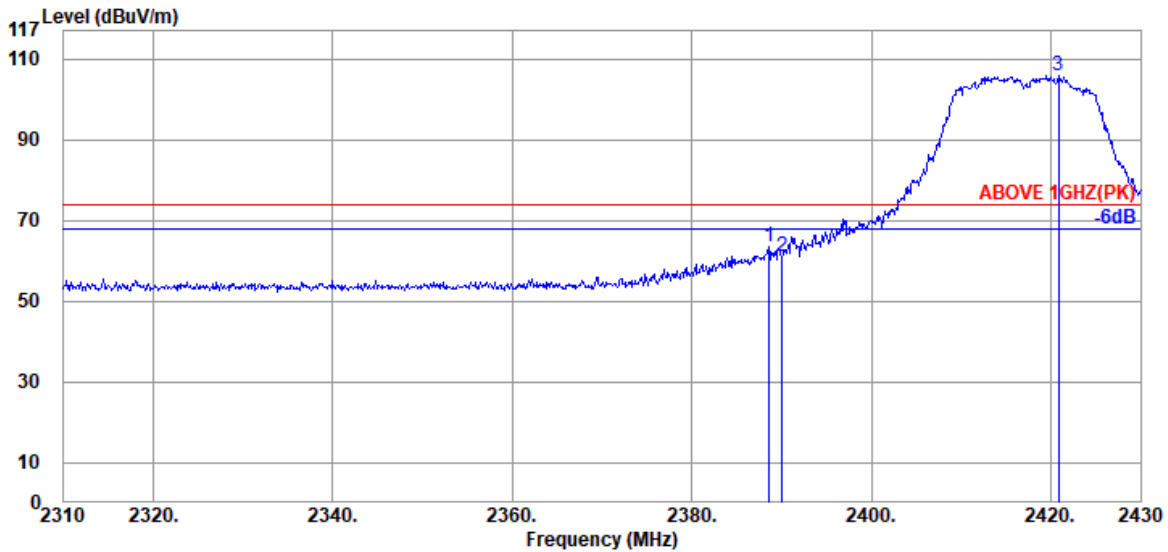

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.27	6.04	39.95	69.25	63.61	74.00	10.39	Peak
2390.040	28.27	6.04	39.95	66.62	60.98	74.00	13.02	Peak
@ 2420.880	28.39	6.10	39.95	111.26	105.80	---	---	Peak

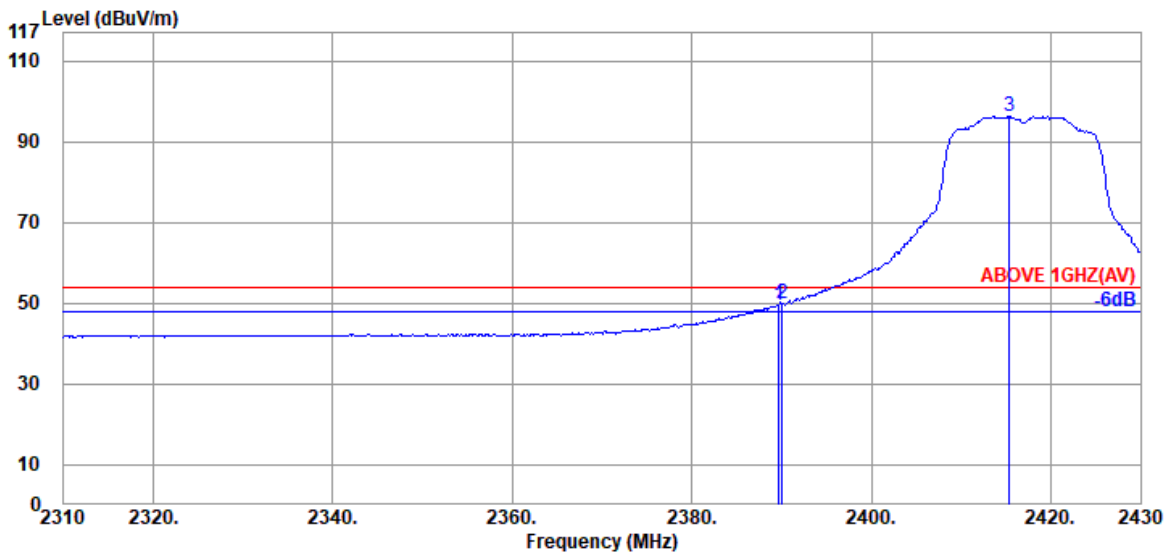


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	55.09	49.45	54.00	4.55	Average
2390.040	28.27	6.04	39.95	55.71	50.07	54.00	3.93	Average
@ 2415.360	28.36	6.07	39.95	101.80	96.28	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.


Mode	802.11g	Frequency	TX 2417MHz
------	---------	-----------	------------

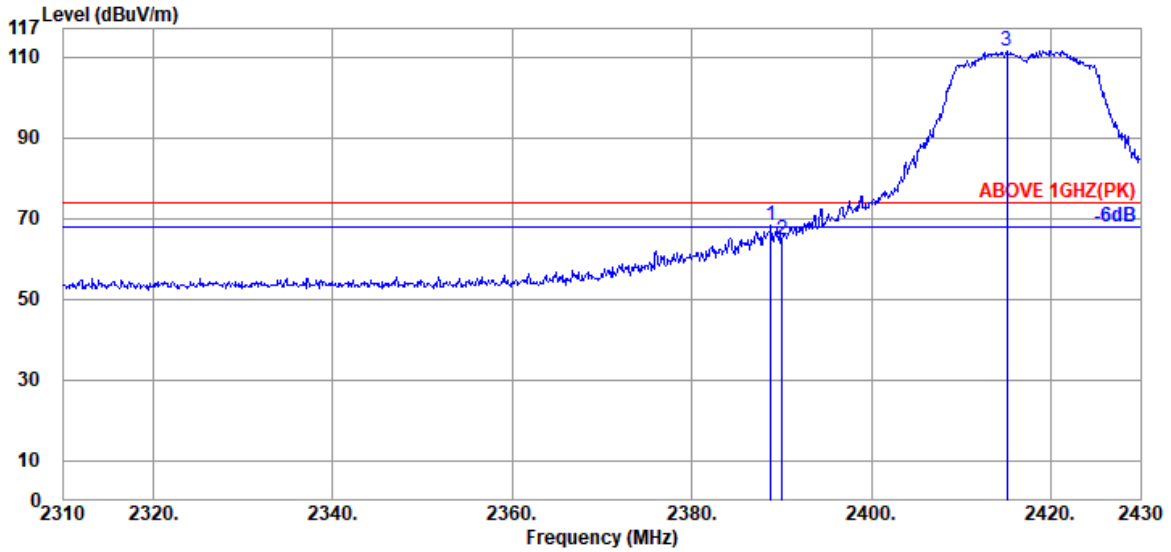

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	6.04	39.95	74.03	68.39	74.00	5.61	Peak
2390.040	28.27	6.04	39.95	70.40	64.76	74.00	9.24	Peak
@ 2415.120	28.36	6.07	39.95	117.08	111.56	---	---	Peak


Antenna at Vertical Polarization

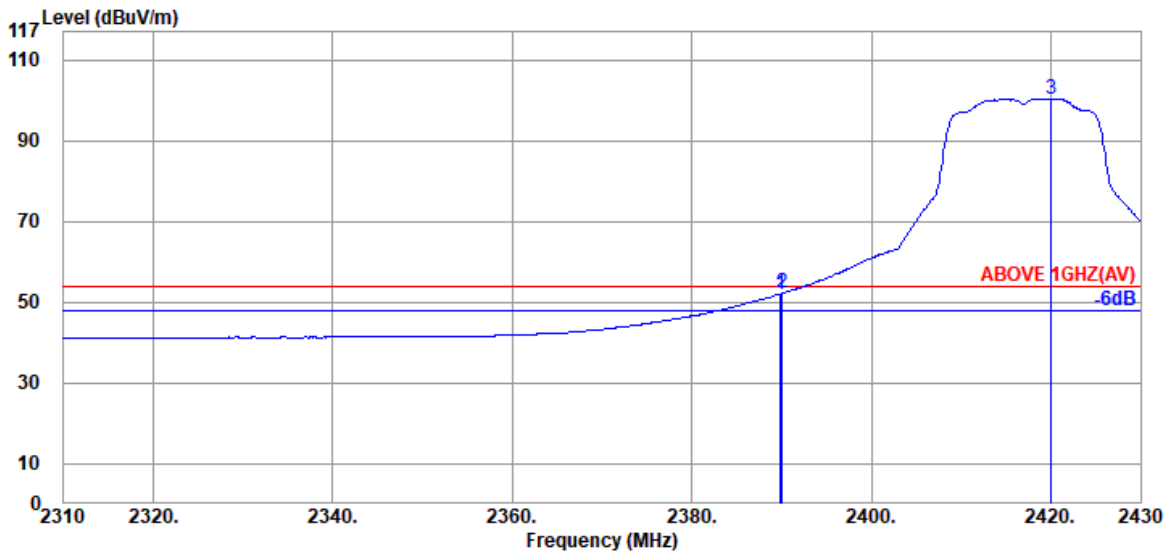

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.920	28.27	6.04	39.95	57.70	52.06	54.00	1.94	Average
2390.040	28.27	6.04	39.95	57.81	52.17	54.00	1.83	Average
@ 2420.040	28.39	6.10	39.95	105.72	100.26	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2452MHz
------	---------	-----------	------------

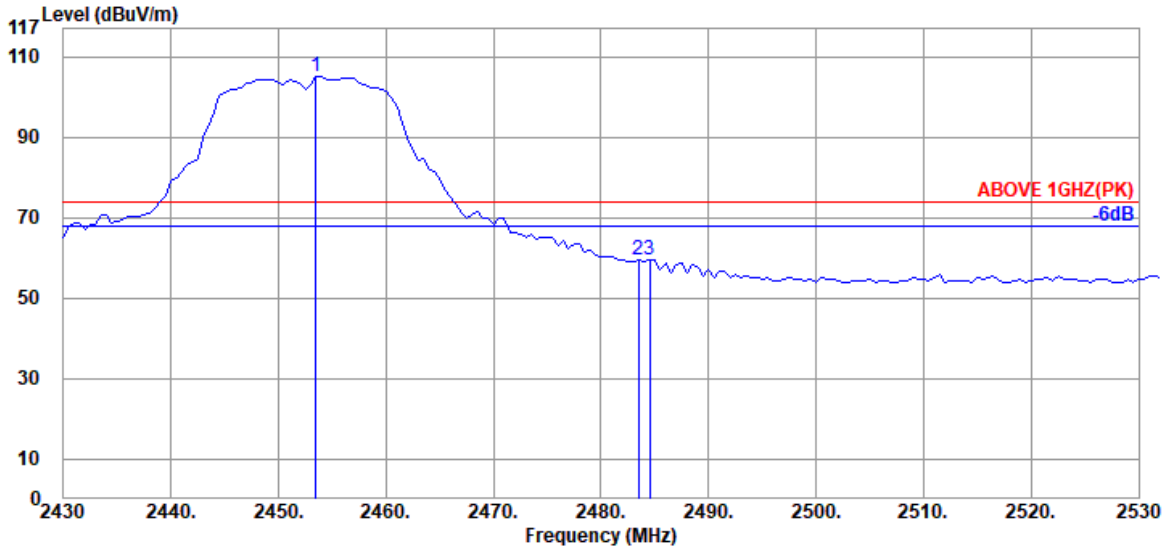

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	28.51	6.15	39.95	110.21	104.92	---	---	Peak
2483.500	28.57	6.18	39.94	64.68	59.49	74.00	14.51	Peak
2484.500	28.57	6.18	39.94	64.72	59.53	74.00	14.47	Peak

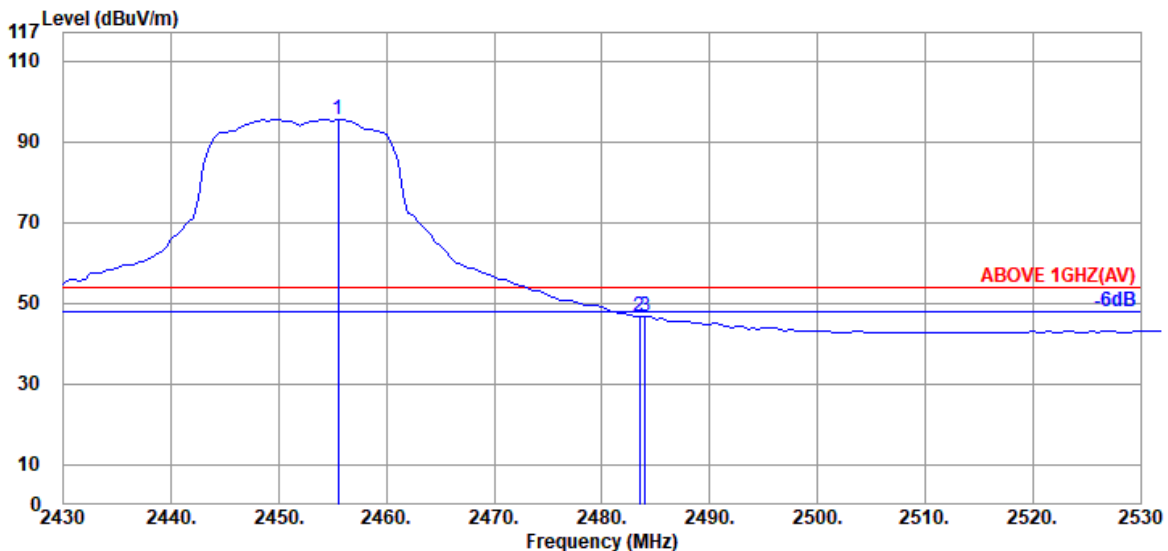


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.51	6.15	39.95	100.73	95.44	---	---	Average
2483.500	28.57	6.18	39.94	52.03	46.84	54.00	7.16	Average
2484.000	28.57	6.18	39.94	51.98	46.79	54.00	7.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2452MHz
------	---------	-----------	------------

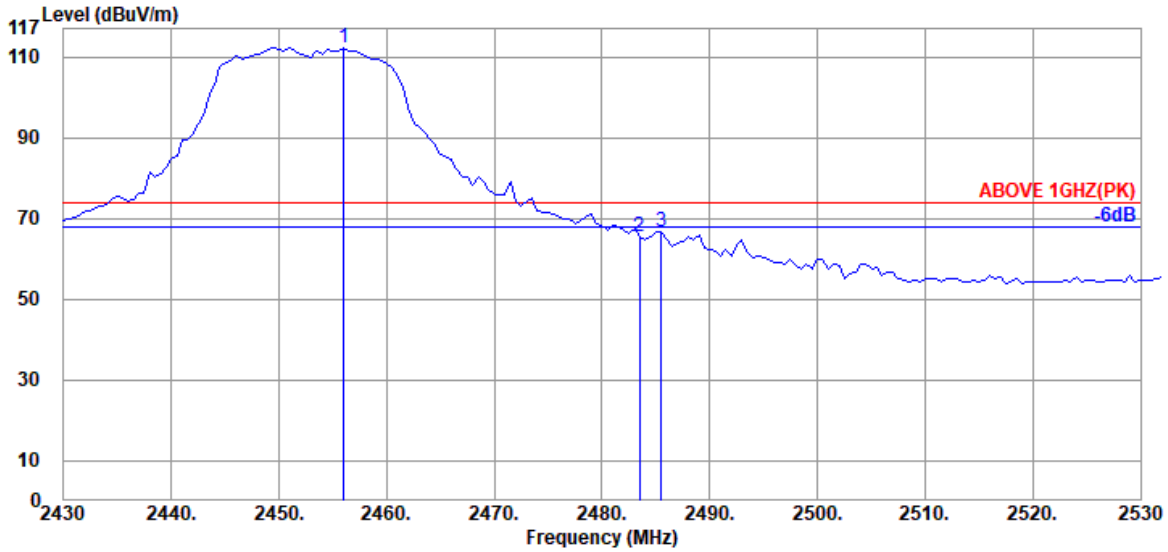

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	28.51	6.15	39.95	117.67	112.38	---	---	Peak
2483.500	28.57	6.18	39.94	70.55	65.36	74.00	8.64	Peak
2485.500	28.57	6.18	39.94	71.86	66.67	74.00	7.33	Peak

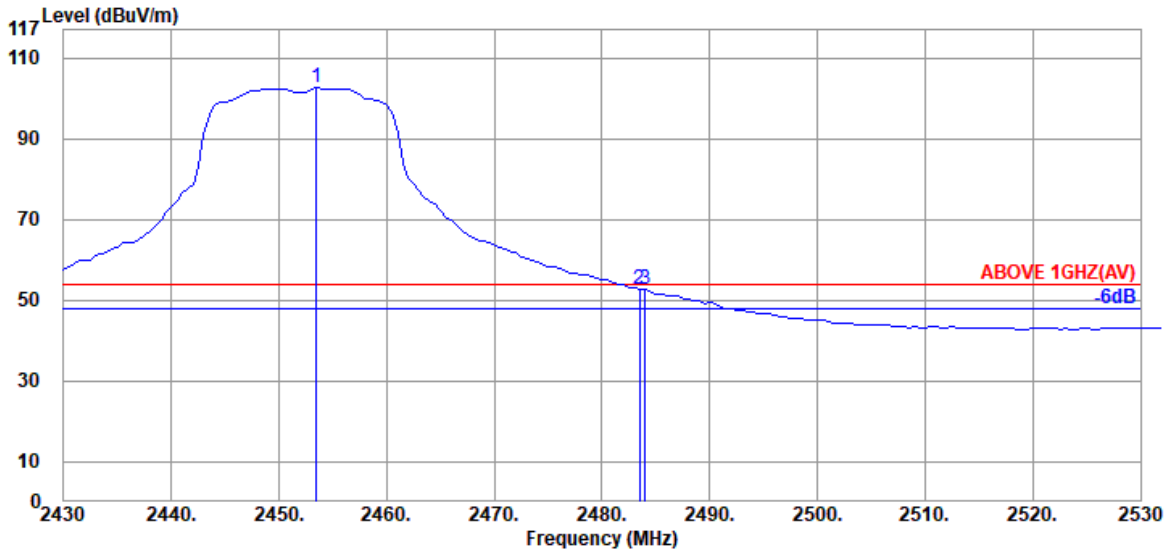


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	28.51	6.15	39.95	107.76	102.47	---	---	Average
2483.500	28.57	6.18	39.94	57.98	52.79	54.00	1.21	Average
2484.000	28.57	6.18	39.94	57.96	52.77	54.00	1.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

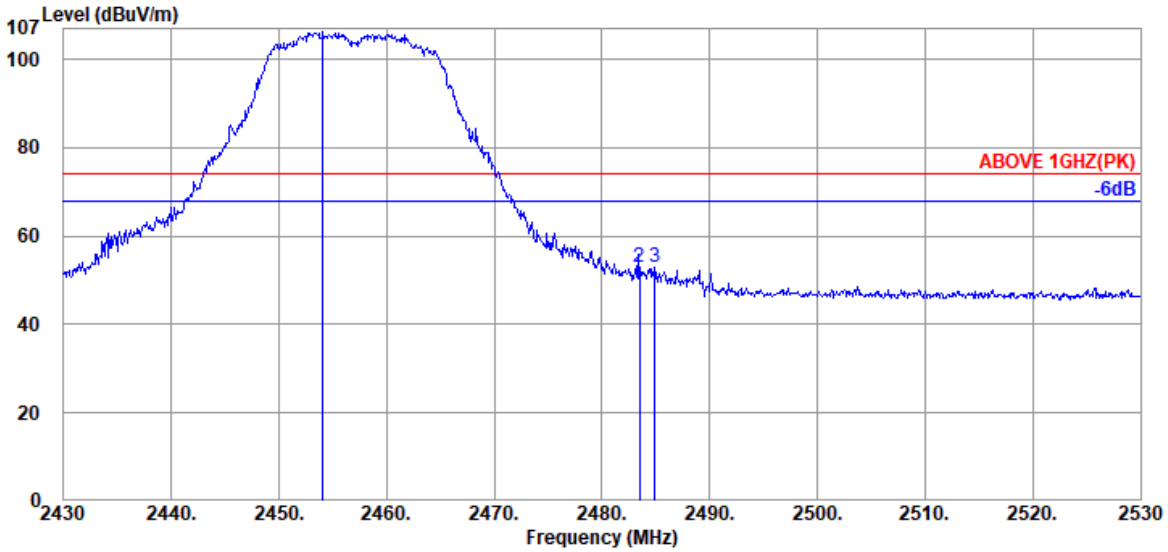

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.100	28.51	5.83	39.95	111.73	106.12	---	---	Peak
2483.500	28.57	5.87	39.94	58.48	52.98	74.00	21.02	Peak
2484.900	28.57	5.87	39.94	58.43	52.93	74.00	21.07	Peak

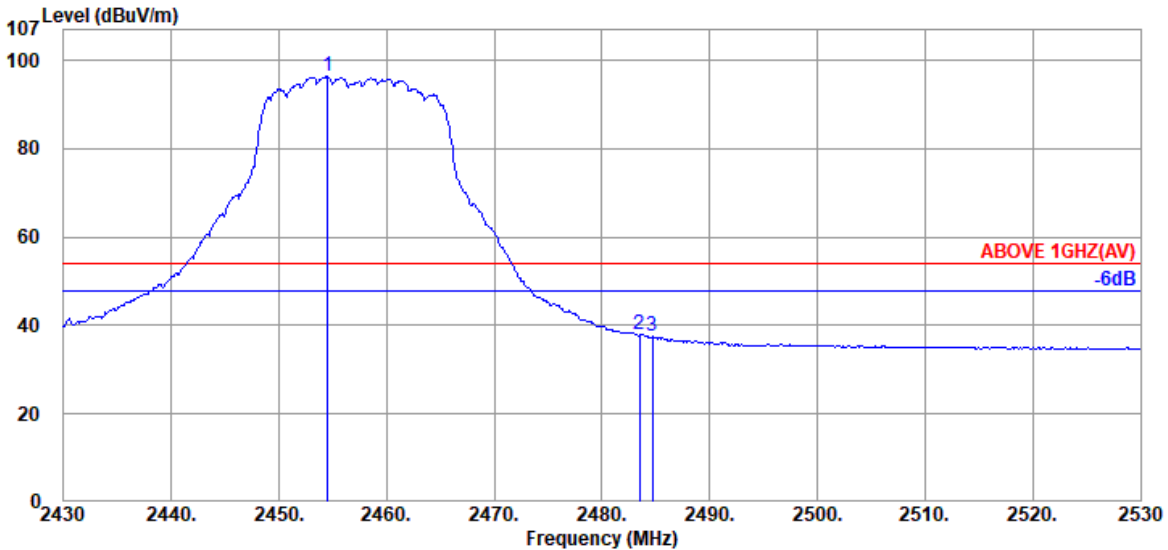


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.51	5.83	39.95	101.95	96.34	---	---	Average
2483.500	28.57	5.87	39.94	43.30	37.80	54.00	16.20	Average
2484.700	28.57	5.87	39.94	42.94	37.44	54.00	16.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2457MHz
------	---------	-----------	------------

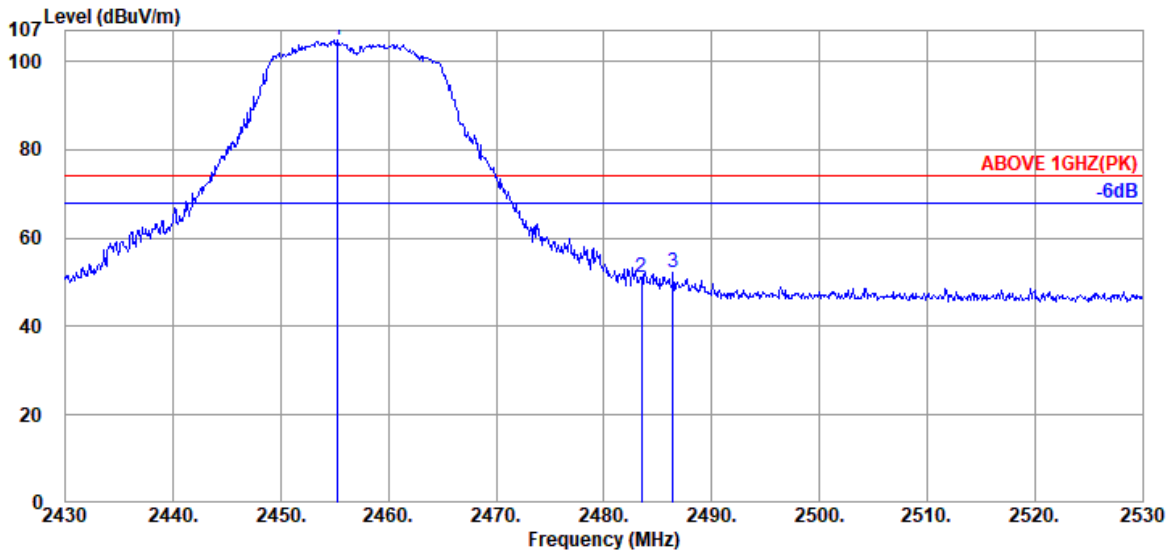

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.300	28.51	5.83	39.95	110.28	104.67	---	---	Peak
2483.500	28.57	5.87	39.94	56.67	51.17	74.00	22.83	Peak
2486.400	28.57	5.87	39.94	57.63	52.13	74.00	21.87	Peak

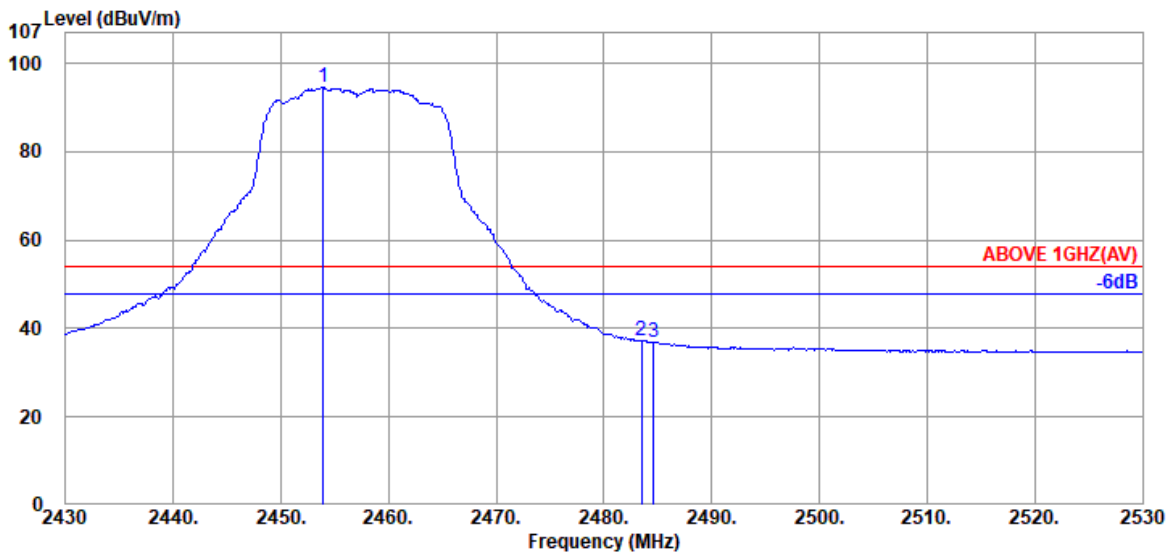


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.900	28.51	5.83	39.95	100.16	94.55	---	---	Average
2483.500	28.57	5.87	39.94	42.74	37.24	54.00	16.76	Average
2484.600	28.57	5.87	39.94	42.37	36.87	54.00	17.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

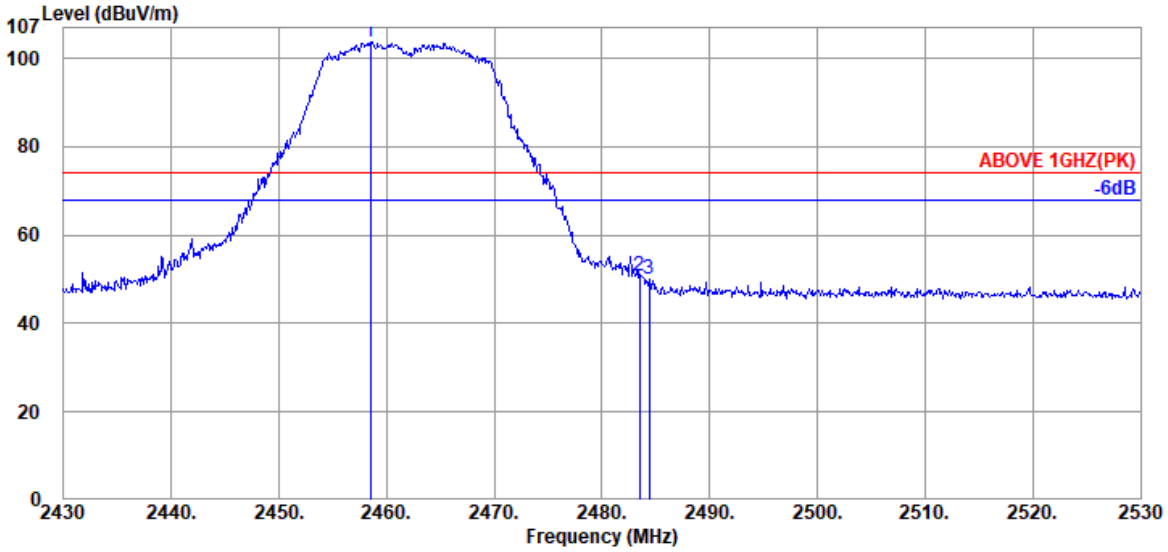

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.51	5.83	39.95	109.47	103.86	---	---	Peak
2483.500	28.57	5.87	39.94	56.40	50.90	74.00	23.10	Peak
2484.400	28.57	5.87	39.94	55.46	49.96	74.00	24.04	Peak

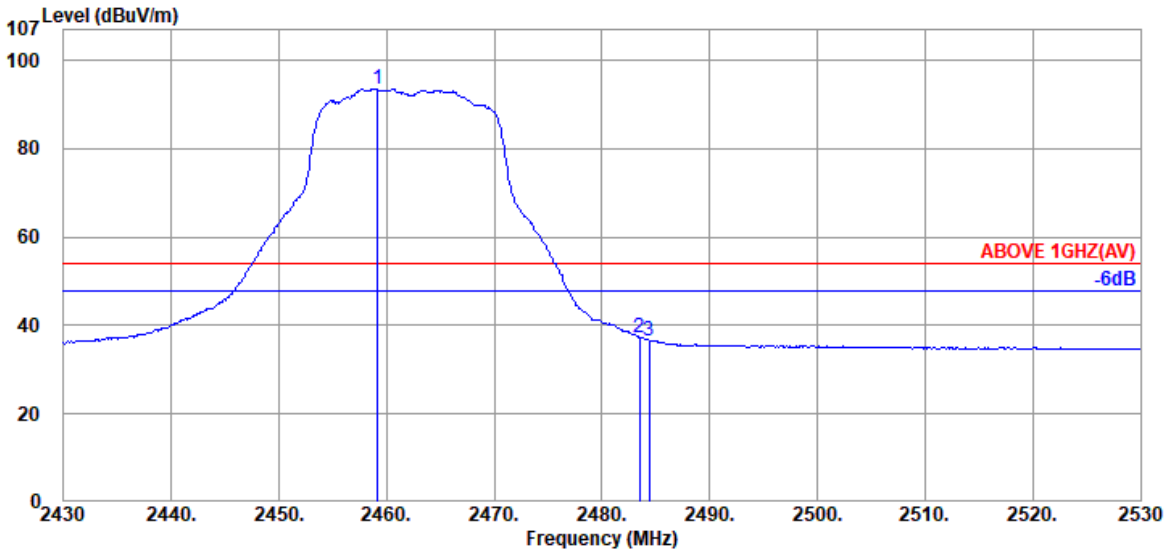


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.200	28.51	5.83	39.95	99.21	93.60	---	---	Average
2483.500	28.57	5.87	39.94	42.83	37.33	54.00	16.67	Average
2484.400	28.57	5.87	39.94	42.20	36.70	54.00	17.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

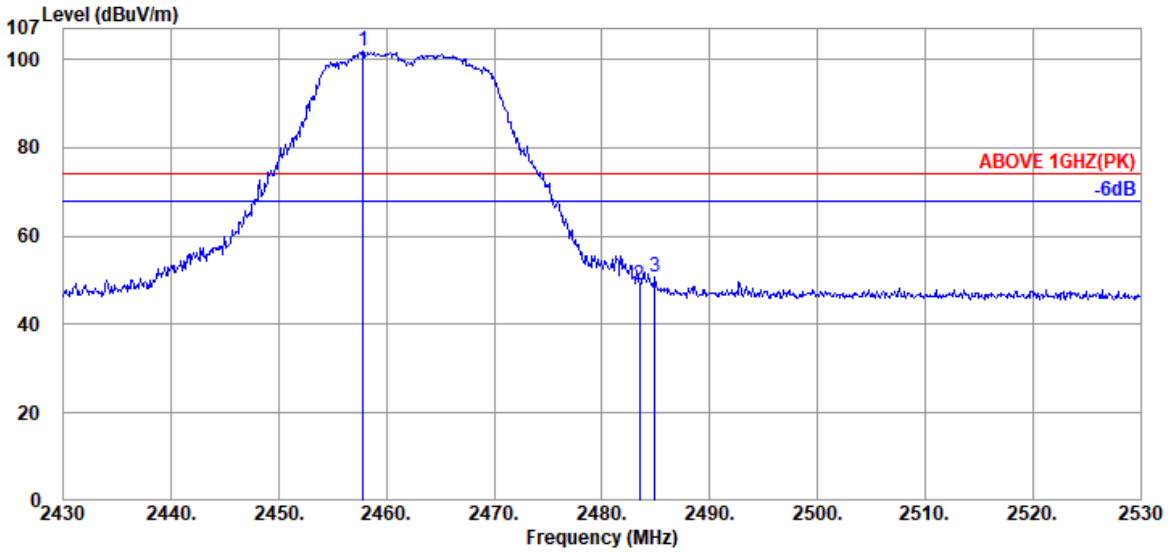

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.800	28.51	5.83	39.95	107.59	101.98	---	---	Peak
2483.500	28.57	5.87	39.94	54.46	48.96	74.00	25.04	Peak
2484.900	28.57	5.87	39.94	56.09	50.59	74.00	23.41	Peak

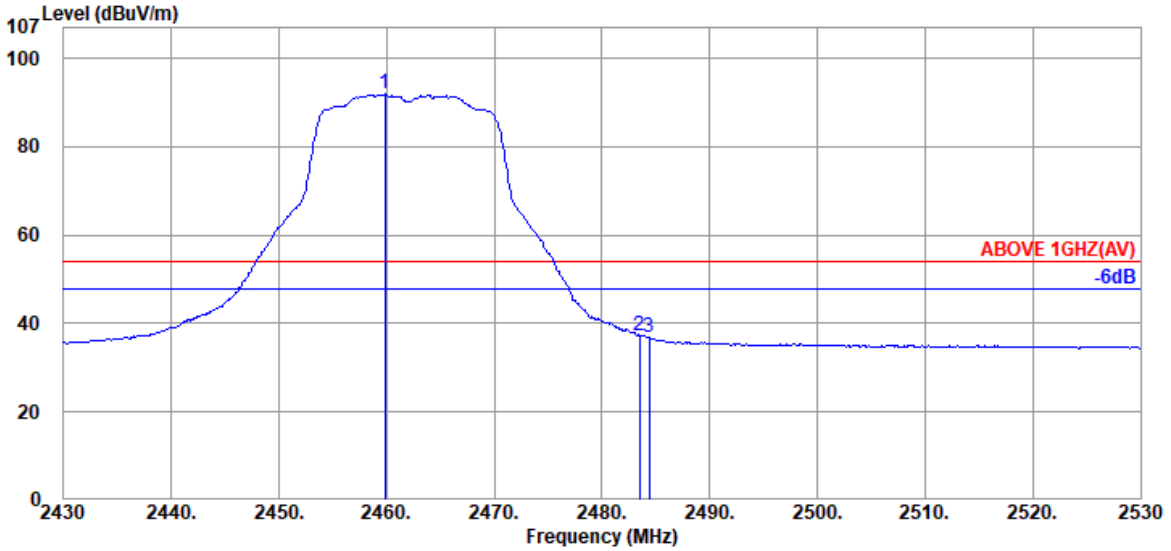


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.800	28.51	5.83	39.95	97.48	91.87	---	---	Average
2483.500	28.57	5.87	39.94	42.88	37.38	54.00	16.62	Average
2484.400	28.57	5.87	39.94	42.34	36.84	54.00	17.16	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

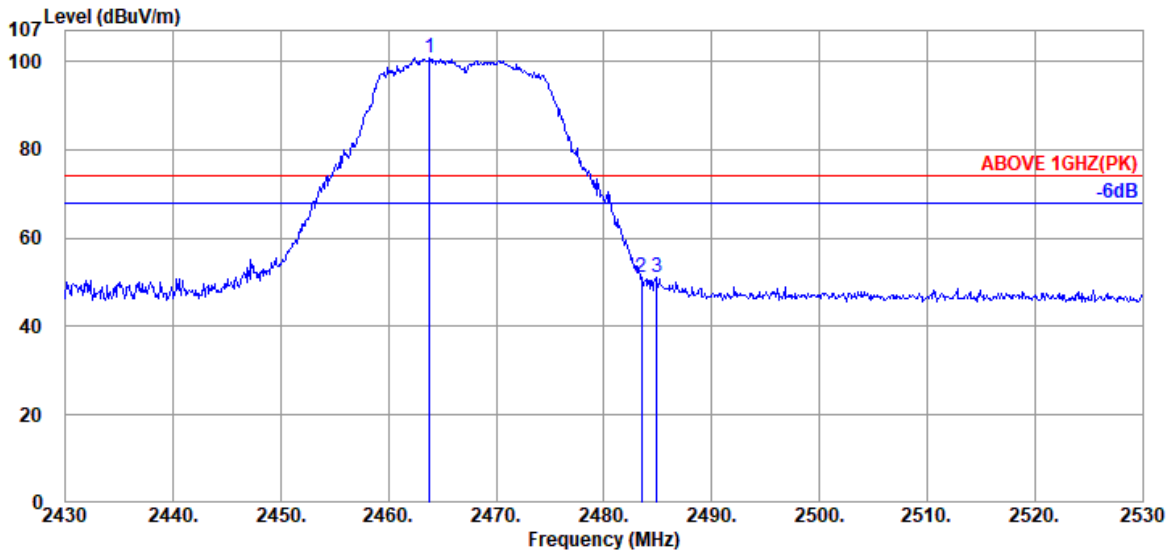

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.800	28.53	5.84	39.95	106.42	100.84	---	---	Peak
2483.500	28.57	5.87	39.94	56.50	51.00	74.00	23.00	Peak
2484.900	28.57	5.87	39.94	56.75	51.25	74.00	22.75	Peak

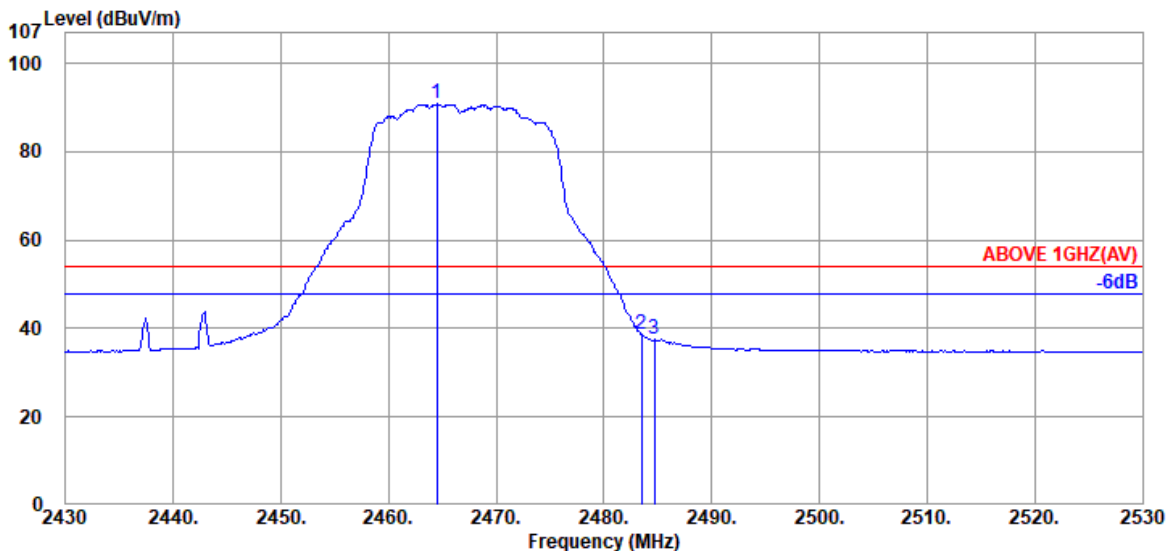


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.53	5.84	39.95	96.40	90.82	---	---	Average
2483.500	28.57	5.87	39.94	44.04	38.54	54.00	15.46	Average
2484.700	28.57	5.87	39.94	42.96	37.46	54.00	16.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

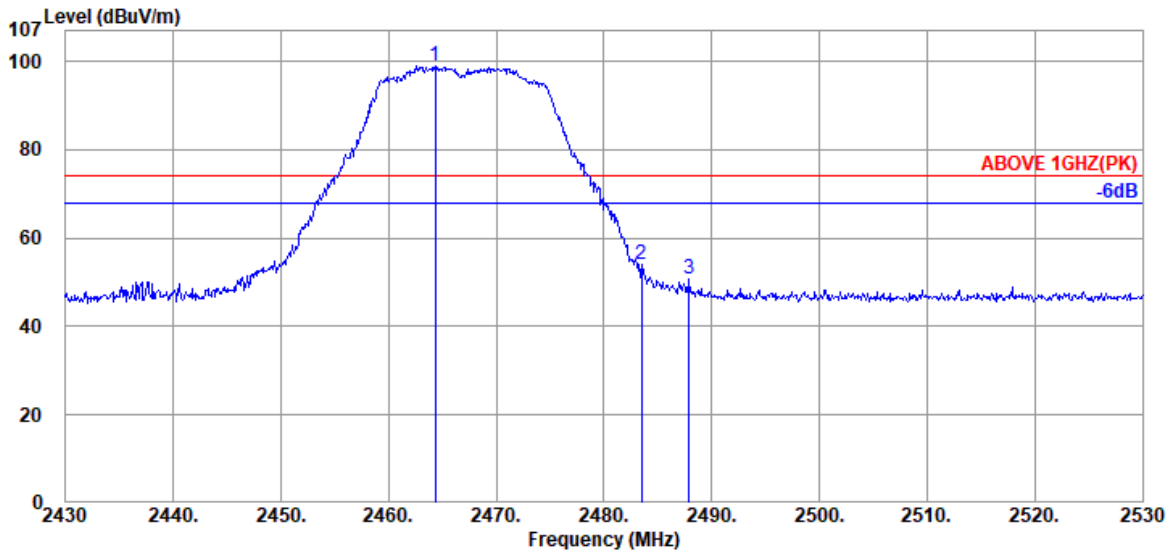

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.300	28.53	5.84	39.95	104.62	99.04	---	---	Peak
2483.500	28.57	5.87	39.94	59.38	53.88	74.00	20.12	Peak
2487.900	28.57	5.87	39.94	56.29	50.79	74.00	23.21	Peak

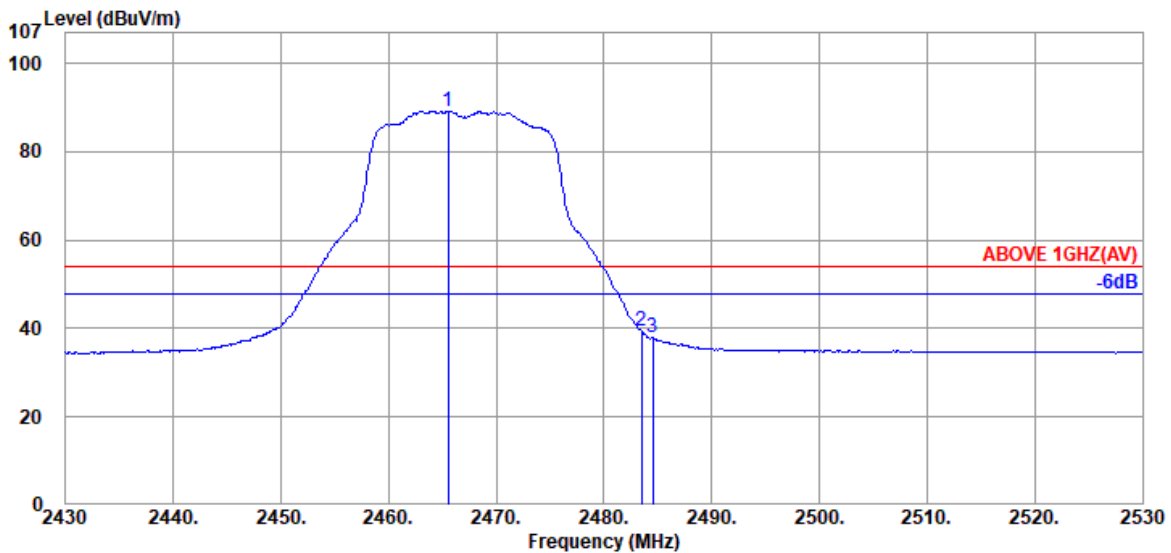


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.53	5.84	39.95	94.80	89.22	---	---	Average
2483.500	28.57	5.87	39.94	44.82	39.32	54.00	14.68	Average
2484.500	28.57	5.87	39.94	43.39	37.89	54.00	16.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

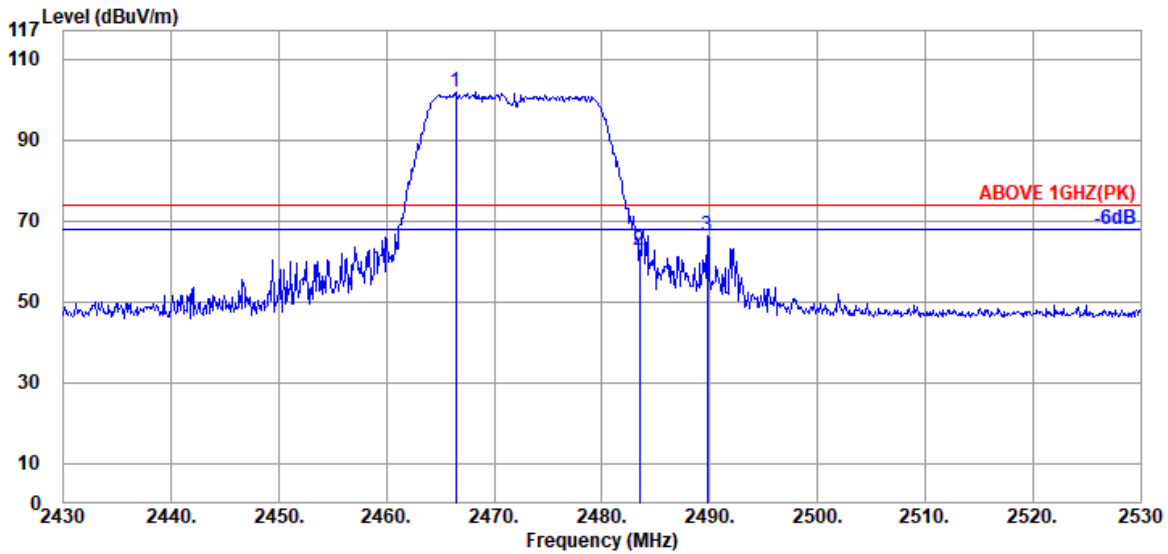

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.400	28.53	5.84	34.52	102.01	101.86	---	---	Peak
2483.500	28.57	5.87	34.53	62.69	62.60	74.00	11.40	Peak
2489.800	28.59	5.88	34.53	66.28	66.22	74.00	7.78	Peak

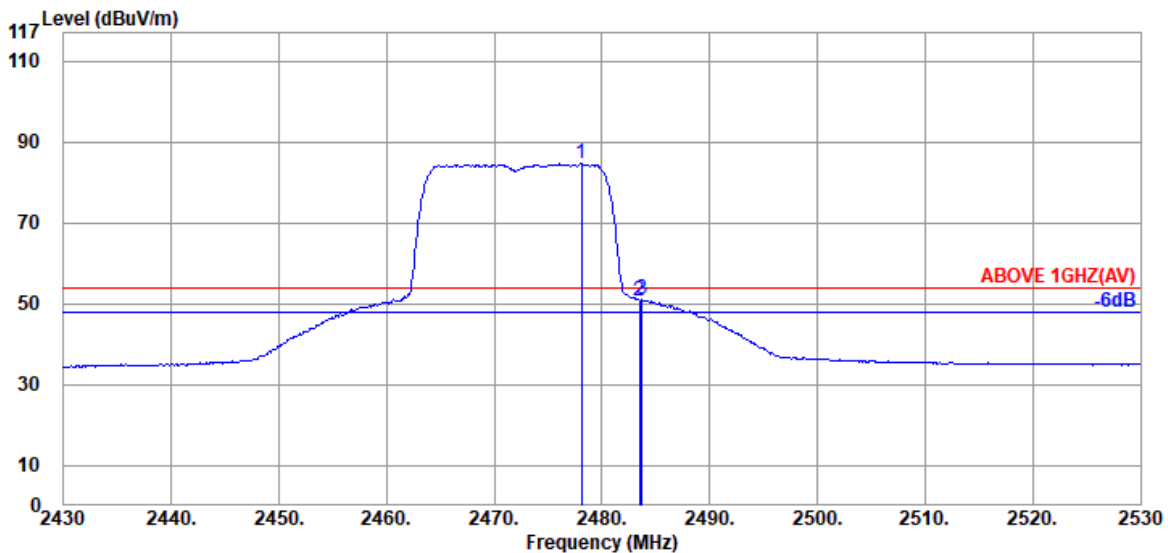


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.100	28.56	5.86	34.53	84.70	84.59	---	---	Average
2483.500	28.57	5.87	34.53	50.99	50.90	54.00	3.10	Average
2483.700	28.57	5.87	34.53	51.09	51.00	54.00	3.00	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

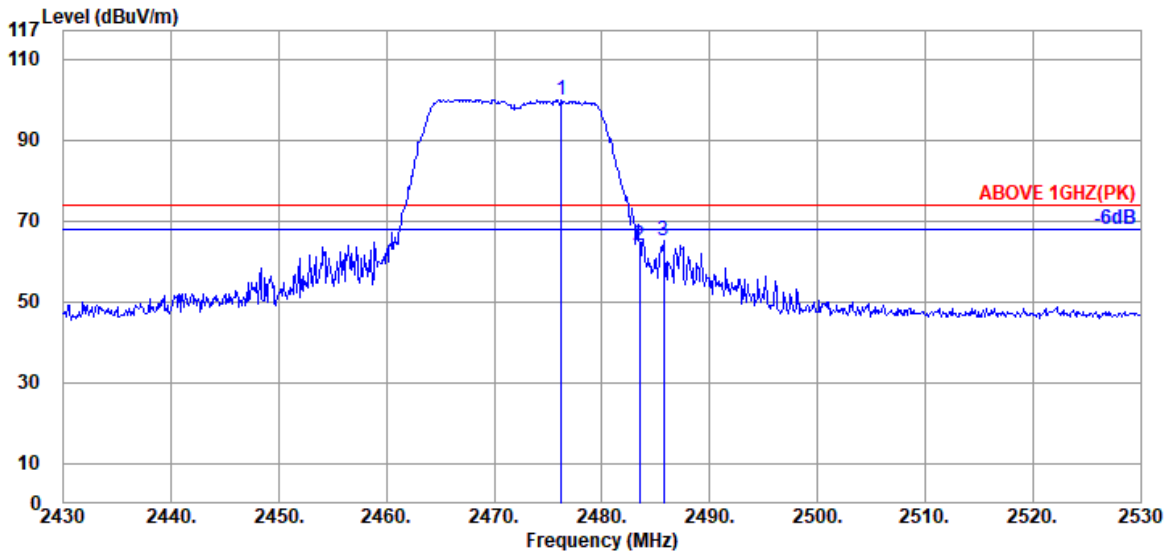

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.200	28.56	5.86	34.53	100.08	99.97	---	---	Peak
2483.500	28.57	5.87	34.53	64.12	64.03	74.00	9.97	Peak
2485.700	28.57	5.87	34.53	65.24	65.15	74.00	8.85	Peak

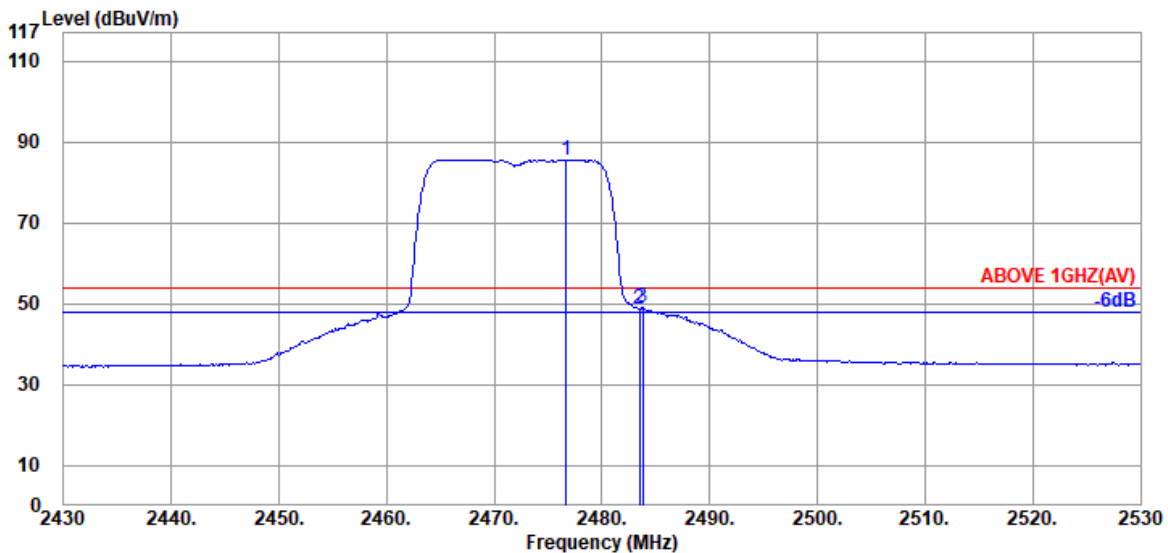


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.700	28.56	5.86	34.53	85.76	85.65	---	---	Average
2483.500	28.57	5.87	34.53	48.85	48.76	54.00	5.24	Average
2483.800	28.57	5.87	34.53	49.12	49.03	54.00	4.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

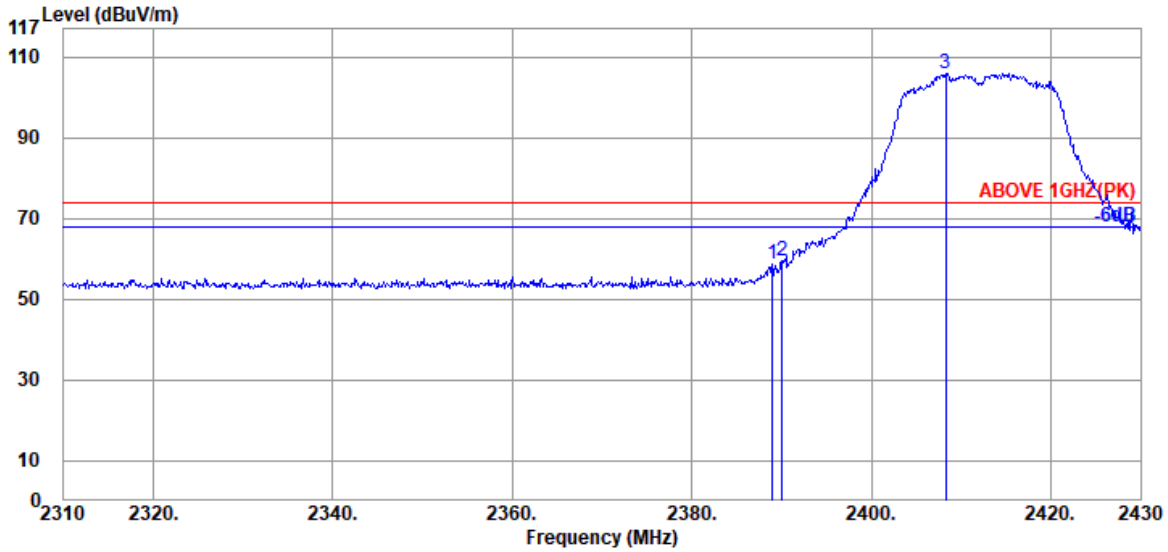

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	39.95	64.39	58.75	74.00	15.25	Peak
2390.040	28.27	6.04	39.95	65.23	59.59	74.00	14.41	Peak
@ 2408.280	28.33	6.07	39.95	111.42	105.87	---	---	Peak

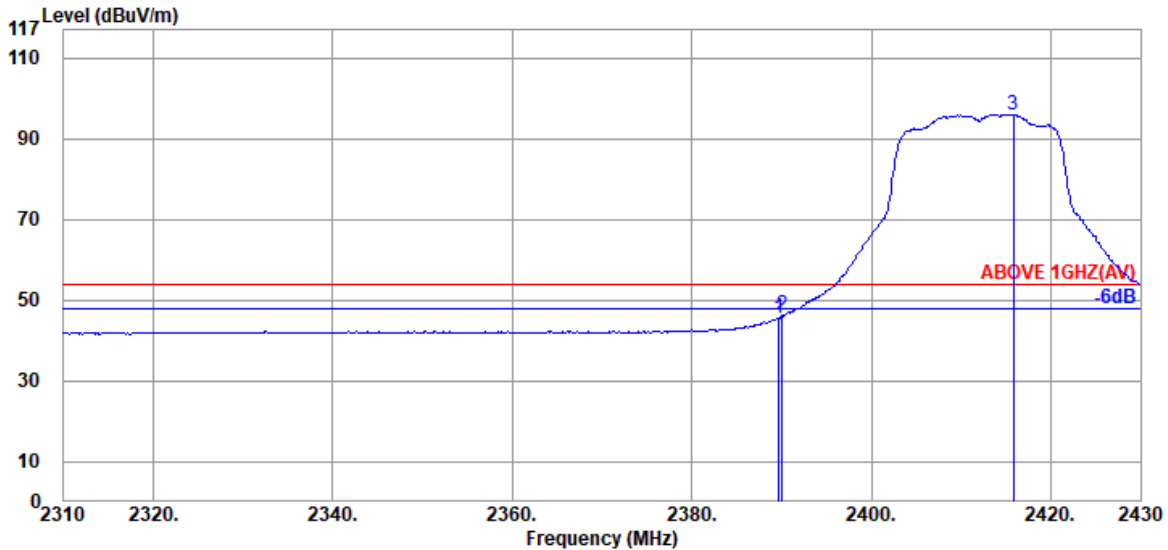


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	51.31	45.67	54.00	8.33	Average
2390.040	28.27	6.04	39.95	51.89	46.25	54.00	7.75	Average
@ 2415.840	28.36	6.07	39.95	101.45	95.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

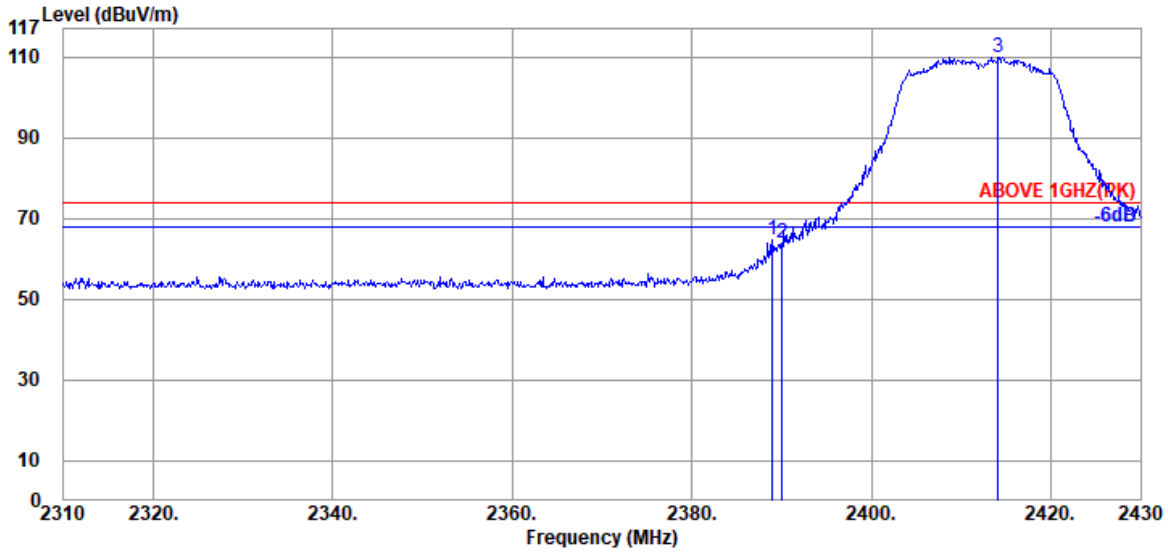

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	39.95	70.32	64.68	74.00	9.32	Peak
2390.040	28.27	6.04	39.95	69.43	63.79	74.00	10.21	Peak
@ 2414.160	28.36	6.07	39.95	115.32	109.80	---	---	Peak

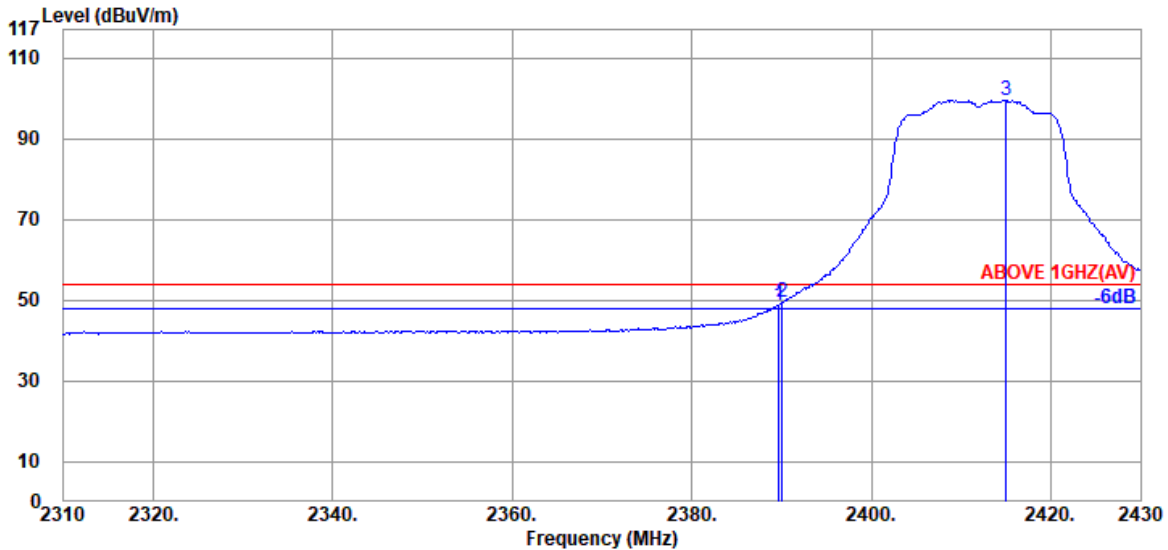


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	54.45	48.81	54.00	5.19	Average
2390.040	28.27	6.04	39.95	55.18	49.54	54.00	4.46	Average
@ 2415.000	28.36	6.07	39.95	105.04	99.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

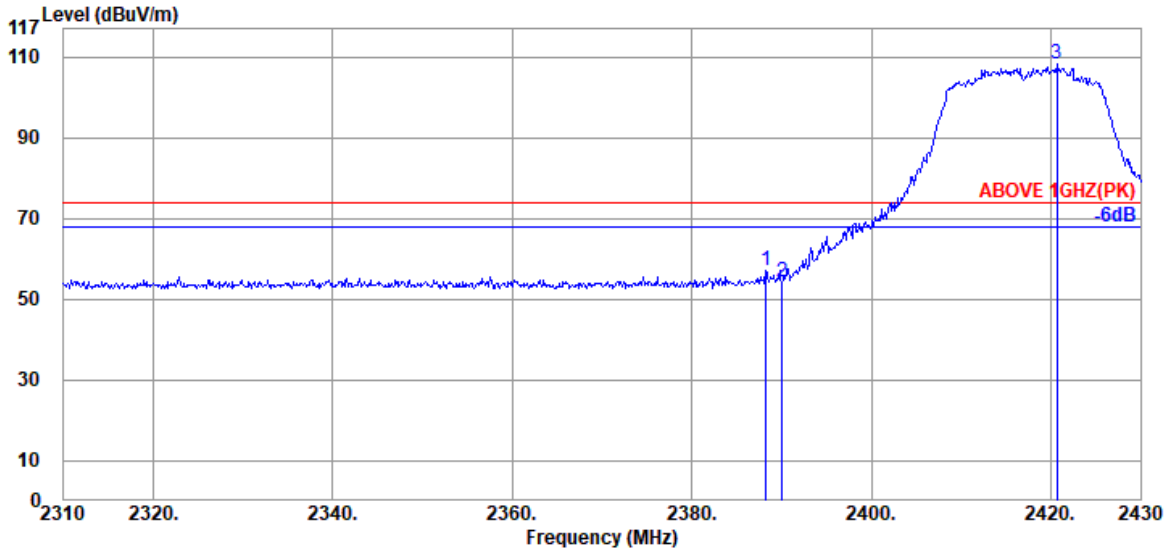

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.240	28.27	6.04	39.95	62.70	57.06	74.00	16.94	Peak
2390.040	28.27	6.04	39.95	60.00	54.36	74.00	19.64	Peak
@ 2420.640	28.39	6.10	39.95	113.72	108.26	---	---	Peak

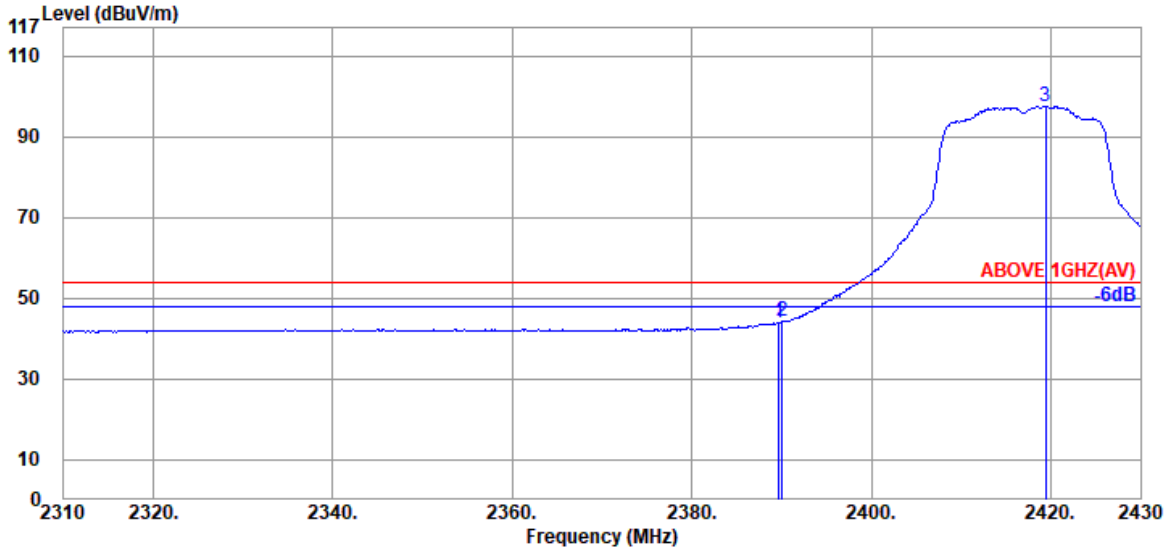


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	49.60	43.96	54.00	10.04	Average
2390.040	28.27	6.04	39.95	49.90	44.26	54.00	9.74	Average
@ 2419.440	28.39	6.07	39.95	102.84	97.35	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2417MHz
------	--------------	-----------	------------

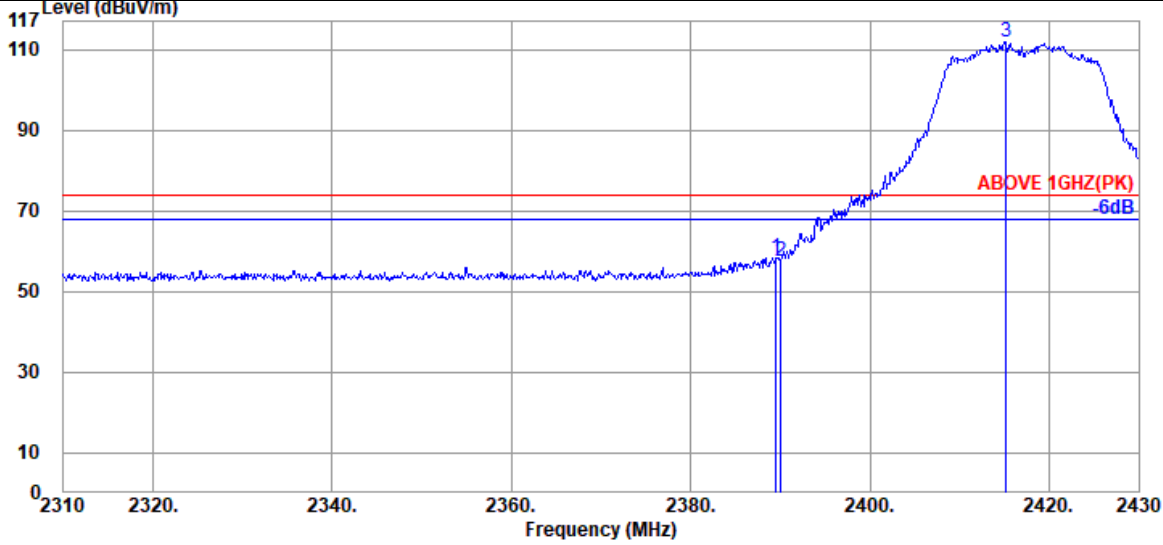

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	6.04	39.95	64.08	58.44	74.00	15.56	Peak
2390.040	28.27	6.04	39.95	63.28	57.64	74.00	16.36	Peak
@ 2415.240	28.36	6.07	39.95	117.23	111.71	---	---	Peak

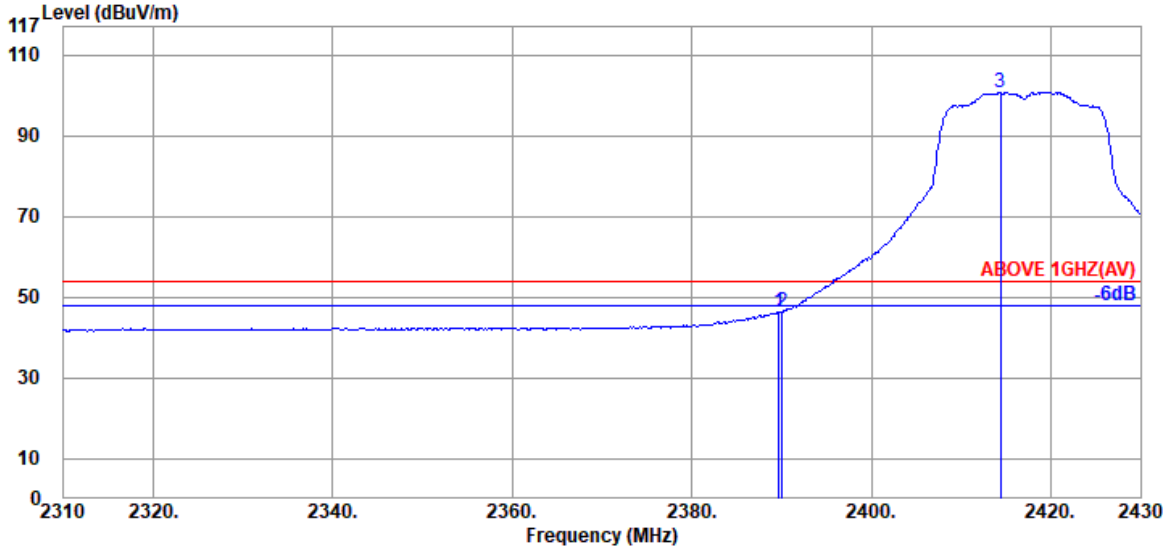


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	51.85	46.21	54.00	7.79	Average
2390.040	28.27	6.04	39.95	52.11	46.47	54.00	7.53	Average
@ 2414.400	28.36	6.07	39.95	106.15	100.63	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

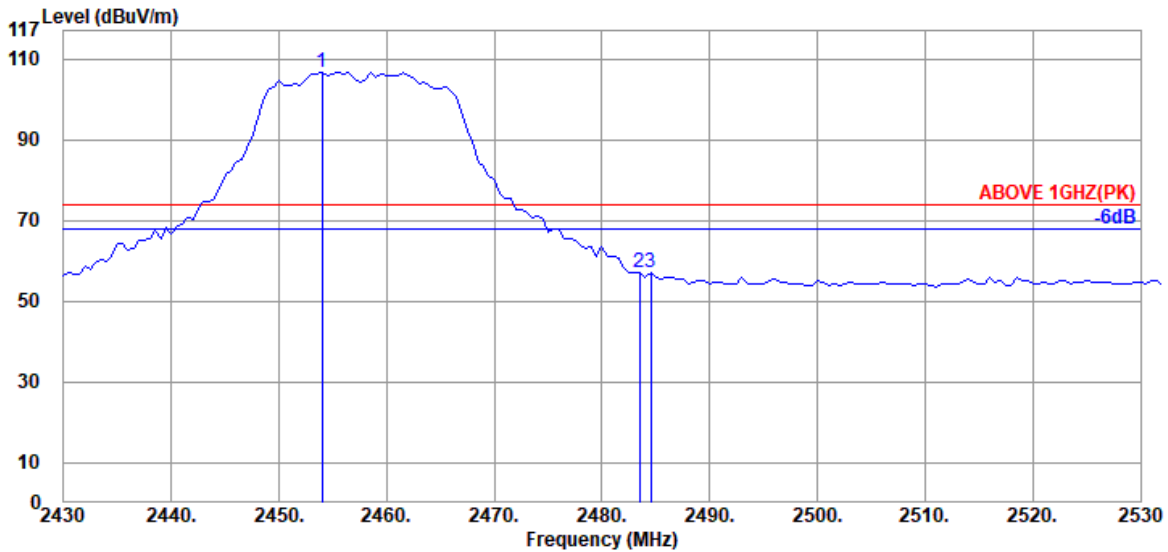

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	28.51	6.15	39.95	111.98	106.69	---	---	Peak
2483.500	28.57	6.18	39.94	62.21	57.02	74.00	16.98	Peak
2484.500	28.57	6.18	39.94	62.34	57.15	74.00	16.85	Peak

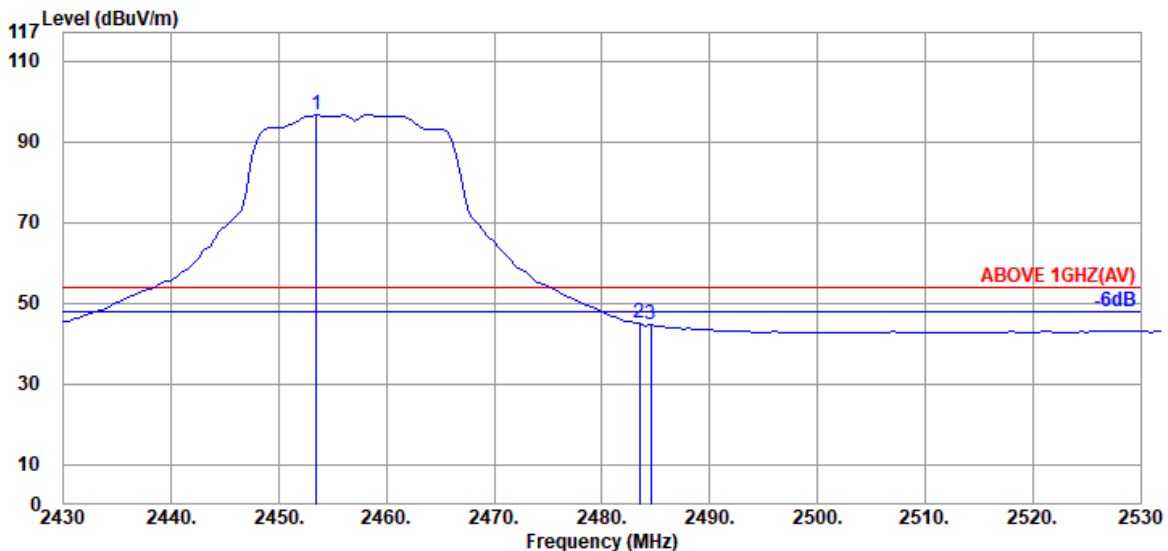


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2453.500	28.51	6.15	39.95	101.80	96.51	---	---	Average
2483.500	28.57	6.18	39.94	50.16	44.97	54.00	9.03	Average
2484.500	28.57	6.18	39.94	49.86	44.67	54.00	9.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

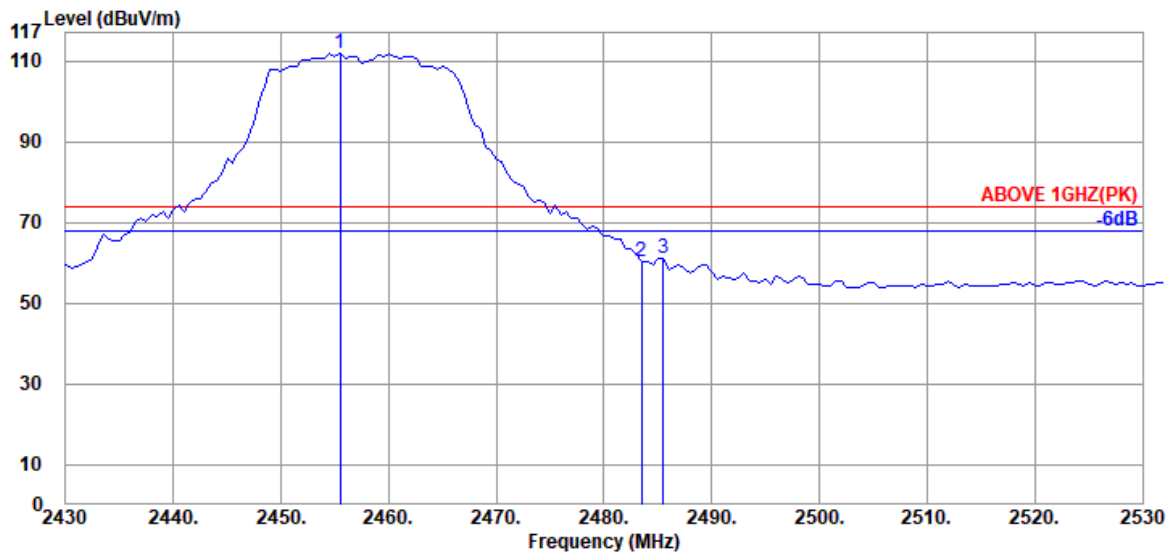

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.51	6.15	39.95	117.13	111.84	---	---	Peak
2483.500	28.57	6.18	39.94	65.52	60.33	74.00	13.67	Peak
2485.500	28.57	6.18	39.94	66.48	61.29	74.00	12.71	Peak

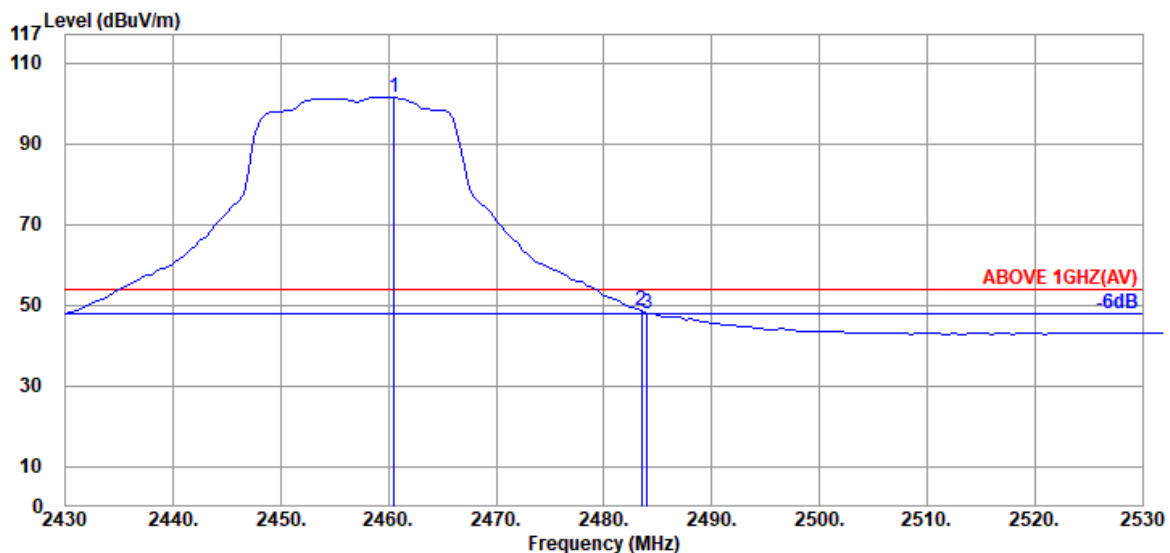


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	28.53	6.15	39.95	106.59	101.32	---	---	Average
2483.500	28.57	6.18	39.94	53.86	48.67	54.00	5.33	Average
2484.000	28.57	6.18	39.94	53.28	48.09	54.00	5.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

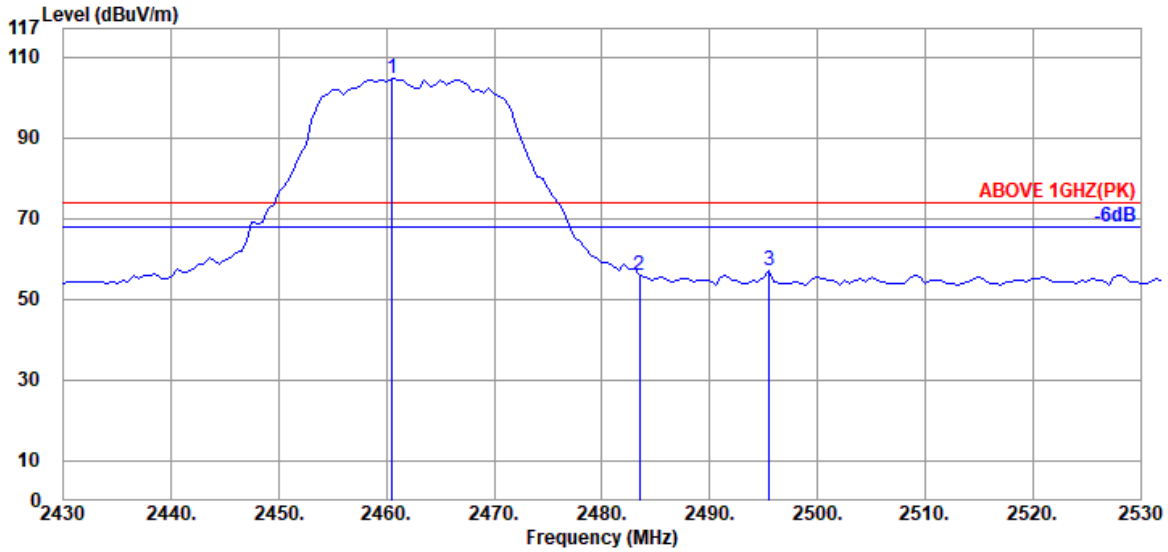

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.500	28.53	6.15	39.95	109.70	104.43	---	---	Peak
2483.500	28.57	6.18	39.94	60.94	55.75	74.00	18.25	Peak
2495.500	28.59	6.21	39.94	62.26	57.12	74.00	16.88	Peak

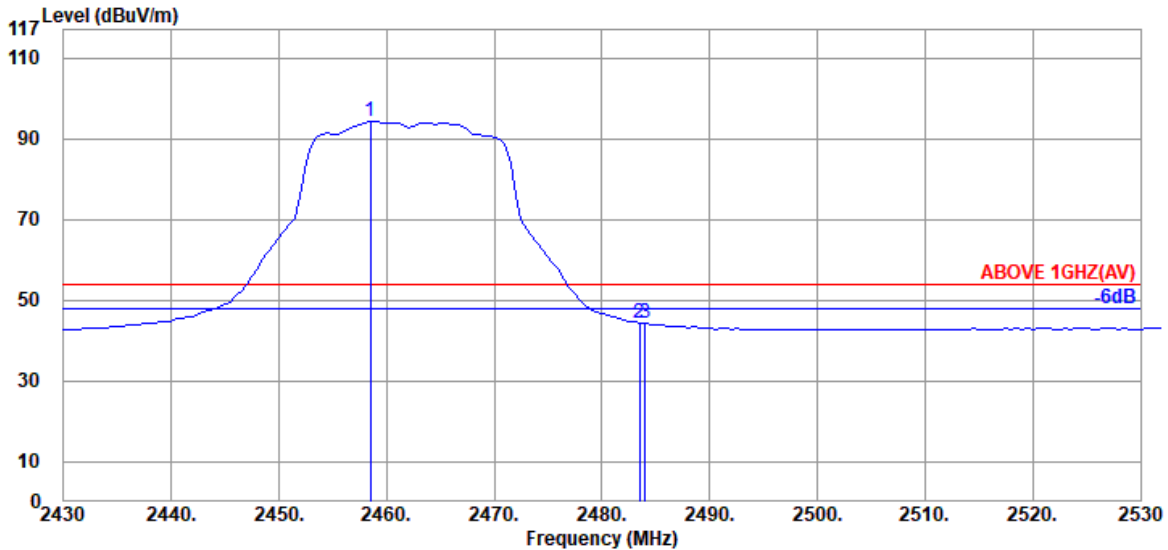


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.51	6.15	39.95	99.47	94.18	---	---	Average
2483.500	28.57	6.18	39.94	49.55	44.36	54.00	9.64	Average
2484.000	28.57	6.18	39.94	49.35	44.16	54.00	9.84	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

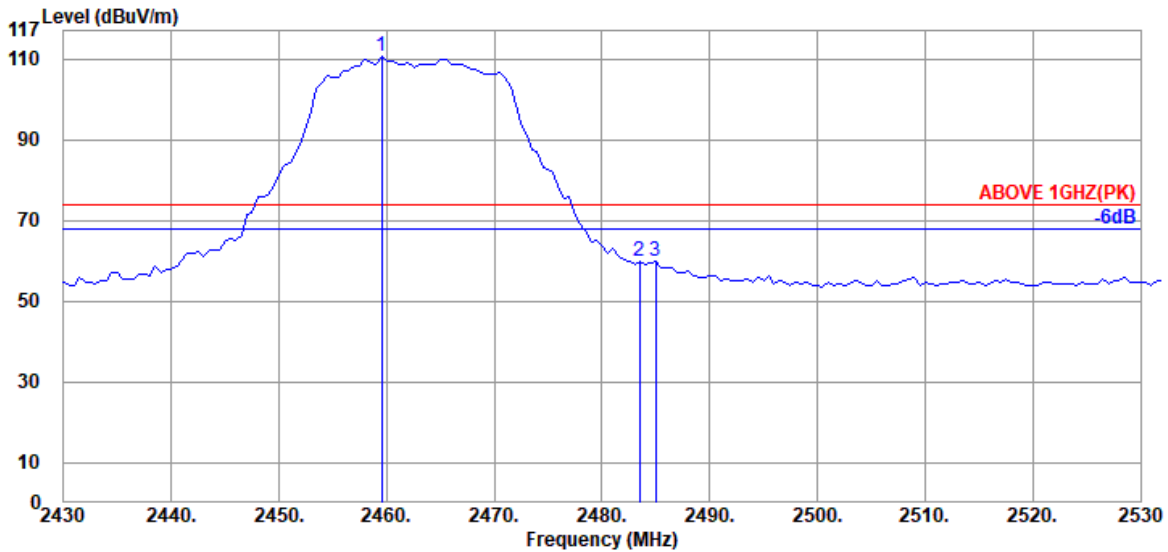

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.51	6.15	39.95	115.97	110.68	---	---	Peak
2483.500	28.57	6.18	39.94	64.92	59.73	74.00	14.27	Peak
2485.000	28.57	6.18	39.94	64.92	59.73	74.00	14.27	Peak

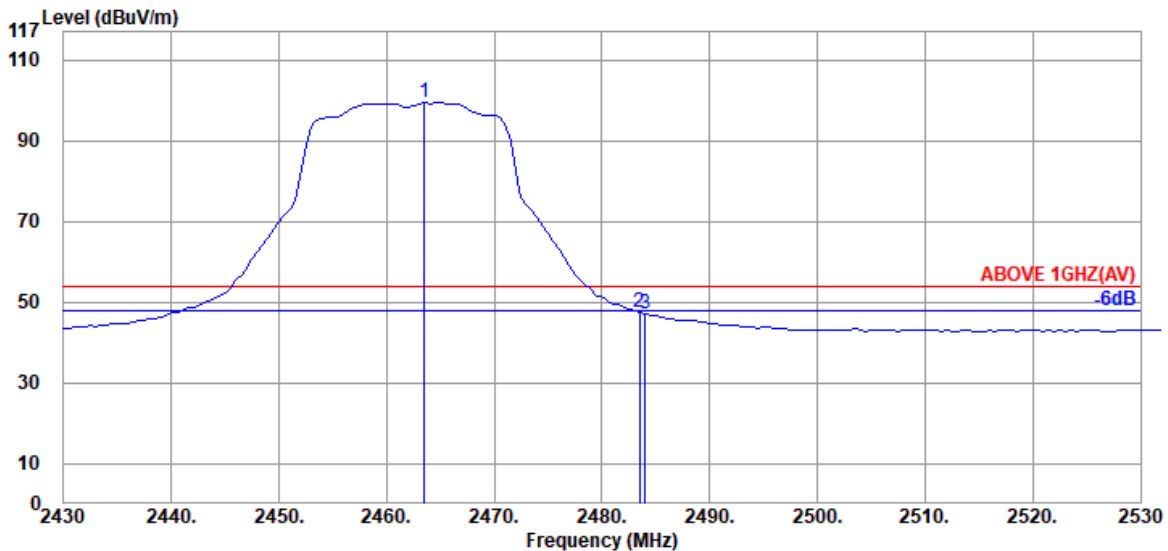


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.53	6.15	39.95	104.69	99.42	---	---	Average
2483.500	28.57	6.18	39.94	52.67	47.48	54.00	6.52	Average
2484.000	28.57	6.18	39.94	52.29	47.10	54.00	6.90	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

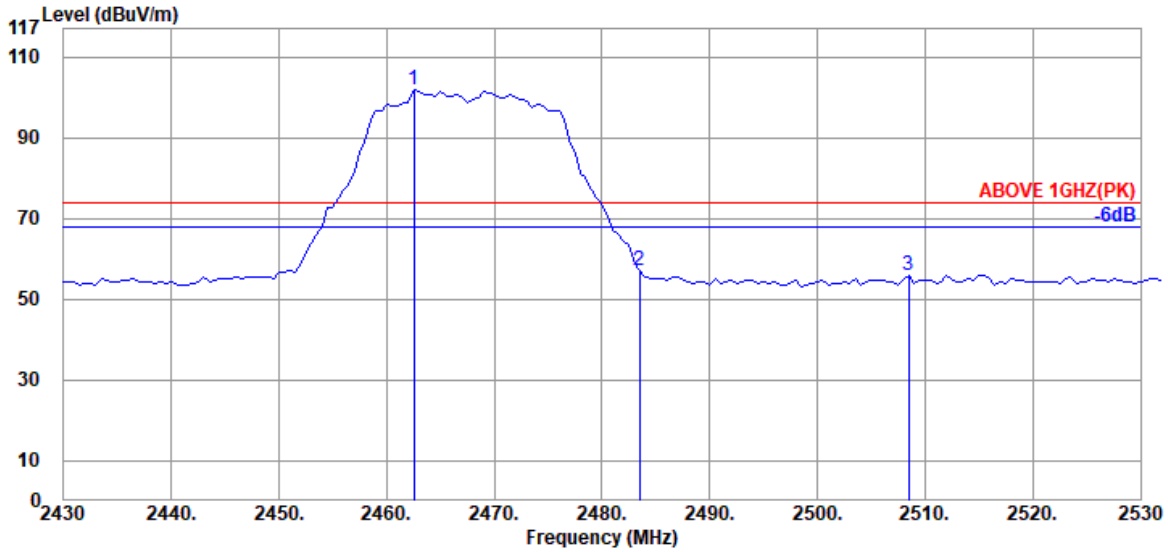

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.53	6.15	39.95	106.92	101.65	---	---	Peak
2483.500	28.57	6.18	39.94	62.15	56.96	74.00	17.04	Peak
2508.500	28.63	5.91	39.94	61.45	56.05	74.00	17.95	Peak

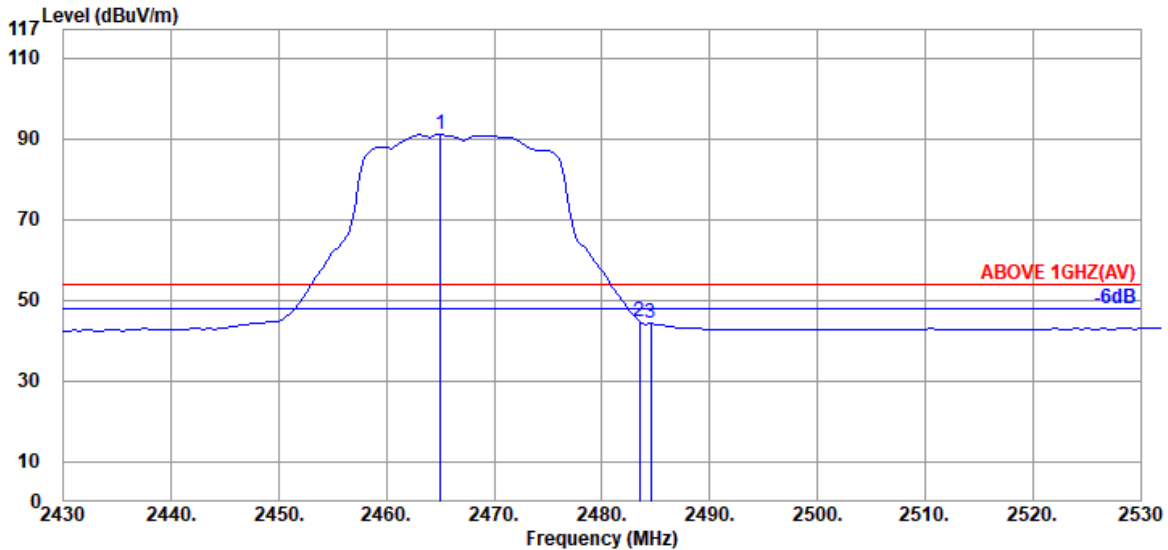


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	39.95	96.23	90.96	---	---	Average
2483.500	28.57	6.18	39.94	49.87	44.68	54.00	9.32	Average
2484.500	28.57	6.18	39.94	49.36	44.17	54.00	9.83	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

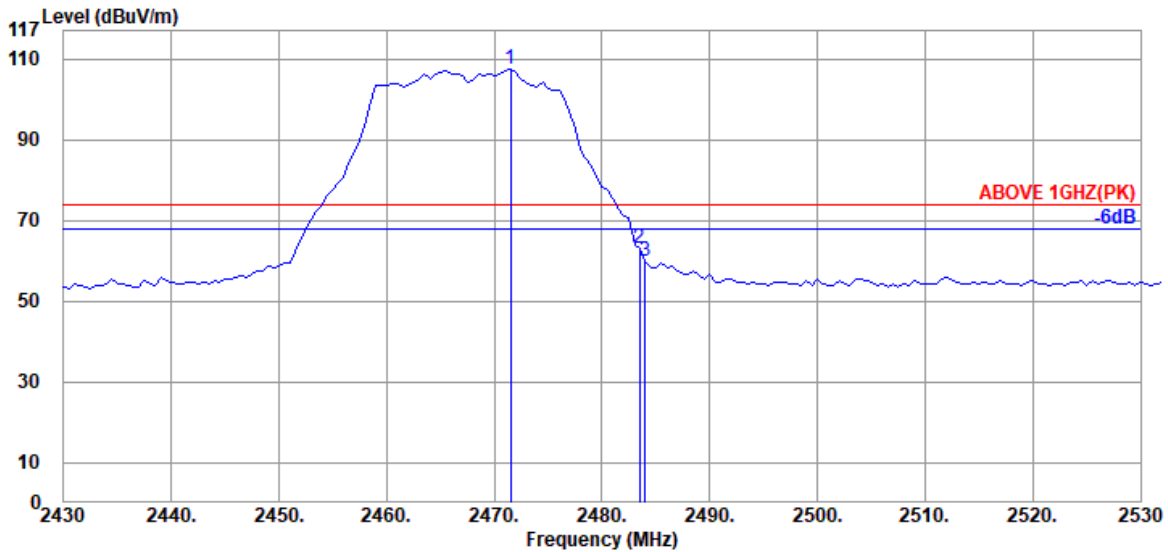

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.500	28.54	6.18	39.94	112.49	107.27	---	---	Peak
2483.500	28.57	6.18	39.94	68.25	63.06	74.00	10.94	Peak
2484.000	28.57	6.18	39.94	64.99	59.80	74.00	14.20	Peak

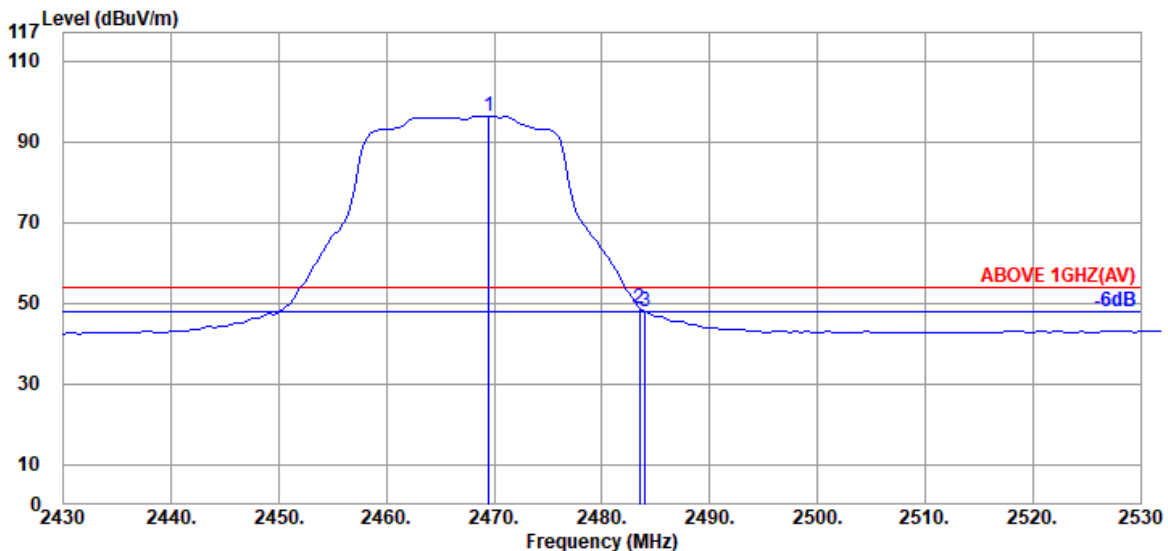


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.54	6.15	39.94	101.62	96.37	---	---	Average
2483.500	28.57	6.18	39.94	53.93	48.74	54.00	5.26	Average
2484.000	28.57	6.18	39.94	53.10	47.91	54.00	6.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

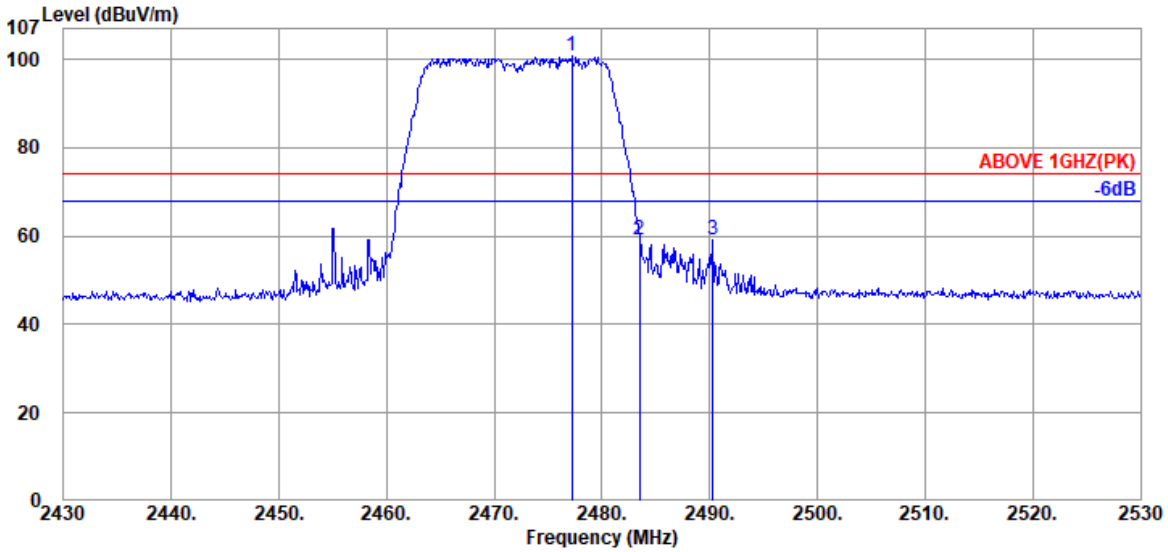

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.200	28.56	5.86	39.94	106.44	100.92	---	---	Peak
2483.500	28.57	5.87	39.94	64.77	59.27	74.00	14.73	Peak
2490.300	28.59	5.88	39.94	64.60	59.13	74.00	14.87	Peak

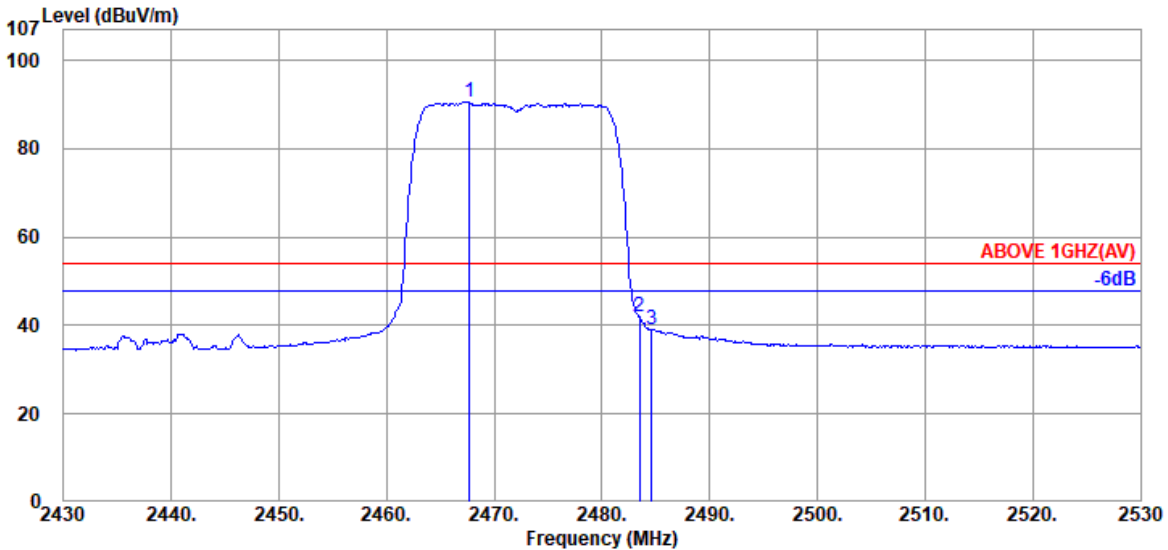


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.700	28.54	5.85	39.94	96.10	90.55	---	---	Average
2483.500	28.57	5.87	39.94	47.41	41.91	54.00	12.09	Average
2484.600	28.57	5.87	39.94	44.68	39.18	54.00	14.82	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

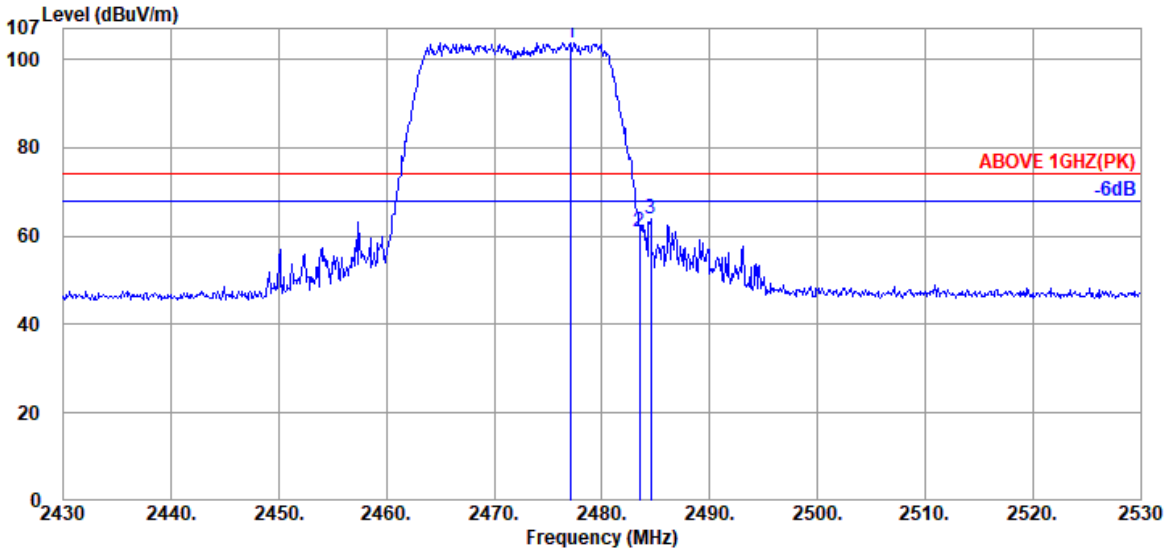

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.100	28.56	5.86	39.94	109.30	103.78	---	---	Peak
2483.500	28.57	5.87	39.94	66.43	60.93	74.00	13.07	Peak
2484.500	28.57	5.87	39.94	69.58	64.08	74.00	9.92	Peak

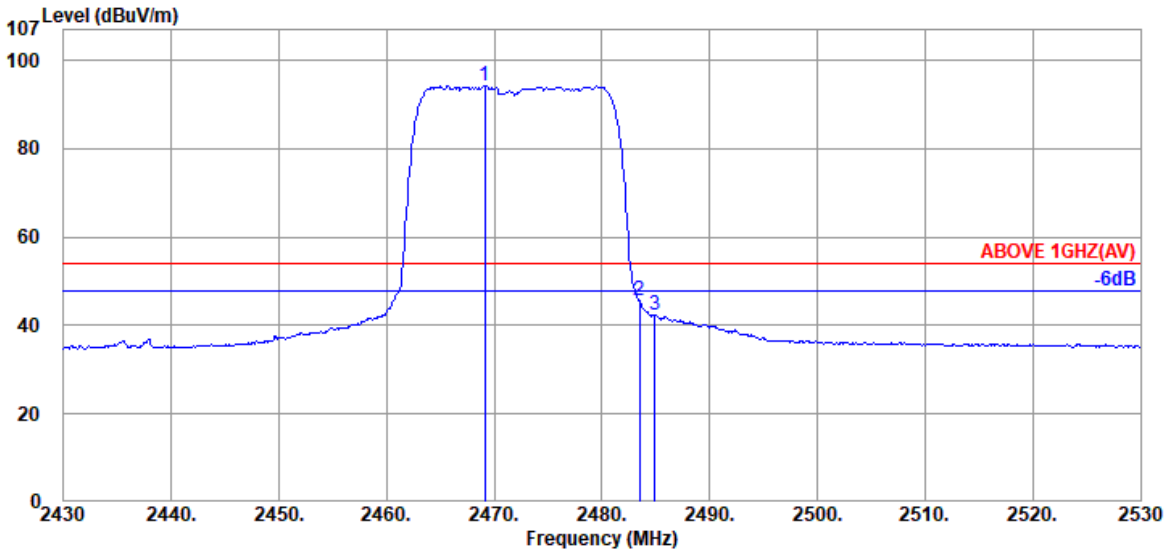


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.100	28.54	5.85	39.94	99.78	94.23	---	---	Average
2483.500	28.57	5.87	39.94	51.19	45.69	54.00	8.31	Average
2484.900	28.57	5.87	39.94	48.03	42.53	54.00	11.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

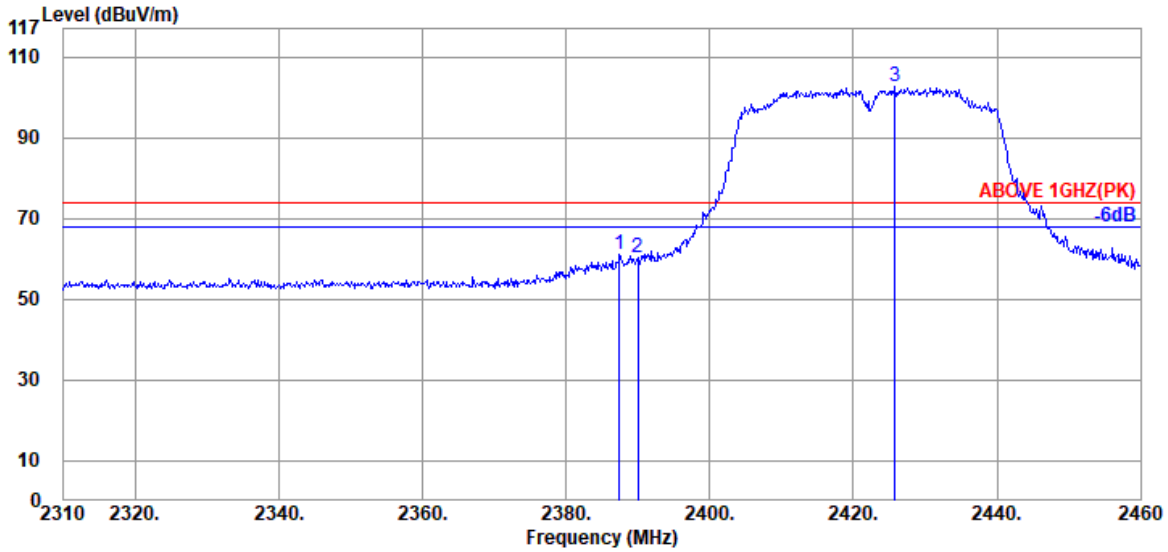

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Liits (dBμV/m)	Margin (dB)	Detector
2387.400	28.27	6.04	39.95	66.82	61.18	74.00	12.82	Peak
2389.950	28.27	6.04	39.95	65.74	60.10	74.00	13.90	Peak
@ 2425.800	28.41	6.10	39.95	108.06	102.62	---	---	Peak

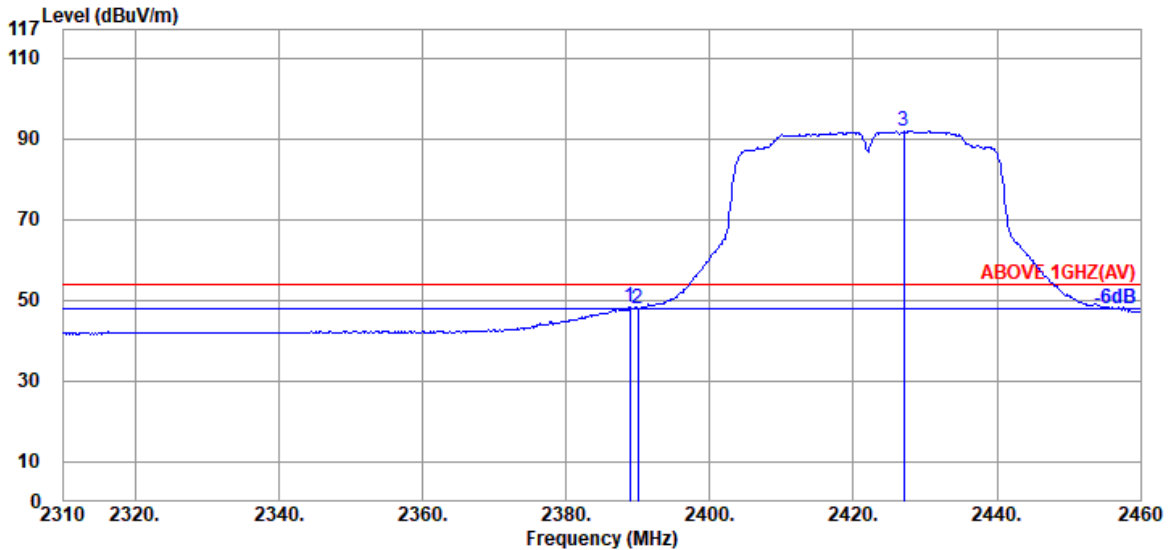


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.27	6.04	39.95	53.95	48.31	54.00	5.69	Average
2389.950	28.27	6.04	39.95	53.69	48.05	54.00	5.95	Average
@ 2427.000	28.41	6.10	39.95	97.19	91.75	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

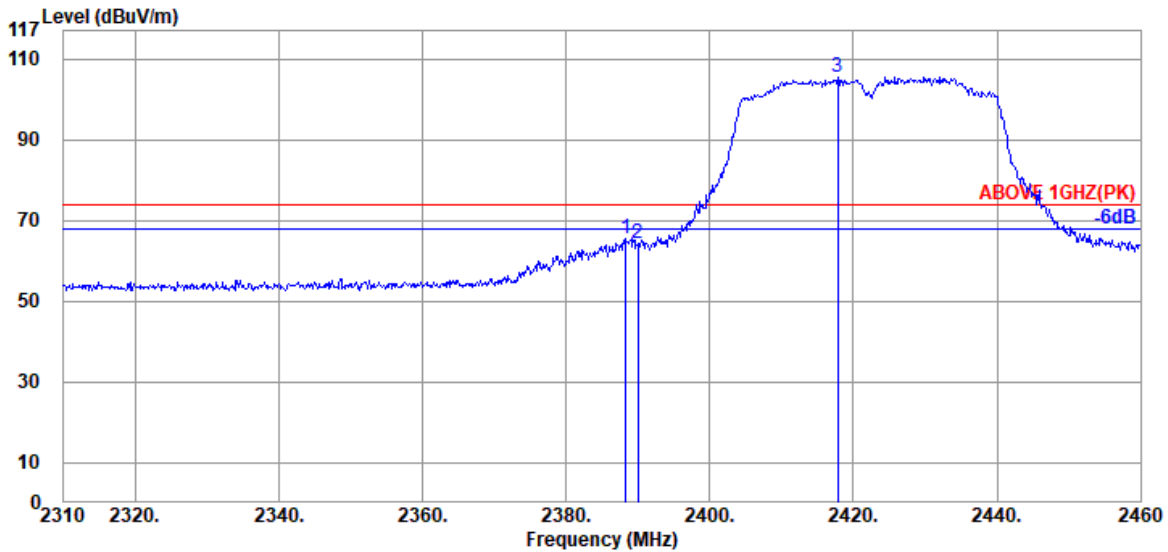

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.27	6.04	39.95	71.19	65.55	74.00	8.45	Peak
2389.950	28.27	6.04	39.95	69.91	64.27	74.00	9.73	Peak
@ 2417.850	28.36	6.07	39.95	111.05	105.53	---	---	Peak

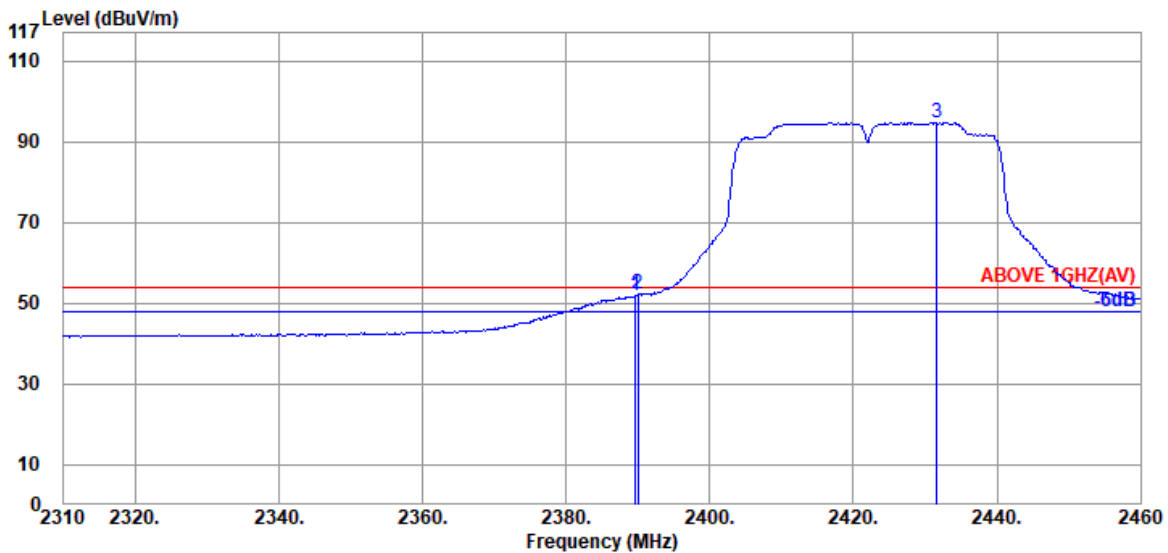


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.27	6.04	39.95	57.39	51.75	54.00	2.25	Average
2389.950	28.27	6.04	39.95	57.96	52.32	54.00	1.68	Average
@ 2431.650	28.41	6.10	39.95	100.21	94.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

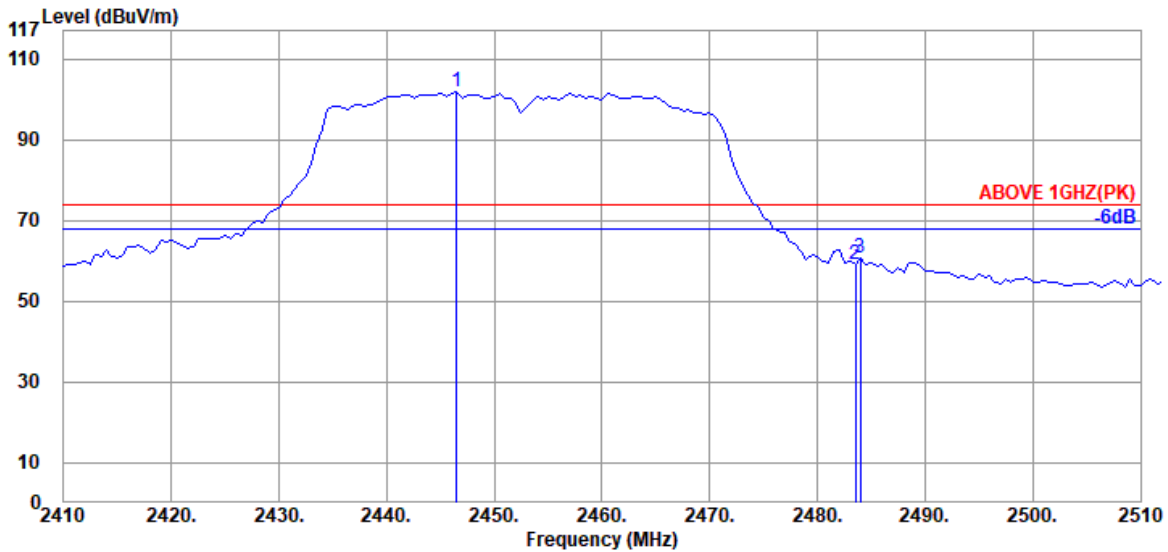

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	28.50	6.13	39.95	107.27	101.95	---	---	Peak
2483.500	28.57	6.18	39.94	64.30	59.11	74.00	14.89	Peak
2484.000	28.57	6.18	39.94	65.72	60.53	74.00	13.47	Peak

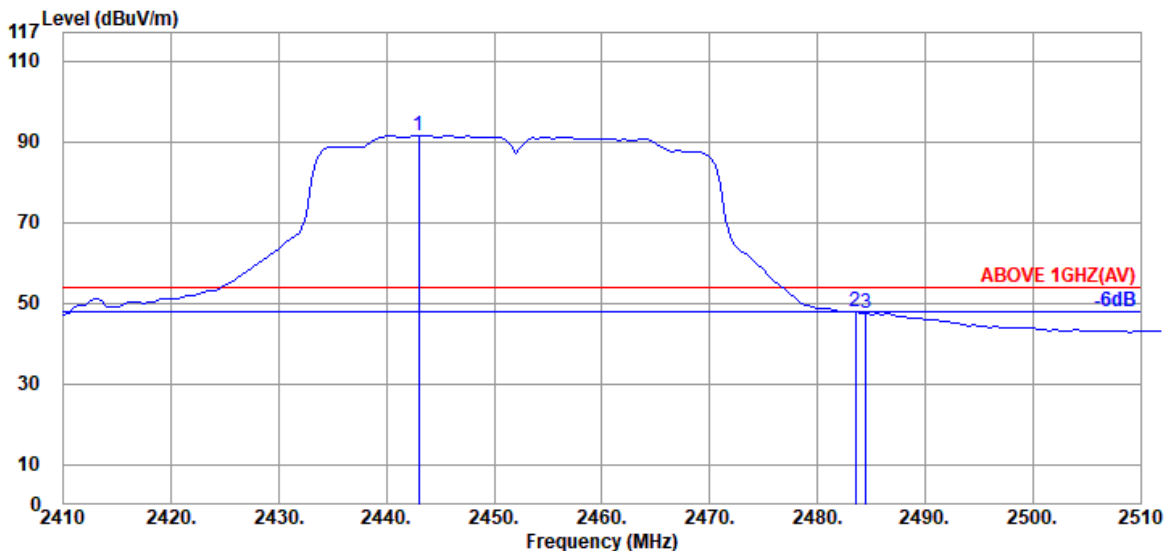


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2443.000	28.47	6.13	39.95	96.89	91.54	---	---	Average
2483.500	28.57	6.18	39.94	53.15	47.96	54.00	6.04	Average
2484.500	28.57	6.18	39.94	52.74	47.55	54.00	6.45	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

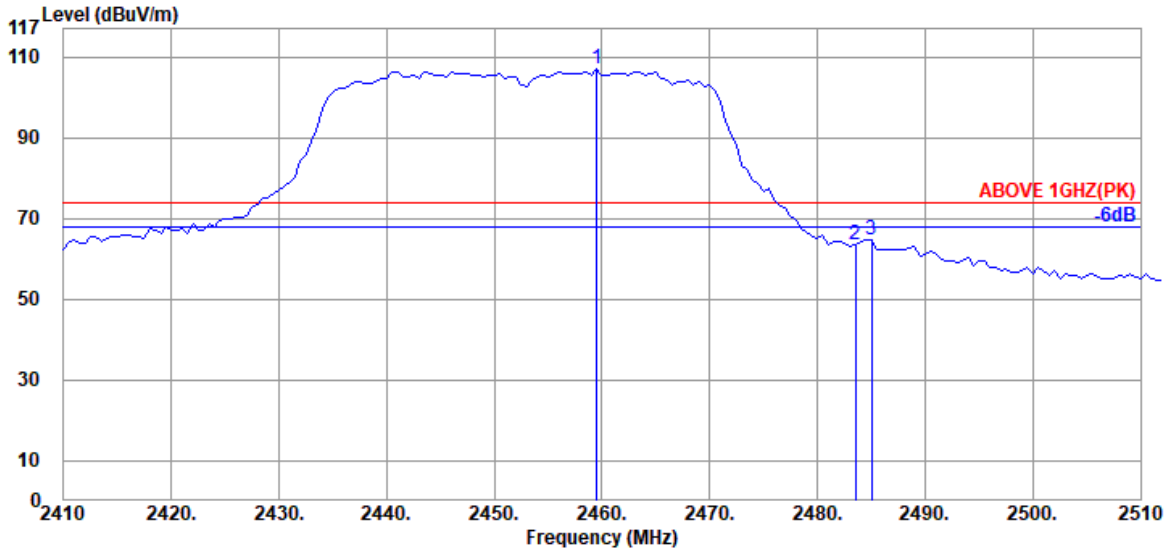

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2459.500	28.51	6.15	39.95	112.35	107.06	---	---	Peak
2483.500	28.57	6.18	39.94	68.85	63.66	74.00	10.34	Peak
2485.000	28.57	6.18	39.94	69.84	64.65	74.00	9.35	Peak

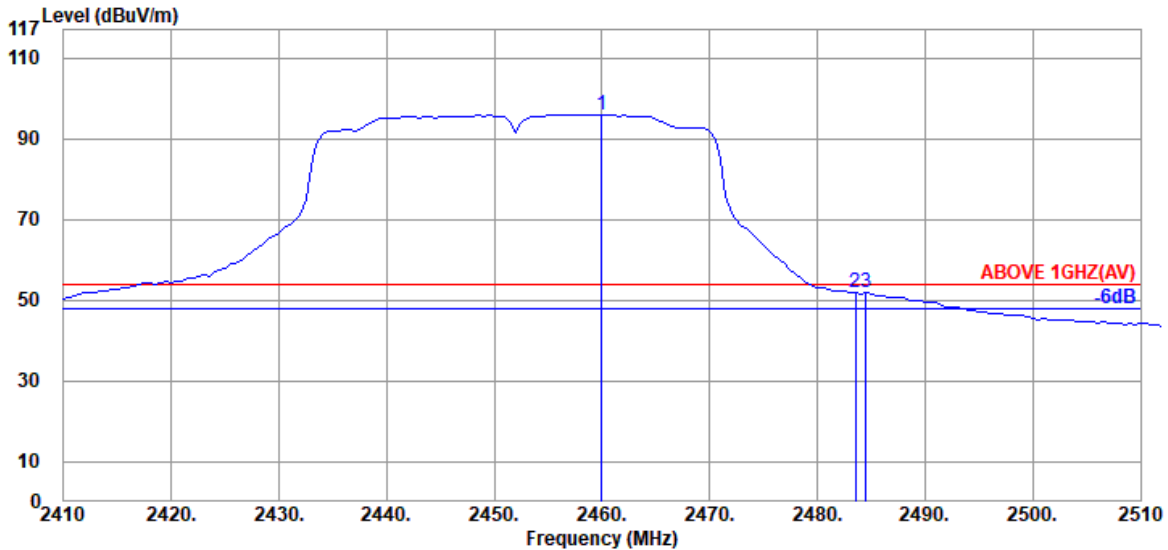


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.000	28.51	6.15	39.95	101.25	95.96	---	---	Average
2483.500	28.57	6.18	39.94	57.11	51.92	54.00	2.08	Average
2484.500	28.57	6.18	39.94	56.94	51.75	54.00	2.25	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

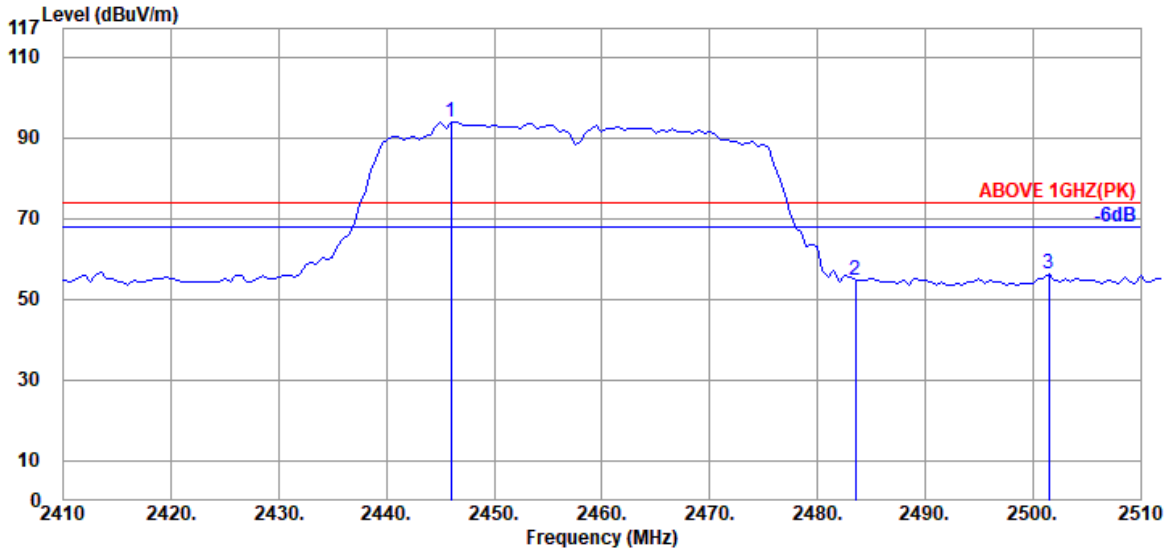

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	28.47	6.13	39.95	99.36	94.01	---	---	Peak
2483.500	28.57	6.18	39.94	59.73	54.54	74.00	19.46	Peak
2501.500	28.60	5.89	39.94	61.77	56.32	74.00	17.68	Peak

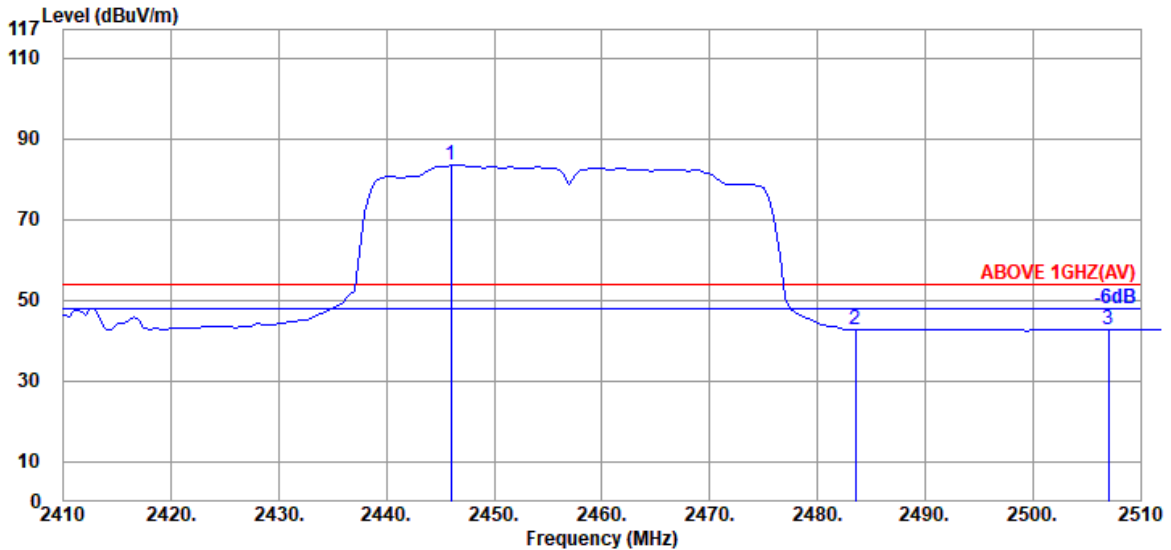


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.000	28.47	6.13	39.95	88.78	83.43	---	---	Average
2483.500	28.57	6.18	39.94	47.89	42.70	54.00	11.30	Average
2507.000	28.63	5.91	39.94	48.22	42.82	54.00	11.18	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

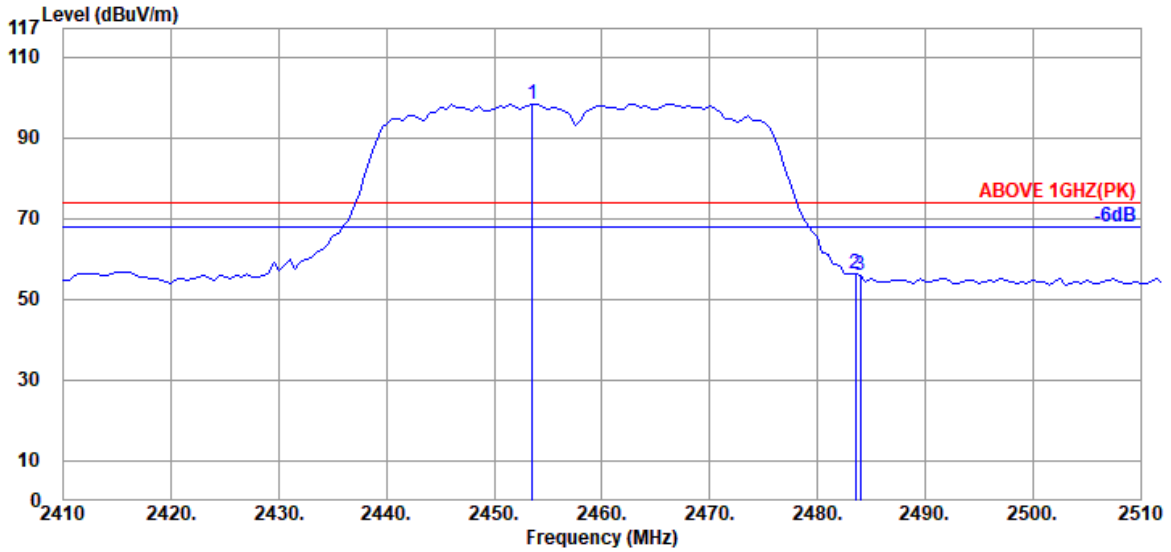

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.500	28.51	6.15	39.95	103.63	98.34	---	---	Peak
2483.500	28.57	6.18	39.94	61.65	56.46	74.00	17.54	Peak
2484.000	28.57	5.87	39.94	61.38	55.88	74.00	18.12	Peak

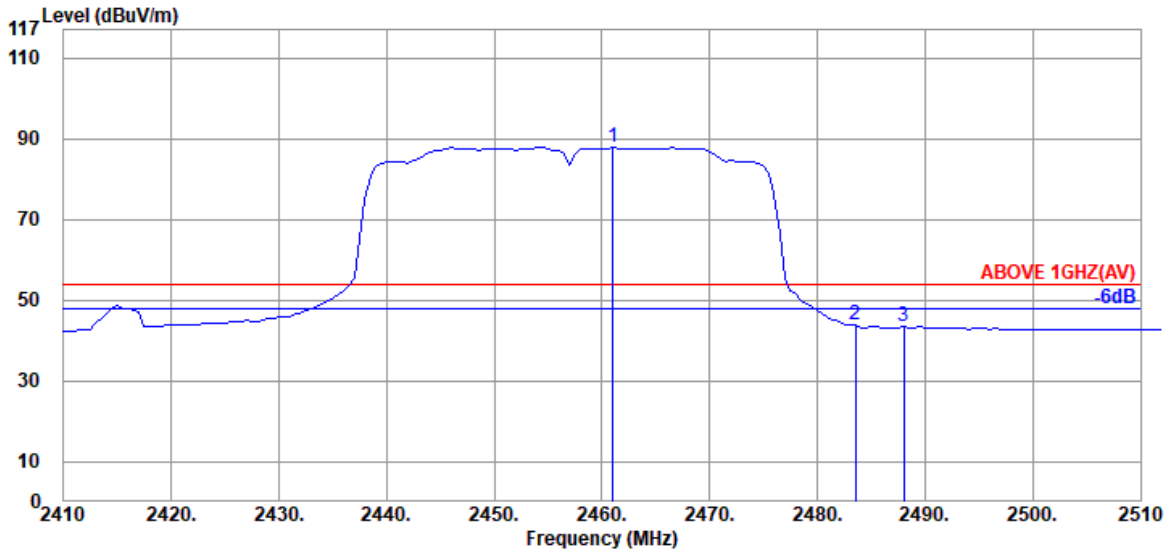


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	28.53	6.15	39.95	93.16	87.89	---	---	Average
2483.500	28.57	6.18	39.94	49.04	43.85	54.00	10.15	Average
2488.000	28.57	5.87	39.94	49.00	43.50	54.00	10.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

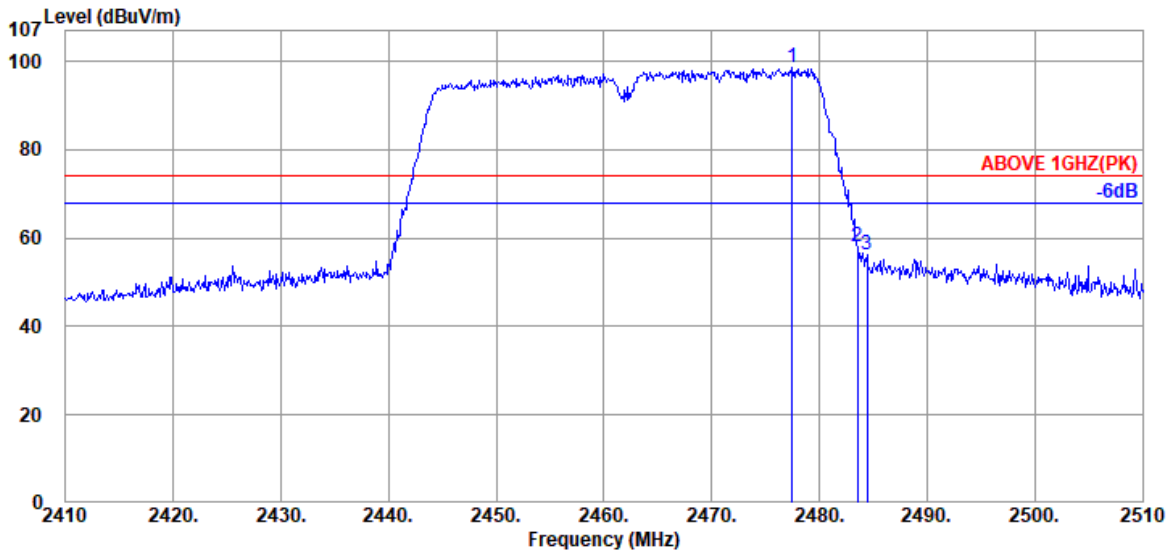

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.500	28.56	5.86	39.94	103.98	98.46	---	---	Peak
2483.500	28.57	5.87	39.94	63.70	58.20	74.00	15.80	Peak
2484.400	28.57	5.87	39.94	61.72	56.22	74.00	17.78	Peak

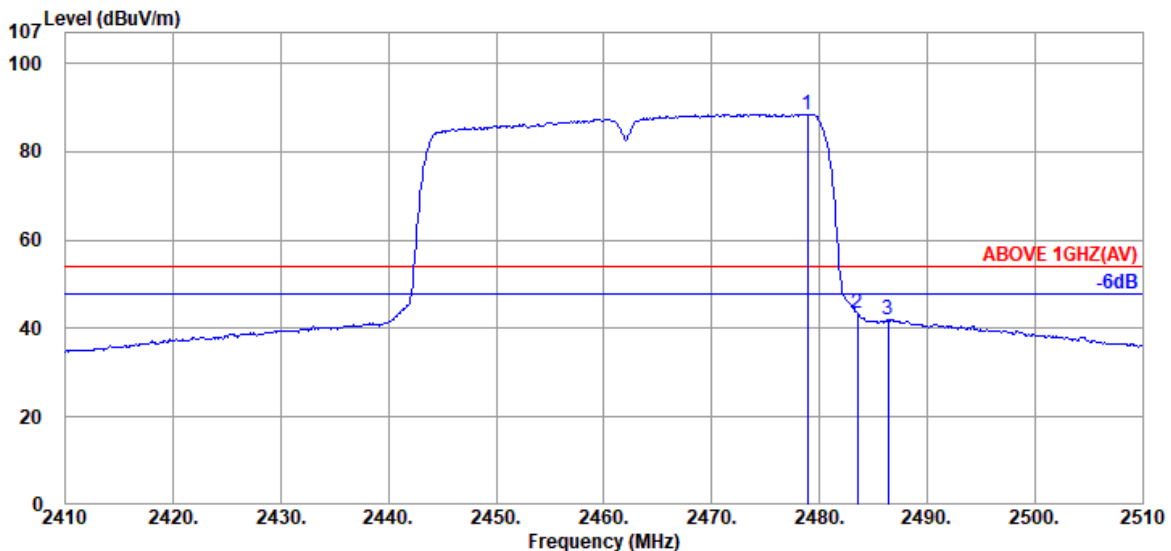


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.900	28.56	5.86	39.94	94.06	88.54	---	---	Average
2483.500	28.57	5.87	39.94	49.03	43.53	54.00	10.47	Average
2486.400	28.57	5.87	39.94	47.58	42.08	54.00	11.92	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

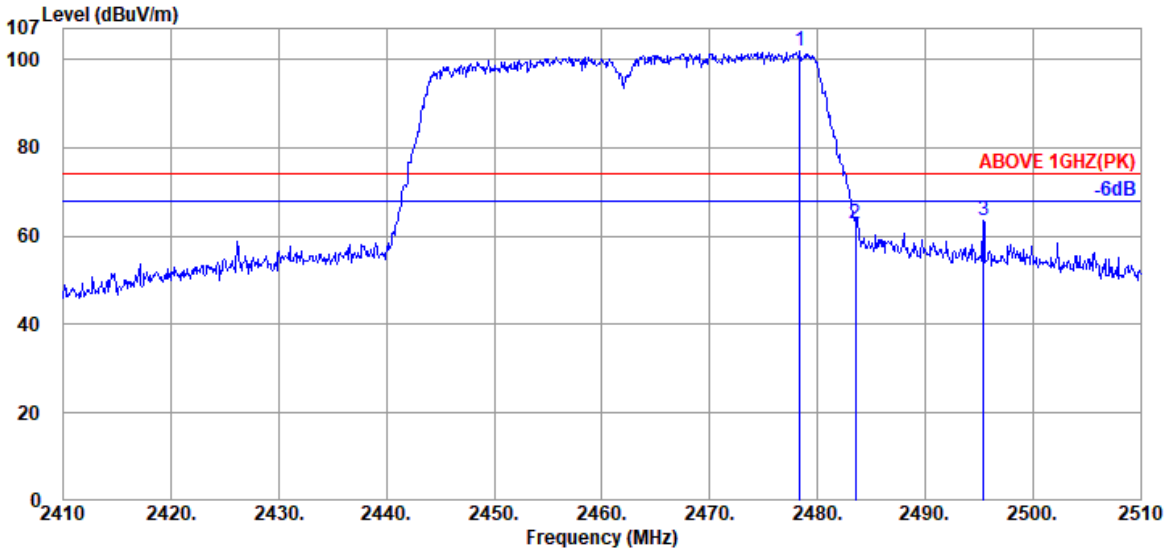

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.400	28.56	5.86	39.94	107.41	101.89	---	---	Peak
2483.500	28.57	5.87	39.94	68.32	62.82	74.00	11.18	Peak
2495.400	28.59	5.88	39.94	68.98	63.51	74.00	10.49	Peak

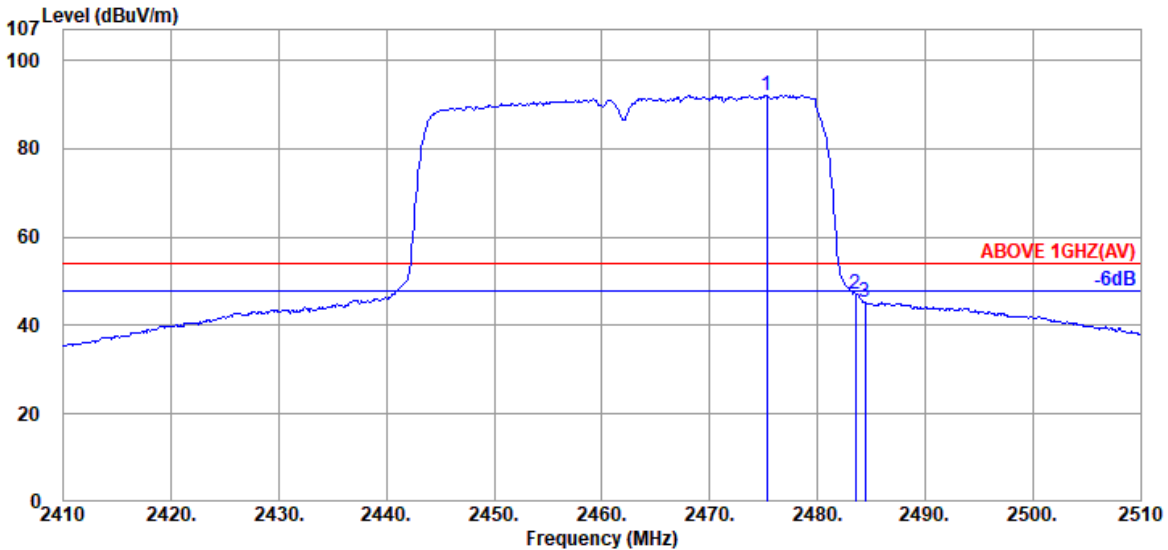


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.300	28.56	5.86	39.94	97.64	92.12	---	---	Average
2483.500	28.57	5.87	39.94	52.74	47.24	54.00	6.76	Average
2484.400	28.57	5.87	39.94	50.74	45.24	54.00	8.76	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

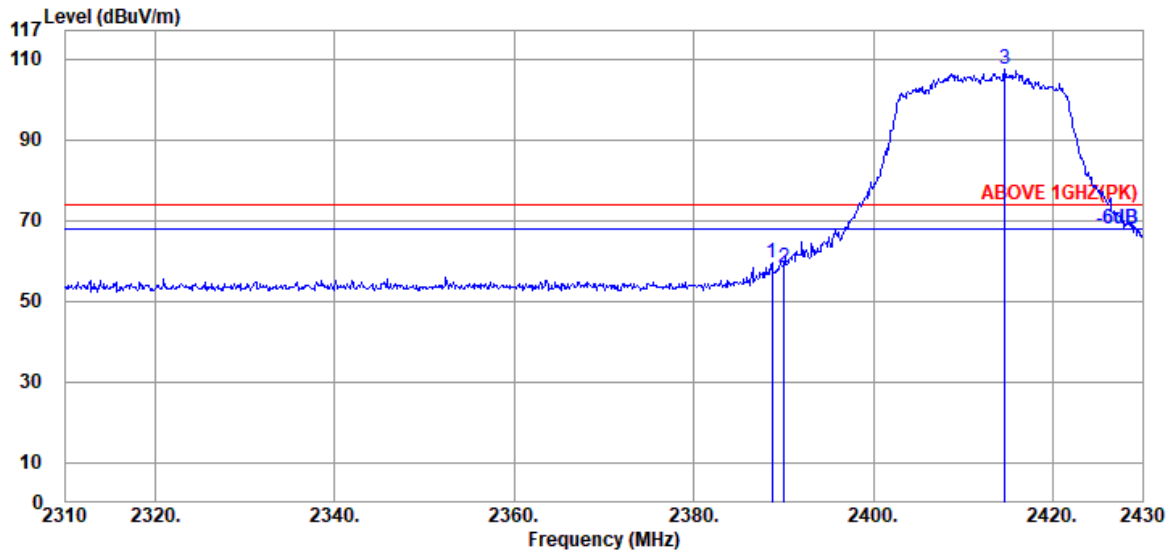

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.27	6.04	39.95	65.30	59.66	74.00	14.34	Peak
2390.040	28.27	6.04	39.95	63.81	58.17	74.00	15.83	Peak
@ 2414.640	28.36	6.07	39.95	112.88	107.36	---	---	Peak

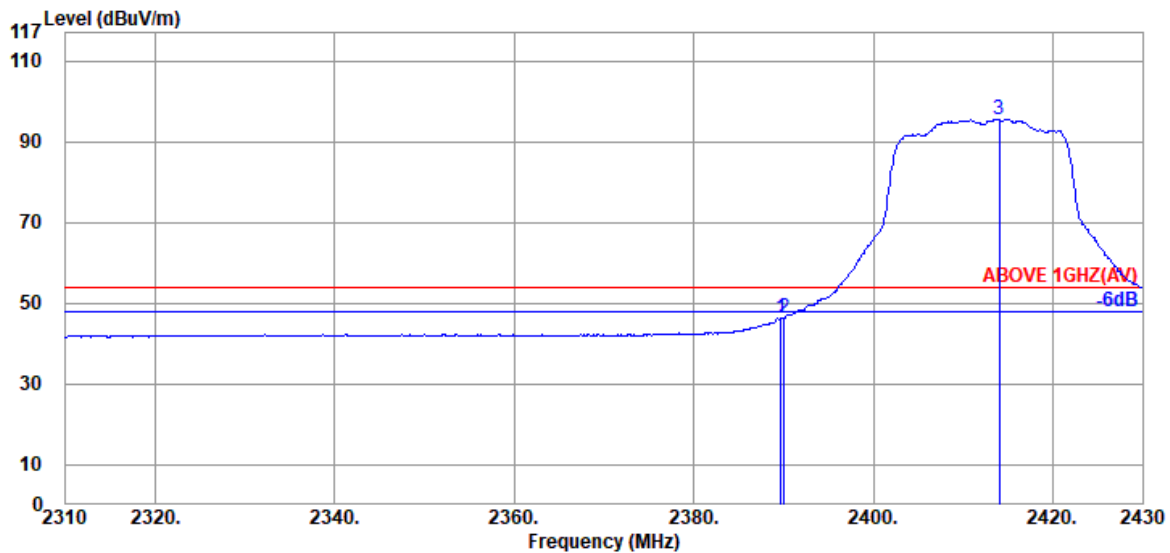


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	51.81	46.17	54.00	7.83	Average
2390.040	28.27	6.04	39.95	52.02	46.38	54.00	7.62	Average
@ 2414.040	28.36	6.07	39.95	100.97	95.45	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

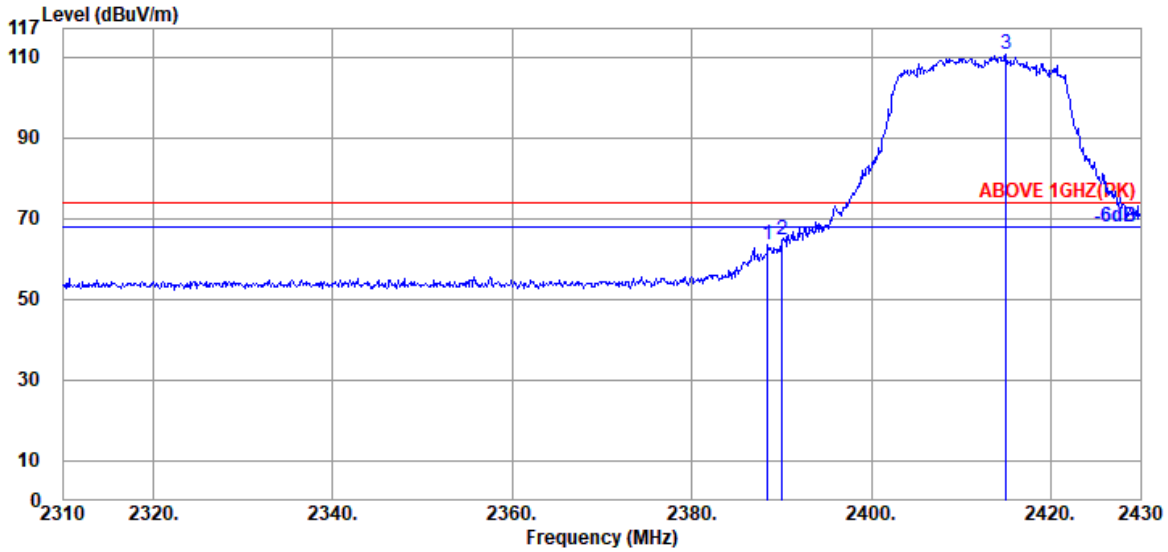

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.480	28.27	6.04	39.95	69.15	63.51	74.00	10.49	Peak
2390.040	28.27	6.04	39.95	70.19	64.55	74.00	9.45	Peak
@ 2415.000	28.36	6.07	39.95	116.32	110.80	---	---	Peak

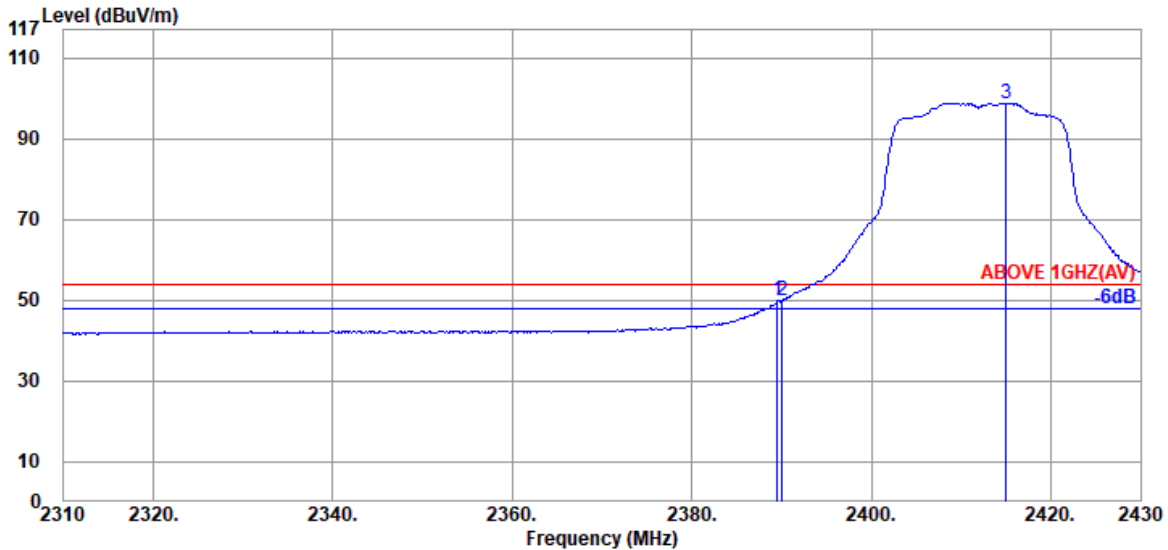


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	6.04	39.95	55.39	49.75	54.00	4.25	Average
2390.040	28.27	6.04	39.95	55.38	49.74	54.00	4.26	Average
@ 2415.000	28.36	6.07	39.95	104.35	98.83	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

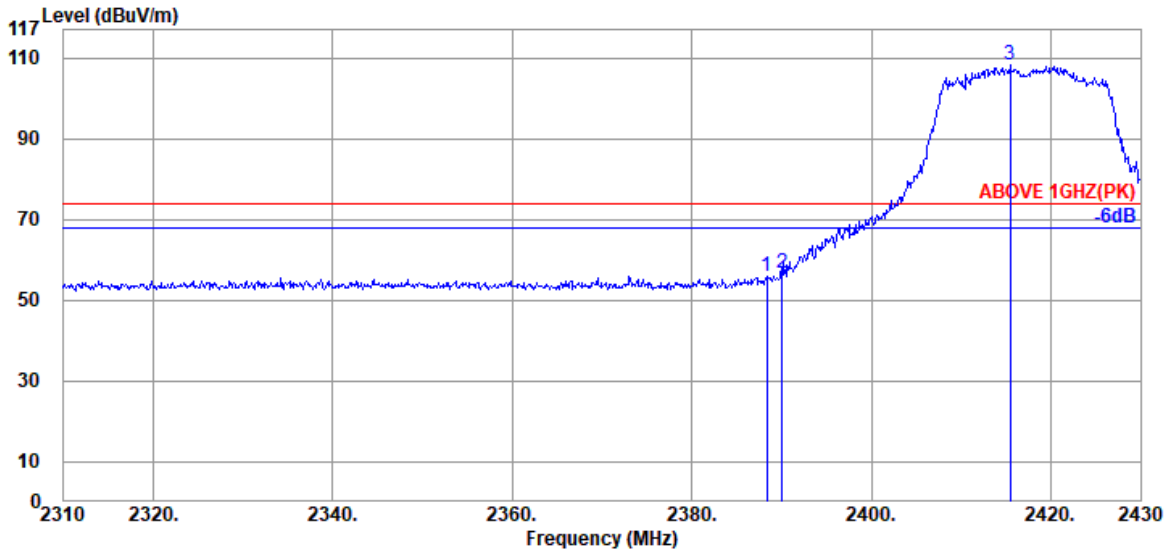

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.360	28.27	6.04	39.95	61.58	55.94	74.00	18.06	Peak
2390.040	28.27	6.04	39.95	62.29	56.65	74.00	17.35	Peak
@ 2415.480	28.36	6.07	39.95	113.69	108.17	---	---	Peak

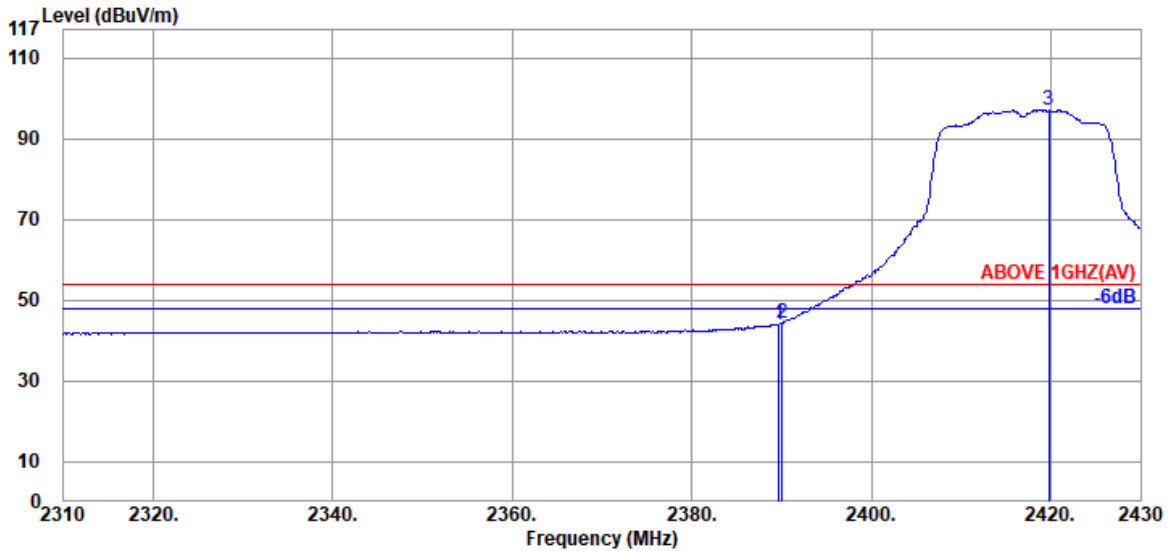


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	49.72	44.08	54.00	9.92	Average
2390.040	28.27	6.04	39.95	50.11	44.47	54.00	9.53	Average
@ 2419.800	28.39	6.10	39.95	102.53	97.07	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

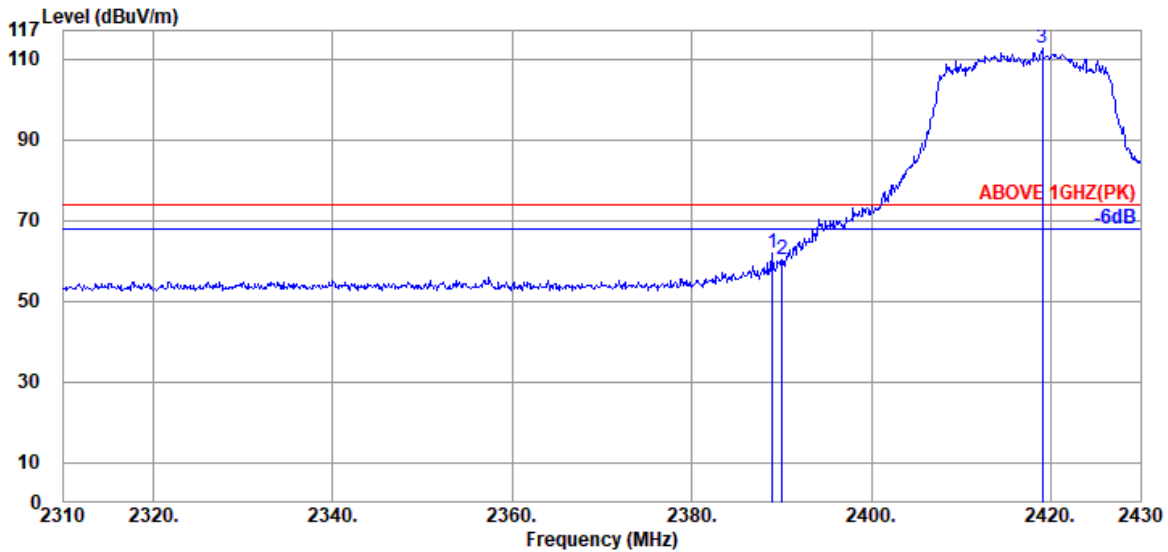

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	39.95	67.49	61.85	74.00	12.15	Peak
2390.040	28.27	6.04	39.95	65.89	60.25	74.00	13.75	Peak
@ 2419.080	28.39	6.07	39.95	118.03	112.54	---	---	Peak

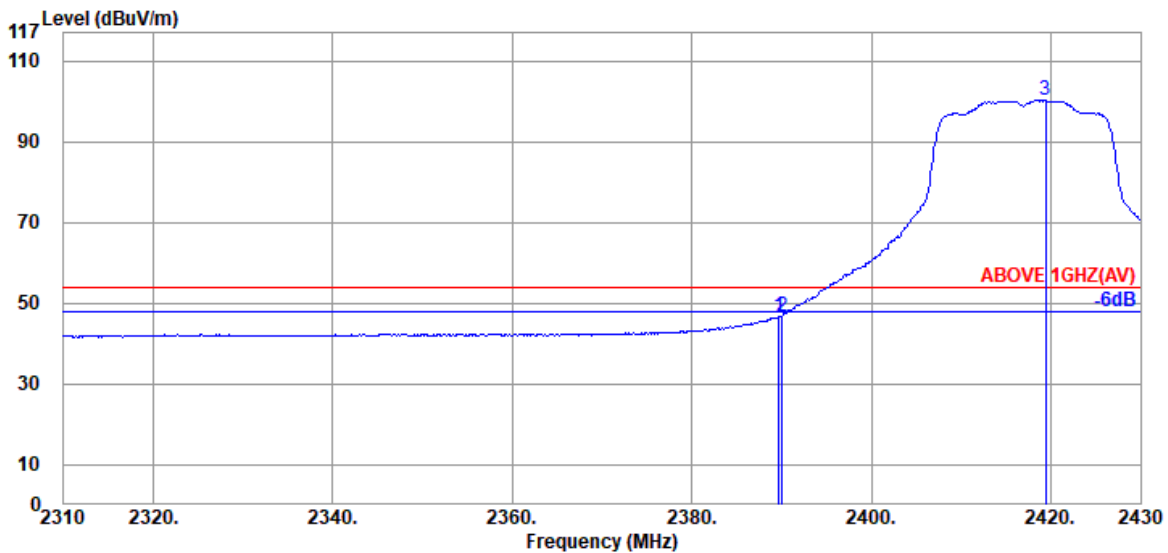


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	39.95	52.41	46.77	54.00	7.23	Average
2390.040	28.27	6.04	39.95	52.51	46.87	54.00	7.13	Average
@ 2419.440	28.39	6.07	39.95	105.76	100.27	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

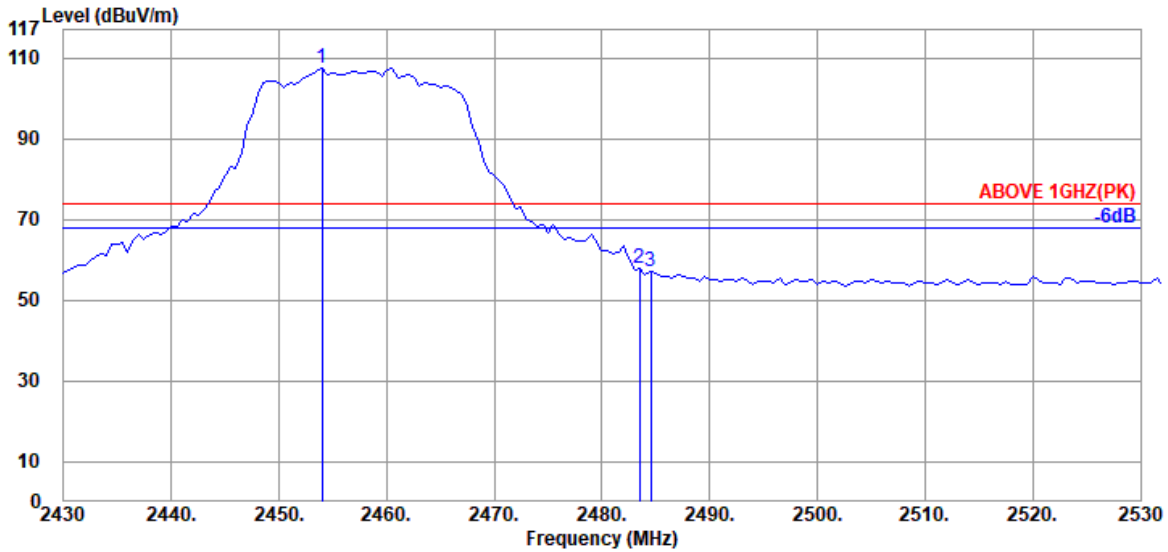

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	28.51	6.15	39.95	112.82	107.53	---	---	Peak
2483.500	28.57	6.18	39.94	63.06	57.87	74.00	16.13	Peak
2484.500	28.57	6.18	39.94	62.35	57.16	74.00	16.84	Peak

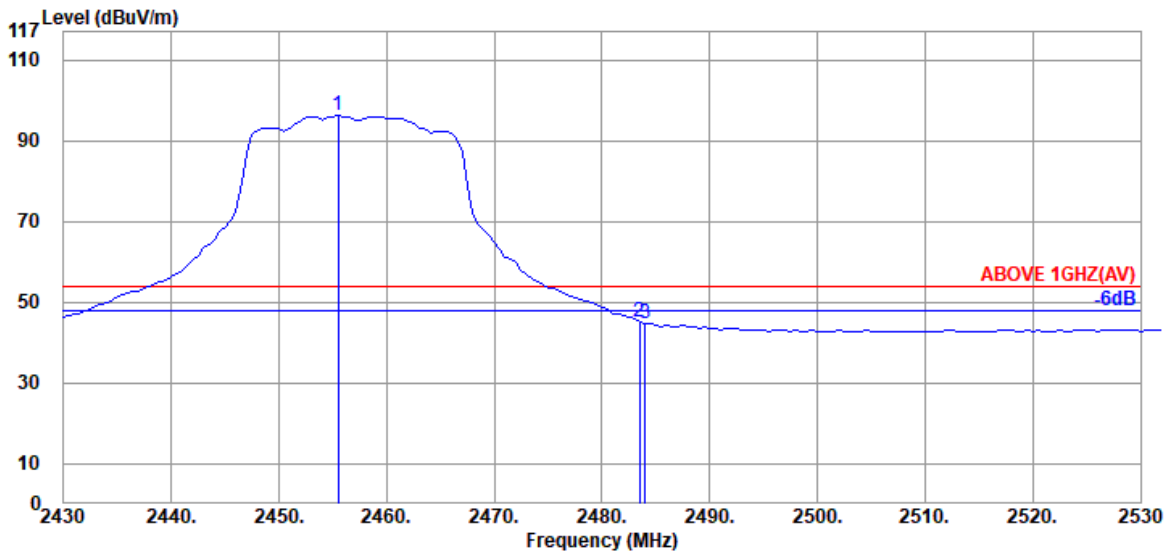


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.51	6.15	39.95	101.33	96.04	---	---	Average
2483.500	28.57	6.18	39.94	50.36	45.17	54.00	8.83	Average
2484.000	28.57	6.18	39.94	50.02	44.83	54.00	9.17	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2457MHz
------	---------------	-----------	------------

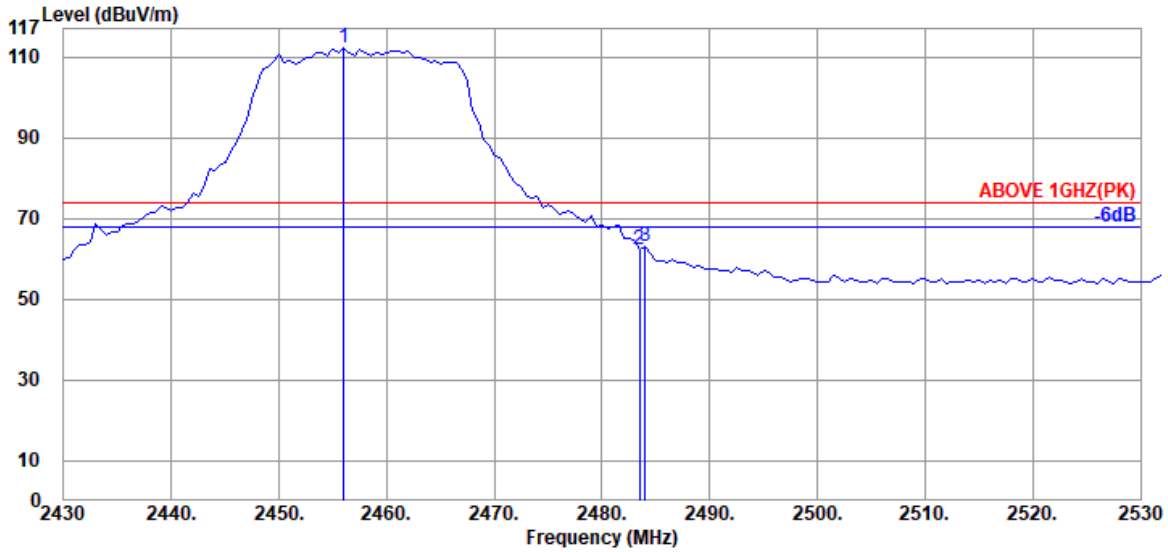

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.000	28.51	6.15	39.95	117.37	112.08	---	---	Peak
2483.500	28.57	6.18	39.94	67.38	62.19	74.00	11.81	Peak
2484.000	28.57	6.18	39.94	68.09	62.90	74.00	11.10	Peak

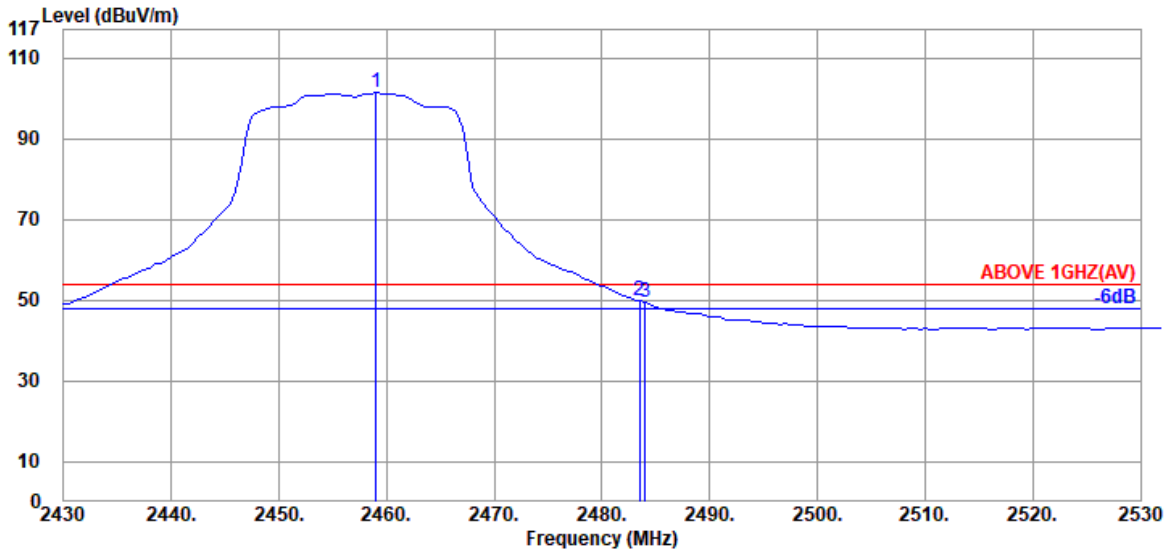


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.51	6.15	39.95	106.55	101.26	---	---	Average
2483.500	28.57	6.18	39.94	55.18	49.99	54.00	4.01	Average
2484.000	28.57	6.18	39.94	54.54	49.35	54.00	4.65	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

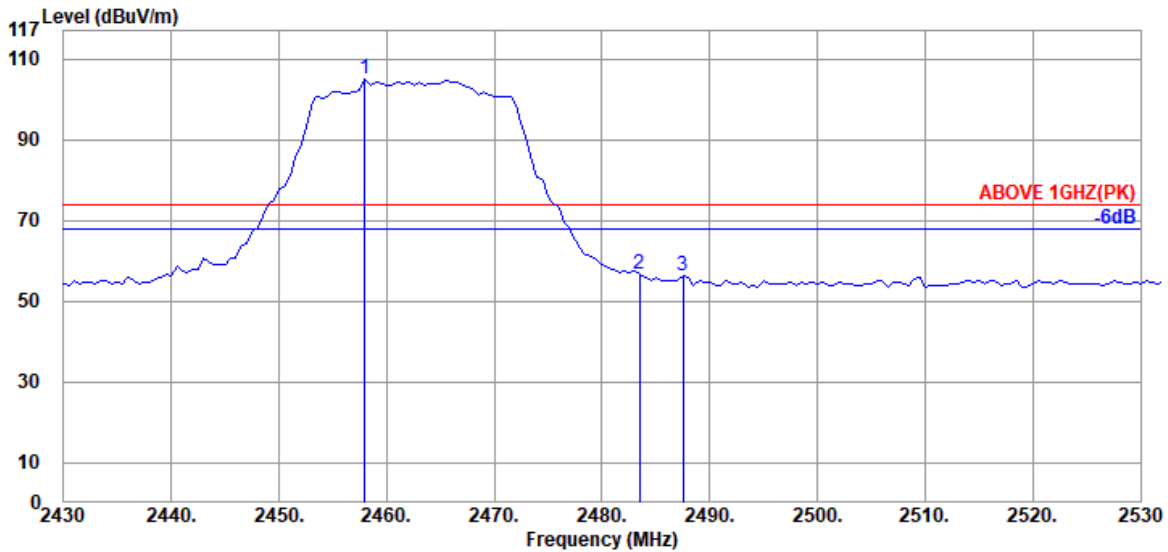

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.51	6.15	39.95	110.19	104.90	---	---	Peak
2483.500	28.57	6.18	39.94	61.84	56.65	74.00	17.35	Peak
2487.500	28.57	5.87	39.94	61.72	56.22	74.00	17.78	Peak

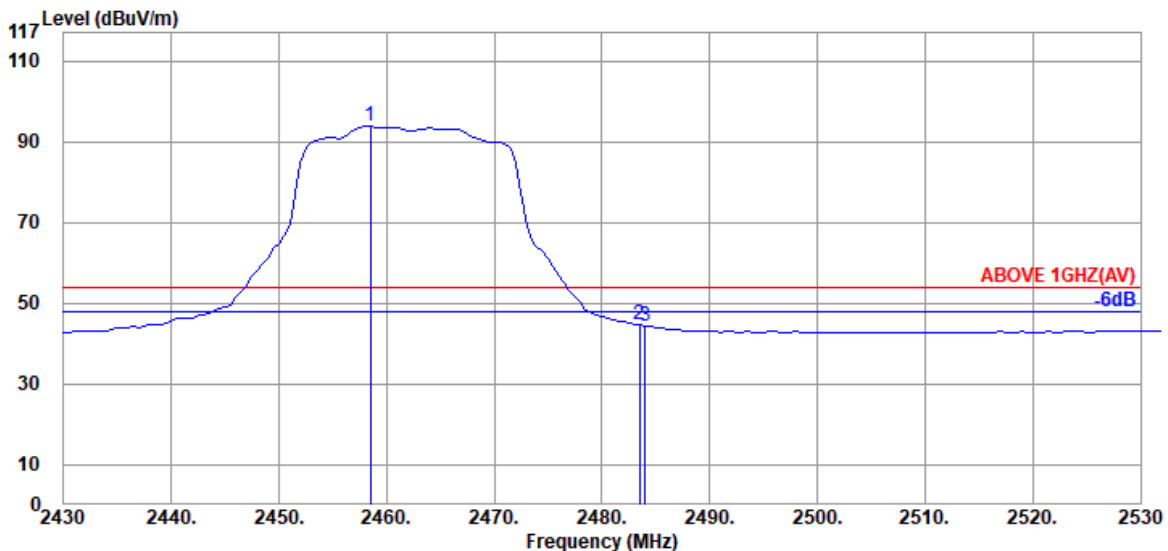


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.51	6.15	39.95	99.08	93.79	---	---	Average
2483.500	28.57	6.18	39.94	49.76	44.57	54.00	9.43	Average
2484.000	28.57	6.18	39.94	49.60	44.41	54.00	9.59	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

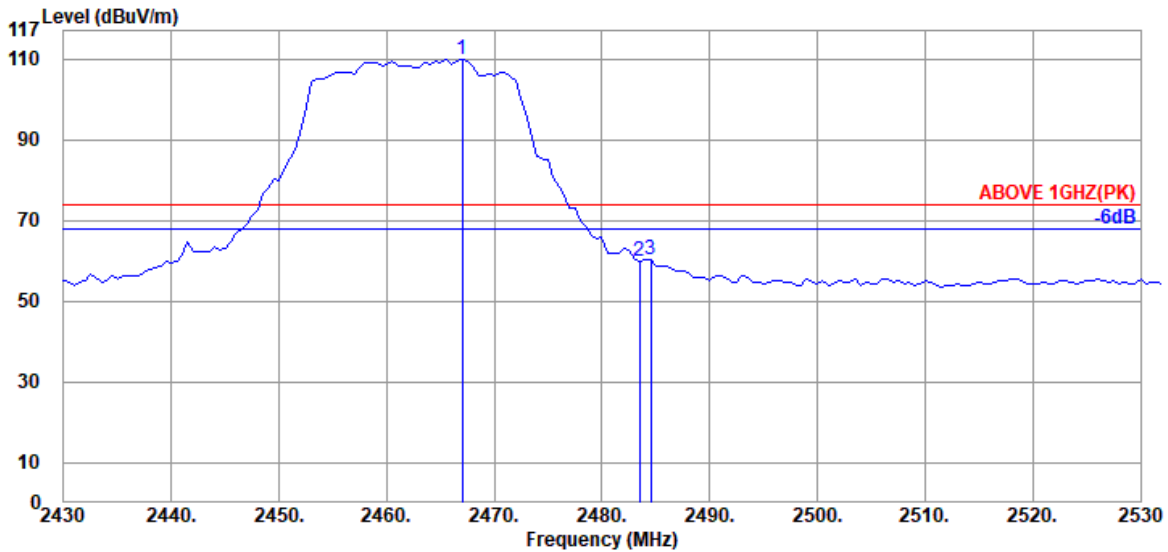

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.000	28.53	6.15	39.94	115.15	109.89	---	---	Peak
2483.500	28.57	6.18	39.94	65.13	59.94	74.00	14.06	Peak
2484.500	28.57	6.18	39.94	65.41	60.22	74.00	13.78	Peak

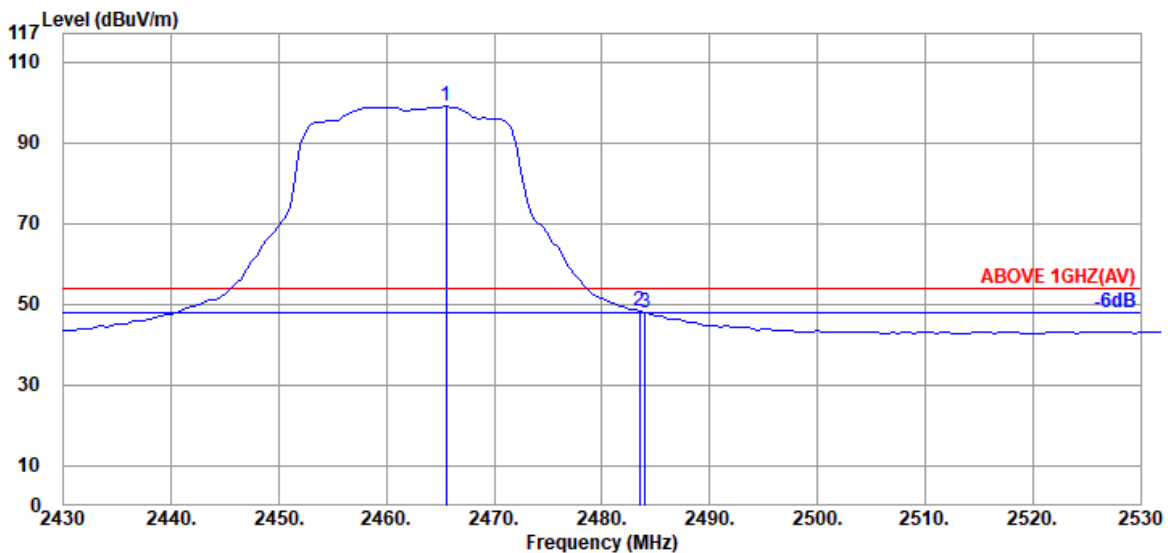


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.53	6.15	39.95	104.15	98.88	---	---	Average
2483.500	28.57	6.18	39.94	53.46	48.27	54.00	5.73	Average
2484.000	28.57	6.18	39.94	53.12	47.93	54.00	6.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

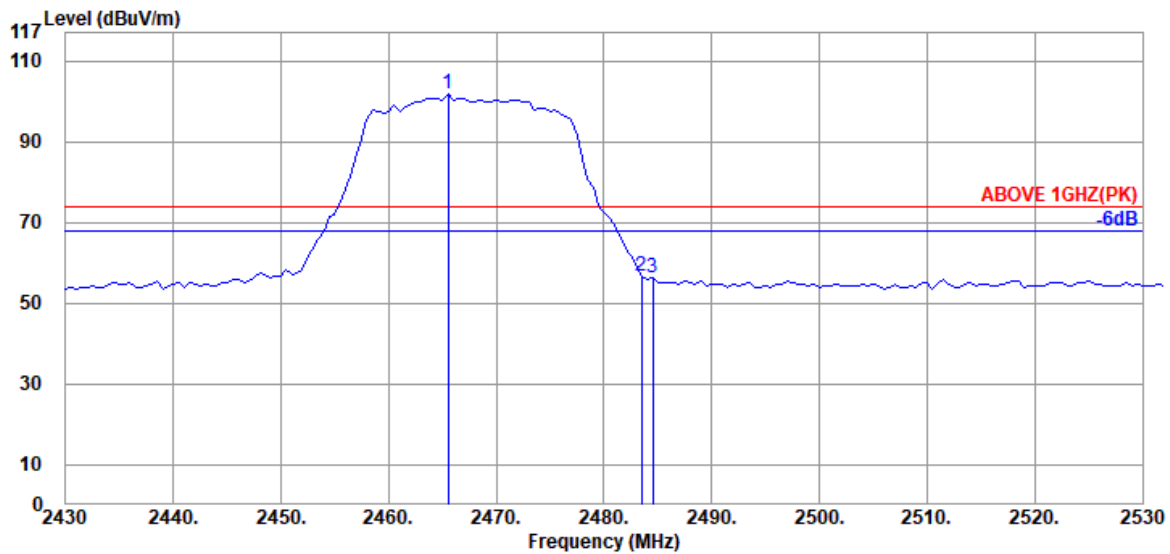

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.53	6.15	39.95	107.03	101.76	---	---	Peak
2483.500	28.57	6.18	39.94	61.99	56.80	74.00	17.20	Peak
2484.500	28.57	5.87	39.94	61.67	56.17	74.00	17.83	Peak

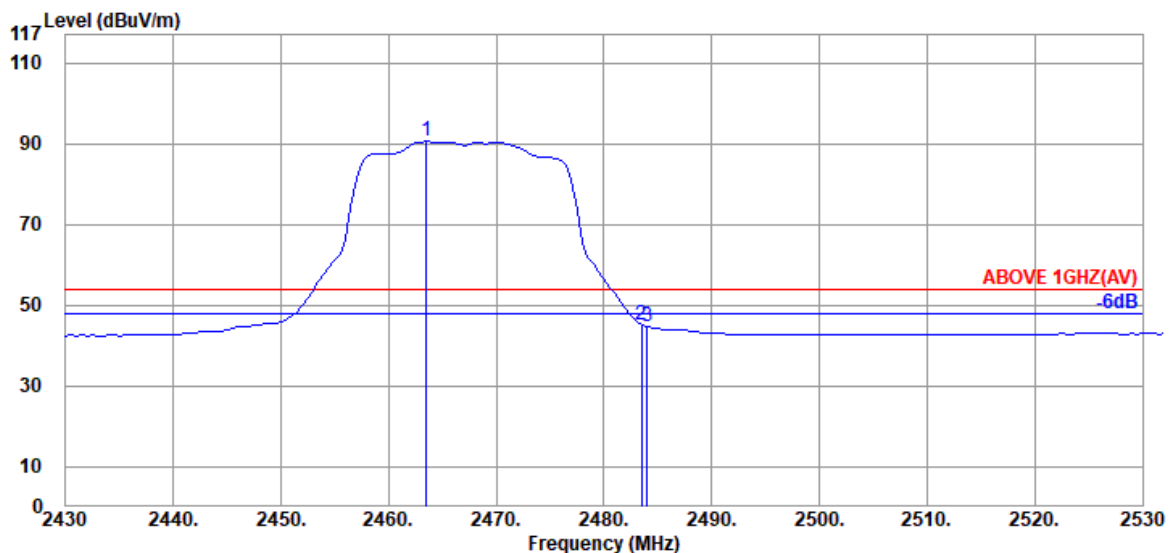


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.53	6.15	39.95	95.76	90.49	---	---	Average
2483.500	28.57	6.18	39.94	50.26	45.07	54.00	8.93	Average
2484.000	28.57	6.18	39.94	49.94	44.75	54.00	9.25	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

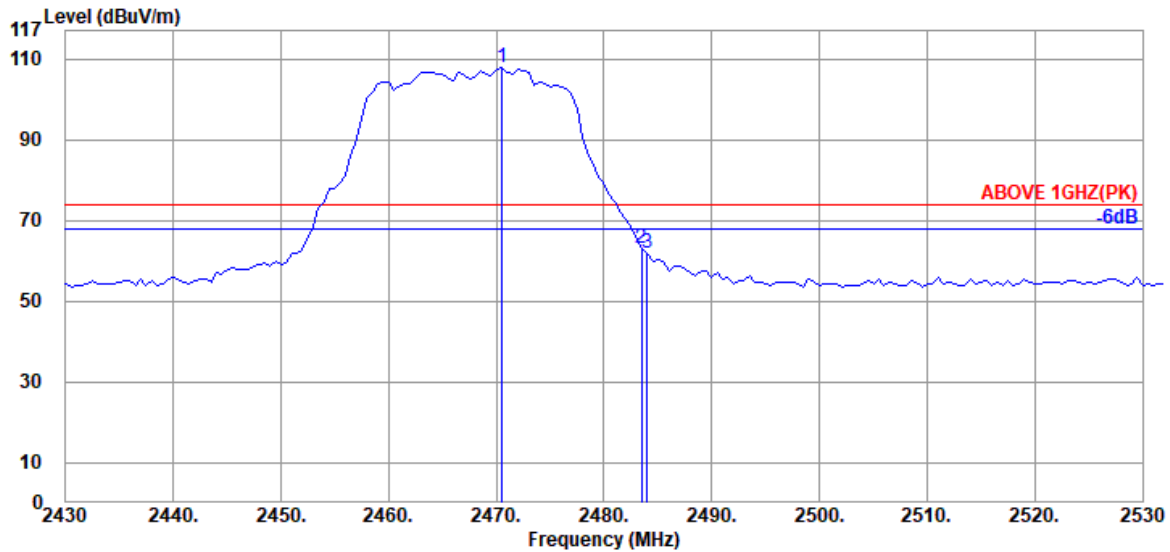

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.54	6.15	39.94	112.91	107.66	---	---	Peak
2483.500	28.57	6.18	39.94	68.15	62.96	74.00	11.04	Peak
2484.000	28.57	6.18	39.94	66.91	61.72	74.00	12.28	Peak

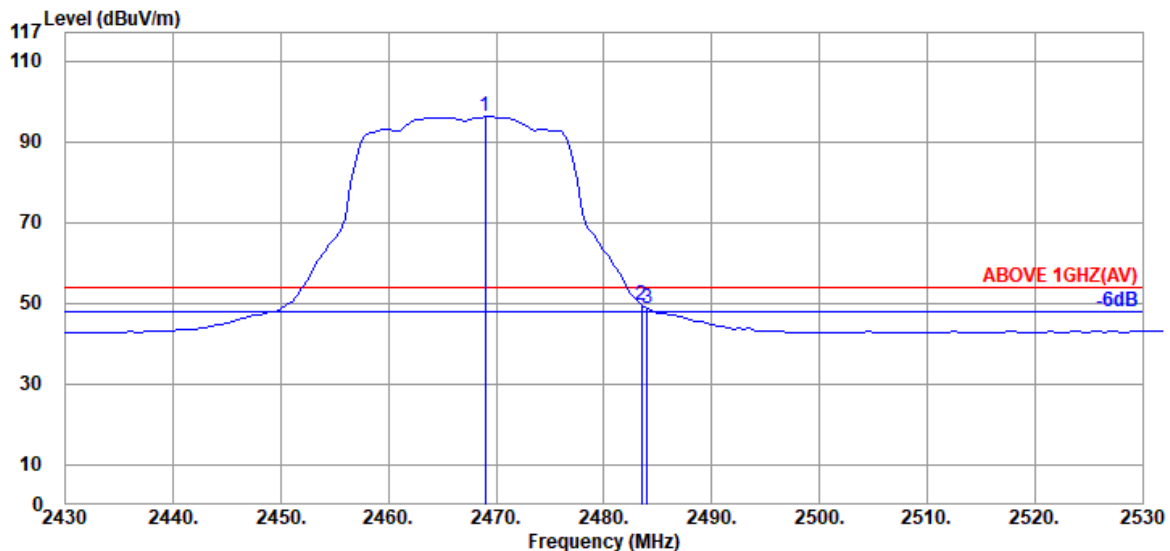


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.54	6.15	39.94	101.53	96.28	---	---	Average
2483.500	28.57	6.18	39.94	54.86	49.67	54.00	4.33	Average
2484.000	28.57	6.18	39.94	53.79	48.60	54.00	5.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

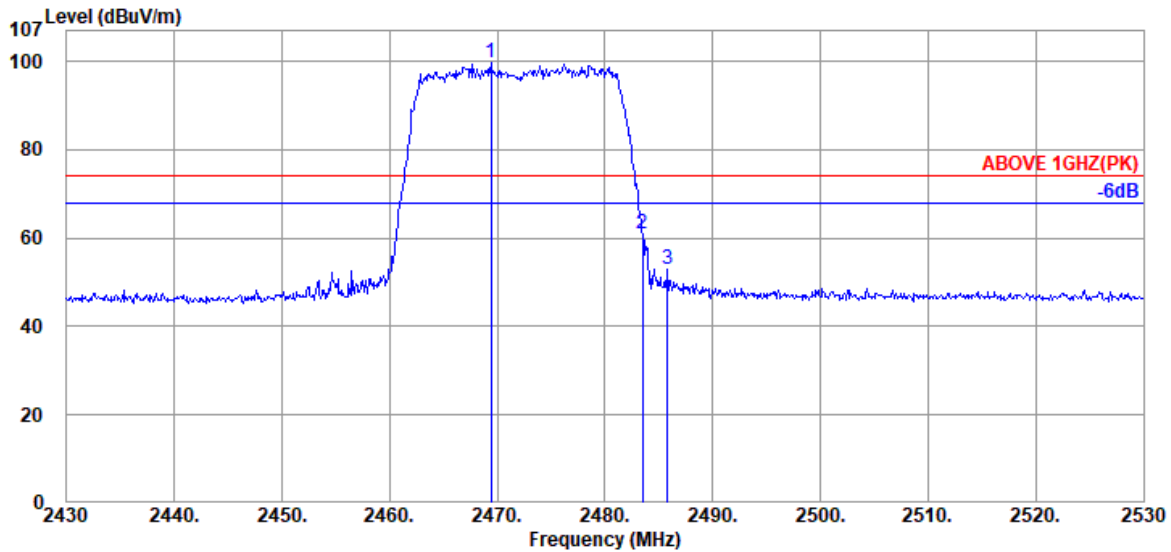

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.400	28.54	5.85	39.94	105.14	99.59	---	---	Peak
2483.500	28.57	5.87	39.94	66.62	61.12	74.00	12.88	Peak
2485.800	28.57	5.87	39.94	58.56	53.06	74.00	20.94	Peak

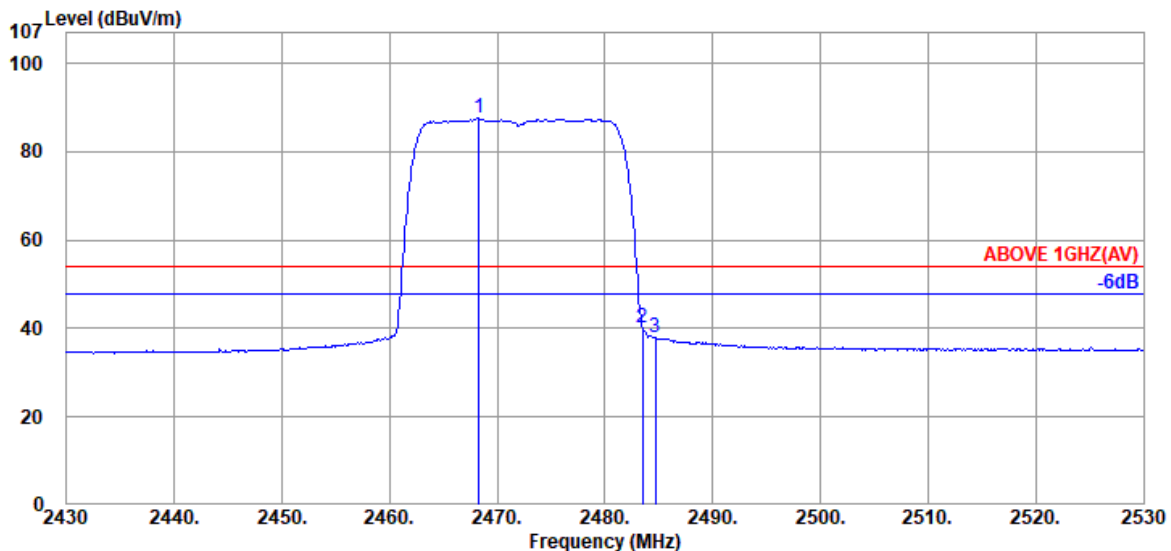


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.300	28.54	5.85	39.94	93.15	87.60	---	---	Average
2483.500	28.57	5.87	39.94	45.61	40.11	54.00	13.89	Average
2484.700	28.57	5.87	39.94	43.52	38.02	54.00	15.98	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

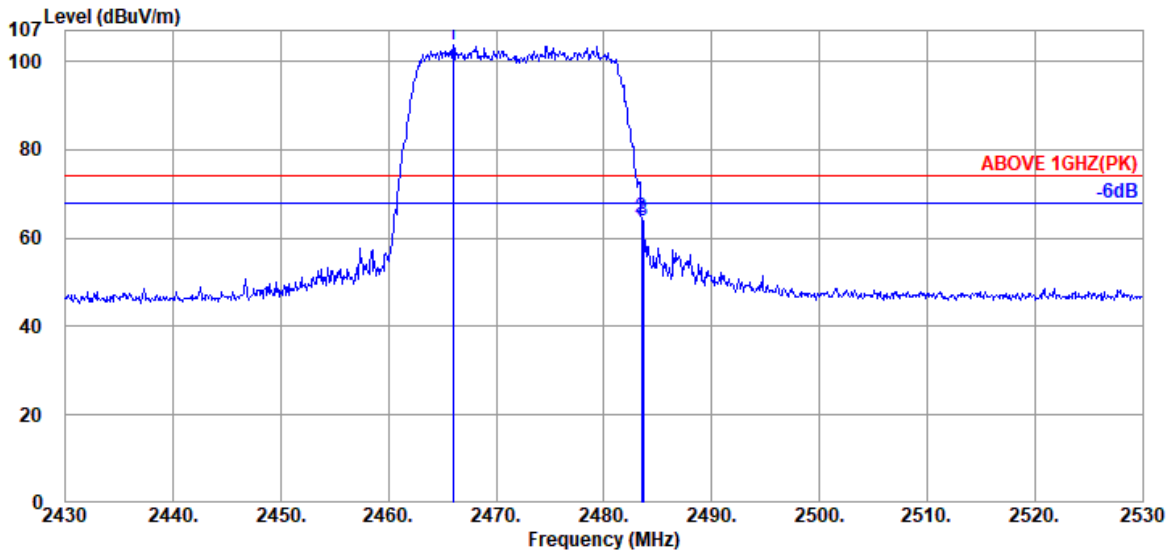

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.53	5.84	39.95	109.24	103.66	---	---	Peak
2483.500	28.57	5.87	39.94	70.06	64.56	74.00	9.44	Peak
2483.600	28.57	5.87	39.94	69.29	63.79	74.00	10.21	Peak

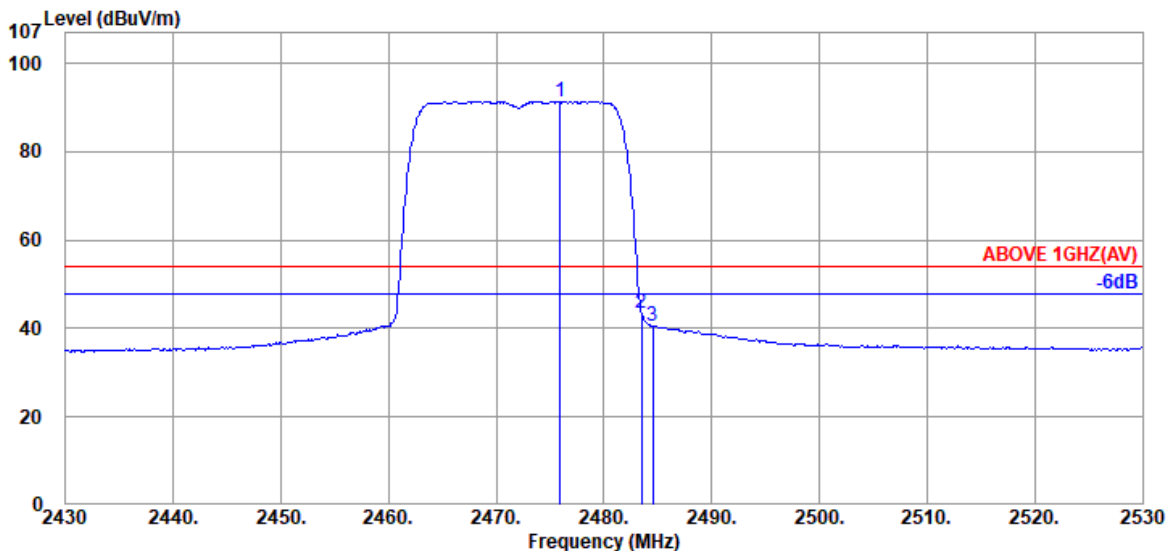


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.900	28.56	5.86	39.94	96.97	91.45	---	---	Average
2483.500	28.57	5.87	39.94	48.80	43.30	54.00	10.70	Average
2484.500	28.57	5.87	39.94	46.11	40.61	54.00	13.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

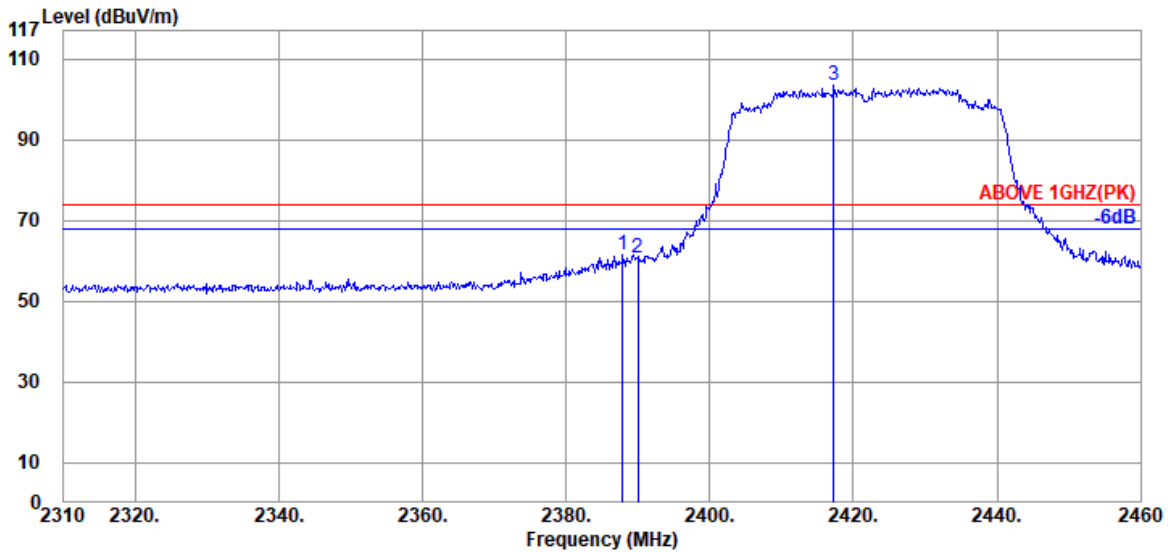

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.850	28.27	6.04	39.95	67.11	61.47	74.00	12.53	Peak
2389.950	28.27	6.04	39.95	66.27	60.63	74.00	13.37	Peak
@ 2417.250	28.36	6.07	39.95	108.91	103.39	---	---	Peak

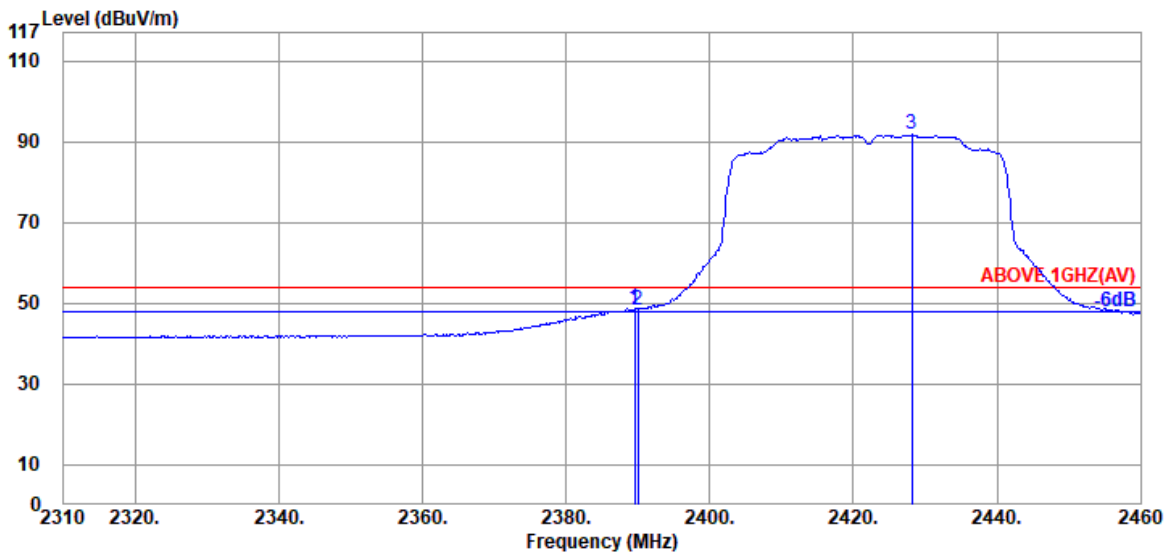


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.27	6.04	39.95	54.46	48.82	54.00	5.18	Average
2389.950	28.27	6.04	39.95	54.11	48.47	54.00	5.53	Average
@ 2428.200	28.41	6.10	39.95	97.09	91.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

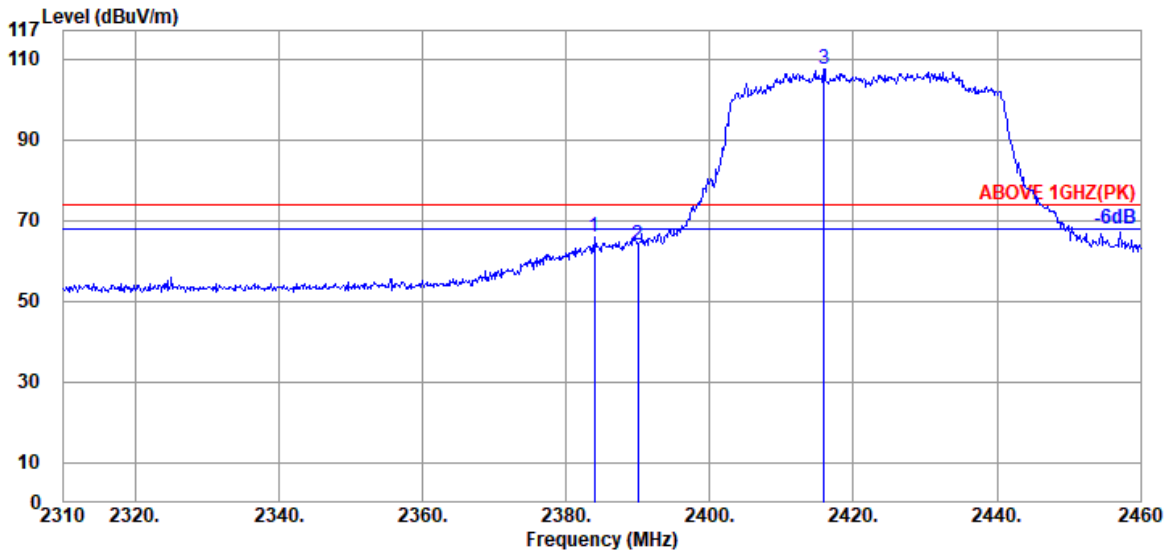

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.950	28.27	6.01	39.96	71.60	65.92	74.00	8.08	Peak
2389.950	28.27	6.04	39.95	69.67	64.03	74.00	9.97	Peak
@ 2415.900	28.36	6.07	39.95	112.87	107.35	---	---	Peak

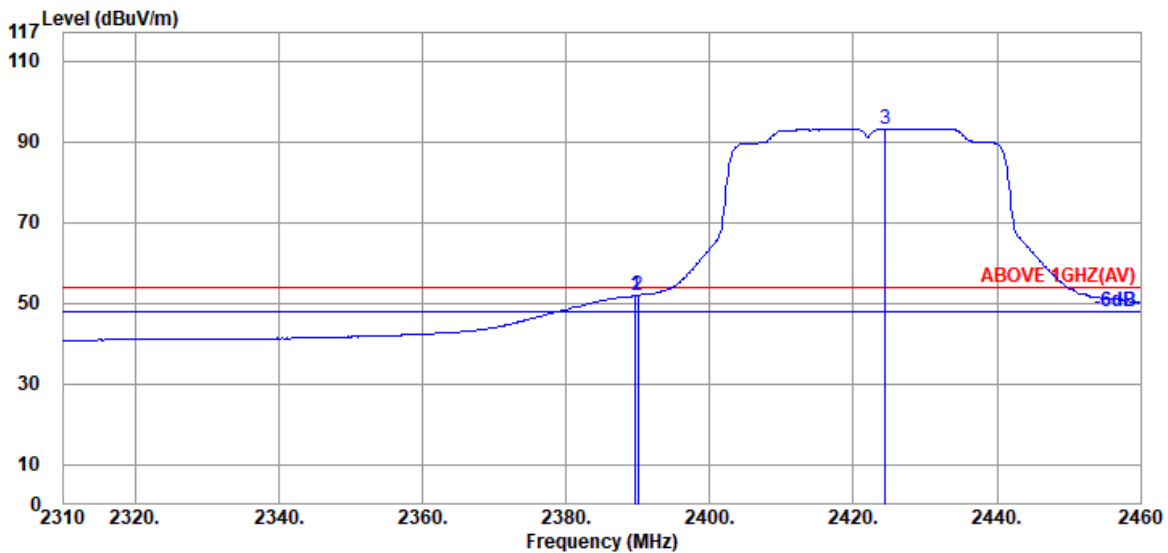


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.27	6.04	39.95	57.54	51.90	54.00	2.10	Average
2389.950	28.27	6.04	39.95	57.64	52.00	54.00	2.00	Average
@ 2424.450	28.39	6.10	39.95	98.57	93.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

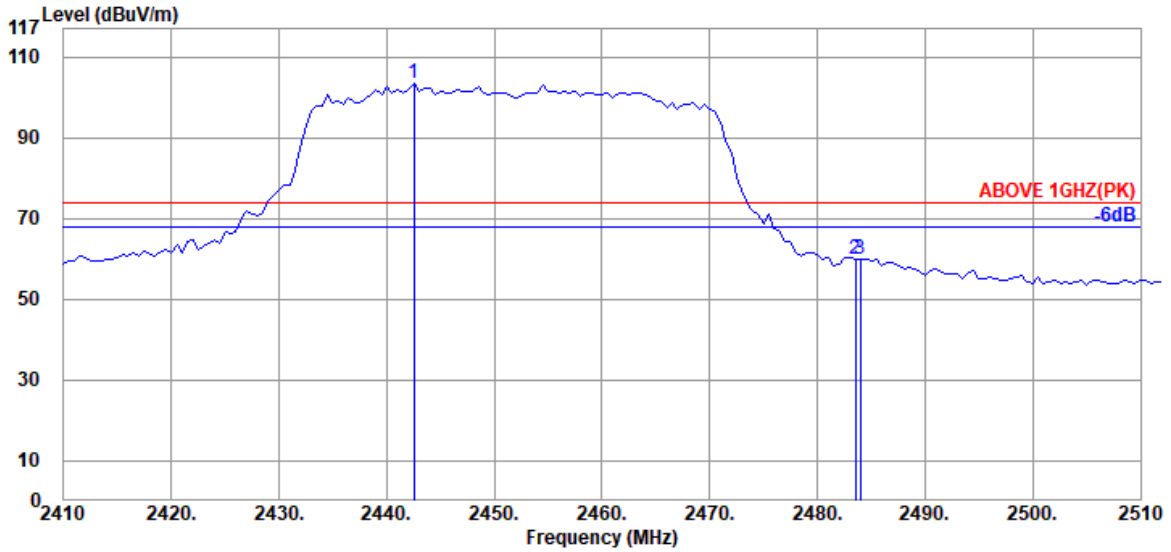

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2442.500	28.47	6.13	39.95	108.72	103.37	---	---	Peak
2483.500	28.57	6.18	39.94	65.01	59.82	74.00	14.18	Peak
2484.000	28.57	6.18	39.94	65.24	60.05	74.00	13.95	Peak

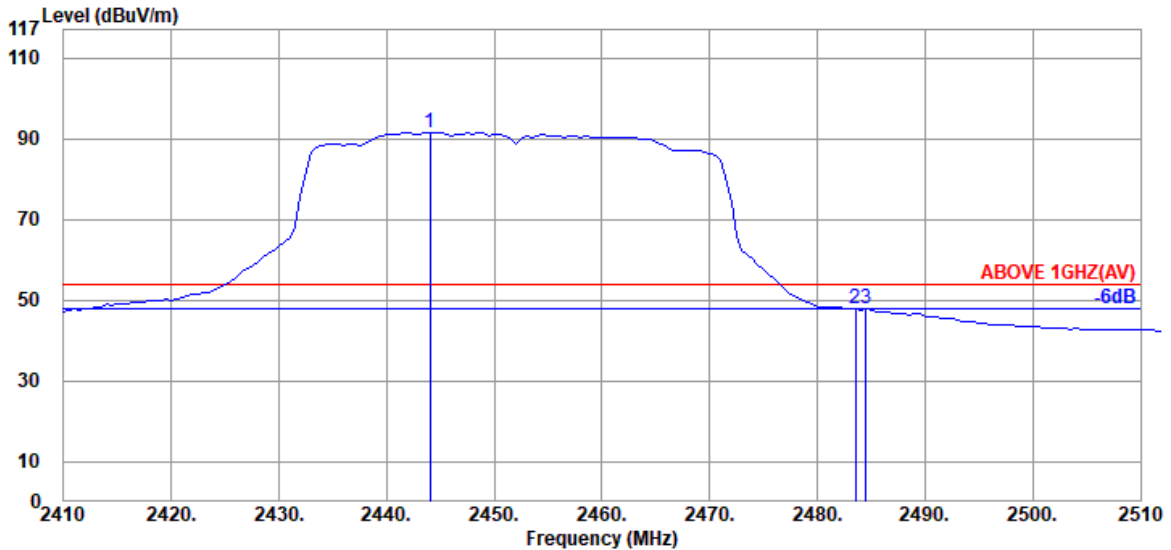


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2444.000	28.47	6.13	39.95	96.91	91.56	---	---	Average
2483.500	28.57	6.18	39.94	52.97	47.78	54.00	6.22	Average
2484.500	28.57	6.18	39.94	52.93	47.74	54.00	6.26	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

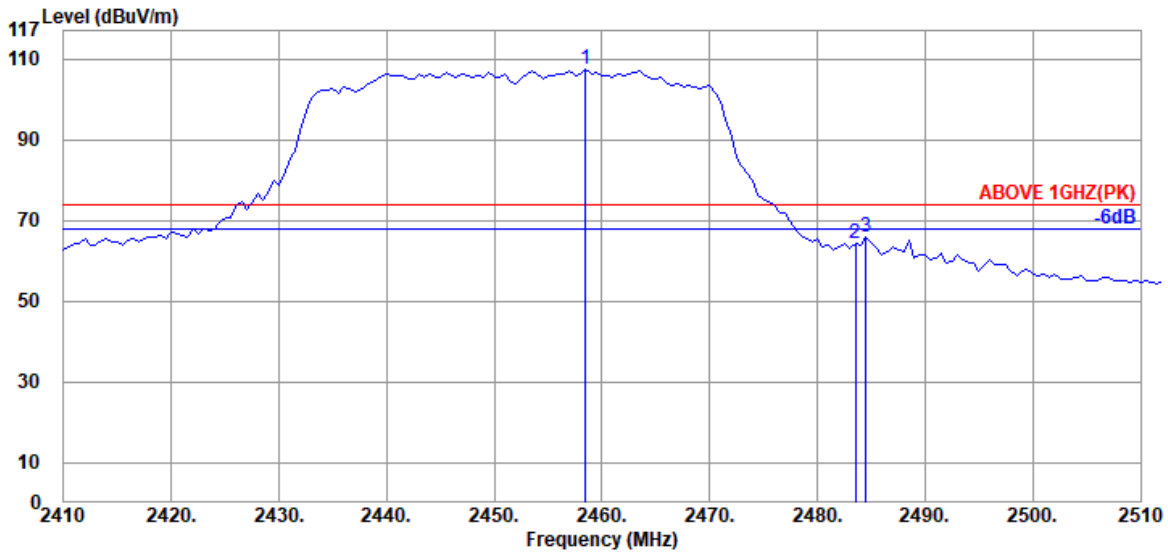

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2458.500	28.51	6.15	39.95	112.90	107.61	---	---	Peak
2483.500	28.57	6.18	39.94	69.66	64.47	74.00	9.53	Peak
2484.500	28.57	6.18	39.94	71.00	65.81	74.00	8.19	Peak

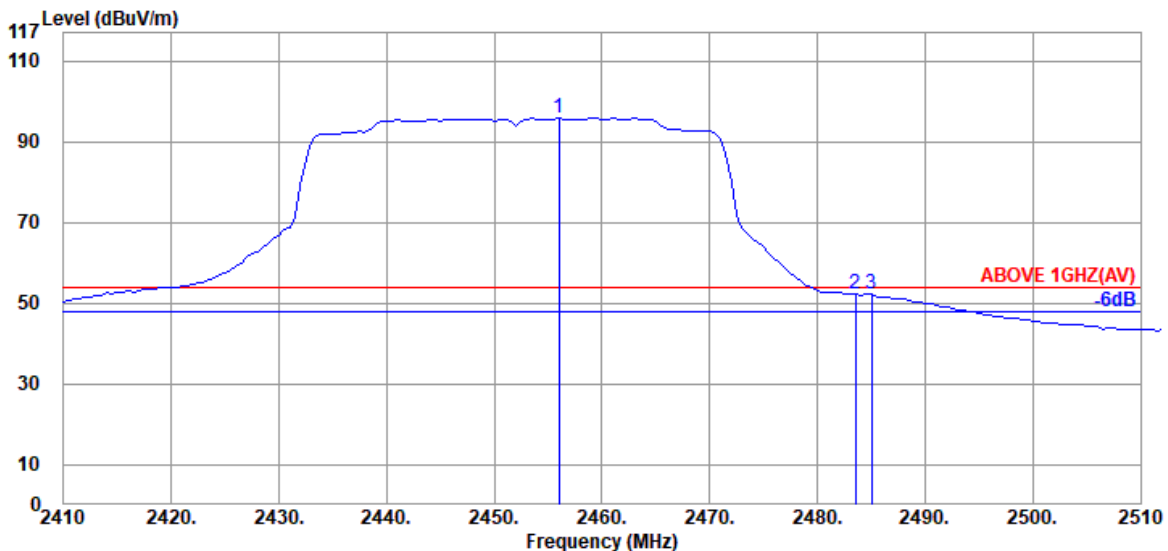


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2456.000	28.51	6.15	39.95	101.07	95.78	---	---	Average
2483.500	28.57	6.18	39.94	57.35	52.16	54.00	1.84	Average
2485.000	28.57	6.18	39.94	57.34	52.15	54.00	1.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

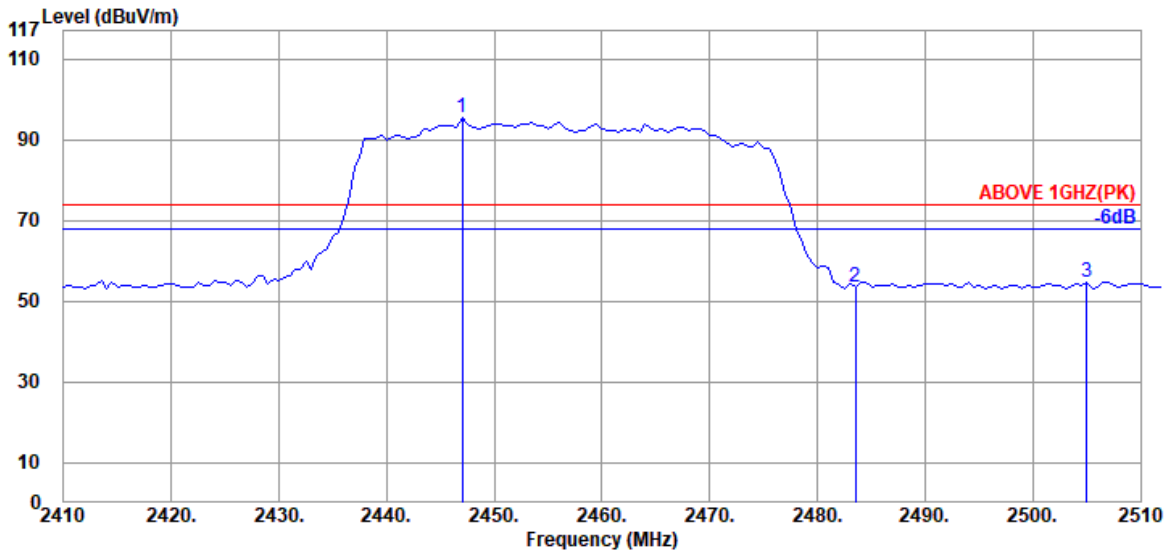

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.000	28.50	6.13	39.95	100.90	95.58	---	---	Peak
2483.500	28.57	6.18	39.94	58.75	53.56	74.00	20.44	Peak
2505.000	28.63	5.91	39.94	60.20	54.80	74.00	19.20	Peak

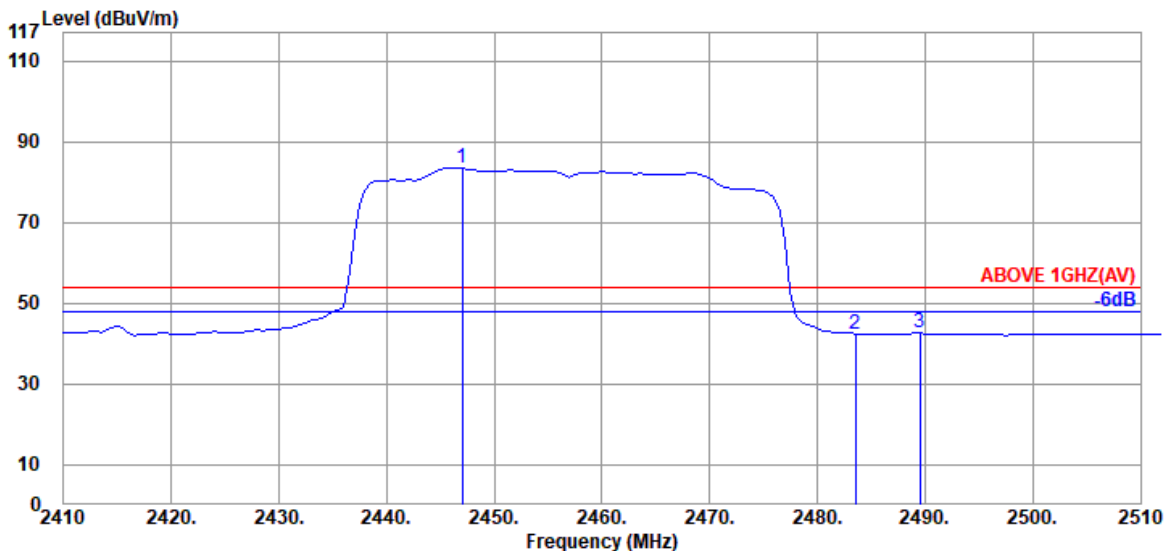


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2447.000	28.50	6.13	39.95	88.73	83.41	---	---	Average
2483.500	28.57	6.18	39.94	47.56	42.37	54.00	11.63	Average
2489.500	28.59	5.88	39.94	48.14	42.67	54.00	11.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

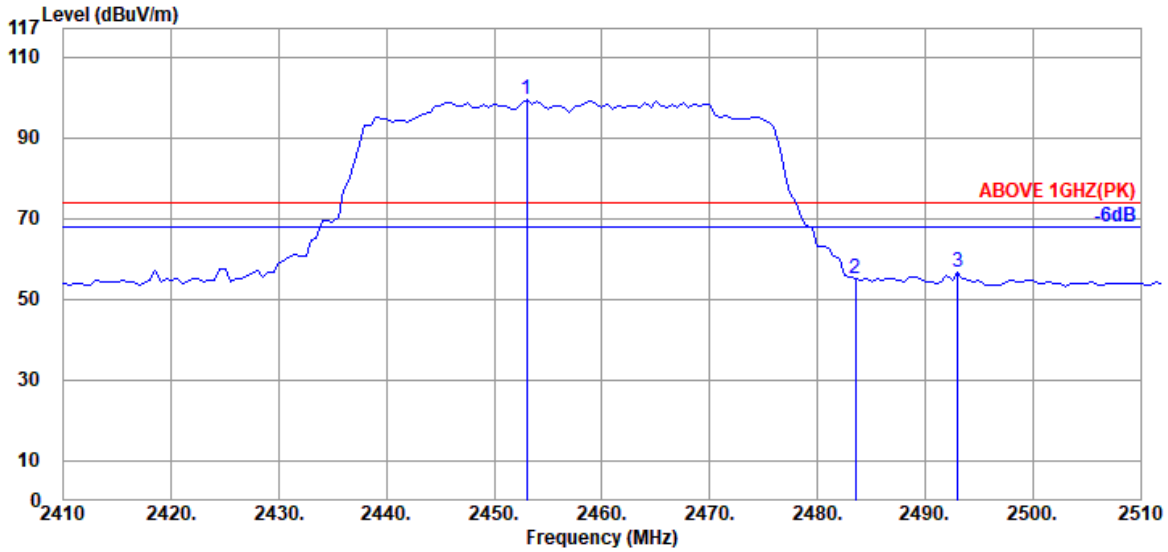

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2453.000	28.50	6.13	39.95	104.74	99.42	---	---	Peak
2483.500	28.57	6.18	39.94	60.18	54.99	74.00	19.01	Peak
2493.000	28.59	6.21	39.94	61.94	56.80	74.00	17.20	Peak

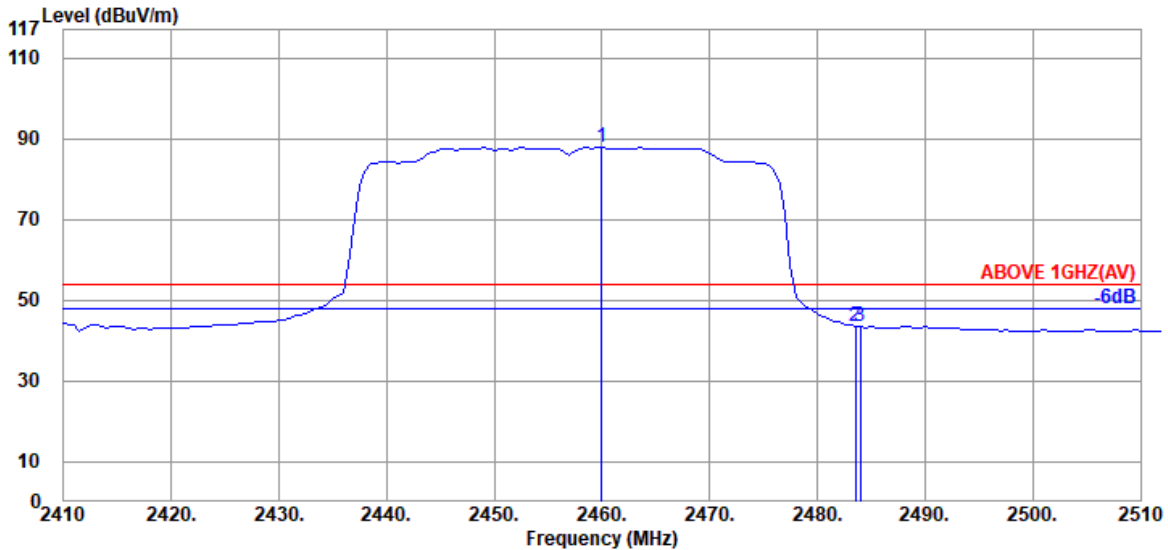


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2460.000	28.51	6.15	39.95	93.10	87.81	---	---	Average
2483.500	28.57	6.18	39.94	48.90	43.71	54.00	10.29	Average
2484.000	28.57	5.87	39.94	49.00	43.50	54.00	10.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

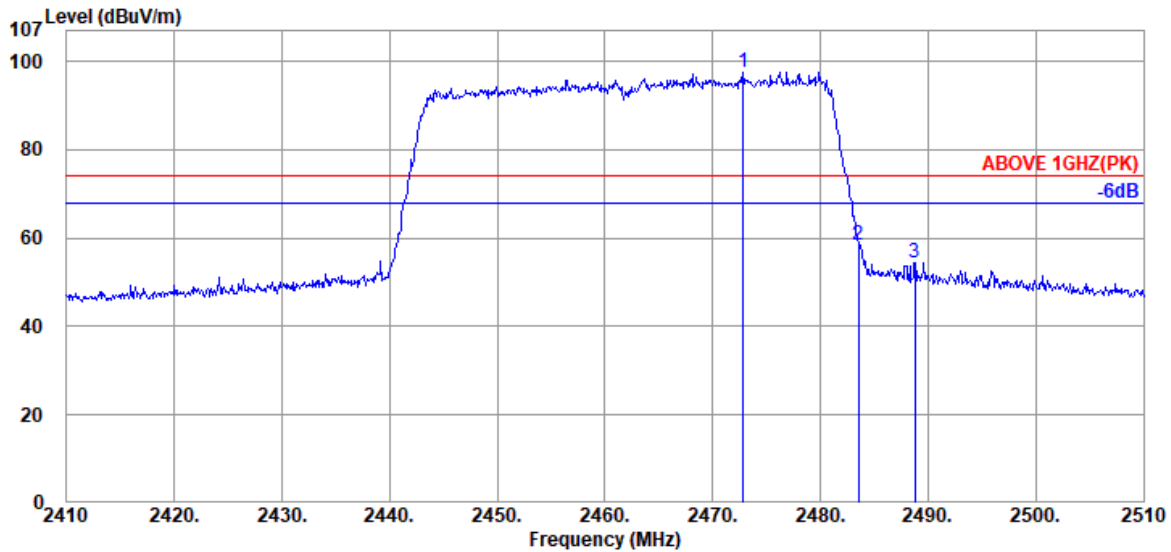

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.800	28.54	5.85	39.94	103.23	97.68	---	---	Peak
2483.500	28.57	5.87	39.94	63.80	58.30	74.00	15.70	Peak
2488.800	28.57	5.87	39.94	59.99	54.49	74.00	19.51	Peak

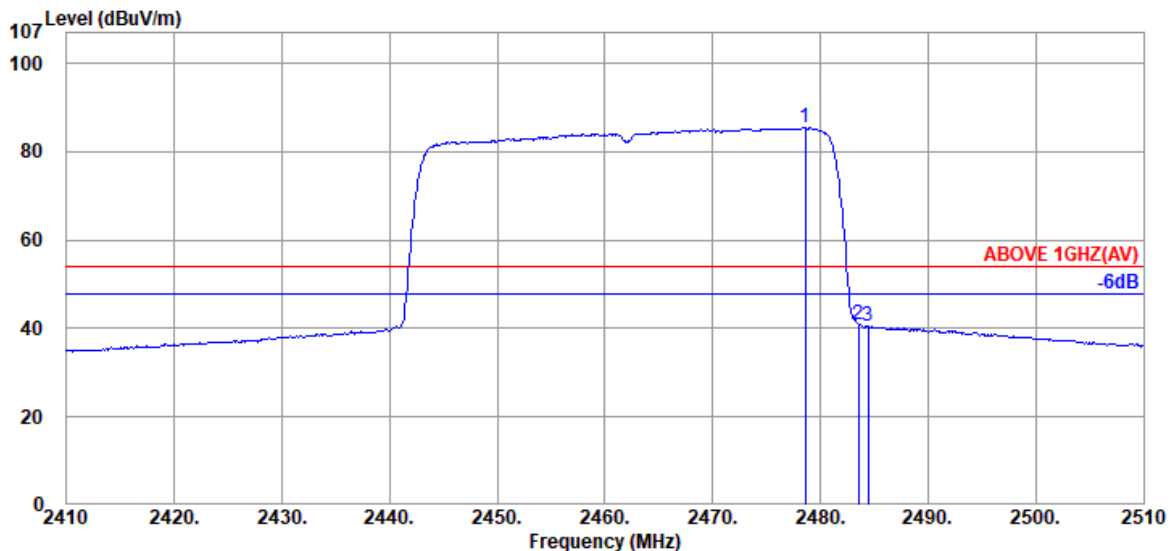


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.56	5.86	39.94	90.97	85.45	---	---	Average
2483.500	28.57	5.87	39.94	46.48	40.98	54.00	13.02	Average
2484.400	28.57	5.87	39.94	45.97	40.47	54.00	13.53	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

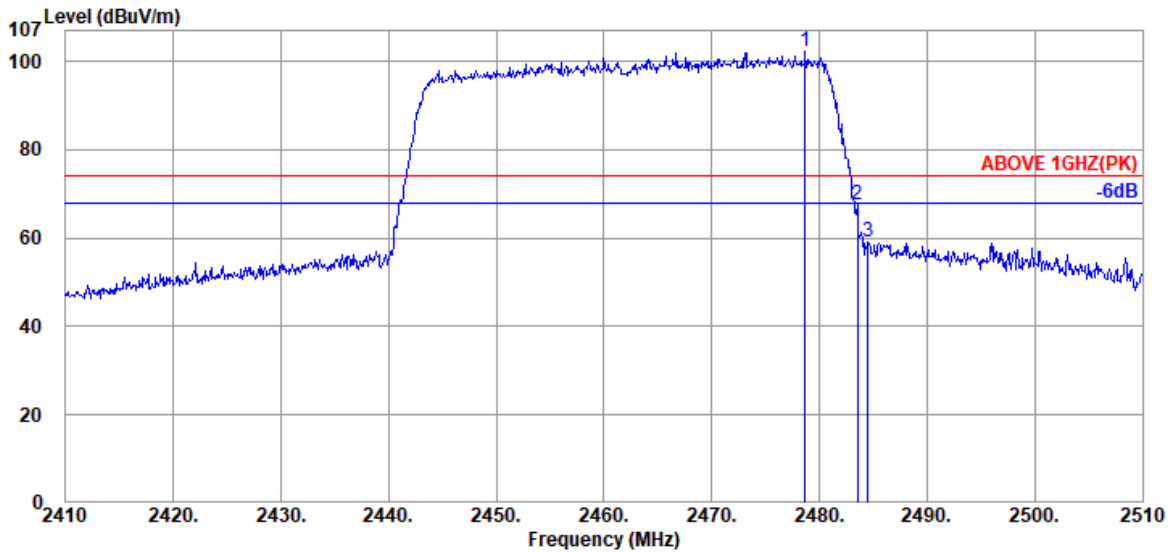

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.700	28.56	5.86	39.94	107.62	102.10	---	---	Peak
2483.500	28.57	5.87	39.94	72.92	67.42	74.00	6.58	Peak
2484.500	28.57	5.87	39.94	64.49	58.99	74.00	15.01	Peak

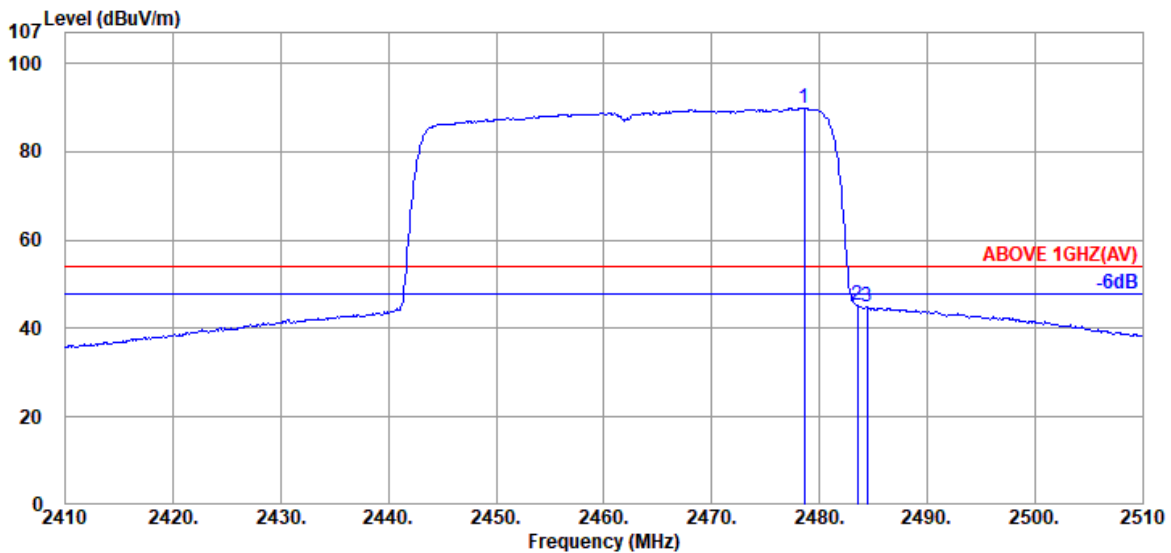


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.600	28.56	5.86	39.94	95.51	89.99	---	---	Average
2483.500	28.57	5.87	39.94	50.91	45.41	54.00	8.59	Average
2484.400	28.57	5.87	39.94	50.41	44.91	54.00	9.09	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

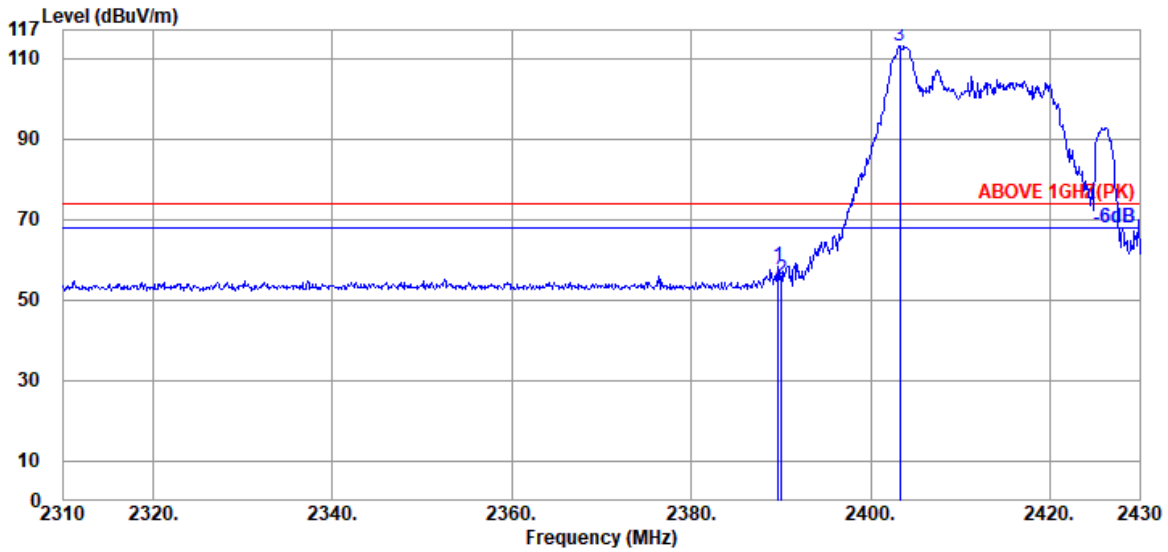

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.72	39.95	64.30	58.34	74.00	15.66	Peak
2390.040	28.27	5.72	39.95	61.09	55.13	74.00	18.87	Peak
@ 2403.240	28.30	5.74	39.95	118.95	113.04	---	---	Peak

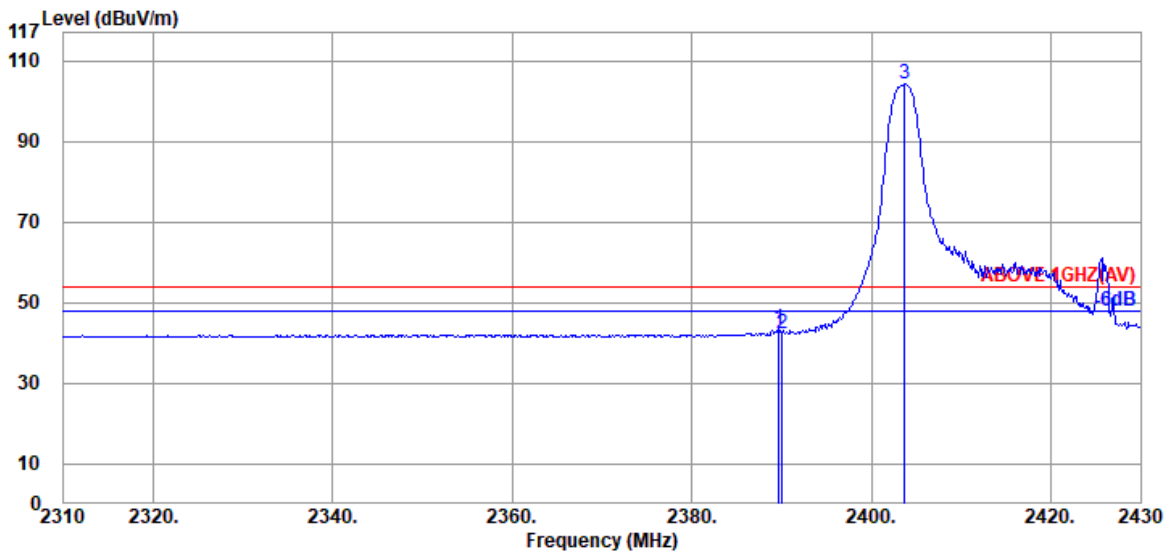


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.72	39.95	49.29	43.33	54.00	10.67	Average
2390.040	28.27	5.72	39.95	48.39	42.43	54.00	11.57	Average
@ 2403.720	28.30	5.74	39.95	110.11	104.20	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

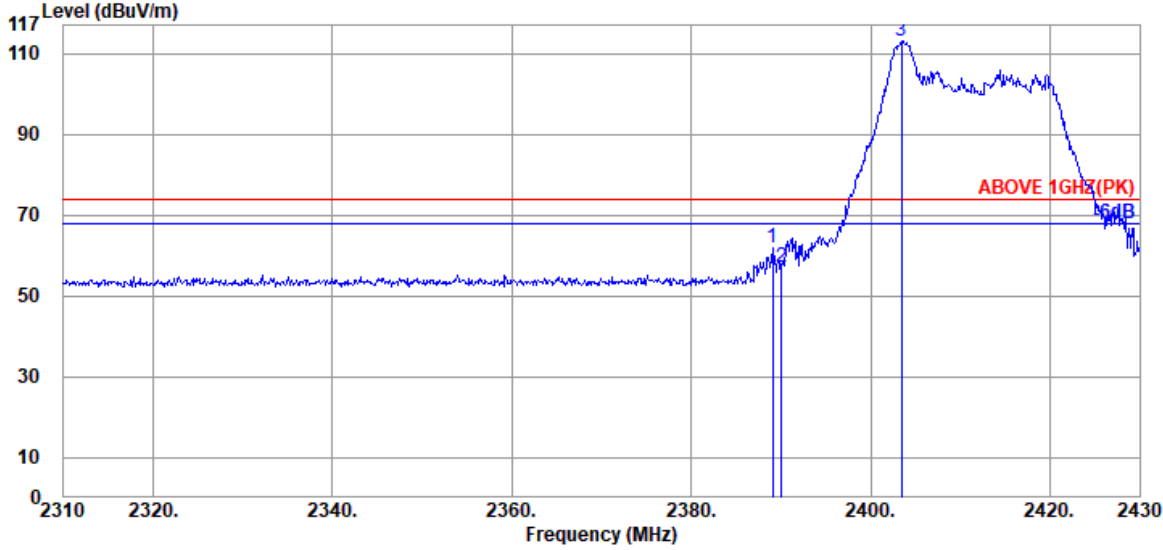

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.27	5.72	39.95	67.82	61.86	74.00	12.14	Peak
2390.040	28.27	5.72	39.95	62.97	57.01	74.00	16.99	Peak
@ 2403.480	28.30	5.74	39.95	119.09	113.18	---	---	Peak

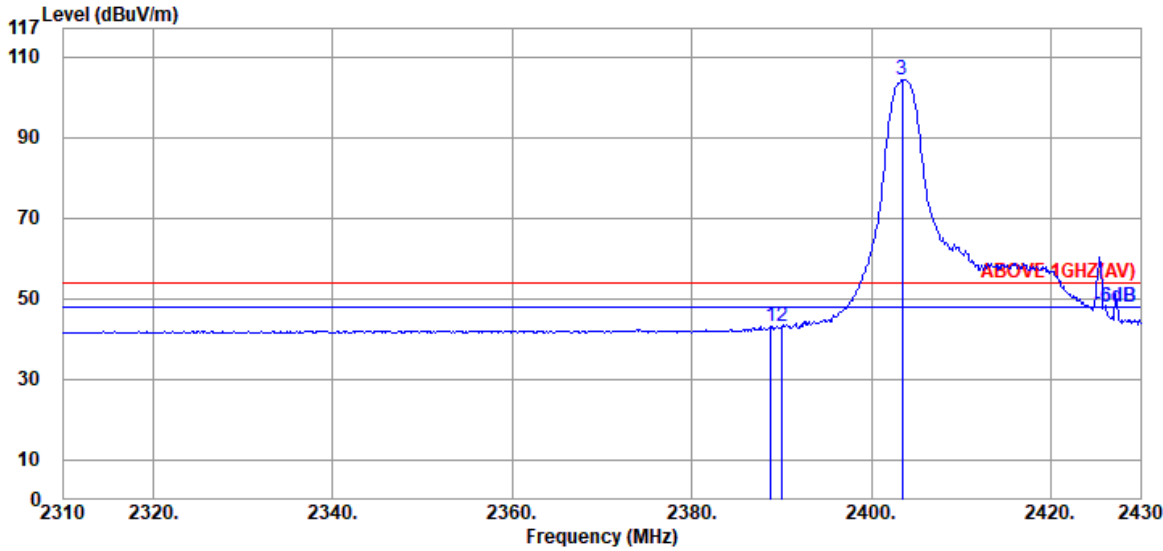


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	5.72	39.95	49.16	43.20	54.00	10.80	Average
2390.040	28.27	5.72	39.95	49.12	43.16	54.00	10.84	Average
@ 2403.480	28.30	5.74	39.95	110.31	104.40	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

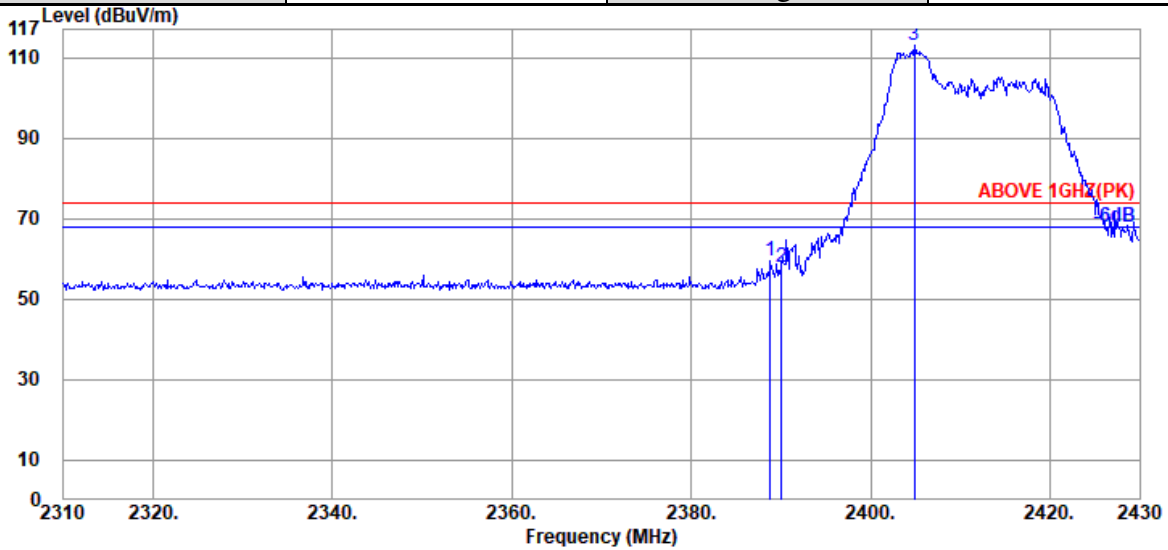

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	5.72	39.95	65.41	59.45	74.00	14.55	Peak
2390.040	28.27	5.72	39.95	63.68	57.72	74.00	16.28	Peak
@ 2404.920	28.33	5.75	39.95	118.69	112.82	---	---	Peak

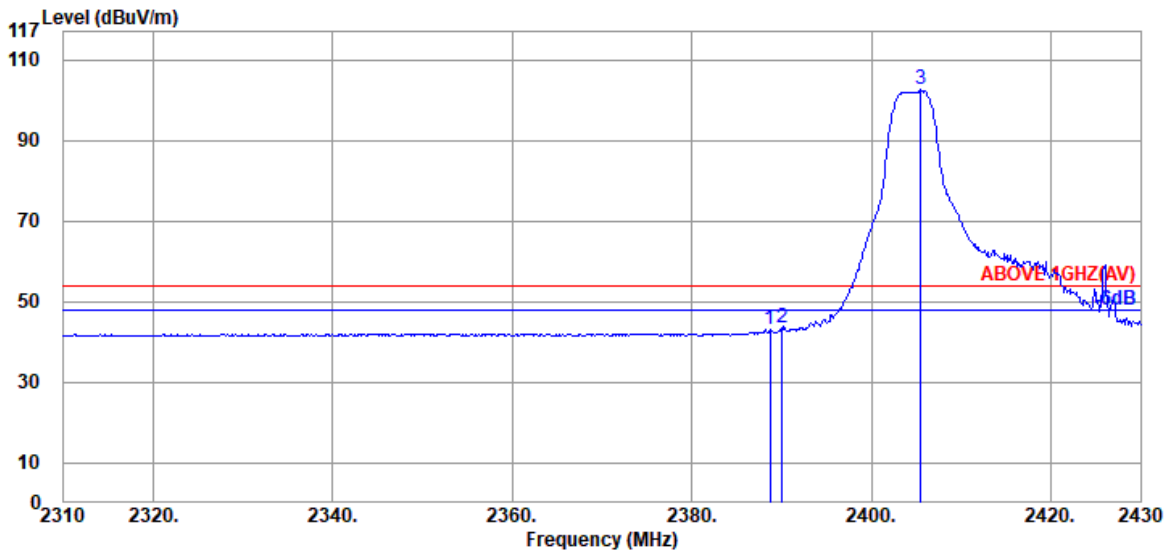


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.27	5.72	39.95	49.11	43.15	54.00	10.85	Average
2390.040	28.27	5.72	39.95	49.61	43.65	54.00	10.35	Average
@ 2405.520	28.33	5.75	39.95	108.39	102.52	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

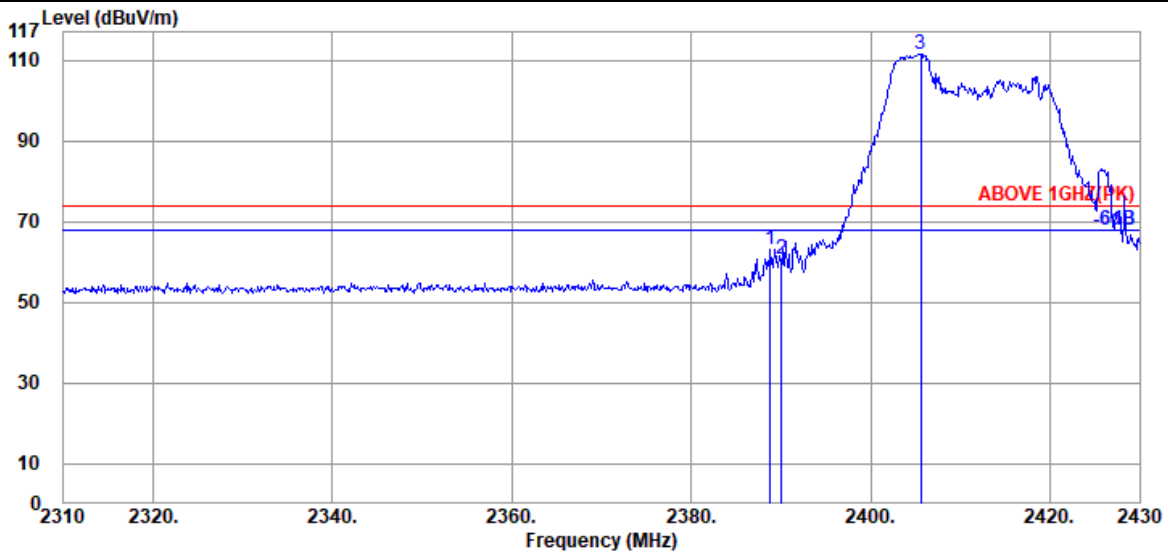

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	5.72	39.95	69.16	63.20	74.00	10.80	Peak
2390.040	28.27	5.72	39.95	66.54	60.58	74.00	13.42	Peak
@ 2405.640	28.33	5.75	39.95	117.34	111.47	---	---	Peak

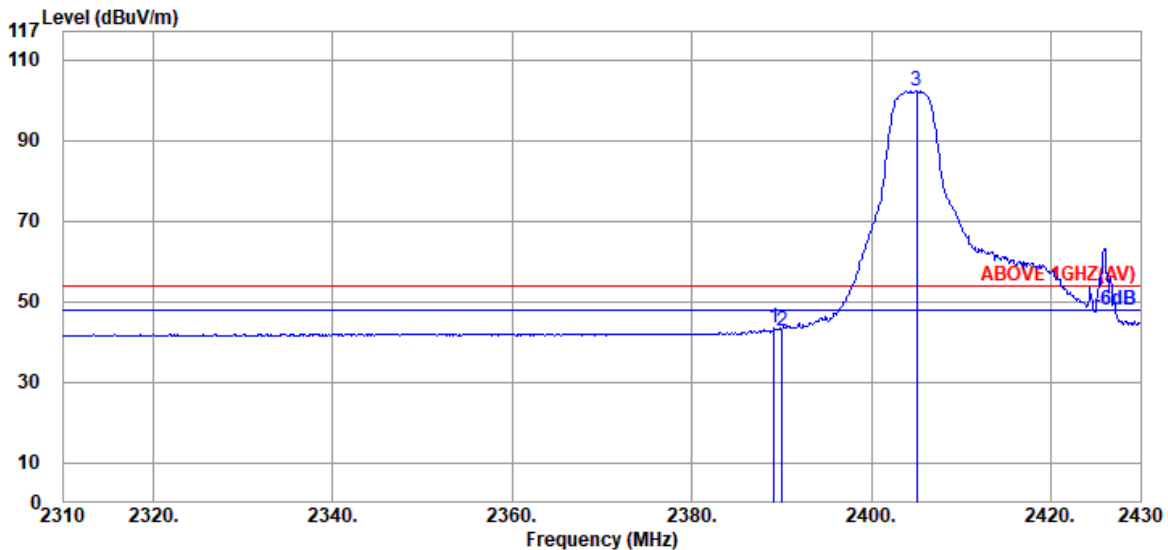


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.27	5.72	39.95	49.50	43.54	54.00	10.46	Average
2390.040	28.27	5.72	39.95	48.83	42.87	54.00	11.13	Average
@ 2405.040	28.33	5.75	39.95	107.98	102.11	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

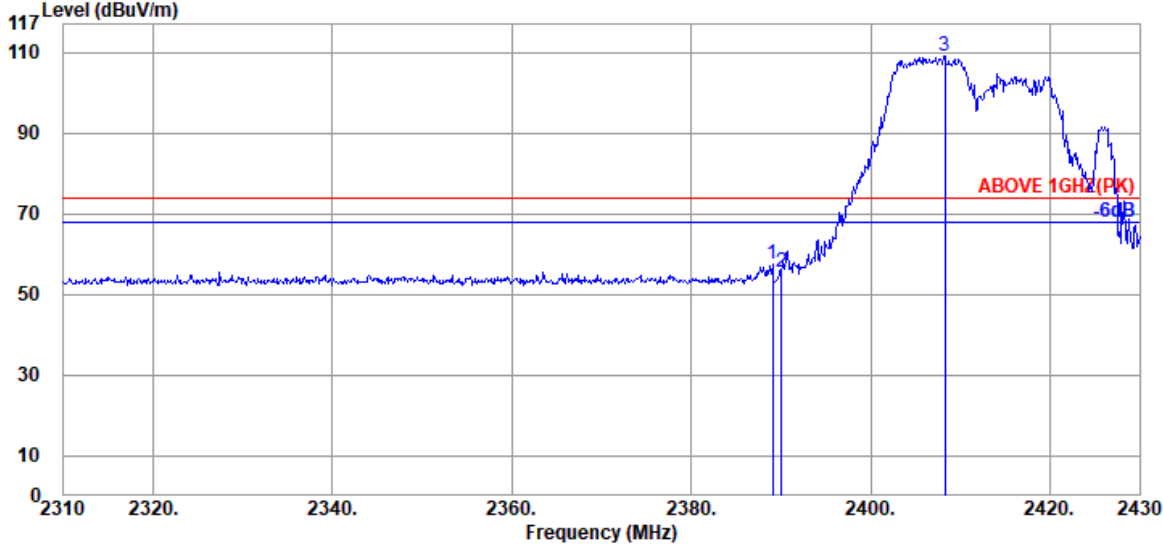

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.27	5.72	39.95	63.63	57.67	74.00	16.33	Peak
2390.040	28.27	5.72	39.95	61.62	55.66	74.00	18.34	Peak
@ 2408.280	28.33	5.75	39.95	114.81	108.94	---	---	Peak

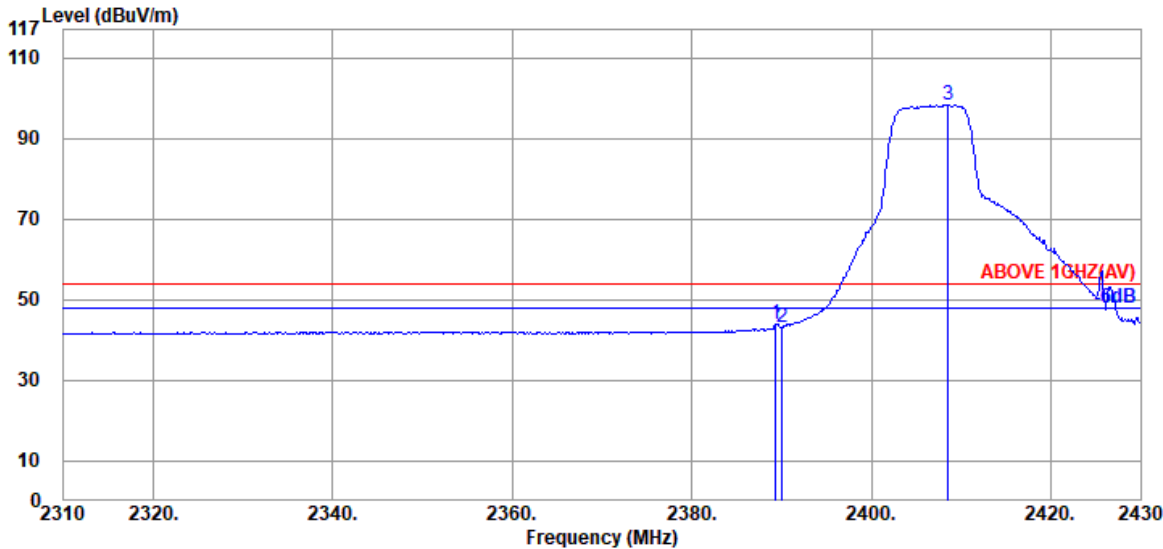


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	5.72	39.95	49.95	43.99	54.00	10.01	Average
2390.040	28.27	5.72	39.95	49.22	43.26	54.00	10.74	Average
@ 2408.520	28.33	5.75	39.95	104.28	98.41	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

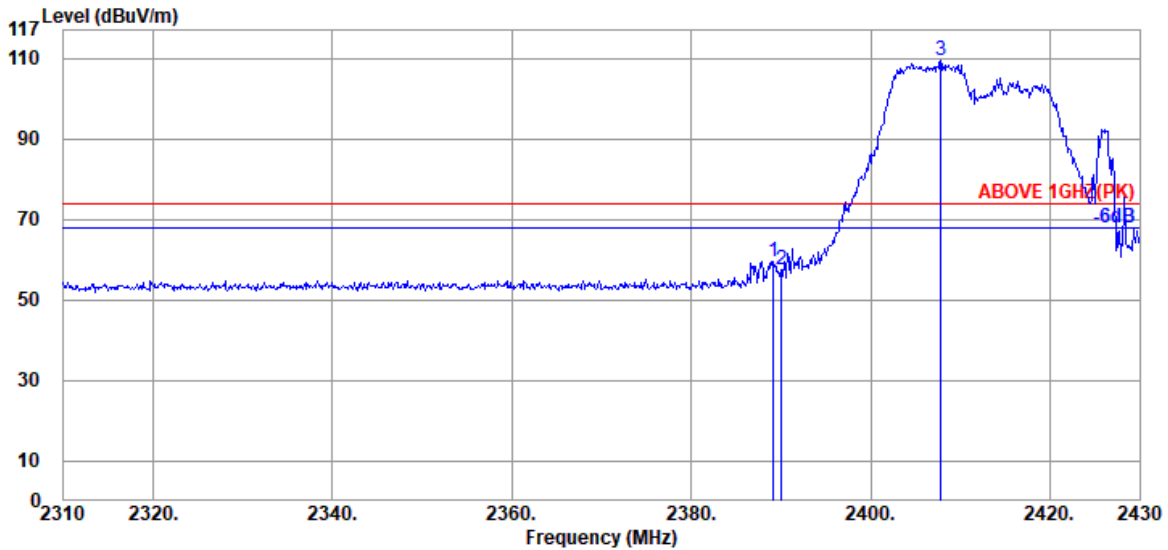

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.27	5.72	39.95	65.57	59.61	74.00	14.39	Peak
2390.040	28.27	5.72	39.95	63.49	57.53	74.00	16.47	Peak
@ 2407.800	28.33	5.75	39.95	115.14	109.27	---	---	Peak

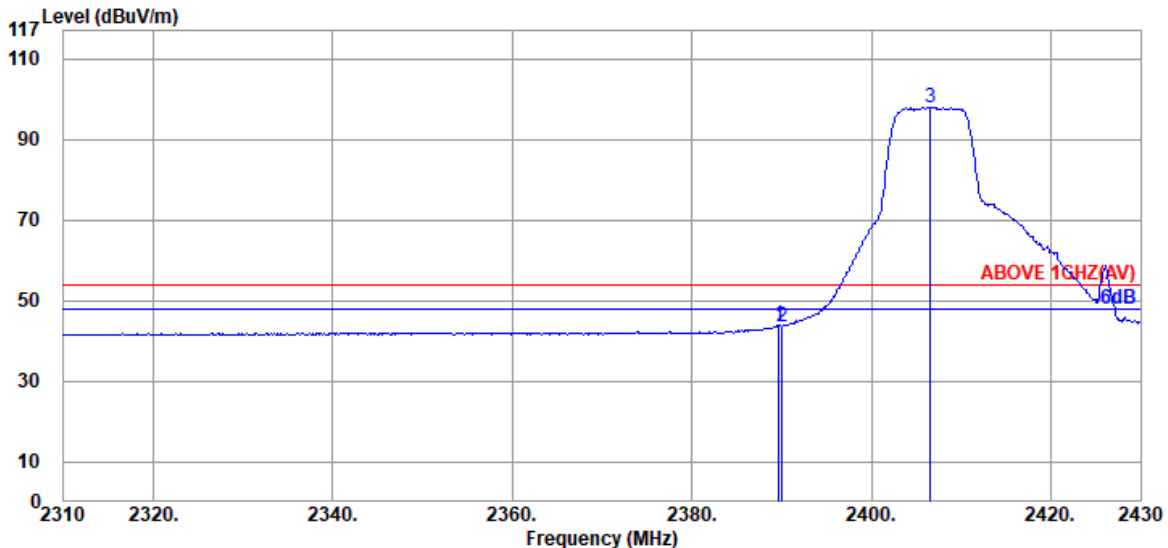


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	5.72	39.95	49.79	43.83	54.00	10.17	Average
2390.040	28.27	5.72	39.95	49.64	43.68	54.00	10.32	Average
@ 2406.600	28.33	5.75	39.95	103.78	97.91	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

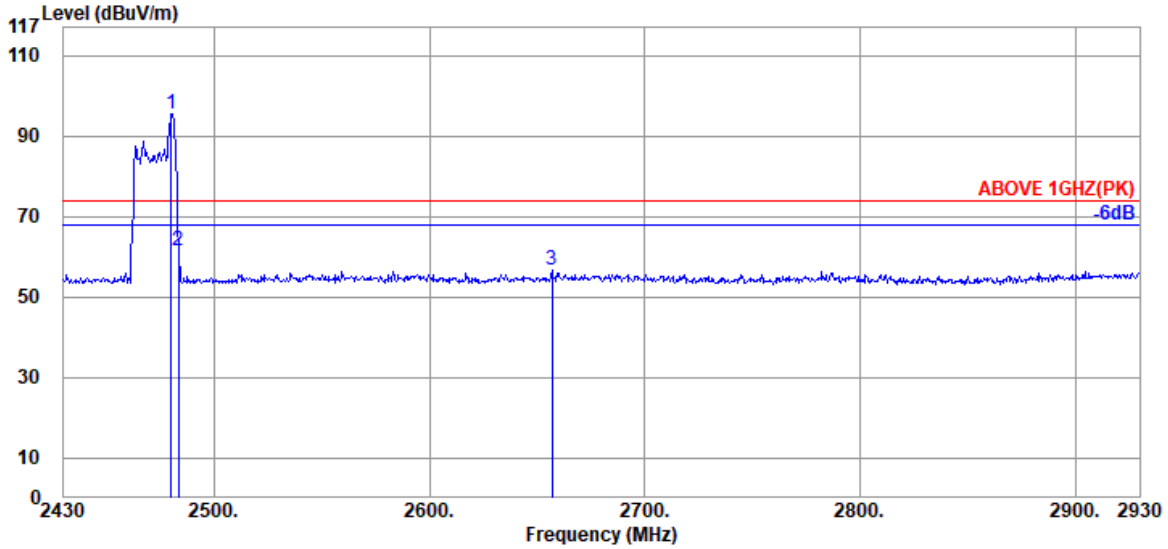

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.56	5.86	39.94	101.03	95.51	---	---	Peak
	2483.500	28.57	5.87	39.94	66.87	61.37	74.00	12.63	Peak
	2657.000	28.93	6.26	39.99	61.36	56.56	74.00	17.44	Peak

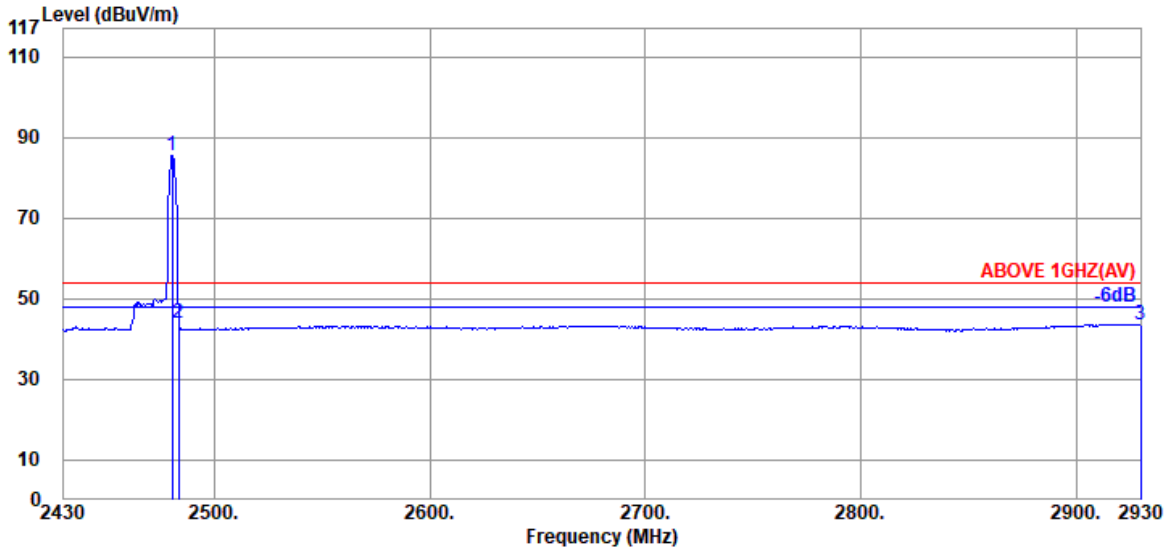


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.56	5.86	39.94	90.99	85.47	---	---	Average
	2483.500	28.57	5.87	39.94	49.59	44.09	54.00	9.91	Average
	2930.000	29.73	6.86	40.06	47.12	43.65	54.00	10.35	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

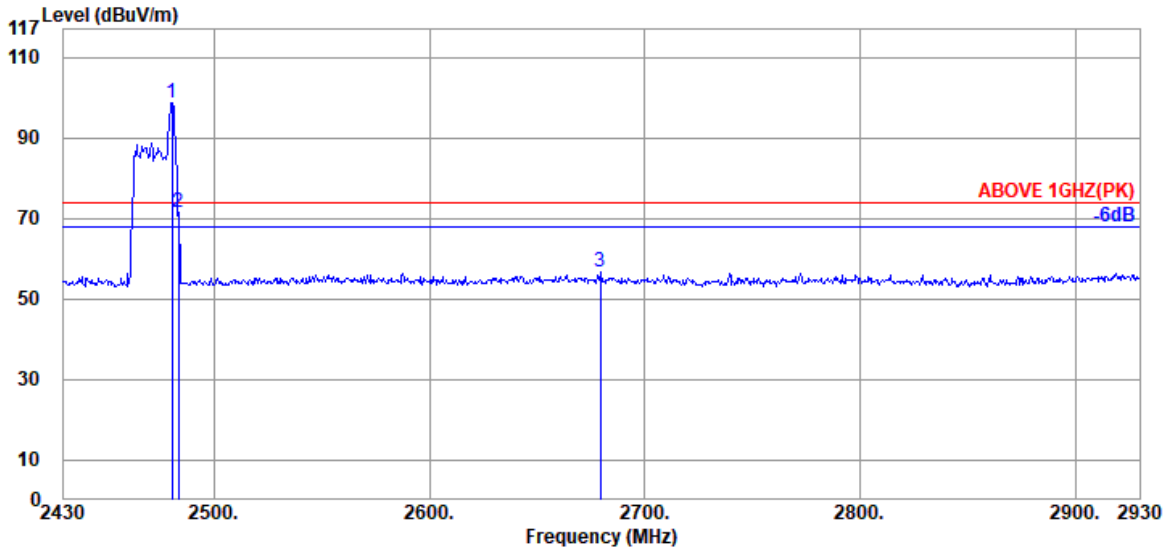

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.56	5.86	39.94	104.18	98.66	---	---	Peak
2483.500	28.57	5.87	39.94	76.87	71.37	74.00	2.63	Peak
2679.500	29.01	6.31	39.99	61.21	56.54	74.00	17.46	Peak

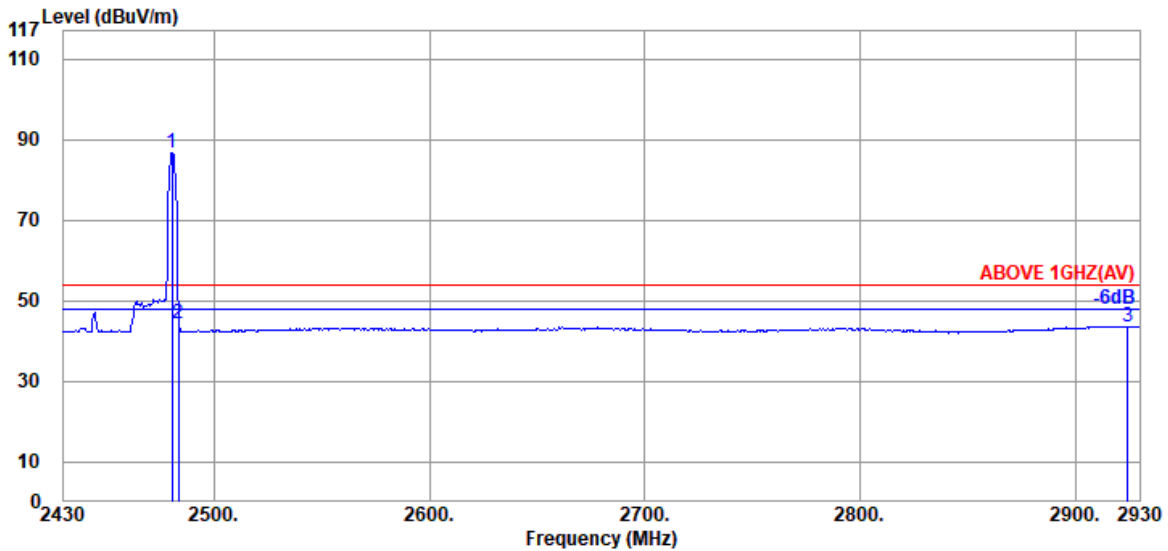


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.56	5.86	39.94	92.25	86.73	---	---	Average
2483.500	28.57	5.87	39.94	49.92	44.42	54.00	9.58	Average
2924.500	29.70	6.84	40.06	47.21	43.69	54.00	10.31	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

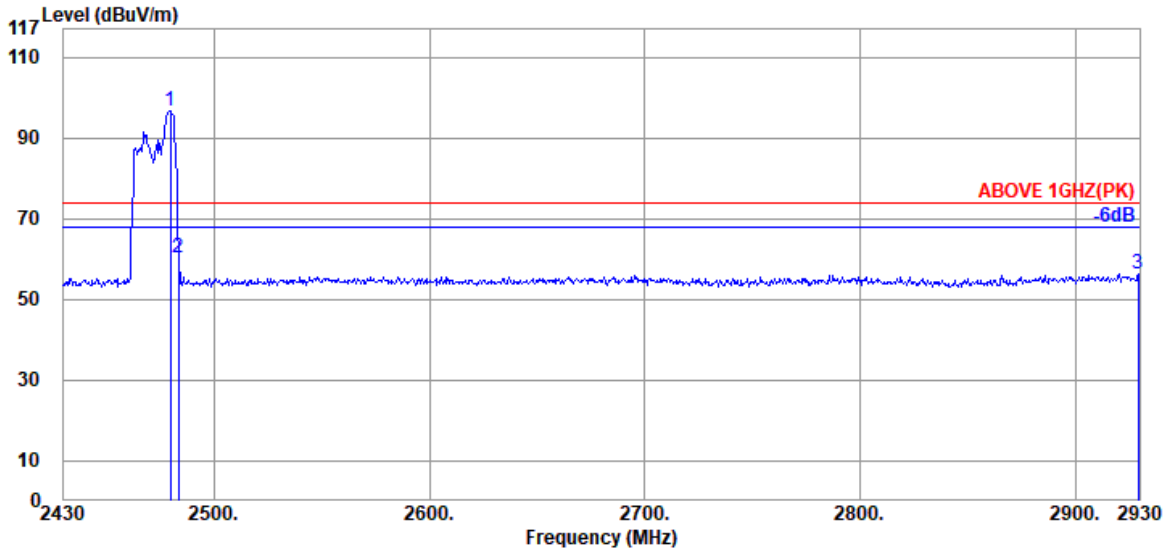

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	5.86	39.94	102.10	96.58	---	---	Peak
2483.500	28.57	5.87	39.94	65.68	60.18	74.00	13.82	Peak
2929.500	29.73	6.86	40.06	59.90	56.43	74.00	17.57	Peak

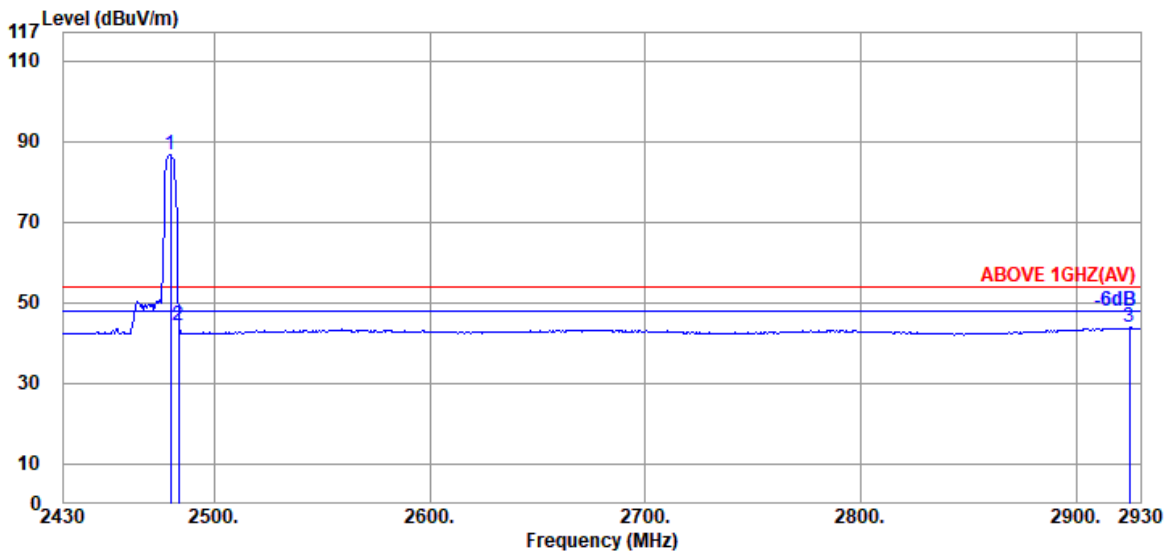


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	5.86	39.94	92.16	86.64	---	---	Average
2483.500	28.57	5.87	39.94	50.00	44.50	54.00	9.50	Average
2925.000	29.70	6.84	40.06	47.45	43.93	54.00	10.07	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

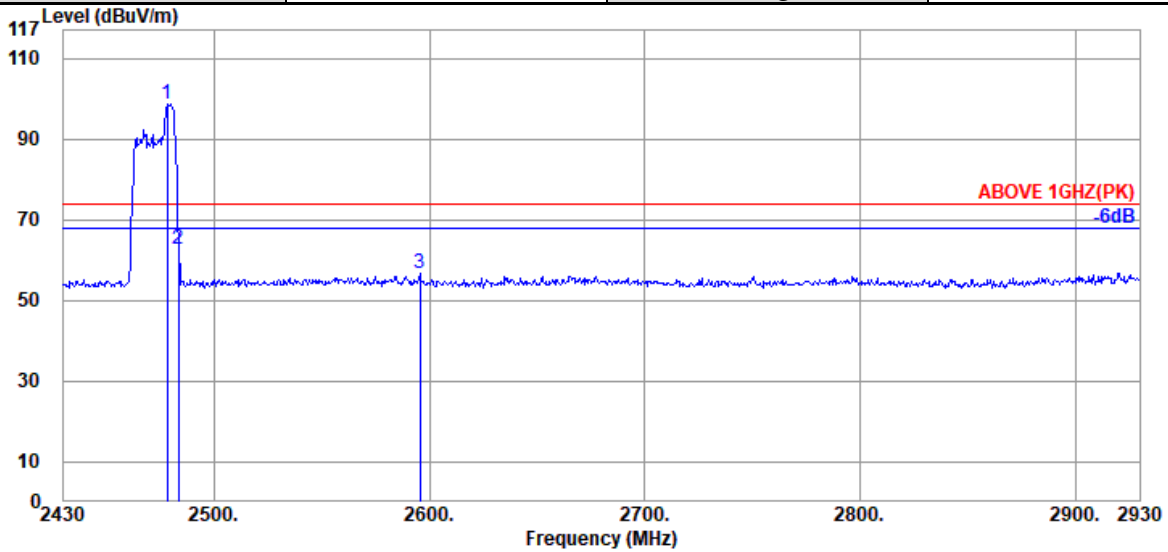

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.56	5.86	39.94	104.17	98.65	---	---	Peak
2483.500	28.57	5.87	39.94	68.20	62.70	74.00	11.30	Peak
2595.500	28.97	6.12	39.97	61.73	56.85	74.00	17.15	Peak

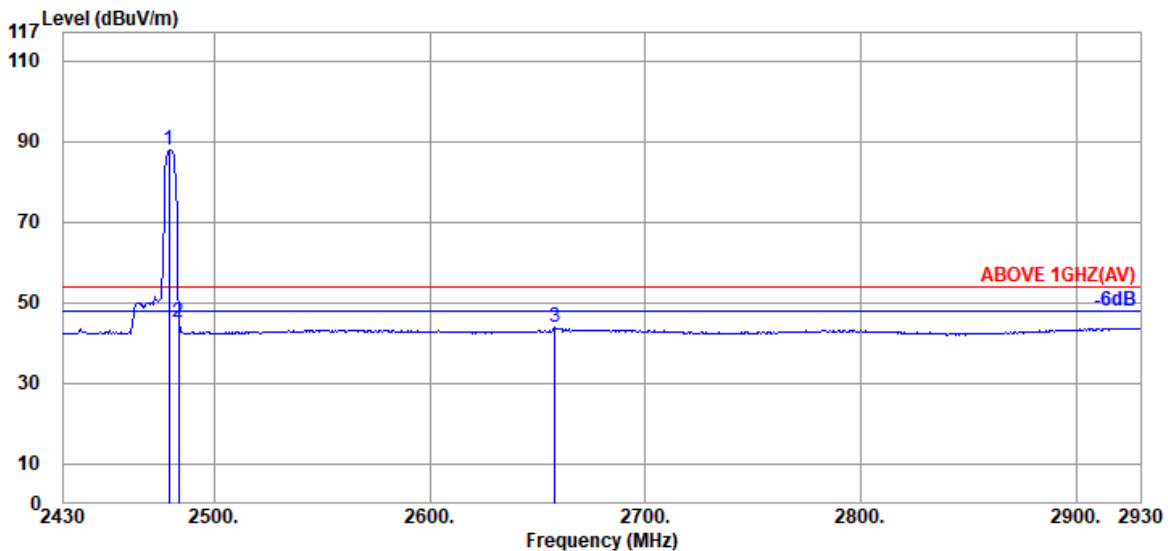


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.56	5.86	39.94	93.56	88.04	---	---	Average
2483.500	28.57	5.87	39.94	50.51	45.01	54.00	8.99	Average
2658.000	28.93	6.26	39.99	48.59	43.79	54.00	10.21	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

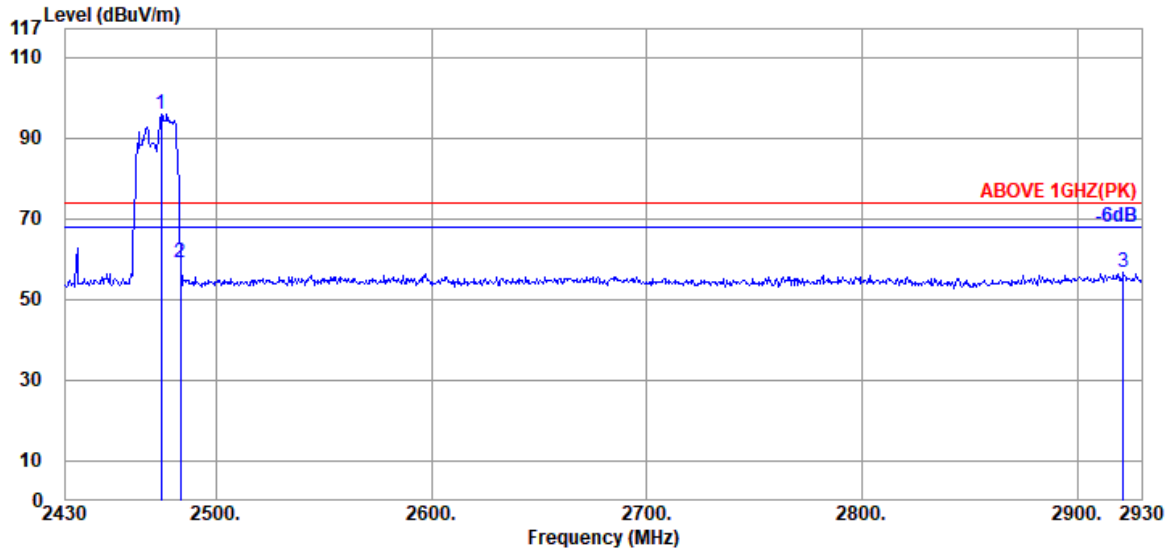

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	28.54	5.85	39.94	101.50	95.95	---	---	Peak
2483.500	28.57	5.87	39.94	64.41	58.91	74.00	15.09	Peak
2921.500	29.70	6.84	40.06	60.08	56.56	74.00	17.44	Peak

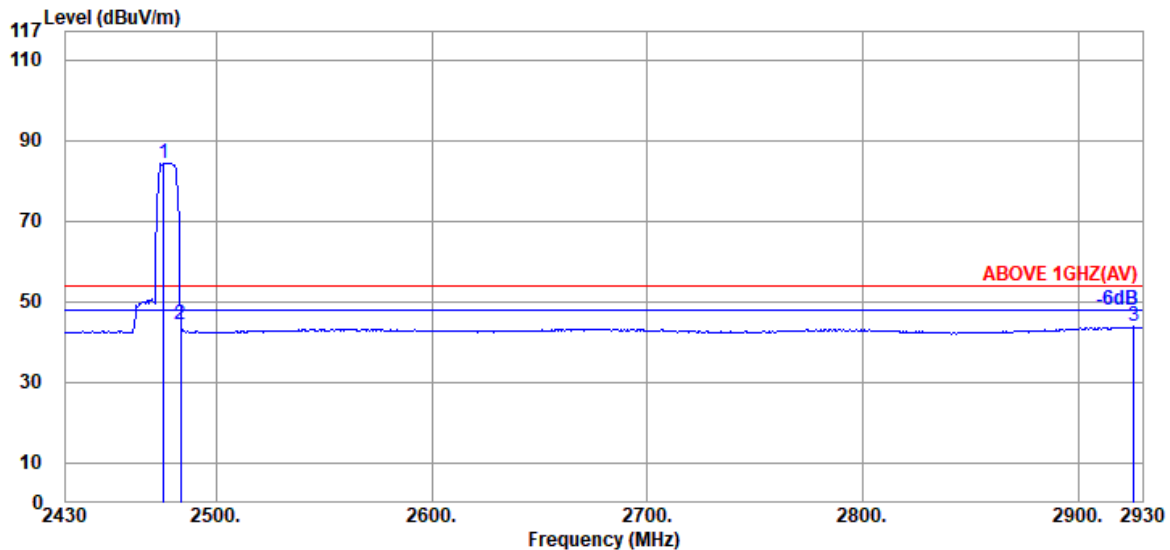


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.56	5.86	39.94	89.93	84.41	---	---	Average
2483.500	28.57	5.87	39.94	49.79	44.29	54.00	9.71	Average
2926.000	29.70	6.84	40.06	47.28	43.76	54.00	10.24	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

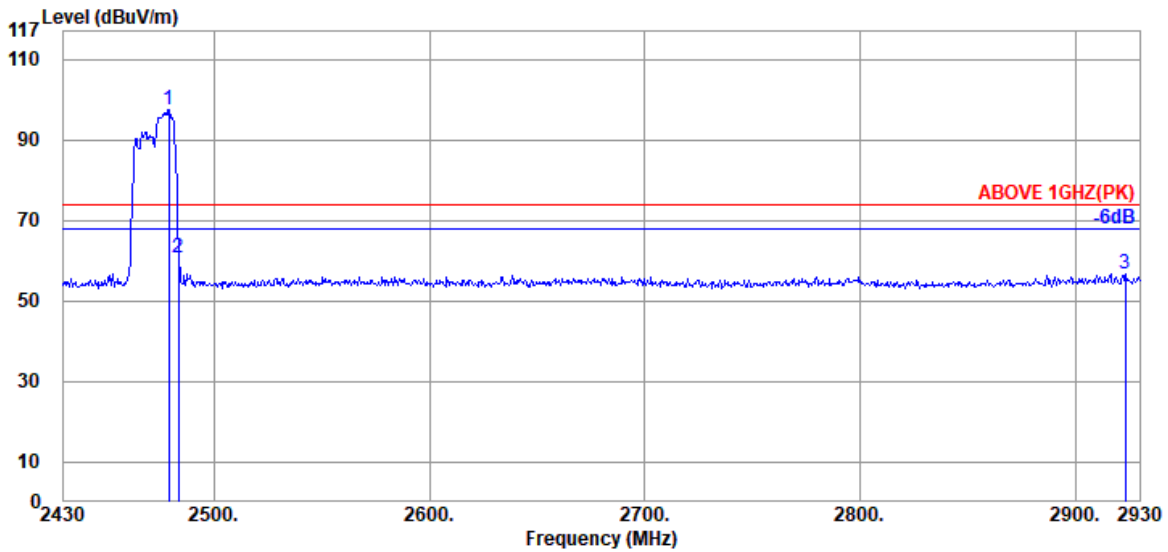

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.56	5.86	39.94	102.92	97.40	---	---	Peak
2483.500	28.57	5.87	39.94	66.12	60.62	74.00	13.38	Peak
2923.500	29.70	6.84	40.06	60.21	56.69	74.00	17.31	Peak

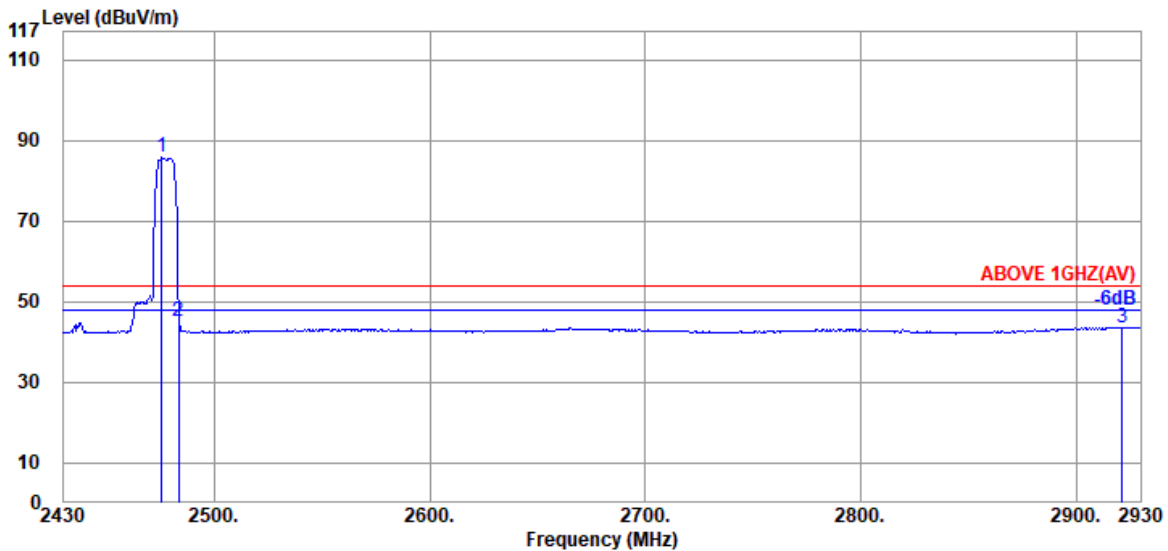


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2475.500	28.56	5.86	39.94	91.22	85.70	---	---	Average
2483.500	28.57	5.87	39.94	50.63	45.13	54.00	8.87	Average
2921.500	29.70	6.84	40.06	47.22	43.70	54.00	10.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

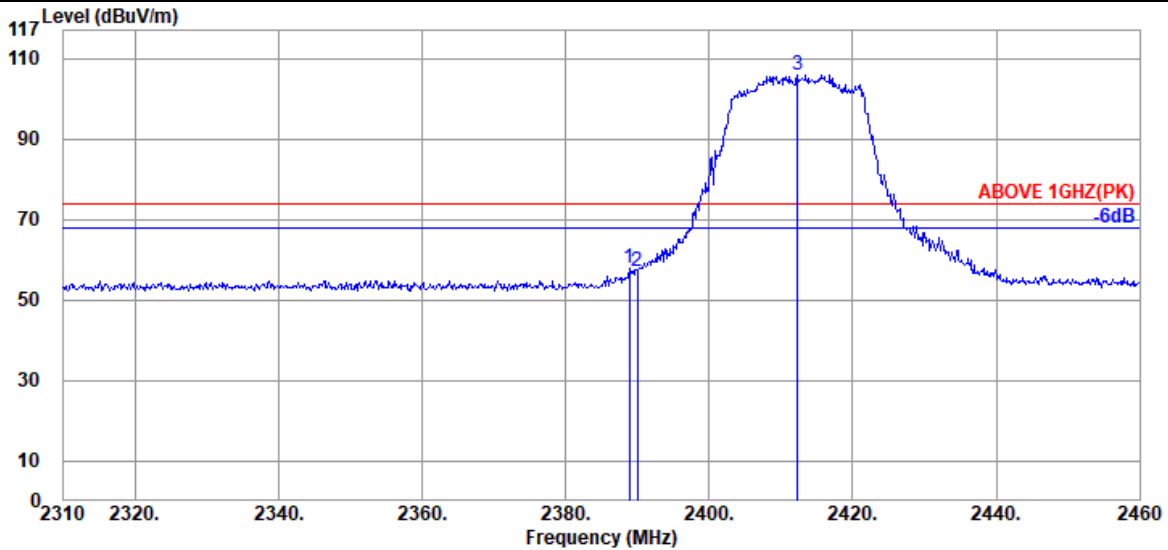

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.27	5.72	39.95	63.80	57.84	74.00	16.16	Peak
2389.950	28.27	5.72	39.95	62.90	56.94	74.00	17.06	Peak
@ 2412.300	28.36	5.76	39.95	111.83	106.00	---	---	Peak

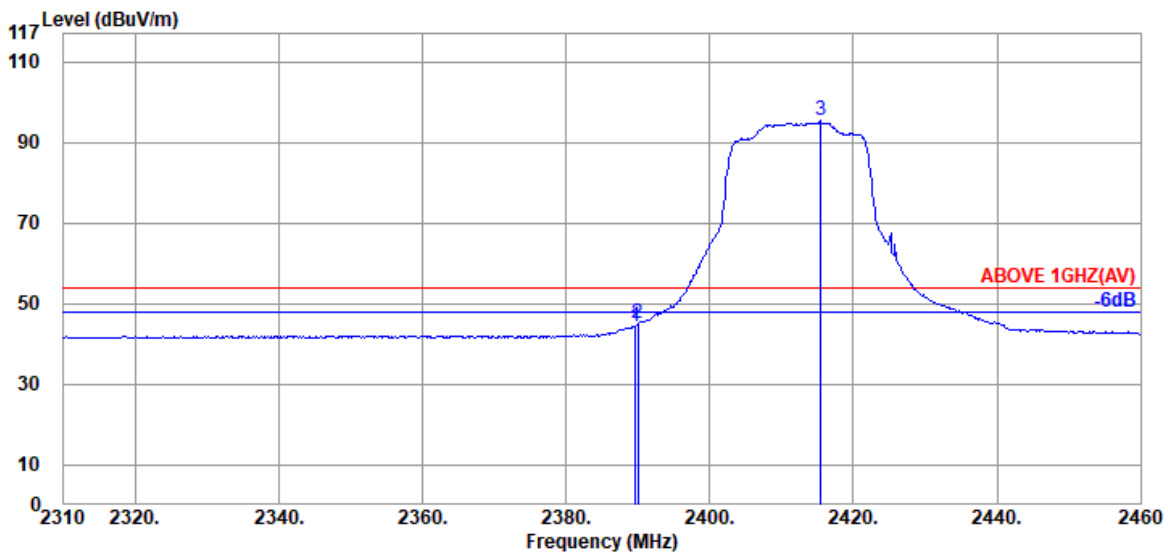


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.27	5.72	39.95	50.38	44.42	54.00	9.58	Average
2389.950	28.27	5.72	39.95	51.02	45.06	54.00	8.94	Average
@ 2415.450	28.36	5.76	39.95	101.11	95.28	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

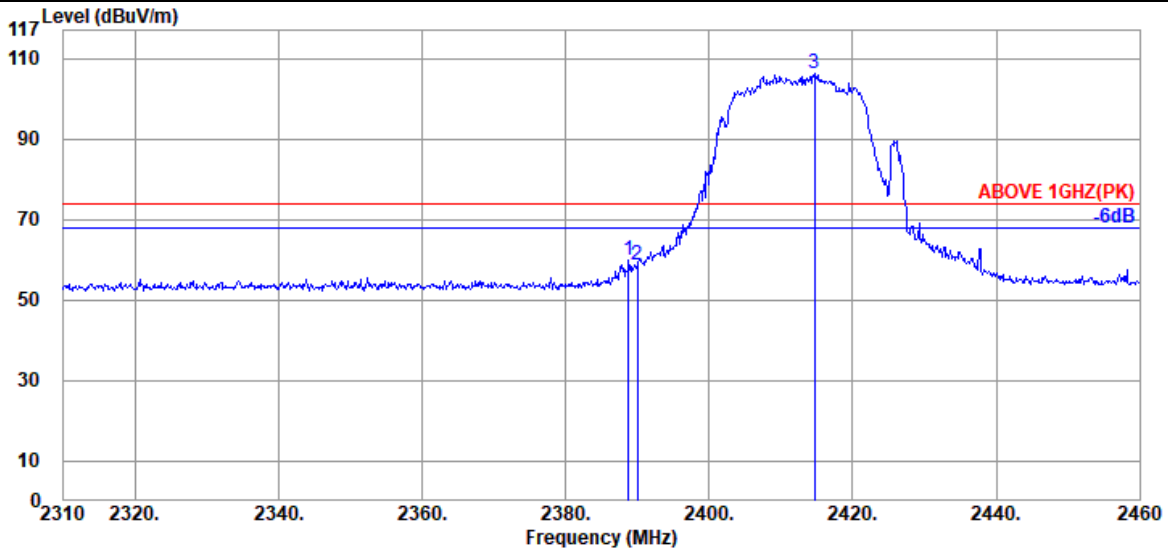

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.27	5.72	39.95	65.75	59.79	74.00	14.21	Peak
2389.950	28.27	5.72	39.95	64.79	58.83	74.00	15.17	Peak
@ 2414.700	28.36	5.76	39.95	111.94	106.11	---	---	Peak

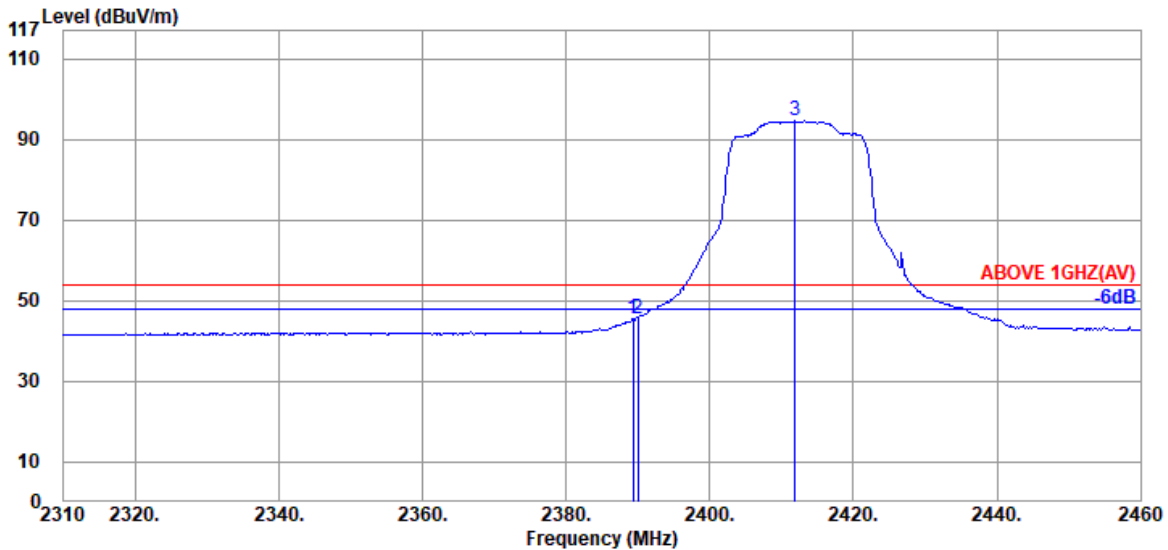


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.27	5.72	39.95	51.48	45.52	54.00	8.48	Average
2389.950	28.27	5.72	39.95	51.55	45.59	54.00	8.41	Average
@ 2411.850	28.36	5.76	39.95	100.29	94.46	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

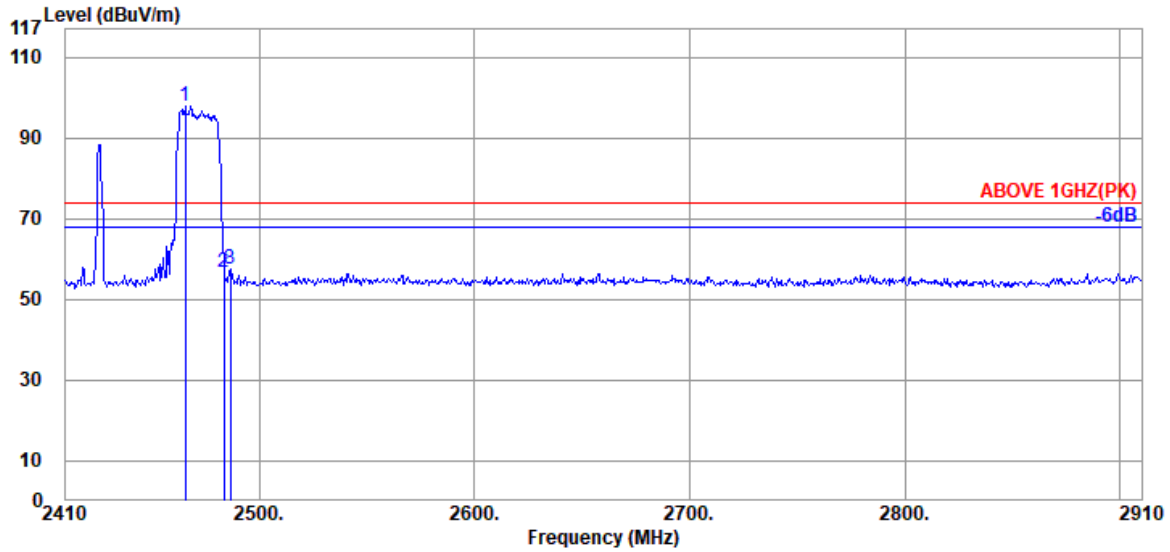

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2465.500	28.53	5.84	39.95	103.42	97.84	---	---	Peak
	2483.500	28.57	5.87	39.94	62.13	56.63	74.00	17.37	Peak
	2486.500	28.57	5.87	39.94	62.89	57.39	74.00	16.61	Peak

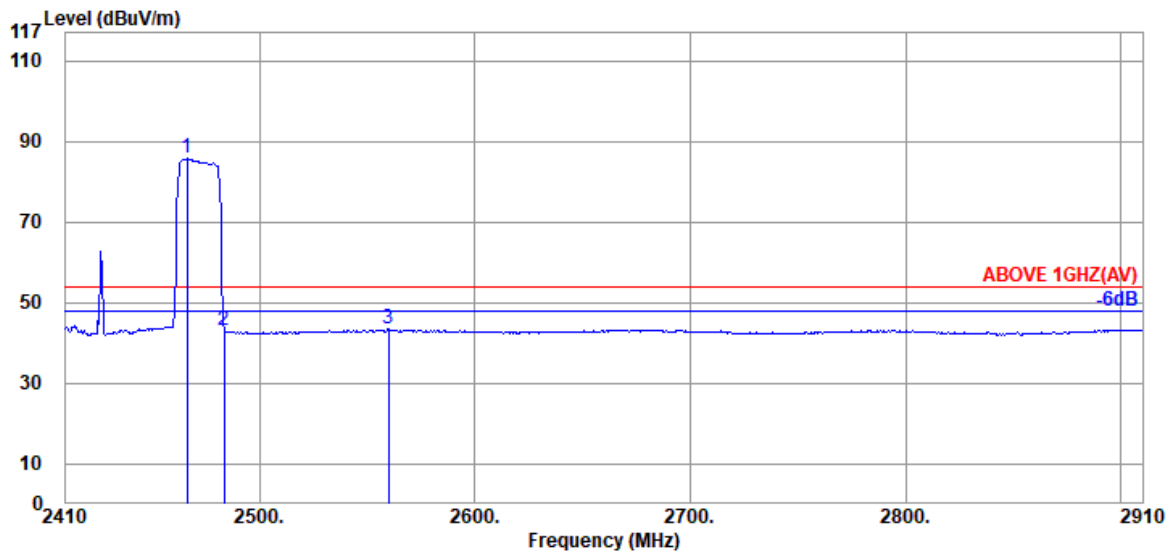


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2466.500	28.53	5.84	39.95	91.26	85.68	---	---	Average
	2483.500	28.57	5.87	39.94	48.56	43.06	54.00	10.94	Average
	2560.000	28.83	6.03	39.96	48.70	43.60	54.00	10.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

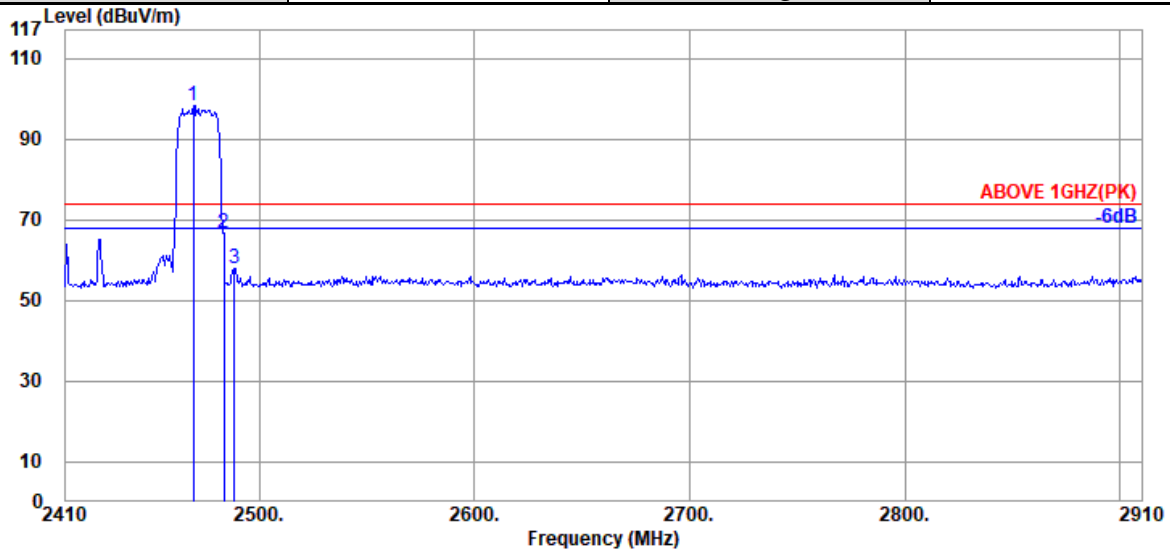

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.54	5.85	39.94	103.75	98.20	---	---	Peak
2483.500	28.57	5.87	39.94	72.10	66.60	74.00	7.40	Peak
2488.500	28.57	5.87	39.94	63.30	57.80	74.00	16.20	Peak

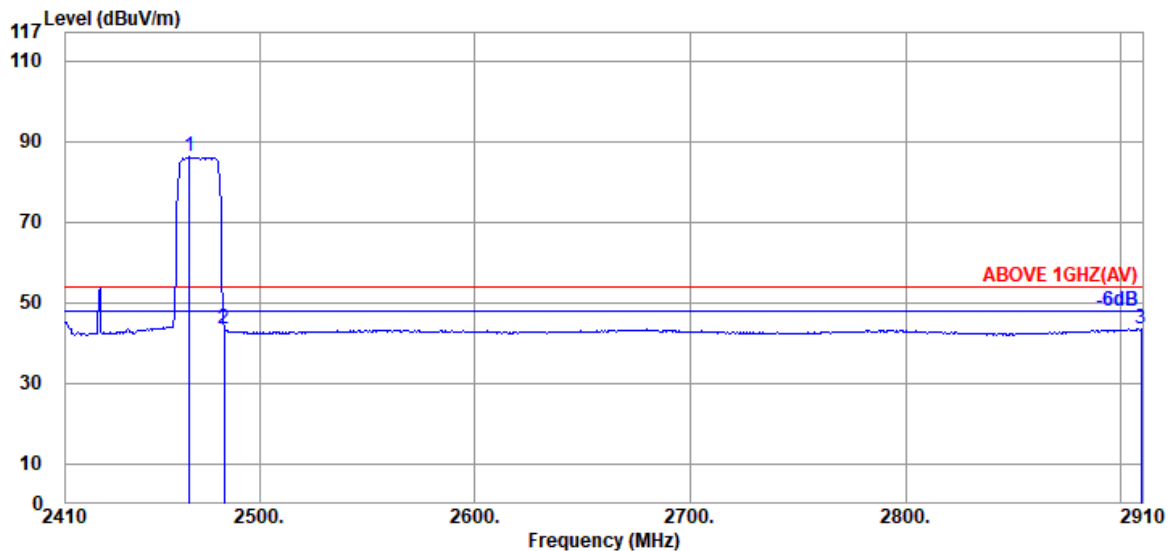


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.53	5.84	39.94	91.63	86.06	---	---	Average
2483.500	28.57	5.87	39.94	49.09	43.59	54.00	10.41	Average
2909.500	29.63	6.81	40.06	47.02	43.40	54.00	10.60	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

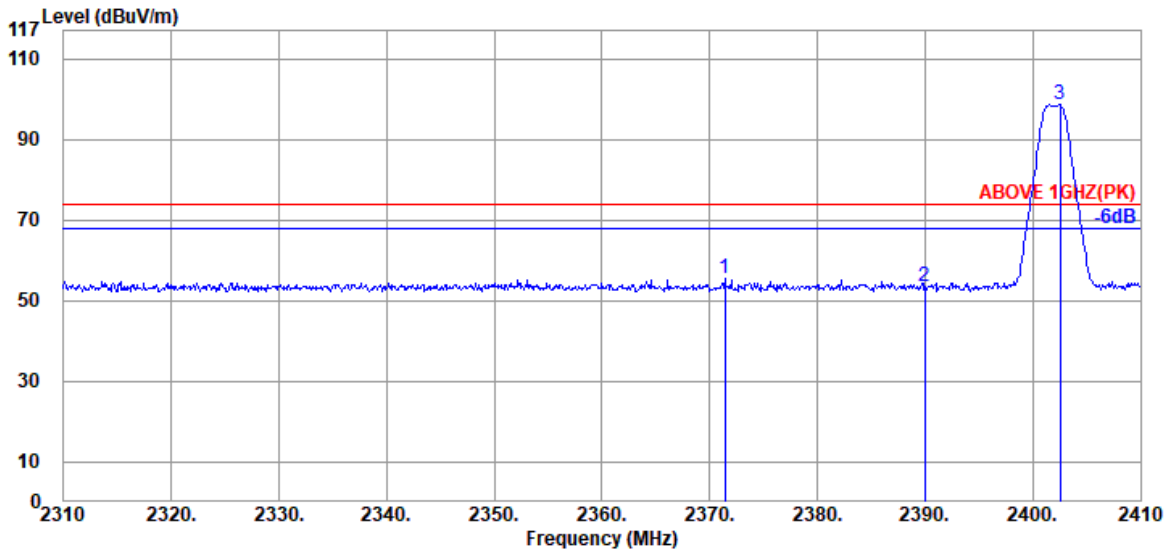

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2371.400	28.24	6.01	39.96	61.05	55.34	74.00	18.66	Peak
2390.000	28.27	6.04	39.95	59.14	53.50	74.00	20.50	Peak
@ 2402.500	28.30	6.04	39.95	104.10	98.49	---	---	Peak

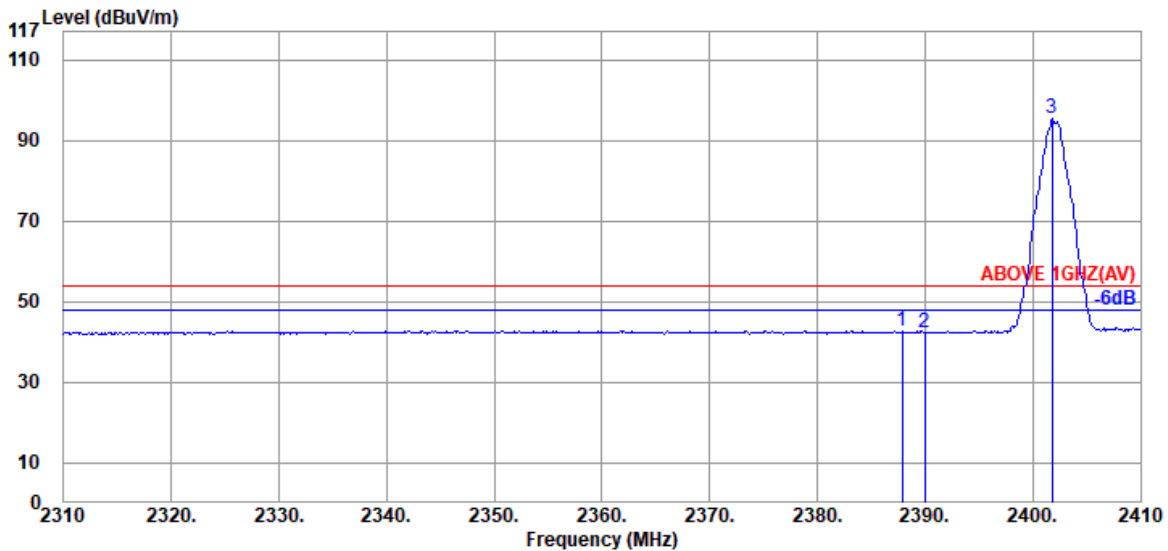


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.900	28.27	6.04	39.95	48.38	42.74	54.00	11.26	Average
2390.000	28.27	6.04	39.95	47.97	42.33	54.00	11.67	Average
@ 2401.800	28.30	6.04	39.95	100.92	95.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

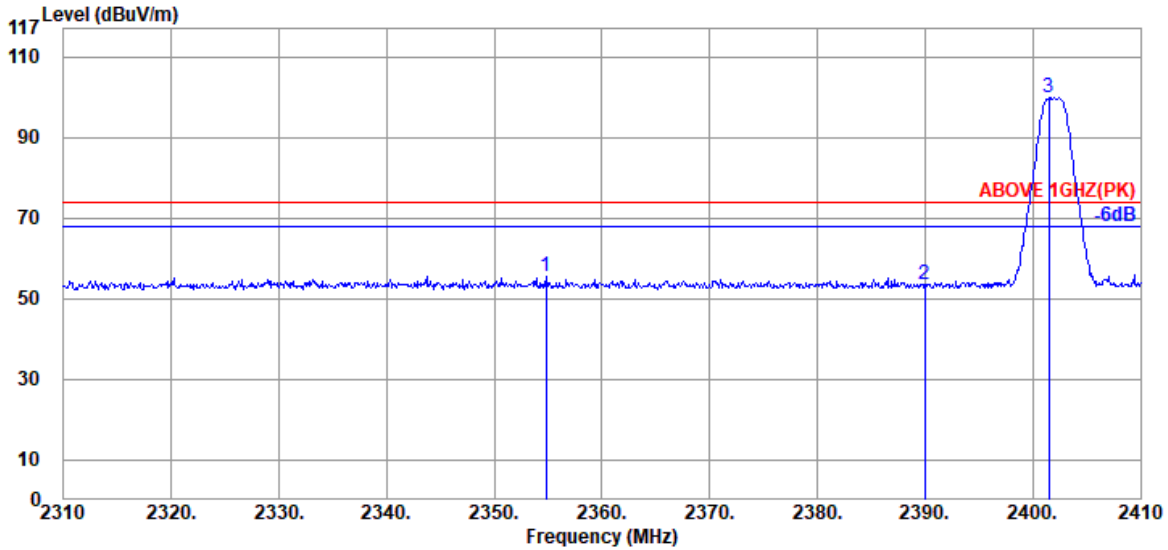

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2354.800	28.20	5.98	39.96	61.25	55.47	74.00	18.53	Peak
2390.000	28.27	6.04	39.95	59.21	53.57	74.00	20.43	Peak
@ 2401.500	28.30	6.04	39.95	105.35	99.74	---	---	Peak

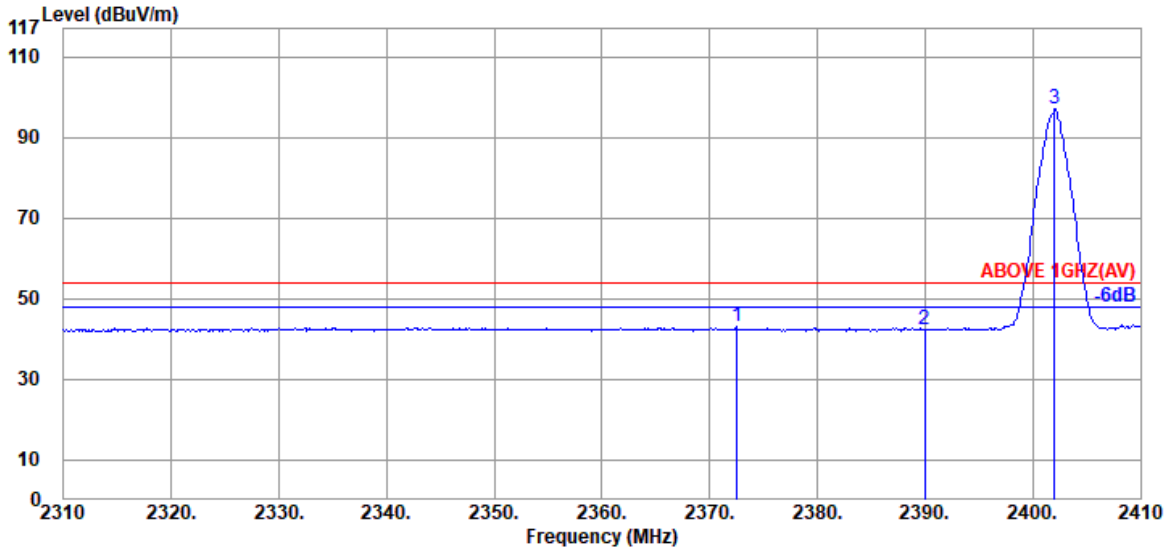


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2372.500	28.24	6.01	39.96	48.66	42.95	54.00	11.05	Average
2390.000	28.27	6.04	39.95	47.88	42.24	54.00	11.76	Average
@ 2402.000	28.30	6.04	39.95	102.50	96.89	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

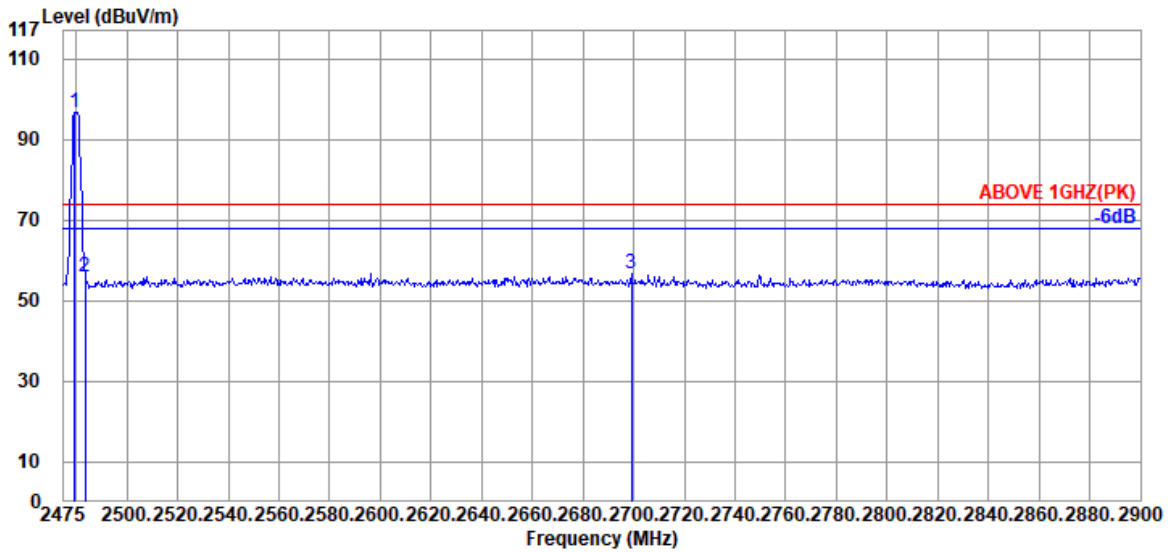

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.250	28.56	6.18	39.94	102.02	96.82	---	---	Peak
2483.500	28.57	6.18	39.94	61.02	55.83	74.00	18.17	Peak
2698.975	29.10	6.47	40.00	61.18	56.75	74.00	17.25	Peak

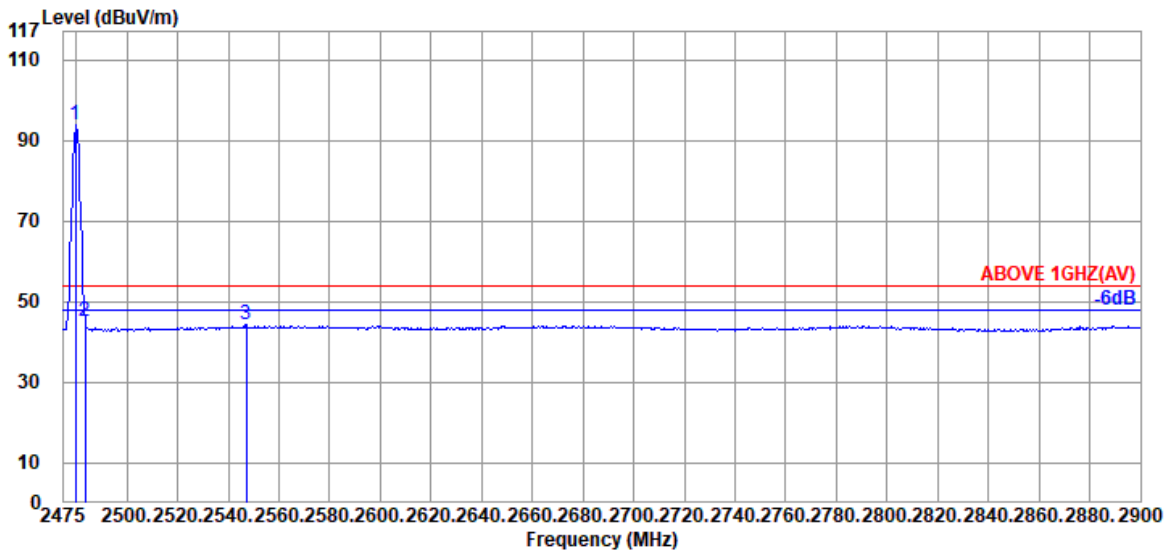


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.675	28.56	6.18	39.94	98.94	93.74	---	---	Average
2483.500	28.57	6.18	39.94	50.30	45.11	54.00	8.89	Average
2547.250	28.77	6.28	39.95	49.04	44.14	54.00	9.86	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

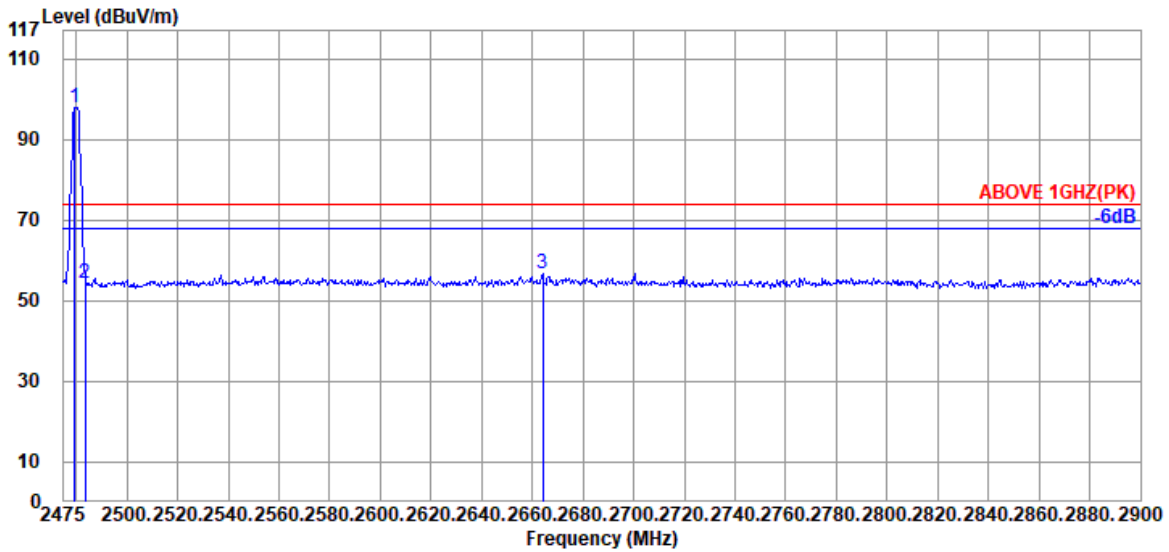

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.250	28.56	6.18	39.94	103.19	97.99	---	---	Peak
2483.500	28.57	6.18	39.94	59.50	54.31	74.00	19.69	Peak
2664.125	28.96	6.43	39.99	61.42	56.82	74.00	17.18	Peak

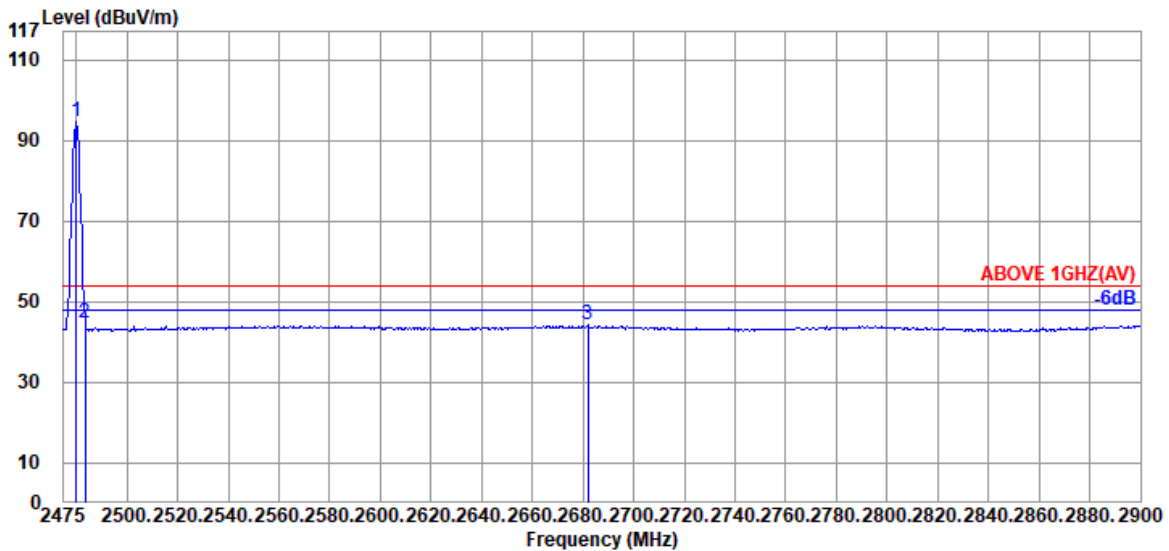

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2480.100	28.56	6.18	39.94	100.03	94.83	---	---	Average
2483.500	28.57	6.18	39.94	50.11	44.92	54.00	9.08	Average
2681.975	29.01	6.45	39.99	48.80	44.27	54.00	9.73	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..

### A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

Mode	802.11b	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	38.70	41.47	54.00	12.53	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	41.72	44.49	54.00	9.51	Peak

Mode	802.11g	Frequency	TX 2442MHz
------	---------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	39.56	42.33	54.00	11.67	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	38.97	41.74	54.00	12.26	Peak

Mode	802.11n-HT20	Frequency	TX 2457MHz
------	--------------	-----------	------------

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.43	8.74	39.34	38.87	41.70	54.00	12.30	Peak

#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4914.000	33.43	8.74	39.34	41.61	44.44	54.00	9.56	Peak

Mode	802.11n-HT40	Frequency	TX 2442MHz
------	--------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	38.34	41.11	54.00	12.89	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	39.15	41.92	54.00	12.08	Peak

Mode	802.11ax-HE20	Frequency	TX 2417MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.37	8.70	39.37	37.71	40.41	54.00	13.59	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4834.000	33.37	8.70	39.37	37.83	40.53	54.00	13.47	Peak

Mode	802.11ax-HE40	Frequency	TX 2442MHz
------	---------------	-----------	------------

## Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	38.64	41.41	54.00	12.59	Peak

## Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4884.000	33.40	8.72	39.35	37.83	40.60	54.00	13.40	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz					
------	----------	-----------	------------	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.30	8.68	39.39	38.77	41.36	54.00	12.64	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4804.000	33.30	8.68	39.39	39.03	41.62	54.00	12.38	Peak

Mode	BLE (2M)	Frequency	TX 2440MHz					
------	----------	-----------	------------	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.40	8.72	39.35	37.51	40.28	54.00	13.72	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4880.000	33.40	8.72	39.35	37.97	40.74	54.00	13.26	Peak

Mode	BLE (2M)	Frequency	TX 2480MHz					
------	----------	-----------	------------	--	--	--	--	--

**Antenna at Horizontal Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.55	8.77	39.31	38.68	41.69	54.00	12.31	Peak

**Antenna at Vertical Polarization**

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4960.000	33.55	8.77	39.31	37.83	40.84	54.00	13.16	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

Pursuant to ANSI C63.10:2013 that emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.