

FCC 15.247 & RSS-247 2.4 GHz Test Report

for

LG Electronics Inc.

**222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do,
451-713, Korea**

Product Name : Notebook Computer
Model Name : 14Z995
Brand : LG
FCC ID : BEJNT-14Z995
IC : 2703H-14Z995

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| TEST REPORT CERTIFICATION..... | 4 |
| 1. REVISION RECORD OF TEST REPORT | 5 |
| 2. SUMMARY OF TEST RESULTS | 6 |
| 3. GENERAL INFORMATION | 7 |
| 3.1. Description of Application | 7 |
| 3.2. Description of EUT | 8 |
| 3.3. Antenna Information | 9 |
| 3.4. EUT Specifications Assessed in Current Report | 9 |
| 3.5. Description of Key Components | 11 |
| 3.6. Test Configuration | 13 |
| 3.7. Tested Supporting System List | 14 |
| 3.8. Setup Configuration | 14 |
| 3.9. Operating Condition of EUT | 14 |
| 3.10. Description of Test Facility | 15 |
| 3.11. Measurement Uncertainty | 16 |
| 4. MEASUREMENT EQUIPMENT LIST | 16 |
| 4.1. Conducted Emission Measurement | 17 |
| 4.2. Radiated Emission Measurement | 17 |
| 4.3. RF Conducted Measurement | 18 |
| 5. CONDUCTED EMISSION | 18 |
| 5.1. Block Diagram of Test Setup | 19 |
| 5.2. Conducted Emission Limit | 19 |
| 5.3. Test Procedure | 19 |
| 5.4. Test Results | 19 |
| 6. RADIATED EMISSION | 20 |
| 6.1. Block Diagram of Test Setup | 20 |
| 6.2. Radiated Emission Limits | 22 |
| 6.3. Test Procedure | 23 |
| 6.4. Measurement Result Explanation | 24 |
| 6.5. Test Results | 24 |
| 7. 20dB BANDWIDTH | 25 |
| 7.1. Block Diagram of Test Setup | 25 |
| 7.2. Specification Limits | 25 |
| 7.3. Test Procedure | 25 |
| 7.4. Test Results | 25 |
| 8. CARRIER FREQUENCY SEPARATION | 26 |
| 8.1. Block Diagram of Test Setup | 26 |
| 8.2. Specification Limits | 26 |
| 8.3. Test Procedure | 26 |
| 8.4. Test Results | 26 |
| 9. TIME OF OCCUPANCY | 27 |
| 9.1. Block Diagram of Test Setup | 27 |
| 9.2. Specification Limits | 27 |
| 9.3. Test Procedure | 27 |



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

| | |
|---|-----------|
| 9.4. Test Results | 27 |
| 10. NUMBER OF HOPPING CHANNELS | 28 |
| 10.1. Block Diagram of Test Setup | 28 |
| 10.2. Specification Limits..... | 28 |
| 10.3. Test Procedure | 28 |
| 10.4. Test Results | 28 |
| 11. MAXIMUM PEAK OUTPUT POWER | 29 |
| 11.1. Block Diagram of Test Setup | 29 |
| 11.2. Specification Limits..... | 29 |
| 11.3. Test Procedure | 29 |
| 11.4. Test Results | 29 |
| 12. EMISSION LIMITATIONS | 30 |
| 12.1. Block Diagram of Test Setup | 30 |
| 12.2. Specification Limits..... | 30 |
| 12.3. Test Procedure | 30 |
| 12.4. Test Results | 30 |
| 13. DEVIATION TO TEST SPECIFICATIONS | 31 |

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TESTPHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.
Manufacturer : LG Electronics Inc.
Factory #1 : LG Electronics Nanjing New Technology Co., Ltd.
Factory #2 : SEO HEUNG ELECTRONICS CO LTD
EUT Description
(1) Product : Notebook Computer
(2) Model : 14Z995
(3) Brand : LG
(4) Power Rating : DC 19V, 2.53A

Applicable Standards:

47CFR FCC Part 15 Subpart C
RSS-Gen (Issue 5), April 2018
RSS-247 (Issue 2), February 2017
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2020. 01. 06

Reviewed by:



(Sabrina Wang/Administrator)

Approved by:



(Johnny Hsueh/Section Manager)

1. REVISION RECORD OF TEST REPORT

| Edition No | Issued Date | Revision Summary | Report Number |
|------------|--------------|------------------|---------------|
| 0 | 2020. 01. 06 | Original Report | EM-F190521 |

2. SUMMARY OF TEST RESULTS

| Rule | | Description | Data Reused | Results |
|-------------------|------------------------------|---|-------------------------|-------------------|
| FCC | IC | | | |
| 15.207 | RSS-Gen §8.8 | Conducted Emission | No | PASS |
| 15.247(d)/15.205 | RSS-Gen §8.9 RSS-247 §5.5 | Radiated Band Edge and Radiated Spurious Emission | No | PASS |
| 15.247(a)(1) | RSS-247 §5.1(2) | 20dB Bandwidth | No | PASS |
| 15.247(a)(1) | RSS-247 §5.1(2) | Carrier Frequency Separation | No | PASS |
| 15.247(a)(1)(iii) | RSS-247 §5.1(4) | Time of Occupancy | No | PASS |
| 15.247(a)(1)(iii) | RSS-247 §5.1(4) | Number of Hopping Channels | No | PASS |
| 15.247(b)(1) | RSS-247 §5.1(2) | Maximum Peak Output Power | SPOT CHECK Note 2 | PASS |
| 15.247(d) | RSS-247 §5.5 | Conducted Band Edges and Conducted Spurious Emission | No | PASS |
| 15.203 | RSS-Gen §6.8 | Antenna Requirement | --- | Compliance |

Note: 1. The uncertainties value is not used in determining the result.
2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, grant on 11/28 2019 and IC: 2703H-15Z90N approved on 12/04/2019. According to KDB 484596 D01, we did spot check for output power and all output power values keep identical thus we reuse all results.

3. GENERAL INFORMATION

3.1. Description of Application

| | |
|--------------|---|
| Applicant | LG Electronics Inc. 222, LG-roJinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea |
| Manufacturer | LG Electronics Inc. 222, LG-roJinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea |
| Factory #1 | LG Electronics Nanjing New Technology Co., Ltd. No.346,Yaoxin Road, Economic & Technical Development Zone, Nanjing, China. |
| Factory #2 | SEO HEUNG ELECTRONICS CO LTD 55 Asan valley Seo-ro, Dunpo-myeon,Asan-si, Chungcheongnam-do, 31409 Korea |
| Product | Notebook Computer The product has two colors (Dark Silver and White). |
| Model | 14Z995 |
| Brand | LG |

3.2. Description of EUT

| | | |
|------------------------|---|-----------------|
| Test Model | 14Z995 | |
| Serial Number | N/A | |
| Power Rating | DC 19V, 2.53A | |
| Software Version | N/A | |
| RF Features | WLAN: 802.11 a/b/g/n/ac/ax Bluetooth: BT and BLE (BT 5.0) | |
| Transmit Type | 2.4 GHz | |
| | 802.11b | 1T1R |
| | 802.11g | 1T1R |
| | 802.11n-HT20 | 2T2R |
| | 802.11n-HT40 | 2T2R |
| | 802.11ax-HE20 | 2T2R |
| | 802.11ax-HE40 | 2T2R |
| | BT/BLE | 1T1R |
| | UNII Bands | |
| | 802.11a | 1T1R |
| | 802.11n-HT20/802.11ac-VHT20/802.11ax-HE20 | 2T2R |
| | 802.11n-HT40/802.11ac-VHT40/802.11ax-HE40 | 2T2R |
| | 802.11ac-VHT80/802.11ax-HE80 | 2T2R |
| | 802.11ac-VHT160/802.11ax-HE160 | 2T2R |
| | Sample Status | Mass production |
| Date of Receipt | 2019. 12. 16 | |
| Date of Test | 2019. 12. 25~ 30 | |
| Interface Ports of EUT | <ul style="list-style-type: none"> • One Micro SD Card Slot • One Earphone Port • Two USB 3.0 Ports • One USB Type C Port • One HDMI Port • One DC Input Port | |
| Accessories Supplied | <ul style="list-style-type: none"> • AC Adapter • LAN Gender | |

3.3. Antenna Information

| No. | Antenna Part Number | Manufacture | Antenna Type | Frequency (MHz) | Max Gain (dBi) |
|-----|----------------------------|-------------|--------------|-----------------|----------------|
| 1 | WA-F-LBLB-04-058 (Main) | INPAQ | FPCB | 2400 | 1.94 |
| | | | | 2450 | 2.72 |
| | | | | 2500 | 1.20 |
| | | | | 5100 | 1.35 |
| | | | | 5400 | 3.06 |
| | | | | 5800 | 2.10 |
| 2 | WA-F-LBLB-04-058 (AUX) | INPAQ | FPCB | 2400 | 2.79 |
| | | | | 2450 | 2.29 |
| | | | | 2500 | 1.90 |
| | | | | 5100 | 2.82 |
| | | | | 5400 | 1.12 |
| | | | | 5800 | 0.58 |

3.4. EUT Specifications Assessed in Current Report

| Mode | Fundamental Range (MHz) | Channel Number | Modulation | Data Rate (Mbps) |
|-----------|-------------------------|----------------|--------------------------------|------------------|
| Bluetooth | 2402-2480 | 79 | FHSS (GFSK, 1/4 DQPSK, 8-DPSK) | Up to 3 |

| Channel List | | | | | | | |
|----------------|-----------------|----------------|-----------------|----------------|-----------------|----------------|-----------------|
| Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) | Channel Number | Frequency (MHz) |
| 00 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 01 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 02 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 03 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 04 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 05 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 06 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 07 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 08 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 09 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2432 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |

3.5. Description of Key Components

3.5.1. For the All Component Lists

| Item | Supplier | Model / Type | Character | |
|--|--|--------------------------------------|---|--|
| System | Microsoft | Win10 Home | --- | |
| | | Win10 Pro | --- | |
| Main Board | LG | 14_15Z990/995 Main B/D | Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited | |
| SUB Board | LG | 14Z990 WLAN SUB B/D | Manufacturer: #1 HannstarBoardTech(Jiang Yin)Corp.,Ltd. #2 Elec&Eltek Company (MCO) Limited | |
| CPU (Socket:FCBGA1528) | Intel | i5-10210U | 1.6GHz, up to 4.2GHz | |
| | | i7-10510U | 1.8GHz, up to 4.9GHz | |
| 14" LCD Panel | LG Display | LP140WFA-SPY1 | Resolution: 1920X1080, 60HzFHD IPS | |
| Storage (SSD) | Samsung | MZ-VLB2560 | 256GB | |
| | | MZ-VLB512B | 512GB | |
| Memory (RAM) | Samsung | - | 8GB DDR4 (On Board) | |
| | SK hynix | - | 8GB DDR4 (On Board) | |
| | Samsung | - | 8GB DDR4 SODIMM (On Card) | |
| Battery Pack | LG | LBS1224E | DC 7.7V, 72Wh, Typ 9450mAh | |
| WLAN Combo Card | Intel | AX201D2W | WLAN and BT, 2x2 CNVi1216 FCC ID: PD9AX201NG IC: 1000M-AX201NG | |
| WLAN Combo Antenna | LG (INPAQ) | WA-F-LBLB-04-058 | FPCB Type, Main: Black, Aux: Gray | |
| Web Camera | Chicony | CKFIH2821005290LH | With two microphones | |
| | | CKFIH28-121005290LH | With one microphone | |
| | Luxvisions | 7BF109N2DC | With two microphones | |
| | | 7BF109N2DD | With one microphone | |
| Keyboard | LG | SN3871BL1 (White) | --- | |
| | | SN3871BL (Black) | --- | |
| LAN Gender (Type C to LAN) | SUZHOU MEC ELECTRONICS | 80-5946-111 | (White) 10/100 Megabit Ethernet | |
| | | 80-5946-101 | (Black) 10/100 Megabit Ethernet | |
| | ARIN TECH CO. LTD | GD-08MF-36-WH-LP10 | (White) 10/100Megabit Ethernet | |
| | | GD-08MF-36-BK-LP11 | (Black) 10/100 Megabit Ethernet | |
| | Type C to LAN: Shielded, Undetached, 0.12m | | | |
| | SUZHOU MEC ELECTRONICS | 80-5946-200 | (White) 10/100/1000 Megabit Ethernet | |
| 80-5946-210 | | (Black) 10/100/1000 Megabit Ethernet | | |
| Type C to LAN: Shielded, Undetached, 0.13m | | | | |
| AC Adapter (48W) | LG (HONOR) | ADS-48MS-19-2 19048E | I/P: AC 100-240V, 50-60Hz, 1.5A, O/P: DC 19V, 2.53A | |
| | DC Power Cord: Non-Shielded, Undetached, 1.5m AC Power Cord: Non-Shielded, Detached, 1.55m (2C) | | | |

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.5.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

| SKU | | 1 |
|---------------------------|----------------------------------|---|
| Main Board | 14_15Z990/995 Main B/D | V |
| SUB Board | 14Z990 WLAN SUB B/D | V |
| CPU | i7-10510U | V |
| 14" LCD Panel | LG Display, LP140WFA-SPY1 | V |
| Storage (SSD) | Samsung, 512GB | V |
| Memory (RAM) | SK Hynix, 8GB (On Board) | V |
| | Samsung, 8GB (On Card) | V |
| Battery Pack | LG, LBS1224E | V |
| WLAN Combo Card | Intel, AX201D2W | V |
| WLAN Combo Antenna | LG (INPAQ), WA-F-LBLB-04-058 | V |
| Keyboard | TIC, SN3871BL (Black) | V |
| Web Camera | Chicony, CKFIH2821005290LH | V |
| AC Adapter | LG (HONOR), ADS-48MS-19-2 19048E | V |
| Type C Link to LAN Gender | MEC, 80-5946-101 (Black) | V |

3.7. Tested Supporting System List

3.7.1. Support Peripheral Unit


| No. | Product | Brand | Model No. | Serial No. | Approval |
|-----|-------------|-------|------------|------------|------------|
| 1. | LCD Monitor | LG | 22LK330-DB | N/A | N/A |
| 2. | USB Mouse | ASUS | MOBTUO | N/A | FCC By DoC |
| 3. | Earphone | APPLE | N/A | N/A | N/A |

3.7.2. Cable Lists


| No. | Cable Description Of The Above Support Units |
|-----|---|
| 1. | HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m |
| 2. | USB Cable: Unshielded, Undetachable, 1.8m |
| 3. | Earphone Cable: Unshielded, Undetachable, 0.9m |

3.8. Setup Configuration

3.8.1. EUT Configuration for Power Line & Radiated Emission

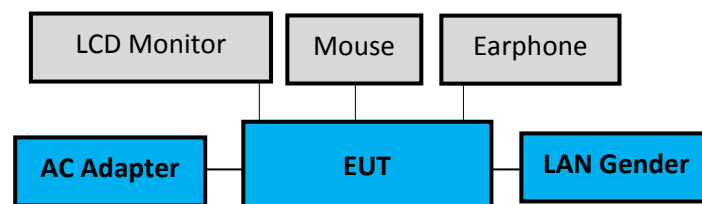

3.8.2. EUT Configuration for RF Conducted Test Items

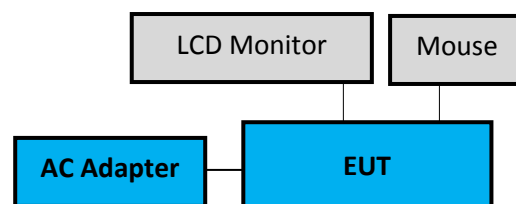

3.9. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.6. Test Configuration

| Mode | Duty Cycle (x) | T (ms) | Duty Cycle Correction Factor (dB) |
|------|----------------|--------|-----------------------------------|
| BT | N/A | 2.890 | N/A |

| AC Conduction |
|------------------|
| Normal operation |

| | Item | Modulation | Data Rate | Test Channel |
|---------------------|---|------------|-----------|--------------|
| Radiated Test Case | Radiated Band Edge ^{Note1} | GFSK | 1Mbps | 00/78 |
| | | 8-DPSK | 3Mbps | 00/78 |
| | Radiated Spurious Emission ^{Note1} | GFSK | 1Mbps | 00/39/78 |
| Conducted Test Case | 20dB Bandwidth | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Carrier Frequency Separation | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Time of Occupancy | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Number of Hopping Channels | GFSK | 1Mbps | 39 |
| | | 8-DPSK | 3Mbps | 39 |
| | Maximum Peak Output Power | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |
| | Band Edges | GFSK | 1Mbps | 00/78 |
| | | 8-DPSK | 3Mbps | 00/78 |
| | Spurious Emission | GFSK | 1Mbps | 00/39/78 |
| | | 8-DPSK | 3Mbps | 00/39/78 |

Note 1: Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow: Lie Side Stand

Note 2: Both of the antennas are the same type, and we presented the worst case in the report.

The max-gain condition with SISO (aux port) is SKU #1.

Note 3: We performed testing of the highest and lowest data rate.

3.10. Description of Test Facility

| | |
|-------------------|---|
| Name of Test Firm | Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com |
| Accreditations | The laboratory is accredited by following organizations under ISO/IEC 17025:2017 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724 |
| Test Facilities | FCC OET Designation Number under APEC MRA by NCC is : TW1724 ISED CAB Identifier Number under APEC TEL MRA by NCC is TW1724 (1) No.8 Shielded Room (2) No.1 3m Semi Anechoic Chamber |

3.11.Measurement Uncertainty

| Test Items/Facilities | | Frequency Range | Uncertainty |
|-----------------------|-------------------------------|--------------------------------|-------------|
| Conduction Test | | 9kHz-150kHz | ±3.7dB |
| | | 150kHz-30MHz | ±3.5dB |
| Radiation Test | No.1 3m Semi Anechoic Chamber | 30MHz-200MHz, 3m, Horizontal | ±4.1dB |
| | | 200MHz-1000MHz, 3m, Horizontal | ±3.9dB |
| | | 30MHz-200MHz, 3m, Vertical | ±4.2dB |
| | | 200MHz-1000MHz, 3m, Vertical | ±4.1dB |
| | | 1GHz-6GHz, 3m | ±4.2dB |
| | | 6GHz-18GHz, 3m | ±4.6dB |
| | No.3 3m Semi Anechoic Chamber | 30MHz-200MHz, 3m, Horizontal | ±3.9dB |
| | | 200MHz-1000MHz, 3m, Horizontal | ±3.9dB |
| | | 30MHz-200MHz, 3m, Vertical | ±4.4dB |
| | | 200MHz-1000MHz, 3m, Vertical | ±4.1dB |
| | No.4 3m Semi Anechoic Chamber | 30MHz-200MHz, 3m, Horizontal | ±4.3dB |
| | | 200MHz-1000MHz, 3m, Horizontal | ±4.0dB |
| | | 30MHz-200MHz, 3m, Vertical | ±4.3dB |
| | | 200MHz-1000MHz, 3m, Vertical | ±4.4dB |
| | | 1GHz-6GHz, 3m | ±4.5dB |
| | | 6GHz-18GHz, 3m | ±4.6dB |
| | No.5 3m Semi Anechoic Chamber | 30MHz-200MHz, 3m, Horizontal | ±4.0dB |
| | | 200MHz-1000MHz, 3m, Horizontal | ±3.9dB |
| | | 30MHz-200MHz, 3m, Vertical | ±4.2dB |
| | | 200MHz-1000MHz, 3m, Vertical | ±4.3dB |
| | | 1GHz-6GHz, 3m | ±4.3dB |
| | | 6GHz-18GHz, 3m | ±4.7dB |
| | Fully Anechoic Chamber | 30MHz~1000MHz | ±4.7dB |
| | | 1GHz~18GHz | ±5.3dB |

Remark : Uncertainty = $ku_c(y)$

| Test Item | Uncertainty |
|--------------------------------|-------------|
| 20dB Bandwidth | ±0.2kHz |
| Carrier Frequency Separation | ±0.2kHz |
| Time of Occupancy | ±0.03sec |
| Maximum peak Output power | ± 0.52dB |
| Conducted Emission Limitations | ± 0.13dB |

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

| Item | Type | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Interval |
|------|----------------------------|--------------|-----------|------------|--------------|---------------|
| 1. | Test Receiver | R&S | ESR3 | 101774 | 2019. 01. 23 | 1 Year |
| 2. | A.M.N. | R&S | ENV4200 | 100169 | 2019. 11. 13 | 1 Year |
| 3. | L.I.S.N. | Kyoritsu | KNW-407 | 8-855-9 | 2019. 12. 10 | 1 Year |
| 4. | Pulse Limiter | R&S | ESH3-Z2 | 100354 | 2019. 01. 12 | 1 Year |
| 5. | Digital Thermo-Hygro Meter | iMax | HTC-1 | No.8 S/R | 2019. 04. 20 | 1 Year |
| 6. | Test Software | Audix | e3 | V6.120619c | N.C.R. | N.C.R. |

4.2. Radiated Emission Measurement

| Item | Type | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Interval |
|------|----------------------------|--------------|--------------------------|---------------------|--------------|---------------|
| 1. | Spectrum Analyzer | Keysight | N9020B-544 | MY57120357 | 2019. 01. 17 | 1 Year |
| 2. | Test Receiver | R & S | ESCS30 | 100338 | 2019. 06. 12 | 1 Year |
| 3. | Amplifier | HP | 8447D | 2944A06305 | 2019. 01. 30 | 1 Year |
| 4. | Amplifier | HP | 8449B | 3008A00529 | 2019. 01. 23 | 1 Year |
| 5. | Amplifier | Keysight | 83051A | MY53010042 | 2019. 08. 08 | 1 Year |
| 6. | Loop Antenna | R&S | HFH2-Z2 | 891847/27 | 2019.12. 26 | 2 Years |
| 7. | Bilog Antenna | TESEQ | CBL6112D | 33821 | 2019. 01. 19 | 1 Year |
| 8. | Horn Antenna | EMCO | 3115 | 9609-4927 | 2019. 06. 24 | 1 Year |
| 9. | Horn Antenna | COM-POWER | AH-840 | 101092 | 2019. 05. 14 | 1 Year |
| 10. | 2.4GHz Notch Filter | K&L | 7NSL10-2441.5/E130.5-O/O | 1 | 2019. 07. 24 | 1 Year |
| 11. | 3GHz Notch Filter | Microwave | H3G018G1 | 484796 | 2019. 08. 21 | 1 Year |
| 12. | Coaxial Cable | MIYAZAKI | 5D2W | RE-11 | 2019. 02. 01 | 1 Year |
| 13. | Coaxial Cable | HUBER+SUHNER | SUCOFLEX 106 | 54602/6 | 2019. 02. 01 | 1 Year |
| 14. | Coaxial Cable | HUBER+SUHNER | SUCOFLEX 102 | No.1 18-40GHz Cable | 2019.09.20 | 1 Year |
| 15. | Digital Thermo-Hygro Meter | iMax | HTC-1 | No.1 3m A/C | 2019. 04. 20 | 1 Year |
| 16. | Test Software | Audix | e3 | V6.120619c | N.C.R. | N.C.R. |

4.3. RF Conducted Measurement

| Item | Type | Manufacturer | Model No. | Serial No. | Cal. Date | Cal. Interval |
|------|-------------------------------|------------------------------------|------------|------------|--------------|---------------|
| 1. | Spectrum Analyzer | Keysight | N9020B-544 | MY57120357 | 2019. 01. 17 | 1 Year |
| 2. | Power Meter | Anritsu | ML2495A | 1145008 | 2019. 11. 06 | 1 Year |
| 3. | Power Sensor | Anritsu | MA2411B | 1126096 | 2019. 11. 06 | 1 Year |
| 4. | Digital Thermo-Hygro Meter | Shenzhen Datronn Electronics | KT-905 | RF | 2019. 04. 20 | 1 Year |


5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT

Indicated as section 3.8

5.1.2. Shielded Room Setup Diagram

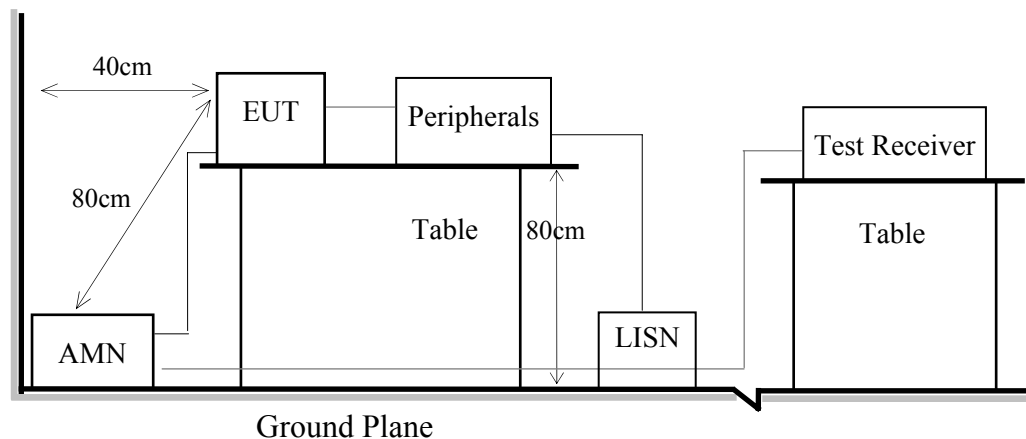

5.2. Conducted Emission Limit

| Frequency | Conducted Limit | |
|-----------------|--------------------|--------------------|
| | Quasi-Peak Level | Average Level |
| 150kHz ~ 500kHz | 66 ~ 56 dB μ V | 56 ~ 46 dB μ V |
| 500kHz ~ 5MHz | 56 dB μ V | 46 dB μ V |
| 5MHz ~ 30MHz | 60 dB μ V | 50 dB μ V |

Remark1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.

6. RADIATED EMISSION


6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of EUT

Indicated as section 3.8


6.1.2. Setup Diagram for 9kHz-30MHz

☒ No.1 3m Semi Anechoic Chamber

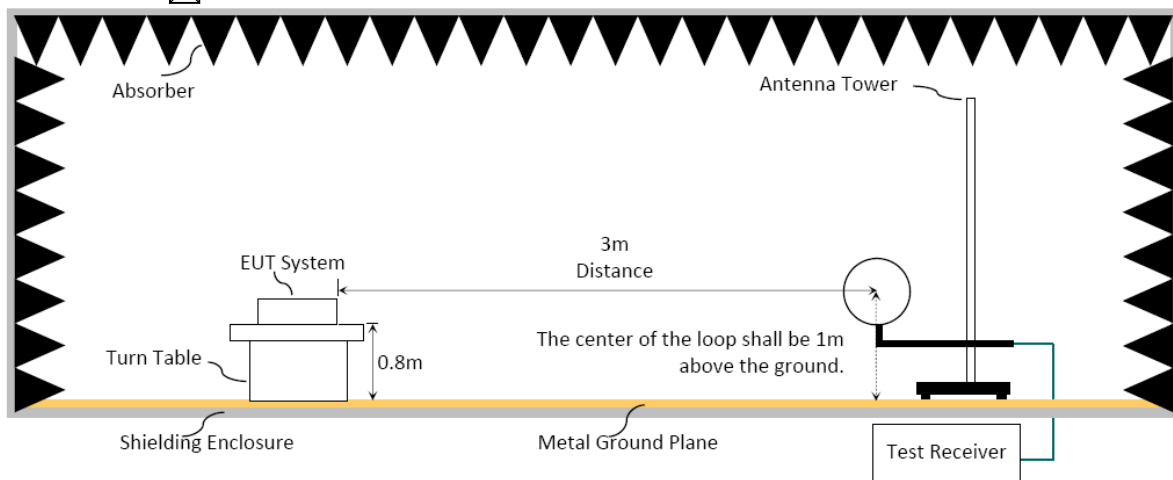


6.1.3. Setup Diagram for 30-1000MHz

☒ No.1 3m Semi Anechoic Chamber

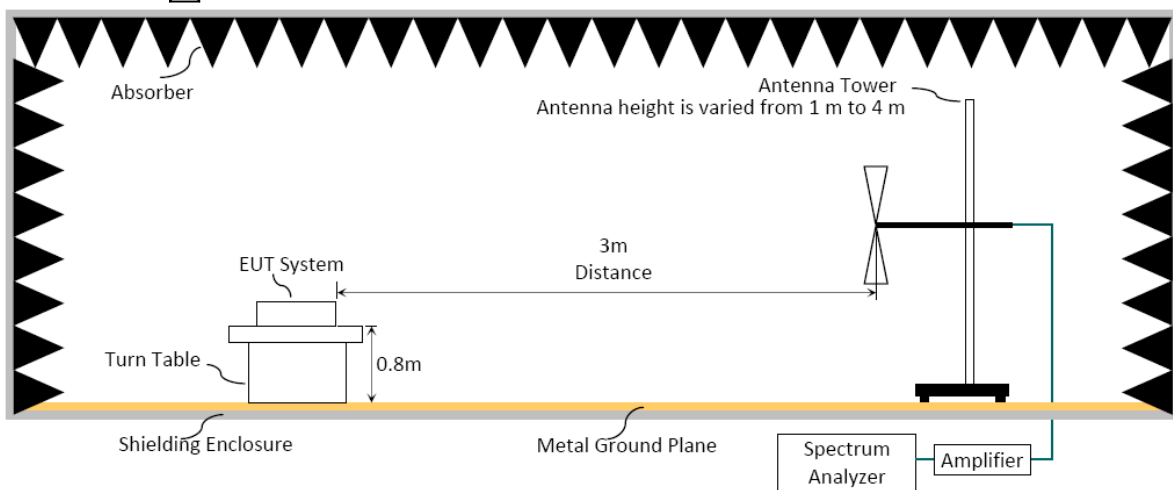


6.1.4. Setup Diagram for above 1GHz

No.1 3m Semi Anechoic Chamber

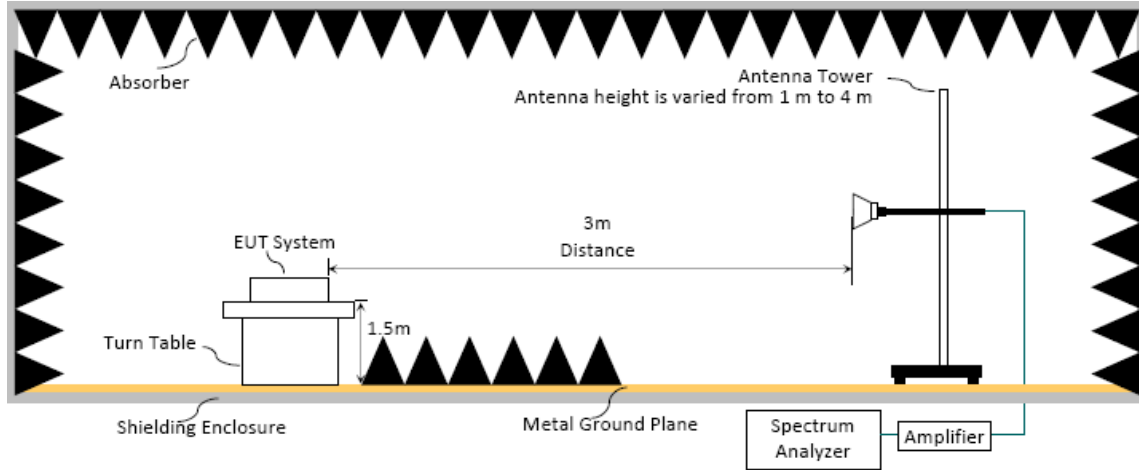

Fully Anechoic Chamber

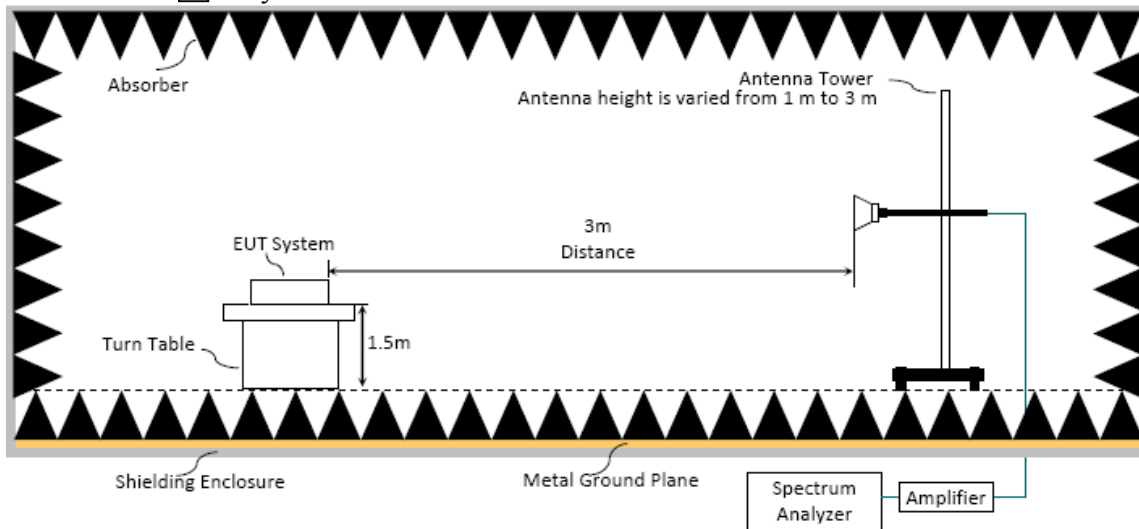

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

| Frequency (MHz) | Distance(m) | Limits | |
|-----------------|-------------|---|-------------|
| | | dB μ V/m | μ V/m |
| 0.009 - 0.490 | 300 | 67.6-20 log f(kHz) | 2400/f kHz |
| 0.490 - 1.705 | 30 | 87.6-20 log f(kHz) | 24000/f kHz |
| 1.705 - 30 | 30 | 29.5 | 30 |
| 30 - 88 | 3 | 40.0 | 100 |
| 88- 216 | 3 | 43.5 | 150 |
| 216- 960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |
| Above 1000 | 3 | 74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average) | |

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turntable which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn table which has 80 cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m (for 30-1000MHz) or antenna varied from 1 m to 3 m (for above 1GHz) to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note 1: When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

Note 2: When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Frequency above 1GHz to 10th harmonic(up to 25 GHz):

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Note: When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

Average Detector:

Option 1:

- (1) RBW = 1MHz
- (2) VBW \geq 1/ T.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading (including Preamp factor if test used)

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20\log(TX_{on}/TX_{on+off})$ presented in section 3.6


ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 20dB BANDWIDTH

7.1. Block Diagram of Test Setup

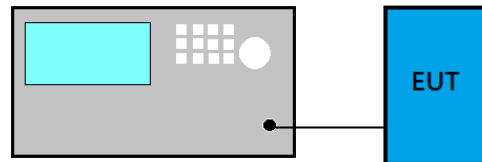

7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Set RBW close to 1% to 5% of OBW.
- (2) Set $VBW \geq 3 \times RBW$.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

7.4. Test Results

Please refer to Appendix A

8. CARRIER FREQUENCY SEPARATION

8.1. Block Diagram of Test Setup

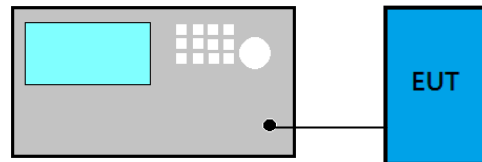

8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = Wide enough to capture the peaks of two adjacent channels
- (2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- (3) $VBW \geq RBW$
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold
- (7) Allow the trace to stabilize.

8.4. Test Results

Please refer to Appendix A

9. TIME OF OCCUPANCY

9.1. Block Diagram of Test Setup

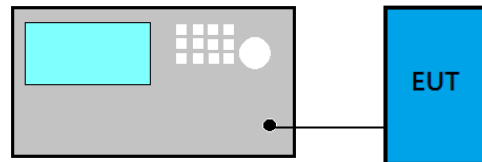

9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: Zero span, centered on a hopping channel.
- (2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
- (3) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- (4) Detector function = Peak
- (5) Trace = Max hold

9.4. Test Results

Please refer to Appendix A

10. NUMBER OF HOPPING CHANNELS

10.1. Block Diagram of Test Setup

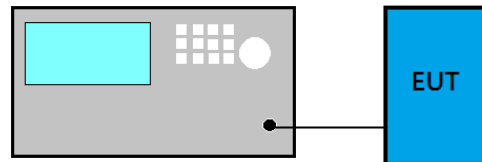

10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- (2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = m=Max hold
- (7) Allow the trace to stabilize.

10.4. Test Results

Please refer to Appendix A

11. MAXIMUM PEAK OUTPUT POWER

11.1. Block Diagram of Test Setup

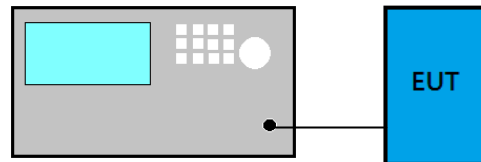

11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

11.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (a) Use the following spectrum analyzer settings
 - (1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - (2) RBW > 20 dB bandwidth of the emission being measured.
 - (3) VBW \geq RBW
 - (4) Sweep: Auto
 - (5) Detector function: Peak
 - (6) Trace: Max hold
- (b) Allow trace to stabilize.
- (c) Use the marker-to-peak function to set the marker to the peak of the emission.

11.4. Test Results

Please refer to Appendix A

12. EMISSION LIMITATIONS

12.1. Block Diagram of Test Setup

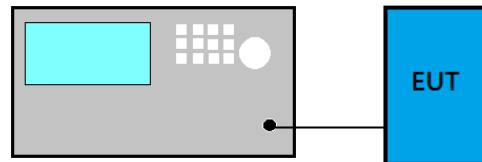

12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a)/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified in Section 15.209(a)/RSS-Gen Section 8.9 table 4 (See Section 15.205(c)).

12.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10th harmonic.
- (2) RBW = 100 kHz
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

12.4. Test Results

Please refer to Appendix A



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

13.DEVIATION TO TEST SPECIFICATIONS

【NONE】



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan*

APPENDIX A

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPDNDIX A

TEST DATA AND PLOTS


(Model: 14Z995)

TABLE OF CONTENTS

| | |
|---|-----------|
| A.1 CONDUCTED EMISSION | 2 |
| A.2 RADIATED EMISSION | 4 |
| A.2.1 Emissions within Restricted Frequency Bands..... | 4 |
| A.2.2 Emissions outside the frequency band:..... | 13 |
| A.2.3 Emissions in Non-restricted Frequency Bands:..... | 14 |
| A.3 20dB BANDWIDTH | 15 |
| A.3.1 6dB Bandwidth Result..... | 15 |
| A.3.2 Measurement Plots | 16 |
| A.4 CARRIER FREQUENCY SEPARATION | 17 |
| A.5 TIME OF OCCUPANCY | 19 |
| A.5.1 Time of Occupancy | 19 |
| A.6 NUMBER OF HOPPING CHANNELS | 29 |
| A.7 MAXIMUM PEAK OUTPUT POWER | 30 |
| A.7.1 Maximum Peak Output Power | 30 |
| A.7.2 Measurement Plots | 31 |
| A.8 EMISSION LIMITATIONS MEASUREMENT | 32 |
| A.8.1 Band Edge..... | 32 |
| A.8.2 Spurious Emission | 34 |

A.1 CONDUCTED EMISSION

| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/12/30 | Temp./Hum. | 25°C/59% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Chucky Chiu |

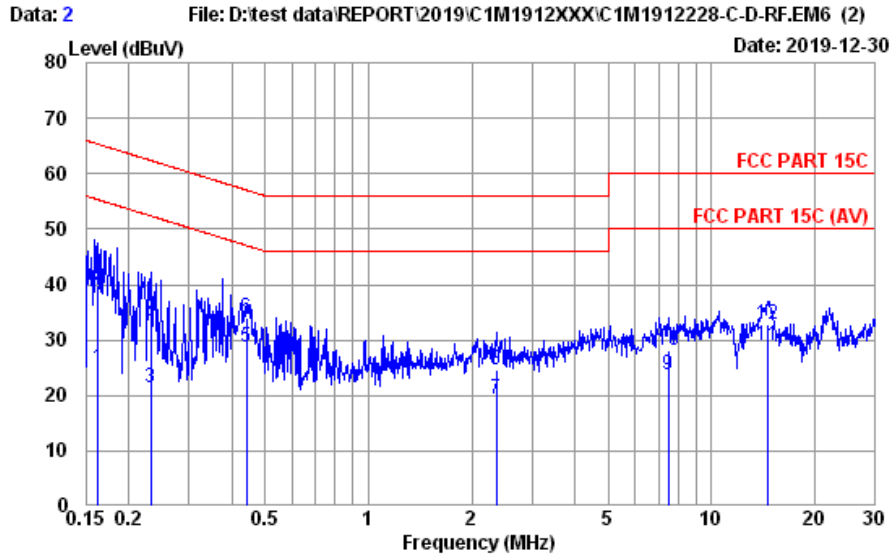


Site no. : No.8 Shielded Room Data no. : 2
 Condition : ENV4200 (169) (A) LISN Phase : NEUTRAL
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 14Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

| | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.162 | 10.72 | 0.04 | 9.86 | 4.20 | 24.82 | 55.34 | 30.52 | Average |
| 2 | 0.162 | 10.72 | 0.04 | 9.86 | 19.21 | 39.83 | 65.34 | 25.51 | QP |
| 3 | 0.232 | 10.62 | 0.04 | 9.86 | 0.84 | 21.36 | 52.39 | 31.03 | Average |
| 4 | 0.232 | 10.62 | 0.04 | 9.86 | 12.31 | 32.83 | 62.39 | 29.56 | QP |
| 5 | 0.442 | 10.52 | 0.04 | 9.86 | 8.31 | 28.73 | 47.02 | 18.29 | Average |
| 6 | 0.442 | 10.52 | 0.04 | 9.86 | 13.45 | 33.87 | 57.02 | 23.15 | QP |
| 7 | 2.358 | 10.57 | 0.07 | 9.86 | -1.23 | 19.27 | 46.00 | 26.73 | Average |
| 8 | 2.358 | 10.57 | 0.07 | 9.86 | 4.10 | 24.60 | 56.00 | 31.40 | QP |
| 9 | 7.486 | 11.19 | 0.13 | 9.88 | 2.63 | 23.83 | 50.00 | 26.17 | Average |
| 10 | 7.486 | 11.19 | 0.13 | 9.88 | 6.80 | 28.00 | 60.00 | 32.00 | QP |
| 11 | 14.594 | 12.63 | 0.16 | 9.92 | 6.28 | 28.99 | 50.00 | 21.01 | Average |
| 12 | 14.594 | 12.63 | 0.16 | 9.92 | 10.10 | 32.81 | 60.00 | 27.19 | QP |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/12/30 | Temp./Hum. | 25°C/59% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Chucky Chiu |

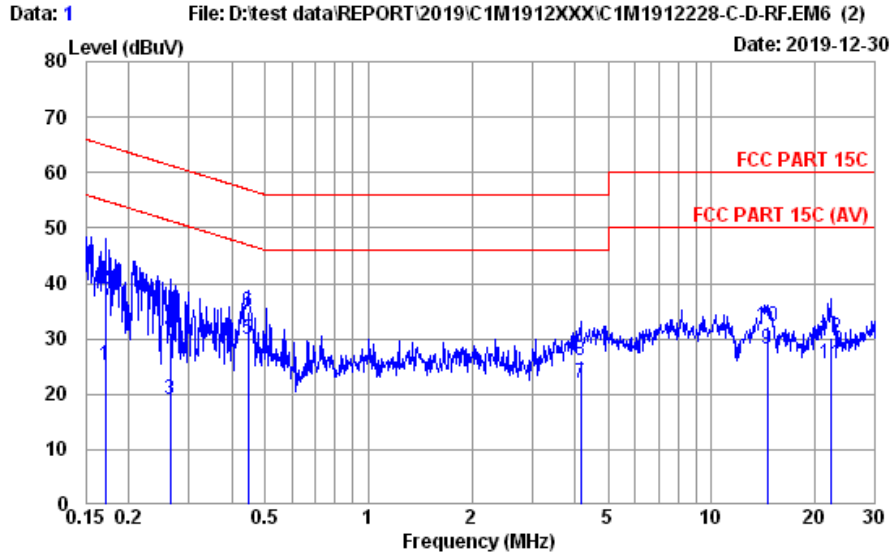

Site no. : No.8 Shielded Room Data no. : 1
 Condition : ENV4200 (169) (A) LISN Phase : LINE
 Limit : FCC PART 15C
 Env. / Ins. : 25°C / 59% ESR3 (1774) Engineer : Chucky Chiu
 EUT : 14Z995
 Power Rating : 120Vac/60Hz
 Test Mode : Operating

| | Freq. (MHz) | AMN Factor (dB) | Cable Loss (dB) | Pulse Att. (dB) | Reading (dBμV) | Emission Level (dBμV) | Limits (dBμV) | Margin (dB) | Remark |
|----|----------------|-----------------------|-----------------------|-----------------------|-------------------|-----------------------------|------------------|----------------|---------|
| 1 | 0.171 | 10.65 | 0.04 | 9.86 | 4.61 | 25.16 | 54.90 | 29.74 | Average |
| 2 | 0.171 | 10.65 | 0.04 | 9.86 | 18.32 | 38.87 | 64.90 | 26.03 | QP |
| 3 | 0.264 | 10.56 | 0.04 | 9.86 | -1.55 | 18.91 | 51.29 | 32.38 | Average |
| 4 | 0.264 | 10.56 | 0.04 | 9.86 | 10.56 | 31.02 | 61.29 | 30.27 | QP |
| 5 | 0.447 | 10.49 | 0.04 | 9.86 | 9.46 | 29.85 | 46.93 | 17.08 | Average |
| 6 | 0.447 | 10.49 | 0.04 | 9.86 | 14.39 | 34.78 | 56.93 | 22.15 | QP |
| 7 | 4.158 | 10.63 | 0.09 | 9.87 | 1.40 | 21.99 | 46.00 | 24.01 | Average |
| 8 | 4.158 | 10.63 | 0.09 | 9.87 | 5.38 | 25.97 | 56.00 | 30.03 | QP |
| 9 | 14.517 | 12.29 | 0.16 | 9.92 | 5.90 | 28.27 | 50.00 | 21.73 | Average |
| 10 | 14.517 | 12.29 | 0.16 | 9.92 | 9.98 | 32.35 | 60.00 | 27.65 | QP |
| 11 | 22.180 | 13.89 | 0.20 | 9.96 | 1.43 | 25.48 | 50.00 | 24.52 | Average |
| 12 | 22.180 | 13.89 | 0.20 | 9.96 | 6.09 | 30.14 | 60.00 | 29.86 | QP |

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

A.2 RADIATED EMISSION

| | | | |
|--------------|-------------------------------|------------|----------------|
| Test Date | 2019/12/24 ~ 27 | Temp./Hum. | 21~23°C/51~58% |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Tested By | Sean Wang |

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

| | | | |
|------|------|-----------|------------|
| Mode | GFSK | Frequency | TX 2441MHz |
|------|------|-----------|------------|

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 53.28 | 13.98 | 1.62 | 9.45 | 25.05 | 40.00 | 14.95 | Peak |
| 101.78 | 17.50 | 2.31 | 4.75 | 24.56 | 43.50 | 18.94 | Peak |
| 216.24 | 17.15 | 3.60 | 7.08 | 27.83 | 46.00 | 18.17 | Peak |
| 335.55 | 20.76 | 4.99 | 4.01 | 29.76 | 46.00 | 16.24 | Peak |
| 630.43 | 24.98 | 7.03 | 2.60 | 34.61 | 46.00 | 11.39 | Peak |
| 957.32 | 27.77 | 8.80 | 2.12 | 38.69 | 46.00 | 7.31 | Peak |


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 33.88 | 23.04 | 1.27 | 11.18 | 35.49 | 40.00 | 4.51 | Peak |
| 53.28 | 13.98 | 1.62 | 21.60 | 37.20 | 40.00 | 2.80 | Peak |
| 94.99 | 16.45 | 2.23 | 10.72 | 29.40 | 43.50 | 14.10 | Peak |
| 178.41 | 15.50 | 3.21 | 13.80 | 32.51 | 43.50 | 10.99 | Peak |
| 515.97 | 23.88 | 6.77 | 4.19 | 34.84 | 46.00 | 11.16 | Peak |
| 996.12 | 28.04 | 9.02 | 4.67 | 41.73 | 54.00 | 12.27 | Peak |

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

| | | | |
|------|------|-----------|------------|
| Mode | GFSK | Frequency | TX 2402MHz |
|------|------|-----------|------------|

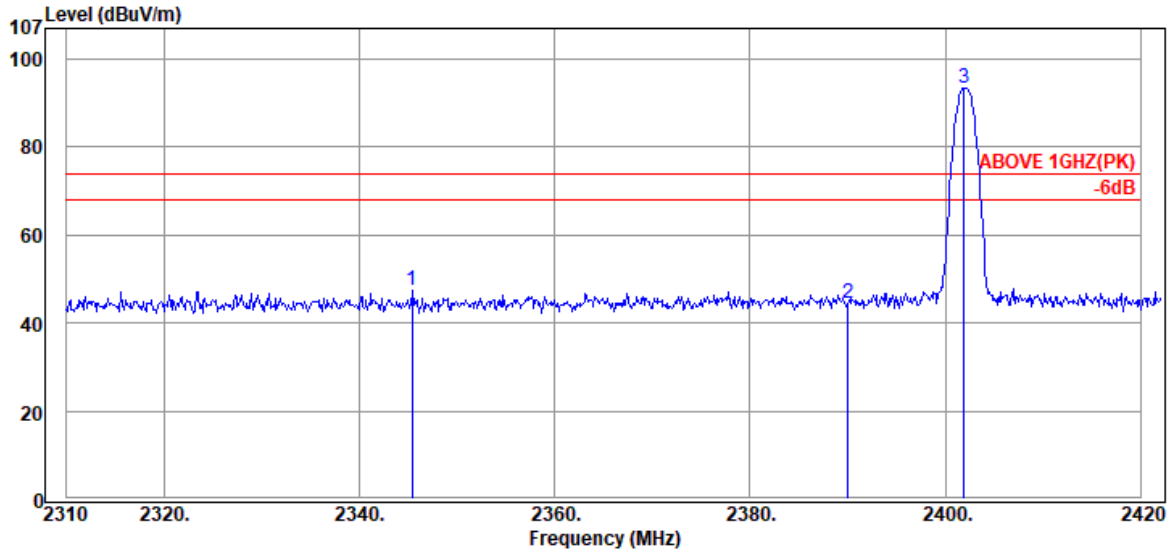

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2345.40 | 27.98 | 5.97 | 13.56 | 47.51 | 74.00 | 26.49 | Peak |
| 2390.04 | 28.32 | 6.03 | 9.98 | 44.33 | 74.00 | 29.67 | Peak |
| @ 2401.92 | 28.40 | 6.04 | 58.83 | 93.27 | --- | --- | Peak |

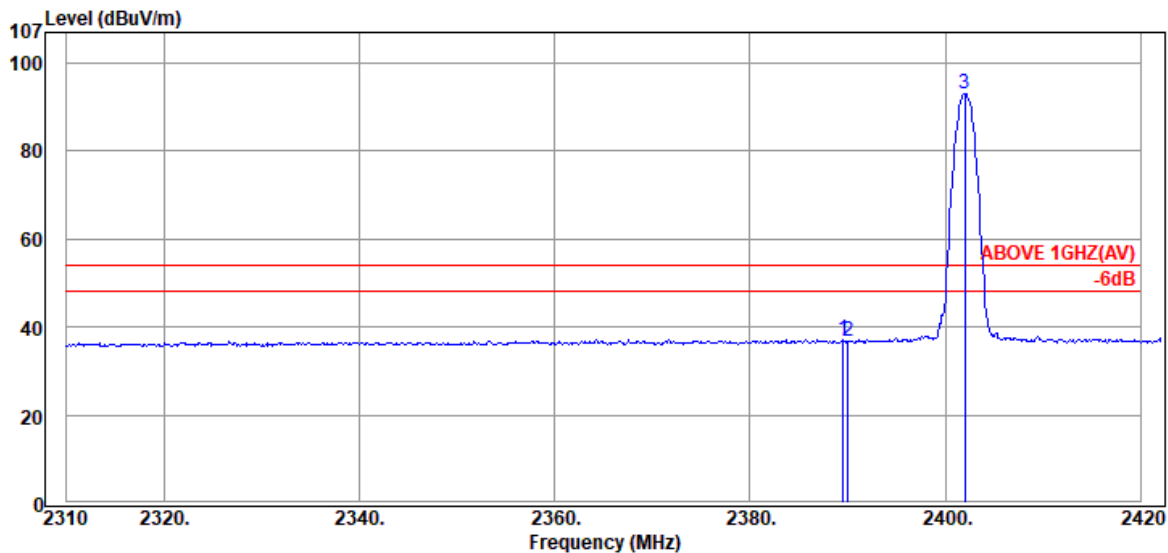


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.56 | 28.32 | 6.02 | 2.79 | 37.13 | 54.00 | 16.87 | Average |
| 2390.04 | 28.32 | 6.03 | 2.36 | 36.71 | 54.00 | 17.29 | Average |
| @ 2402.04 | 28.40 | 6.04 | 58.64 | 93.08 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|------|-----------|------------|
| Mode | GFSK | Frequency | TX 2402MHz |
|------|------|-----------|------------|

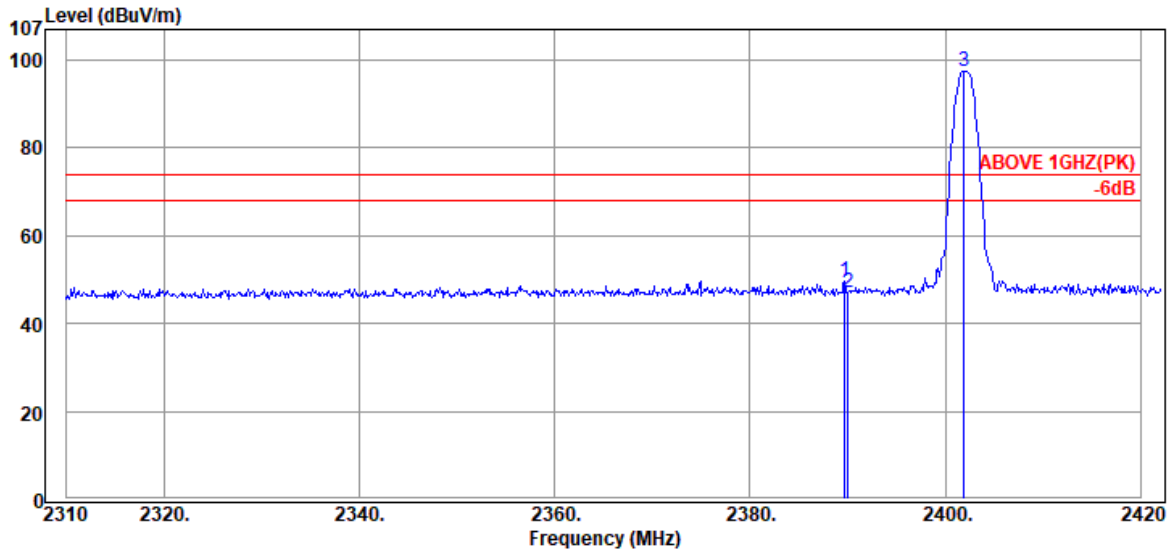

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2389.68 | 28.32 | 6.02 | 15.45 | 49.79 | 74.00 | 24.21 | Peak |
| 2390.04 | 28.32 | 6.03 | 12.67 | 47.02 | 74.00 | 26.98 | Peak |
| @ 2401.92 | 28.40 | 6.04 | 63.06 | 97.50 | --- | --- | Peak |

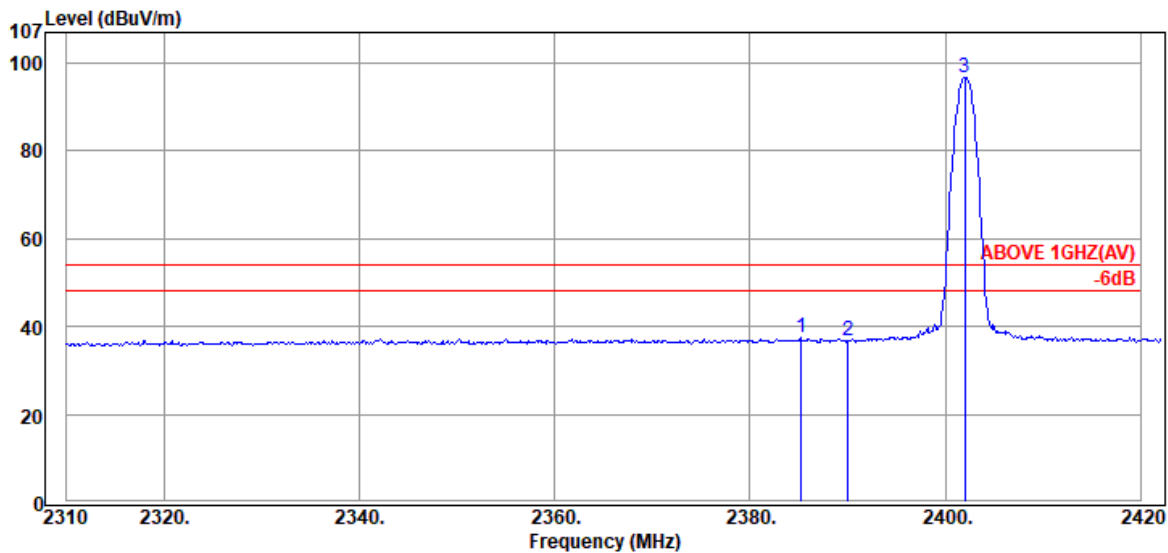


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2385.24 | 28.28 | 6.02 | 3.11 | 37.41 | 54.00 | 16.59 | Average |
| 2390.04 | 28.32 | 6.03 | 2.34 | 36.69 | 54.00 | 17.31 | Average |
| @ 2402.04 | 28.40 | 6.04 | 62.37 | 96.81 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|------|-----------|------------|
| Mode | GFSK | Frequency | TX 2480MHz |
|------|------|-----------|------------|

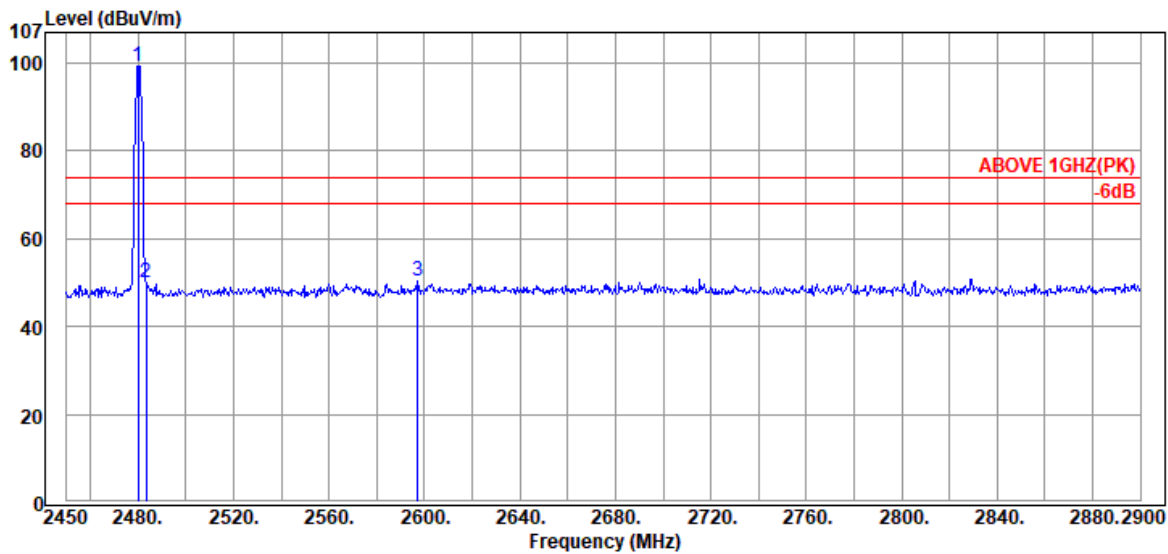

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 64.51 | 99.32 | --- | --- | Peak |
| 2483.30 | 28.70 | 6.13 | 15.30 | 50.13 | 74.00 | 23.87 | Peak |
| 2597.15 | 29.09 | 6.28 | 15.06 | 50.43 | 74.00 | 23.57 | Peak |

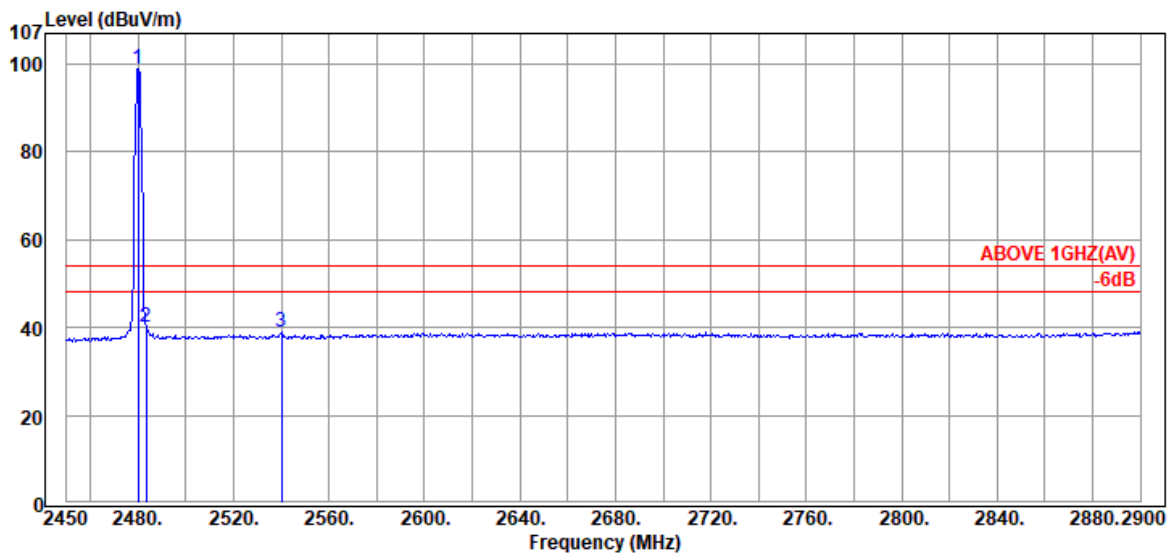


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 64.22 | 99.03 | --- | --- | Average |
| 2483.30 | 28.70 | 6.13 | 5.20 | 40.03 | 54.00 | 13.97 | Average |
| 2540.00 | 28.88 | 6.20 | 3.86 | 38.94 | 54.00 | 15.06 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|------|-----------|------------|
| Mode | GFSK | Frequency | TX 2480MHz |
|------|------|-----------|------------|

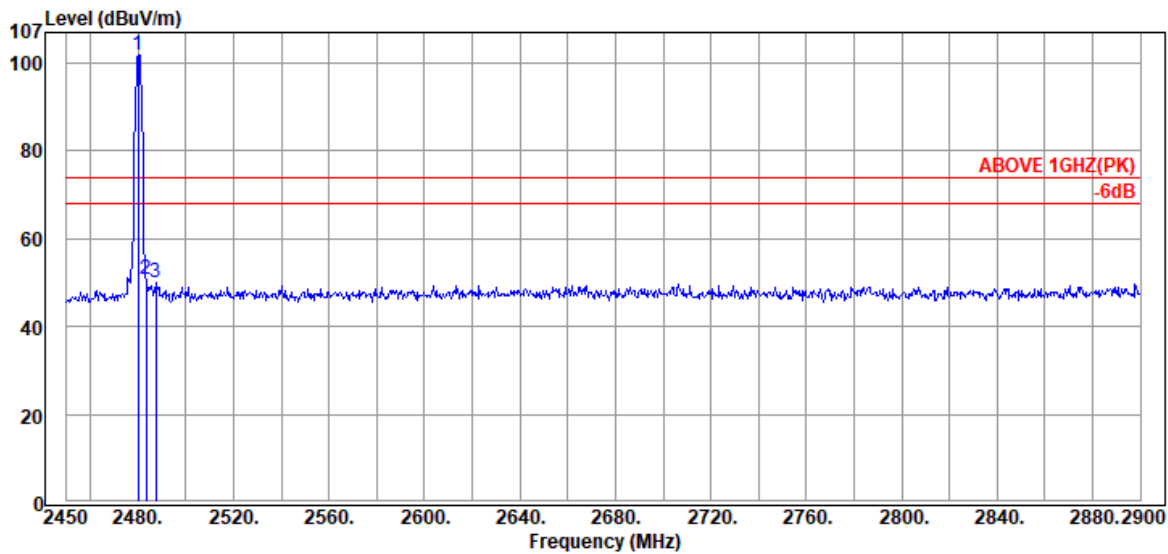

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 67.01 | 101.82 | --- | --- | Peak |
| 2483.30 | 28.70 | 6.13 | 15.88 | 50.71 | 74.00 | 23.29 | Peak |
| 2487.35 | 28.72 | 6.14 | 15.26 | 50.12 | 74.00 | 23.88 | Peak |

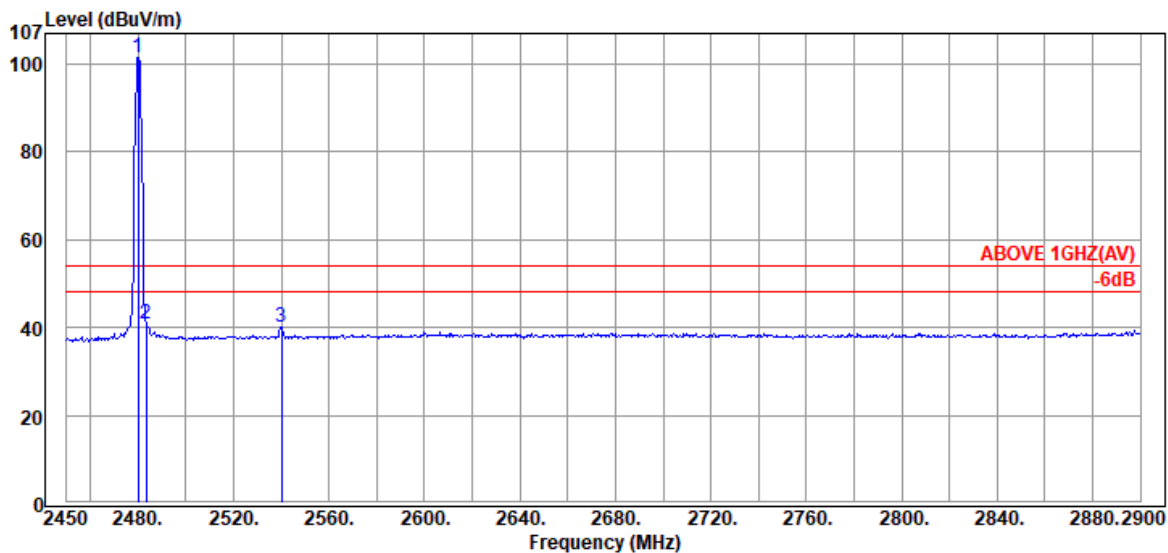


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 66.71 | 101.52 | --- | --- | Average |
| 2483.30 | 28.70 | 6.13 | 6.16 | 40.99 | 54.00 | 13.01 | Average |
| 2540.00 | 28.88 | 6.20 | 5.15 | 40.23 | 54.00 | 13.77 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------|-----------|------------|
| Mode | 8-DPSK | Frequency | TX 2402MHz |
|------|--------|-----------|------------|

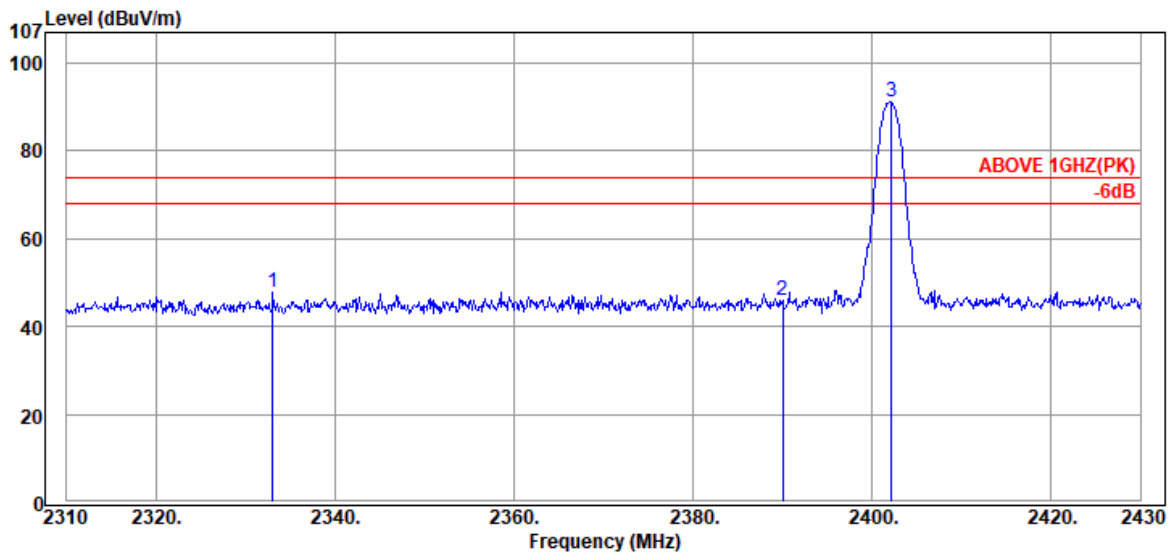

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2333.04 | 27.93 | 5.96 | 14.06 | 47.95 | 74.00 | 26.05 | Peak |
| 2390.04 | 28.32 | 6.03 | 11.46 | 45.81 | 74.00 | 28.19 | Peak |
| @ 2402.16 | 28.40 | 6.04 | 56.68 | 91.12 | --- | --- | Peak |

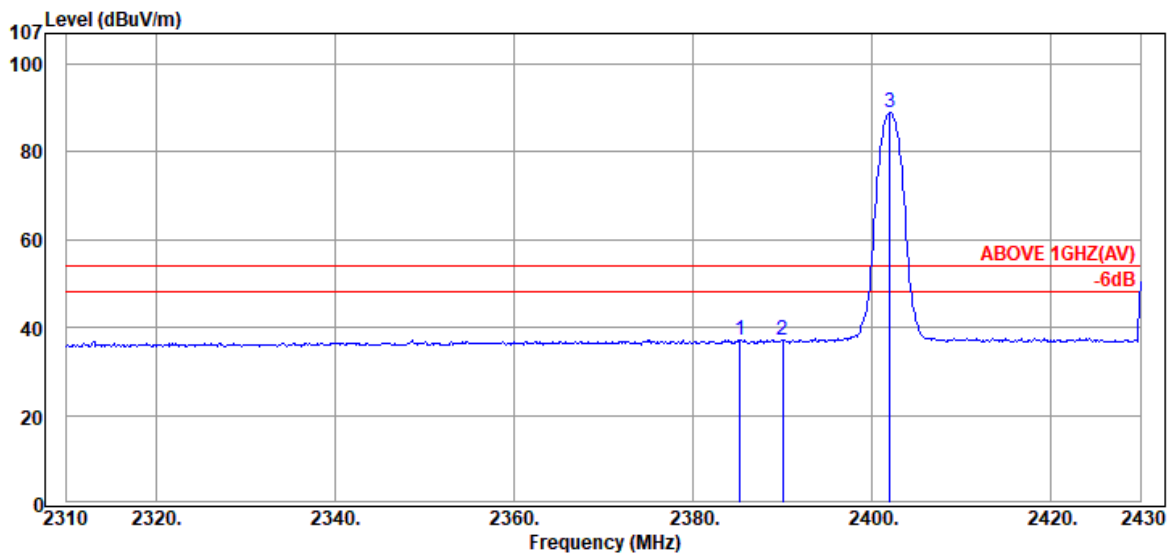


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2385.24 | 28.28 | 6.02 | 2.97 | 37.27 | 54.00 | 16.73 | Average |
| 2390.04 | 28.32 | 6.03 | 2.83 | 37.18 | 54.00 | 16.82 | Average |
| @ 2402.04 | 28.40 | 6.04 | 54.43 | 88.87 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------|-----------|------------|
| Mode | 8-DPSK | Frequency | TX 2402MHz |
|------|--------|-----------|------------|

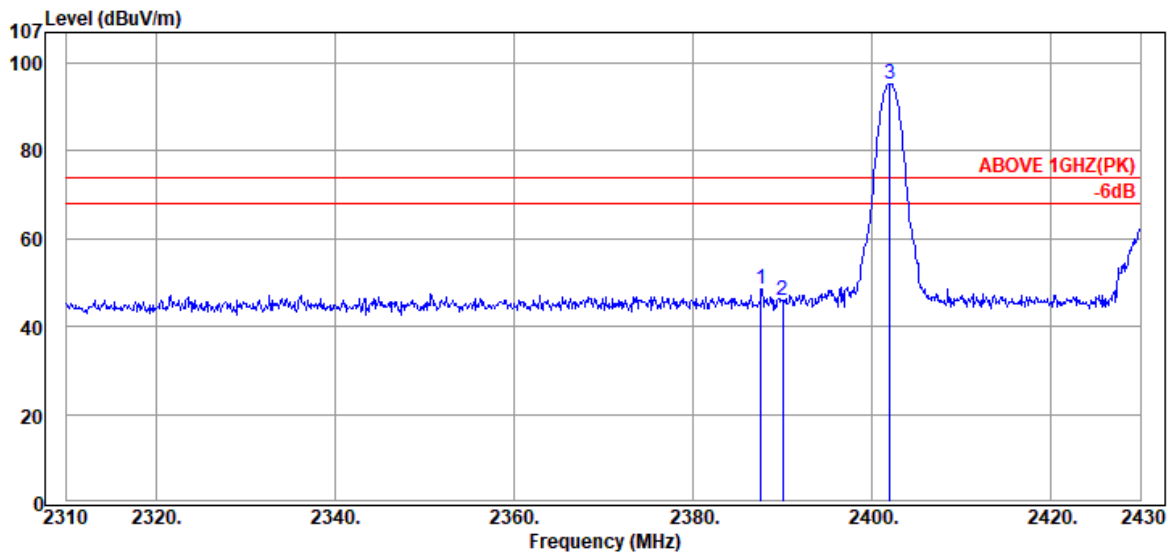

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2387.64 | 28.30 | 6.02 | 14.12 | 48.44 | 74.00 | 25.56 | Peak |
| 2390.04 | 28.32 | 6.03 | 11.51 | 45.86 | 74.00 | 28.14 | Peak |
| @ 2402.04 | 28.40 | 6.04 | 60.83 | 95.27 | --- | --- | Peak |

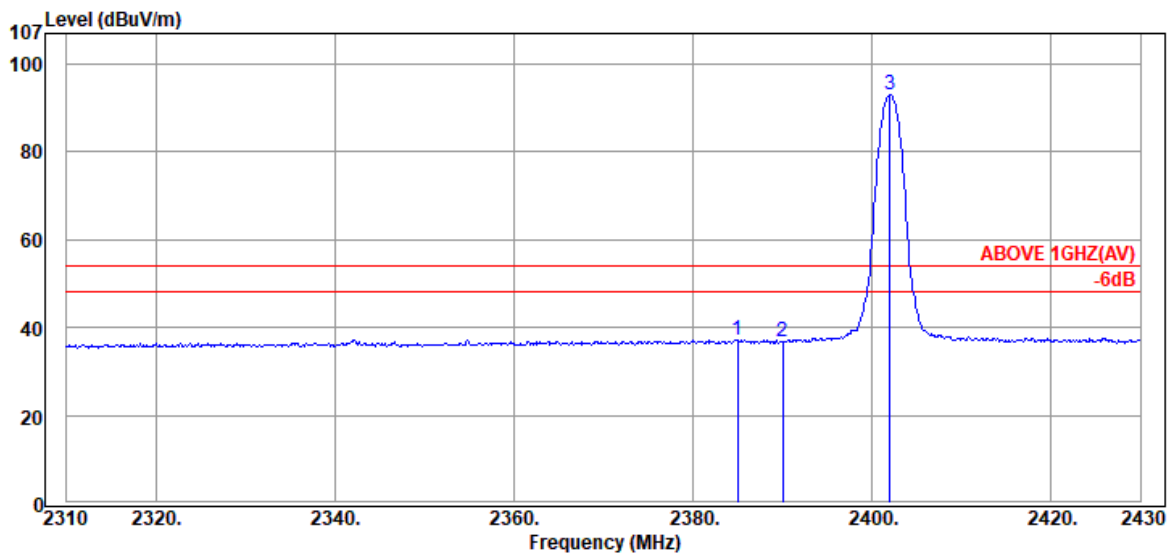


Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| 2385.00 | 28.28 | 6.02 | 2.95 | 37.25 | 54.00 | 16.75 | Average |
| 2390.04 | 28.32 | 6.03 | 2.49 | 36.84 | 54.00 | 17.16 | Average |
| @ 2402.04 | 28.40 | 6.04 | 58.56 | 93.00 | --- | --- | Average |


Remark: The "@" means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------|-----------|------------|
| Mode | 8-DPSK | Frequency | TX 2480MHz |
|------|--------|-----------|------------|

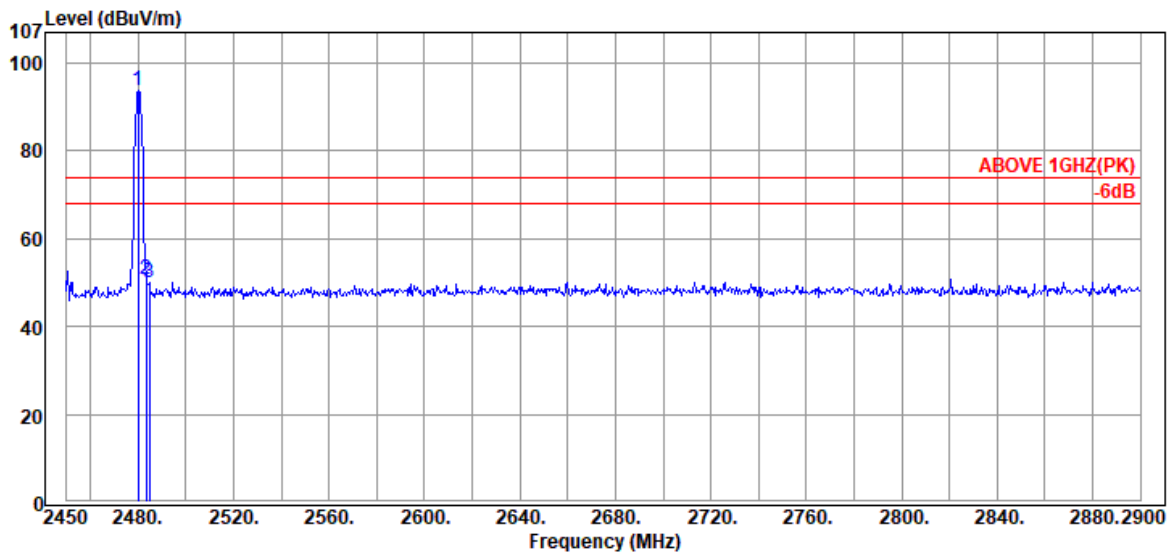

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 58.94 | 93.75 | --- | --- | Peak |
| 2483.30 | 28.70 | 6.13 | 15.76 | 50.59 | 74.00 | 23.41 | Peak |
| 2484.65 | 28.71 | 6.13 | 15.11 | 49.95 | 74.00 | 24.05 | Peak |

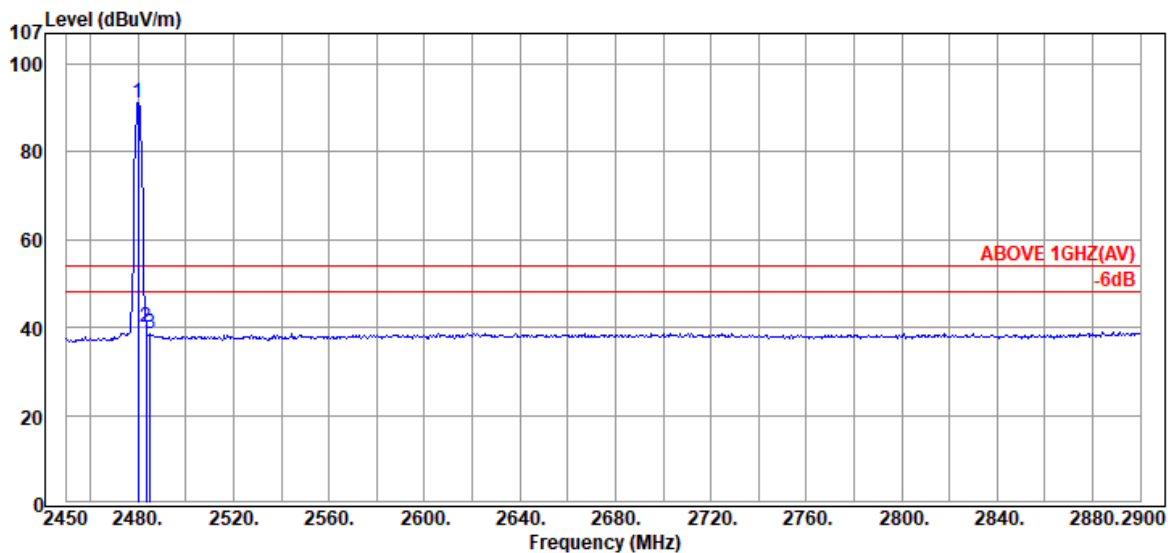


Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 56.43 | 91.24 | --- | --- | Average |
| 2483.30 | 28.70 | 6.13 | 5.22 | 40.05 | 54.00 | 13.95 | Average |
| 2485.10 | 28.71 | 6.13 | 3.71 | 38.55 | 54.00 | 15.45 | Average |


Remark: The “@” means fundamental frequency, it is ignored in this section.

| | | | |
|------|--------|-----------|------------|
| Mode | 8-DPSK | Frequency | TX 2480MHz |
|------|--------|-----------|------------|

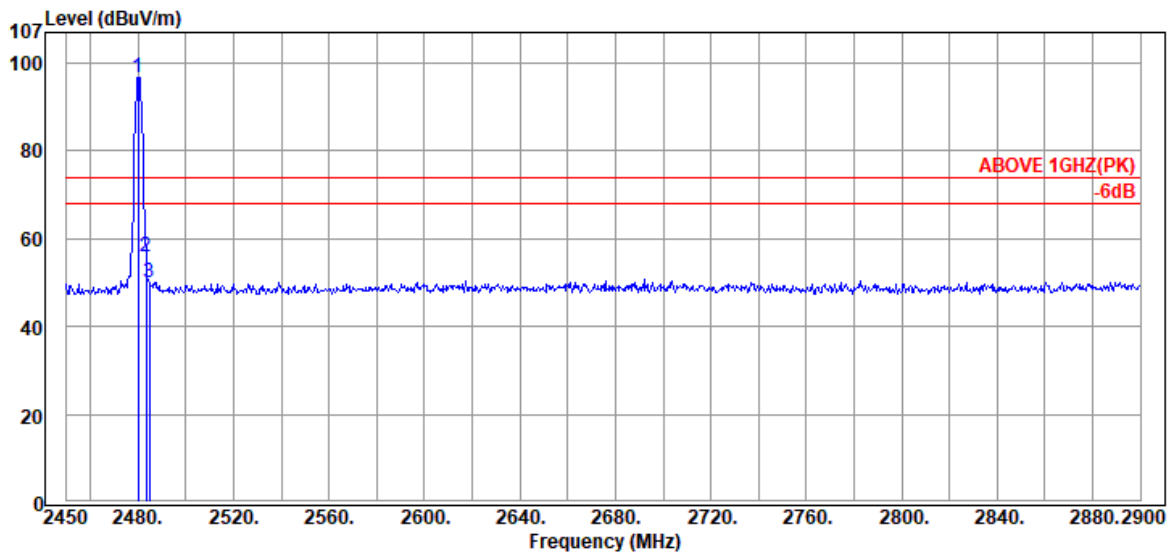

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 62.07 | 96.88 | --- | --- | Peak |
| 2483.30 | 28.70 | 6.13 | 20.94 | 55.77 | 74.00 | 18.23 | Peak |
| 2484.65 | 28.71 | 6.13 | 15.29 | 50.13 | 74.00 | 23.87 | Peak |

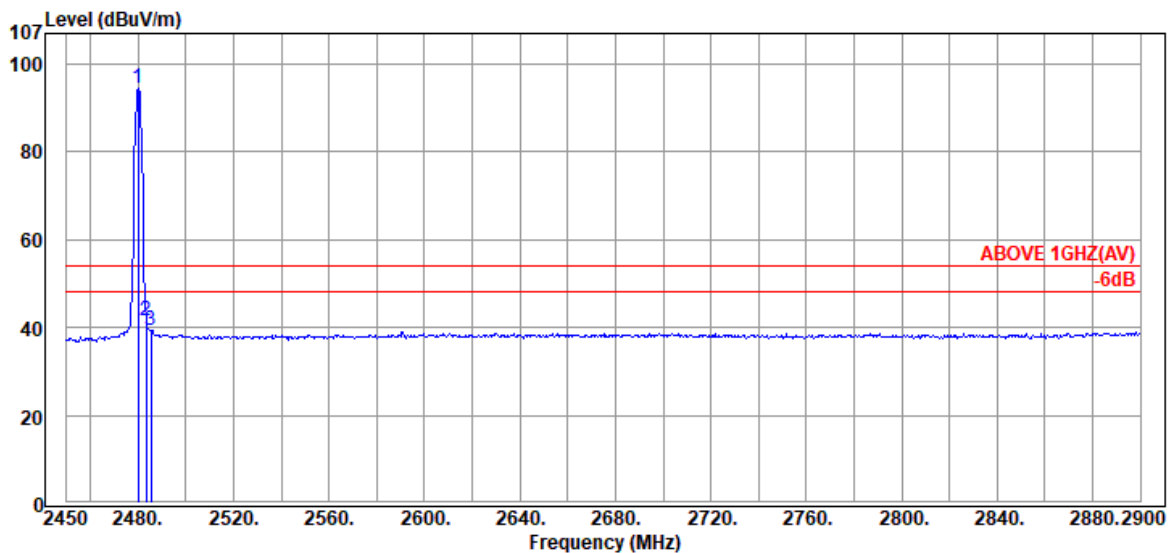

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dBμV) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------|-------------------------|-----------------|-------------|----------|
| @ 2480.15 | 28.68 | 6.13 | 59.62 | 94.43 | --- | --- | Average |
| 2483.30 | 28.70 | 6.13 | 6.65 | 41.48 | 54.00 | 12.52 | Average |
| 2485.55 | 28.71 | 6.13 | 4.50 | 39.34 | 54.00 | 14.66 | Average |

Remark: The “@” means fundamental frequency, it is ignored in this section.

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

| Mode | GFSK | | | Frequency | TX 2402MHz | | |
|------|------|--|--|-----------|------------|--|--|
|------|------|--|--|-----------|------------|--|--|

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4804.00 | 33.31 | 8.44 | -1.98 | 39.77 | 54.00 | 14.23 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4804.00 | 33.31 | 8.44 | -2.30 | 39.45 | 54.00 | 14.55 | Peak |

| Mode | GFSK | | | Frequency | TX 2441MHz | | |
|------|------|--|--|-----------|------------|--|--|
|------|------|--|--|-----------|------------|--|--|

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4882.00 | 33.53 | 8.52 | -1.21 | 40.84 | 54.00 | 13.16 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4882.00 | 33.53 | 8.52 | -2.83 | 39.22 | 54.00 | 14.78 | Peak |

| Mode | GFSK | | | Frequency | TX 2480MHz | | |
|------|------|--|--|-----------|------------|--|--|
|------|------|--|--|-----------|------------|--|--|

Antenna at Horizontal Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4960.00 | 33.72 | 8.60 | -3.15 | 39.17 | 54.00 | 14.83 | Peak |

Antenna at Vertical Polarization

| Emission Frequency (MHz) | Antenna Factor (dB/m) | Cable Loss (dB) | Meter Reading (dB μ V) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector |
|--------------------------|-----------------------|-----------------|----------------------------|-------------------------------|-----------------------|-------------|----------|
| 4960.00 | 33.72 | 8.60 | -2.66 | 39.66 | 54.00 | 14.34 | Peak |

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the FCC 15.209(a)/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH


| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/09/18 | Temp./Hum. | 25°C/51% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |

A.3.1 6dB Bandwidth Result

| Mode | Centre Frequency (MHz) | 20dB Bandwidth (MHz) | 99%Occupied Bandwidth (MHz) (Reference only) | 2/3 (20dB Bandwidth) |
|--------|------------------------|----------------------|--|----------------------|
| GFSK | 2402 | 0.9217 | 0.86410 | 0.614 |
| | 2441 | 0.9232 | 0.86892 | 0.615 |
| | 2480 | 0.9220 | 0.86466 | 0.615 |
| 8-DPSK | 2402 | 1.386 | 1.3581 | 0.924 |
| | 2441 | 1.386 | 1.3566 | 0.924 |
| | 2480 | 1.389 | 1.3547 | 0.926 |


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


A.3.2 Measurement Plots

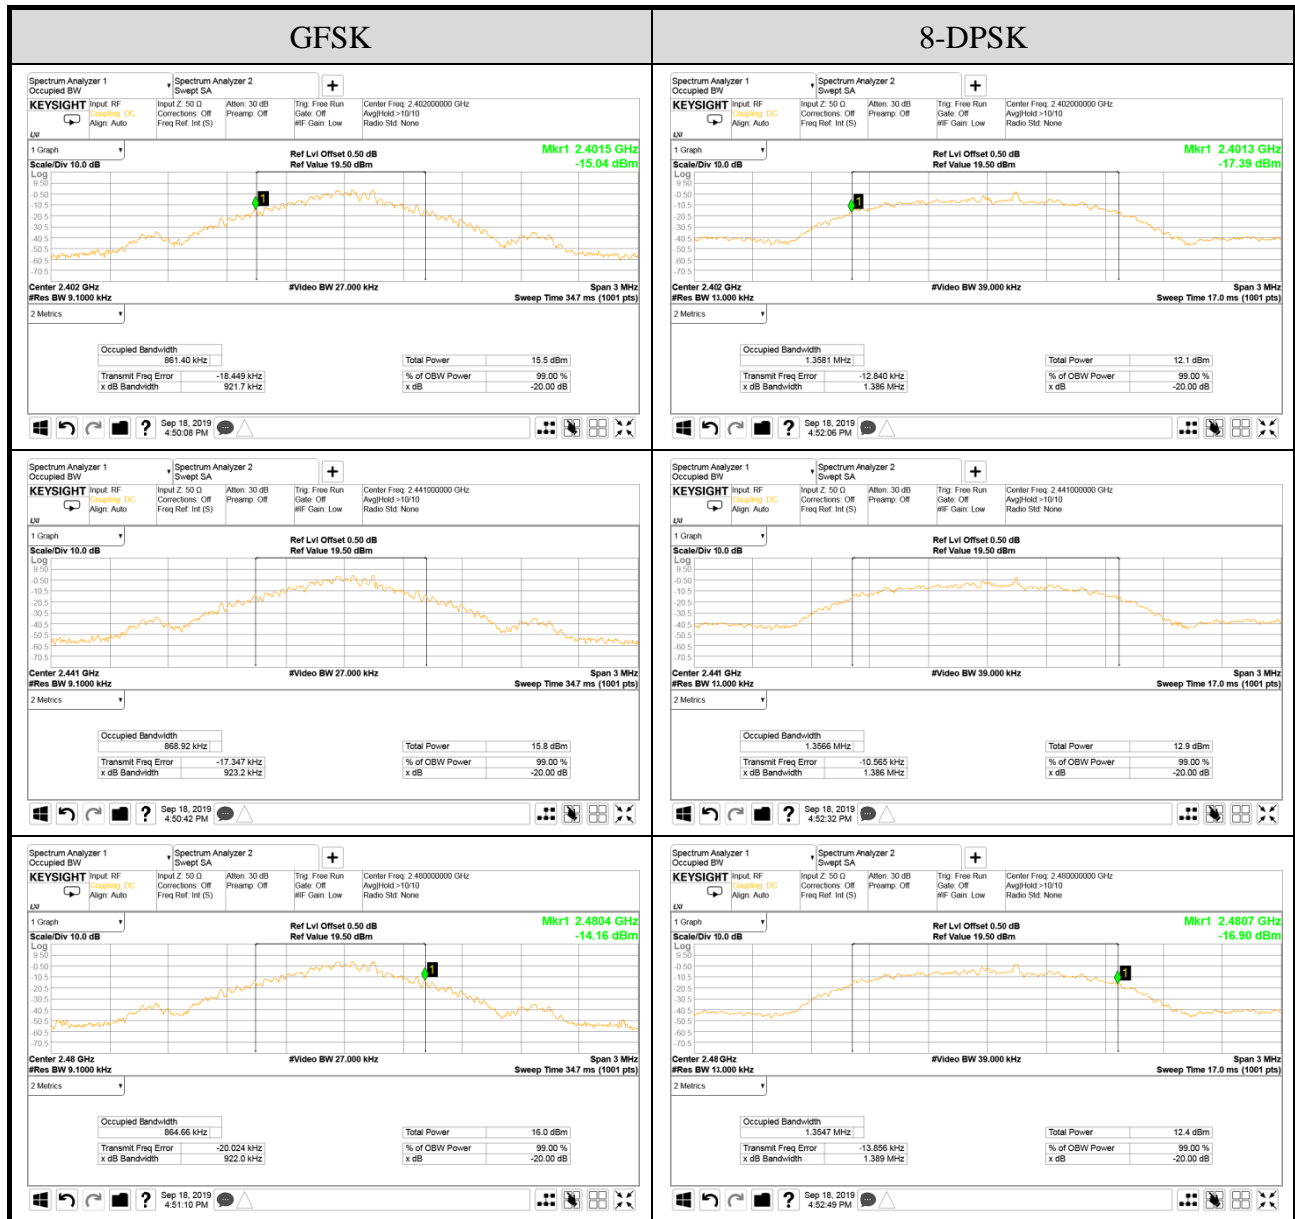

A.4 CARRIER FREQUENCY SEPARATION

| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/09/19 | Temp./Hum. | 25°C /54% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |

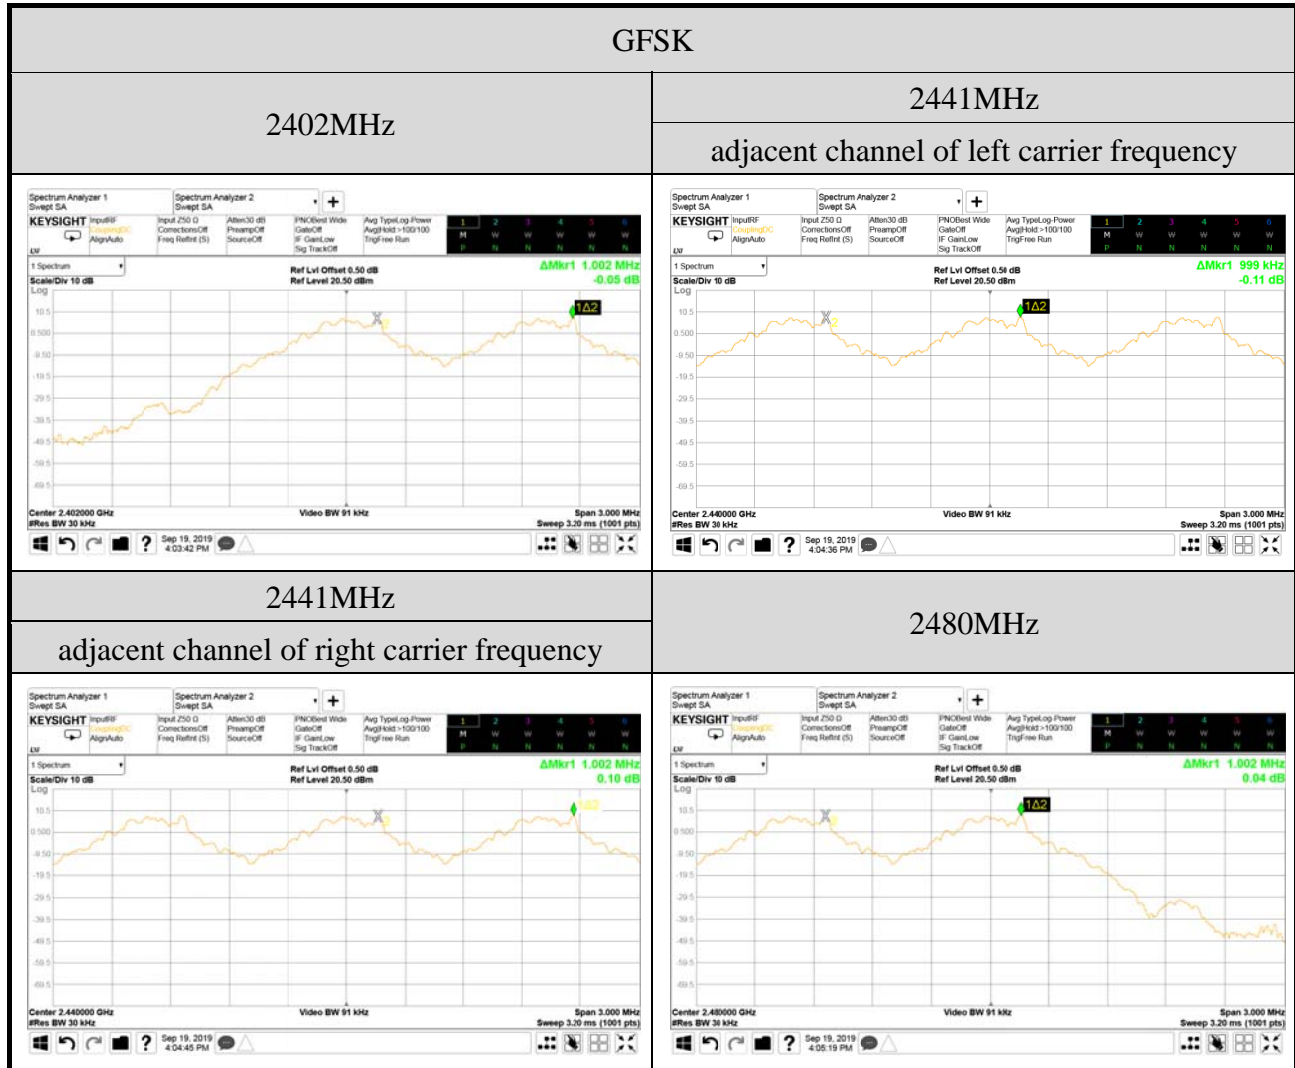

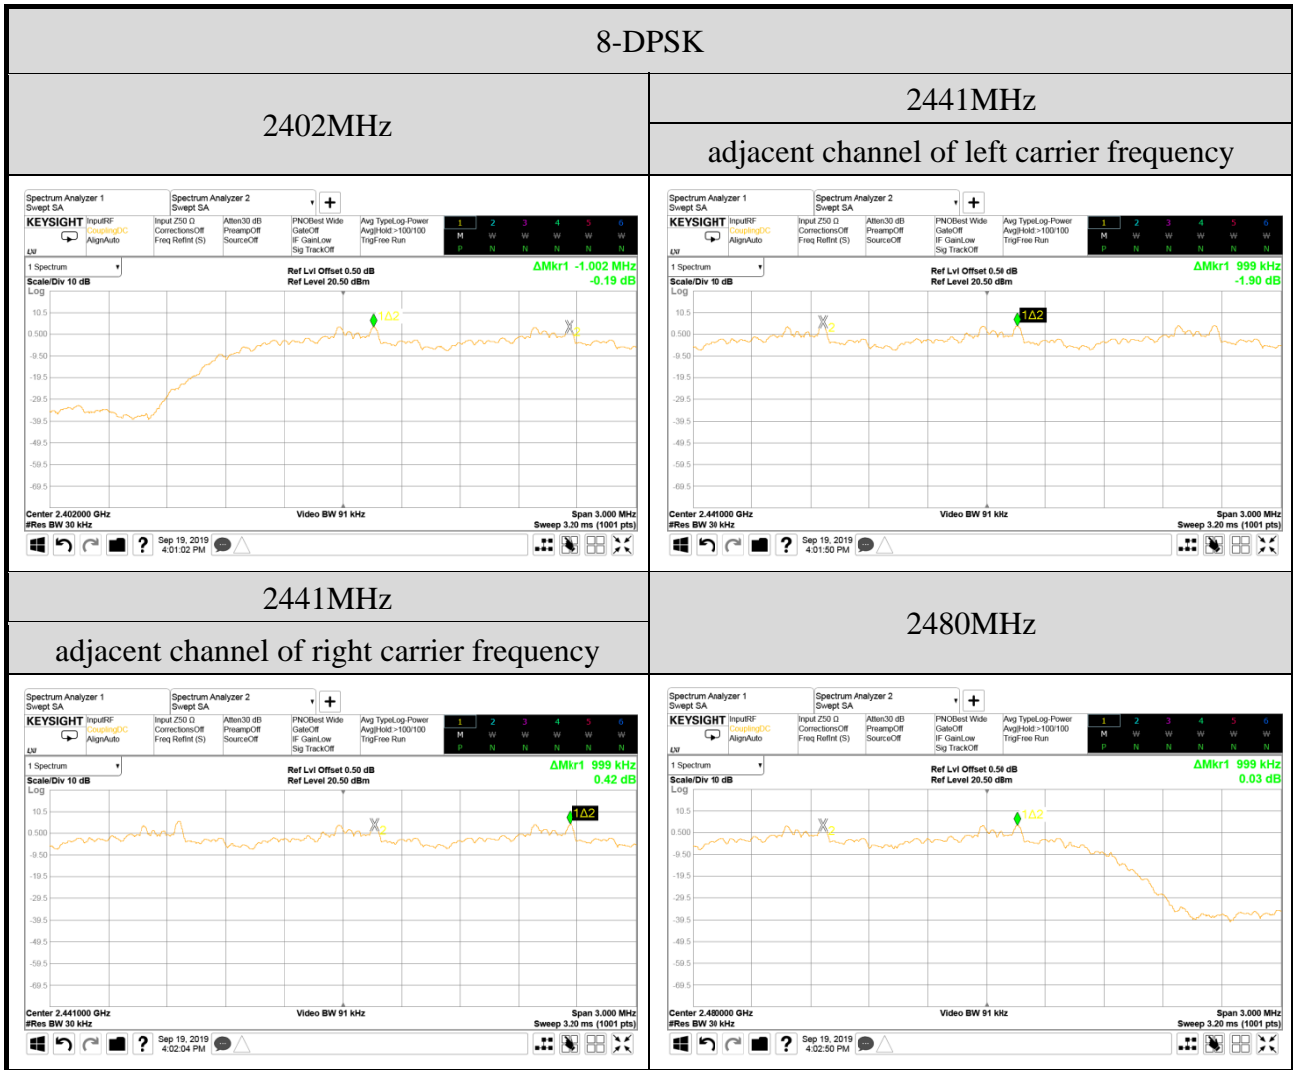

A.5 TIME OF OCCUPANCY

| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/09/19 | Temp./Hum. | 25°C/54% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |

A.5.1 Time of Occupancy

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|------|------------------------|------|-------------------------------------|------------------------|--|------------|
| GFSK | 2402 | DH1 | 10 | 0.380 | 120.080 | <400 |
| | | DH3 | 5 | 1.635 | 258.330 | <400 |
| | | DH5 | 3 | 2.880 | 273.024 | <400 |

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 2.880 ms = 273.024 ms (<400ms)

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|------|------------------------|------|-------------------------------------|------------------------|--|------------|
| GFSK | 2440 | DH1 | 10 | 0.380 | 120.080 | <400 |
| | | DH3 | 5 | 1.635 | 258.330 | <400 |
| | | DH5 | 3 | 2.880 | 273.024 | <400 |

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

DH1 Mode

For each second of 10 transmission appearance, the longest time of occupancy is
 10 transmission * 31.6 seconds * 0.380 ms = 120.080 ms (<400ms)

DH3 Mode

For each second of 5 transmission appearance, the longest time of occupancy is
 5 transmission * 31.6 seconds * 1.635 ms = 258.330 ms (<400ms)

DH5 Mode

For each second of 3 transmission appearance, the longest time of occupancy is
 3 transmission * 31.6 seconds * 2.880 ms = 273.024 ms (<400ms)

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|------|------------------------|------|-------------------------------------|------------------------|--|------------|
| GFSK | 2480 | DH1 | 10 | 0.380 | 120.080 | <400 |
| | | DH3 | 5 | 1.635 | 258.330 | <400 |
| | | DH5 | 3 | 2.880 | 273.024 | <400 |

Observation Period:

$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$

DH1 Mode

For each second of **10** transmission appearance,the longest time of occupancy is
 $10 \text{ transmission} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms} (<400\text{ms})$


DH3 Mode


For each second of **5** transmission appearance,the longest time of occupancy is
 $5 \text{ transmission} * 31.6 \text{ seconds} * 1.635 \text{ ms} = 258.330 \text{ ms} (<400\text{ms})$

DH5 Mode

For each second of **3** transmission appearance,the longest time of occupancy is
 $3 \text{ transmission} * 31.6 \text{ seconds} * 2.880 \text{ ms} = 273.024 \text{ ms} (<400\text{ms})$


● Measurement Plots

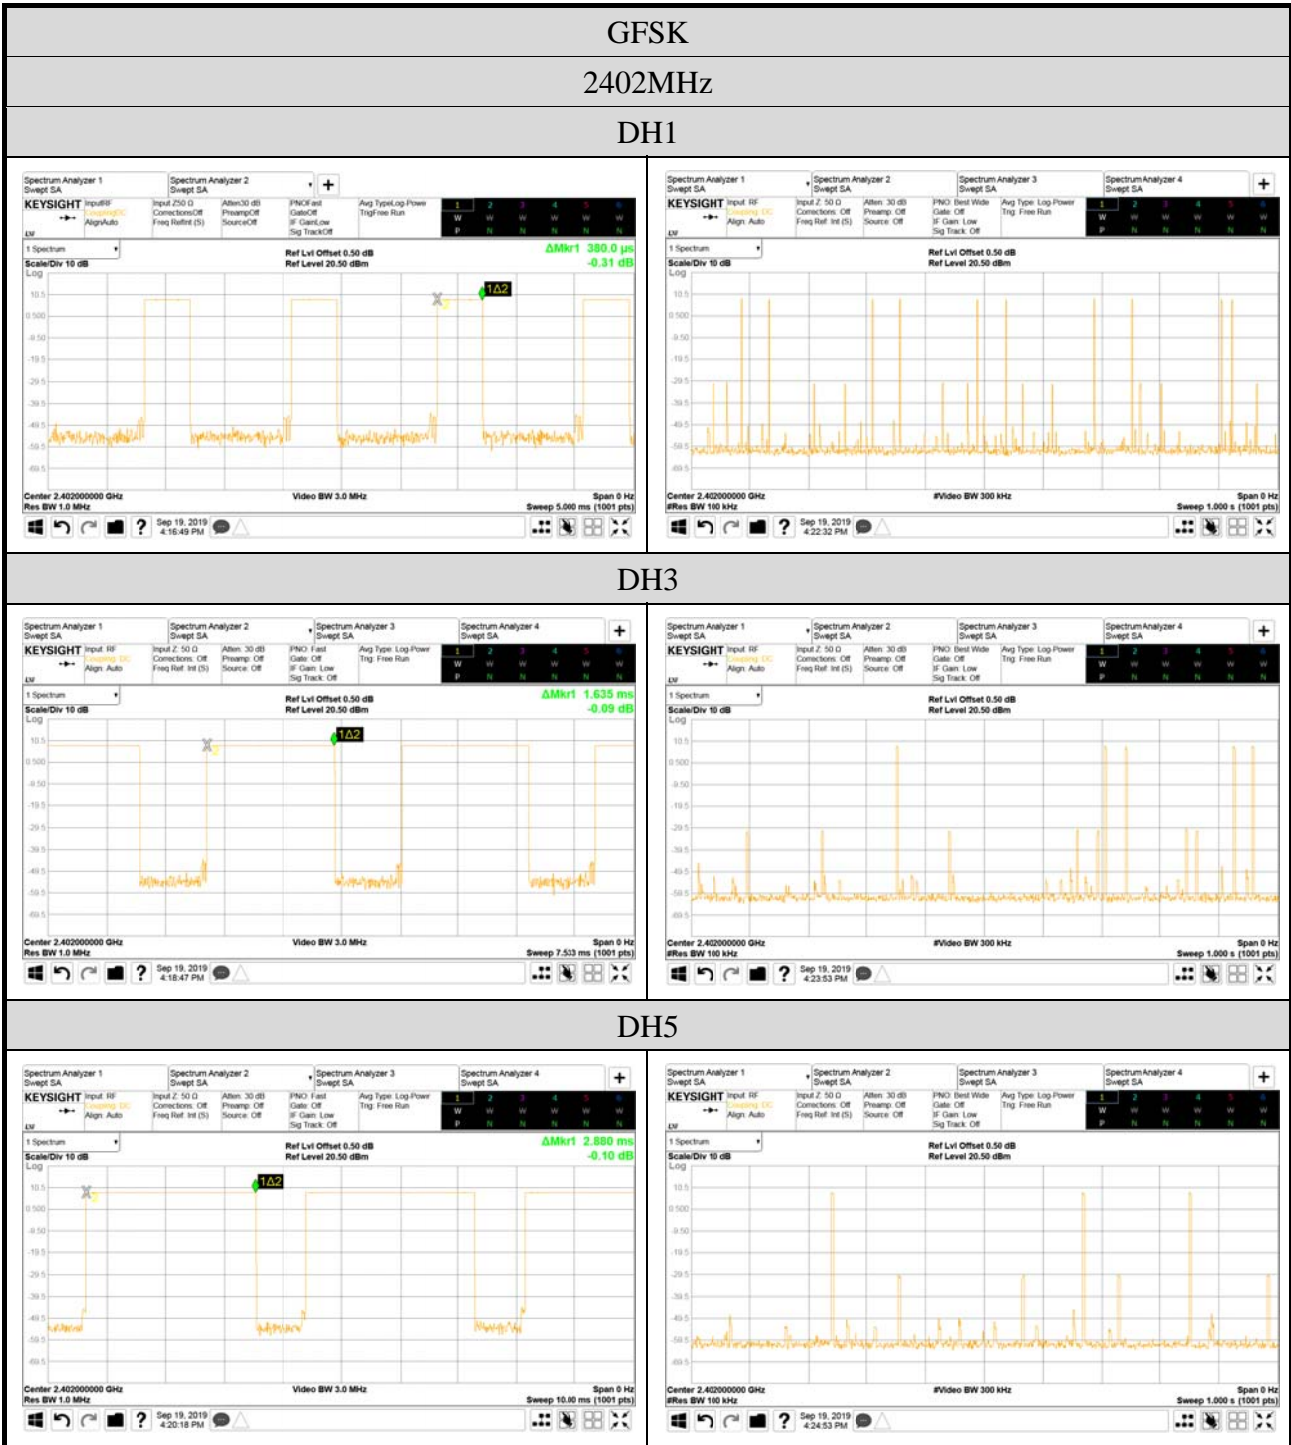

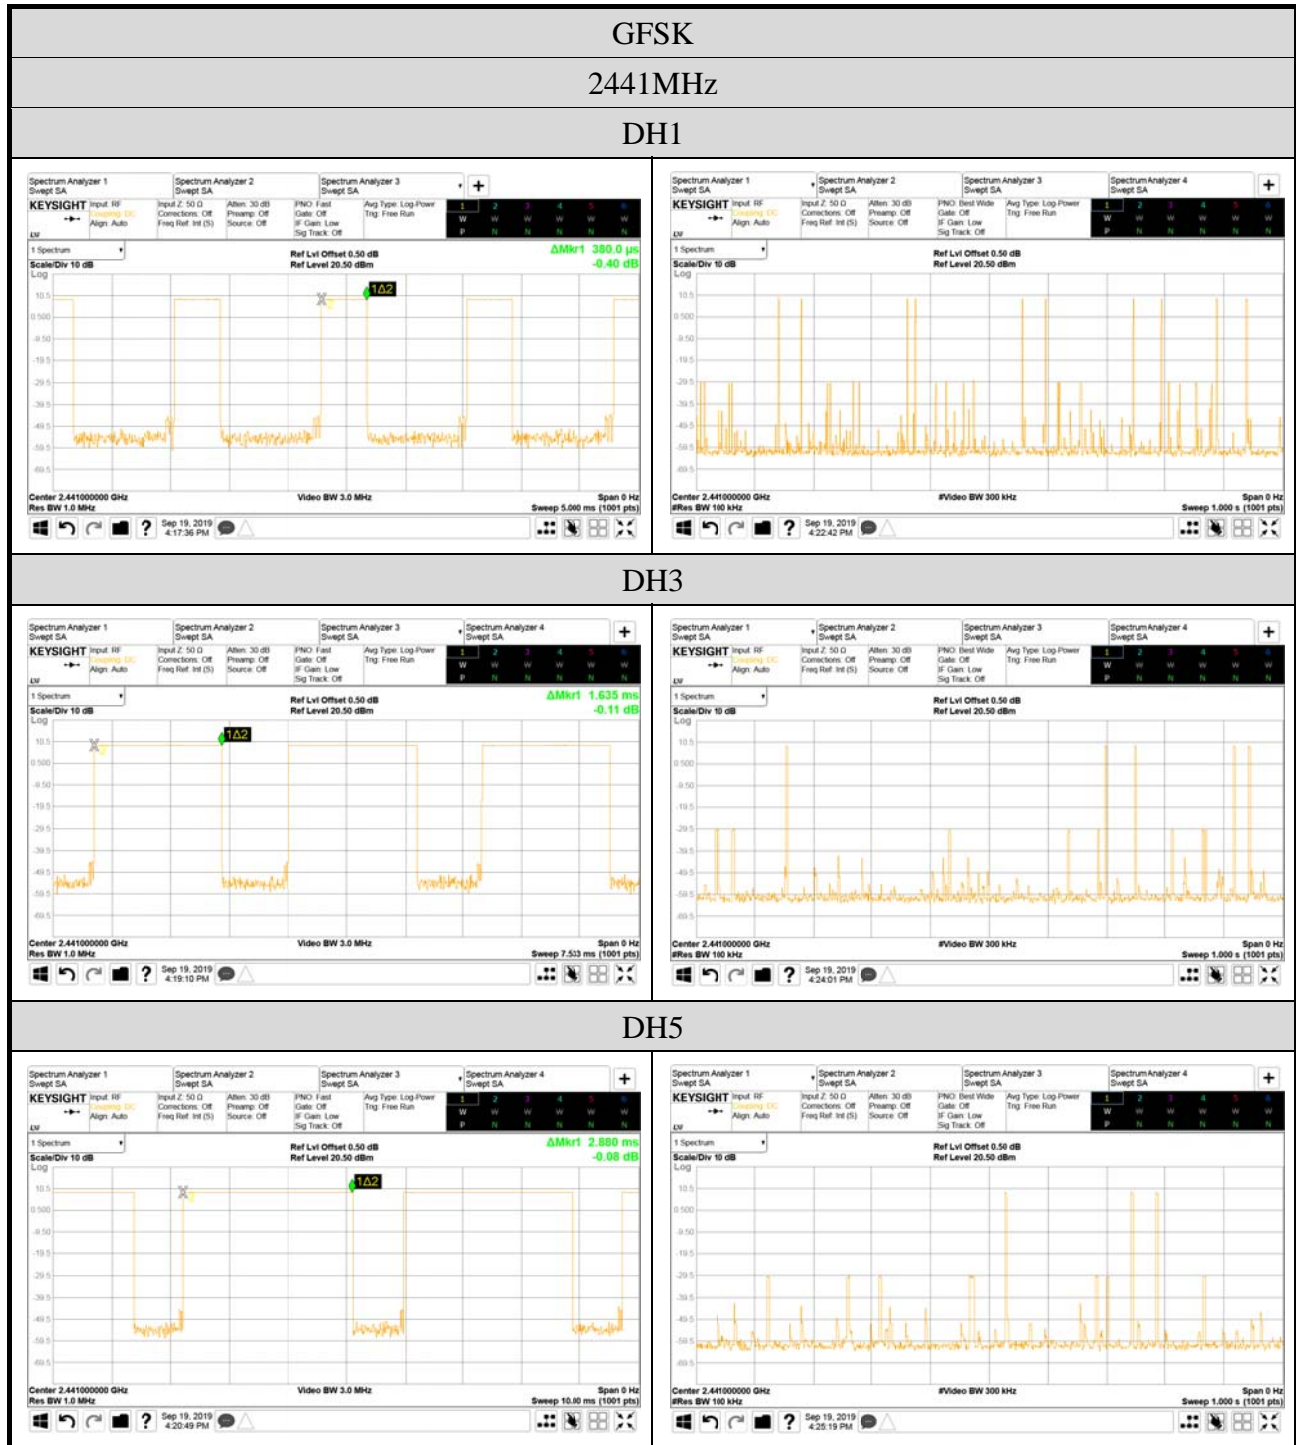


GFSK
 2480MHz


DH1

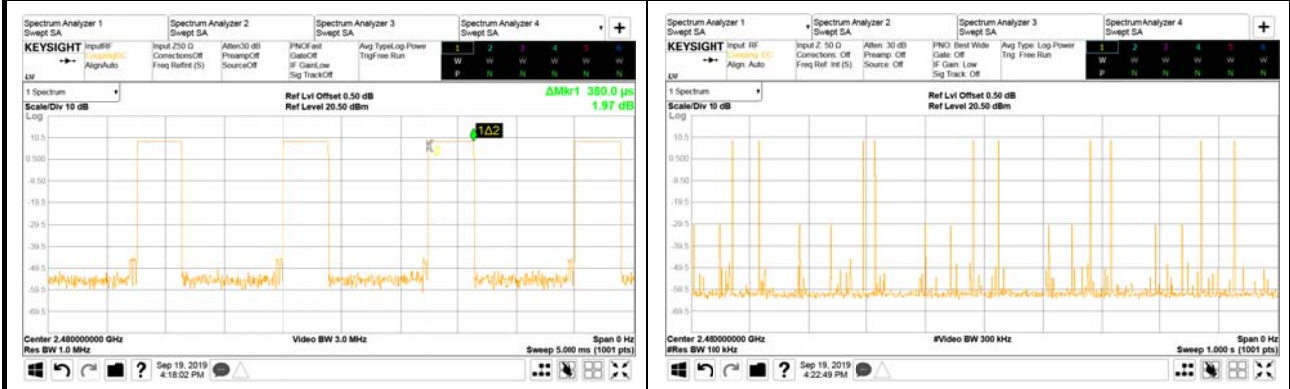

DH3

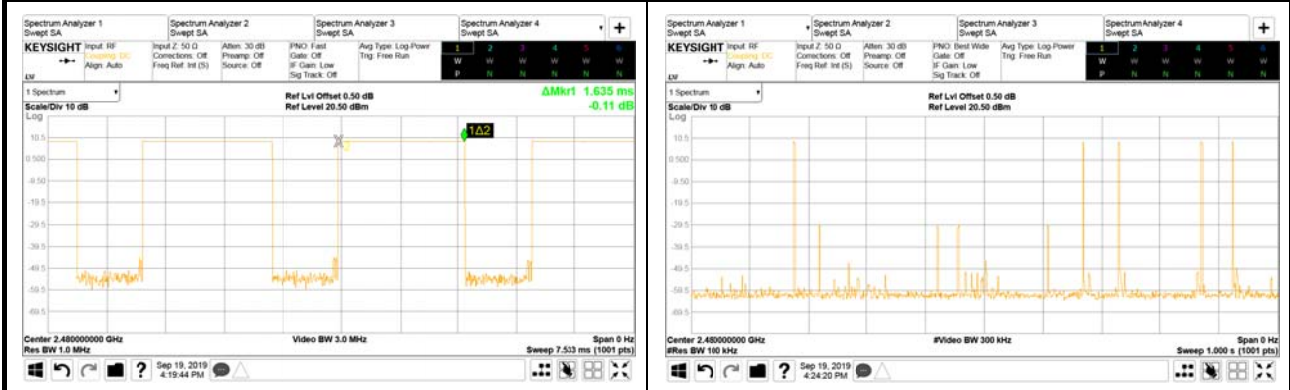

DH5

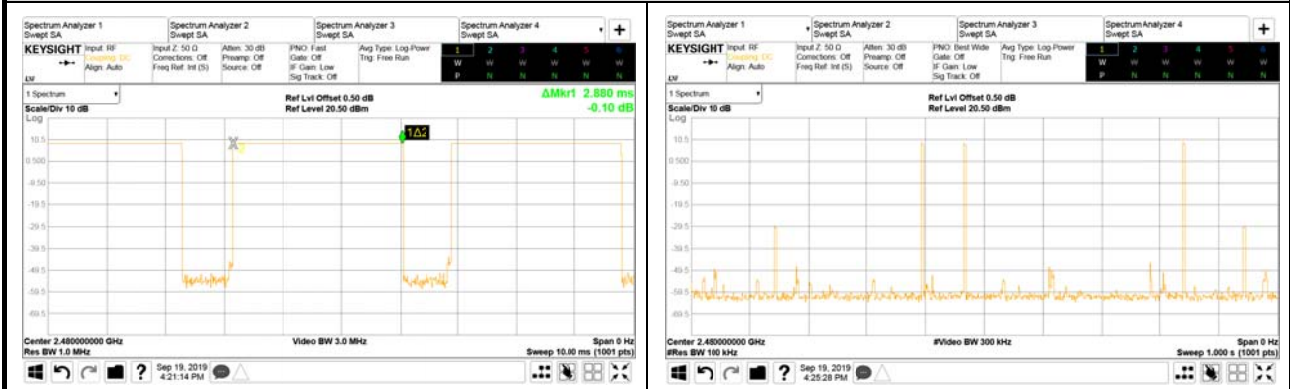

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|--------|------------------------|------|-------------------------------------|------------------------|--|------------|
| 8-DPSK | 2402 | 3DH1 | 10 | 0.390 | 123.240 | <400 |
| | | 3DH3 | 5 | 1.635 | 258.330 | <400 |
| | | 3DH5 | 3 | 2.890 | 273.972 | <400 |

Observation Period:

79 channels * **0.4** seconds = **31.6** seconds

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.390** ms = **123.240** ms (<400ms)

3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
5 transmission * **31.6** seconds * **1.635** ms = **258.330** ms (<400ms)

3DH5 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * **31.6** seconds * **2.890** ms = **273.972** ms (<400ms)

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|--------|------------------------|------|-------------------------------------|------------------------|--|------------|
| 8-DPSK | 2441 | 3DH1 | 10 | 0.390 | 123.240 | <400 |
| | | 3DH3 | 5 | 1.635 | 258.330 | <400 |
| | | 3DH5 | 3 | 2.890 | 273.972 | <400 |

Observation Period:

79 channels * **0.4** seconds = **31.6** seconds

3DH1 Mode

For each second of **10** transmission appearance, the longest time of occupancy is
10 transmission * **31.6** seconds * **0.390** ms = **123.240** ms (<400ms)

3DH3 Mode

For each second of **5** transmission appearance, the longest time of occupancy is
5 transmission * **31.6** seconds * **1.635** ms = **258.330** ms (<400ms)

3DH5 Mode

For each second of **3** transmission appearance, the longest time of occupancy is
3 transmission * **31.6** seconds * **2.890** ms = **273.972** ms (<400ms)

| Mode | Centre Frequency (MHz) | Mode | Each second appearance transmission | Time of Occupancy (ms) | Maximum accumulated Time of Occupancy (ms) | Limit (ms) |
|--------|------------------------|------|-------------------------------------|------------------------|--|------------|
| 8-DPSK | 2480 | 3DH1 | 10 | 0.390 | 123.240 | <400 |
| | | 3DH3 | 5 | 1.635 | 258.330 | <400 |
| | | 3DH5 | 3 | 2.890 | 273.972 | <400 |

Observation Period:

$$79 \text{ channels} * 0.4 \text{ seconds} = 31.6 \text{ seconds}$$

3DH1 Mode

For each second of **10** transmission appearance,the longest time of occupancy is

$$10 \text{ transmission} * 31.6 \text{ seconds} * 0.390 \text{ ms} = 123.240 \text{ ms} (<400\text{ms})$$

3DH3 Mode

For each second of **5** transmission appearance,the longest time of occupancy is


$$5 \text{ transmission} * 31.6 \text{ seconds} * 1.635 \text{ ms} = 258.330 \text{ ms} (<400\text{ms})$$

3DH5 Mode

For each second of **3** transmission appearance,the longest time of occupancy is

$$3 \text{ transmission} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms} (<400\text{ms})$$


● Measurement Plots

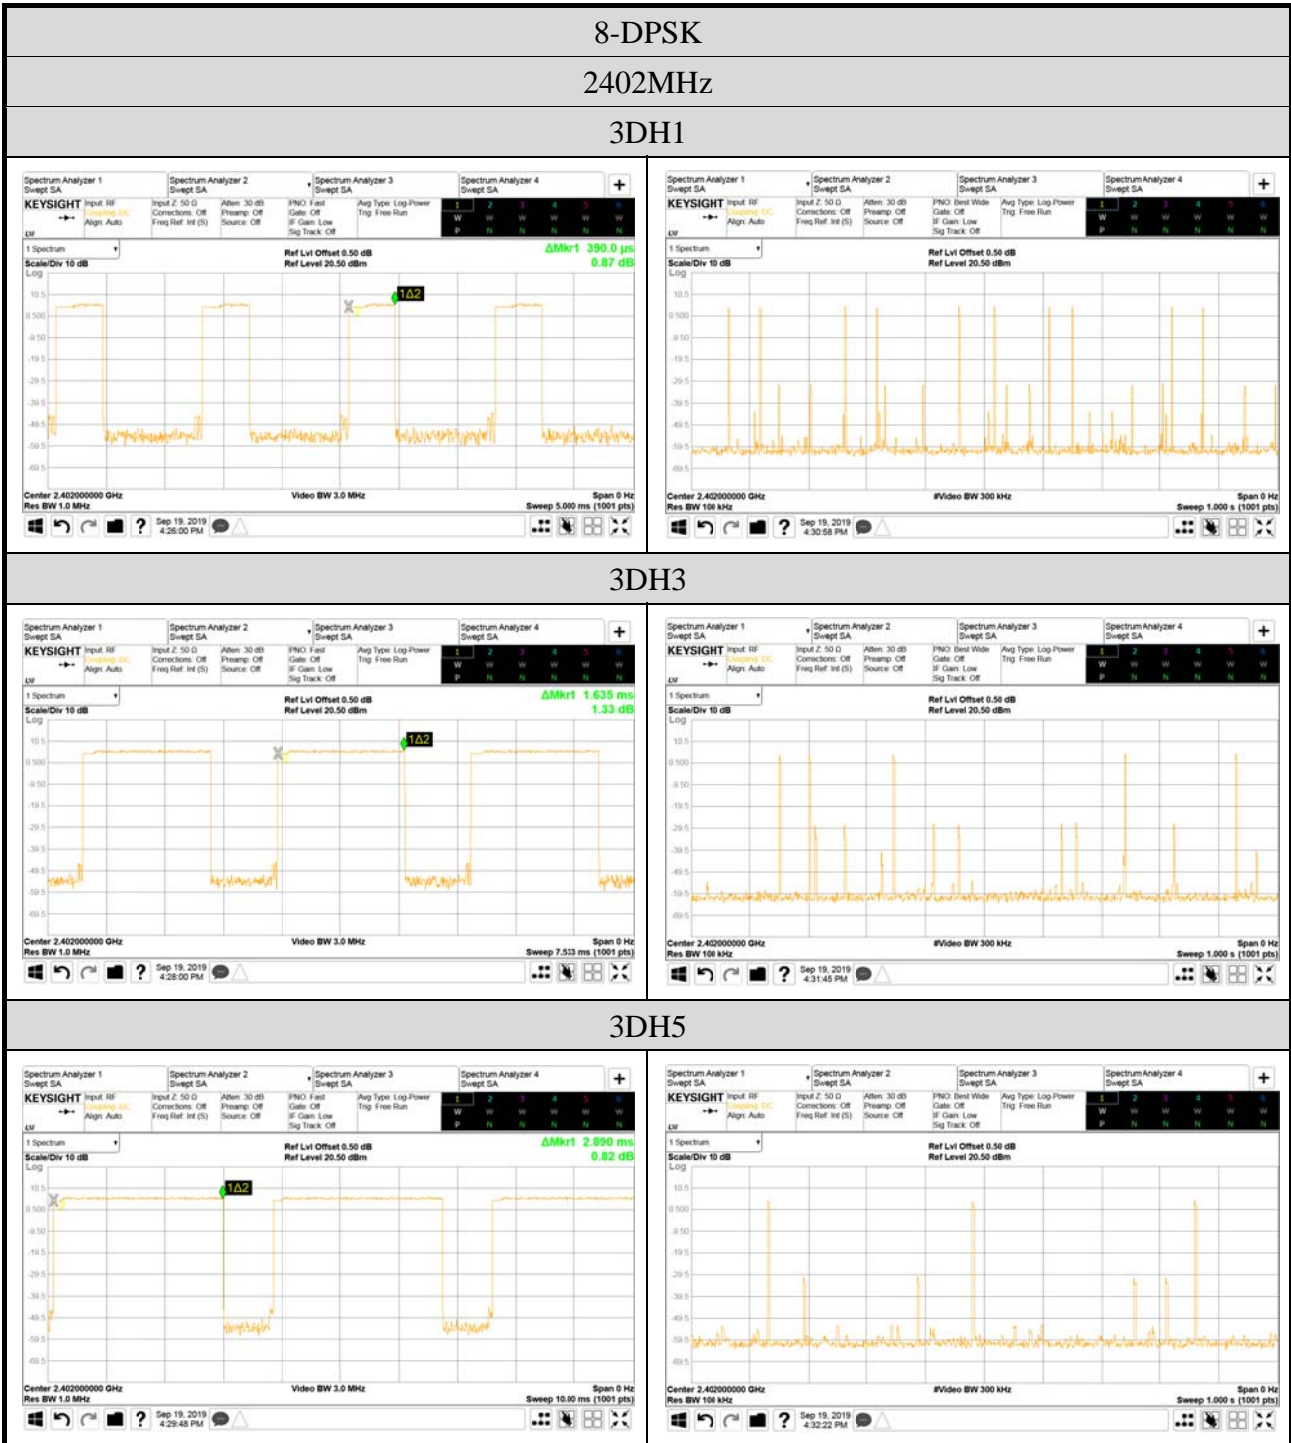

8-DPSK

2441MHz


3DH1

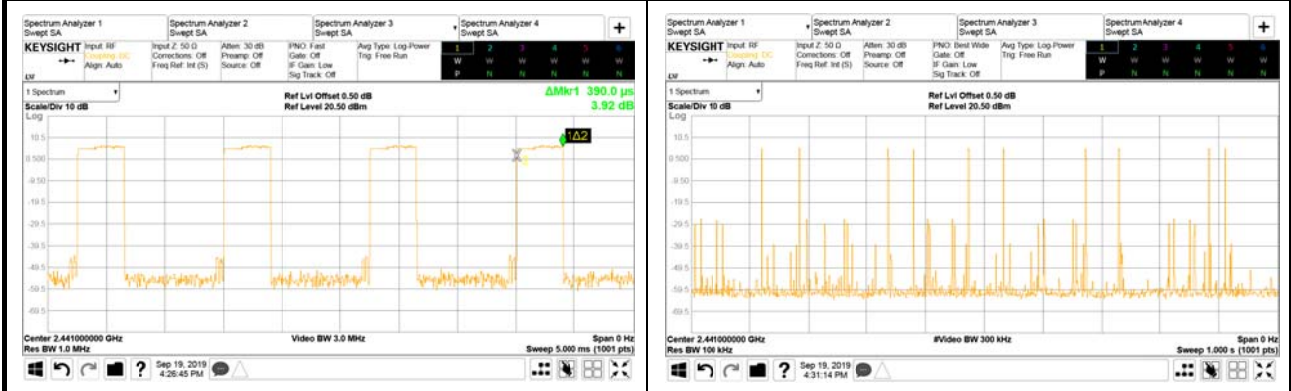

3DH3




3DH5

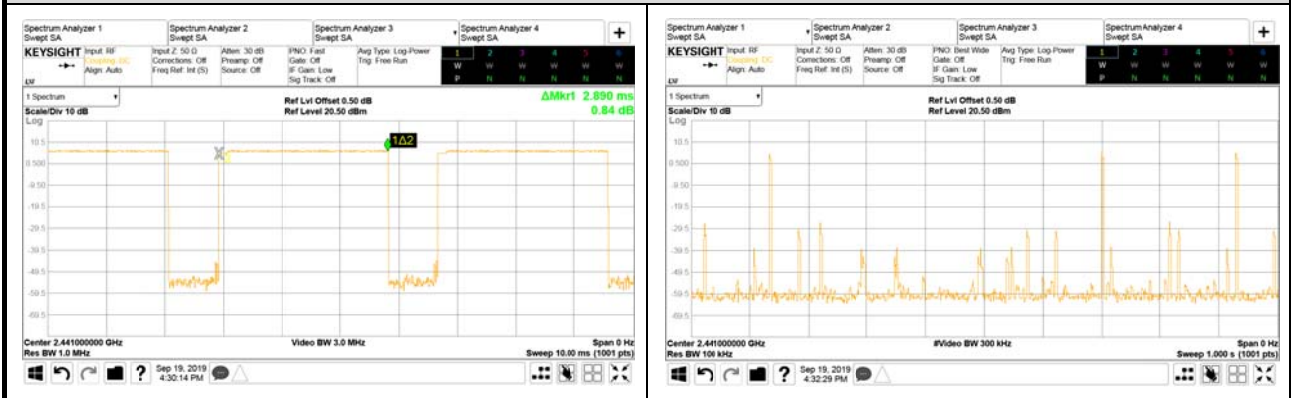


8-DPSK
 2480MHz
 3DH1



3DH3

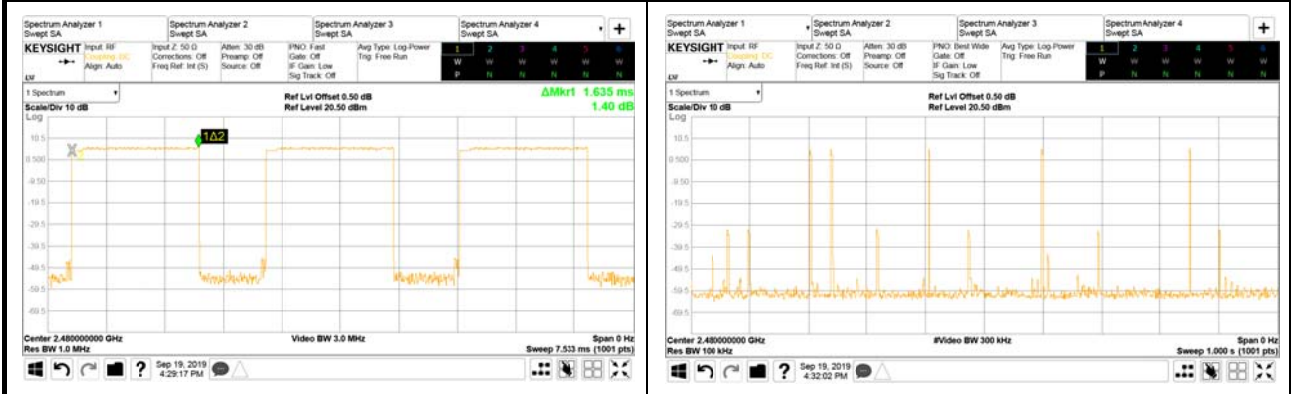

3DH5

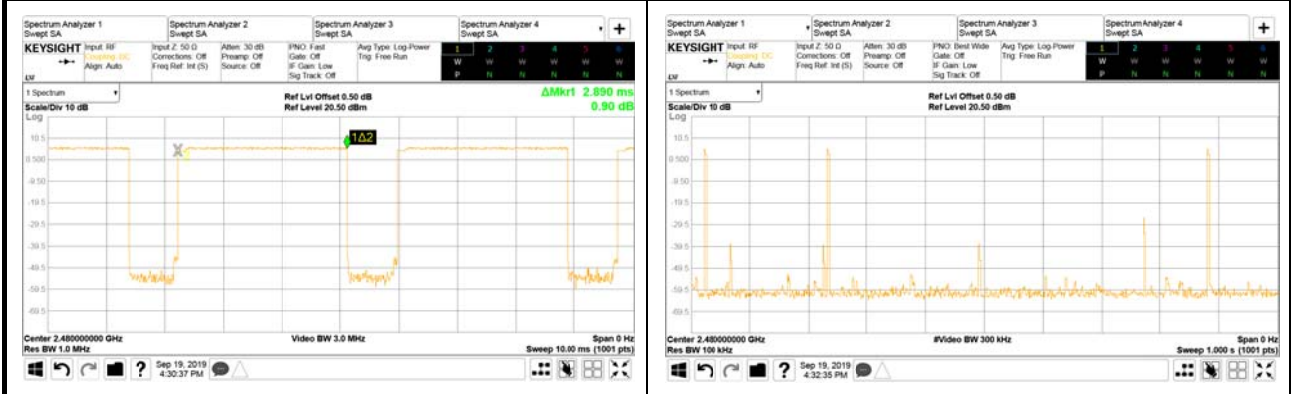

A.6 NUMBER OF HOPPING CHANNELS

| | | | |
|------------|------------|--------------|--------------------------------|
| Test Date | 2019/09/19 | Temp./Hum. | 25°C/54% |
| Cable Loss | 0.50dB | Test Voltage | AC 120V, 60Hz (via AC Adapter) |

| Mode: GFSK | Mode: 8-DPSK | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------------------------------|-------|-------------|------------|----------|----------------|----------------|----------------|---|---|---|-------------|------------|--|--|--|---|---|---|-------------|------------|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|--|------|-------|-------|---|---|----------|----------------|----------------|---|---|---|-------------|------------|--|--|--|---|---|---|-------------|------------|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|---|--|--|--|--|--|--|--|
| <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.399 9 GHz</td> <td>-46.95 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>2.483 6 GHz</td> <td>-53.95 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Mode | Trace | Scale | X | Y | Function | Function Width | Function Value | 1 | N | f | 2.399 9 GHz | -46.95 dBm | | | | 2 | N | f | 2.483 6 GHz | -53.95 dBm | | | | 3 | | | | | | | | 4 | | | | | | | | 5 | | | | | | | | 6 | | | | | | | | <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>f</td> <td>2.399 9 GHz</td> <td>-44.01 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>f</td> <td>2.483 6 GHz</td> <td>-52.81 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | Mode | Trace | Scale | X | Y | Function | Function Width | Function Value | 1 | N | f | 2.399 9 GHz | -44.01 dBm | | | | 2 | N | f | 2.483 6 GHz | -52.81 dBm | | | | 3 | | | | | | | | 4 | | | | | | | | 5 | | | | | | | | 6 | | | | | | | |
| Mode | Trace | Scale | X | Y | Function | Function Width | Function Value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | f | 2.399 9 GHz | -46.95 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | f | 2.483 6 GHz | -53.95 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mode | Trace | Scale | X | Y | Function | Function Width | Function Value | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | f | 2.399 9 GHz | -44.01 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | f | 2.483 6 GHz | -52.81 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| The number hopping channel is 79. | The number hopping channel is 79. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

A.7 MAXIMUM PEAK OUTPUT POWER

| | | | |
|--------------|-------------------------------|------------|----------------|
| Test Date | 2019/09/18 ~ 12/19 | Temp./Hum. | 24~25°C/51~55% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |

A.7.1 Maximum Peak Output Power

| Mode | Centre Frequency (MHz) | Maximum Peak Output Power | | Limit |
|--------|---------------------------|---------------------------|-------|-------------------|
| | | dBm | W | |
| GFSK | 2402 | 9.14 | 0.008 | 21dBm (0.125W) |
| | 2441 | 9.59 | 0.009 | |
| | 2480 | 9.48 | 0.009 | |
| 8-DPSK | 2402 | 6.89 | 0.005 | |
| | 2441 | 7.55 | 0.006 | |
| | 2480 | 7.00 | 0.005 | |


SPOT CHECK

| Mode | Centre Frequency (MHz) | Maximum Peak Output Power | | Limit |
|--------|---------------------------|---------------------------|-------|-------------------|
| | | dBm | W | |
| GFSK | 2402 | 9.12 | 0.008 | 21dBm (0.125W) |
| | 2441 | 9.48 | 0.009 | |
| | 2480 | 9.65 | 0.009 | |
| 8-DPSK | 2402 | 6.95 | 0.005 | |
| | 2441 | 7.36 | 0.005 | |
| | 2480 | 6.94 | 0.005 | |

Note: 1. The results have been included cable loss.

2. This device embedded with same radio transmitter with FCC ID: BEJNT-15Z90N, IC: 2703H-15Z90N. We did spot check for output power and all output power values keep identical thus we reuse all results except to E.I.R.P. test items.


A.7.2 Measurement Plots

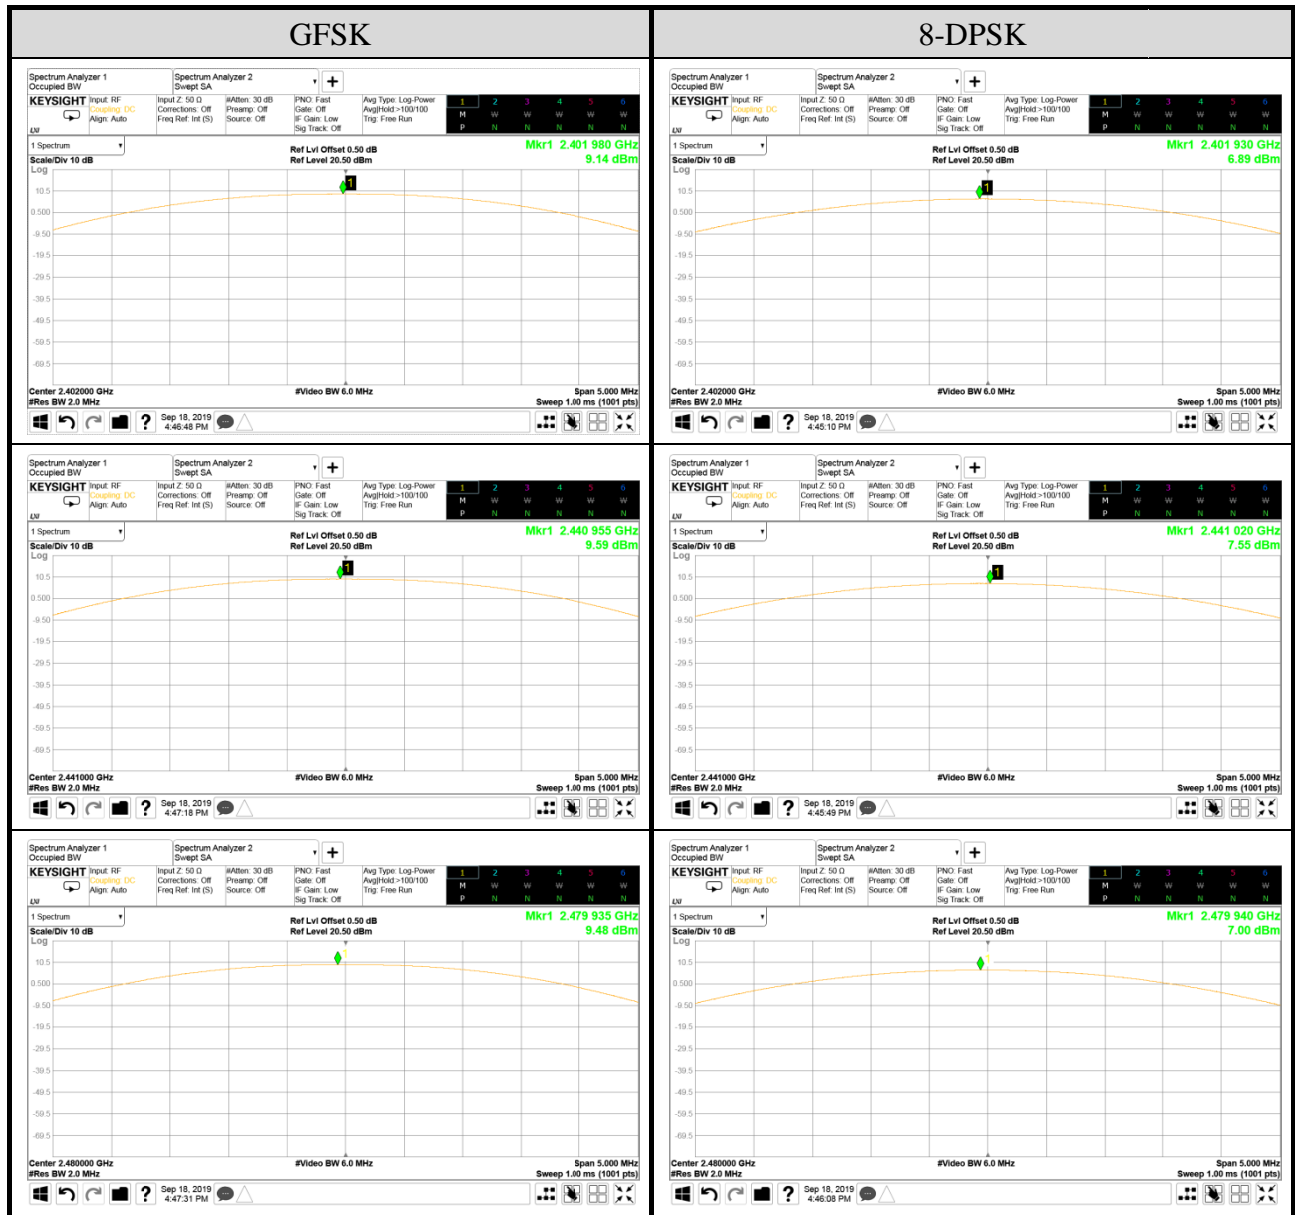


A.8 EMISSION LIMITATIONS MEASUREMENT

| | | | |
|--------------|-------------------------------|------------|---------------|
| Test Date | 2019/09/18 ~ 19 | Temp./Hum. | 25°C/51 ~ 54% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |


A.8.1 Band Edge

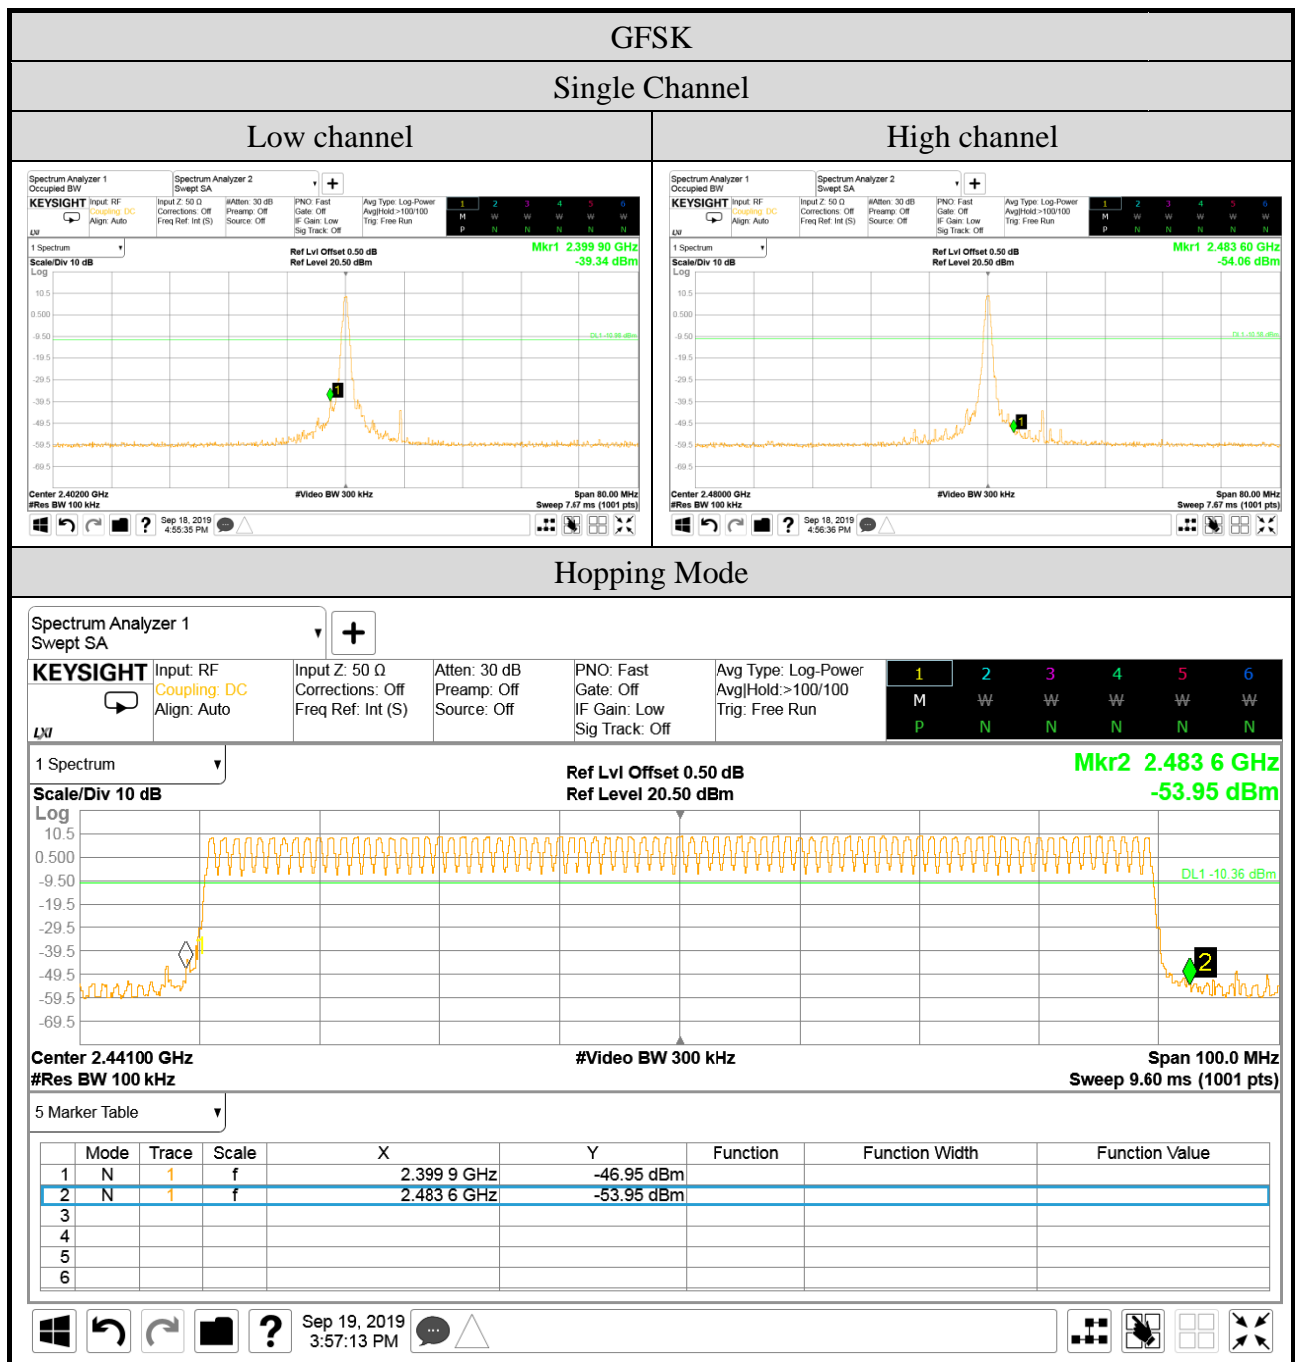

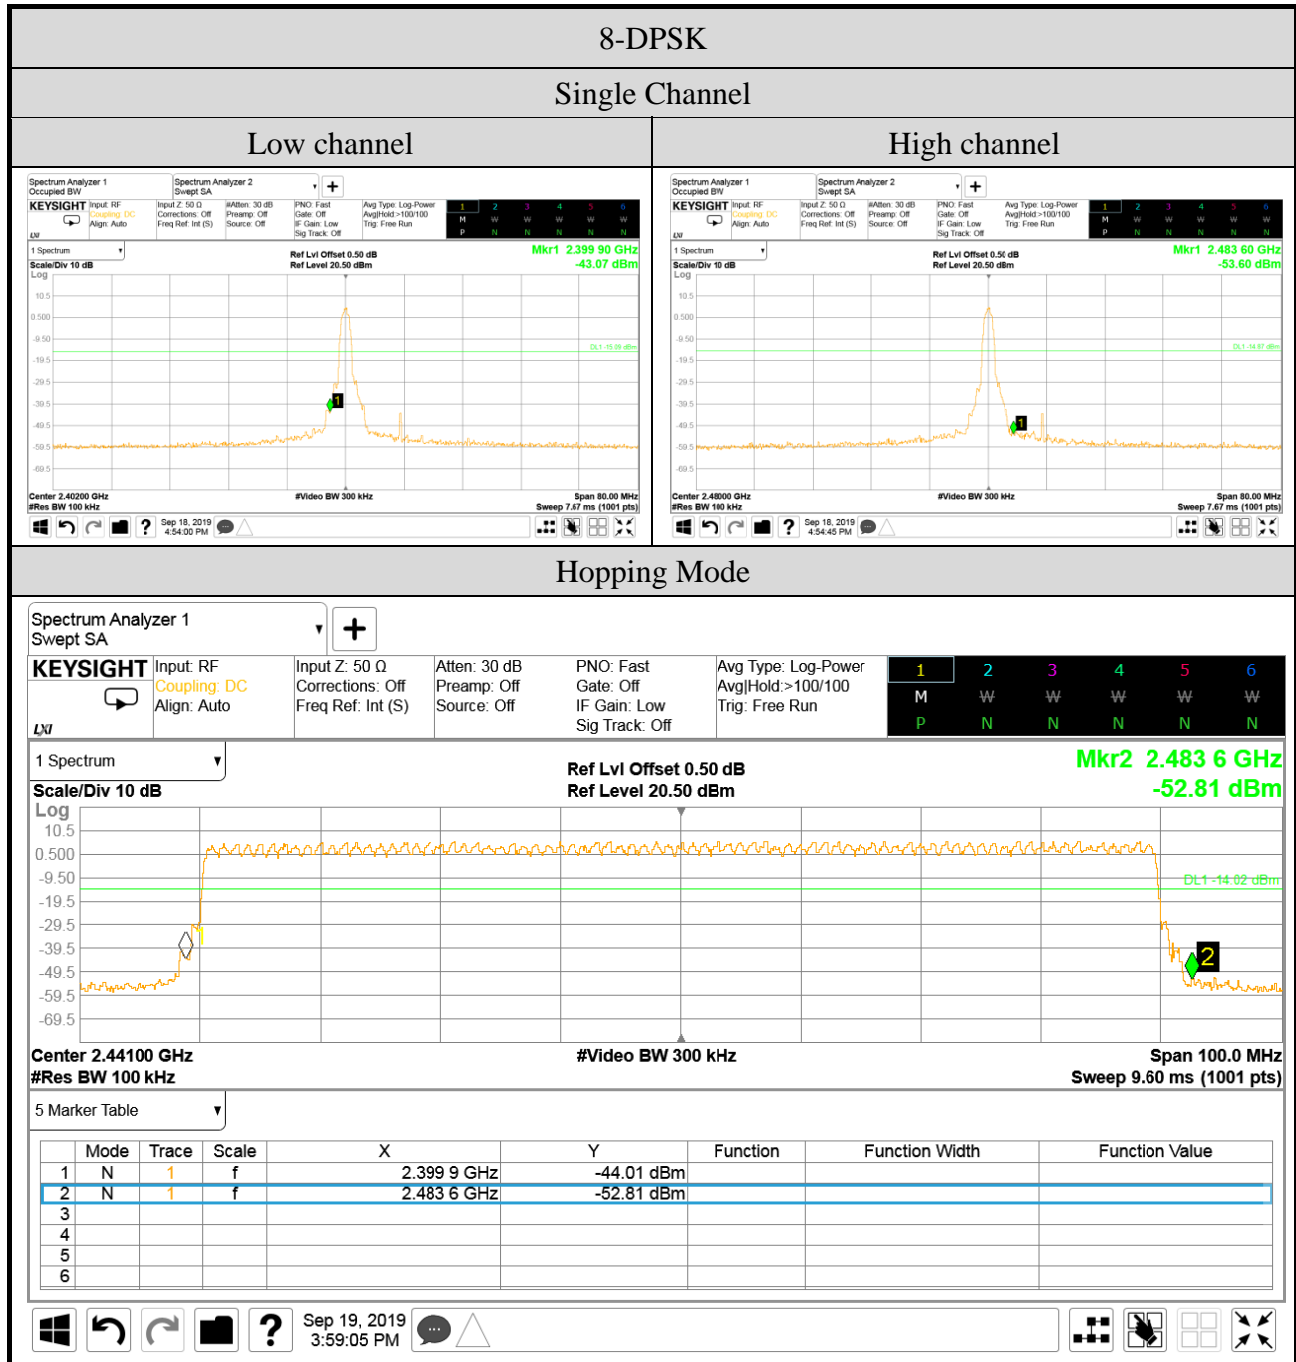


A.8.2 Spurious Emission

| | | | |
|--------------|-------------------------------|------------|-------------|
| Test Date | 2019/09/18 | Temp./Hum. | 25°C/51% |
| Cable Loss | 0.50dB | Tested By | Martin Chen |
| Test Voltage | AC 120V 60Hz (Via AC Adapter) | Test Model | 14Z995 |

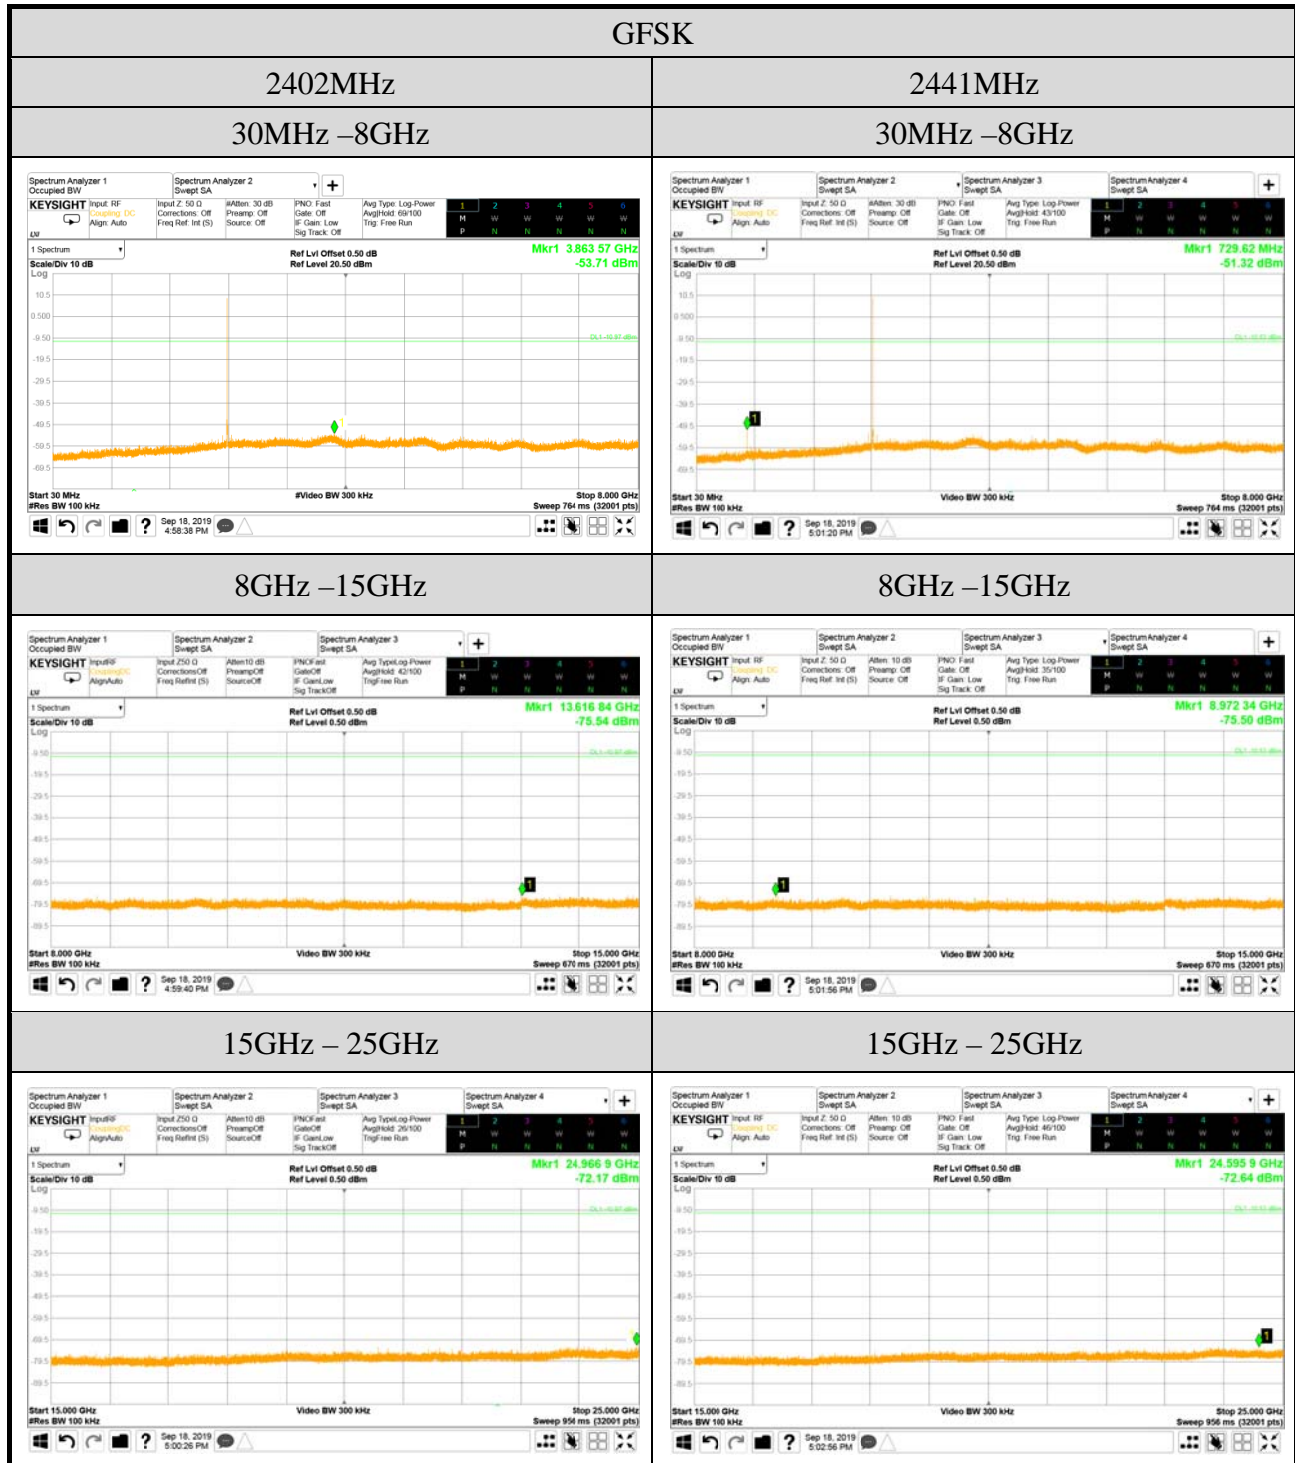

Note: All results have been included cable loss.

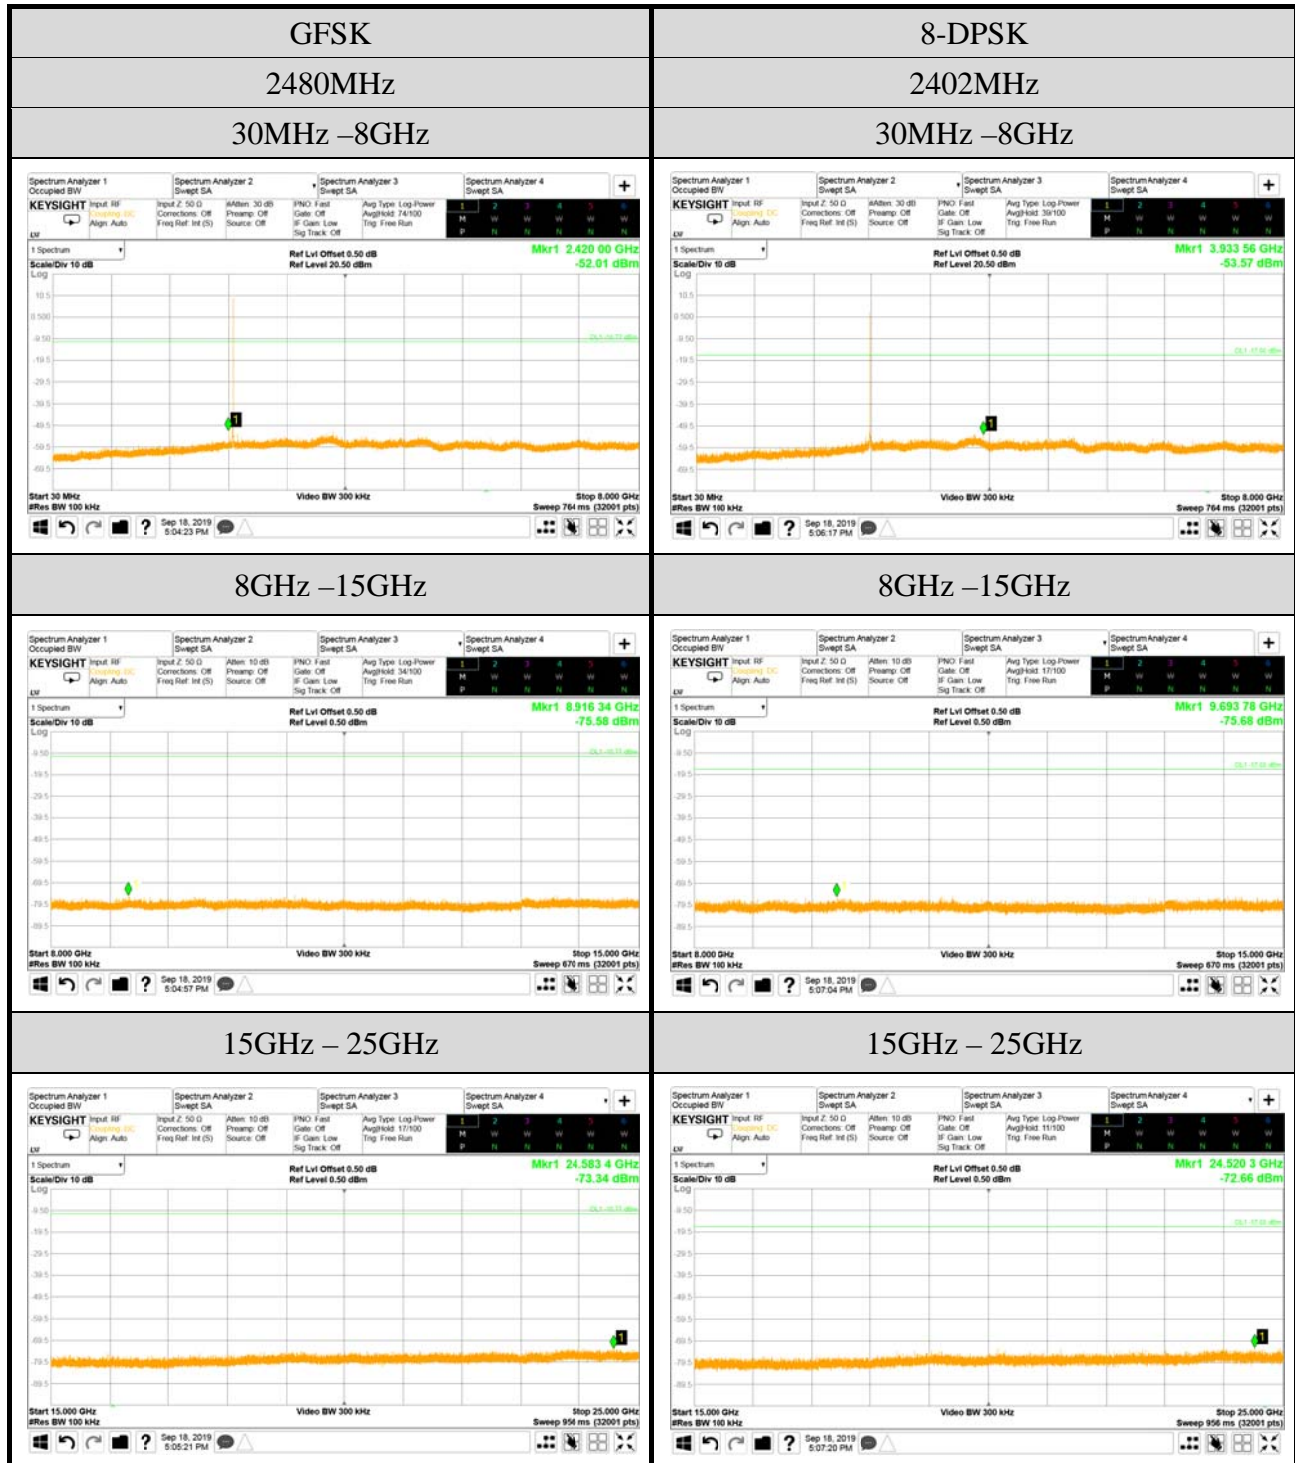

Note: All results have been included cable loss.



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: 14Z995)