

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	78
A.2.3 Emissions in Non-restricted Frequency Bands.....	78
A.3 EMISSION BANDWIDTH	79
A.3.1 Emission Bandwidth Result.....	79
A.3.2 Measurement Plots	81
A.4 MAXIMUM OUTPUT POWER	91
A.4.1 Average Output Power	91
A.4.1 Measurement Plots	93
A.5 EMISSION LIMITATIONS MEASUREMENT	96
A.6 POWER SPECTRAL DENSITY	268
A.6.1 Power Spectral Density Result	268
A.6.2 Measurement Plots	271
A.7 FREQUENCY STABILITY	279
A.7.1 Frequency stability Result	279

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

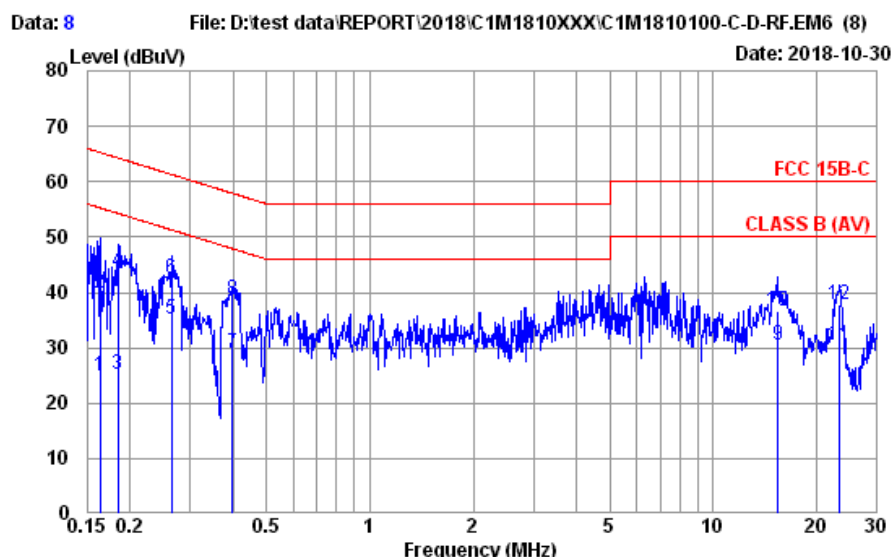

Site no. : No.8 Shielded Room Data no. : 8
Condition : ENV4200 100169 LISN Phase : NEUTRAL
Limit : FCC 15B-C
Env. / Ins. : 24°C / 49% ESR3(1774) Engineer : Nick Du
EUT : 15Z990
Power Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.163	10.56	0.03	9.98	4.47	25.04	55.30	30.26	Average
2	0.163	10.56	0.03	9.98	19.40	39.97	65.30	25.33	QP
3	0.184	10.53	0.03	9.98	4.68	25.22	54.28	29.06	Average
4	0.184	10.53	0.03	9.98	23.11	43.65	64.28	20.63	QP
5	0.264	10.48	0.03	9.98	14.59	35.08	51.29	16.21	Average
6	0.264	10.48	0.03	9.98	21.96	42.45	61.29	18.84	QP
7	0.398	10.43	0.04	9.98	8.64	29.09	47.90	18.81	Average
8	0.398	10.43	0.04	9.98	18.11	38.56	57.90	19.34	QP
9	15.470	12.69	0.23	10.05	7.46	30.43	50.00	19.57	Average
10	15.470	12.69	0.23	10.05	13.53	36.50	60.00	23.50	QP
11	23.387	14.58	0.29	10.08	5.64	30.59	50.00	19.41	Average
12	23.387	14.58	0.29	10.08	12.90	37.85	60.00	22.15	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

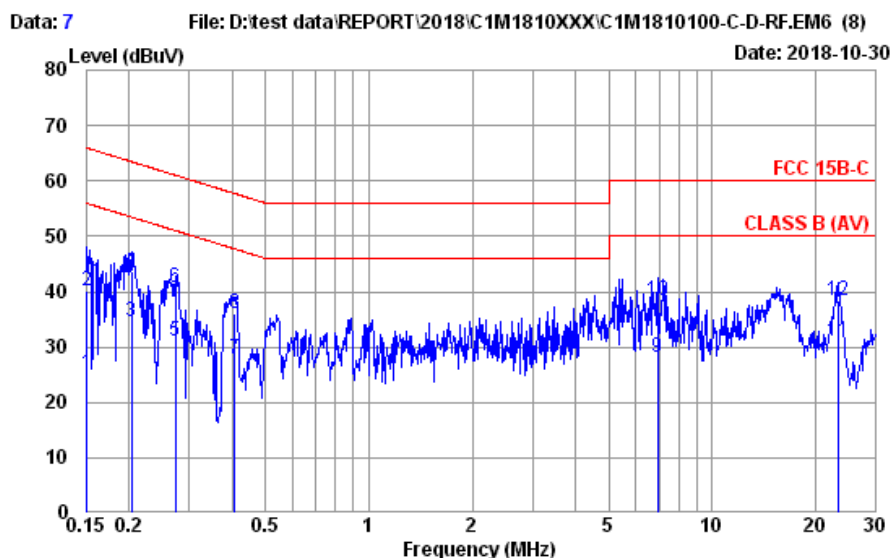

Site no. : No.8 Shielded Room Data no. : 7
Condition : ENV4200 100169 LISN Phase : LINE
Limit : FCC 15B-C
Env. / Ins. : 24°C / 49% ESR3(1774) Engineer : Nick Du
EUT : 15Z990
Power Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.151	10.63	0.03	9.98	4.64	25.28	55.96	30.68	Average
2	0.151	10.63	0.03	9.98	19.65	40.29	65.96	25.67	QP
3	0.204	10.56	0.03	9.98	14.09	34.66	53.45	18.79	Average
4	0.204	10.56	0.03	9.98	23.06	43.63	63.45	19.82	QP
5	0.273	10.51	0.03	9.98	10.54	31.06	51.03	19.97	Average
6	0.273	10.51	0.03	9.98	20.32	40.84	61.03	20.19	QP
7	0.406	10.45	0.04	9.98	7.49	27.96	47.73	19.77	Average
8	0.406	10.45	0.04	9.98	15.48	35.95	57.73	21.78	QP
9	6.951	11.02	0.16	10.01	7.00	28.19	50.00	21.81	Average
10	6.951	11.02	0.16	10.01	17.31	38.50	60.00	21.50	QP
11	23.263	14.60	0.29	10.08	6.15	31.12	50.00	18.88	Average
12	23.263	14.60	0.29	10.08	13.39	38.36	60.00	21.64	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2018/10/30 ~ 11/01	Temp./Hum.	24°C/53%
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Test Antenna	WA-F-LBLB-04-056
--------------	------------------

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	24.27	1.22	5.53	31.02	40.00	8.98	Peak
101.78	17.60	2.29	7.93	27.82	43.50	15.68	Peak
288.99	19.42	4.20	4.56	28.18	46.00	17.82	Peak
406.36	22.14	5.61	4.27	32.02	46.00	13.98	Peak
676.02	24.82	7.01	1.76	33.59	46.00	12.41	Peak
922.40	27.05	8.32	2.99	38.36	46.00	7.64	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.94	23.76	1.25	13.82	38.83	40.00	1.17	Peak
94.99	16.56	2.21	12.03	30.80	43.50	12.70	Peak
163.86	16.17	2.97	8.36	27.50	43.50	16.00	Peak
239.52	18.47	3.71	5.77	27.95	46.00	18.05	Peak
321.00	20.09	4.60	7.70	32.39	46.00	13.61	Peak
413.15	22.22	5.68	5.21	33.11	46.00	12.89	Peak

Audix Technology Corp.

No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Test Antenna	15Z980 ANTENNA ASM
--------------	--------------------

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
31.94	23.76	1.25	3.04	28.05	40.00	11.95	Peak
101.78	17.60	2.29	9.26	29.15	43.50	14.35	Peak
216.24	16.92	3.50	7.65	28.07	46.00	17.93	Peak
276.38	19.34	4.08	4.56	27.98	46.00	18.02	Peak
491.72	23.07	6.37	2.53	31.97	46.00	14.03	Peak
716.76	25.06	7.18	2.74	34.98	46.00	11.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.97	24.27	1.22	9.54	35.03	40.00	4.97	Peak
93.05	16.17	2.18	12.05	30.40	43.50	13.10	Peak
164.83	16.11	2.98	8.73	27.82	43.50	15.68	Peak
243.40	18.73	3.75	4.65	27.13	46.00	18.87	Peak
321.97	20.12	4.61	7.46	32.19	46.00	13.81	Peak
415.09	22.24	5.70	3.51	31.45	46.00	14.55	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Test Antenna	WA-F-LBLB-04-056
--------------	------------------


Band Edge:

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

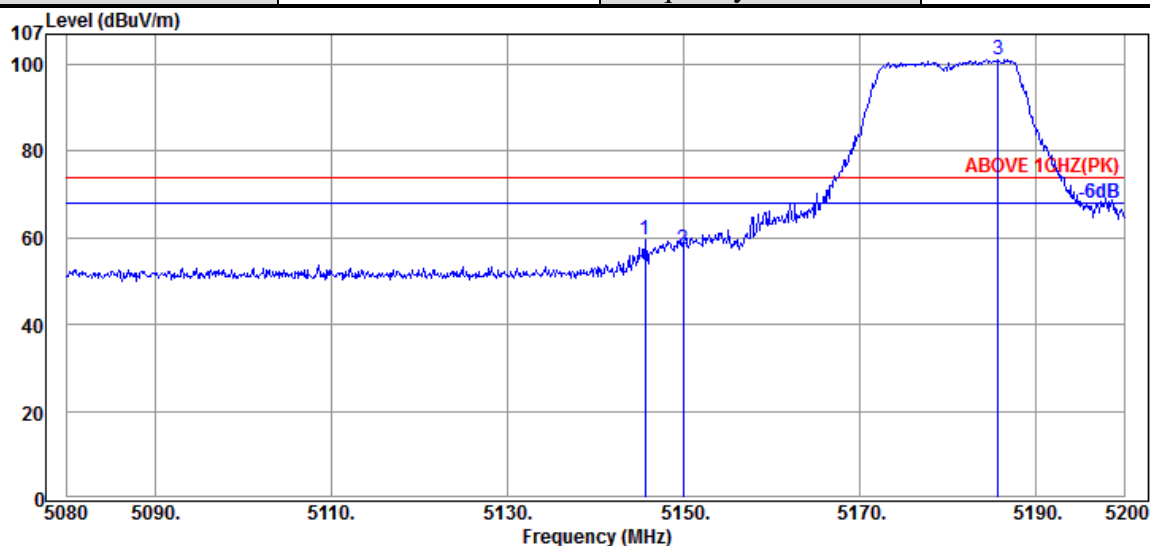

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.64	34.45	13.22	11.82	59.49	74.00	14.51	Peak
5149.960	34.45	13.22	9.59	57.26	74.00	16.74	Peak
5185.72	34.48	13.19	53.50	101.17	---	---	Peak

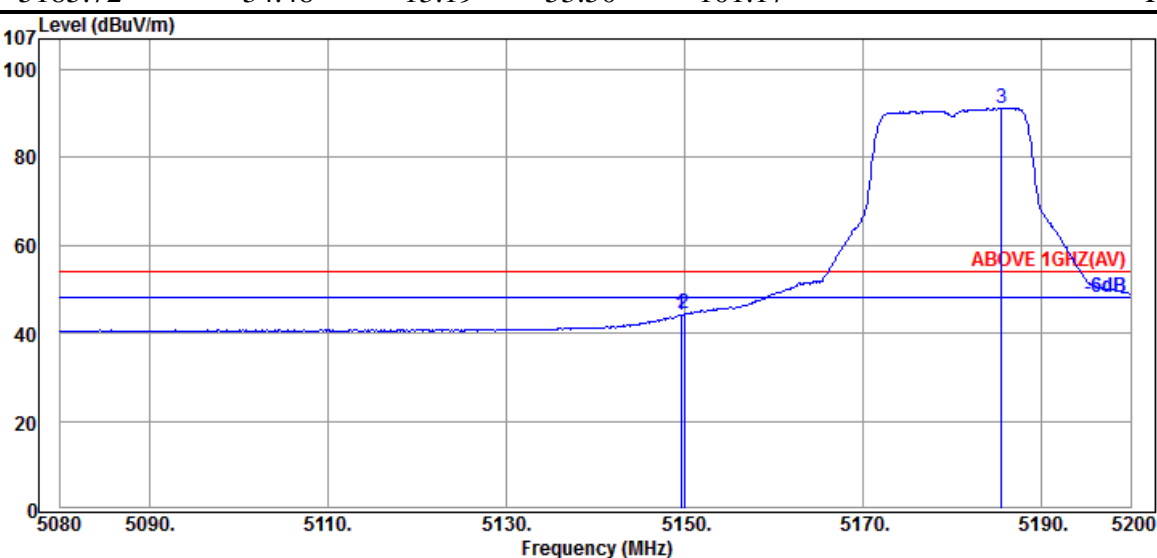

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.60	34.45	13.22	-3.63	44.04	54.00	9.96	Average
5149.96	34.45	13.22	-3.33	44.34	54.00	9.66	Average
5185.48	34.48	13.19	43.61	91.28	---	---	Average

File Number: CIM1810100

Report Number: EM-F180490

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

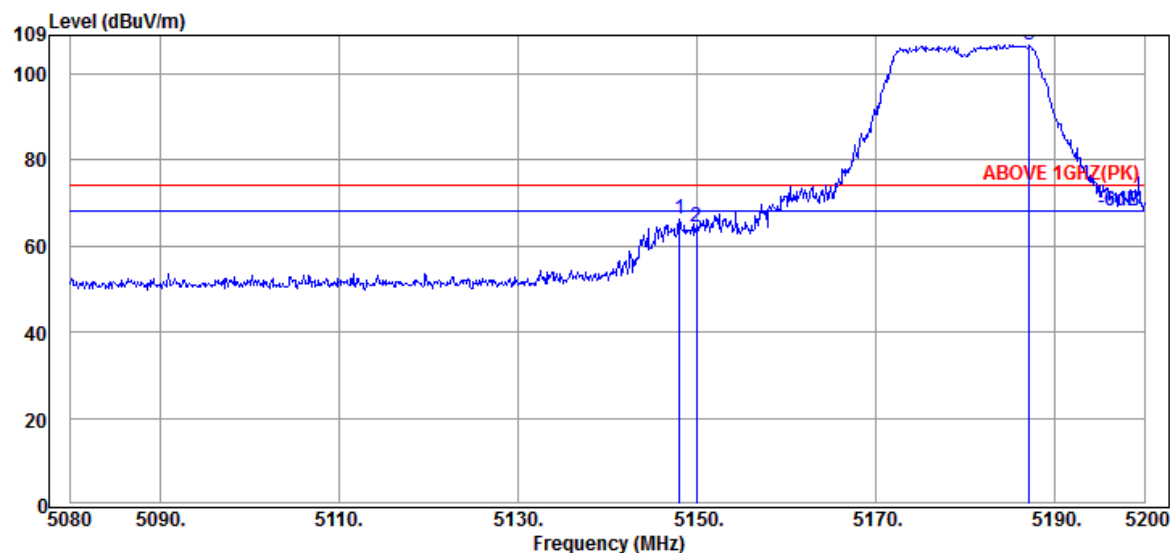

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.04	34.45	13.22	18.57	66.24	74.00	7.76	Peak
5149.96	34.45	13.22	16.76	64.43	74.00	9.57	Peak
5187.16	34.48	13.19	59.20	106.87	---	---	Peak

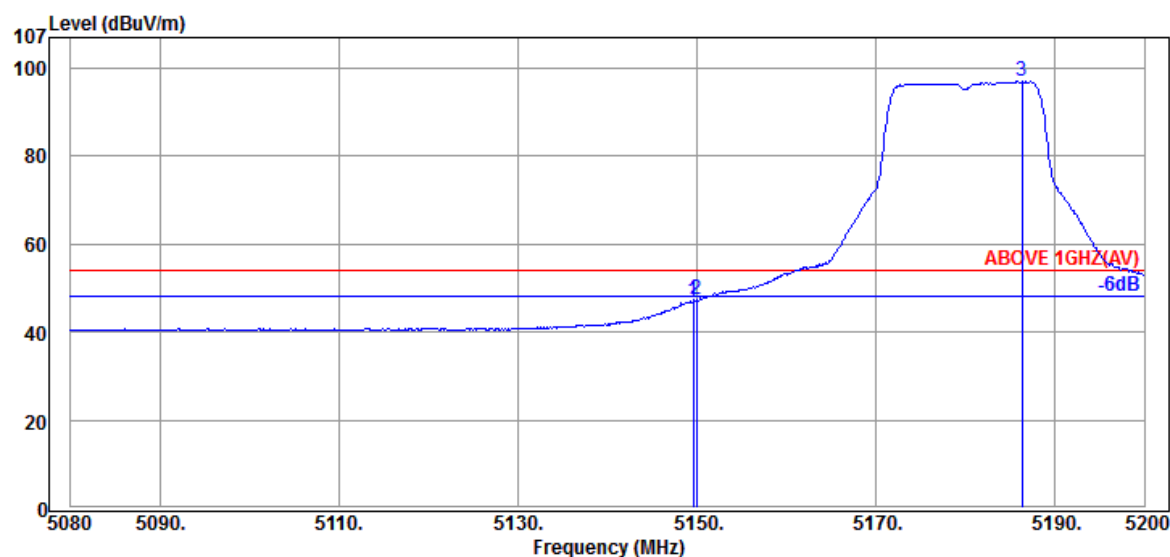

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.60	34.45	13.22	-0.71	46.96	54.00	7.04	Average
5149.96	34.45	13.22	-0.41	47.26	54.00	6.74	Average
5186.32	34.48	13.19	49.29	96.96	---	---	Average

File Number: CIM1810100

Report Number: EM-F180490


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

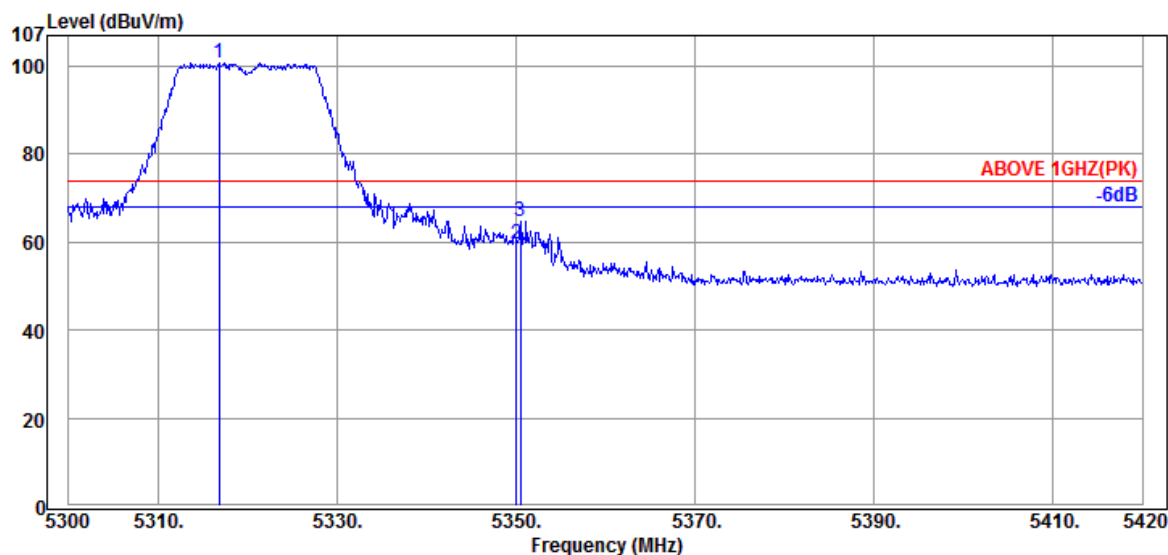

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.80	34.62	13.22	53.07	100.91	---	---	Peak
5350.04	34.65	13.31	11.76	59.72	74.00	14.28	Peak
5350.52	34.65	13.31	16.87	64.83	74.00	9.17	Peak

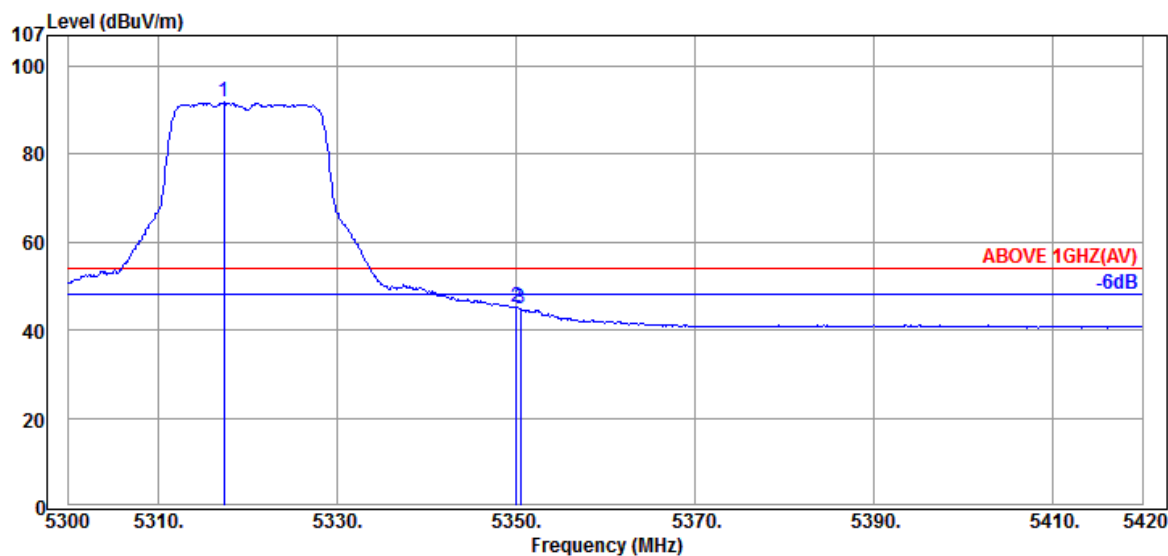


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.40	34.62	13.22	43.92	91.76	---	---	Average
5350.04	34.65	13.31	-2.75	45.21	54.00	8.79	Average
5350.52	34.65	13.31	-3.07	44.89	54.00	9.11	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

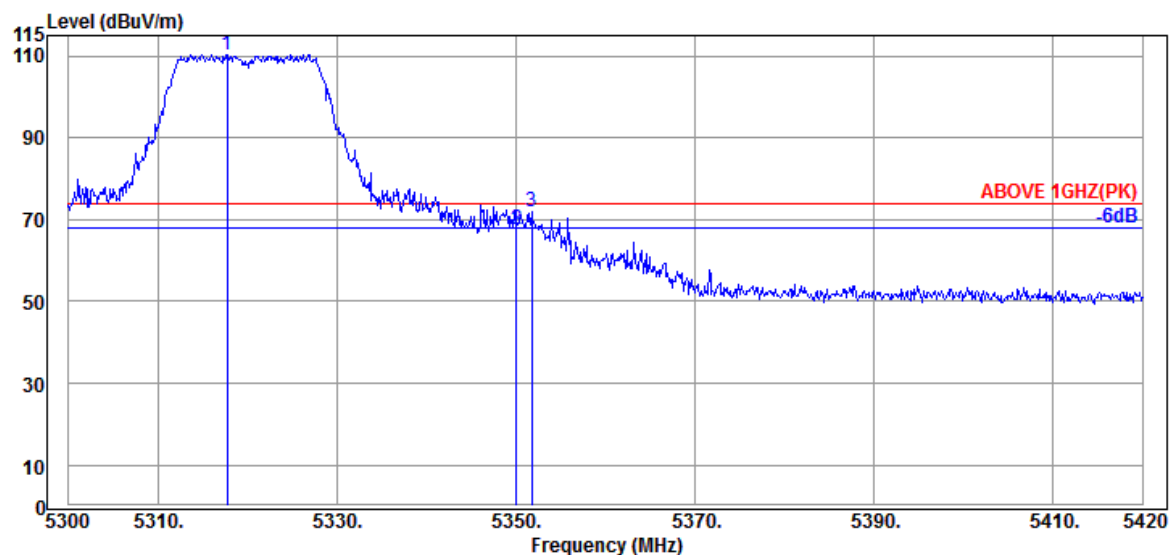

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.76	34.62	13.22	62.60	110.44	---	---	Peak
5350.04	34.65	13.31	19.52	67.48	74.00	6.52	Peak
5351.72	34.65	13.31	24.12	72.08	74.00	1.92	Peak

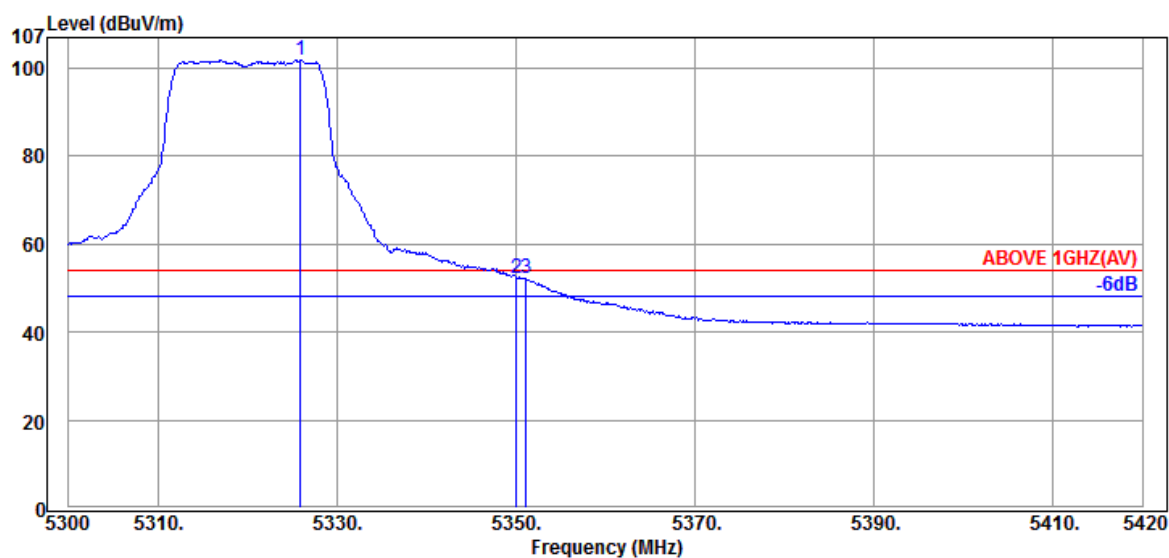


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.92	34.62	13.22	54.00	101.84	---	---	Average
5350.04	34.65	13.31	4.31	52.27	54.00	1.73	Average
5351.12	34.65	13.31	4.41	52.37	54.00	1.63	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

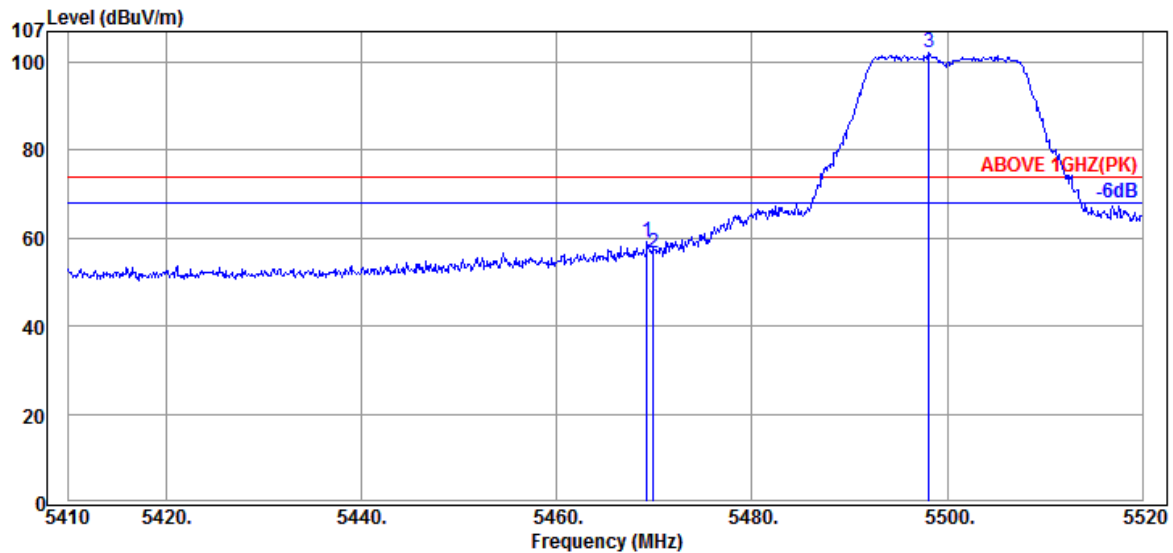

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.29	34.77	13.51	10.86	59.14	74.00	14.86	Peak
5469.95	34.77	13.51	8.36	56.64	74.00	17.36	Peak
5498.11	34.80	13.55	53.70	102.05	---	---	Peak

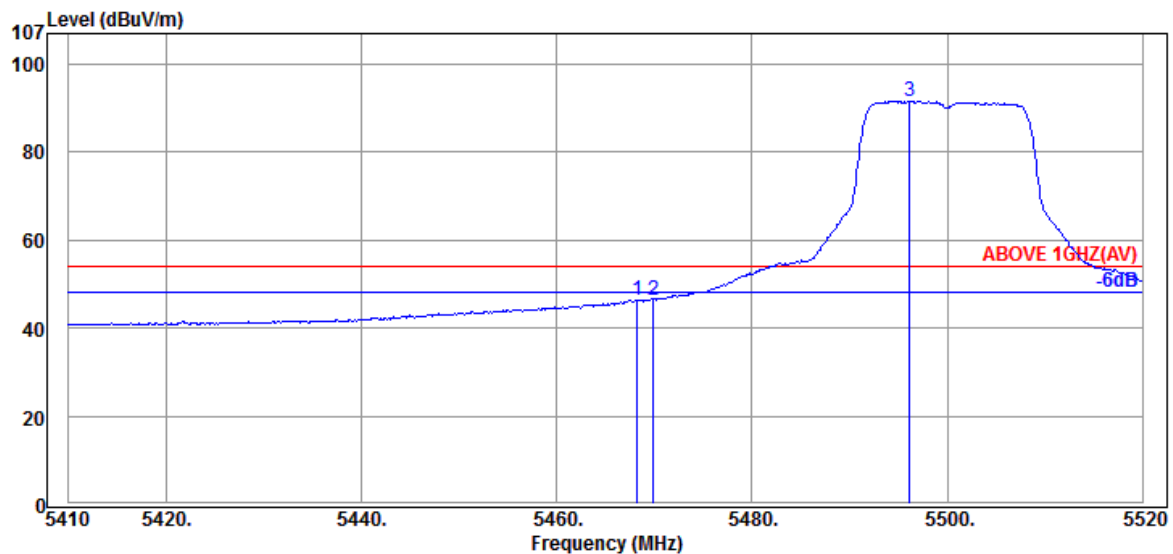


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.30	34.77	13.51	-1.81	46.47	54.00	7.53	Average
5469.95	34.77	13.51	-1.77	46.51	54.00	7.49	Average
5496.13	34.78	13.53	43.29	91.60	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

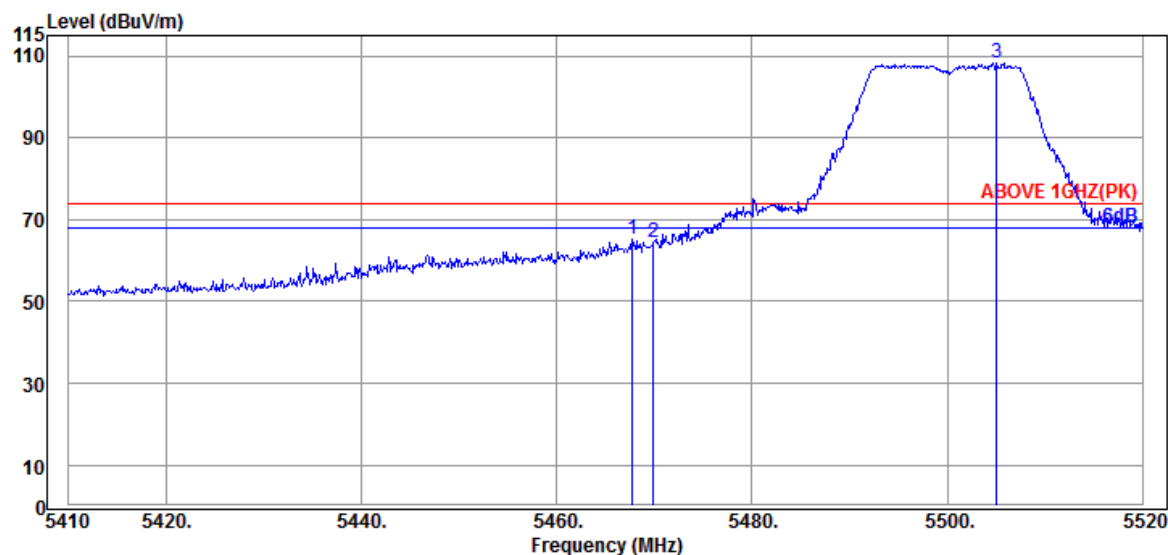

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.75	34.77	13.51	16.94	65.22	74.00	8.78	Peak
5469.95	34.77	13.51	16.17	64.45	74.00	9.55	Peak
5505.04	34.80	13.55	60.01	108.36	---	---	Peak

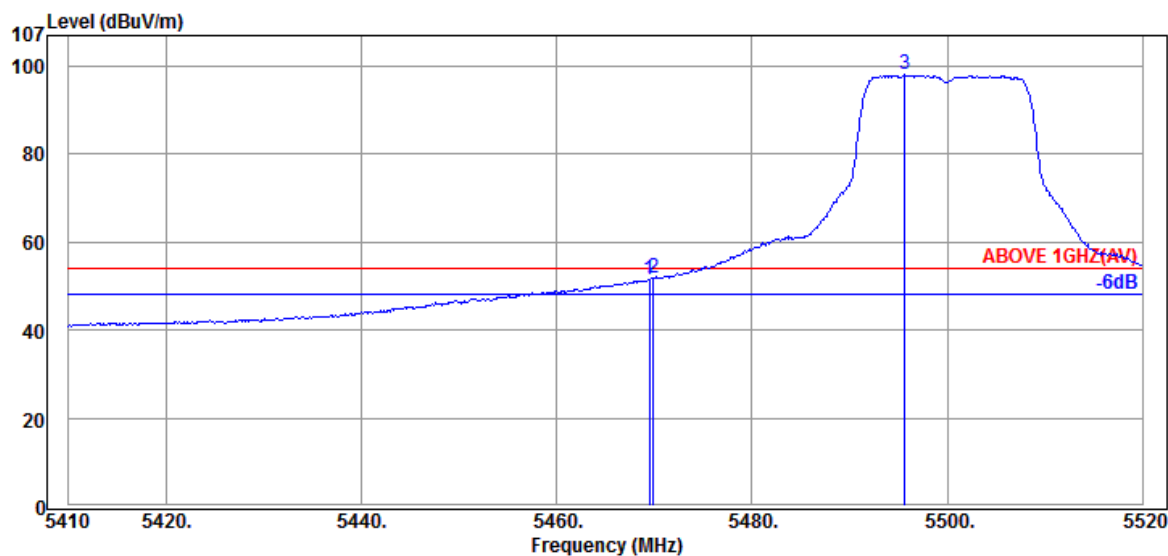

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.51	34.77	13.51	3.36	51.64	54.00	2.36	Average
5469.95	34.77	13.51	3.55	51.83	54.00	2.17	Average
5495.69	34.78	13.53	49.77	98.08	---	---	Average

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

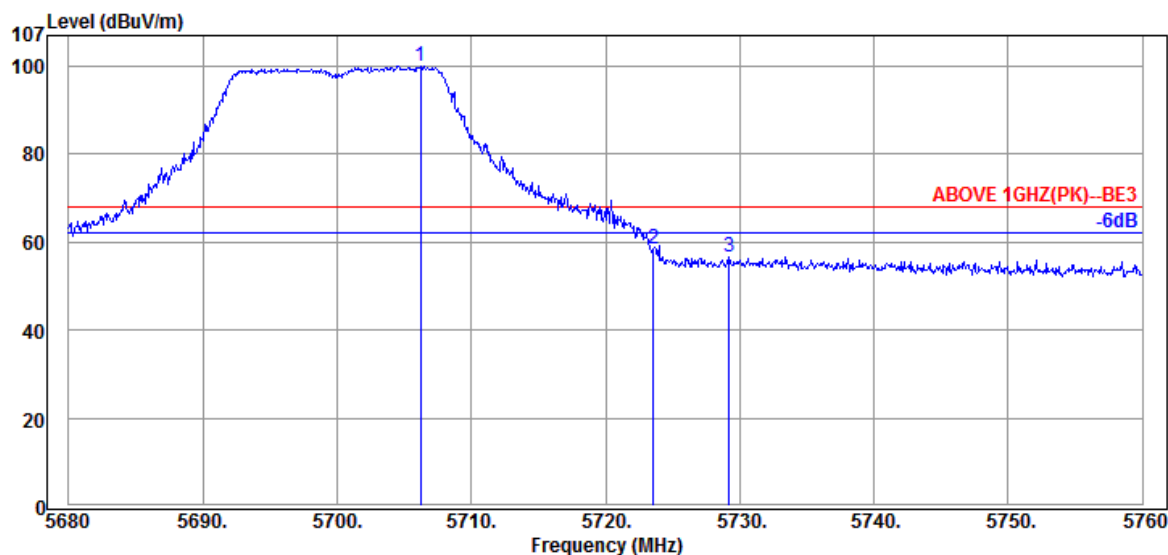

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5706.24	35.05	13.94	50.93	99.92	68.20	---	Peak
5723.60	35.07	13.98	9.31	58.36	68.20	9.84	Peak
5729.20	35.07	13.98	7.73	56.78	68.20	11.42	Peak

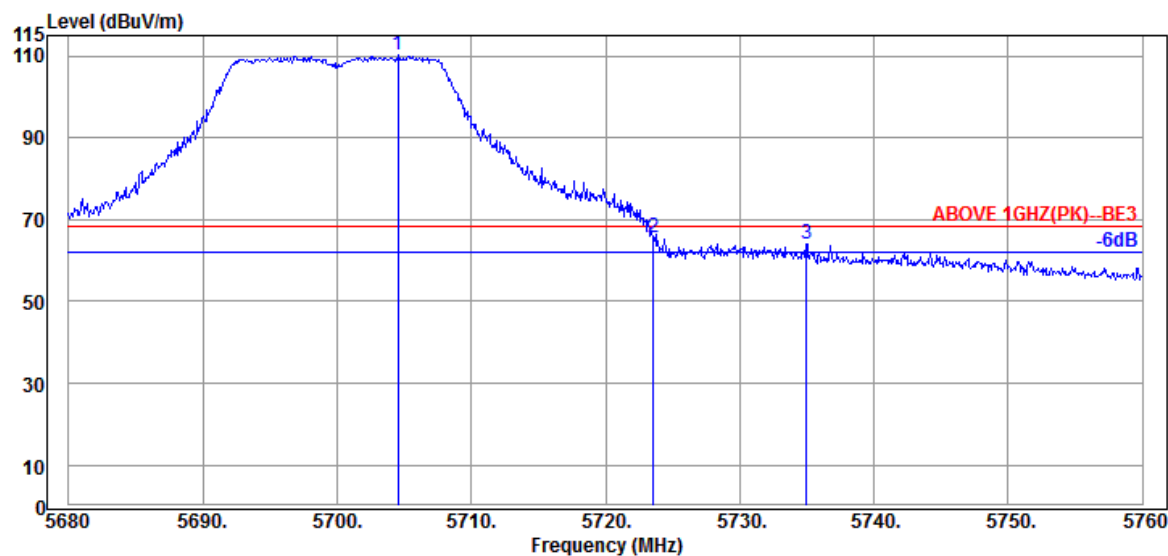


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5704.56	35.05	13.94	61.35	110.34	68.20	---	Peak
5723.60	35.07	13.98	16.69	65.74	68.20	2.46	Peak
5734.96	35.09	14.02	14.91	64.02	68.20	4.18	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

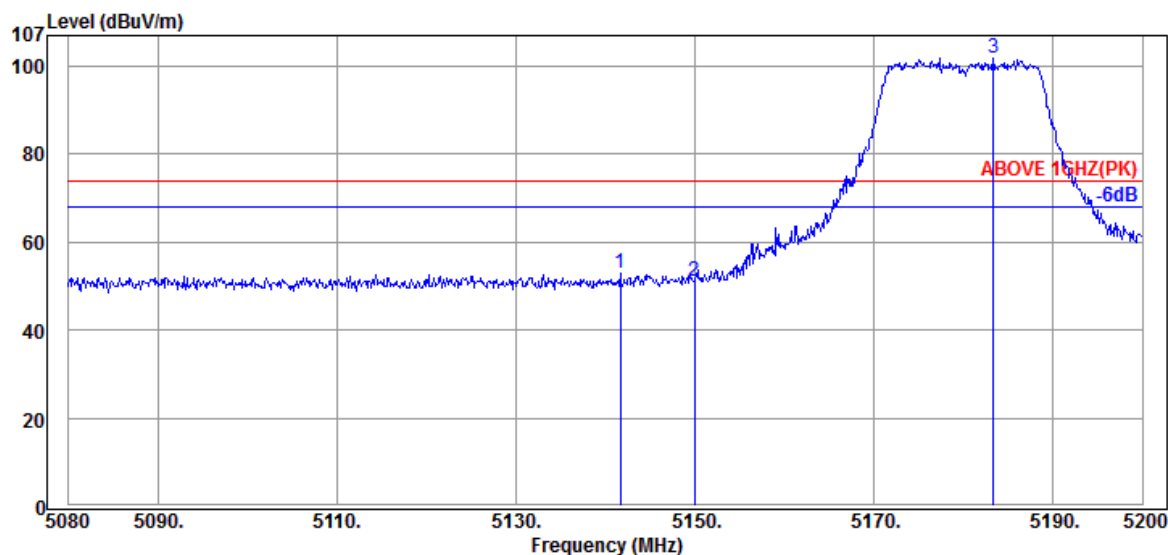

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.68	34.45	13.22	5.26	52.93	74.00	21.07	Peak
5149.96	34.45	13.22	3.42	51.09	74.00	22.91	Peak
5183.32	34.48	13.19	54.10	101.77	---	---	Peak

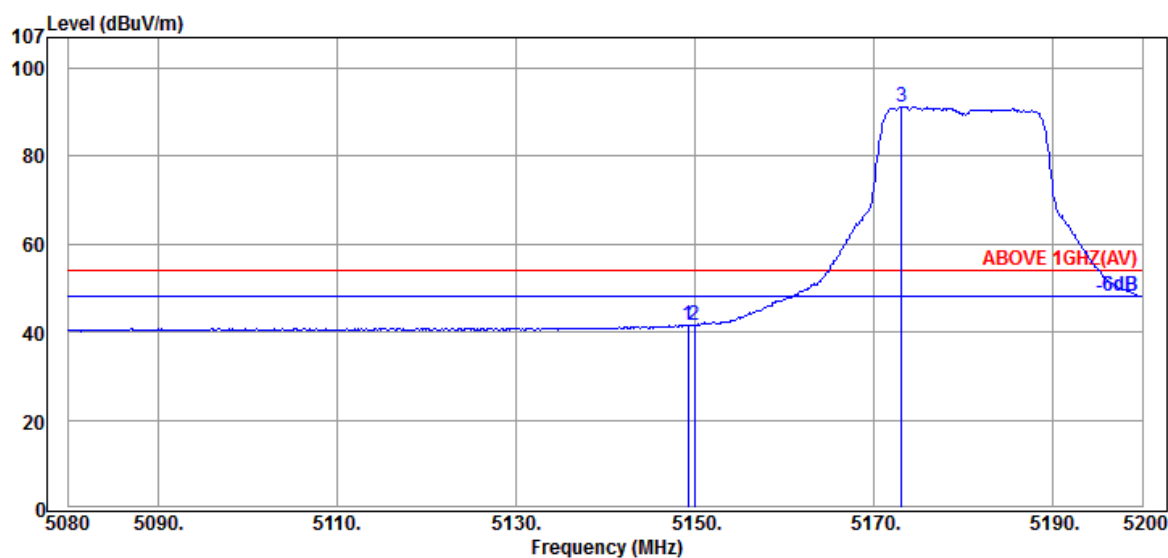


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.24	34.45	13.22	-6.05	41.62	54.00	12.38	Average
5149.96	34.45	13.22	-6.02	41.65	54.00	12.35	Average
5173.12	34.47	13.20	43.52	91.19	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

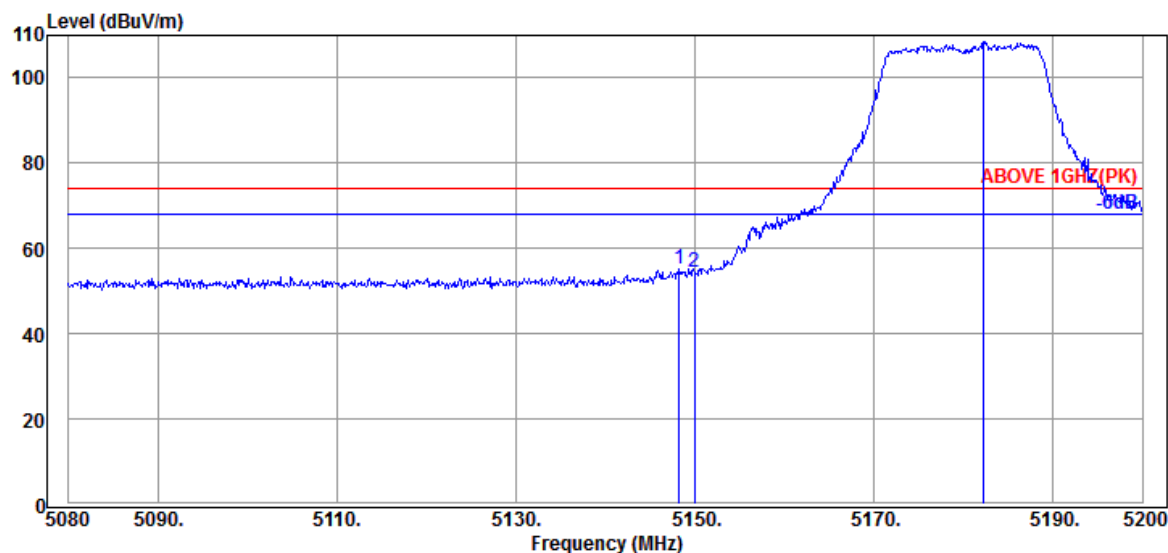

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5148.28	34.45	13.22	7.70	55.37	74.00	18.63	Peak
5149.96	34.45	13.22	6.59	54.26	74.00	19.74	Peak
5182.24	34.48	13.19	60.71	108.38	---	---	Peak

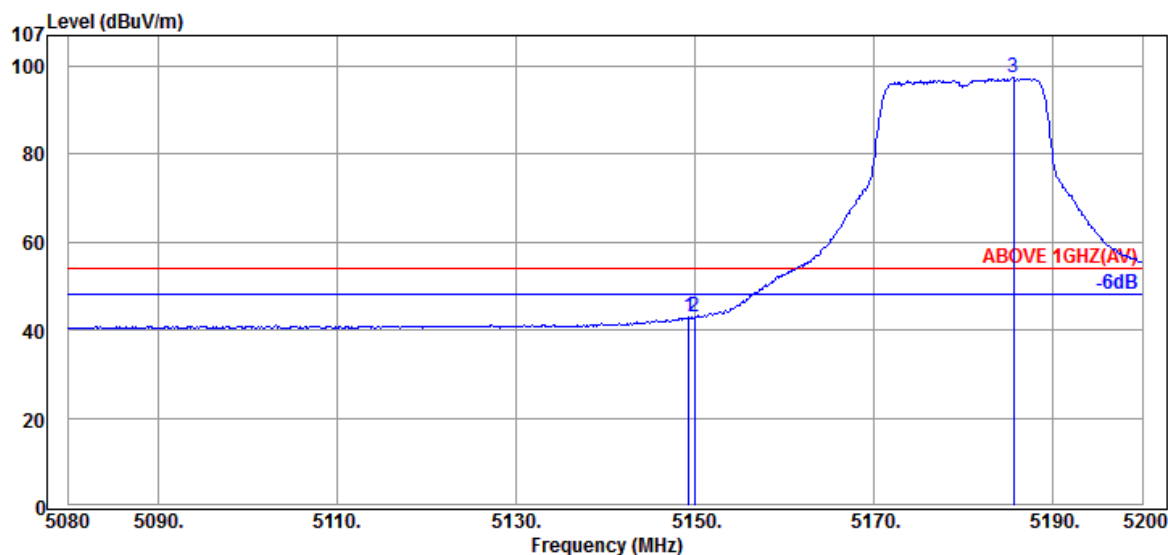


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.36	34.45	13.22	-4.75	42.92	54.00	11.08	Average
5149.96	34.45	13.22	-4.60	43.07	54.00	10.93	Average
5185.60	34.48	13.19	49.64	97.31	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

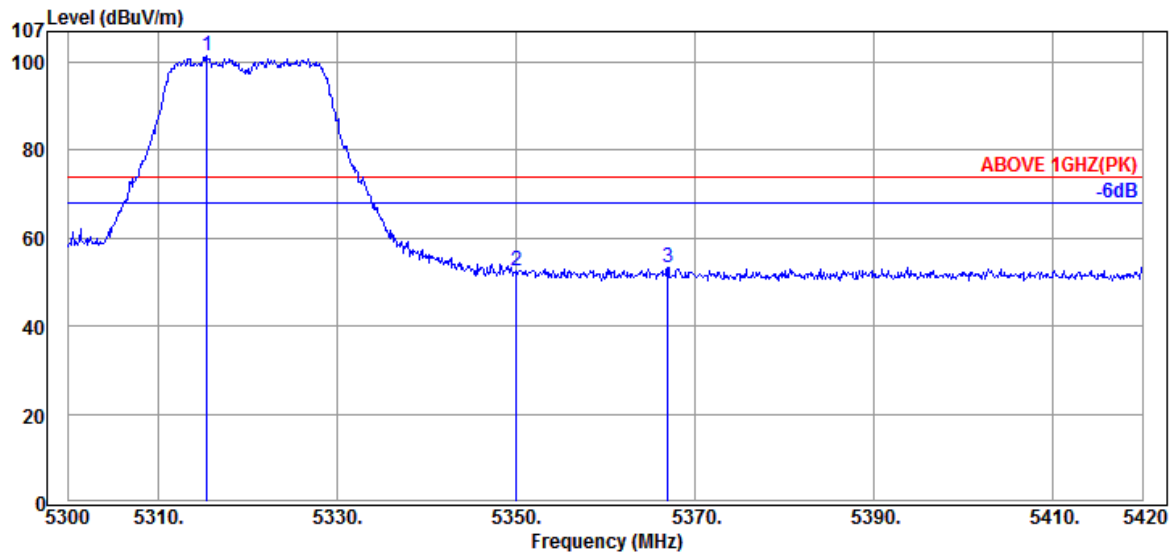

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.48	34.62	13.22	53.64	101.48	---	---	Peak
5350.04	34.65	13.31	4.63	52.59	74.00	21.41	Peak
5366.96	34.67	13.35	5.32	53.34	74.00	20.66	Peak

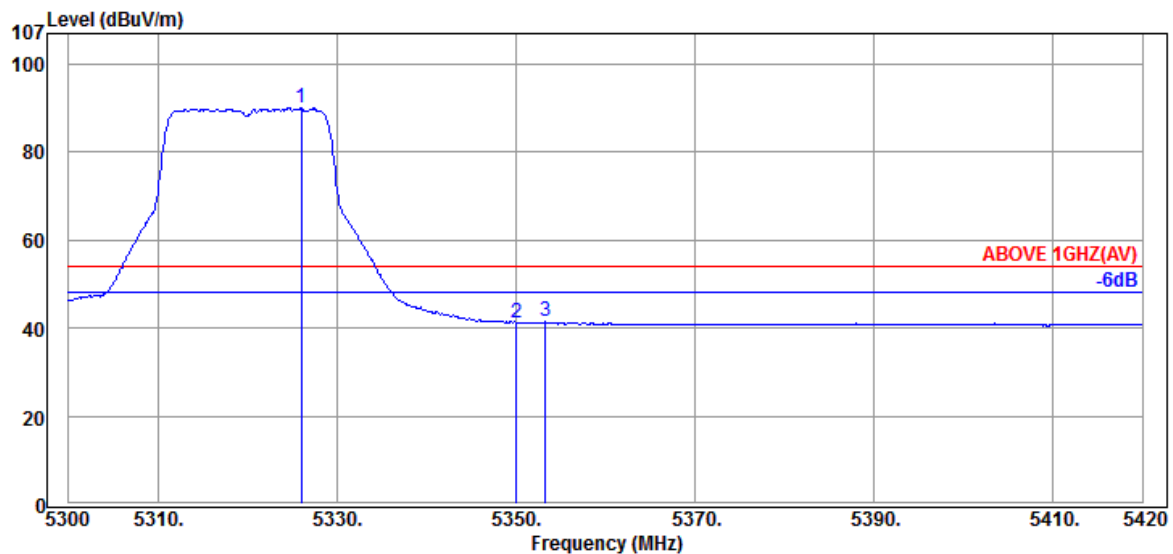


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5326.04	34.62	13.22	42.25	90.09	---	---	Average
5350.04	34.65	13.31	-6.66	41.30	54.00	12.70	Average
5353.28	34.65	13.31	-6.44	41.52	54.00	12.48	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

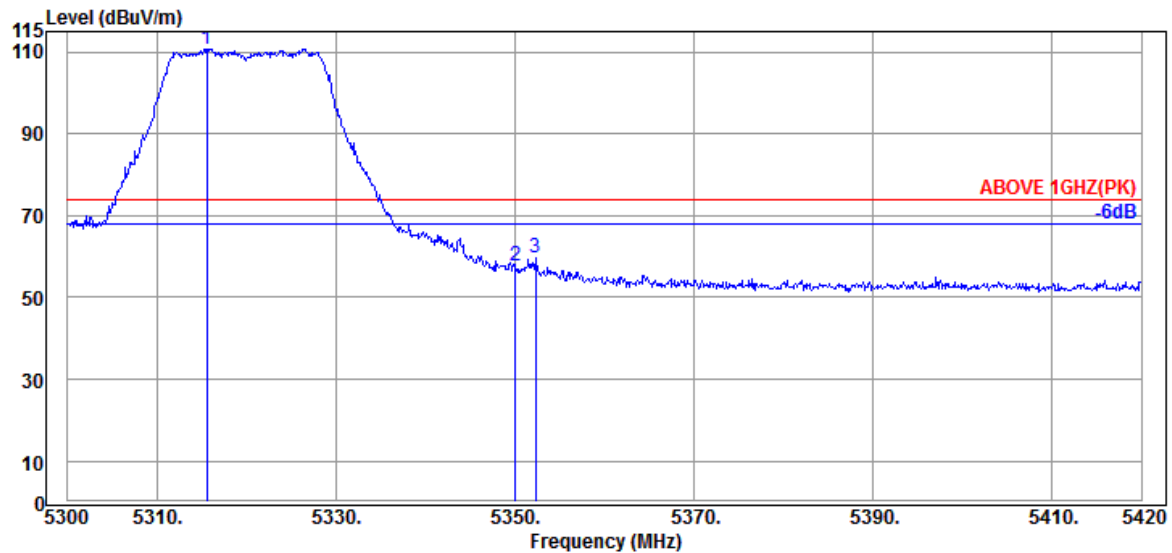

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5315.60	34.62	13.22	62.73	110.57	---	---	Peak
5350.04	34.65	13.31	9.79	57.75	74.00	16.25	Peak
5352.32	34.65	13.31	11.63	59.59	74.00	14.41	Peak

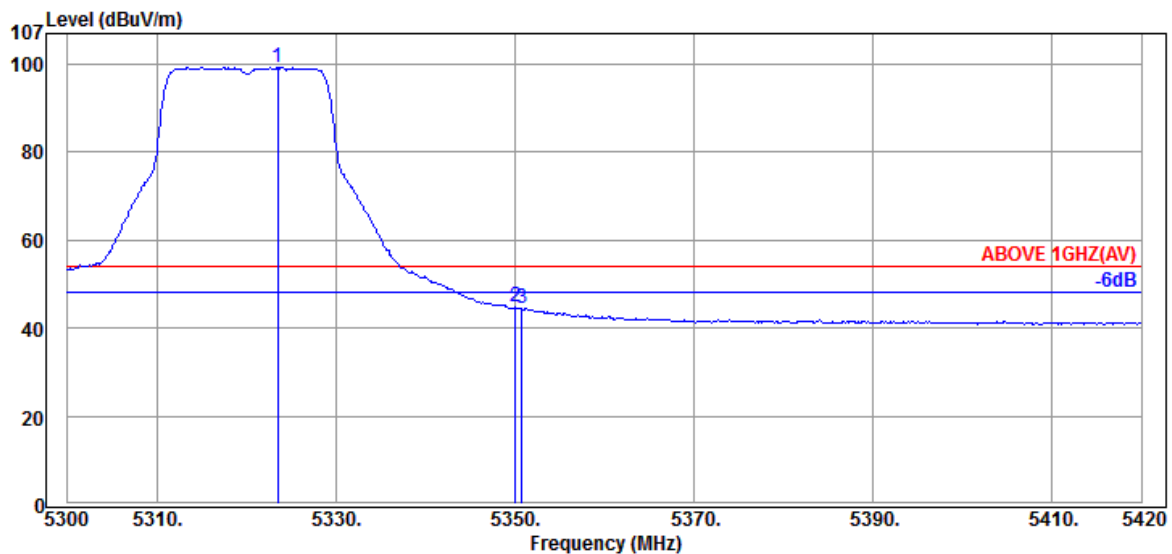


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5323.52	34.62	13.22	51.47	99.31	54.00	---	Average
5350.04	34.65	13.31	-3.22	44.74	54.00	9.26	Average
5350.76	34.65	13.31	-3.33	44.63	54.00	9.37	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

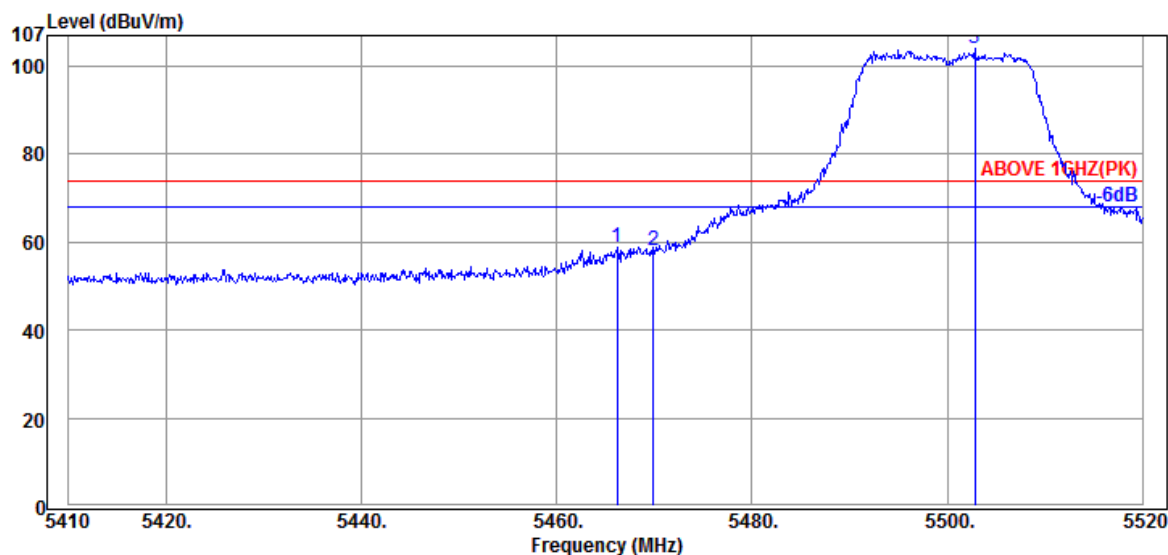

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.21	34.77	13.51	10.67	58.95	74.00	15.05	Peak
5469.95	34.77	13.51	9.74	58.02	74.00	15.98	Peak
5502.84	34.80	13.55	55.66	104.01	---	---	Peak

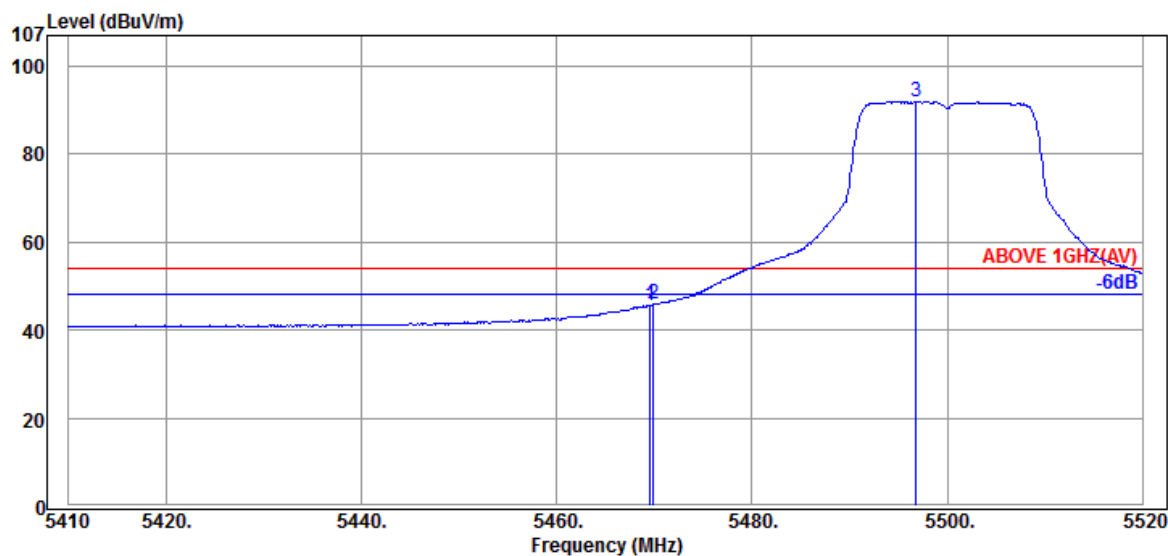


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.62	34.77	13.51	-2.56	45.72	54.00	8.28	Average
5469.95	34.77	13.51	-2.16	46.12	54.00	7.88	Average
5496.79	34.80	13.55	43.73	92.08	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

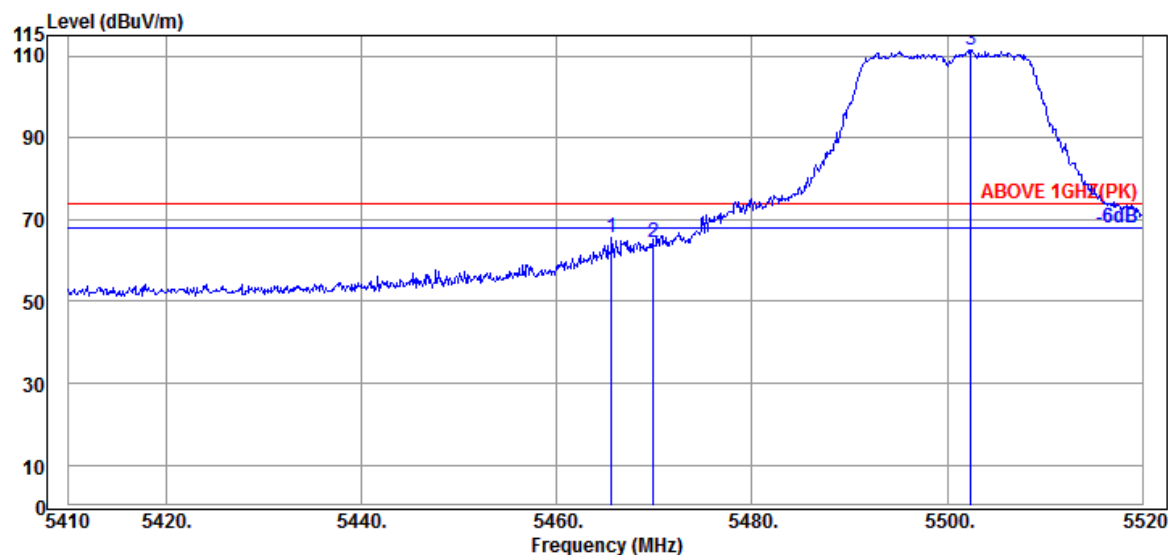

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.66	34.77	13.51	17.22	65.50	74.00	8.50	Peak
5469.95	34.77	13.51	16.16	64.44	74.00	9.56	Peak
5502.40	34.80	13.55	62.99	111.34	---	---	Peak

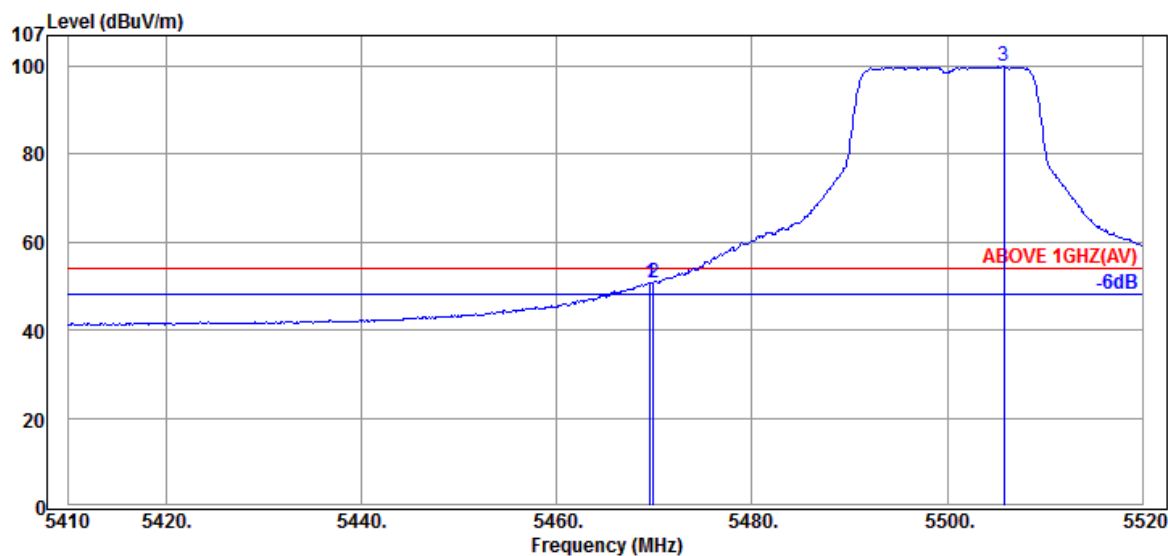


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.62	34.77	13.51	2.53	50.81	54.00	3.19	Average
5469.95	34.77	13.51	2.55	50.83	54.00	3.17	Average
5505.81	34.80	13.55	51.54	99.89	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

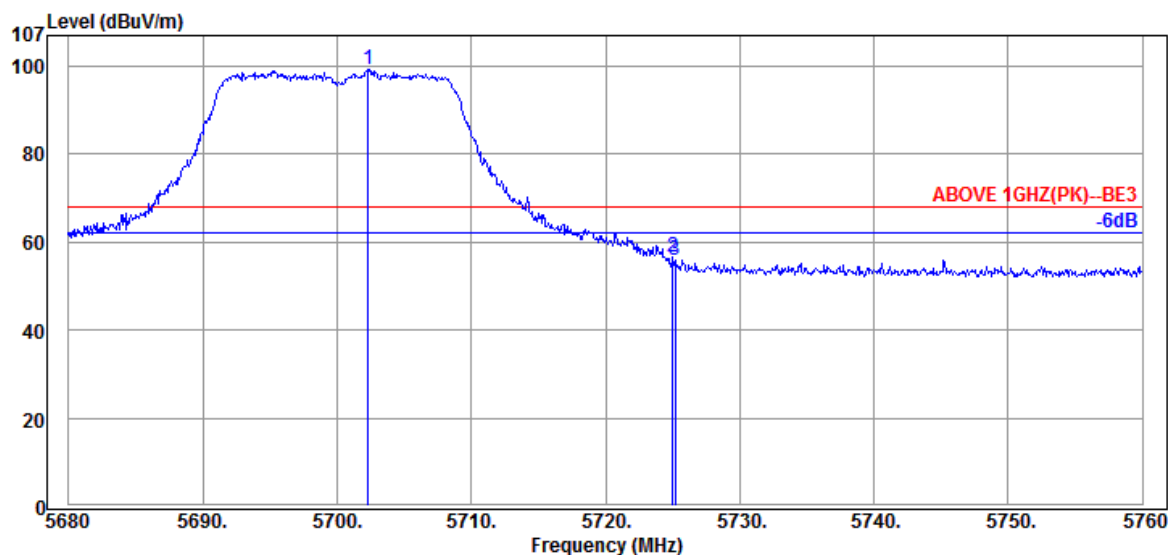

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.32	35.05	13.94	50.18	99.17	68.20	---	Peak
5725.04	35.07	13.98	7.47	56.52	68.20	11.68	Peak
5725.20	35.07	13.98	6.93	55.98	68.20	12.22	Peak

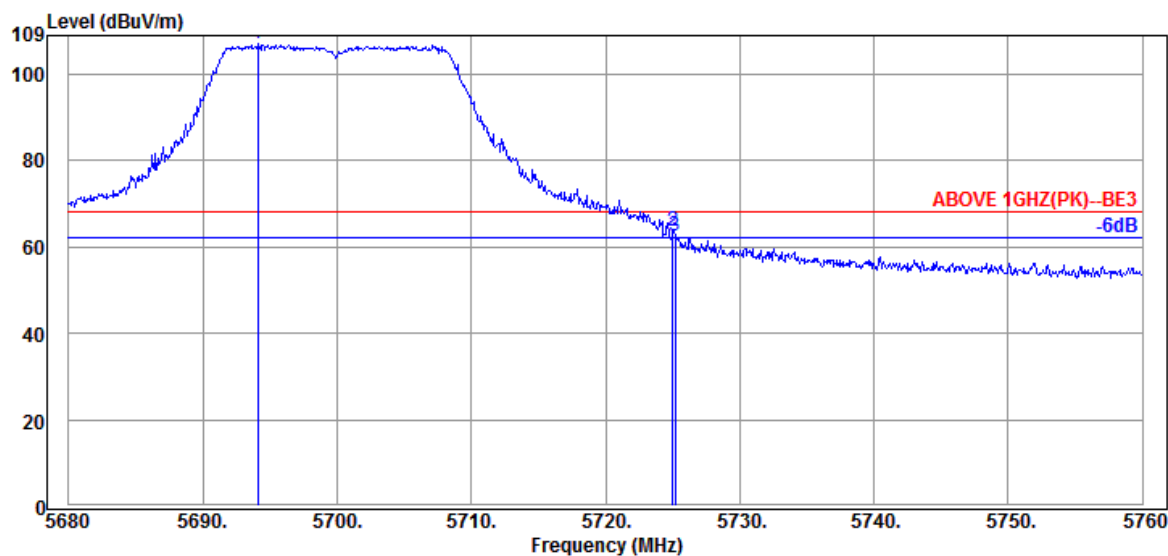


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5694.08	35.03	13.90	58.07	107.00	68.20	---	Peak
5725.04	35.07	13.98	14.47	63.52	68.20	4.68	Peak
5725.20	35.07	13.98	13.57	62.62	68.20	5.58	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

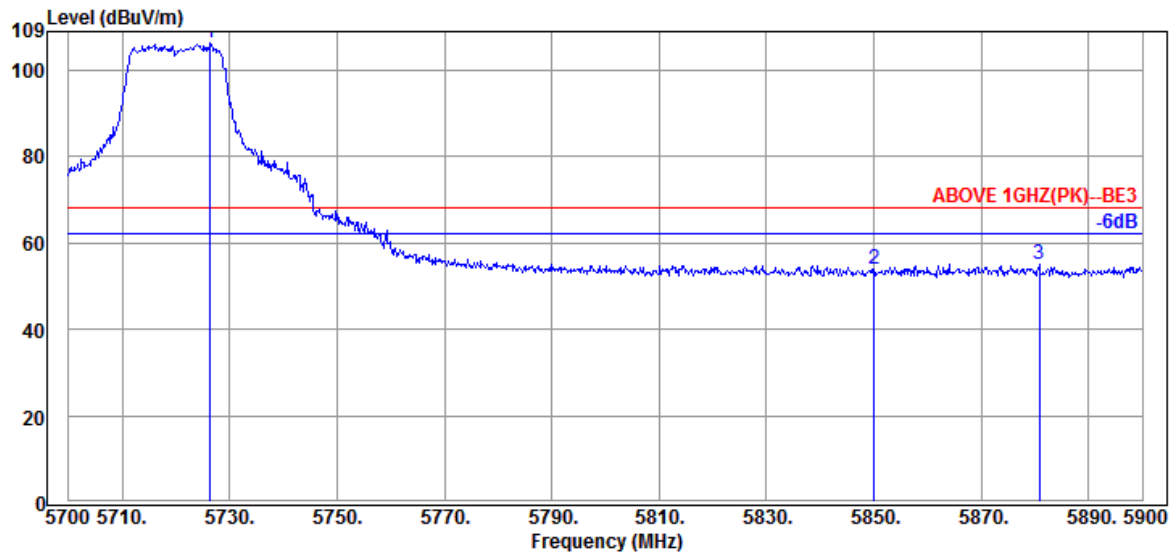

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5726.40	35.07	13.98	57.20	106.25	68.20	---	Peak
5850.00	35.21	14.25	4.43	53.89	68.20	14.31	Peak
5880.80	35.26	14.32	5.62	55.20	68.20	13.00	Peak

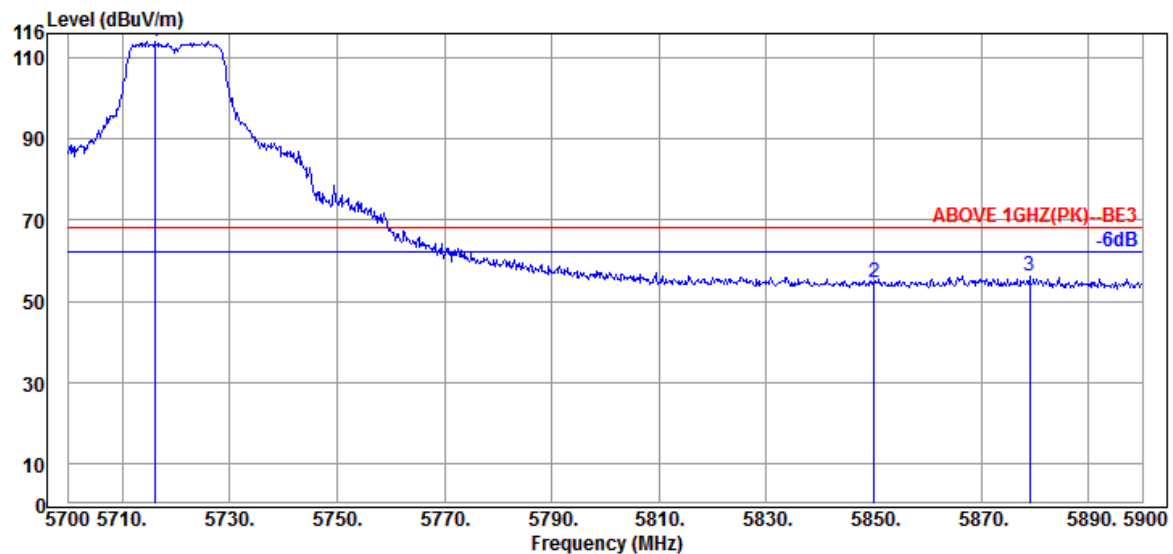


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5716.20	35.05	13.94	64.93	113.92	68.20	---	Peak
5850.00	35.21	14.25	4.98	54.44	68.20	13.76	Peak
5879.00	35.26	14.32	6.66	56.24	68.20	11.96	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

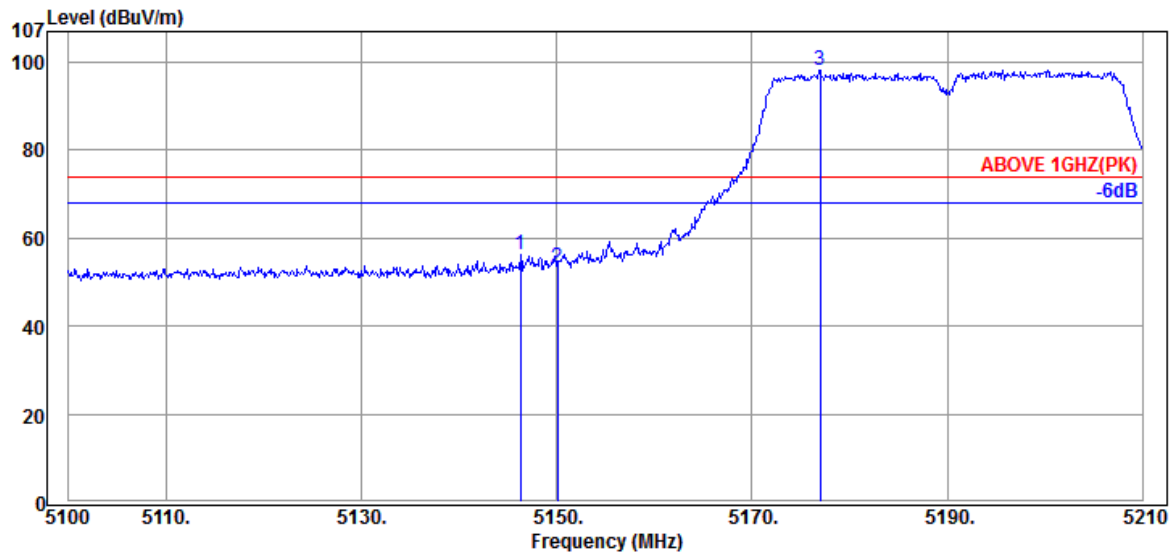

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.31	34.45	13.22	8.44	56.11	74.00	17.89	Peak
5150.05	34.45	13.22	5.71	53.38	74.00	20.62	Peak
5177.00	34.48	13.19	50.66	98.33	---	---	Peak

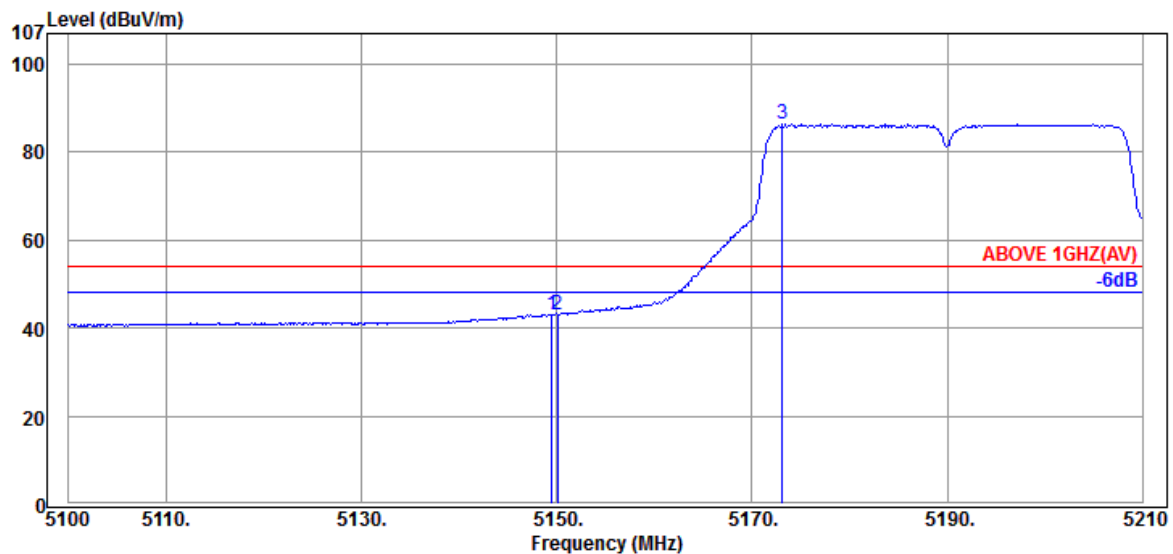

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	34.45	13.22	-4.50	43.17	54.00	10.83	Average
5150.05	34.45	13.22	-4.54	43.13	54.00	10.87	Average
5173.15	34.47	13.20	38.70	86.37	---	---	Average

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

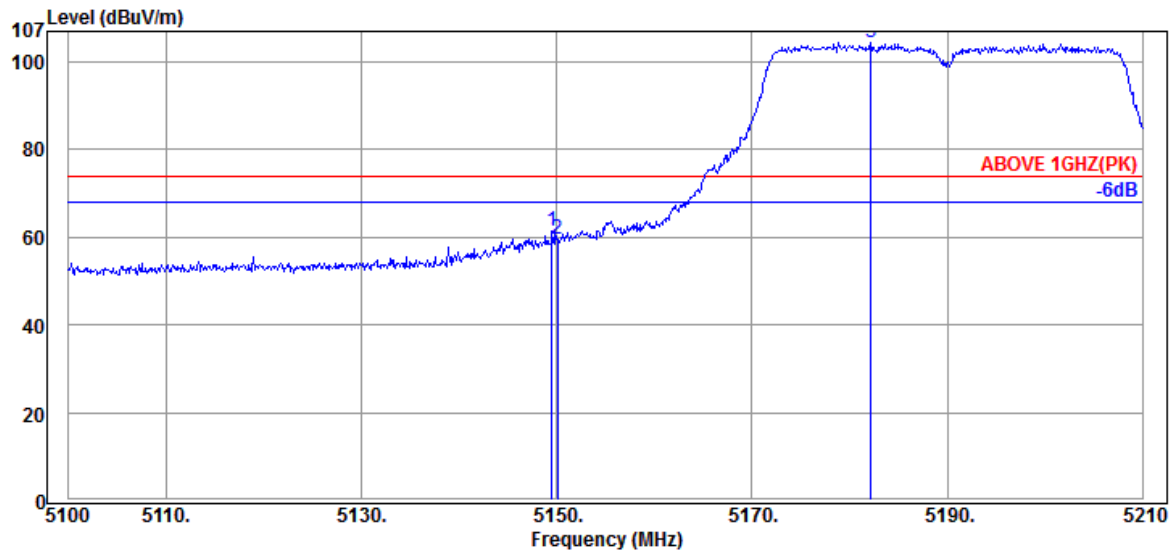

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	34.45	13.22	13.80	61.47	74.00	12.53	Peak
5150.05	34.45	13.22	11.76	59.43	74.00	14.57	Peak
5182.17	34.48	13.19	56.92	104.59	---	---	Peak

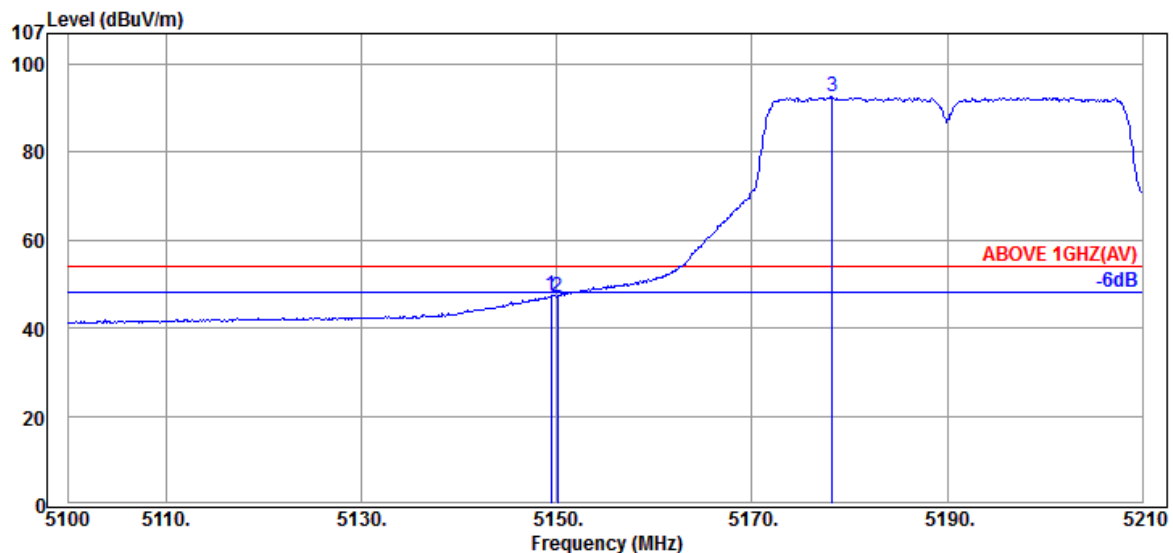

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.39	34.45	13.22	-0.25	47.42	54.00	6.58	Average
5150.05	34.45	13.22	-0.51	47.16	54.00	6.84	Average
5178.21	34.48	13.19	44.90	92.57	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

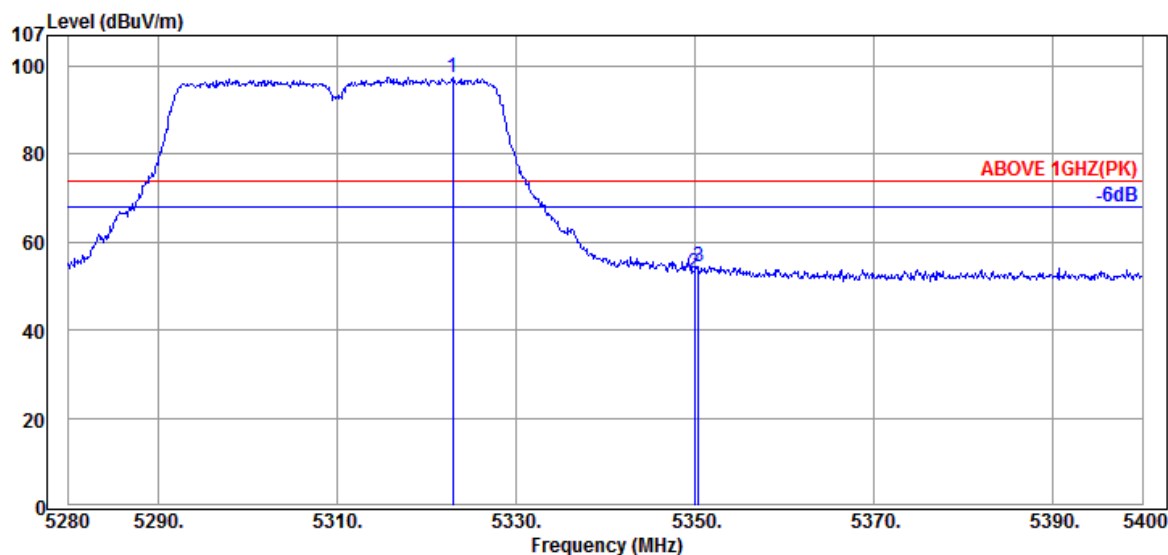

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5322.96	34.62	13.22	49.60	97.44	---	---	Peak
5349.96	34.65	13.31	5.00	52.96	74.00	21.04	Peak
5350.44	34.65	13.31	6.43	54.39	74.00	19.61	Peak

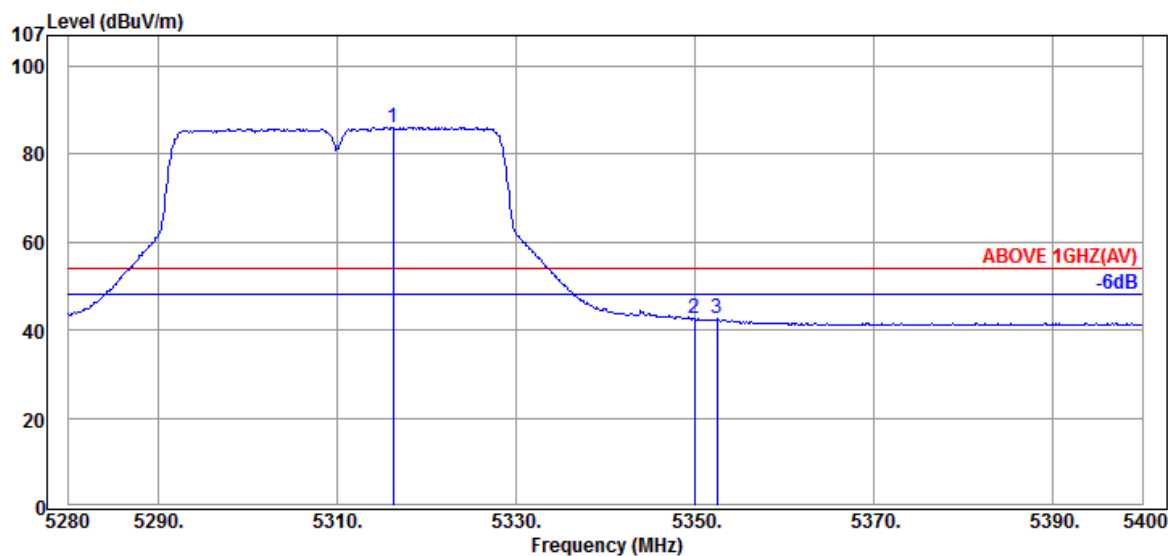

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.24	34.62	13.22	38.26	86.10	---	---	Average
5349.96	34.65	13.31	-5.27	42.69	54.00	11.31	Average
5352.48	34.65	13.31	-5.38	42.58	54.00	11.42	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

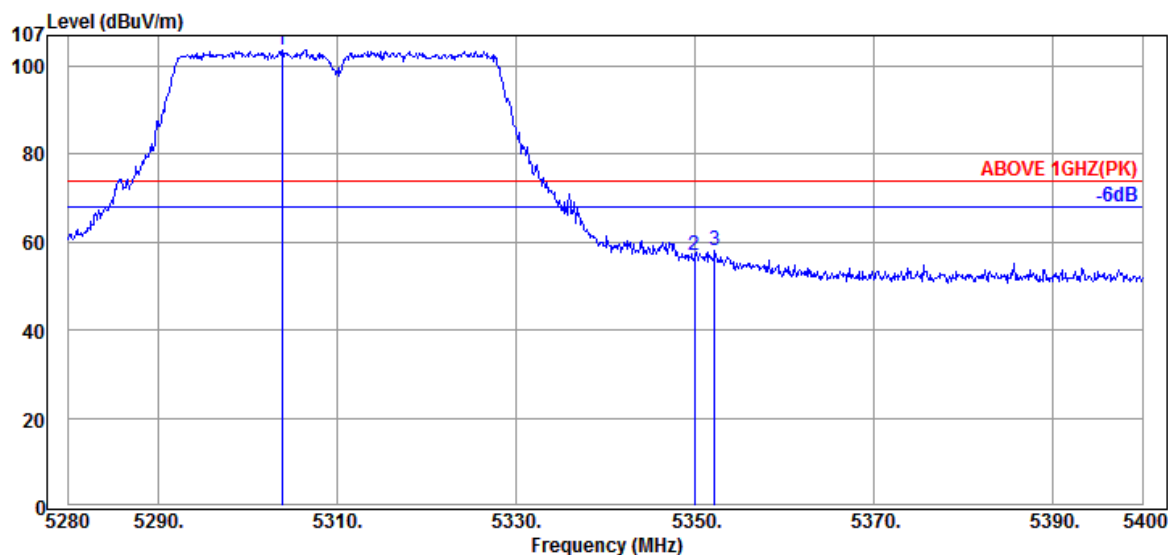

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5303.88	34.60	13.17	56.00	103.77	---	---	Peak
5349.96	34.65	13.31	9.07	57.03	74.00	16.97	Peak
5352.24	34.65	13.31	10.17	58.13	74.00	15.87	Peak

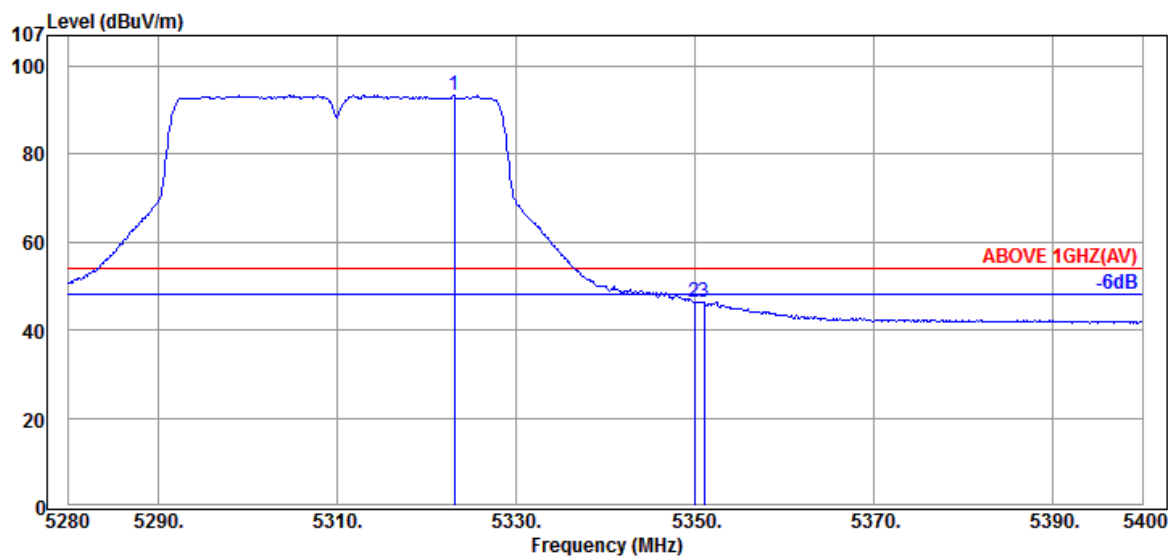


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5323.08	34.62	13.22	45.54	93.38	---	---	Average
5349.96	34.65	13.31	-1.63	46.33	54.00	7.67	Average
5351.04	34.65	13.31	-1.45	46.51	54.00	7.49	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

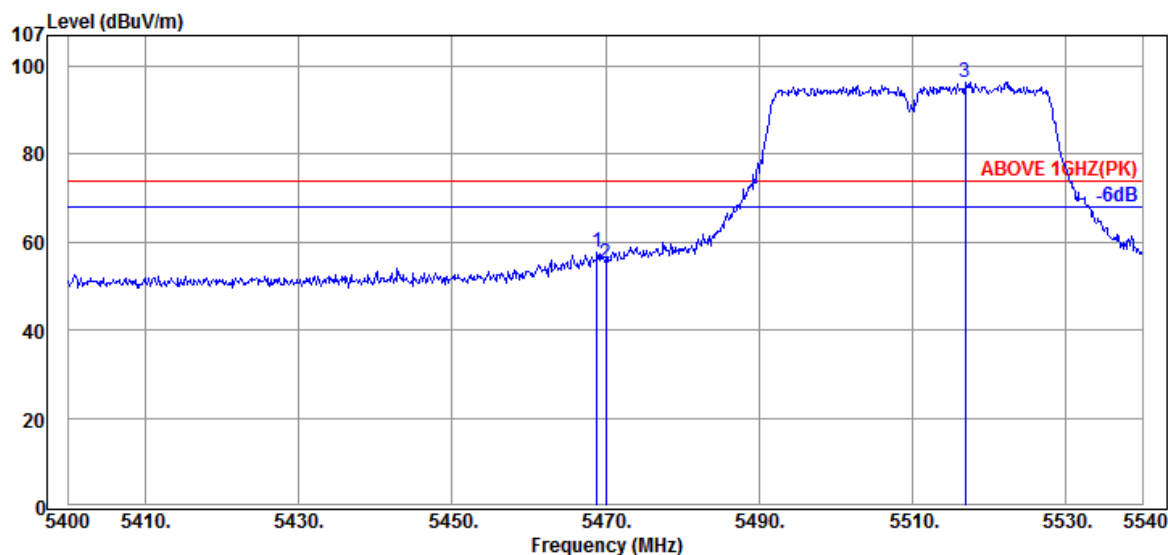

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.88	34.77	13.51	9.48	57.76	74.00	16.24	Peak
5470.00	34.77	13.51	6.71	54.99	74.00	19.01	Peak
5516.90	34.82	13.58	48.04	96.44	---	---	Peak

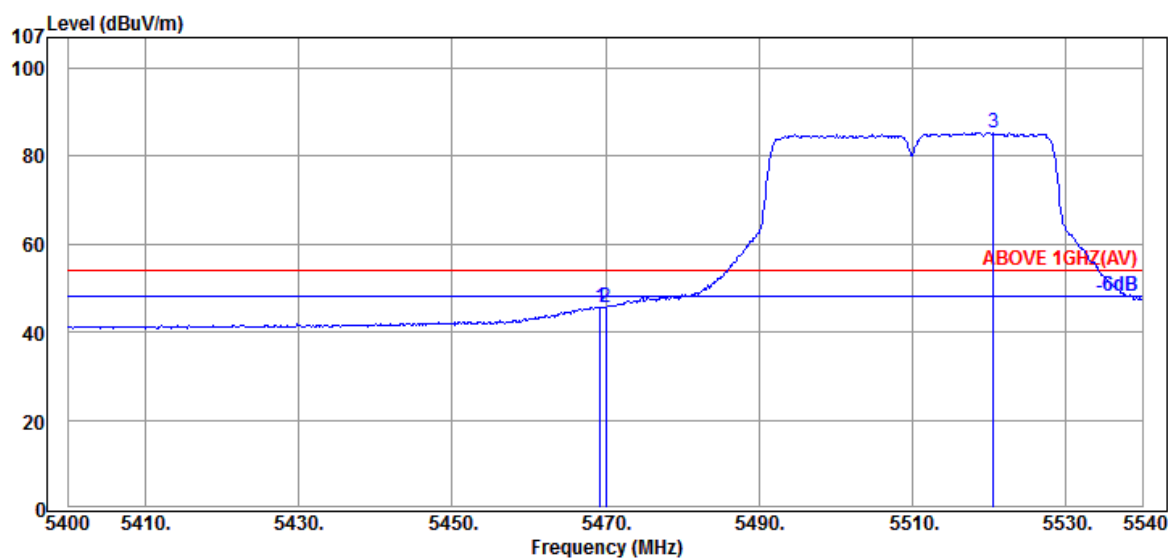


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.30	34.77	13.51	-2.51	45.77	54.00	8.23	Average
5470.00	34.77	13.51	-2.58	45.70	54.00	8.30	Average
5520.54	34.82	13.58	37.02	85.42	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

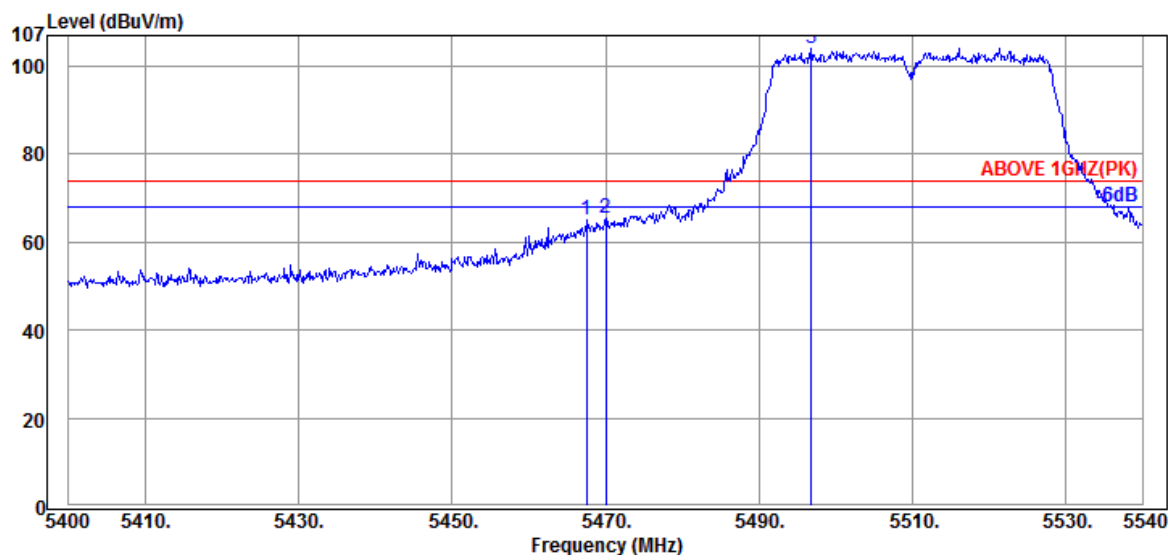

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.48	34.77	13.51	16.63	64.91	74.00	9.09	Peak
5470.00	34.77	13.51	17.27	65.55	74.00	8.45	Peak
5496.88	34.80	13.55	55.81	104.16	---	---	Peak

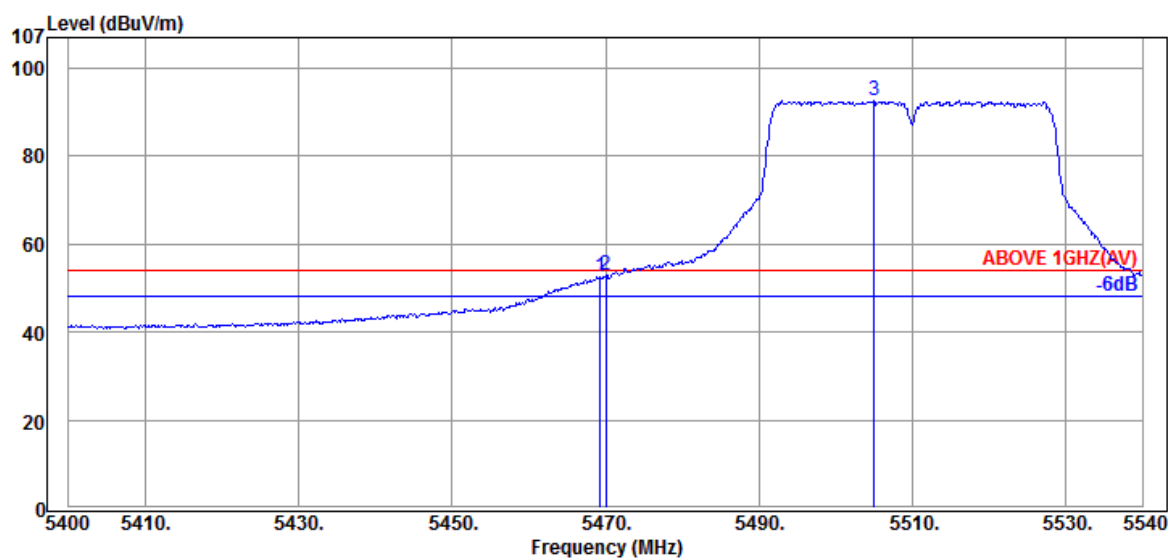

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.30	34.77	13.51	4.24	52.52	54.00	1.48	Average
5470.00	34.77	13.51	4.58	52.86	54.00	1.14	Average
5505.00	34.80	13.55	44.24	92.59	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

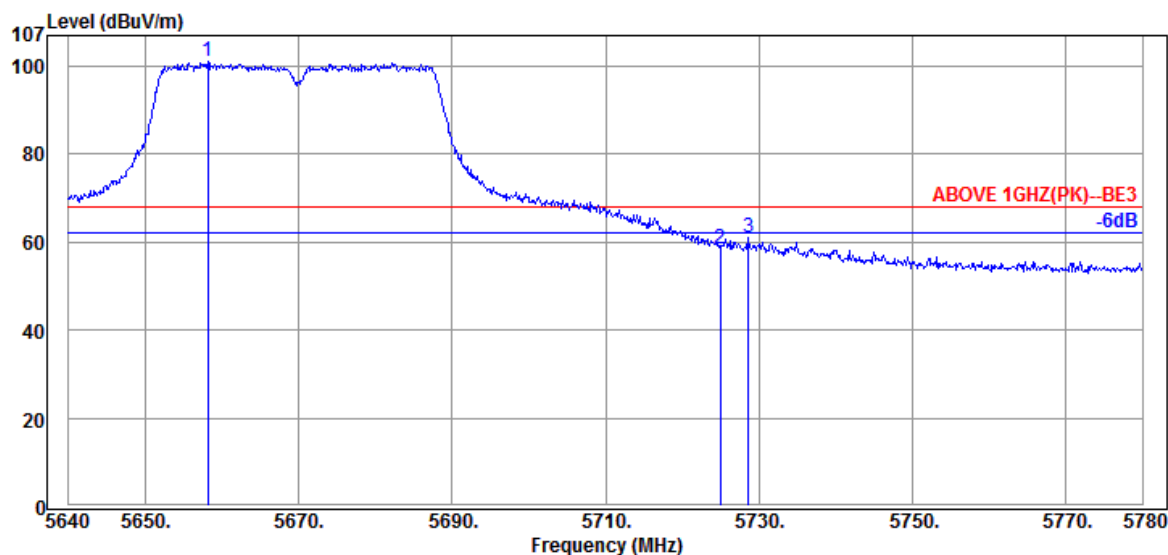

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5658.20	34.99	13.83	52.12	100.94	68.20	---	Peak
5724.98	35.07	13.98	9.58	58.63	68.20	9.57	Peak
5728.62	35.07	13.98	11.90	60.95	68.20	7.25	Peak

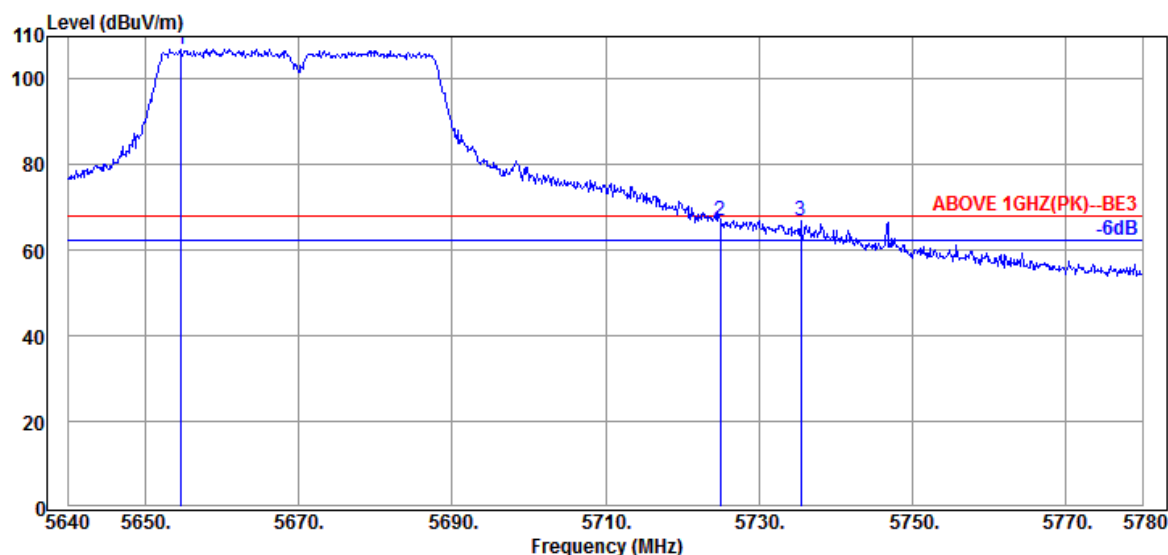

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5654.70	34.99	13.83	58.34	107.16	68.20	---	Peak
5724.98	35.07	13.98	17.90	66.95	68.20	1.25	Peak
5735.48	35.09	14.02	17.76	66.87	68.20	1.33	Peak

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

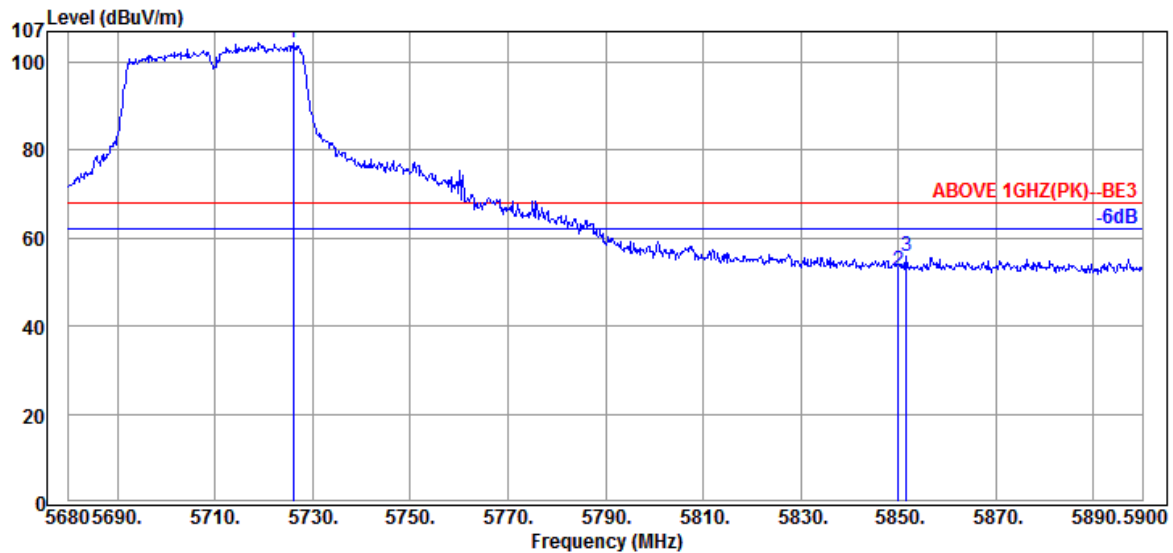

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5725.98	35.07	13.98	55.41	104.46	68.20	---	Peak
5850.06	35.21	14.25	3.20	52.66	68.20	15.54	Peak
5851.60	35.21	14.25	6.29	55.75	78.20	22.45	Peak

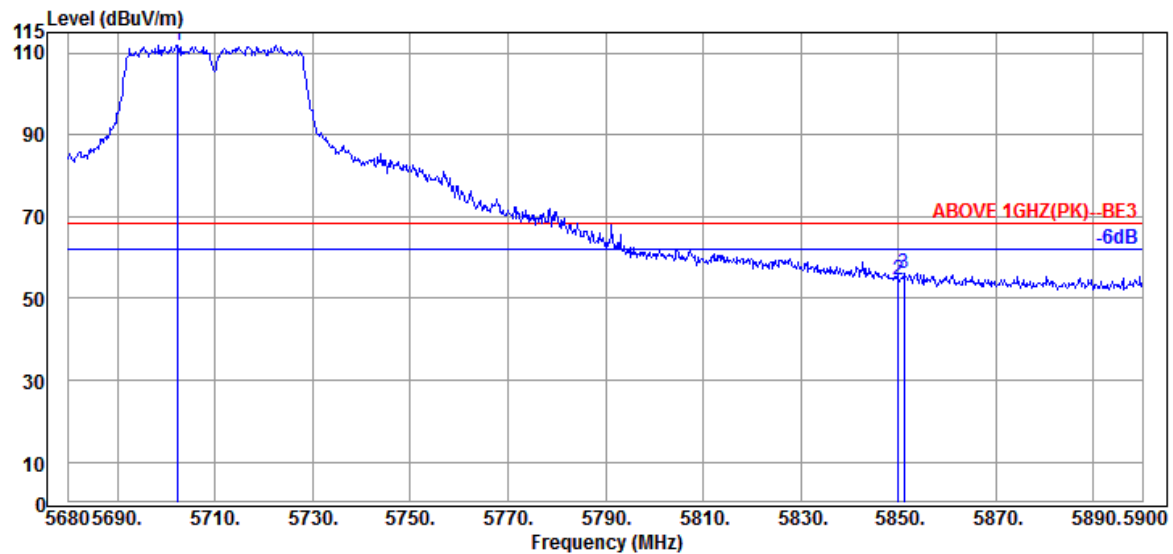


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5702.44	35.05	13.94	62.96	111.95	68.20	---	Peak
5850.06	35.21	14.25	5.14	54.60	68.20	13.60	Peak
5851.16	35.21	14.25	6.72	56.18	78.20	22.02	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

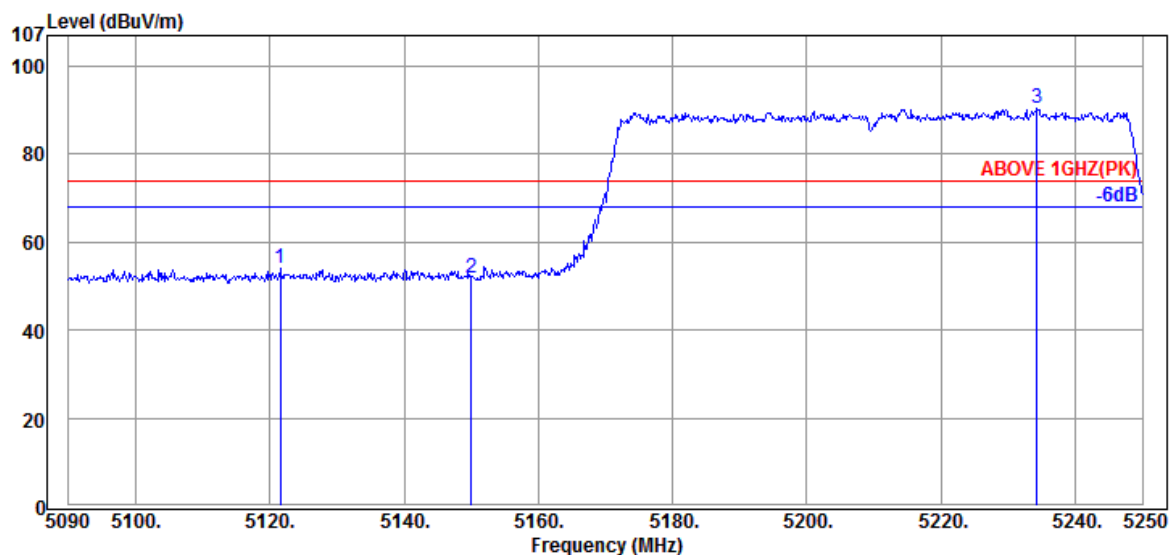

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.52	34.42	13.24	6.27	53.93	74.00	20.07	Peak
5150.00	34.45	13.22	4.17	51.84	74.00	22.16	Peak
5234.32	34.53	13.18	42.60	90.31	---	---	Peak

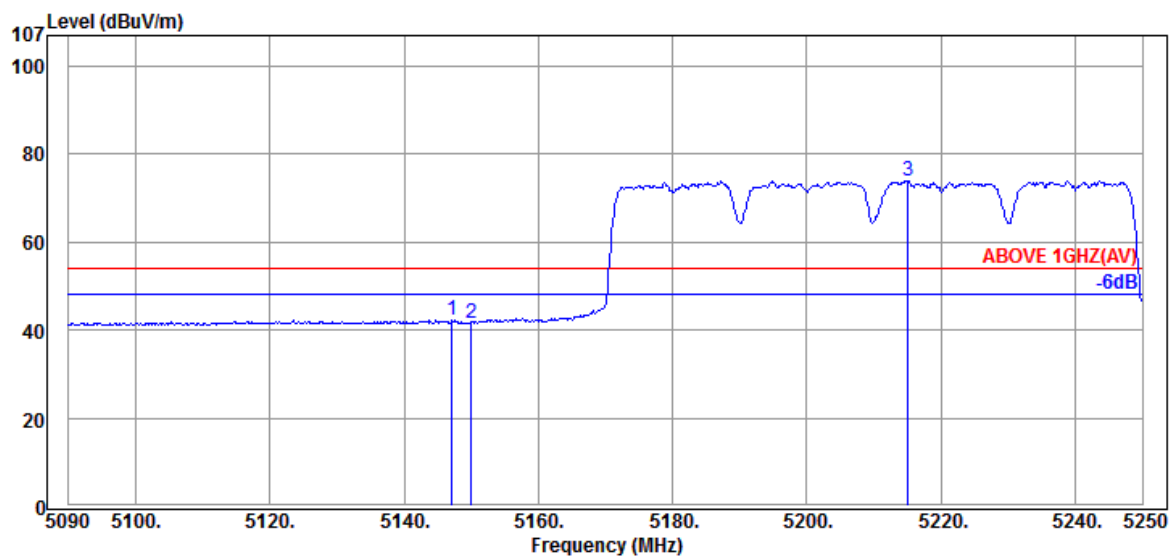

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.12	34.45	13.22	-5.46	42.21	54.00	11.79	Average
5150.00	34.45	13.22	-5.98	41.69	54.00	12.31	Average
5215.12	34.52	13.18	26.38	74.08	---	---	Average

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

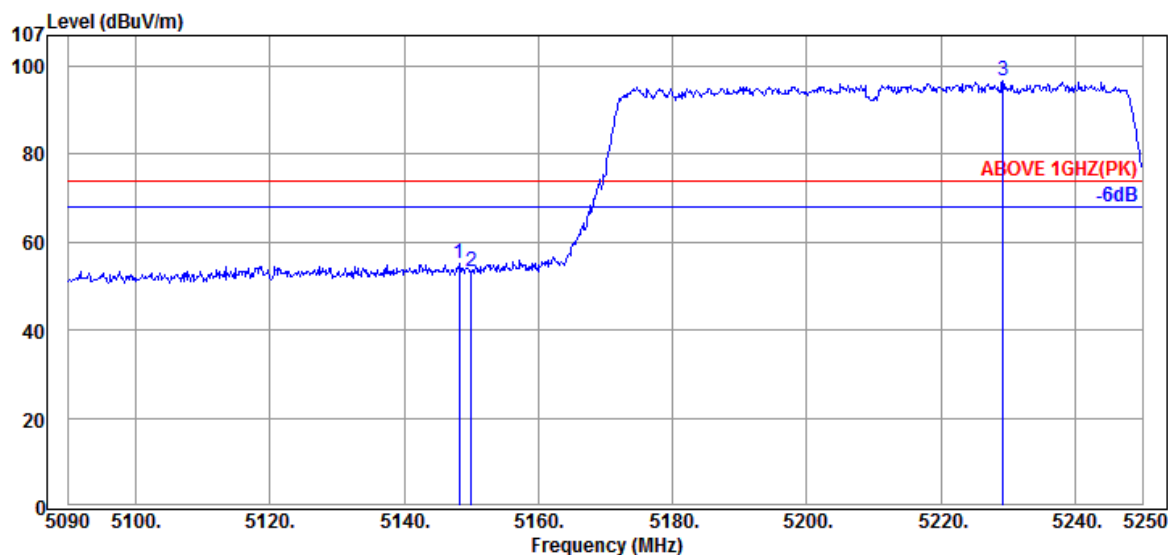

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.24	34.45	13.22	7.33	55.00	74.00	19.00	Peak
5150.00	34.45	13.22	5.82	53.49	74.00	20.51	Peak
5229.20	34.53	13.18	48.86	96.57	---	---	Peak

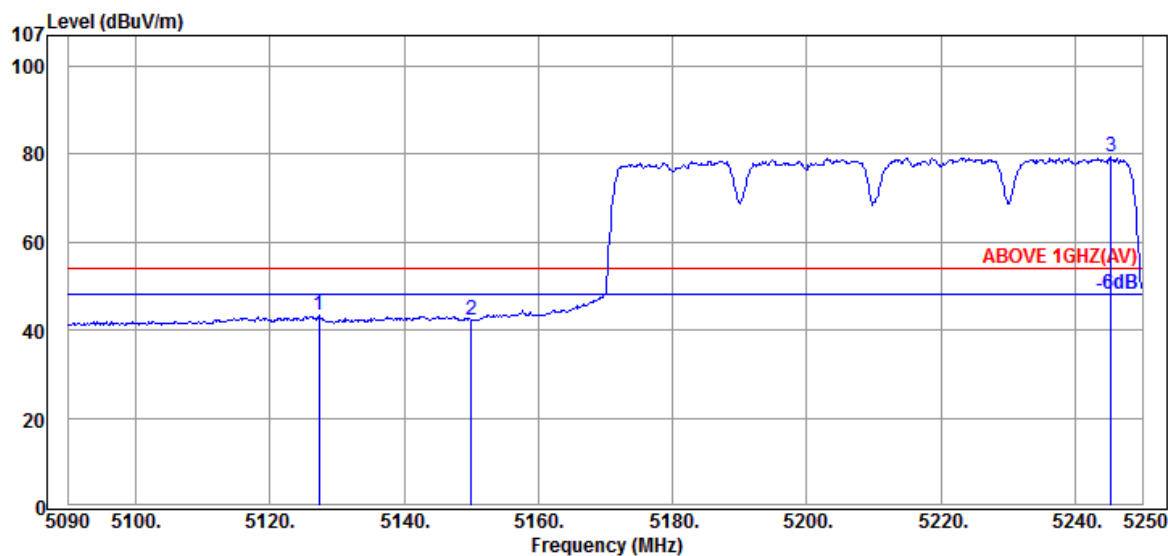

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5127.28	34.43	13.23	-4.40	43.26	54.00	10.74	Average
5150.00	34.45	13.22	-5.25	42.42	54.00	11.58	Average
5245.36	34.55	13.18	31.52	79.25	---	---	Average

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

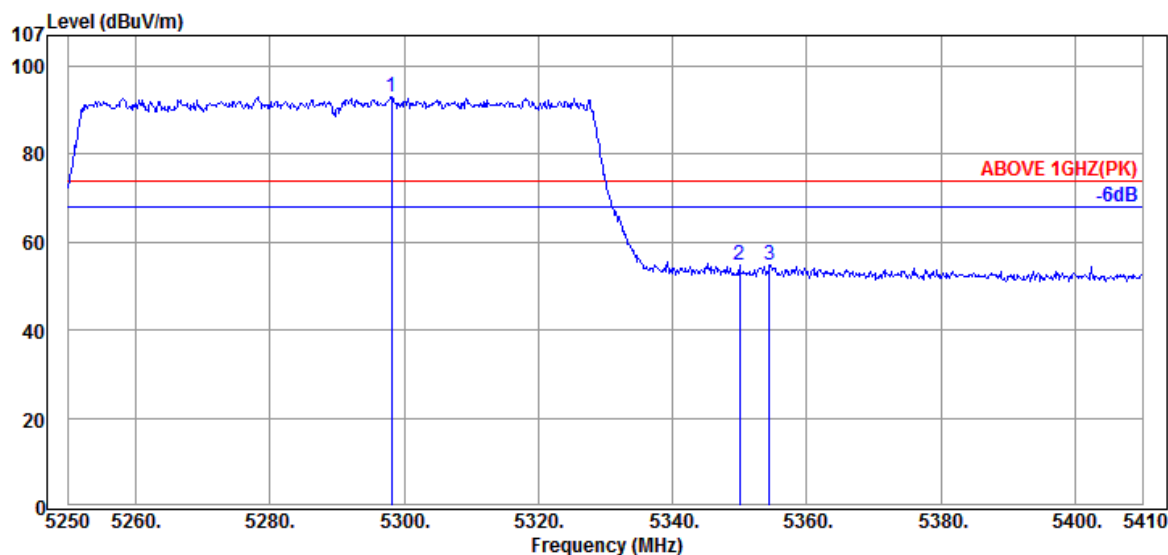

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5298.16	34.60	13.17	45.28	93.05	---	---	Peak
5350.00	34.65	13.31	6.71	54.67	74.00	19.33	Peak
5354.48	34.65	13.31	6.97	54.93	74.00	19.07	Peak

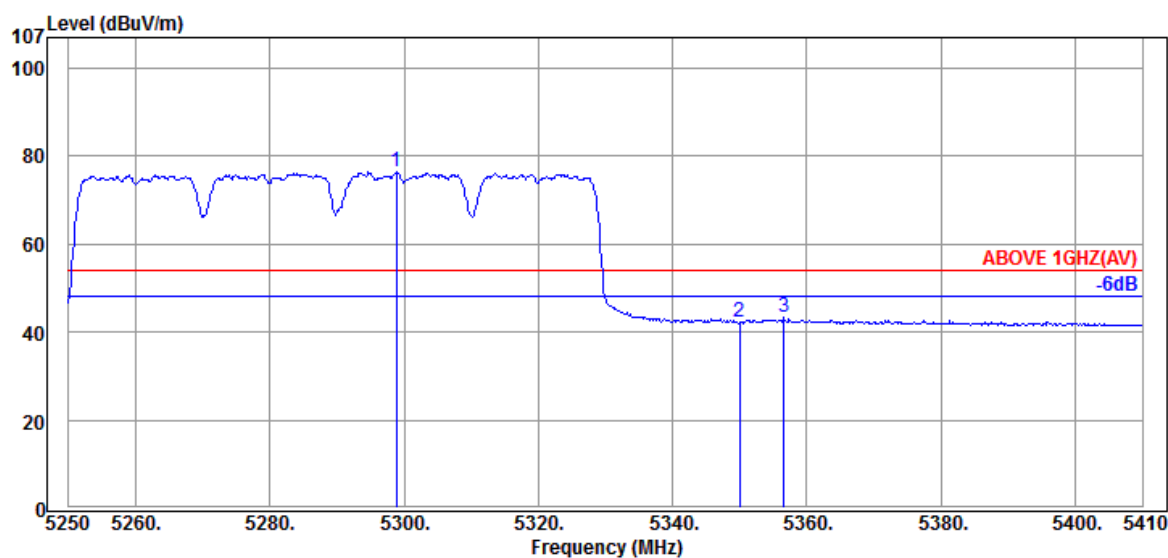

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5298.80	34.60	13.17	28.57	76.34	---	---	Average
5350.00	34.65	13.31	-5.82	42.14	54.00	11.86	Average
5356.56	34.65	13.31	-4.61	43.35	54.00	10.65	Average

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

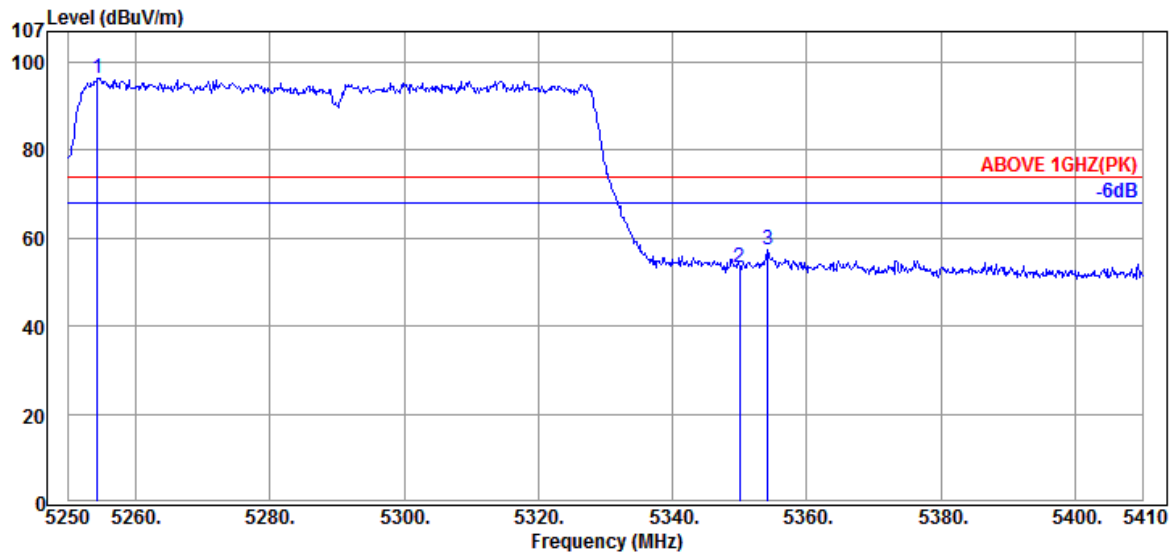

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5254.32	34.55	13.18	48.72	96.45	---	---	Peak
5350.00	34.65	13.31	5.47	53.43	74.00	20.57	Peak
5354.16	34.65	13.31	9.30	57.26	74.00	16.74	Peak

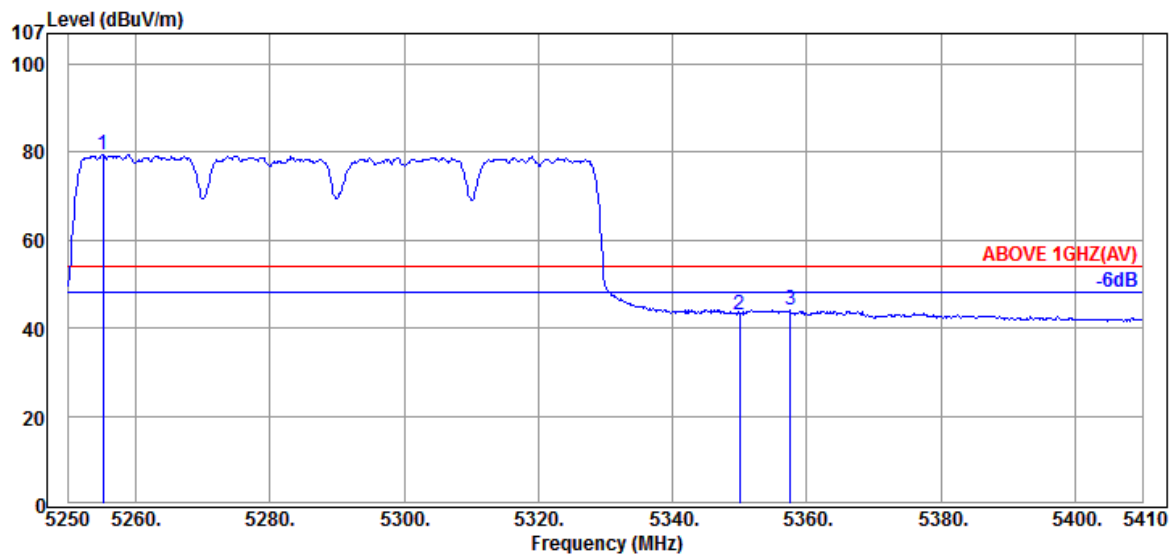


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5255.12	34.55	13.18	31.78	79.51	---	---	Average
5350.00	34.65	13.31	-4.80	43.16	54.00	10.84	Average
5357.52	34.65	13.31	-3.89	44.07	54.00	9.93	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

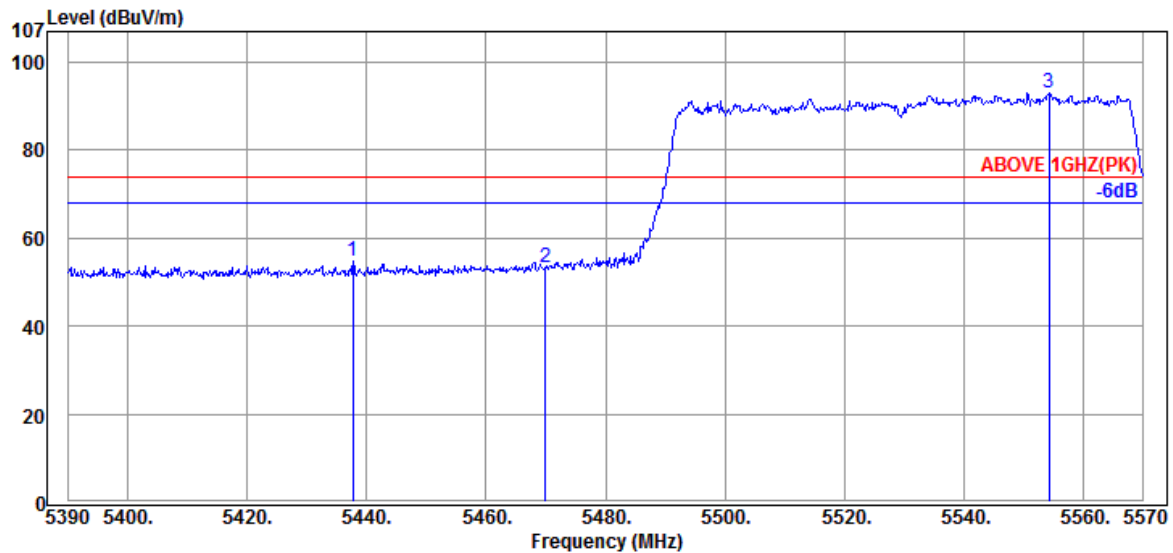

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.70	34.73	13.48	6.47	54.68	74.00	19.32	Peak
5469.92	34.77	13.51	5.15	53.43	74.00	20.57	Peak
5554.34	34.86	13.64	44.46	92.96	---	---	Peak

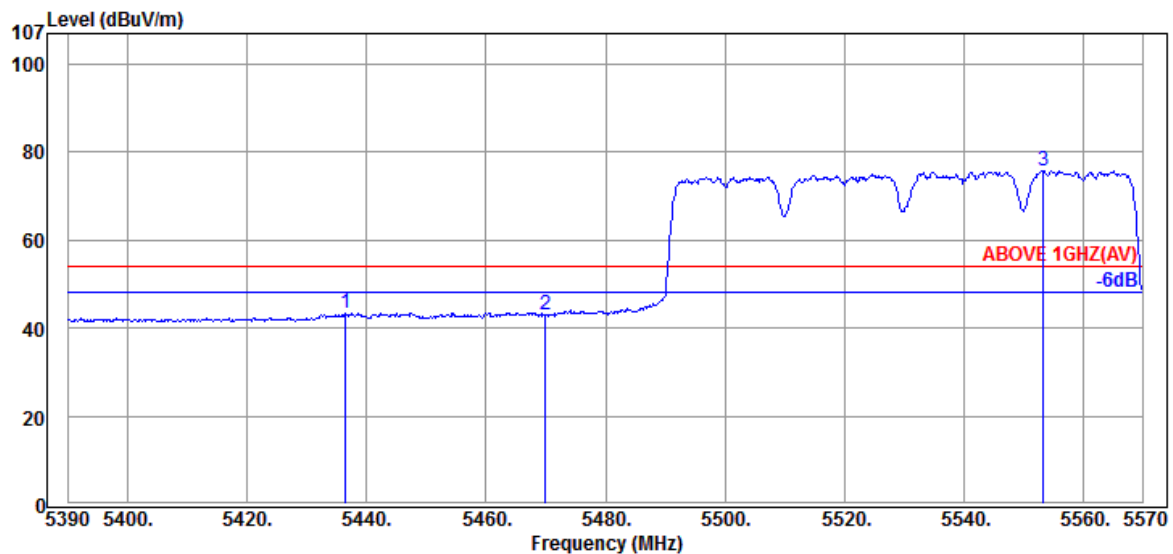


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.44	34.73	13.48	-4.66	43.55	54.00	10.45	Average
5469.92	34.77	13.51	-5.43	42.85	54.00	11.15	Average
5553.44	34.86	13.64	27.27	75.77	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

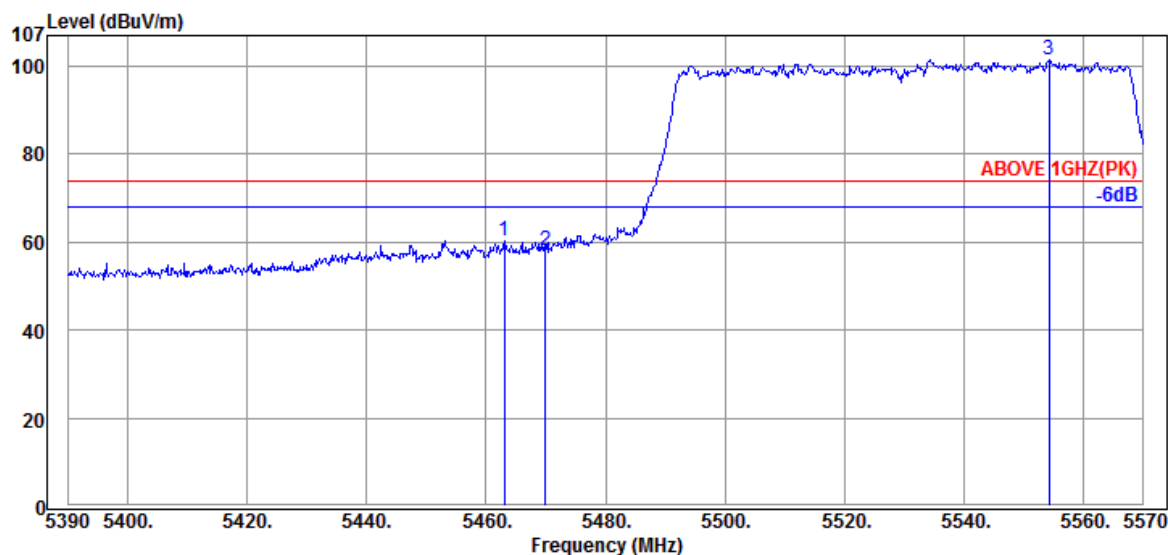

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.08	34.77	13.51	12.18	60.46	74.00	13.54	Peak
5469.92	34.77	13.51	9.99	58.27	74.00	15.73	Peak
5554.34	34.86	13.64	52.86	101.36	---	---	Peak

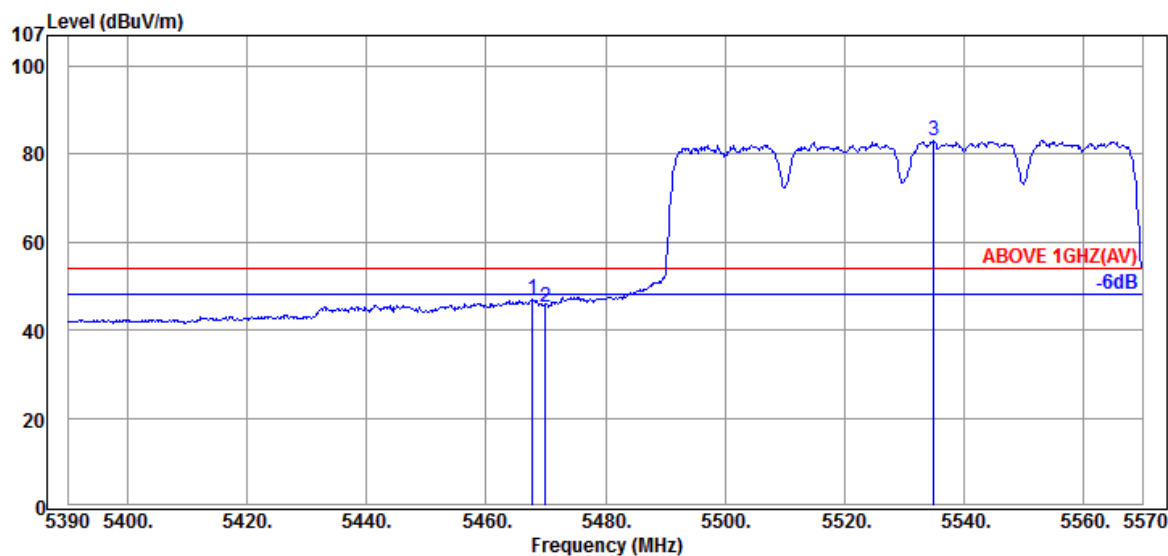


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.76	34.77	13.51	-1.37	46.91	54.00	7.09	Average
5469.92	34.77	13.51	-2.92	45.36	54.00	8.64	Average
5535.08	34.84	13.61	34.75	83.20	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

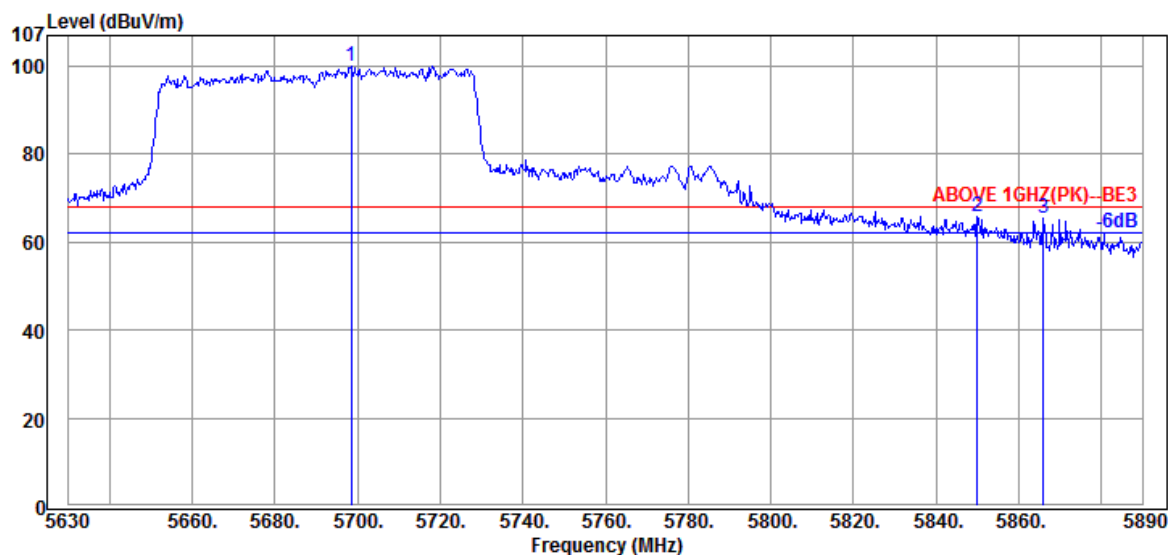

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5698.38	35.03	13.90	51.00	99.93	68.20	---	Peak
5849.96	35.21	14.25	16.18	65.64	68.20	2.56	Peak
5866.08	35.23	14.28	15.81	65.32	68.20	2.88	Peak

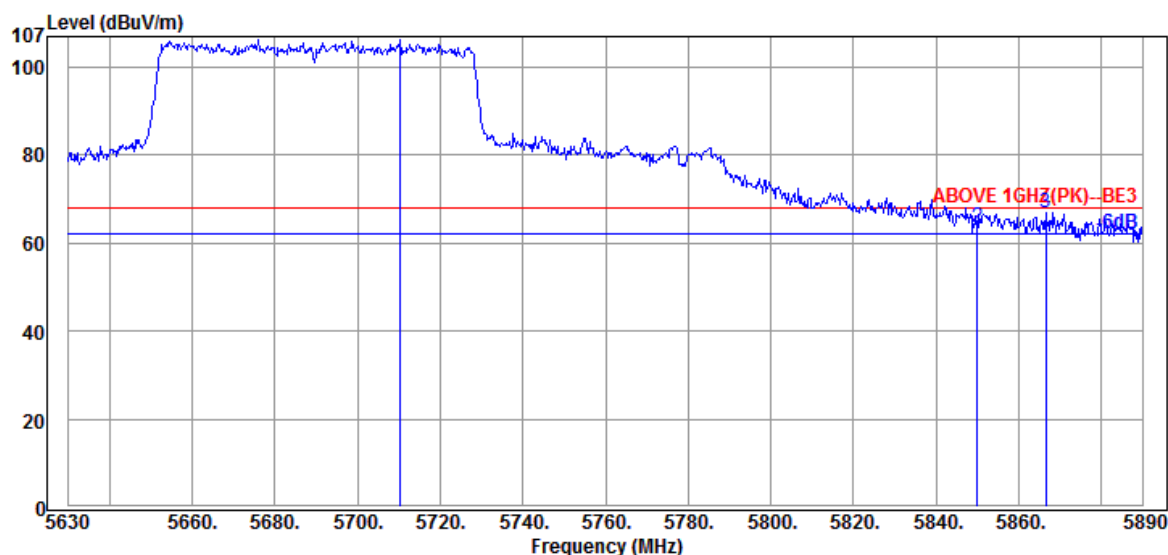

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5710.34	35.05	13.94	57.35	106.34	68.20	---	Peak
5849.96	35.21	14.25	14.12	63.58	68.20	4.62	Peak
5866.60	35.23	14.28	17.27	66.78	68.20	1.42	Peak

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

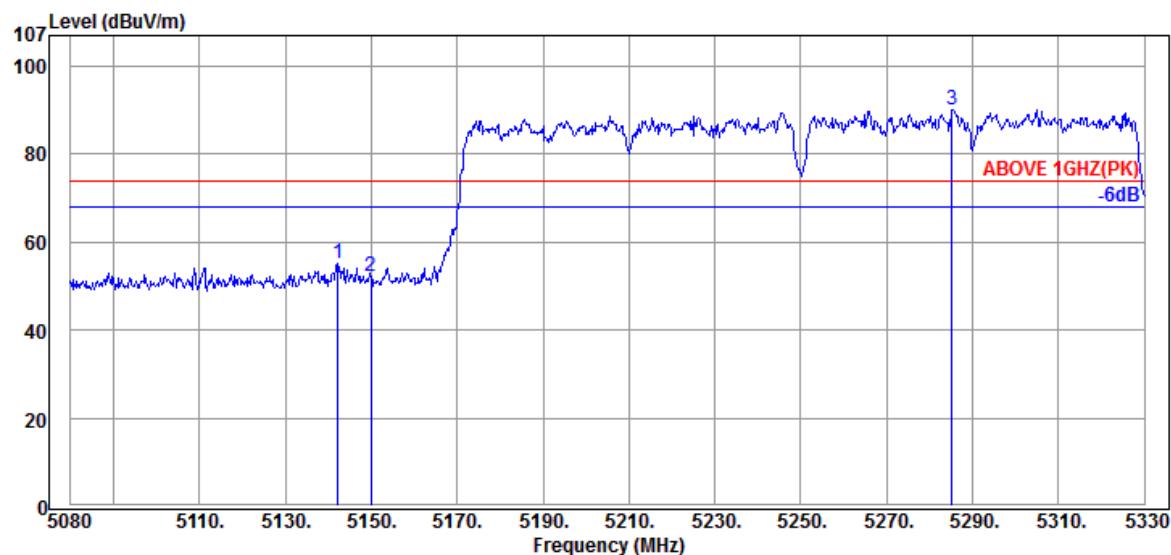

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5142.25	34.45	13.22	7.60	55.27	74.00	18.73	Peak
5150.00	34.45	13.22	4.62	52.29	74.00	21.71	Peak
5285.25	34.58	13.17	42.33	90.08	---	---	Peak

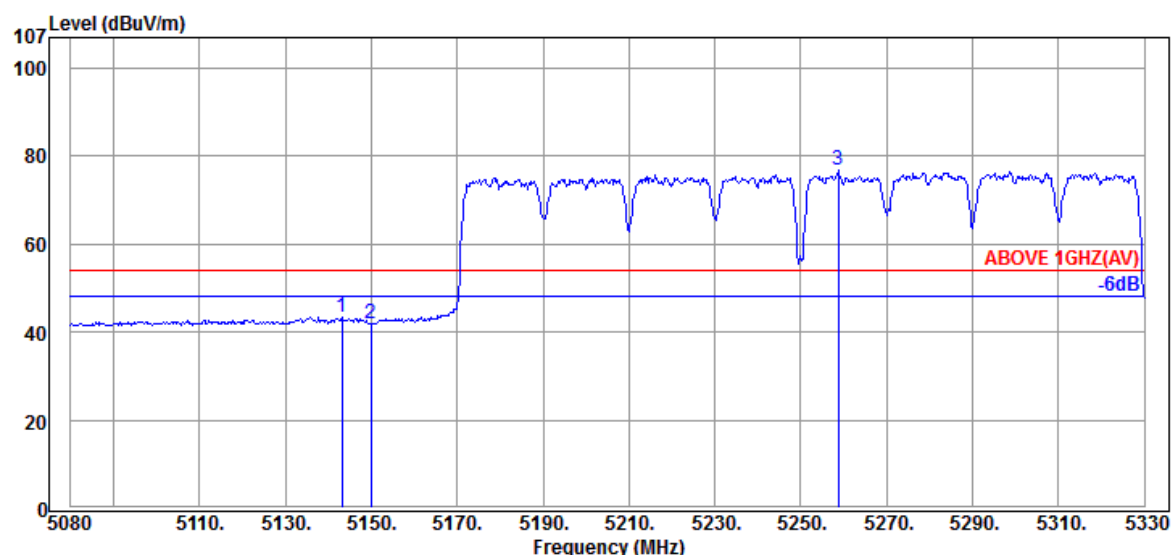

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5143.25	34.45	13.22	-4.30	43.37	54.00	10.63	Average
5150.00	34.45	13.22	-5.75	41.92	54.00	12.08	Average
5258.75	34.57	13.17	29.02	76.76	---	---	Average

File Number: CIM1810100

Report Number: EM-F180490

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

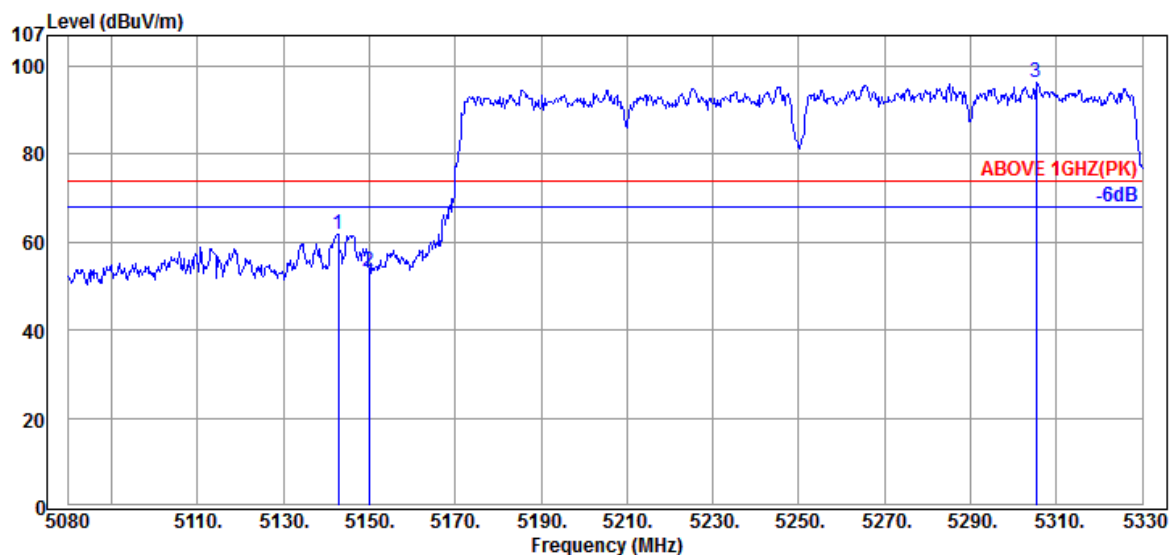

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5142.75	34.45	13.22	14.24	61.91	74.00	12.09	Peak
5150.00	34.45	13.22	5.47	53.14	74.00	20.86	Peak
5305.25	34.60	13.17	48.56	96.33	---	---	Peak

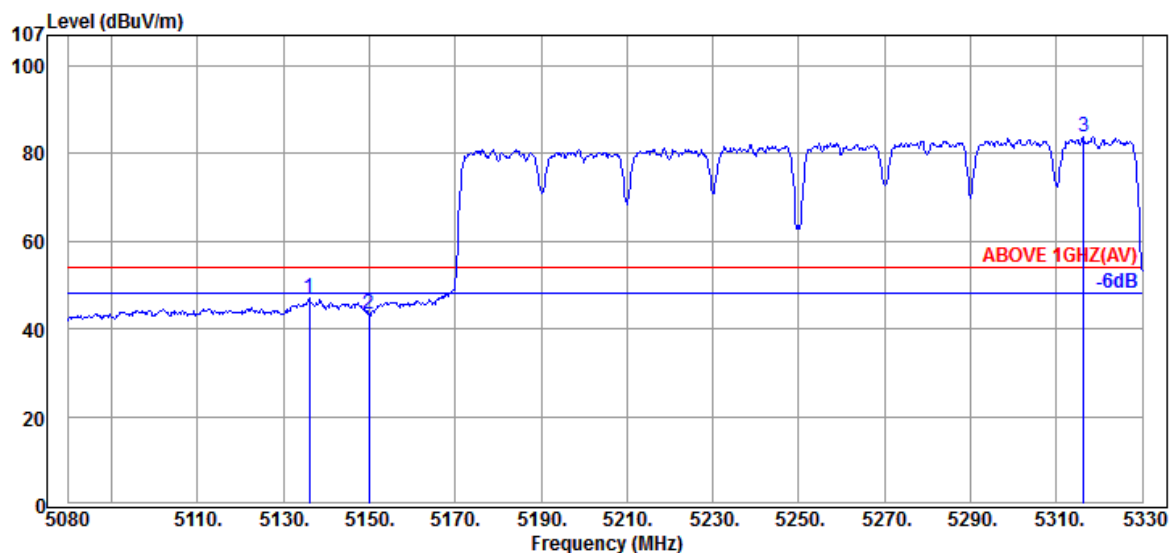

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5136.00	34.43	13.23	-0.73	46.93	54.00	7.07	Average
5150.00	34.45	13.22	-4.15	43.52	54.00	10.48	Average
5316.25	34.62	13.22	35.89	83.73	---	---	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

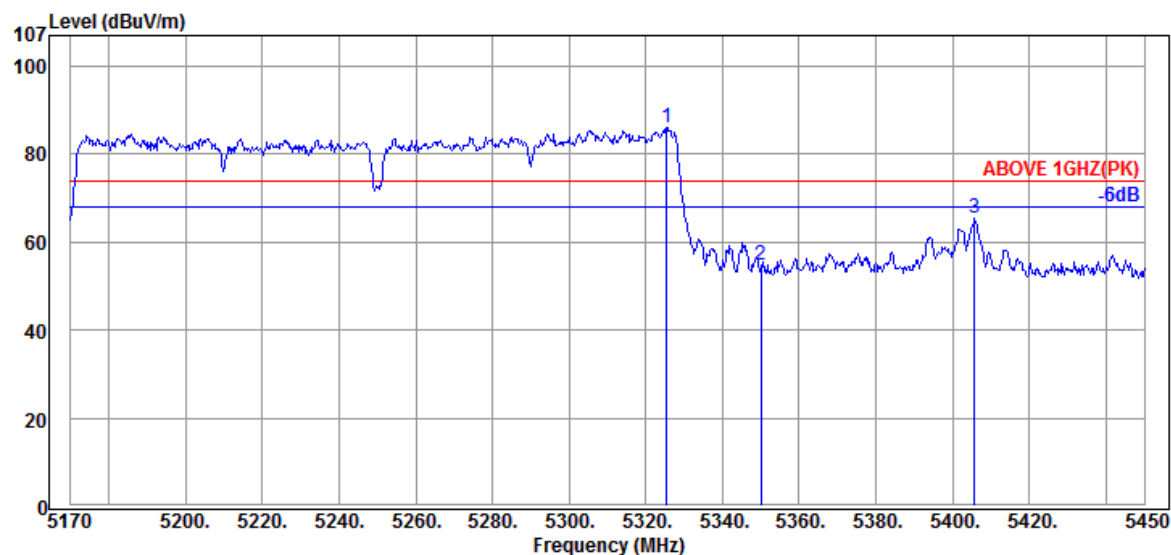

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.40	34.62	13.22	38.29	86.13	---	---	Peak
5350.04	34.65	13.31	6.78	54.74	74.00	19.26	Peak
5405.76	34.70	13.44	17.13	65.27	74.00	8.73	Peak

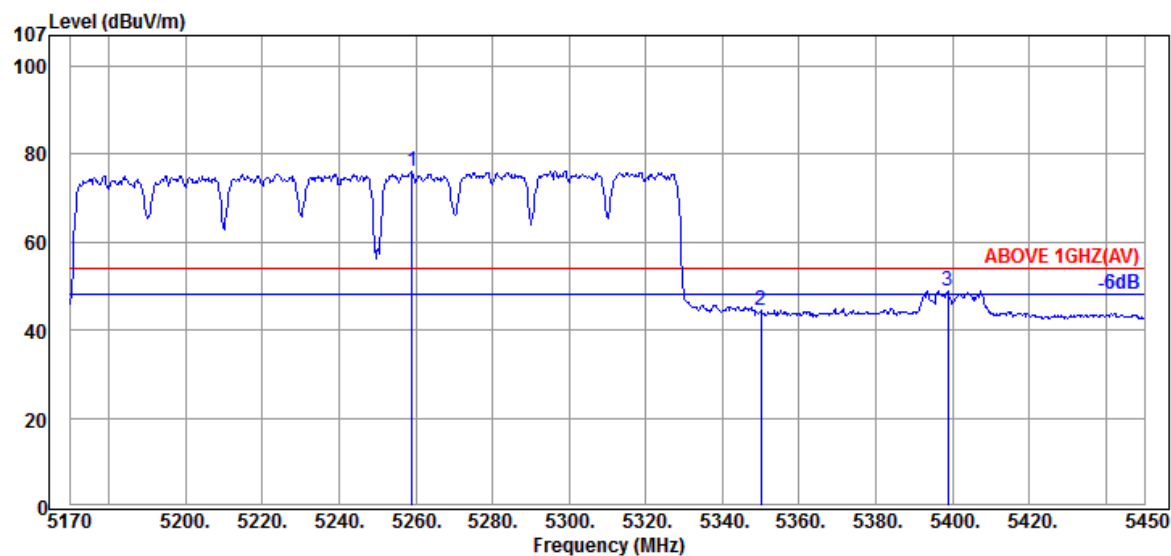


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5259.04	34.57	13.17	28.49	76.23	---	---	Average
5350.04	34.65	13.31	-3.55	44.41	54.00	9.59	Average
5398.76	34.70	13.44	0.65	48.79	54.00	5.21	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

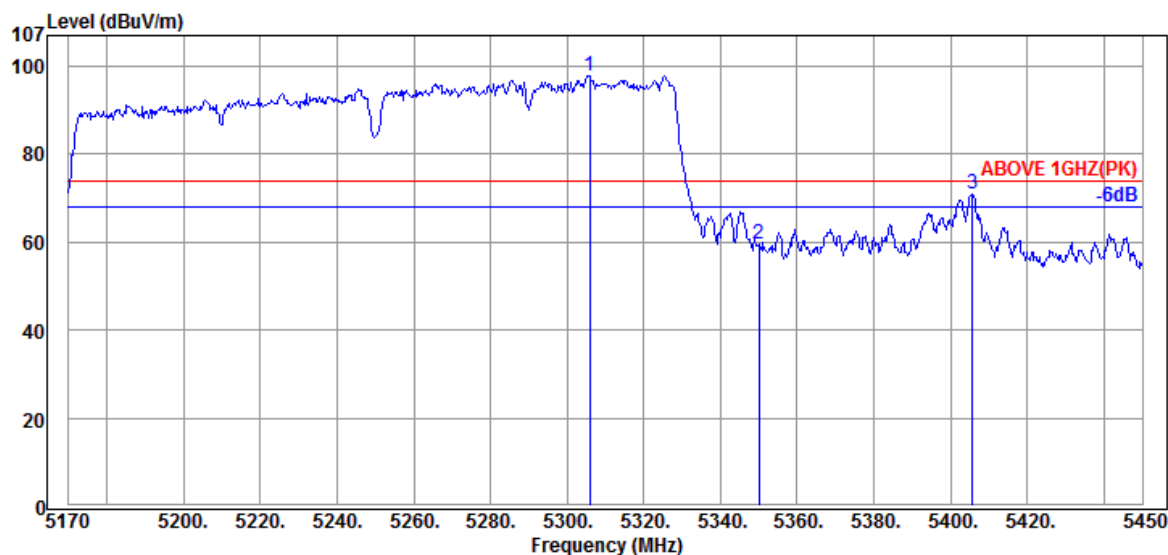

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5305.80	34.60	13.17	50.15	97.92	---	---	Peak
5350.04	34.65	13.31	11.52	59.48	74.00	14.52	Peak
5405.76	34.70	13.44	22.93	71.07	74.00	2.93	Peak

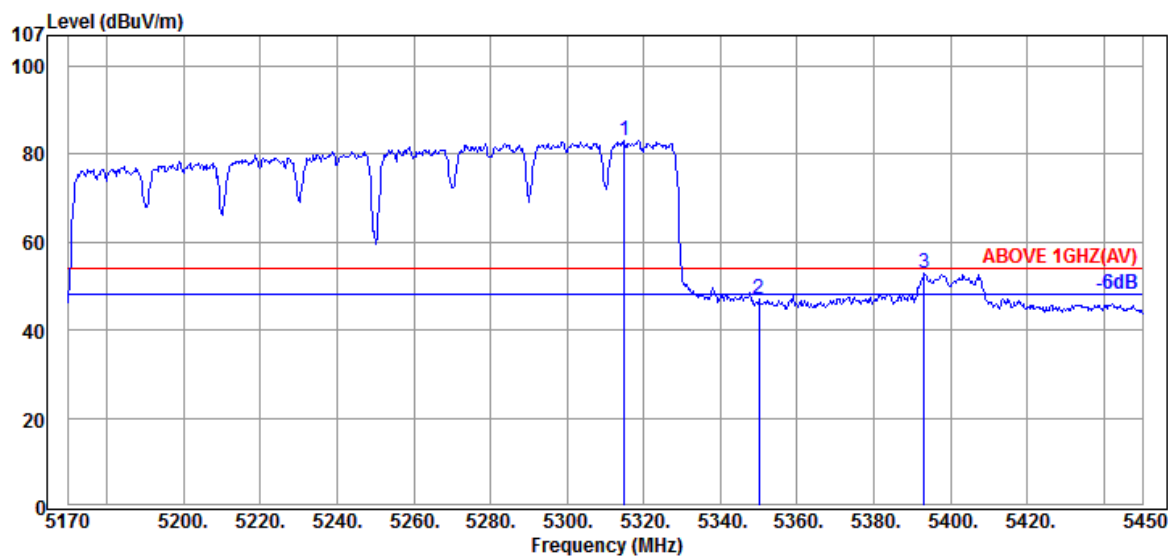


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5315.04	34.62	13.22	35.22	83.06	---	---	Average
5350.04	34.65	13.31	-0.98	46.98	54.00	7.02	Average
5393.16	34.68	13.39	4.76	52.83	54.00	1.17	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

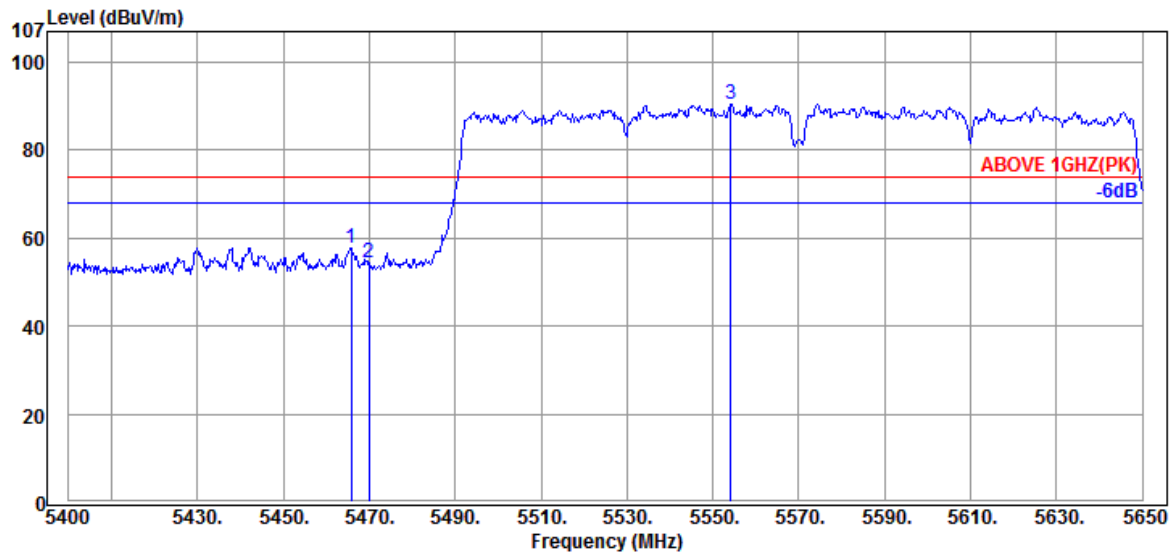

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.75	34.77	13.51	9.60	57.88	74.00	16.12	Peak
5470.00	34.77	13.51	6.25	54.53	74.00	19.47	Peak
5554.25	34.86	13.64	41.94	90.44	---	---	Peak

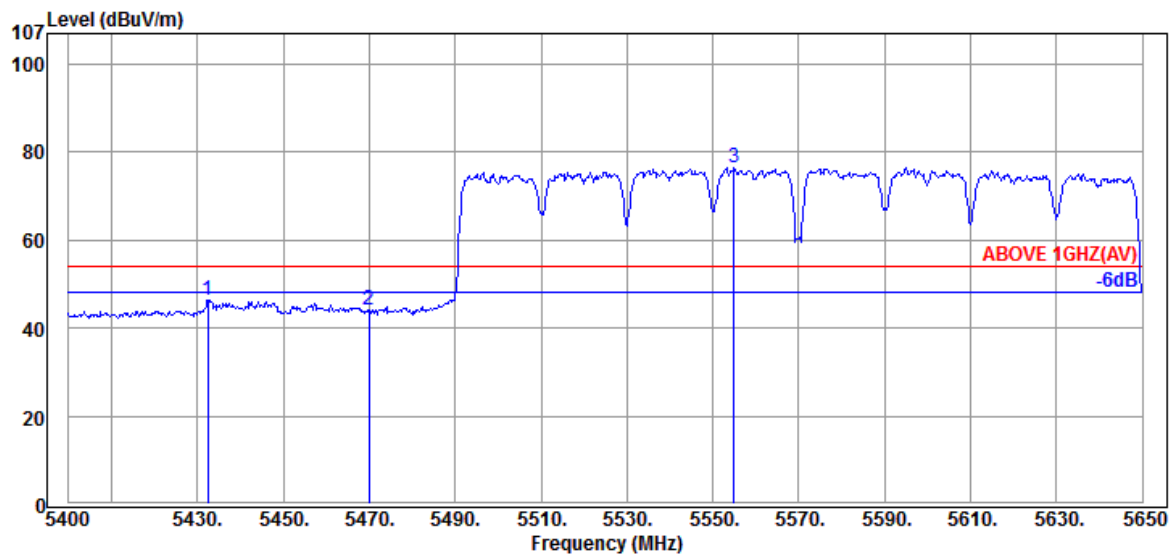

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5432.50	34.73	13.48	-1.77	46.44	54.00	7.56	Average
5470.00	34.77	13.51	-4.34	43.94	54.00	10.06	Average
5555.00	34.86	13.64	28.05	76.55	---	---	Average

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

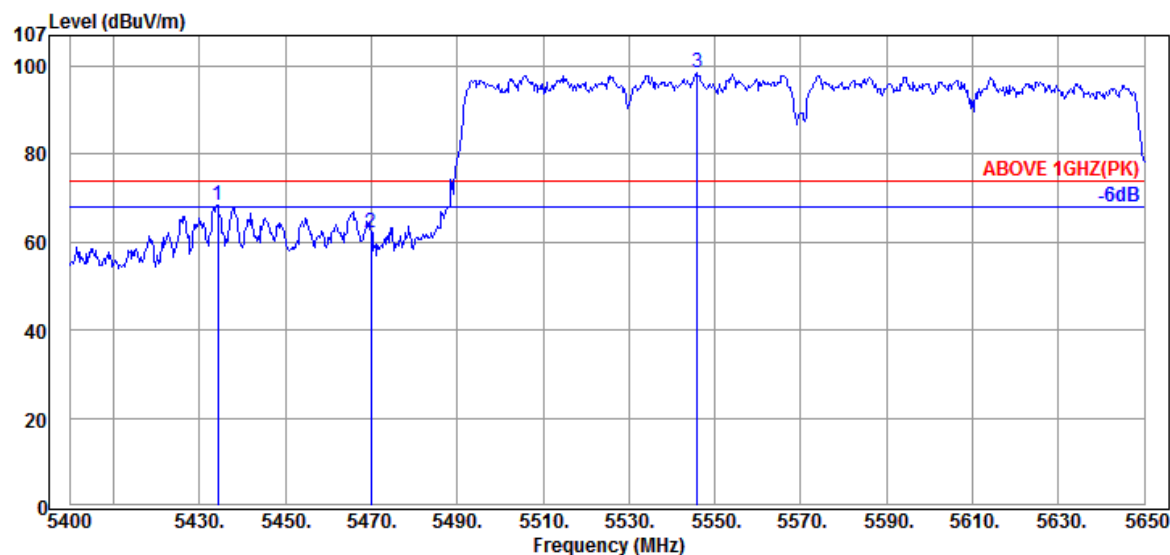

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.25	34.73	13.48	20.12	68.33	74.00	5.67	Peak
5470.00	34.77	13.51	13.89	62.17	74.00	11.83	Peak
5546.00	34.84	13.61	50.04	98.49	---	---	Peak

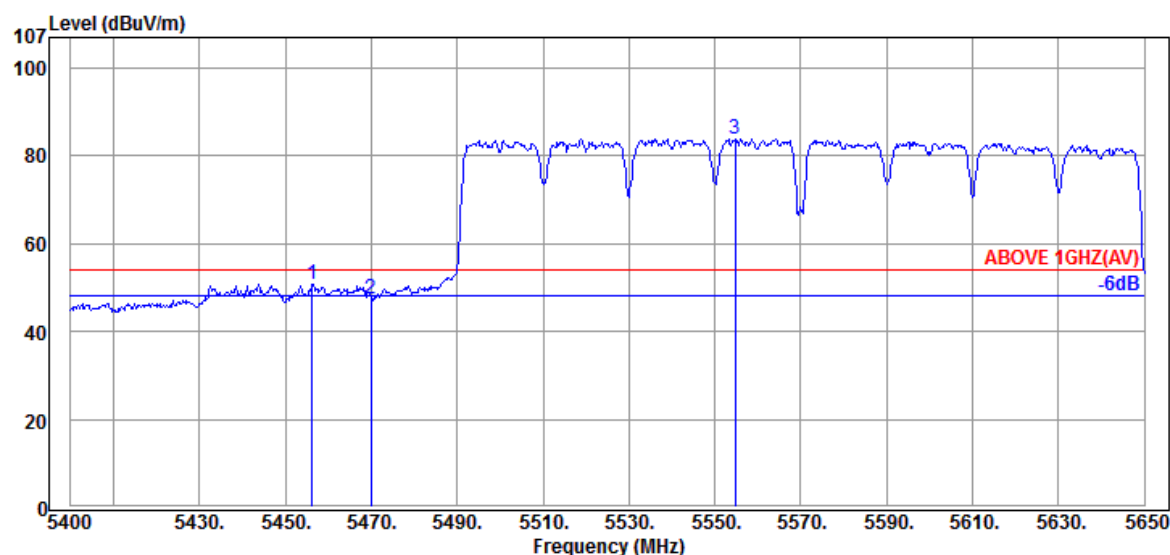

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.25	34.75	13.49	2.45	50.69	54.00	3.31	Average
5470.00	34.77	13.51	-1.01	47.27	54.00	6.73	Average
5554.75	34.86	13.64	35.41	83.91	---	---	Average


Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Antenna	15Z980 ANTENNA ASM
--------------	--------------------


Band Edge:

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

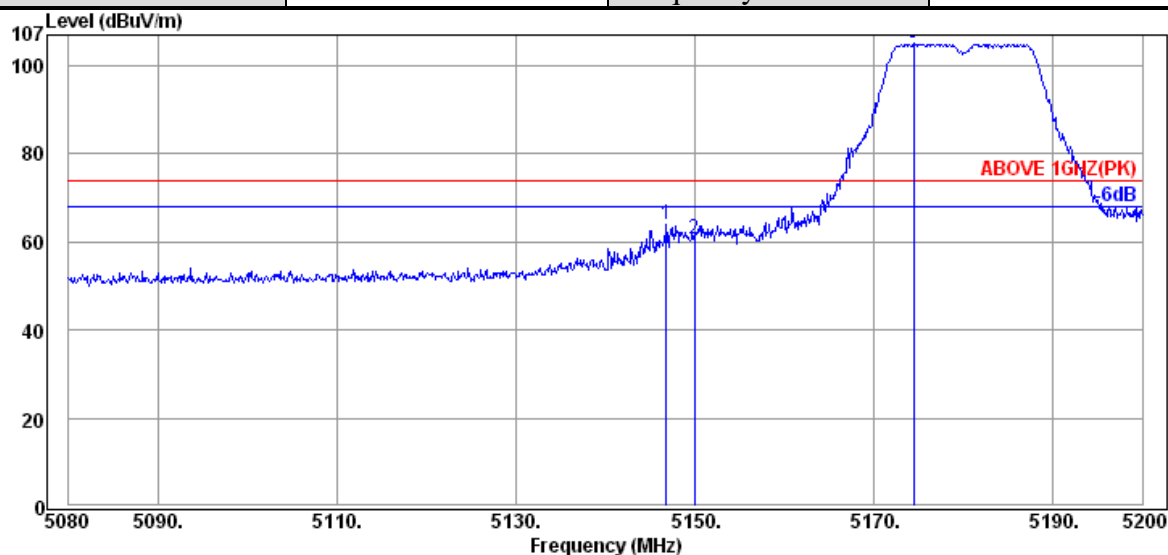

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.84	34.45	13.22	16.49	64.16	74.00	9.84	Peak
5149.96	34.45	13.22	12.95	60.62	74.00	13.38	Peak
5174.44	34.48	13.19	57.38	105.05	---	---	Peak

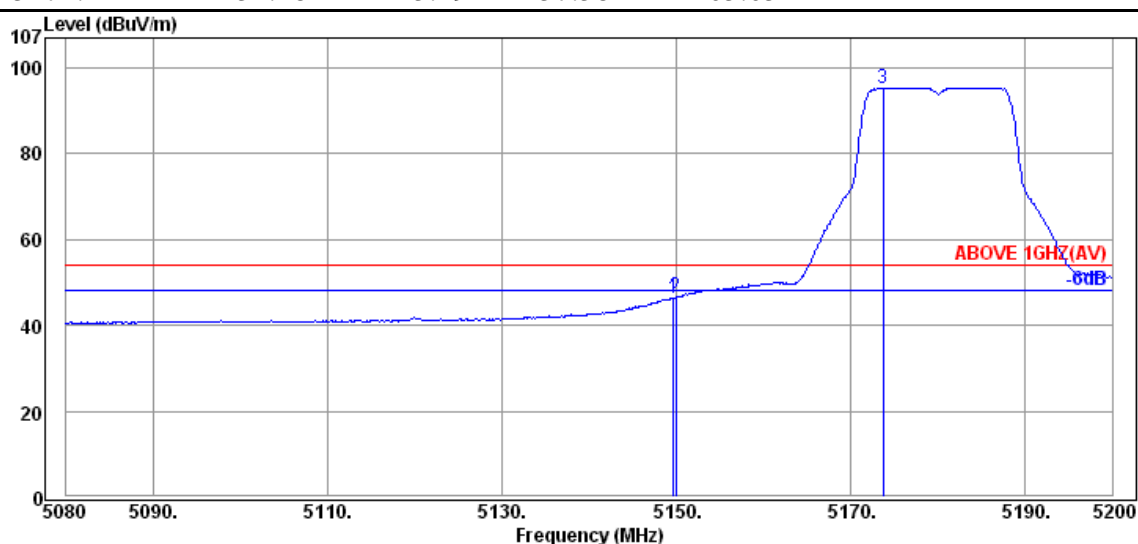

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.45	13.22	-1.26	46.41	54.00	7.59	Average
5149.96	34.45	13.22	-1.11	46.56	54.00	7.44	Average
5173.72	34.48	13.19	47.70	95.37	---	---	Average

File Number: CIM1810100


Report Number: EM-F180490

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

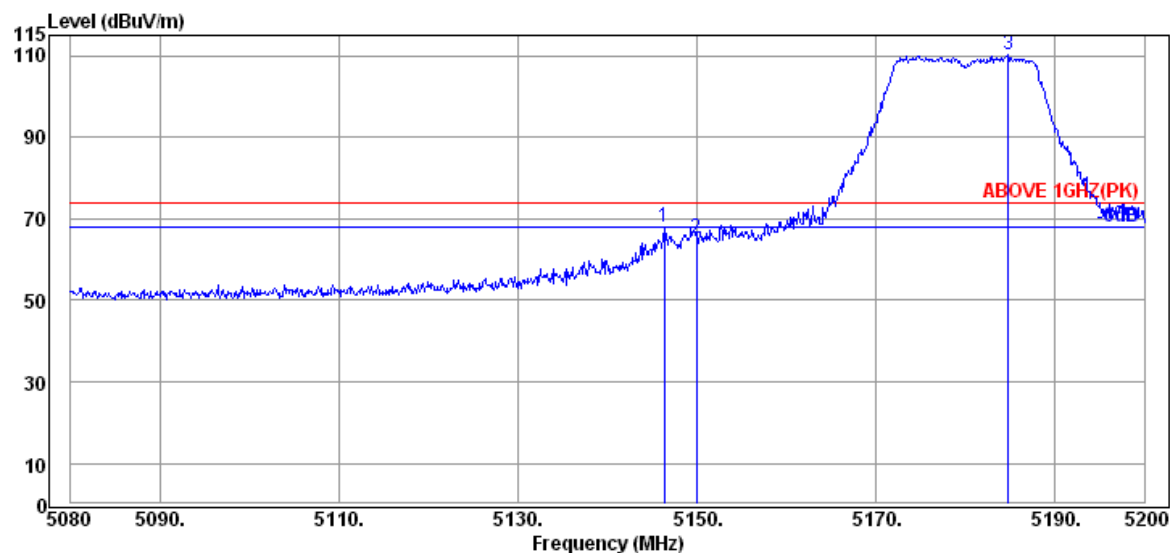

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5146.36	34.45	13.22	20.11	67.78	74.00	6.22	Peak
5149.96	34.45	13.22	17.53	65.20	74.00	8.80	Peak
5184.76	34.48	13.19	62.57	110.24	---	---	Peak

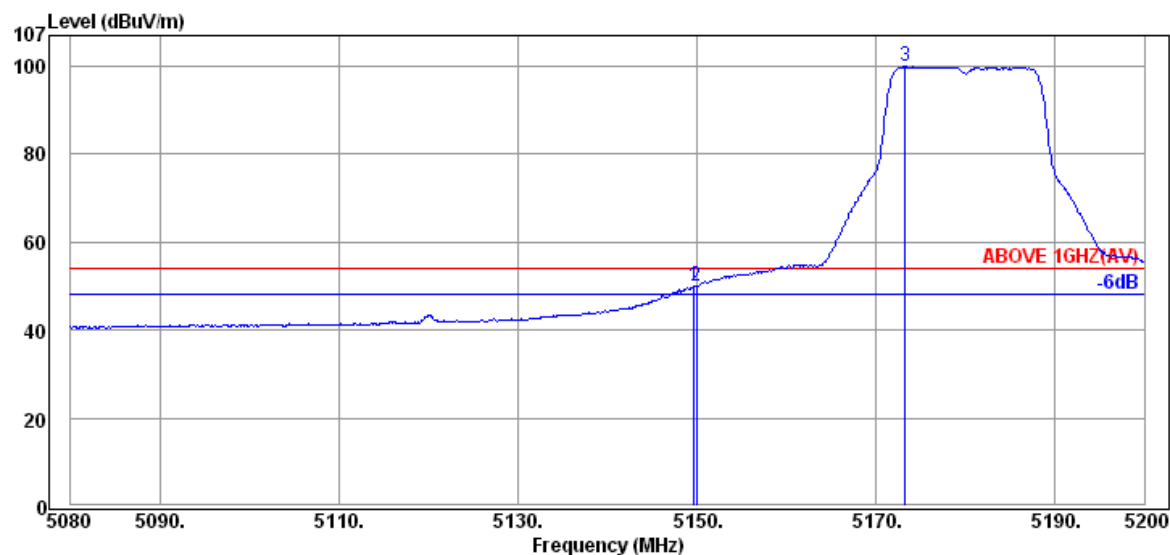

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.72	34.45	13.22	2.30	49.97	54.00	4.03	Average
5149.96	34.45	13.22	2.25	49.92	54.00	4.08	Average
5173.24	34.47	13.20	52.27	99.94	---	---	Average

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

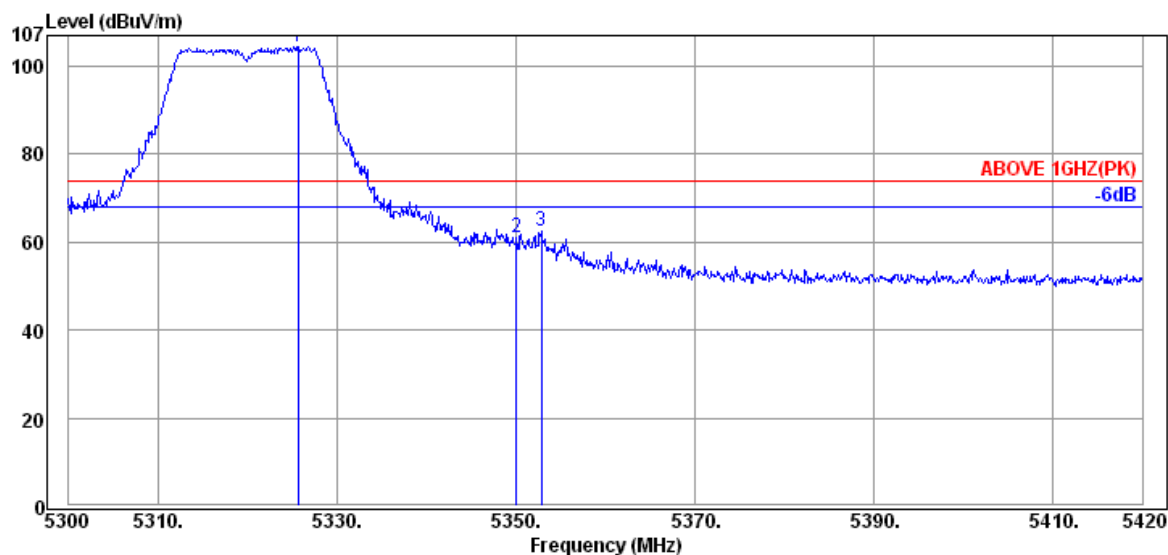

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.68	34.62	13.22	56.63	104.47	---	---	Peak
5350.04	34.65	13.31	13.24	61.20	74.00	12.80	Peak
5352.80	34.65	13.31	14.67	62.63	74.00	11.37	Peak

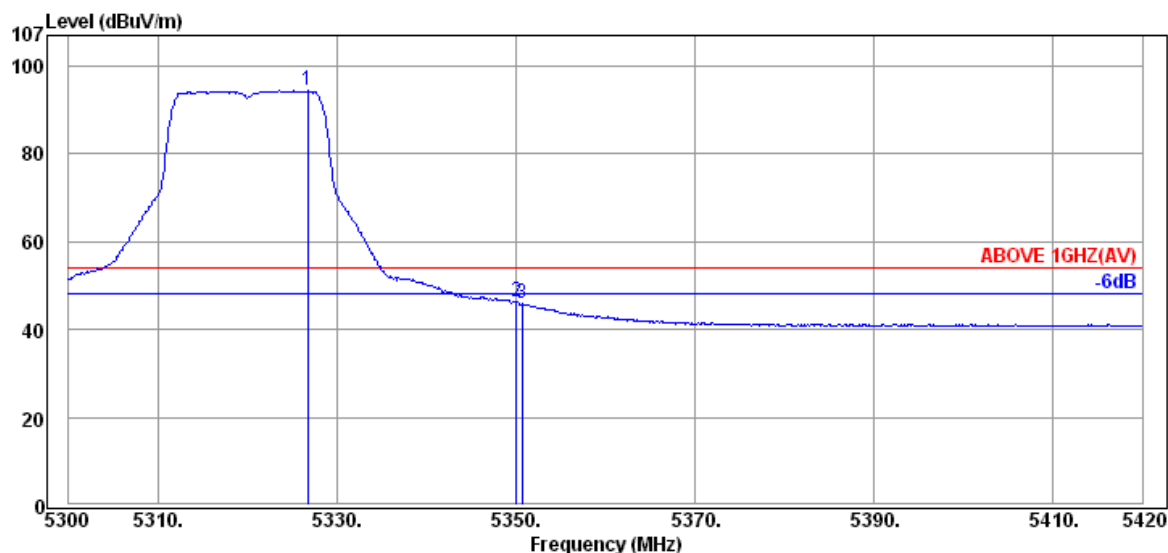

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5326.76	34.63	13.26	46.45	94.34	---	---	Average
5350.04	34.65	13.31	-1.67	46.29	54.00	7.71	Average
5350.64	34.65	13.31	-2.01	45.95	54.00	8.05	Average

Mode	802.11	UNII Band	II-2A
		Frequency	TX 5320MHz

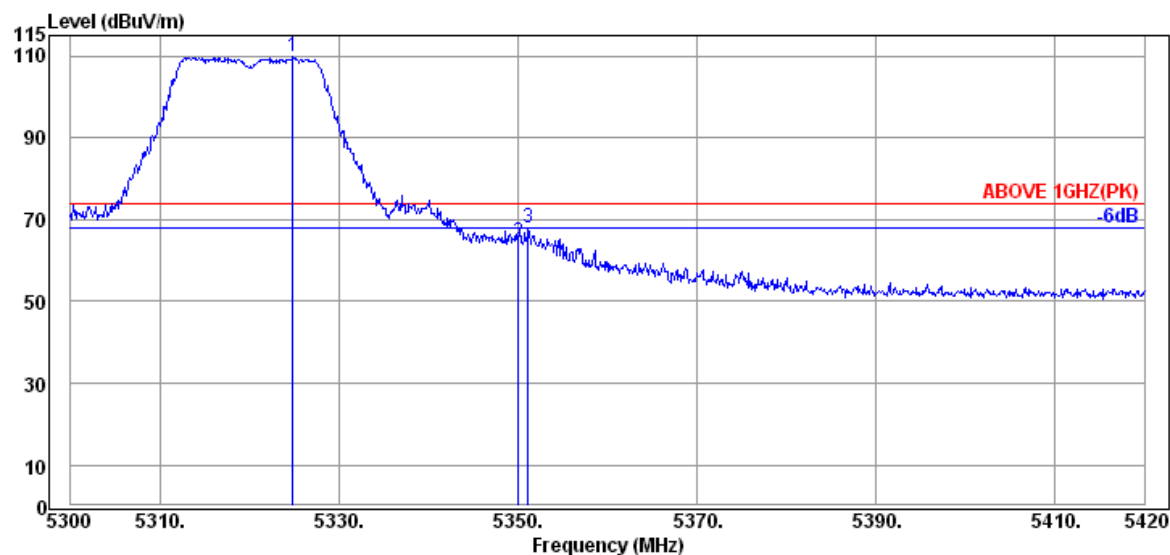

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5324.84	34.62	13.22	62.02	109.86	---	---	Peak
5350.04	34.65	13.31	16.35	64.31	74.00	9.69	Peak
5351.12	34.65	13.31	19.82	67.78	74.00	6.22	Peak

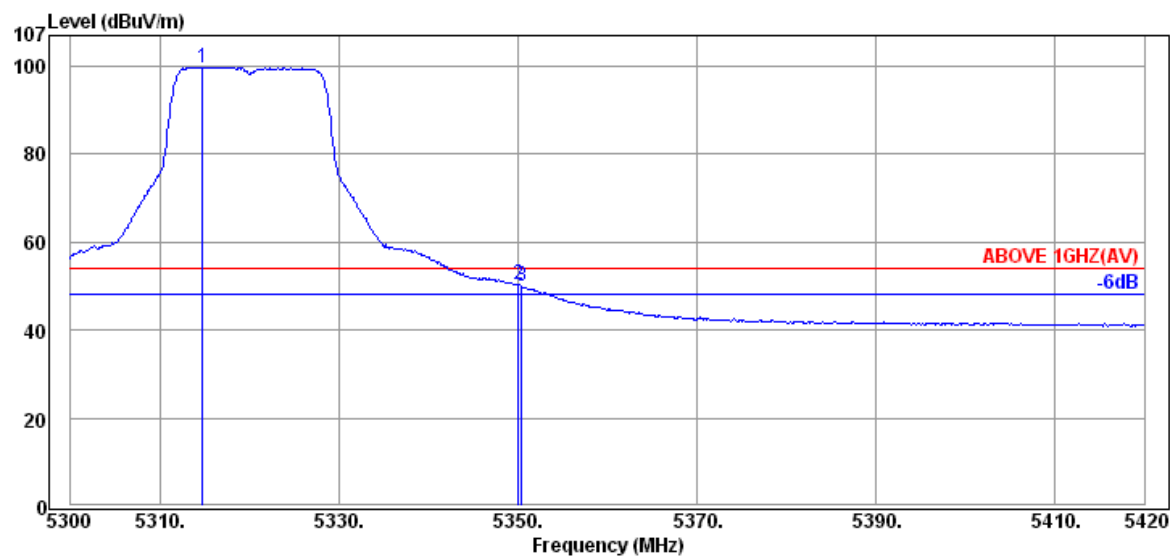


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5314.76	34.62	13.22	51.95	99.79	---	---	Average
5350.04	34.65	13.31	2.42	50.38	54.00	3.62	Average
5350.40	34.65	13.31	1.92	49.88	54.00	4.12	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

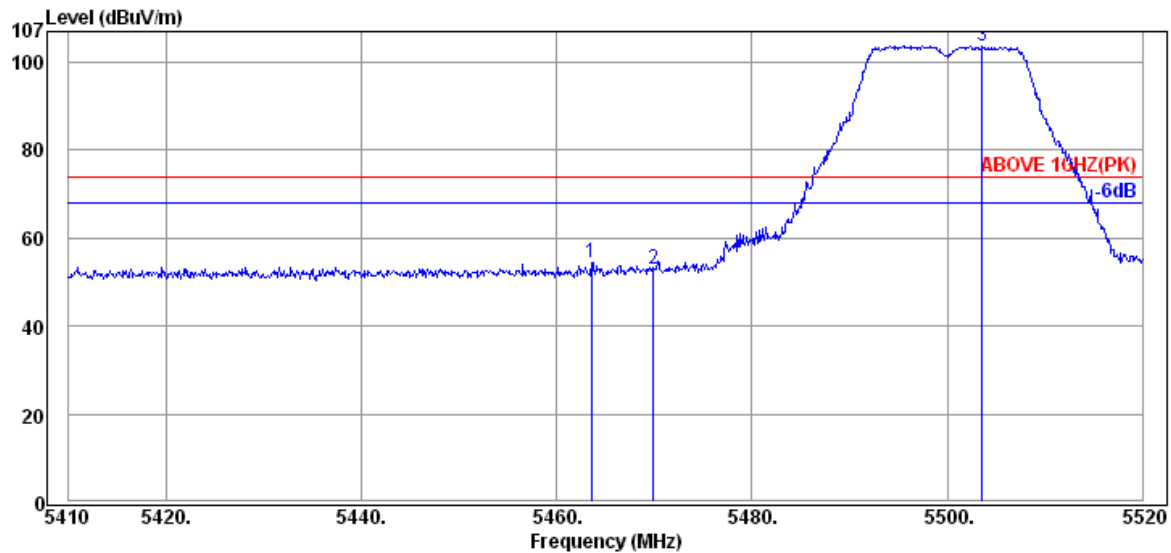

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.57	34.77	13.51	6.20	54.48	74.00	19.52	Peak
5469.95	34.77	13.51	4.55	52.83	74.00	21.17	Peak
5503.61	34.80	13.55	55.33	103.68	---	---	Peak

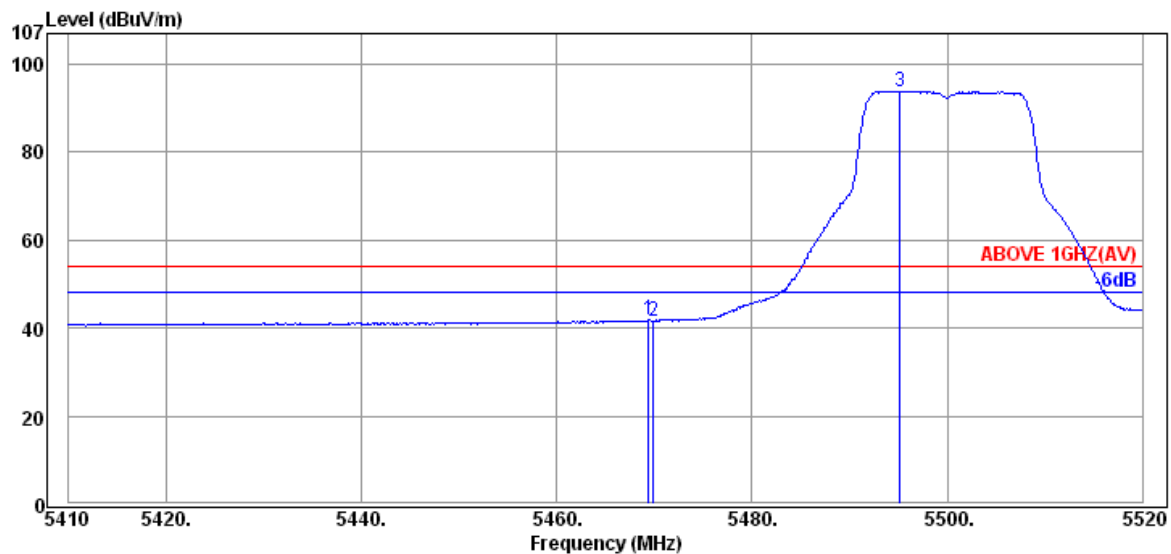


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.40	34.77	13.51	-6.43	41.85	54.00	12.15	Average
5469.95	34.77	13.51	-6.70	41.58	54.00	12.42	Average
5495.14	34.78	13.53	45.55	93.86	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

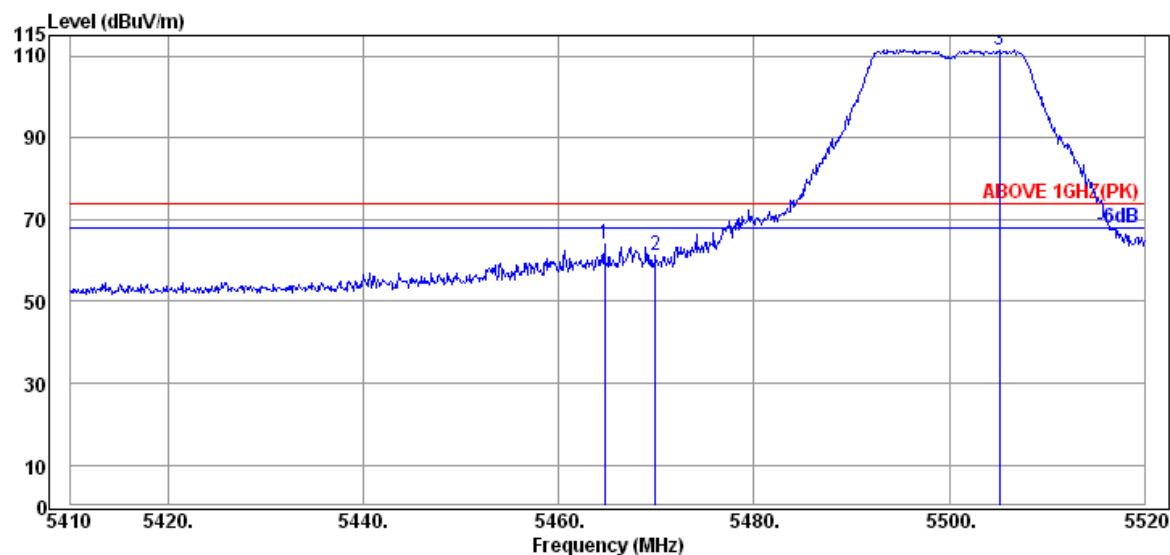

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.67	34.77	13.51	15.82	64.10	74.00	9.90	Peak
5469.95	34.77	13.51	13.09	61.37	74.00	12.63	Peak
5505.15	34.80	13.55	63.28	111.63	---	---	Peak

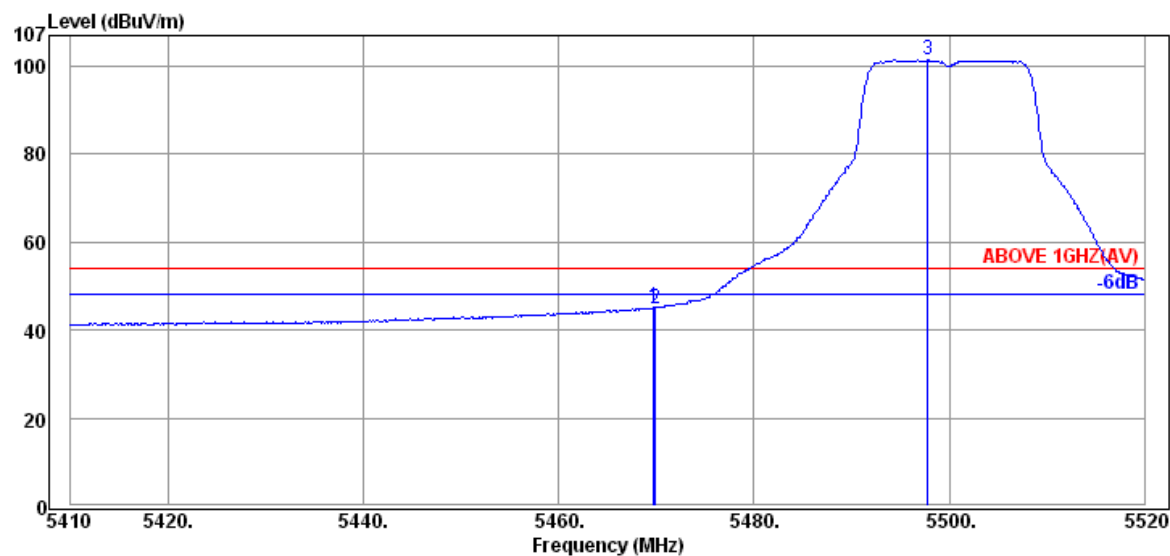

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.73	34.77	13.51	-3.21	45.07	54.00	8.93	Average
5469.95	34.77	13.51	-3.35	44.93	54.00	9.07	Average
5497.78	34.80	13.55	53.07	101.42	---	---	Average

Audix Technology Corp.


No. 53-11, Dingfu, Linkou, Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

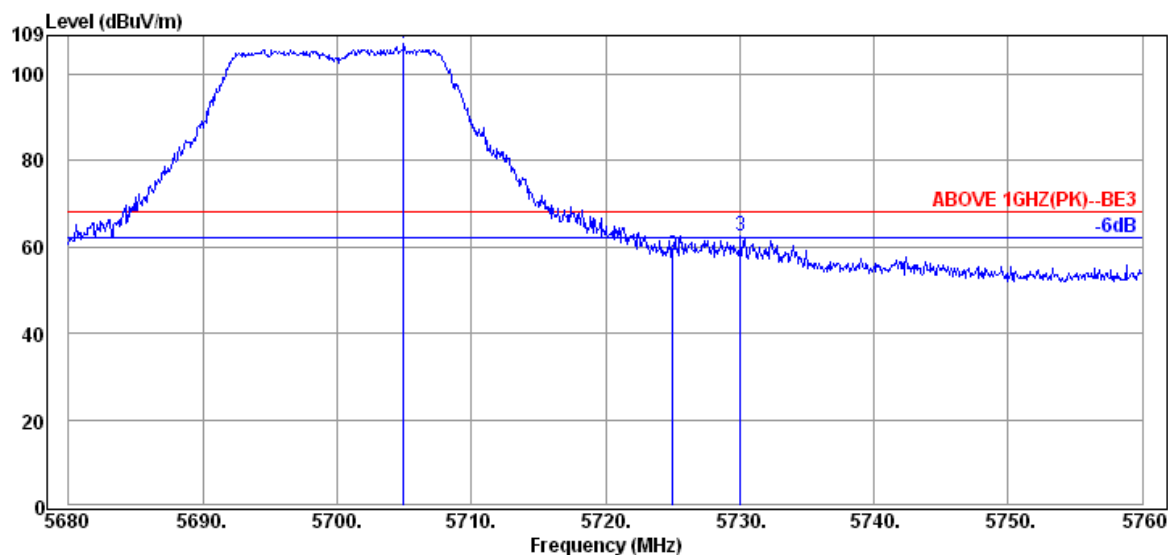

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5704.96	35.05	13.94	58.03	107.02	68.20	---	Peak
5725.04	35.07	13.98	8.85	57.90	68.20	10.30	Peak
5730.08	35.07	13.98	13.58	62.63	68.20	5.57	Peak

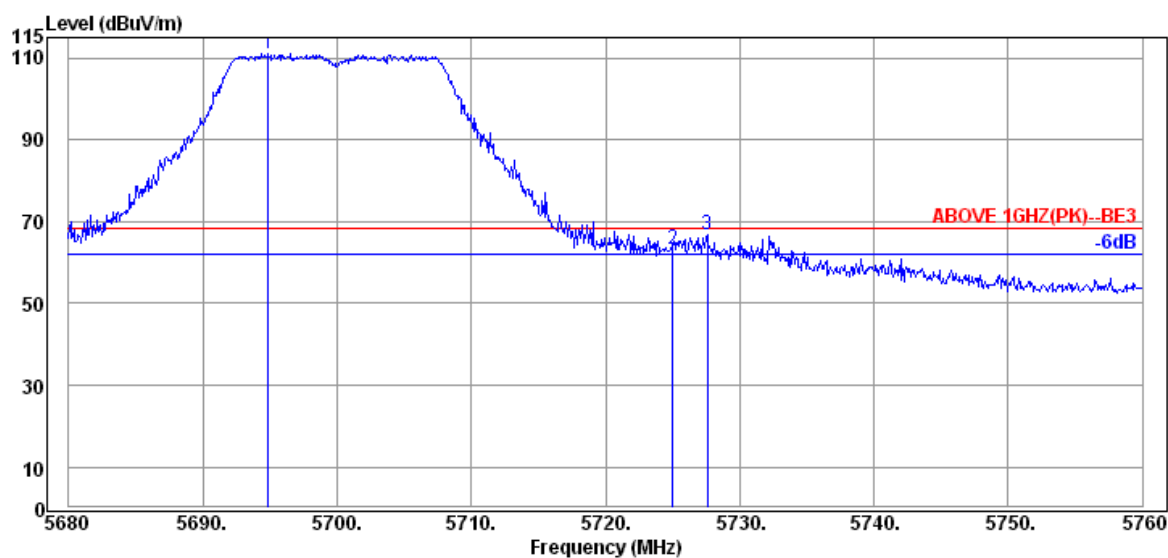

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5694.88	35.03	13.90	61.99	110.92	68.20	---	Peak
5725.04	35.07	13.98	14.36	63.41	68.20	4.79	Peak
5727.60	35.07	13.98	17.88	66.93	68.20	1.27	Peak

File Number: CIM1810100


Report Number: EM-F180490

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

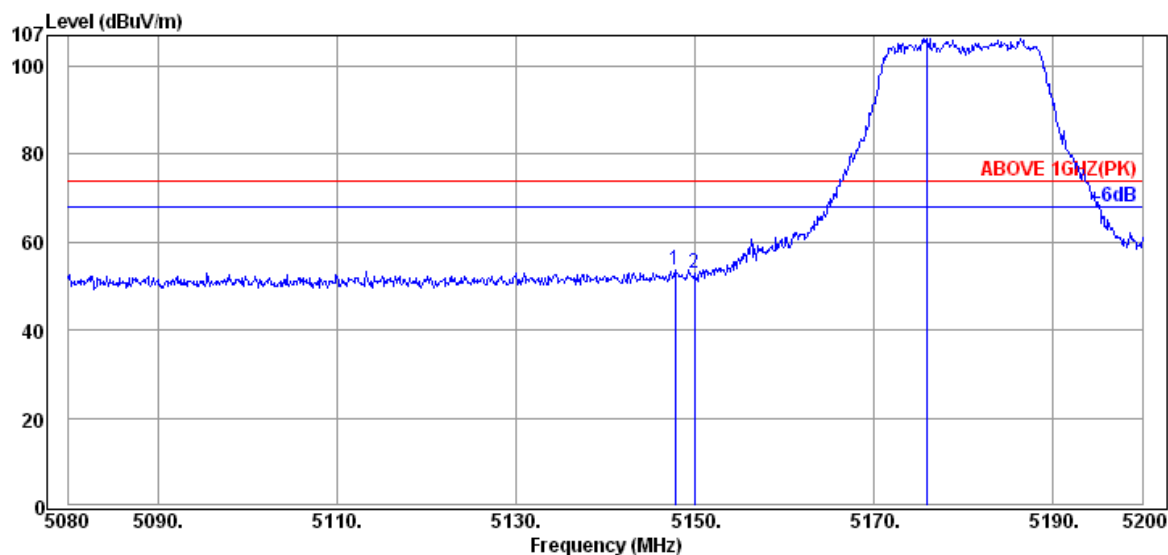

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.80	34.45	13.22	6.13	53.80	74.00	20.20	Peak
5149.96	34.45	13.22	5.38	53.05	74.00	20.95	Peak
5176.00	34.48	13.19	58.78	106.45	---	---	Peak

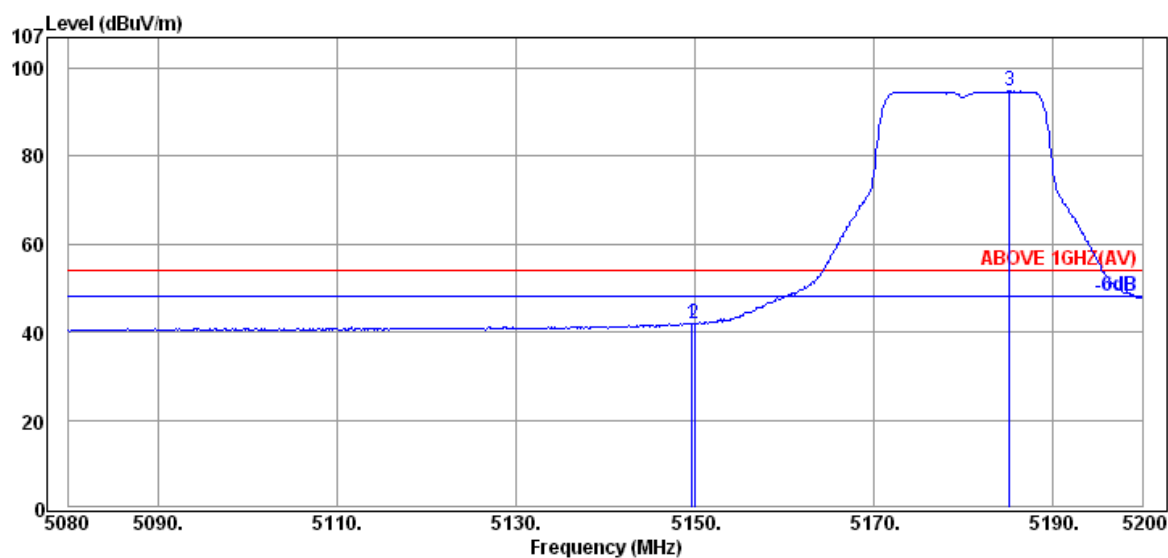


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.72	34.45	13.22	-5.73	41.94	54.00	12.06	Average
5149.96	34.45	13.22	-5.78	41.89	54.00	12.11	Average
5185.12	34.48	13.19	47.19	94.86	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

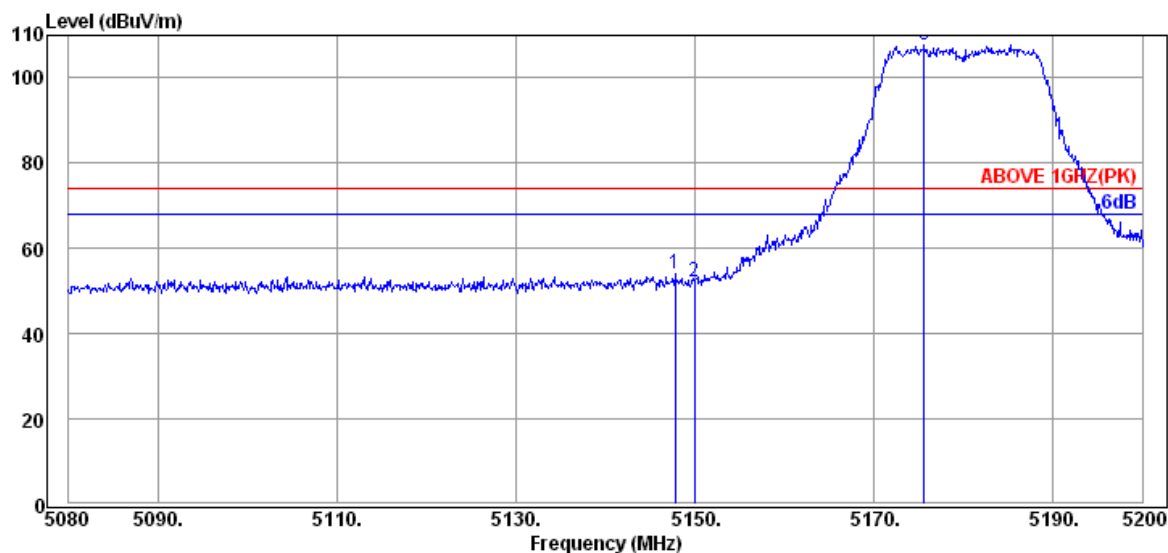

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5147.80	34.45	13.22	6.55	54.22	74.00	19.78	Peak
5149.96	34.45	13.22	4.31	51.98	74.00	22.02	Peak
5175.64	34.48	13.19	60.17	107.84	---	---	Peak

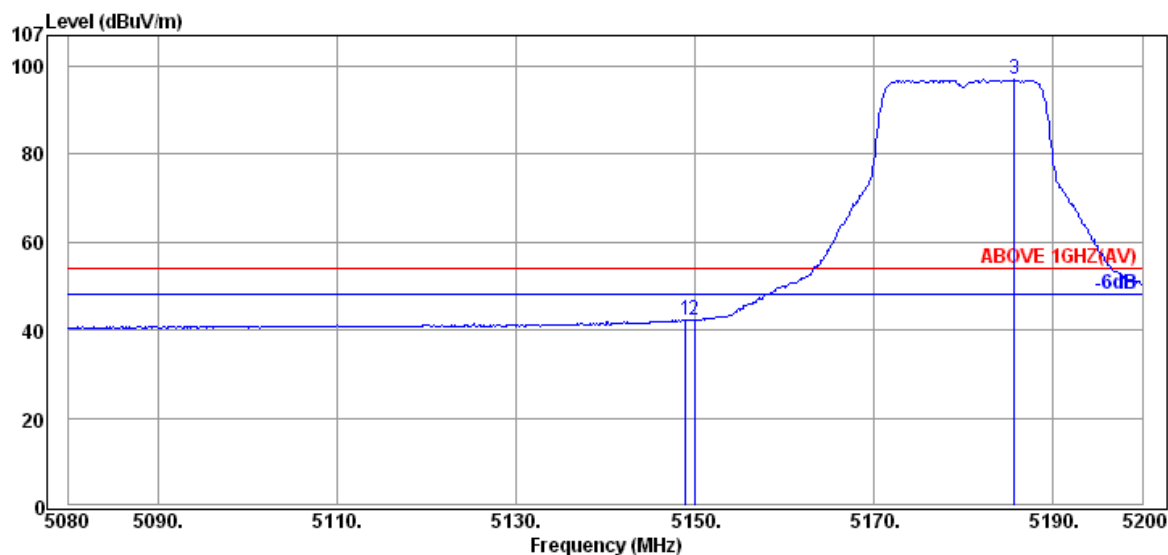

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.00	34.45	13.22	-5.22	42.45	54.00	11.55	Average
5149.96	34.45	13.22	-5.25	42.42	54.00	11.58	Average
5185.72	34.48	13.19	49.29	96.96	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

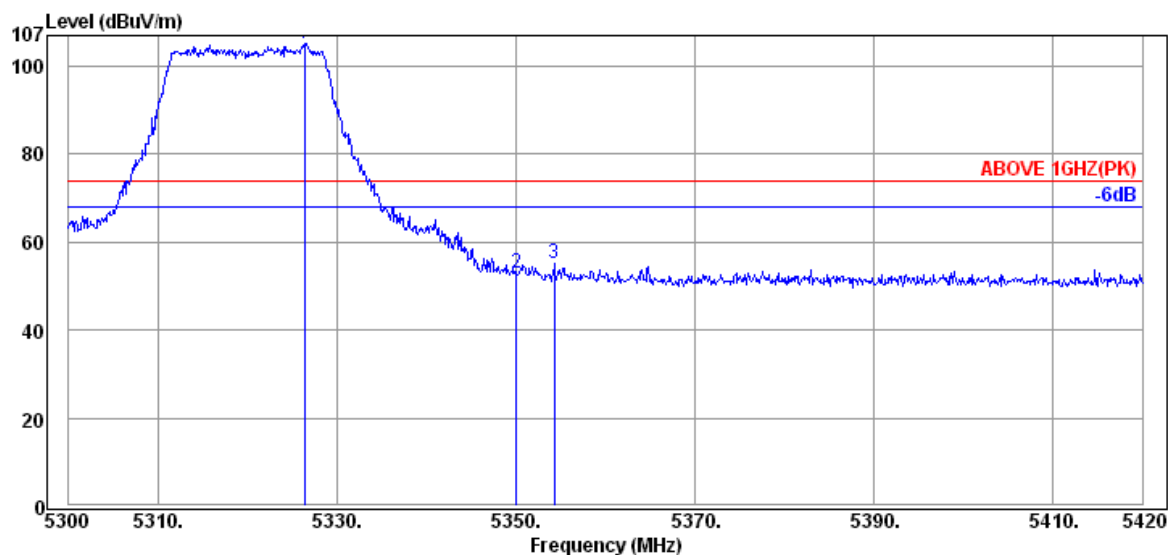

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5326.40	34.62	13.22	57.32	105.16	---	---	Peak
5350.04	34.65	13.31	5.08	53.04	74.00	20.96	Peak
5354.24	34.65	13.31	7.37	55.33	74.00	18.67	Peak

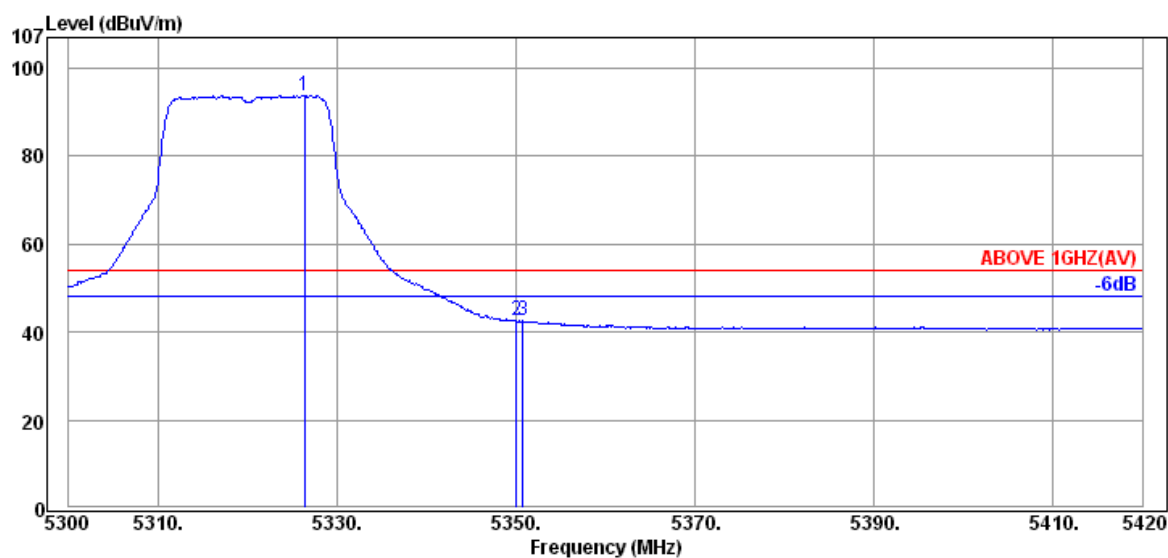


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5326.40	34.62	13.22	45.99	93.83	---	---	Average
5350.04	34.65	13.31	-5.43	42.53	54.00	11.47	Average
5350.76	34.65	13.31	-5.41	42.55	54.00	11.45	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

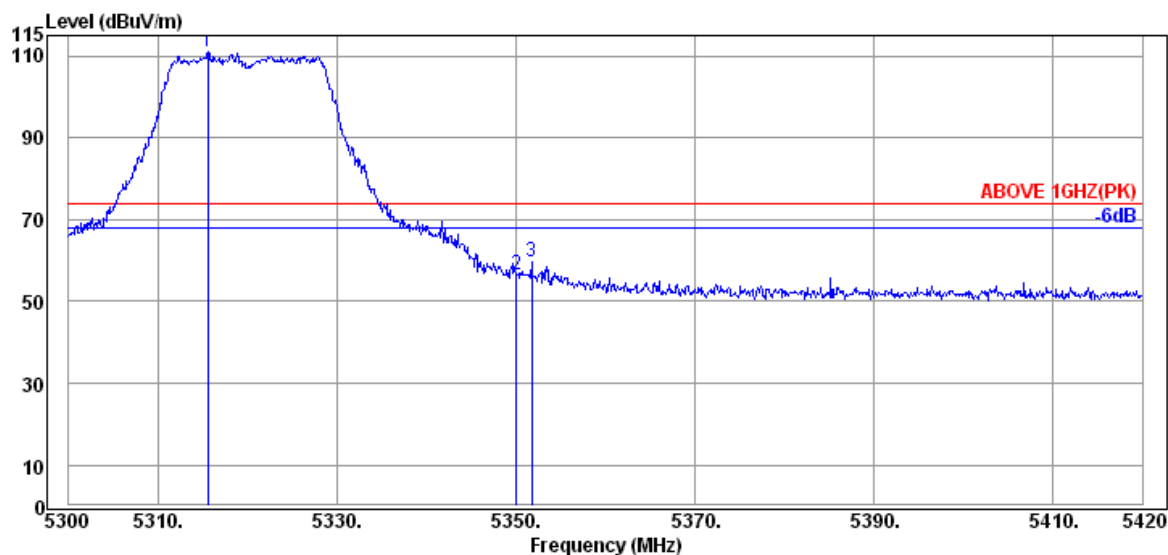

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5315.60	34.62	13.22	63.11	110.95	---	---	Peak
5350.04	34.65	13.31	8.65	56.61	74.00	17.39	Peak
5351.72	34.65	13.31	11.78	59.74	74.00	14.26	Peak

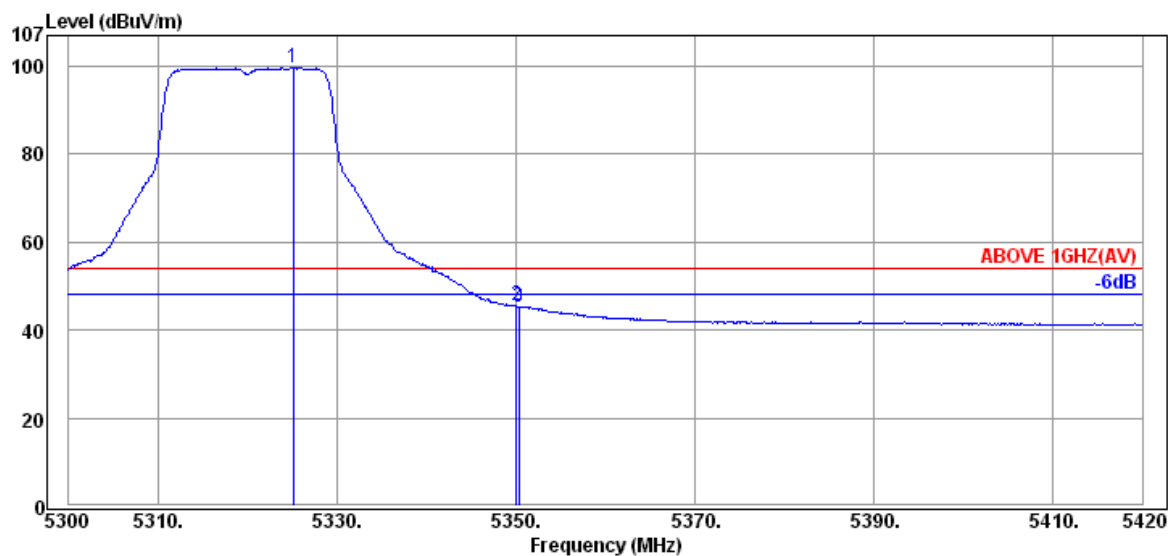


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5325.08	34.62	13.22	51.85	99.69	54.00	---	Average
5350.04	34.65	13.31	-2.49	45.47	54.00	8.53	Average
5350.28	34.65	13.31	-2.60	45.36	54.00	8.64	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

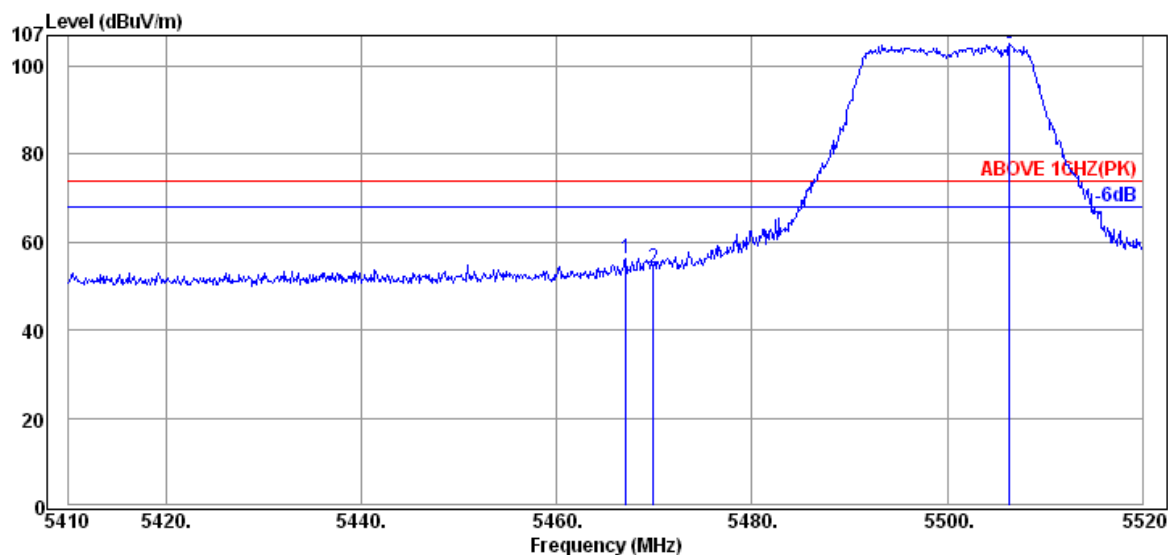

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.09	34.77	13.51	7.90	56.18	74.00	17.82	Peak
5469.95	34.77	13.51	5.60	53.88	74.00	20.12	Peak
5506.36	34.80	13.55	56.63	104.98	---	---	Peak

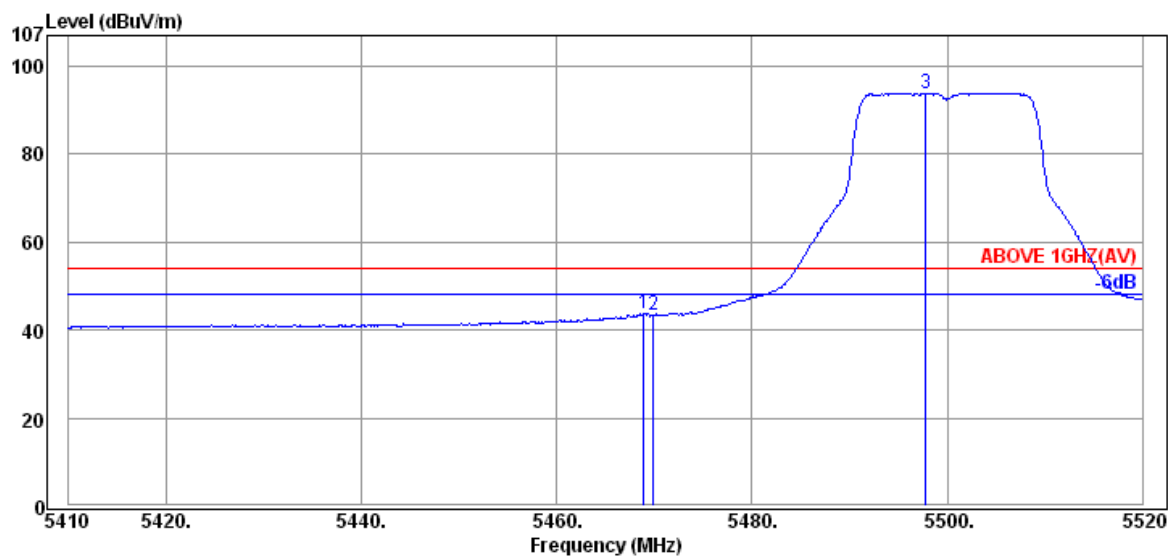


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.96	34.77	13.51	-4.40	43.88	54.00	10.12	Average
5469.95	34.77	13.51	-4.84	43.44	54.00	10.56	Average
5497.78	34.80	13.55	45.59	93.94	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

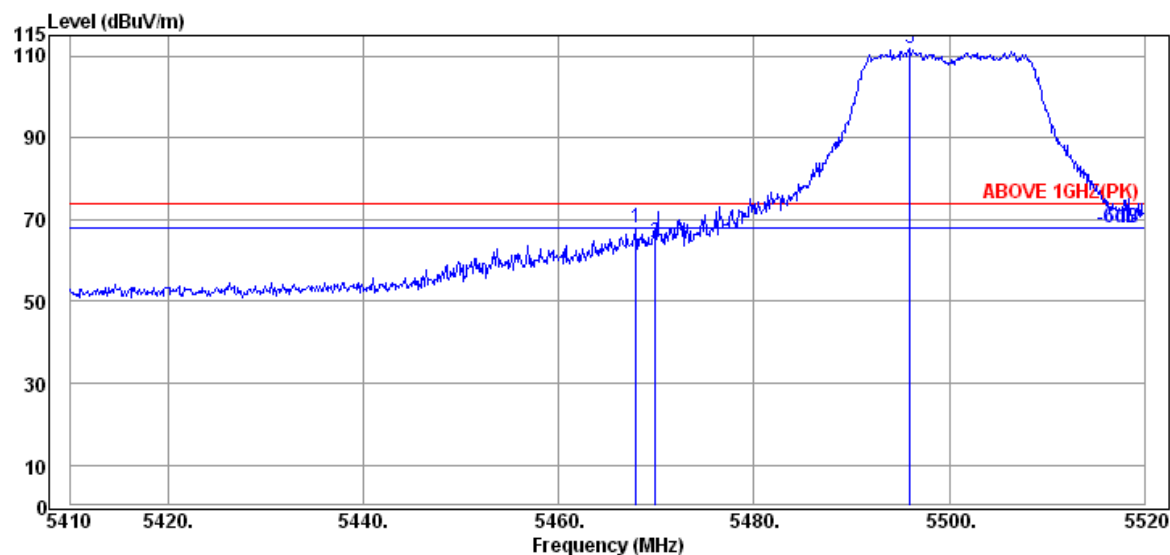

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.97	34.77	13.51	19.50	67.78	74.00	6.22	Peak
5469.95	34.77	13.51	16.09	64.37	74.00	9.63	Peak
5496.02	34.78	13.53	63.37	111.68	---	---	Peak

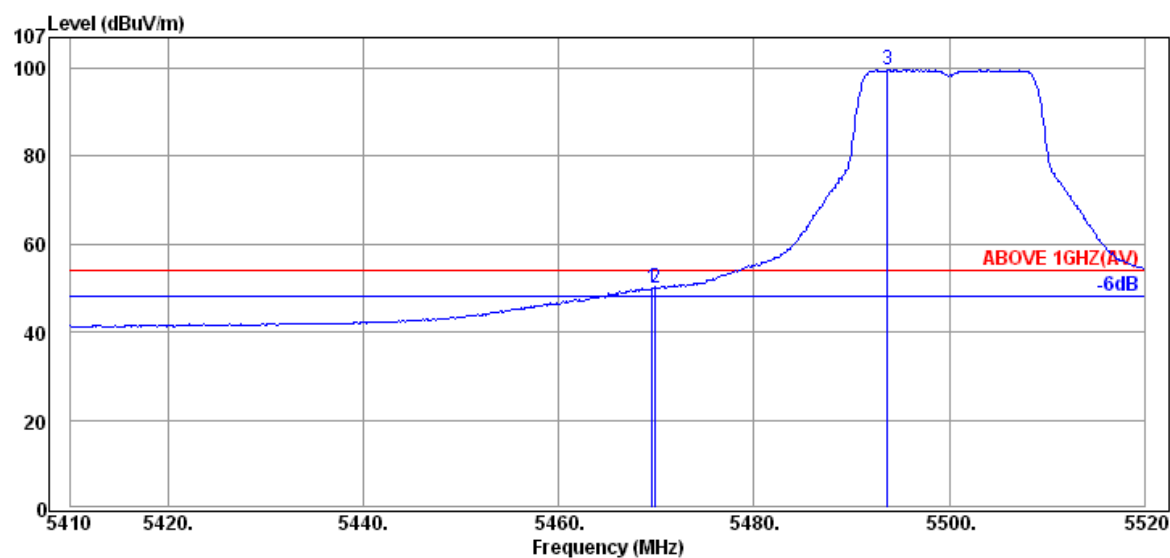

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.62	34.77	13.51	1.86	50.14	54.00	3.86	Average
5469.95	34.77	13.51	1.69	49.97	54.00	4.03	Average
5493.71	34.78	13.53	51.44	99.75	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

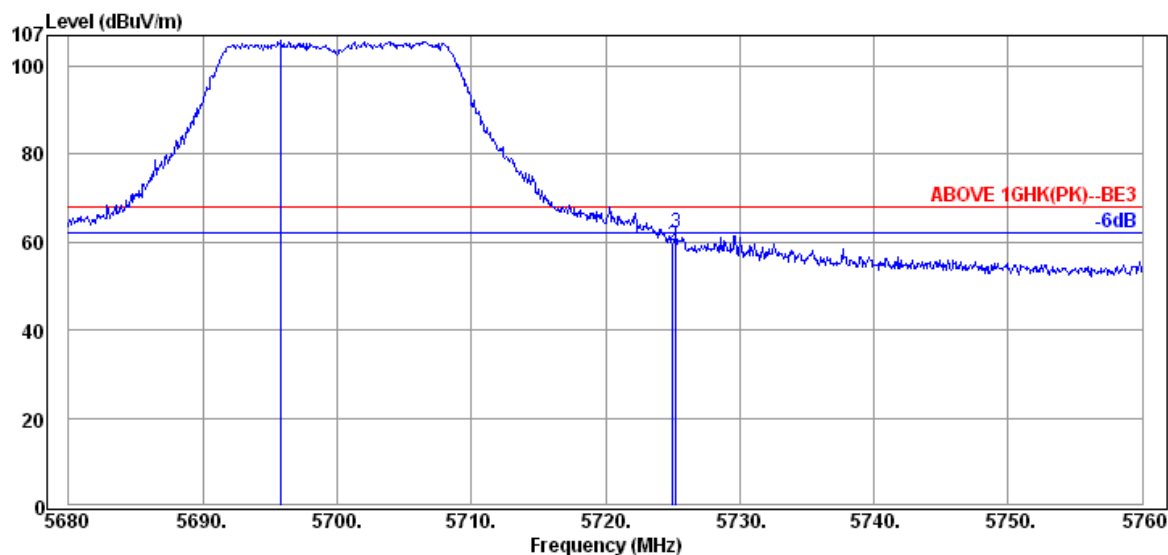

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5695.84	35.03	13.90	56.96	105.89	68.20	---	Peak
5725.04	35.07	13.98	10.20	59.25	68.20	8.95	Peak
5725.28	35.07	13.98	13.11	62.16	68.20	6.04	Peak

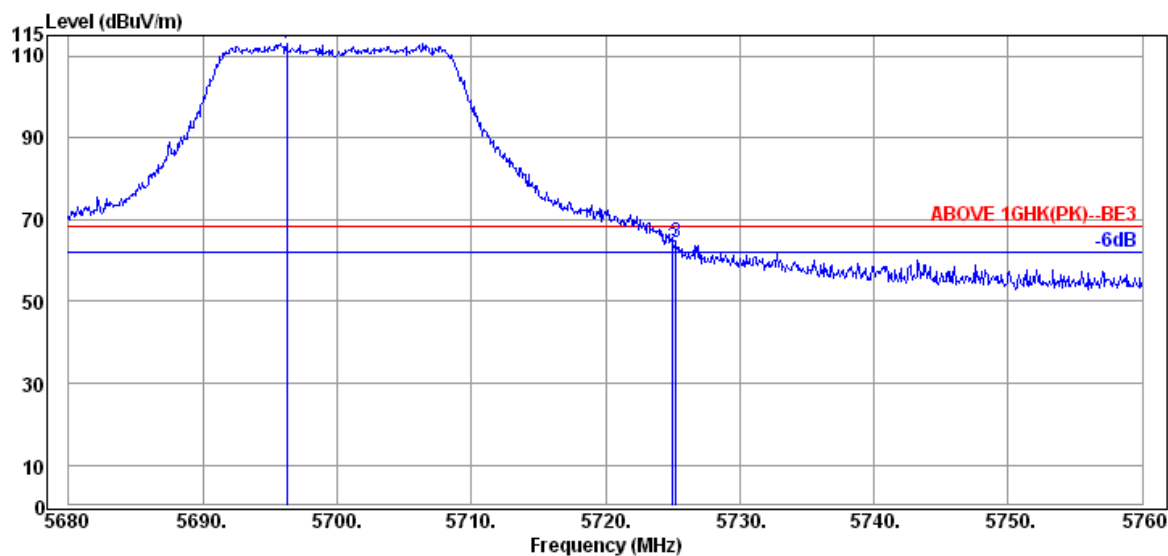

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.24	35.03	13.90	64.27	113.20	68.20	---	Peak
5725.04	35.07	13.98	13.99	63.04	68.20	5.16	Peak
5725.28	35.07	13.98	15.35	64.40	68.20	3.80	Peak

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

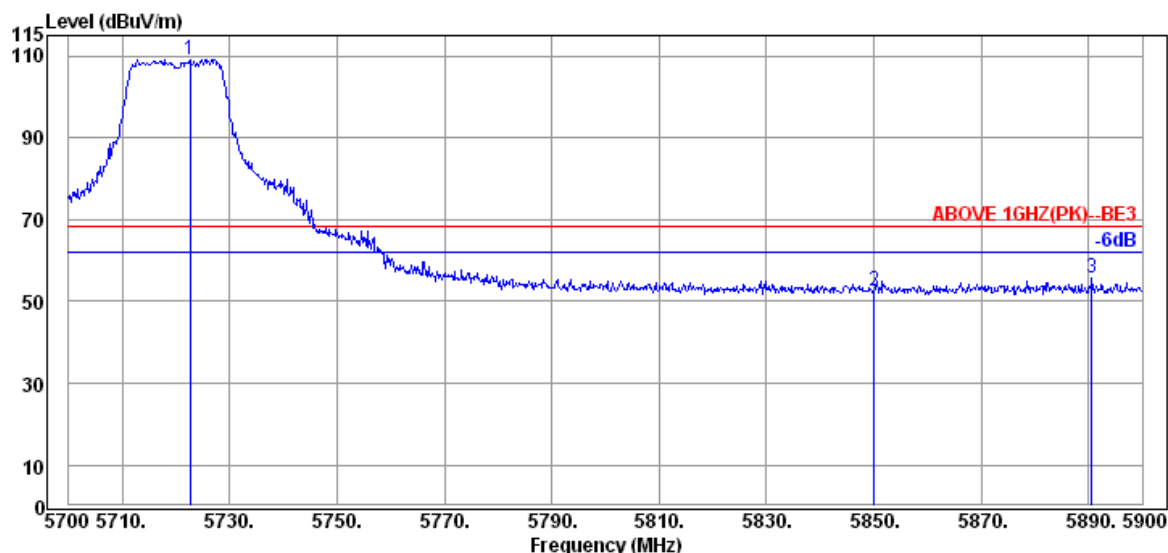

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5722.60	35.07	13.98	60.09	109.14	68.20	---	Peak
5850.00	35.21	14.25	3.11	52.57	68.20	15.63	Peak
5890.60	35.28	14.35	5.98	55.61	68.20	12.59	Peak

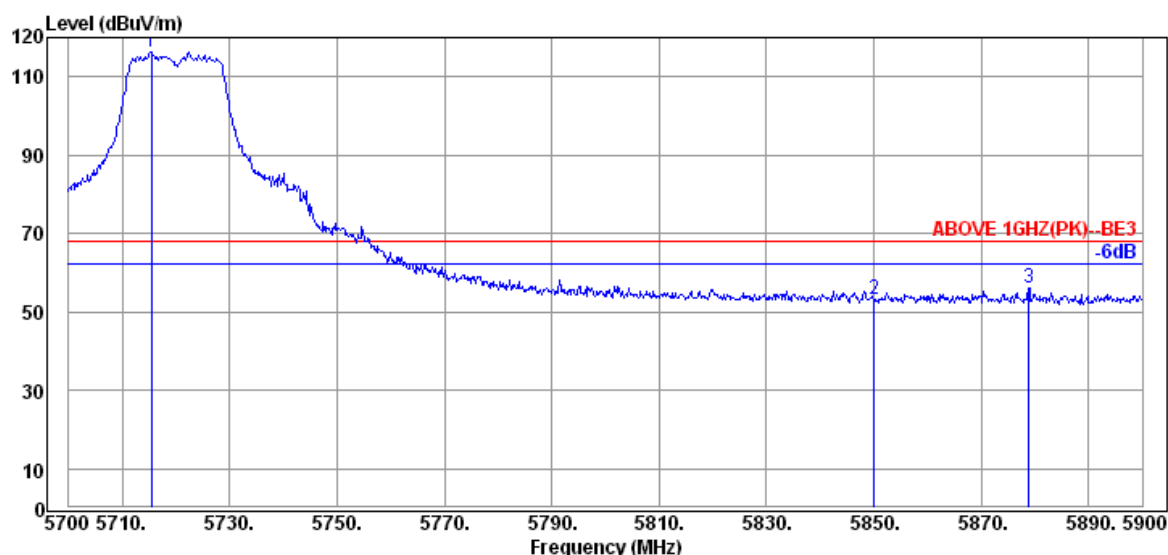


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5715.40	35.05	13.94	67.36	116.35	68.20	---	Peak
5850.00	35.21	14.25	3.91	53.37	68.20	14.83	Peak
5878.80	35.26	14.32	6.41	55.99	68.20	12.21	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

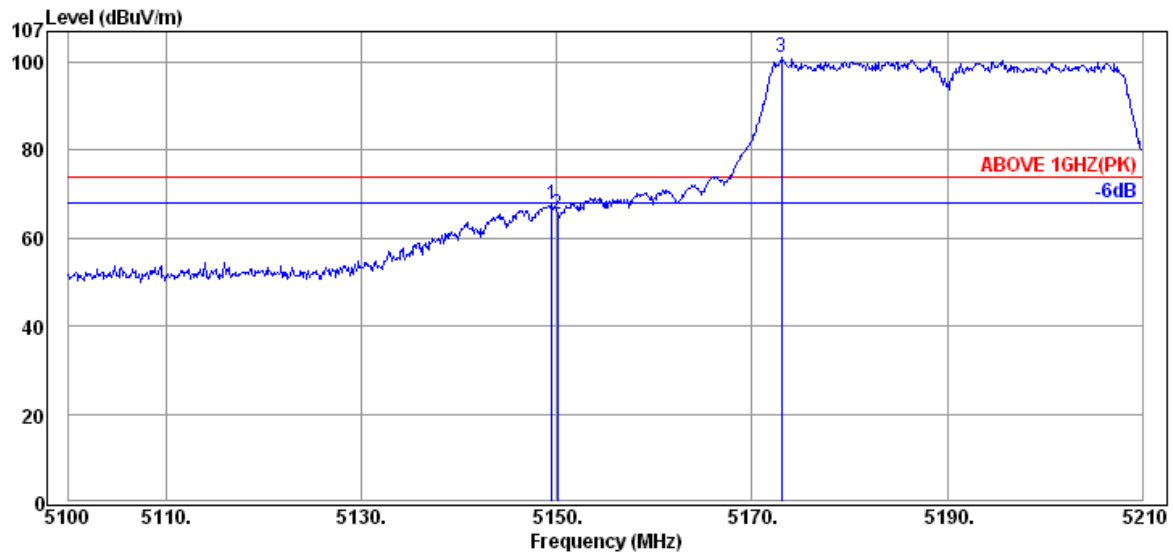

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.50	34.45	13.22	20.17	67.84	74.00	6.16	Peak
5150.05	34.45	13.22	17.66	65.33	74.00	8.67	Peak
5173.04	34.47	13.20	53.29	100.96	---	---	Peak

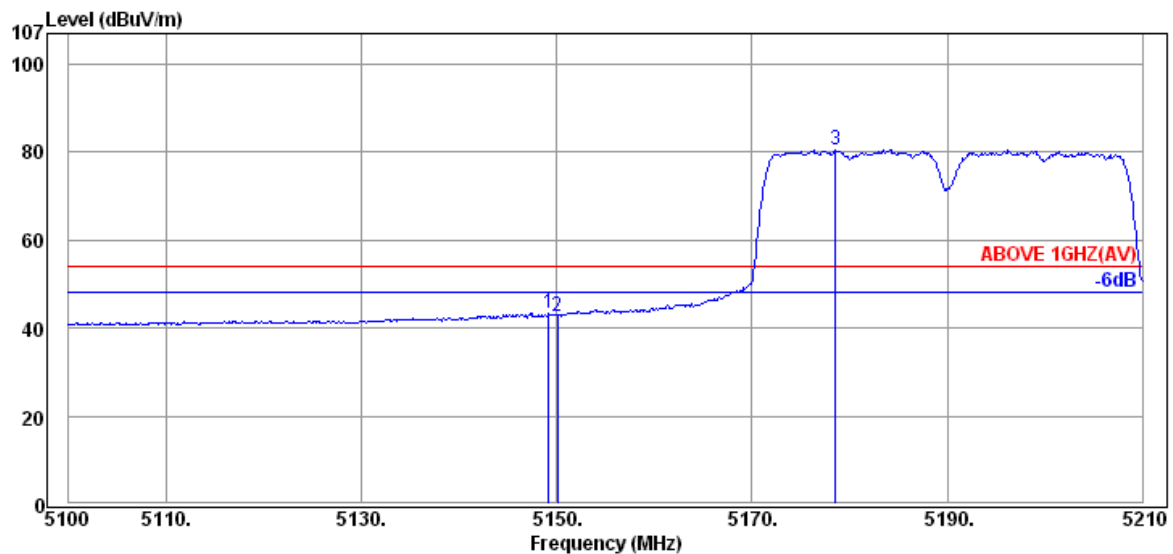


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.17	34.45	13.22	-4.40	43.27	54.00	10.73	Average
5150.05	34.45	13.22	-4.94	42.73	54.00	11.27	Average
5178.54	34.48	13.19	32.81	80.48	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

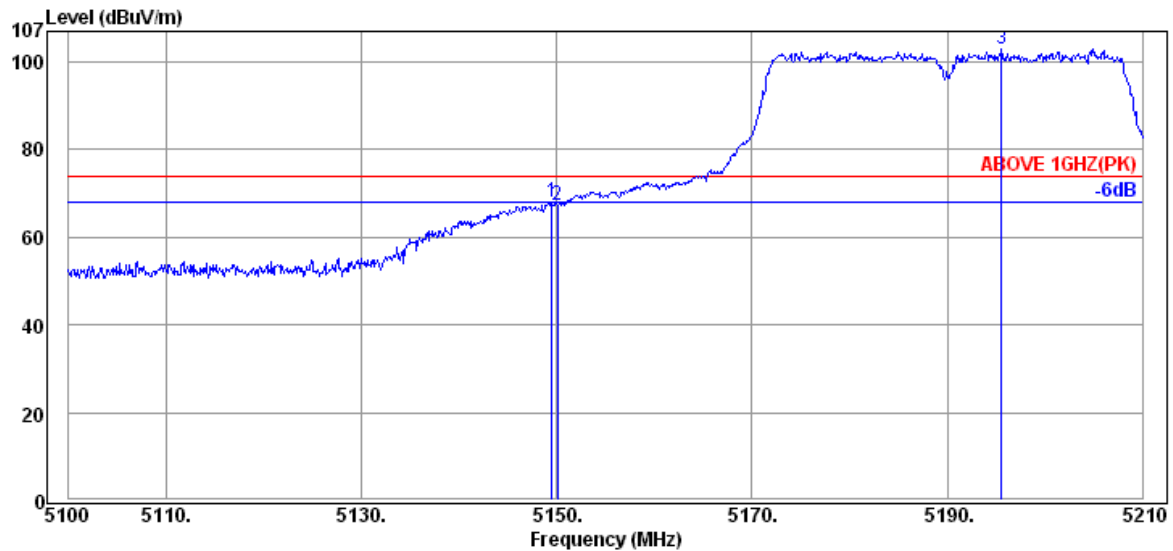

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5149.50	34.45	13.22	20.32	67.99	74.00	6.01	Peak
5150.05	34.45	13.22	19.67	67.34	74.00	6.66	Peak
5195.59	34.50	13.18	55.23	102.91	---	---	Peak

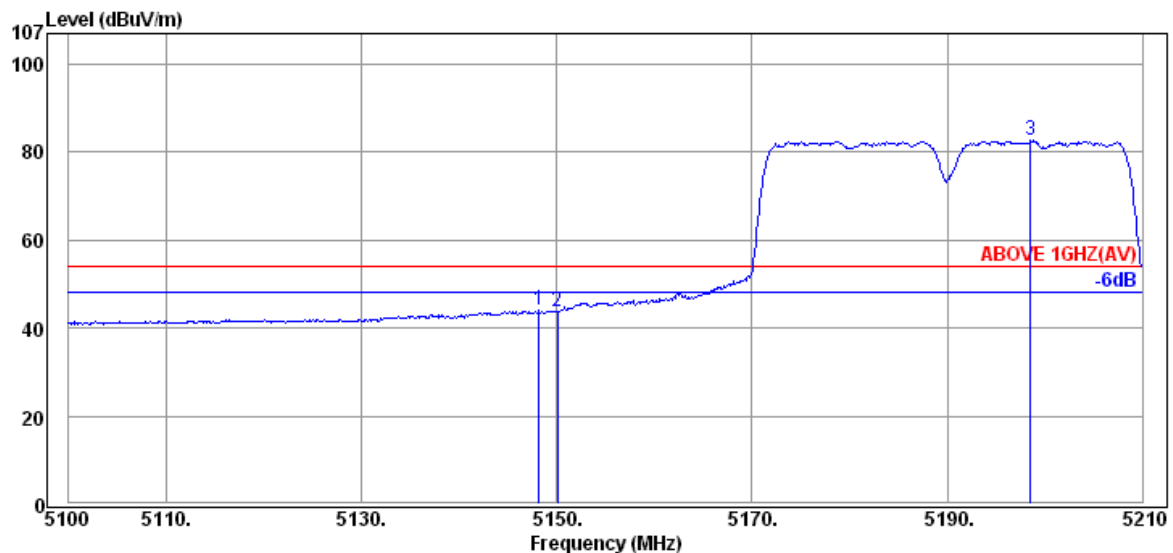


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5148.18	34.45	13.22	-3.61	44.06	54.00	9.94	Average
5150.05	34.45	13.22	-3.75	43.92	54.00	10.08	Average
5198.56	34.50	13.18	35.15	82.83	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

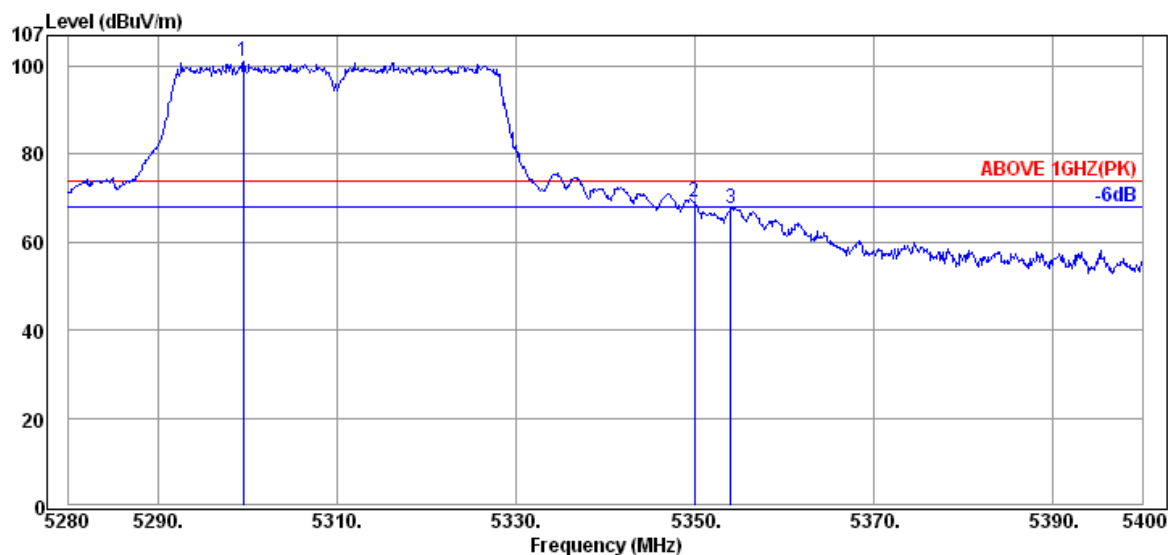

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5299.56	34.60	13.17	53.24	101.01	---	---	Peak
5349.96	34.65	13.31	21.12	69.08	74.00	4.92	Peak
5354.04	34.65	13.31	19.73	67.69	74.00	6.31	Peak

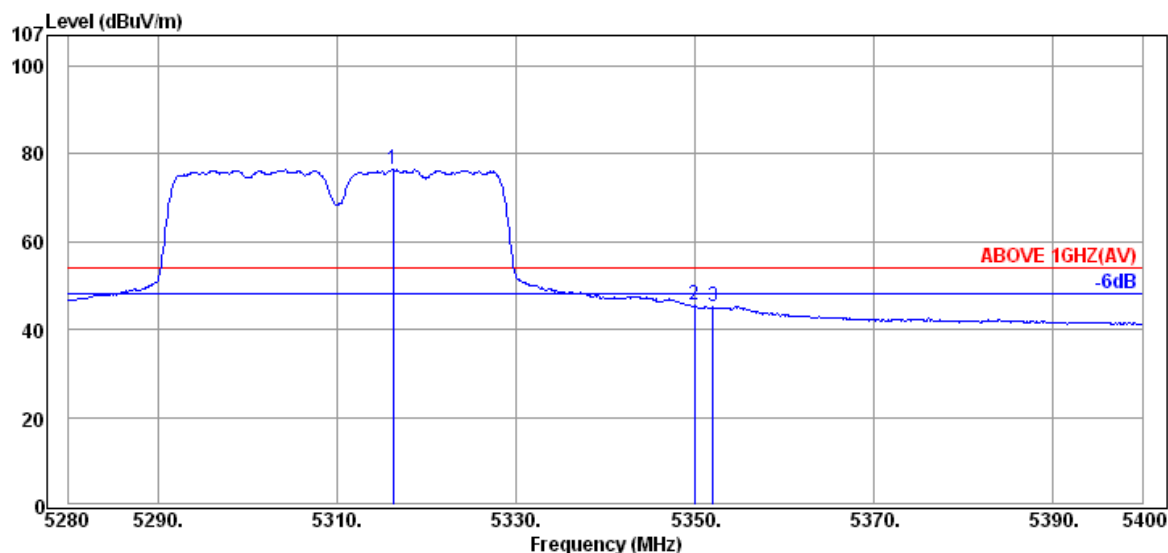

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.24	34.62	13.22	28.64	76.48	---	---	Average
5349.96	34.65	13.31	-2.49	45.47	54.00	8.53	Average
5352.00	34.65	13.31	-2.77	45.19	54.00	8.81	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

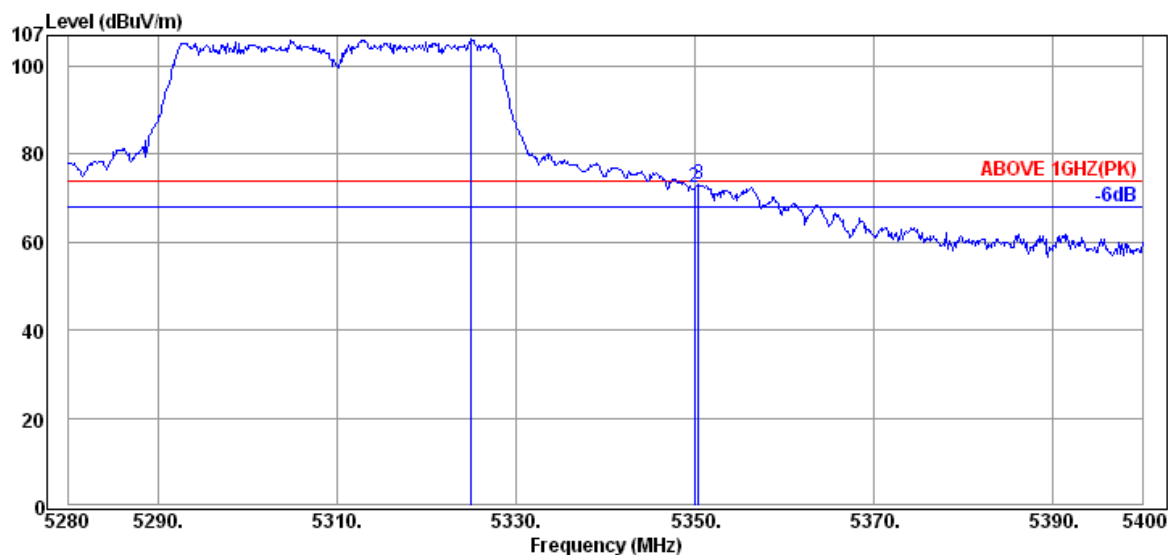

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5324.88	34.62	13.22	58.25	106.09	---	---	Peak
5349.96	34.65	13.31	24.41	72.37	74.00	1.63	Peak
5350.44	34.65	13.31	25.04	73.00	74.00	1.00	Peak

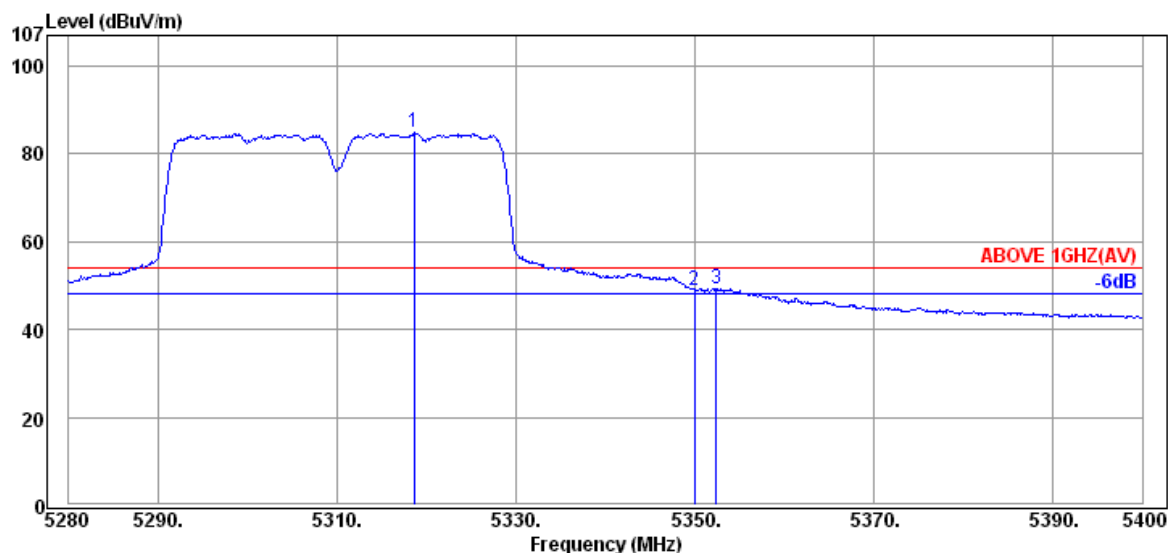


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5318.64	34.62	13.22	36.98	84.82	---	---	Average
5349.96	34.65	13.31	0.82	48.78	54.00	5.22	Average
5352.36	34.65	13.31	1.39	49.35	54.00	4.65	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

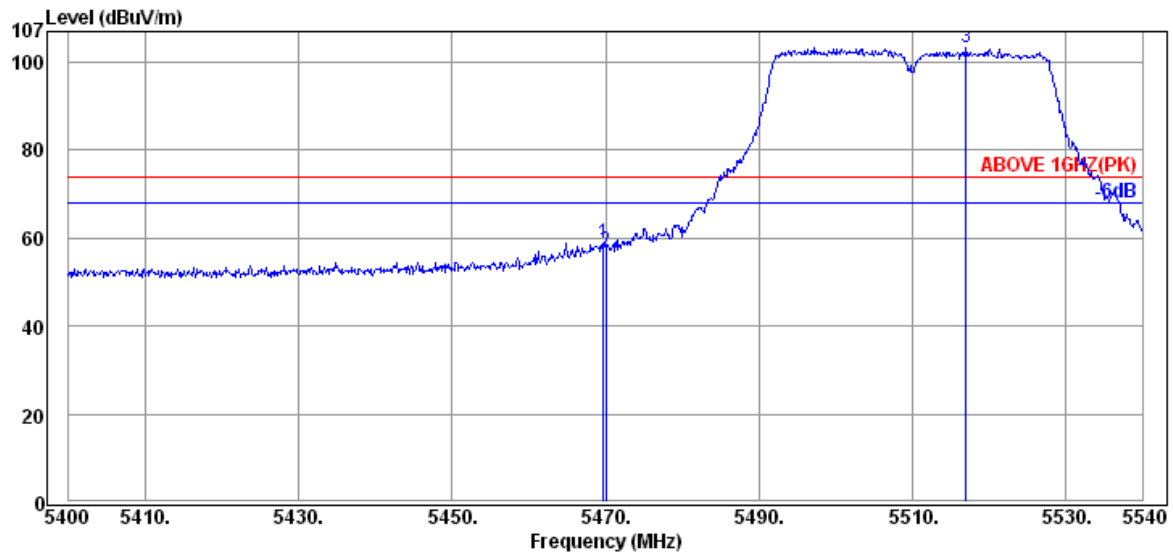

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.72	34.77	13.51	10.55	58.83	74.00	15.17	Peak
5470.00	34.77	13.51	8.83	57.11	74.00	16.89	Peak
5517.04	34.82	13.58	55.06	103.46	---	---	Peak

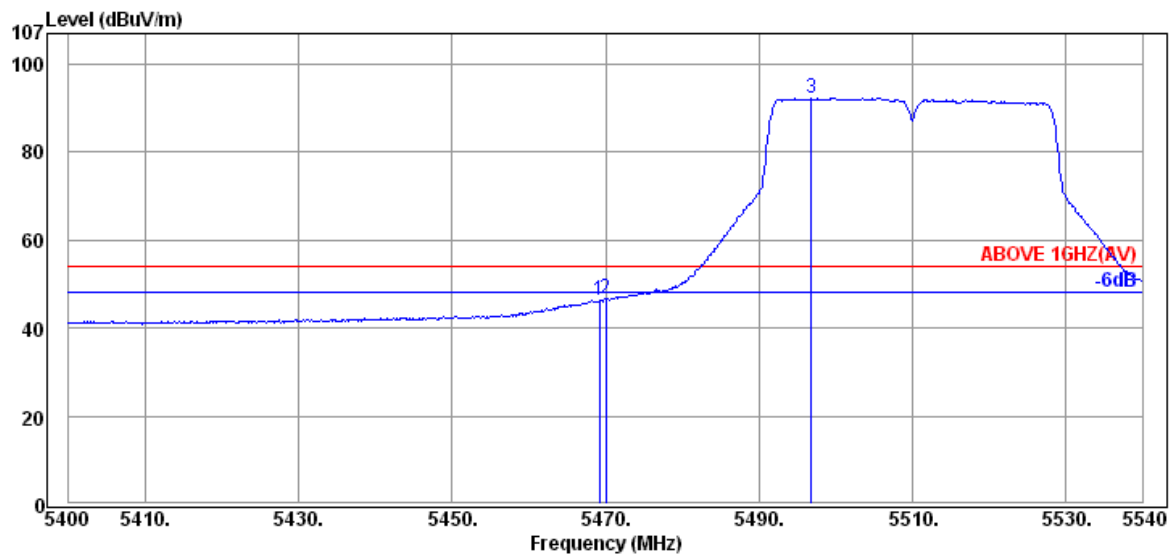


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.16	34.77	13.51	-1.98	46.30	54.00	7.70	Average
5470.00	34.77	13.51	-1.50	46.78	54.00	7.22	Average
5496.88	34.80	13.55	44.00	92.35	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

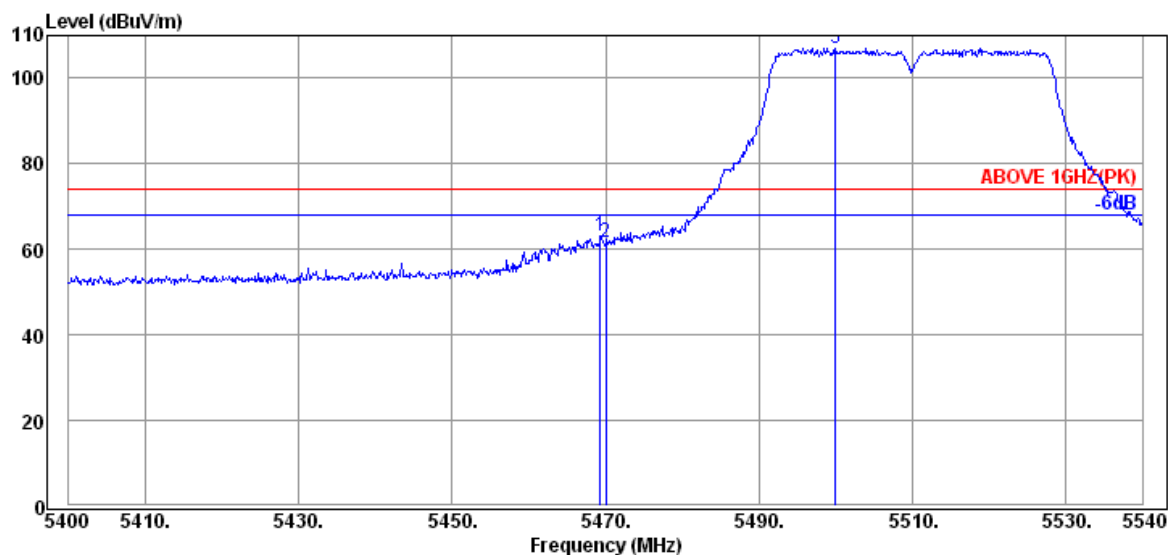

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5469.30	34.77	13.51	14.72	63.00	74.00	11.00	Peak
5470.00	34.77	13.51	13.44	61.72	74.00	12.28	Peak
5499.96	34.80	13.55	58.80	107.15	---	---	Peak

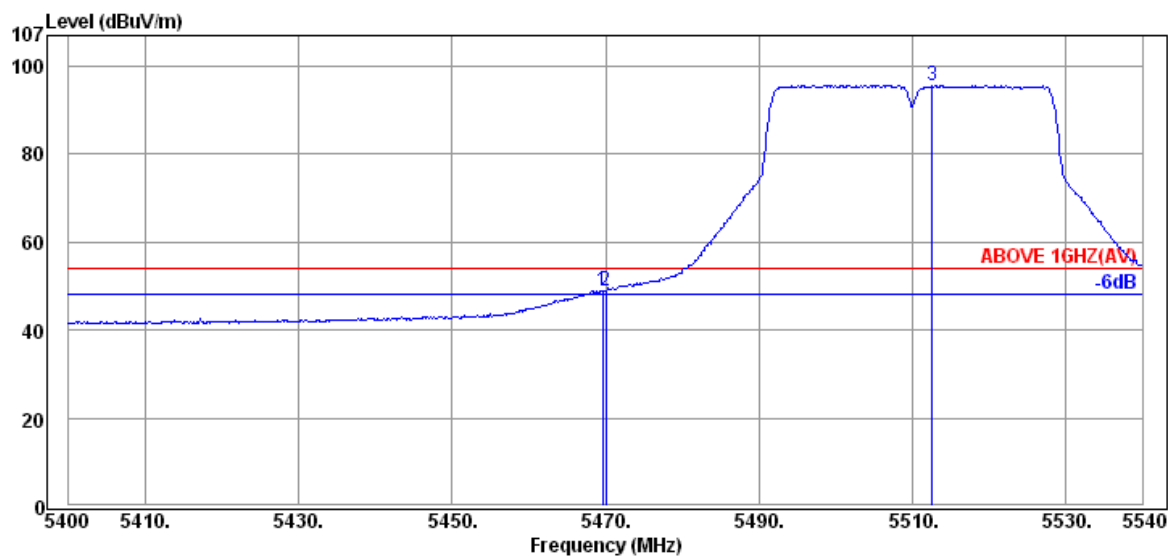

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5469.58	34.77	13.51	0.69	48.97	54.00	5.03	Average
5470.00	34.77	13.51	0.58	48.86	54.00	5.14	Average
5512.56	34.80	13.55	47.31	95.66	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

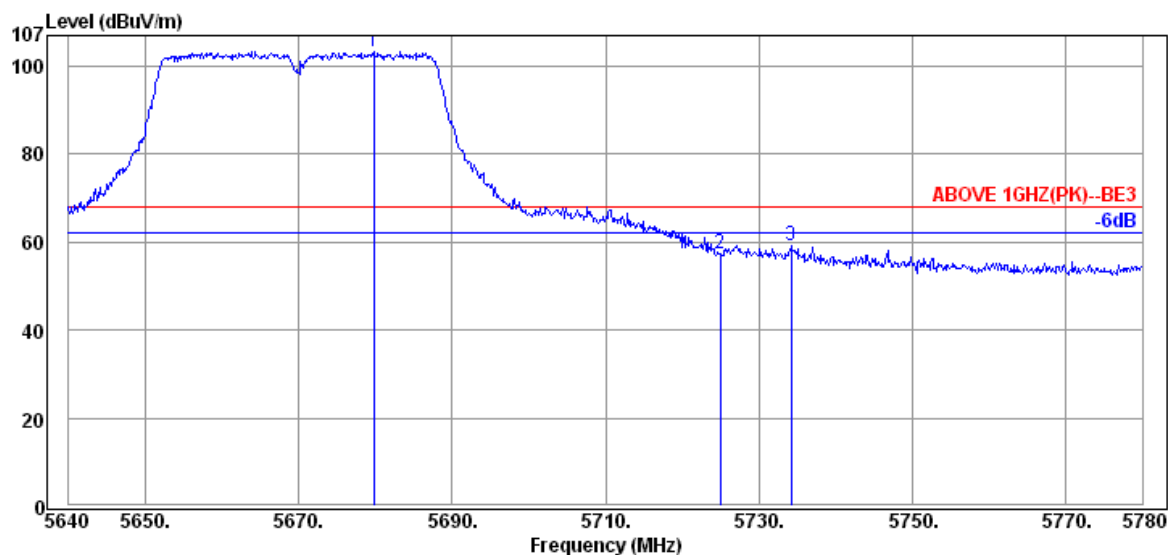

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5679.76	35.01	13.87	54.44	103.32	68.20	---	Peak
5724.98	35.07	13.98	8.39	57.44	68.20	10.76	Peak
5734.22	35.07	13.98	10.13	59.18	68.20	9.02	Peak

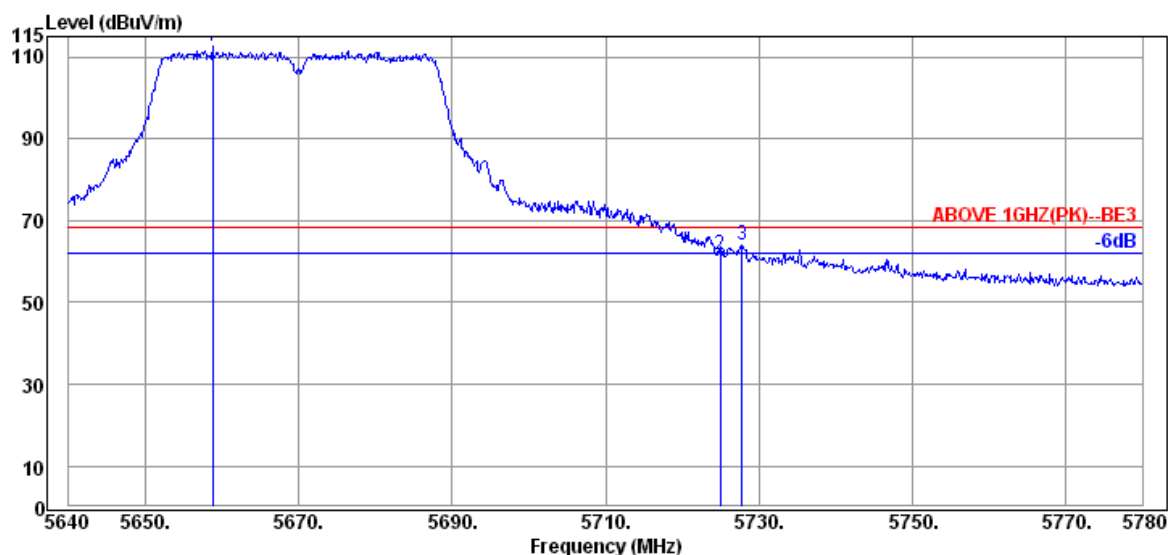

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5658.76	34.99	13.83	63.76	112.58	68.20	---	Peak
5724.98	35.07	13.98	12.44	61.49	68.20	6.71	Peak
5727.78	35.07	13.98	15.11	64.16	68.20	4.04	Peak

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

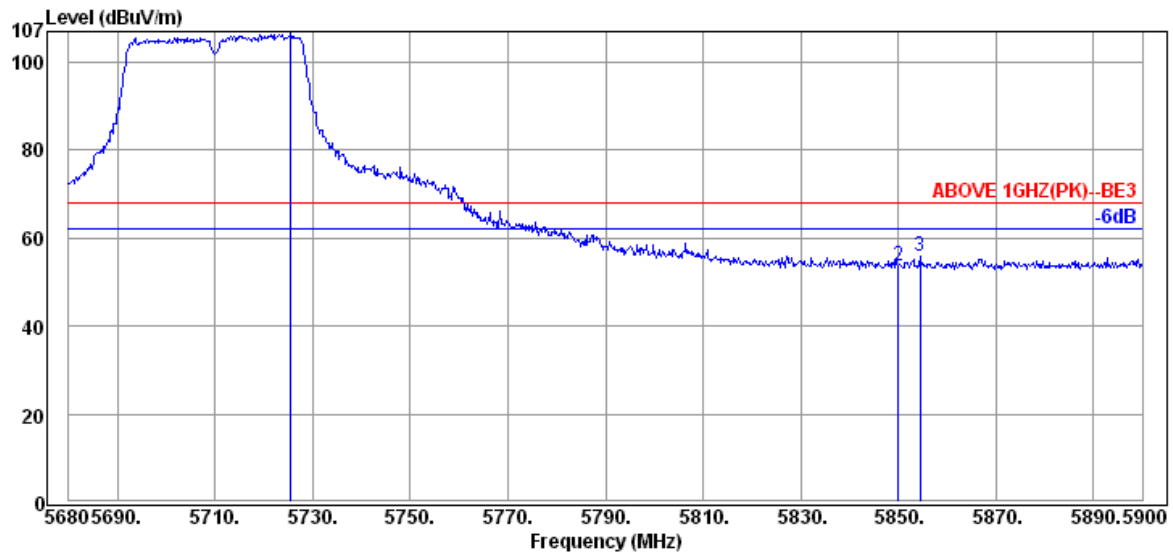

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5725.54	35.07	13.98	57.48	106.53	68.20	---	Peak
5850.00	35.21	14.25	4.26	53.72	68.20	14.48	Peak
5854.46	35.23	14.28	6.34	55.85	78.20	22.35	Peak

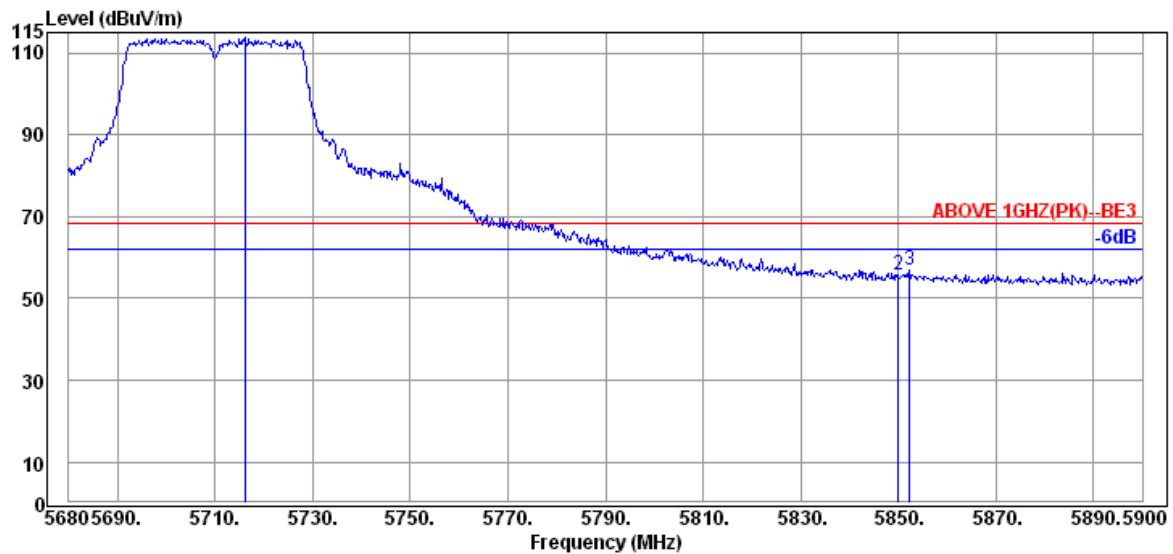

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5716.08	35.05	13.94	64.78	113.77	68.20	---	Peak
5850.00	35.21	14.25	6.29	55.75	68.20	12.45	Peak
5852.26	35.21	14.25	7.31	56.77	78.20	21.43	Peak

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

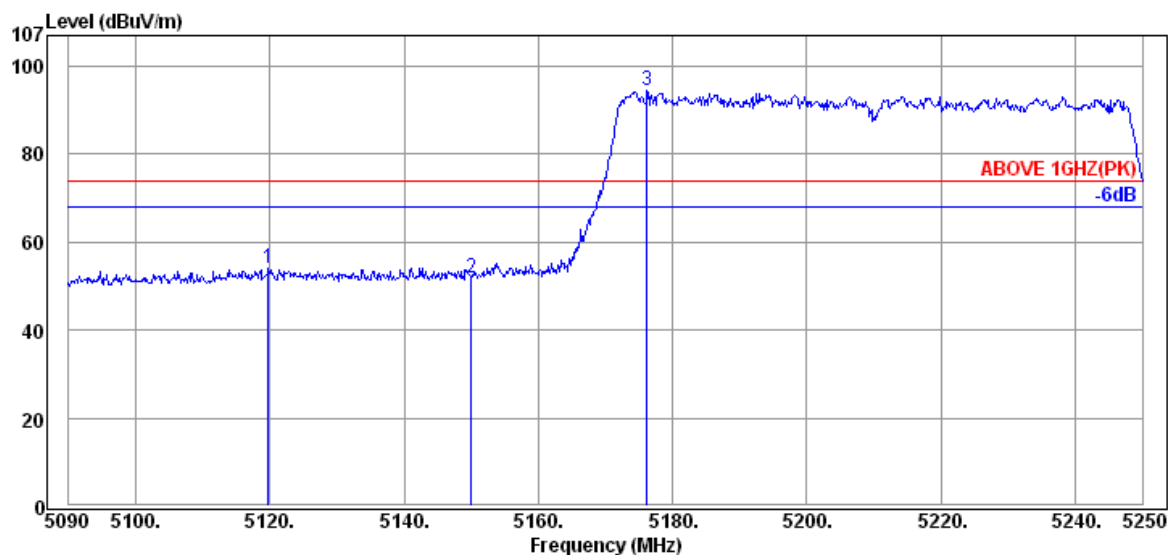

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5119.76	34.42	13.24	6.51	54.17	74.00	19.83	Peak
5150.00	34.45	13.22	4.17	51.84	74.00	22.16	Peak
5176.24	34.48	13.19	46.71	94.38	---	---	Peak

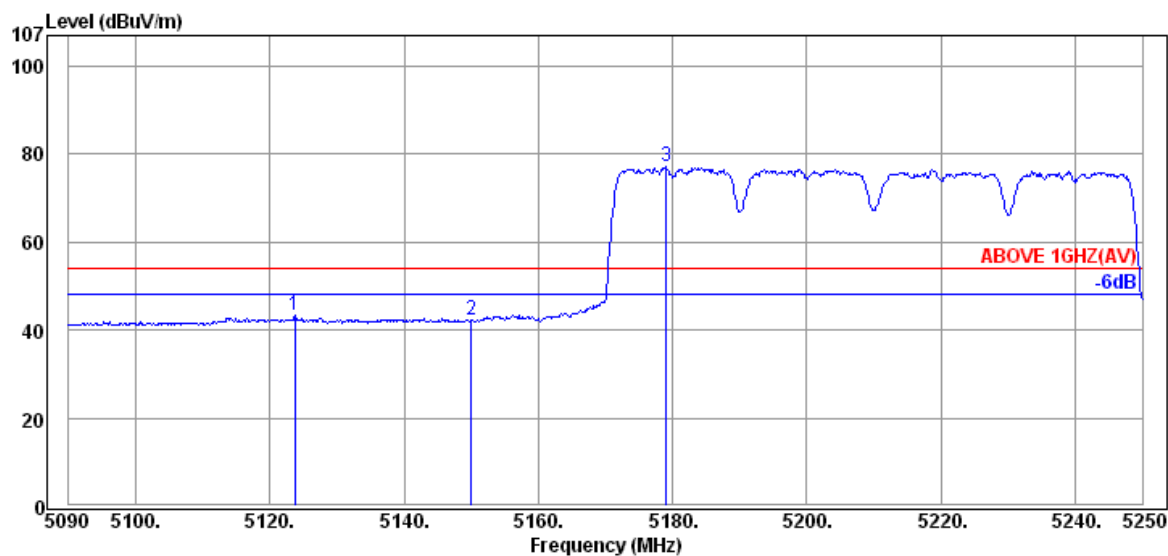


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.76	34.43	13.23	-4.43	43.23	54.00	10.77	Average
5150.00	34.45	13.22	-5.51	42.16	54.00	11.84	Average
5179.12	34.48	13.19	29.53	77.20	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

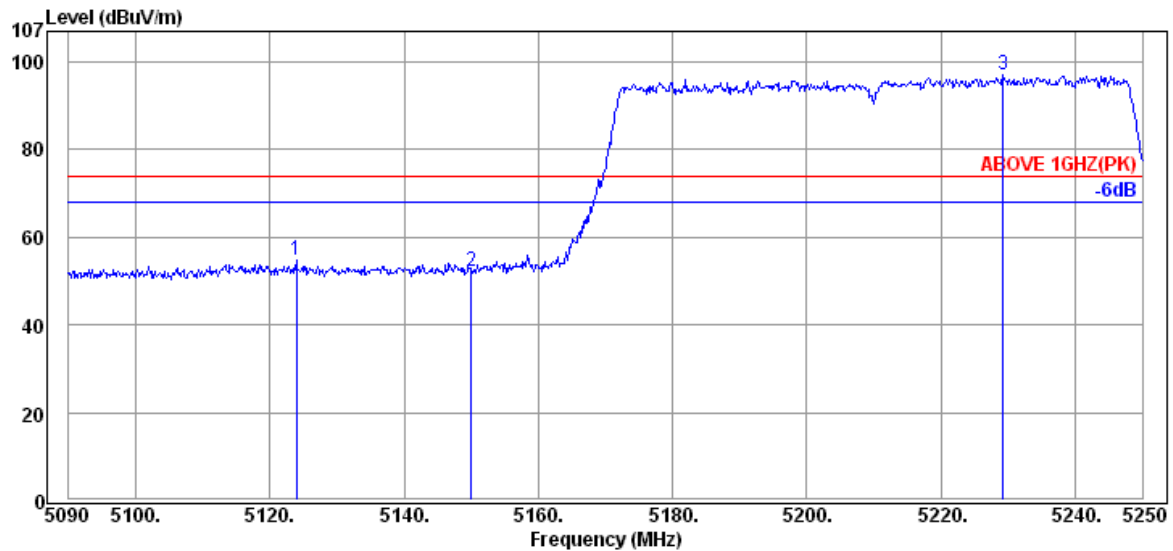

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5123.92	34.43	13.23	7.06	54.72	74.00	19.28	Peak
5150.00	34.45	13.22	4.36	52.03	74.00	21.97	Peak
5229.20	34.53	13.18	49.21	96.92	---	---	Peak

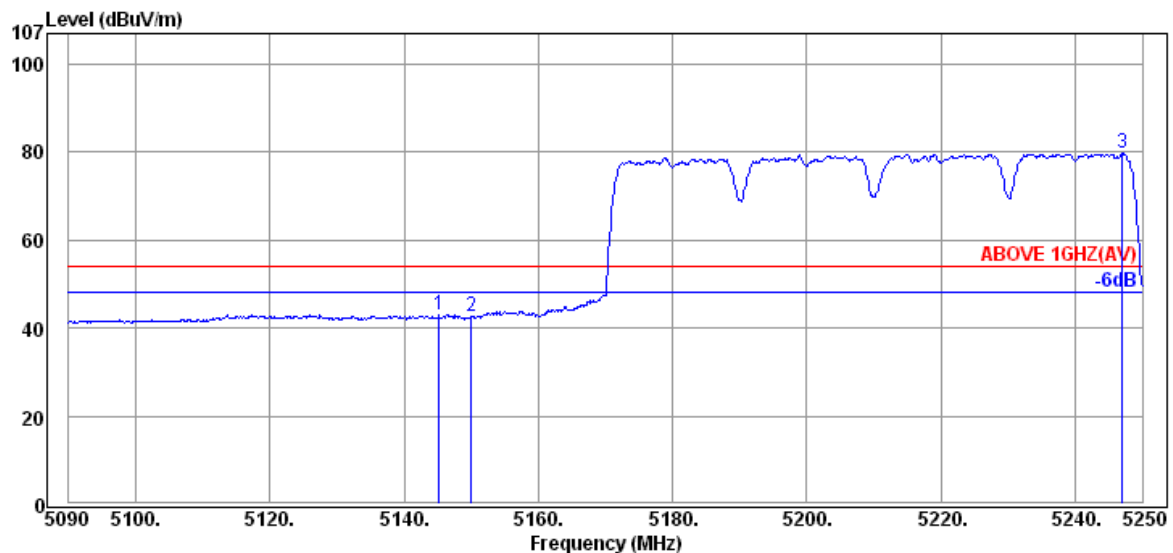


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5145.20	34.45	13.22	-4.63	43.04	54.00	10.96	Average
5150.00	34.45	13.22	-5.11	42.56	54.00	11.44	Average
5246.96	34.55	13.18	32.09	79.82	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

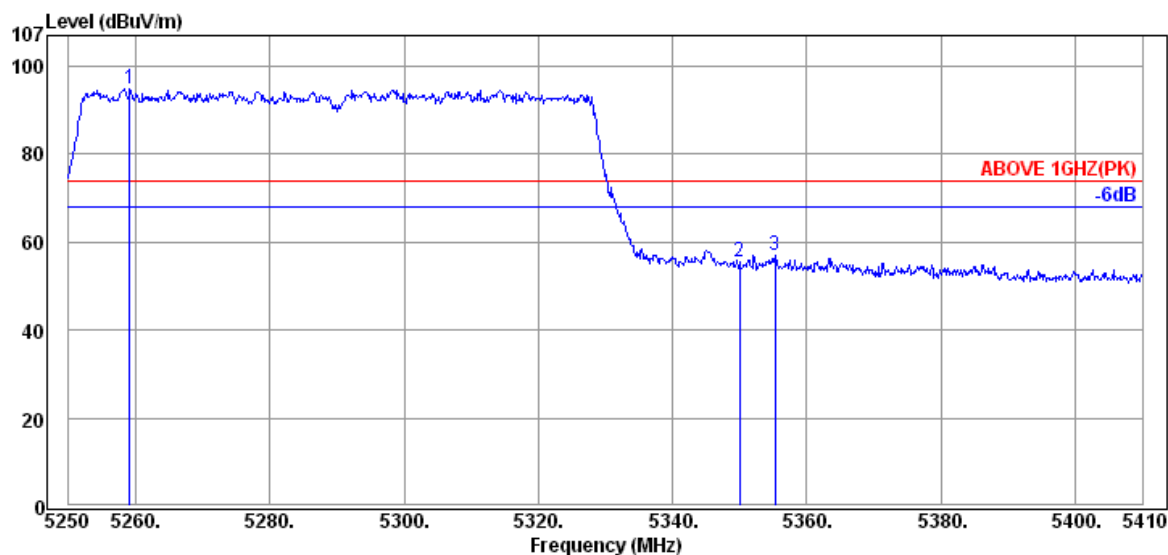

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5259.12	34.57	13.17	47.27	95.01	---	---	Peak
5350.00	34.65	13.31	7.57	55.53	74.00	18.47	Peak
5355.28	34.65	13.31	9.01	56.97	74.00	17.03	Peak

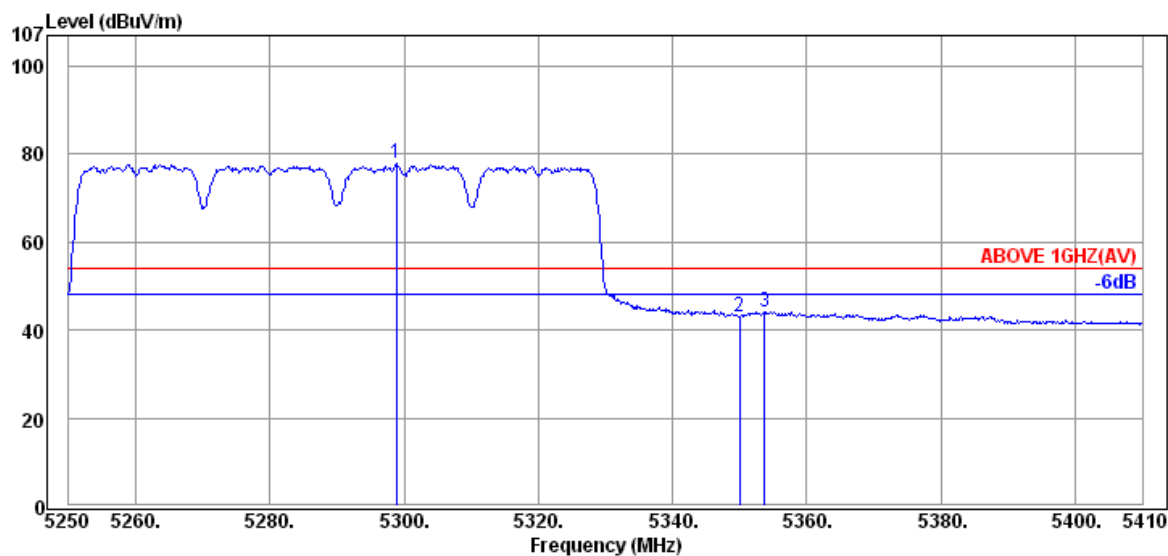

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector
5298.80	34.60	13.17	30.01	77.78	---	---	Average
5350.00	34.65	13.31	-4.83	43.13	54.00	10.87	Average
5353.68	34.65	13.31	-3.74	44.22	54.00	9.78	Average

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

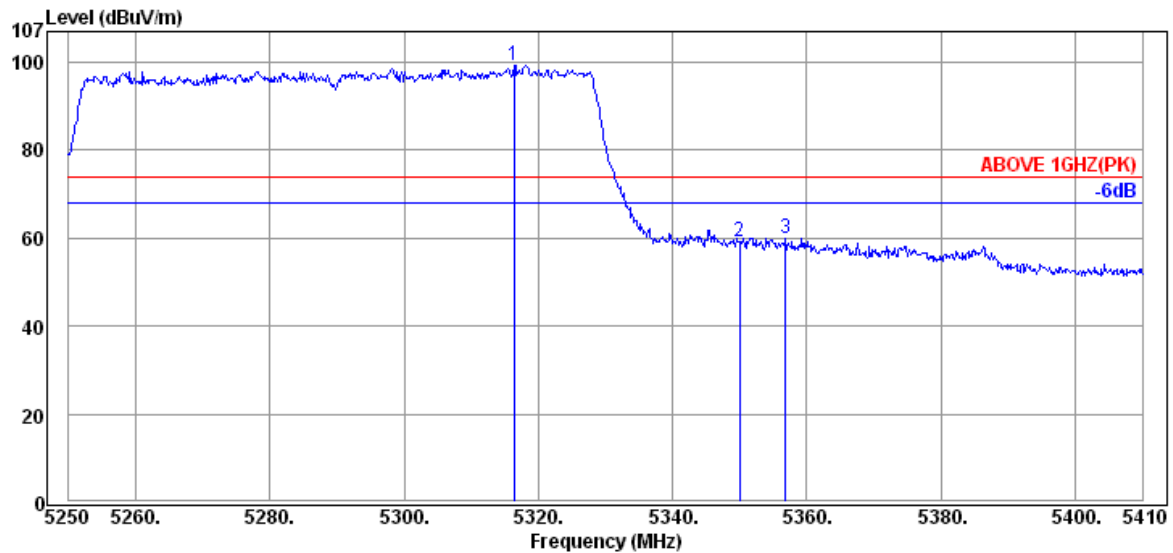

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5316.40	34.62	13.22	51.55	99.39	---	---	Peak
5350.00	34.65	13.31	11.19	59.15	74.00	14.85	Peak
5356.88	34.65	13.31	11.99	59.95	74.00	14.05	Peak

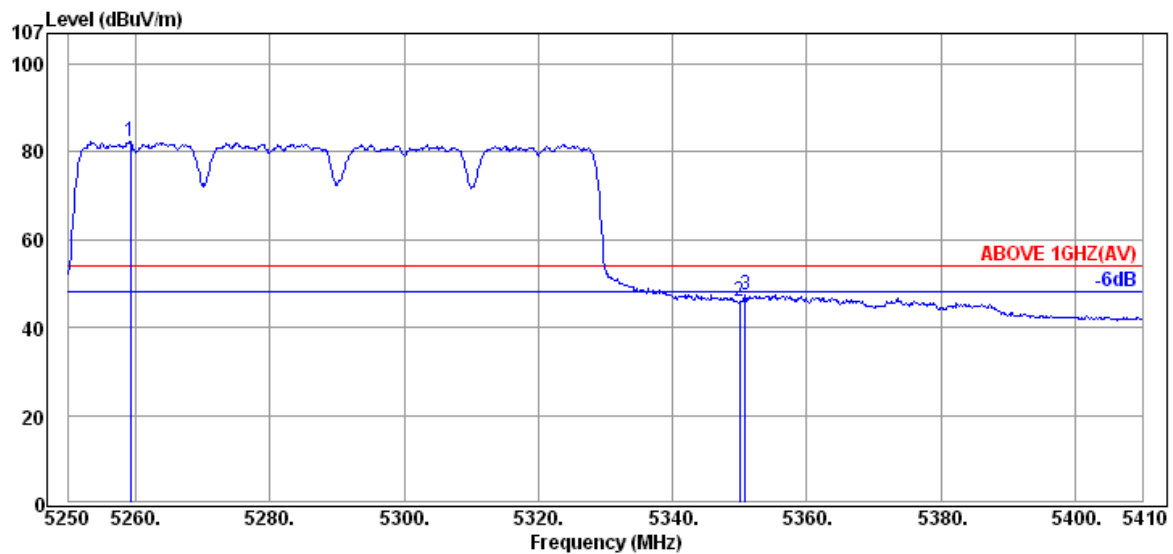


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5259.28	34.57	13.17	34.57	82.31	---	---	Average
5350.00	34.65	13.31	-1.92	46.04	54.00	7.96	Average
5350.80	34.65	13.31	-0.35	47.61	54.00	6.39	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

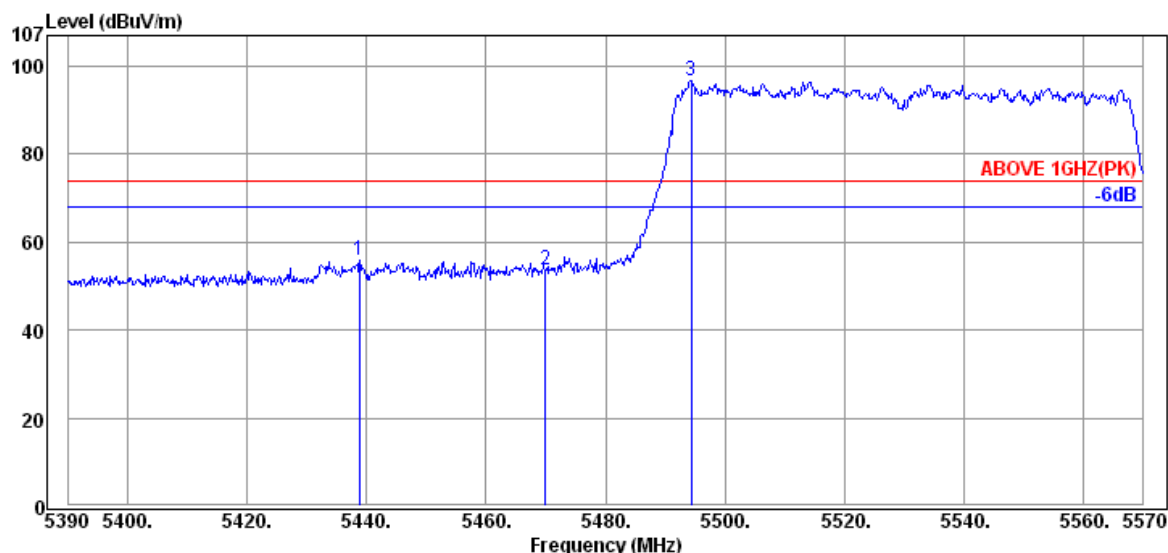

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5438.78	34.73	13.48	7.73	55.94	74.00	18.06	Peak
5469.92	34.77	13.51	5.57	53.85	74.00	20.15	Peak
5494.40	34.78	13.53	48.35	96.66	---	---	Peak

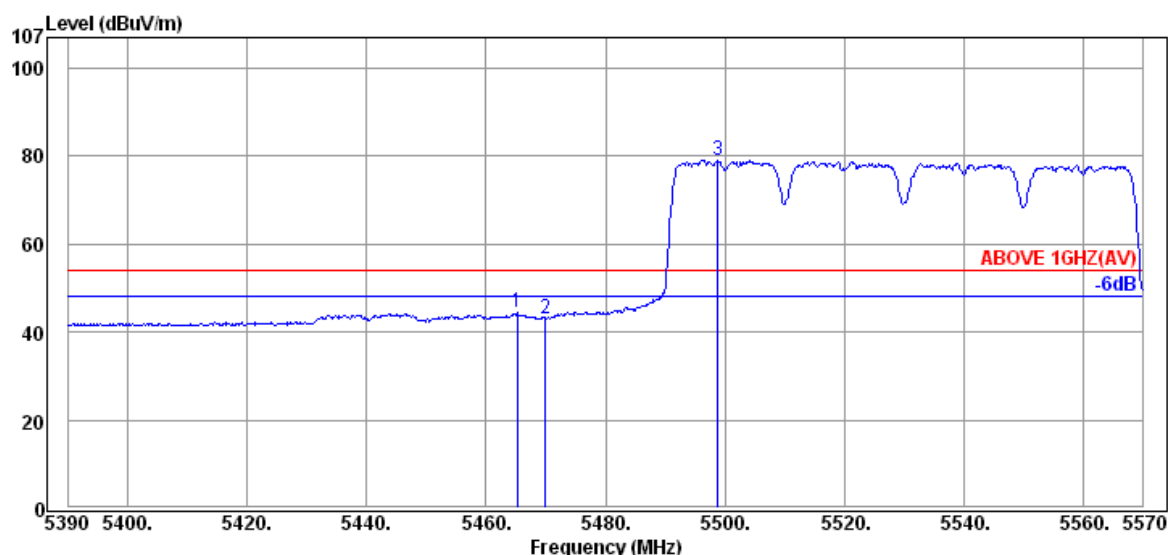


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.24	34.77	13.51	-3.88	44.40	54.00	9.60	Average
5469.92	34.77	13.51	-5.18	43.10	54.00	10.90	Average
5498.90	34.80	13.55	30.76	79.11	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

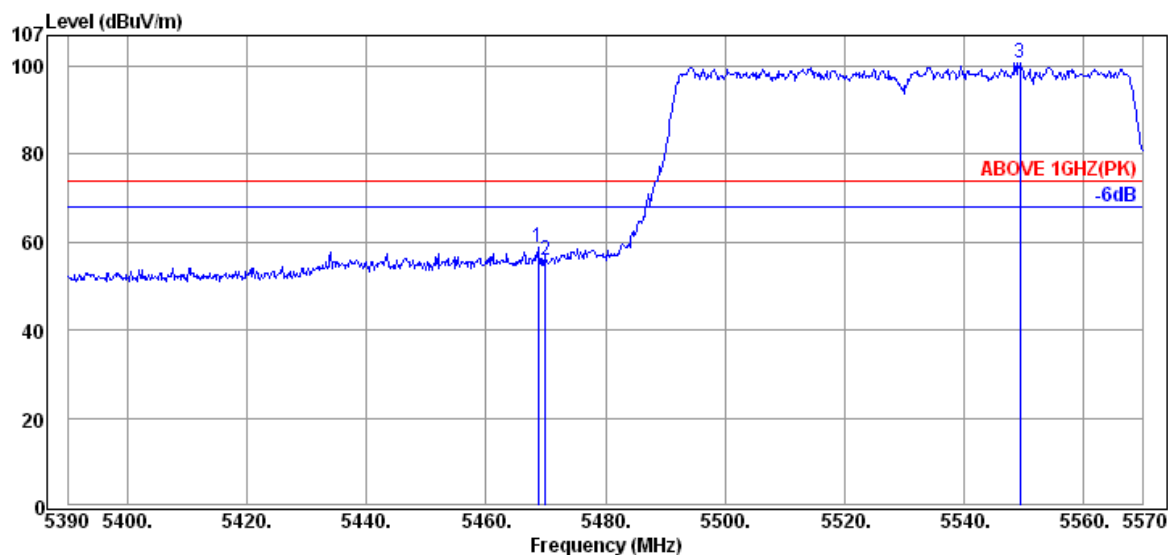

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.66	34.77	13.51	10.43	58.71	74.00	15.29	Peak
5469.92	34.77	13.51	7.72	56.00	74.00	18.00	Peak
5549.48	34.86	13.64	52.22	100.72	---	---	Peak

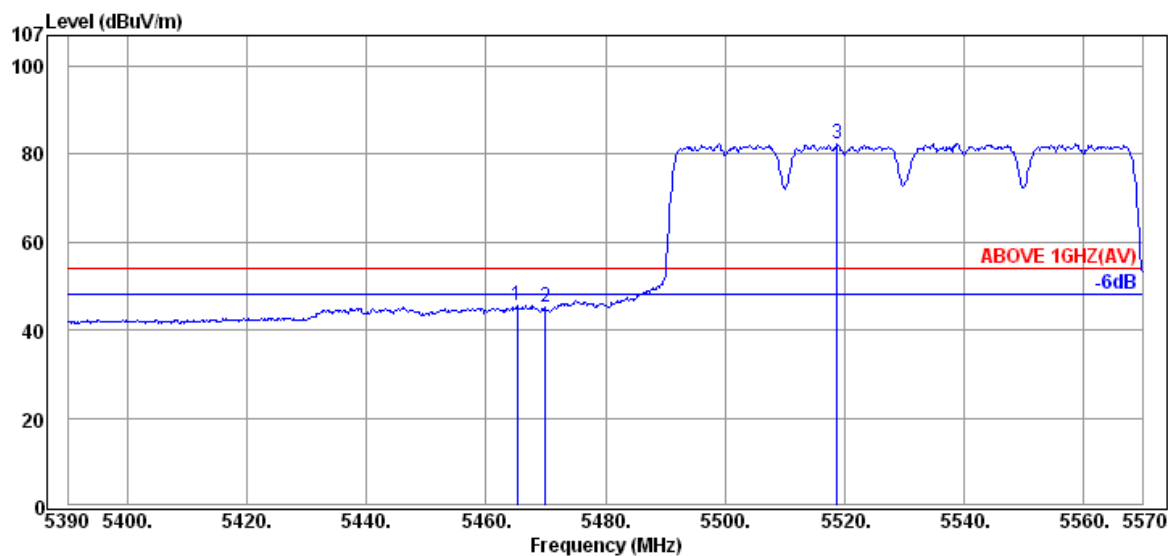


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.24	34.77	13.51	-2.77	45.51	54.00	8.49	Average
5469.92	34.77	13.51	-2.90	45.38	54.00	8.62	Average
5518.88	34.82	13.58	34.02	82.42	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

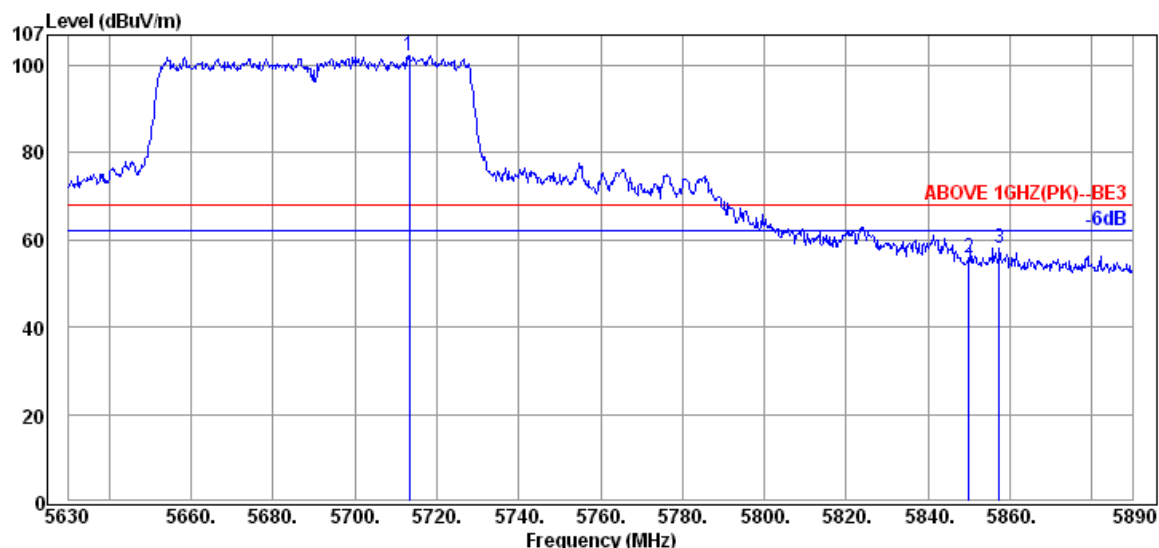

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5713.20	35.05	13.94	53.37	102.36	68.20	---	Peak
5849.96	35.21	14.25	6.60	56.06	68.20	12.14	Peak
5857.50	35.23	14.28	8.64	58.15	68.20	10.05	Peak

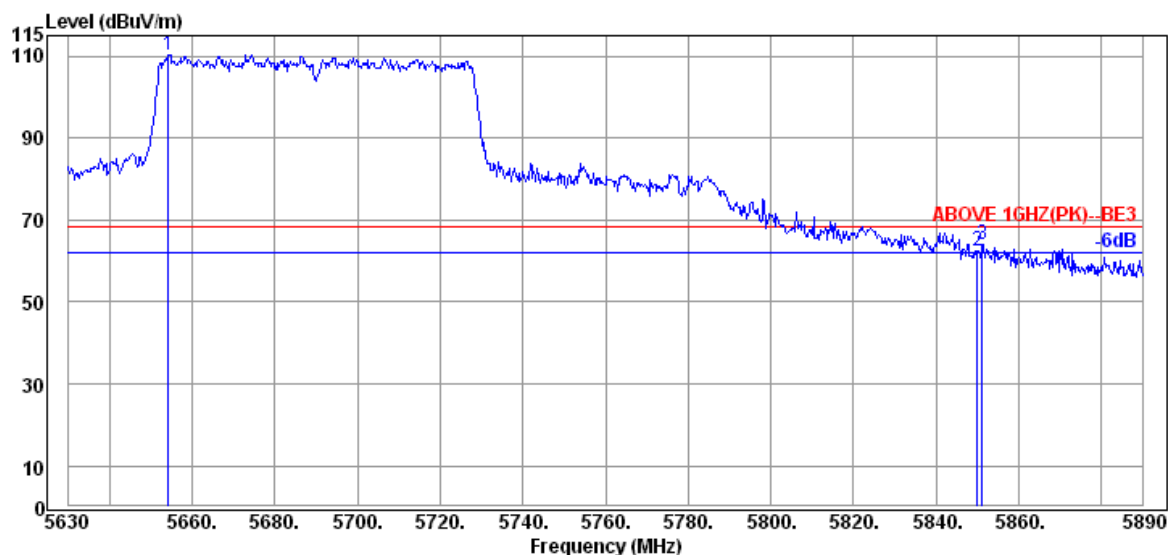


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5654.18	34.99	13.83	61.56	110.38	68.20	---	Peak
5849.96	35.21	14.25	12.92	62.38	68.20	5.82	Peak
5851.26	35.21	14.25	14.64	64.10	68.20	4.10	Peak

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

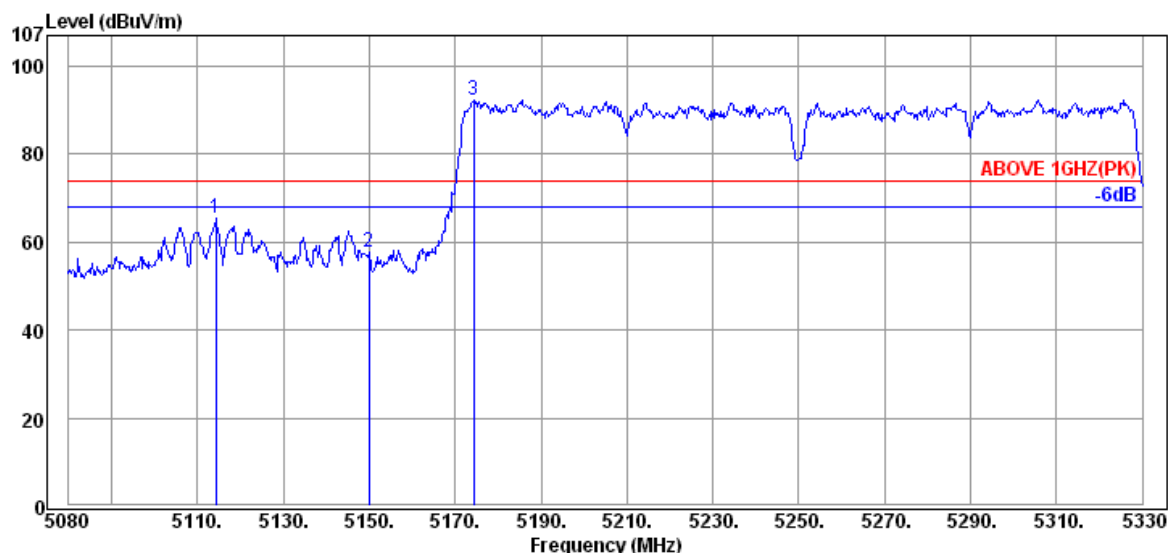

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.25	34.42	13.24	17.77	65.43	74.00	8.57	Peak
5150.00	34.45	13.22	10.13	57.80	74.00	16.20	Peak
5174.25	34.48	13.19	44.68	92.35	---	---	Peak

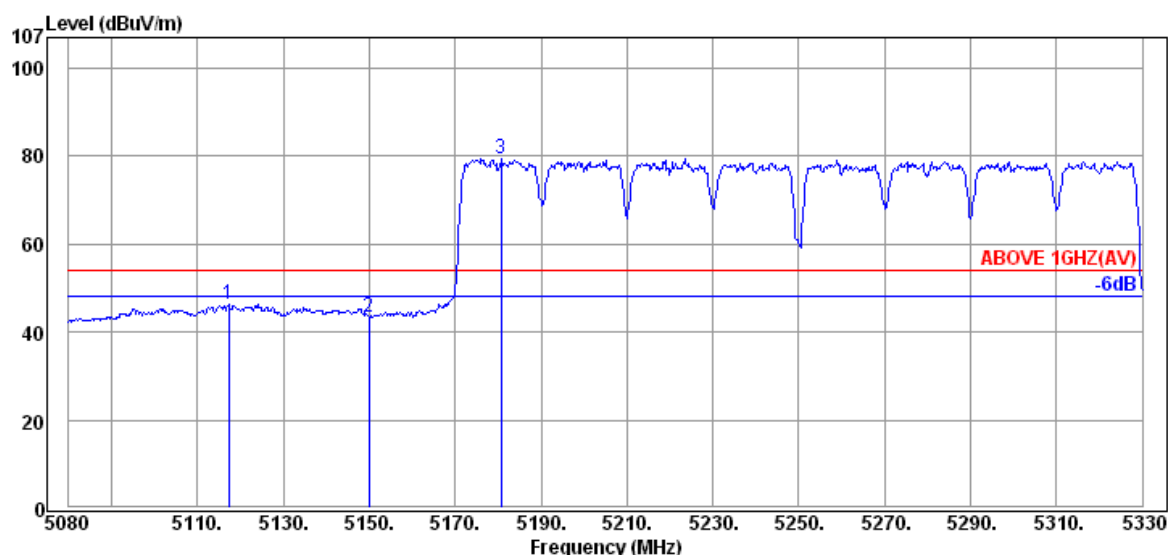

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5117.25	34.42	13.24	-1.34	46.32	54.00	7.68	Average
5150.00	34.45	13.22	-4.29	43.38	54.00	10.62	Average
5180.75	34.48	13.19	31.86	79.53	---	---	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

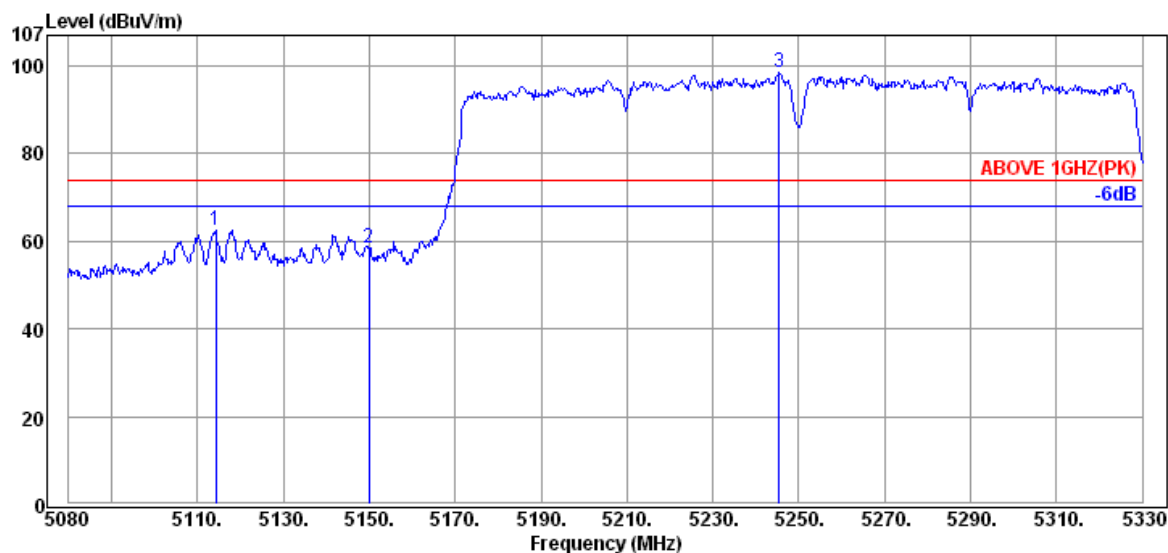

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.25	34.42	13.24	14.80	62.46	74.00	11.54	Peak
5150.00	34.45	13.22	10.62	58.29	74.00	15.71	Peak
5245.50	34.55	13.18	50.64	98.37	---	---	Peak

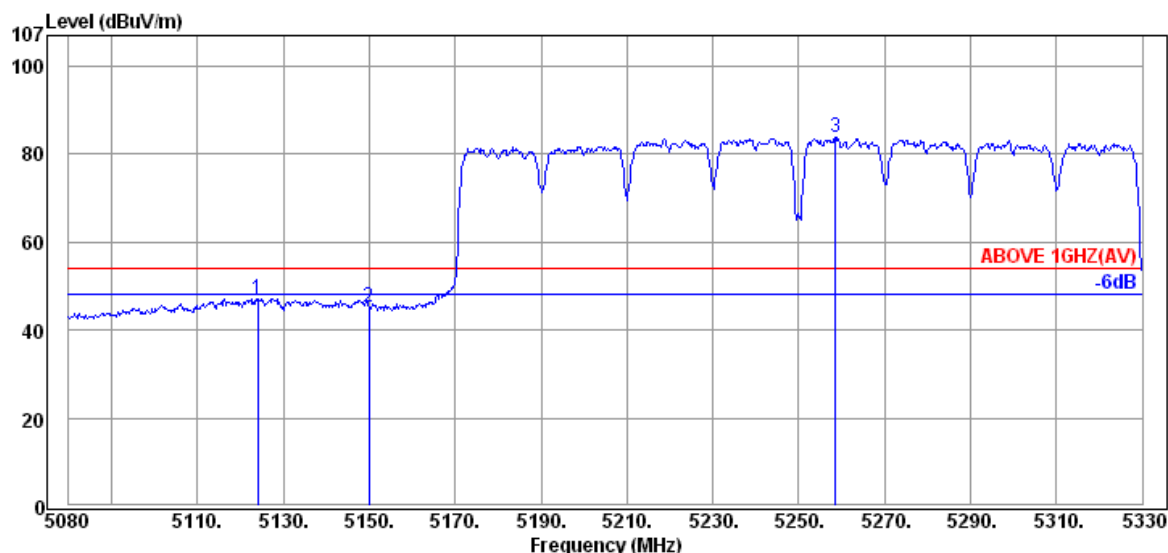


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5124.00	34.43	13.23	-0.53	47.13	54.00	6.87	Average
5150.00	34.45	13.22	-2.45	45.22	54.00	8.78	Average
5258.50	34.55	13.18	36.16	83.89	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

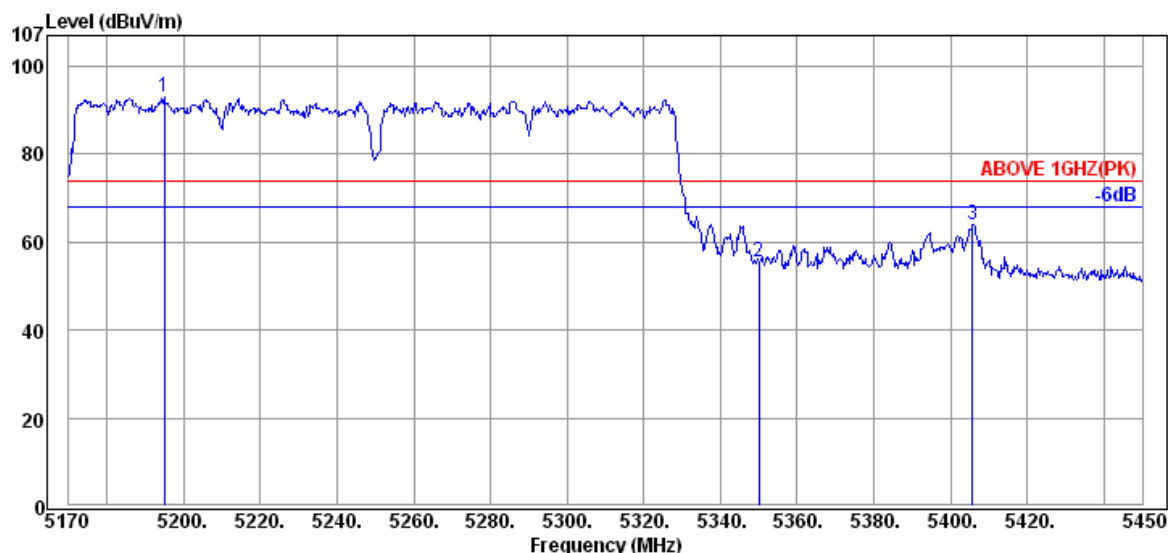

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5194.92	34.50	13.18	45.28	92.96	---	---	Peak
5350.04	34.65	13.31	7.44	55.40	74.00	18.60	Peak
5405.76	34.70	13.44	15.77	63.91	74.00	10.09	Peak

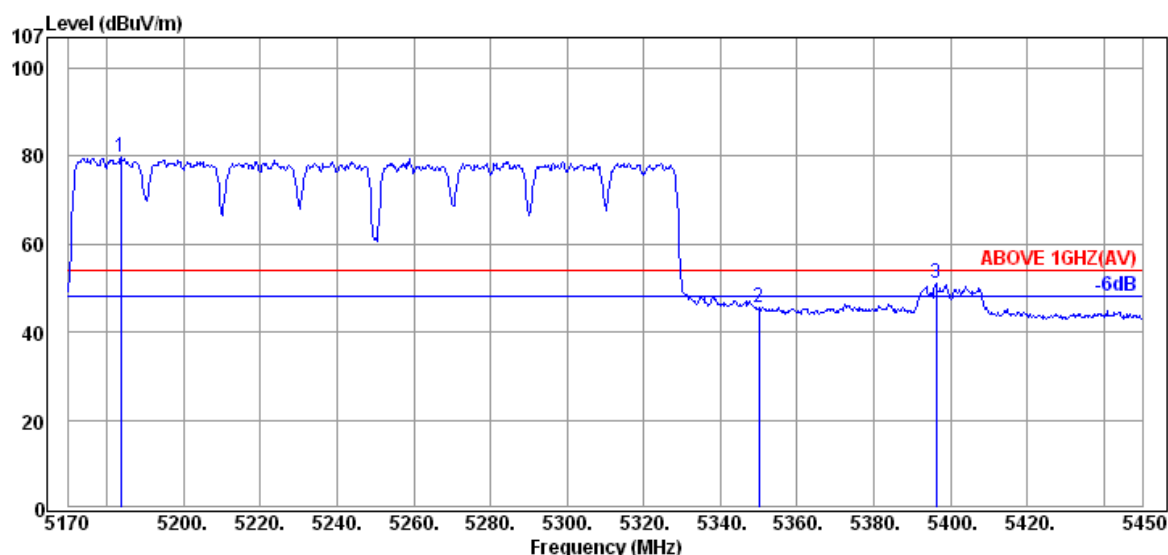


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5183.72	34.48	13.19	31.99	79.66	---	---	Average
5350.04	34.65	13.31	-2.34	45.62	54.00	8.38	Average
5396.24	34.70	13.44	2.81	50.95	54.00	3.05	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

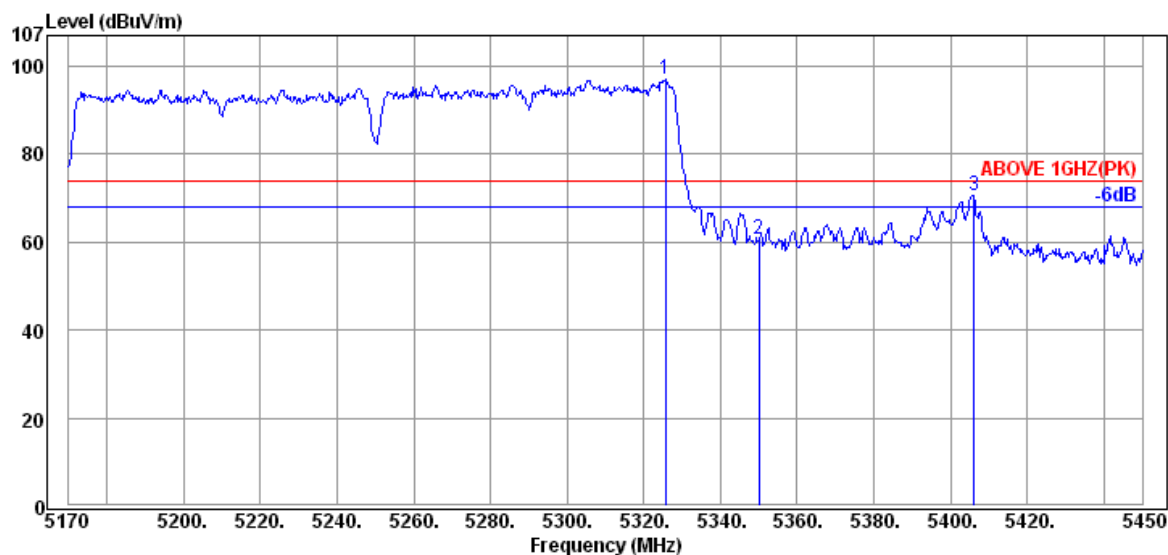

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.68	34.62	13.22	49.14	96.98	---	---	Peak
5350.04	34.65	13.31	12.74	60.70	74.00	13.30	Peak
5406.04	34.70	13.44	22.46	70.60	74.00	3.40	Peak

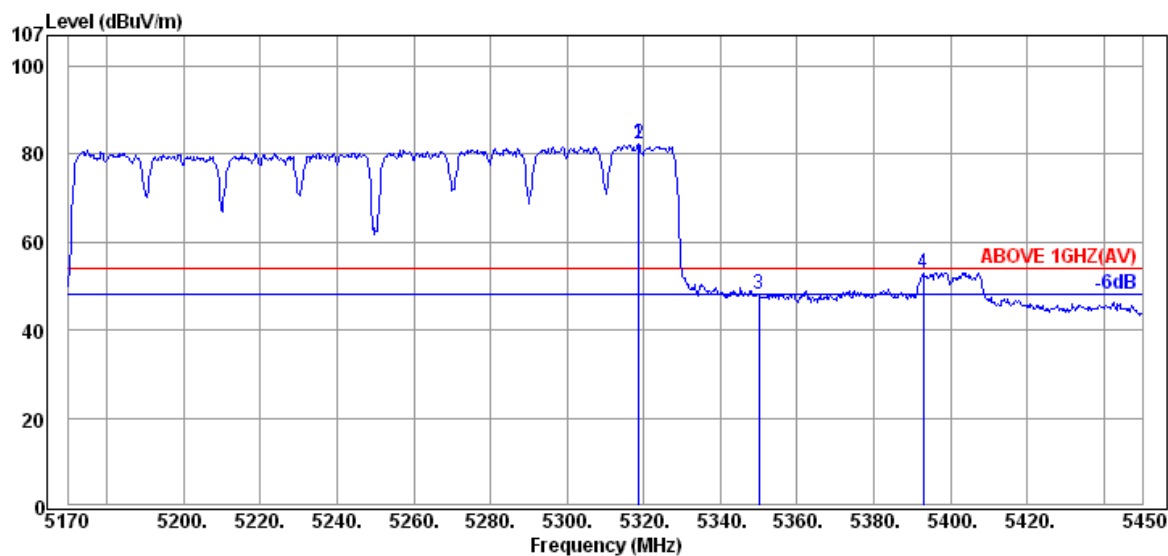


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5318.68	34.62	13.22	34.53	82.37	---	---	Average
5350.04	34.65	13.31	0.03	47.99	54.00	6.01	Average
5392.88	34.68	13.39	4.93	53.00	54.00	1.00	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

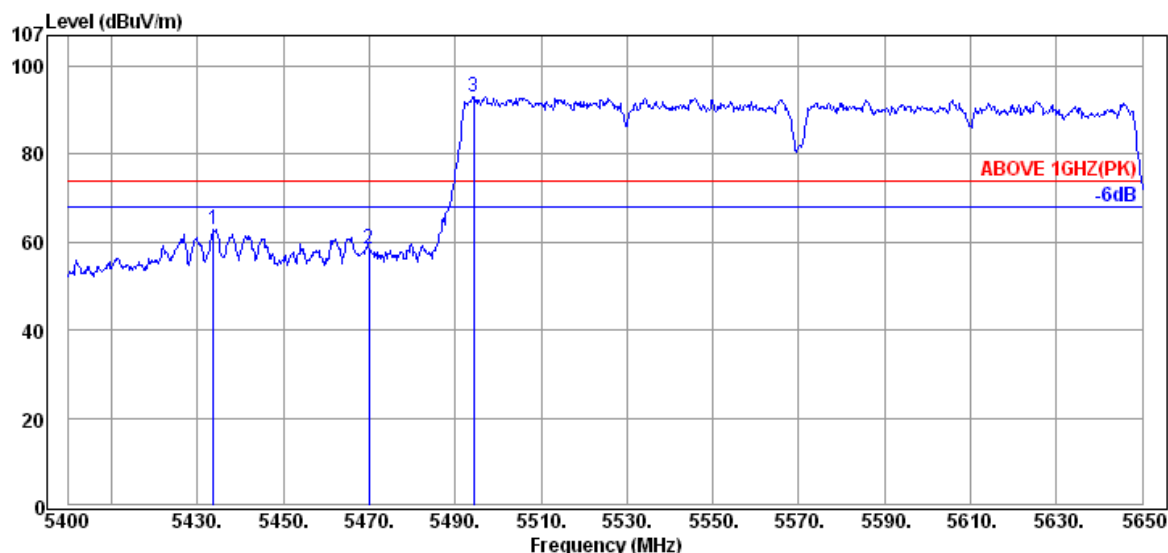

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.75	34.73	13.48	14.67	62.88	74.00	11.12	Peak
5470.00	34.77	13.51	10.19	58.47	74.00	15.53	Peak
5494.25	34.78	13.53	44.86	93.17	---	---	Peak

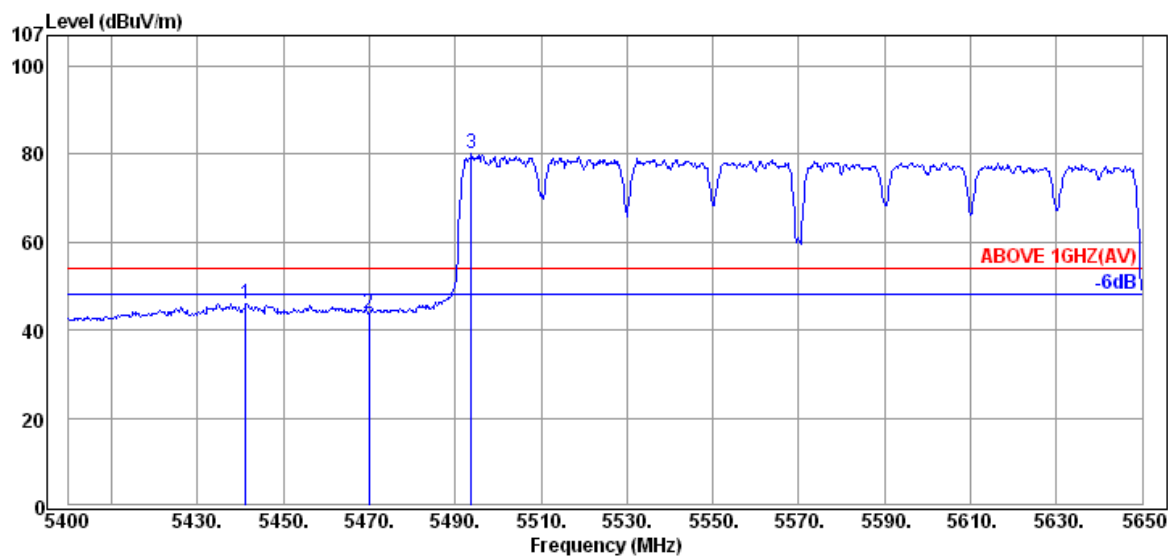


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.25	34.73	13.48	-2.12	46.09	54.00	7.91	Average
5470.00	34.77	13.51	-4.58	43.70	54.00	10.30	Average
5493.75	34.78	13.53	31.69	80.00	---	---	Average

Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

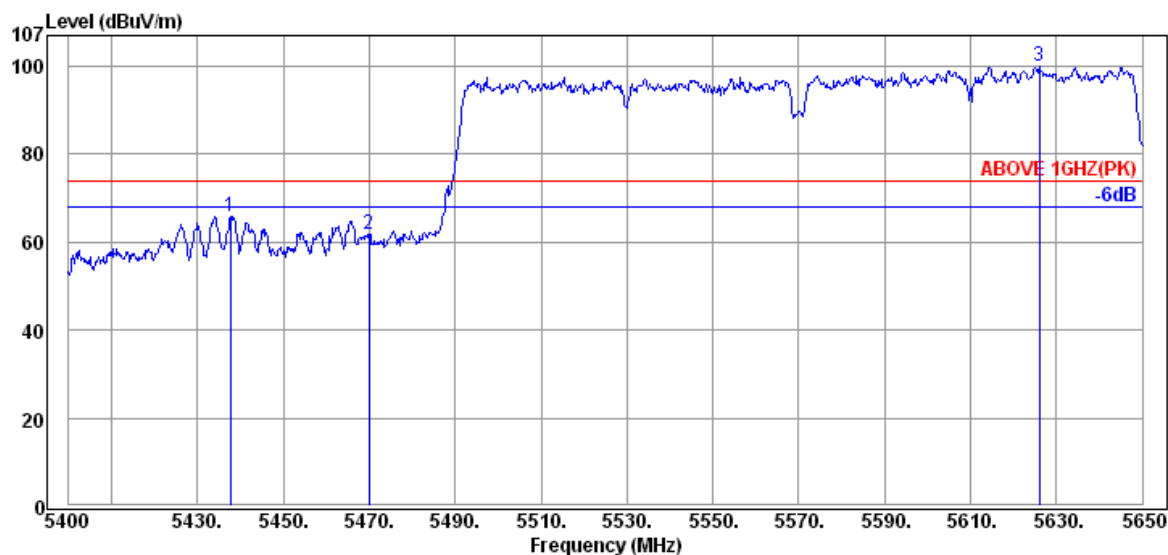

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.75	34.73	13.48	17.68	65.89	74.00	8.11	Peak
5470.00	34.77	13.51	13.61	61.89	74.00	12.11	Peak
5626.00	34.94	13.76	51.17	99.87	---	---	Peak

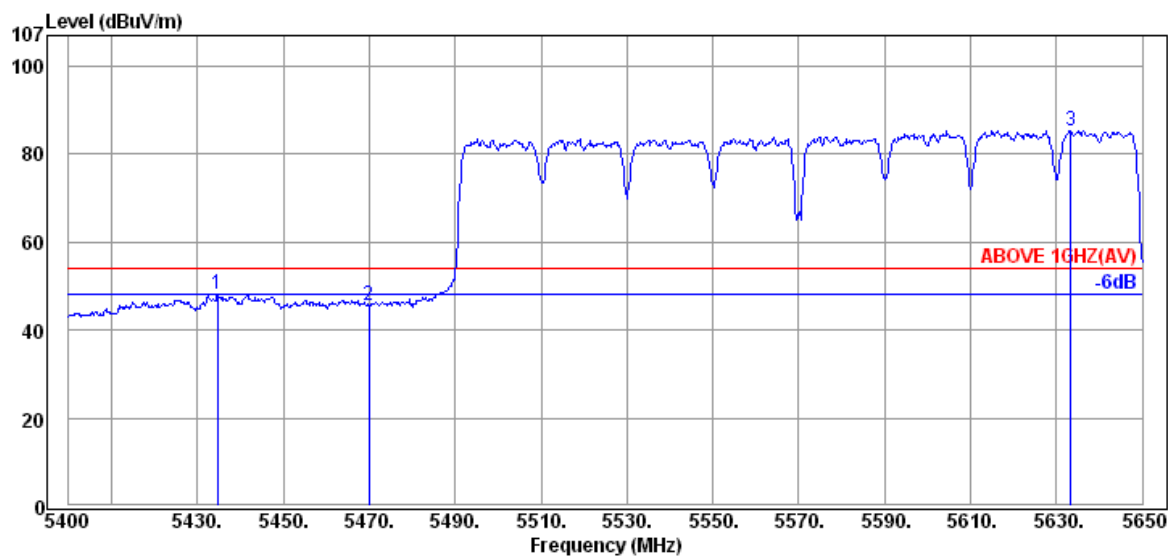

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.75	34.73	13.48	-0.18	48.03	54.00	5.97	Average
5470.00	34.77	13.51	-2.62	45.66	54.00	8.34	Average
5633.25	34.97	13.80	36.70	85.47	---	---	Average

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Test Antenna	WA-F-LBLB-04-056
--------------	------------------

The emissions (up to 40GHz) not reported for there is no emission be found.

Test Antenna	15Z980 ANTENNA ASM
--------------	--------------------

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.