

FCC Test Report

Report No.: RFBEQF-WTW-P22010505-1

FCC ID: BEJNT-16T90Q

Test Model: 16T90Q

Series Model: 16TD90Q, 16TG90Q, 16TB90Q (refer to item 3.1 for more details)

Received Date: Jan. 04, 2022

Test Date: Jan. 31 ~ Feb. 18, 2022

Issued Date: Mar. 07, 2022

Applicant: LG Electronics USA

Address: 111 Sylvan Avenue North Building Englewood Cliffs New Jersey United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location (2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

FCC Registration / 788550 / TW0003
Designation Number(1):
FCC Registration /
Designation Number(2): 281270 / TW0032



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	12
3.3 Duty Cycle of Test Signal	17
3.4 Description of Support Units	18
3.4.1 Configuration of System under Test	18
3.5 General Description of Applied Standards and References	18
4 Test Types and Results	19
4.1 Radiated Emission and Bandedge Measurement.....	19
4.1.1 Limits of Radiated Emission and Bandedge Measurement	19
4.1.2 Test Instruments	20
4.1.3 Test Procedures.....	21
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup.....	22
4.1.6 EUT Operating Conditions.....	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	98
4.2.1 Limits of Conducted Emission Measurement	98
4.2.2 Test Instruments	98
4.2.3 Test Procedures.....	99
4.2.4 Deviation from Test Standard	99
4.2.5 Test Setup.....	99
4.2.6 EUT Operating Conditions.....	99
4.2.7 Test Results	100
4.3 Transmit Power Measurement	102
4.3.1 Limits of Transmit Power Measurement	102
4.3.2 Test Setup.....	102
4.3.3 Test Instruments	102
4.3.4 Test Procedure	103
4.3.5 Deviation from Test Standard	103
4.3.6 EUT Operating Conditions.....	103
4.3.7 Test Result.....	104
4.4 Occupied Bandwidth Measurement	129
4.4.1 Test Setup.....	129
4.4.2 Test Instruments	129
4.4.3 Test Procedure	129
4.4.4 Test Result.....	130
4.5 Peak Power Spectral Density Measurement	138
4.5.1 Limits of Peak Power Spectral Density Measurement	138
4.5.2 Test Setup.....	138
4.5.3 Test Instruments	138
4.5.4 Test Procedures.....	138
4.5.5 Deviation from Test Standard	139
4.5.6 EUT Operating Conditions.....	139
4.5.7 Test Results	140
4.6 Frequency Stability.....	160
4.6.1 Limits of Frequency Stability Measurement	160

4.6.2	Test Setup	160
4.6.3	Test Instruments	160
4.6.4	Test Procedure	160
4.6.5	Deviation from Test Standard	161
4.6.6	EUT Operating Condition	161
4.6.7	Test Results	161
4.7	6dB Bandwidth Measurement	163
4.7.1	Limits of 6dB Bandwidth Measurement	163
4.7.2	Test Setup	163
4.7.3	Test Instruments	163
4.7.4	Test Procedure	163
4.7.5	Deviation from Test Standard	163
4.7.6	EUT Operating Condition	163
4.7.7	Test Results	164
5	Pictures of Test Arrangements	167
	Annex A - Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	168
	Annex B - Band Edge Measurement	173
	Appendix – Information of the Testing Laboratories	197

Release Control Record

Issue No.	Description	Date Issued
RFBEQF-WTW-P22010505-1	Original release.	Mar. 07, 2022

1 Certificate of Conformity

Product: Notebook Computer

Brand: LG

Test Model: 16T90Q

Series Model: 16TD90Q, 16TG90Q, 16TB90Q (refer to item 3.1 for more details)

Sample Status: Engineering sample

Applicant: LG Electronics USA

Test Date: Jan. 31 ~ Feb. 18, 2022

Standards: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Polly Chien , **Date:** Mar. 07, 2022
Polly Chien / Specialist

Approved by : Jeremy Lin , **Date:** Mar. 07, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(9)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -21.78dB at 0.16200MHz.
15.407(b)(1/2/3/4(i/ii)/9)	Radiated Emissions & Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -3.07dB at 5470.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is I-PEX not a standard connector.

Note:

- For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.
- For U-NII-1, U-NII-2A, U-NII-2C band compliance with rule 15.407(b) of the band-edge items, the test plots were recorded in Annex B. Test Procedures refer to report 4.1.3.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Notebook Computer
Brand	LG
Test Model	16T90Q
Series Model	16TD90Q, 16TG90Q, 16TB90Q
Model Difference	For marketing purpose
Sample Status	Engineering sample
Power Supply Rating	7.74 Vdc (Battery) 5 Vdc / 15Vdc / 9Vdc / 20Vdc (Adapter)
Modulation Type	256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDMA
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps
Operating Frequency	5180 ~ 5320MHz, 5500 ~ 5720MHz, 5745 ~ 5825MHz
Number of Channel	5180 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 8 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2 802.11ac (VHT160), 802.11ax (HE160): 1 5500 ~ 5720MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 12 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 6 802.11ac (VHT80), 802.11ax (HE80): 3 802.11ac (VHT160), 802.11ax (HE160): 1 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 5 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 2 802.11ac (VHT80), 802.11ax (HE80): 1
Output Power	Refer to note
Antenna Type	Refer to note
Antenna Connector	Refer to note
Accessory Device	Refer to note
Cable Supplied	Refer to note

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Modulation Mode	TX Function
802.11a	1TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX
802.11ac (VHT20)	2TX
802.11ac (VHT40)	2TX
802.11ac (VHT80)	2TX
802.11ac (VHT160)	2TX
802.11ax (HE20)	2TX
802.11ax (HE40)	2TX
802.11ax (HE80)	2TX
802.11ax (HE160)	2TX

* The bandwidth and modulation are similar for HT20/HT40 on 802.11n mode and VHT20/VHT40 on 802.11ac mode and HE20/HE40 on 802.11ax mode. The bandwidth and modulation are similar for VHT80/VHT160 on 802.11ac mode and HE80/HE160 on 802.11ax mode. Therefore the investigated worst case is the representative mode in test report. (Final test mode refer section 3.2.1)

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	LG	LBV7227E	Rating: 7.74V , 80Wh ,10336mAh Rated :9891mAh
Adapter	LG	ADT-65DSU-D03-2	I/P: 100-240Vac, 50-60Hz,1.6A O/P: 20Vdc, 3.25A, 65W (USB-PD) 5.0Vdc, 3.0A, 15.0W or 9.0Vdc, 3.0A, 27.0 W or 15.0Vdc, 3.0A, 45.0W Power cord: 1.5m 1.47m
Module	Intel	AX211D2W	

3. The antenna used in this EUT is listed as below table:

NB:

Ant. Type	Brand	Ant.	Model	Antenna Peak Gain (dBi)					Connector
				2400-2483.5MHz	5150-5250MHz	5250-5350MHz	5470-5725MHz	5725-5850MHz	
PIFA	CHILISIN	Main	DQ600111500 (BTEA00111525GC1A01)	2.76	0.30	0.07	2.87	0.32	I-PEX
		Aux.	DQ600111500 (BTEA00111525GC1A01)	1.02	2.35	2.30	2.07	0.81	
	Pulse	Main	DQ602119000 (TZ21190)	3.16	0.57	0.57	3.22	0.84	I-PEX
		Aux.	DQ602119000 (TZ21190)	1.33	2.77	2.77	2.15	1.39	

Tablet:

Ant. Type	Brand	Ant.	Model	Antenna Peak Gain (dBi)					Connector
				2400-2483.5MHz	5150-5250MHz	5250-5350MHz	5470-5725MHz	5725-5850MHz	
PIFA	CHILISIN	Main	DQ600111500 (BTEA00111525GC1A01)	2.04	1.84	1.53	0.69	0.50	I-PEX
		Aux.	DQ600111500 (BTEA00111525GC1A01)	1.64	1.02	0.78	1.73	1.62	
	Pulse	Main	DQ602119000 (TZ21190)	2.68	2.38	1.65	1.02	1.11	I-PEX
		Aux.	DQ602119000 (TZ21190)	2.42	1.34	1.14	2.38	2.06	

* The NB mode has the largest antenna and was chosen for final test.

4. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

5. Output Power are as below:

Frequency (MHz)	Output Power (mW): 1TX							
	Full RU							
5180-5250	14.060							
5250-5320	13.964							
5500-5720	13.836							
5745-5825	13.521							
Frequency (MHz)	Output Power (mW): 2TX							
	Full RU	Partial RU						
		RU26	RU52	RU106	RU242	RU486	RU996	RU996S
5180-5250	27.641	27.167	27.230	27.136	27.419	27.106	25.706	0.002
5250-5320	27.673	26.959	27.175	26.958	27.483	26.886	0.002	26.519
5500-5720	27.895	27.323	27.481	27.418	27.703	27.387	27.514	27.642
5745-5825	27.704	27.292	27.386	27.355	27.073	27.262	-	-

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

For 5180 ~ 5320MHz:

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz
54	5270 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
42	5210MHz	58	5290MHz

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency
50	5250MHz

For 5500 ~ 5720MHz:

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency
114	5570MHz

For 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement
 RE<1G: Radiated Emission below 1GHz
 PLC: Power Line Conducted Emission
 APCM: Antenna Port Conducted Measurement

Note: Radiated emission test (below 1GHz) and power line conducted emission test items chosen the worst maximum power.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5250	36 to 48	36, 40, 48	OFDM	6.0
	802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38, 46	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5250-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11ax (HE20)		52 to 64	52, 60, 64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	54, 62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	MCS0
	802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	MCS0
	802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Partial RU

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11ax (HE20)	5180-5250	36 to 48	36	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5250-5320	52 to 64	64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5500-5720	100 to 140	100, 140	OFDMA	MCS0
	802.11ax (HE40)		102 to 134	102, 134	OFDMA	MCS0
	802.11ax (HE80)		106	106	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11ax (HE20)	5745-5825	149 to 165	149	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11ax (HE40)	5180-5250	38 to 46	134	OFDMA	6.0
	802.11ax (HE40)	5250-5320	54 to 62		OFDMA	6.0
	802.11ax (HE40)	5500-5720	102 to 134		OFDMA	6.0
	802.11ax (HE40)	5745-5825	151 to 159		OFDMA	6.0

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11ax (HE40)	5180-5250	38 to 46	134	OFDMA	6.0
	802.11ax (HE40)	5250-5320	54 to 62		OFDMA	6.0
	802.11ax (HE40)	5500-5720	102 to 134		OFDMA	6.0
	802.11ax (HE40)	5745-5825	151 to 159		OFDMA	6.0

Bandwidth, Power Spectral Density and Frequency Stability Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5250	36 to 48	36, 40, 48	OFDM	6.0
	802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38, 46	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5250-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11ax (HE20)		52 to 64	52, 60, 64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	54, 62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	MCS0
	802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	MCS0
	802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Partial RU

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11ax (HE20)	5180-5250	36 to 48	36	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5250-5320	52 to 64	64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5500-5720	100 to 140	100, 140	OFDMA	MCS0
	802.11ax (HE40)		102 to 134	102, 134	OFDMA	MCS0
	802.11ax (HE80)		106	106	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11ax (HE20)	5745-5825	149 to 165	149	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Transmit Power Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11a	5180-5250	36 to 48	36, 40, 48	OFDM	6.0
	802.11n (HT20)		36 to 48	36, 40, 48	OFDM	6.5
	802.11n (HT40)		38 to 46	38, 46	OFDM	13.5
	802.11ac (VHT80)		42	42	OFDM	29.3
	802.11ac (VHT160)		50	50	OFDM	58.5
	802.11ax (HE20)		36 to 48	36, 40, 48	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38, 46	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5250-5320	52 to 64	52, 60, 64	OFDM	6.0
	802.11n (HT20)		52 to 64	52, 60, 64	OFDM	6.5
	802.11n (HT40)		54 to 62	54, 62	OFDM	13.5
	802.11ac (VHT80)		58	58	OFDM	29.3
	802.11ac (VHT160)		50	50	OFDM	58.5
	802.11ax (HE20)		52 to 64	52, 60, 64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	54, 62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
	802.11n (HT20)		100 to 144	100, 116, 140, 144	OFDM	6.5
	802.11n (HT40)		102 to 142	102, 110, 134, 142	OFDM	13.5
	802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	29.3
	802.11ac (VHT160)		114	114	OFDM	58.5
	802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	MCS0
	802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	MCS0
	802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
	802.11n (HT20)		149 to 165	149, 157, 165	OFDM	6.5
	802.11n (HT40)		151 to 159	151, 159	OFDM	13.5
	802.11ac (VHT80)		155	155	OFDM	29.3
	802.11ax (HE20)		149 to 165	149, 157, 165	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Partial RU

EUT Configure Mode	Mode	Frequency Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Data Rate (Mbps)
-	802.11ax (HE20)	5180-5250	36 to 48	36	OFDMA	MCS0
	802.11ax (HE40)		38 to 46	38	OFDMA	MCS0
	802.11ax (HE80)		42	42	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5250-5320	52 to 64	64	OFDMA	MCS0
	802.11ax (HE40)		54 to 62	62	OFDMA	MCS0
	802.11ax (HE80)		58	58	OFDMA	MCS0
	802.11ax (HE160)		50	50	OFDMA	MCS0
-	802.11ax (HE20)	5500-5720	100 to 140	100, 140	OFDMA	MCS0
	802.11ax (HE40)		102 to 134	102, 134	OFDMA	MCS0
	802.11ax (HE80)		106 to 138	106	OFDMA	MCS0
	802.11ax (HE160)		114	114	OFDMA	MCS0
-	802.11ax (HE20)	5745-5825	149 to 165	149	OFDMA	MCS0
	802.11ax (HE40)		151 to 159	151, 159	OFDMA	MCS0
	802.11ax (HE80)		155	155	OFDMA	MCS0

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE$\geq$1G	23 deg. C, 67% RH 23 deg. C, 68% RH 26 deg. C, 66% RH	120Vac, 60Hz	Wade Huang, Adair Peng, Edsion Lee, Randy Wu
RE<1G	26 deg. C, 66% RH	120Vac, 60Hz	Randy Wu
PLC	23 deg. C, 67% RH	120Vac, 60Hz	Adair Peng
APCM	25 deg. C, 60% RH	120Vac, 60Hz	Alan Wu

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is > 98 %, duty factor is not required.

Duty cycle of test signal is < 98 %, duty factor is required.

802.11a: Chain 0: Duty cycle = 2.082/ 2.136 = 0.975, Duty factor = $10 \cdot \log(1/0.975) = 0.11$


802.11a: Chain 1: Duty cycle = 2.085/ 2.141 = 0.974, Duty factor = $10 \cdot \log(1/0.974) = 0.12$

802.11ax (HE20): Duty cycle = 3.949/4.017 = 0.983

802.11ax (HE40): Duty cycle = 3.959/4.025 = 0.984

802.11ax (HE80): Duty cycle = 3.969/4.045 = 0.981

802.11ax (HE160): Duty cycle = 4.51/4.56 = 0.989

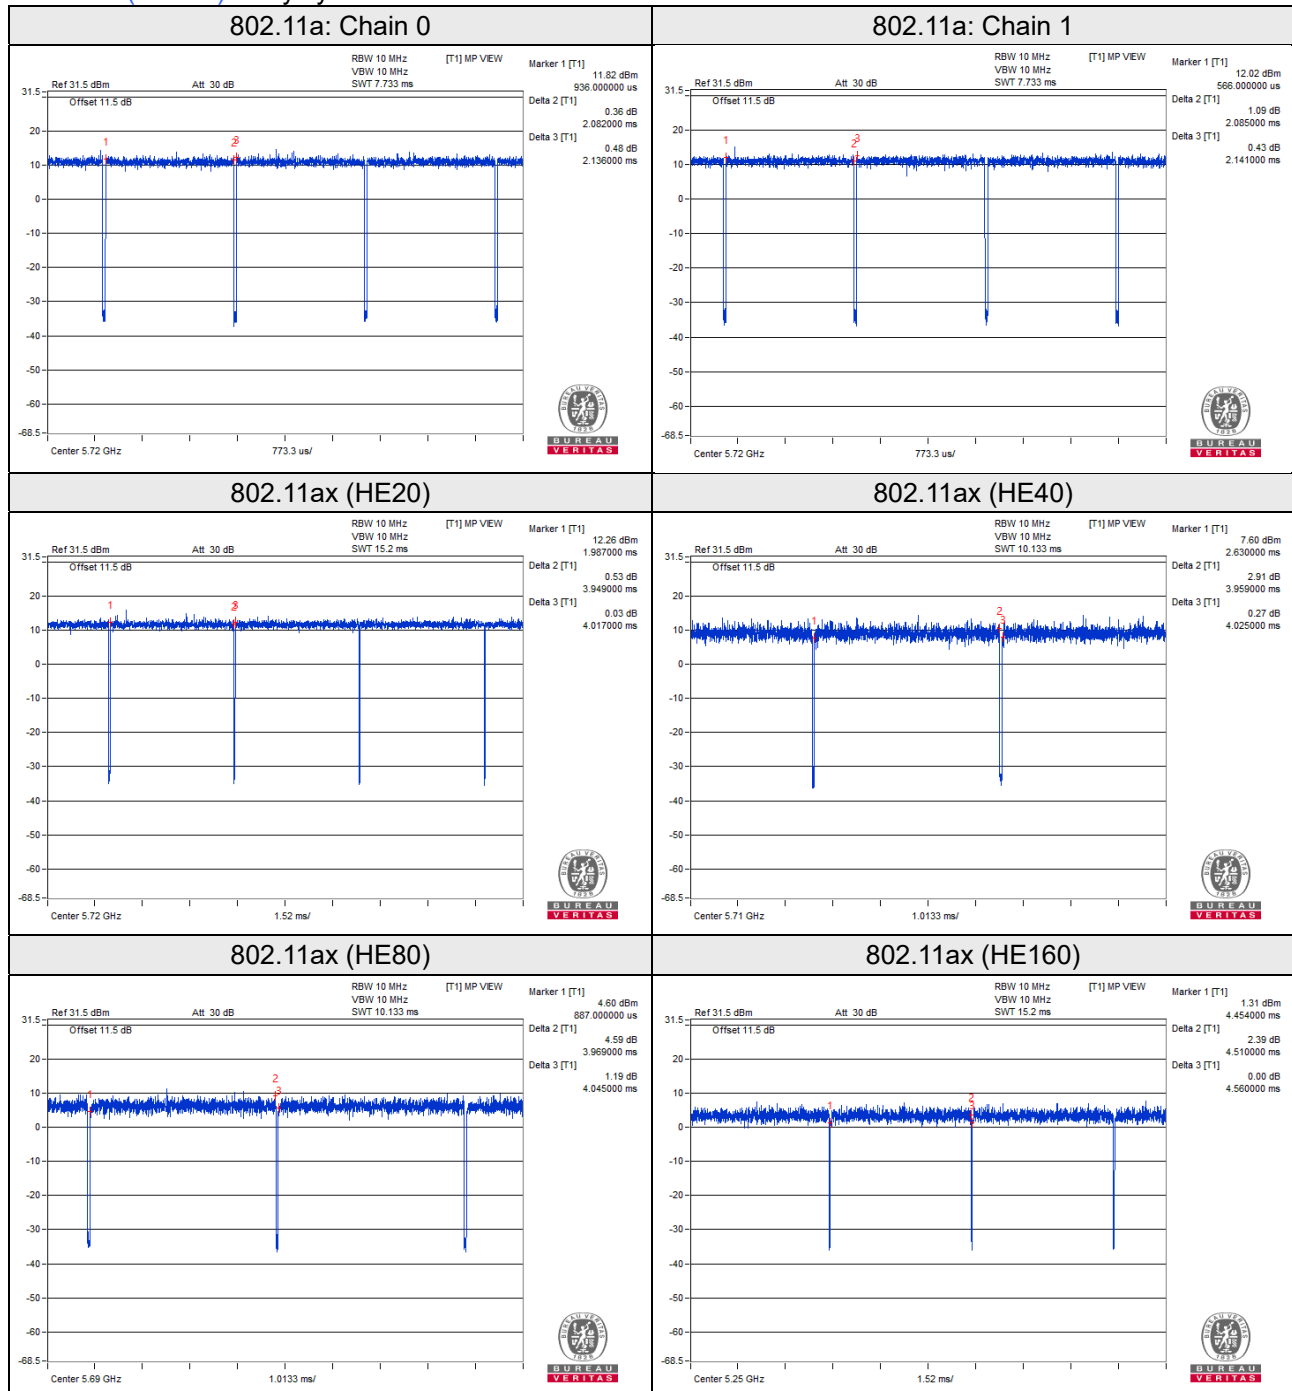


3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Flash	SanDisk	SDDDC3-032G	05	NA	Type-C
B.	Flash	HP	v250W	01	NA	Type-A

3.4.1 Configuration of System under Test

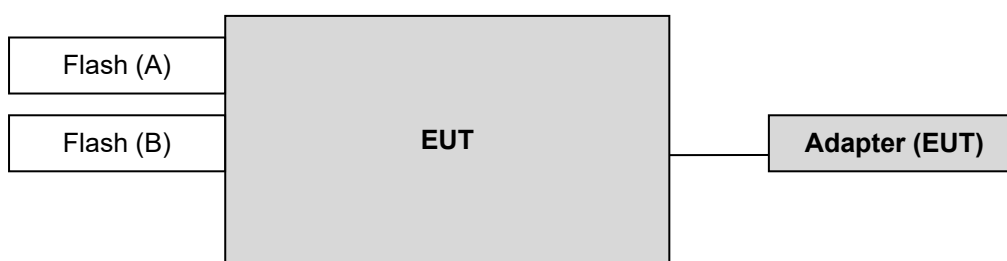

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test standard:

FCC Part 15, Subpart E (15.407)

ANSI C63.10:2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v02r01			Field Strength at 3m	
			PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000}{3} \sqrt{30 P} \quad \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	Mar. 29, 2021	Mar. 28, 2022
Test Receiver Rohde & Schwarz	ESR3	102782	Dec. 10, 2021	Dec. 09, 2022
Spectrum Analyzer Rohde & Schwarz	FSW43	101582	Apr. 01, 2021	Mar. 31, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna RF SPIN	DRH18-E	210103A18E	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-1048	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980782	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980808	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI	EMC184045SE	980788	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(9 000+2000+1000)	201243+ 201231+ 210102	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-N M-(9000+300+500)	201236+ 201235+ 201233	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM- (5000+3000+2000)	201260+201257+201254	Jan. 17, 2022	Jan. 16, 2023
Software BV ADT	ADT_Radiated_V7. 6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
Peak Power Analyzer KEYSIGHT	8990B	MY51000485	Jan. 18, 2022	Jan. 17, 2023
Wideband Power Sensor KEYSIGHT	N1923A	MY58020002	Jan. 17, 2022	Jan. 16, 2023
PXA Signal Analyzer KEYSIGHT	N9030B	MY57140938	Mar. 09, 2021	Mar. 08, 2022
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in WM Chamber 8.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
(802.11a: RBW = 1MHz, VBW = 1kHz; 802.11ax (HE20): RBW = 1MHz, VBW = 10Hz;
802.11ax (HE40): RBW = 1MHz, VBW = 10Hz; 802.11ax (HE80): RBW = 1MHz, VBW = 10Hz; 802.11ax (HE160): RBW = 1MHz, VBW = 10Hz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

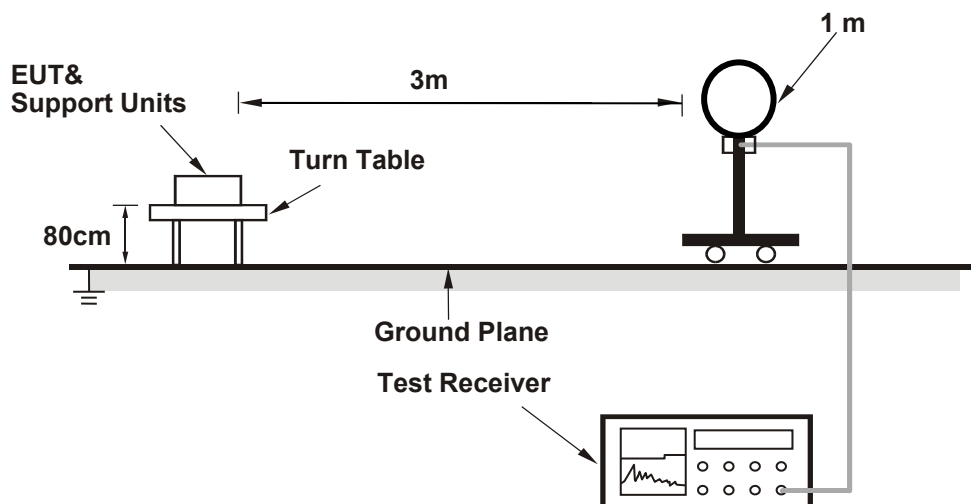

For Radiated emission 30MHz to 1GHz

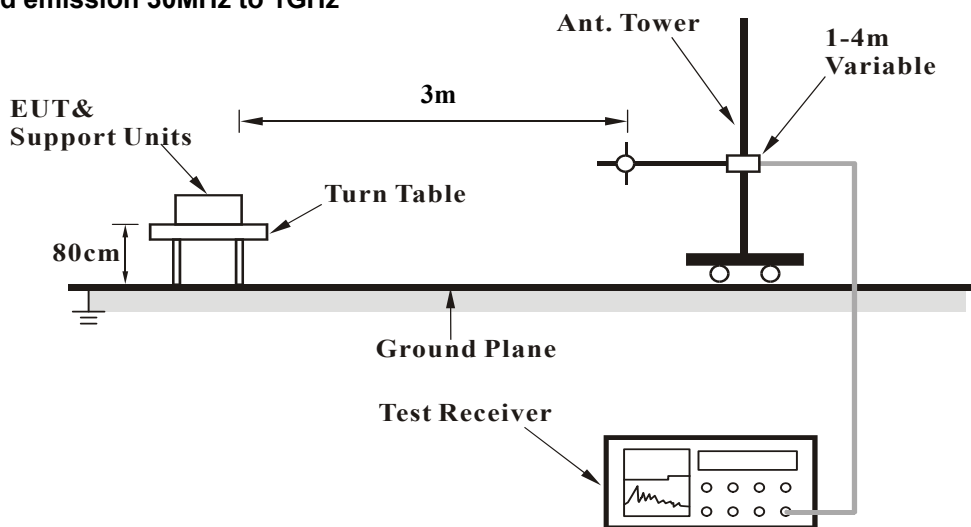

For Radiated emission above 1GHz

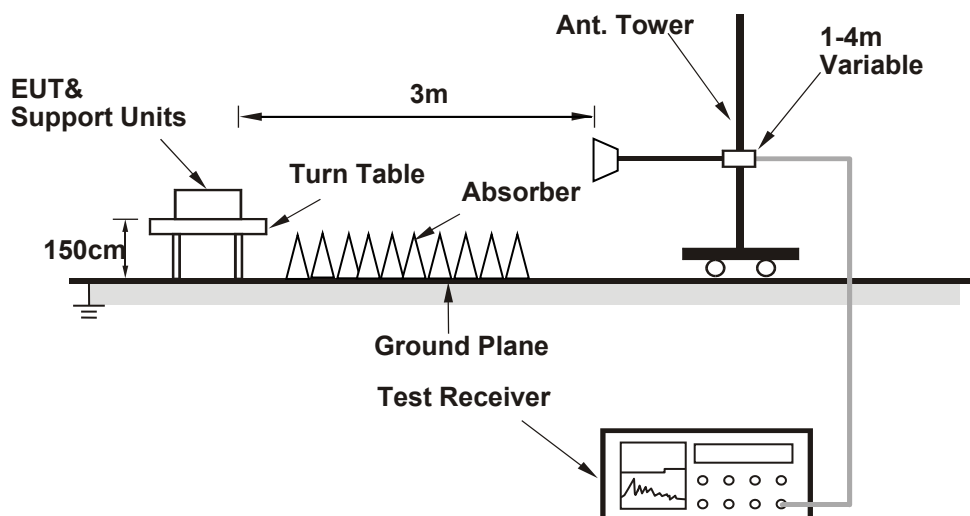

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- a. Set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1GHz data:

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.41 PK	74.00	-16.59	3.54 H	310	55.30	2.11
2	5150.00	45.61 AV	54.00	-8.39	3.54 H	310	43.50	2.11
3	*5180.00	97.56 PK			3.54 H	310	57.20	40.36
4	*5180.00	88.26 AV			3.54 H	310	47.90	40.36
5	#10360.00	56.37 PK	68.20	-11.83	1.85 H	287	48.20	8.17
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.51 PK	74.00	-16.49	1.26 V	32	55.40	2.11
2	5150.00	45.71 AV	54.00	-8.29	1.26 V	32	43.60	2.11
3	*5180.00	106.06 PK			1.26 V	32	65.70	40.36
4	*5180.00	95.86 AV			1.26 V	32	55.50	40.36
5	#10360.00	56.57 PK	68.20	-11.63	2.22 V	115	48.40	8.17

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	98.25 PK			3.53 H	315	57.90	40.35
2	*5200.00	88.05 AV			3.53 H	315	47.70	40.35
3	#10400.00	56.51 PK	68.20	-11.69	1.91 H	285	48.33	8.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	105.97 PK			1.31 V	34	65.62	40.35
2	*5200.00	95.83 AV			1.31 V	34	55.48	40.35
3	#10400.00	56.59 PK	68.20	-11.61	2.28 V	119	48.41	8.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	98.02 PK			3.51 H	312	57.80	40.22
2	*5240.00	87.92 AV			3.51 H	312	47.70	40.22
3	5350.00	57.40 PK	74.00	-16.60	3.51 H	312	55.60	1.80
4	5350.00	45.10 AV	54.00	-8.90	3.51 H	312	43.30	1.80
5	#10480.00	56.33 PK	74.00	-17.67	1.91 H	292	48.42	7.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	105.62 PK			1.25 V	34	65.40	40.22
2	*5240.00	95.52 AV			1.25 V	34	55.30	40.22
3	5350.00	57.50 PK	74.00	-16.50	1.25 V	34	55.70	1.80
4	5350.00	45.20 AV	54.00	-8.80	1.25 V	34	43.40	1.80
5	#10480.00	56.41 PK	68.20	-11.79	2.30 V	113	48.50	7.91

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.61 PK	74.00	-16.39	3.61 H	315	55.50	2.11
2	5150.00	45.51 AV	54.00	-8.49	3.61 H	315	43.40	2.11
3	*5260.00	97.76 PK			3.61 H	315	57.60	40.16
4	*5260.00	87.76 AV			3.61 H	315	47.60	40.16
5	#10520.00	56.17 PK	68.20	-12.03	1.92 H	284	48.30	7.87

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.71 PK	74.00	-16.29	1.31 V	32	55.60	2.11
2	5150.00	45.61 AV	54.00	-8.39	1.31 V	32	43.50	2.11
3	*5260.00	105.46 PK			1.31 V	32	65.30	40.16
4	*5260.00	95.36 AV			1.31 V	32	55.20	40.16
5	#10520.00	56.27 PK	68.20	-11.93	2.27 V	121	48.40	7.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	97.53 PK			3.52 H	308	57.50	40.03
2	*5300.00	87.43 AV			3.52 H	308	47.40	40.03
3	10600.00	56.13 PK	74.00	-17.87	1.82 H	288	48.10	8.03
4	10600.00	43.73 AV	54.00	-10.27	1.82 H	288	35.70	8.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	105.23 PK			1.29 V	33	65.20	40.03
2	*5300.00	95.13 AV			1.29 V	33	55.10	40.03
3	10600.00	56.23 PK	74.00	-17.77	2.22 V	129	48.20	8.03
4	10600.00	43.83 AV	54.00	-10.17	2.22 V	129	35.80	8.03

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	97.95 PK			3.50 H	315	57.90	40.05
2	*5320.00	87.85 AV			3.50 H	315	47.80	40.05
3	5350.00	57.20 PK	74.00	-16.80	3.50 H	315	55.40	1.80
4	5350.00	45.10 AV	54.00	-8.90	3.50 H	315	43.30	1.80
5	10640.00	56.21 PK	74.00	-17.79	1.90 H	291	48.20	8.01
6	10640.00	43.81 AV	54.00	-10.19	1.90 H	291	35.80	8.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.75 PK			1.29 V	32	65.70	40.05
2	*5320.00	95.65 AV			1.29 V	32	55.60	40.05
3	5350.00	57.30 PK	74.00	-16.70	1.29 V	32	55.50	1.80
4	5350.00	45.20 AV	54.00	-8.80	1.29 V	32	43.40	1.80
5	10640.00	56.41 PK	74.00	-17.59	2.18 V	121	48.40	8.01
6	10640.00	44.01 AV	54.00	-9.99	2.18 V	121	36.00	8.01

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.30 PK	74.00	-16.70	3.53 H	297	55.20	2.10
2	5460.00	44.50 AV	54.00	-9.50	3.53 H	297	42.40	2.10
3	#5470.00	58.13 PK	68.20	-10.07	3.53 H	297	56.00	2.13
4	*5500.00	97.67 PK			3.53 H	297	57.50	40.17
5	*5500.00	88.17 AV			3.53 H	297	48.00	40.17
6	11000.00	56.62 PK	74.00	-17.38	1.88 H	291	47.90	8.72
7	11000.00	43.72 AV	54.00	-10.28	1.88 H	291	35.00	8.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.60 PK	74.00	-16.40	1.54 V	35	55.50	2.10
2	5460.00	45.40 AV	54.00	-8.60	1.54 V	35	43.30	2.10
3	#5470.00	60.53 PK	68.20	-7.67	1.54 V	35	58.40	2.13
4	*5500.00	103.57 PK			1.54 V	35	63.40	40.17
5	*5500.00	93.27 AV			1.54 V	35	53.10	40.17
6	11000.00	56.72 PK	74.00	-17.28	2.22 V	116	48.00	8.72
7	11000.00	43.92 AV	54.00	-10.08	2.22 V	116	35.20	8.72

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	98.25 PK			3.50 H	300	57.40	40.85
2	*5580.00	88.65 AV			3.50 H	300	47.80	40.85
3	11160.00	57.03 PK	74.00	-16.97	1.88 H	279	48.20	8.83
4	11160.00	44.33 AV	54.00	-9.67	1.88 H	279	35.50	8.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	104.25 PK			1.66 V	37	63.40	40.85
2	*5580.00	94.05 AV			1.66 V	37	53.20	40.85
3	11160.00	57.43 PK	74.00	-16.57	2.23 V	120	48.60	8.83
4	11160.00	44.73 AV	54.00	-9.27	2.23 V	120	35.90	8.83

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	99.01 PK			3.49 H	292	57.60	41.41
2	*5700.00	89.81 AV			3.49 H	292	48.40	41.41
3	#5725.00	58.82 PK	68.20	-9.38	3.49 H	292	55.20	3.62
4	11400.00	57.87 PK	74.00	-16.13	1.89 H	293	48.30	9.57
5	11400.00	45.47 AV	54.00	-8.53	1.89 H	293	35.90	9.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	104.21 PK			1.67 V	33	62.80	41.41
2	*5700.00	93.91 AV			1.67 V	33	52.50	41.41
3	#5725.00	59.42 PK	68.20	-8.78	1.67 V	33	55.80	3.62
4	11400.00	58.37 PK	74.00	-15.63	2.31 V	122	48.80	9.57
5	11400.00	45.57 AV	54.00	-8.43	2.31 V	122	36.00	9.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.43 PK	68.20	-11.77	3.61 H	306	54.30	2.13
2	*5720.00	96.42 PK			3.61 H	306	54.90	41.52
3	*5720.00	86.72 AV			3.61 H	306	45.20	41.52
4	#5850.00	58.07 PK	68.20	-10.13	3.61 H	306	54.30	3.77
5	11420.00	57.49 PK	74.00	-16.51	1.88 H	287	47.90	9.59
6	11420.00	44.89 AV	54.00	-9.11	1.88 H	287	35.30	9.59
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.13 PK	68.20	-11.07	1.51 V	43	55.00	2.13
2	*5720.00	102.72 PK			1.51 V	43	61.20	41.52
3	*5720.00	92.52 AV			1.51 V	43	51.00	41.52
4	#5850.00	58.67 PK	68.20	-9.53	1.51 V	43	54.90	3.77
5	11440.00	57.81 PK	74.00	-16.19	2.22 V	115	48.20	9.61
6	11440.00	45.91 AV	54.00	-8.09	2.22 V	115	36.30	9.61

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5624.40	58.94 PK	68.20	-9.26	3.34 H	290	55.69	3.25
2	*5745.00	98.77 PK			3.34 H	290	57.10	41.67
3	*5745.00	88.97 AV			3.34 H	290	47.30	41.67
4	#5976.80	59.38 PK	68.20	-8.82	3.34 H	290	55.39	3.99
5	11490.00	57.87 PK	74.00	-16.13	1.87 H	293	48.20	9.67
6	11490.00	45.67 AV	54.00	-8.33	1.87 H	293	36.00	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.00	58.60 PK	68.20	-9.60	1.52 V	38	55.23	3.37
2	*5745.00	104.17 PK			1.52 V	38	62.50	41.67
3	*5745.00	94.07 AV			1.52 V	38	52.40	41.67
4	#5939.60	60.08 PK	68.20	-8.12	1.52 V	38	56.30	3.78
5	11490.00	58.37 PK	74.00	-15.63	2.19 V	125	48.70	9.67
6	11490.00	46.27 AV	54.00	-7.73	2.19 V	125	36.60	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5604.00	59.10 PK	68.20	-9.10	3.52 H	311	55.96	3.14
2	*5785.00	99.40 PK			3.52 H	311	57.60	41.80
3	*5785.00	89.60 AV			3.52 H	311	47.80	41.80
4	#5977.60	59.12 PK	68.20	-9.08	3.52 H	311	55.13	3.99
5	11570.00	58.20 PK	74.00	-15.80	1.79 H	275	48.60	9.60
6	11570.00	46.10 AV	54.00	-7.90	1.79 H	275	36.50	9.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5629.20	57.67 PK	68.20	-10.53	1.56 V	42	54.40	3.27
2	*5785.00	104.70 PK			1.56 V	42	62.90	41.80
3	*5785.00	94.40 AV			1.56 V	42	52.60	41.80
4	#5962.80	58.71 PK	68.20	-9.49	1.56 V	42	54.81	3.90
5	11570.00	58.60 PK	74.00	-15.40	2.23 V	119	49.00	9.60
6	11570.00	46.40 AV	54.00	-7.60	2.23 V	119	36.80	9.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.00	58.29 PK	68.20	-9.91	3.48 H	309	54.91	3.38
2	*5825.00	98.68 PK			3.48 H	309	56.90	41.78
3	*5825.00	89.18 AV			3.48 H	309	47.40	41.78
4	#5994.00	59.78 PK	68.20	-8.42	3.48 H	309	55.69	4.09
5	11650.00	57.95 PK	74.00	-16.05	1.89 H	289	48.40	9.55
6	11650.00	45.75 AV	54.00	-8.25	1.89 H	289	36.20	9.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.00	57.79 PK	68.20	-10.41	1.63 V	40	54.41	3.38
2	*5825.00	104.28 PK			1.63 V	40	62.50	41.78
3	*5825.00	94.18 AV			1.63 V	40	52.40	41.78
4	#5987.60	58.69 PK	68.20	-9.51	1.63 V	40	54.63	4.06
5	11650.00	58.15 PK	74.00	-15.85	2.11 V	126	48.60	9.55
6	11650.00	46.15 AV	54.00	-7.85	2.11 V	126	36.60	9.55

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Full RU

RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.71 PK	74.00	-16.29	3.86 H	289	55.60	2.11
2	5150.00	45.71 AV	54.00	-8.29	3.86 H	289	43.60	2.11
3	*5180.00	103.16 PK			3.86 H	289	62.80	40.36
4	*5180.00	92.26 AV			3.86 H	289	51.90	40.36
5	#10360.00	55.77 PK	68.20	-12.43	1.91 H	278	47.60	8.17

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.51 PK	74.00	-15.49	1.33 V	317	56.40	2.11
2	5150.00	46.01 AV	54.00	-7.99	1.33 V	317	43.90	2.11
3	*5180.00	105.76 PK			1.33 V	317	65.40	40.36
4	*5180.00	95.76 AV			1.33 V	317	55.40	40.36
5	#10360.00	55.97 PK	68.20	-12.23	2.22 V	130	47.80	8.17

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	103.35 PK			3.88 H	291	63.00	40.35
2	*5200.00	92.75 AV			3.88 H	291	52.40	40.35
3	#10400.00	55.88 PK	68.20	-12.32	1.96 H	282	47.70	8.18
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	106.05 PK			1.37 V	321	65.70	40.35
2	*5200.00	95.95 AV			1.37 V	321	55.60	40.35
3	#10400.00	56.18 PK	68.20	-12.02	2.25 V	124	48.00	8.18

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	103.72 PK			3.82 H	285	63.50	40.22
2	*5240.00	92.52 AV			3.82 H	285	52.30	40.22
3	5350.00	57.70 PK	74.00	-16.30	3.82 H	285	55.90	1.80
4	5350.00	45.00 AV	54.00	-9.00	3.82 H	285	43.20	1.80
5	#10480.00	55.61 PK	68.20	-12.59	1.88 H	282	47.70	7.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	106.32 PK			1.21 V	317	66.10	40.22
2	*5240.00	95.82 AV			1.21 V	317	55.60	40.22
3	5350.00	58.10 PK	74.00	-15.90	1.21 V	317	56.30	1.80
4	5350.00	45.20 AV	54.00	-8.80	1.21 V	317	43.40	1.80
5	#10480.00	55.81 PK	68.20	-12.39	2.20 V	118	47.90	7.91

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.21 PK	74.00	-16.79	3.85 H	285	55.10	2.11
2	5150.00	45.71 AV	54.00	-8.29	3.85 H	285	43.60	2.11
3	*5260.00	103.96 PK			3.85 H	285	63.80	40.16
4	*5260.00	92.76 AV			3.85 H	285	52.60	40.16
5	#10520.00	55.77 PK	68.20	-12.43	1.82 H	282	47.90	7.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.41 PK	74.00	-16.59	1.26 V	320	55.30	2.11
2	5150.00	45.81 AV	54.00	-8.19	1.26 V	320	43.70	2.11
3	*5260.00	106.86 PK			1.26 V	320	66.70	40.16
4	*5260.00	95.96 AV			1.26 V	320	55.80	40.16
5	#10520.00	55.97 PK	68.20	-12.23	2.10 V	124	48.10	7.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	104.03 PK			3.82 H	289	64.00	40.03
2	*5300.00	92.63 AV			3.82 H	289	52.60	40.03
3	10600.00	56.03 PK	74.00	-17.97	1.90 H	293	48.00	8.03
4	10600.00	43.93 AV	54.00	-10.07	1.90 H	293	35.90	8.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	106.83 PK			1.25 V	317	66.80	40.03
2	*5300.00	95.93 AV			1.25 V	317	55.90	40.03
3	10600.00	56.23 PK	74.00	-17.77	2.05 V	127	48.20	8.03
4	10600.00	44.23 AV	54.00	-9.77	2.05 V	127	36.20	8.03

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	104.65 PK			3.88 H	293	64.60	40.05
2	*5320.00	93.05 AV			3.88 H	293	53.00	40.05
3	5350.00	57.60 PK	74.00	-16.40	3.88 H	293	55.80	1.80
4	5350.00	45.50 AV	54.00	-8.50	3.88 H	293	43.70	1.80
5	10640.00	56.11 PK	74.00	-17.89	1.82 H	287	48.10	8.01
6	10640.00	44.21 AV	54.00	-9.79	1.82 H	287	36.20	8.01
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	107.45 PK			1.16 V	320	67.40	40.05
2	*5320.00	96.25 AV			1.16 V	320	56.20	40.05
3	5350.00	57.90 PK	74.00	-16.10	1.16 V	320	56.10	1.80
4	5350.00	45.70 AV	54.00	-8.30	1.16 V	320	43.90	1.80
5	10640.00	56.31 PK	74.00	-17.69	2.11 V	122	48.30	8.01
6	10640.00	44.31 AV	54.00	-9.69	2.11 V	122	36.30	8.01

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.10 PK	74.00	-16.90	3.93 H	272	55.00	2.10
2	5460.00	44.60 AV	54.00	-9.40	3.93 H	272	42.50	2.10
3	#5470.00	59.03 PK	68.20	-9.17	3.93 H	272	56.90	2.13
4	*5500.00	102.77 PK			3.93 H	272	100.56	2.21
5	*5500.00	91.17 AV			3.93 H	272	88.96	2.21
6	11000.00	55.82 PK	74.00	-18.18	1.93 H	285	47.10	8.72
7	11000.00	43.92 AV	54.00	-10.08	1.93 H	285	35.20	8.72
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.30 PK	74.00	-16.70	1.10 V	317	55.20	2.10
2	5460.00	44.70 AV	54.00	-9.30	1.10 V	317	42.60	2.10
3	#5470.00	59.83 PK	68.20	-8.37	1.10 V	317	57.70	2.13
4	*5500.00	106.37 PK			1.10 V	317	66.20	40.17
5	*5500.00	95.17 AV			1.10 V	317	55.00	40.17
6	11000.00	56.32 PK	74.00	-17.68	2.22 V	135	47.60	8.72
7	11000.00	44.32 AV	54.00	-9.68	2.22 V	135	35.60	8.72

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	103.65 PK			3.90 H	278	62.80	40.85
2	*5580.00	91.95 AV			3.90 H	278	51.10	40.85
3	11160.00	55.83 PK	74.00	-18.17	1.99 H	280	47.00	8.83
4	11160.00	44.03 AV	54.00	-9.97	1.99 H	280	35.20	8.83
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	107.15 PK			1.14 V	316	66.30	40.85
2	*5580.00	96.05 AV			1.14 V	316	55.20	40.85
3	11160.00	56.53 PK	74.00	-17.47	2.30 V	131	47.70	8.83
4	11160.00	44.53 AV	54.00	-9.47	2.30 V	131	35.70	8.83

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	104.61 PK			3.68 H	306	63.20	41.41
2	*5700.00	92.71 AV			3.68 H	306	51.30	41.41
3	#5725.00	59.42 PK	68.20	-8.78	3.68 H	306	55.80	3.62
4	11400.00	57.17 PK	74.00	-16.83	1.80 H	291	47.60	9.57
5	11400.00	45.27 AV	54.00	-8.73	1.80 H	291	35.70	9.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.91 PK			1.47 V	331	66.50	41.41
2	*5700.00	96.91 AV			1.47 V	331	55.50	41.41
3	#5725.00	63.32 PK	68.20	-4.88	1.47 V	331	59.70	3.62
4	11400.00	57.37 PK	74.00	-16.63	2.18 V	130	47.80	9.57
5	11400.00	45.47 AV	54.00	-8.53	2.18 V	130	35.90	9.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.73 PK	68.20	-11.47	3.63 H	66	54.60	2.13
2	*5720.00	104.82 PK			3.63 H	66	63.30	41.52
3	*5720.00	90.72 AV			3.63 H	66	49.20	41.52
4	#5850.00	57.87 PK	68.20	-10.33	3.63 H	66	54.10	3.77
5	11440.00	57.01 PK	74.00	-16.99	1.96 H	282	47.40	9.61
6	11440.00	45.51 AV	54.00	-8.49	1.96 H	282	35.90	9.61
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.93 PK	68.20	-11.27	1.37 V	333	54.80	2.13
2	*5720.00	107.02 PK			1.37 V	333	65.50	41.52
3	*5720.00	93.52 AV			1.37 V	333	52.00	41.52
4	#5850.00	58.07 PK	68.20	-10.13	1.37 V	333	54.30	3.77
5	11440.00	57.41 PK	74.00	-16.59	2.23 V	131	47.80	9.61
6	11440.00	45.71 AV	54.00	-8.29	2.23 V	131	36.10	9.61

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.40	59.21 PK	68.20	-8.99	3.88 H	289	56.03	3.18
2	*5745.00	102.87 PK			3.88 H	289	61.20	41.67
3	*5745.00	90.77 AV			3.88 H	289	49.10	41.67
4	#5966.80	59.00 PK	68.20	-9.20	3.88 H	289	55.08	3.92
5	11490.00	56.87 PK	74.00	-17.13	1.98 H	270	47.20	9.67
6	11490.00	45.07 AV	54.00	-8.93	1.98 H	270	35.40	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.40	58.60 PK	68.20	-9.60	1.53 V	329	55.25	3.35
2	*5745.00	106.17 PK			1.53 V	329	64.50	41.67
3	*5745.00	93.97 AV			1.53 V	329	52.30	41.67
4	#5968.80	59.73 PK	68.20	-8.47	1.53 V	329	55.80	3.93
5	11490.00	57.37 PK	74.00	-16.63	2.20 V	129	47.70	9.67
6	11490.00	45.47 AV	54.00	-8.53	2.20 V	129	35.80	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.00	58.51 PK	68.20	-9.69	3.90 H	310	55.30	3.21
2	*5785.00	102.30 PK			3.90 H	310	60.50	41.80
3	*5785.00	90.70 AV			3.90 H	310	48.90	41.80
4	#5990.80	59.33 PK	68.20	-8.87	3.90 H	310	55.25	4.08
5	11570.00	57.20 PK	74.00	-16.80	1.98 H	260	47.60	9.60
6	11570.00	45.00 AV	54.00	-9.00	1.98 H	260	35.40	9.60
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5642.40	58.22 PK	68.20	-9.98	1.05 V	328	54.87	3.35
2	*5785.00	105.90 PK			1.05 V	328	64.10	41.80
3	*5785.00	93.80 AV			1.05 V	328	52.00	41.80
4	#5992.40	59.65 PK	68.20	-8.55	1.05 V	328	55.55	4.10
5	11570.00	57.50 PK	74.00	-16.50	2.23 V	122	47.90	9.60
6	11570.00	45.20 AV	54.00	-8.80	2.23 V	122	35.60	9.60

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.80	58.71 PK	68.20	-9.49	3.86 H	285	55.52	3.19
2	*5825.00	101.58 PK			3.86 H	285	59.80	41.78
3	*5825.00	89.98 AV			3.86 H	285	48.20	41.78
4	#5975.60	58.89 PK	68.20	-9.31	3.86 H	285	54.91	3.98
5	11650.00	56.75 PK	74.00	-17.25	1.80 H	299	47.20	9.55
6	11650.00	45.05 AV	54.00	-8.95	1.80 H	299	35.50	9.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5649.60	58.33 PK	68.20	-9.87	1.17 V	329	54.94	3.39
2	*5825.00	104.78 PK			1.17 V	329	63.00	41.78
3	*5825.00	93.48 AV			1.17 V	329	51.70	41.78
4	#5957.20	59.71 PK	68.20	-8.49	1.17 V	329	55.86	3.85
5	11650.00	57.25 PK	74.00	-16.75	2.21 V	128	47.70	9.55
6	11650.00	45.45 AV	54.00	-8.55	2.21 V	128	35.90	9.55

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.81 PK	74.00	-16.19	3.79 H	291	55.70	2.11
2	5150.00	46.41 AV	54.00	-7.59	3.79 H	291	44.30	2.11
3	*5190.00	101.86 PK			3.79 H	291	61.50	40.36
4	*5190.00	89.16 AV			3.79 H	291	48.80	40.36
5	#10380.00	55.97 PK	68.20	-12.23	1.88 H	282	47.80	8.17
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.11 PK	74.00	-15.89	1.08 V	315	56.00	2.11
2	5150.00	46.71 AV	54.00	-7.29	1.08 V	315	44.60	2.11
3	*5190.00	104.46 PK			1.08 V	315	64.10	40.36
4	*5190.00	92.46 AV			1.08 V	315	52.10	40.36
5	#10380.00	56.17 PK	68.20	-12.03	2.12 V	123	48.00	8.17

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	101.65 PK			3.82 H	288	61.40	40.25
2	*5230.00	89.15 AV			3.82 H	288	48.90	40.25
3	5350.00	57.40 PK	74.00	-16.60	3.82 H	288	55.60	1.80
4	5350.00	45.30 AV	54.00	-8.70	3.82 H	288	43.50	1.80
5	#10460.00	55.78 PK	68.20	-12.42	1.93 H	292	47.80	7.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5230.00	104.35 PK			1.34 V	319	64.10	40.25
2	*5230.00	92.45 AV			1.34 V	319	52.20	40.25
3	5350.00	57.90 PK	74.00	-16.10	1.34 V	319	56.10	1.80
4	5350.00	45.50 AV	54.00	-8.50	1.34 V	319	43.70	1.80
5	#10460.00	56.08 PK	68.20	-12.12	2.08 V	116	48.10	7.98

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.31 PK	74.00	-16.69	3.87 H	288	55.20	2.11
2	5150.00	45.61 AV	54.00	-8.39	3.87 H	288	43.50	2.11
3	*5270.00	101.72 PK			3.87 H	288	61.60	40.12
4	*5270.00	89.52 AV			3.87 H	288	49.40	40.12
5	#10540.00	55.82 PK	68.20	-12.38	1.87 H	286	47.90	7.92
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.51 PK	74.00	-16.49	1.16 V	323	55.40	2.11
2	5150.00	45.81 AV	54.00	-8.19	1.16 V	323	43.70	2.11
3	*5270.00	104.52 PK			1.16 V	323	64.40	40.12
4	*5270.00	92.72 AV			1.16 V	323	52.60	40.12
5	#10540.00	56.02 PK	68.20	-12.18	2.08 V	129	48.10	7.92

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	101.25 PK			3.86 H	292	61.20	40.05
2	*5310.00	89.65 AV			3.86 H	292	49.60	40.05
3	5350.00	57.40 PK	74.00	-16.60	3.86 H	292	55.60	1.80
4	5350.00	45.90 AV	54.00	-8.10	3.86 H	292	44.10	1.80
5	10620.00	55.92 PK	74.00	-18.08	1.92 H	287	47.90	8.02
6	10620.00	43.92 AV	54.00	-10.08	1.92 H	287	35.90	8.02
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	103.85 PK			1.14 V	319	63.80	40.05
2	*5310.00	92.85 AV			1.14 V	319	52.80	40.05
3	5350.00	57.60 PK	74.00	-16.40	1.14 V	319	55.80	1.80
4	5350.00	46.10 AV	54.00	-7.90	1.14 V	319	44.30	1.80
5	10620.00	56.22 PK	74.00	-17.78	2.19 V	132	48.20	8.02
6	10620.00	44.12 AV	54.00	-9.88	2.19 V	132	36.10	8.02

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 102 : 5510 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.20 PK	74.00	-16.80	3.89 H	271	55.10	2.10
2	5460.00	44.30 AV	54.00	-9.70	3.89 H	271	42.20	2.10
3	#5470.00	57.83 PK	68.20	-10.37	3.89 H	271	55.70	2.13
4	*5510.00	101.85 PK			3.89 H	271	61.60	40.25
5	*5510.00	87.85 AV			3.89 H	271	47.60	40.25
6	11020.00	55.87 PK	74.00	-18.13	1.83 H	287	47.10	8.77
7	11020.00	43.87 AV	54.00	-10.13	1.83 H	287	35.10	8.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.30 PK	74.00	-15.70	1.10 V	316	56.20	2.10
2	5460.00	44.60 AV	54.00	-9.40	1.10 V	316	42.50	2.10
3	#5470.00	59.33 PK	68.20	-8.87	1.10 V	316	57.20	2.13
4	*5510.00	103.95 PK			1.10 V	316	63.70	40.25
5	*5510.00	91.55 AV			1.10 V	316	51.30	40.25
6	11020.00	56.37 PK	74.00	-17.63	2.23 V	136	47.60	8.77
7	11020.00	44.47 AV	54.00	-9.53	2.23 V	136	35.70	8.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 110 : 5550 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	101.80 PK			3.87 H	285	61.20	40.60
2	*5550.00	87.90 AV			3.87 H	285	47.30	40.60
3	11100.00	56.09 PK	74.00	-17.91	1.86 H	292	47.10	8.99
4	11100.00	43.99 AV	54.00	-10.01	1.86 H	292	35.00	8.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5550.00	103.90 PK			1.19 V	318	63.30	40.60
2	*5550.00	91.50 AV			1.19 V	318	50.90	40.60
3	11100.00	56.39 PK	74.00	-17.61	2.27 V	137	47.40	8.99
4	11100.00	44.39 AV	54.00	-9.61	2.27 V	137	35.40	8.99

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	103.25 PK			3.87 H	276	61.90	41.35
2	*5670.00	89.45 AV			3.87 H	276	48.10	41.35
3	#5725.00	59.12 PK	68.20	-9.08	3.87 H	276	55.50	3.62
4	11340.00	57.03 PK	74.00	-16.97	1.80 H	289	47.50	9.53
5	11340.00	45.13 AV	54.00	-8.87	1.80 H	289	35.60	9.53
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	105.35 PK			1.01 V	332	64.00	41.35
2	*5670.00	92.95 AV			1.01 V	332	51.60	41.35
3	#5725.00	59.62 PK	68.20	-8.58	1.01 V	332	56.00	3.62
4	11340.00	57.33 PK	74.00	-16.67	2.25 V	132	47.80	9.53
5	11340.00	45.33 AV	54.00	-8.67	2.25 V	132	35.80	9.53

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 142 : 5710 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.63 PK	68.20	-11.57	3.99 H	71	54.50	2.13
2	*5710.00	99.27 PK			3.99 H	71	57.80	41.47
3	*5710.00	87.57 AV			3.99 H	71	46.10	41.47
4	#5850.00	57.87 PK	68.20	-10.33	3.99 H	71	54.10	3.77
5	11420.00	56.79 PK	74.00	-17.21	1.90 H	279	47.20	9.59
6	11420.00	45.39 AV	54.00	-8.61	1.90 H	279	35.80	9.59
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.53 PK	68.20	-11.67	1.39 V	332	54.40	2.13
2	*5710.00	102.37 PK			1.39 V	332	60.90	41.47
3	*5710.00	90.37 AV			1.39 V	332	48.90	41.47
4	#5850.00	58.47 PK	68.20	-9.73	1.39 V	332	54.70	3.77
5	11420.00	57.39 PK	74.00	-16.61	2.13 V	129	47.80	9.59
6	11420.00	45.69 AV	54.00	-8.31	2.13 V	129	36.10	9.59

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5641.20	58.19 PK	68.20	-10.01	3.92 H	288	54.85	3.34
2	*5755.00	99.62 PK			3.92 H	288	57.90	41.72
3	*5755.00	90.52 AV			3.92 H	288	48.80	41.72
4	#5980.00	59.04 PK	68.20	-9.16	3.92 H	288	55.03	4.01
5	11510.00	57.17 PK	74.00	-16.83	1.81 H	291	47.50	9.67
6	11510.00	45.27 AV	54.00	-8.73	1.81 H	291	35.60	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5611.60	60.10 PK	68.20	-8.10	1.00 V	326	56.91	3.19
2	*5755.00	103.62 PK			1.00 V	326	61.90	41.72
3	*5755.00	93.32 AV			1.00 V	326	51.60	41.72
4	#5967.20	60.45 PK	68.20	-7.75	1.00 V	326	56.52	3.93
5	11510.00	57.47 PK	74.00	-16.53	2.11 V	130	47.80	9.67
6	11510.00	45.47 AV	54.00	-8.53	2.11 V	130	35.80	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 159 : 5795 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5648.00	57.87 PK	68.20	-10.33	3.87 H	287	54.49	3.38
2	*5795.00	100.82 PK			3.87 H	287	59.00	41.82
3	*5795.00	90.52 AV			3.87 H	287	48.70	41.82
4	#5974.80	58.62 PK	68.20	-9.58	3.87 H	287	54.65	3.97
5	11590.00	56.98 PK	74.00	-17.02	1.90 H	285	47.40	9.58
6	11590.00	44.78 AV	54.00	-9.22	1.90 H	285	35.20	9.58
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5613.20	59.56 PK	68.20	-8.64	1.03 V	326	56.36	3.20
2	*5795.00	104.02 PK			1.03 V	326	62.20	41.82
3	*5795.00	93.62 AV			1.03 V	326	51.80	41.82
4	#5953.20	60.19 PK	68.20	-8.01	1.03 V	326	56.36	3.83
5	11590.00	57.38 PK	74.00	-16.62	2.16 V	129	47.80	9.58
6	11590.00	45.28 AV	54.00	-8.72	2.16 V	129	35.70	9.58

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 42 : 5210 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	59.31 PK	74.00	-14.69	3.87 H	286	57.20	2.11
2	5150.00	46.71 AV	54.00	-7.29	3.87 H	286	44.60	2.11
3	*5210.00	98.21 PK			3.87 H	286	57.90	40.31
4	*5210.00	86.51 AV			3.87 H	286	46.20	40.31
5	#10420.00	55.91 PK	68.20	-12.29	1.92 H	279	47.80	8.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.21 PK	74.00	-13.79	1.31 V	317	58.10	2.11
2	5150.00	47.01 AV	54.00	-6.99	1.31 V	317	44.90	2.11
3	*5210.00	100.91 PK			1.31 V	317	60.60	40.31
4	*5210.00	89.71 AV			1.31 V	317	49.40	40.31
5	#10420.00	56.11 PK	68.20	-12.09	2.17 V	124	48.00	8.11

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 58 : 5290 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	98.76 PK			3.82 H	284	58.70	40.06
2	*5290.00	87.36 AV			3.82 H	284	47.30	40.06
3	5350.00	61.30 PK	74.00	-12.70	3.82 H	284	59.50	1.80
4	5350.00	45.90 AV	54.00	-8.10	3.82 H	284	44.10	1.80
5	#10580.00	55.70 PK	68.20	-12.50	1.86 H	278	47.70	8.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	101.56 PK			1.15 V	322	61.50	40.06
2	*5290.00	90.36 AV			1.15 V	322	50.30	40.06
3	5350.00	61.90 PK	74.00	-12.10	1.15 V	322	60.10	1.80
4	5350.00	46.40 AV	54.00	-7.60	1.15 V	322	44.60	1.80
5	#10580.00	55.90 PK	68.20	-12.30	1.92 V	293	47.90	8.00

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 106 : 5530 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.50 PK	74.00	-16.50	3.88 H	285	55.40	2.10
2	5460.00	44.40 AV	54.00	-9.60	3.88 H	285	42.30	2.10
3	#5470.00	57.73 PK	68.20	-10.47	3.88 H	285	55.60	2.13
4	*5530.00	99.02 PK			3.88 H	285	58.60	40.42
5	*5530.00	86.22 AV			3.88 H	285	45.80	40.42
6	11060.00	56.08 PK	74.00	-17.92	1.94 H	277	47.20	8.88
7	11060.00	44.28 AV	54.00	-9.72	1.94 H	277	35.40	8.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	58.00 PK	74.00	-16.00	1.00 V	318	55.90	2.10
2	5460.00	45.30 AV	54.00	-8.70	1.00 V	318	43.20	2.10
3	#5470.00	59.93 PK	68.20	-8.27	1.00 V	318	57.80	2.13
4	*5530.00	102.02 PK			1.00 V	318	61.60	40.42
5	*5530.00	88.62 AV			1.00 V	318	48.20	40.42
6	11060.00	56.38 PK	74.00	-17.62	2.19 V	144	47.50	8.88
7	11060.00	44.58 AV	54.00	-9.42	2.19 V	144	35.70	8.88

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 122 : 5610 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	99.28 PK			3.92 H	279	58.20	41.08
2	*5610.00	86.98 AV			3.92 H	279	45.90	41.08
3	#5725.00	58.92 PK	68.20	-9.28	3.92 H	279	55.30	3.62
4	11220.00	56.06 PK	74.00	-17.94	1.88 H	280	47.20	8.86
5	11220.00	44.06 AV	54.00	-9.94	1.88 H	280	35.20	8.86
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5610.00	102.48 PK			1.07 V	317	61.40	41.08
2	*5610.00	89.08 AV			1.07 V	317	48.00	41.08
3	#5725.00	59.62 PK	68.20	-8.58	1.07 V	317	56.00	3.62
4	11220.00	56.36 PK	74.00	-17.64	2.25 V	139	47.50	8.86
5	11220.00	44.36 AV	54.00	-9.64	2.25 V	139	35.50	8.86

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 138 : 5690 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	56.63 PK	68.20	-11.57	3.82 H	69	54.50	2.13
2	*5690.00	98.88 PK			3.82 H	69	57.50	41.38
3	*5690.00	86.58 AV			3.82 H	69	45.20	41.38
4	#5850.00	58.47 PK	68.20	-9.73	3.82 H	69	54.70	3.77
5	11380.00	56.75 PK	74.00	-17.25	1.93 H	285	47.20	9.55
6	11380.00	45.35 AV	54.00	-8.65	1.93 H	285	35.80	9.55
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5470.00	57.03 PK	68.20	-11.17	1.07 V	320	54.90	2.13
2	*5690.00	101.38 PK			1.07 V	320	60.00	41.38
3	*5690.00	89.78 AV			1.07 V	320	48.40	41.38
4	#5850.00	58.87 PK	68.20	-9.33	1.07 V	320	55.10	3.77
5	11380.00	57.15 PK	74.00	-16.85	2.09 V	133	47.60	9.55
6	11380.00	45.75 AV	54.00	-8.25	2.09 V	133	36.20	9.55

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80)	Channel	CH 155 : 5775 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.80	58.82 PK	68.20	-9.38	3.84 H	287	55.49	3.33
2	*5775.00	100.07 PK			3.86 H	287	58.30	41.77
3	*5775.00	88.87 AV			3.86 H	287	47.10	41.77
4	#5948.40	59.00 PK	68.20	-9.20	3.84 H	287	55.20	3.80
5	11550.00	57.22 PK	74.00	-16.78	1.94 H	275	47.60	9.62
6	11550.00	45.12 AV	54.00	-8.88	1.94 H	275	35.50	9.62
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5619.20	58.45 PK	68.20	-9.75	1.00 V	325	55.23	3.22
2	*5775.00	103.27 PK			1.00 V	325	61.50	41.77
3	*5775.00	91.37 AV			1.00 V	325	49.60	41.77
4	#5982.00	59.17 PK	68.20	-9.03	1.00 V	325	55.15	4.02
5	11550.00	57.52 PK	74.00	-16.48	2.19 V	133	47.90	9.62
6	11550.00	45.52 AV	54.00	-8.48	2.19 V	133	35.90	9.62

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 50 : 5250 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.80 PK	74.00	-17.20	3.89 H	286	54.40	2.40
2	5150.00	43.90 AV	54.00	-10.10	3.89 H	286	41.50	2.40
3	*5250.00	91.78 PK			3.89 H	286	51.70	40.08
4	*5250.00	81.28 AV			3.89 H	286	41.20	40.08
5	#10500.00	56.10 PK	68.20	-12.10	1.98 H	260	47.60	8.50
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.60 PK	74.00	-15.40	1.00 V	314	56.20	2.40
2	5150.00	44.70 AV	54.00	-9.30	1.00 V	314	42.30	2.40
3	*5250.00	95.38 PK			1.00 V	314	55.30	40.08
4	*5250.00	84.48 AV			1.00 V	314	44.40	40.08
5	#10500.00	56.50 PK	68.20	-11.70	2.23 V	127	48.00	8.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160)	Channel	CH 114 : 5570 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.10 PK	74.00	-16.90	3.91 H	294	55.00	2.10
2	5460.00	44.00 AV	54.00	-10.00	3.91 H	294	41.90	2.10
3	#5470.00	57.93 PK	68.20	-10.27	3.91 H	294	55.80	2.13
4	*5570.00	90.87 PK			3.91 H	294	50.10	40.77
5	*5570.00	80.77 AV			3.91 H	294	40.00	40.77
6	11140.00	56.07 PK	74.00	-17.93	1.87 H	299	47.20	8.87
7	11140.00	44.27 AV	54.00	-9.73	1.87 H	299	35.40	8.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.30 PK	74.00	-16.70	1.01 V	311	55.20	2.10
2	5460.00	44.20 AV	54.00	-9.80	1.01 V	311	42.10	2.10
3	#5470.00	58.23 PK	68.20	-9.97	1.01 V	311	56.10	2.13
4	*5570.00	95.47 PK			1.01 V	311	54.70	40.77
5	*5570.00	84.97 AV			1.01 V	311	44.20	40.77
6	11140.00	56.57 PK	74.00	-17.43	2.22 V	121	47.70	8.87
7	11140.00	44.87 AV	54.00	-9.13	2.22 V	121	36.00	8.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Partial RU

RF Mode	TX 802.11ax (HE20) (RU26)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.02 PK	74.00	-16.98	3.93 H	288	54.46	2.56
2	5150.00	44.80 AV	54.00	-9.20	3.93 H	288	42.24	2.56
3	*5180.00	110.95 PK			3.93 H	288	69.82	41.13
4	*5180.00	101.78 AV			3.93 H	288	60.65	41.13
5	#10360.00	54.41 PK	68.20	-13.79	2.61 H	303	47.34	7.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.11 PK	74.00	-15.89	1.77 V	318	55.55	2.56
2	5150.00	45.30 AV	54.00	-8.70	1.77 V	318	42.74	2.56
3	*5180.00	112.05 PK			1.77 V	318	70.92	41.13
4	*5180.00	103.94 AV			1.77 V	318	62.81	41.13
5	#10360.00	52.97 PK	68.20	-15.23	2.36 V	177	45.90	7.07

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	109.84 PK			3.73 H	290	69.02	40.82
2	*5320.00	101.63 AV			3.73 H	290	60.81	40.82
3	5350.00	56.66 PK	74.00	-17.34	3.73 H	290	54.47	2.19
4	5350.00	44.47 AV	54.00	-9.53	3.73 H	290	42.28	2.19
5	10640.00	54.10 PK	74.00	-19.90	2.43 H	281	47.32	6.78
6	10640.00	40.48 AV	54.00	-13.52	2.43 H	281	33.70	6.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.45 PK			1.40 V	321	72.63	40.82
2	*5320.00	104.71 AV			1.40 V	321	63.89	40.82
3	5350.00	58.26 PK	74.00	-15.74	1.40 V	321	56.07	2.19
4	5350.00	47.16 AV	54.00	-6.84	1.40 V	321	44.97	2.19
5	10640.00	54.73 PK	74.00	-19.27	2.40 V	199	47.95	6.78
6	10640.00	40.88 AV	54.00	-13.12	2.40 V	199	34.10	6.78

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE20) (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.90 PK	74.00	-18.10	3.66 H	284	53.65	2.25
2	5460.00	44.70 AV	54.00	-9.30	3.66 H	284	42.45	2.25
3	#5470.00	55.94 PK	68.20	-12.26	3.66 H	284	53.66	2.28
4	*5500.00	110.24 PK			3.66 H	284	69.16	41.08
5	*5500.00	101.87 AV			3.66 H	284	60.79	41.08
6	11000.00	53.62 PK	74.00	-20.38	2.21 H	256	46.91	6.71
7	11000.00	41.32 AV	54.00	-12.68	2.21 H	256	34.61	6.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.58 PK	74.00	-17.42	1.36 V	322	54.33	2.25
2	5460.00	44.96 AV	54.00	-9.04	1.36 V	322	42.71	2.25
3	#5470.00	56.47 PK	68.20	-11.73	1.36 V	322	54.19	2.28
4	*5500.00	113.31 PK			1.36 V	322	72.23	41.08
5	*5500.00	103.99 AV			1.36 V	322	62.91	41.08
6	11000.00	54.70 PK	74.00	-19.30	2.39 V	210	47.99	6.71
7	11000.00	41.49 AV	54.00	-12.51	2.39 V	210	34.78	6.71

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	108.01 PK			3.80 H	260	66.60	41.41
2	*5700.00	98.41 AV			3.80 H	260	57.00	41.41
3	#5725.00	59.22 PK	68.20	-8.98	3.80 H	260	55.60	3.62
4	11400.00	56.37 PK	74.00	-17.63	2.33 H	309	46.80	9.57
5	11400.00	43.77 AV	54.00	-10.23	2.33 H	309	34.20	9.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.41 PK			1.33 V	328	71.00	41.41
2	*5700.00	102.81 AV			1.33 V	328	61.40	41.41
3	#5725.00	59.72 PK	68.20	-8.48	1.33 V	328	56.10	3.62
4	11400.00	56.57 PK	74.00	-17.43	2.48 V	198	47.00	9.57
5	11400.00	44.17 AV	54.00	-9.83	2.48 V	198	34.60	9.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5618.00	56.20 PK	68.20	-12.00	3.79 H	263	52.99	3.21
2	*5745.00	111.07 PK			3.79 H	263	69.40	41.67
3	*5745.00	98.57 AV			3.79 H	263	56.90	41.67
4	#5980.40	57.94 PK	68.20	-10.26	3.79 H	263	53.93	4.01
5	11490.00	56.57 PK	74.00	-17.43	2.37 H	305	46.90	9.67
6	11490.00	44.17 AV	54.00	-9.83	2.37 H	305	34.50	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5603.60	56.76 PK	68.20	-11.44	1.31 V	319	53.62	3.14
2	*5745.00	115.17 PK			1.31 V	319	73.50	41.67
3	*5745.00	102.67 AV			1.31 V	319	61.00	41.67
4	#5968.80	57.74 PK	68.20	-10.46	1.31 V	319	53.81	3.93
5	11490.00	56.97 PK	74.00	-17.03	2.44 V	172	47.30	9.67
6	11490.00	44.47 AV	54.00	-9.53	2.44 V	172	34.80	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.44 PK	74.00	-17.56	3.94 H	283	53.88	2.56
2	5150.00	45.07 AV	54.00	-8.93	3.94 H	283	42.51	2.56
3	*5180.00	108.31 PK			3.94 H	283	67.18	41.13
4	*5180.00	98.47 AV			3.94 H	283	57.34	41.13
5	#10360.00	53.86 PK	68.20	-14.34	2.73 H	291	46.79	7.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.72 PK	74.00	-16.28	1.62 V	321	55.16	2.56
2	5150.00	45.28 AV	54.00	-8.72	1.62 V	321	42.72	2.56
3	*5180.00	111.68 PK			1.62 V	321	70.55	41.13
4	*5180.00	100.72 AV			1.62 V	321	59.59	41.13
5	#10360.00	53.50 PK	68.20	-14.70	2.44 V	189	46.43	7.07

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.29 PK			3.97 H	294	69.47	40.82
2	*5320.00	99.09 AV			3.97 H	294	58.27	40.82
3	5350.00	55.81 PK	74.00	-18.19	3.97 H	294	53.62	2.19
4	5350.00	45.00 AV	54.00	-9.00	3.97 H	294	42.81	2.19
5	10640.00	53.98 PK	74.00	-20.02	2.21 H	273	47.20	6.78
6	10640.00	40.48 AV	54.00	-13.52	2.21 H	273	33.70	6.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.68 PK			1.17 V	318	71.86	40.82
2	*5320.00	102.11 AV			1.17 V	318	61.29	40.82
3	5350.00	56.14 PK	74.00	-17.86	1.17 V	318	53.95	2.19
4	5350.00	44.97 AV	54.00	-9.03	1.17 V	318	42.78	2.19
5	10640.00	54.34 PK	74.00	-19.66	2.56 V	204	47.56	6.78
6	10640.00	40.78 AV	54.00	-13.22	2.56 V	204	34.00	6.78

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20) (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.11 PK	74.00	-17.89	3.65 H	284	53.86	2.25
2	5460.00	44.55 AV	54.00	-9.45	3.65 H	284	42.30	2.25
3	#5470.00	57.21 PK	68.20	-10.99	3.65 H	284	54.93	2.28
4	*5500.00	110.77 PK			3.65 H	284	69.69	41.08
5	*5500.00	98.72 AV			3.65 H	284	57.64	41.08
6	11000.00	54.53 PK	74.00	-19.47	2.37 H	264	47.82	6.71
7	11000.00	41.27 AV	54.00	-12.73	2.37 H	264	34.56	6.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.02 PK	74.00	-17.98	1.57 V	326	53.77	2.25
2	5460.00	44.81 AV	54.00	-9.19	1.57 V	326	42.56	2.25
3	#5470.00	56.71 PK	68.20	-11.49	1.57 V	326	54.43	2.28
4	*5500.00	112.40 PK			1.57 V	326	71.32	41.08
5	*5500.00	101.08 AV			1.57 V	326	60.00	41.08
6	11000.00	54.29 PK	74.00	-19.71	2.47 V	226	47.58	6.71
7	11000.00	41.22 AV	54.00	-12.78	2.47 V	226	34.51	6.71

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	107.91 PK			3.89 H	269	66.50	41.41
2	*5700.00	96.51 AV			3.89 H	269	55.10	41.41
3	#5725.00	59.32 PK	68.20	-8.88	3.89 H	269	55.70	3.62
4	11400.00	56.47 PK	74.00	-17.53	2.26 H	301	46.90	9.57
5	11400.00	43.97 AV	54.00	-10.03	2.26 H	301	34.40	9.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	111.01 PK			1.27 V	318	69.60	41.41
2	*5700.00	99.71 AV			1.27 V	318	58.30	41.41
3	#5725.00	59.62 PK	68.20	-8.58	1.27 V	318	56.00	3.62
4	11400.00	56.77 PK	74.00	-17.23	2.45 V	196	47.20	9.57
5	11400.00	44.27 AV	54.00	-9.73	2.45 V	196	34.70	9.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5625.60	56.20 PK	68.20	-12.00	3.76 H	280	52.95	3.25
2	*5745.00	107.57 PK			3.76 H	280	65.90	41.67
3	*5745.00	95.67 AV			3.76 H	280	54.00	41.67
4	#5928.00	56.69 PK	68.20	-11.51	3.76 H	280	52.95	3.74
5	11490.00	56.17 PK	74.00	-17.83	2.18 H	307	46.50	9.67
6	11490.00	44.07 AV	54.00	-9.93	2.18 H	307	34.40	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5610.80	56.37 PK	68.20	-11.83	1.16 V	321	53.18	3.19
2	*5745.00	111.77 PK			1.16 V	321	70.10	41.67
3	*5745.00	99.47 AV			1.16 V	321	57.80	41.67
4	#5983.20	56.06 PK	68.20	-12.14	1.16 V	321	52.03	4.03
5	11490.00	56.87 PK	74.00	-17.13	2.53 V	177	47.20	9.67
6	11490.00	44.47 AV	54.00	-9.53	2.53 V	177	34.80	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.43 PK	74.00	-16.57	3.91 H	281	54.87	2.56
2	5150.00	44.64 AV	54.00	-9.36	3.91 H	281	42.08	2.56
3	*5180.00	105.68 PK			3.91 H	281	64.55	41.13
4	*5180.00	95.40 AV			3.91 H	281	54.27	41.13
5	#10360.00	53.64 PK	68.20	-14.56	2.61 H	274	46.57	7.07
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.24 PK	74.00	-16.76	1.42 V	323	54.68	2.56
2	5150.00	45.26 AV	54.00	-8.74	1.42 V	323	42.70	2.56
3	*5180.00	108.36 PK			1.42 V	323	67.23	41.13
4	*5180.00	97.95 AV			1.42 V	323	56.82	41.13
5	#10360.00	53.56 PK	68.20	-14.64	2.51 V	178	46.49	7.07

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	105.96 PK			3.73 H	286	65.14	40.82
2	*5320.00	95.72 AV			3.73 H	286	54.90	40.82
3	5350.00	56.12 PK	74.00	-17.88	3.73 H	286	53.93	2.19
4	5350.00	44.64 AV	54.00	-9.36	3.73 H	286	42.45	2.19
5	10640.00	53.84 PK	74.00	-20.16	2.10 H	266	47.06	6.78
6	10640.00	40.38 AV	54.00	-13.62	2.10 H	266	33.60	6.78
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	110.29 PK			1.31 V	320	69.47	40.82
2	*5320.00	98.91 AV			1.31 V	320	58.09	40.82
3	5350.00	55.47 PK	74.00	-18.53	1.31 V	320	53.28	2.19
4	5350.00	44.95 AV	54.00	-9.05	1.31 V	320	42.76	2.19
5	10640.00	54.30 PK	74.00	-19.70	2.48 V	197	47.52	6.78
6	10640.00	40.68 AV	54.00	-13.32	2.48 V	197	33.90	6.78

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20) (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.20 PK	74.00	-17.80	3.64 H	283	53.95	2.25
2	5460.00	44.41 AV	54.00	-9.59	3.64 H	283	42.16	2.25
3	#5470.00	55.99 PK	68.20	-12.21	3.64 H	283	53.71	2.28
4	*5500.00	106.53 PK			3.64 H	283	65.45	41.08
5	*5500.00	95.82 AV			3.64 H	283	54.74	41.08
6	11000.00	54.21 PK	74.00	-19.79	2.49 H	244	47.50	6.71
7	11000.00	41.48 AV	54.00	-12.52	2.49 H	244	34.77	6.71
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	55.72 PK	74.00	-18.28	1.59 V	325	53.47	2.25
2	5460.00	44.56 AV	54.00	-9.44	1.59 V	325	42.31	2.25
3	#5470.00	55.78 PK	68.20	-12.42	1.59 V	325	53.50	2.28
4	*5500.00	108.96 PK			1.59 V	325	67.88	41.08
5	*5500.00	98.05 AV			1.59 V	325	56.97	41.08
6	11000.00	53.32 PK	74.00	-20.68	2.22 V	242	46.61	6.71
7	11000.00	41.27 AV	54.00	-12.73	2.22 V	242	34.56	6.71

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	105.61 PK			3.88 H	281	64.20	41.41
2	*5700.00	94.01 AV			3.88 H	281	52.60	41.41
3	#5725.00	59.32 PK	68.20	-8.88	3.88 H	281	55.70	3.62
4	11400.00	56.37 PK	74.00	-17.63	2.21 H	299	46.80	9.57
5	11400.00	43.97 AV	54.00	-10.03	2.21 H	299	34.40	9.57
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.31 PK			1.16 V	321	67.90	41.41
2	*5700.00	97.21 AV			1.16 V	321	55.80	41.41
3	#5725.00	59.62 PK	68.20	-8.58	1.16 V	321	56.00	3.62
4	11400.00	56.67 PK	74.00	-17.33	2.43 V	189	47.10	9.57
5	11400.00	44.17 AV	54.00	-9.83	2.43 V	189	34.60	9.57

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20) (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5608.40	55.87 PK	68.20	-12.33	3.72 H	259	52.71	3.16
2	*5745.00	104.57 PK			3.72 H	259	62.90	41.67
3	*5745.00	92.67 AV			3.72 H	259	51.00	41.67
4	#5946.80	57.28 PK	68.20	-10.92	3.72 H	259	53.48	3.80
5	11490.00	56.07 PK	74.00	-17.93	2.05 H	312	46.40	9.67
6	11490.00	43.87 AV	54.00	-10.13	2.05 H	312	34.20	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5650.00	56.07 PK	68.20	-12.13	1.13 V	324	52.68	3.39
2	*5745.00	109.57 PK			1.13 V	324	67.90	41.67
3	*5745.00	96.47 AV			1.13 V	324	54.80	41.67
4	#5989.60	56.61 PK	68.20	-11.59	1.13 V	324	52.54	4.07
5	11490.00	56.57 PK	74.00	-17.43	2.49 V	168	46.90	9.67
6	11490.00	44.27 AV	54.00	-9.73	2.49 V	168	34.60	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40) (RU242)	Channel	CH 38 : 5190 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.10 PK	74.00	-16.90	3.99 H	307	54.70	2.40
2	5150.00	44.10 AV	54.00	-9.90	3.99 H	307	41.70	2.40
3	*5190.00	103.56 PK			3.99 H	307	63.30	40.26
4	*5190.00	91.46 AV			3.99 H	307	51.20	40.26
5	#10380.00	54.88 PK	68.20	-13.32	2.06 H	310	46.40	8.48

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.50 PK	74.00	-16.50	1.00 V	308	55.10	2.40
2	5150.00	44.50 AV	54.00	-9.50	1.00 V	308	42.10	2.40
3	*5190.00	107.56 PK			1.00 V	308	67.30	40.26
4	*5190.00	95.26 AV			1.00 V	308	55.00	40.26
5	#10380.00	55.08 PK	68.20	-13.12	2.39 V	172	46.60	8.48

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40) (RU242)	Channel	CH 62 : 5310 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	103.53 PK			3.91 H	306	63.50	40.03
2	*5310.00	90.53 AV			3.91 H	306	50.50	40.03
3	5350.00	60.55 PK	74.00	-13.45	3.91 H	306	58.50	2.05
4	5350.00	44.15 AV	54.00	-9.85	3.91 H	306	42.10	2.05
5	10620.00	55.10 PK	74.00	-18.90	2.13 H	305	46.40	8.70
6	10620.00	42.80 AV	54.00	-11.20	2.13 H	305	34.10	8.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	107.73 PK			1.14 V	317	67.70	40.03
2	*5310.00	95.63 AV			1.14 V	317	55.60	40.03
3	5350.00	60.95 PK	74.00	-13.05	1.14 V	317	58.90	2.05
4	5350.00	44.35 AV	54.00	-9.65	1.14 V	317	42.30	2.05
5	10620.00	55.50 PK	74.00	-18.50	2.34 V	169	46.80	8.70
6	10620.00	43.20 AV	54.00	-10.80	2.34 V	169	34.50	8.70

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 802.11ax (HE40) (RU242)	Channel	CH 102 : 5510 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.50 PK	74.00	-16.50	3.89 H	252	55.40	2.10
2	5460.00	43.90 AV	54.00	-10.10	3.89 H	252	41.80	2.10
3	#5470.00	57.83 PK	68.20	-10.37	3.89 H	252	55.70	2.13
4	*5510.00	103.85 PK			3.89 H	252	63.60	40.25
5	*5510.00	91.85 AV			3.89 H	252	51.60	40.25
6	11020.00	55.27 PK	74.00	-18.73	2.11 H	317	46.50	8.77
7	11020.00	43.07 AV	54.00	-10.93	2.11 H	317	34.30	8.77
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.70 PK	74.00	-16.30	1.11 V	319	55.60	2.10
2	5460.00	44.20 AV	54.00	-9.80	1.11 V	319	42.10	2.10
3	#5470.00	58.03 PK	68.20	-10.17	1.11 V	319	55.90	2.13
4	*5510.00	107.45 PK			1.11 V	319	67.20	40.25
5	*5510.00	95.25 AV			1.11 V	319	55.00	40.25
6	11020.00	55.67 PK	74.00	-18.33	2.38 V	170	46.90	8.77
7	11020.00	43.37 AV	54.00	-10.63	2.38 V	170	34.60	8.77

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40) (RU242)	Channel	CH 134 : 5670 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	103.65 PK			3.97 H	298	62.30	41.35
2	*5670.00	91.15 AV			3.97 H	298	49.80	41.35
3	#5725.00	58.32 PK	68.20	-9.88	1.26 H	311	54.70	3.62
4	11340.00	56.03 PK	74.00	-17.97	2.04 H	312	46.50	9.53
5	11340.00	43.93 AV	54.00	-10.07	2.04 H	312	34.40	9.53
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5670.00	107.65 PK			1.26 V	311	66.30	41.35
2	*5670.00	95.05 AV			1.26 V	311	53.70	41.35
3	#5725.00	58.62 PK	68.20	-9.58	1.26 V	311	55.00	3.62
4	11340.00	56.43 PK	74.00	-17.57	2.33 V	176	46.90	9.53
5	11340.00	44.23 AV	54.00	-9.77	2.33 V	176	34.70	9.53

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40) (RU242)	Channel	CH 151 : 5755 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5628.80	57.95 PK	68.20	-10.25	3.35 H	250	54.68	3.27
2	*5755.00	104.12 PK			3.35 H	250	62.40	41.72
3	*5755.00	90.92 AV			3.35 H	250	49.20	41.72
4	#5977.20	58.85 PK	68.20	-9.35	3.35 H	250	54.86	3.99
5	11510.00	55.97 PK	74.00	-18.03	2.12 H	313	46.30	9.67
6	11510.00	43.87 AV	54.00	-10.13	2.12 H	313	34.20	9.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.20	57.91 PK	68.20	-10.29	1.35 V	317	54.56	3.35
2	*5755.00	106.72 PK			1.35 V	317	65.00	41.72
3	*5755.00	93.92 AV			1.35 V	317	52.20	41.72
4	#5988.00	57.79 PK	68.20	-10.41	1.35 V	317	53.73	4.06
5	11510.00	56.67 PK	74.00	-17.33	2.37 V	174	47.00	9.67
6	11510.00	44.47 AV	54.00	-9.53	2.37 V	174	34.80	9.67

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80) (RU484)	Channel	CH 42 : 5210 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	61.70 PK	74.00	-12.30	3.94 H	310	59.30	2.40
2	5150.00	44.40 AV	54.00	-9.60	3.94 H	310	42.00	2.40
3	*5210.00	99.41 PK			3.94 H	310	59.20	40.21
4	*5210.00	87.11 AV			3.94 H	310	46.90	40.21
5	#10420.00	54.96 PK	68.20	-13.24	2.09 H	319	46.50	8.46

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	66.80 PK	74.00	-7.20	1.12 V	315	64.40	2.40
2	5150.00	45.30 AV	54.00	-8.70	1.12 V	315	42.90	2.40
3	*5210.00	103.61 PK			1.12 V	315	63.40	40.21
4	*5210.00	90.91 AV			1.12 V	315	50.70	40.21
5	#10420.00	55.26 PK	68.20	-12.94	2.41 V	175	46.80	8.46

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80) (RU484)	Channel	CH 58 : 5290 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	100.92 PK			4.00 H	305	60.90	40.02
2	*5290.00	88.02 AV			4.00 H	305	48.00	40.02
3	5350.00	57.35 PK	74.00	-16.65	4.00 H	305	55.30	2.05
4	5350.00	43.65 AV	54.00	-10.35	4.00 H	305	41.60	2.05
5	#10580.00	55.03 PK	68.20	-13.17	1.99 H	308	46.30	8.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5290.00	105.12 PK			1.00 V	315	65.10	40.02
2	*5290.00	91.92 AV			1.00 V	315	51.90	40.02
3	5350.00	62.05 PK	74.00	-11.95	1.00 V	315	60.00	2.05
4	5350.00	44.75 AV	54.00	-9.25	1.00 V	315	42.70	2.05
5	#10580.00	55.63 PK	68.20	-12.57	2.37 V	171	46.90	8.73

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80) (RU484)	Channel	CH 106 : 5530 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	56.80 PK	74.00	-17.20	3.85 H	252	54.70	2.10
2	5460.00	43.70 AV	54.00	-10.30	3.85 H	252	41.60	2.10
3	#5470.00	62.63 PK	68.20	-5.57	3.85 H	252	60.50	2.13
4	*5530.00	101.32 PK			3.85 H	252	60.90	40.42
5	*5530.00	88.42 AV			3.85 H	252	48.00	40.42
6	11060.00	55.38 PK	74.00	-18.62	2.01 H	317	46.50	8.88
7	11060.00	45.28 AV	54.00	-8.72	2.01 H	317	36.40	8.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	60.70 PK	74.00	-13.30	1.01 V	312	58.60	2.10
2	5460.00	44.20 AV	54.00	-9.80	1.01 V	312	42.10	2.10
3	#5470.00	65.13 PK	68.20	-3.07	1.01 V	312	63.00	2.13
4	*5530.00	104.92 PK			1.01 V	312	64.50	40.42
5	*5530.00	92.42 AV			1.01 V	312	52.00	40.42
6	11060.00	55.88 PK	74.00	-18.12	2.46 V	180	47.00	8.88
7	11060.00	45.58 AV	54.00	-8.42	2.46 V	180	36.70	8.88

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE80) (RU484)	Channel	CH 155 : 5775 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5640.80	57.97 PK	68.20	-10.23	3.84 H	297	54.63	3.34
2	*5775.00	100.97 PK			3.84 H	297	59.20	41.77
3	*5775.00	87.77 AV			3.84 H	297	46.00	41.77
4	#5982.80	57.45 PK	68.20	-10.75	3.84 H	297	53.43	4.02
5	11550.00	55.92 PK	74.00	-18.08	2.11 H	308	46.30	9.62
6	11550.00	45.92 AV	54.00	-8.08	2.11 H	308	36.30	9.62

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.40	57.62 PK	68.20	-10.58	1.19 V	317	54.36	3.26
2	*5775.00	103.07 PK			1.19 V	317	61.30	41.77
3	*5775.00	90.87 AV			1.19 V	317	49.10	41.77
4	#5968.00	58.69 PK	68.20	-9.51	1.19 V	317	54.76	3.93
5	11550.00	56.42 PK	74.00	-17.58	2.41 V	178	46.80	9.62
6	11550.00	46.32 AV	54.00	-7.68	2.41 V	178	36.70	9.62

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160) (RU966)	Channel	CH 50 : 5250 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.50 PK	74.00	-13.50	3.83 H	305	58.10	2.40
2	5150.00	44.00 AV	54.00	-10.00	3.83 H	305	41.60	2.40
3	*5250.00	97.58 PK			3.83 H	305	57.50	40.08
4	*5250.00	84.88 AV			3.83 H	305	44.80	40.08
5	#10500.00	55.00 PK	68.20	-13.20	1.98 H	305	46.50	8.50

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.80 PK	74.00	-10.20	1.01 V	317	61.40	2.40
2	5150.00	45.00 AV	54.00	-9.00	1.01 V	317	42.60	2.40
3	*5250.00	101.48 PK			1.01 V	317	61.40	40.08
4	*5250.00	88.48 AV			1.01 V	317	48.40	40.08
5	#10500.00	55.30 PK	68.20	-12.90	2.45 V	181	46.80	8.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160) (RU966)	Channel	CH 114 : 5570 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.50 PK	74.00	-16.50	3.56 H	298	55.40	2.10
2	5460.00	43.50 AV	54.00	-10.50	3.56 H	298	41.40	2.10
3	#5470.00	57.03 PK	68.20	-11.17	3.56 H	298	54.90	2.13
4	*5570.00	98.67 PK			3.56 H	298	57.90	40.77
5	*5570.00	84.97 AV			3.56 H	298	44.20	40.77
6	11140.00	55.47 PK	74.00	-18.53	1.98 H	316	46.60	8.87
7	11140.00	45.27 AV	54.00	-8.73	1.98 H	316	36.40	8.87

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	57.00 PK	74.00	-17.00	1.13 V	313	54.90	2.10
2	5460.00	44.20 AV	54.00	-9.80	1.13 V	313	42.10	2.10
3	#5470.00	60.53 PK	68.20	-7.67	1.13 V	313	58.40	2.13
4	*5570.00	102.87 PK			1.13 V	313	62.10	40.77
5	*5570.00	89.37 AV			1.13 V	313	48.60	40.77
6	11140.00	55.87 PK	74.00	-18.13	2.27 V	172	47.00	8.87
7	11140.00	45.67 AV	54.00	-8.33	2.27 V	172	36.80	8.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160) (RU966S)	Channel	CH 50 : 5250 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5250.00	97.68 PK			3.89 H	272	57.60	40.08
2	*5250.00	84.98 AV			3.89 H	272	44.90	40.08
3	5350.00	62.35 PK	74.00	-11.65	3.89 H	272	60.30	2.05
4	5350.00	43.95 AV	54.00	-10.05	3.89 H	272	41.90	2.05
5	#10500.00	54.90 PK	68.20	-13.30	2.01 H	311	46.40	8.50

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5250.00	101.48 PK			1.04 V	316	61.40	40.08
2	*5250.00	89.08 AV			1.04 V	316	49.00	40.08
3	5350.00	67.15 PK	74.00	-6.85	1.04 V	316	65.10	2.05
4	5350.00	45.65 AV	54.00	-8.35	1.04 V	316	43.60	2.05
5	#10500.00	55.60 PK	68.20	-12.60	2.38 V	169	47.10	8.50

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE160) (RU966S)	Channel	CH 114 : 5570 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5570.00	96.07 PK			3.47 H	302	55.30	40.77
2	*5570.00	84.07 AV			3.47 H	302	43.30	40.77
3	#5725.00	58.12 PK	68.20	-10.08	3.47 H	302	54.50	3.62
4	11140.00	55.37 PK	74.00	-18.63	2.01 H	312	46.50	8.87
5	11140.00	45.37 AV	54.00	-8.63	2.01 H	312	36.50	8.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5570.00	101.27 PK			1.03 V	317	60.50	40.77
2	*5570.00	89.37 AV			1.03 V	317	48.60	40.77
3	#5725.00	58.82 PK	68.20	-9.38	1.03 V	317	55.20	3.62
4	11140.00	56.07 PK	74.00	-17.93	2.32 V	169	47.20	8.87
5	11140.00	45.77 AV	54.00	-8.23	2.32 V	169	36.90	8.87

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Worst-Case Data:

RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.16	25.15 QP	43.50	-18.35	1.49 H	260	45.84	-20.69
2	249.30	26.76 QP	46.00	-19.24	1.49 H	18	46.51	-19.75
3	448.93	25.40 QP	46.00	-20.60	1.99 H	181	39.43	-14.03
4	669.64	20.77 QP	46.00	-25.23	1.49 H	102	30.69	-9.92
5	770.86	22.39 QP	46.00	-23.61	1.99 H	2	30.52	-8.13
6	981.72	24.90 QP	54.00	-29.10	1.01 H	306	30.29	-5.39

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

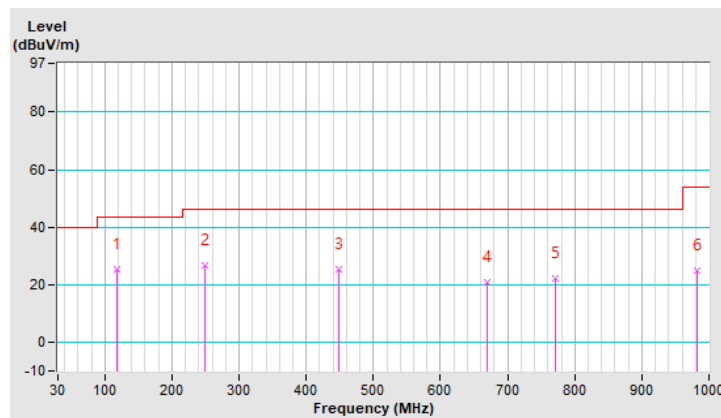


RF Mode	TX 802.11ax (HE40)	Channel	CH 134 : 5670 MHz
Frequency Range	30MHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.81	34.79 QP	40.00	-5.21	1.01 V	16	54.33	-19.54
2	297.10	28.20 QP	46.00	-17.80	1.01 V	102	46.32	-18.12
3	448.93	22.07 QP	46.00	-23.93	1.01 V	165	36.10	-14.03
4	578.26	19.45 QP	46.00	-26.55	1.01 V	270	30.94	-11.49
5	777.88	24.43 QP	46.00	-21.57	1.51 V	291	32.43	-8.00
6	949.39	25.37 QP	46.00	-20.63	1.01 V	265	31.27	-5.90

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit of frequency range 30MHz ~ 1000MHz.
4. Margin value = Emission Level – Limit value.
5. The emission levels were very low against the limit of frequency range 9kHz ~ 30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

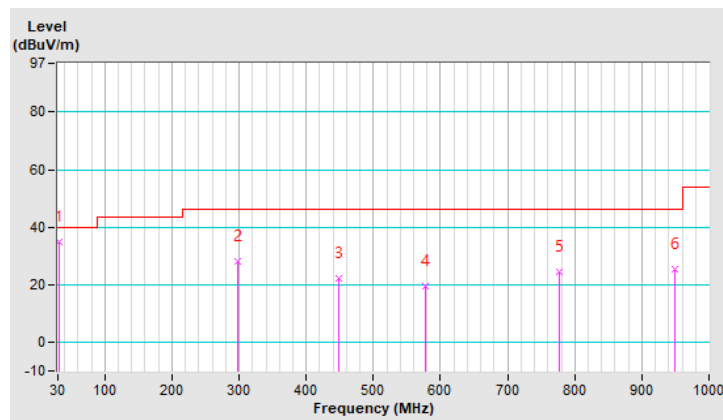

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 03, 2021	Dec. 02, 2022
RF signal cable Woken	5D-FB	Cable-cond1-01	Jan. 15, 2022	Jan. 14, 2023
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 25, 2021	Feb. 24, 2022
V-LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Sep. 07, 2021	Sep. 06, 2022
Software ADT	BV ADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1 (Conduction 1).
 3. The VCCI Site Registration No. is C-12040.
 4. Tested date: Feb. 09, 2022

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

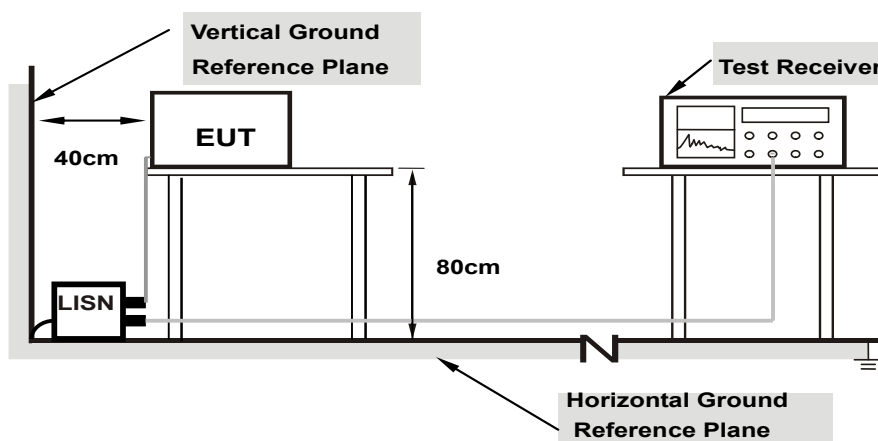

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results

Worst-case data:


802.11ax (HE40)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.71	31.23	20.78	40.94	30.49	66.00	56.00	-25.06	-25.51
2	0.17000	9.71	25.65	5.96	35.36	15.67	64.96	54.96	-29.60	-39.29
3	0.22152	9.72	24.43	12.08	34.15	21.80	62.76	52.76	-28.61	-30.96
4	1.04200	9.77	6.17	2.39	15.94	12.16	56.00	46.00	-40.06	-33.84
5	7.70200	9.85	15.77	10.67	25.62	20.52	60.00	50.00	-34.38	-29.48
6	17.18200	9.85	22.44	17.35	32.29	27.20	60.00	50.00	-27.71	-22.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

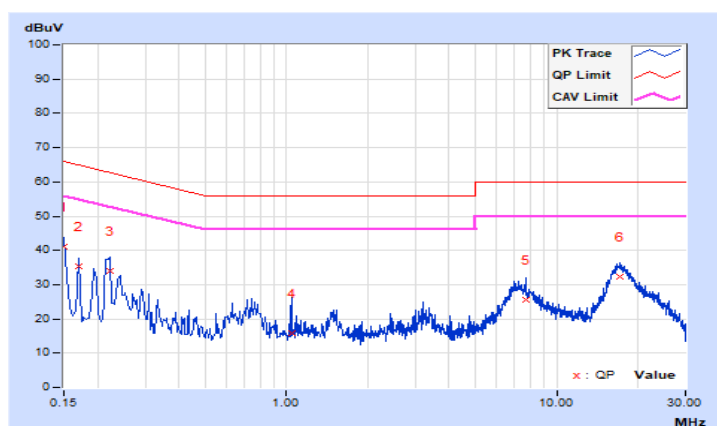


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16200	9.76	33.82	14.46	43.58	24.22	65.36	55.36	-21.78	-31.14
2	0.21000	9.78	26.87	13.91	36.65	23.69	63.21	53.21	-26.56	-29.52
3	0.24200	9.79	21.73	12.24	31.52	22.03	62.03	52.03	-30.51	-30.00
4	0.76200	9.83	13.39	7.21	23.22	17.04	56.00	46.00	-32.78	-28.96
5	7.29800	9.91	15.80	10.73	25.71	20.64	60.00	50.00	-34.29	-29.36
6	17.37400	9.99	19.42	14.40	29.41	24.39	60.00	50.00	-30.59	-25.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

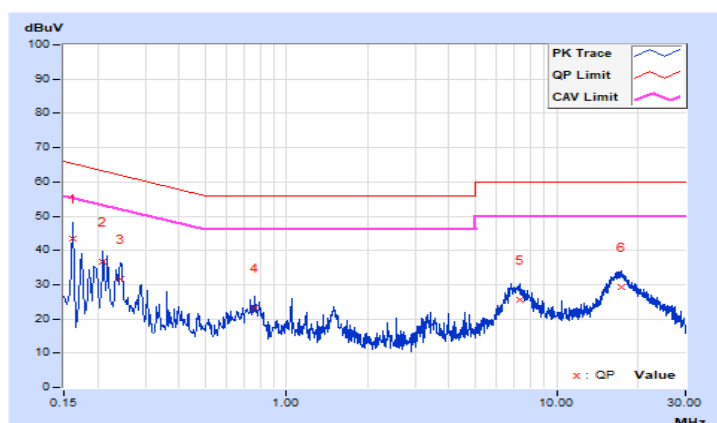

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	✓	Mobile and Portable client device	250mW (24 dBm)
U-NII-2A	✓		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	✓		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	✓		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;


Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.


For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup

For Power Output



For 26dB Bandwidth and power output of transmission above 5.725 GHz where the EBW crosses 5.725 GHz



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

For Average Power Measurement

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to average. Duty factor is not added to measured value.

For transmission above 5.725 GHz where the EBW crosses 5.725 GHz

For channel aggregation (channel 138, 142, 144) measurement refer to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section III Channel Aggregation subpart C. measurement procedures 2 and section II E 2 d) method SA-2.

For 26dB Bandwidth

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

For straddle channels, measured in accordance with FCC KDB 789033 UNII Test Procedure Method SA-2 and tested with a spectrum analyzer, if the duty cycle is less than 98%, the duty cycle factor is included in the total power. The duty cycle factor can be found in chapter 3.3 of the report.

Power Output:

1TX: Chain 0

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
36	5180	13.614	11.34	24.00	Pass
40	5200	13.677	11.36	24.00	Pass
48	5240	13.274	11.23	24.00	Pass
52	5260	13.213	11.21	24.00	Pass
60	5300	13.428	11.28	24.00	Pass
64	5320	13.490	11.30	24.00	Pass
100	5500	13.428	11.28	24.00	Pass
116	5580	13.062	11.16	24.00	Pass
140	5700	13.428	11.28	24.00	Pass
144	5720 (For U-NII-2C)	9.509	9.78	23.25	Pass
144	5720 (For U-NII-3)	1.524	1.83	30.00	Pass
149	5745	12.942	11.12	30.00	Pass
157	5785	13.213	11.21	30.00	Pass
165	5825	13.032	11.15	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

1. $11\text{dBm} + 10\log(24.46) = 24.88 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.80) = 24.76 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(24.13) = 24.82 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(23.68) = 24.74 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(24.38) = 24.87 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.03) = 24.62 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.20) = 23.25 < 24\text{dBm}$

1TX: Chain 1

802.11a

Chan.	Freq. (MHz)	Maximum Conducted Power (mW)	Maximum Conducted Power (dBm)	Power Limit (dBm)	Pass / Fail
36	5180	14.060	11.48	24.00	Pass
40	5200	13.868	11.42	24.00	Pass
48	5240	13.772	11.39	24.00	Pass
52	5260	13.900	11.43	24.00	Pass
60	5300	13.740	11.38	24.00	Pass
64	5320	13.964	11.45	24.00	Pass
100	5500	13.804	11.40	24.00	Pass
116	5580	13.521	11.31	24.00	Pass
140	5700	13.836	11.41	24.00	Pass
144	5720 (For U-NII-2C)	10.679	10.29	23.19	Pass
144	5720 (For U-NII-3)	1.677	2.25	30.00	Pass
149	5745	13.335	11.25	30.00	Pass
157	5785	13.521	11.31	30.00	Pass
165	5825	13.335	11.25	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

1. $11\text{dBm} + 10\log(24.25) = 24.84 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.59) = 24.72 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(23.05) = 24.62 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(23.97) = 24.79 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(23.95) = 24.79 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.68) = 24.74 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.42) = 23.19 < 24\text{dBm}$

2TX

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	11.26	11.30	26.856	14.29	24.00	Pass
40	5200	11.30	11.40	27.293	14.36	24.00	Pass
48	5240	11.25	11.31	26.856	14.29	24.00	Pass
52	5260	11.30	11.35	27.135	14.34	24.00	Pass
60	5300	11.28	11.34	27.042	14.32	24.00	Pass
64	5320	11.12	11.42	26.810	14.28	24.00	Pass
100	5500	11.23	11.36	26.951	14.31	24.00	Pass
116	5580	11.26	11.39	27.138	14.34	24.00	Pass
140	5700	11.36	11.42	27.545	14.40	24.00	Pass
144	5720 (For U-NII-2C)	9.37	9.93	18.490	12.67	23.22	Pass
144	5720 (For U-NII-3)	2.30	2.84	3.621	5.59	30.00	Pass
149	5745	11.36	11.38	27.418	14.38	30.00	Pass
157	5785	11.34	11.42	27.482	14.39	30.00	Pass
165	5825	11.21	11.30	26.703	14.27	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(23.59) = 24.72 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.09) = 24.63 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(24.28) = 24.85 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(23.96) = 24.79 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(23.23) = 24.66 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.66) = 24.74 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.31) = 23.22 < 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(23.68) = 24.74 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.16) = 24.64 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(23.28) = 24.66 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(24.42) = 24.87 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(23.00) = 24.61 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.63) = 24.73 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.07) = 23.28 < 24\text{dBm}$

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	11.33	11.42	27.451	14.39	24.00	Pass
46	5230	11.21	11.38	26.953	14.31	24.00	Pass
54	5270	11.28	11.30	26.917	14.30	24.00	Pass
62	5310	11.31	11.41	27.356	14.37	24.00	Pass
102	5510	11.33	11.40	27.387	14.38	24.00	Pass
110	5550	11.28	11.30	26.917	14.30	24.00	Pass
134	5670	11.41	11.44	27.767	14.44	24.00	Pass
142	5710 (For U-NII-2C)	10.96	11.21	25.687	14.10	24.00	Pass
142	5710 (For U-NII-3)	-0.90	-0.62	1.6798	2.25	30.00	Pass
151	5755	11.24	11.29	26.763	14.28	30.00	Pass
159	5795	11.25	11.36	27.013	14.32	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(42.20) = 27.25 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(42.26) = 27.25 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(42.86) = 27.32 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(43.18) = 27.35 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(43.81) = 27.41 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5688.78) = 26.58 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(43.69) = 27.40 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(43.42) = 27.37 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(43.01) = 27.33 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(43.33) = 27.36 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(43.68) = 27.40 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5689.00) = 26.56 > 24\text{dBm}$

802.11ac (VHT80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	11.23	11.39	27.046	14.32	24.00	Pass
58	5290	11.20	11.27	26.579	14.25	24.00	Pass
106	5530	11.31	11.38	27.261	14.36	24.00	Pass
122	5610	11.28	11.31	26.948	14.31	24.00	Pass
138	5690 (For U-NII-2C)	11.16	11.35	26.708	14.27	24.00	Pass
138	5690 (For U-NII-3)	-4.56	-4.36	0.7164	-1.45	30.00	Pass
155	5775	11.25	11.31	26.856	14.29	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(82.70) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(83.59) = 30.22 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(83.06) = 30.19 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5648.77) = 29.82 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(82.81) = 30.18 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(83.69) = 30.22 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(83.09) = 30.19 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5649.02) = 29.80 > 24\text{dBm}$

802.11ac (VHT160)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
*50 (U-NII-1 Band)	5250	8.10	8.41	13.391	11.27	24.00	Pass
*50 (U-NII-2A Band)	5250	8.06	8.43	13.364	11.26	24.00	Pass
114	5570	11.33	11.45	27.547	14.40	24.00	Pass

Note:

For U-NII-2A Band:

Chain 0

1. $11\text{dBm} + 10\log(82.66) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(165.93) = 33.19 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(82.66) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(165.81) = 33.19 > 24\text{dBm}$

Full RU

802.11ax (HE20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	11.32	11.41	27.388	14.38	24.00	Pass
40	5200	11.36	11.45	27.641	14.42	24.00	Pass
48	5240	11.30	11.39	27.262	14.36	24.00	Pass
52	5260	11.36	11.41	27.513	14.40	24.00	Pass
60	5300	11.30	11.39	27.262	14.36	24.00	Pass
64	5320	11.20	11.45	27.146	14.34	24.00	Pass
100	5500	11.32	11.40	27.356	14.37	24.00	Pass
116	5580	11.32	11.41	27.388	14.38	24.00	Pass
140	5700	11.39	11.43	27.672	14.42	24.00	Pass
144	5720 (For U-NII-2C)	9.43	10.03	18.839	12.75	23.22	Pass
144	5720 (For U-NII-3)	2.37	2.95	3.698	5.68	30.00	Pass
149	5745	11.37	11.40	27.513	14.40	30.00	Pass
157	5785	11.38	11.45	27.704	14.43	30.00	Pass
165	5825	11.31	11.39	27.293	14.36	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(23.59) = 24.72 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.09) = 24.63 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(24.28) = 24.85 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(23.96) = 24.79 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(23.23) = 24.66 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.66) = 24.74 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.31) = 23.22 < 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(23.68) = 24.74 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(23.16) = 24.64 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(23.28) = 24.66 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(24.42) = 24.87 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(23.00) = 24.61 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(23.63) = 24.73 > 24\text{dBm}$
7. $11\text{dBm} + 10\log(5725.00 - 5708.07) = 23.28 < 24\text{dBm}$

802.11ax (HE40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	11.36	11.45	27.641	14.42	24.00	Pass
46	5230	11.30	11.40	27.293	14.36	24.00	Pass
54	5270	11.36	11.42	27.545	14.40	24.00	Pass
62	5310	11.36	11.46	27.673	14.42	24.00	Pass
102	5510	11.36	11.41	27.513	14.40	24.00	Pass
110	5550	11.30	11.36	27.167	14.34	24.00	Pass
134	5670	11.44	11.45	27.895	14.46	24.00	Pass
142	5710 (For U-NII-2C)	11.06	11.29	26.223	14.19	24.00	Pass
142	5710 (For U-NII-3)	-0.82	-0.57	1.7049	2.32	30.00	Pass
151	5755	11.30	11.39	27.262	14.36	30.00	Pass
159	5795	11.31	11.40	27.325	14.37	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(42.20) = 27.25 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(42.26) = 27.25 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(42.86) = 27.32 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(43.18) = 27.35 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(43.81) = 27.41 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5688.78) = 26.58 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(43.69) = 27.40 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(43.42) = 27.37 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(43.01) = 27.33 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(43.33) = 27.36 > 24\text{dBm}$
5. $11\text{dBm} + 10\log(43.68) = 27.40 > 24\text{dBm}$
6. $11\text{dBm} + 10\log(5725.00 - 5689.00) = 26.56 > 24\text{dBm}$

802.11ax (HE80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	11.30	11.41	27.325	14.37	24.00	Pass
58	5290	11.31	11.33	27.104	14.33	24.00	Pass
106	5530	11.36	11.41	27.513	14.40	24.00	Pass
122	5610	11.31	11.39	27.293	14.36	24.00	Pass
138	5690 (For U-NII-2C)	11.24	11.41	27.140	14.34	24.00	Pass
138	5690 (For U-NII-3)	-4.51	-4.33	0.723	-1.41	30.00	Pass
155	5775	11.34	11.42	27.482	14.39	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(82.70) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(83.59) = 30.22 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(83.06) = 30.19 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5648.77) = 29.82 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(82.81) = 30.18 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(83.69) = 30.22 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(83.09) = 30.19 > 24\text{dBm}$
4. $11\text{dBm} + 10\log(5725.00 - 5649.02) = 29.80 > 24\text{dBm}$

802.11ax (HE160)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
*50 (U-NII-1 Band)	5250	8.46	8.65	14.343	11.57	24.00	Pass
*50 (U-NII-2A Band)	5250	8.43	8.67	14.328	11.56	24.00	Pass
114	5570	11.39	11.48	27.833	14.45	24.00	Pass

Note:

For U-NII-2A Band:

Chain 0

1. $11\text{dBm} + 10\log(82.66) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(165.93) = 33.19 > 24\text{dBm}$


Chain 1

1. $11\text{dBm} + 10\log(82.66) = 30.17 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(165.81) = 33.19 > 24\text{dBm}$


Straddle channel power plots:

802.11a

Chain 0

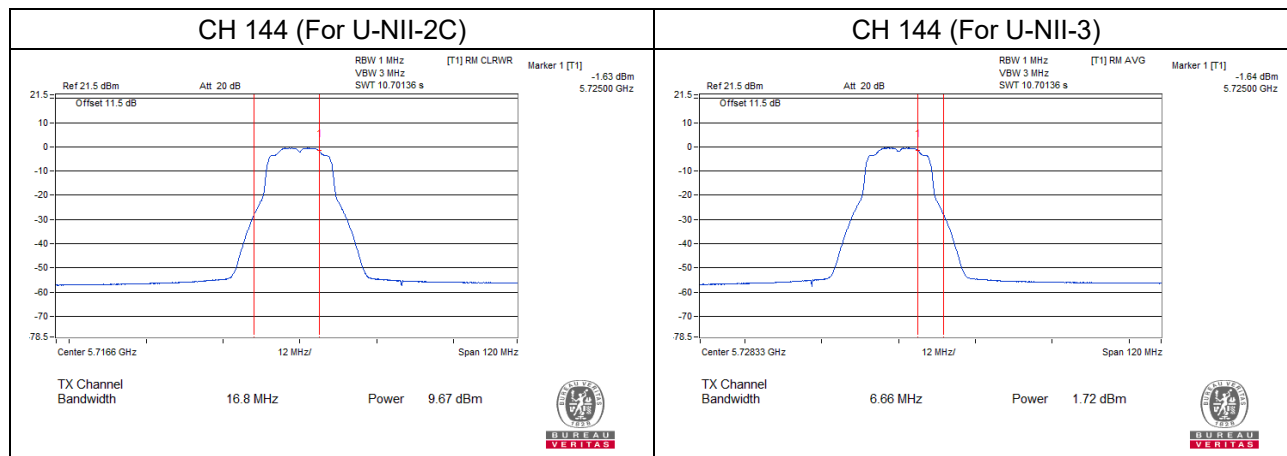


Chain 1

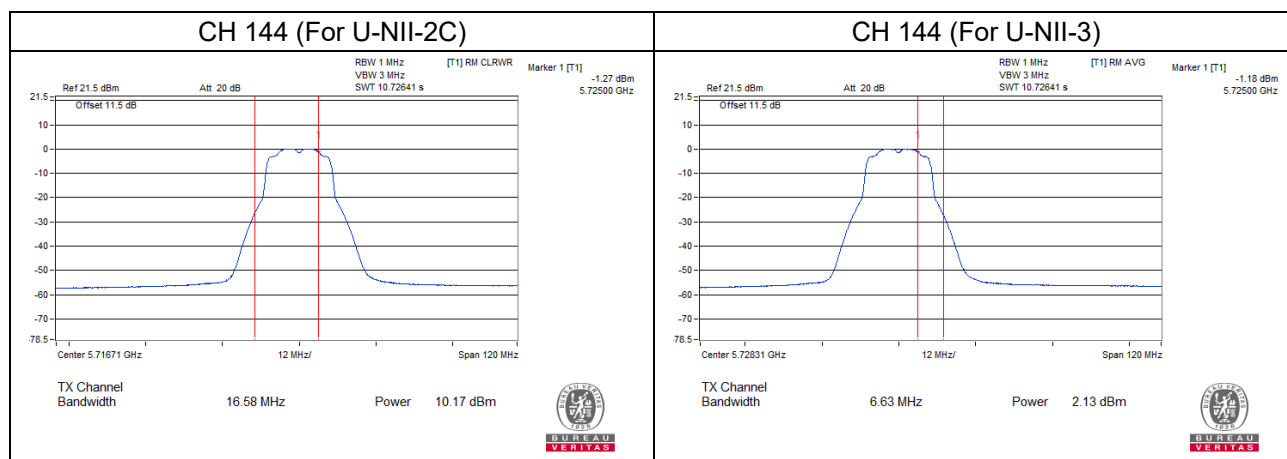


802.11ax (HE20)


Chain 0

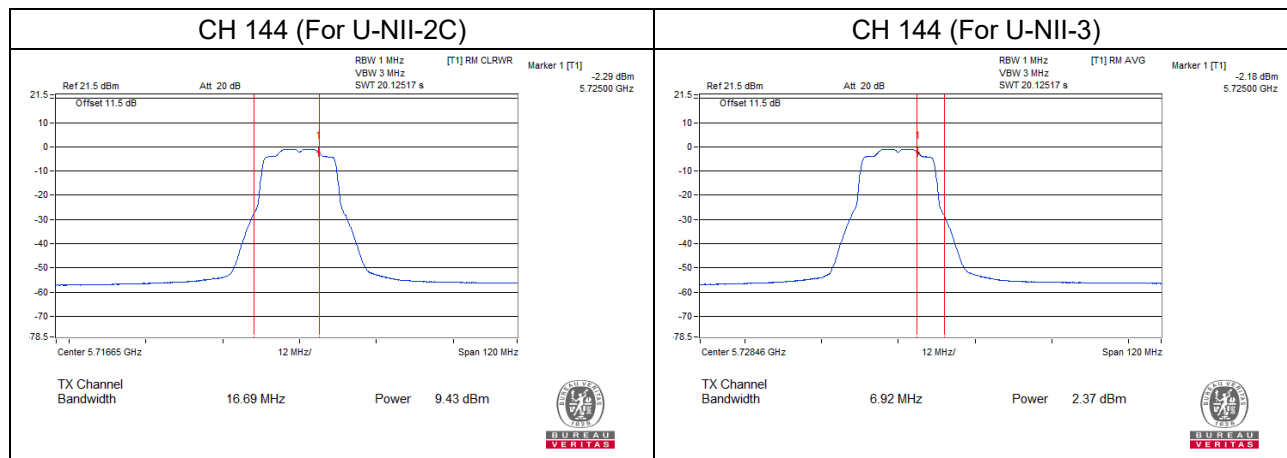


Chain 1

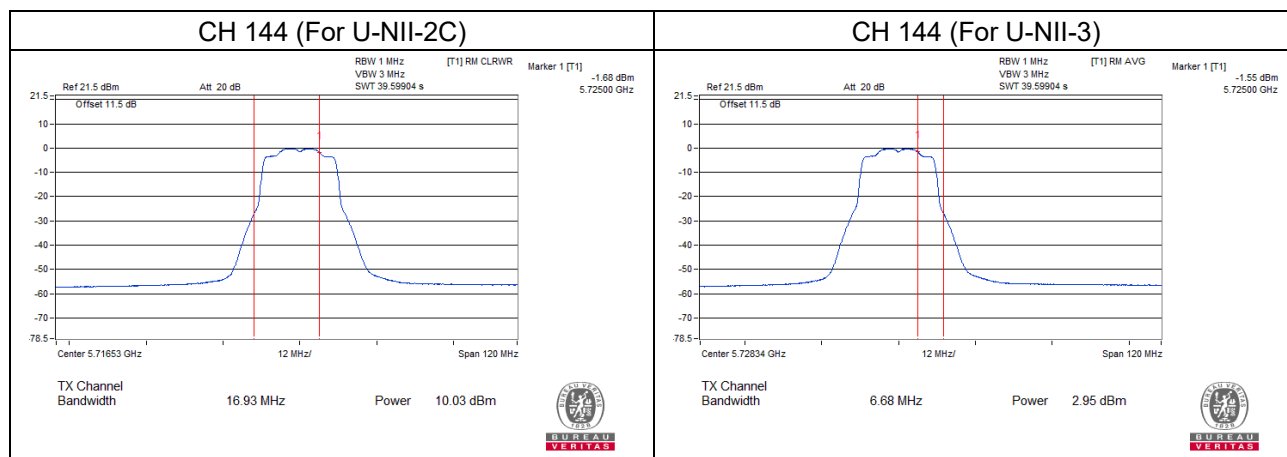

802.11ax (HE40)
Chain 0

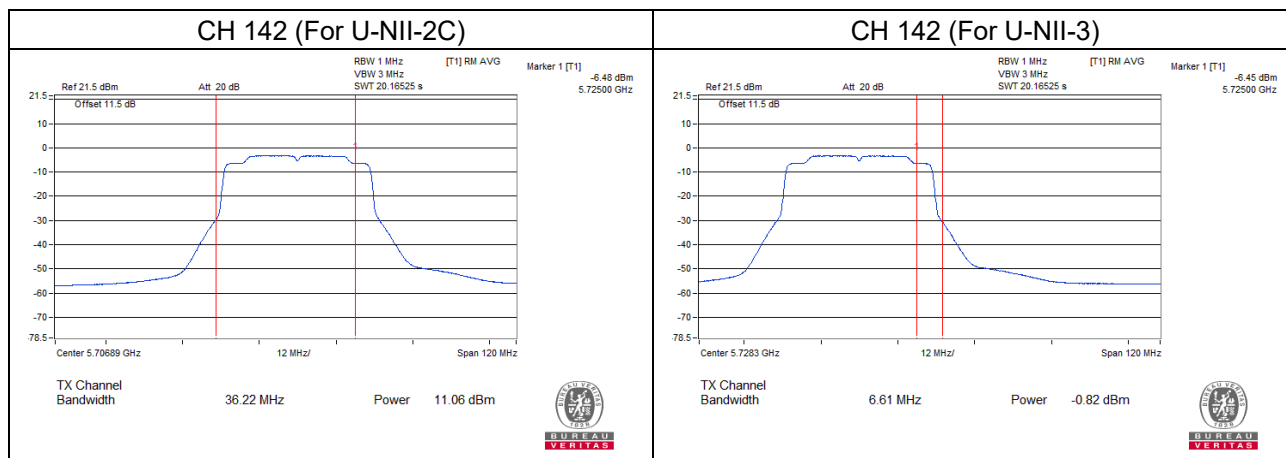


Chain 1

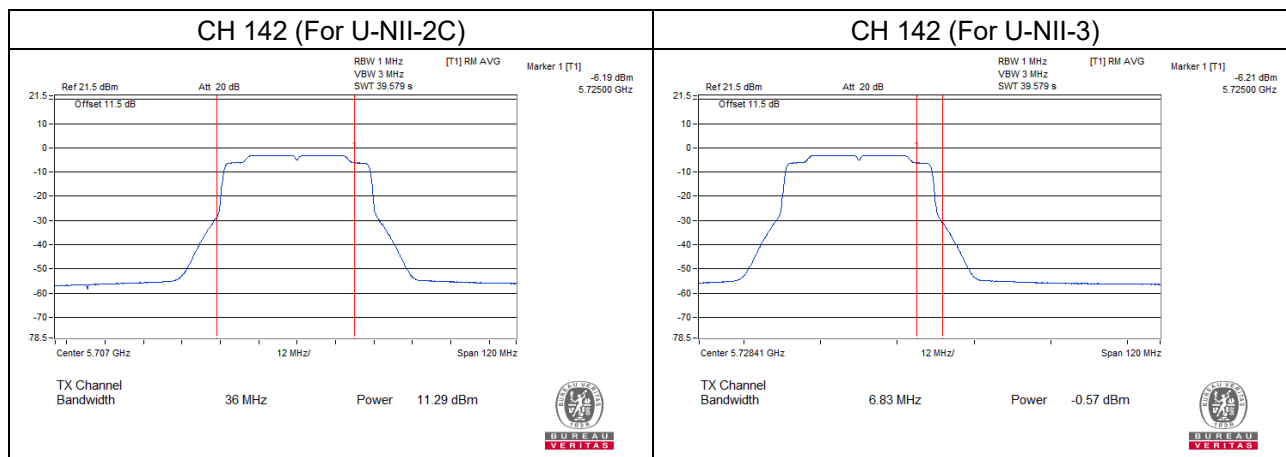


802.11ax (HE80)

Chain 0

CH 138 (For U-NII-2C)

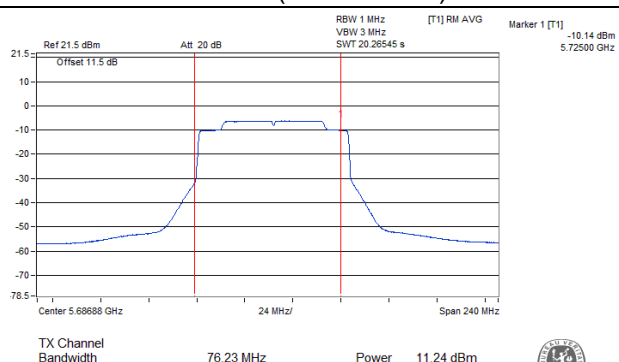


CH 138 (For U-NII-3)

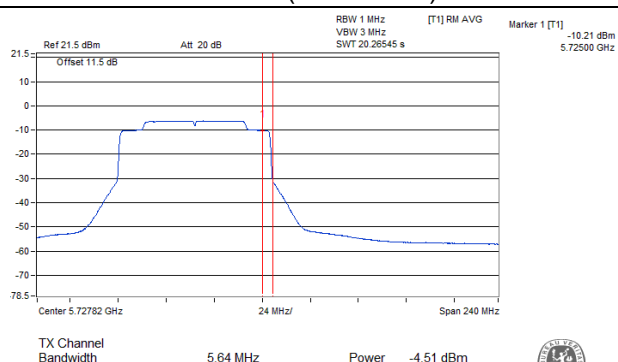


Chain 1

CH 138 (For U-NII-2C)

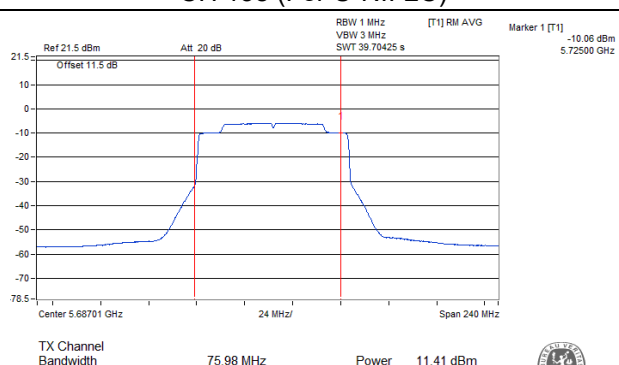

CH 138 (For U-NII-3)

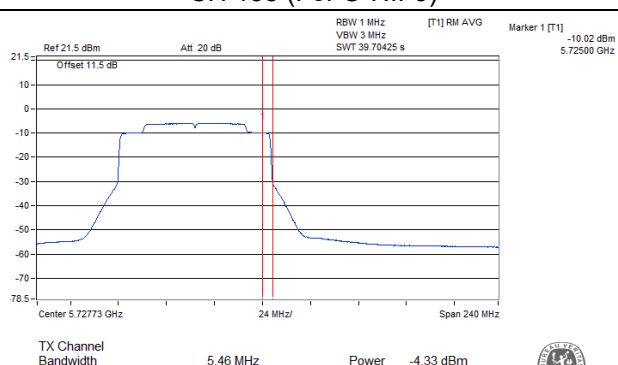

Partial RU

2TX

RU26

802.11ax (HE20)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	11.29	11.37	27.167	14.34	24.00	Pass
64	5320	11.17	11.42	26.959	14.31	24.00	Pass
100	5500	11.29	11.37	27.167	14.34	24.00	Pass
140	5700	11.34	11.37	27.323	14.37	24.00	Pass
149	5745	11.34	11.36	27.292	14.36	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(20.88) = 24.19 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(20.67) = 24.15 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(21.16) = 24.25 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(20.85) = 24.19 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.39) = 24.30 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(20.79) = 24.17 > 24\text{dBm}$

RU52

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	11.30	11.38	27.230	14.35	24.00	Pass
64	5320	11.22	11.44	27.175	14.34	24.00	Pass
100	5500	11.32	11.38	27.292	14.36	24.00	Pass
140	5700	11.37	11.39	27.481	14.39	24.00	Pass
149	5745	11.35	11.38	27.386	14.38	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(21.82) = 24.38 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.10) = 24.24 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(21.76) = 24.37 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(20.15) = 24.04 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(20.16) = 24.04 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(20.25) = 24.06 > 24\text{dBm}$

RU106

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
36	5180	11.29	11.36	27.136	14.34	24.00	Pass
64	5320	11.18	11.41	26.958	14.31	24.00	Pass
100	5500	11.28	11.38	27.168	14.34	24.00	Pass
140	5700	11.35	11.39	27.418	14.38	24.00	Pass
149	5745	11.35	11.37	27.355	14.37	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(22.28) = 24.47 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.27) = 24.27 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(22.54) = 24.52 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(20.60) = 24.13 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.04) = 24.23 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(20.48) = 24.11 > 24\text{dBm}$

RU242

802.11ax (HE40)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
38	5190	11.33	11.41	27.419	14.38	24.00	Pass
62	5310	11.33	11.43	27.483	14.39	24.00	Pass
102	5510	11.32	11.37	27.261	14.36	24.00	Pass
134	5670	11.41	11.42	27.703	14.43	24.00	Pass
151	5755	11.28	11.35	27.073	14.33	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(21.92) = 24.40 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.98) = 24.42 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(21.90) = 24.40 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(21.15) = 24.25 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(21.59) = 24.34 > 24\text{dBm}$
3. $11\text{dBm} + 10\log(21.47) = 24.31 > 24\text{dBm}$

RU484

802.11ax (HE80)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
42	5210	11.26	11.38	27.106	14.33	24.00	Pass
58	5290	11.27	11.30	26.886	14.30	24.00	Pass
106	5530	11.34	11.39	27.387	14.38	24.00	Pass
155	5775	11.30	11.39	27.262	14.36	30.00	Pass

Note:

For U-NII-2A, U-NII-2C Band:

Chain 0

1. $11\text{dBm} + 10\log(44.47) = 27.48 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(44.41) = 27.47 > 24\text{dBm}$

Chain 1

1. $11\text{dBm} + 10\log(44.91) = 27.52 > 24\text{dBm}$
2. $11\text{dBm} + 10\log(45.48) = 27.57 > 24\text{dBm}$

RU996

802.11ax (HE160)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
*50 (U-NII-1 Band)	5250	11.10	11.08	25.706	14.10	24.00	Pass
*50 (U-NII-2A Band)	5250	-30.25	-30.11	0.002	-27.17	24.00	Pass
114	5570	11.34	11.43	27.514	14.40	24.00	Pass

Note:

For U-NII-2A Band:

Chain 0

$$1. 11\text{dBm} + 10\log(86.17) = 30.35 > 24\text{dBm}$$

$$2. 11\text{dBm} + 10\log(83.76) = 30.23 > 24\text{dBm}$$

Chain 1

$$1. 11\text{dBm} + 10\log(85.34) = 30.31 > 24\text{dBm}$$

$$2. 11\text{dBm} + 10\log(82.34) = 30.15 > 24\text{dBm}$$

RU996S

802.11ax (HE160)

Chan.	Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
*50 (U-NII-1 Band)	5250	-29.83	-30.30	0.002	-27.05	24.00	Pass
*50 (U-NII-2A Band)	5250	11.18	11.27	26.519	14.24	24.00	Pass
114	5570	11.35	11.46	27.642	14.42	24.00	Pass

Note:

For U-NII-2A Band

Chain 0

$$1. 11\text{dBm} + 10\log(88.69) = 30.47 > 24\text{dBm}$$

$$2. 11\text{dBm} + 10\log(82.75) = 30.17 > 24\text{dBm}$$

Chain 1

$$1. 11\text{dBm} + 10\log(85.71) = 30.33 > 24\text{dBm}$$

$$2. 11\text{dBm} + 10\log(83.92) = 30.23 > 24\text{dBm}$$

26dB Bandwidth:

1TX: Chain 0

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)
52	5260	24.46
60	5300	23.80
64	5320	24.13
100	5500	23.68
116	5580	24.38
140	5700	23.03
144	5720 (For U-NII-2C)	16.80


For CH144 (U-NII-2C Band): The 26dBc bandwidth below 5725MHz = 5725MHz - Marker 1

1TX: Chain 1

802.11a

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)
52	5260	24.25
60	5300	23.59
64	5320	23.05
100	5500	23.97
116	5580	23.95
140	5700	23.68
144	5720 (For U-NII-2C)	16.58

For CH144 (U-NII-2C Band): The 26dBc bandwidth below 5725MHz = 5725MHz - Marker 1

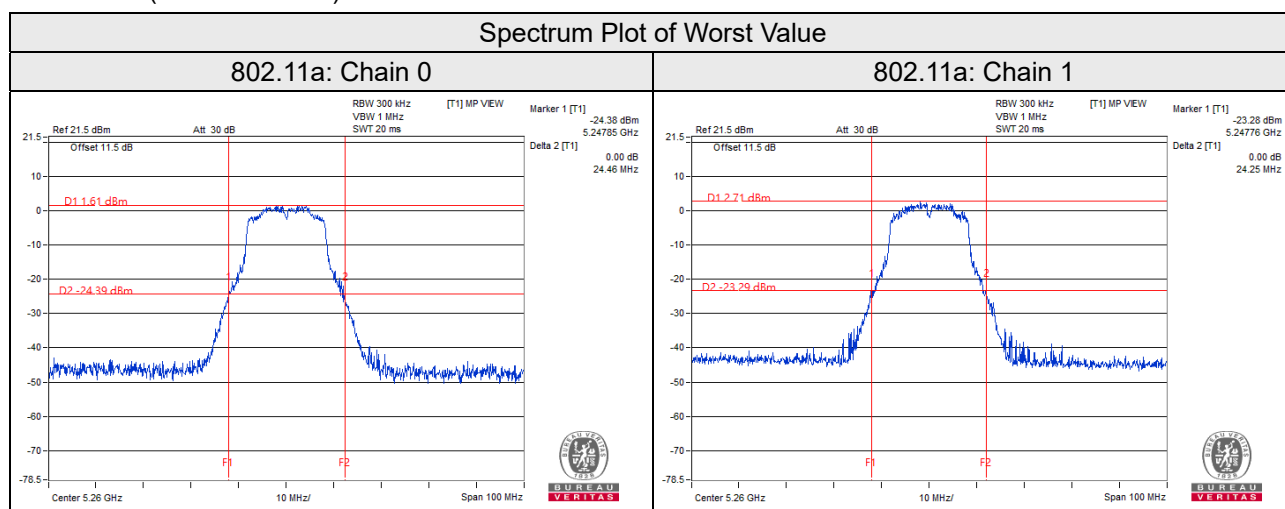

2TX

Full RU

802.11ax (HE20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	23.59	23.68
60	5300	23.09	23.16
64	5320	24.28	23.28
100	5500	23.96	24.42
116	5580	23.23	23.00
140	5700	23.66	23.63
144	5720 (For U-NII-2C)	16.69	16.93

For CH144 (U-NII-2C Band): The 26dBc bandwidth below 5725MHz = 5725MHz - Marker 1

802.11ax (HE40)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	42.20	43.69
62	5310	42.26	43.42
102	5510	42.86	43.01
110	5550	43.18	43.33
134	5670	43.81	43.68
142	5710 (For U-NII-2C)	36.22	36.00

For CH142 (U-NII-2C Band): The 26dBc bandwidth below 5725MHz = 5725MHz - Marker 1

802.11ax (HE80)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	82.70	82.81
106	5530	83.59	83.69
122	5610	83.06	83.09
138	5690 (For U-NII-2C)	76.23	75.98

For CH138 (U-NII-2C Band): The 26dBc bandwidth below 5725MHz = 5725MHz - Marker 1

802.11ax (HE160)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-2A Band)	5250	82.66	82.66
114	5570	165.93	165.81

Spectrum Plot of Worst Value

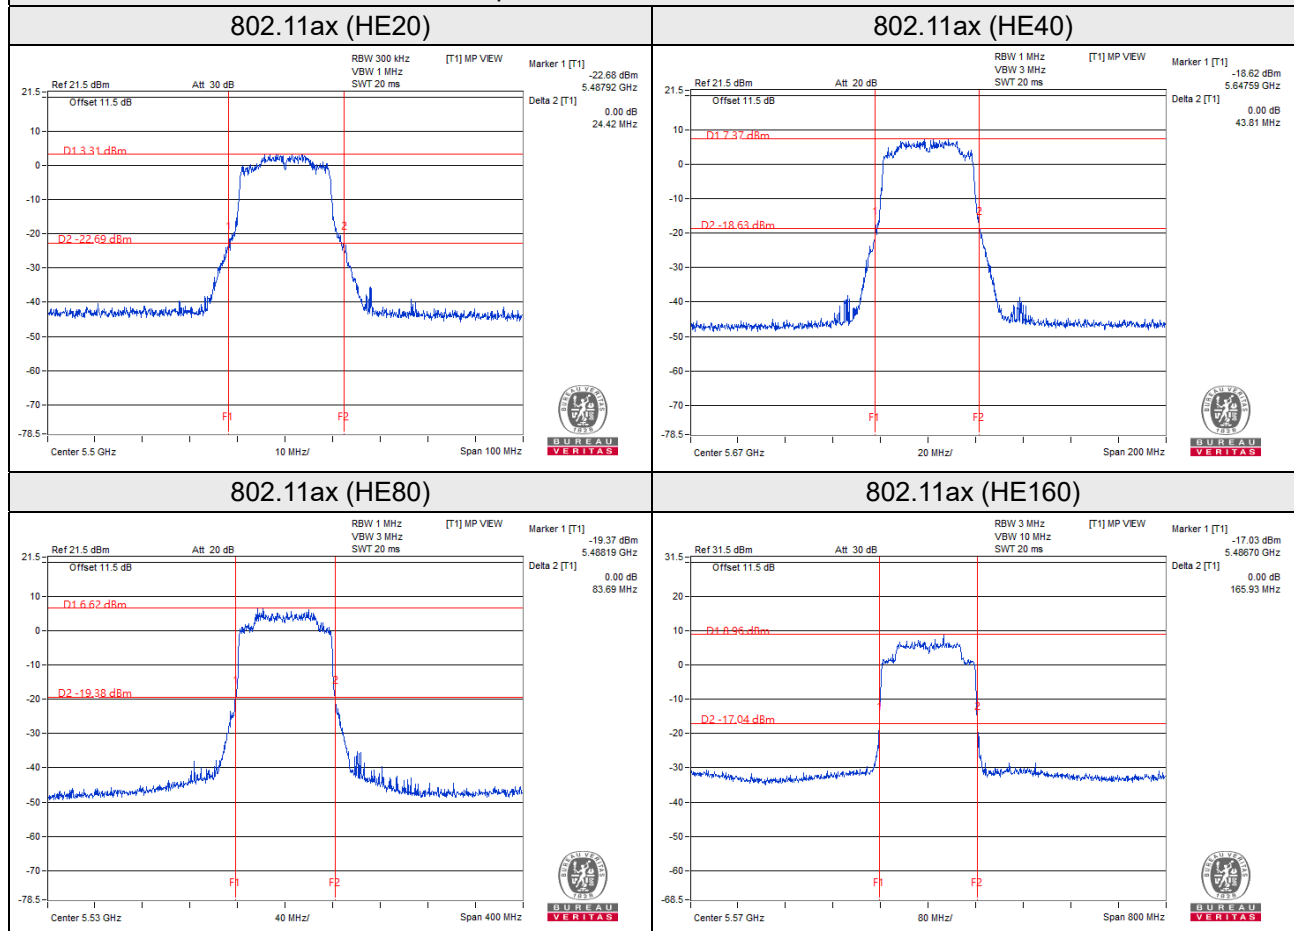

Partial RU

2TX

RU26

802.11ax (HE20)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	20.69	21.04
64	5320	20.88	20.85
100	5500	20.67	21.39
140	5700	21.16	20.79

RU52

802.11ax (HE20)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	21.08	20.77
64	5320	21.82	20.15
100	5500	21.10	20.16
140	5700	21.76	20.25

RU106


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	21.12	21.11
64	5320	22.28	20.60
100	5500	21.27	21.04
140	5700	22.54	20.48

Spectrum Plot of Worst Value


802.11ax (HE20) (RU26)

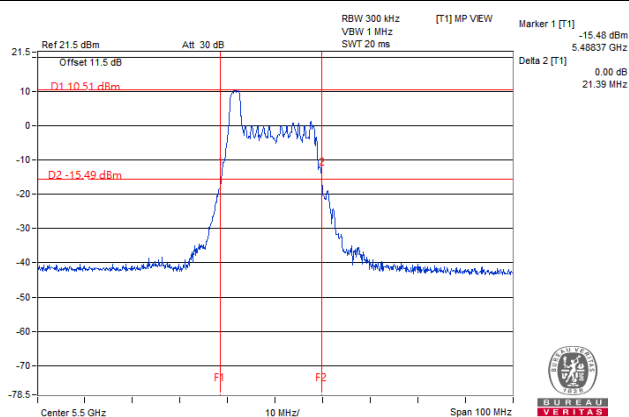

802.11ax (HE20) (RU52)

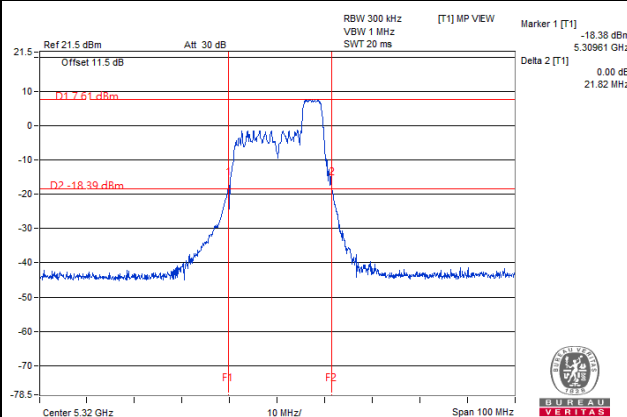


802.11ax (HE20) (RU106)

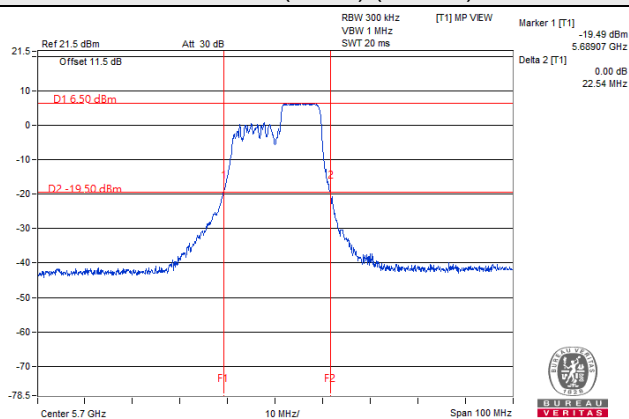

RU242

802.11ax (HE40)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	22.15	21.82
62	5310	21.92	21.15
102	5510	21.98	21.59
134	5670	21.90	21.47

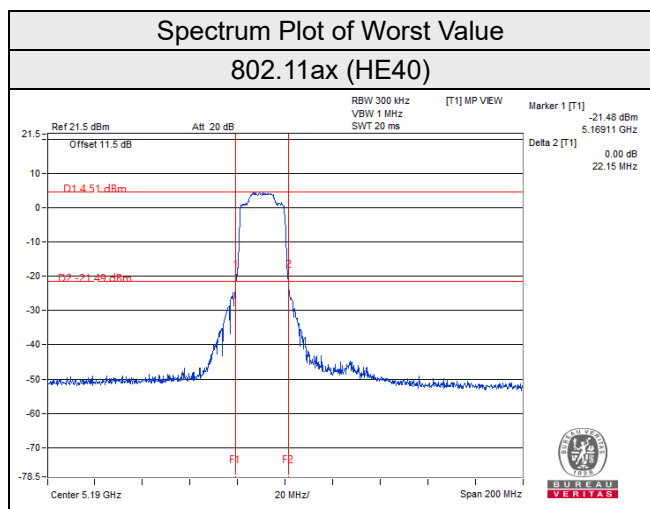

RU484

802.11ax (HE80)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	44.95	45.96
58	5290	44.47	44.91
106	5530	44.41	45.48

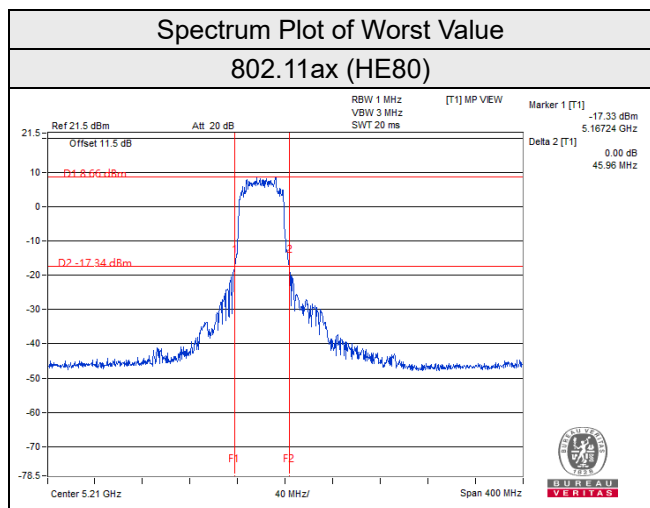

RU996

802.11ax (HE160)


Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-2A Band)	5250	86.17	85.34
114	5570	83.76	82.34

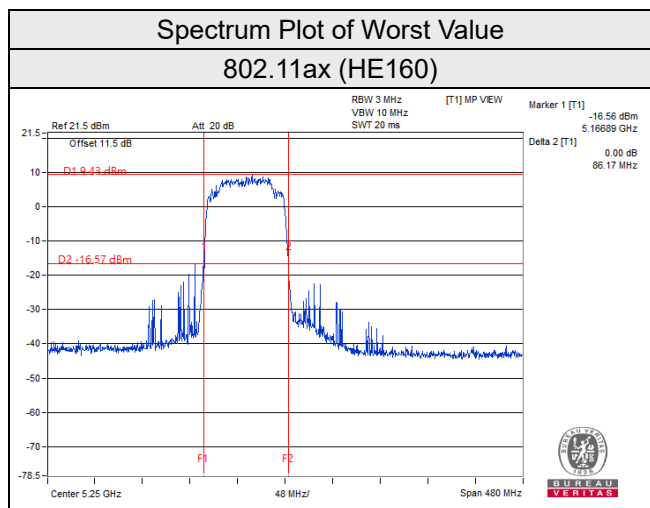

RU996S

802.11ax (HE160)

Chan.	Freq. (MHz)	26dBc Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-2A Band)	5250	88.69	85.71
114	5570	82.75	83.92

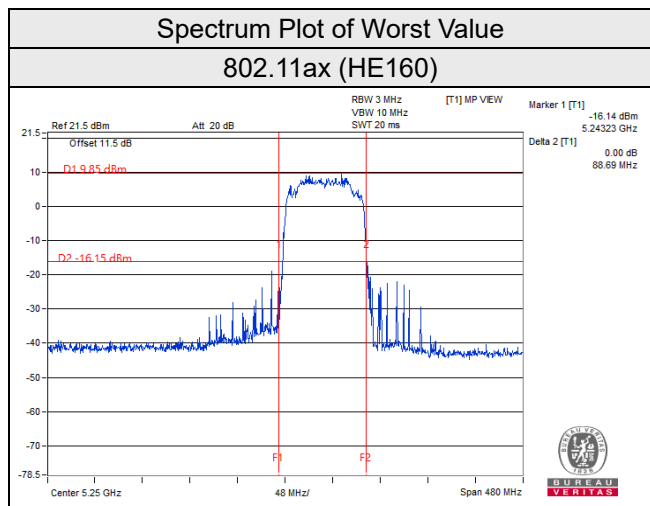

EUT Average Power

1TX: Chain 0

802.11a

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	13.490	11.30
5470~5725	13.428	11.28

1TX: Chain 1

802.11a

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	13.964	11.45
5470~5725	13.836	11.41

2TX

802.11n (HT20)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	27.135	14.34
5470~5725	27.545	14.40

802.11n (HT40)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	27.356	14.37
5470~5725	27.767	14.44

802.11ac (VHT80)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	26.579	14.25
5470~5725	27.261	14.36

802.11ac (VHT160)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	13.364	11.26
5470~5725	27.547	14.40

802.11ax (HE20)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	27.513	14.40
5470~5725	27.672	14.42

802.11ax (HE40)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	27.673	14.42
5470~5725	27.895	14.46

802.11ax (HE80)


Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	27.104	14.33
5470~5725	27.513	14.40

802.11ax (HE160)

Frequency Band (MHz)	Max. Power	
	Output Power (mW)	Output Power (dBm)
5250~5350	14.328	11.56
5470~5725	27.833	14.45

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.4 Test Result

Full RU

1TX: Chain 0

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	16.68
40	5200	16.56
48	5240	16.74
52	5260	16.68
60	5300	16.56
64	5320	16.74
100	5500	16.68
116	5580	16.62
140	5700	16.74
144	5720 (For U-NII-2C)	13.34
144	5720 (For U-NII-3)	3.28
149	5745	16.56
157	5785	16.68
165	5825	16.68

For CH144 (U-NII-2C Band): The Occupied bandwidth below 5725MHz = 5725MHz - Marker 1

For CH144 (U-NII-3 Band): The Occupied bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


1TX: Chain 1

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
36	5180	16.62
40	5200	16.68
48	5240	16.68
52	5260	16.68
60	5300	16.68
64	5320	16.56
100	5500	16.62
116	5580	16.62
140	5700	16.62
144	5720 (For U-NII-2C)	13.46
144	5720 (For U-NII-3)	3.28
149	5745	16.68
157	5785	16.62
165	5825	16.68


For CH144 (U-NII-2C Band): The Occupied bandwidth below 5725MHz = 5725MHz - Marker 1

For CH144 (UNII-3 Band): The Occupied bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

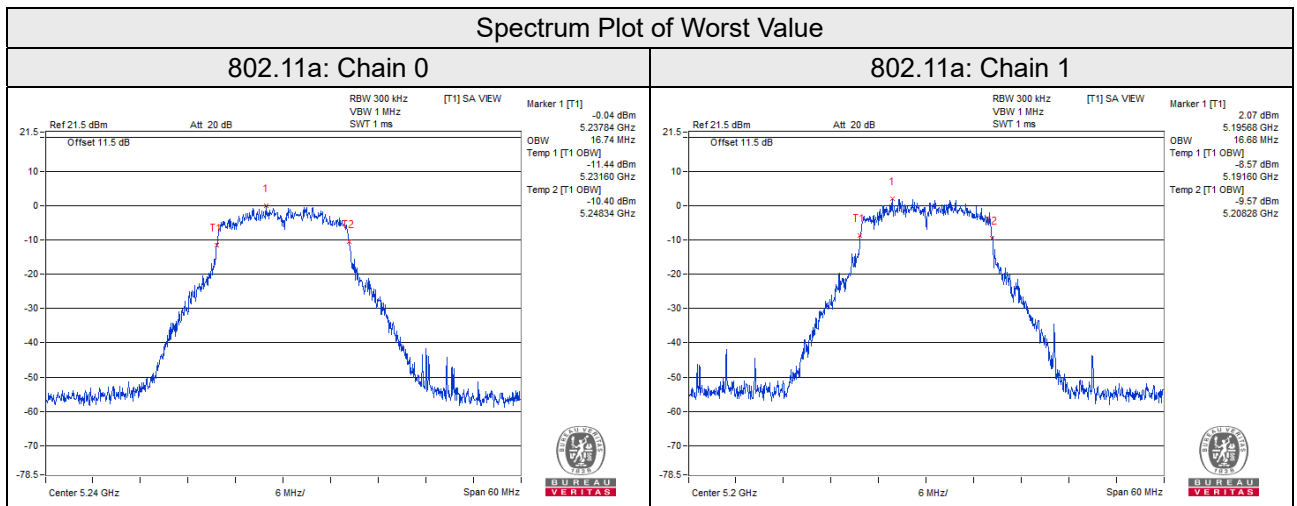


Spectrum Plot for near By DFS Band

802.11a / Chain 0 / CH 48

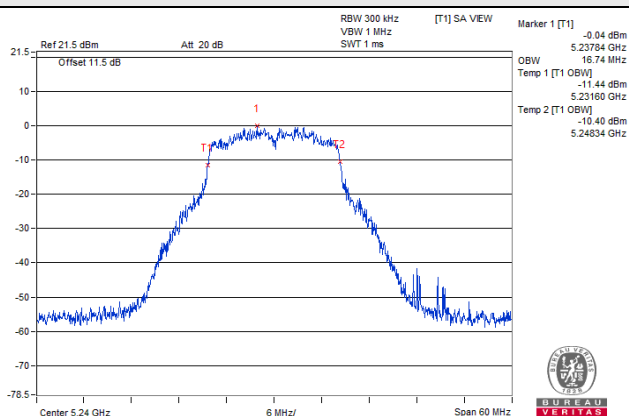


802.11a / Chain 0 / CH 48

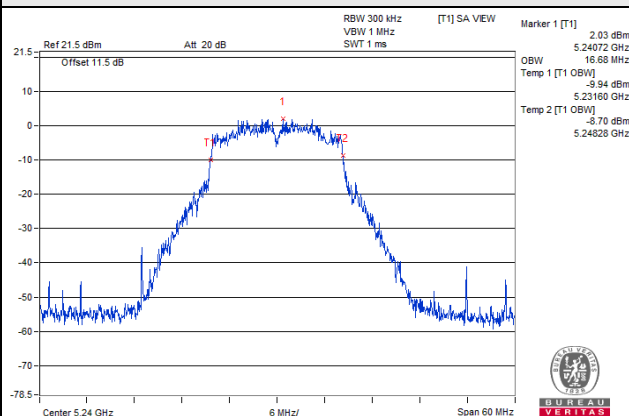


Spectrum Plot for near By DFS Band

802.11a / Chain 0 / CH 149

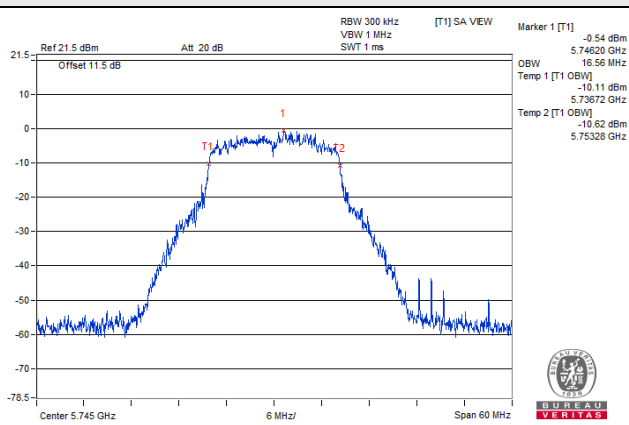

802.11a / Chain 1 / CH 149

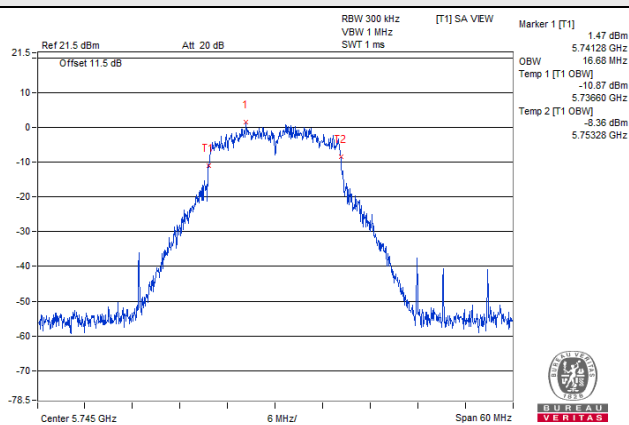

2TX

802.11ax (HE20)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.90	18.90
40	5200	18.84	18.84
48	5240	18.90	18.90
52	5260	18.90	18.90
60	5300	18.90	18.90
64	5320	18.90	18.78
100	5500	18.84	18.90
116	5580	18.90	18.90
140	5700	18.84	18.84
144	5720 (For U-NII-2C)	14.54	14.54
144	5720 (For U-NII-3)	4.42	4.36
149	5745	18.84	18.96
157	5785	18.90	18.90
165	5825	18.90	18.84

For CH144 (U-NII-2C Band): The Occupied bandwidth below 5725MHz = 5725MHz - Marker 1

For CH144 (UNII-3 Band): The Occupied bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

802.11ax (HE40)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	37.62	37.62
46	5230	37.68	37.68
54	5270	37.50	37.56
62	5310	37.68	37.50
102	5510	37.62	37.68
110	5550	37.68	37.68
134	5670	37.56	37.56
142	5710 (For U-NII-2C)	33.90	33.90
142	5710 (For U-NII-3)	3.84	3.78
151	5755	37.56	37.80
159	5795	37.68	37.62

For CH142 (U-NII-2C Band): The Occupied bandwidth below 5725MHz = 5725MHz - Marker 1

For CH142 (UNII-3 Band): The Occupied bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

802.11ax (HE80)

Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	76.68	76.44
58	5290	76.32	76.80
106	5530	76.68	76.56
122	5610	76.32	76.68
138	5690 (For U-NII-2C)	73.52	73.40
138	5690 (For U-NII-3)	3.04	3.28
155	5775	76.56	76.44


For CH138 (U-NII-2C Band): The Occupied bandwidth below 5725MHz = 5725MHz - Marker 1

For CH138 (UNII-3 Band): The Occupied bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

802.11ax (HE160)


Chan.	Freq. (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1 Band)	5250	77.28	77.28
50 (U-NII-2A Band)	5250	77.28	77.28
114	5570	154.20	154.80

Spectrum Plot of Worst Value

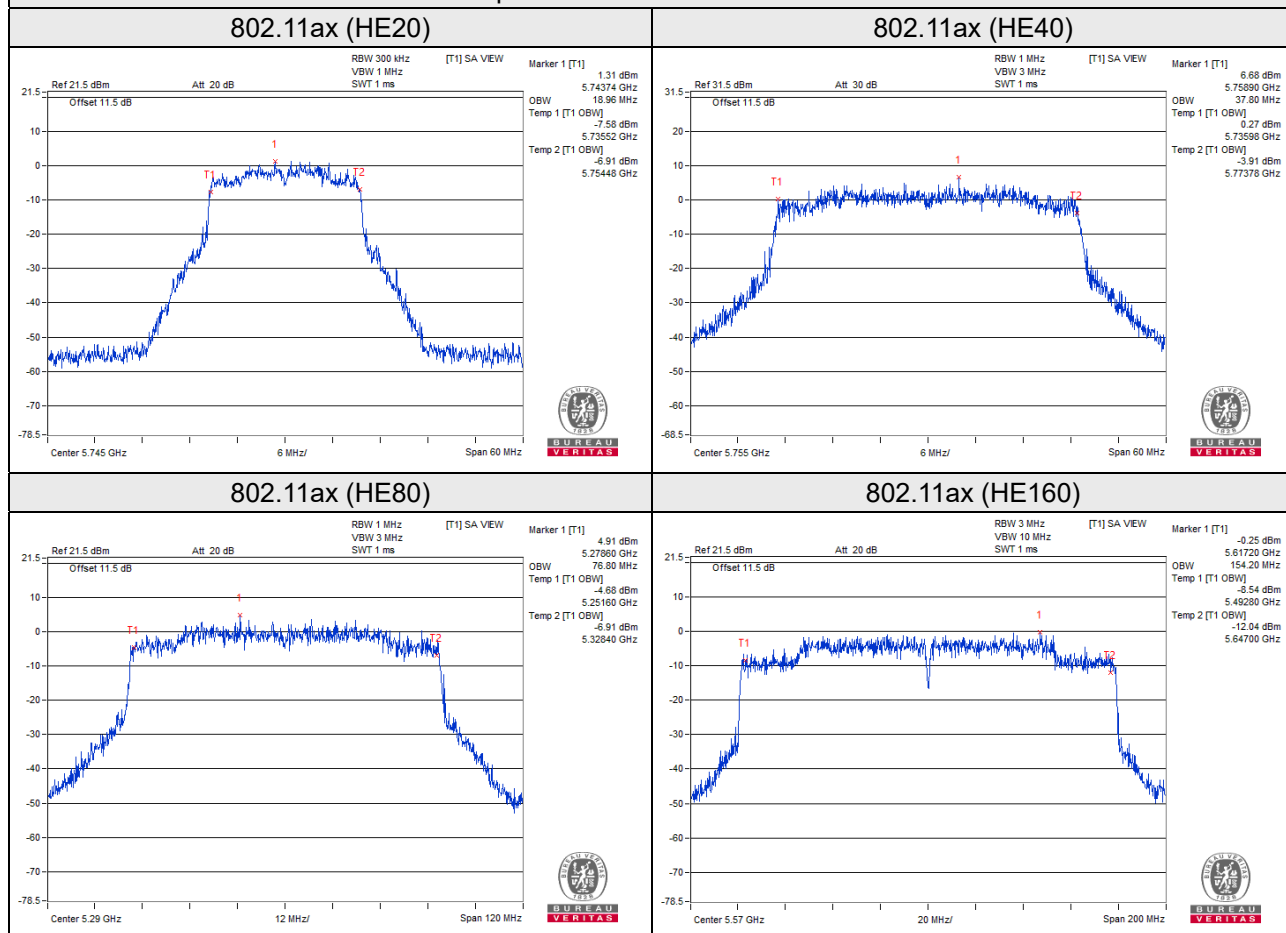


Spectrum Plot for near By DFS Band


802.11ax (HE20) / Chain 0 / CH 48

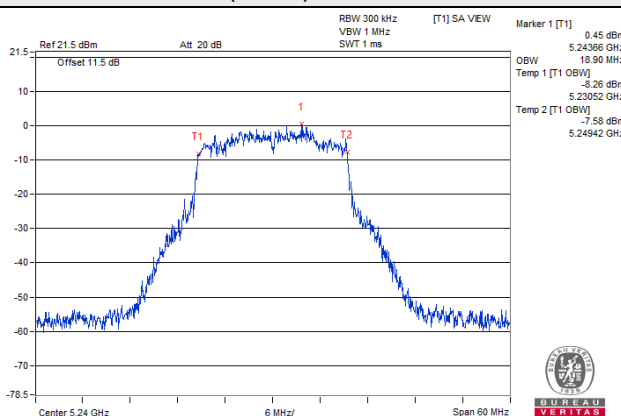


802.11ax (HE20) / Chain 1 / CH 48

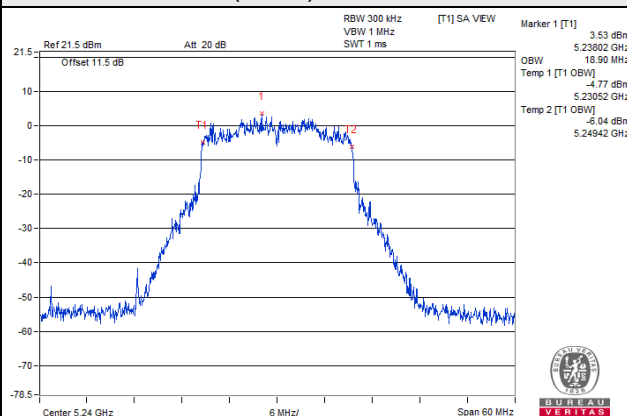


802.11ax (HE40) / Chain 0 / CH 46

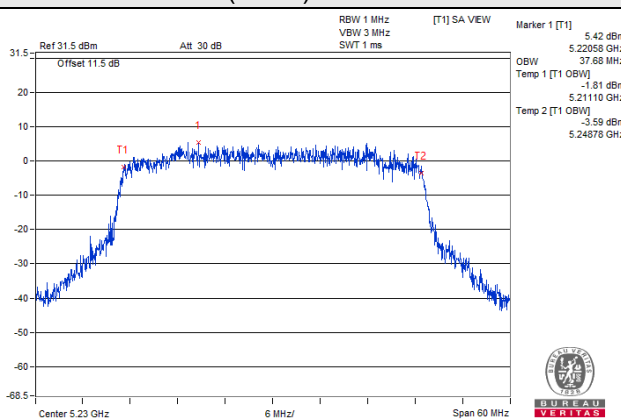


802.11ax (HE40) / Chain 1 / CH 46

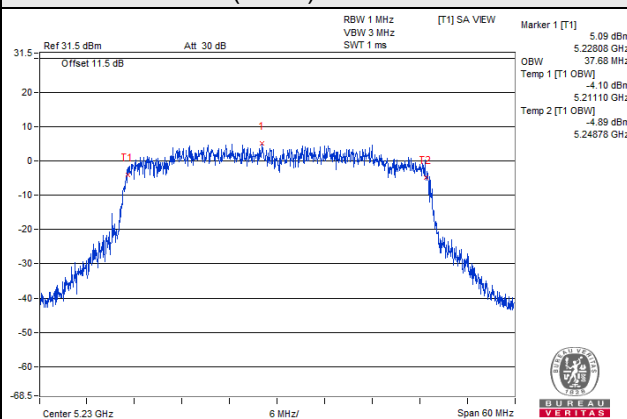

802.11ax (HE80) / Chain 0 / CH 42

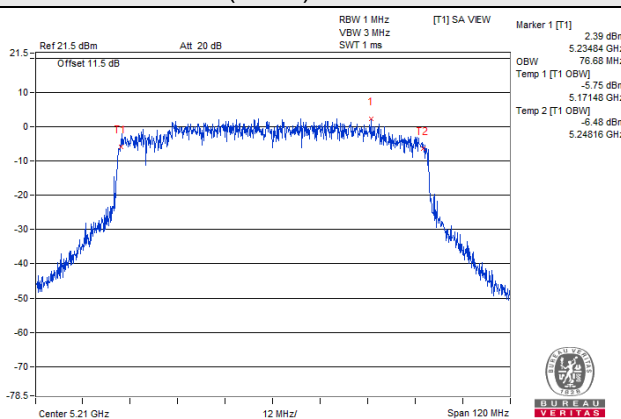


802.11ax (HE80) / Chain 1 / CH 42

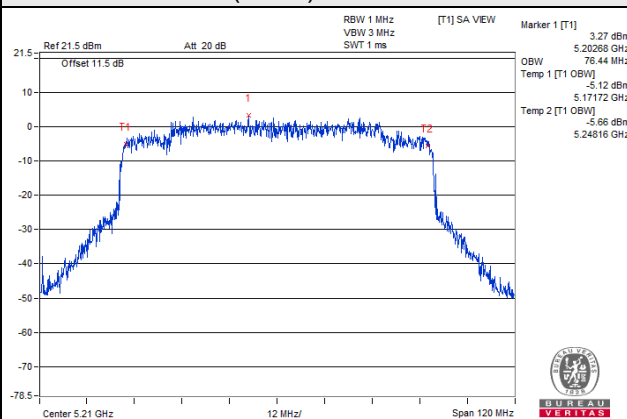


Spectrum Plot for near By DFS Band


802.11ax (HE20) / Chain 0 / CH 149

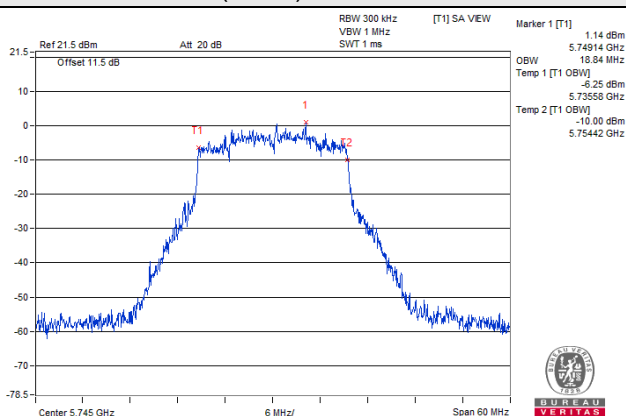


802.11ax (HE20) / Chain 1 / CH 149

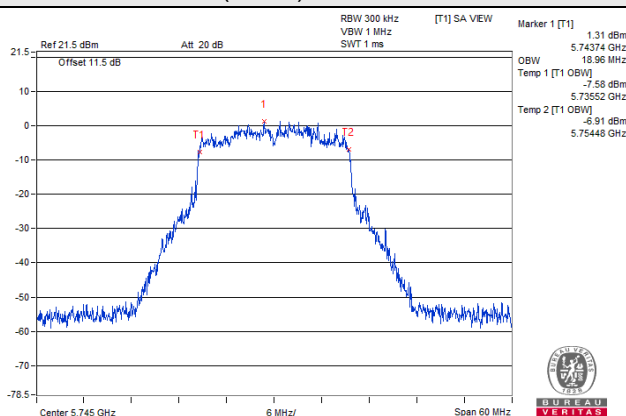


802.11ax (HE40) / Chain 0 / CH 151

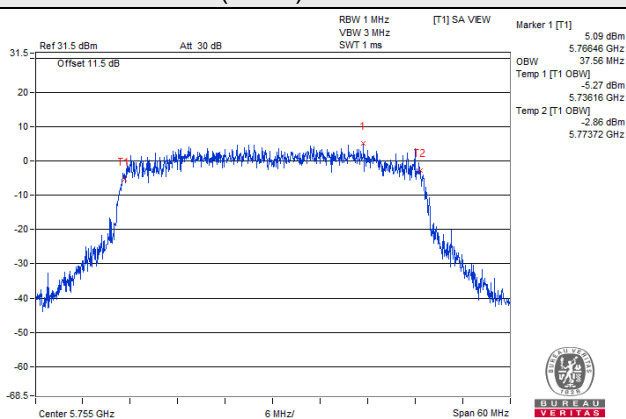


802.11ax (HE40) / Chain 1 / CH 151

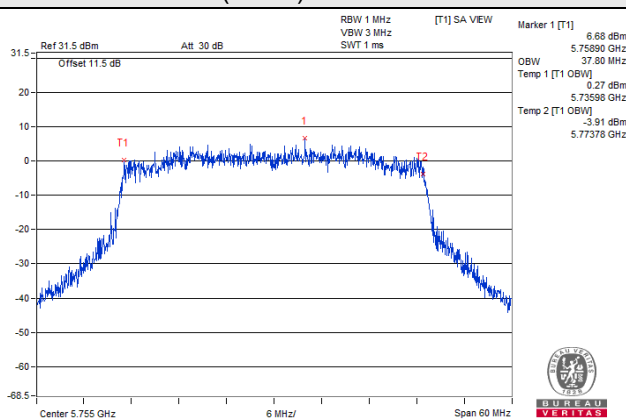

802.11ax (HE80) / Chain 0 / CH 155

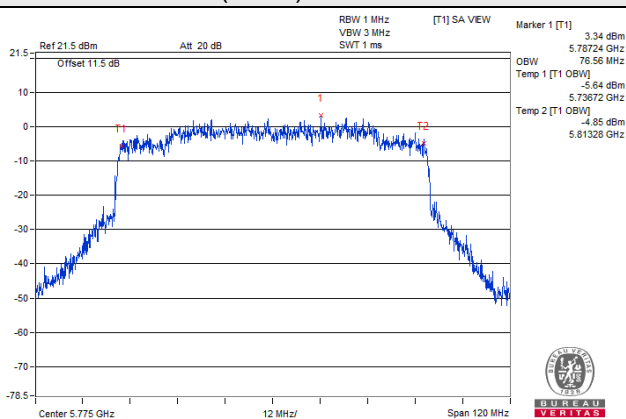

802.11ax (HE80) / Chain 1 / CH 155

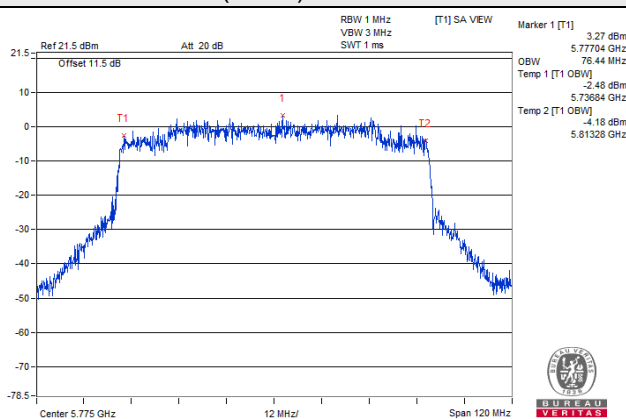


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Mobile and Portable client device	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedures

For U-NII-1, U-NII-2A and U-NII-2C band:

Duty cycle of test signal is > 98%

- 1) Using method SA-1
- 2) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 3) Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value

Duty cycle of test signal is < 98%

Using method SA-2

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1MHz, Set VBW ≥ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to “free run”.
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

Duty cycle of test signal is > 98%

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value

Duty cycle <98%

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
- 4) Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
- 5) Sweep time = auto, trigger set to "free run".
- 6) Trace average at least 100 traces in power averaging mode.
- 7) Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Conditions

Same as 4.3.6.

4.5.7 Test Results

For U-NII-1, U-NII-2A and U-NII-2C band:

1TX: Chain 0

802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
36	5180	-2.16	0.11	-2.05	11.00	Pass
40	5200	-2.29	0.11	-2.18	11.00	Pass
48	5240	-2.22	0.11	-2.11	11.00	Pass
52	5260	-2.44	0.11	-2.33	11.00	Pass
60	5300	-2.28	0.11	-2.17	11.00	Pass
64	5320	-2.32	0.11	-2.21	11.00	Pass
100	5500	-2.55	0.11	-2.44	11.00	Pass
116	5580	-2.20	0.11	-2.09	11.00	Pass
140	5700	-1.67	0.11	-1.56	11.00	Pass
144	5720 (For U-NII-2C)	-1.76	0.11	-1.65	11.00	Pass

Note: Refer to section 3.3 for duty cycle spectrum plot.

1TX: Chain 1


802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)	Duty Factor (dB)	PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
36	5180	-1.41	0.12	-1.29	11.00	Pass
40	5200	-1.33	0.12	-1.21	11.00	Pass
48	5240	-1.29	0.12	-1.17	11.00	Pass
52	5260	-1.93	0.12	-1.81	11.00	Pass
60	5300	-1.97	0.12	-1.85	11.00	Pass
64	5320	-1.82	0.12	-1.70	11.00	Pass
100	5500	-1.84	0.12	-1.72	11.00	Pass
116	5580	-1.78	0.12	-1.66	11.00	Pass
140	5700	-1.28	0.12	-1.16	11.00	Pass
144	5720 (For U-NII-2C)	-1.33	0.12	-1.21	11.00	Pass


Note: Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value

802.11a: Chain 0

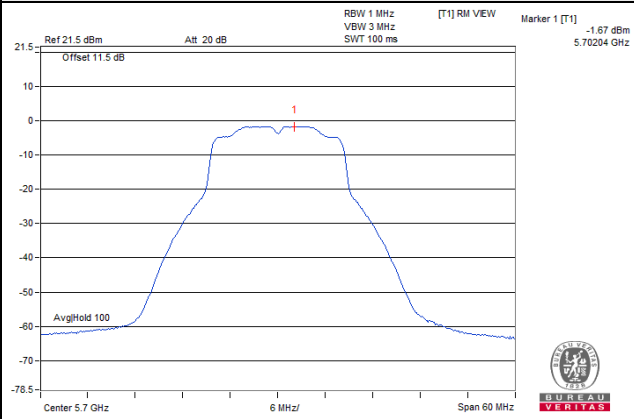

802.11a: Chain 1

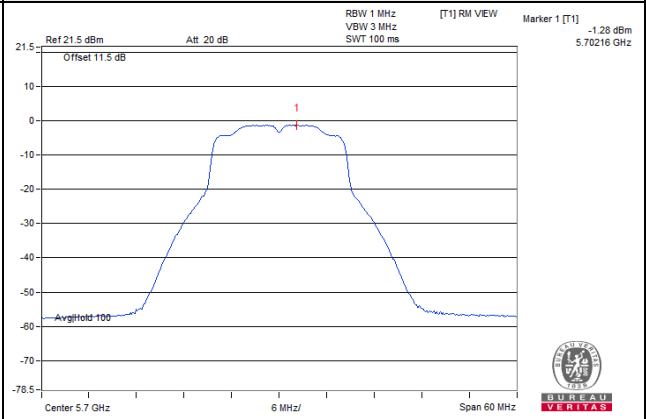

For U-NII-3 band:

1TX: Chain 0

802.11a

Chan.	Freq. (MHz)	PSD		Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		(dBm/300kHz)	(dBm/500kHz)				
144	5720 (For U-NII-3)	-8.14	-5.92	0.11	-5.81	30	Pass
149	5745	-6.99	-4.77	0.11	-4.66	30	Pass
157	5785	-7.14	-4.92	0.11	-4.81	30	Pass
165	5825	-7.27	-5.05	0.11	-4.94	30	Pass


Note: Refer to section 3.3 for duty cycle spectrum plot.

1TX: Chain 1

802.11a

Chan.	Freq. (MHz)	PSD		Duty Factor (dB)	Total PSD with Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
		(dBm/300kHz)	(dBm/500kHz)				
144	5720 (For U-NII-3)	-7.65	-5.43	0.12	-5.31	30	Pass
149	5745	-6.79	-4.57	0.12	-4.45	30	Pass
157	5785	-6.73	-4.51	0.12	-4.39	30	Pass
165	5825	-6.53	-4.31	0.12	-4.19	30	Pass

Note: Refer to section 3.3 for duty cycle spectrum plot.

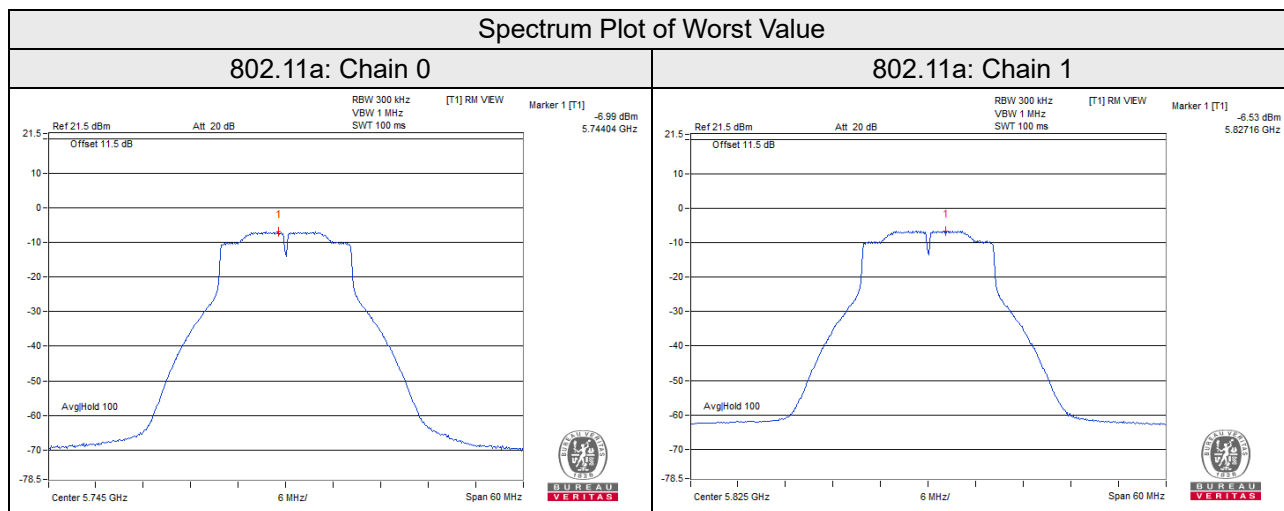

Full RU

2TX

For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	-2.21	-1.75	1.04	11.00	Pass
40	5200	-2.31	-1.77	0.98	11.00	Pass
48	5240	-2.38	-1.60	1.04	11.00	Pass
52	5260	-2.42	-1.71	0.96	11.00	Pass
60	5300	-2.38	-1.60	1.04	11.00	Pass
64	5320	-2.45	-1.70	0.95	11.00	Pass
100	5500	-2.61	-2.02	0.71	11.00	Pass
116	5580	-1.97	-1.95	1.05	11.00	Pass
140	5700	-2.82	-2.10	0.57	11.00	Pass
144	5720 (For U-NII-2C)	-2.34	-1.73	0.99	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11ax (HE40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
38	5190	-4.53	-4.26	-1.38	11.00	Pass
46	5230	-4.70	-4.49	-1.58	11.00	Pass
54	5270	-4.59	-4.42	-1.49	11.00	Pass
62	5310	-4.51	-4.37	-1.43	11.00	Pass
102	5510	-4.64	-4.20	-1.40	11.00	Pass
110	5550	-4.37	-4.08	-1.21	11.00	Pass
134	5670	-4.47	-4.22	-1.33	11.00	Pass
142	5710 (For U-NII-2C)	-4.58	-4.41	-1.48	11.00	Pass

Note:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
3. 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
4. 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11ax (HE80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
42	5210	-7.32	-6.78	-4.03	11.00	Pass
58	5290	-7.36	-6.58	-3.94	11.00	Pass
106	5530	-7.24	-6.41	-3.79	11.00	Pass
122	5610	-6.96	-6.52	-3.72	11.00	Pass
138	5690 (For U-NII-2C)	-7.51	-7.38	-4.43	11.00	Pass

Note:


1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
3. 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
4. 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11ax (HE160)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
50 (U-NII-1 Band)	5250	-10.29	-10.20	-7.23	11.00	Pass
50 (U-NII-2A Band)	5250	-10.31	-10.28	-7.28	11.00	Pass
114	5570	-9.84	-9.58	-6.70	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5250MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5570MHz: Directional gain = $10 \log[(10^{G^1/20} + 10^{G^2/20} + \dots + 10^{G^N/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

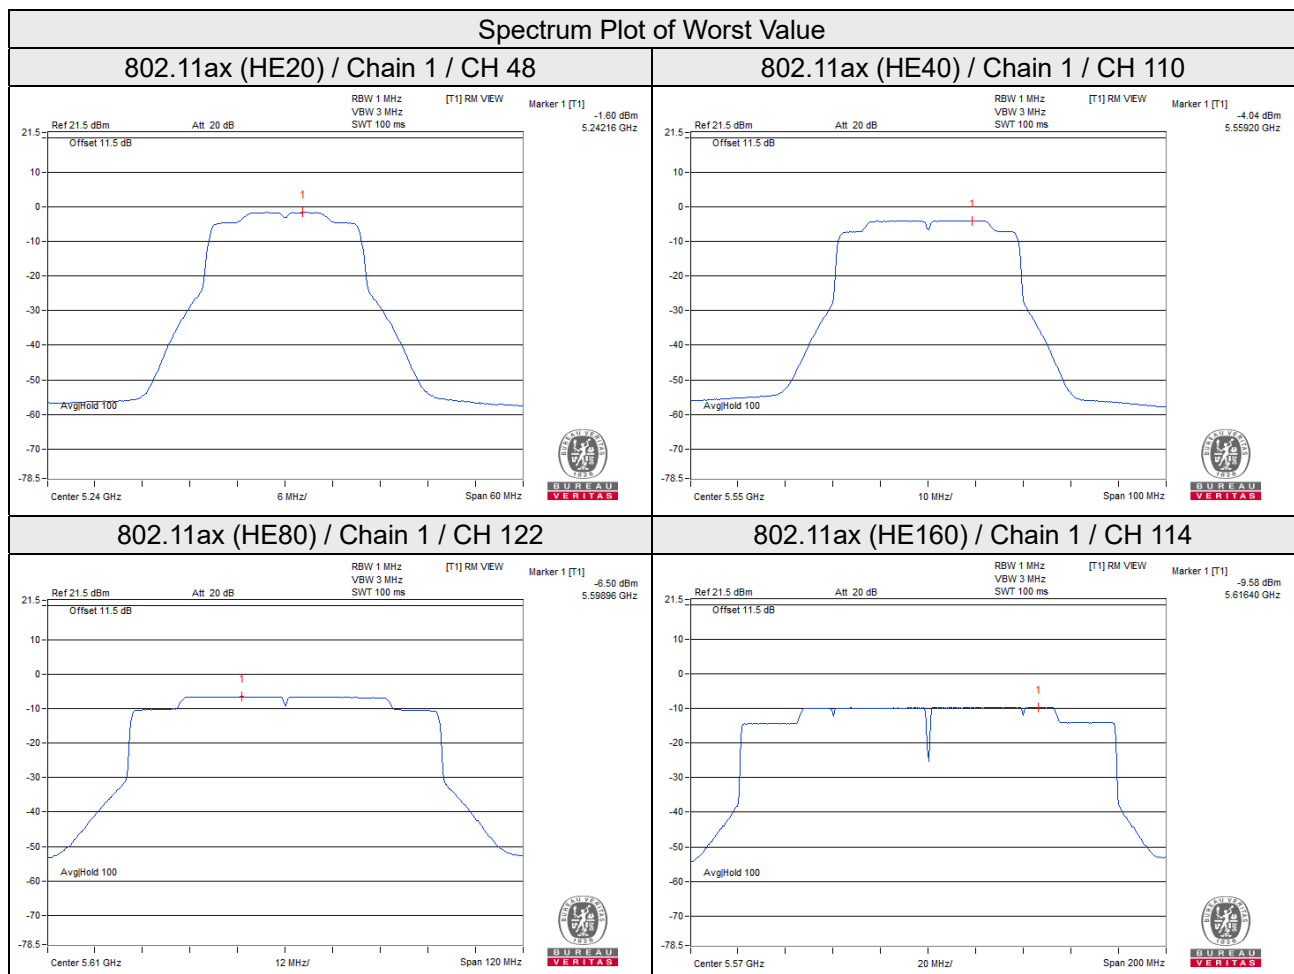

For U-NII-3 band:

802.11ax (HE20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	144	5720 (For U-NII-3)	-8.74	-6.52	3.01	-3.51	30	Pass
	149	5745	-7.50	-5.28	3.01	-2.27	30	Pass
	157	5785	-7.68	-5.46	3.01	-2.45	30	Pass
	165	5825	-8.44	-6.22	3.01	-3.21	30	Pass
1	144	5720 (For U-NII-3)	-8.22	-6.00	3.01	-2.99	30	Pass
	149	5745	-7.78	-5.56	3.01	-2.55	30	Pass
	157	5785	-7.64	-5.42	3.01	-2.41	30	Pass
	165	5825	-7.47	-5.25	3.01	-2.24	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11ax (HE40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	142	5710 (For U-NII-3)	-13.01	-10.79	3.01	-7.78	30	Pass
	151	5755	-10.03	-7.81	3.01	-4.80	30	Pass
	159	5795	-10.17	-7.95	3.01	-4.94	30	Pass
1	142	5710 (For U-NII-3)	-12.83	-10.61	3.01	-7.60	30	Pass
	151	5755	-9.90	-7.68	3.01	-4.67	30	Pass
	159	5795	-9.22	-7.00	3.01	-3.99	30	Pass

Note:


1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

802.11ax (HE80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	138	5690 (For U-NII-3)	-16.72	-14.50	3.01	-11.49	30	Pass
	155	5775	-12.91	-10.69	3.01	-7.68	30	Pass
1	138	5690 (For U-NII-3)	-16.65	-14.43	3.01	-11.42	30	Pass
	155	5775	-12.28	-10.06	3.01	-7.05	30	Pass

Note:

- Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
- Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

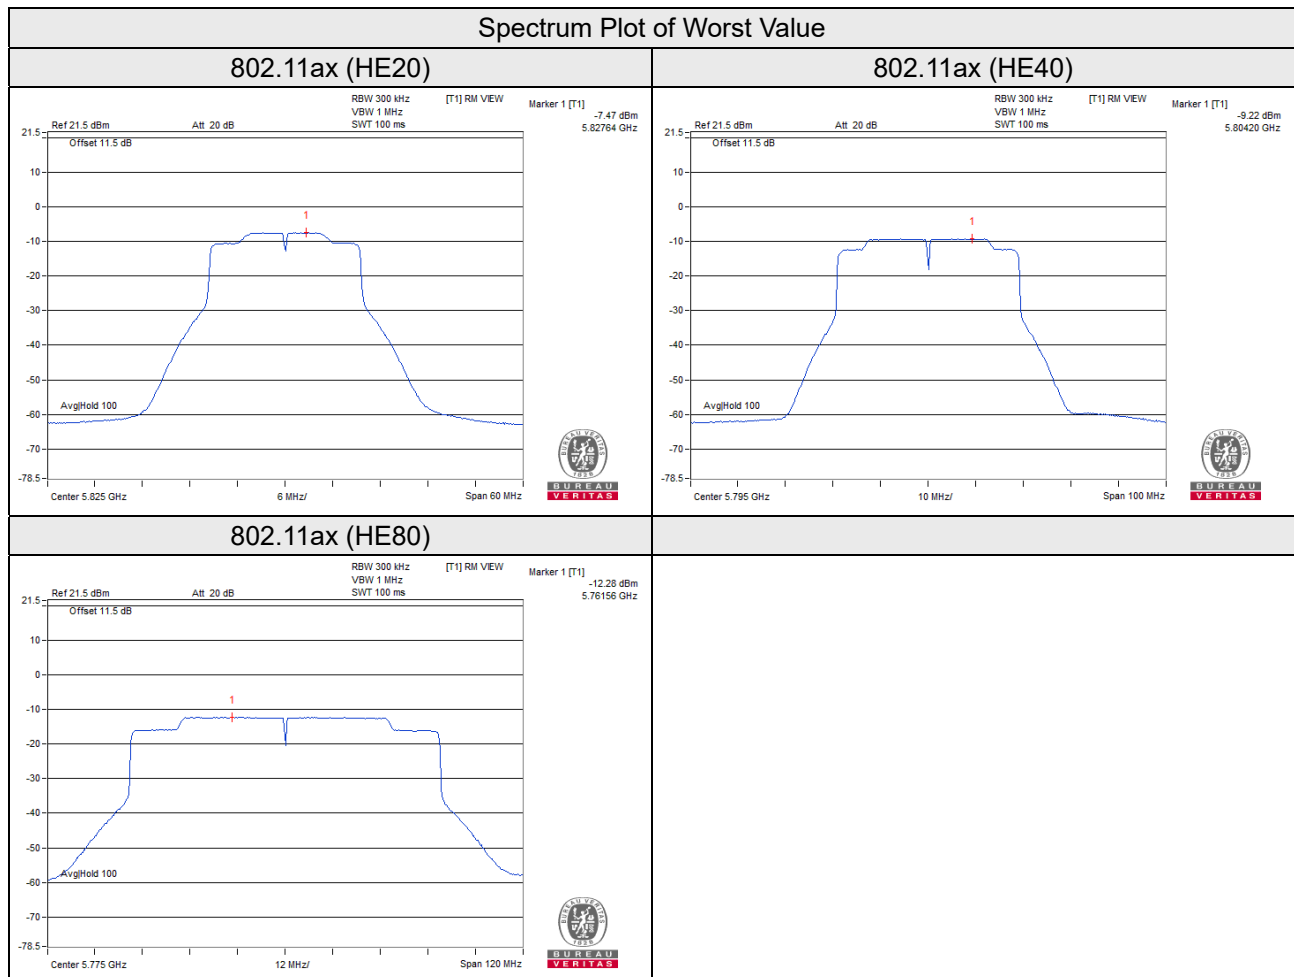

Partial RU

2TX

RU26


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	5.12	5.35	8.25	11.00	Pass
64	5320	4.92	5.67	8.32	11.00	Pass
100	5500	4.82	5.54	8.21	11.00	Pass
140	5700	4.60	5.00	7.81	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

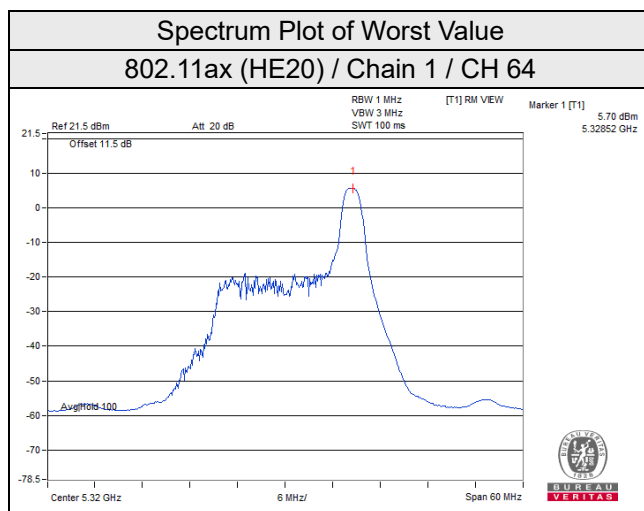


For U-NII-3 band:

802.11ax (HE20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	-0.24	1.98	3.01	4.99	30	Pass
1	149	5745	-0.06	2.16	3.01	5.17	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

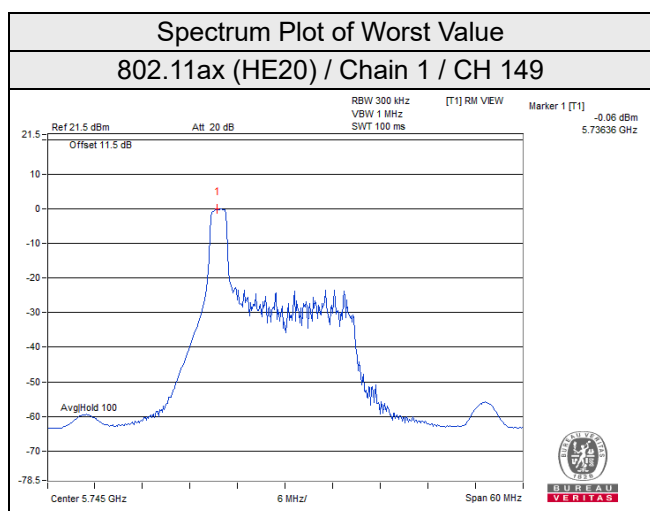

RU52


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	2.64	2.70	5.68	11.00	Pass
64	5320	2.51	2.98	5.76	11.00	Pass
100	5500	2.07	2.45	5.27	11.00	Pass
140	5700	1.94	2.00	4.98	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

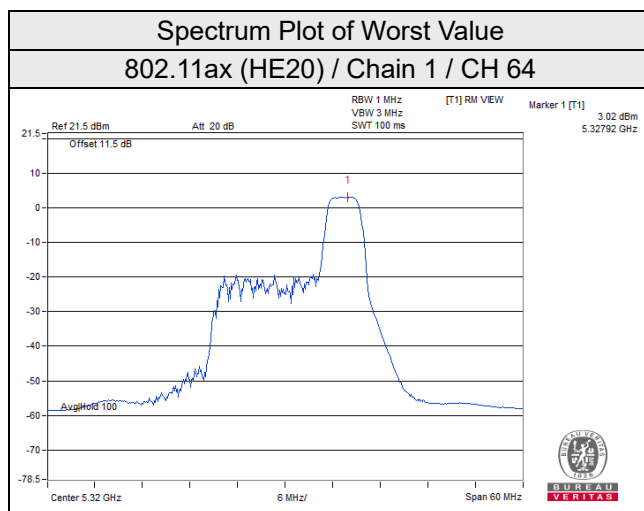


For U-NII-3 band:

802.11ax (HE20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	-3.11	-0.89	3.01	2.12	30	Pass
1	149	5745	-3.08	-0.86	3.01	2.15	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

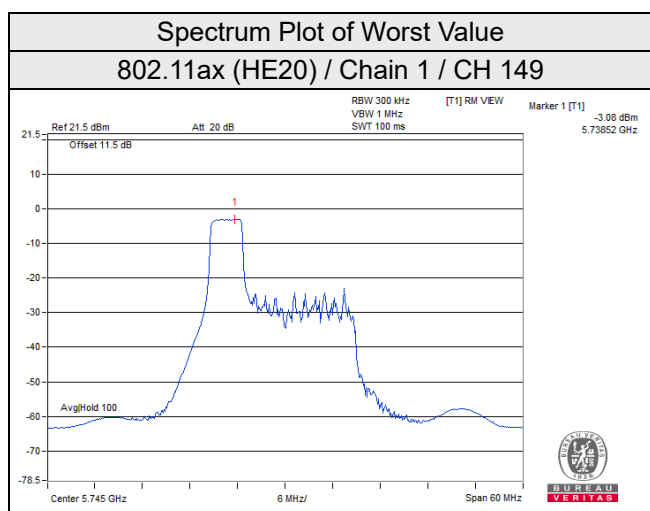

RU106


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
36	5180	1.25	1.44	4.36	11.00	Pass
64	5320	1.41	1.90	4.67	11.00	Pass
100	5500	0.94	1.25	4.11	11.00	Pass
140	5700	1.23	1.18	4.22	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

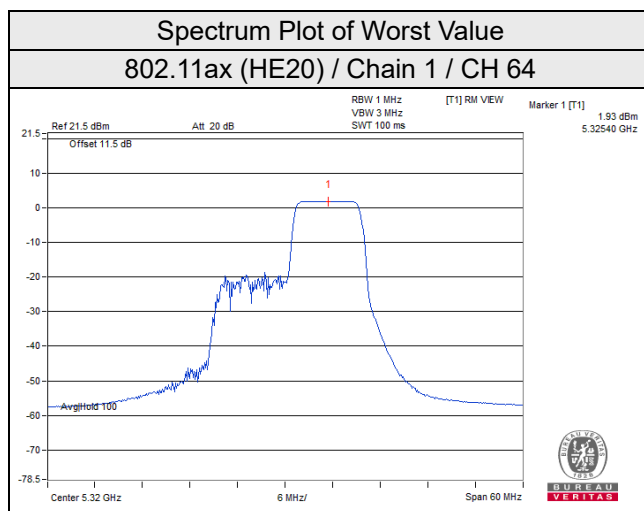


For U-NII-3 band:

802.11ax (HE20)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	149	5745	-3.97	-1.75	3.01	1.26	30	Pass
1	149	5745	-3.90	-1.68	3.01	1.33	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

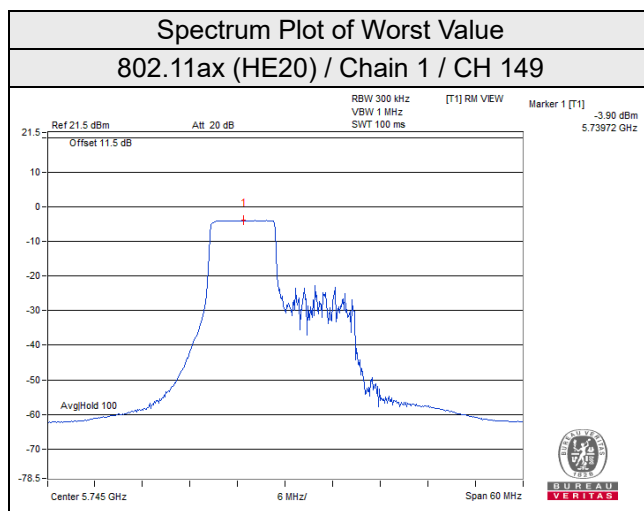

RU242


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE40)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
38	5190	-0.88	-0.53	2.31	11.00	Pass
62	5310	-1.24	-0.63	2.09	11.00	Pass
102	5510	-1.20	-0.69	2.07	11.00	Pass
134	5670	-1.07	-0.65	2.16	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

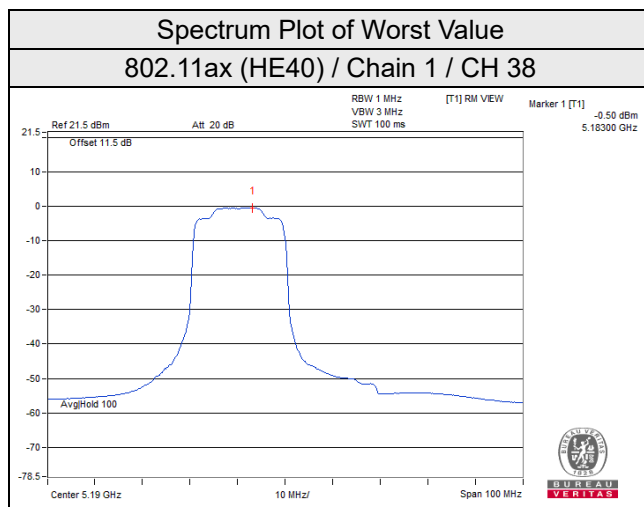


For U-NII-3 band:

802.11ax (HE40)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	151	5755	-6.48	-4.26	3.01	-1.25	30	Pass
1	151	5755	-6.39	-4.17	3.01	-1.16	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add $10 \log (N_{ANT})$ dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

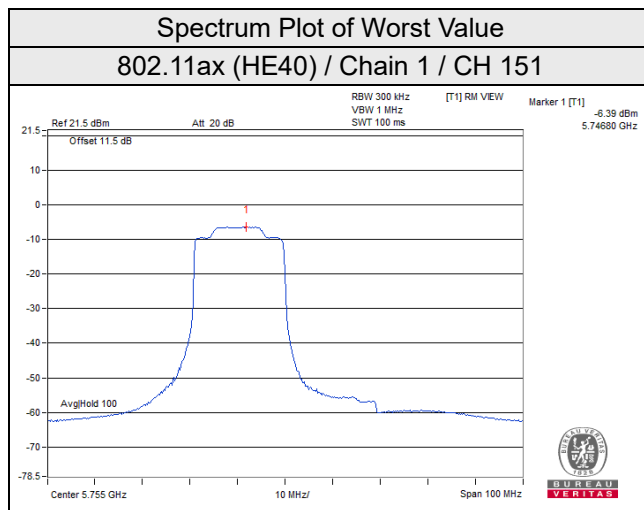

RU486


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE80)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
42	5210	-4.47	-4.37	-1.41	11.00	Pass
58	5290	-4.64	-4.25	-1.43	11.00	Pass
106	5530	-4.76	-4.52	-1.63	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5180-5240MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5260-5320MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5500-5720MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

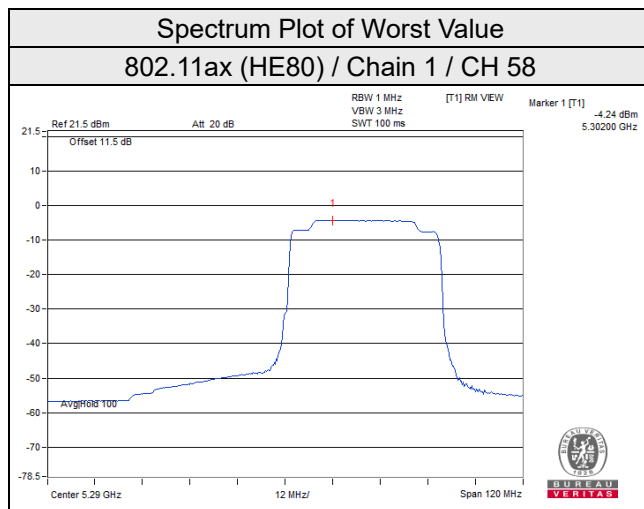


For U-NII-3 band:

802.11ax (HE80)

TX chain	Chan.	Freq. (MHz)	PSD W/O Duty Factor		10 log (N=2) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass / Fail
			(dBm/300kHz)	(dBm/500kHz)				
0	155	5775	-10.00	-7.78	3.01	-4.77	30	Pass
1	155	5775	-9.87	-7.65	3.01	-4.64	30	Pass

Note:

1. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add 10 log (N_{ANT}) dB.
2. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.13\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

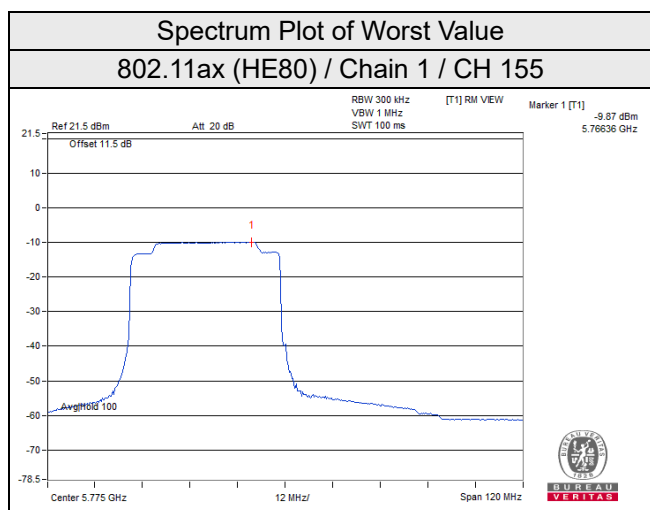

RU996


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE160)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
50 (U-NII-1 Band)	5250	-7.96	-7.75	-4.84	11.00	Pass
50 (U-NII-2A Band)	5250	-30.84	-29.62	-27.18	11.00	Pass
114	5570	-7.97	-7.34	-4.63	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5570MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

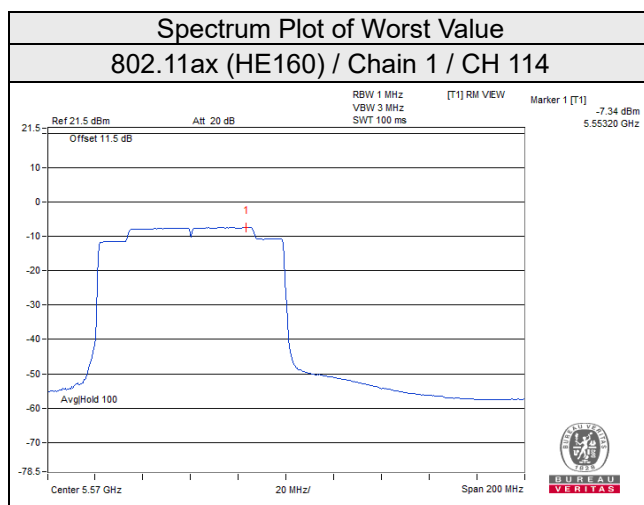

RU996S


For U-NII-1, U-NII-2A and U-NII-2C band:

802.11ax (HE160)

Chan.	Freq. (MHz)	PSD w/o Duty Factor (dBm/MHz)		Total PSD (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1			
50 (U-NII-1 Band)	5250	-27.77	-26.00	-23.79	11.00	Pass
50 (U-NII-2A Band)	5250	-7.53	-7.19	-4.35	11.00	Pass
114	5570	-7.20	-7.05	-4.11	11.00	Pass

Note:

- Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- 5250MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 4.75\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.
- 5570MHz: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/2] = 5.71\text{dBi} < 6\text{dBi}$, so the limit no need to reduced.

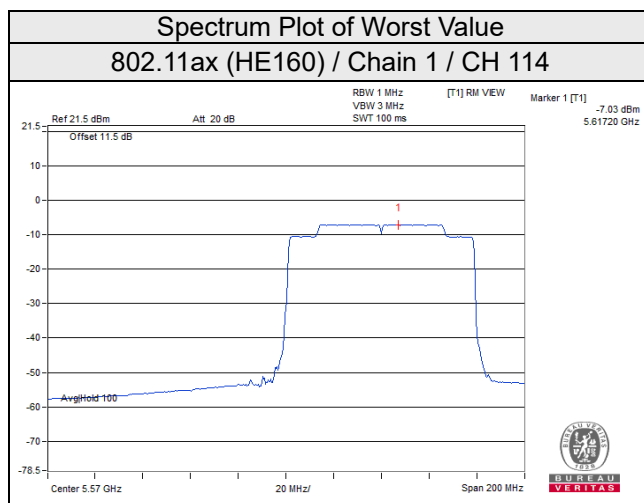


4.6 Frequency Stability

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

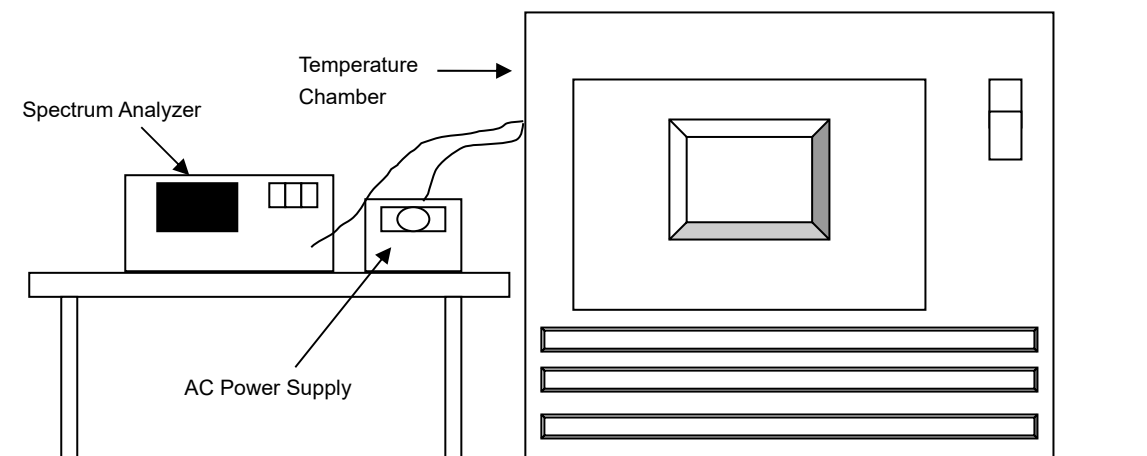

4.6.3 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jun. 07, 2021	Jun. 06, 2022
WIT Standard Temperature And Humidity Chamber	TH-4S-C	W981030	Jun. 01, 2021	May 31, 2022
Digital Multimeter Fluke	87-III	70360755	Jul. 08, 2021	Jul. 07, 2022
AC Power Supply Extech	CFW-105	E000603	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- Repeat step d with every 10 degrees reduction until the lowest temperature achieved.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

802.11a: Chain 0

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
55	120	5179.9818	Pass	5179.9825	Pass	5179.9775	Pass	5179.9793	Pass
50	120	5180.0211	Pass	5180.0170	Pass	5180.0170	Pass	5180.0177	Pass
40	120	5180.0027	Pass	5180.0020	Pass	5180.0057	Pass	5180.0060	Pass
30	120	5180.0037	Pass	5180.0040	Pass	5180.0043	Pass	5180.0017	Pass
20	120	5179.9943	Pass	5179.9924	Pass	5179.9927	Pass	5179.9959	Pass
10	120	5179.9945	Pass	5179.9981	Pass	5179.9977	Pass	5179.9987	Pass
0	120	5180.0090	Pass	5180.0077	Pass	5180.0103	Pass	5180.0073	Pass
-10	120	5179.9987	Pass	5179.9994	Pass	5180.0020	Pass	5180.0027	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5179.9894	Pass	5179.9865	Pass	5179.9898	Pass	5179.9896	Pass
	120	5179.9943	Pass	5179.9924	Pass	5179.9927	Pass	5179.9959	Pass
	102	5179.9875	Pass	5179.9897	Pass	5179.9878	Pass	5179.9896	Pass

802.11a: Chain 1

Frequency Stability Versus Temp.									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
55	120	5180.0001	Pass	5180.0008	Pass	5180.0011	Pass	5180.0017	Pass
50	120	5180.0125	Pass	5180.0134	Pass	5180.0128	Pass	5180.0130	Pass
40	120	5179.9832	Pass	5179.9828	Pass	5179.9835	Pass	5179.9838	Pass
30	120	5179.9761	Pass	5179.9775	Pass	5179.9765	Pass	5179.9780	Pass
20	120	5180.0003	Pass	5179.9993	Pass	5179.9974	Pass	5179.9959	Pass
10	120	5179.9723	Pass	5179.9742	Pass	5179.9727	Pass	5179.9745	Pass
0	120	5179.9852	Pass	5179.9880	Pass	5179.9864	Pass	5179.9872	Pass
-10	120	5180.0260	Pass	5180.0252	Pass	5180.0238	Pass	5180.0266	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180MHz									
Temp. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result	Measured Frequency (MHz)	Result
20	138	5180.0060	Pass	5180.0061	Pass	5180.0059	Pass	5180.0049	Pass
	120	5180.0003	Pass	5179.9993	Pass	5179.9974	Pass	5179.9959	Pass
	102	5180.0031	Pass	5179.9991	Pass	5179.9992	Pass	5180.0032	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

Full RU

1TX: Chain 0

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
144	5720 (For U-NII-3)	1.84	0.5	Pass
149	5745	15.11	0.5	Pass
157	5785	14.16	0.5	Pass
165	5825	13.64	0.5	Pass


For CH144 (U-NII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

1TX: Chain 1

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
144	5720 (For U-NII-3)	2.47	0.5	Pass
149	5745	15.11	0.5	Pass
157	5785	15.12	0.5	Pass
165	5825	15.25	0.5	Pass

For CH144 (U-NII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

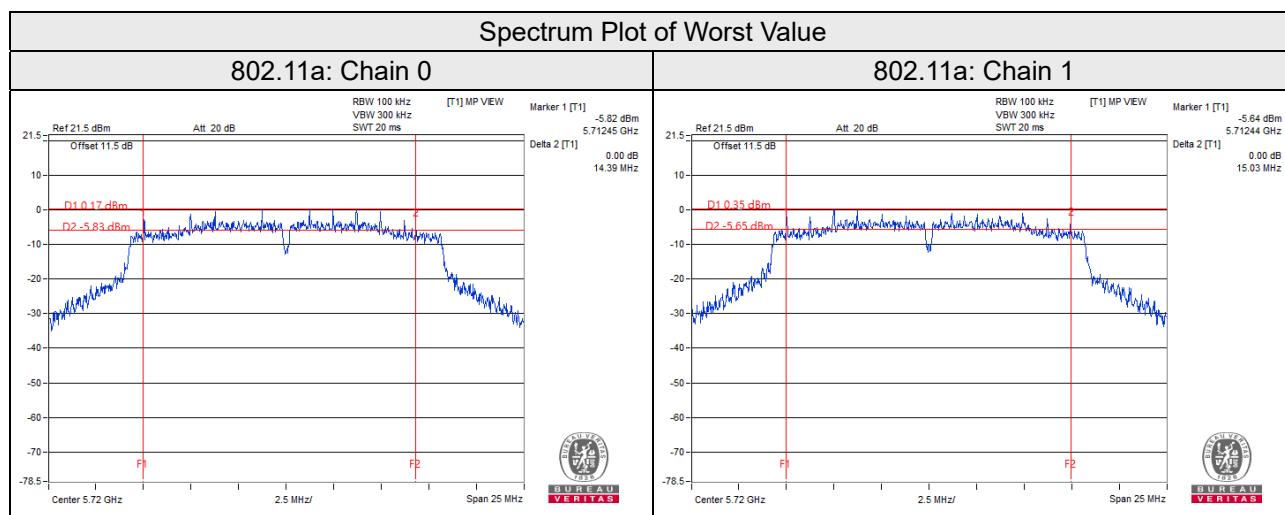

2TX

802.11ax (HE20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
144	5720 (For U-NII-3)	3.23	3.55	0.5	Pass
149	5745	16.69	14.37	0.5	Pass
157	5785	18.16	18.15	0.5	Pass
165	5825	15.89	13.91	0.5	Pass

For CH144 (U-NII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
142	5710 (For U-NII-3)	2.43	3.37	0.5	Pass
151	5755	32.74	33.3	0.5	Pass
159	5795	34.47	32.66	0.5	Pass

For CH142 (U-NII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz


802.11ax (HE80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
138	5690 (For U-NII-3)	2.40	2.84	0.5	Pass
155	5775	58.02	58.14	0.5	Pass


For CH138 (U-NII-3 Band): The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

Spectrum Plot of Worst Value


802.11ax (HE20)

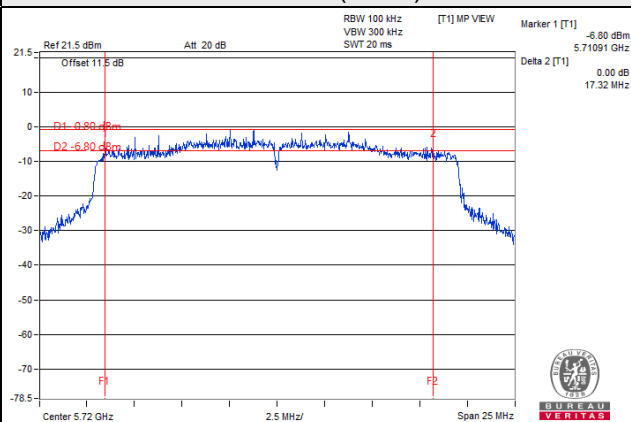

802.11ax (HE40)

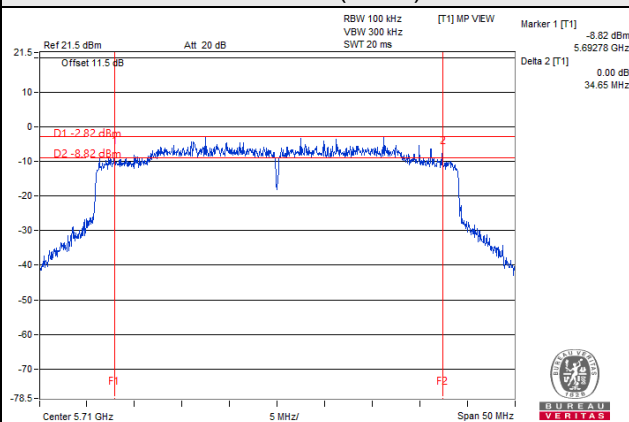

802.11ax (HE80)

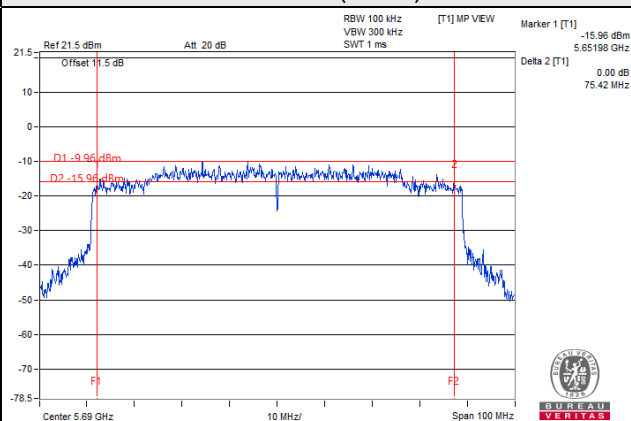

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A - Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


Full RU

802.11a CH 149 : 5745 MHz

Horizontal

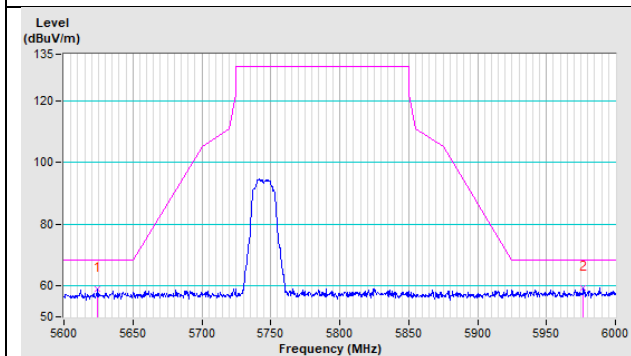


Vertical

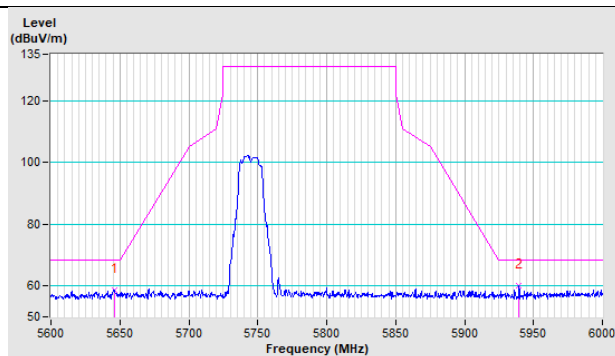


802.11a CH 157 : 5785 MHz

Horizontal

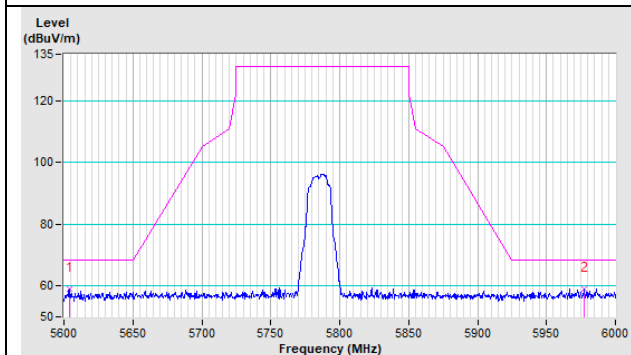


Vertical

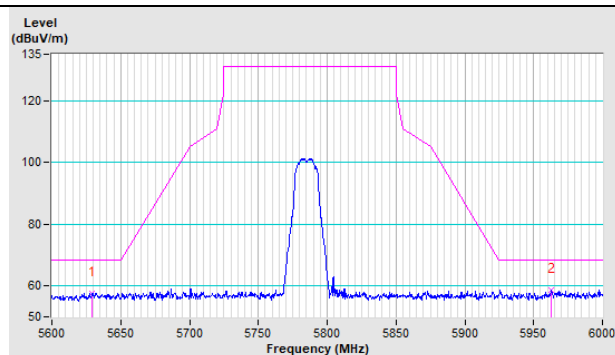


802.11a CH 165 : 5825 MHz

Horizontal

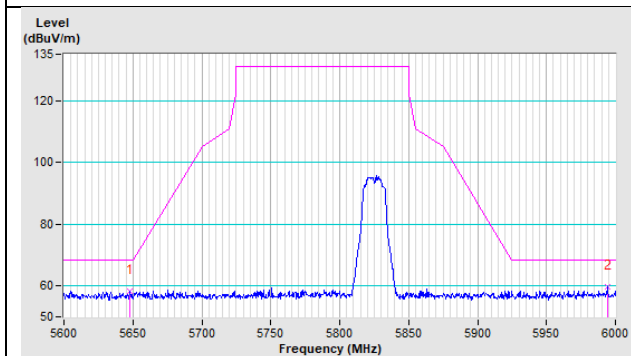


Vertical

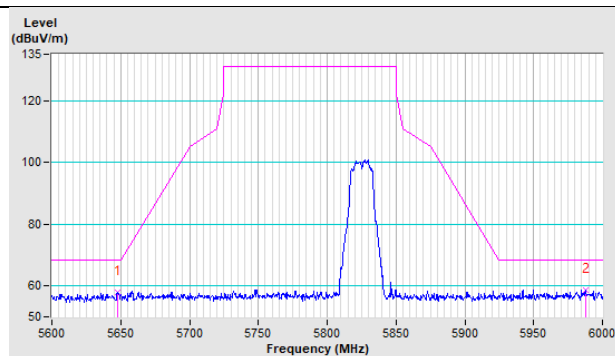


802.11ax (HE20) CH 149 : 5745 MHz

Horizontal

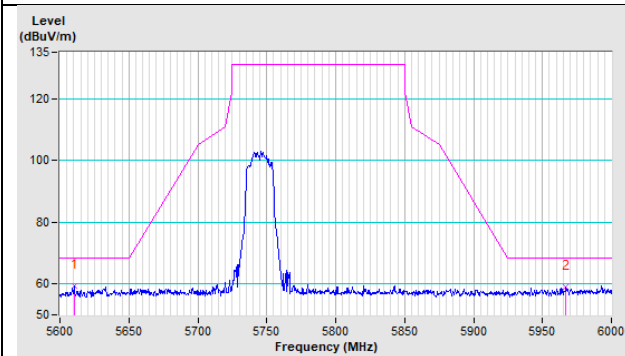


Vertical

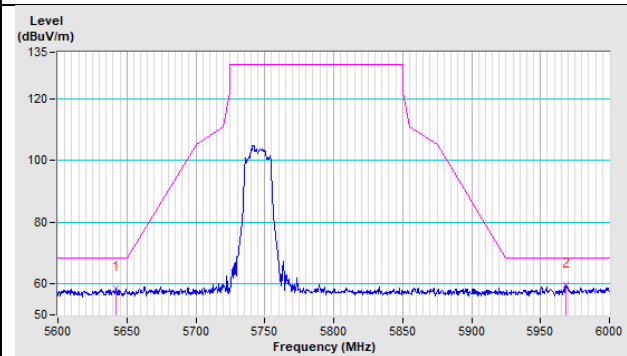


802.11ax (HE20) CH 157 : 5785 MHz

Horizontal

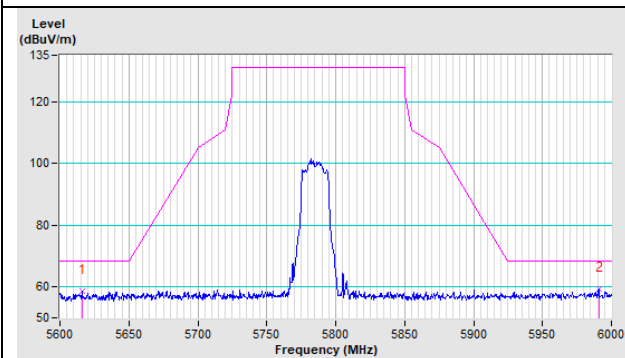


Vertical

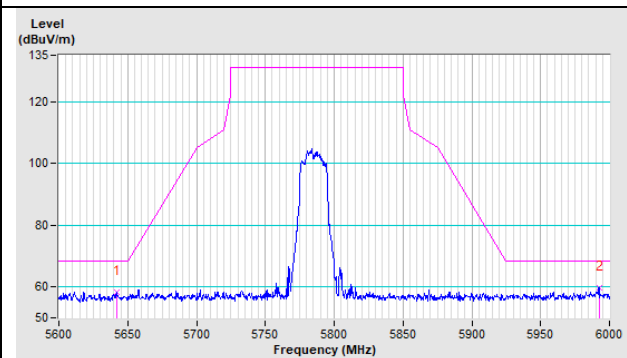


802.11ax (HE20) CH 165 : 5825 MHz

Horizontal

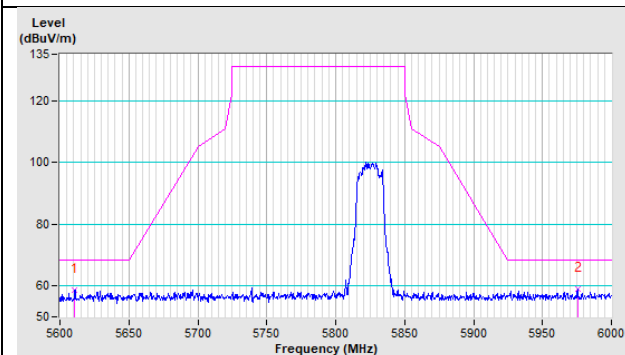


Vertical

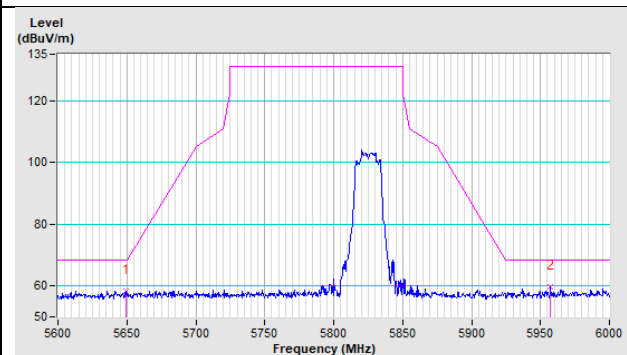


802.11ax (HE40) CH 151 : 5755 MHz

Horizontal

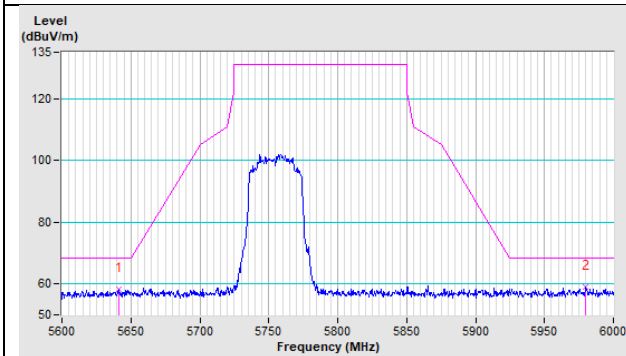


Vertical

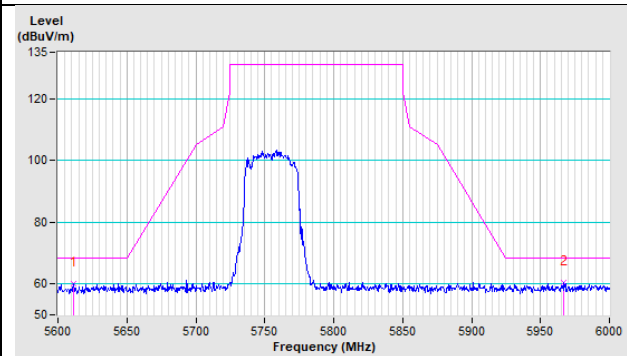


802.11ax (HE40) CH 159 : 5795 MHz

Horizontal

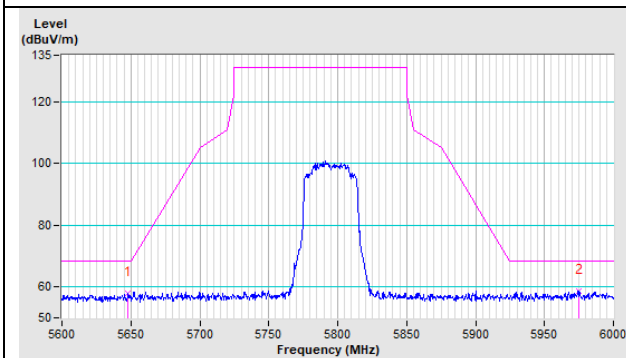


Vertical

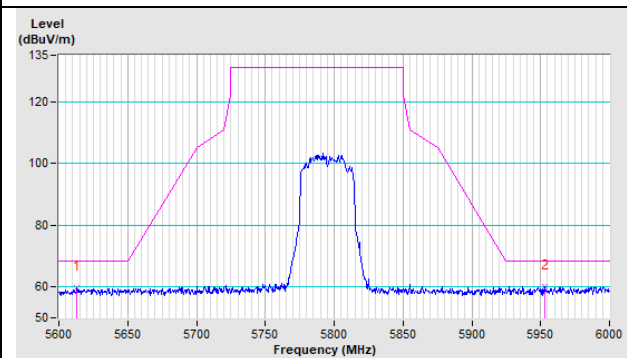


802.11ax (HE80) CH 155 : 5775 MHz

Horizontal

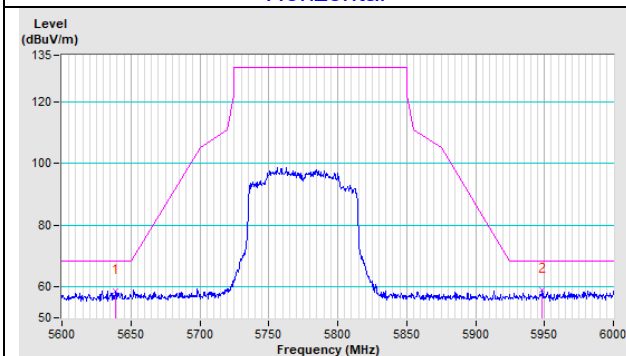


Vertical

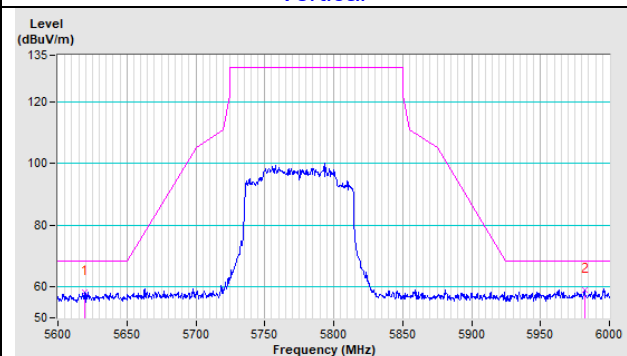


Partial RU


802.11ax (HE20) (RU26) CH 149 : 5745 MHz

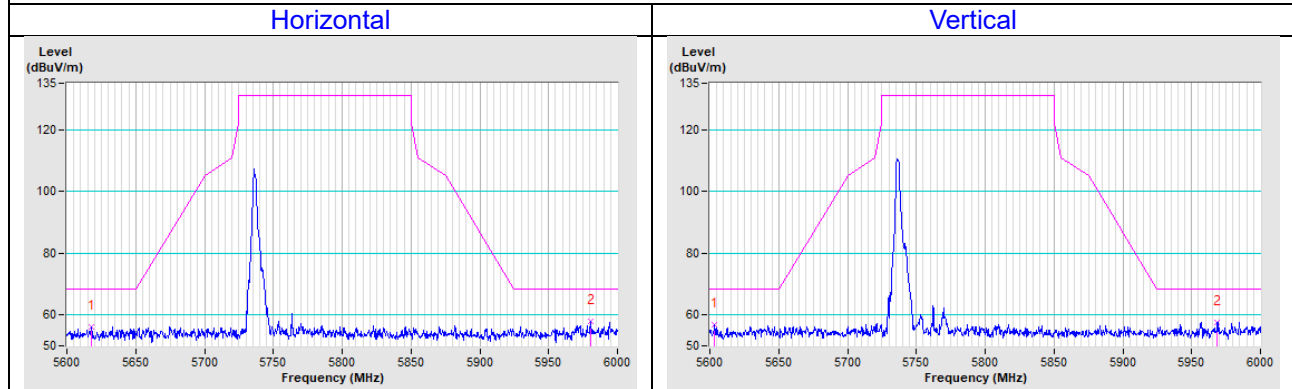

802.11ax (HE20) (RU52) CH 149 : 5745 MHz

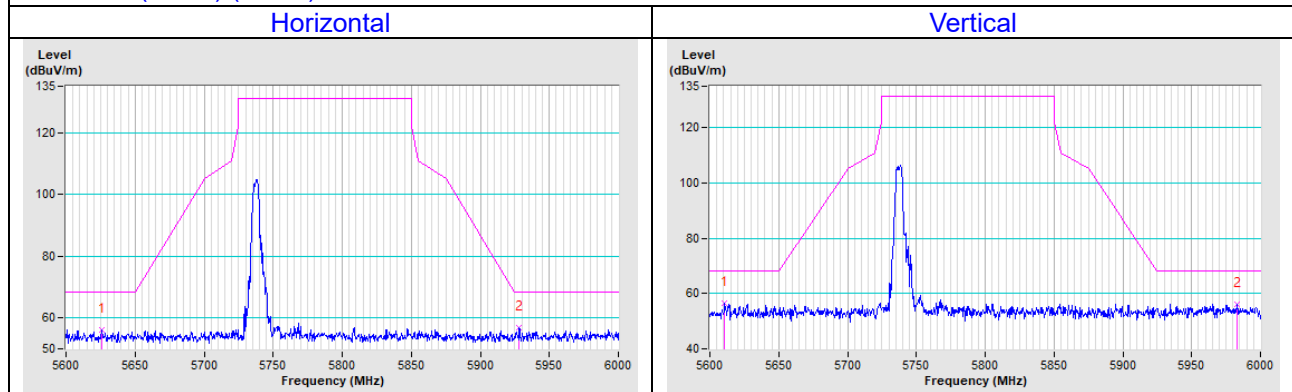


802.11ax (HE20) (RU106) CH 149 : 5745 MHz

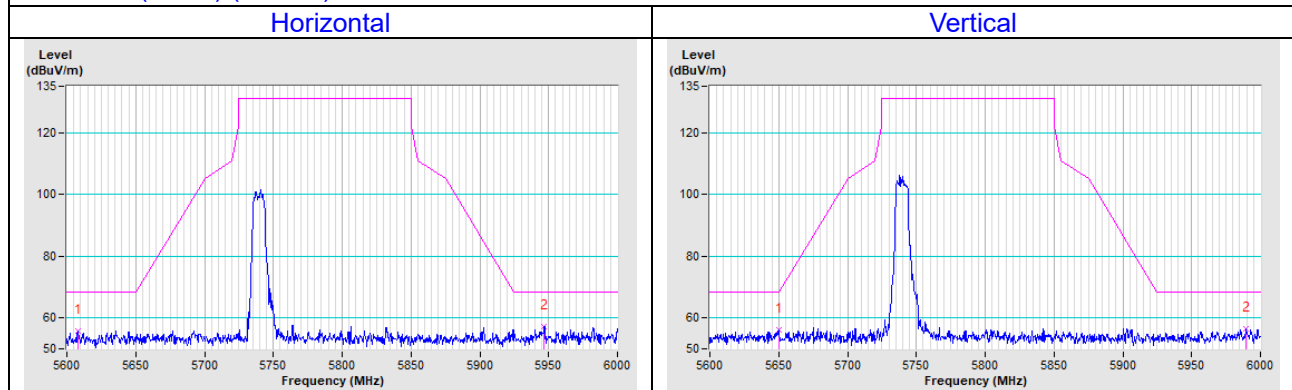


802.11ax (HE40) (242) CH 151 : 5755 MHz

Horizontal

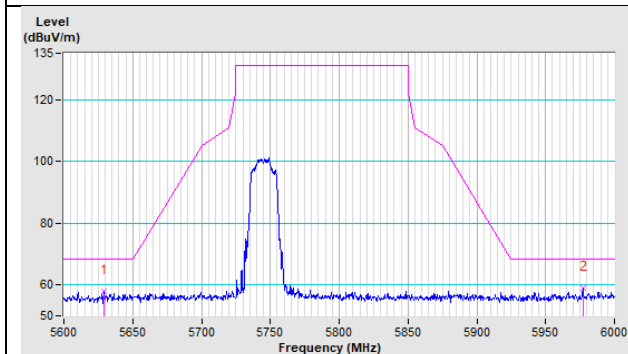


Vertical

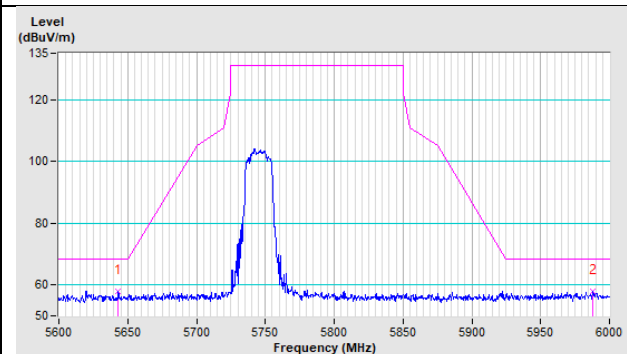


802.11ax (HE80) (484) CH 155 : 5775 MHz

Horizontal

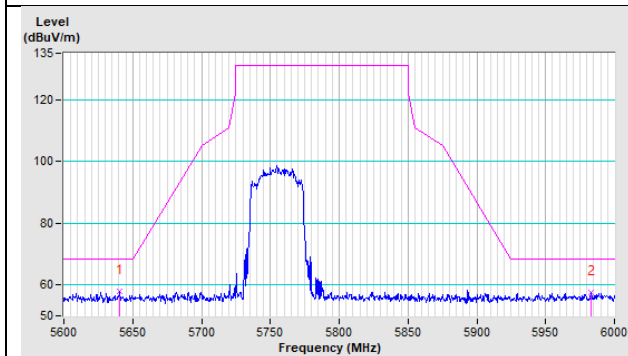



Vertical

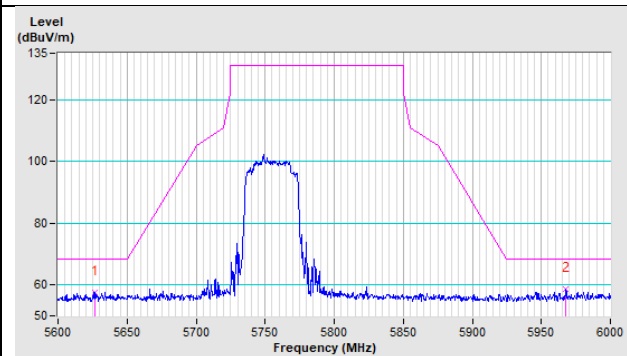



Annex B - Band Edge Measurement

Full RU

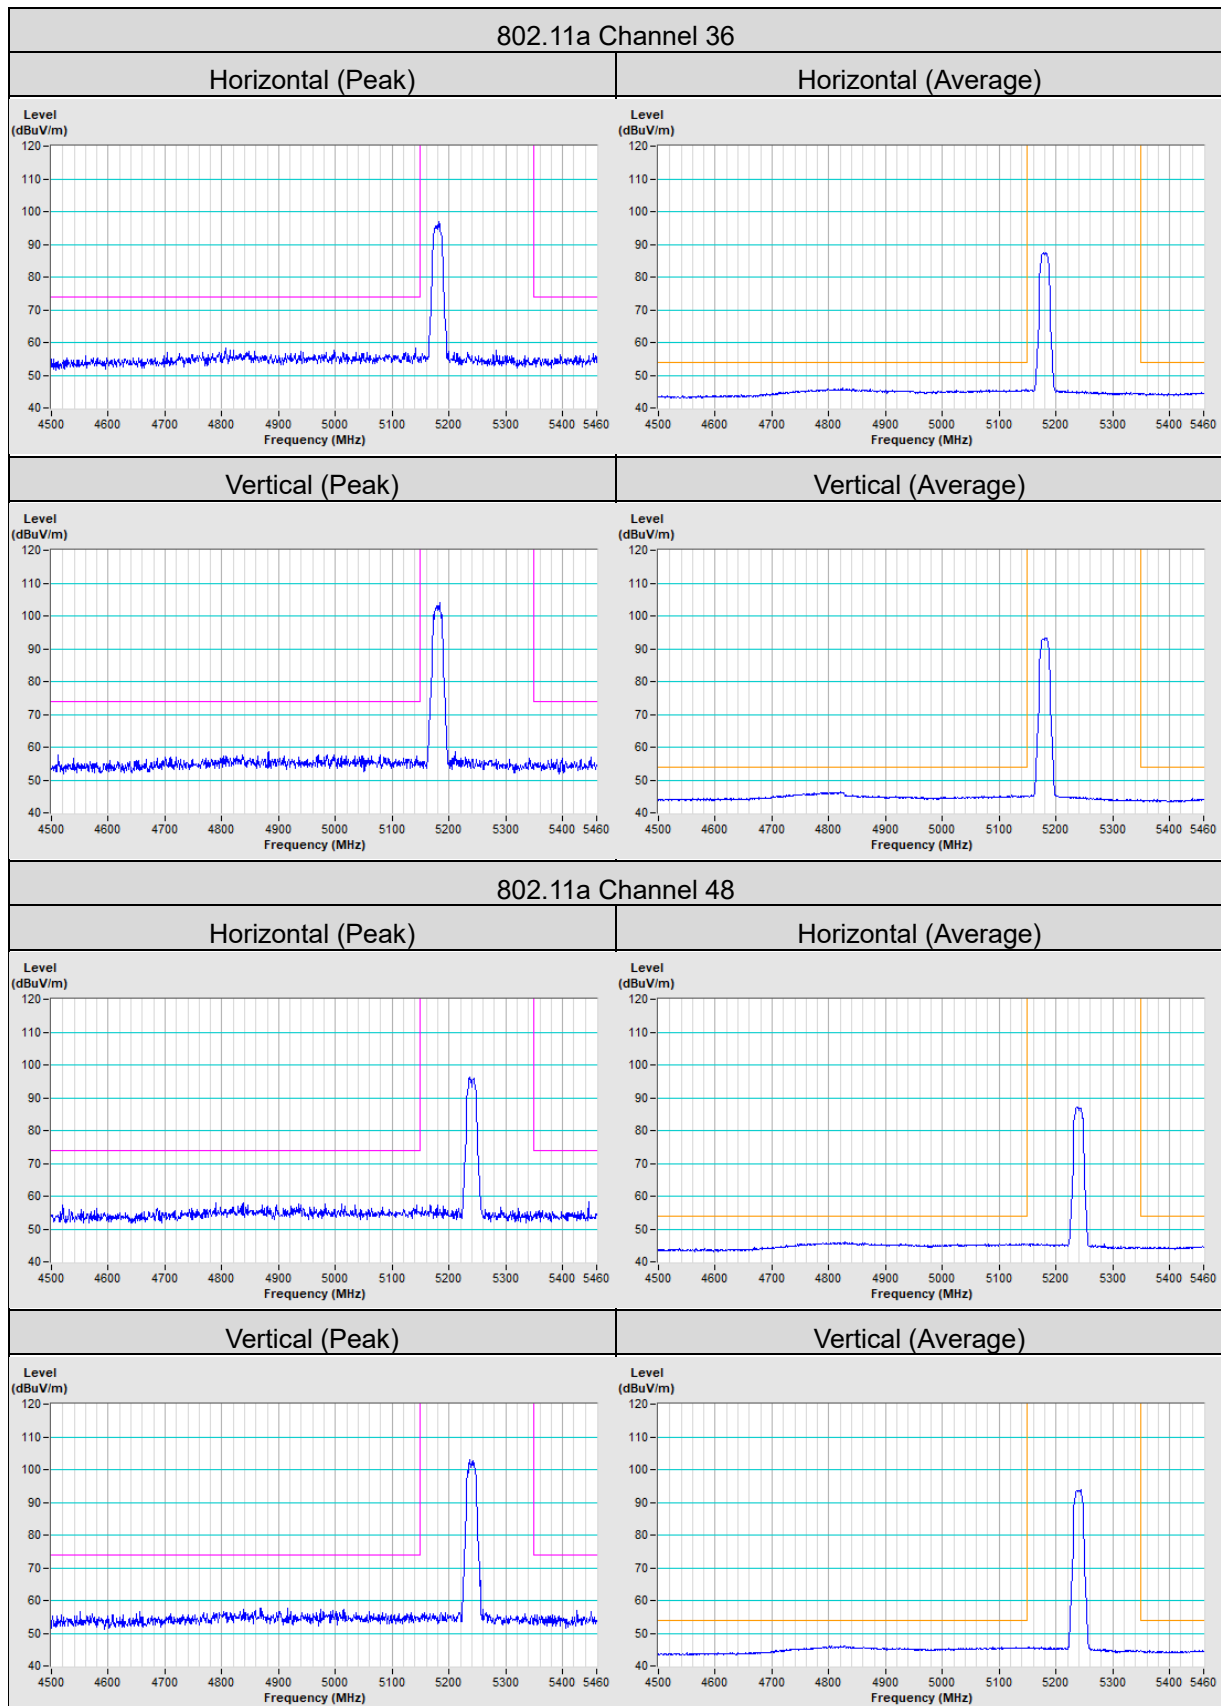

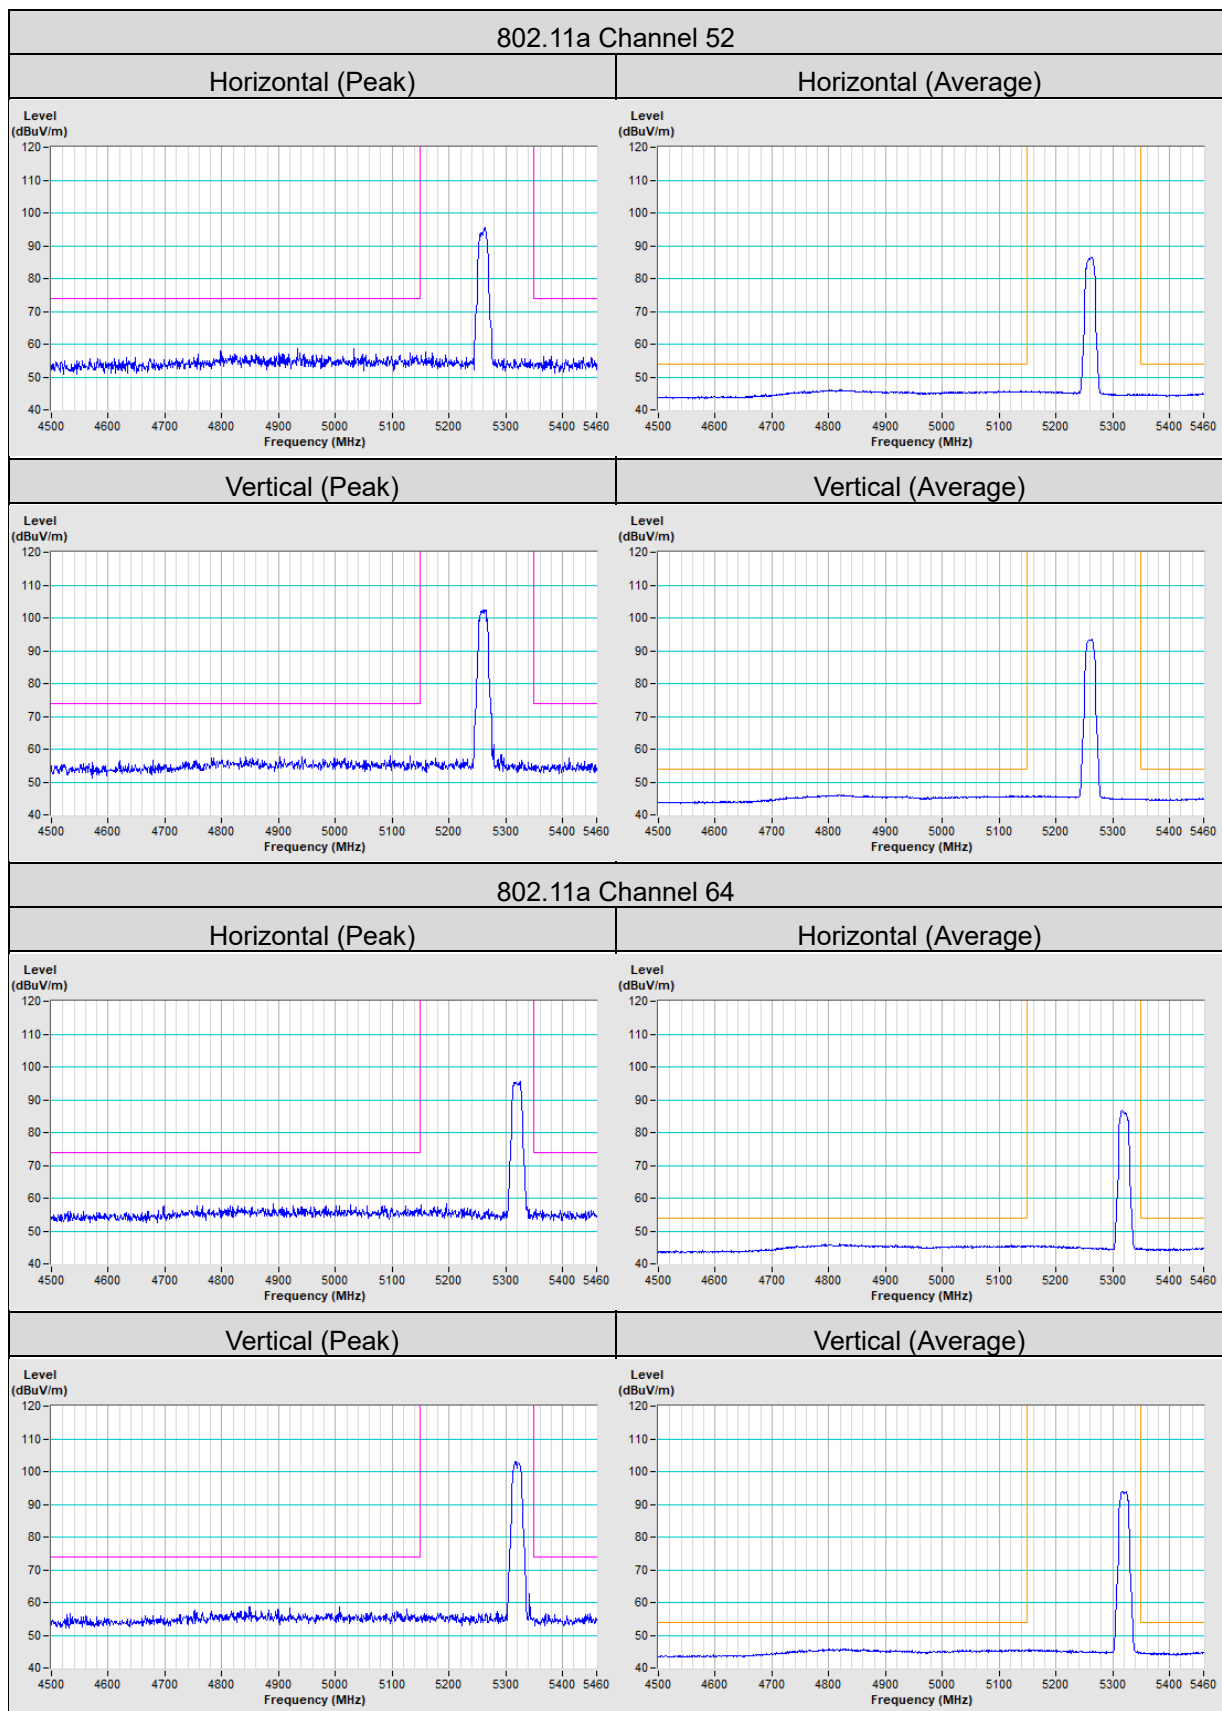


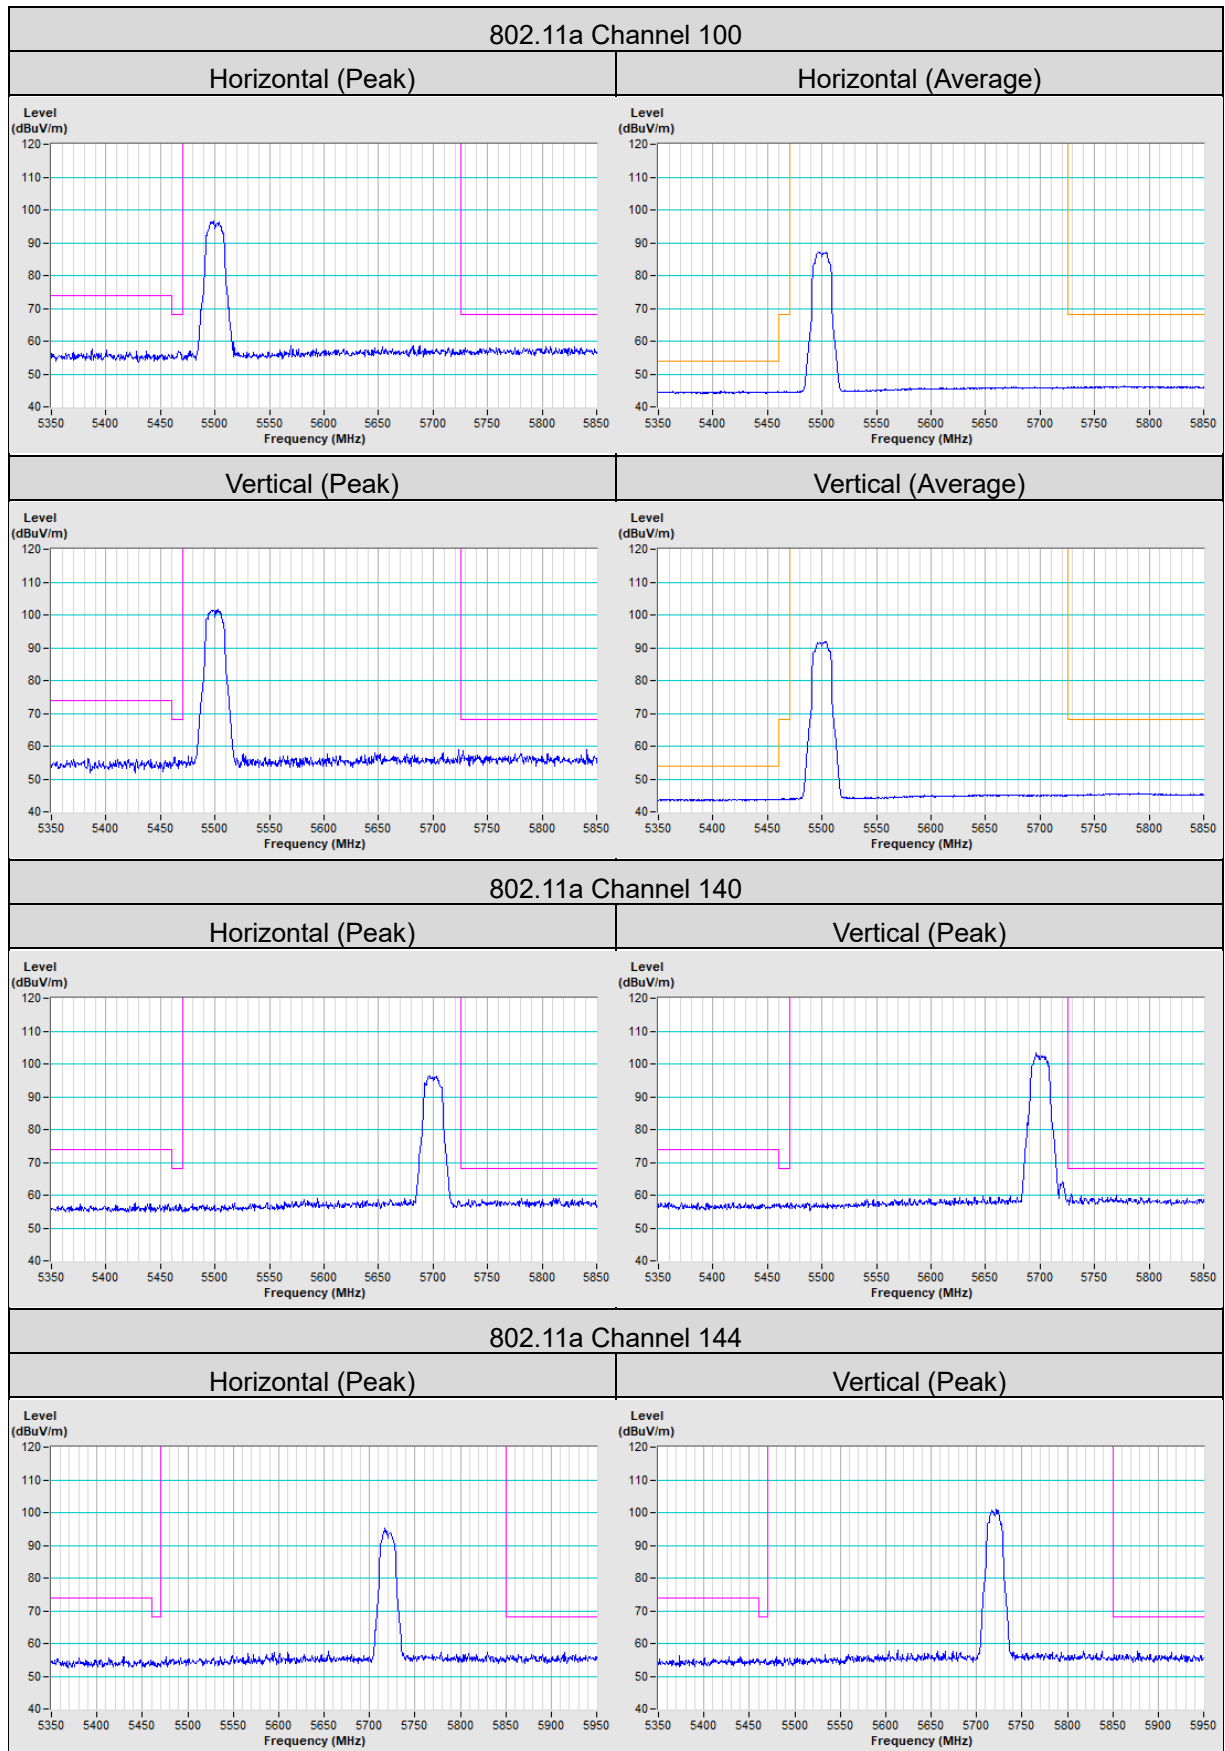

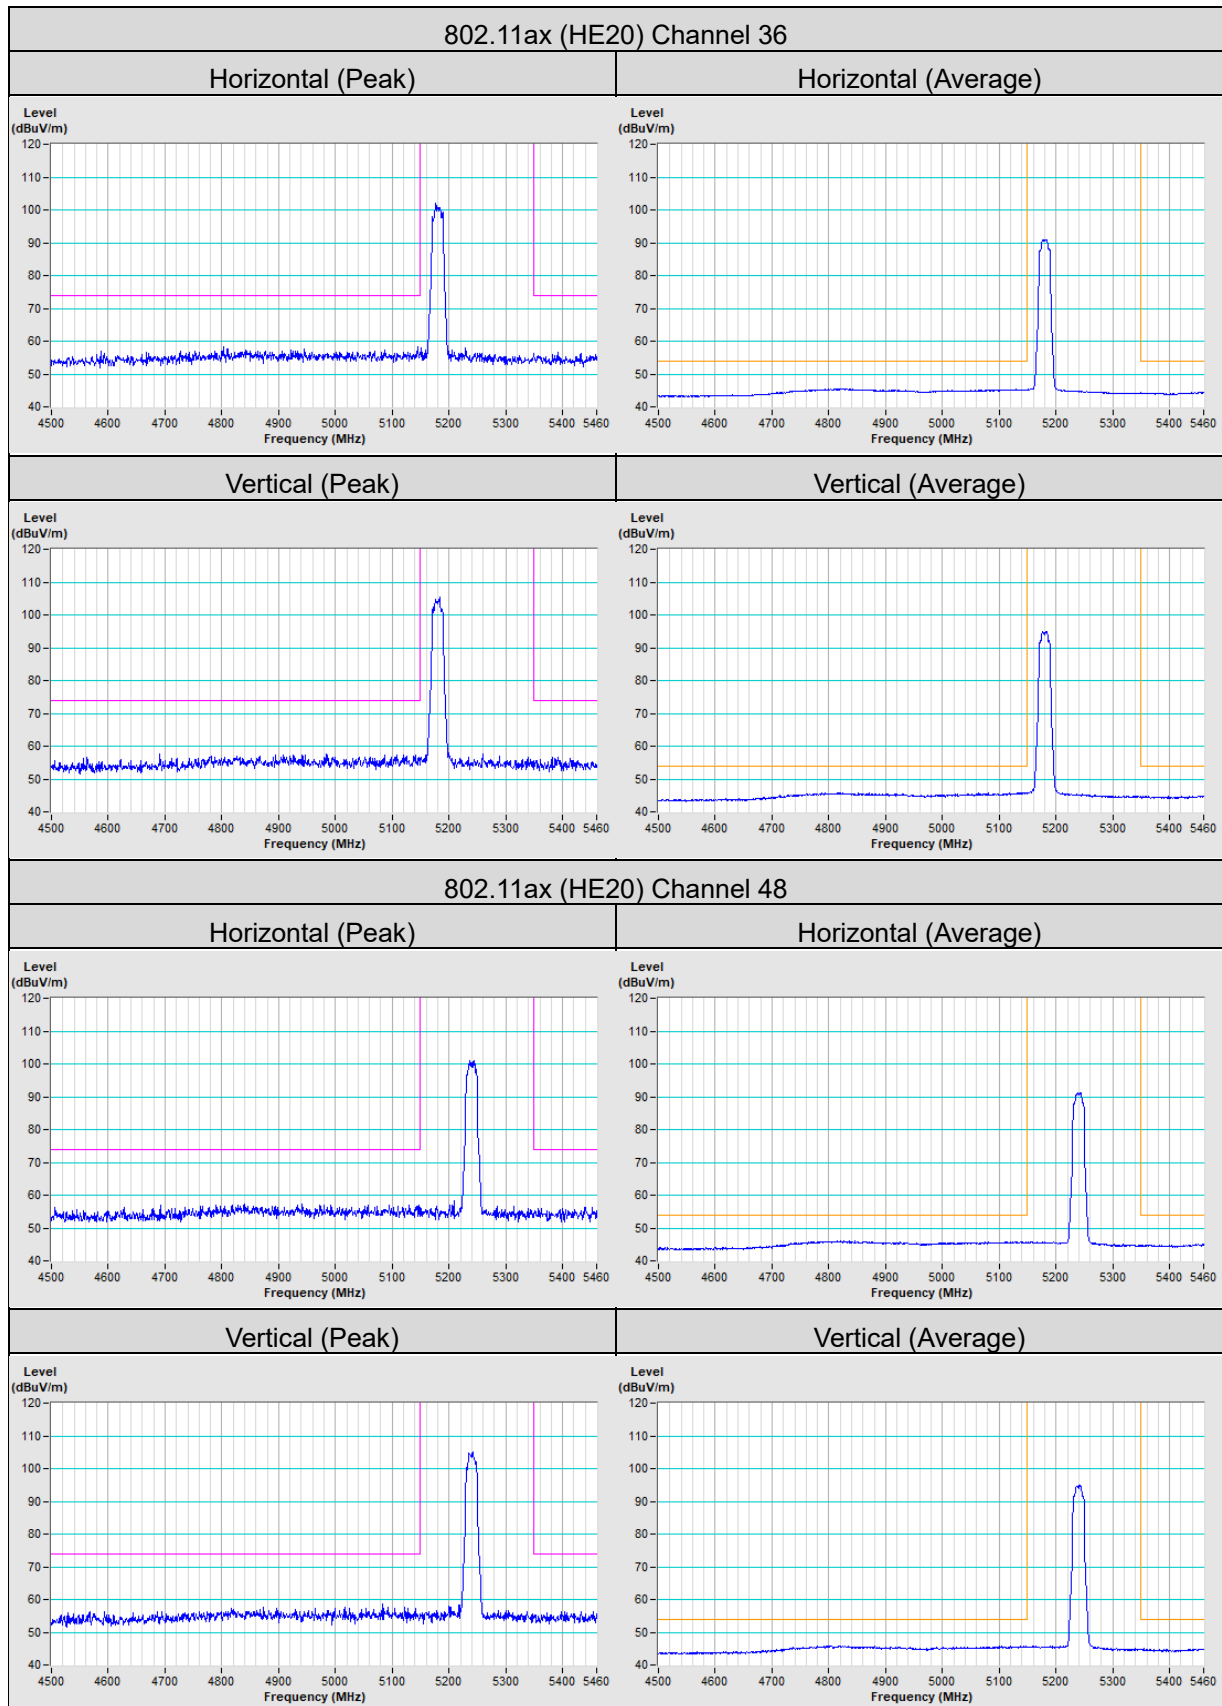


802.11ax (HE20) Channel 52


Horizontal (Peak)

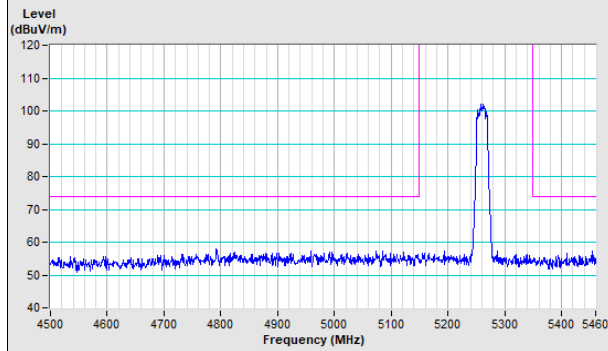


Horizontal (Average)

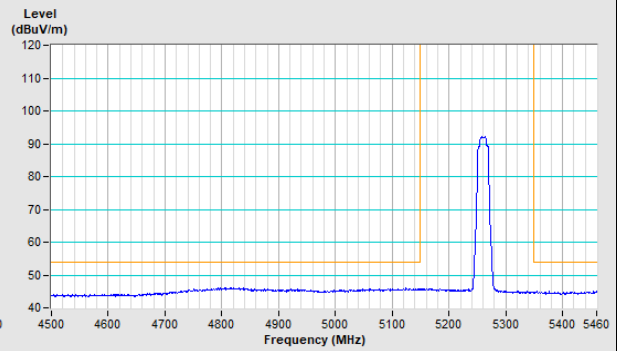

Vertical (Peak)

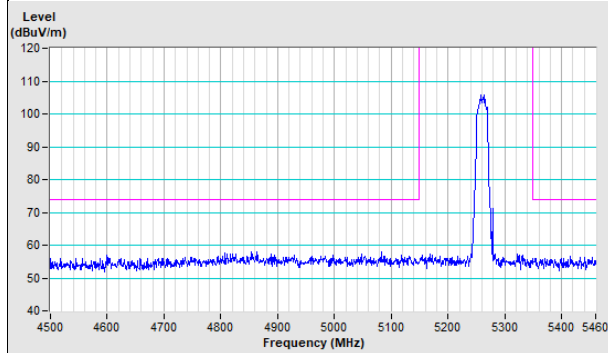


Vertical (Average)

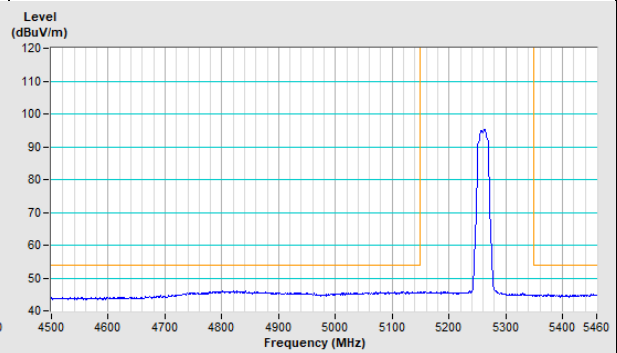


802.11ax (HE20) Channel 64


Horizontal (Peak)

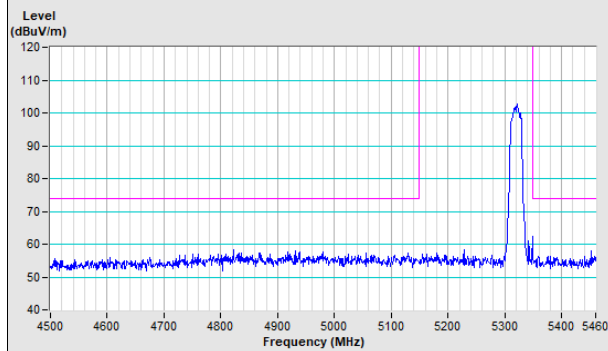


Horizontal (Average)

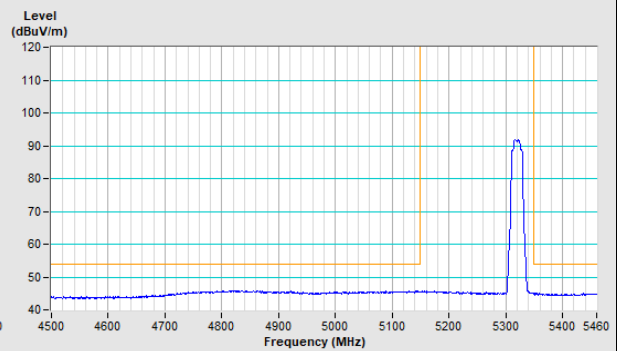



Vertical (Peak)

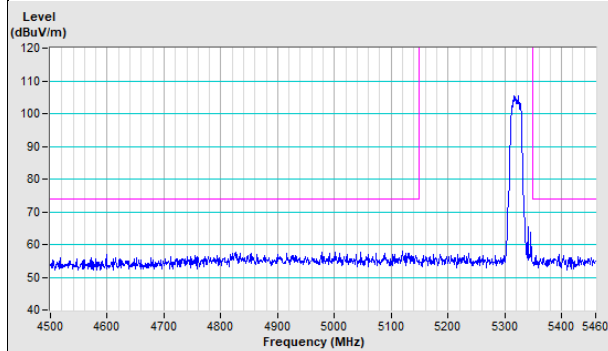



Vertical (Average)

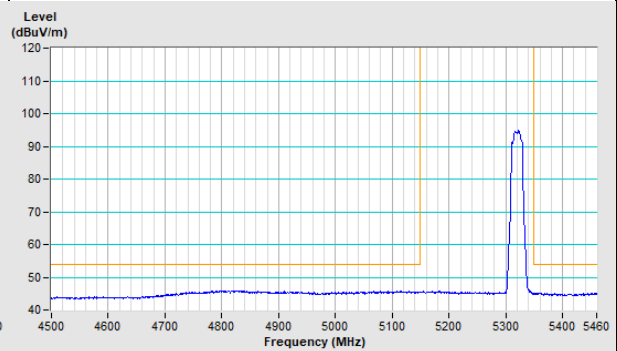


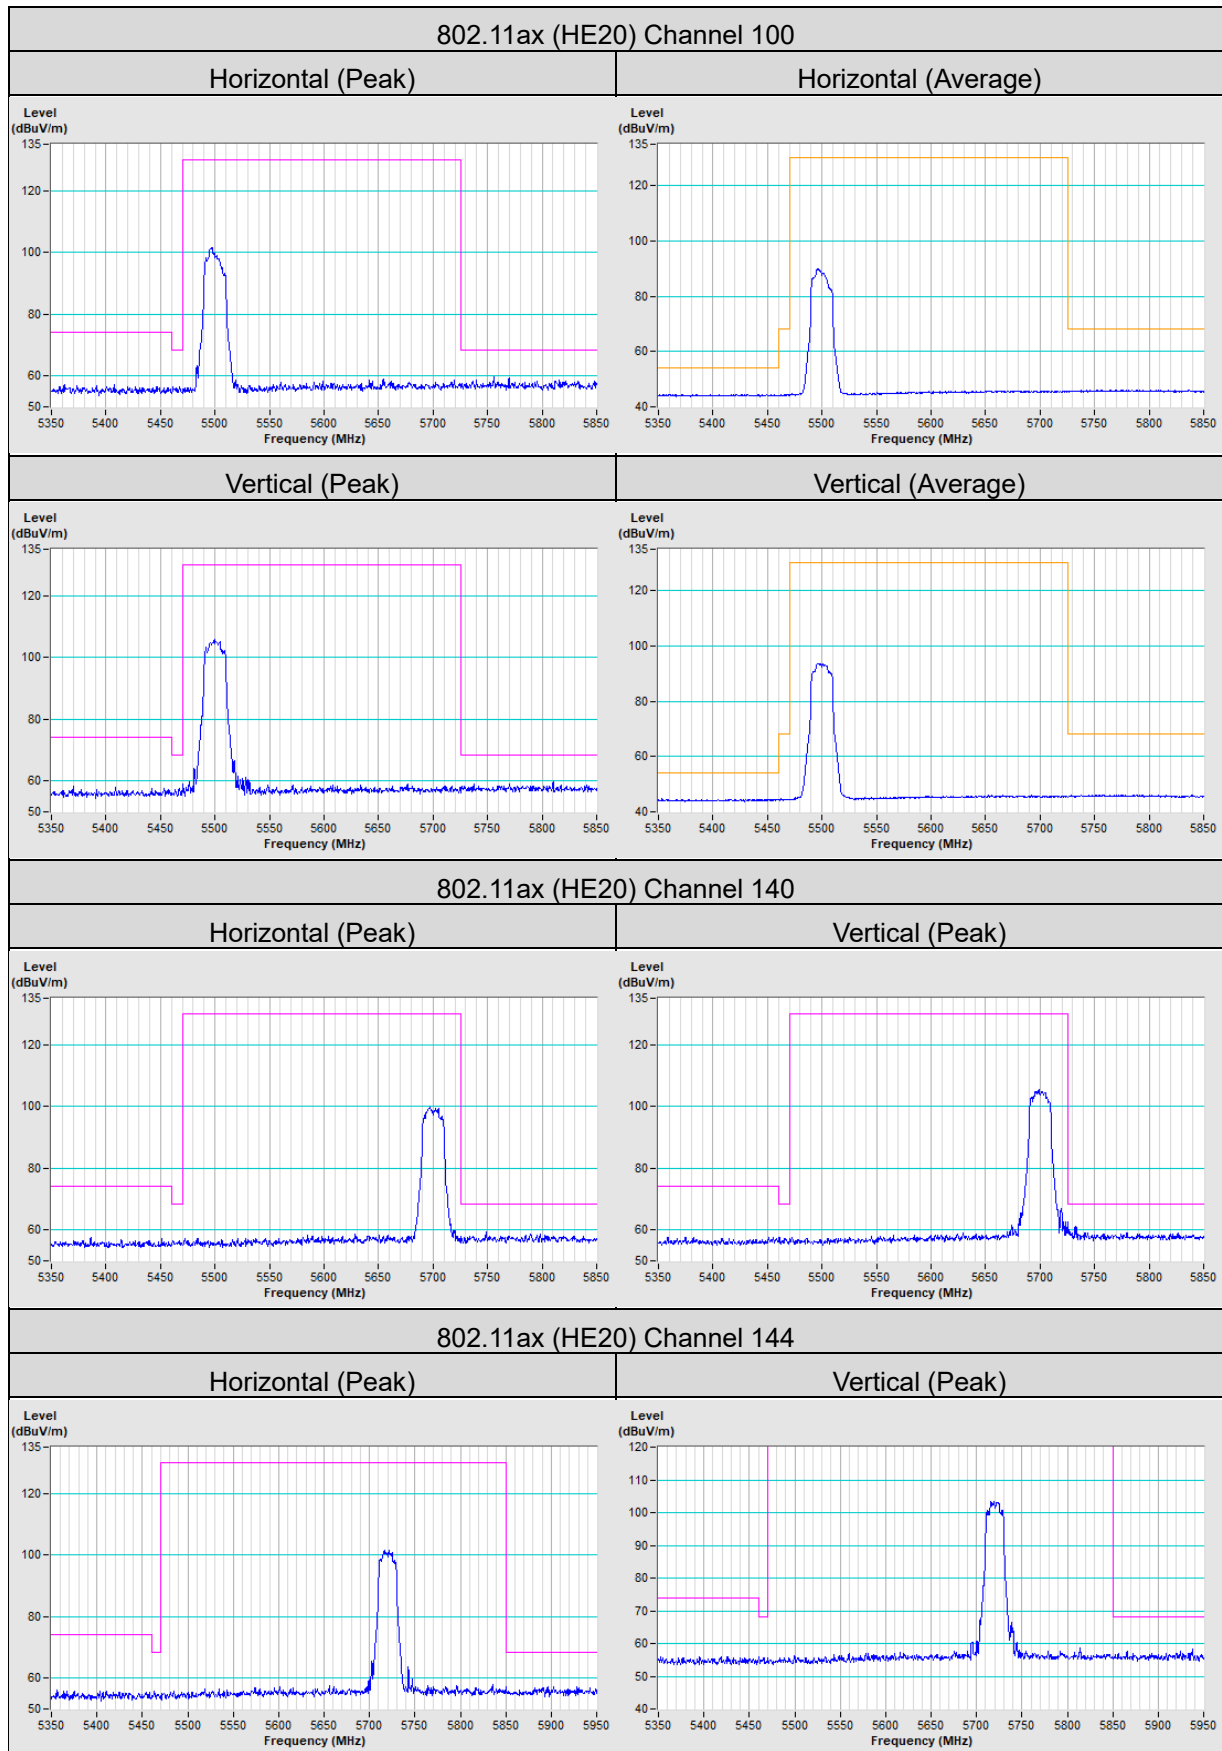


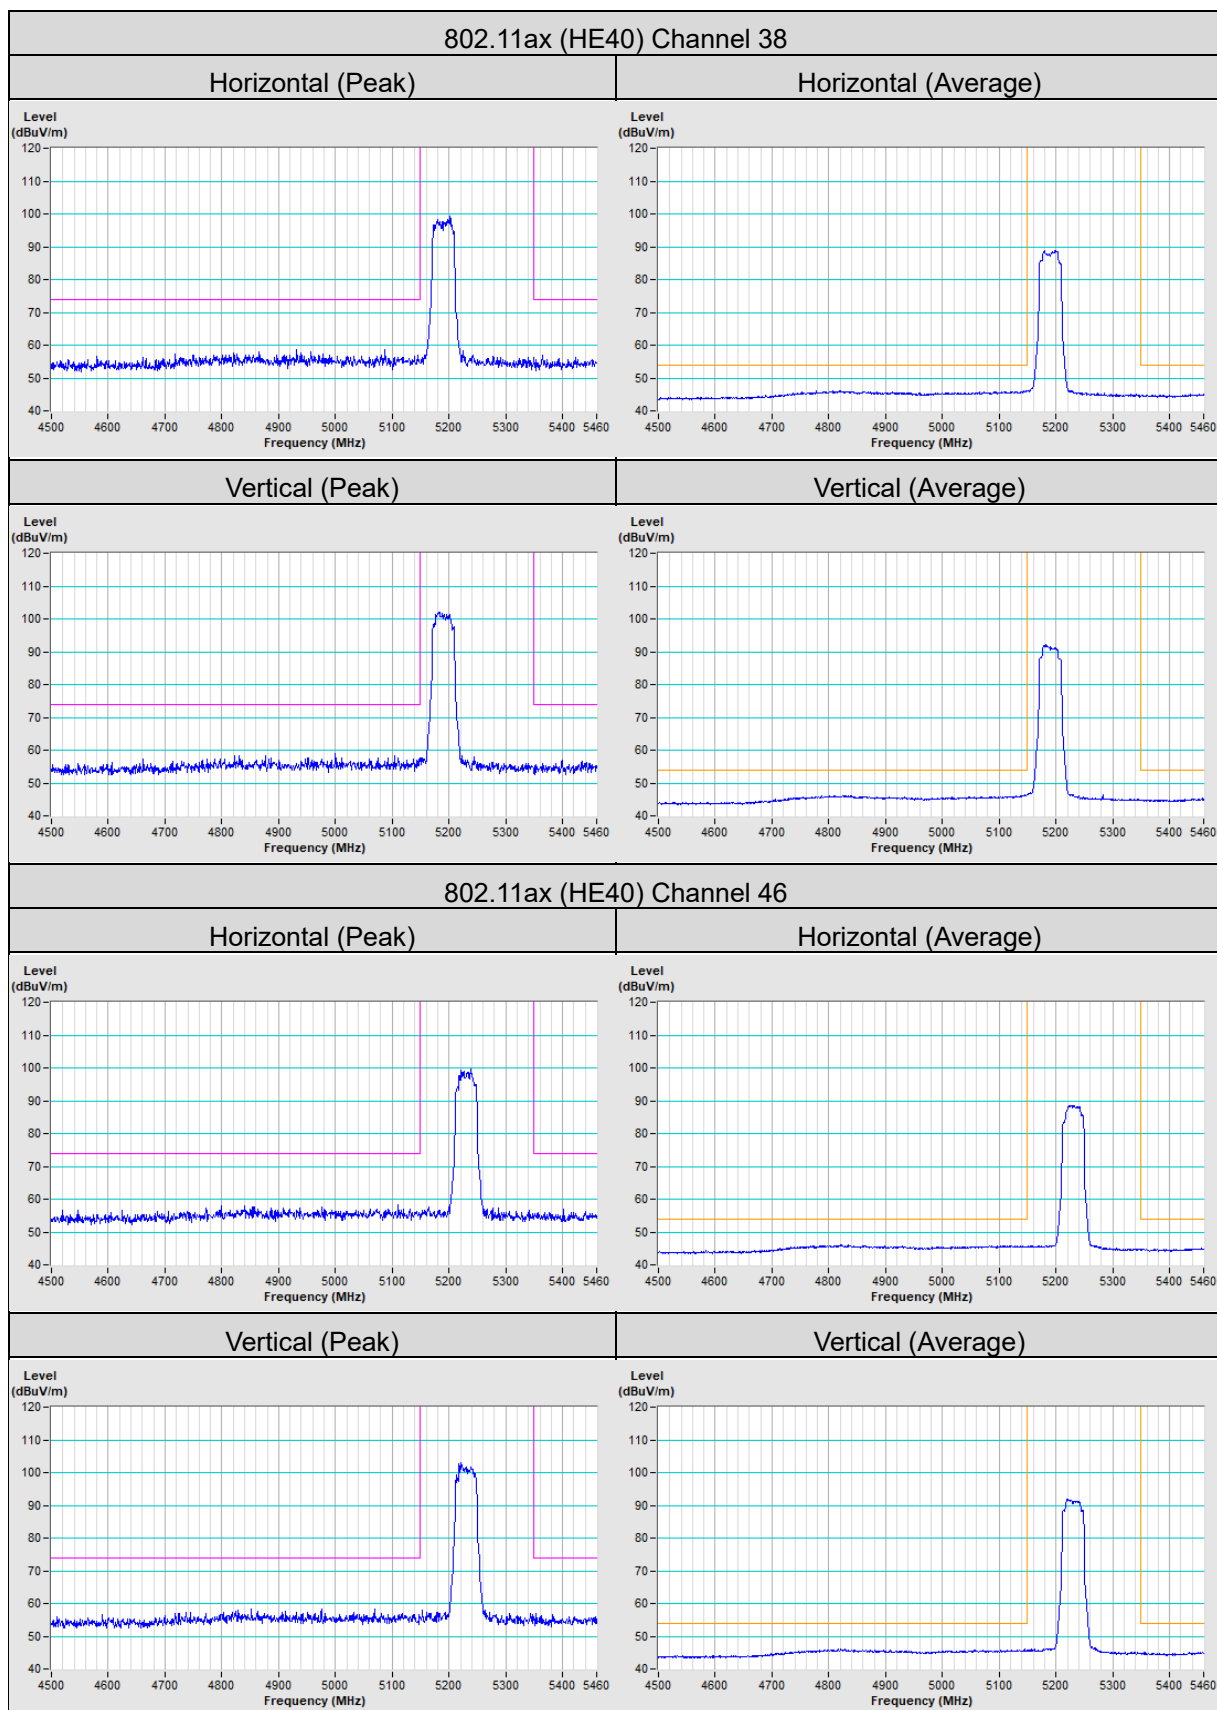


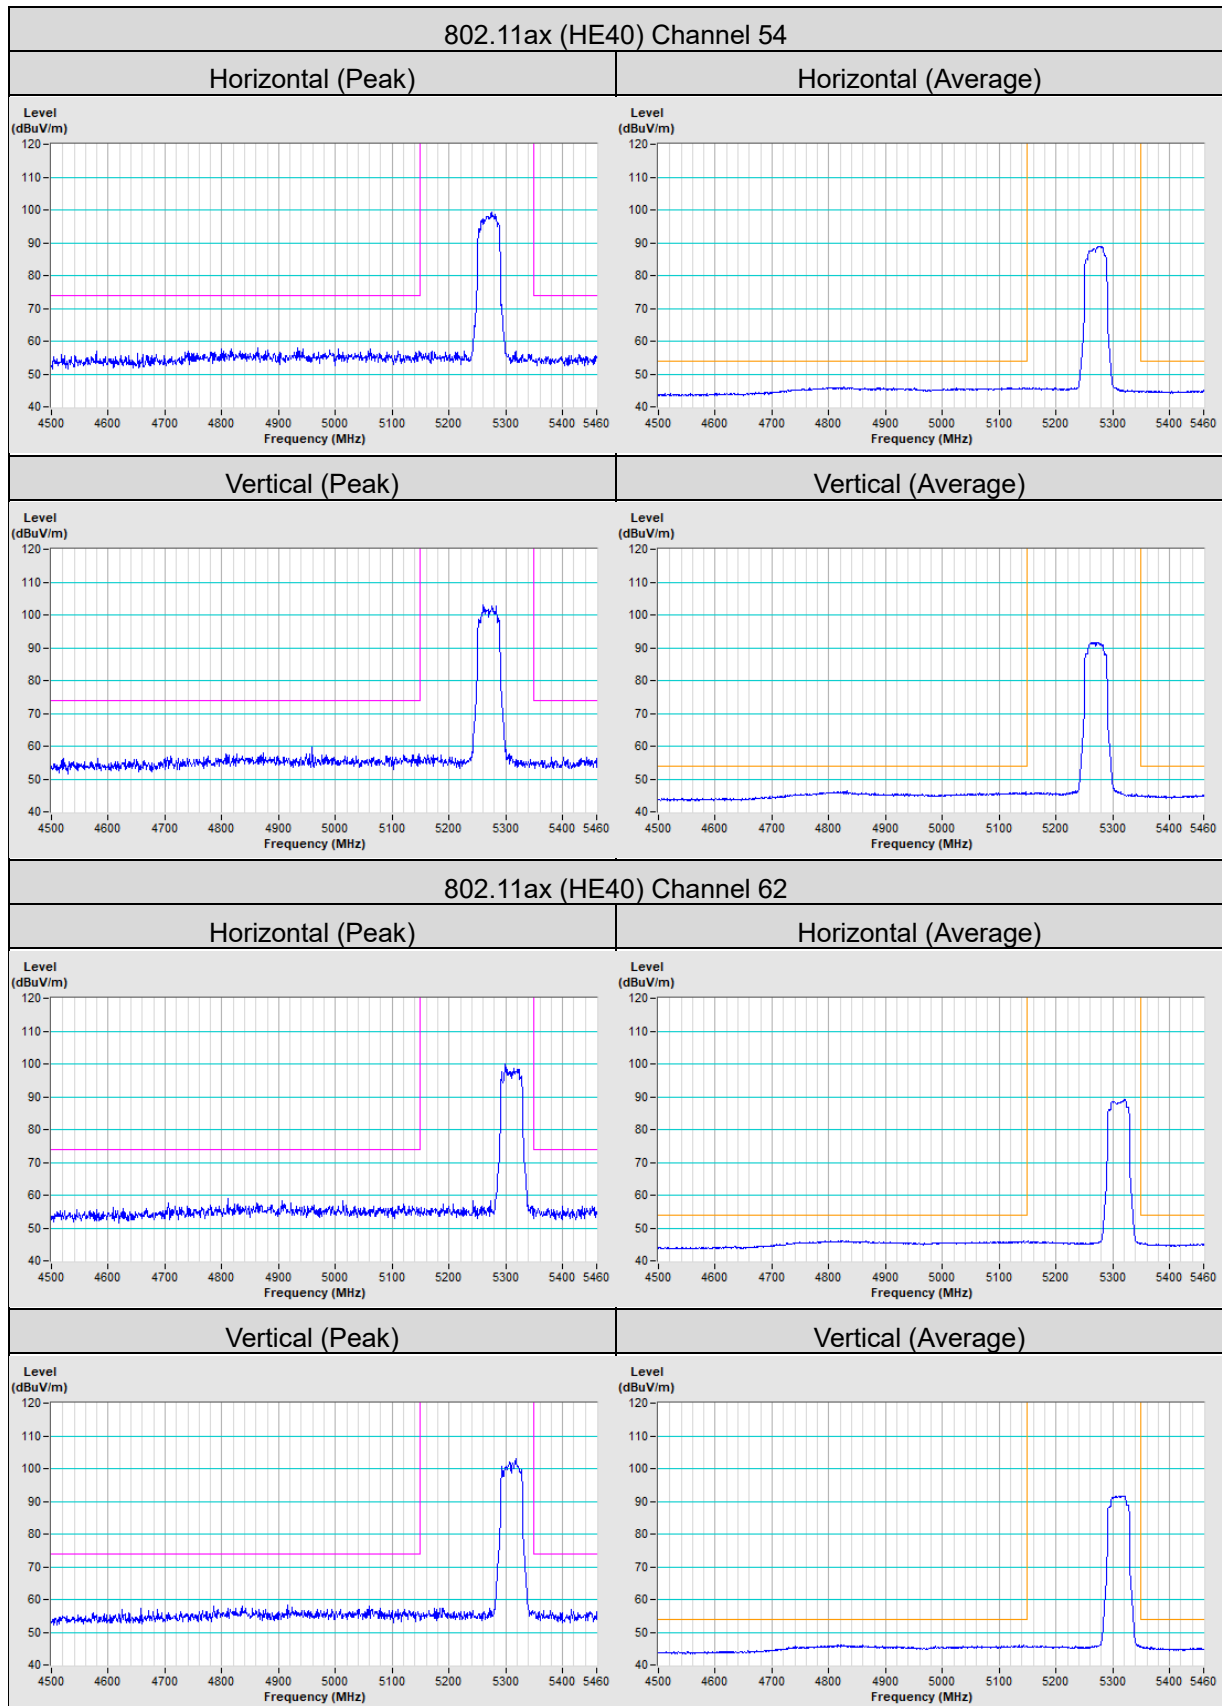

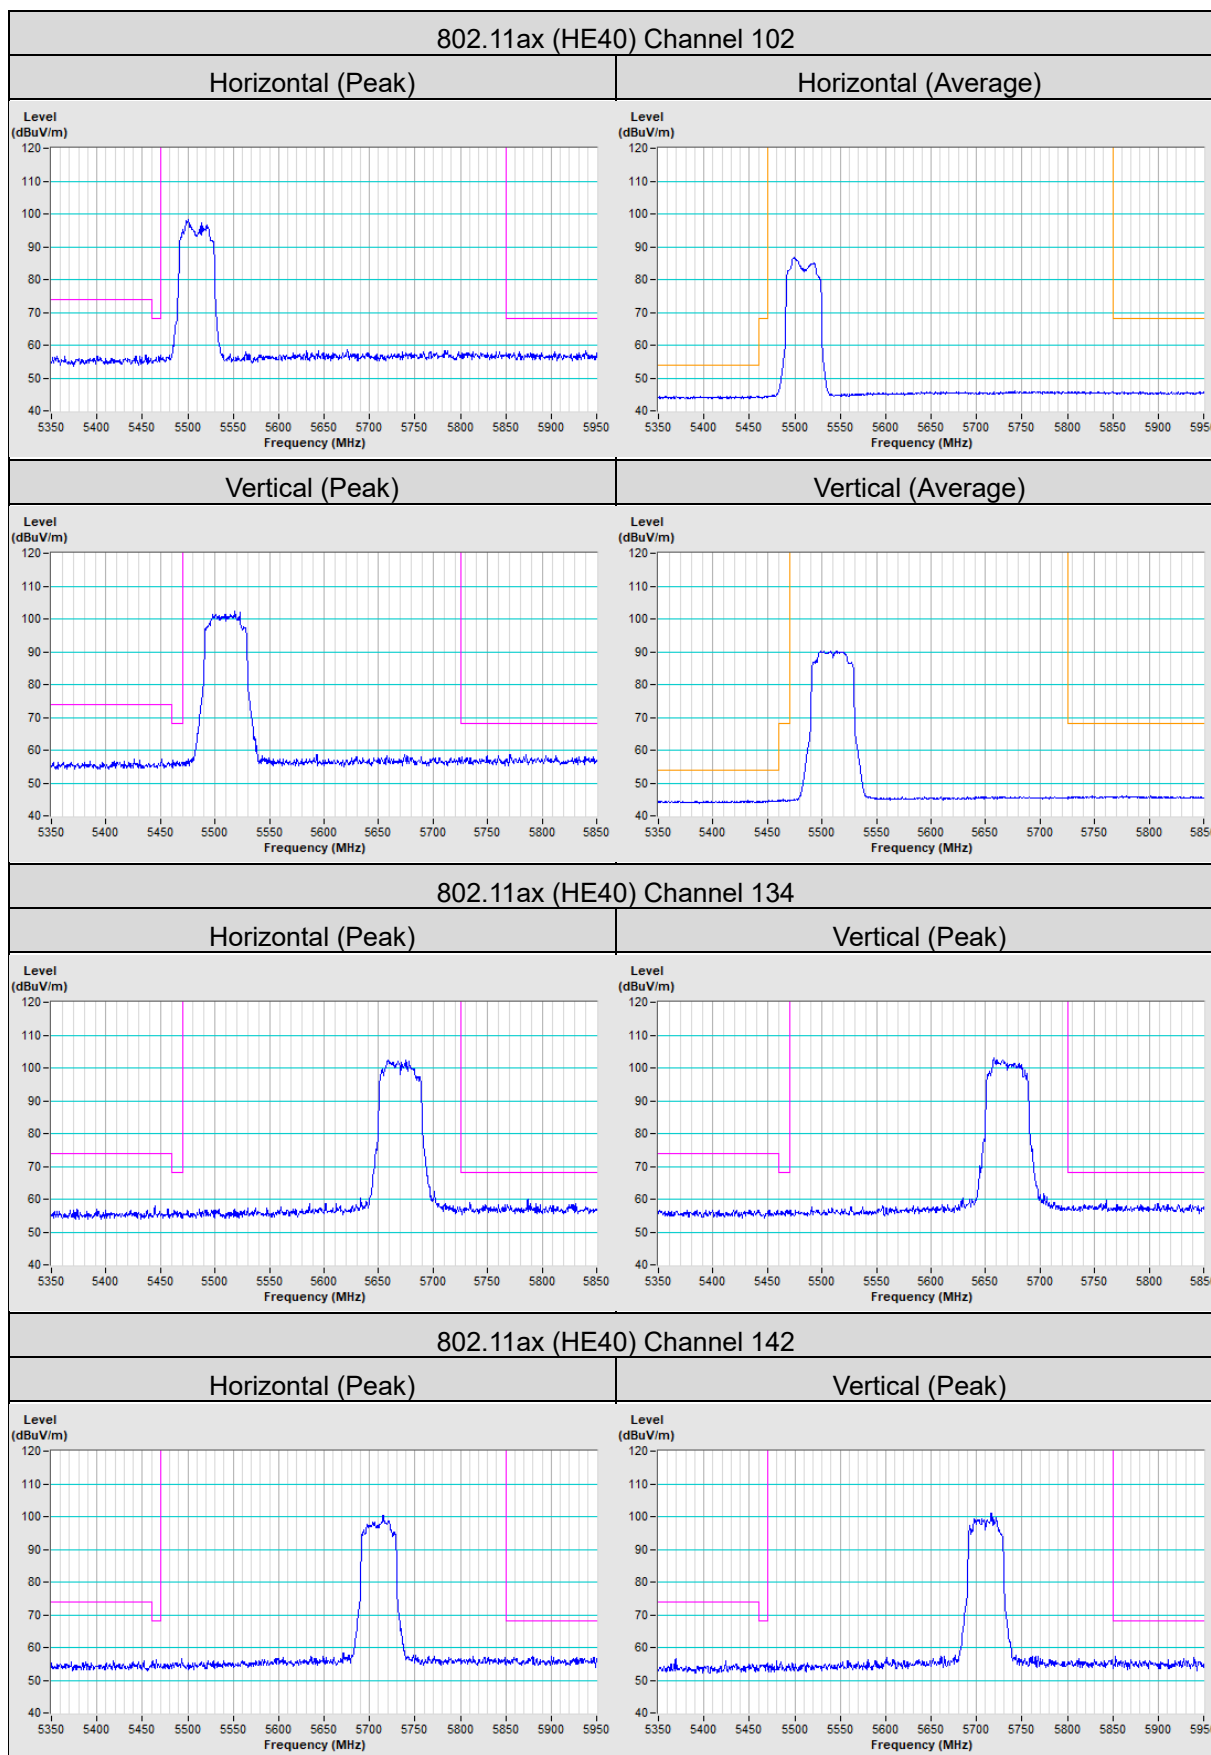


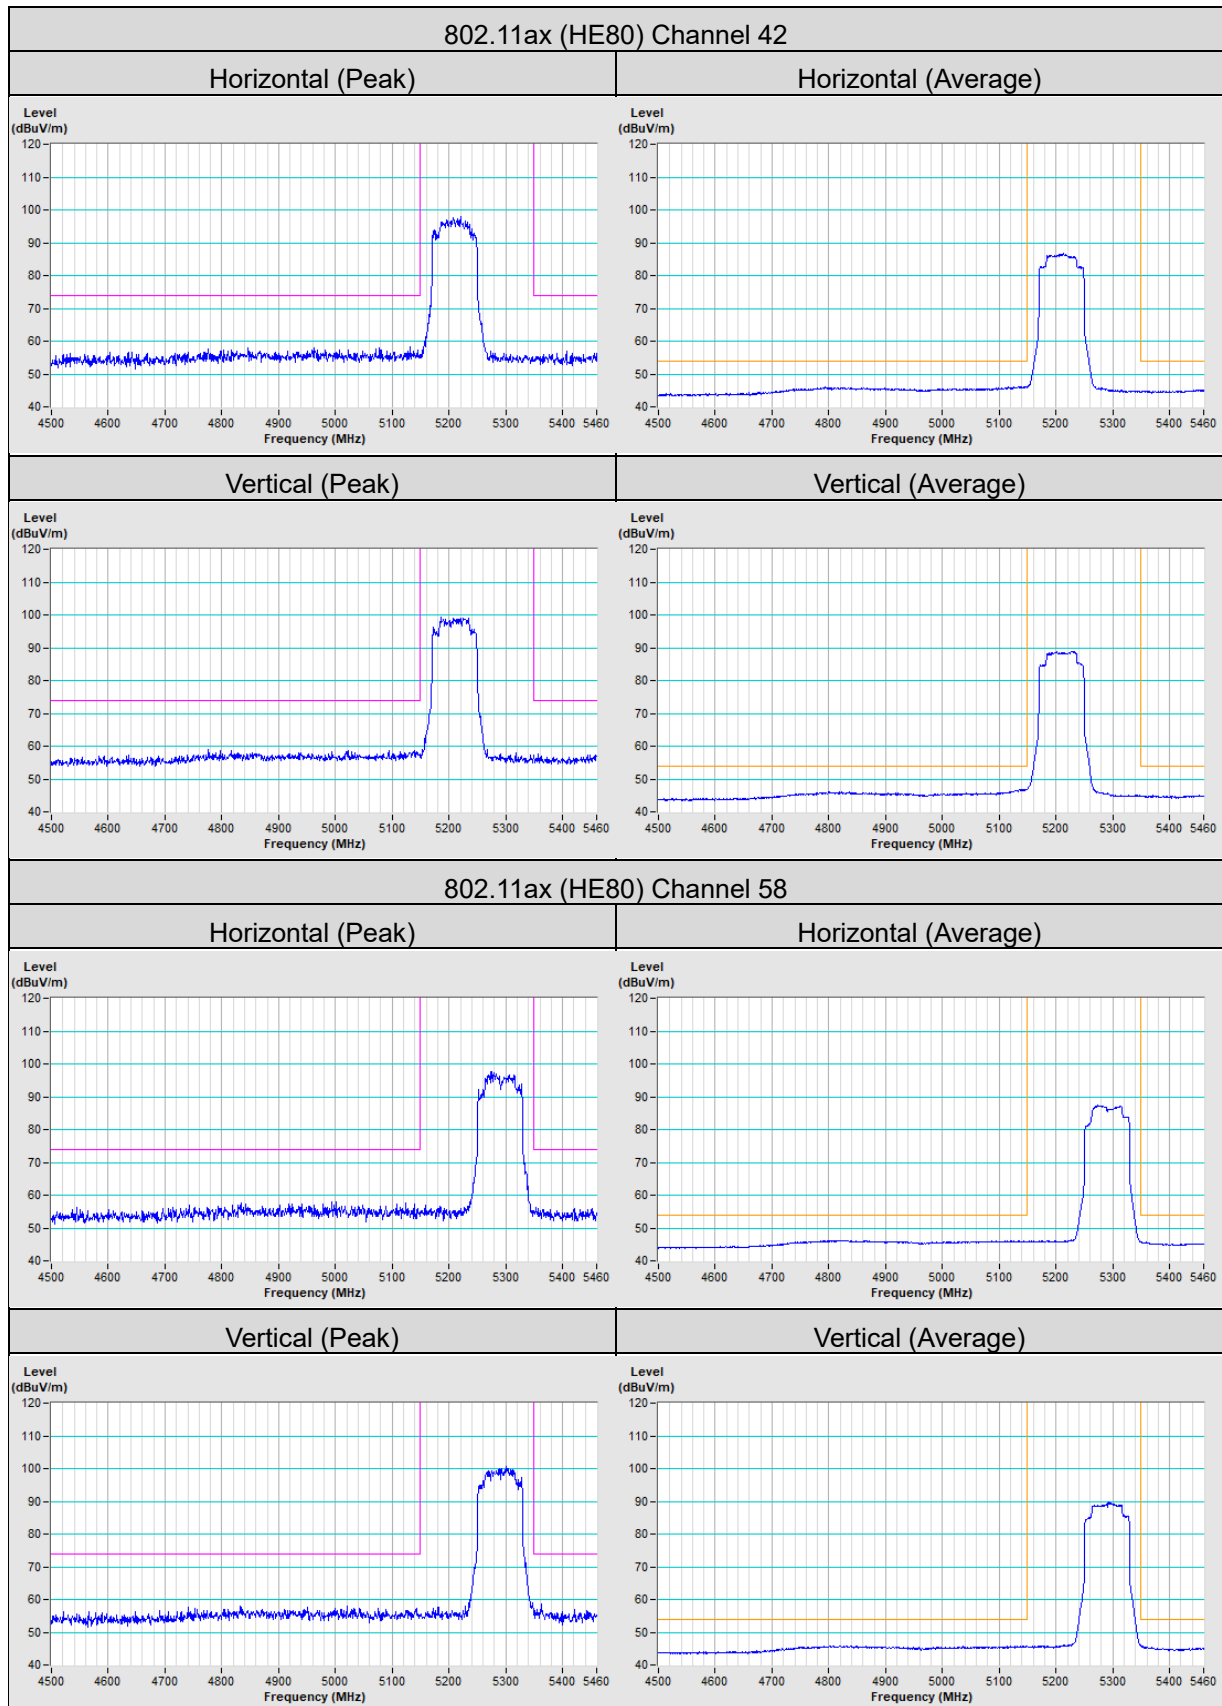


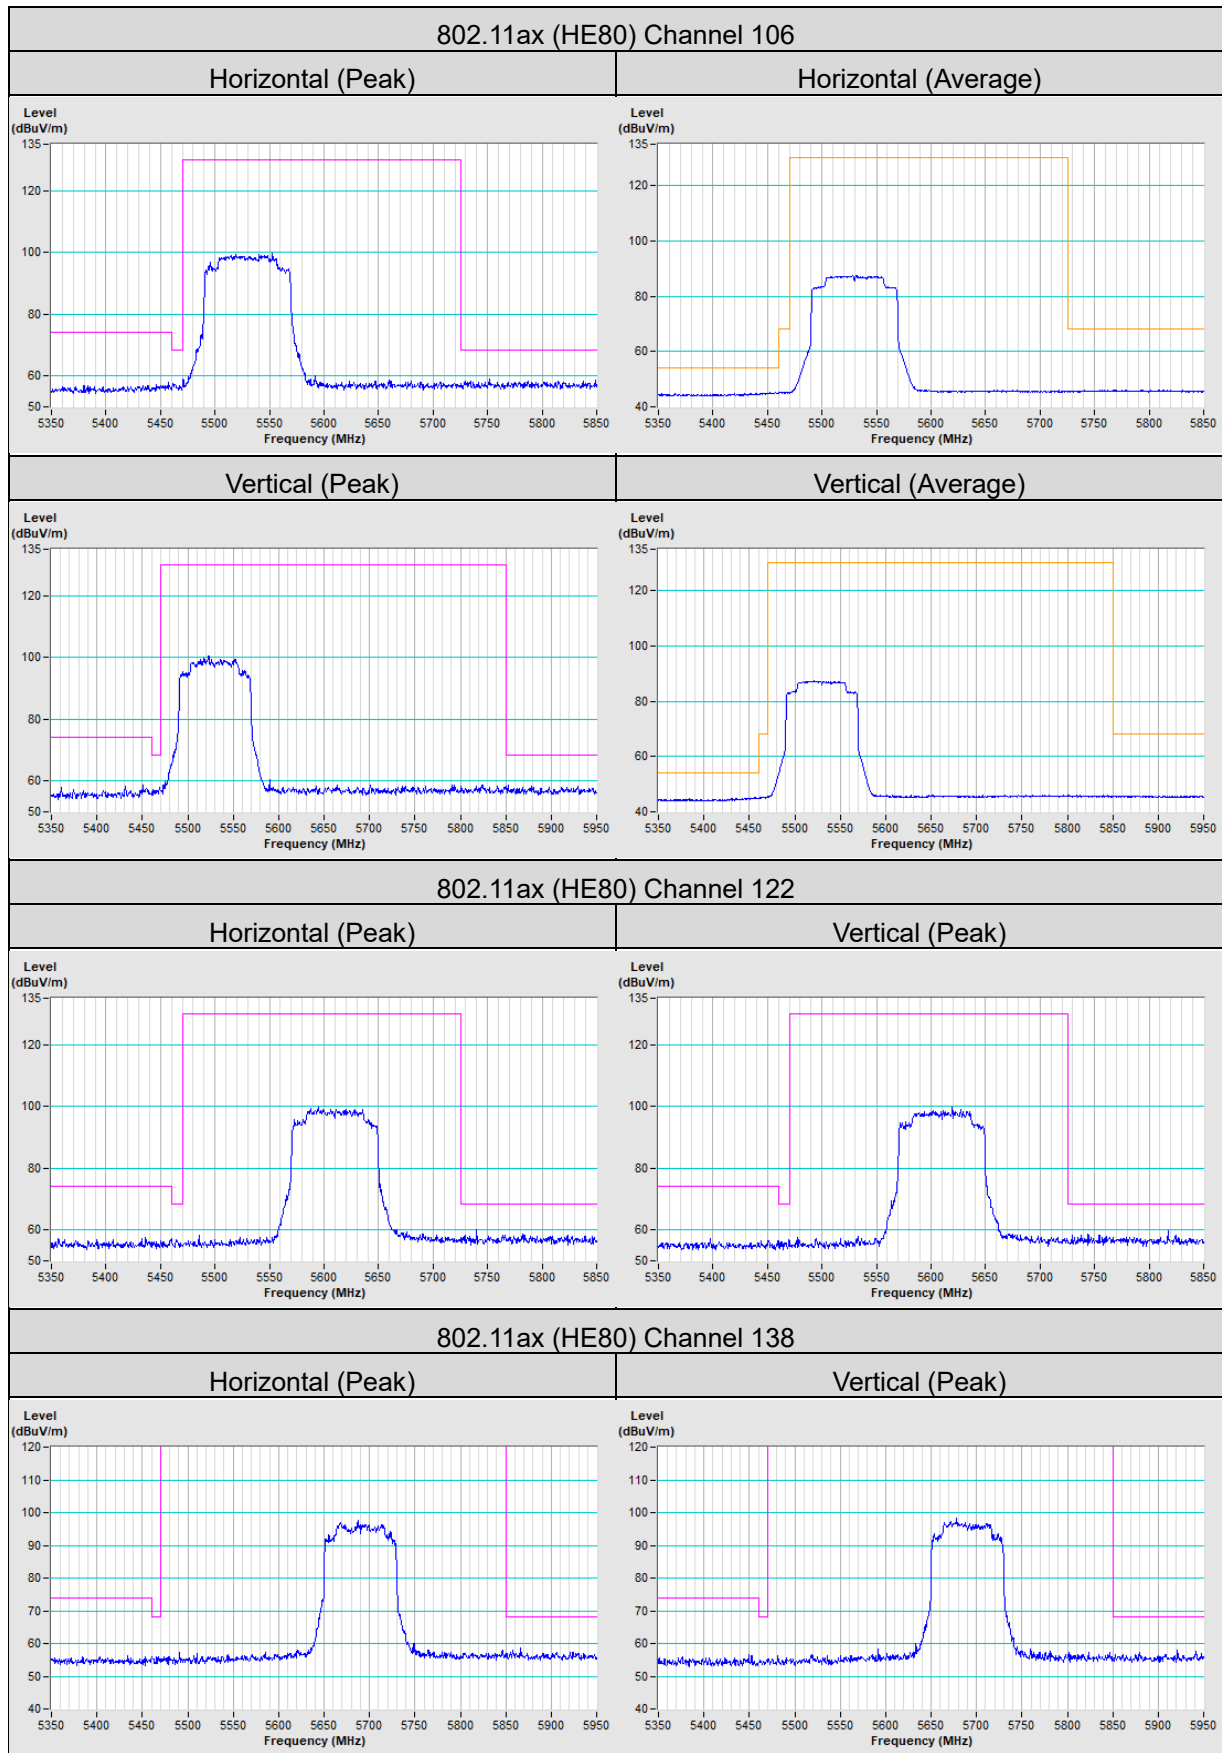


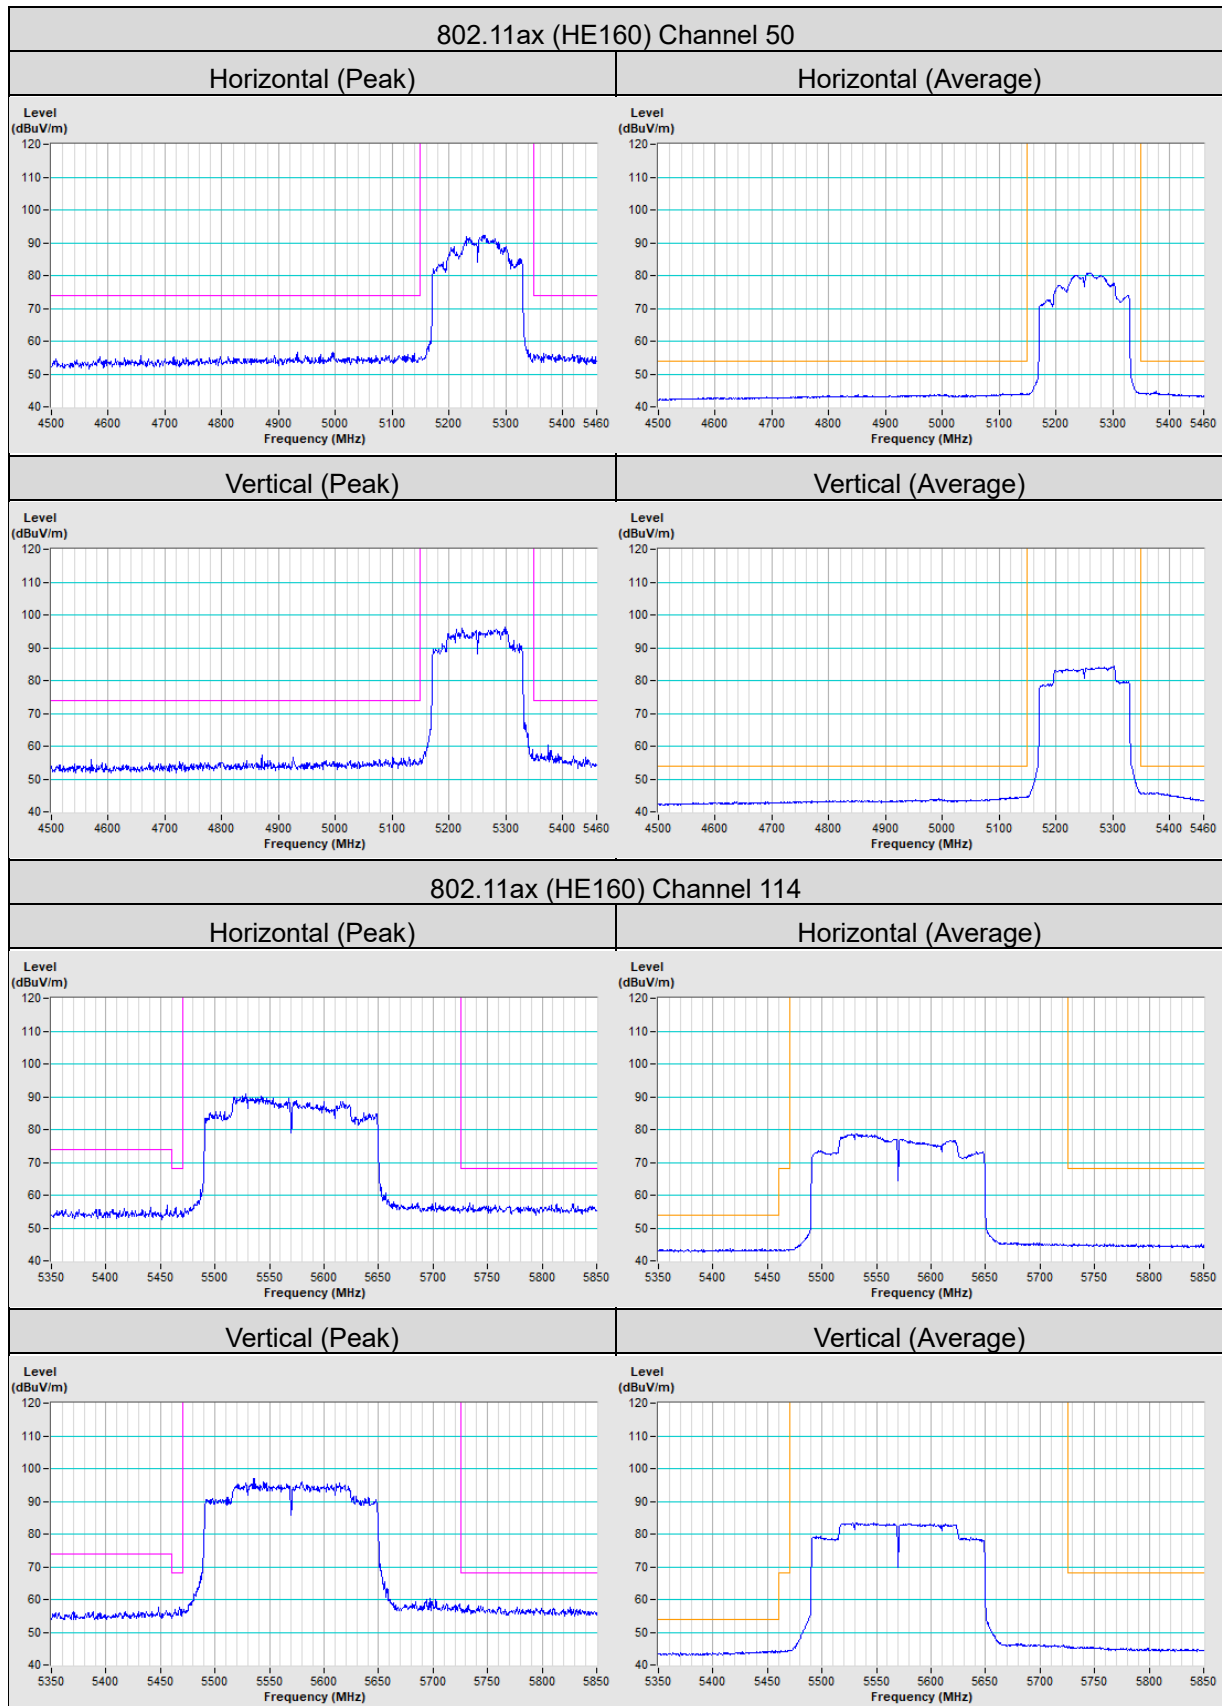



Partial RU

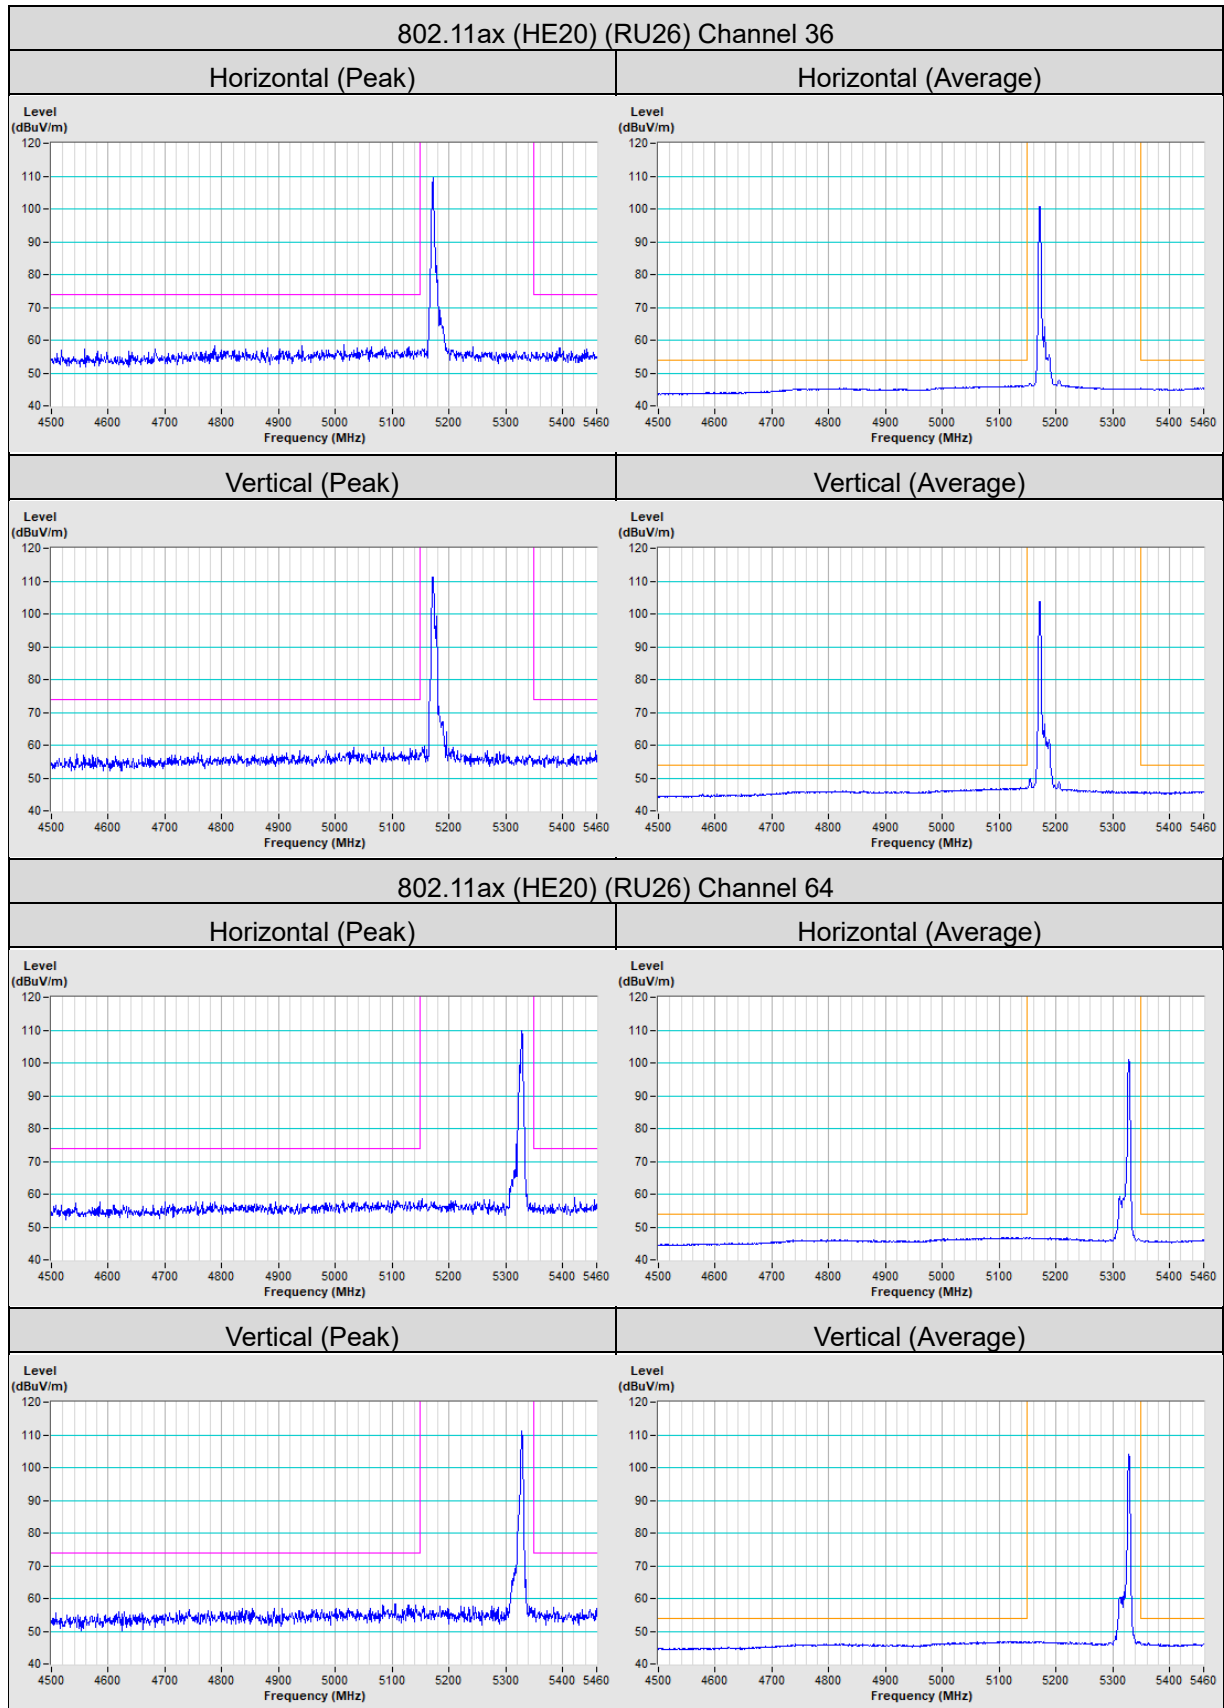


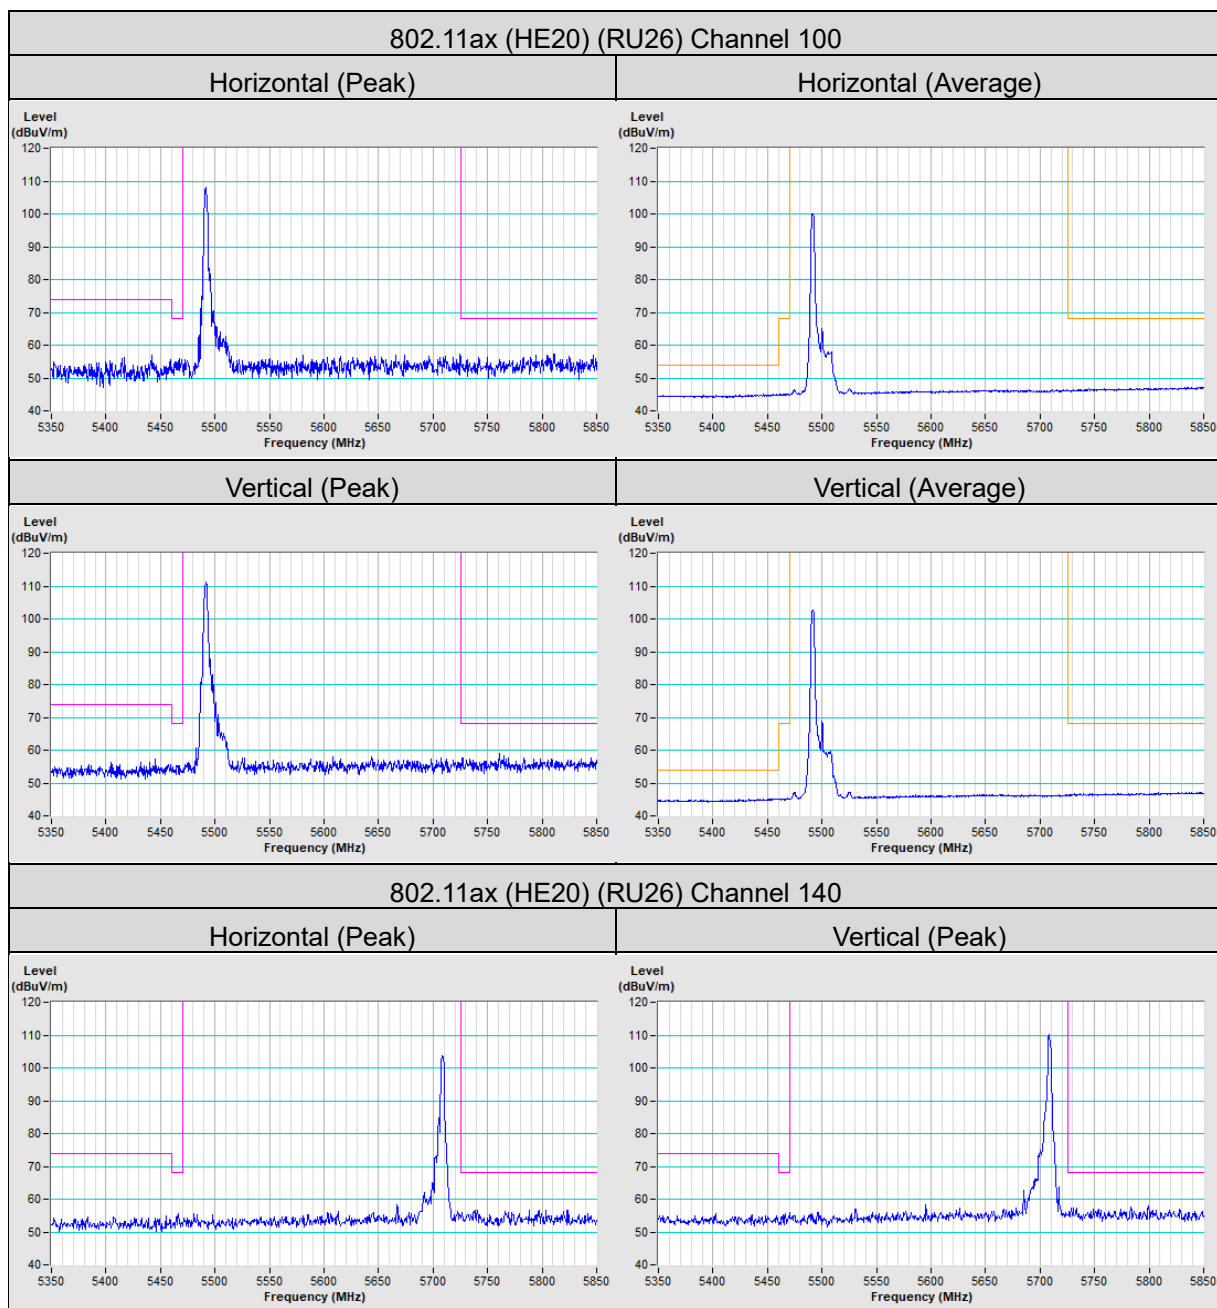

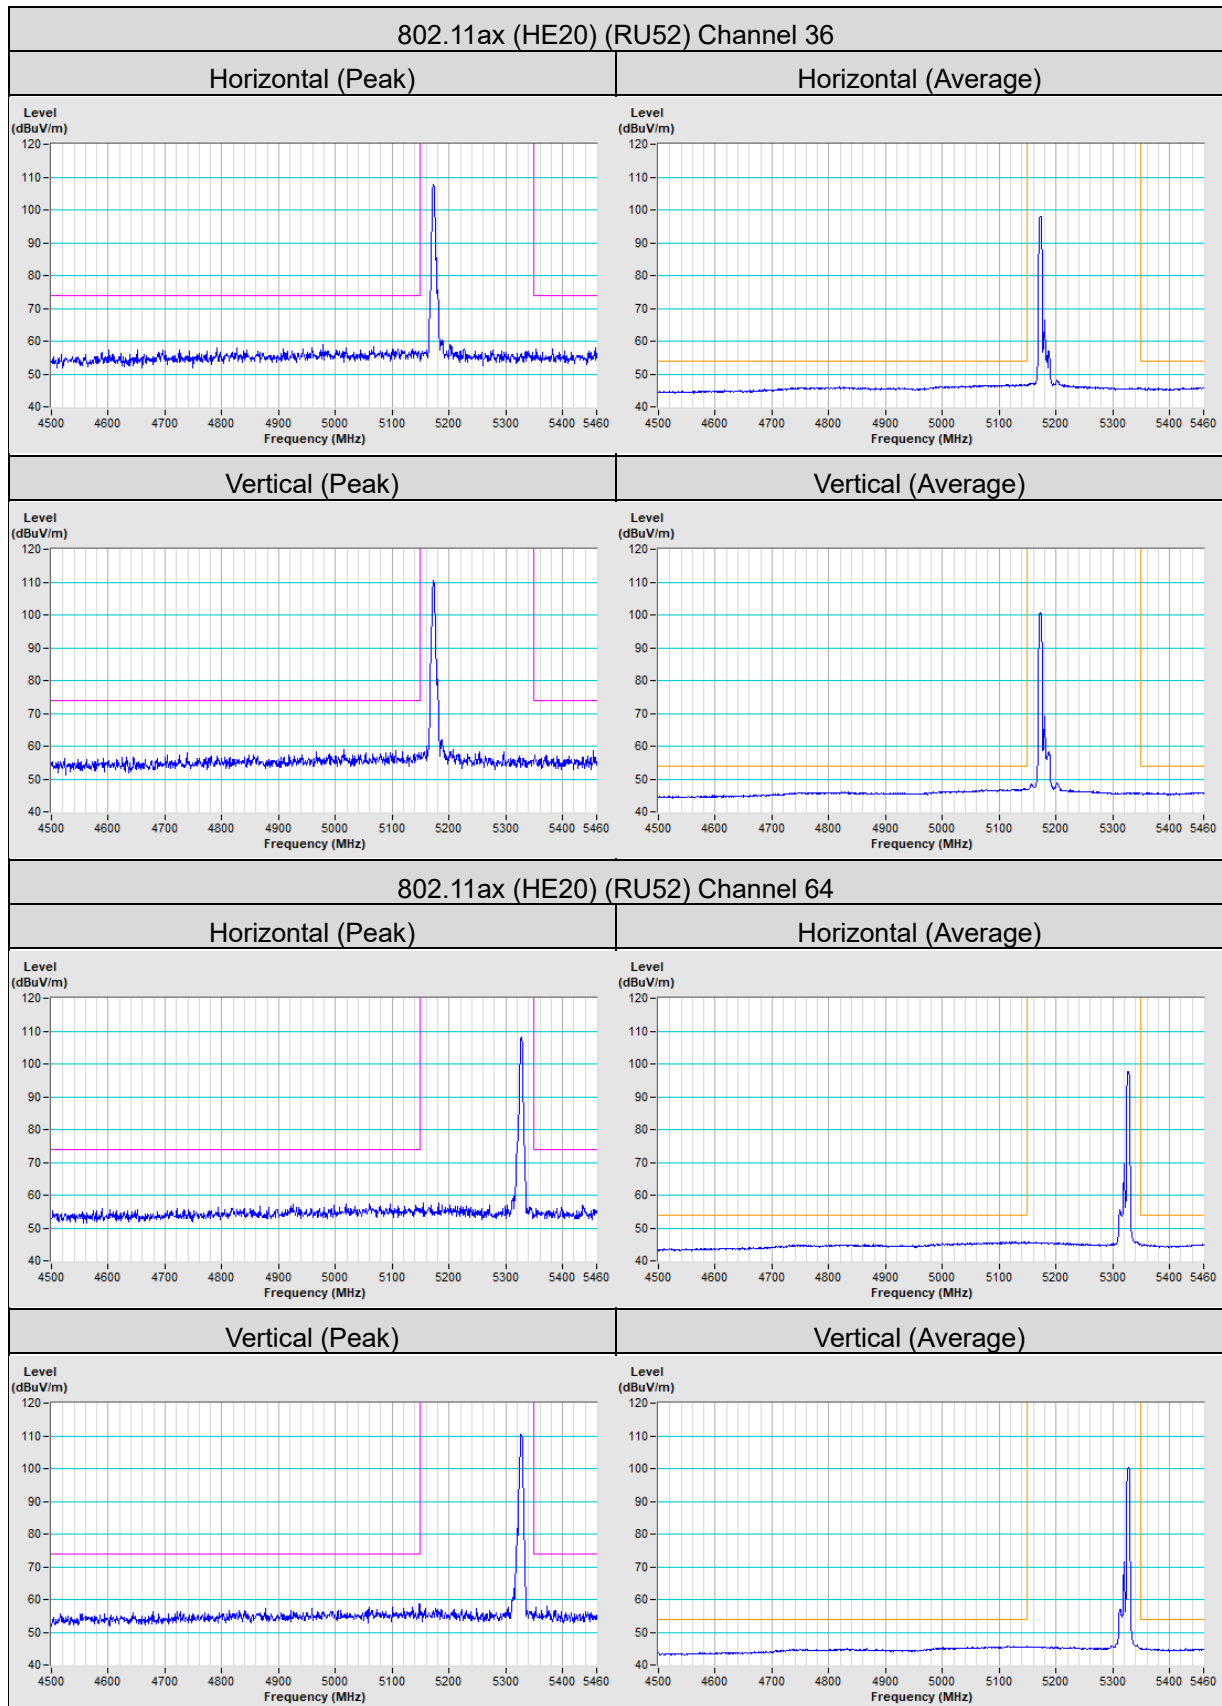

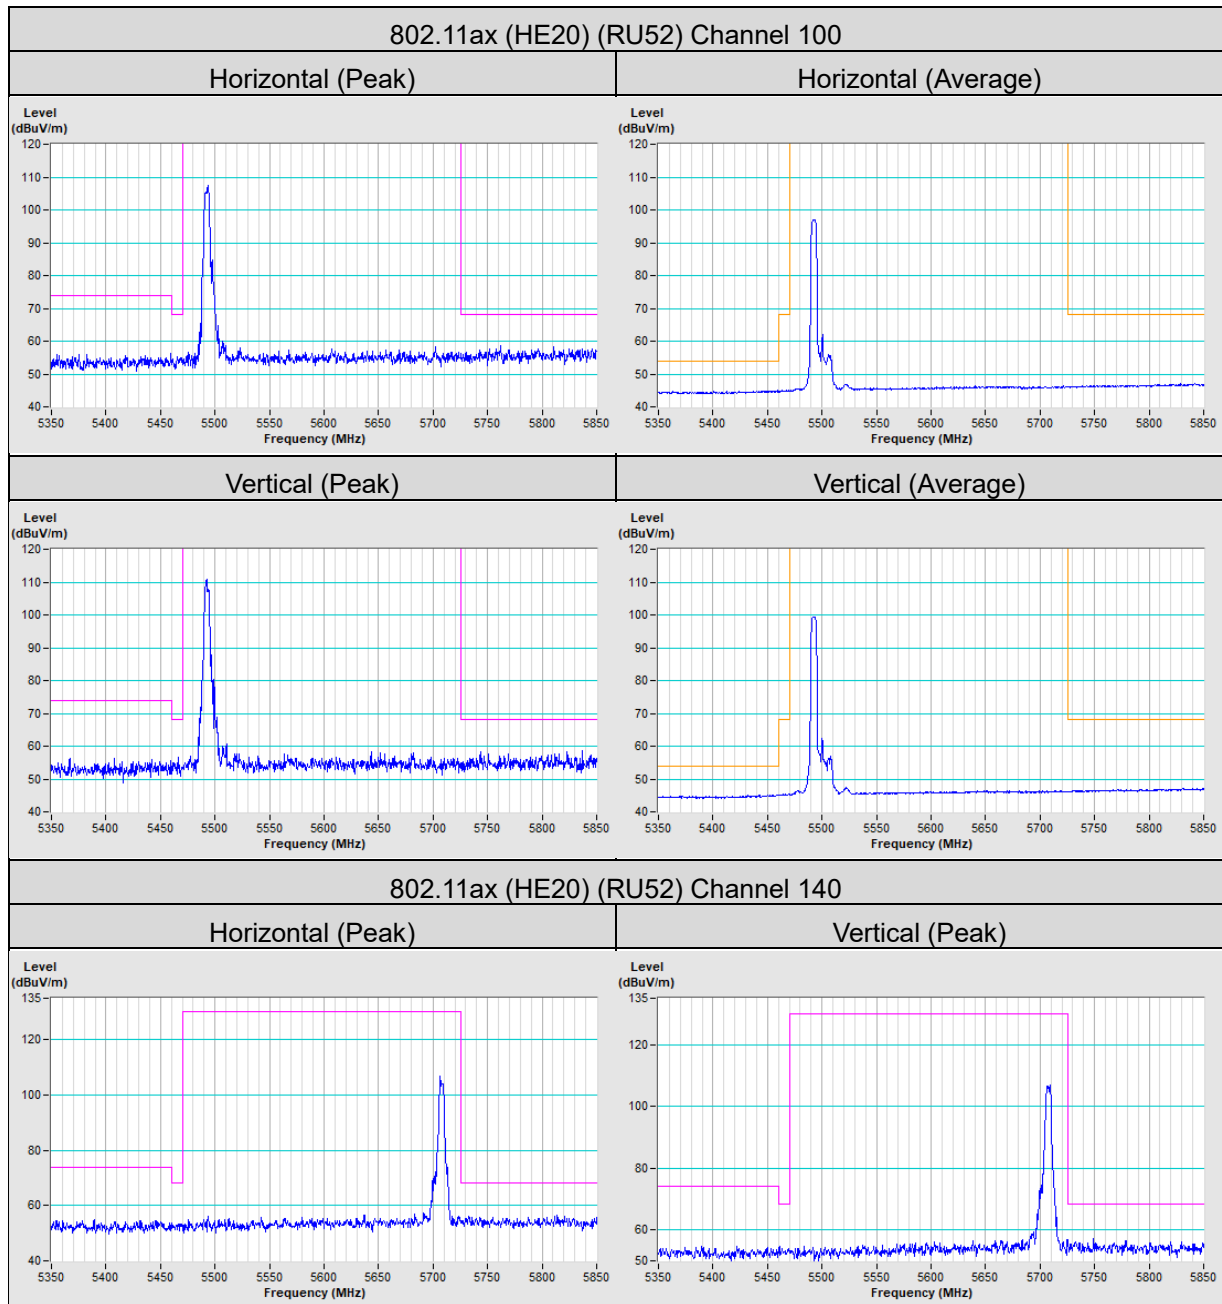


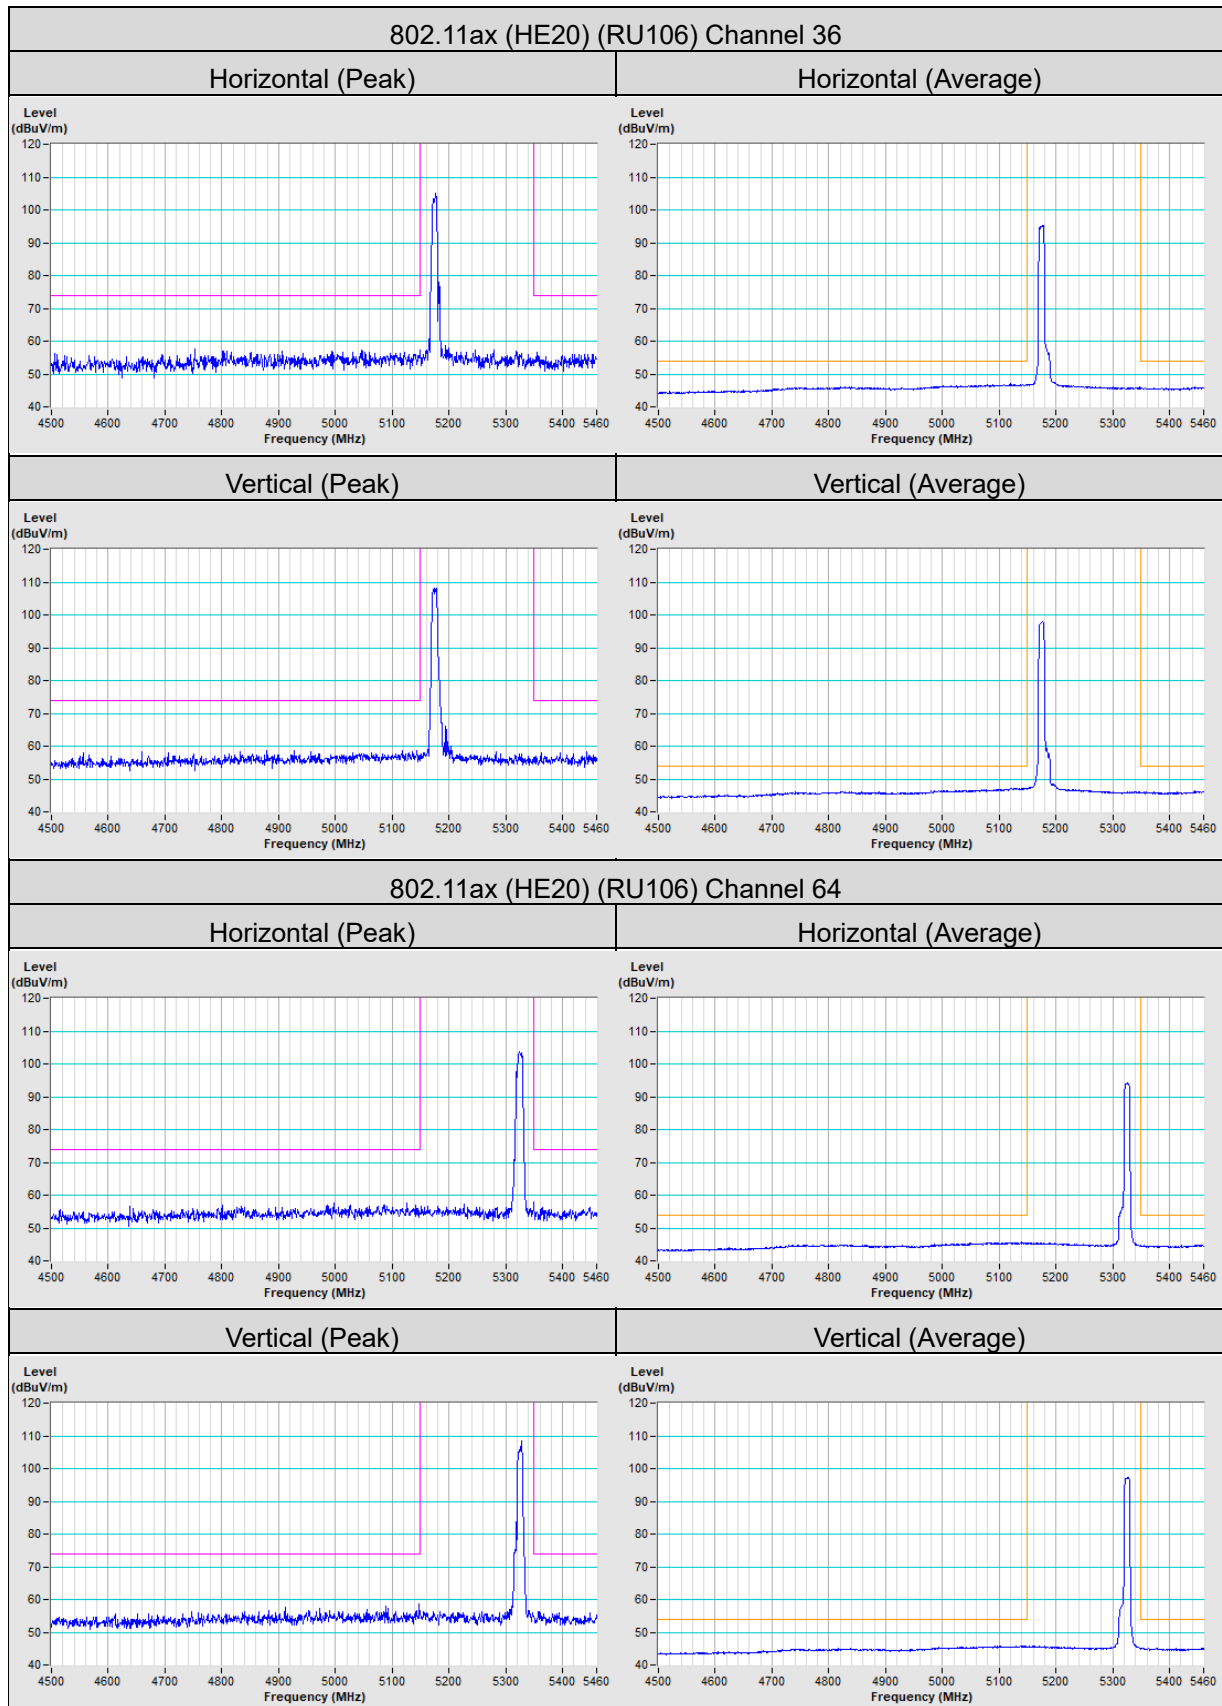

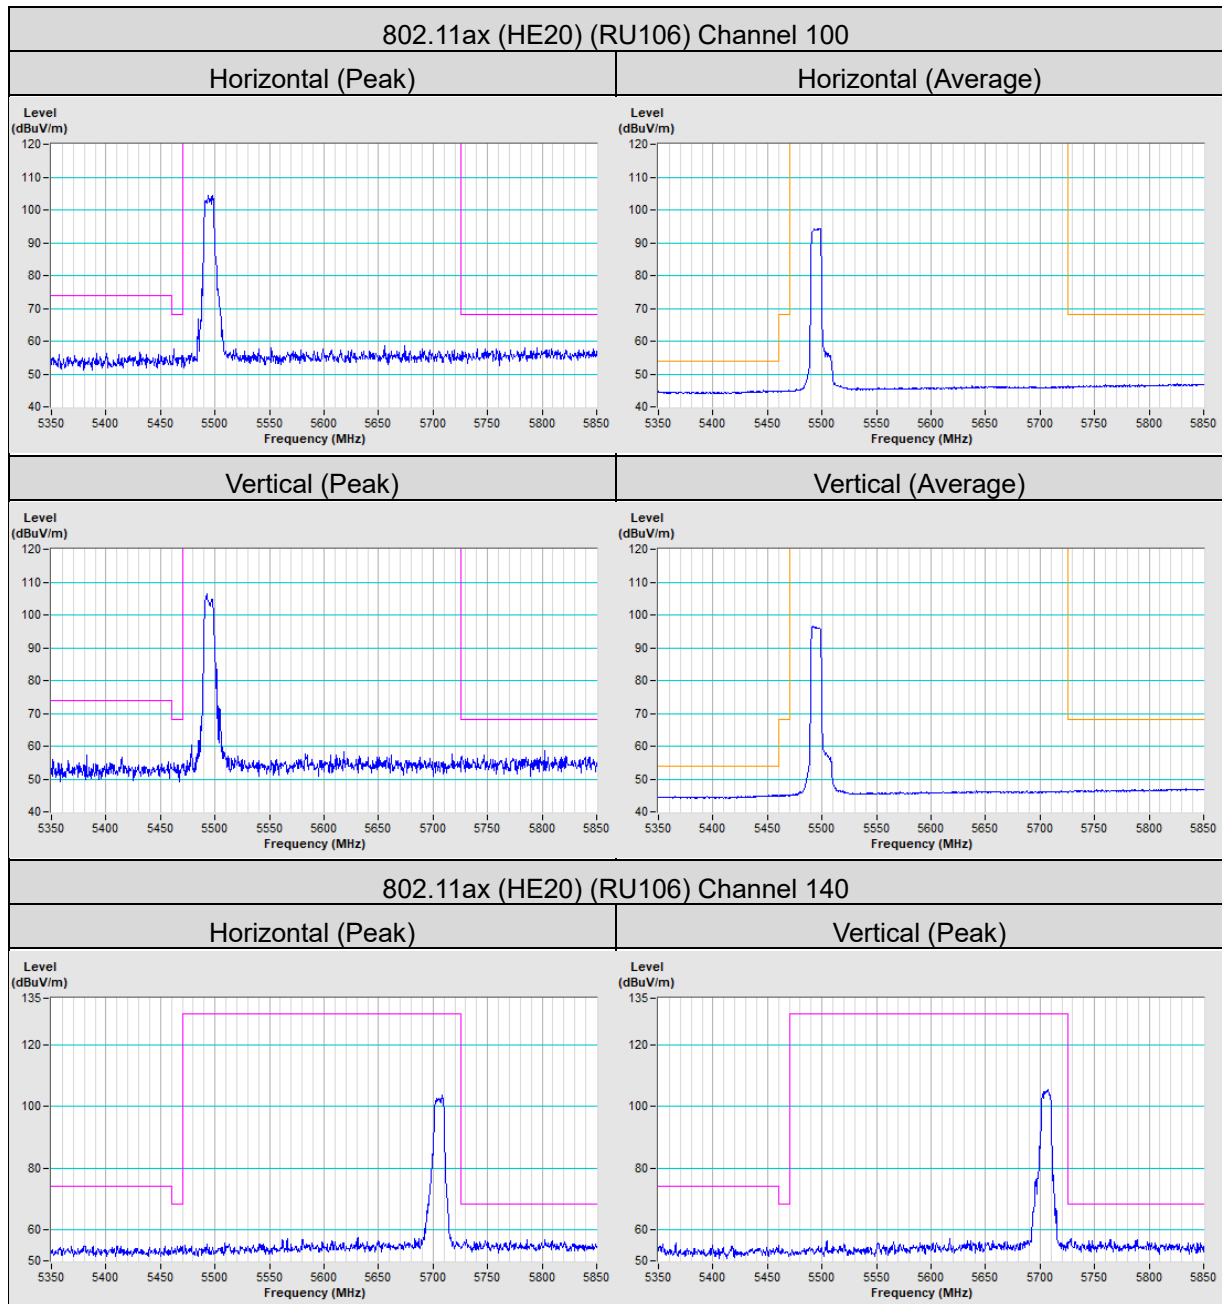


802.11ax (HE40) (RU242) Channel 38


Horizontal (Peak)

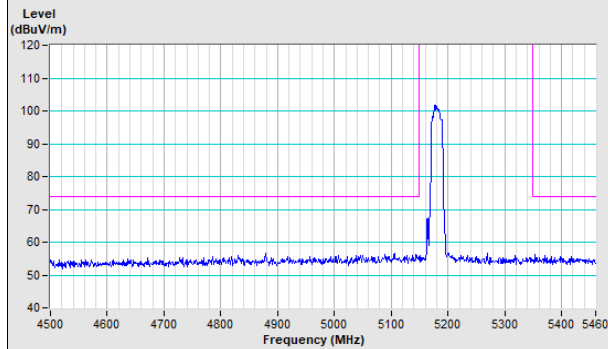


Horizontal (Average)

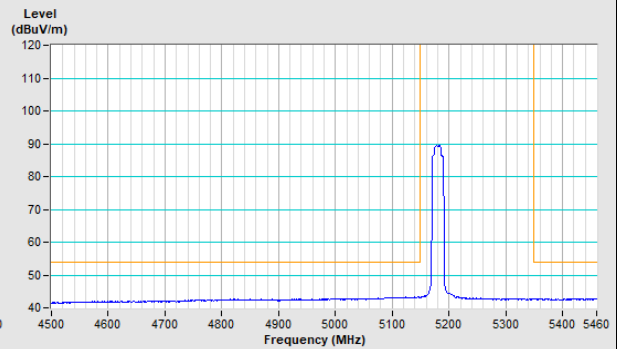

Vertical (Peak)

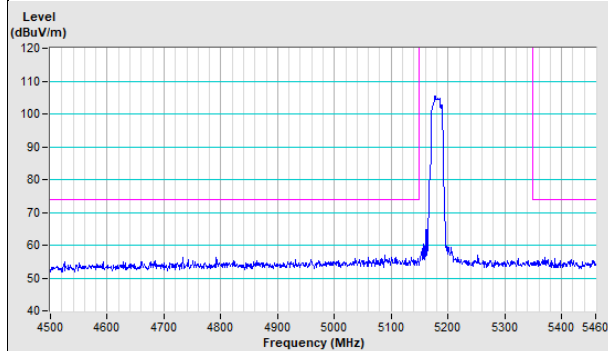


Vertical (Average)

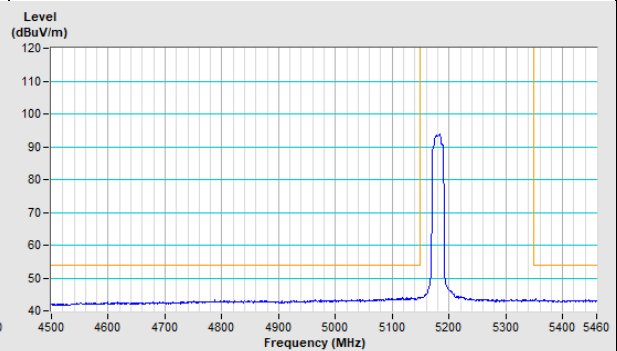


802.11ax (HE40) (RU242) Channel 62


Horizontal (Peak)

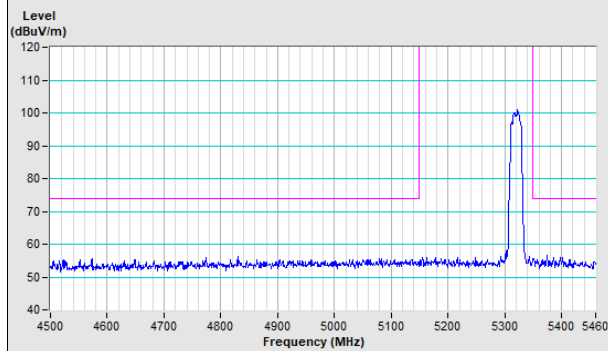


Horizontal (Average)

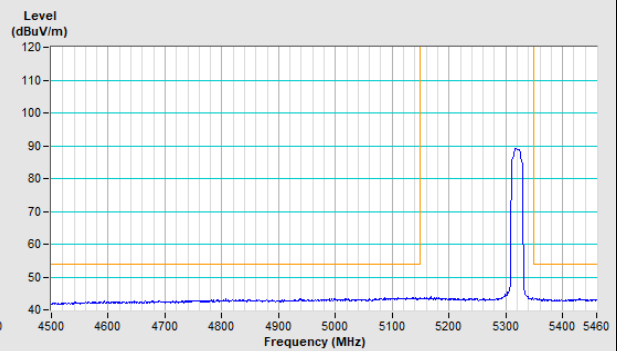



Vertical (Peak)

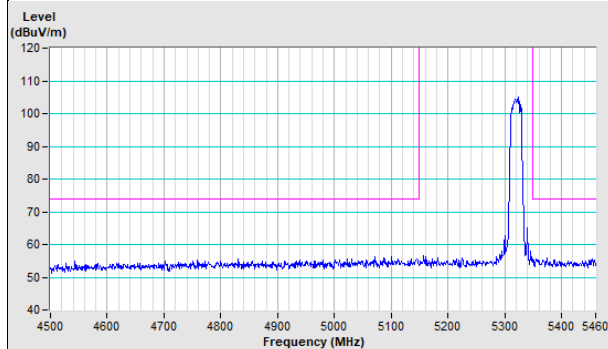



Vertical (Average)

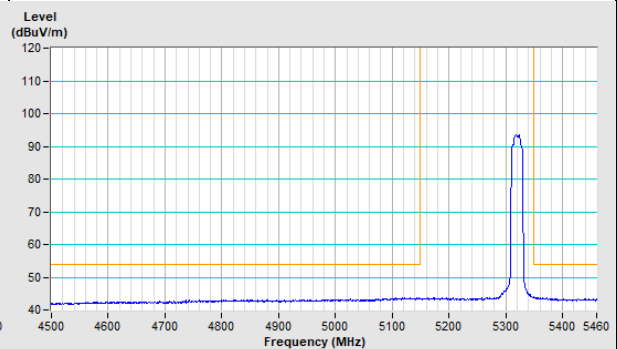


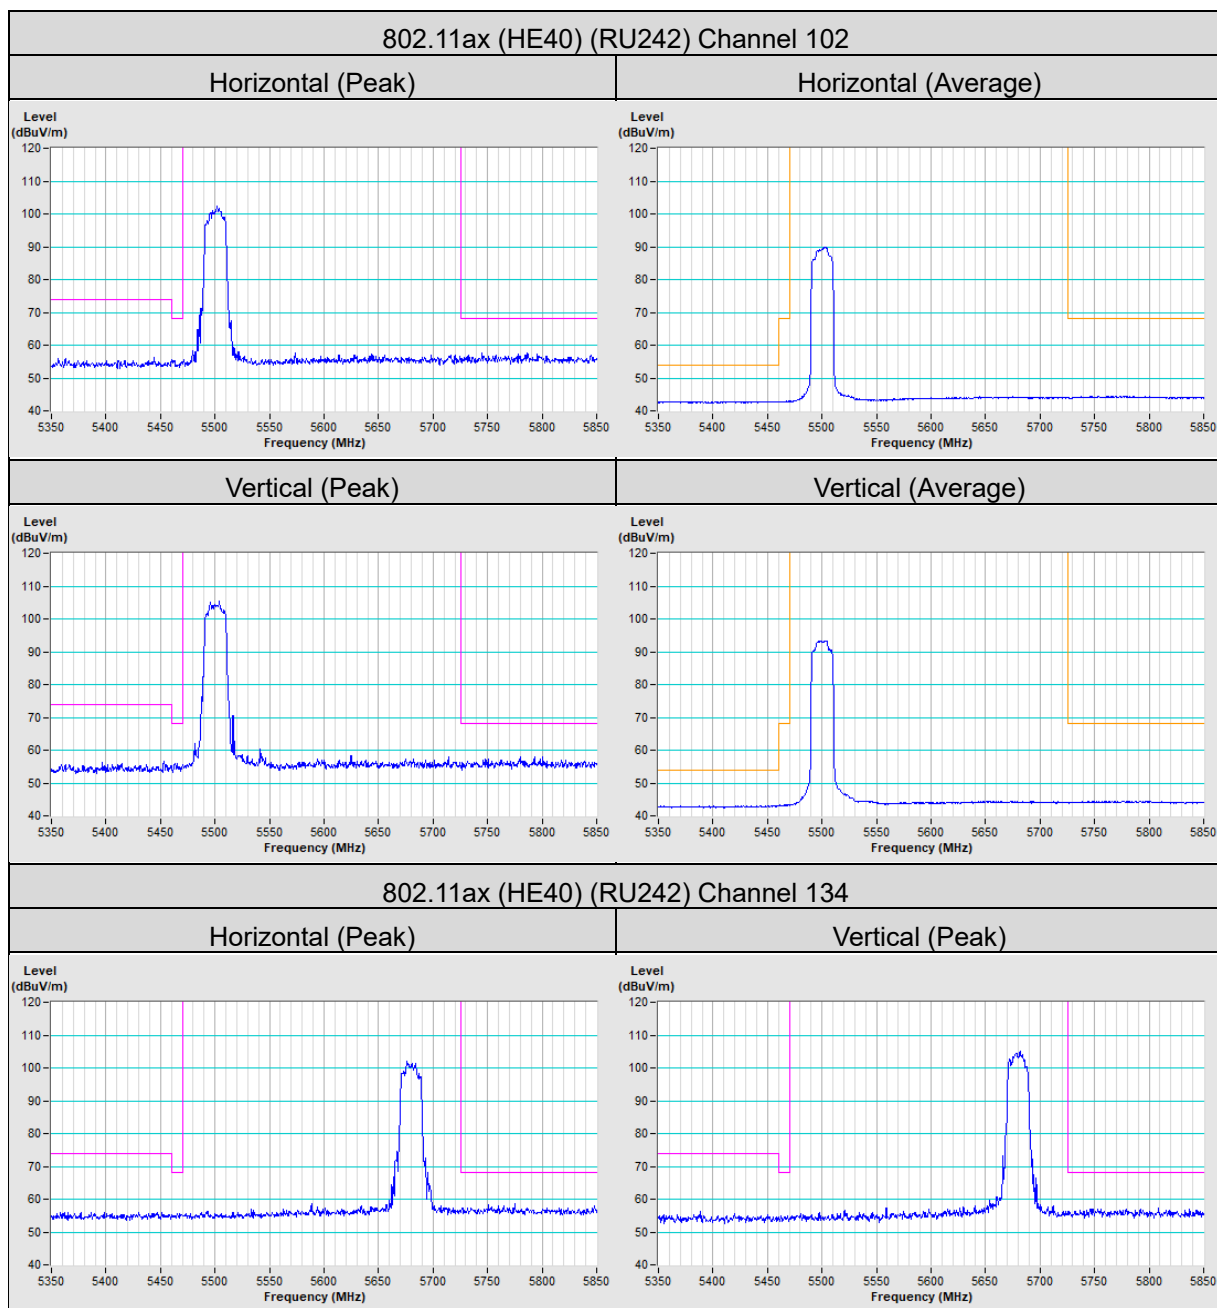

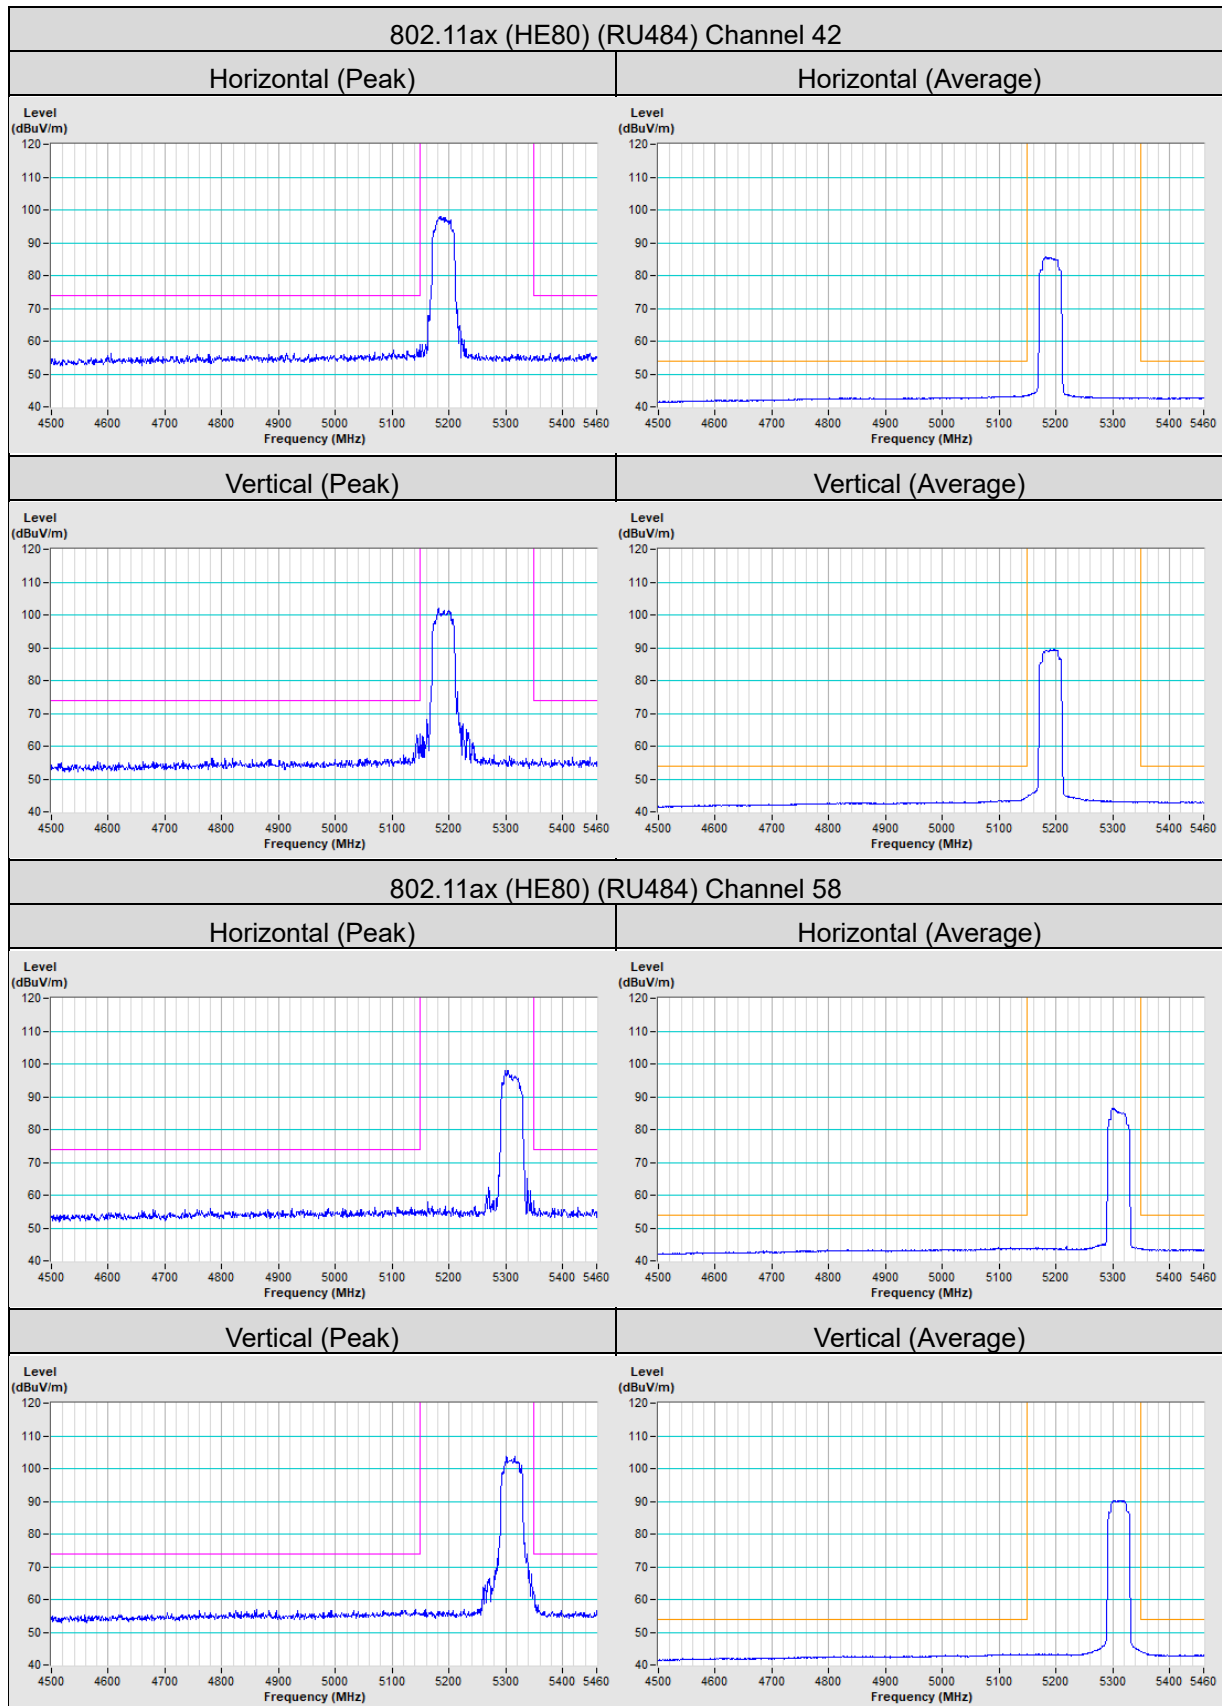

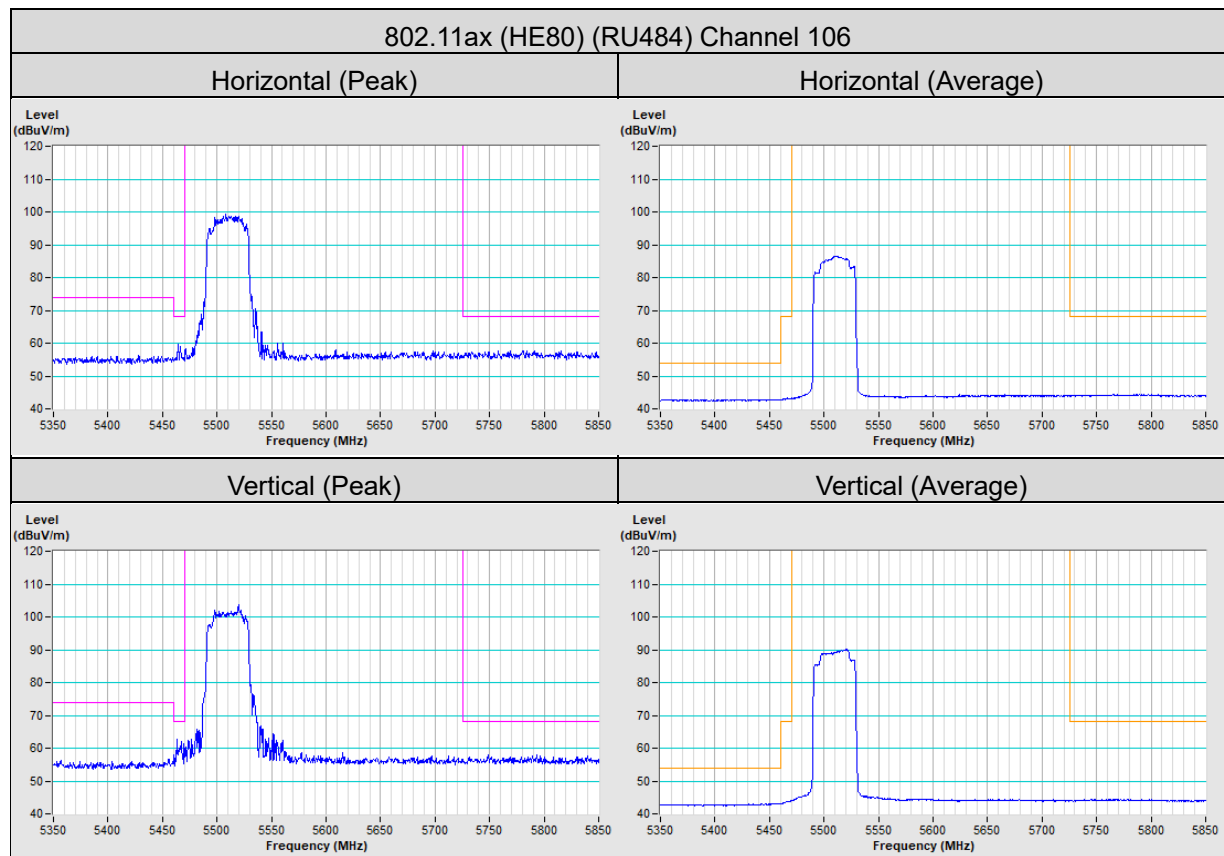

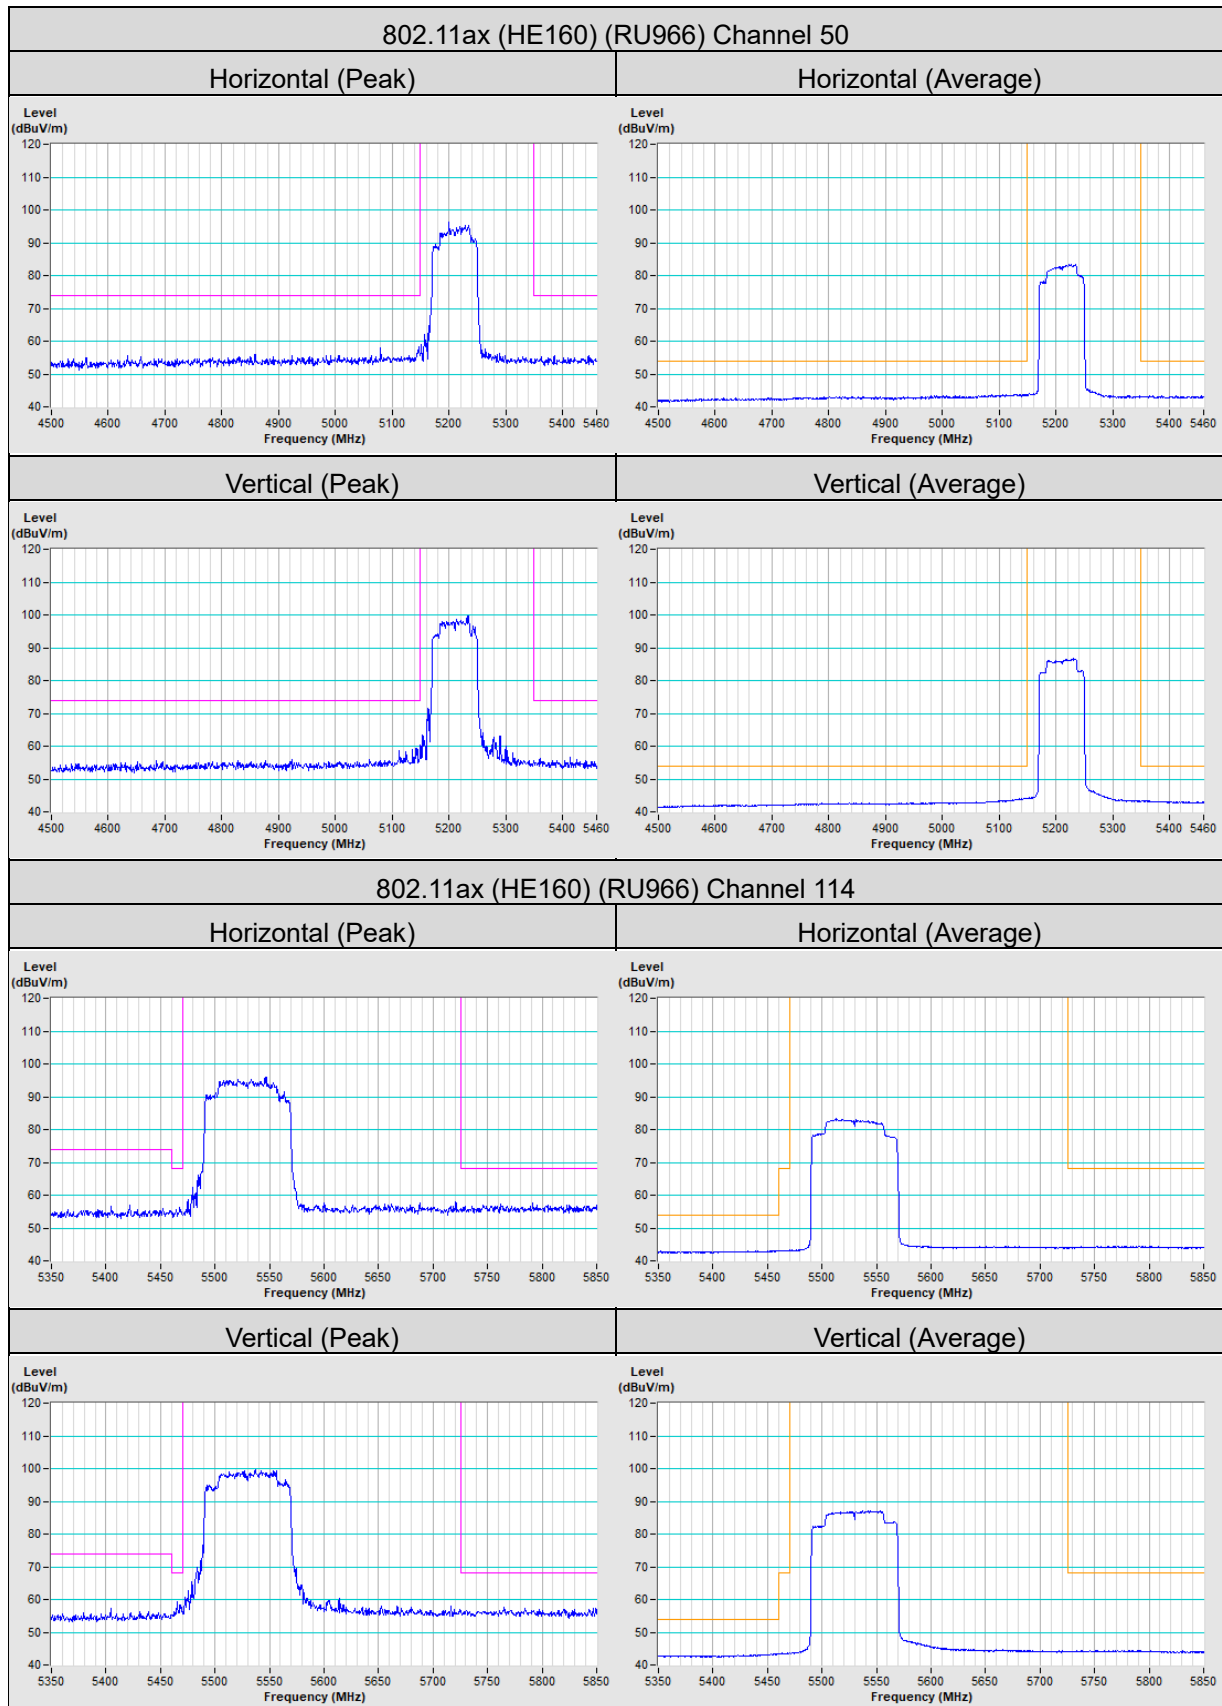

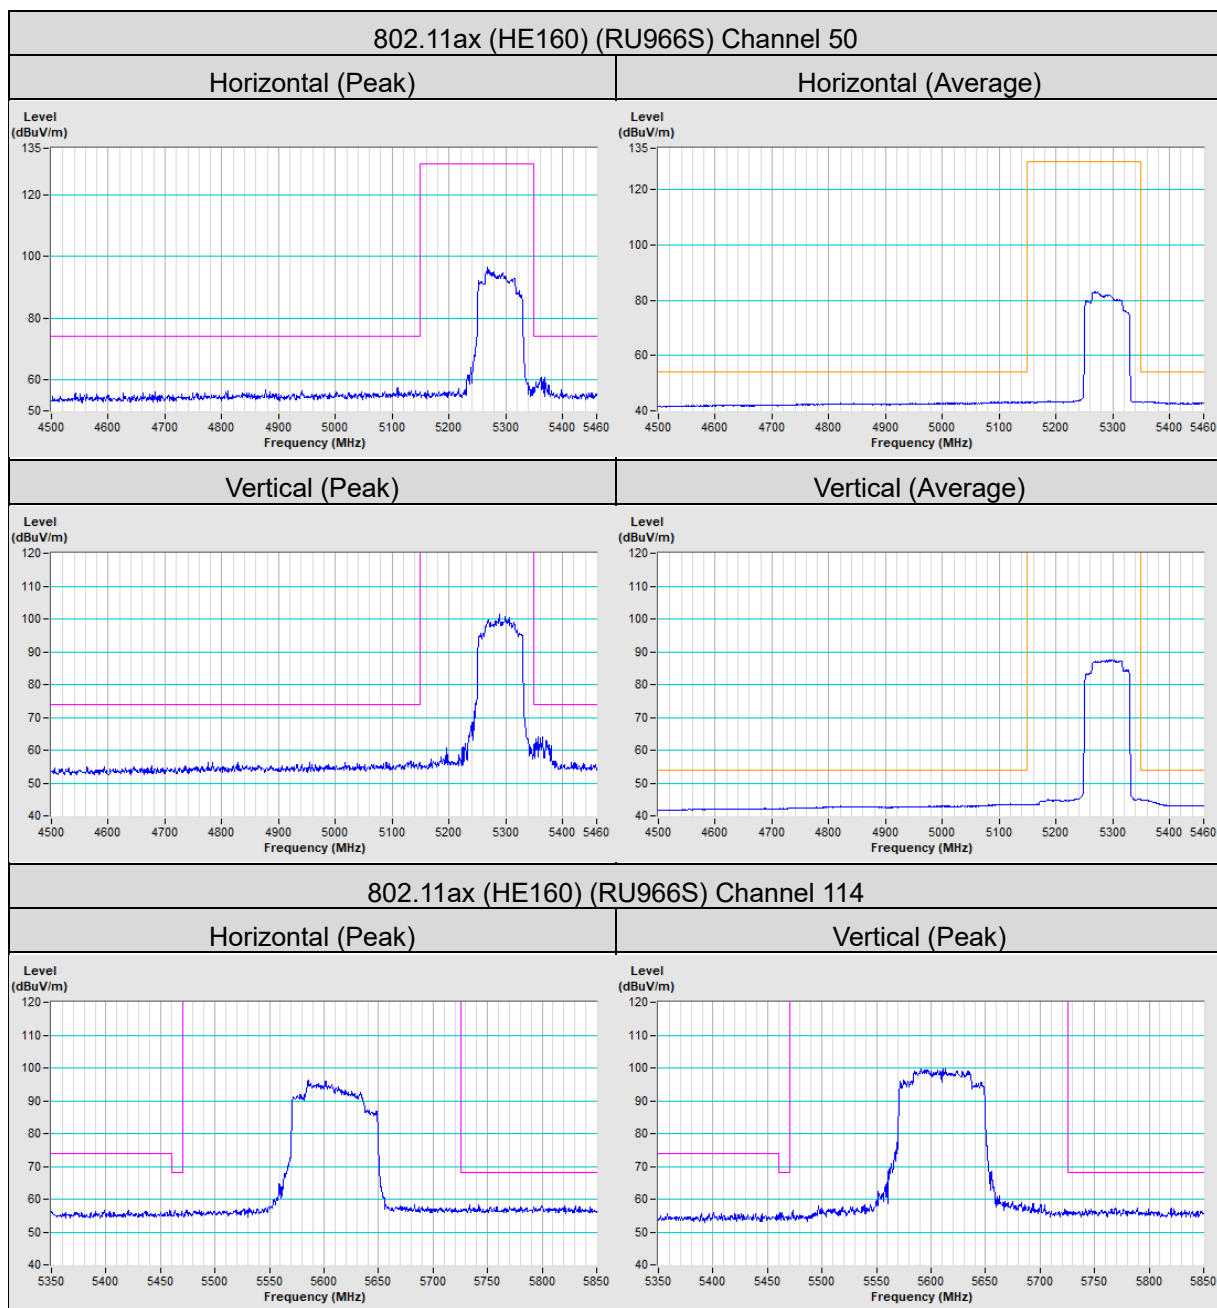

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---