

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	74
A.2.3 Emissions in Non-restricted Frequency Bands:.....	76
A.3 DTS/OCCUPIED BANDWIDTH	77
A.3.1 Emission Bandwidth Result.....	77
A.3.2 Measurement Plots	79
A.4 MAXIMUM PEAK OUTPUT POWER	90
A.4.1 Peak Output Power	90
A.4.2 Average Output Power (Reporting only).....	92
A.4.3 Measurement Plots	94
A.5 EMISSION LIMITATIONS	96
A.6 POWER SPECTRAL DENSITY	123
A.6.1 Power Spectral Density Result	123
A.6.2 Measurement Plots	125

A.1 CONDUCTED EMISSION

Test Date	2022/03/21	Temp./Hum.	26°C/65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

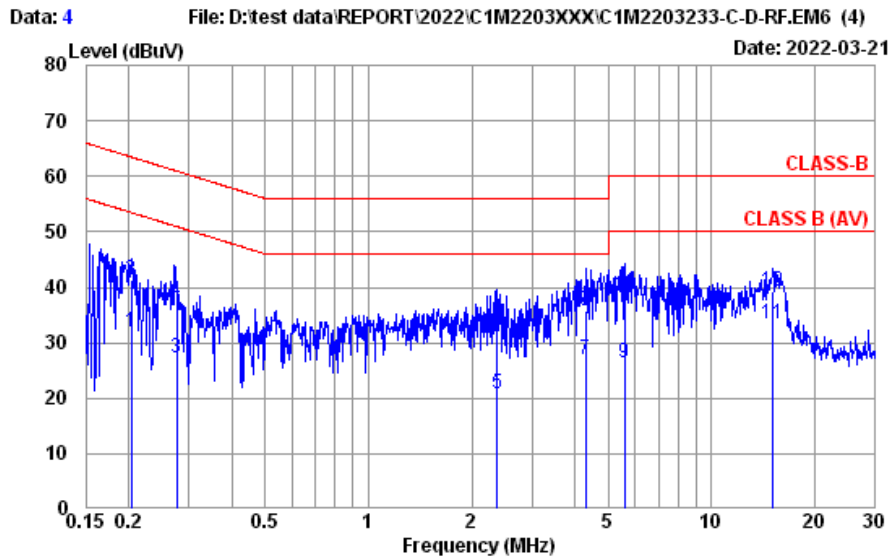


Site No.	: No.8 Shielded Room	Data No.	: 4
Instrument 1	: Receiver ESR3(774)		
Instrument 2	: EHV432 (567)(A) CE-08 ESH3-Z2 (354)		
Limit	: CLASS-B	Phase	: NEUTRAL
Environment	: 26°C / 65%	Engineer	: Chucky Chiu
EUT Model	: 16U70Q	Test Rating	: 120Vac/60Hz
Test Mode	: Operating		

	Freq. (MHz)	AMI Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.204	10.39	0.03	9.85	11.59	31.86	53.45	21.59	Average
2	0.204	10.39	0.03	9.85	21.05	41.32	63.45	22.13	QP
3	0.276	10.38	0.03	9.85	6.85	27.11	50.94	23.83	Average
4	0.276	10.38	0.03	9.85	17.28	37.54	60.94	23.40	QP
5	2.371	10.42	0.07	9.86	0.52	20.87	46.00	25.13	Average
6	2.371	10.42	0.07	9.86	11.52	31.87	56.00	24.13	QP
7	4.292	10.47	0.09	9.86	6.42	26.84	46.00	19.16	Average
8	4.292	10.47	0.09	9.86	15.27	35.69	56.00	20.31	QP
9	5.564	10.53	0.11	9.87	5.98	26.49	50.00	23.51	Average
10	5.564	10.53	0.11	9.87	17.98	38.49	60.00	21.51	QP
11	15.066	10.93	0.17	9.91	12.53	33.54	50.00	16.46	Average
12	15.066	10.93	0.17	9.91	18.22	39.23	60.00	20.77	QP

Remarks: 1. Emission Level= AMI Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2022/03/21	Temp./Hum.	26°C/65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu

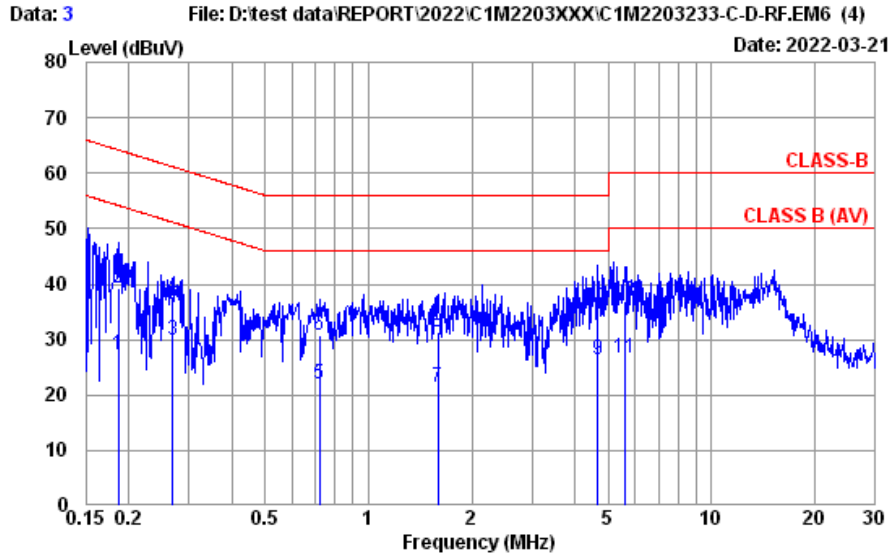

Site No. : No.8 Shielded Room Data No. : 3
 Instrument 1 : Receiver ESR3(774)
 Instrument 2 : EHV432 (567)(A)|CE-08|ESH3-Z2 (354)
 Limit : CLASS-B Phase : LINE
 Environment : 26°C / 65% Engineer : Chucky Chiu
 EUT Model : 16U70Q Test Rating : 120Vac/60Hz
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.186	10.39	0.03	9.85	6.87	27.14	54.20	27.06	Average
2	0.186	10.39	0.03	9.85	19.14	39.41	64.20	24.79	QP
3	0.269	10.38	0.03	9.85	9.55	29.81	51.16	21.35	Average
4	0.269	10.38	0.03	9.85	17.49	37.75	61.16	23.41	QP
5	0.720	10.38	0.04	9.85	1.81	22.08	46.00	23.92	Average
6	0.720	10.38	0.04	9.85	10.55	30.82	56.00	25.18	QP
7	1.593	10.39	0.05	9.86	0.96	21.26	46.00	24.74	Average
8	1.593	10.39	0.05	9.86	11.17	31.47	56.00	24.53	QP
9	4.647	10.44	0.10	9.87	5.91	26.32	46.00	19.68	Average
10	4.647	10.44	0.10	9.87	15.45	35.86	56.00	20.14	QP
11	5.564	10.47	0.11	9.87	6.30	26.75	50.00	23.25	Average
12	5.564	10.47	0.11	9.87	16.38	36.83	60.00	23.17	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/03/16~21	Temp./Hum.	19~23°C/52~76%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11ax-HE20	Frequency	TX 2422MHz
------	---------------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.980	12.19	1.77	26.42	39.09	26.63	40.00	13.37	Peak
152.220	16.17	2.88	26.00	45.25	38.30	43.50	5.20	Peak
317.120	19.50	4.53	25.85	45.10	43.28	46.00	2.72	Peak
605.210	24.33	6.80	27.43	35.46	39.16	46.00	6.84	Peak
888.450	26.26	8.37	27.06	35.25	42.82	46.00	3.18	Peak
996.120	27.10	8.95	26.69	27.98	37.34	54.00	16.66	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.010	12.19	1.76	26.42	48.39	35.92	40.00	4.08	Peak
152.220	16.17	2.88	26.00	44.19	37.24	43.50	6.26	Peak
239.520	17.58	3.75	25.76	46.95	42.52	46.00	3.48	Peak
593.570	24.23	6.75	27.42	34.90	38.46	46.00	7.54	Peak
847.710	26.12	8.12	27.18	33.43	40.49	46.00	5.51	Peak
967.990	26.88	8.81	26.79	30.13	39.03	54.00	14.97	Peak

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.980	12.19	1.77	26.42	38.49	26.03	40.00	13.97	Peak
153.190	16.10	2.89	26.00	45.41	38.40	43.50	5.10	Peak
317.120	19.50	4.53	25.85	45.43	43.61	46.00	2.39	Peak
604.240	24.32	6.79	27.43	35.58	39.26	46.00	6.74	Peak
888.450	26.26	8.37	27.06	35.67	43.24	46.00	2.76	Peak
985.450	27.02	8.90	26.72	28.66	37.86	54.00	16.14	Peak


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.010	12.19	1.76	26.42	49.42	36.95	40.00	3.05	Peak
151.250	16.24	2.87	26.00	43.72	36.83	43.50	6.67	Peak
242.430	17.77	3.78	25.75	46.93	42.73	46.00	3.27	Peak
593.570	24.23	6.75	27.42	36.11	39.67	46.00	6.33	Peak
847.710	26.12	8.12	27.18	33.36	40.42	46.00	5.58	Peak
967.990	26.88	8.81	26.79	29.34	38.24	54.00	15.76	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

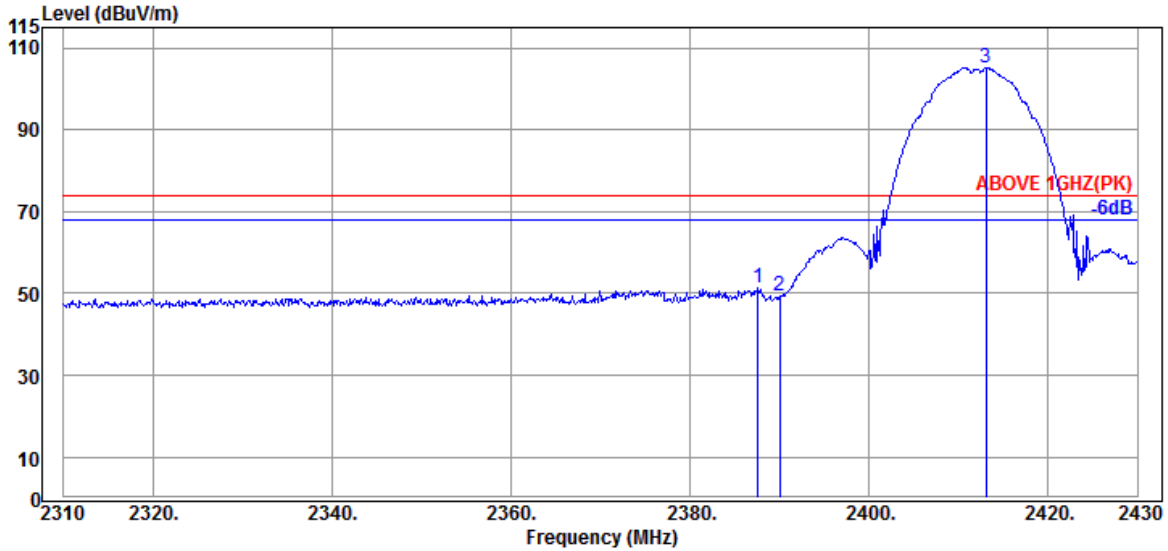

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.640	28.27	6.04	34.53	51.61	51.39	74.00	22.61	Peak
2390.040	28.27	6.04	34.54	49.50	49.27	74.00	24.73	Peak
@ 2413.080	28.36	6.07	34.54	105.18	105.07	---	---	Peak

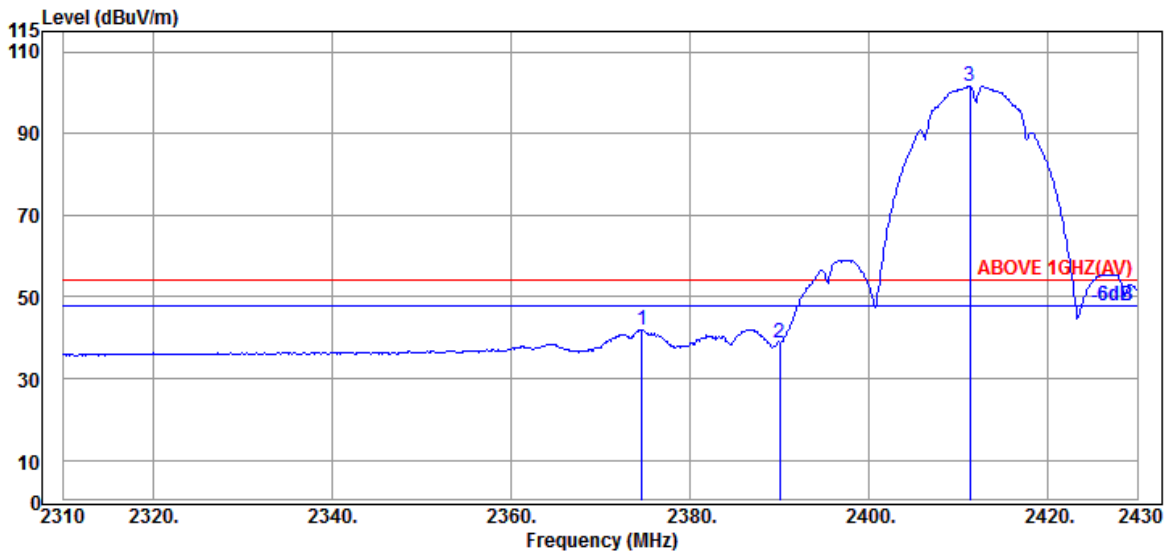


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2374.680	28.24	6.01	34.53	42.31	42.03	54.00	11.97	Average
2390.040	28.27	6.04	34.54	38.98	38.75	54.00	15.25	Average
@ 2411.280	28.36	6.07	34.54	101.84	101.73	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2412MHz
------	---------	-----------	------------

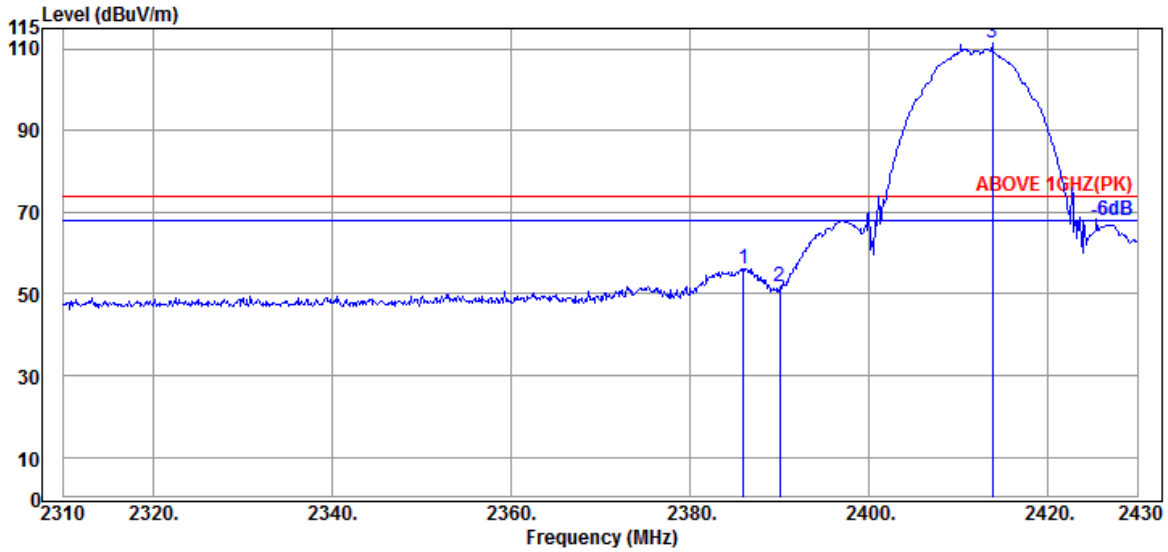

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.960	28.27	6.04	34.53	56.51	56.29	74.00	17.71	Peak
2390.040	28.27	6.04	34.54	52.18	51.95	74.00	22.05	Peak
@ 2413.800	28.36	6.07	34.54	111.37	111.26	---	---	Peak

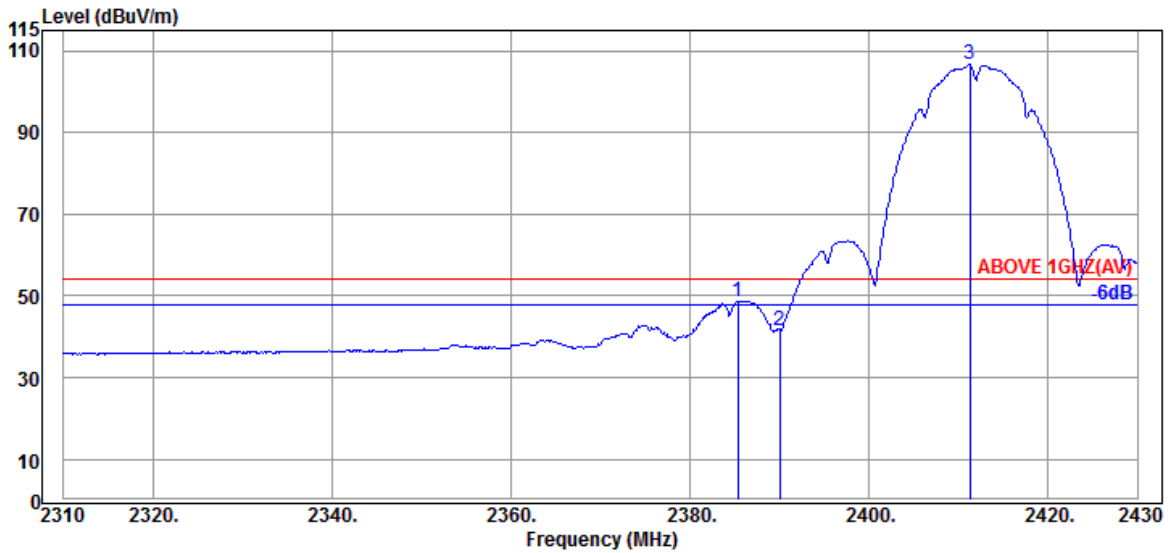


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2385.360	28.27	6.01	34.53	48.97	48.72	54.00	5.28	Average
2390.040	28.27	6.04	34.54	41.76	41.53	54.00	12.47	Average
@ 2411.280	28.36	6.07	34.54	106.82	106.71	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

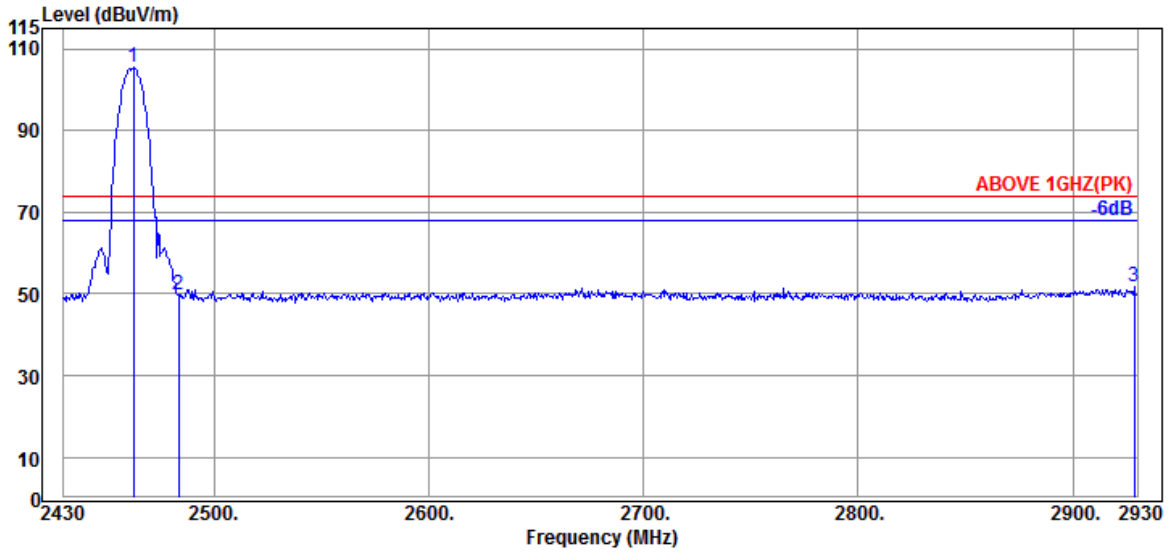

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.500	28.53	6.15	34.55	105.55	105.68	---	---	Peak
2483.500	28.57	6.18	34.55	49.76	49.96	74.00	24.04	Peak
2928.500	29.73	6.75	34.65	49.86	51.69	74.00	22.31	Peak

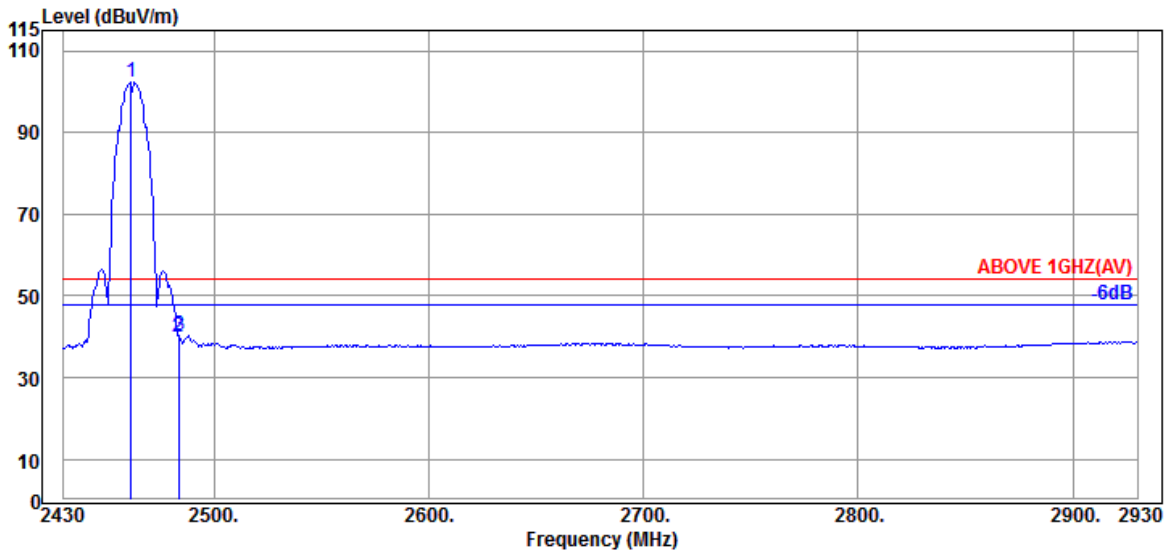


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	28.53	6.15	34.55	102.31	102.44	---	---	Average
2483.500	28.57	6.18	34.55	39.86	40.06	54.00	13.94	Average
2484.000	28.57	6.18	34.55	40.26	40.46	54.00	13.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2462MHz
------	---------	-----------	------------

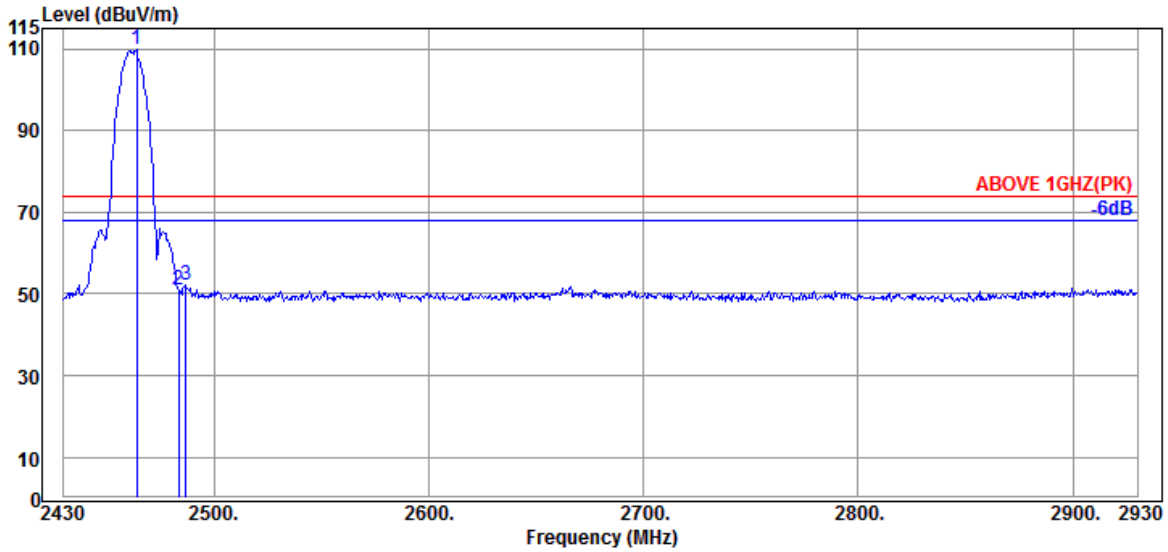

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2464.000	28.53	6.15	34.55	109.76	109.89	---	---	Peak
2483.500	28.57	6.18	34.55	50.90	51.10	74.00	22.90	Peak
2487.000	28.57	6.18	34.55	52.15	52.35	74.00	21.65	Peak

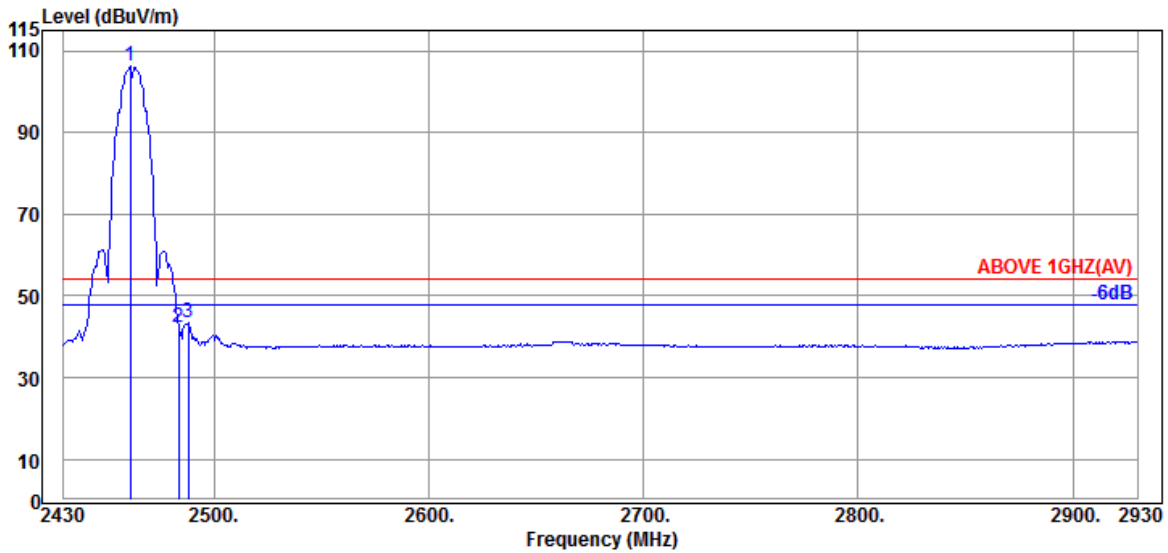


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2461.000	28.53	6.15	34.55	106.17	106.30	---	---	Average
2483.500	28.57	6.18	34.55	42.14	42.34	54.00	11.66	Average
2488.000	28.57	6.21	34.55	43.23	43.46	54.00	10.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

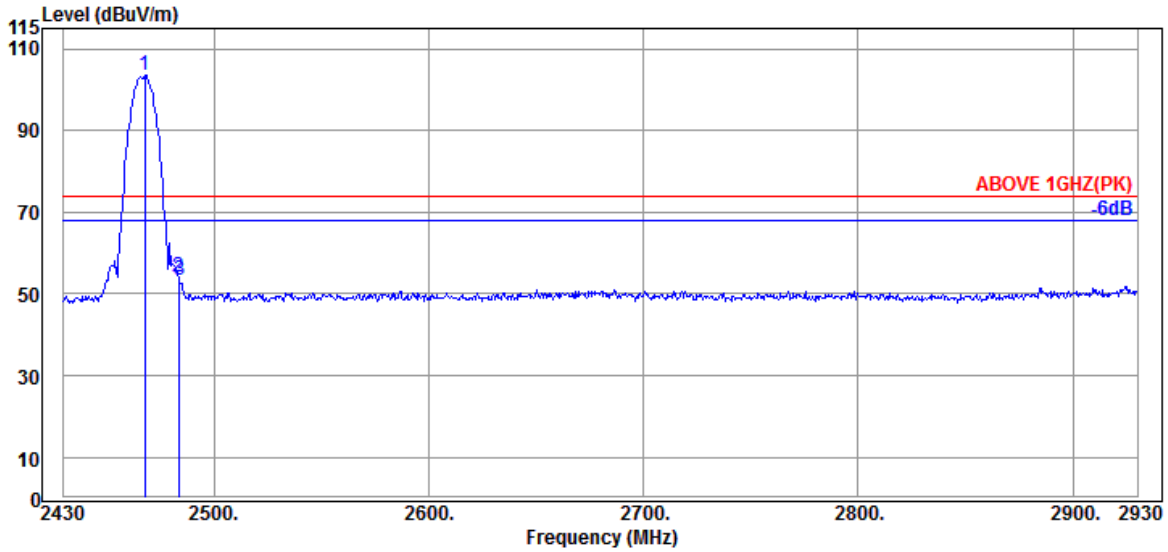

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.54	6.15	34.55	103.29	103.43	---	---	Peak
2483.500	28.57	6.18	34.55	53.89	54.09	74.00	19.91	Peak
2484.000	28.57	6.18	34.55	53.17	53.37	74.00	20.63	Peak

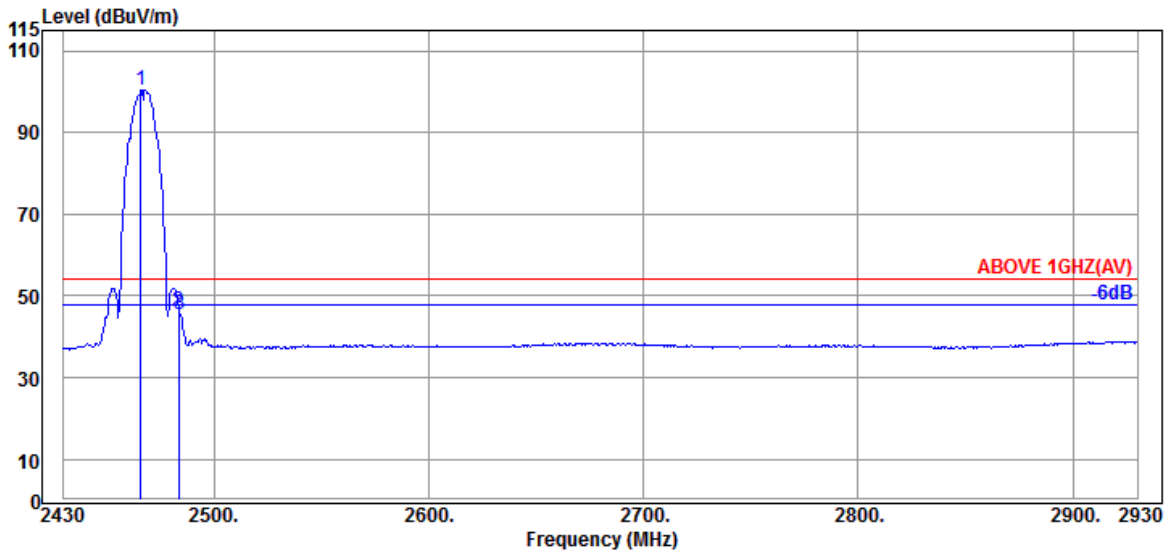


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.53	6.15	34.55	100.31	100.44	---	---	Average
2483.500	28.57	6.18	34.55	46.14	46.34	54.00	7.66	Average
2484.000	28.57	6.18	34.55	45.41	45.61	54.00	8.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2467MHz
------	---------	-----------	------------

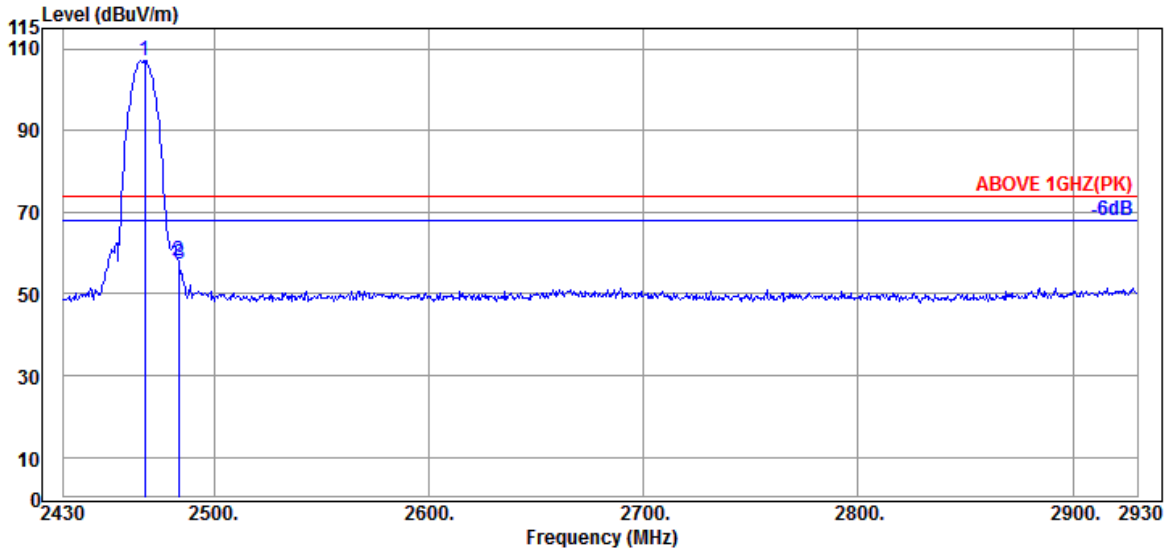

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.54	6.15	34.55	107.09	107.23	---	---	Peak
2483.500	28.57	6.18	34.55	57.87	58.07	74.00	15.93	Peak
2484.000	28.57	6.18	34.55	57.18	57.38	74.00	16.62	Peak

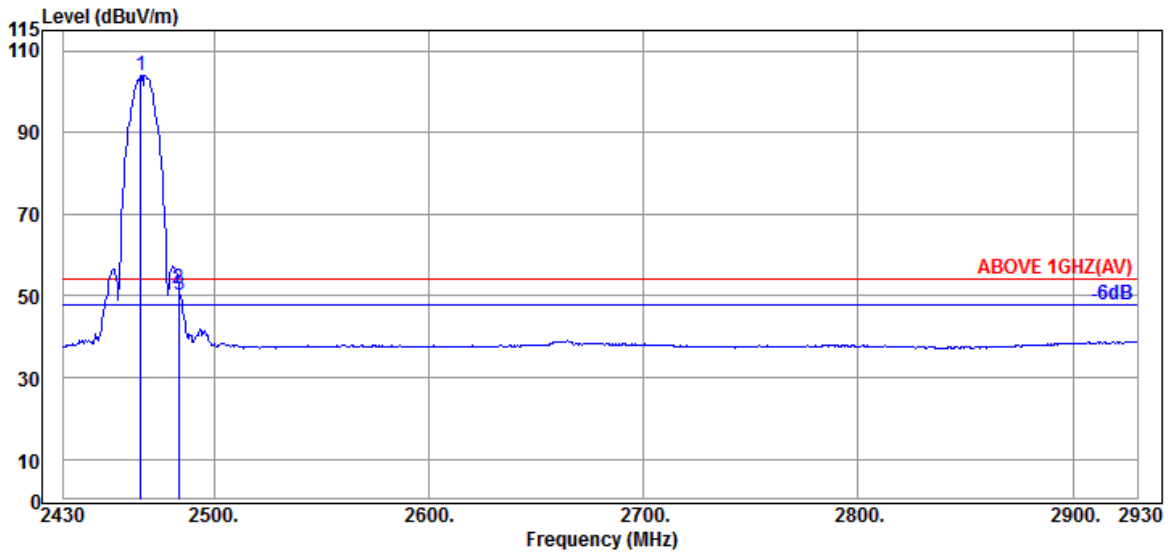


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.53	6.15	34.55	103.96	104.09	---	---	Average
2483.500	28.57	6.18	34.55	51.67	51.87	54.00	2.13	Average
2484.000	28.57	6.18	34.55	50.06	50.26	54.00	3.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

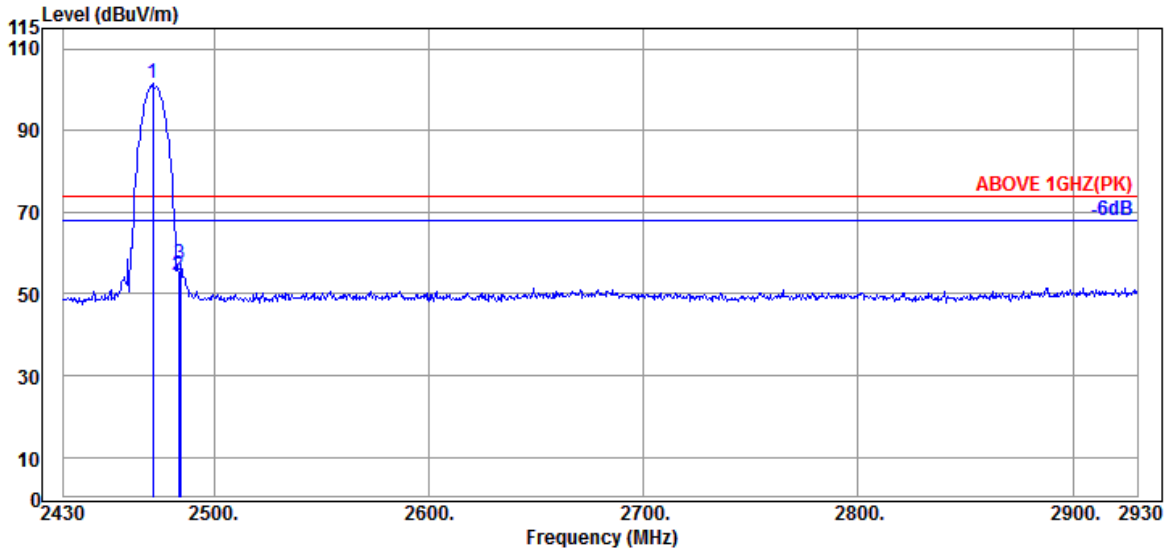

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.500	28.54	6.18	34.55	101.29	101.46	---	---	Peak
2483.500	28.57	6.18	34.55	54.42	54.62	74.00	19.38	Peak
2484.500	28.57	6.18	34.55	57.05	57.25	74.00	16.75	Peak

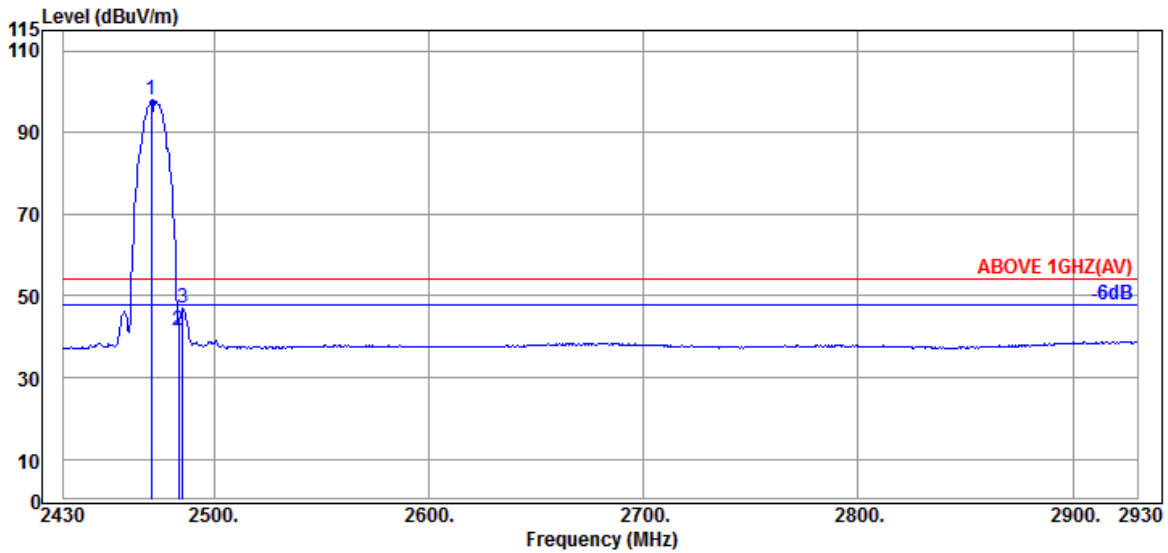


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2471.000	28.54	6.18	34.55	97.69	97.86	---	---	Average
2483.500	28.57	6.18	34.55	41.42	41.62	54.00	12.38	Average
2485.500	28.57	6.18	34.55	46.85	47.05	54.00	6.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11b	Frequency	TX 2472MHz
------	---------	-----------	------------

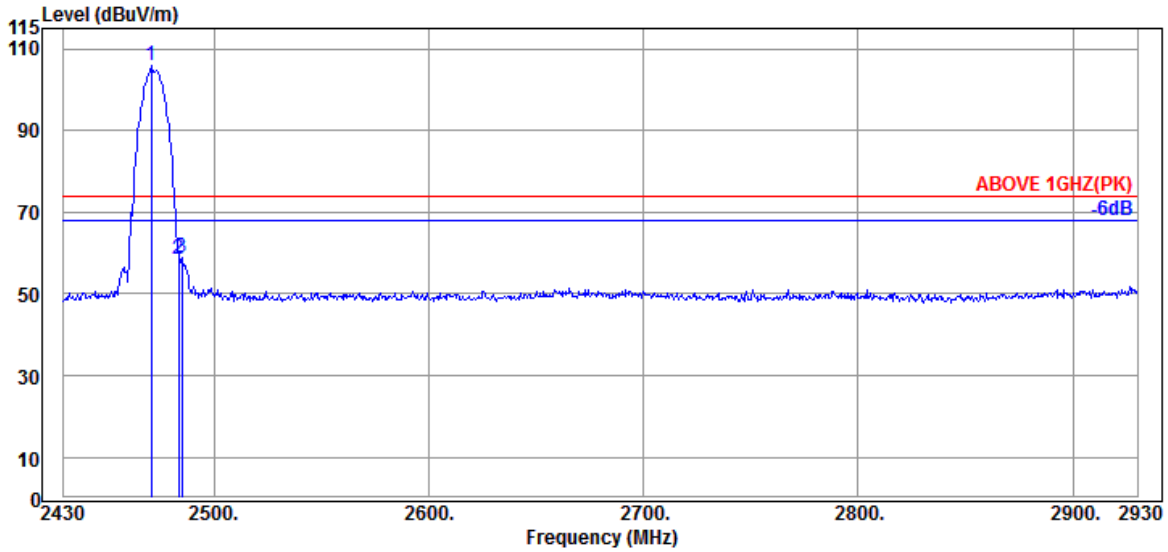

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.54	6.18	34.55	105.56	105.73	---	---	Peak
2483.500	28.57	6.18	34.55	58.28	58.48	74.00	15.52	Peak
2485.000	28.57	6.18	34.55	58.83	59.03	74.00	14.97	Peak

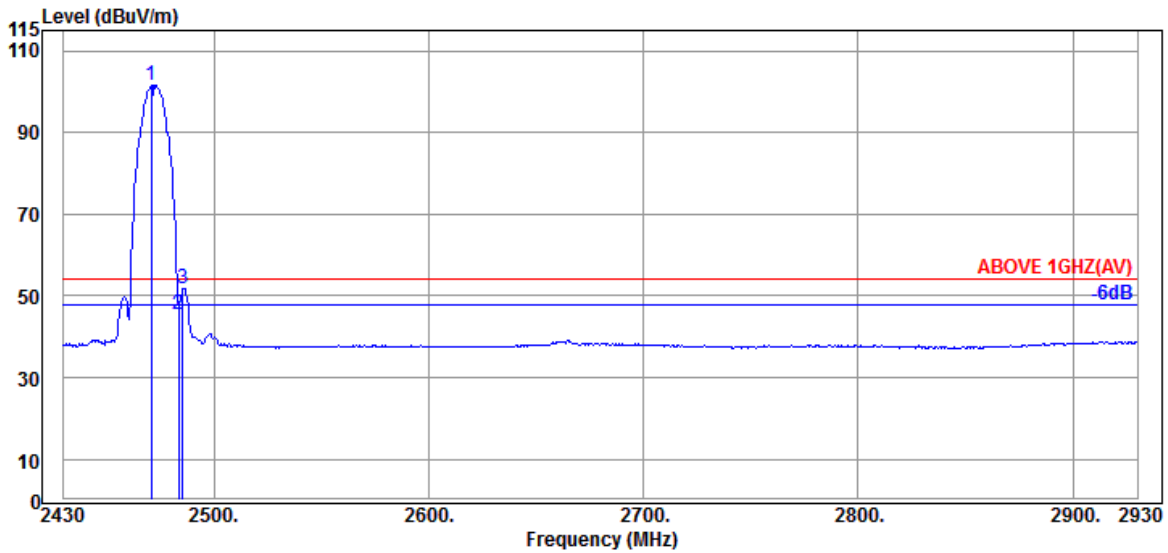


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.54	6.18	34.55	101.48	101.65	---	---	Average
2483.500	28.57	6.18	34.55	45.12	45.32	54.00	8.68	Average
2485.500	28.57	6.18	34.55	51.75	51.95	54.00	2.05	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

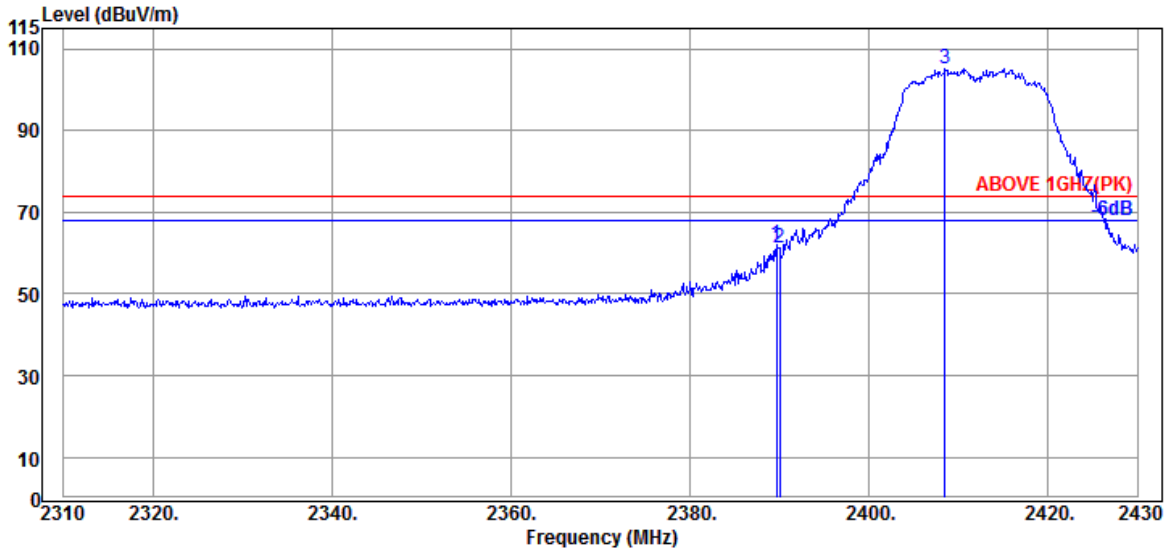

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	62.40	62.18	74.00	11.82	Peak
2390.040	28.27	6.04	34.54	61.42	61.19	74.00	12.81	Peak
@ 2408.520	28.33	6.07	34.54	105.26	105.12	---	---	Peak

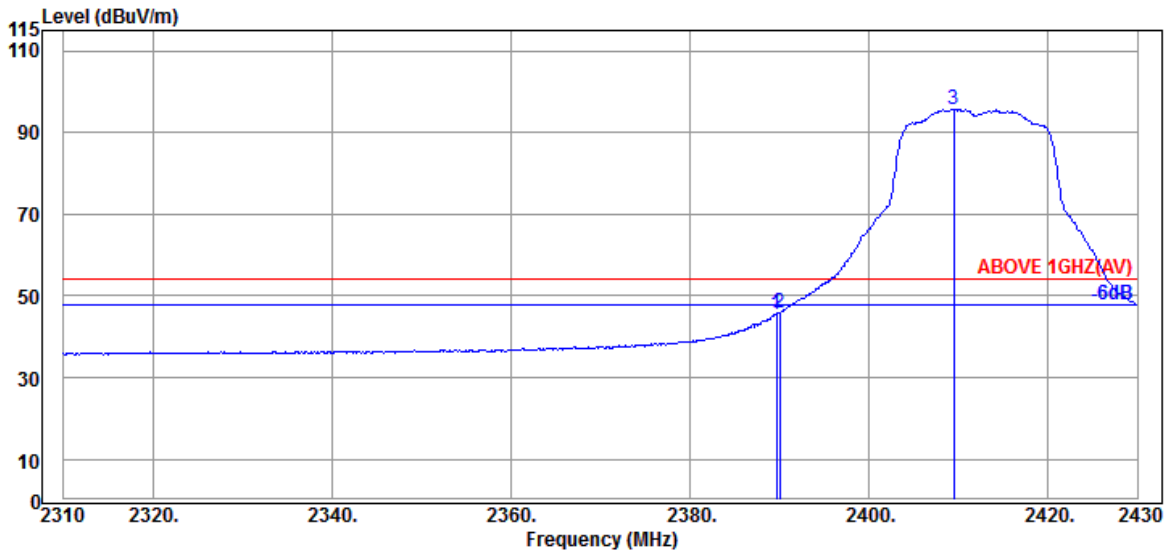


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	45.84	45.62	54.00	8.38	Average
2390.040	28.27	6.04	34.54	46.01	45.78	54.00	8.22	Average
@ 2409.480	28.33	6.07	34.54	95.86	95.72	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2412MHz
------	---------	-----------	------------

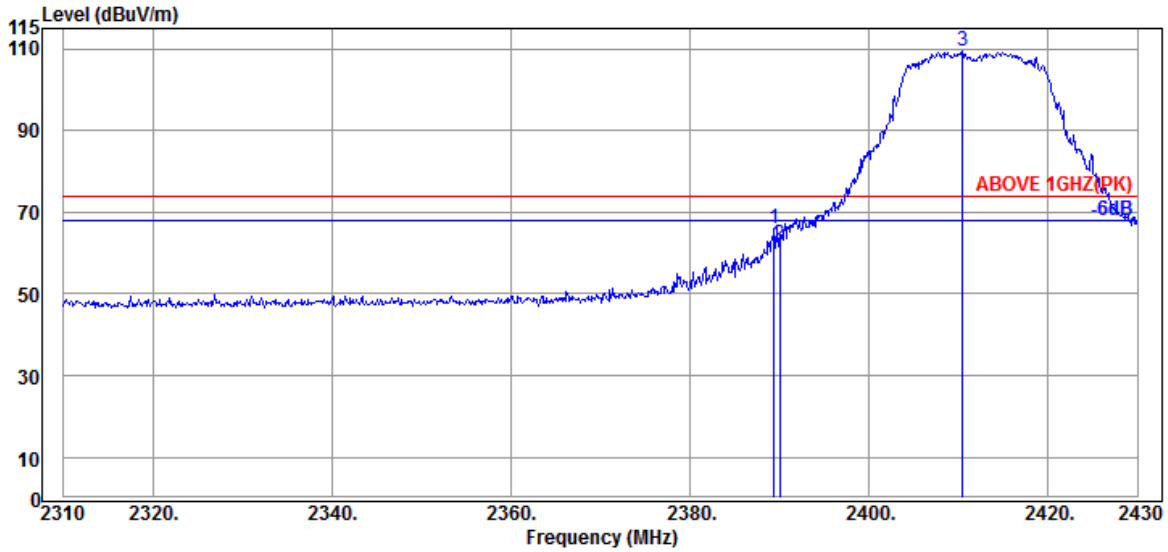

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	6.04	34.53	66.04	65.82	74.00	8.18	Peak
2390.040	28.27	6.04	34.54	62.31	62.08	74.00	11.92	Peak
@ 2410.440	28.33	6.07	34.54	109.59	109.45	---	---	Peak

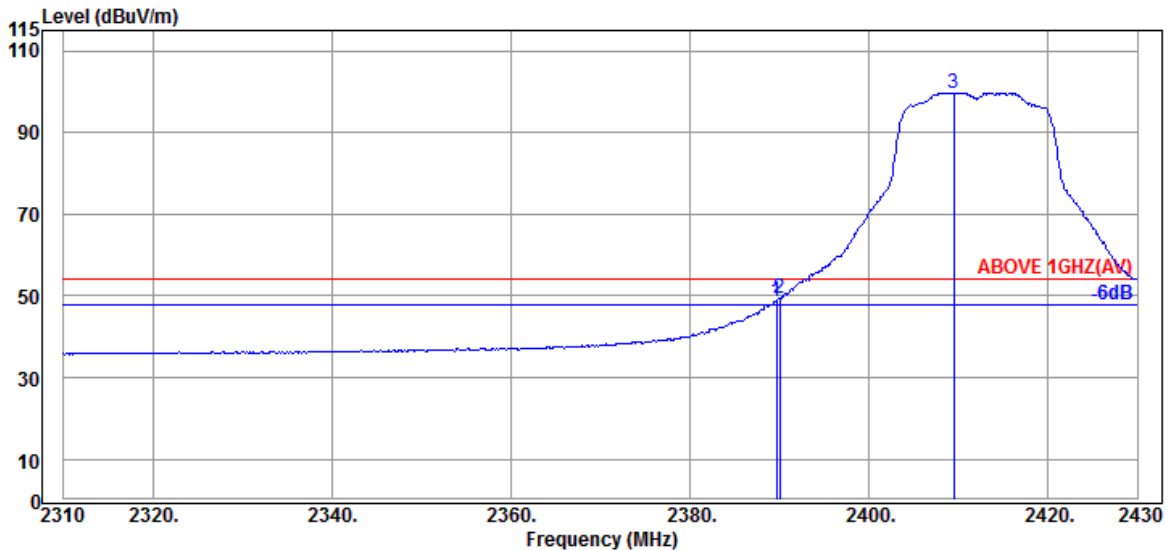


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	48.98	48.76	54.00	5.24	Average
2390.040	28.27	6.04	34.54	49.47	49.24	54.00	4.76	Average
@ 2409.480	28.33	6.07	34.54	99.88	99.74	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

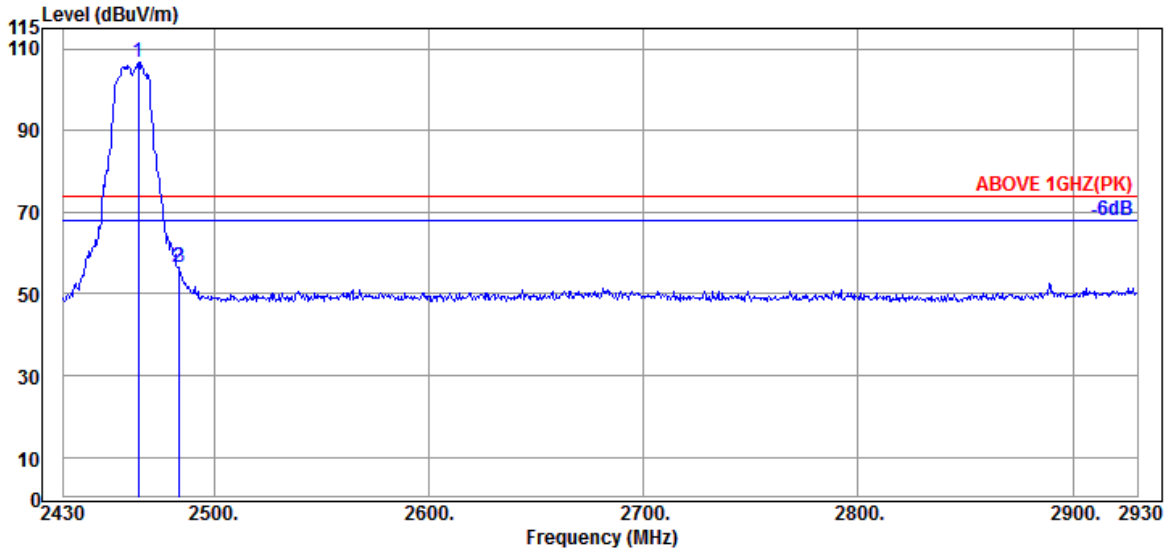

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	106.72	106.85	---	---	Peak
2483.500	28.57	6.18	34.55	56.38	56.58	74.00	17.42	Peak
2484.000	28.57	6.18	34.55	56.24	56.44	74.00	17.56	Peak

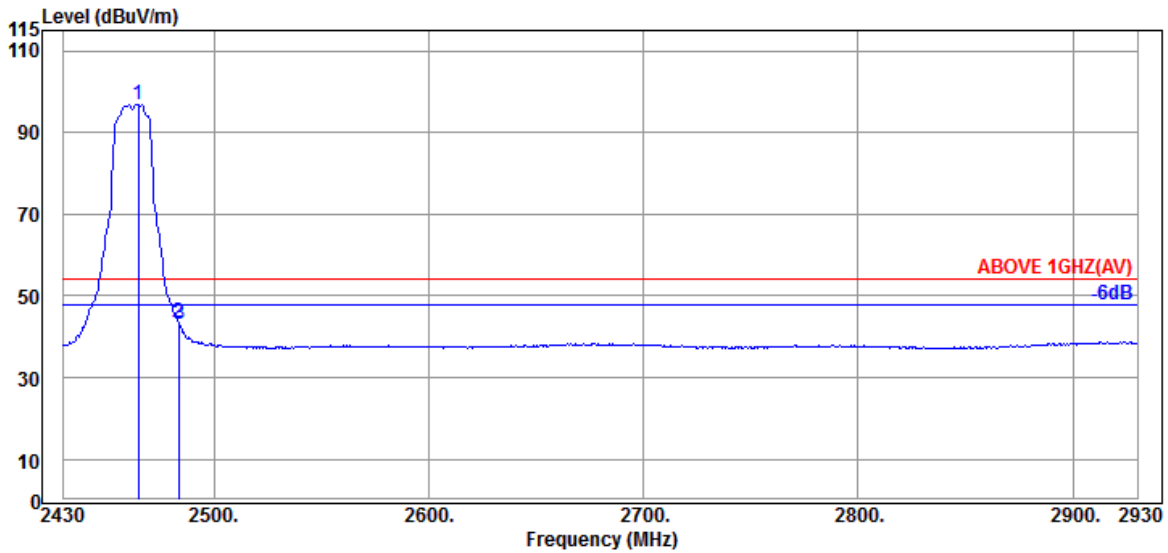


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	96.72	96.85	---	---	Average
2483.500	28.57	6.18	34.55	43.27	43.47	54.00	10.53	Average
2484.000	28.57	6.18	34.55	42.83	43.03	54.00	10.97	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2462MHz
------	---------	-----------	------------

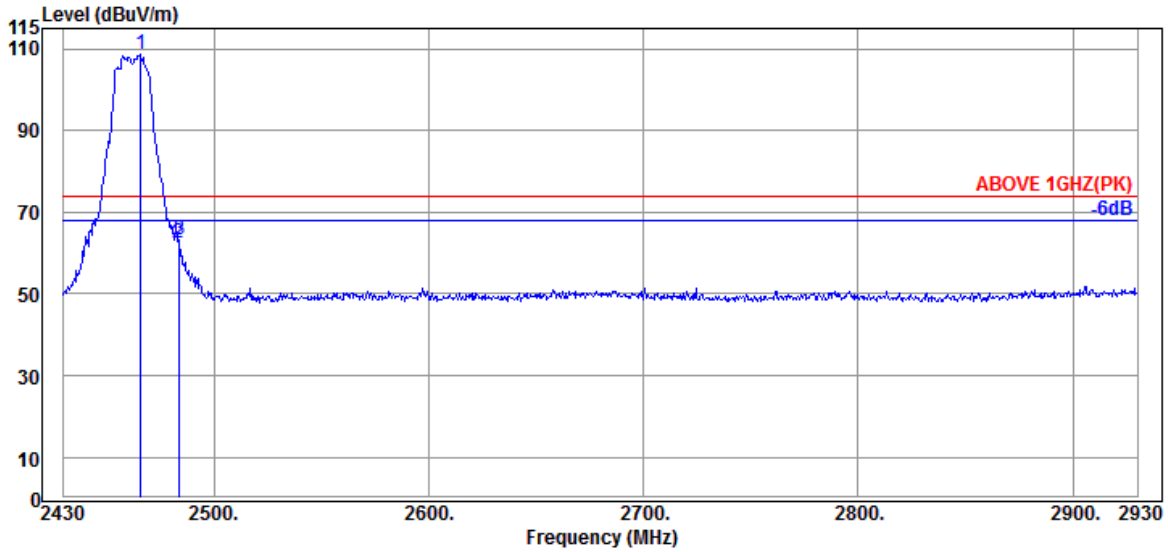

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.53	6.15	34.55	108.39	108.52	---	---	Peak
2483.500	28.57	6.18	34.55	62.26	62.46	74.00	11.54	Peak
2484.000	28.57	6.18	34.55	62.84	63.04	74.00	10.96	Peak

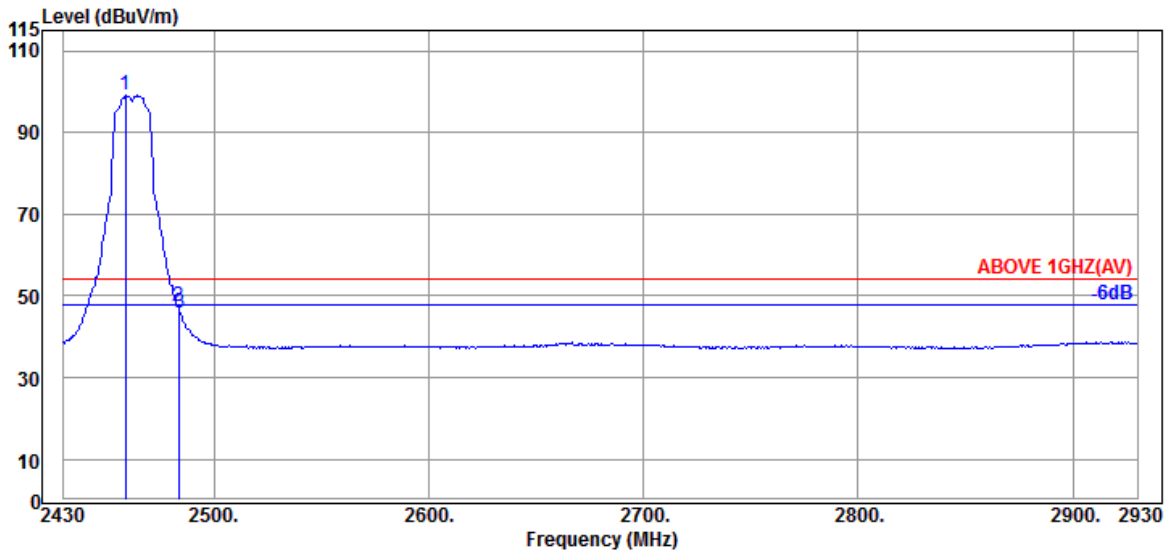


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.51	6.15	34.55	98.94	99.05	---	---	Average
2483.500	28.57	6.18	34.55	47.12	47.32	54.00	6.68	Average
2484.000	28.57	6.18	34.55	45.84	46.04	54.00	7.96	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

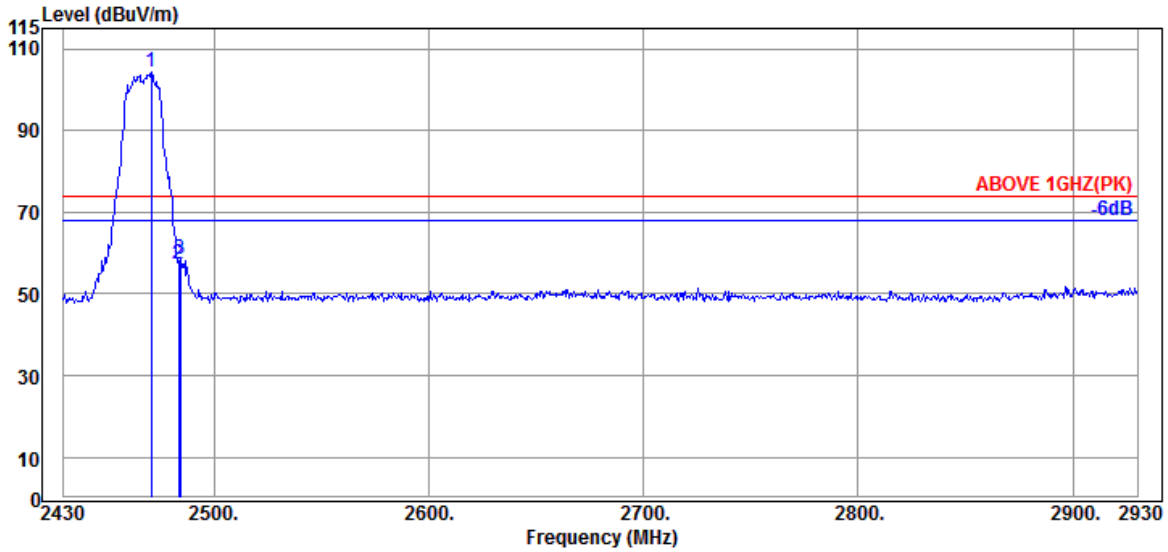

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2471.000	28.54	6.18	34.55	104.19	104.36	---	---	Peak
2483.500	28.57	6.18	34.55	57.14	57.34	74.00	16.66	Peak
2484.500	28.57	6.18	34.55	58.11	58.31	74.00	15.69	Peak

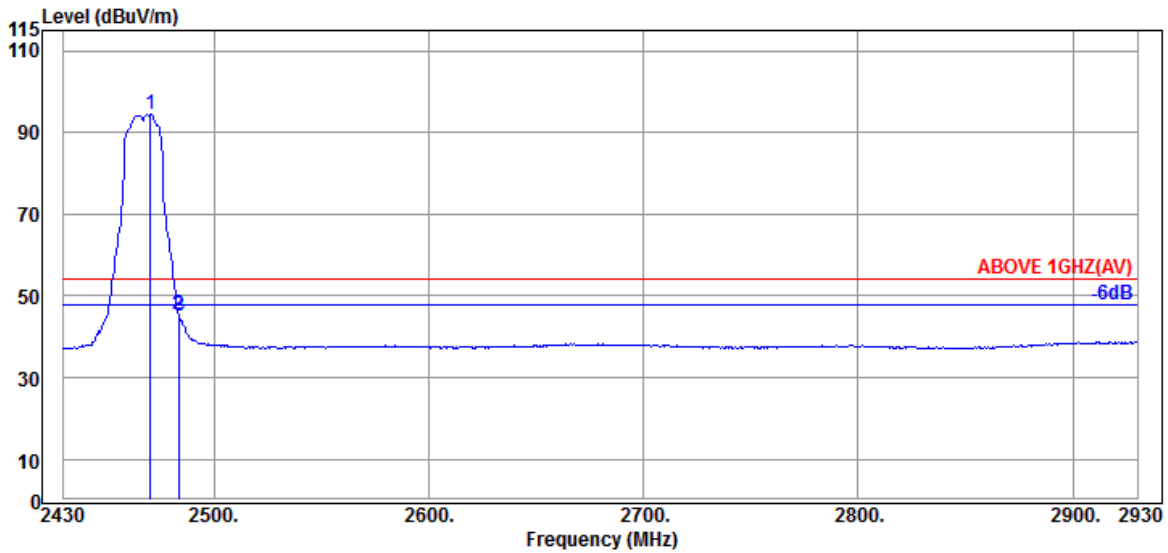


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.54	6.15	34.55	94.42	94.56	---	---	Average
2483.500	28.57	6.18	34.55	45.25	45.45	54.00	8.55	Average
2484.000	28.57	6.18	34.55	44.67	44.87	54.00	9.13	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2467MHz
------	---------	-----------	------------

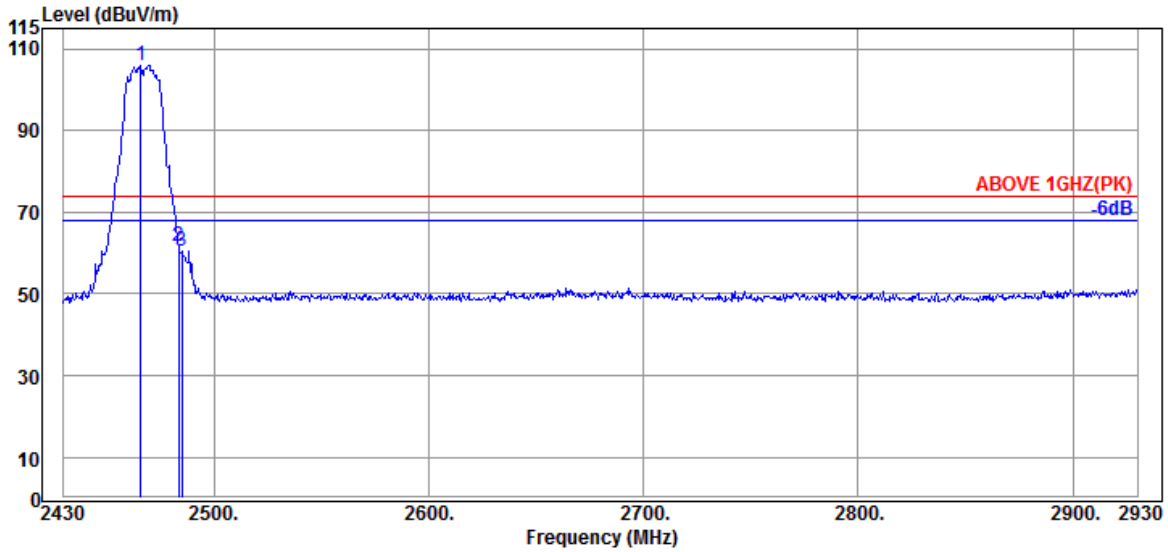

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2466.000	28.53	6.15	34.55	105.77	105.90	---	---	Peak
2483.500	28.57	6.18	34.55	61.59	61.79	74.00	12.21	Peak
2485.000	28.57	6.18	34.55	60.38	60.58	74.00	13.42	Peak

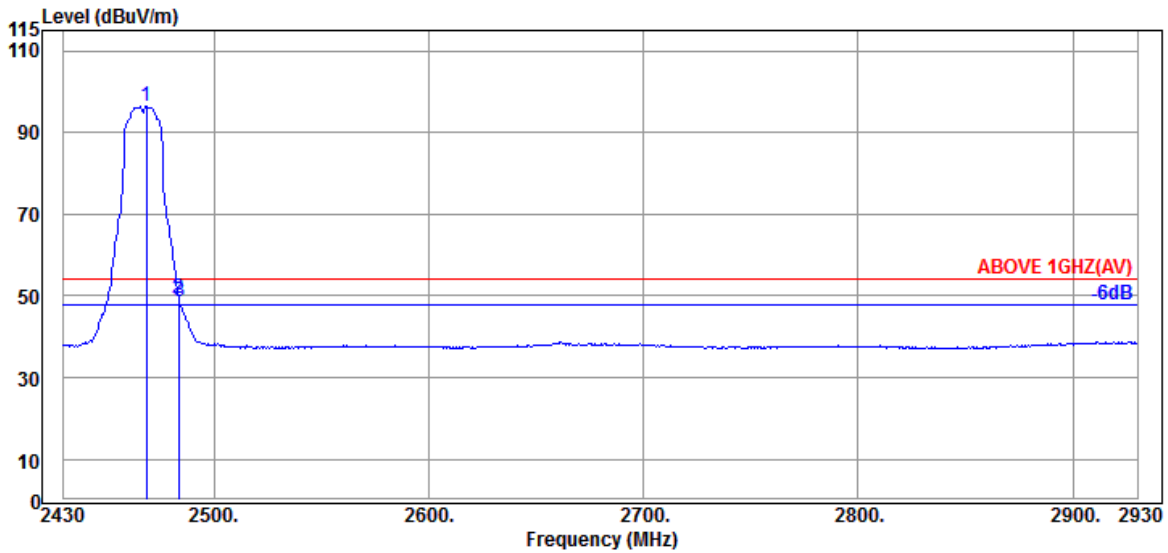


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.54	6.15	34.55	96.38	96.52	---	---	Average
2483.500	28.57	6.18	34.55	49.02	49.22	54.00	4.78	Average
2484.000	28.57	6.18	34.55	48.23	48.43	54.00	5.57	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

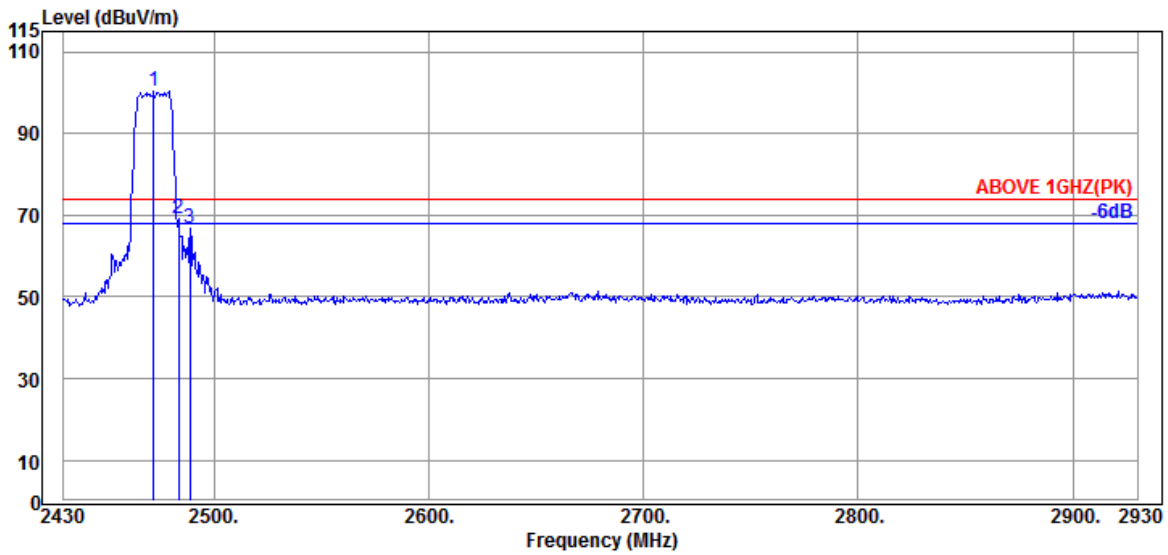

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2472.000	28.54	6.18	34.55	100.20	100.37	---	---	Peak
2483.500	28.57	6.18	34.55	68.78	68.98	74.00	5.02	Peak
2489.000	28.57	6.21	34.55	66.66	66.89	74.00	7.11	Peak

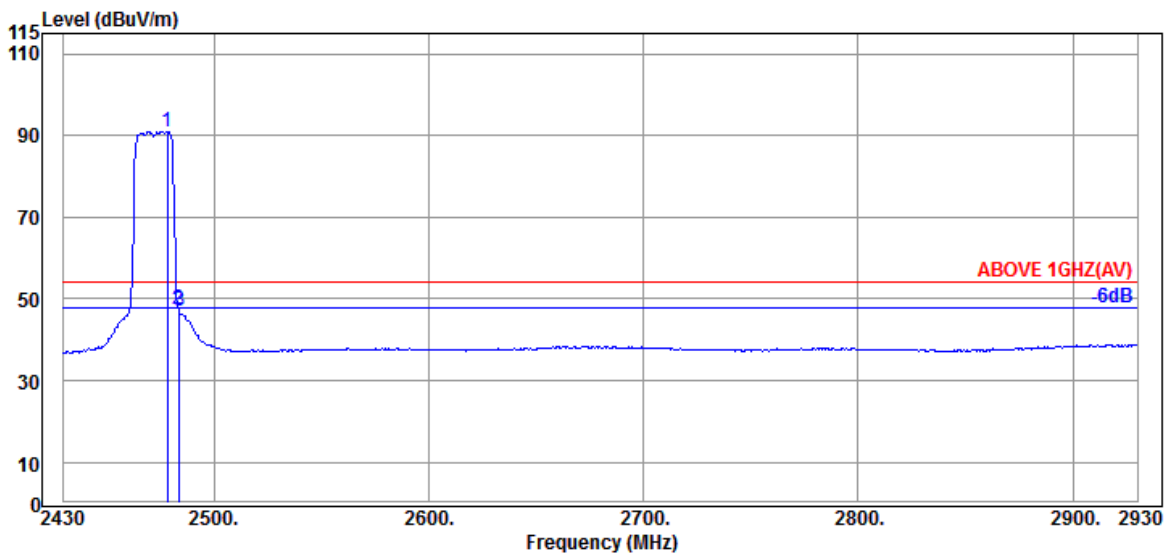


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.56	6.18	34.55	90.85	91.04	---	---	Average
2483.500	28.57	6.18	34.55	47.16	47.36	54.00	6.64	Average
2484.000	28.57	6.18	34.55	47.01	47.21	54.00	6.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11g	Frequency	TX 2472MHz
------	---------	-----------	------------

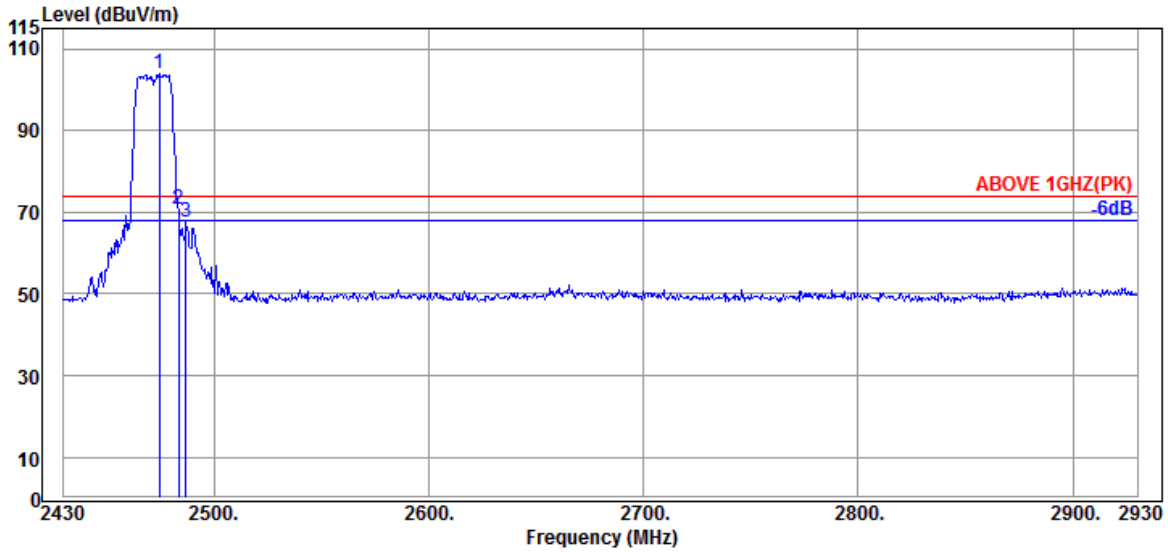

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.500	28.54	6.18	34.55	103.66	103.83	---	---	Peak
2483.500	28.57	6.18	34.55	70.57	70.77	74.00	3.23	Peak
2487.000	28.57	6.18	34.55	67.40	67.60	74.00	6.40	Peak

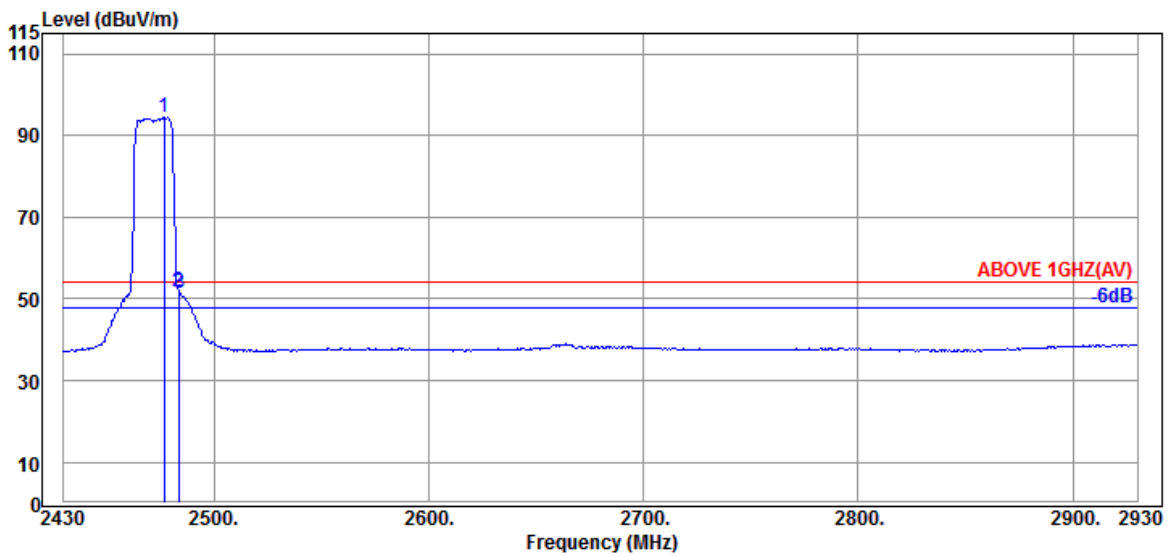


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2477.000	28.56	6.18	34.55	94.24	94.43	---	---	Average
2483.500	28.57	6.18	34.55	51.64	51.84	54.00	2.16	Average
2484.000	28.57	6.18	34.55	51.18	51.38	54.00	2.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

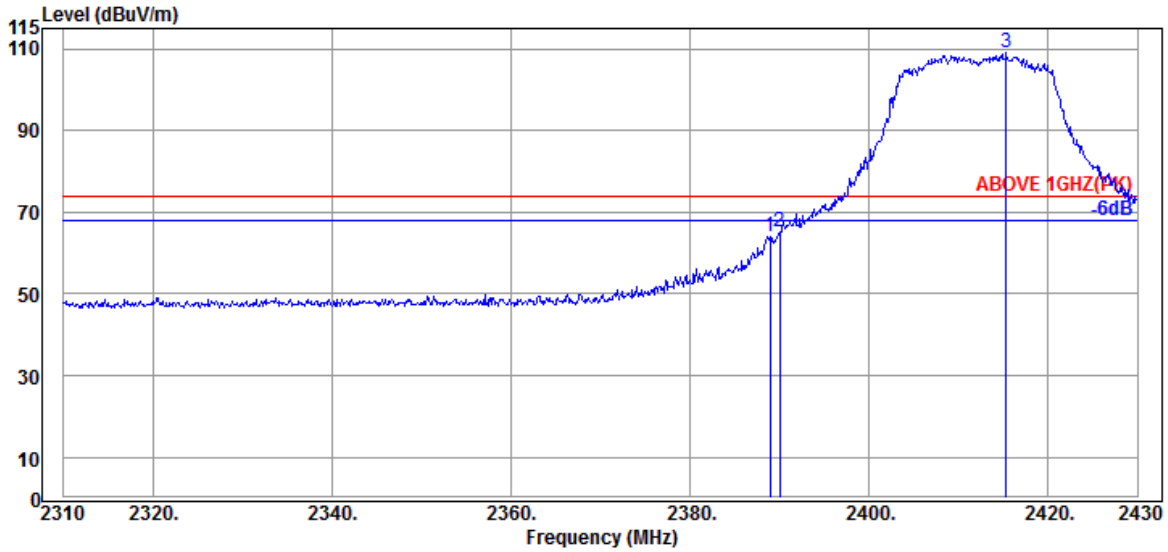

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	34.53	64.20	63.98	74.00	10.02	Peak
2390.040	28.27	6.04	34.54	65.37	65.14	74.00	8.86	Peak
@ 2415.360	28.36	6.07	34.54	109.21	109.10	---	---	Peak

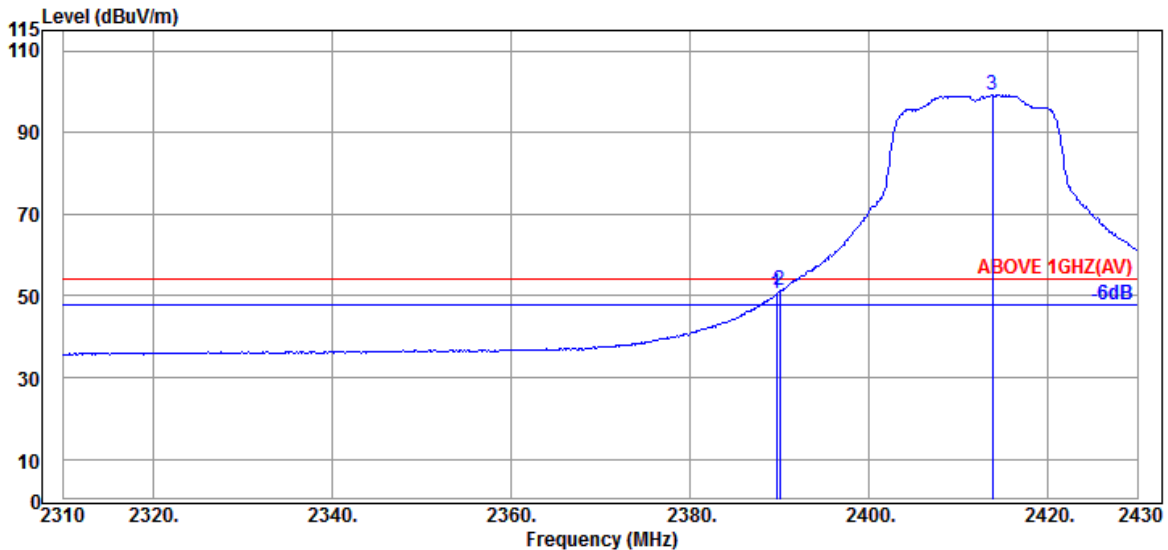


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	50.71	50.49	54.00	3.51	Average
2390.040	28.27	6.04	34.54	51.47	51.24	54.00	2.76	Average
@ 2413.800	28.36	6.07	34.54	99.21	99.10	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2412MHz
------	--------------	-----------	------------

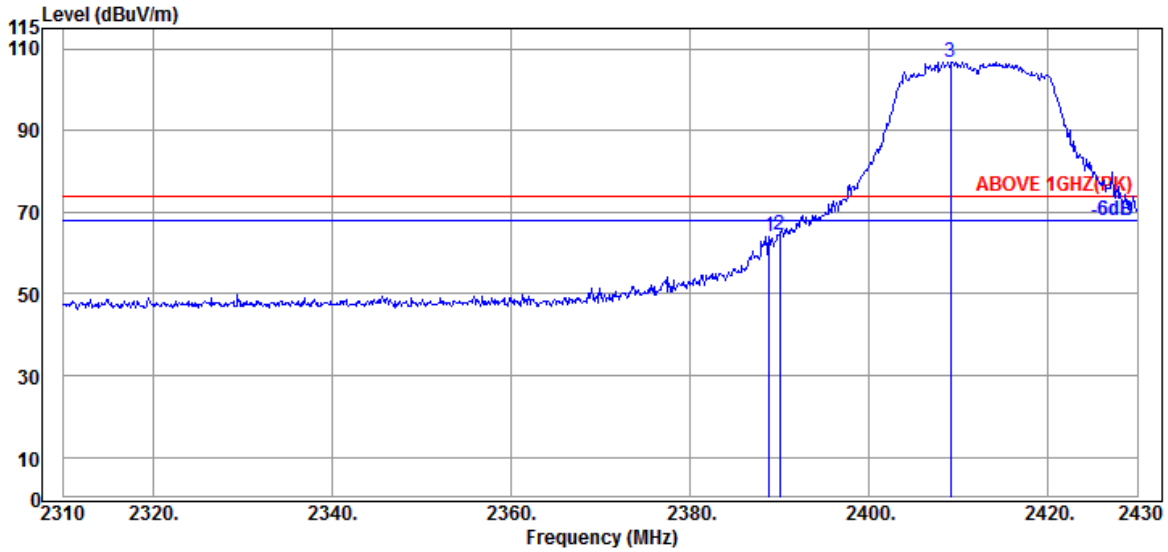

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.840	28.27	6.04	34.53	64.33	64.11	74.00	9.89	Peak
2390.040	28.27	6.04	34.54	64.72	64.49	74.00	9.51	Peak
@ 2409.120	28.33	6.07	34.54	106.93	106.79	---	---	Peak

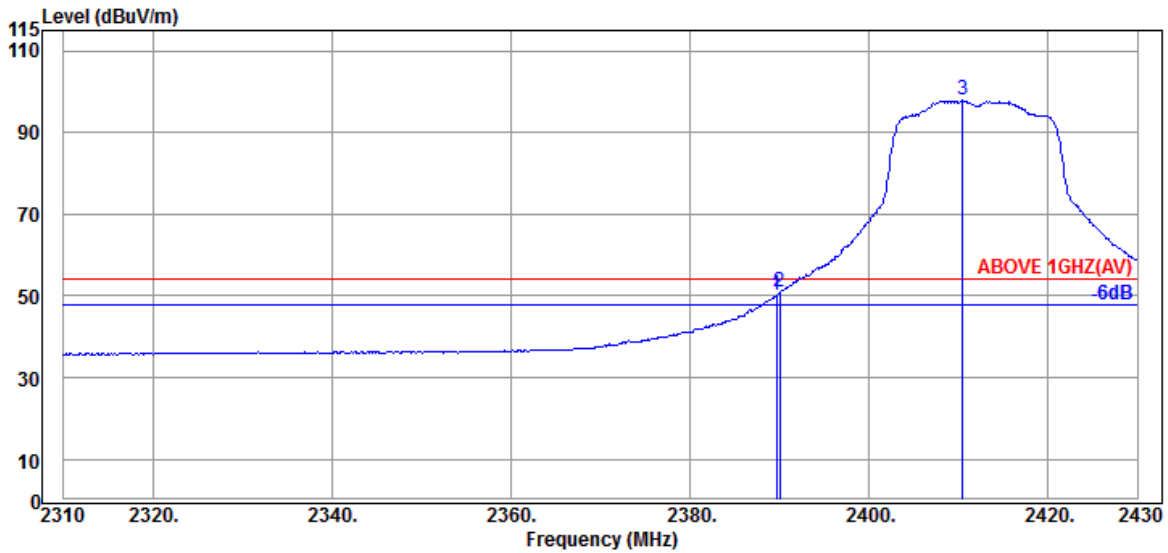


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	50.23	50.01	54.00	3.99	Average
2390.040	28.27	6.04	34.54	51.08	50.85	54.00	3.15	Average
@ 2410.440	28.33	6.07	34.54	97.95	97.81	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

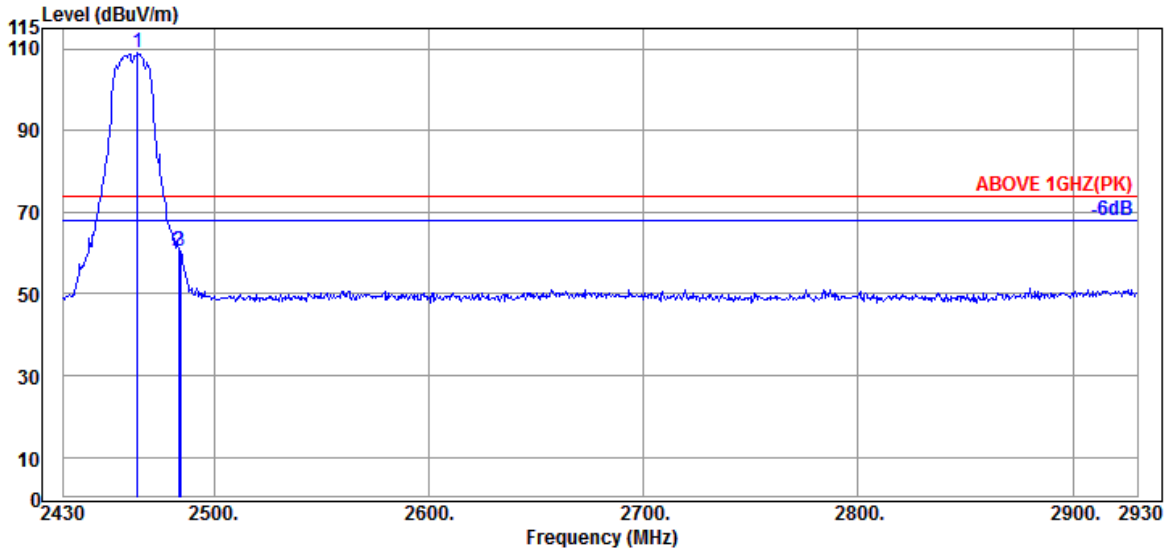

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.500	28.53	6.15	34.55	108.75	108.88	---	---	Peak
2483.500	28.57	6.18	34.55	60.12	60.32	74.00	13.68	Peak
2484.500	28.57	6.18	34.55	60.09	60.29	74.00	13.71	Peak

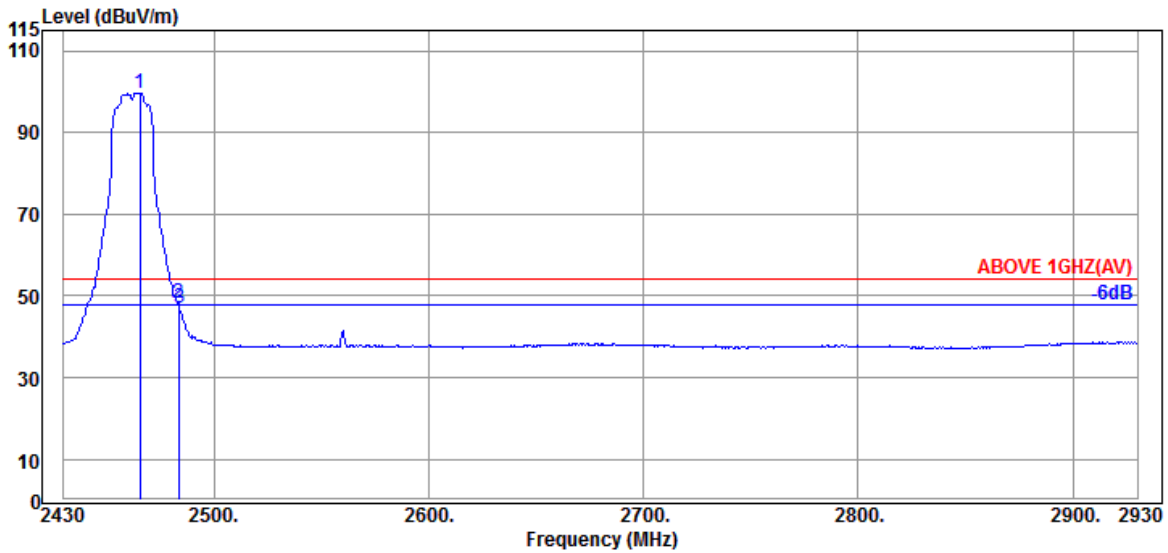


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.53	6.15	34.55	99.54	99.67	---	---	Average
2483.500	28.57	6.18	34.55	47.84	48.04	54.00	5.96	Average
2484.000	28.57	6.18	34.55	46.65	46.85	54.00	7.15	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2462MHz
------	--------------	-----------	------------

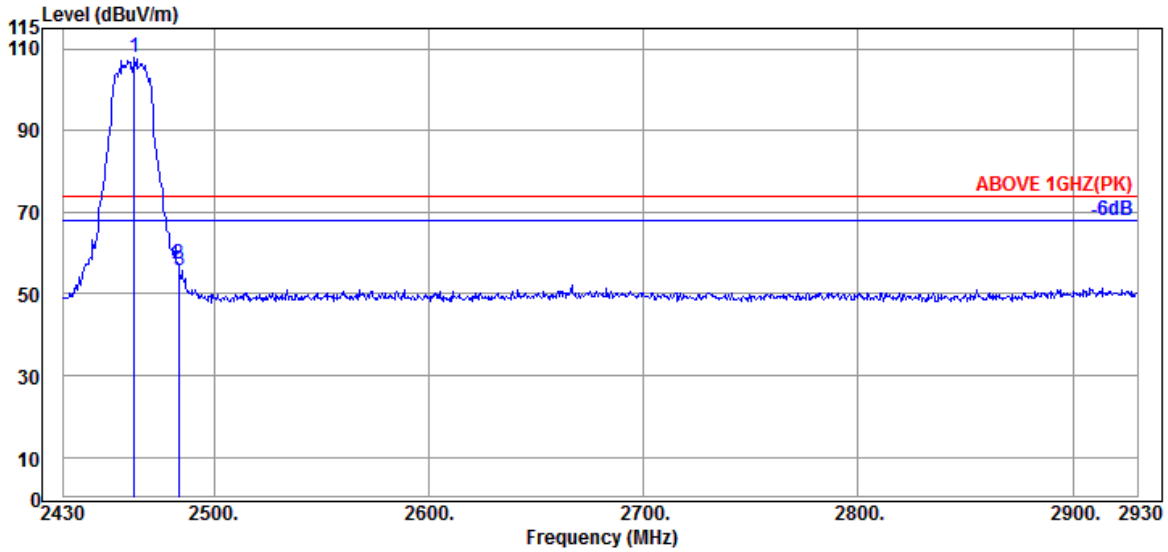

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.000	28.53	6.15	34.55	107.87	108.00	---	---	Peak
2483.500	28.57	6.18	34.55	57.15	57.35	74.00	16.65	Peak
2484.000	28.57	6.18	34.55	55.69	55.89	74.00	18.11	Peak

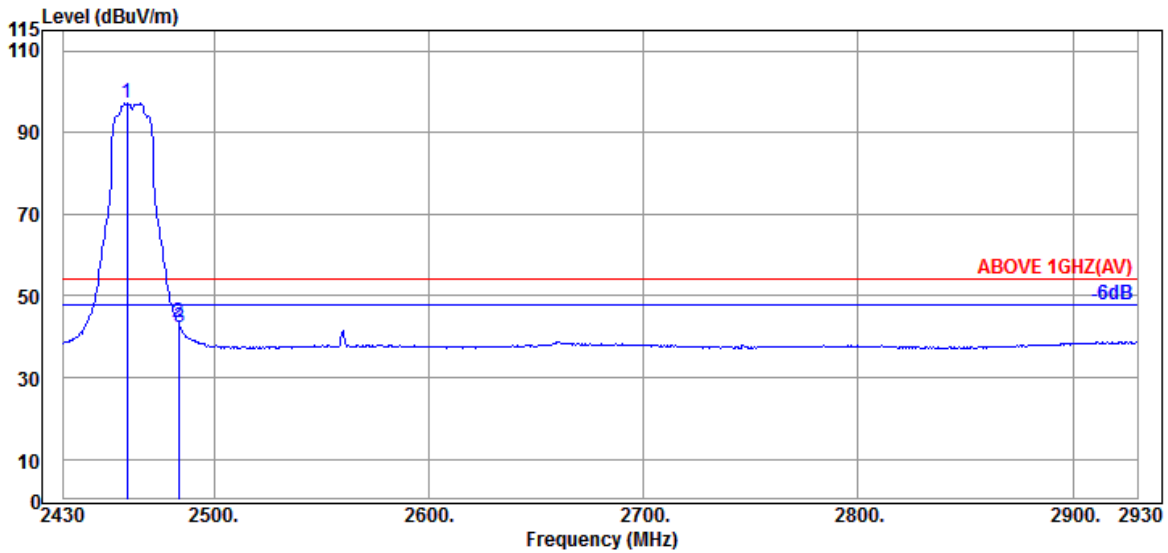


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.500	28.51	6.15	34.55	97.01	97.12	---	---	Average
2483.500	28.57	6.18	34.55	43.12	43.32	54.00	10.68	Average
2484.000	28.57	6.18	34.55	42.22	42.42	54.00	11.58	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

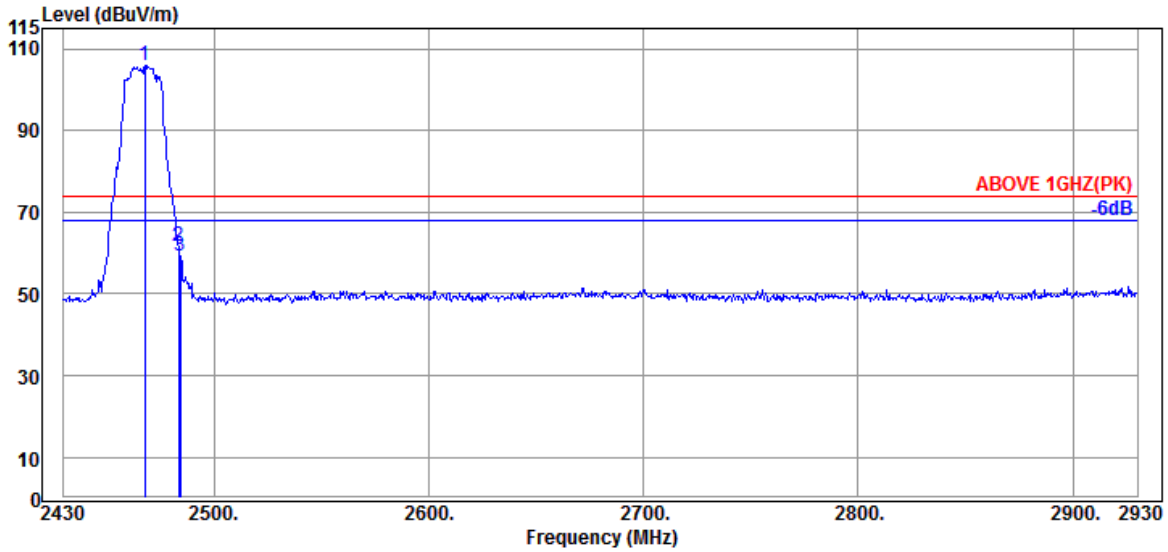

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.54	6.15	34.55	105.84	105.98	---	---	Peak
2483.500	28.57	6.18	34.55	61.61	61.81	74.00	12.19	Peak
2484.500	28.57	6.18	34.55	59.18	59.38	74.00	14.62	Peak

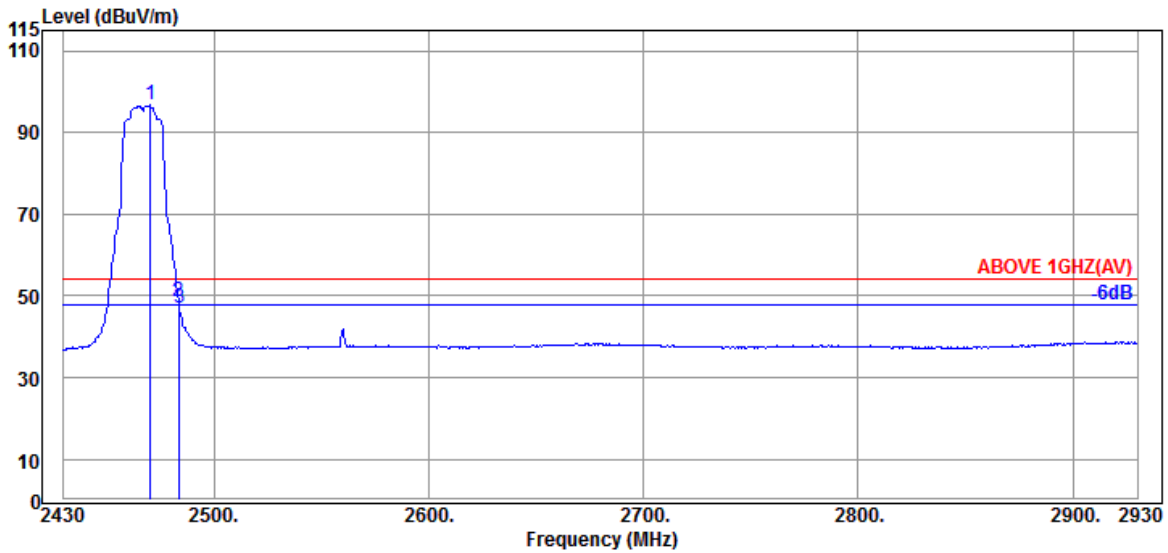


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.500	28.54	6.15	34.55	96.62	96.76	---	---	Average
2483.500	28.57	6.18	34.55	48.50	48.70	54.00	5.30	Average
2484.000	28.57	6.18	34.55	46.76	46.96	54.00	7.04	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2467MHz
------	--------------	-----------	------------

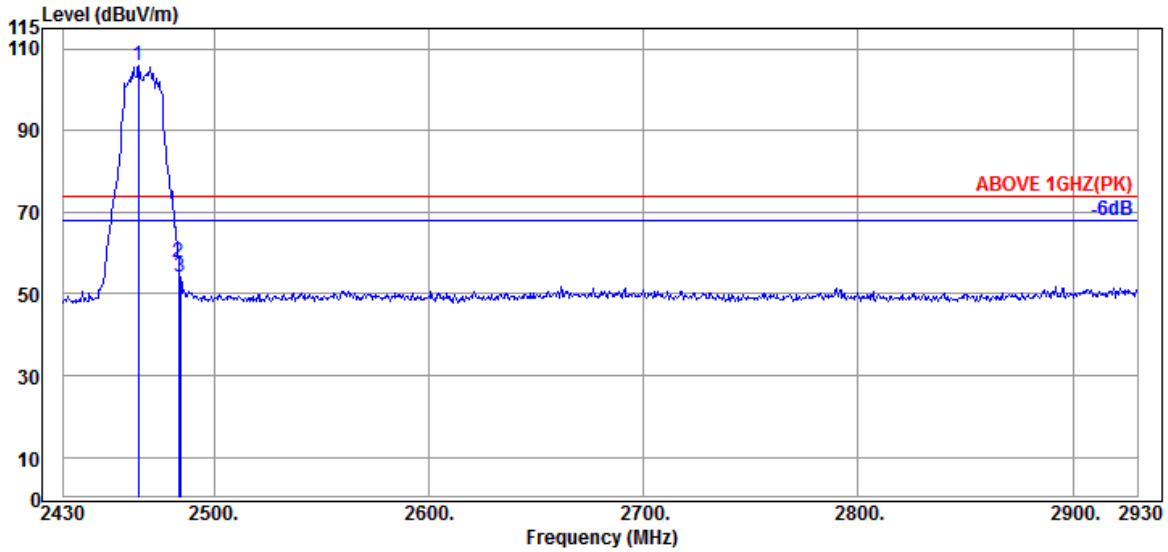

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	105.61	105.74	---	---	Peak
2483.500	28.57	6.18	34.55	57.55	57.75	74.00	16.25	Peak
2484.500	28.57	6.18	34.55	53.93	54.13	74.00	19.87	Peak

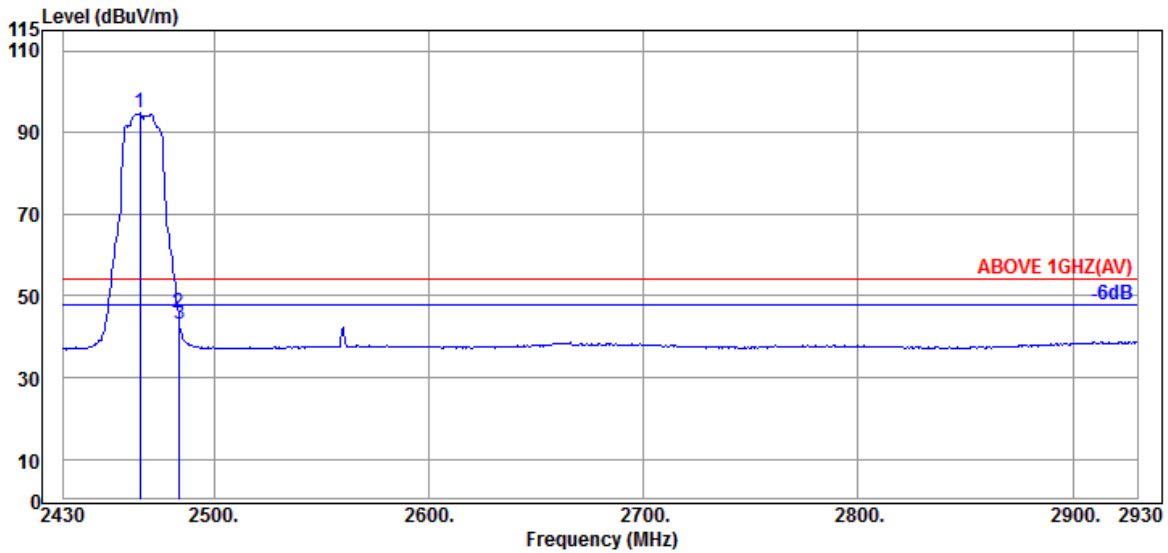


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.500	28.53	6.15	34.55	94.60	94.73	---	---	Average
2483.500	28.57	6.18	34.55	45.55	45.75	54.00	8.25	Average
2484.000	28.57	6.18	34.55	43.06	43.26	54.00	10.74	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

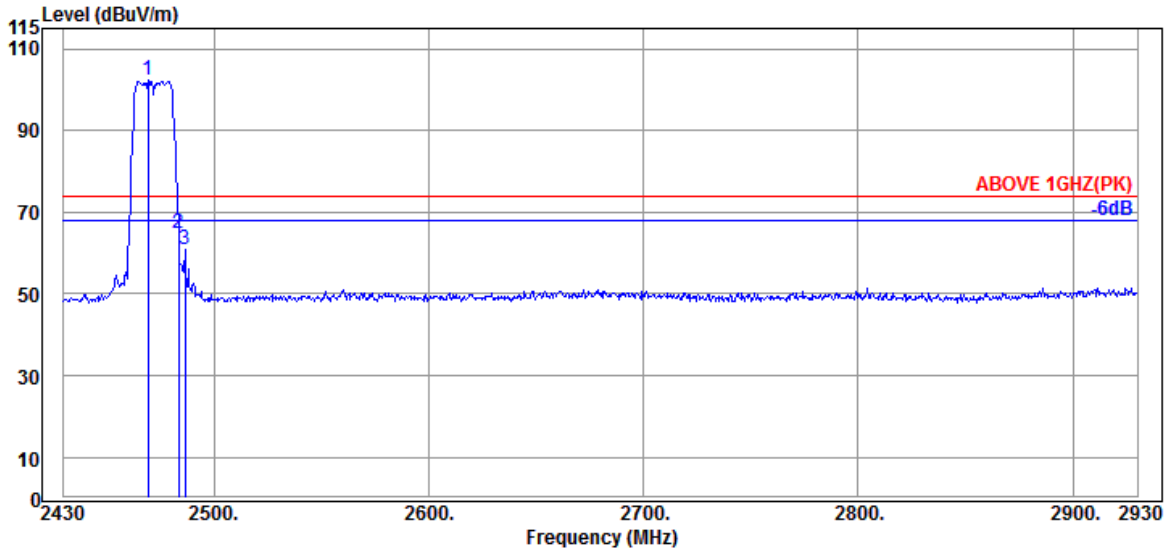

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.54	6.15	34.55	102.07	102.21	---	---	Peak
2483.500	28.57	6.18	34.55	64.47	64.67	74.00	9.33	Peak
2486.500	28.57	6.18	34.55	60.80	61.00	74.00	13.00	Peak

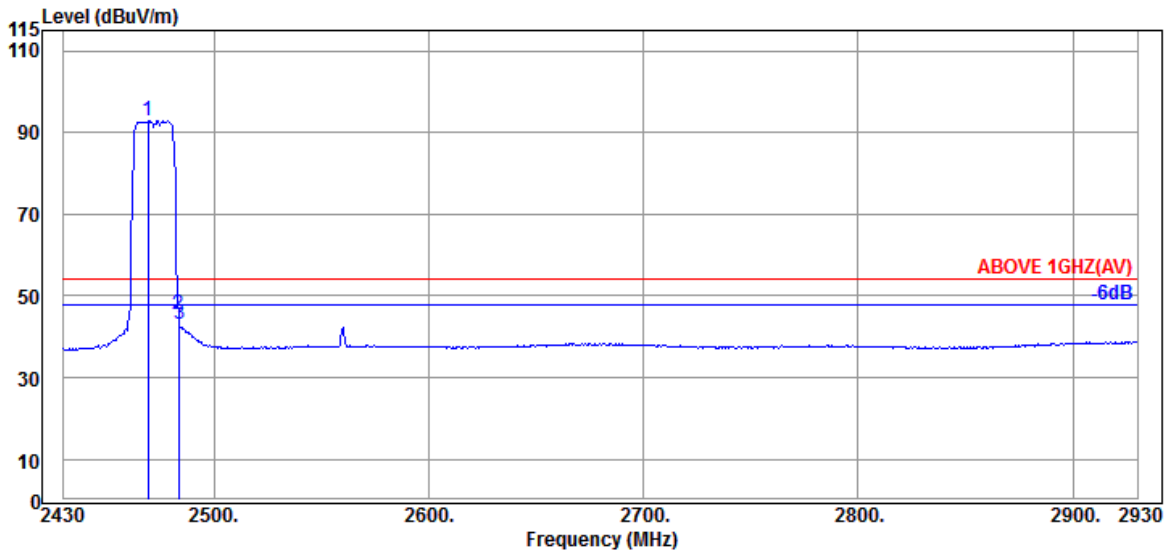


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.54	6.15	34.55	92.72	92.86	---	---	Average
2483.500	28.57	6.18	34.55	45.11	45.31	54.00	8.69	Average
2484.000	28.57	6.18	34.55	43.03	43.23	54.00	10.77	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	Frequency	TX 2472MHz
------	--------------	-----------	------------

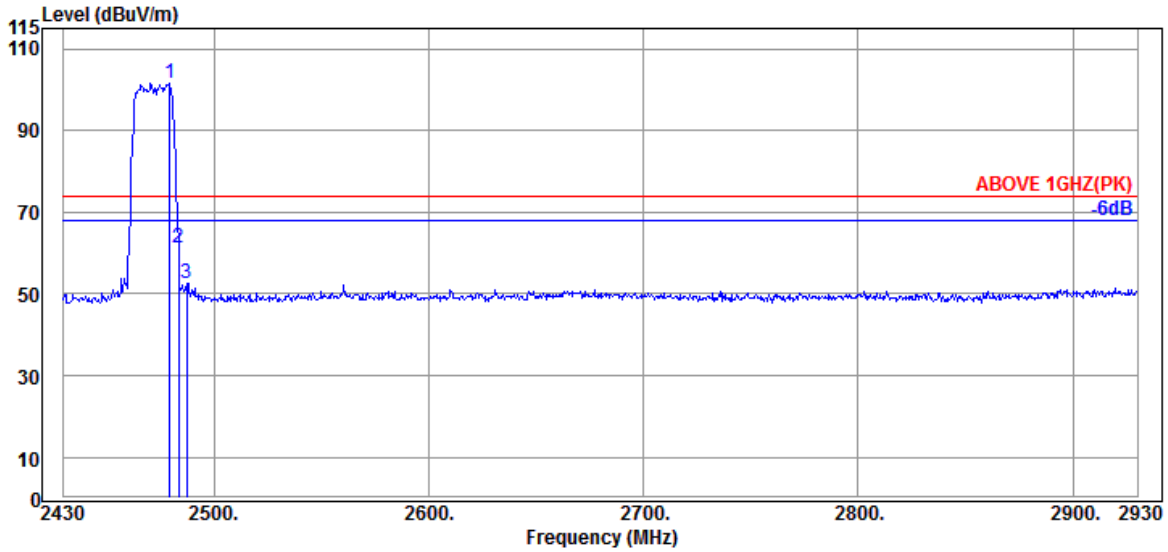

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	6.18	34.55	101.53	101.72	---	---	Peak
2483.500	28.57	6.18	34.55	61.18	61.38	74.00	12.62	Peak
2487.500	28.57	6.21	34.55	52.28	52.51	74.00	21.49	Peak

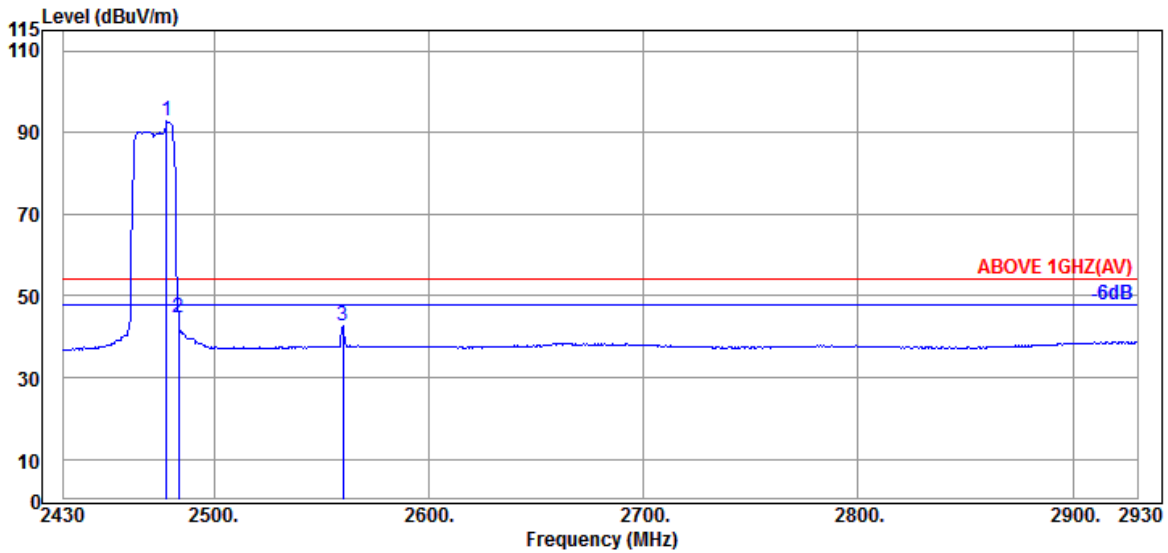


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.56	6.18	34.55	92.61	92.80	---	---	Average
2483.500	28.57	6.18	34.55	44.56	44.76	54.00	9.24	Average
2560.000	28.83	6.30	34.57	41.94	42.50	54.00	11.50	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

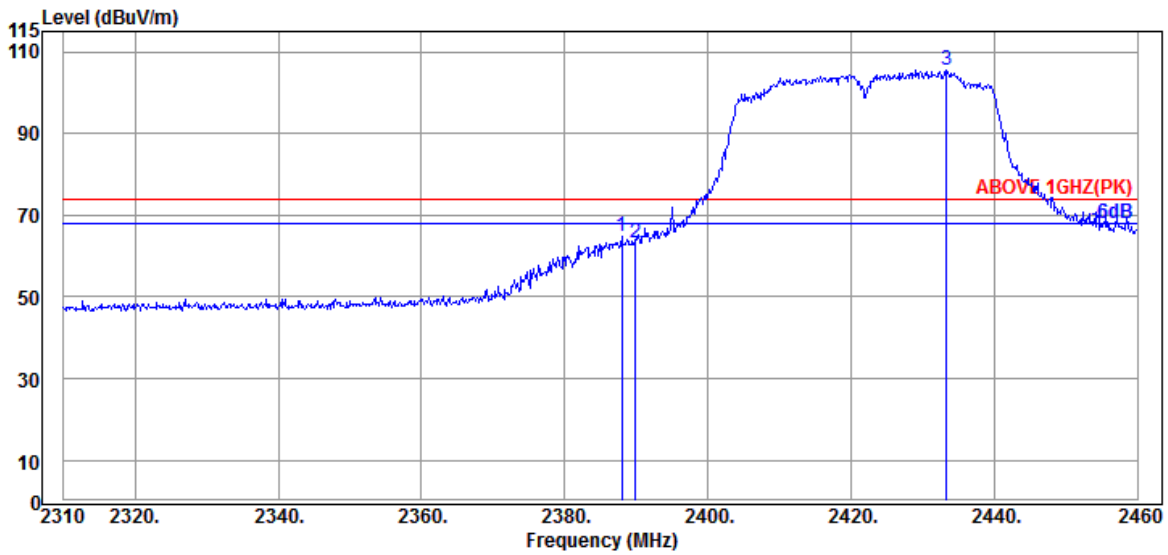

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2388.000	28.27	6.04	34.53	65.08	64.86	74.00	9.14	Peak
2389.950	28.27	6.04	34.54	63.55	63.32	74.00	10.68	Peak
@ 2433.300	28.44	6.10	34.54	105.61	105.61	---	---	Peak

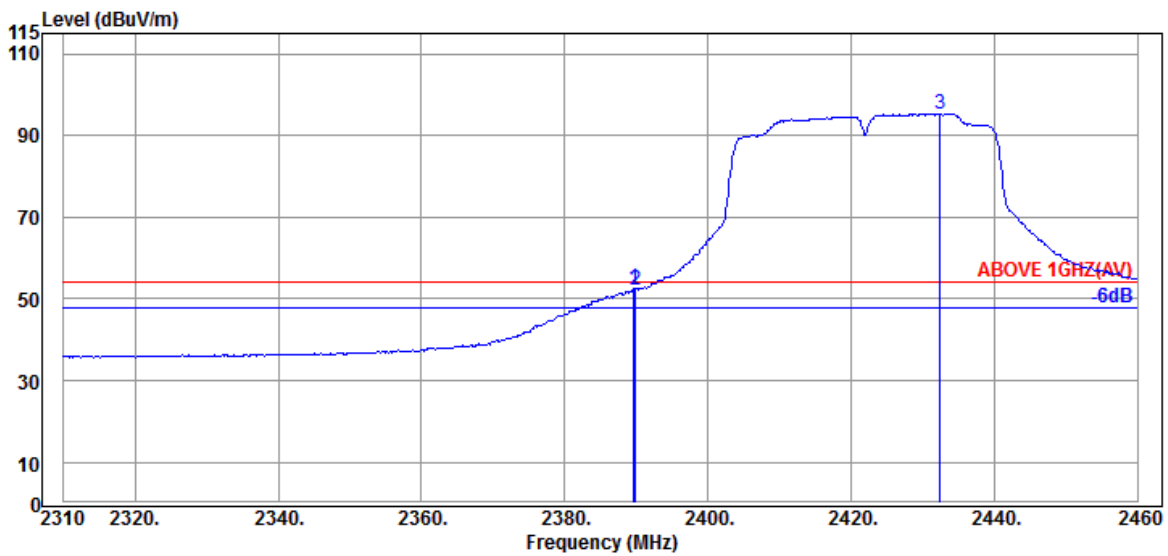


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
2389.650	28.27	6.04	34.53	52.60	52.38	54.00	1.62	Average
2389.950	28.27	6.04	34.54	52.59	52.36	54.00	1.64	Average
@ 2432.400	28.44	6.10	34.54	95.42	95.42	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2422MHz
------	--------------	-----------	------------

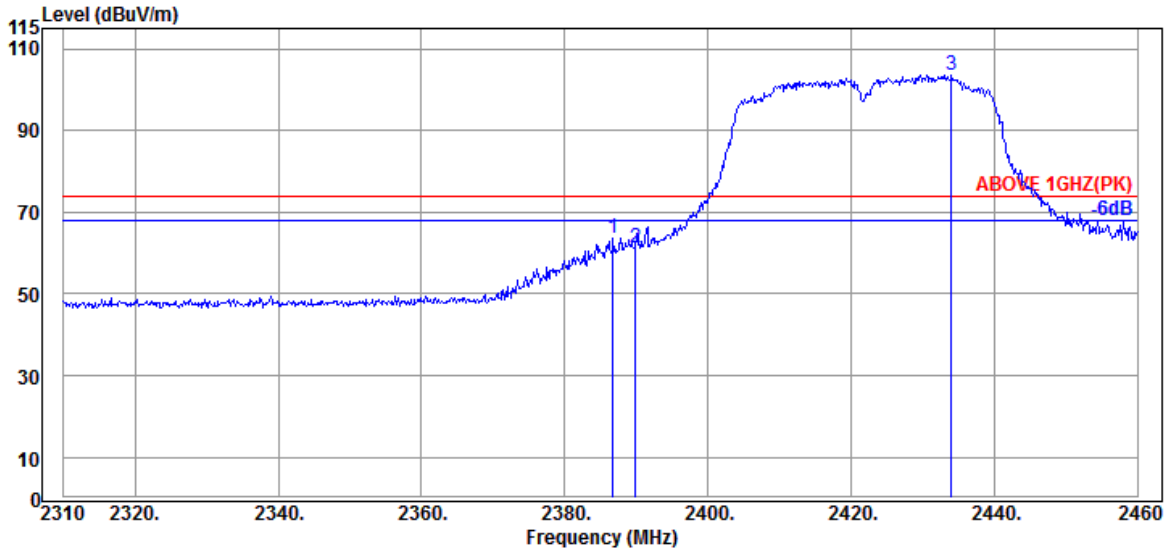

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.800	28.27	6.04	34.53	63.78	63.56	74.00	10.44	Peak
2389.950	28.27	6.04	34.54	61.47	61.24	74.00	12.76	Peak
@ 2434.050	28.44	6.10	34.54	103.49	103.49	---	---	Peak

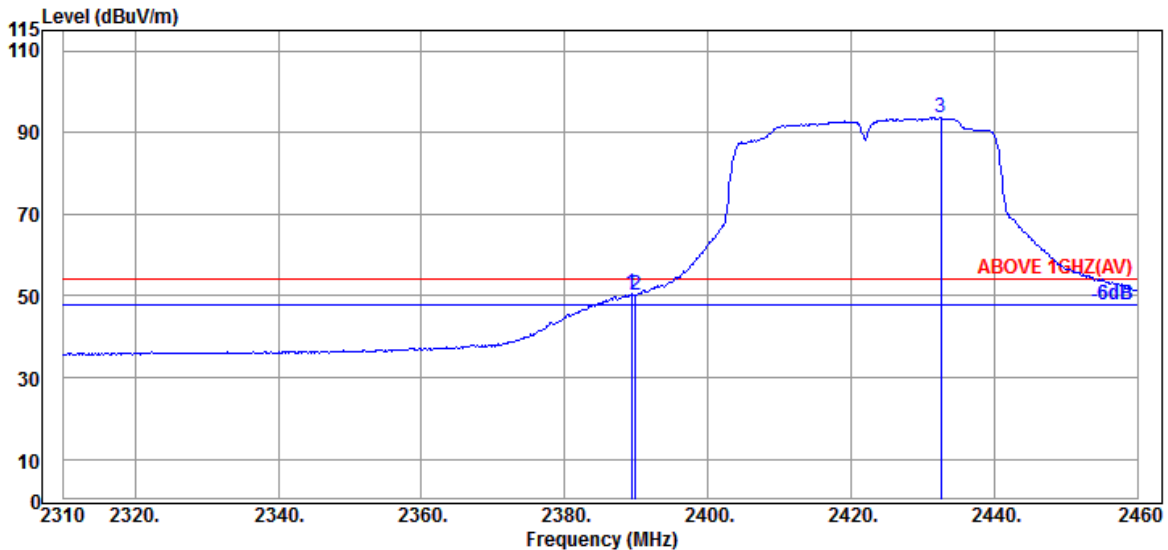


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.350	28.27	6.04	34.53	50.65	50.43	54.00	3.57	Average
2389.950	28.27	6.04	34.54	50.59	50.36	54.00	3.64	Average
@ 2432.550	28.44	6.10	34.54	93.59	93.59	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

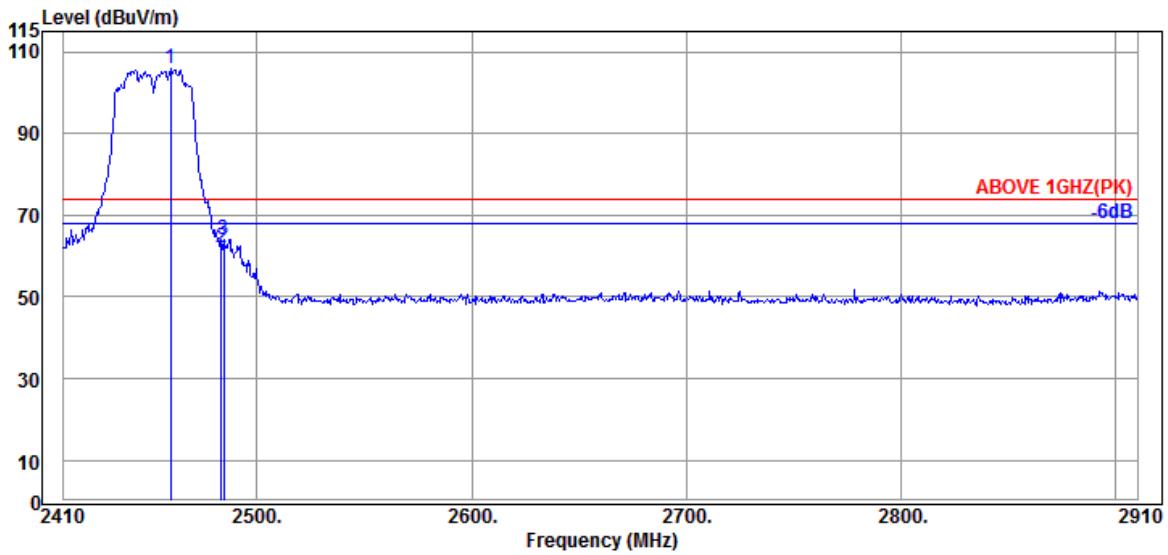

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2460.000	28.51	6.15	34.55	105.78	105.89	---	---	Peak
2483.500	28.57	6.18	34.55	61.84	62.04	74.00	11.96	Peak
2484.500	28.57	6.18	34.55	63.95	64.15	74.00	9.85	Peak

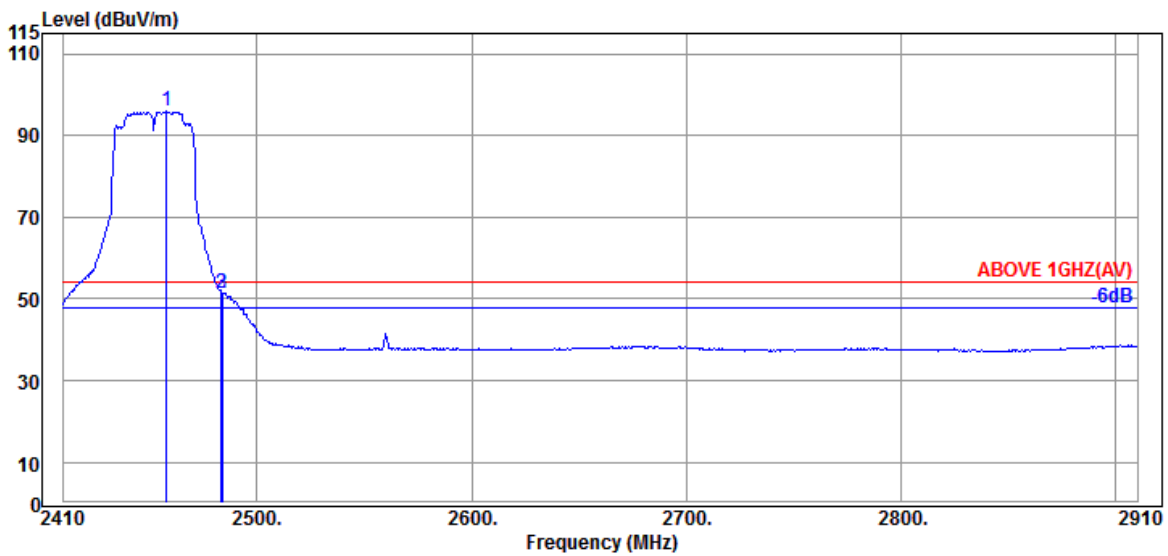


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.000	28.51	6.15	34.55	95.75	95.86	---	---	Average
2483.500	28.57	6.18	34.55	51.27	51.47	54.00	2.53	Average
2484.000	28.57	6.18	34.55	51.25	51.45	54.00	2.55	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2452MHz
------	--------------	-----------	------------

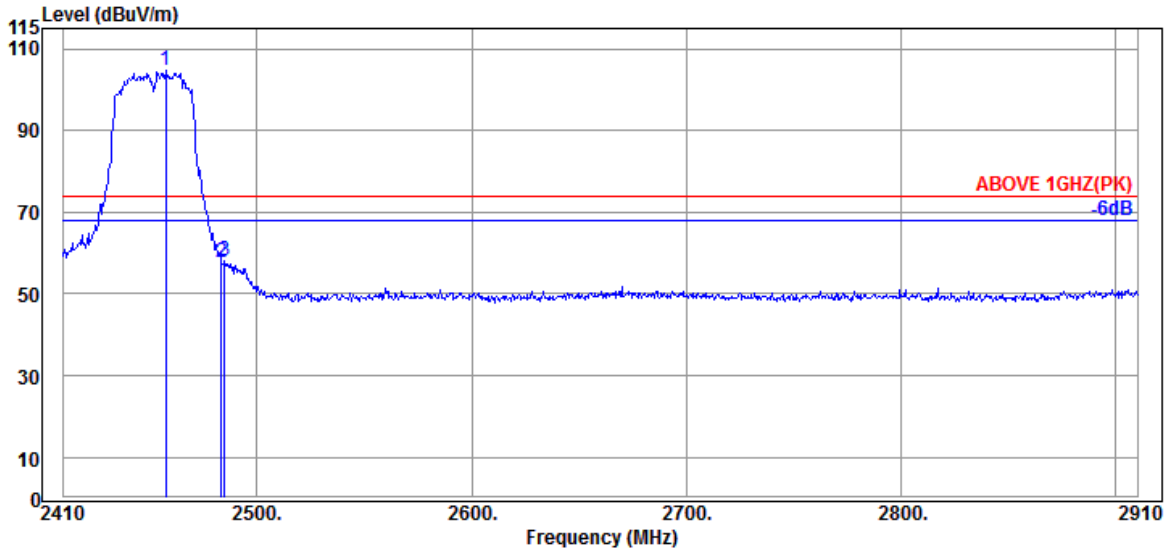

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2457.500	28.51	6.15	34.55	104.56	104.67	---	---	Peak
2483.500	28.57	6.18	34.55	57.58	57.78	74.00	16.22	Peak
2485.000	28.57	6.18	34.55	57.93	58.13	74.00	15.87	Peak

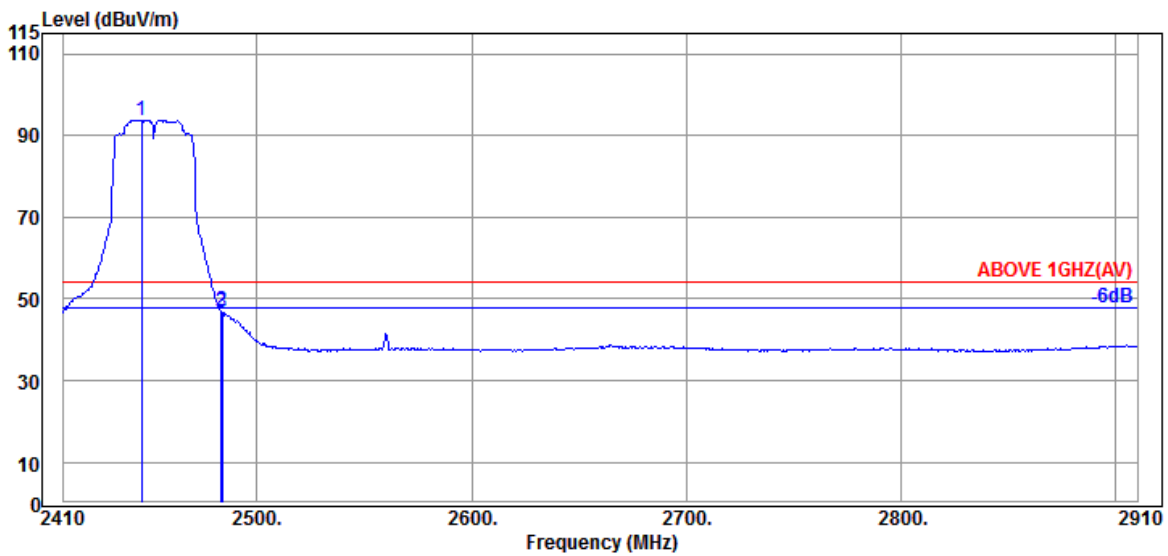


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	28.50	6.13	34.55	93.74	93.82	---	---	Average
2483.500	28.57	6.18	34.55	46.84	47.04	54.00	6.96	Average
2484.000	28.57	6.18	34.55	46.61	46.81	54.00	7.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

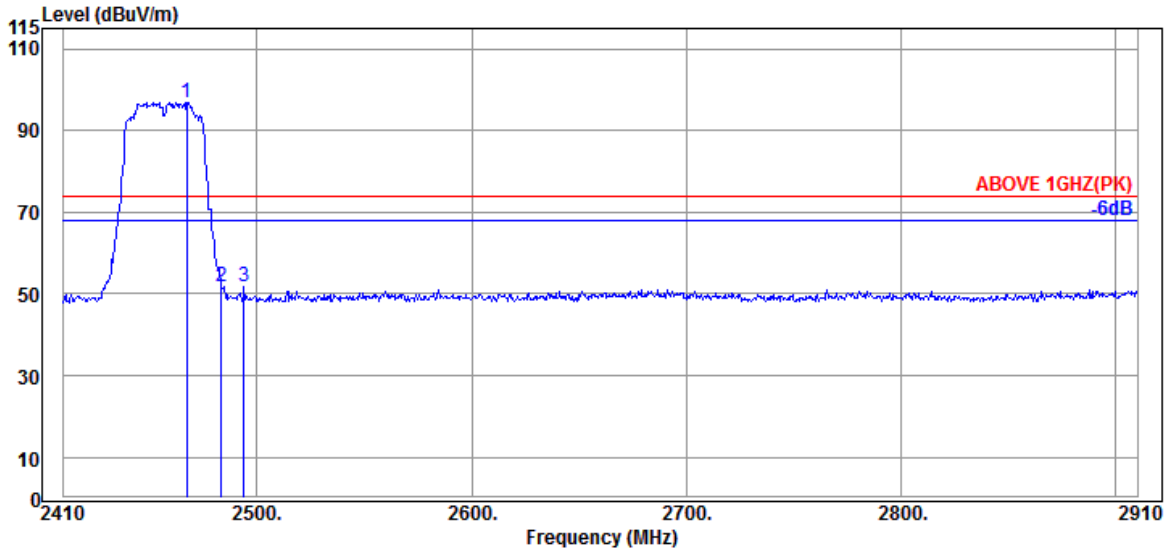

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.53	6.15	34.55	96.86	96.99	---	---	Peak
2483.500	28.57	6.18	34.55	51.56	51.76	74.00	22.24	Peak
2494.000	28.59	6.21	34.56	51.40	51.64	74.00	22.36	Peak

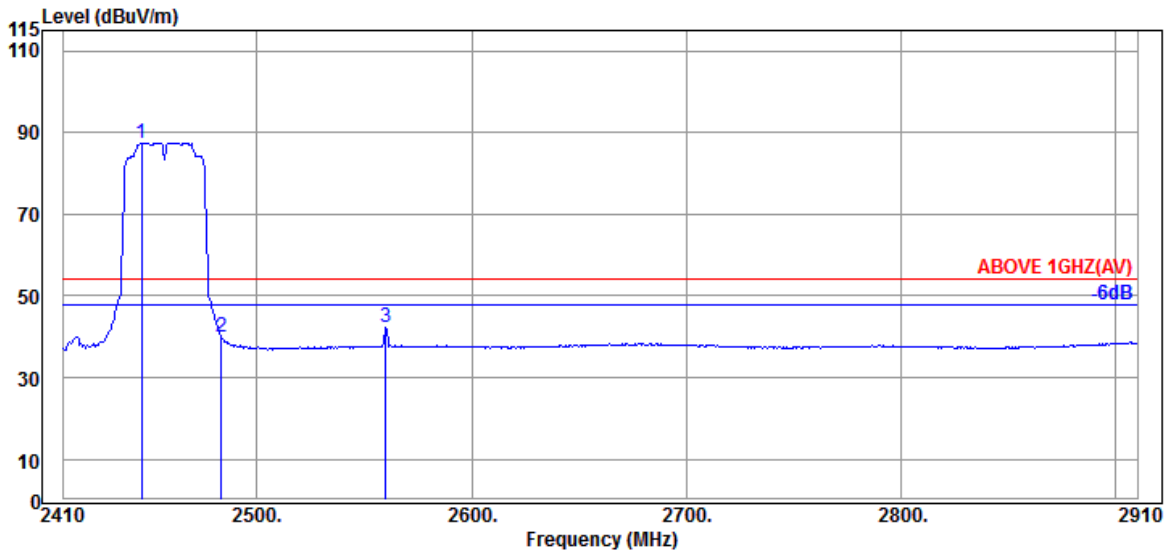


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2446.500	28.50	6.13	34.55	87.42	87.50	---	---	Average
2483.500	28.57	6.18	34.55	39.87	40.07	54.00	13.93	Average
2560.000	28.83	6.30	34.57	41.62	42.18	54.00	11.82	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2457MHz
------	--------------	-----------	------------

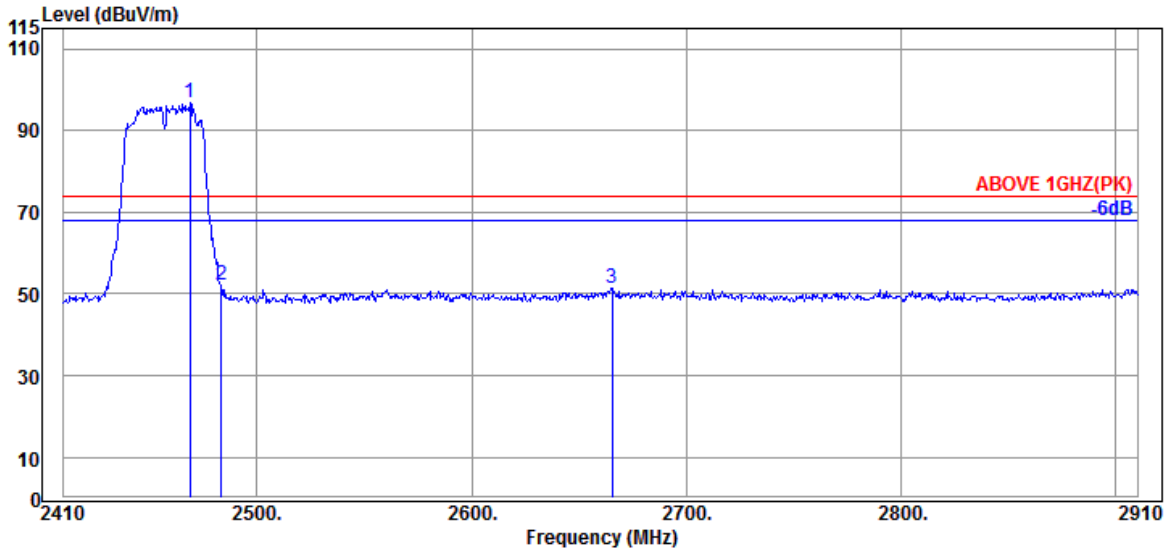

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.54	6.15	34.55	96.65	96.79	---	---	Peak
2483.500	28.57	6.18	34.55	52.08	52.28	74.00	21.72	Peak
2665.500	28.96	6.43	34.59	50.42	51.22	74.00	22.78	Peak

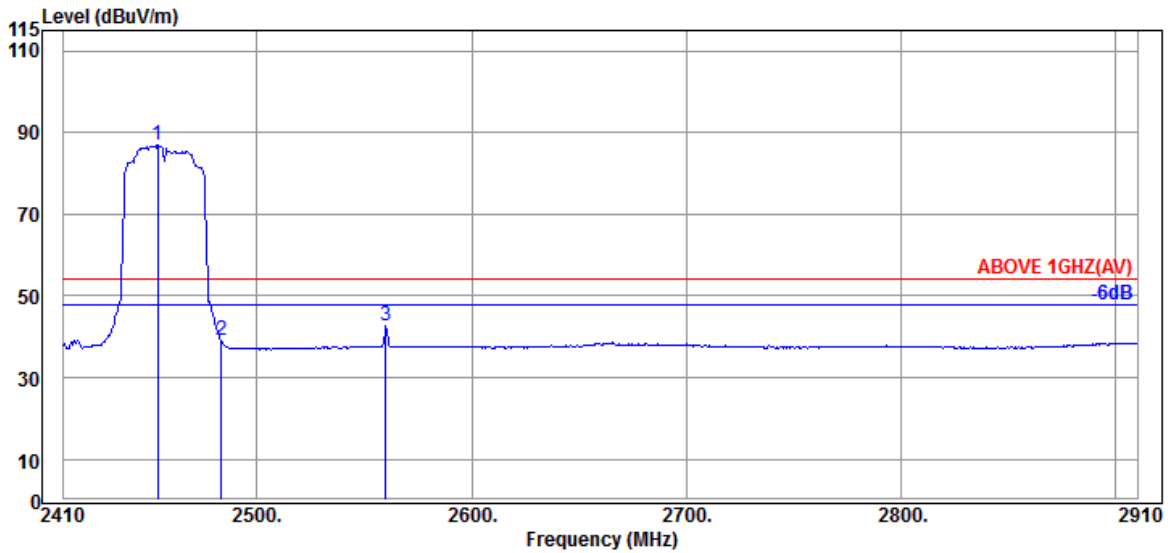


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.000	28.51	6.15	34.55	86.95	87.06	---	---	Average
2483.500	28.57	6.18	34.55	38.97	39.17	54.00	14.83	Average
2560.000	28.83	6.30	34.57	42.04	42.60	54.00	11.40	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

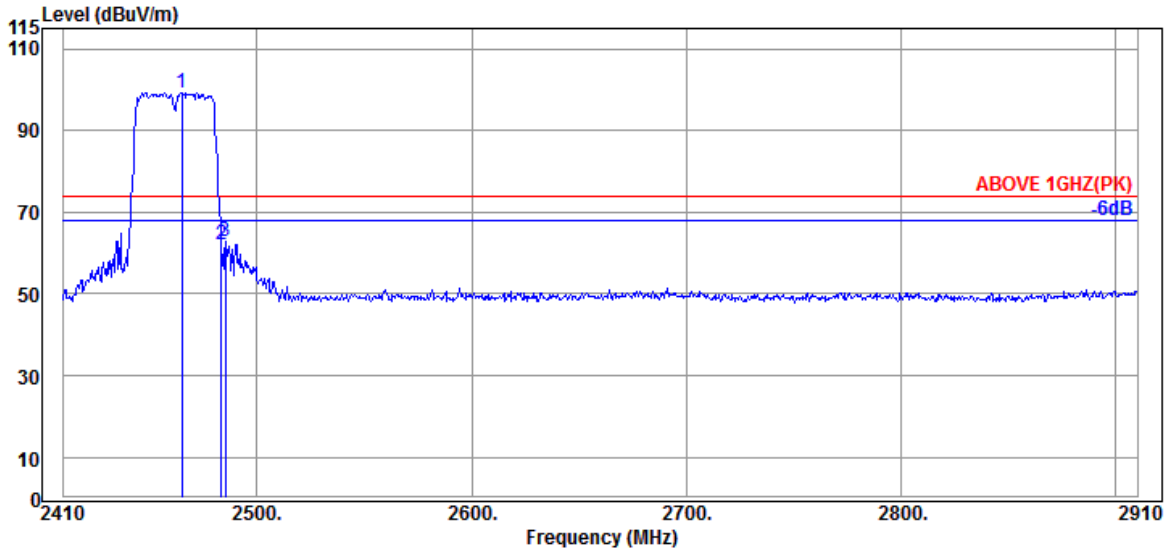

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	99.19	99.32	---	---	Peak
2483.500	28.57	6.18	34.55	61.75	61.95	74.00	12.05	Peak
2485.500	28.57	6.18	34.55	62.50	62.70	74.00	11.30	Peak

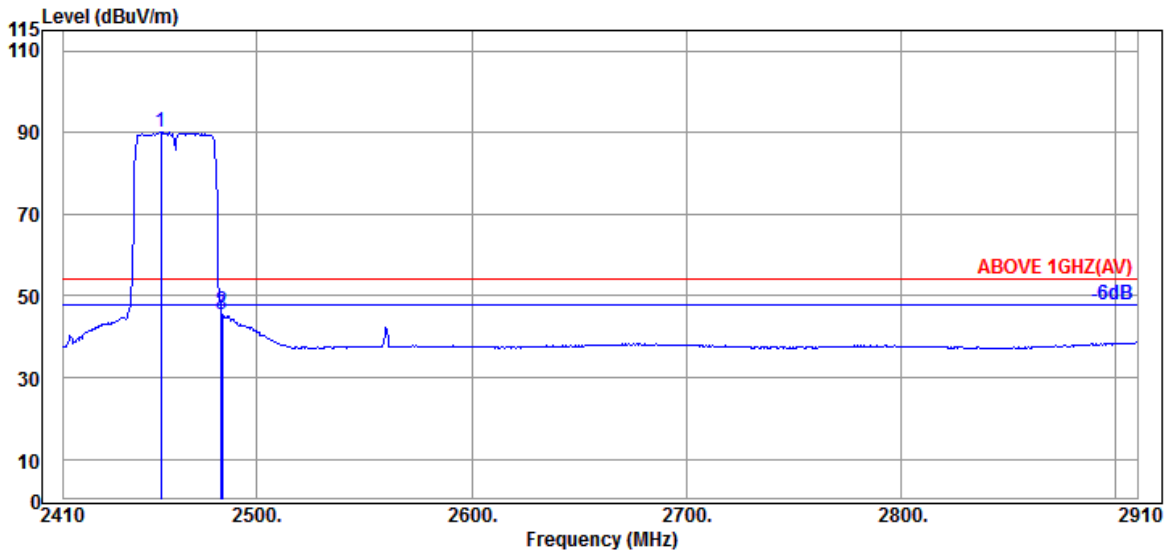


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.51	6.15	34.55	90.00	90.11	---	---	Average
2483.500	28.57	6.18	34.55	46.07	46.27	54.00	7.73	Average
2484.000	28.57	6.18	34.55	45.09	45.29	54.00	8.71	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	Frequency	TX 2462MHz
------	--------------	-----------	------------

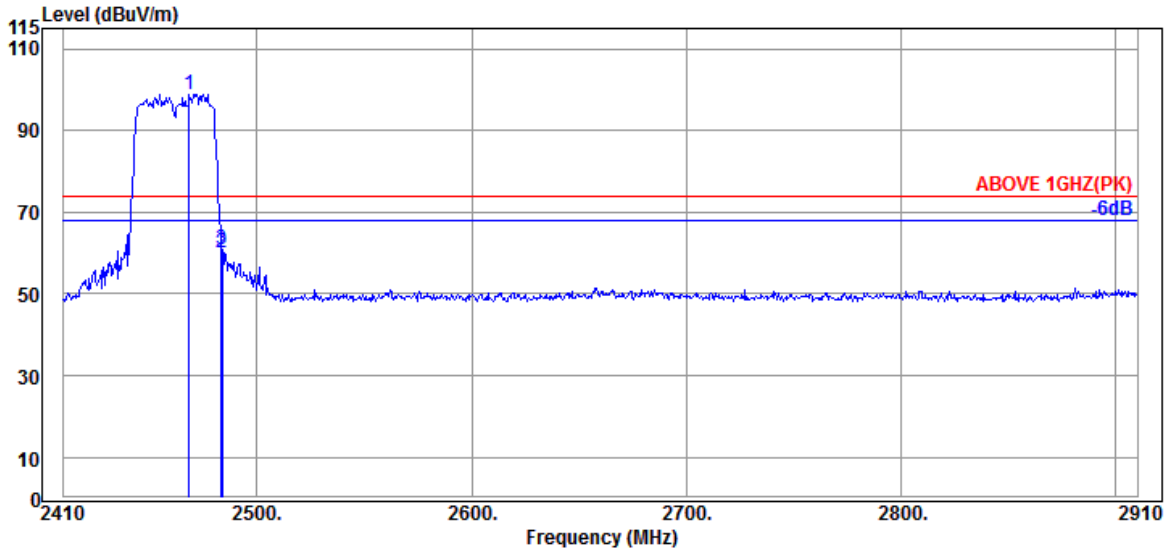

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.54	6.15	34.55	98.85	98.99	---	---	Peak
2483.500	28.57	6.18	34.55	59.89	60.09	74.00	13.91	Peak
2484.000	28.57	6.18	34.55	60.66	60.86	74.00	13.14	Peak

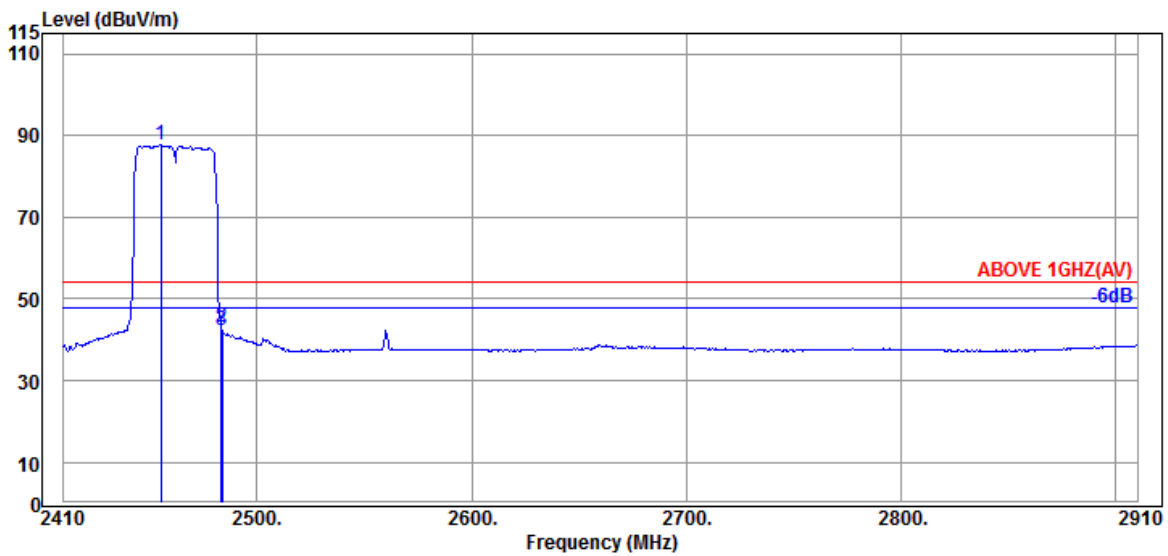


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2455.500	28.51	6.15	34.55	87.49	87.60	---	---	Average
2483.500	28.57	6.18	34.55	42.97	43.17	54.00	10.83	Average
2484.000	28.57	6.18	34.55	42.24	42.44	54.00	11.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

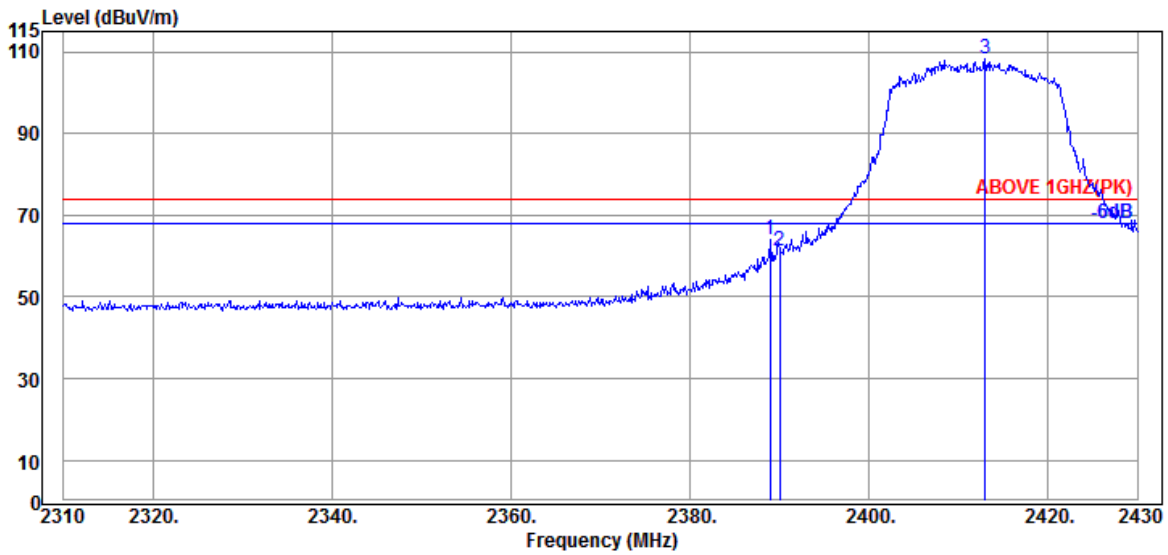

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	34.53	64.06	63.84	74.00	10.16	Peak
2390.040	28.27	6.04	34.54	61.31	61.08	74.00	12.92	Peak
@ 2412.960	28.36	6.07	34.54	108.50	108.39	---	---	Peak

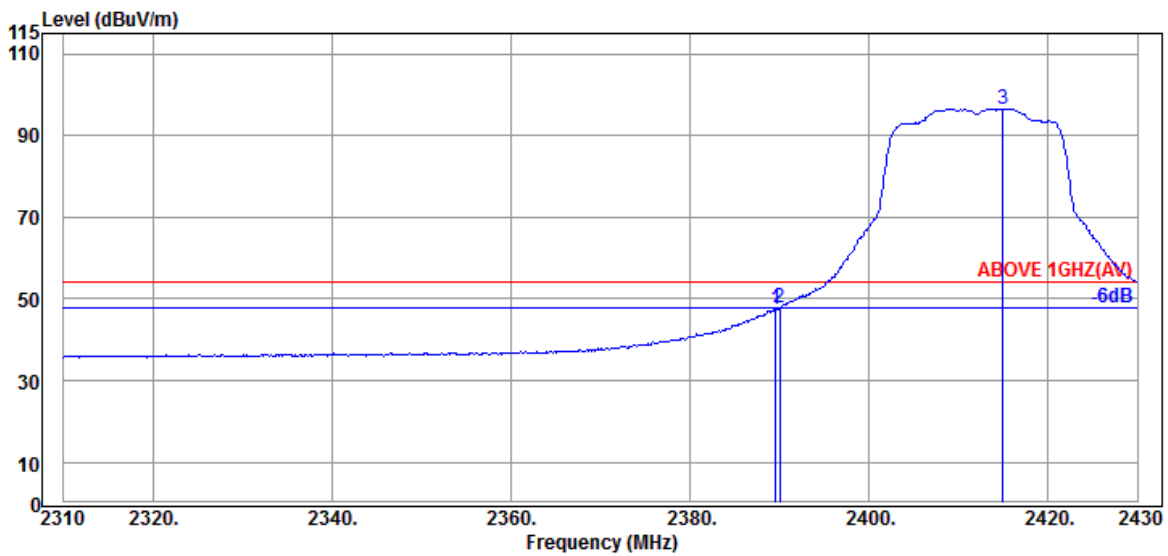


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	6.04	34.53	47.55	47.33	54.00	6.67	Average
2390.040	28.27	6.04	34.54	48.18	47.95	54.00	6.05	Average
@ 2415.000	28.36	6.07	34.54	96.73	96.62	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
------	---------------	-----------	------------

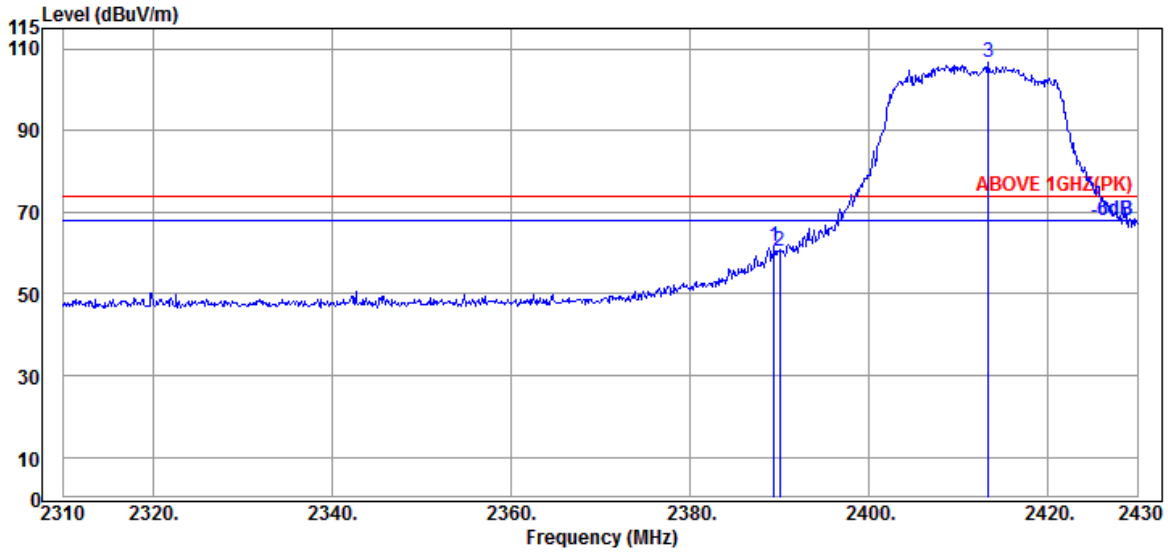

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	6.04	34.53	61.73	61.51	74.00	12.49	Peak
2390.040	28.27	6.04	34.54	60.68	60.45	74.00	13.55	Peak
@ 2413.320	28.36	6.07	34.54	106.63	106.52	---	---	Peak

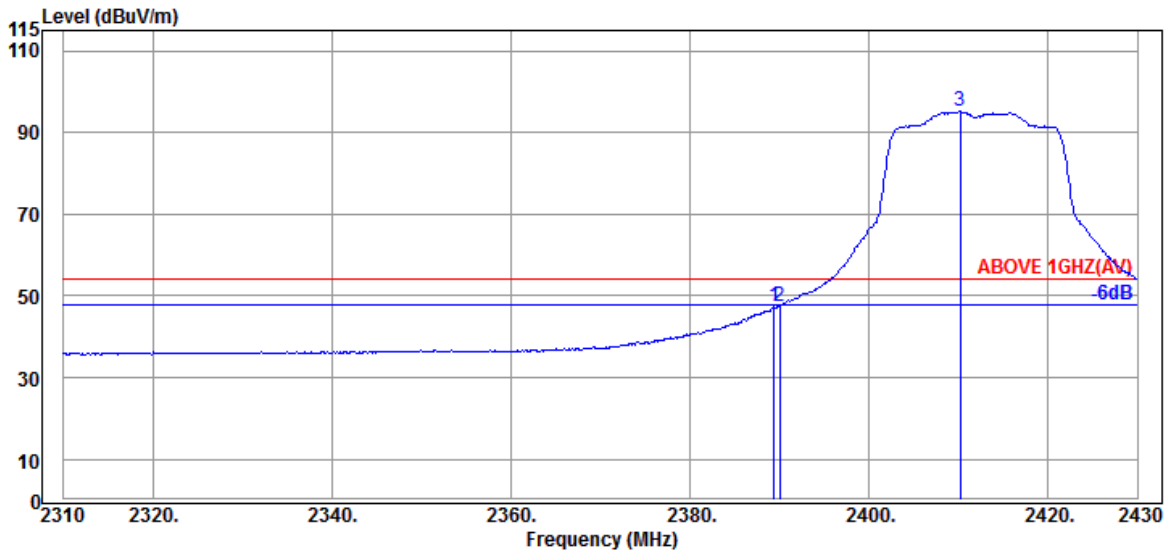


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	6.04	34.53	47.52	47.30	54.00	6.70	Average
2390.040	28.27	6.04	34.54	47.65	47.42	54.00	6.58	Average
@ 2410.200	28.33	6.07	34.54	95.31	95.17	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

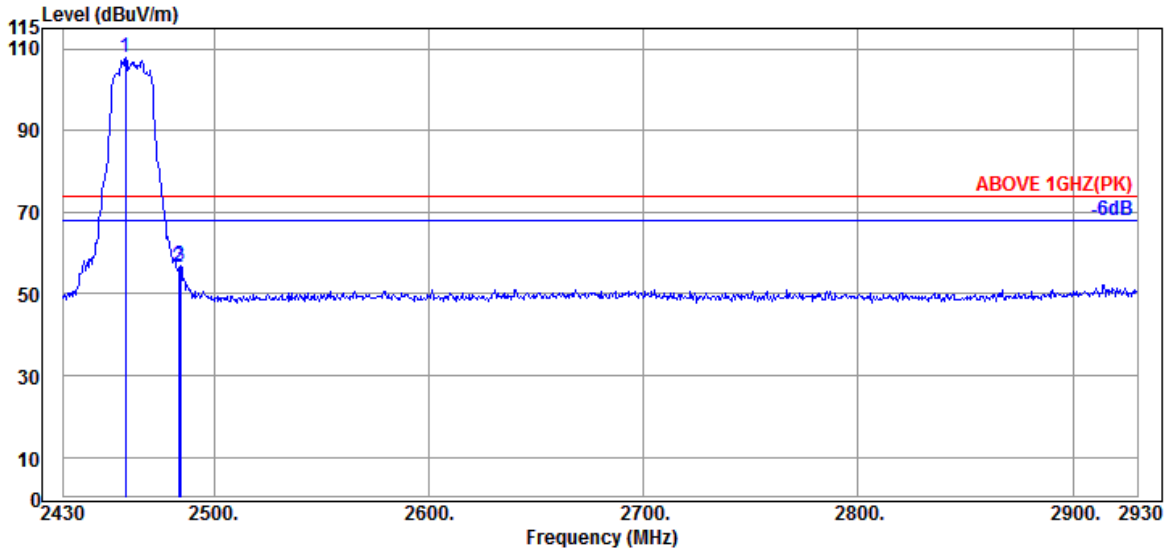

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.51	6.15	34.55	107.73	107.84	---	---	Peak
2483.500	28.57	6.18	34.55	56.14	56.34	74.00	17.66	Peak
2484.500	28.57	6.18	34.55	56.89	57.09	74.00	16.91	Peak

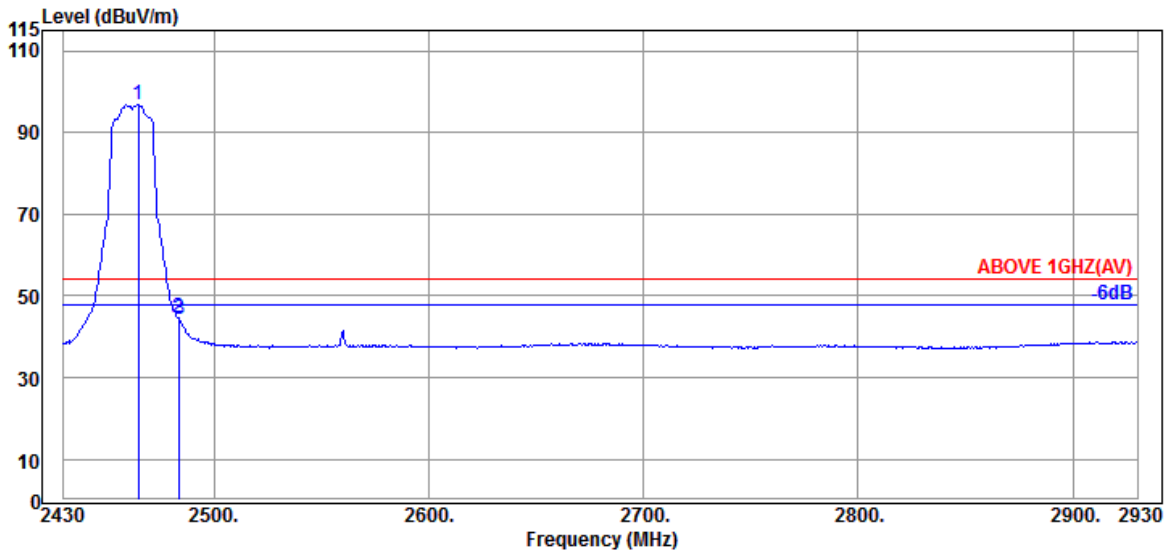


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	96.62	96.75	---	---	Average
2483.500	28.57	6.18	34.55	44.40	44.60	54.00	9.40	Average
2484.000	28.57	6.18	34.55	44.01	44.21	54.00	9.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2462MHz
------	---------------	-----------	------------

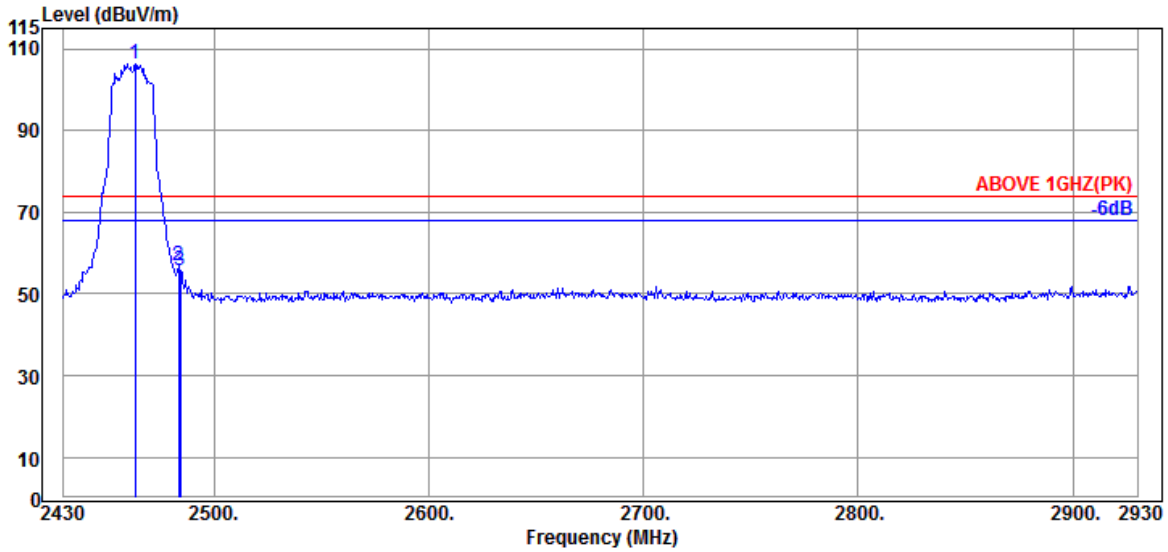

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2463.500	28.53	6.15	34.55	106.22	106.35	---	---	Peak
2483.500	28.57	6.18	34.55	56.77	56.97	74.00	17.03	Peak
2484.500	28.57	6.18	34.55	55.39	55.59	74.00	18.41	Peak

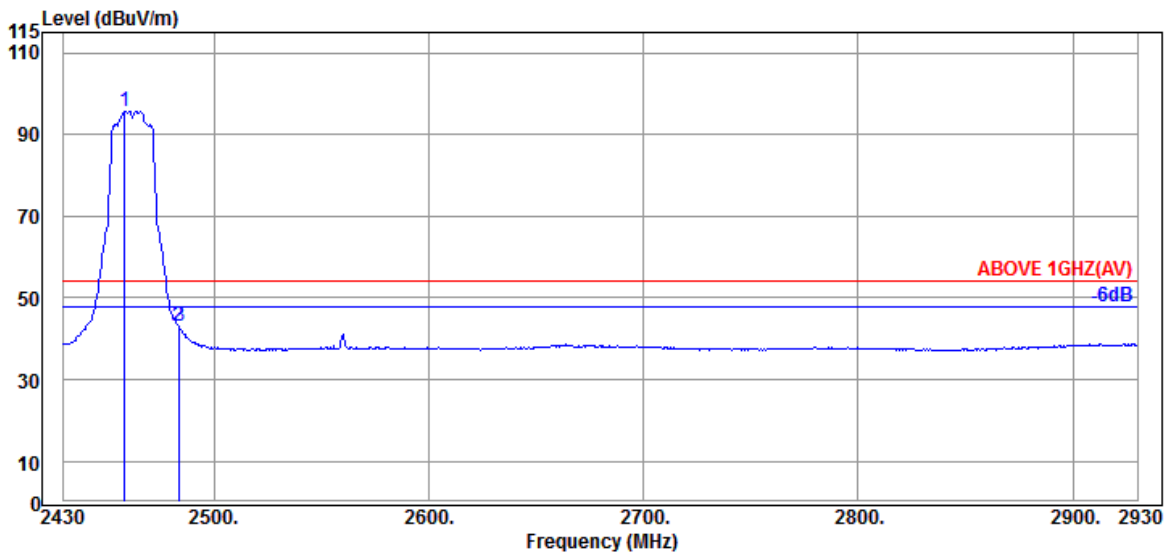


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2458.500	28.51	6.15	34.55	95.57	95.68	---	---	Average
2483.500	28.57	6.18	34.55	43.02	43.22	54.00	10.78	Average
2484.000	28.57	6.18	34.55	42.77	42.97	54.00	11.03	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

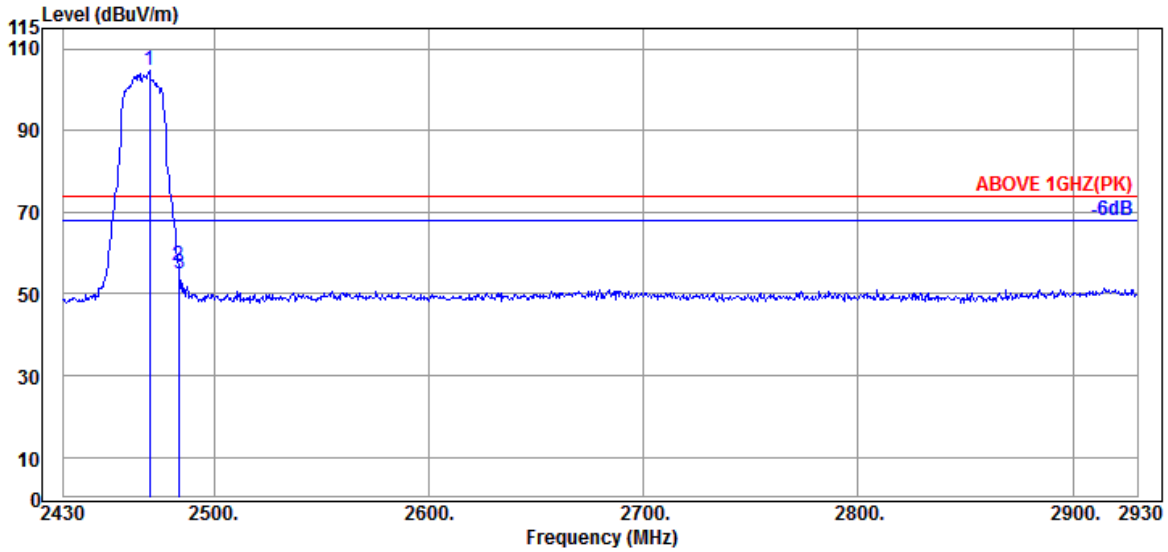

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.54	6.15	34.55	104.65	104.79	---	---	Peak
2483.500	28.57	6.18	34.55	56.51	56.71	74.00	17.29	Peak
2484.000	28.57	6.18	34.55	54.90	55.10	74.00	18.90	Peak

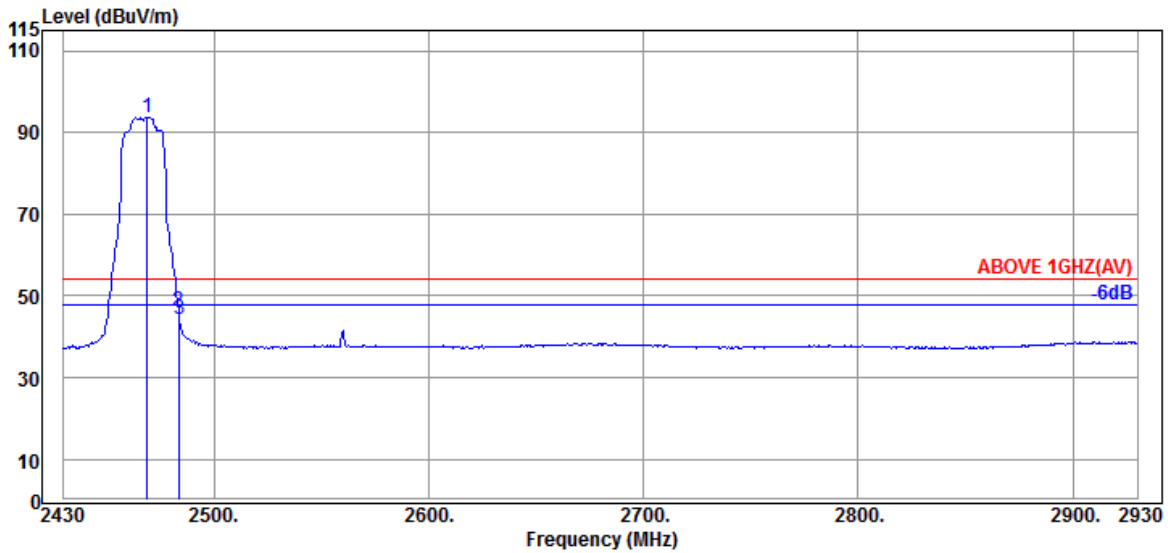


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.54	6.15	34.55	93.61	93.75	---	---	Average
2483.500	28.57	6.18	34.55	46.11	46.31	54.00	7.69	Average
2484.000	28.57	6.18	34.55	43.94	44.14	54.00	9.86	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2467MHz
------	---------------	-----------	------------

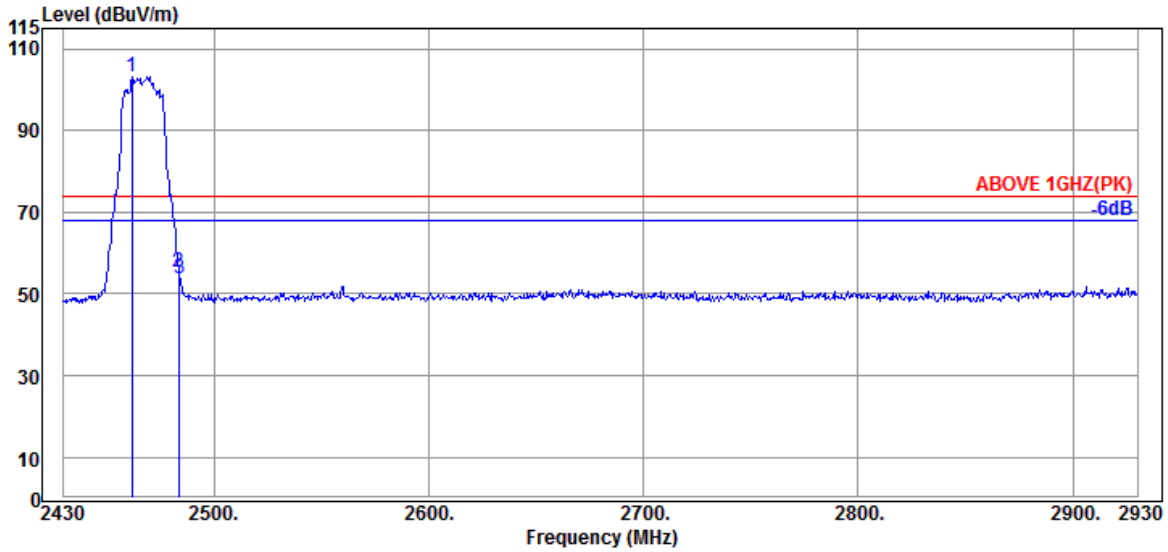

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.53	6.15	34.55	103.17	103.30	---	---	Peak
2483.500	28.57	6.18	34.55	55.25	55.45	74.00	18.55	Peak
2484.000	28.57	6.18	34.55	53.48	53.68	74.00	20.32	Peak

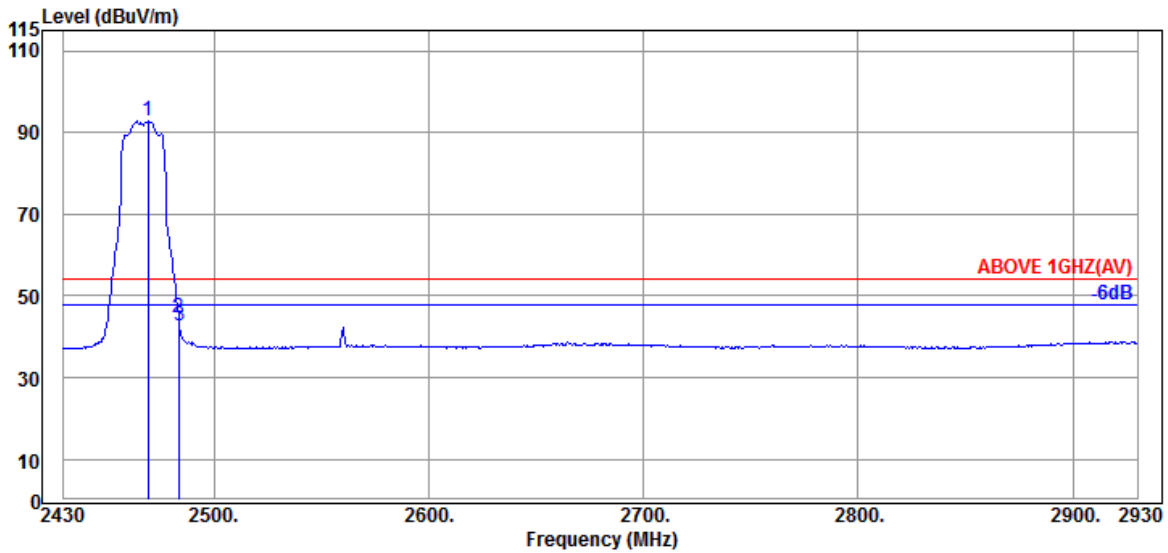


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.500	28.54	6.15	34.55	92.77	92.91	---	---	Average
2483.500	28.57	6.18	34.55	44.62	44.82	54.00	9.18	Average
2484.000	28.57	6.18	34.55	42.33	42.53	54.00	11.47	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

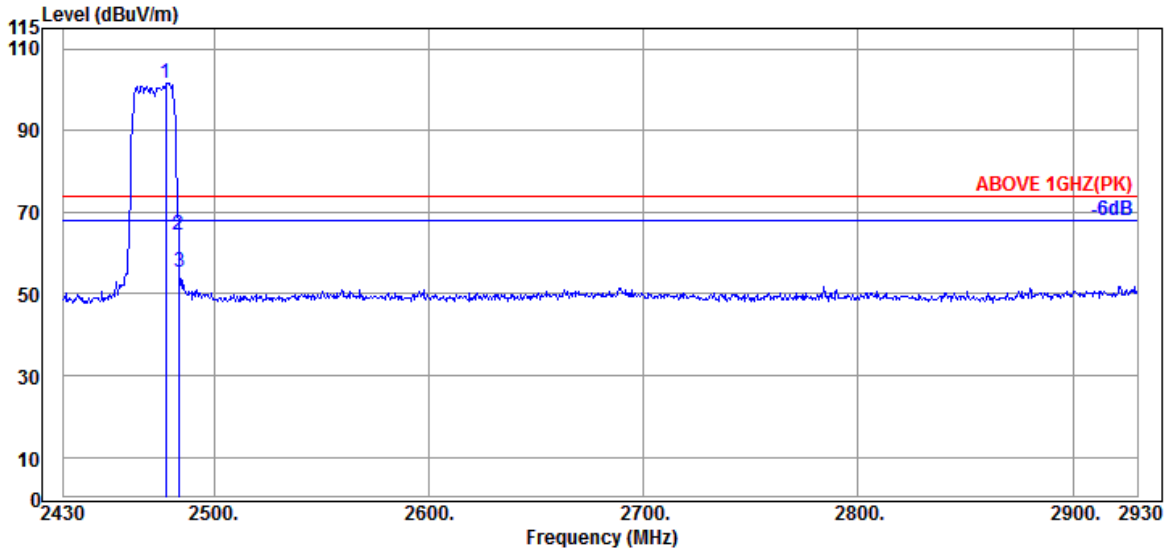

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2477.500	28.56	6.18	34.55	101.52	101.71	---	---	Peak
2483.500	28.57	6.18	34.55	64.10	64.30	74.00	9.70	Peak
2484.000	28.57	6.18	34.55	55.28	55.48	74.00	18.52	Peak

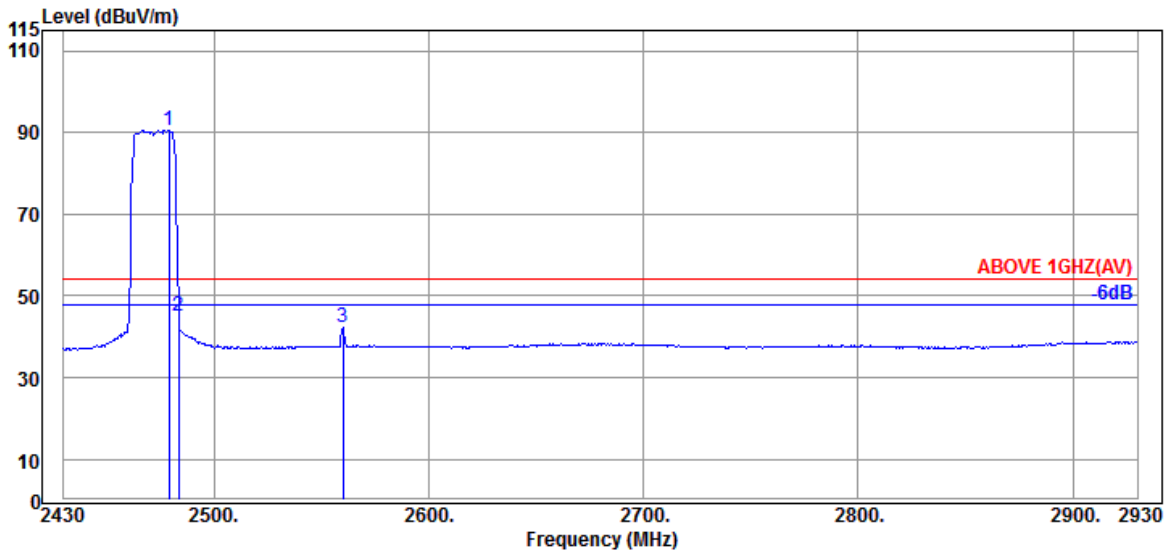


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 2479.000	28.56	6.18	34.55	90.23	90.42	---	---	Average
2483.500	28.57	6.18	34.55	44.76	44.96	54.00	9.04	Average
2560.000	28.83	6.30	34.57	41.88	42.44	54.00	11.56	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
------	---------------	-----------	------------

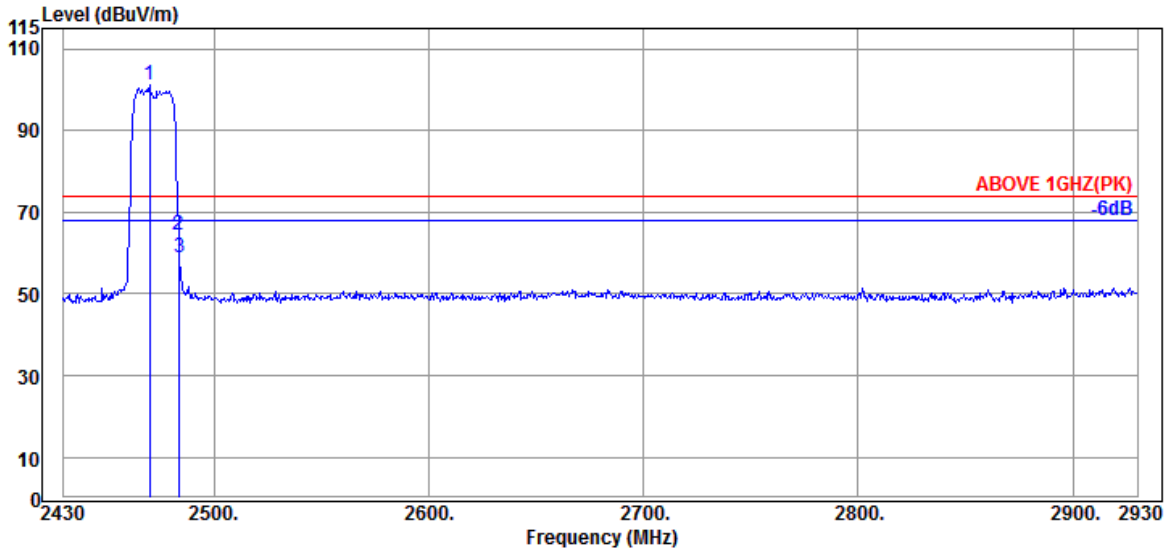

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2470.000	28.54	6.15	34.55	100.86	101.00	---	---	Peak
2483.500	28.57	6.18	34.55	64.17	64.37	74.00	9.63	Peak
2484.000	28.57	6.18	34.55	58.66	58.86	74.00	15.14	Peak

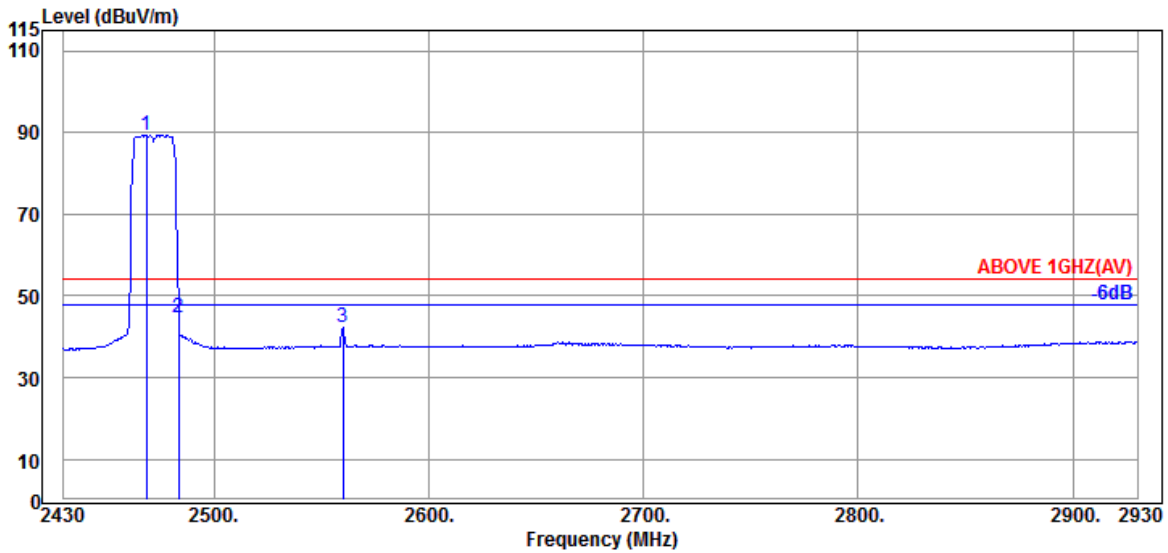


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.500	28.54	6.15	34.55	89.29	89.43	---	---	Average
2483.500	28.57	6.18	34.55	44.27	44.47	54.00	9.53	Average
2560.000	28.83	6.30	34.57	41.64	42.20	54.00	11.80	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

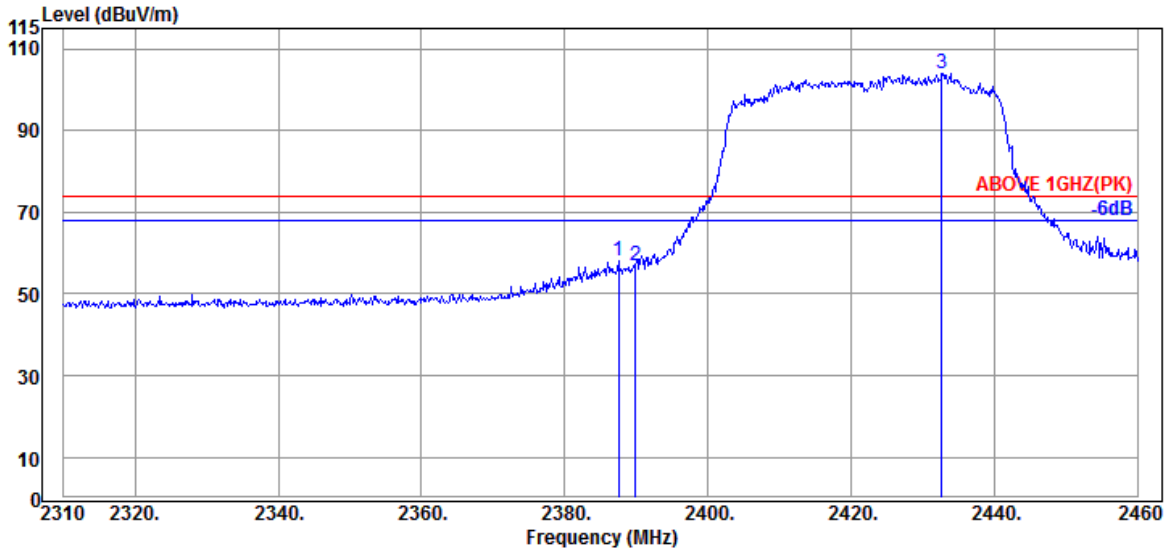

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2387.550	28.27	6.04	34.53	58.46	58.24	74.00	15.76	Peak
2389.950	28.27	6.04	34.54	57.08	56.85	74.00	17.15	Peak
@ 2432.700	28.44	6.10	34.54	103.92	103.92	---	---	Peak

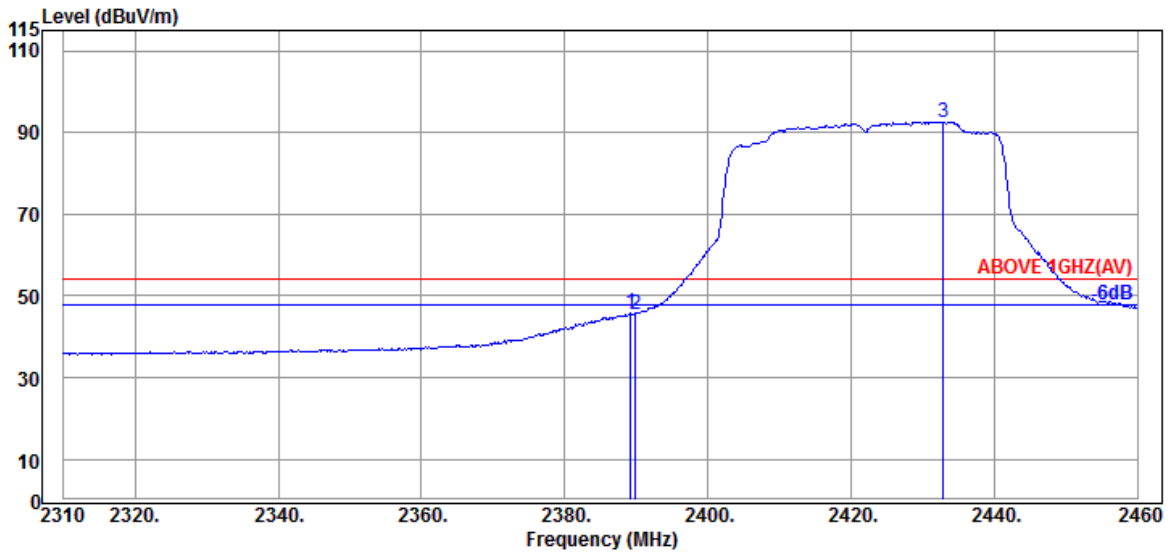


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.200	28.27	6.04	34.53	45.90	45.68	54.00	8.32	Average
2389.950	28.27	6.04	34.54	45.83	45.60	54.00	8.40	Average
@ 2432.850	28.44	6.10	34.54	92.65	92.65	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
------	---------------	-----------	------------

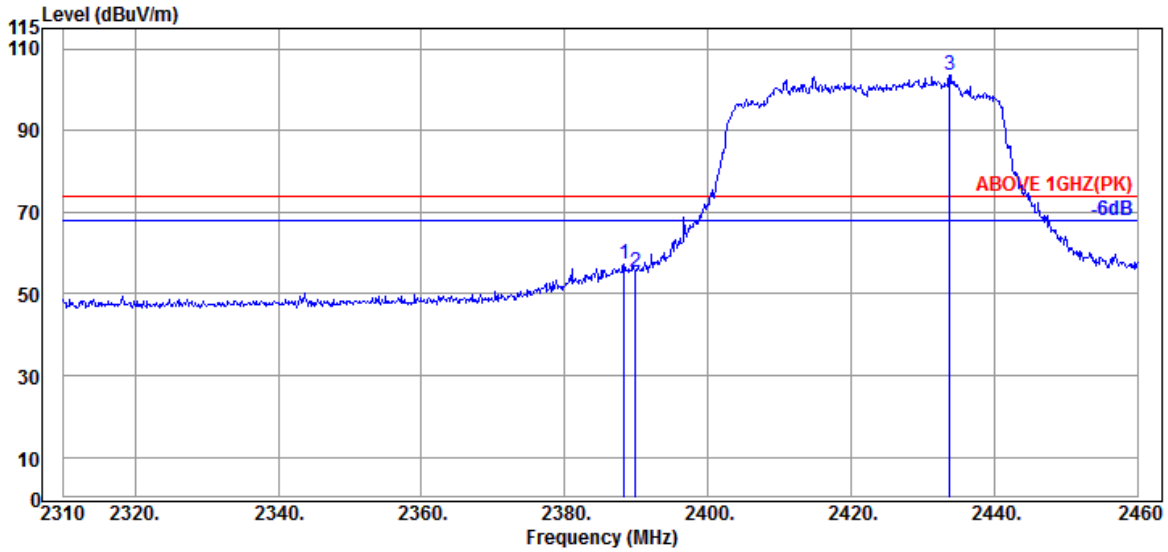

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.300	28.27	6.04	34.53	57.49	57.27	74.00	16.73	Peak
2389.950	28.27	6.04	34.54	55.40	55.17	74.00	18.83	Peak
@ 2433.750	28.44	6.10	34.54	103.68	103.68	---	---	Peak

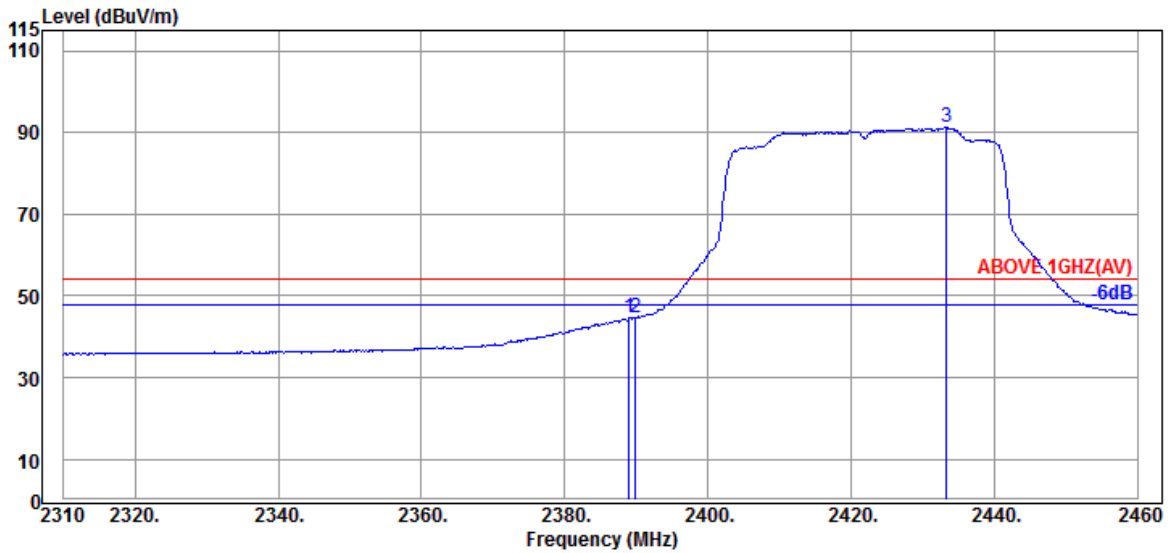


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.050	28.27	6.04	34.53	44.89	44.67	54.00	9.33	Average
2389.950	28.27	6.04	34.54	44.98	44.75	54.00	9.25	Average
@ 2433.300	28.44	6.10	34.54	91.25	91.25	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

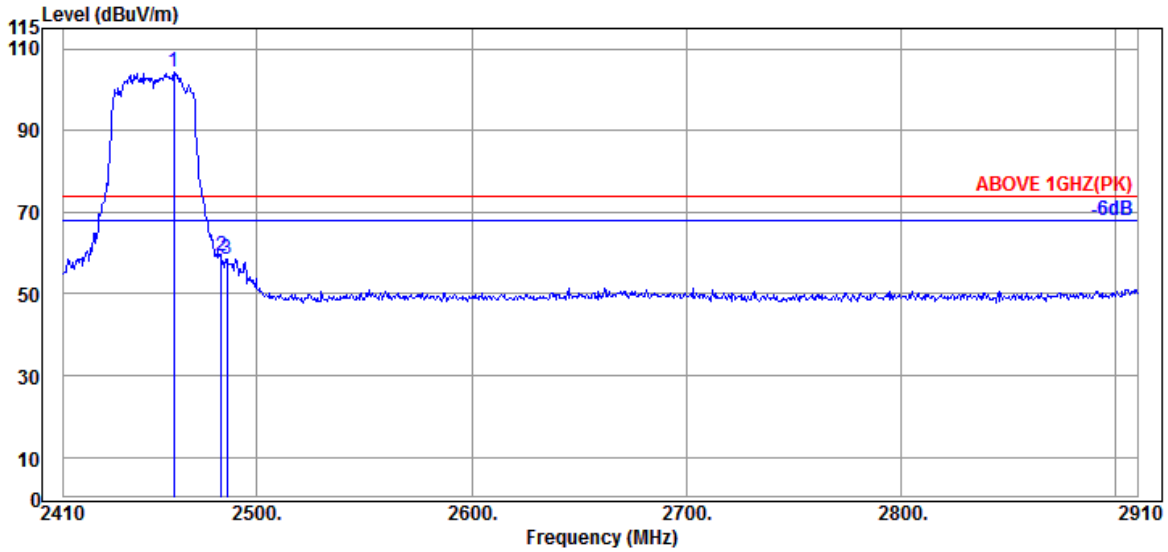

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	28.53	6.15	34.55	104.06	104.19	---	---	Peak
2483.500	28.57	6.18	34.55	59.06	59.26	74.00	14.74	Peak
2486.000	28.57	6.18	34.55	58.46	58.66	74.00	15.34	Peak

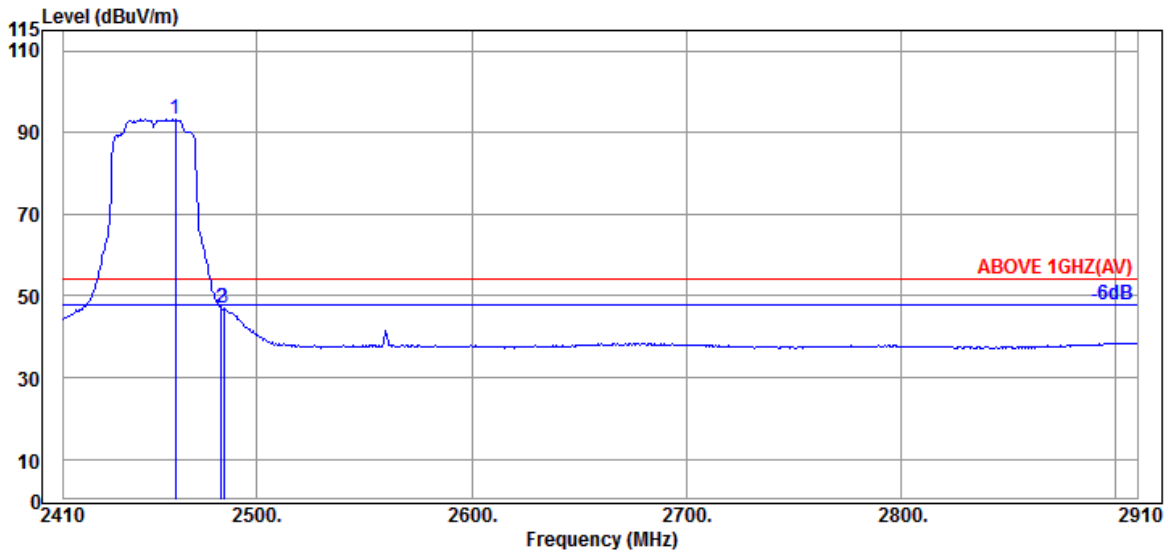


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.53	6.15	34.55	93.09	93.22	---	---	Average
2483.500	28.57	6.18	34.55	47.02	47.22	54.00	6.78	Average
2484.500	28.57	6.18	34.55	46.85	47.05	54.00	6.95	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2452MHz
------	---------------	-----------	------------

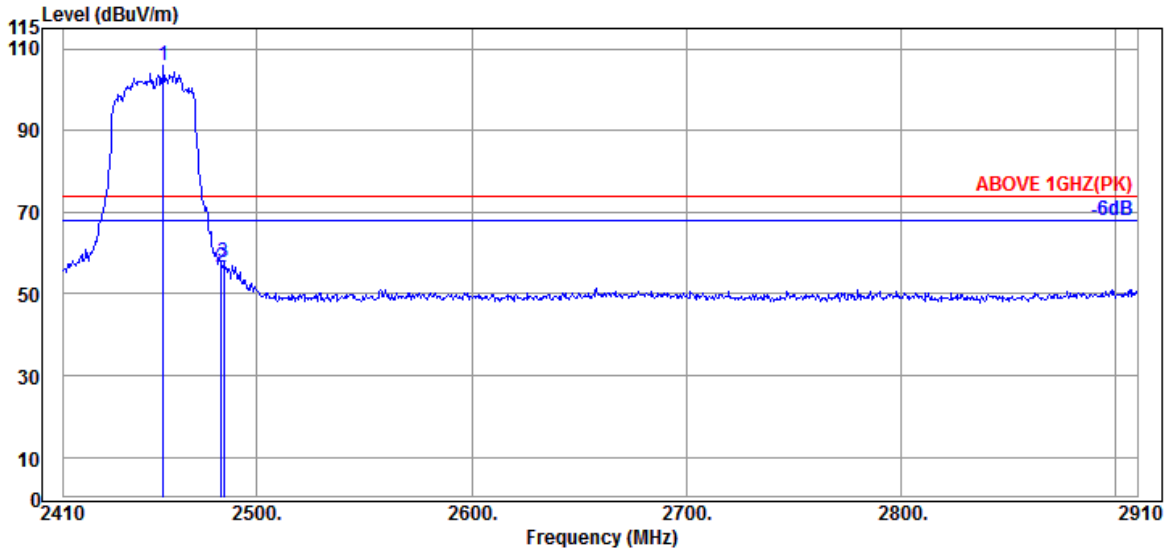

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2456.500	28.51	6.15	34.55	105.61	105.72	---	---	Peak
2483.500	28.57	6.18	34.55	56.22	56.42	74.00	17.58	Peak
2484.500	28.57	6.18	34.55	57.48	57.68	74.00	16.32	Peak

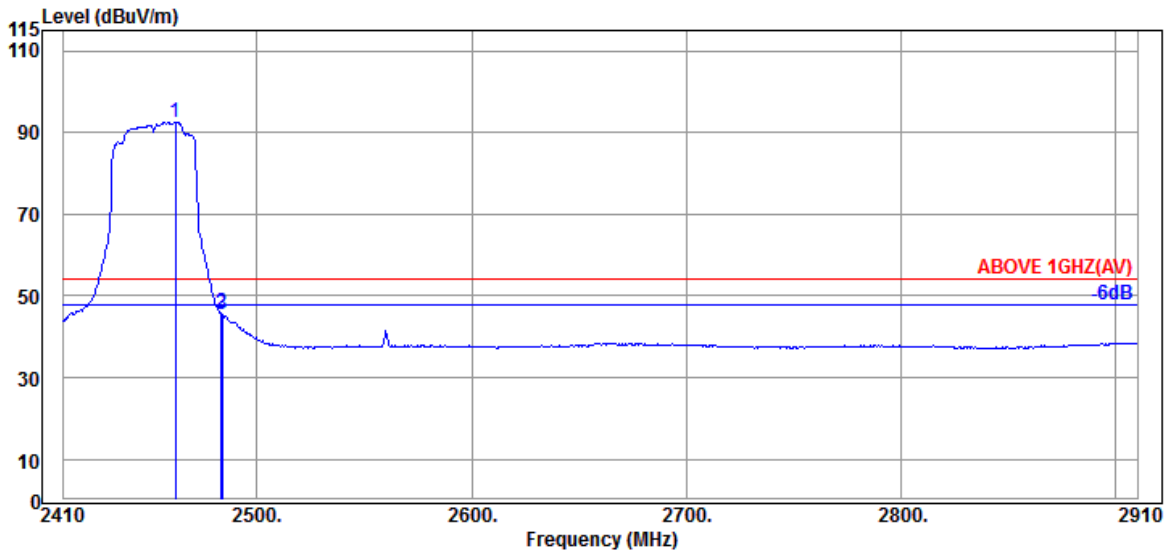


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2462.000	28.53	6.15	34.55	92.38	92.51	---	---	Average
2483.500	28.57	6.18	34.55	45.75	45.95	54.00	8.05	Average
2484.000	28.57	6.18	34.55	45.18	45.38	54.00	8.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

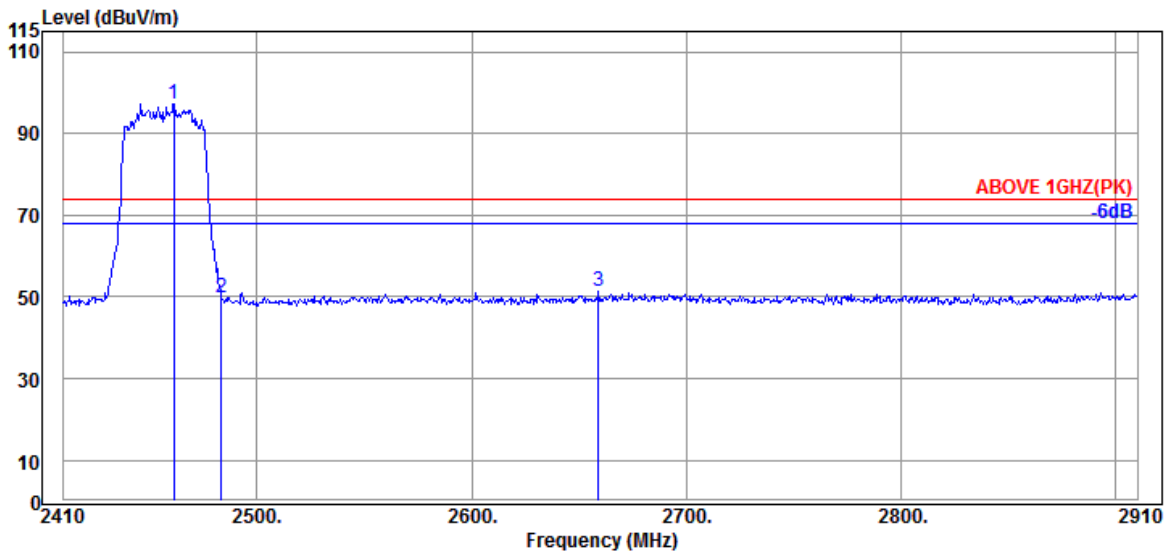

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2461.500	28.53	6.15	34.55	97.03	97.16	---	---	Peak
2483.500	28.57	6.18	34.55	49.41	49.61	74.00	24.39	Peak
2659.000	28.93	6.43	34.59	50.69	51.46	74.00	22.54	Peak

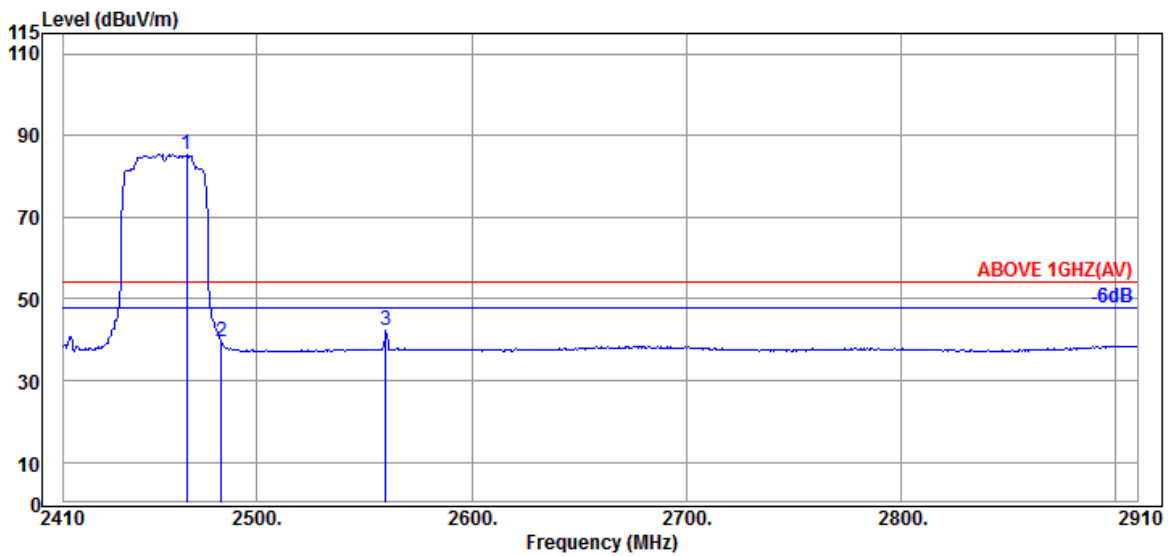


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.53	6.15	34.55	85.30	85.43	---	---	Average
2483.500	28.57	6.18	34.55	39.12	39.32	54.00	14.68	Average
2560.000	28.83	6.30	34.57	41.69	42.25	54.00	11.75	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2457MHz
------	---------------	-----------	------------

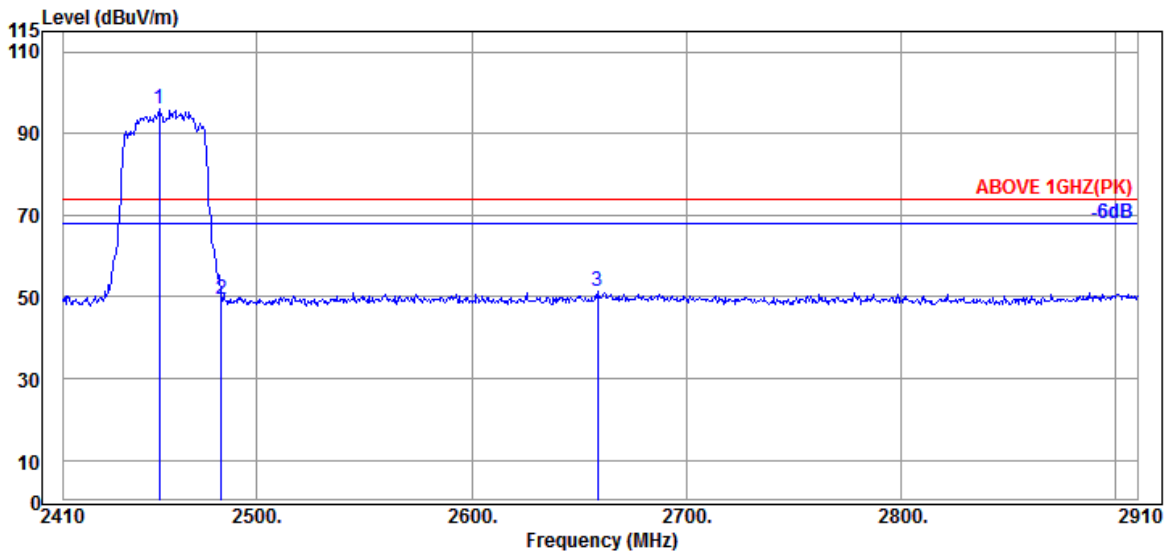

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2454.500	28.51	6.15	34.55	95.85	95.96	---	---	Peak
2483.500	28.57	6.18	34.55	49.01	49.21	74.00	24.79	Peak
2658.500	28.93	6.43	34.59	50.61	51.38	74.00	22.62	Peak

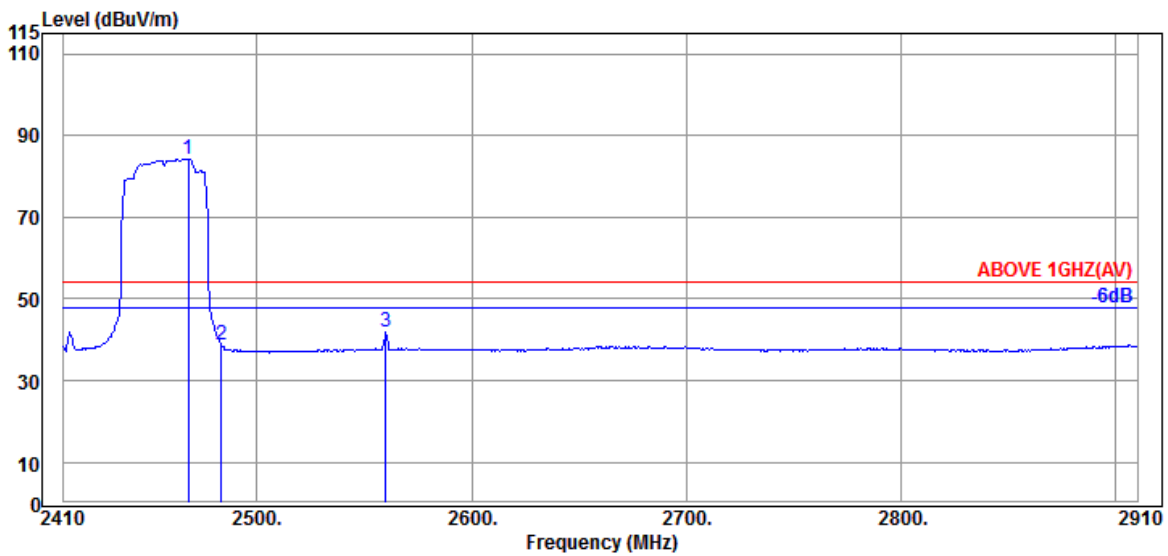


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2468.000	28.54	6.15	34.55	84.16	84.30	---	---	Average
2483.500	28.57	6.18	34.55	38.51	38.71	54.00	15.29	Average
2560.000	28.83	6.30	34.57	41.33	41.89	54.00	12.11	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

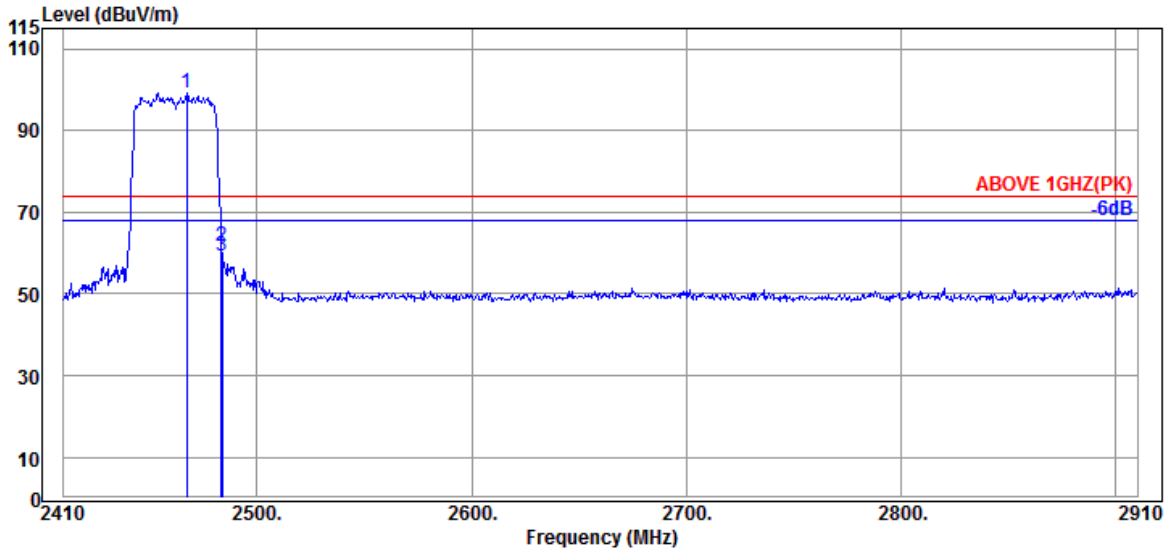

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.53	6.15	34.55	98.99	99.12	---	---	Peak
2483.500	28.57	6.18	34.55	61.56	61.76	74.00	12.24	Peak
2484.000	28.57	6.18	34.55	59.21	59.41	74.00	14.59	Peak

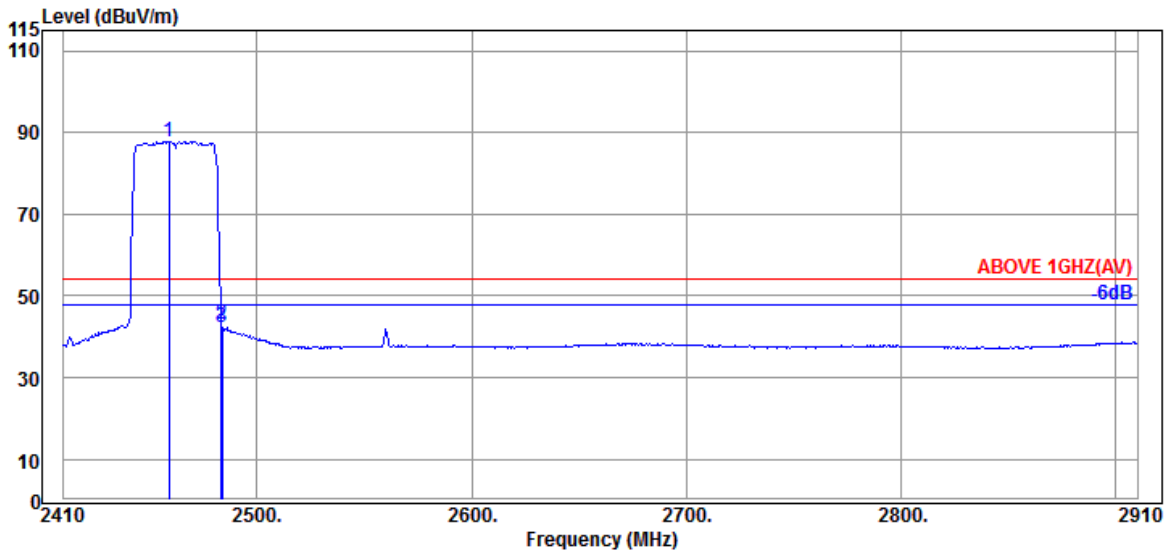


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2459.000	28.51	6.15	34.55	87.71	87.82	---	---	Average
2483.500	28.57	6.18	34.55	42.76	42.96	54.00	11.04	Average
2484.000	28.57	6.18	34.55	42.19	42.39	54.00	11.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
------	---------------	-----------	------------

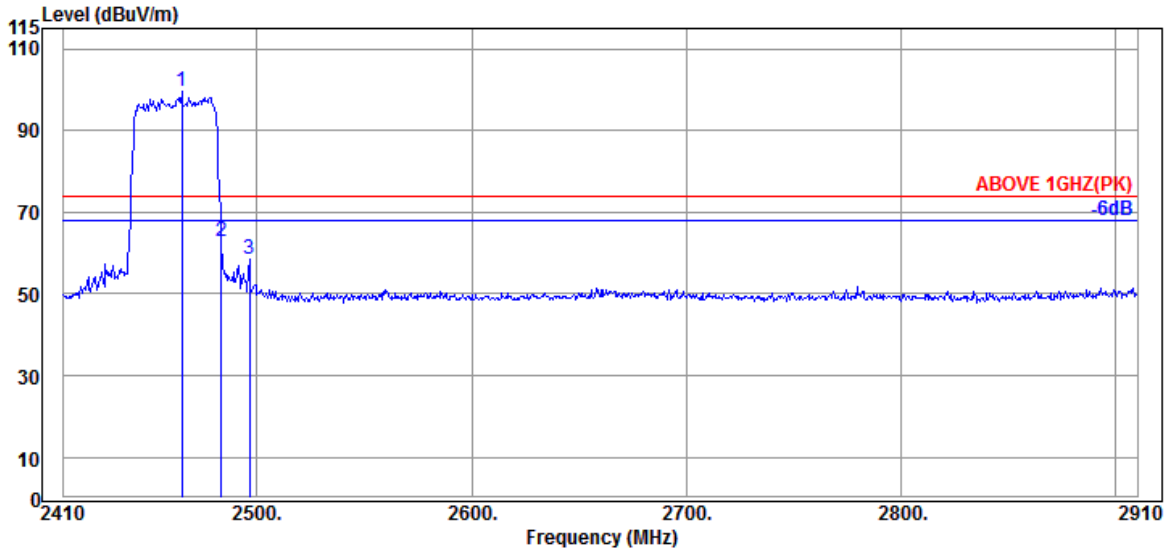

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2465.000	28.53	6.15	34.55	99.41	99.54	---	---	Peak
2483.500	28.57	6.18	34.55	62.62	62.82	74.00	11.18	Peak
2496.500	28.60	6.21	34.56	58.04	58.29	74.00	15.71	Peak

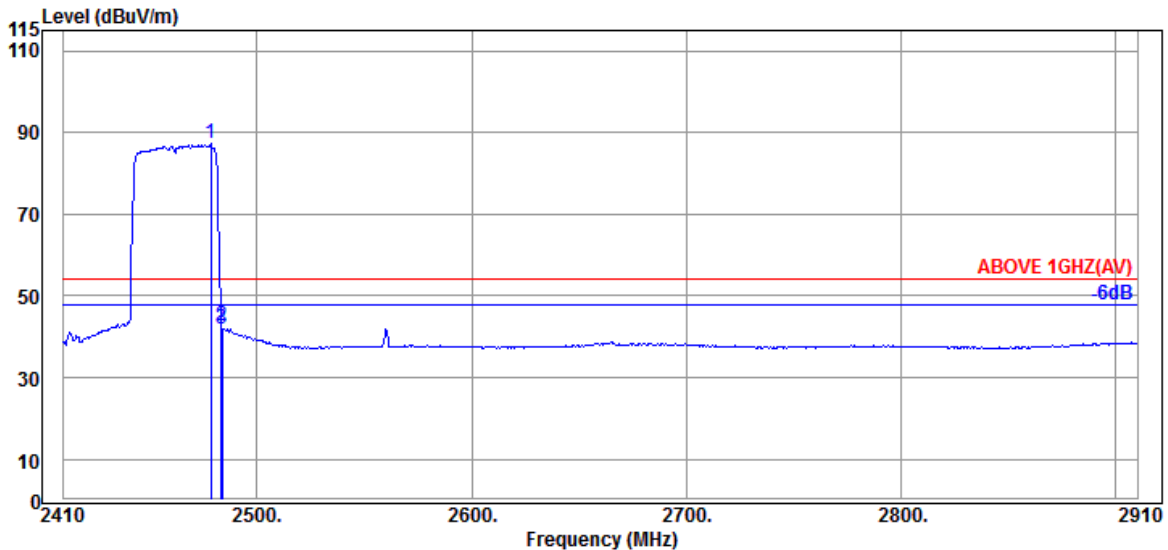


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.56	6.18	34.55	87.04	87.23	---	---	Average
2483.500	28.57	6.18	34.55	42.35	42.55	54.00	11.45	Average
2484.000	28.57	6.18	34.55	41.87	42.07	54.00	11.93	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

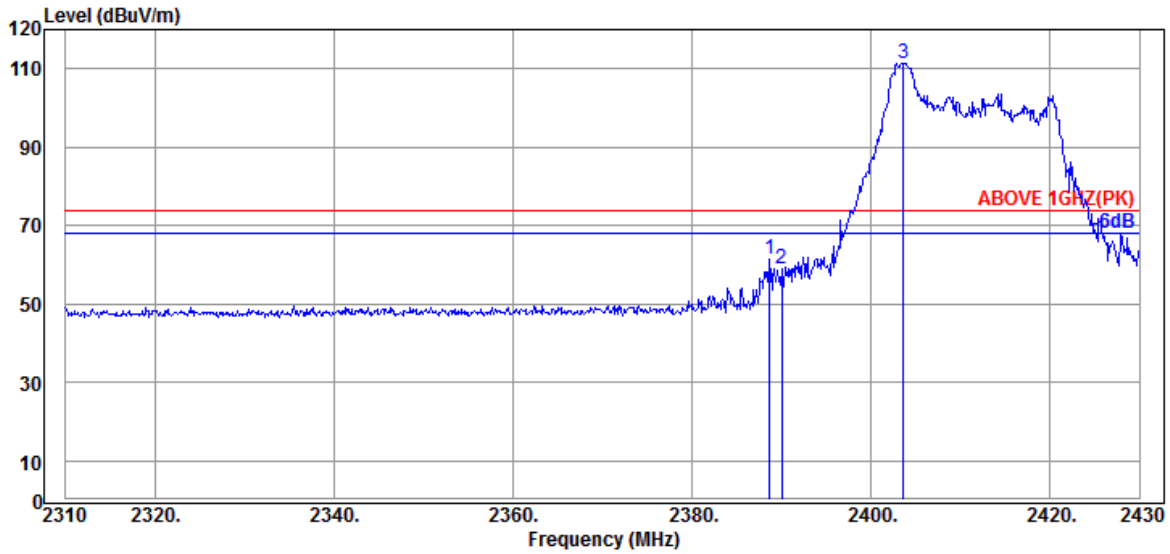

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.720	28.27	6.04	34.53	61.48	61.26	74.00	12.74	Peak
2390.040	28.27	6.04	34.54	59.05	58.82	74.00	15.18	Peak
@ 2403.600	28.30	6.07	34.54	111.50	111.33	---	---	Peak

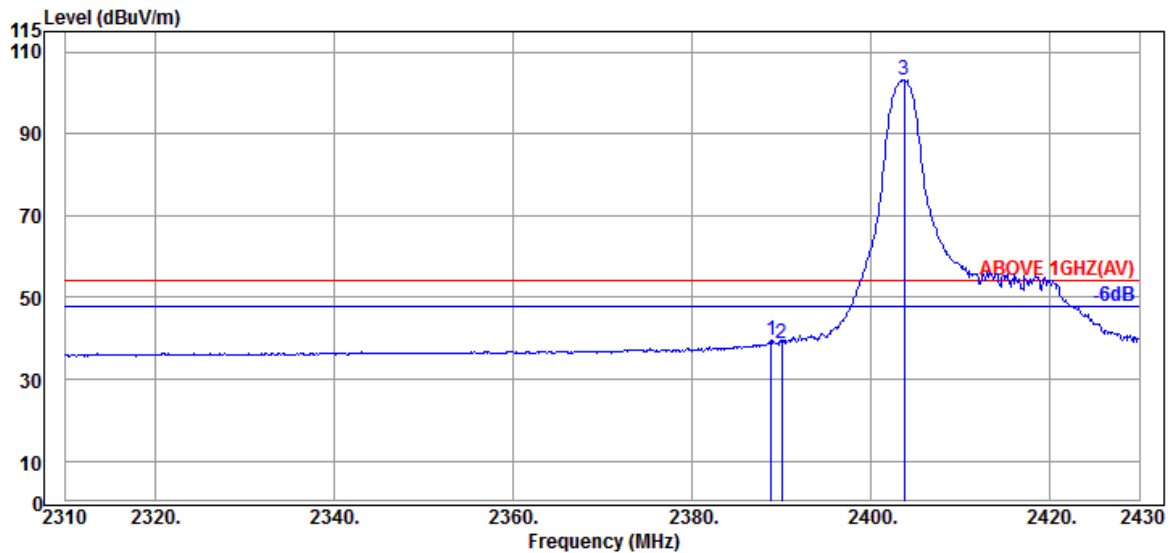


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.840	28.27	6.04	34.53	39.74	39.52	54.00	14.48	Average
2390.040	28.27	6.04	34.54	38.89	38.66	54.00	15.34	Average
@ 2403.720	28.30	6.07	34.54	103.37	103.20	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	26/0

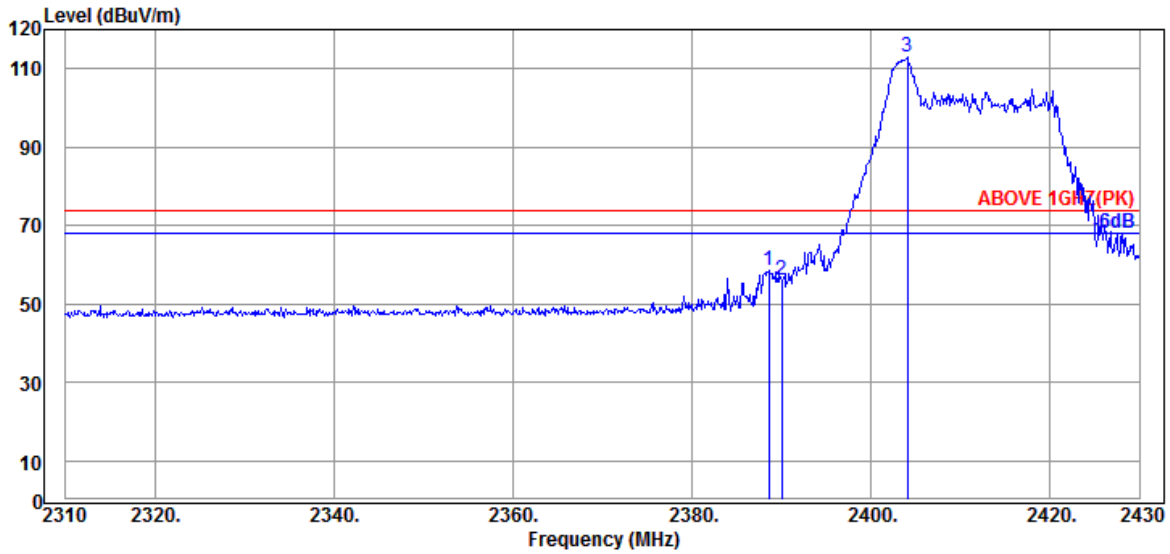

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.27	6.04	34.53	58.67	58.45	74.00	15.55	Peak
2390.040	28.27	6.04	34.54	56.46	56.23	74.00	17.77	Peak
@ 2404.080	28.30	6.07	34.54	113.25	113.08	---	---	Peak

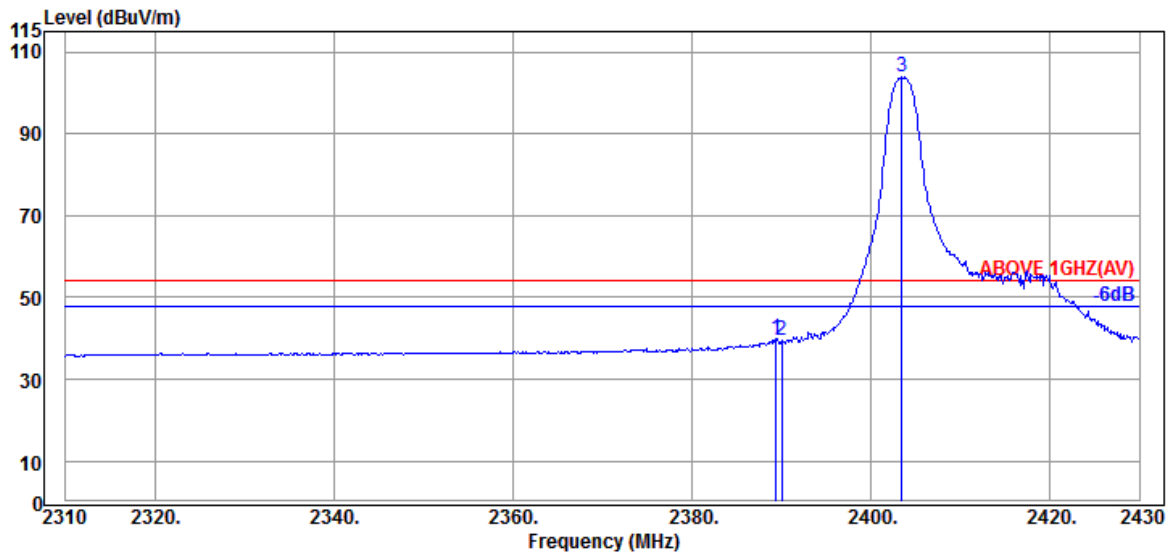


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.440	28.27	6.04	34.53	40.05	39.83	54.00	14.17	Average
2390.040	28.27	6.04	34.54	39.72	39.49	54.00	14.51	Average
@ 2403.480	28.30	6.07	34.54	104.02	103.85	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

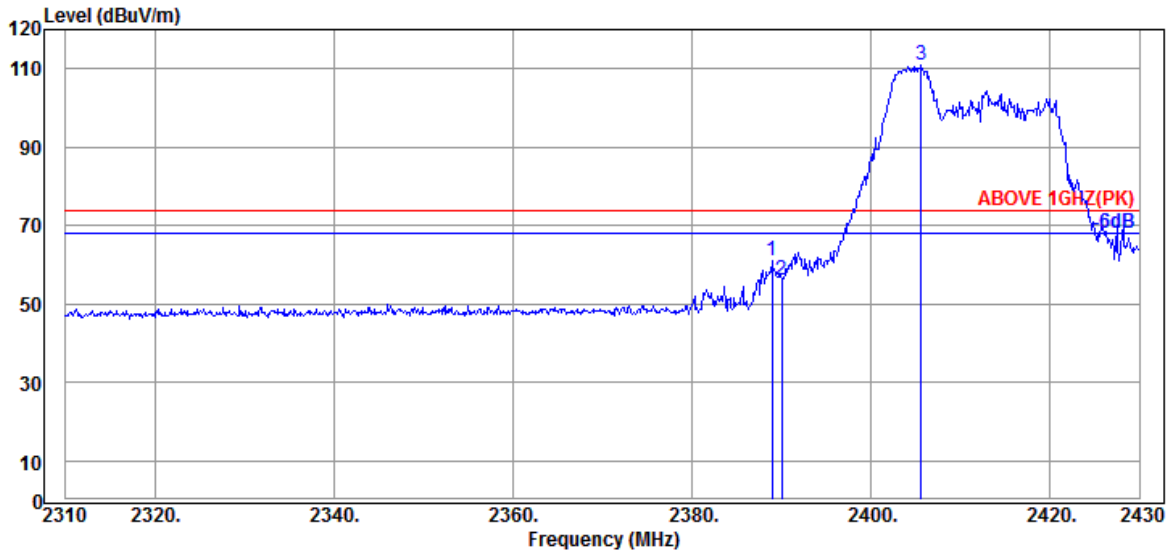

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.960	28.27	6.04	34.53	61.38	61.16	74.00	12.84	Peak
2390.040	28.27	6.04	34.54	56.38	56.15	74.00	17.85	Peak
@ 2405.640	28.33	6.07	34.54	110.88	110.74	---	---	Peak

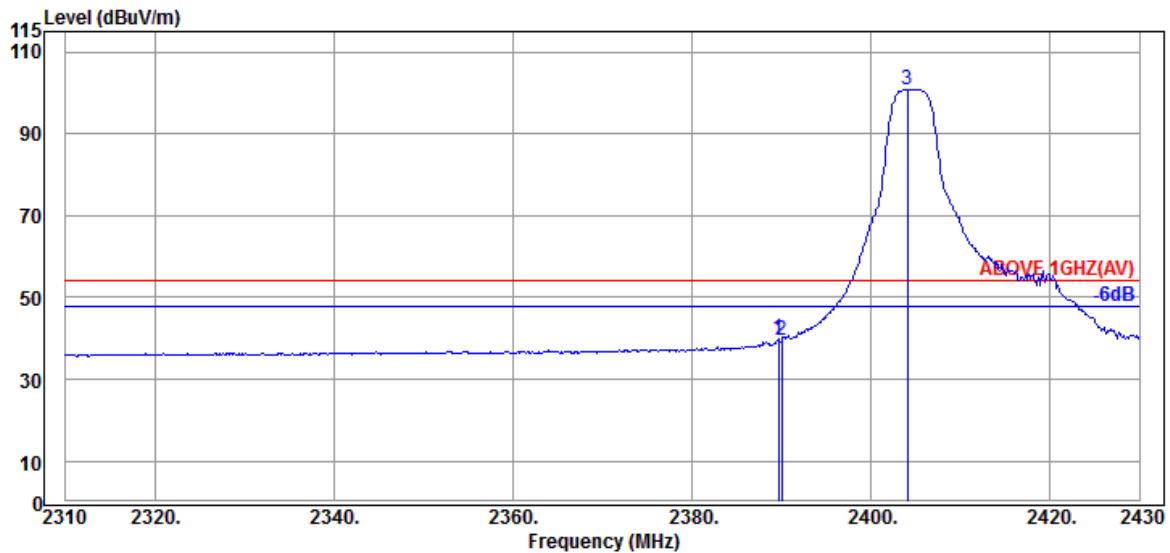


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	40.26	40.04	54.00	13.96	Average
2390.040	28.27	6.04	34.54	39.71	39.48	54.00	14.52	Average
@ 2404.080	28.30	6.07	34.54	101.10	100.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	52/37

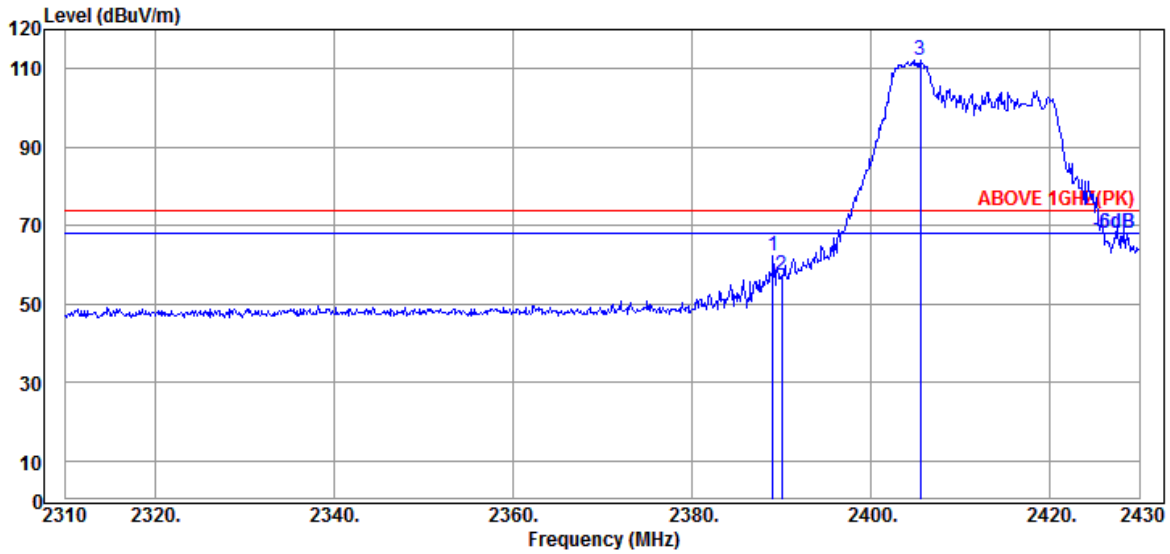

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.080	28.27	6.04	34.53	62.69	62.47	74.00	11.53	Peak
2390.040	28.27	6.04	34.54	57.35	57.12	74.00	16.88	Peak
@ 2405.520	28.33	6.07	34.54	112.13	111.99	---	---	Peak

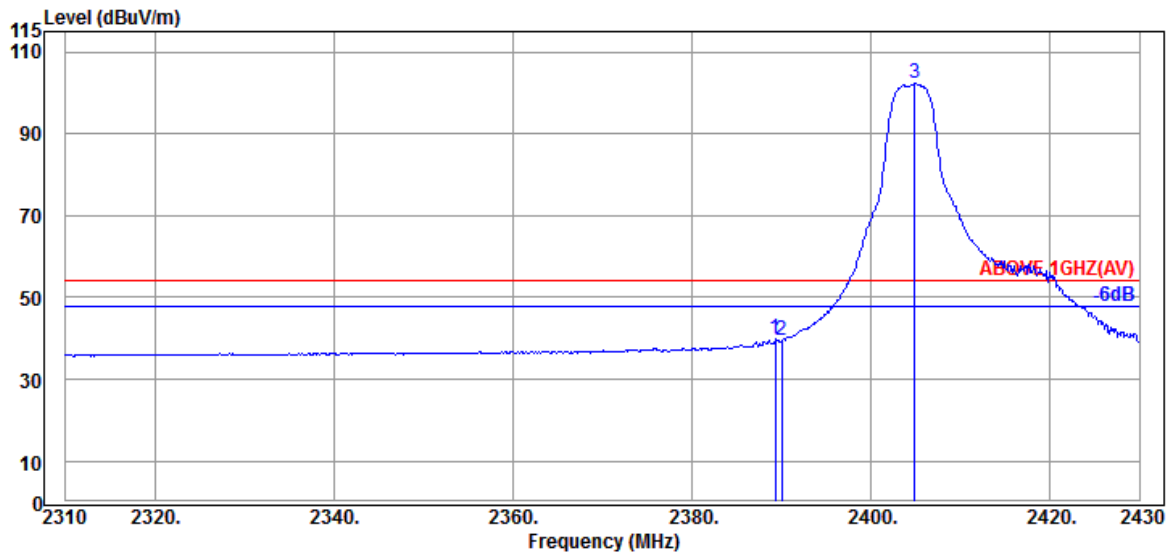


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.320	28.27	6.04	34.53	40.23	40.01	54.00	13.99	Average
2390.040	28.27	6.04	34.54	39.61	39.38	54.00	14.62	Average
@ 2404.920	28.33	6.07	34.54	102.52	102.38	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

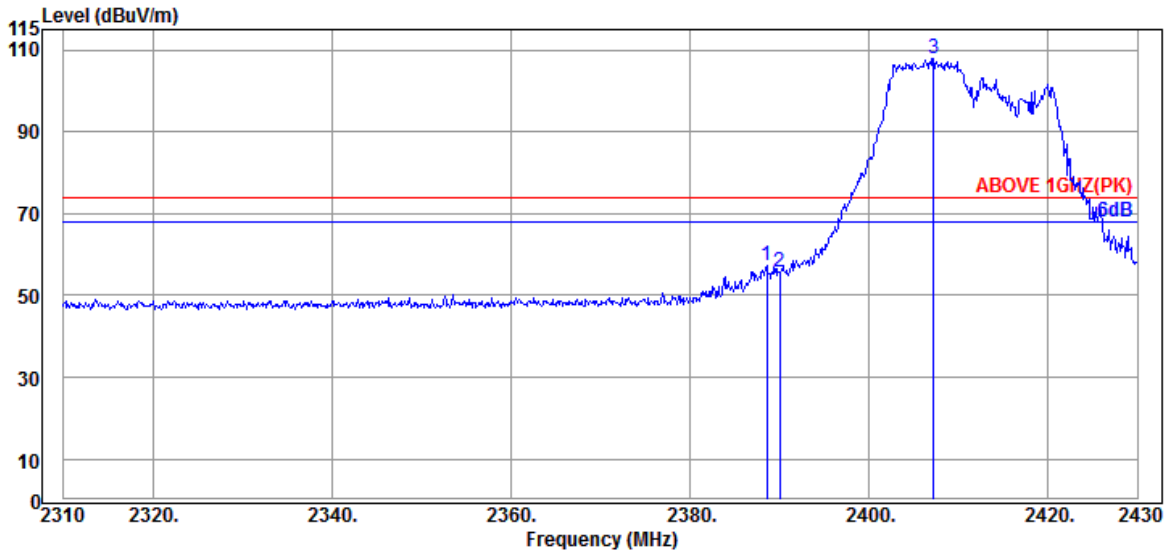

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.600	28.27	6.04	34.53	57.38	57.16	74.00	16.84	Peak
2390.040	28.27	6.04	34.54	55.94	55.71	74.00	18.29	Peak
@ 2407.200	28.33	6.07	34.54	108.15	108.01	---	---	Peak

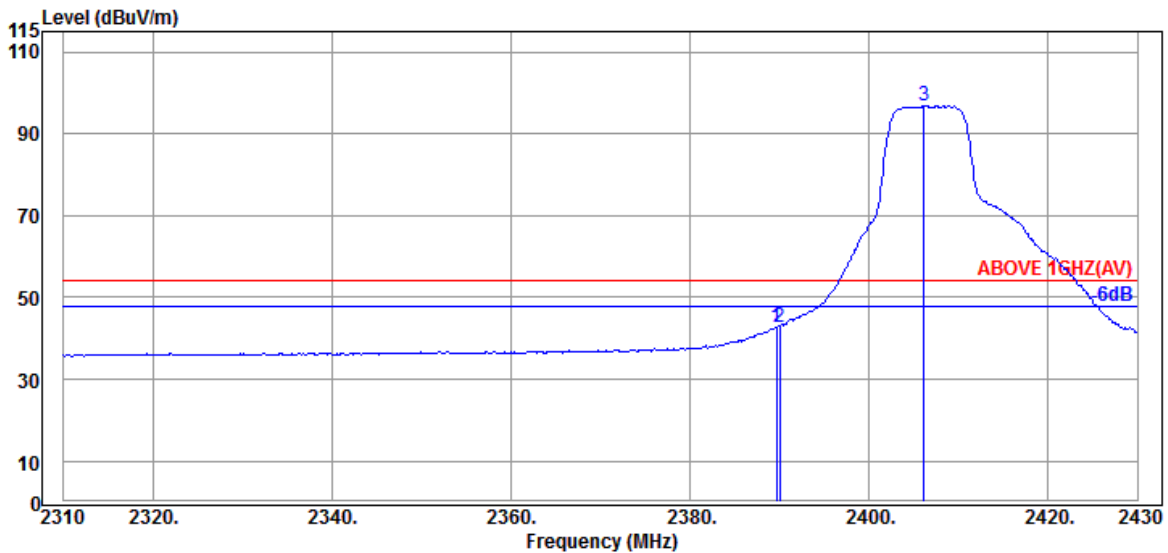


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	42.99	42.77	54.00	11.23	Average
2390.040	28.27	6.04	34.54	43.10	42.87	54.00	11.13	Average
@ 2406.120	28.33	6.07	34.54	97.16	97.02	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2412MHz
		RU Configuration	106/53

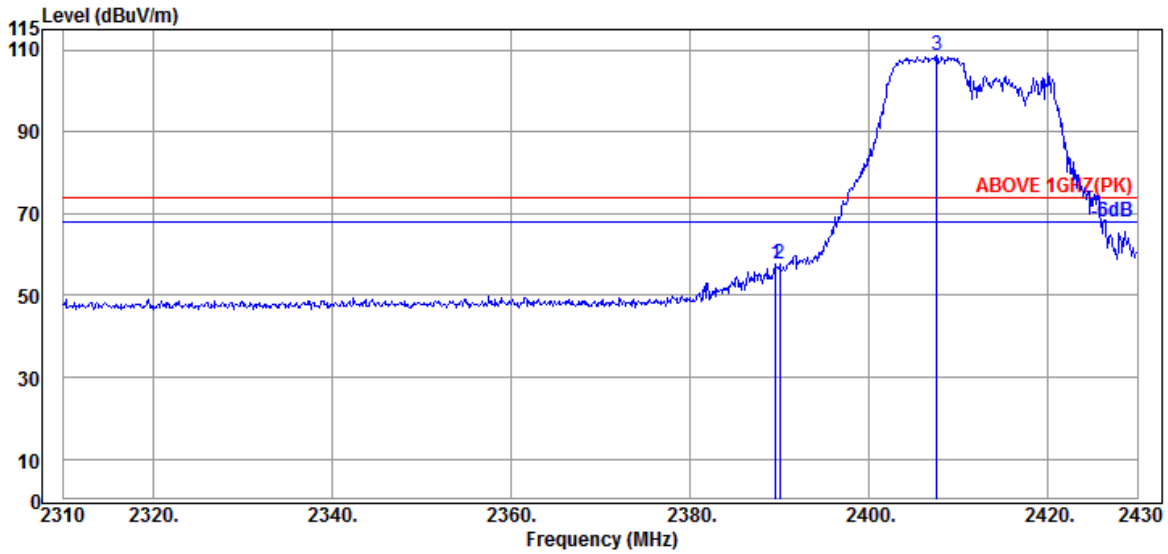

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.560	28.27	6.04	34.53	58.00	57.78	74.00	16.22	Peak
2390.040	28.27	6.04	34.54	57.78	57.55	74.00	16.45	Peak
@ 2407.560	28.33	6.07	34.54	108.93	108.79	---	---	Peak

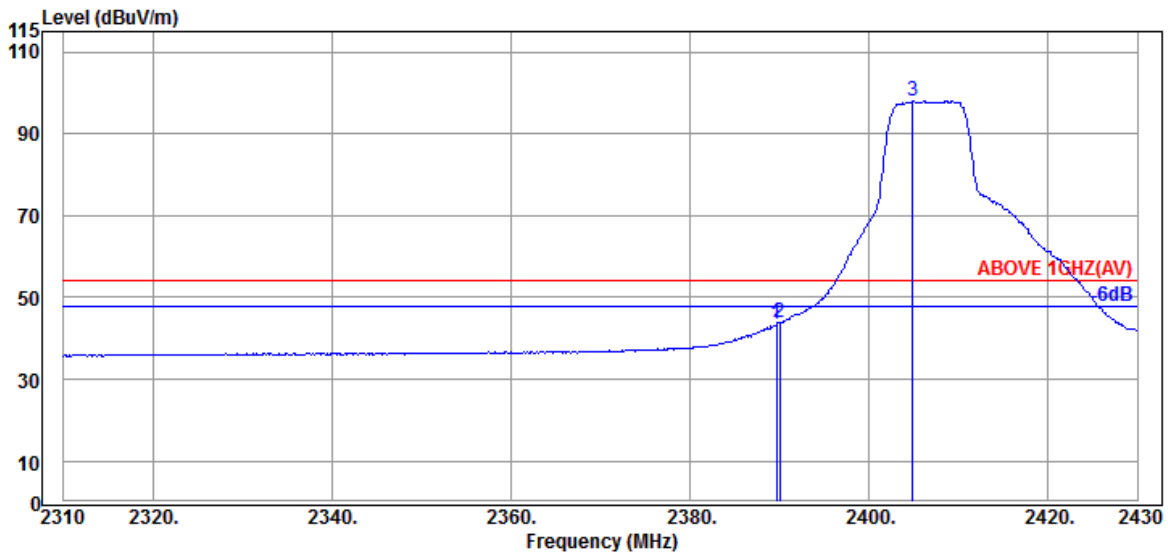


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.680	28.27	6.04	34.53	43.66	43.44	54.00	10.56	Average
2390.040	28.27	6.04	34.54	43.99	43.76	54.00	10.24	Average
@ 2404.920	28.33	6.07	34.54	98.09	97.95	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

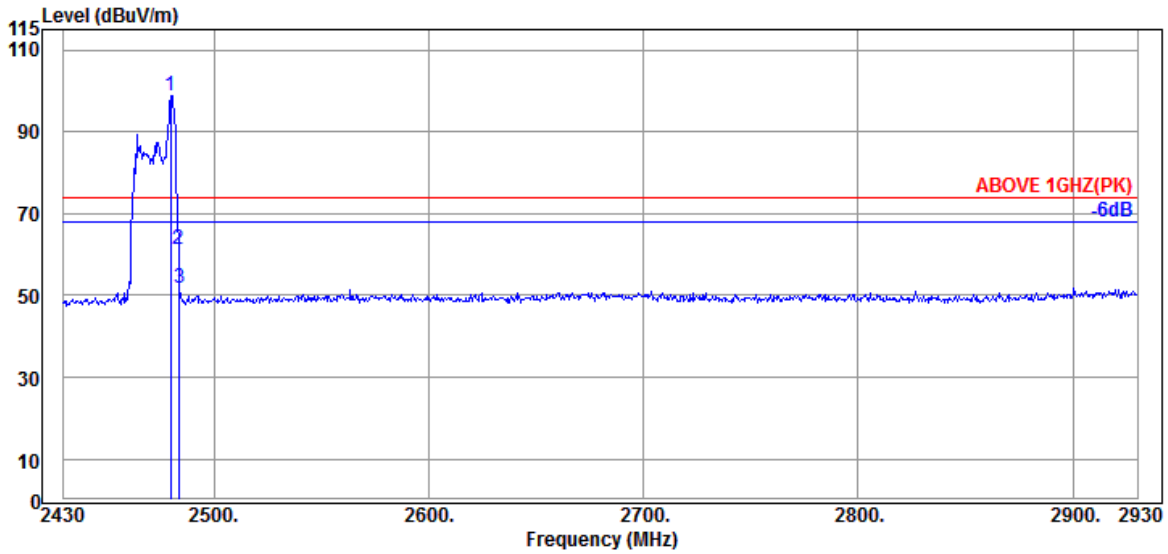

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.000	28.56	6.18	34.55	98.54	98.73	---	---	Peak
	2483.500	28.57	6.18	34.55	61.19	61.39	74.00	12.61	Peak
	2484.000	28.57	6.18	34.55	51.54	51.74	74.00	22.26	Peak

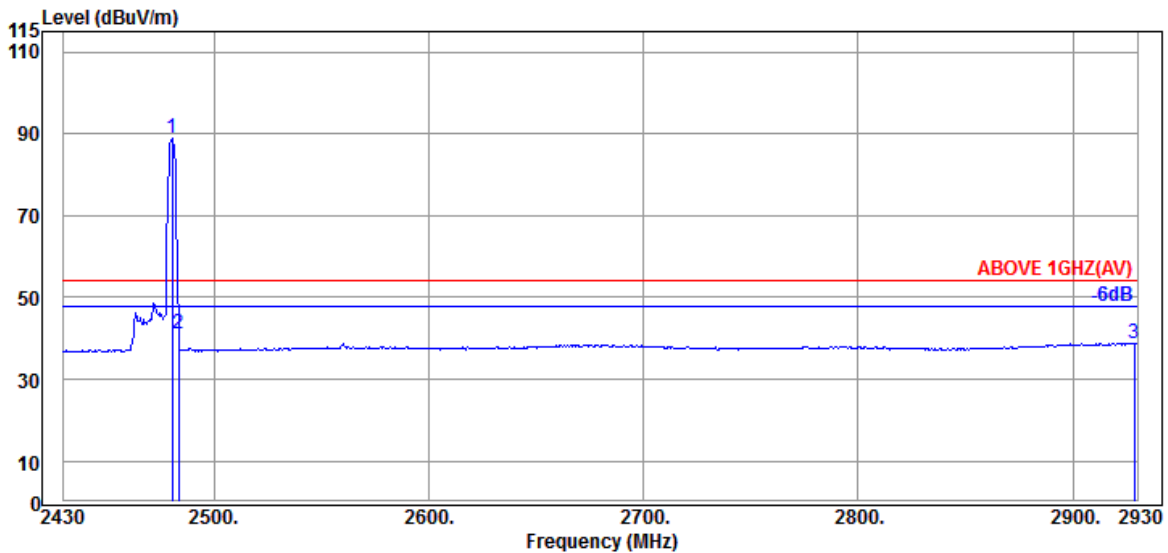


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	2480.500	28.56	6.18	34.55	88.64	88.83	---	---	Average
	2483.500	28.57	6.18	34.55	41.03	41.23	54.00	12.77	Average
	2928.500	29.73	6.75	34.65	36.98	38.81	54.00	15.19	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	26/8

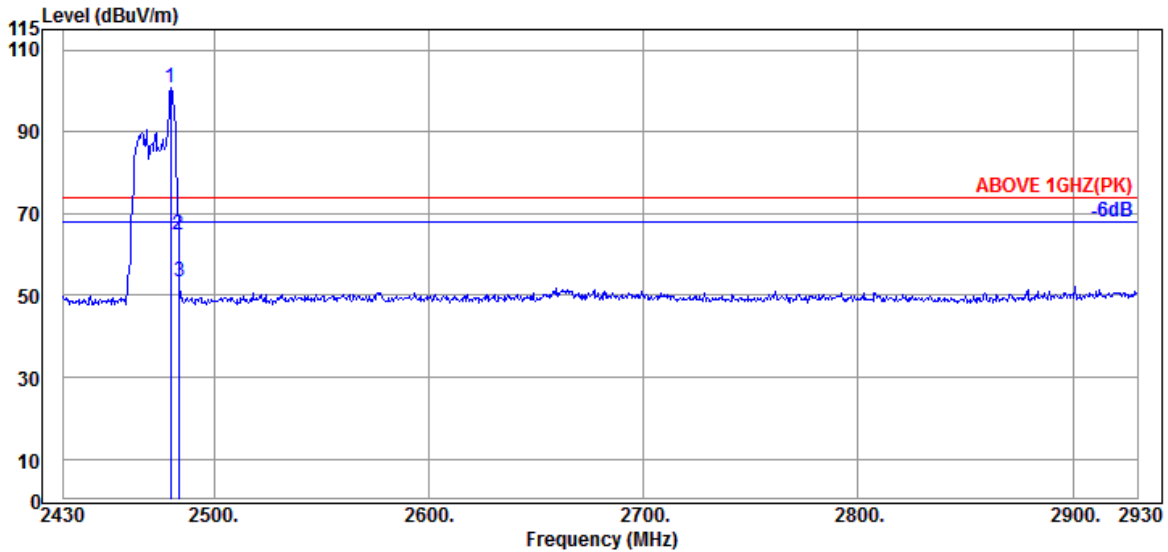

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.56	6.18	34.55	100.58	100.77	---	---	Peak
2483.500	28.57	6.18	34.55	64.53	64.73	74.00	9.27	Peak
2484.000	28.57	6.18	34.55	53.24	53.44	74.00	20.56	Peak

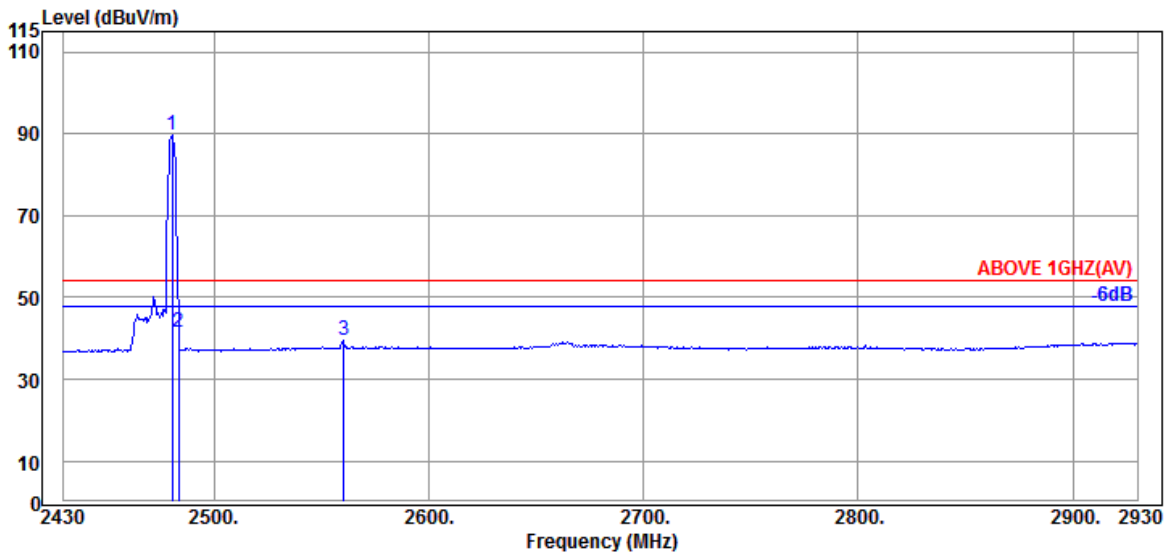


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.500	28.56	6.18	34.55	89.42	89.61	---	---	Average
2483.500	28.57	6.18	34.55	41.45	41.65	54.00	12.35	Average
2560.500	28.83	6.30	34.57	38.82	39.38	54.00	14.62	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

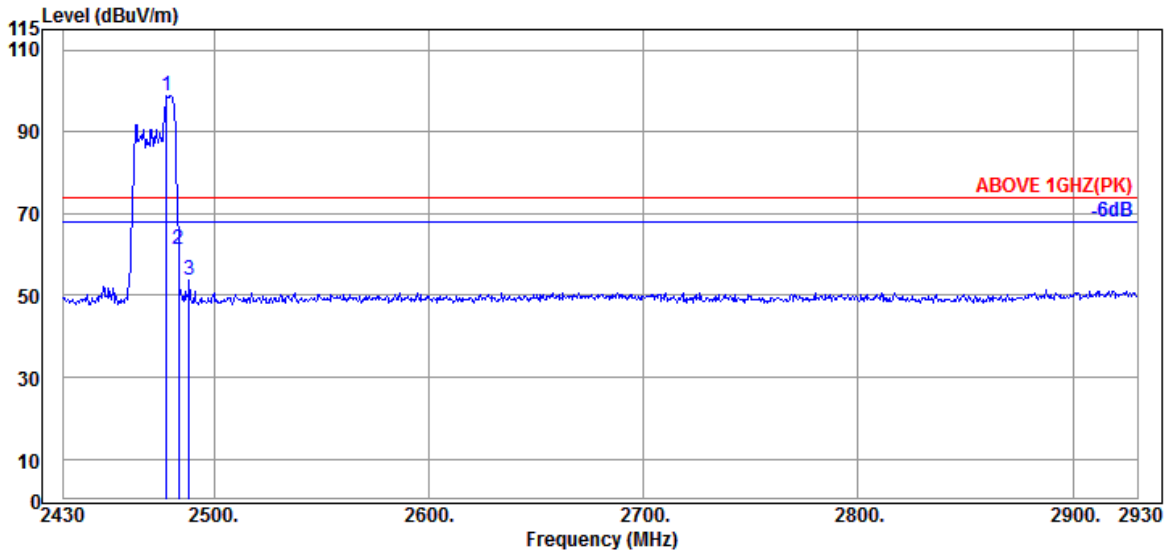

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.000	28.56	6.18	34.55	98.74	98.93	---	---	Peak
2483.500	28.57	6.18	34.55	60.97	61.17	74.00	12.83	Peak
2488.500	28.57	6.21	34.55	53.52	53.75	74.00	20.25	Peak

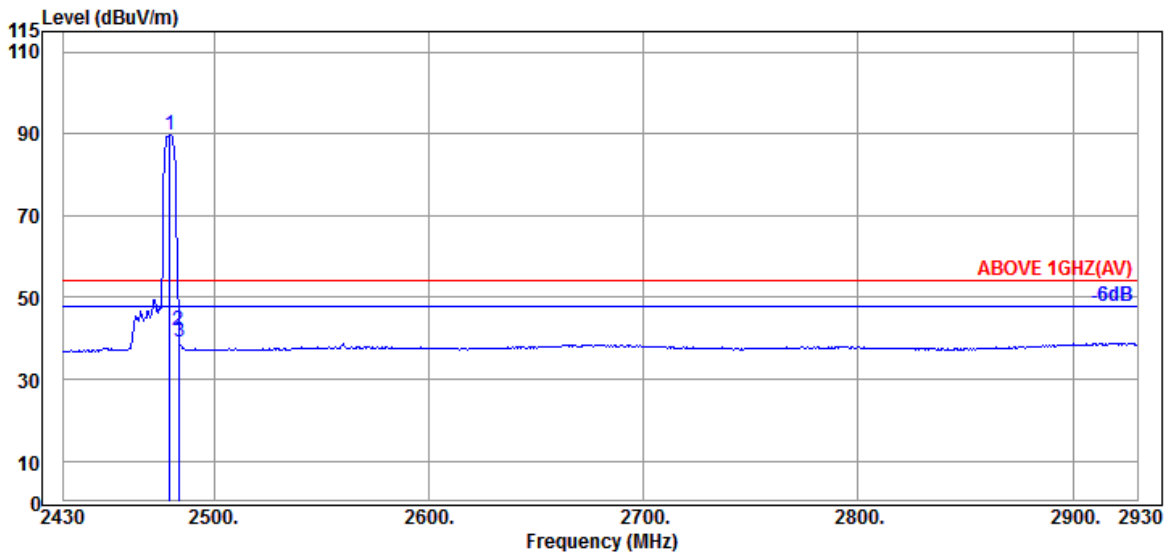


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	6.18	34.55	89.58	89.77	---	---	Average
2483.500	28.57	6.18	34.55	41.75	41.95	54.00	12.05	Average
2484.000	28.57	6.18	34.55	39.01	39.21	54.00	14.79	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	52/40

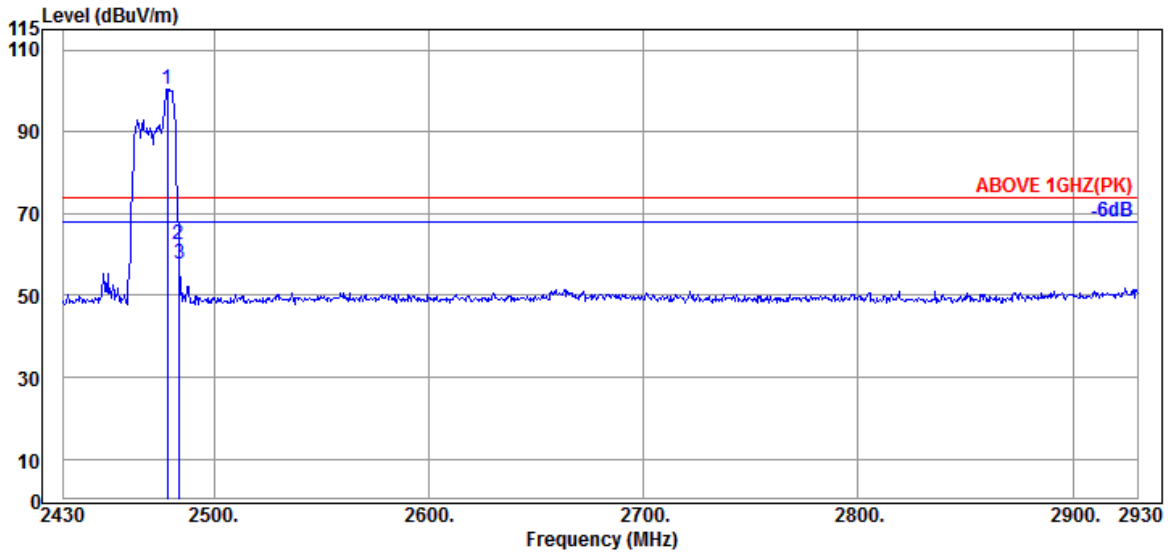

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2478.500	28.56	6.18	34.55	100.38	100.57	---	---	Peak
2483.500	28.57	6.18	34.55	62.37	62.57	74.00	11.43	Peak
2484.000	28.57	6.18	34.55	57.65	57.85	74.00	16.15	Peak

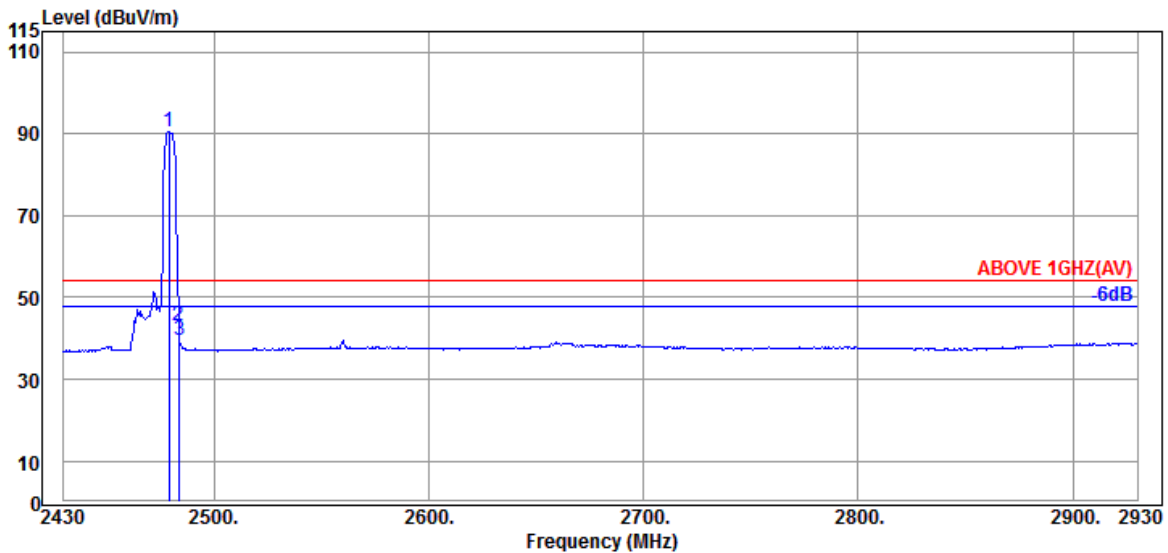


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.000	28.56	6.18	34.55	90.29	90.48	---	---	Average
2483.500	28.57	6.18	34.55	42.99	43.19	54.00	10.81	Average
2484.000	28.57	6.18	34.55	39.41	39.61	54.00	14.39	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

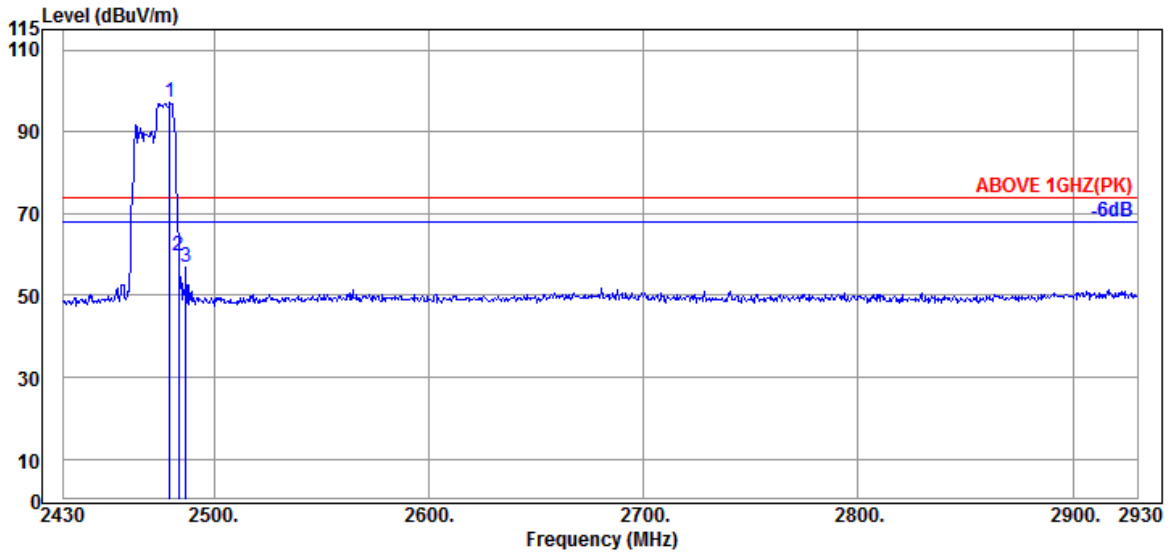

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	6.18	34.55	96.84	97.03	---	---	Peak
2483.500	28.57	6.18	34.55	59.63	59.83	74.00	14.17	Peak
2487.000	28.57	6.18	34.55	56.90	57.10	74.00	16.90	Peak

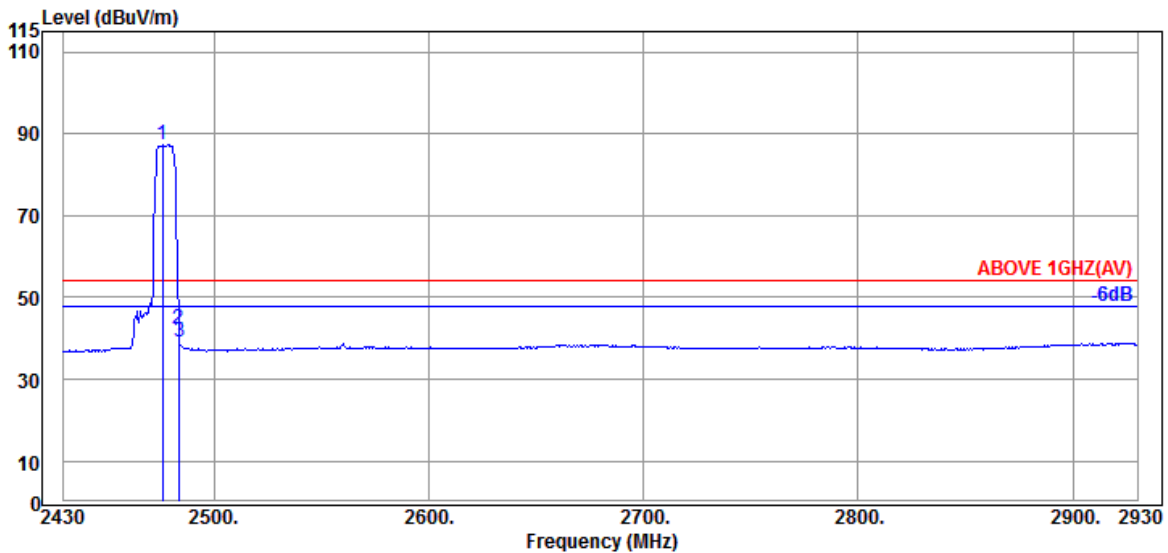


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.56	6.18	34.55	87.02	87.21	---	---	Average
2483.500	28.57	6.18	34.55	41.89	42.09	54.00	11.91	Average
2484.000	28.57	6.18	34.55	38.80	39.00	54.00	15.00	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	Frequency	TX 2472MHz
		RU Configuration	106/54

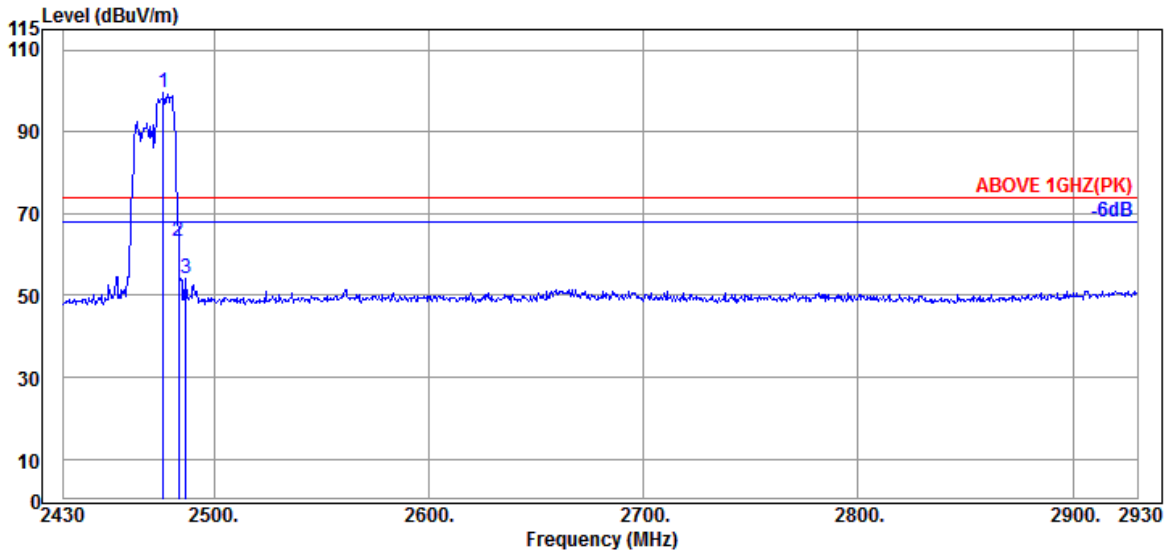

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.500	28.56	6.18	34.55	99.37	99.56	---	---	Peak
2483.500	28.57	6.18	34.55	62.85	63.05	74.00	10.95	Peak
2487.000	28.57	6.18	34.55	54.10	54.30	74.00	19.70	Peak

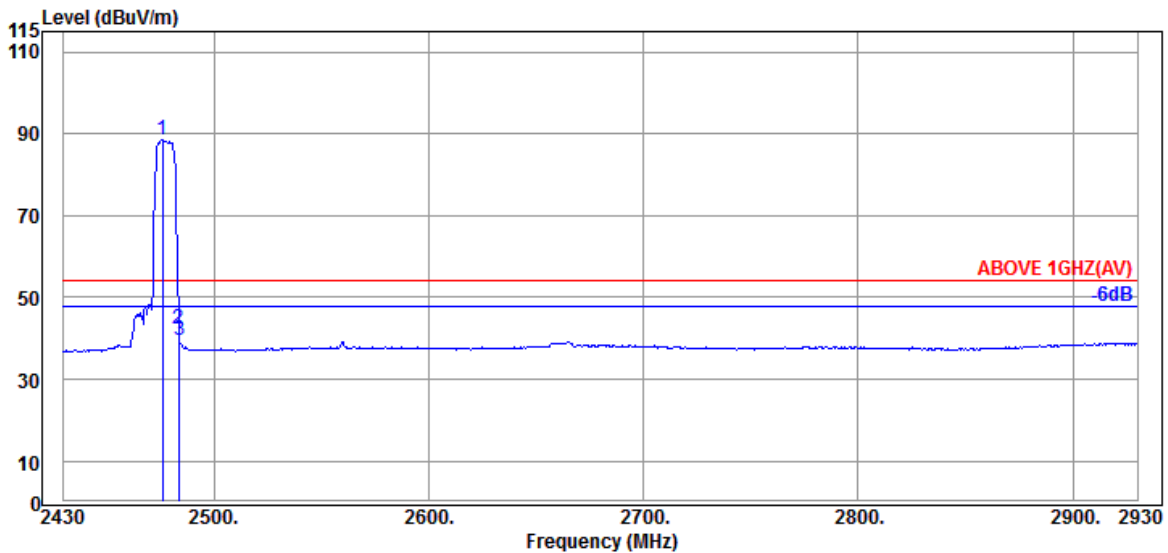


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2476.000	28.56	6.18	34.55	88.32	88.51	---	---	Average
2483.500	28.57	6.18	34.55	42.11	42.31	54.00	11.69	Average
2484.000	28.57	6.18	34.55	39.19	39.39	54.00	14.61	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

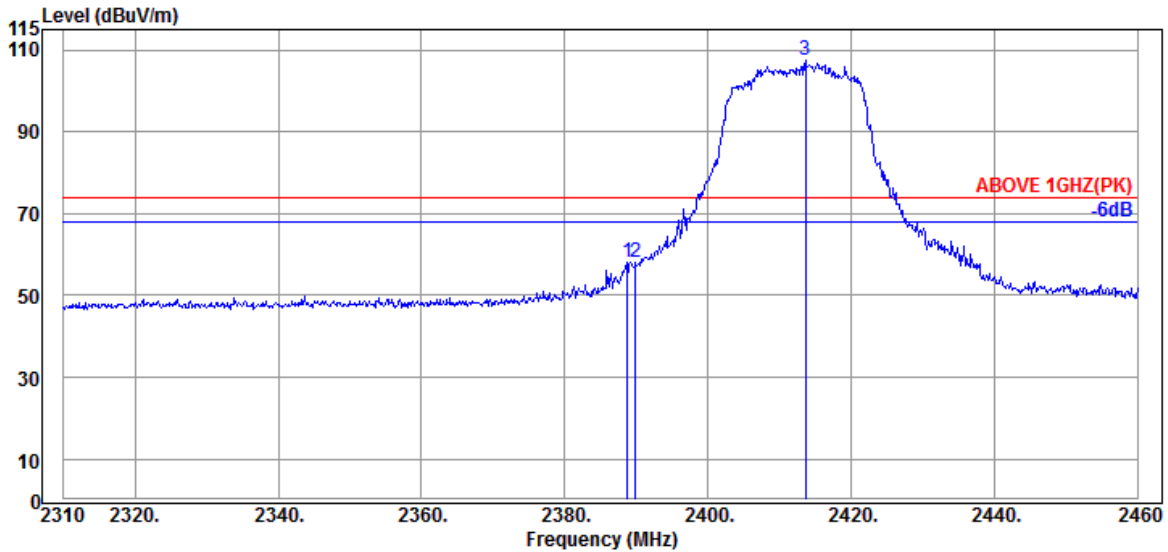

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.750	28.27	6.04	34.53	58.39	58.17	74.00	15.83	Peak
2389.950	28.27	6.04	34.54	58.46	58.23	74.00	15.77	Peak
@ 2413.650	28.36	6.07	34.54	107.52	107.41	---	---	Peak

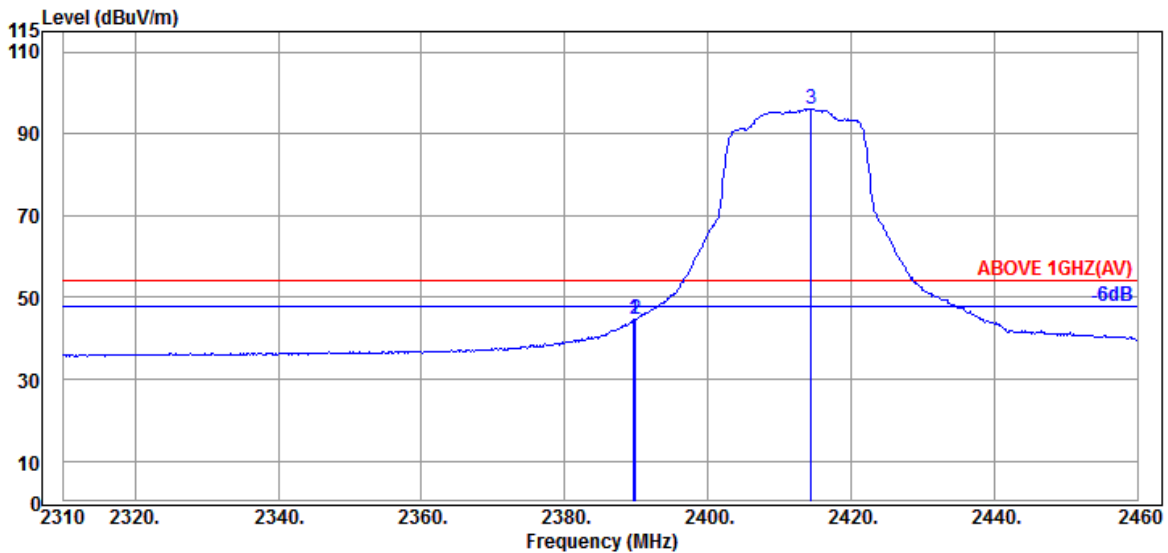


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.650	28.27	6.04	34.53	44.70	44.48	54.00	9.52	Average
2389.950	28.27	6.04	34.54	44.74	44.51	54.00	9.49	Average
@ 2414.400	28.36	6.07	34.54	96.16	96.05	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2422MHz
		RU Configuration	242/61

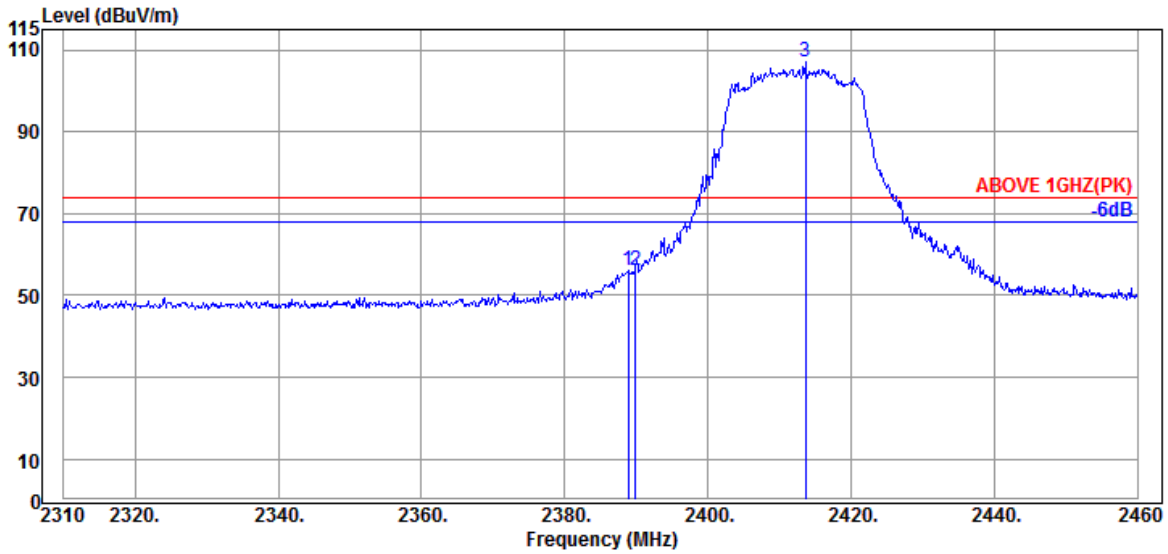

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.900	28.27	6.04	34.53	56.30	56.08	74.00	17.92	Peak
2389.950	28.27	6.04	34.54	56.51	56.28	74.00	17.72	Peak
@ 2413.650	28.36	6.07	34.54	107.27	107.16	---	---	Peak

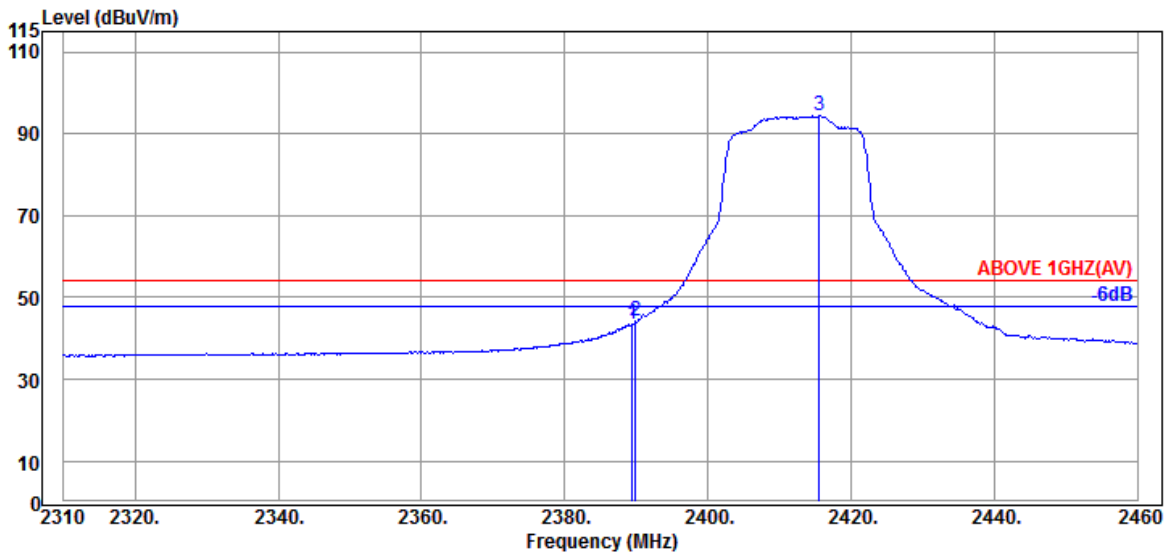


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2389.500	28.27	6.04	34.53	43.81	43.59	54.00	10.41	Average
2389.950	28.27	6.04	34.54	44.30	44.07	54.00	9.93	Average
@ 2415.600	28.36	6.07	34.54	94.72	94.61	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

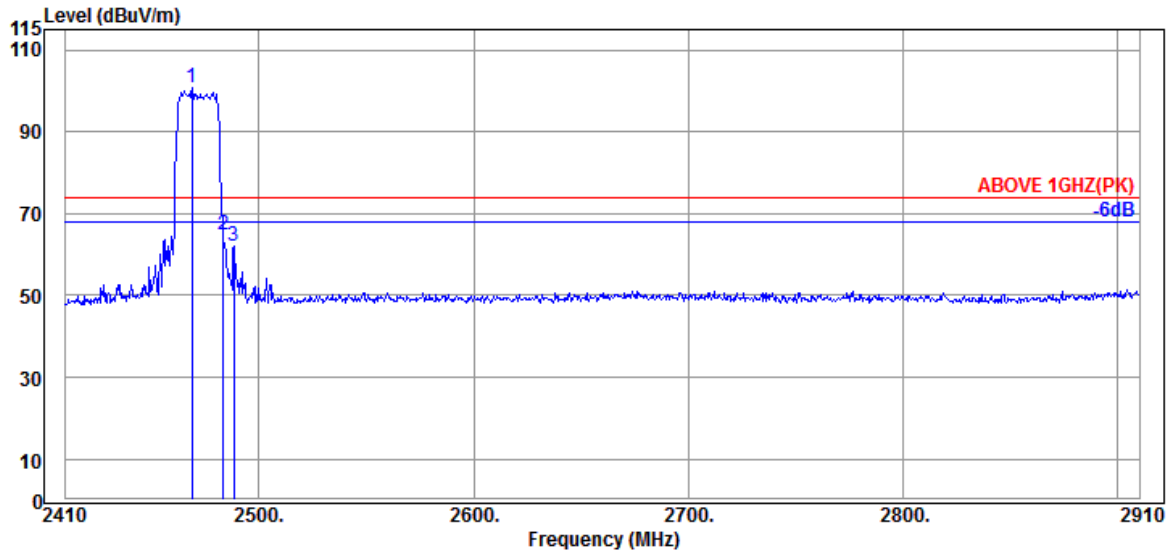

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2469.000	28.54	6.15	34.55	100.57	100.71	---	---	Peak
2483.500	28.57	6.18	34.55	64.63	64.83	74.00	9.17	Peak
2488.500	28.57	6.21	34.55	61.65	61.88	74.00	12.12	Peak

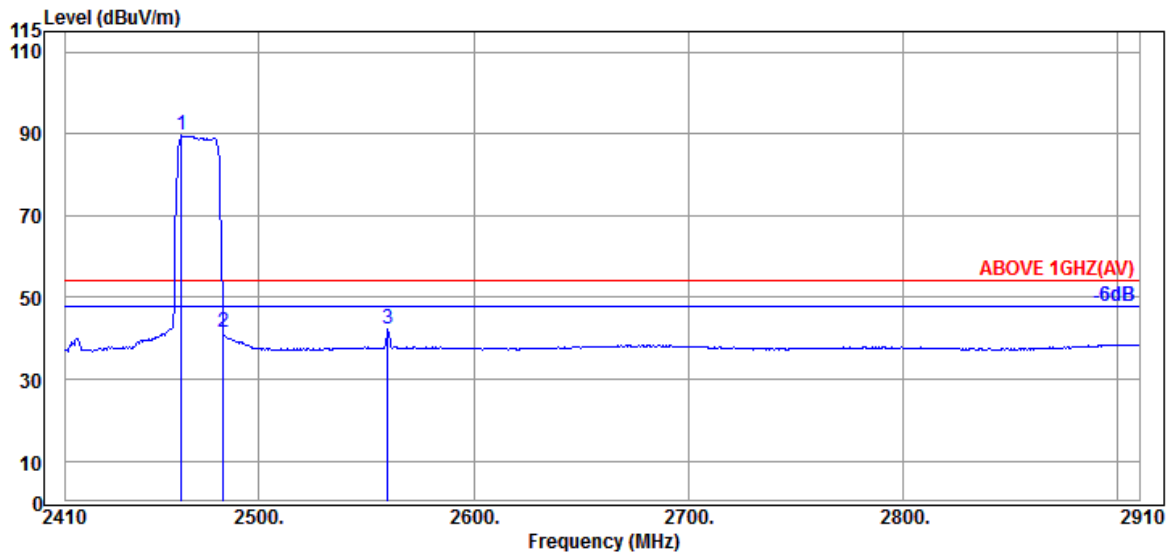


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2464.000	28.53	6.15	34.55	89.39	89.52	---	---	Average
2483.500	28.57	6.18	34.55	41.46	41.66	54.00	12.34	Average
2560.000	28.83	6.30	34.57	41.59	42.15	54.00	11.85	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	Frequency	TX 2462MHz
		RU Configuration	242/62

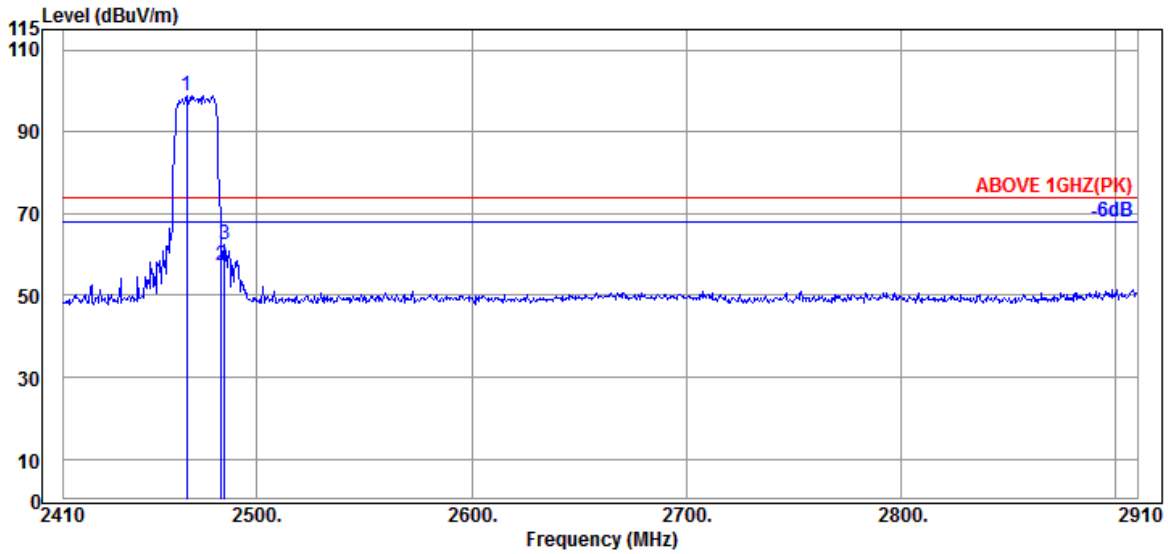

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2467.500	28.53	6.15	34.55	98.64	98.77	---	---	Peak
2483.500	28.57	6.18	34.55	57.29	57.49	74.00	16.51	Peak
2485.000	28.57	6.18	34.55	62.32	62.52	74.00	11.48	Peak

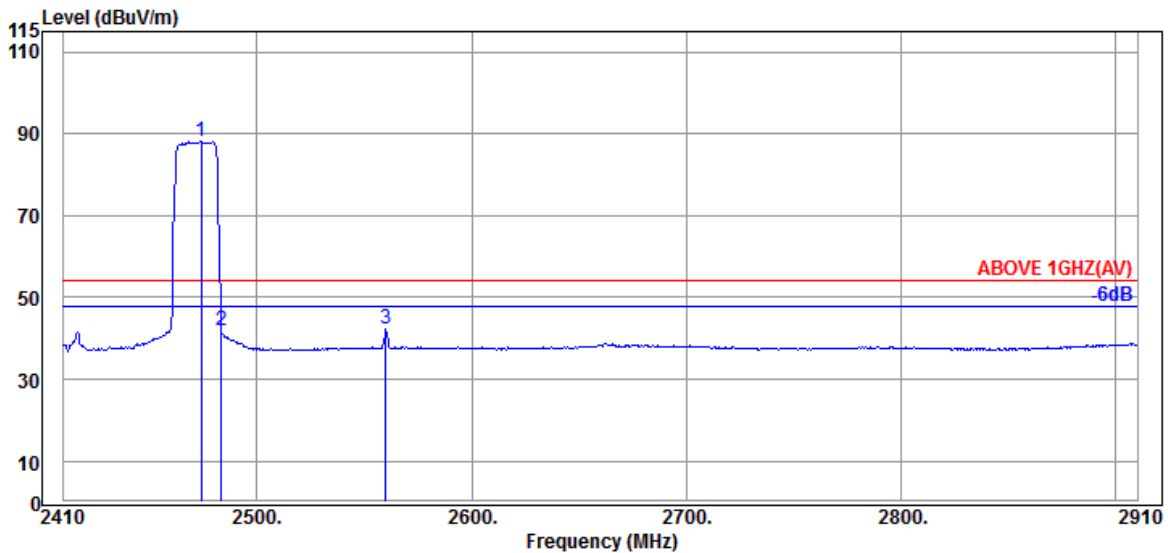


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2474.000	28.54	6.18	34.55	87.98	88.15	---	---	Average
2483.500	28.57	6.18	34.55	41.77	41.97	54.00	12.03	Average
2560.000	28.83	6.30	34.57	41.71	42.27	54.00	11.73	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

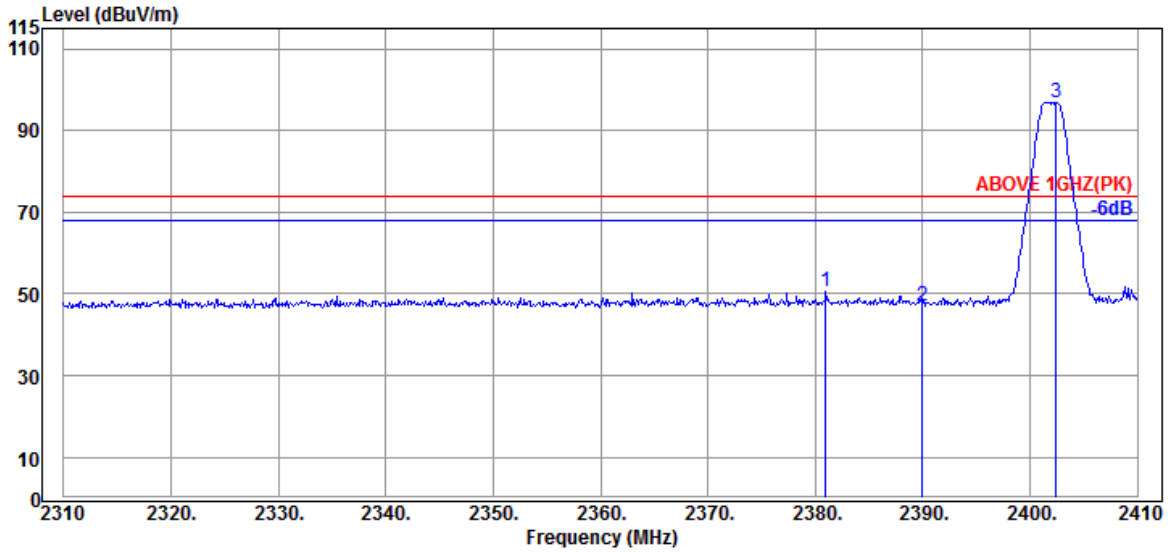

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2381.000	28.26	6.01	34.53	50.91	50.65	74.00	23.35	Peak
2390.000	28.27	6.04	34.54	47.45	47.22	74.00	26.78	Peak
@ 2402.400	28.30	6.04	34.54	97.19	96.99	---	---	Peak

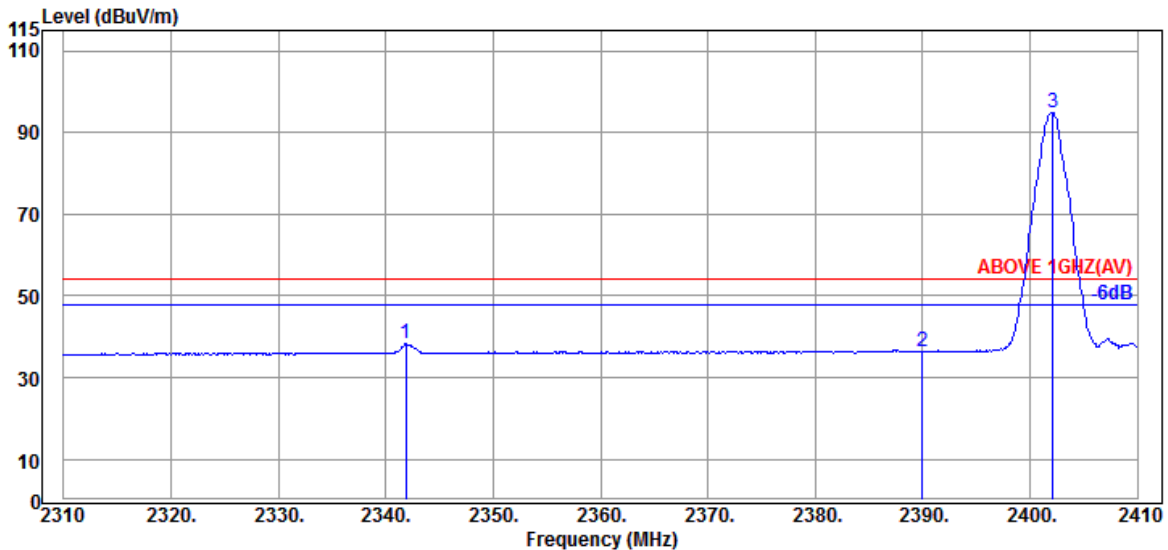


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2341.900	28.10	5.96	34.53	38.77	38.30	54.00	15.70	Average
2390.000	28.27	6.04	34.54	36.66	36.43	54.00	17.57	Average
@ 2402.100	28.30	6.04	34.54	95.13	94.93	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2402MHz
------	----------	-----------	------------

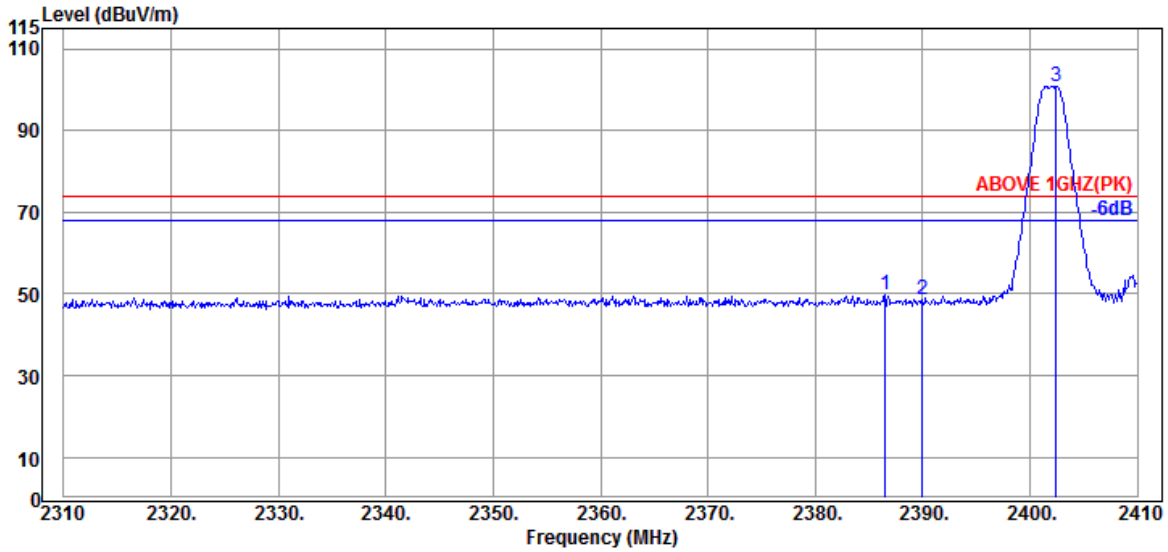

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2386.500	28.27	6.04	34.53	50.07	49.85	74.00	24.15	Peak
2390.000	28.27	6.04	34.54	48.87	48.64	74.00	25.36	Peak
@ 2402.400	28.30	6.04	34.54	100.94	100.74	---	---	Peak

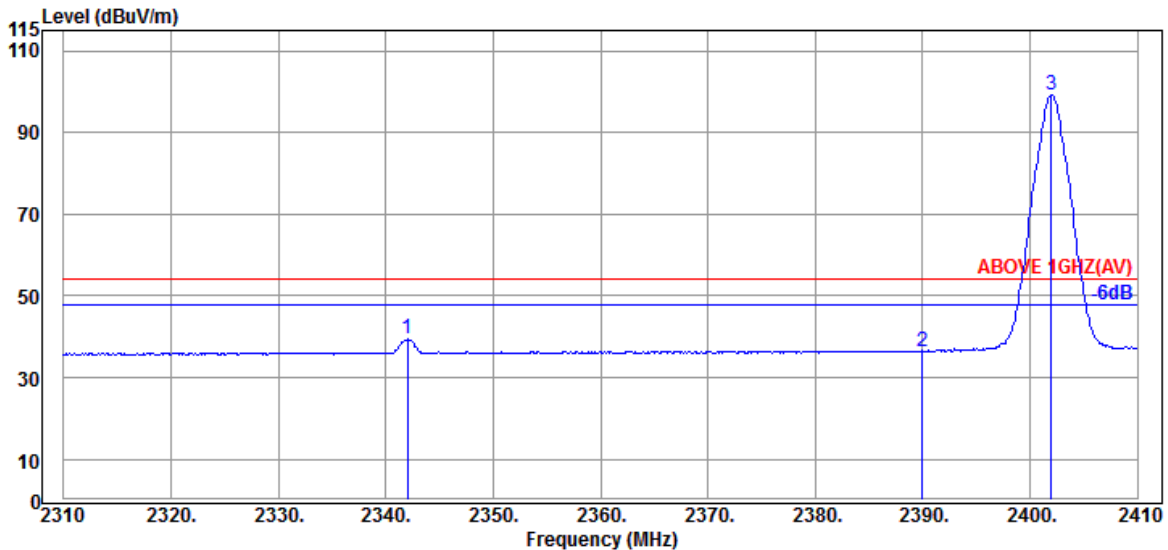


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2342.000	28.10	5.96	34.53	39.83	39.36	54.00	14.64	Average
2390.000	28.27	6.04	34.54	36.70	36.47	54.00	17.53	Average
@ 2402.000	28.30	6.04	34.54	99.41	99.21	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

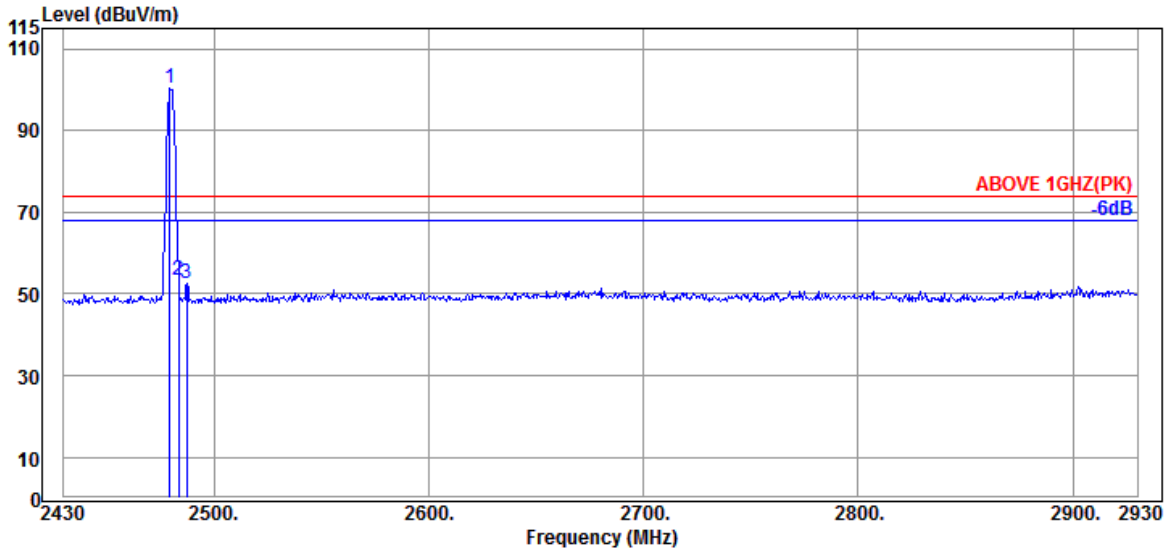

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	6.18	34.55	100.00	100.19	---	---	Peak
2483.500	28.57	6.18	34.55	53.01	53.21	74.00	20.79	Peak
2487.500	28.57	6.21	34.55	52.20	52.43	74.00	21.57	Peak

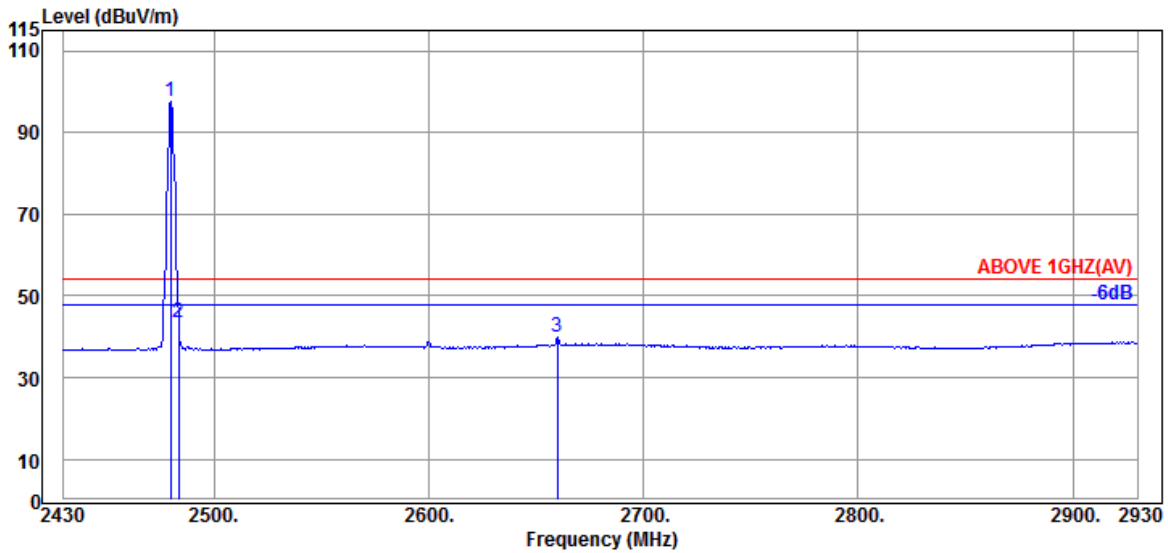


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.56	6.18	34.55	97.31	97.50	---	---	Average
2483.500	28.57	6.18	34.55	43.10	43.30	54.00	10.70	Average
2660.000	28.93	6.43	34.59	39.05	39.82	54.00	14.18	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	BLE (2M)	Frequency	TX 2480MHz
------	----------	-----------	------------

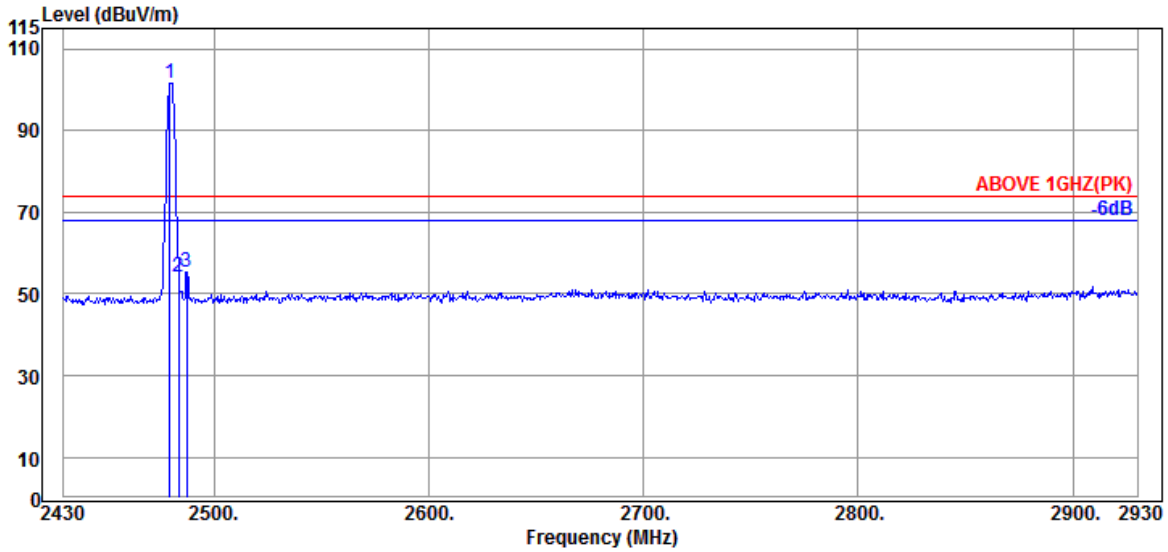

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2479.500	28.56	6.18	34.55	101.52	101.71	---	---	Peak
2483.500	28.57	6.18	34.55	53.98	54.18	74.00	19.82	Peak
2487.500	28.57	6.21	34.55	54.93	55.16	74.00	18.84	Peak

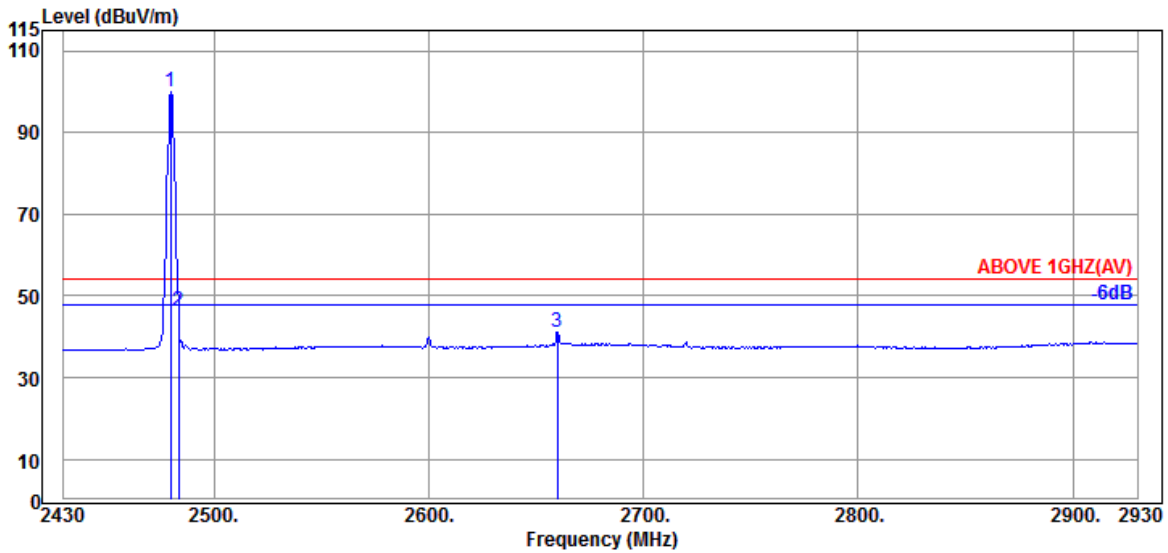

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 2480.000	28.56	6.18	34.55	99.63	99.82	---	---	Average
2483.500	28.57	6.18	34.55	45.98	46.18	54.00	7.82	Average
2660.000	28.93	6.43	34.59	40.48	41.25	54.00	12.75	Average

Remark: The “@” means fundamental frequency, it is ignored in this section..