

TABLE OF CONTENTS


A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	146
A.2.3 Emissions in Non-restricted Frequency Bands.....	161
A.3 EMISSION/OCCUPIED BANDWIDTH.....	162
A.3.1 Emission/Occupied Bandwidth Result	162
A.3.2 Measurement Plots	167
A.4 MAXIMUM OUTPUT POWER	192
A.4.1 Average Output Power	192
A.4.2 Measurement Plots	197
A.5 POWER SPECTRAL DENSITY	205
A.5.1 Power Spectral Density Result	205
A.5.2 Measurement Plots	209
A.6 FREQUENCY STABILITY	249
A.6.1 Frequency stability Result	249

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.1 CONDUCTED EMISSION

Test Date	2022/03/21	Temp./Hum.	26°C/65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1		

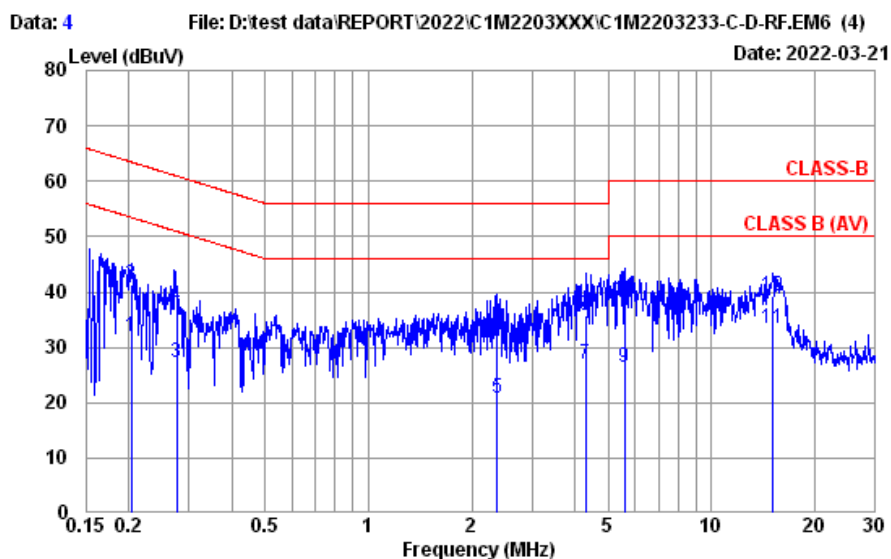

Site No. : No.8 Shielded Room Data No. : 4
Instrument 1 : Receiver ESR3(774)
Instrument 2 : ENH432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : NEUTRAL
Environment : 26°C / 65% Engineer : Chucky Chiu
EUT Model : 16U70Q Test Rating : 120Vac/60Hz
Test Mode : Operating


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.204	10.39	0.03	9.85	11.59	31.86	53.45	21.59	Average
2	0.204	10.39	0.03	9.85	21.05	41.32	63.45	22.13	QP
3	0.276	10.38	0.03	9.85	6.85	27.11	50.94	23.83	Average
4	0.276	10.38	0.03	9.85	17.28	37.54	60.94	23.40	QP
5	2.371	10.42	0.07	9.86	0.52	20.87	46.00	25.13	Average
6	2.371	10.42	0.07	9.86	11.52	31.87	56.00	24.13	QP
7	4.292	10.47	0.09	9.86	6.42	26.84	46.00	19.16	Average
8	4.292	10.47	0.09	9.86	15.27	35.69	56.00	20.31	QP
9	5.564	10.53	0.11	9.87	5.98	26.49	50.00	23.51	Average
10	5.564	10.53	0.11	9.87	17.98	38.49	60.00	21.51	QP
11	15.066	10.93	0.17	9.91	12.53	33.54	50.00	16.46	Average
12	15.066	10.93	0.17	9.91	18.22	39.23	60.00	20.77	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Test Date	2022/03/21	Temp./Hum.	26°C/65%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Chucky Chiu
Test SKU	SKU #1		

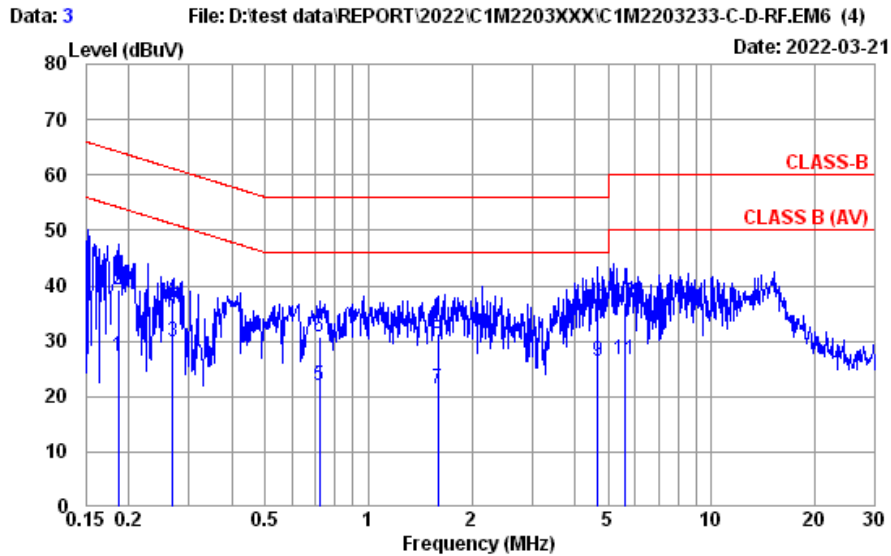

Site No. : No.8 Shielded Room Data No. : 3
Instrument 1 : Receiver ESR3(774)
Instrument 2 : EMI432 (567)(A)|CE-08|ESH3-Z2 (354)
Limit : CLASS-B Phase : LINE
Environment : 26°C / 65% Engineer : Chucky Chiu
EUT Model : 16U70Q Test Rating : 120Vac/60Hz
Test Mode : Operating

	Freq. (MHz)	AMF Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.186	10.39	0.03	9.85	6.87	27.14	54.20	27.06	Average
2	0.186	10.39	0.03	9.85	19.14	39.41	64.20	24.79	QP
3	0.269	10.38	0.03	9.85	9.55	29.81	51.16	21.35	Average
4	0.269	10.38	0.03	9.85	17.49	37.75	61.16	23.41	QP
5	0.720	10.38	0.04	9.85	1.81	22.08	46.00	23.92	Average
6	0.720	10.38	0.04	9.85	10.55	30.82	56.00	25.18	QP
7	1.593	10.39	0.05	9.86	0.96	21.26	46.00	24.74	Average
8	1.593	10.39	0.05	9.86	11.17	31.47	56.00	24.53	QP
9	4.647	10.44	0.10	9.87	5.91	26.32	46.00	19.68	Average
10	4.647	10.44	0.10	9.87	15.45	35.86	56.00	20.14	QP
11	5.564	10.47	0.11	9.87	6.30	26.75	50.00	23.25	Average
12	5.564	10.47	0.11	9.87	16.38	36.83	60.00	23.17	QP

Remarks: 1. Emission Level= AMF Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2022/03/16 ~ 21	Temp./Hum.	19 ~ 23°C/55 ~ 76%
Test Voltage	AC 120V 60Hz (Via AC Adapter)	Tested By	Hua Wu
Test SKU	SKU #1		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1GHz

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.980	12.19	1.77	26.42	38.22	25.76	40.00	14.24	Peak
151.250	16.24	2.87	26.00	44.82	37.93	43.50	5.57	Peak
247.280	18.06	3.83	25.75	47.14	43.28	46.00	2.72	Peak
562.530	23.89	6.65	27.35	33.94	37.13	46.00	8.87	Peak
888.450	26.26	8.37	27.06	34.83	42.40	46.00	3.60	Peak
989.330	27.05	8.92	26.72	28.88	38.13	54.00	15.87	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
62.980	12.19	1.77	26.42	48.31	35.85	40.00	4.15	Peak
152.220	16.17	2.88	26.00	44.56	37.61	43.50	5.89	Peak
246.310	17.97	3.81	25.75	46.24	42.27	46.00	3.73	Peak
593.570	24.23	6.75	27.42	32.71	36.27	46.00	9.73	Peak
847.710	26.12	8.12	27.18	34.84	41.90	46.00	4.10	Peak
964.110	26.85	8.79	26.82	31.86	40.68	54.00	13.32	Peak


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

A.2.1.3 Frequency Above 1 GHz to 10th harmonics


Band Edge:

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

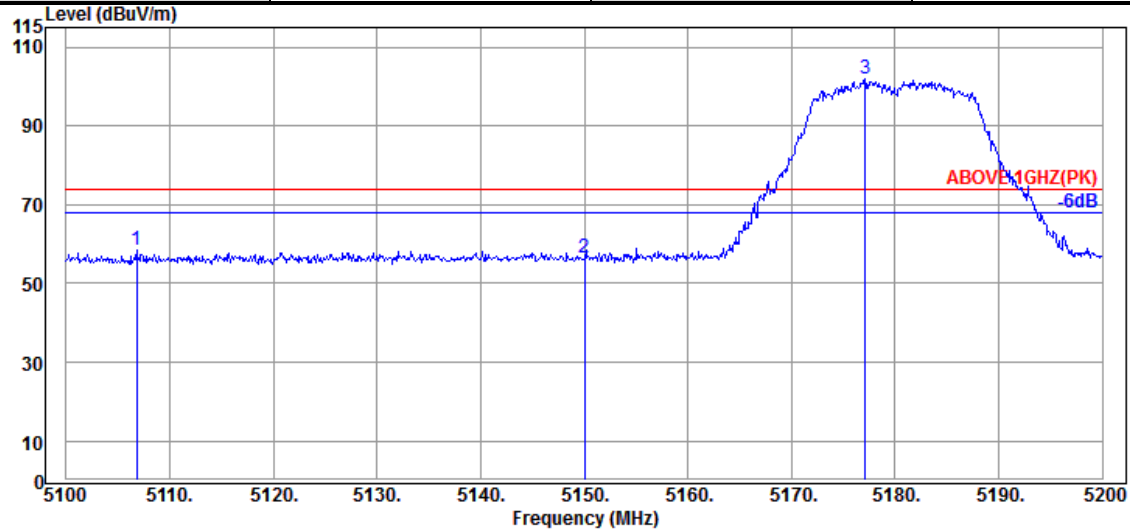

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5106.800	34.00	8.89	34.36	49.80	58.33	74.00	15.67	Peak
5150.000	34.20	8.92	34.35	47.64	56.41	74.00	17.59	Peak
@ 5177.100	34.33	8.95	34.34	92.93	101.87	---	---	Peak

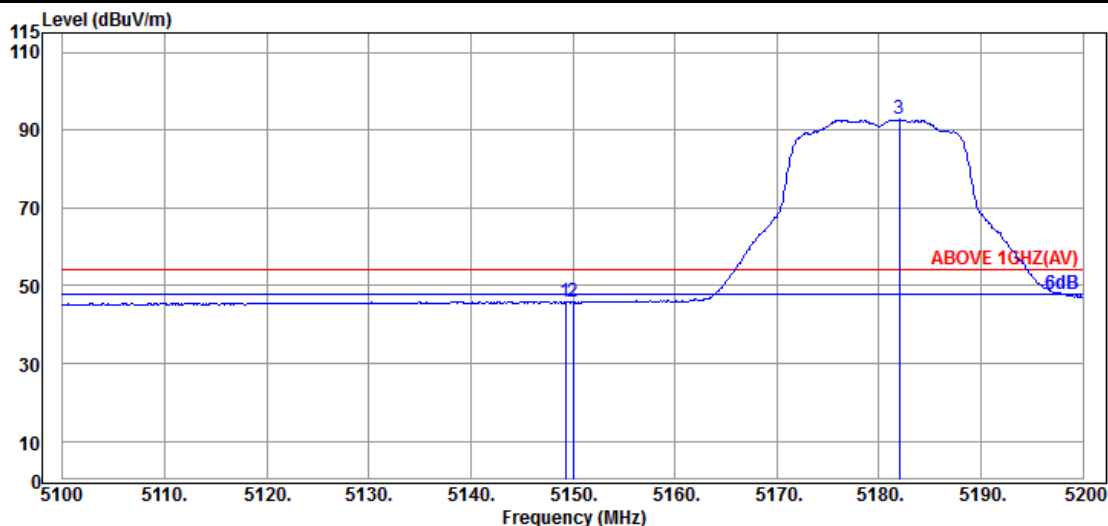

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.300	34.20	8.92	34.35	37.17	45.94	54.00	8.06	Average
5150.000	34.20	8.92	34.35	36.89	45.66	54.00	8.34	Average
@ 5182.000	34.33	8.95	34.34	83.77	92.71	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	1
		Frequency	TX 5180MHz

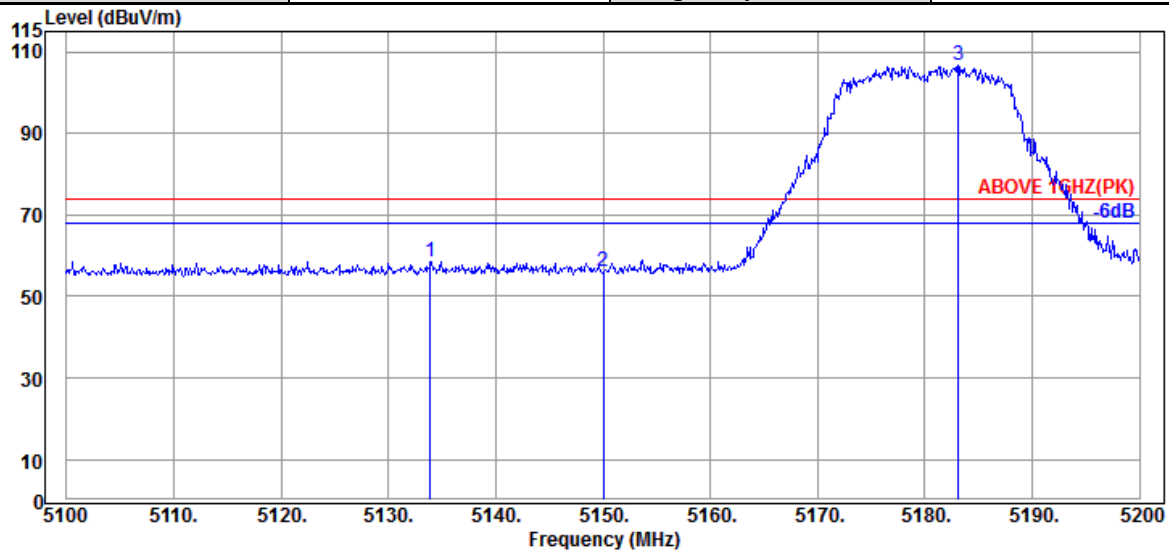

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5133.900	34.13	8.91	34.36	49.94	58.62	74.00	15.38	Peak
5150.000	34.20	8.92	34.35	47.16	55.93	74.00	18.07	Peak
@ 5183.100	34.33	8.95	34.34	97.82	106.76	---	---	Peak

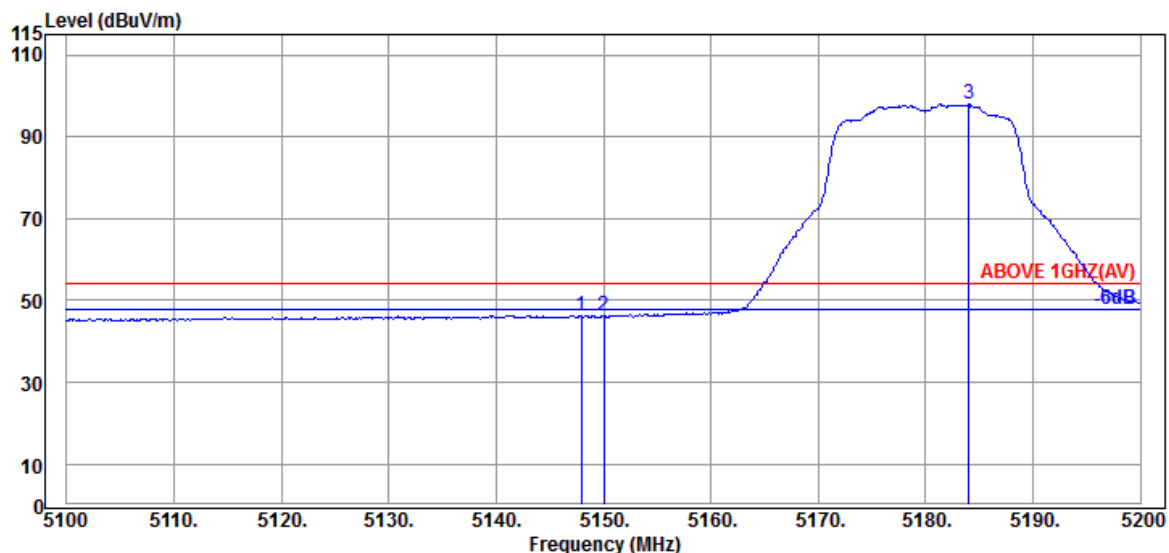


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.900	34.20	8.92	34.35	37.54	46.31	54.00	7.69	Average
5150.000	34.20	8.92	34.35	37.37	46.14	54.00	7.86	Average
@ 5184.000	34.33	8.95	34.34	88.99	97.93	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

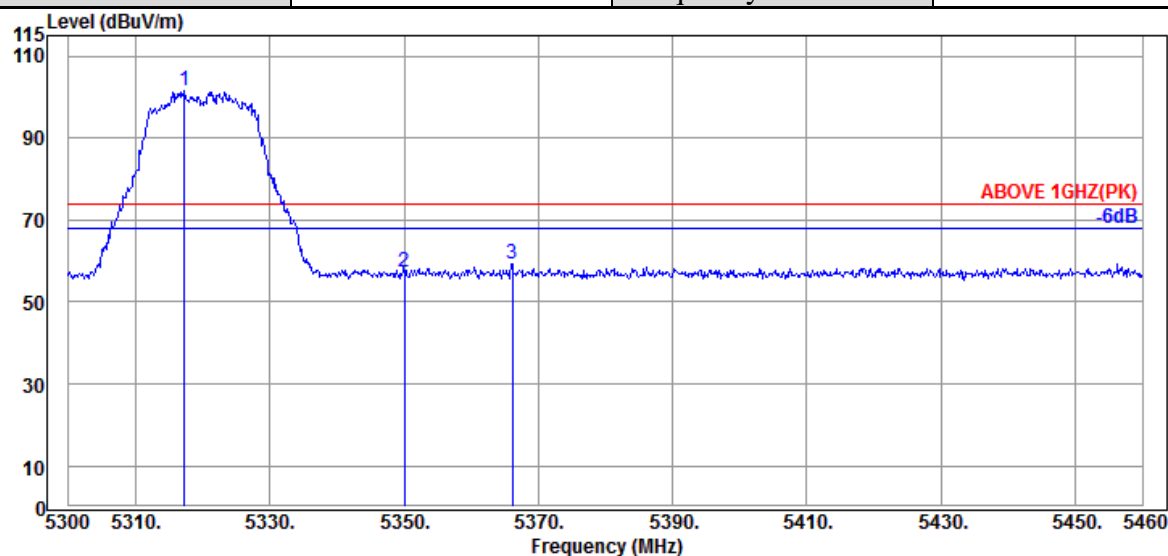

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.280	34.60	9.07	34.29	92.18	101.56	---	---	Peak
	5350.080	34.80	9.10	34.27	47.66	57.29	74.00	16.71	Peak
	5366.080	34.87	9.11	34.27	49.56	59.27	74.00	14.73	Peak

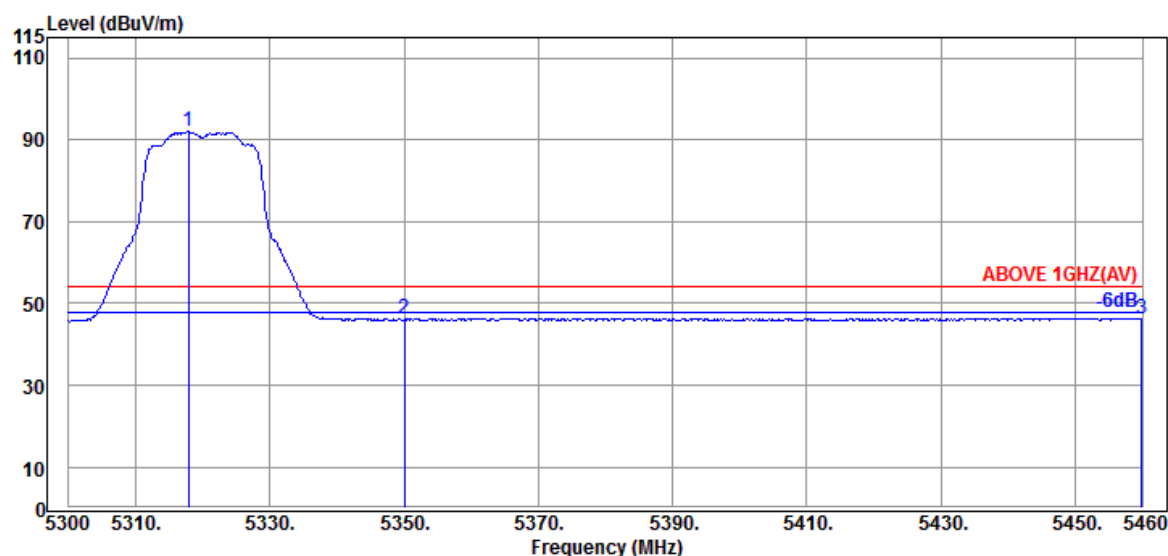


Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5317.920	34.60	9.07	34.29	82.63	92.01	---	---	Average
	5350.080	34.80	9.10	34.27	36.43	46.06	54.00	7.94	Average
	5459.840	35.00	9.18	34.24	36.48	46.42	54.00	7.58	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

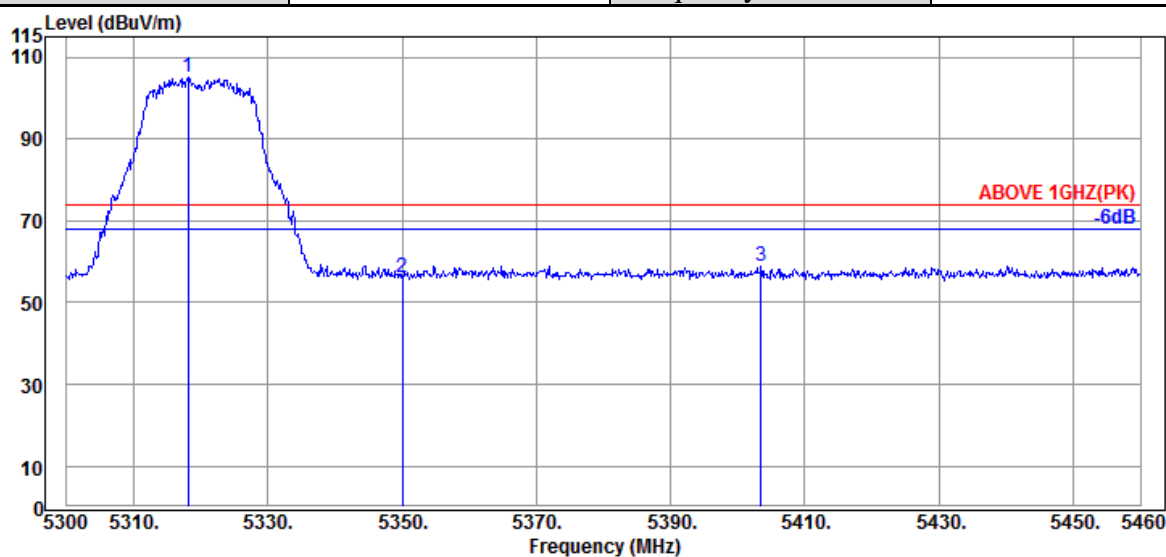

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5318.080	34.60	9.07	34.29	95.68	105.06	---	---	Peak
5350.080	34.80	9.10	34.27	46.51	56.14	74.00	17.86	Peak
5403.520	35.00	9.14	34.26	49.10	58.98	74.00	15.02	Peak

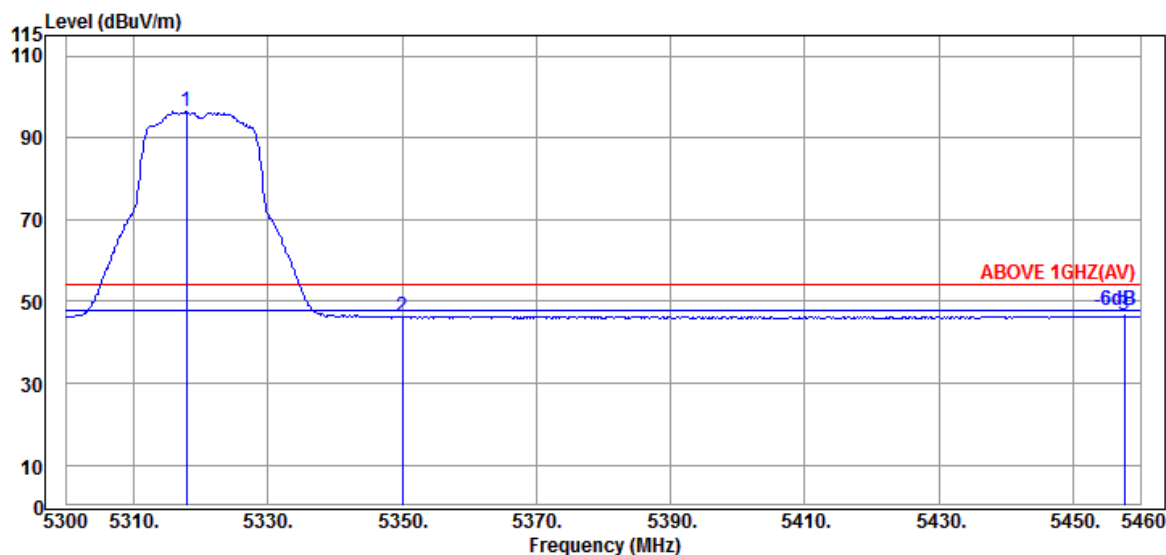

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.920	34.60	9.07	34.29	86.99	96.37	---	---	Average
5350.080	34.80	9.10	34.27	36.41	46.04	54.00	7.96	Average
5457.600	35.00	9.18	34.24	36.52	46.46	54.00	7.54	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

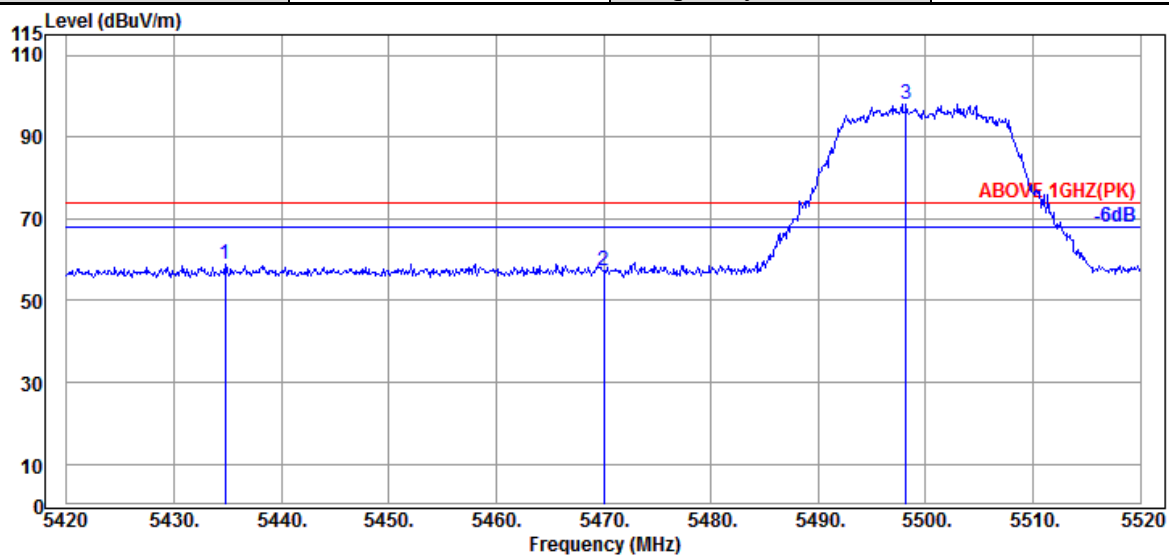

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.800	35.00	9.17	34.25	49.15	59.07	74.00	14.93	Peak
5470.000	34.97	9.20	34.24	47.40	57.33	74.00	16.67	Peak
@ 5498.200	34.90	9.23	34.23	88.21	98.11	---	---	Peak

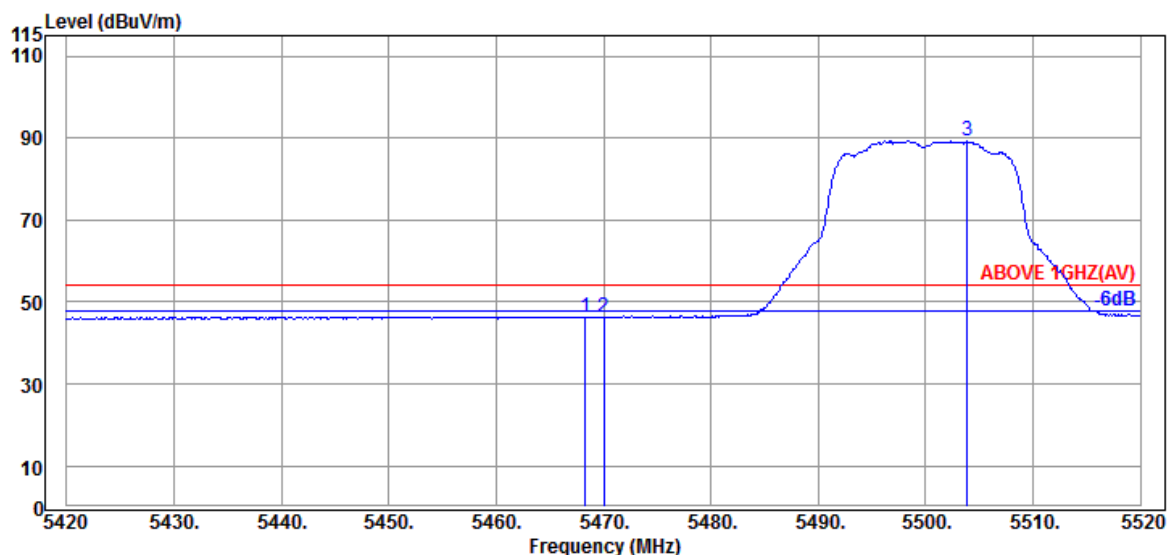


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.300	34.97	9.20	34.24	36.50	46.43	54.00	7.57	Average
5470.000	34.97	9.20	34.24	36.45	46.38	54.00	7.62	Average
@ 5503.900	34.90	9.23	34.24	79.41	89.30	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5500MHz

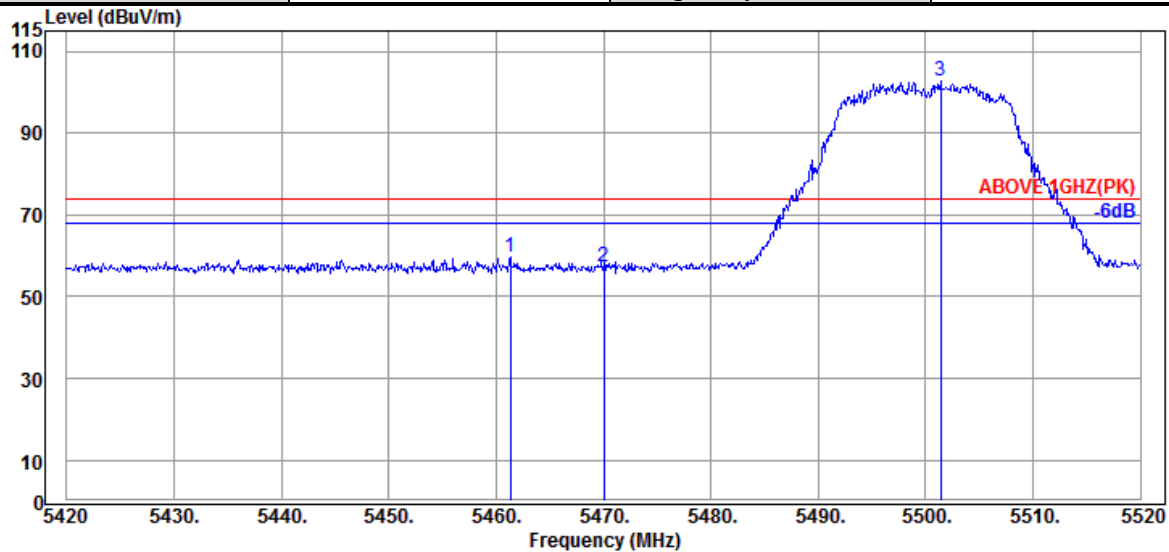

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.300	35.00	9.18	34.24	49.57	59.51	74.00	14.49	Peak
5470.000	34.97	9.20	34.24	47.19	57.12	74.00	16.88	Peak
@ 5501.400	34.90	9.23	34.24	92.81	102.70	---	---	Peak

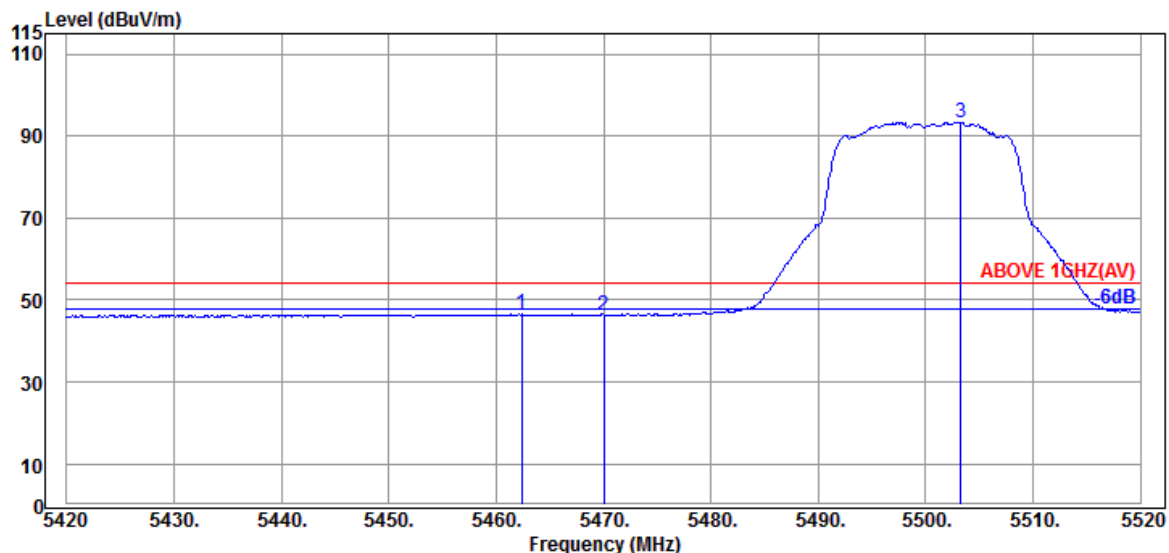

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5462.400	35.00	9.18	34.24	36.58	46.52	54.00	7.48	Average
5470.000	34.97	9.20	34.24	36.39	46.32	54.00	7.68	Average
@ 5503.300	34.90	9.23	34.24	83.49	93.38	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5700MHz

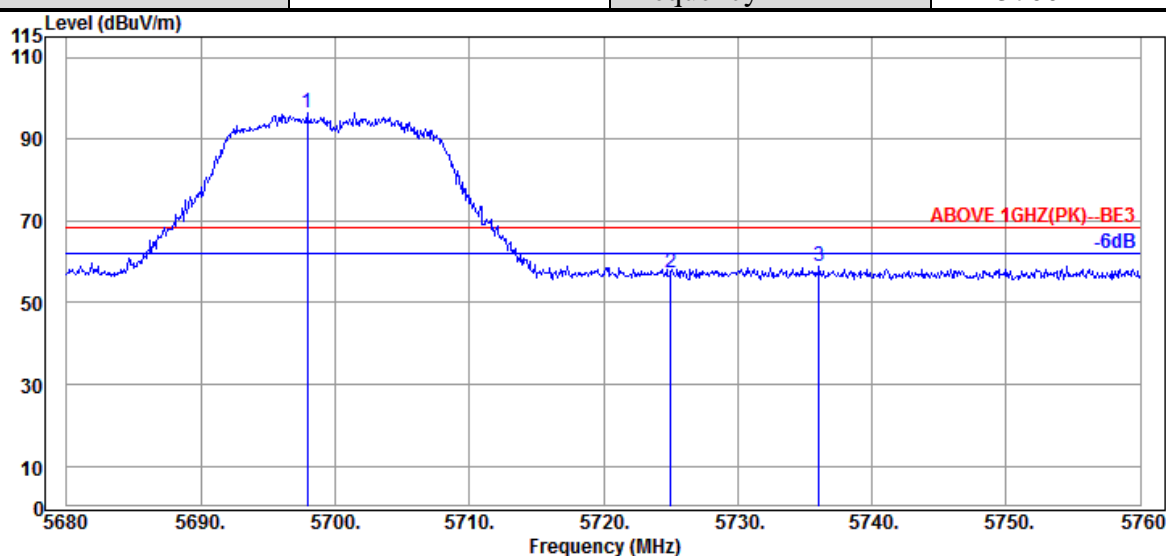

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5697.920	34.50	9.39	34.31	86.87	96.45	---	---	Peak
	5725.040	34.57	9.42	34.32	47.52	57.19	68.20	11.01	Peak
	5736.080	34.57	9.43	34.33	49.08	58.75	68.20	9.45	Peak

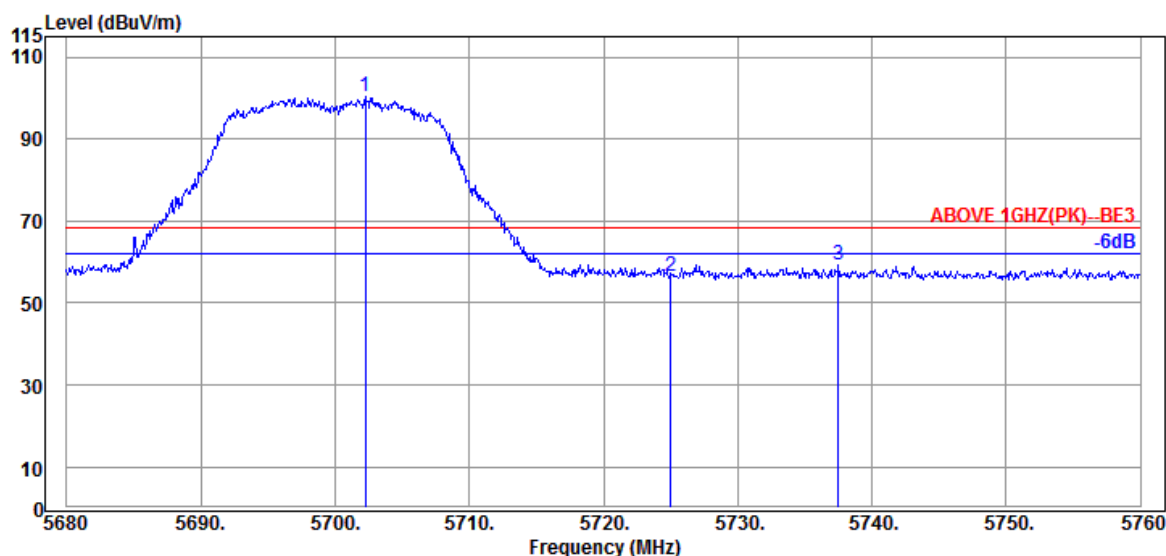

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5702.240	34.50	9.40	34.31	90.62	100.21	---	---	Peak
	5725.040	34.57	9.42	34.32	46.85	56.52	68.20	11.68	Peak
	5737.520	34.57	9.43	34.33	49.61	59.28	68.20	8.92	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

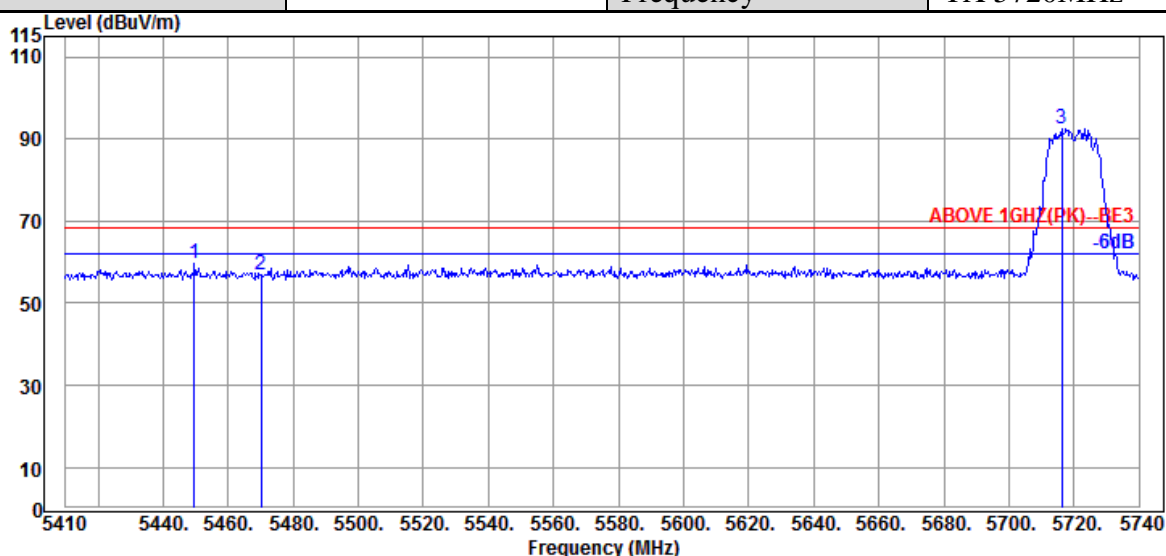

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5449.600	35.00	9.18	34.25	49.65	59.58	68.20	8.62	Peak
5470.060	34.97	9.20	34.24	47.11	57.04	68.20	11.16	Peak
@ 5716.240	34.53	9.40	34.32	82.84	92.45	---	---	Peak

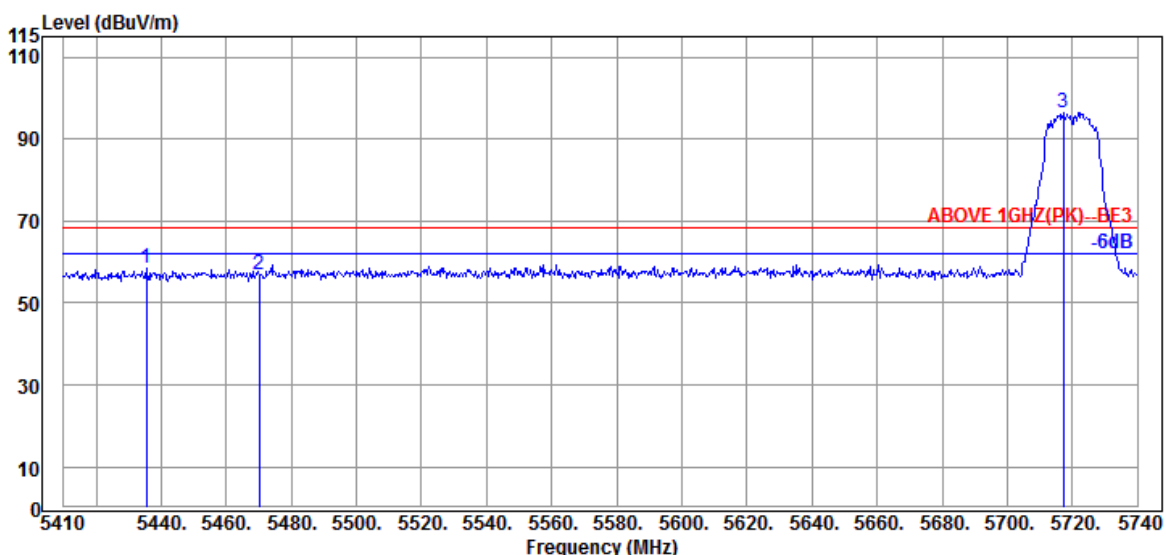

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5435.410	35.00	9.17	34.25	48.59	58.51	68.20	9.69	Peak
5470.060	34.97	9.20	34.24	47.01	56.94	68.20	11.26	Peak
@ 5717.230	34.53	9.40	34.32	86.90	96.51	---	---	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233


Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

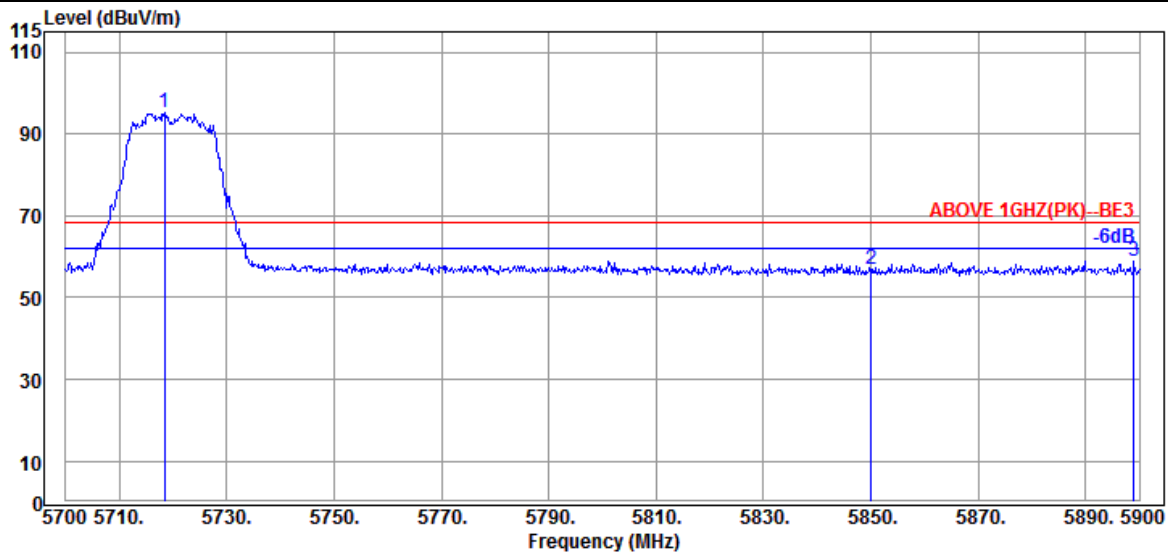

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5718.400	34.53	9.42	34.32	85.68	95.31	---	---	Peak
	5850.000	34.60	9.52	34.38	47.34	57.08	68.20	11.12	Peak
	5899.000	34.60	9.56	34.40	49.04	58.80	68.20	9.40	Peak

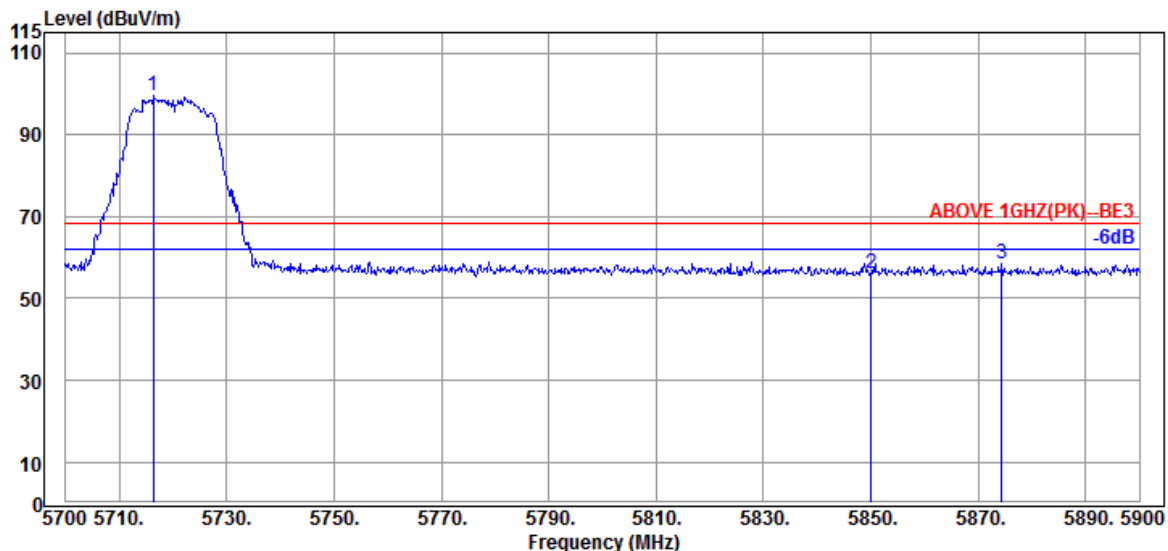

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5716.400	34.53	9.40	34.32	89.78	99.39	---	---	Peak
	5850.000	34.60	9.52	34.38	46.35	56.09	68.20	12.11	Peak
	5874.400	34.60	9.55	34.39	48.61	58.37	68.20	9.83	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11a	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

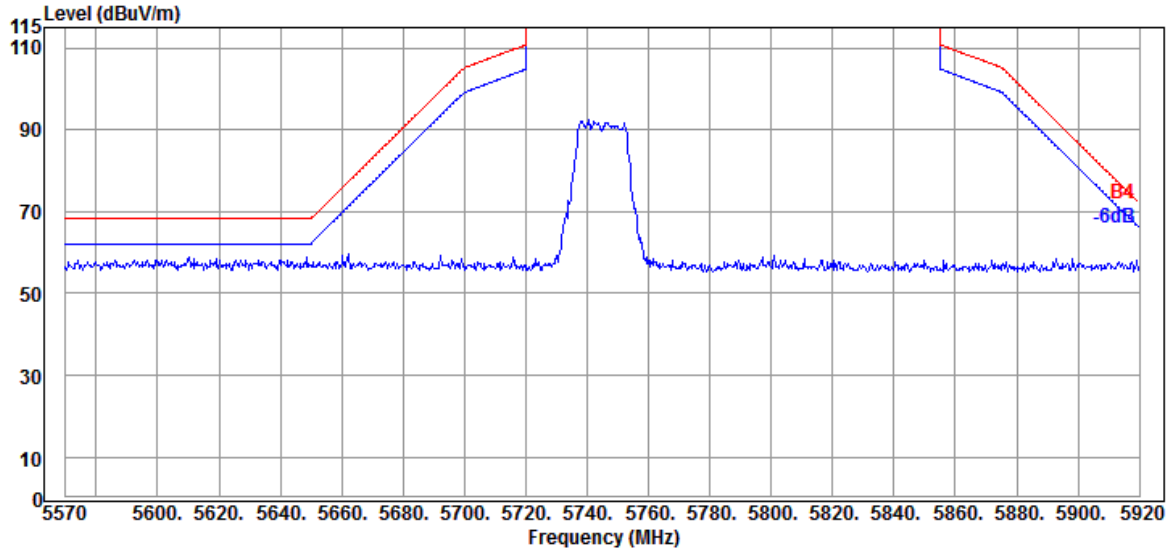


Antenna at Vertical Polarization

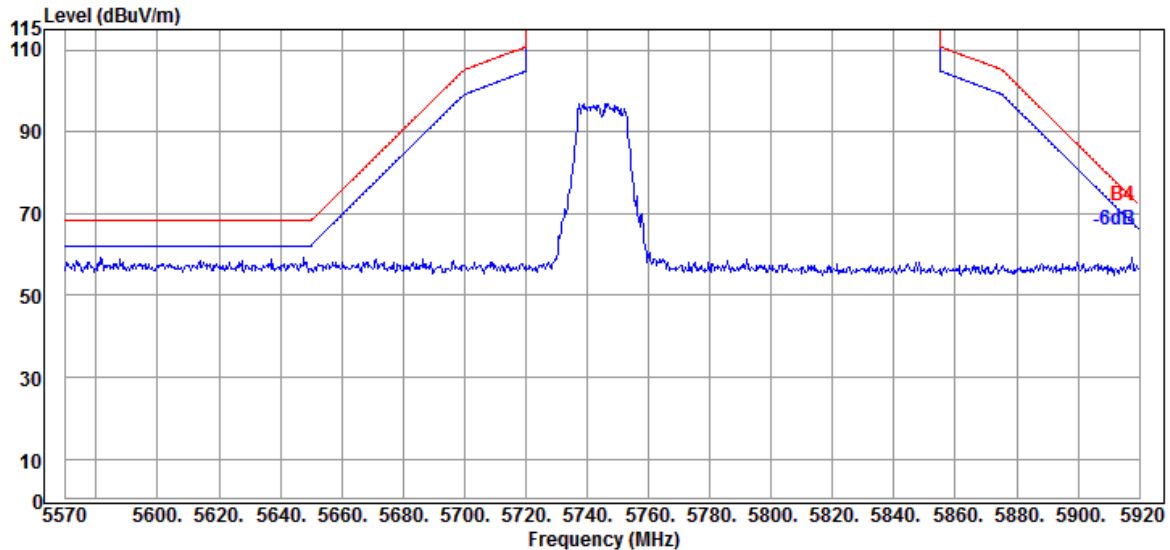


Mode	802.11a	U-NII Band	3
		Frequency	TX 5825MHz

Antenna at Horizontal Polarization

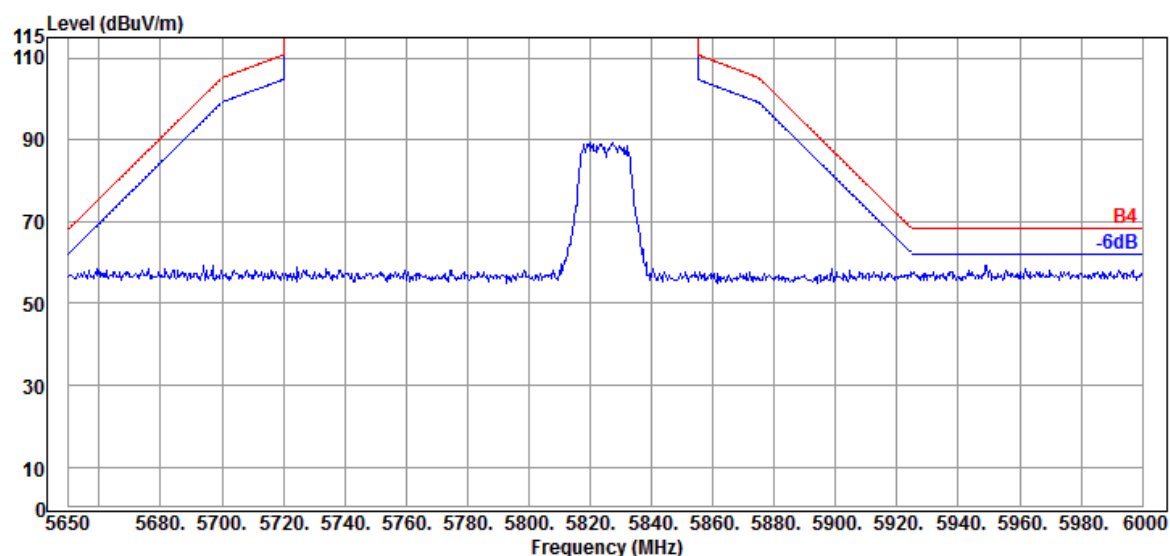

Antenna at Vertical Polarization

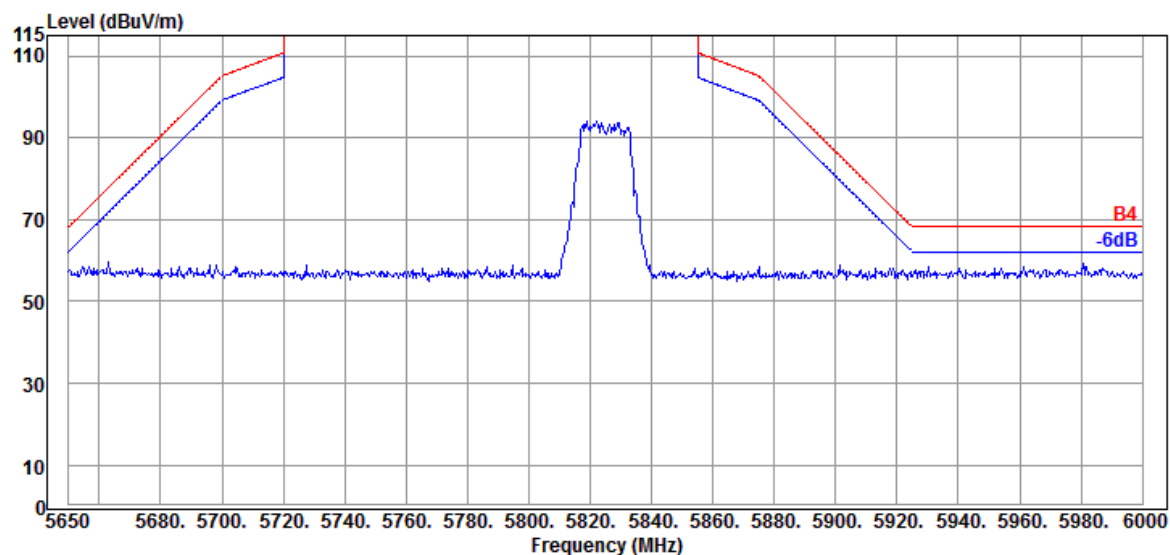

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

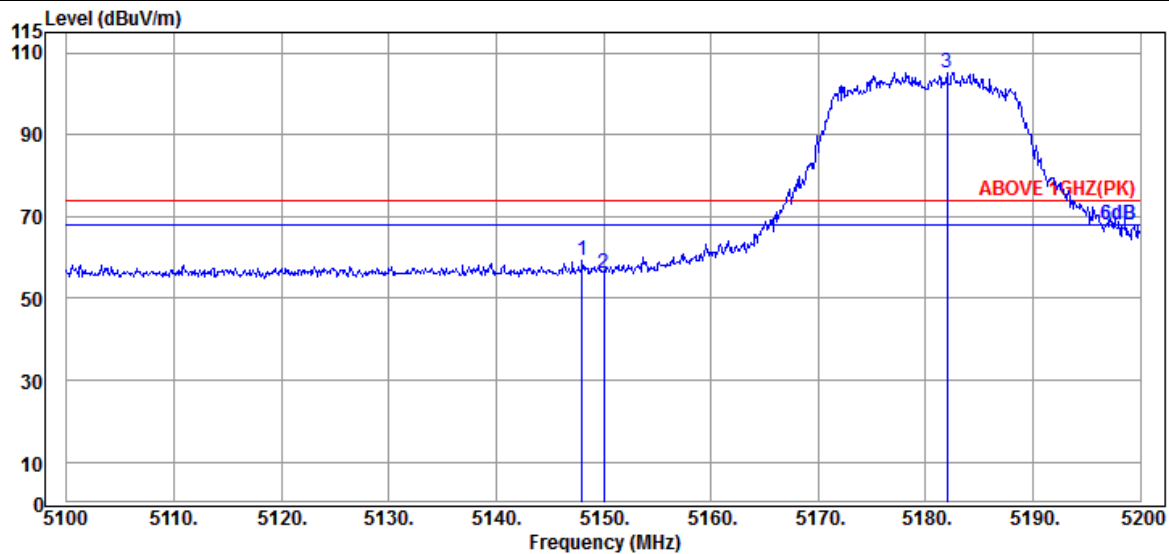

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.000	34.20	8.92	34.35	50.61	59.38	74.00	14.62	Peak
5150.000	34.20	8.92	34.35	47.24	56.01	74.00	17.99	Peak
@ 5182.000	34.33	8.95	34.34	96.29	105.23	---	---	Peak

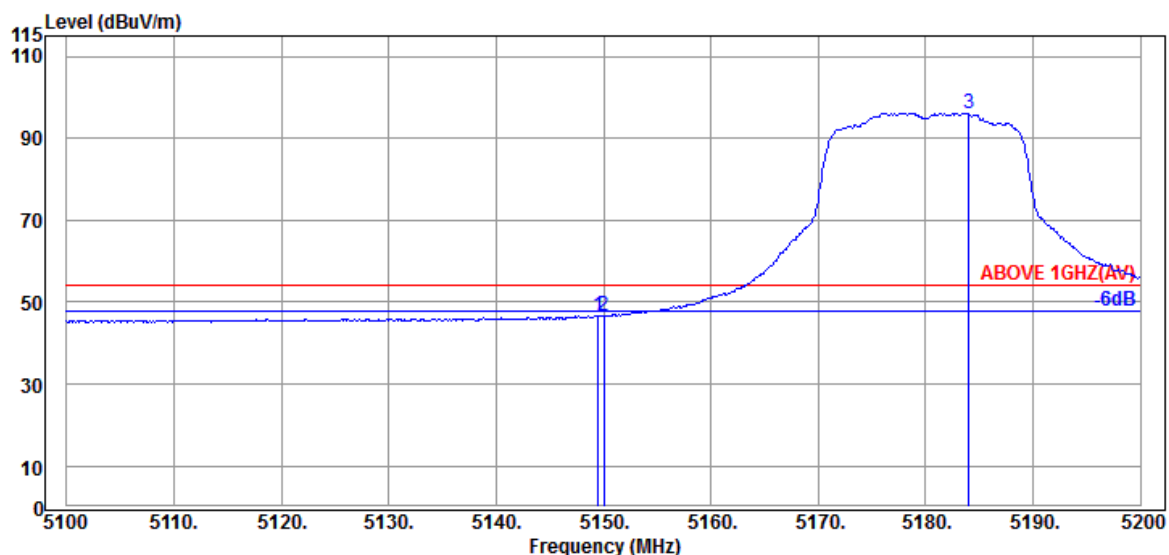

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	38.02	46.79	54.00	7.21	Average
5150.000	34.20	8.92	34.35	37.80	46.57	54.00	7.43	Average
@ 5184.000	34.33	8.95	34.34	87.24	96.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

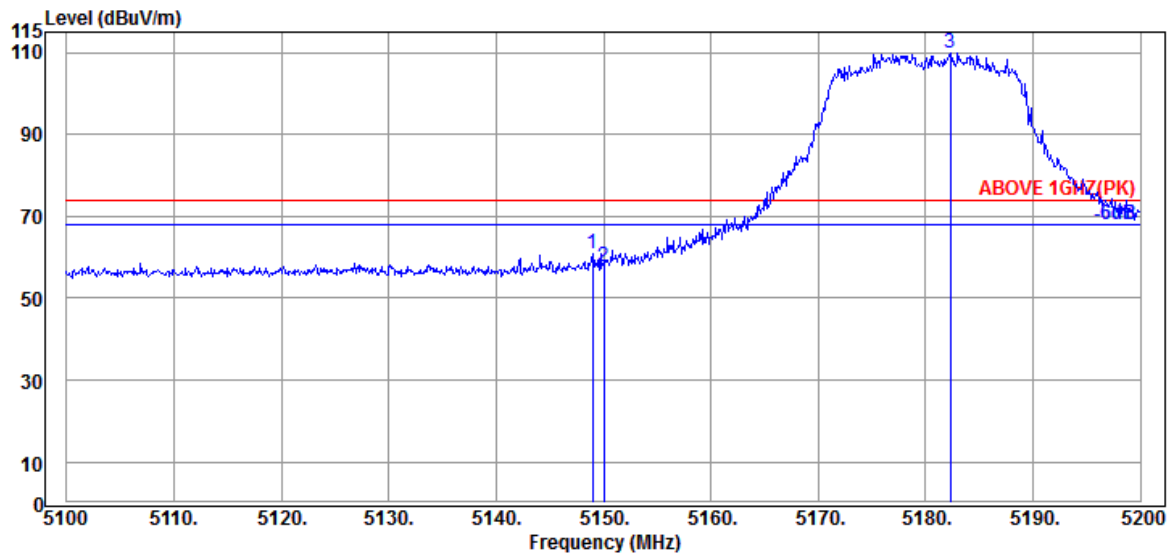

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	34.35	51.96	60.73	74.00	13.27	Peak
5150.000	34.20	8.92	34.35	48.86	57.63	74.00	16.37	Peak
@ 5182.300	34.33	8.95	34.34	101.04	109.98	---	---	Peak

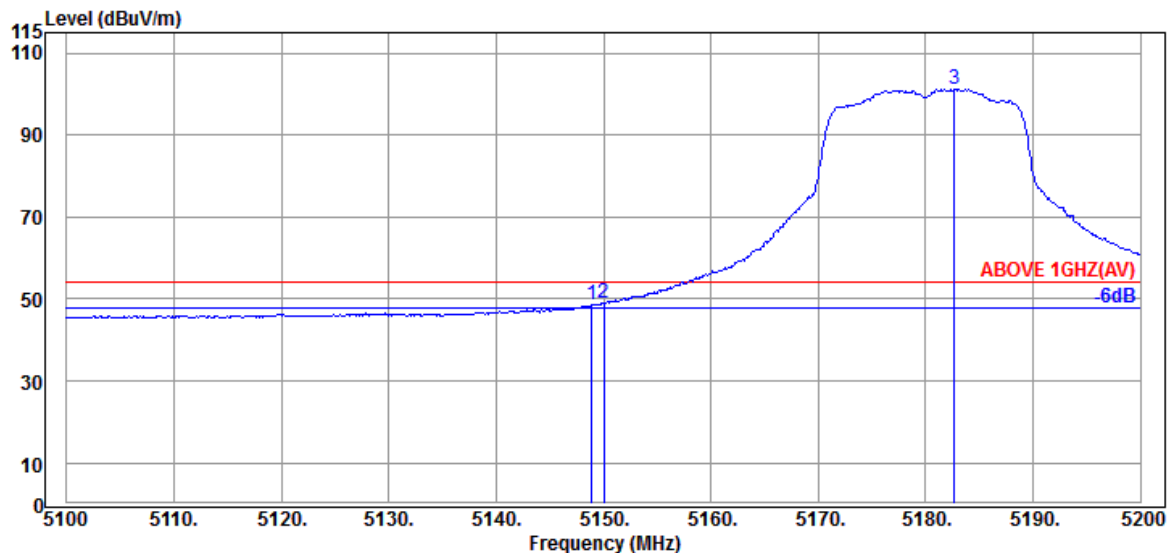

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.900	34.20	8.92	34.35	40.03	48.80	54.00	5.20	Average
5150.000	34.20	8.92	34.35	40.04	48.81	54.00	5.19	Average
@ 5182.700	34.33	8.95	34.34	92.16	101.10	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233


Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

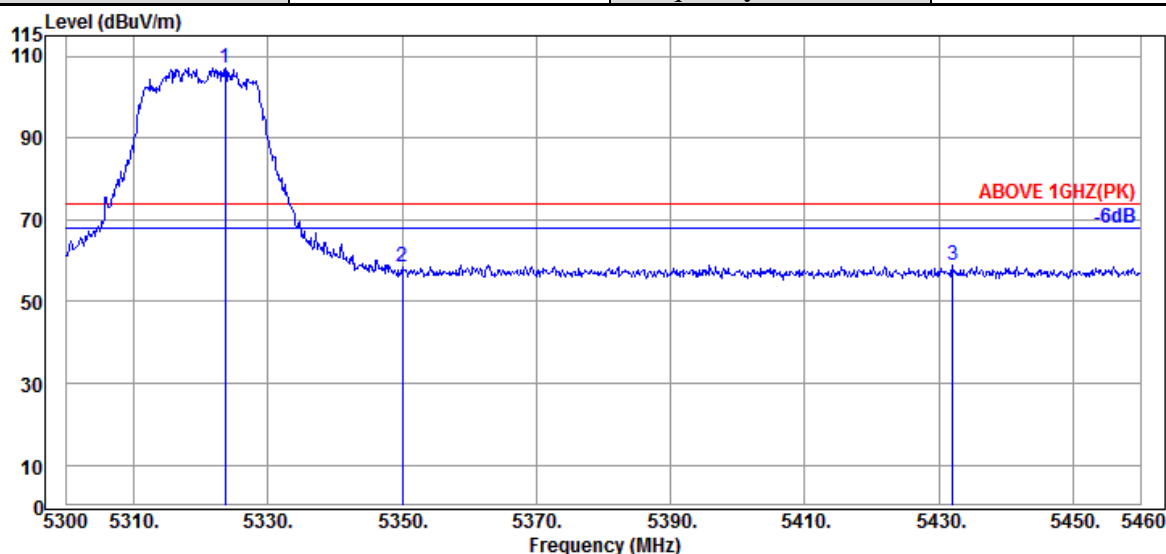

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5323.680	34.70	9.07	34.28	97.74	107.23	---	---	Peak
5350.080	34.80	9.10	34.27	48.70	58.33	74.00	15.67	Peak
5432.000	35.00	9.17	34.25	49.16	59.08	74.00	14.92	Peak

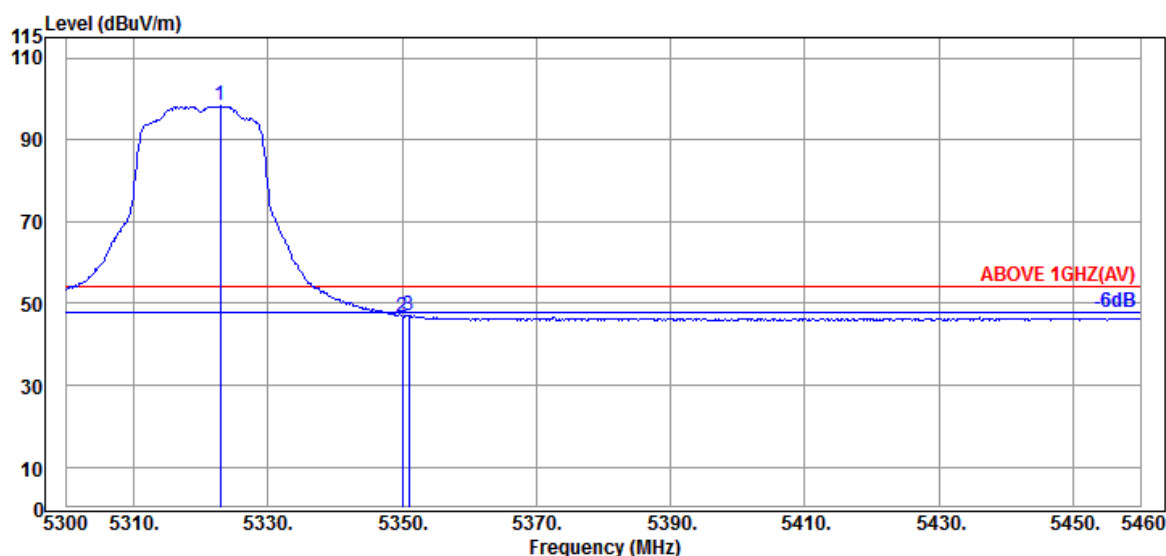


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5322.880	34.60	9.07	34.28	88.85	98.24	---	---	Average
5350.080	34.80	9.10	34.27	37.19	46.82	54.00	7.18	Average
5351.040	34.80	9.10	34.27	37.46	47.09	54.00	6.91	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

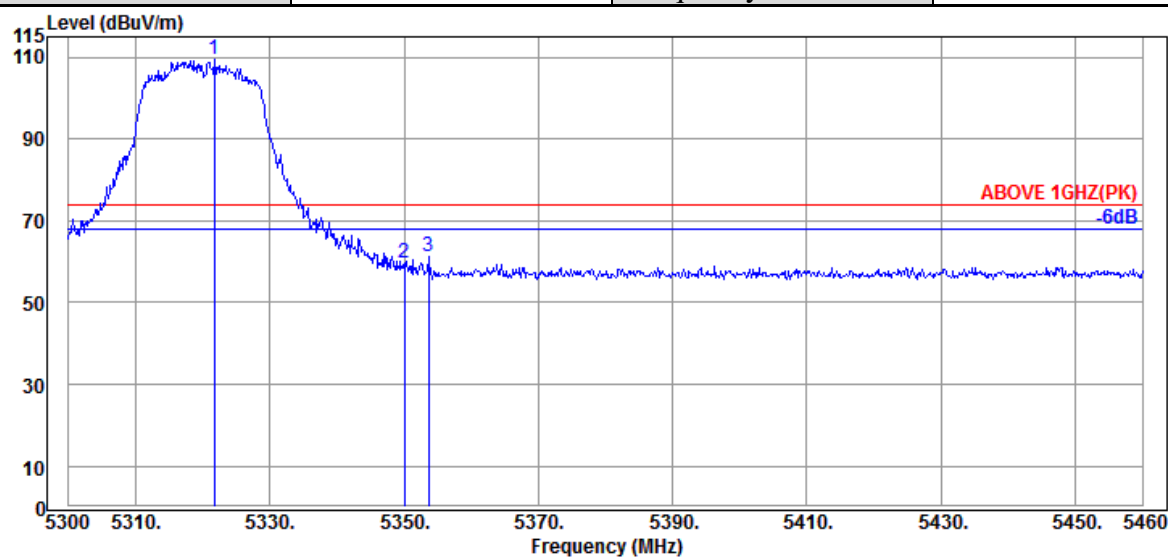

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.60	9.07	34.29	100.22	109.60	---	---	Peak
5350.080	34.80	9.10	34.27	49.93	59.56	74.00	14.44	Peak
5353.600	34.80	9.10	34.27	51.46	61.09	74.00	12.91	Peak

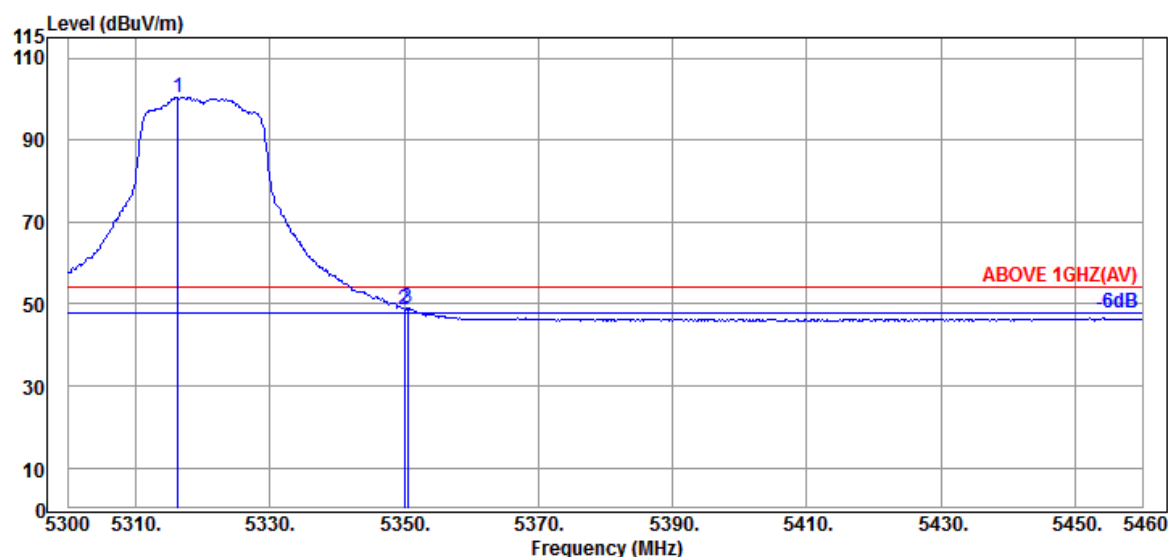


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.320	34.60	9.07	34.29	91.08	100.46	---	---	Average
5350.080	34.80	9.10	34.27	39.05	48.68	54.00	5.32	Average
5350.560	34.80	9.10	34.27	39.46	49.09	54.00	4.91	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

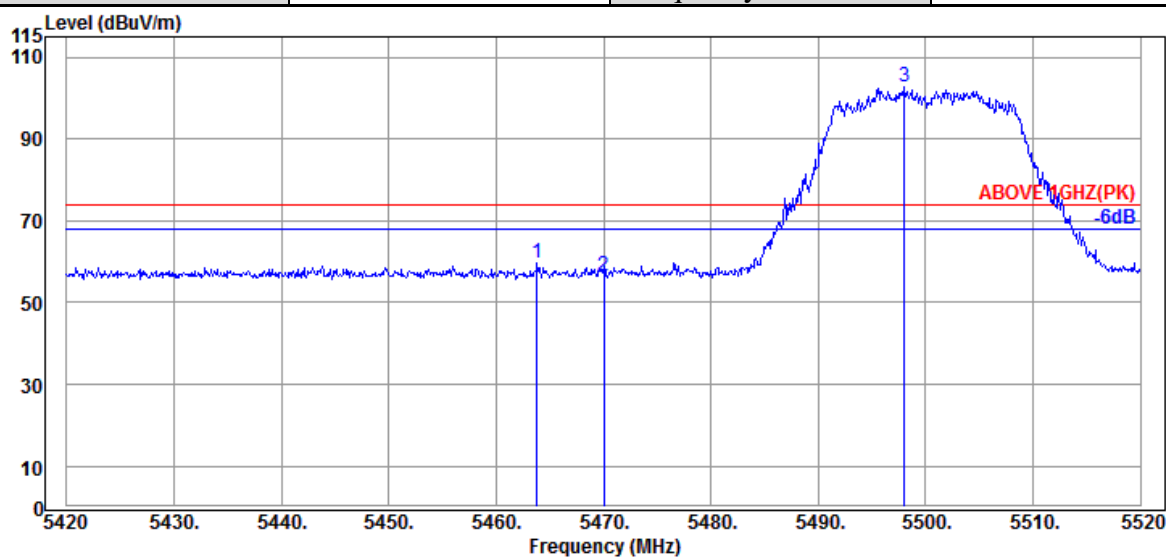

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.97	9.20	34.24	49.55	59.48	74.00	14.52	Peak
5470.000	34.97	9.20	34.24	46.59	56.52	74.00	17.48	Peak
@ 5498.000	34.90	9.23	34.23	92.88	102.78	---	---	Peak

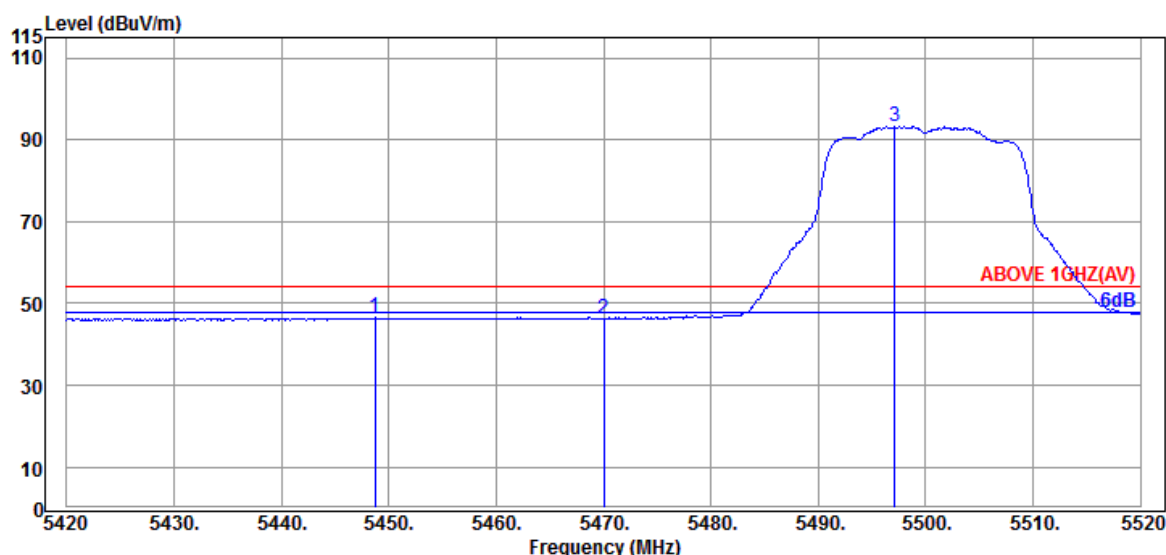

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.700	35.00	9.18	34.25	36.57	46.50	54.00	7.50	Average
5470.000	34.97	9.20	34.24	36.30	46.23	54.00	7.77	Average
@ 5497.100	34.90	9.23	34.23	83.28	93.18	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5500MHz

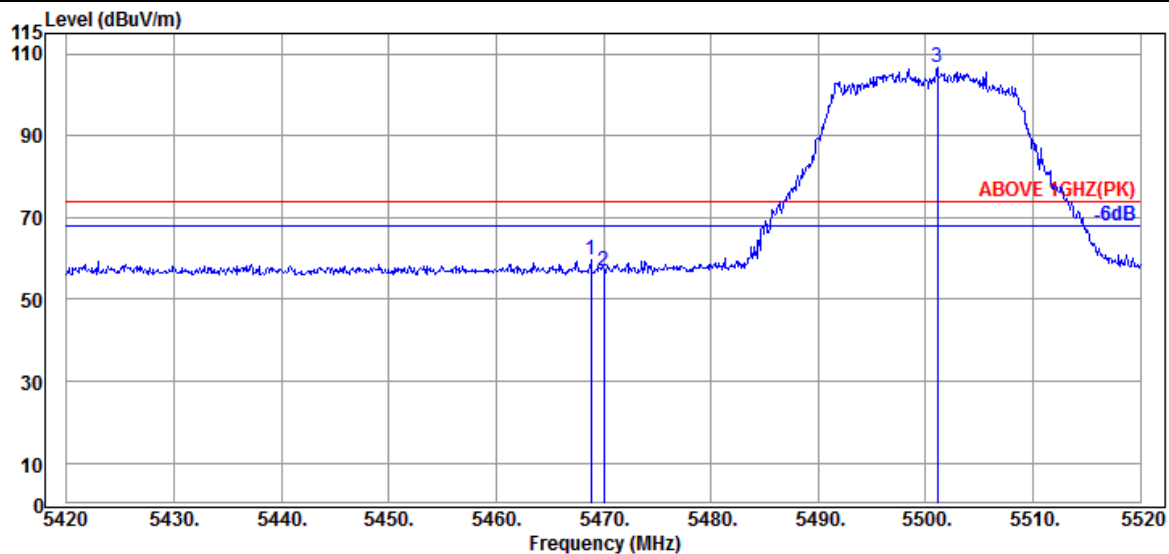

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.800	34.97	9.20	34.24	49.59	59.52	74.00	14.48	Peak
5470.000	34.97	9.20	34.24	46.84	56.77	74.00	17.23	Peak
@ 5501.100	34.90	9.23	34.24	96.98	106.87	---	---	Peak

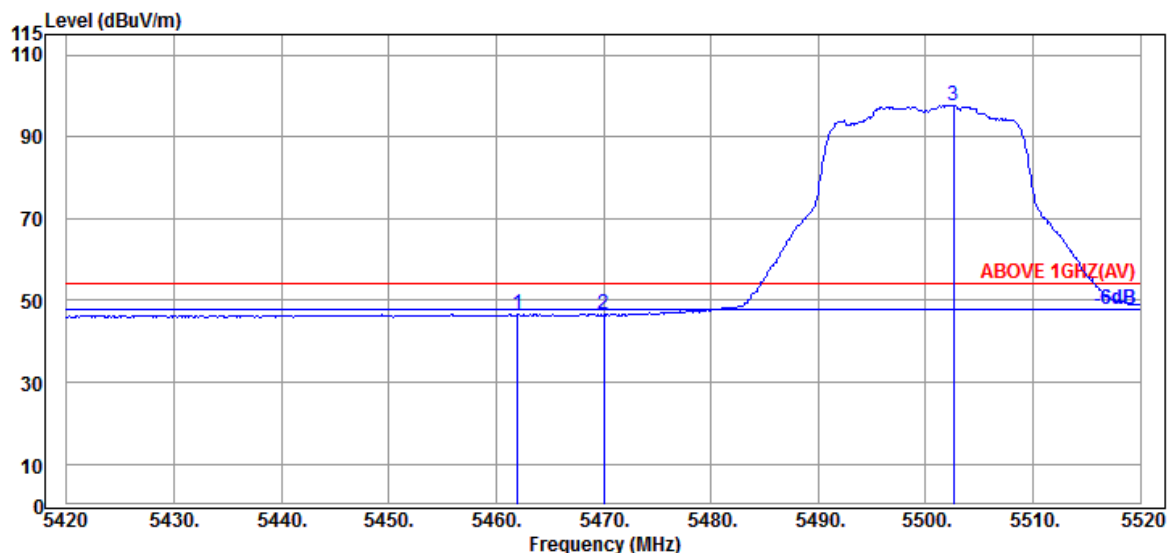

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.000	35.00	9.18	34.24	36.69	46.63	54.00	7.37	Average
5470.000	34.97	9.20	34.24	36.56	46.49	54.00	7.51	Average
@ 5502.600	34.90	9.23	34.24	87.71	97.60	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5700MHz

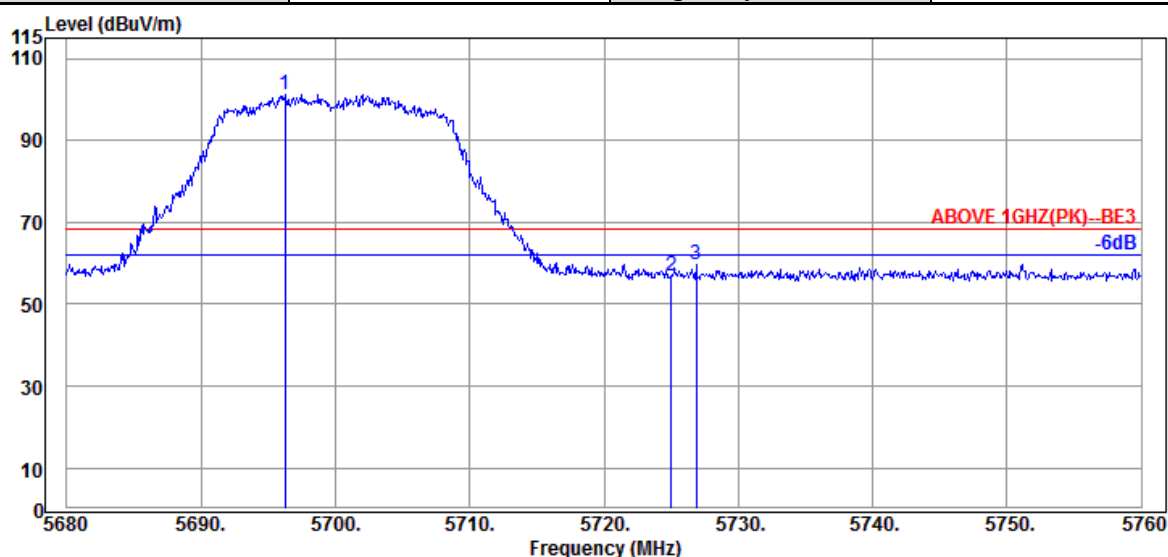

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5696.240	34.50	9.39	34.31	91.69	101.27	---	---	Peak
5725.040	34.57	9.42	34.32	47.42	57.09	68.20	11.11	Peak
5726.880	34.57	9.42	34.32	50.11	59.78	68.20	8.42	Peak

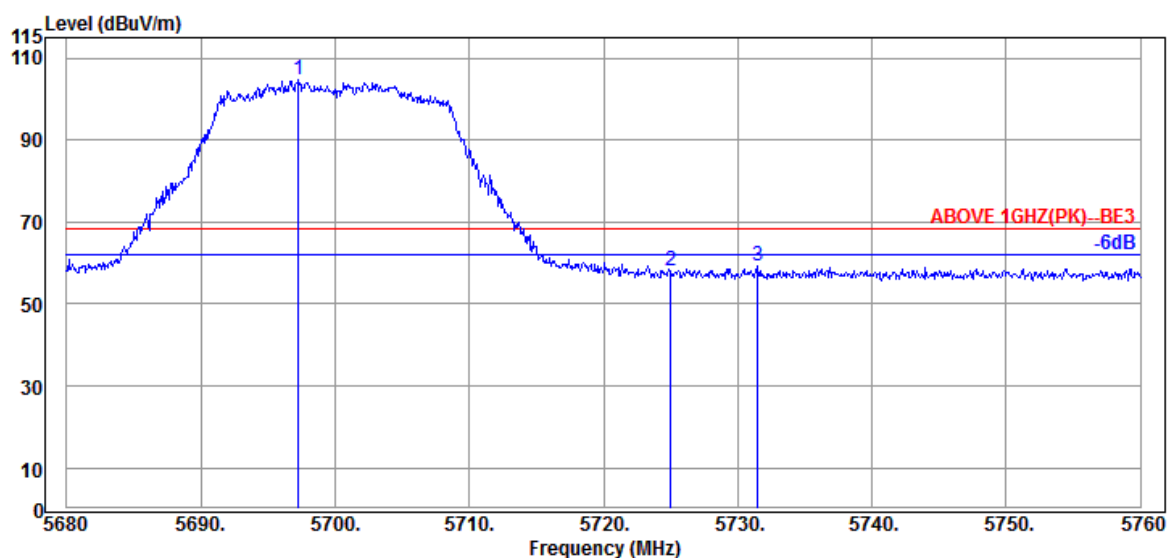

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5697.280	34.50	9.39	34.31	95.00	104.58	---	---	Peak
5725.040	34.57	9.42	34.32	48.28	57.95	68.20	10.25	Peak
5731.520	34.57	9.42	34.33	49.67	59.33	68.20	8.87	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

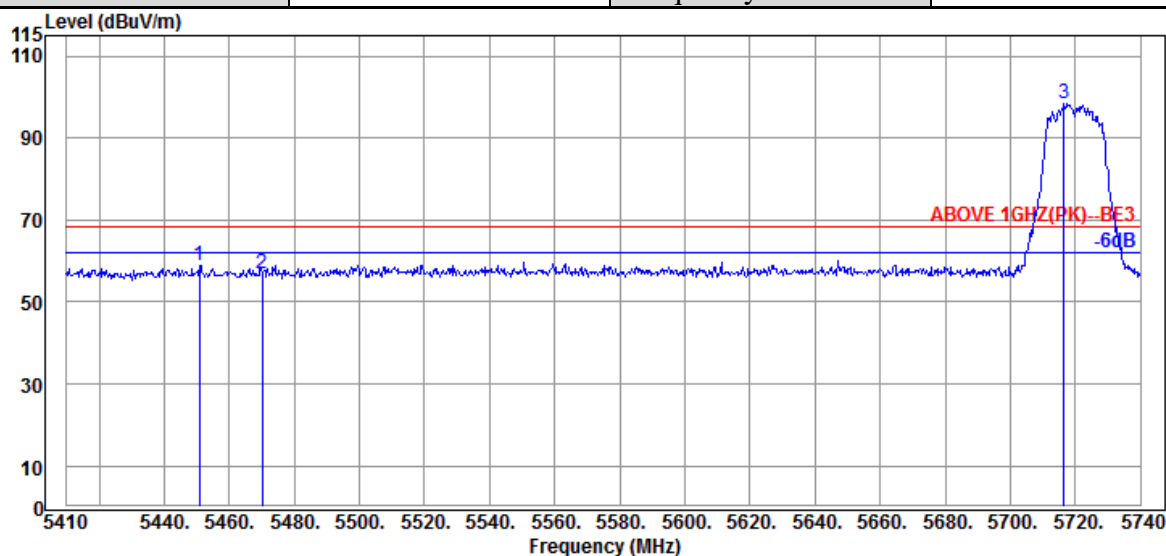

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5450.920	35.00	9.18	34.24	49.02	58.96	68.20	9.24	Peak
5470.060	34.97	9.20	34.24	46.87	56.80	68.20	11.40	Peak
@ 5716.570	34.53	9.40	34.32	88.86	98.47	---	---	Peak

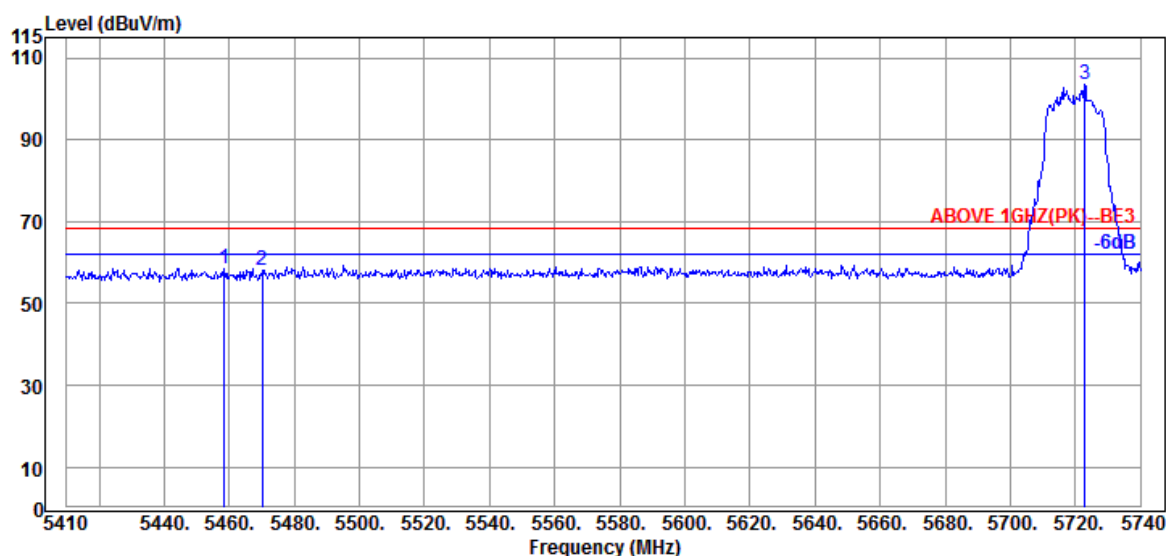

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5458.510	35.00	9.18	34.24	48.68	58.62	68.20	9.58	Peak
5470.060	34.97	9.20	34.24	48.10	58.03	68.20	10.17	Peak
@ 5722.840	34.57	9.42	34.32	93.78	103.45	---	---	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

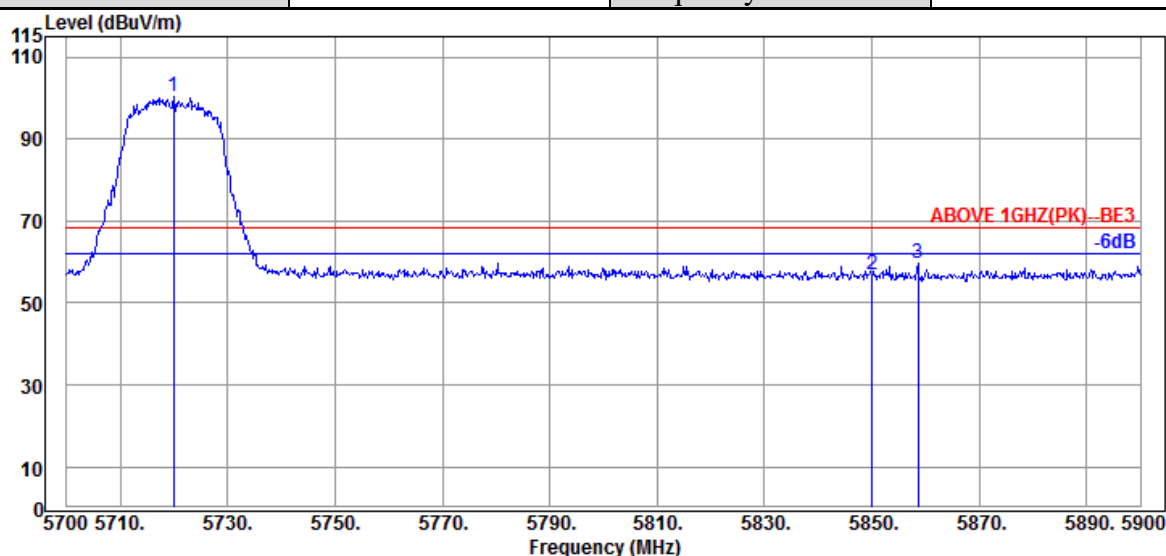

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5720.000	34.53	9.42	34.32	90.83	100.46	---	---	Peak
5850.000	34.60	9.52	34.38	47.31	57.05	68.20	11.15	Peak
5858.600	34.60	9.53	34.39	49.78	59.52	68.20	8.68	Peak

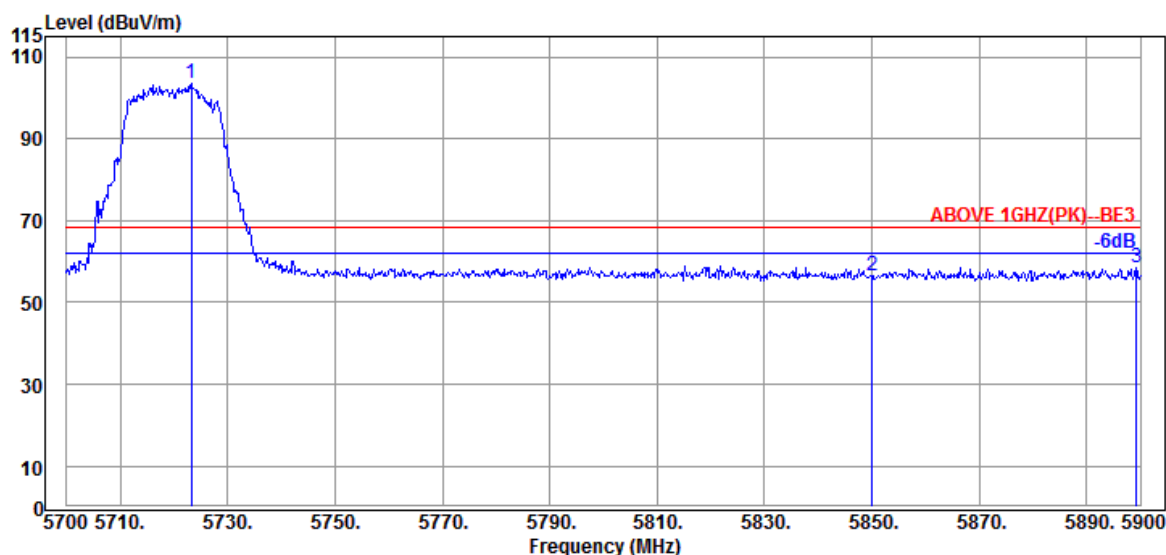

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5723.200	34.57	9.42	34.32	93.76	103.43	---	---	Peak
5850.000	34.60	9.52	34.38	46.60	56.34	68.20	11.86	Peak
5899.200	34.60	9.56	34.40	48.83	58.59	68.20	9.61	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

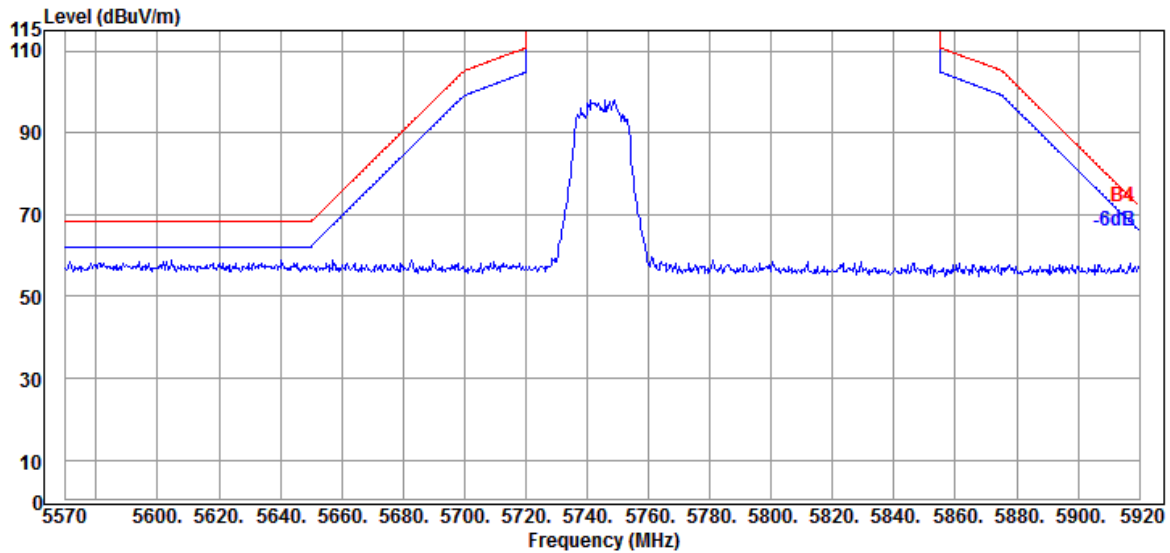

Antenna at Vertical Polarization

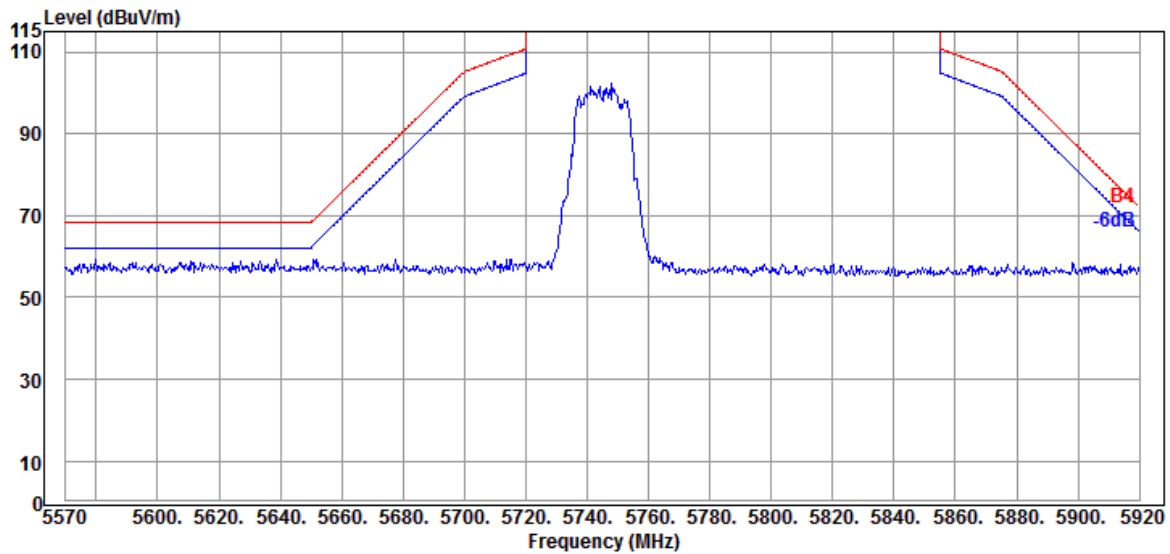


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

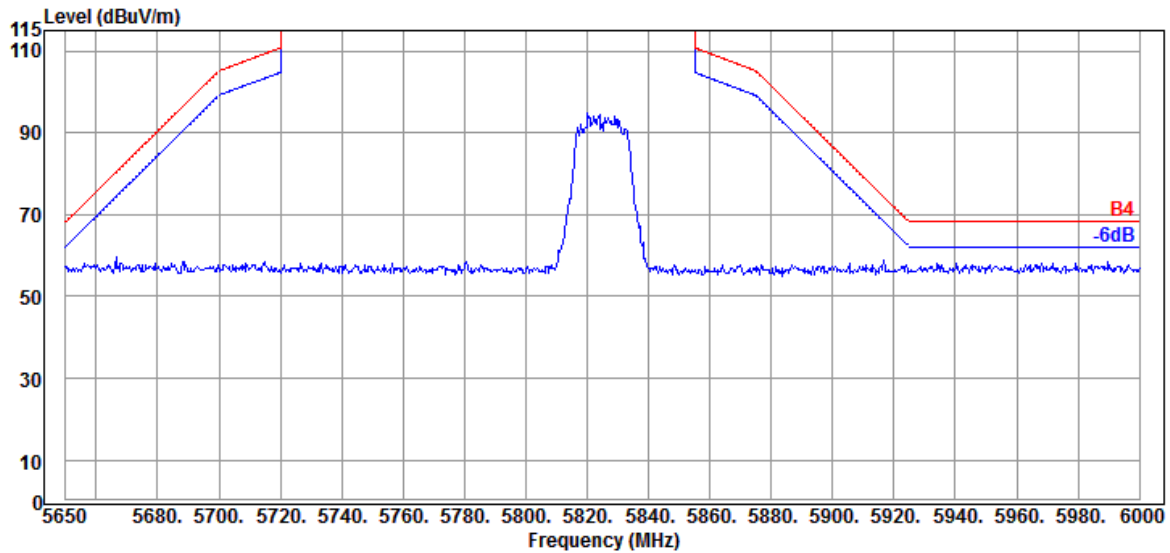

Antenna at Vertical Polarization

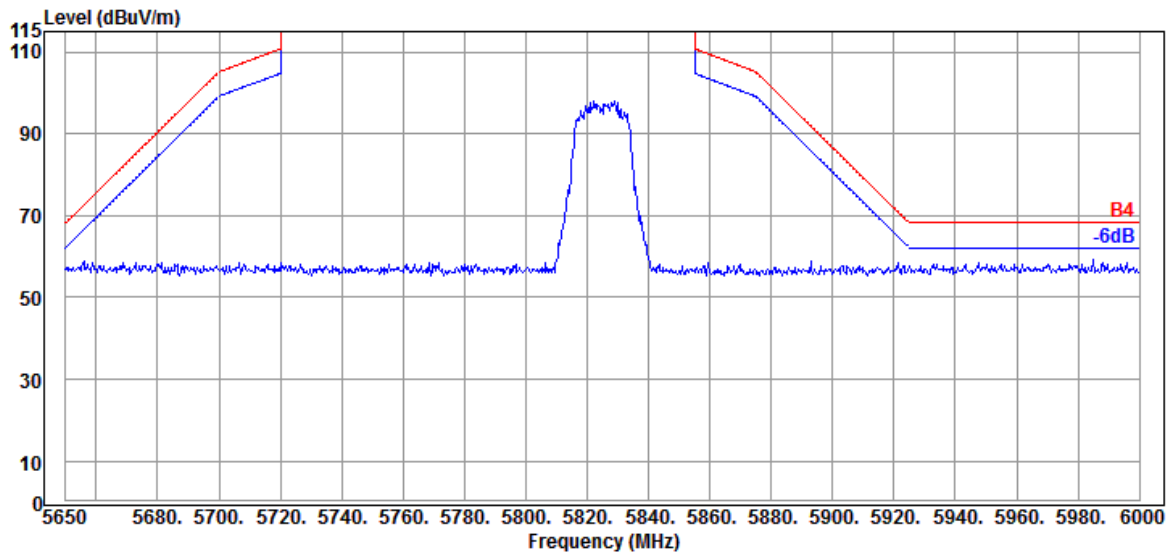


Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

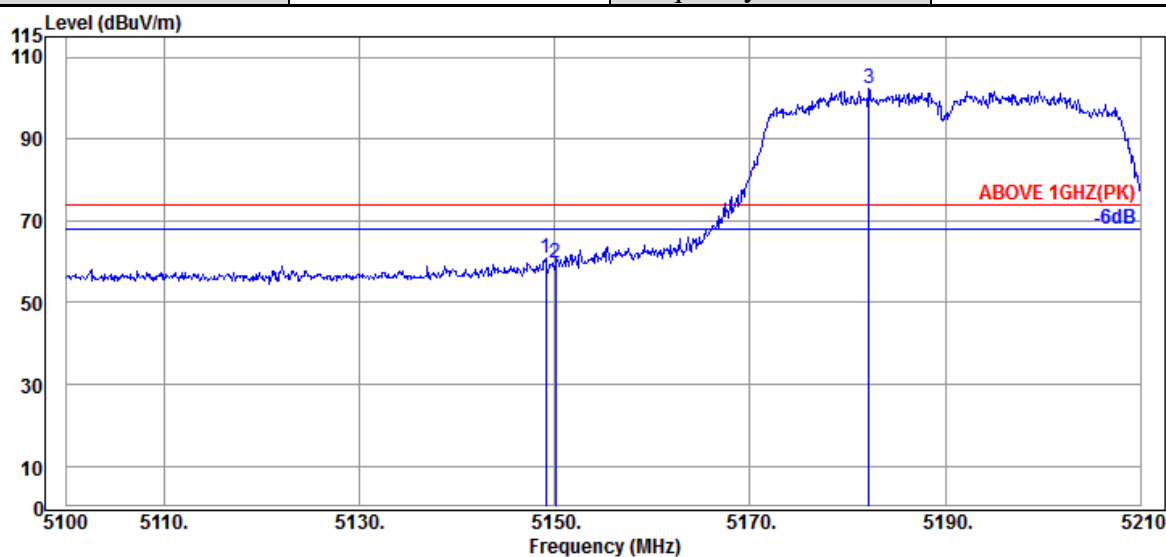

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	34.35	51.92	60.69	74.00	13.31	Peak
5150.050	34.20	8.92	34.35	50.94	59.71	74.00	14.29	Peak
@ 5182.170	34.33	8.95	34.34	93.27	102.21	---	---	Peak

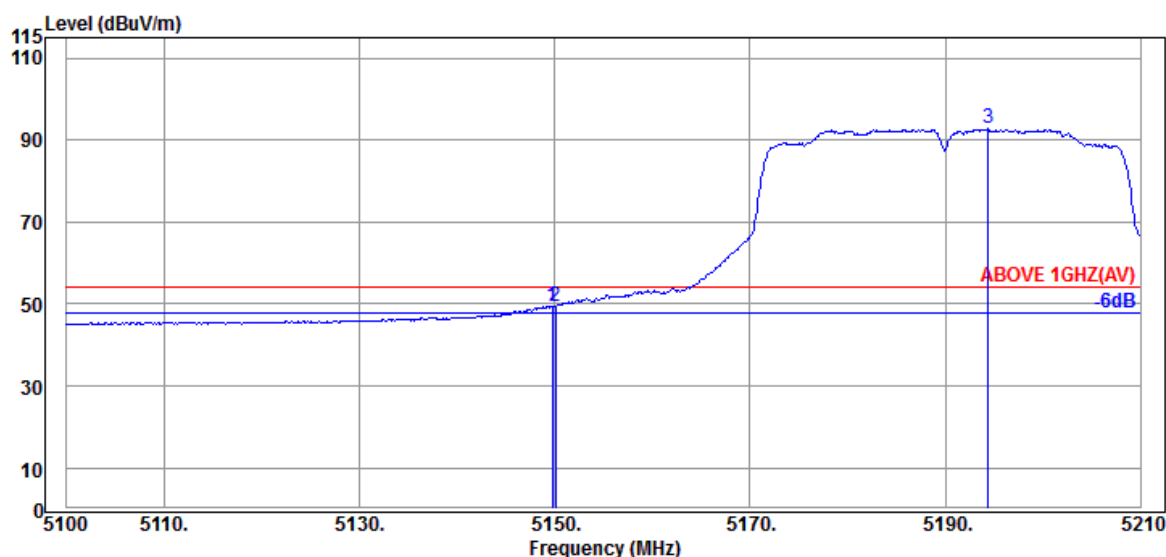


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.92	34.35	40.71	49.48	54.00	4.52	Average
5150.050	34.20	8.92	34.35	40.66	49.43	54.00	4.57	Average
@ 5194.380	34.40	8.96	34.34	83.66	92.68	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	1
		Frequency	TX 5190MHz

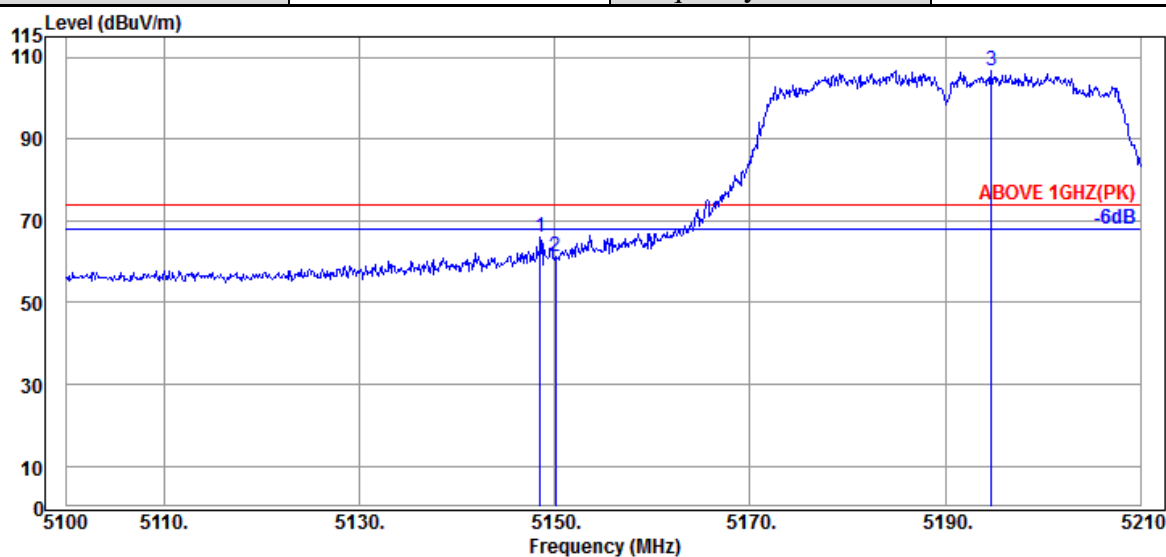

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.510	34.20	8.92	34.35	57.14	65.91	74.00	8.09	Peak
5150.050	34.20	8.92	34.35	52.37	61.14	74.00	12.86	Peak
@ 5194.710	34.40	8.96	34.34	97.61	106.63	---	---	Peak

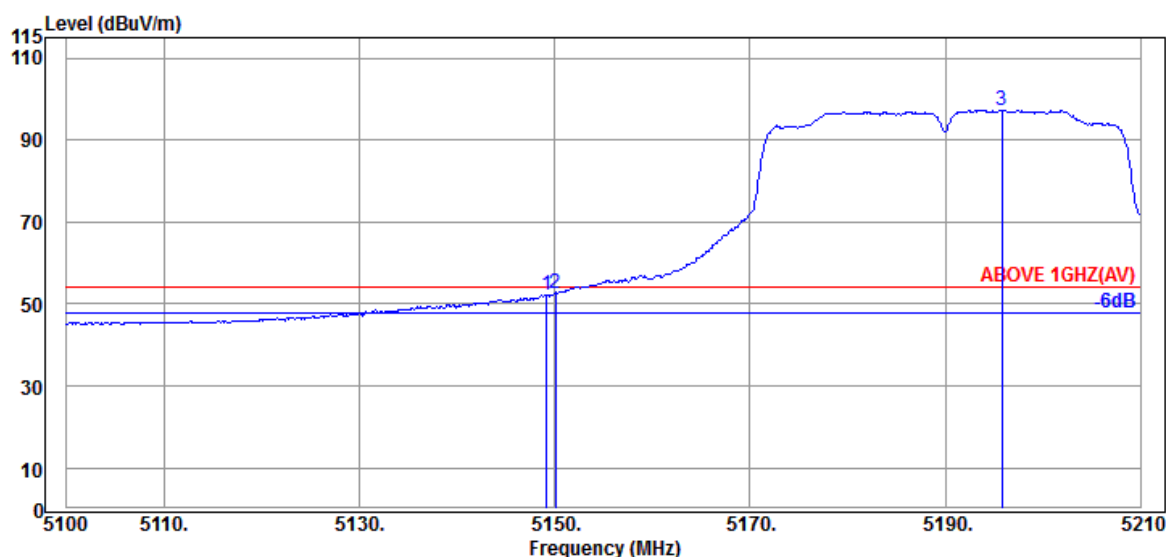


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.92	34.35	43.34	52.11	54.00	1.89	Average
5150.050	34.20	8.92	34.35	43.64	52.41	54.00	1.59	Average
@ 5195.810	34.40	8.96	34.33	88.29	97.32	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

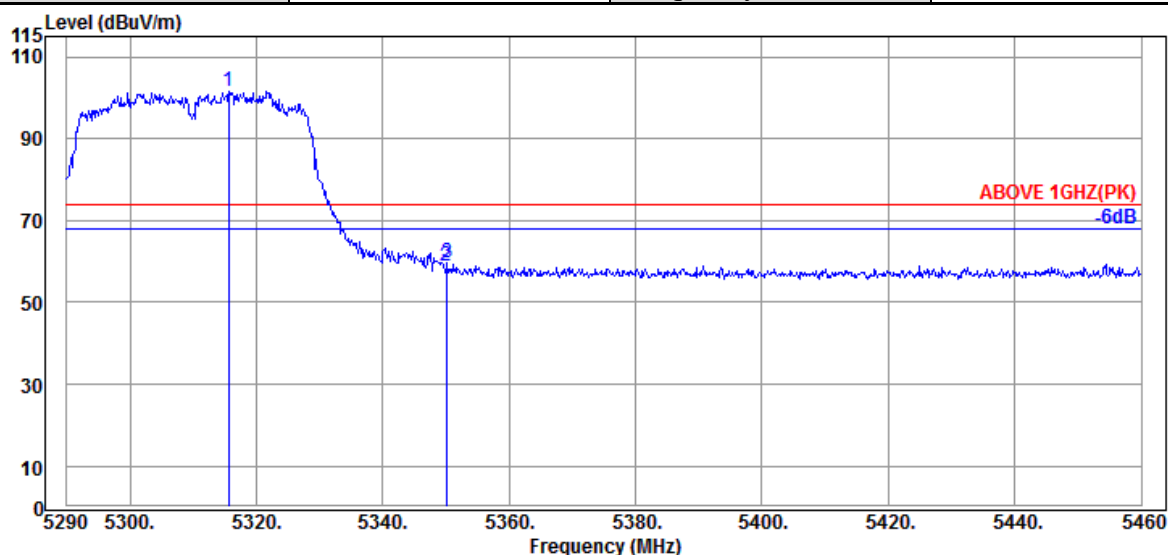

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5315.670	34.60	9.07	34.29	92.32	101.70	---	---	Peak
5350.010	34.80	9.10	34.27	49.26	58.89	74.00	15.11	Peak
5350.180	34.80	9.10	34.27	50.04	59.67	74.00	14.33	Peak

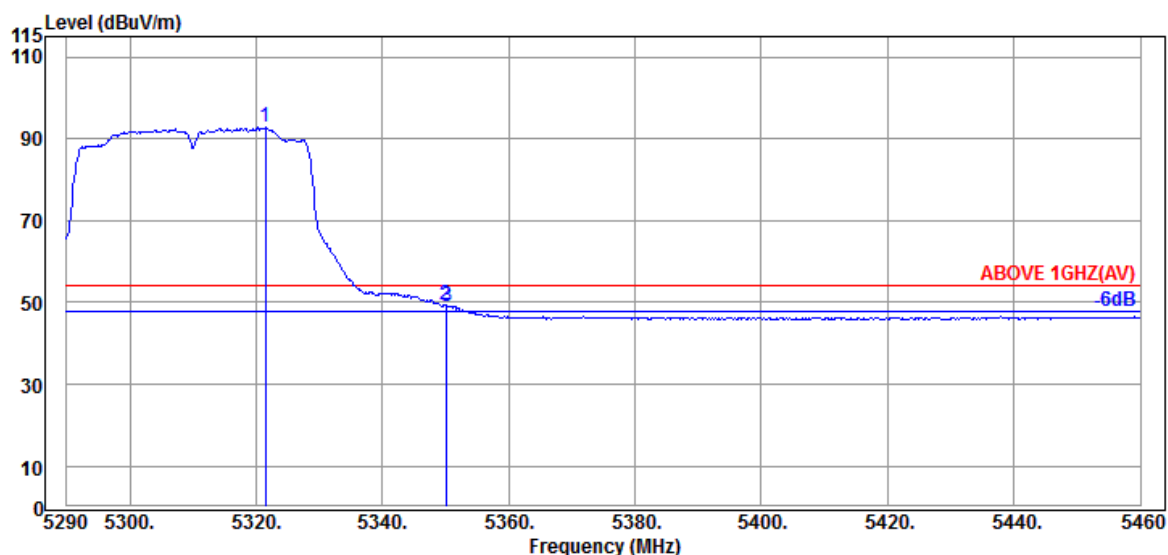


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.450	34.60	9.07	34.29	83.40	92.78	---	---	Average
5350.010	34.80	9.10	34.27	39.66	49.29	54.00	4.71	Average
5350.180	34.80	9.10	34.27	39.35	48.98	54.00	5.02	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5310MHz

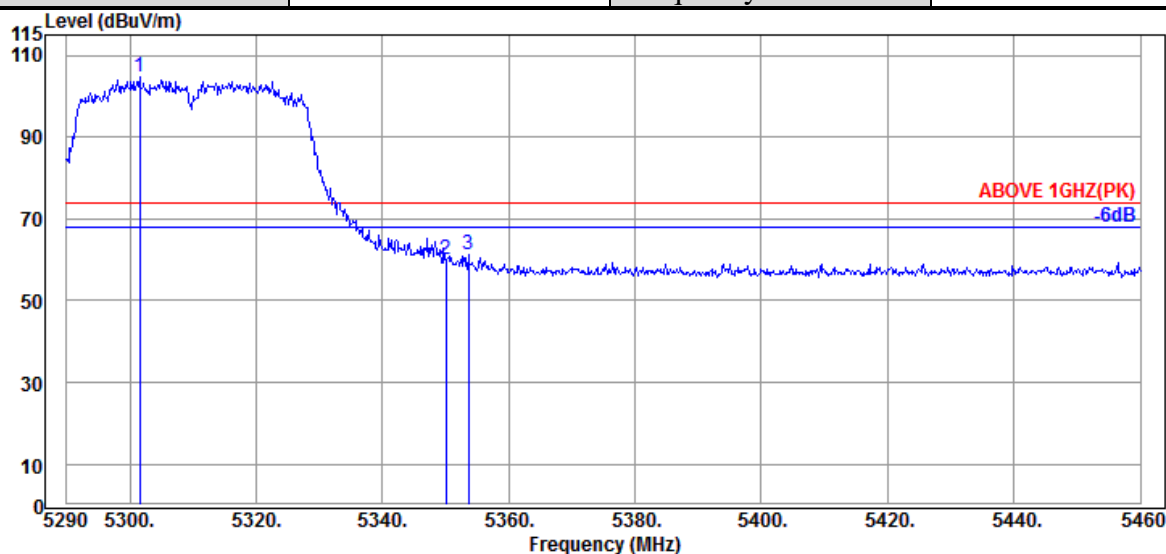

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5301.560	34.50	9.05	34.29	95.45	104.71	---	---	Peak
	5350.010	34.80	9.10	34.27	50.63	60.26	74.00	13.74	Peak
	5353.580	34.80	9.10	34.27	51.73	61.36	74.00	12.64	Peak

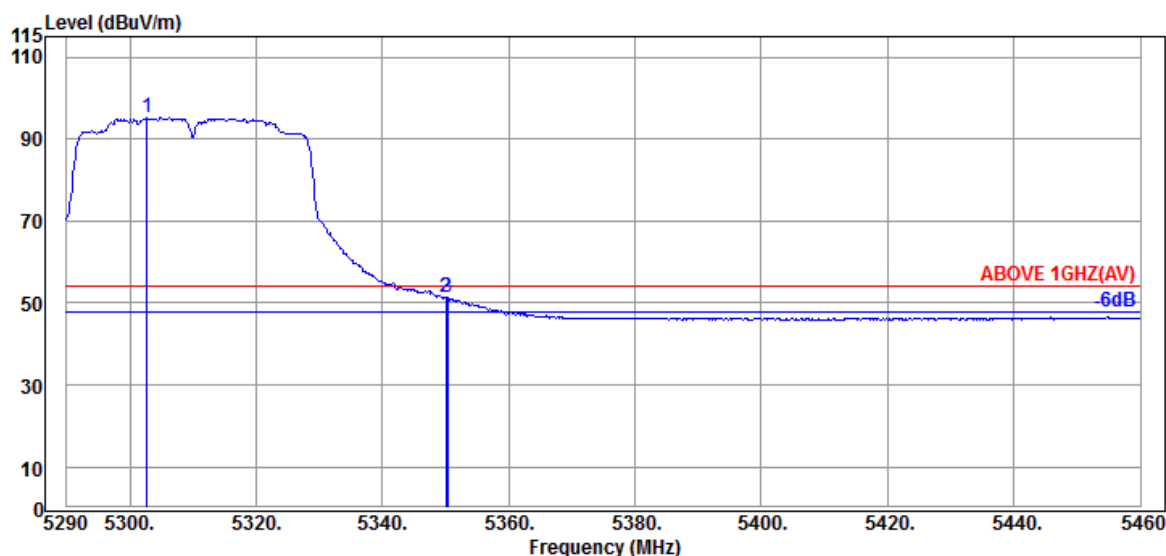

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5302.750	34.50	9.05	34.29	85.99	95.25	---	---	Average
	5350.010	34.80	9.10	34.27	41.75	51.38	54.00	2.62	Average
	5350.350	34.80	9.10	34.27	41.57	51.20	54.00	2.80	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

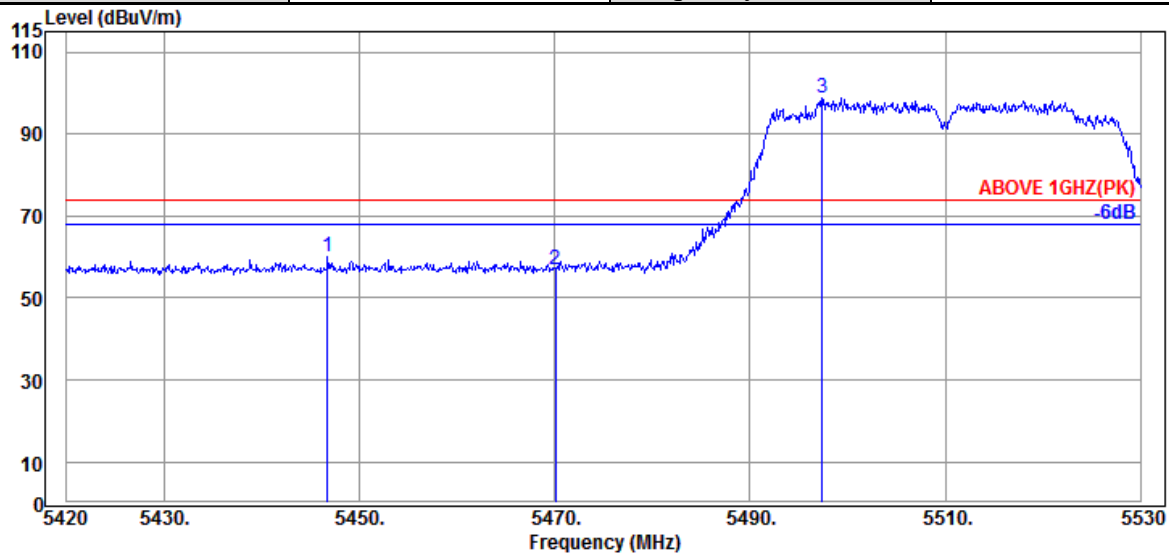

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5446.730	35.00	9.18	34.25	50.27	60.20	74.00	13.80	Peak
5470.050	34.97	9.20	34.24	46.99	56.92	74.00	17.08	Peak
@ 5497.440	34.90	9.23	34.23	88.99	98.89	---	---	Peak

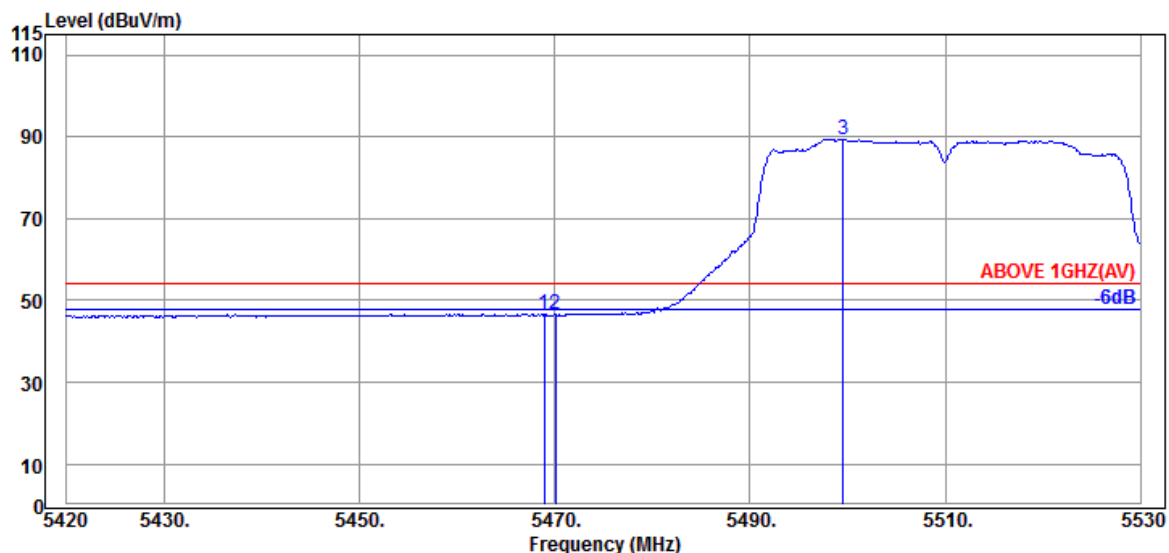

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.97	9.20	34.24	36.79	46.72	54.00	7.28	Average
5470.050	34.97	9.20	34.24	36.56	46.49	54.00	7.51	Average
@ 5499.530	34.90	9.23	34.23	79.53	89.43	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5510MHz

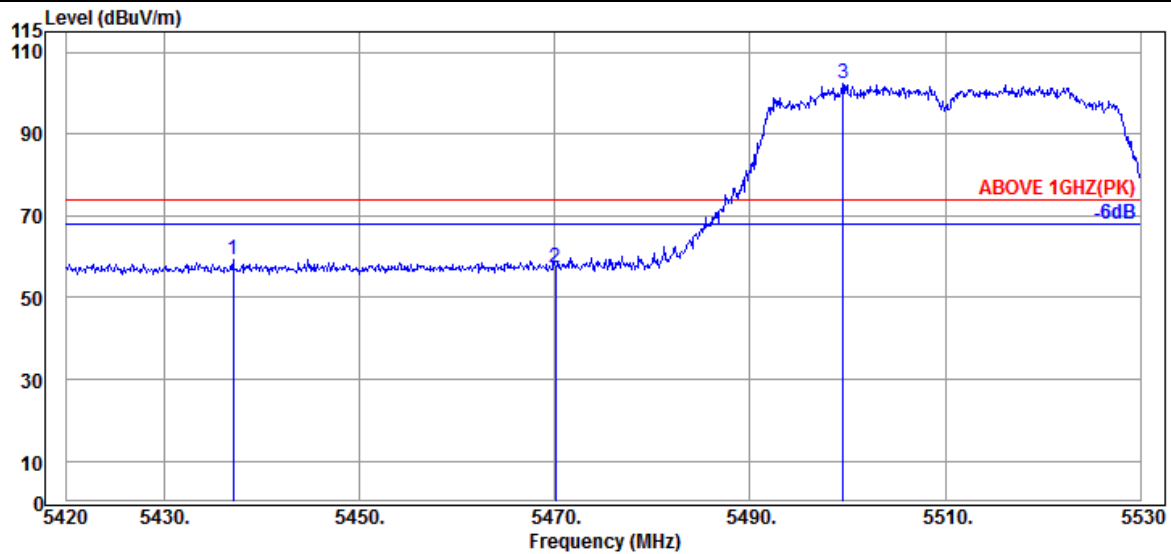

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.050	35.00	9.17	34.25	49.50	59.42	74.00	14.58	Peak
5470.050	34.97	9.20	34.24	47.37	57.30	74.00	16.70	Peak
@ 5499.530	34.90	9.23	34.23	92.40	102.30	---	---	Peak

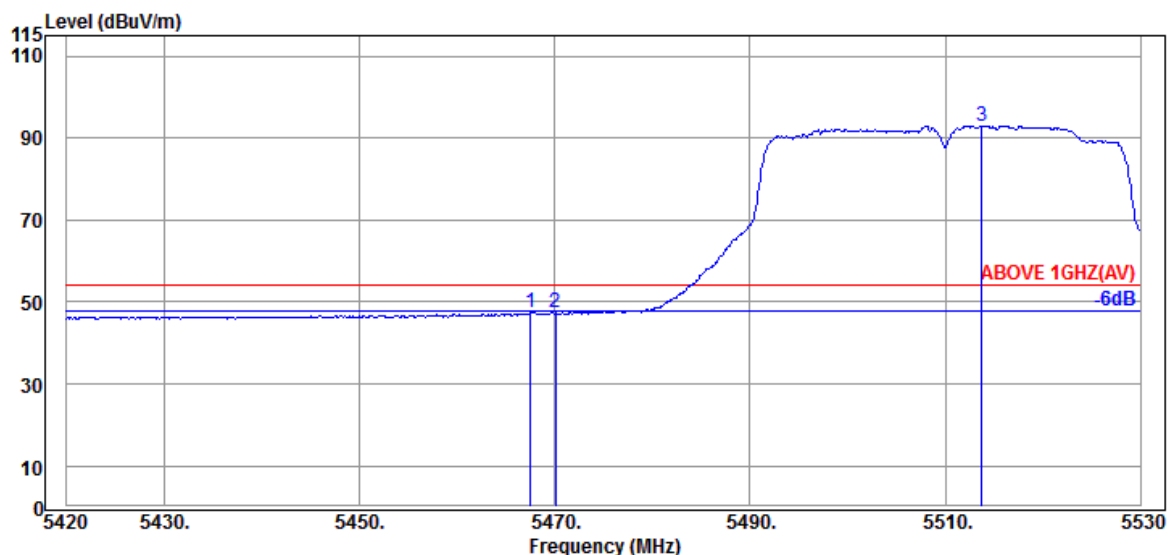

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.520	34.97	9.20	34.24	37.45	47.38	54.00	6.62	Average
5470.050	34.97	9.20	34.24	37.37	47.30	54.00	6.70	Average
@ 5513.720	34.87	9.24	34.24	83.18	93.05	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5670MHz

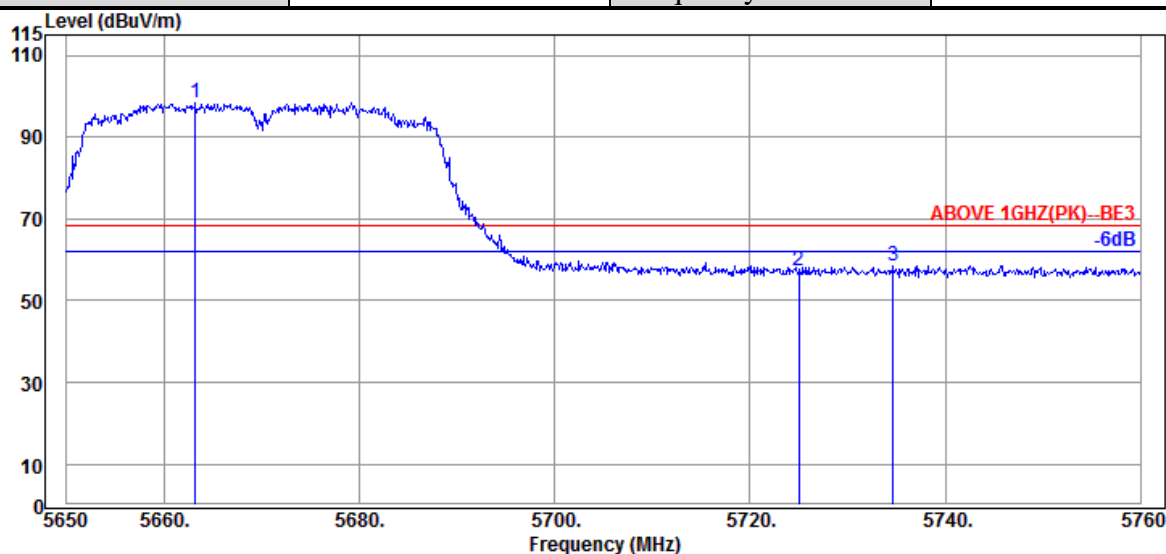

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.200	34.63	9.36	34.30	88.73	98.42	---	---	Peak
5725.020	34.57	9.42	34.32	47.54	57.21	68.20	10.99	Peak
5734.700	34.57	9.43	34.33	49.01	58.68	68.20	9.52	Peak

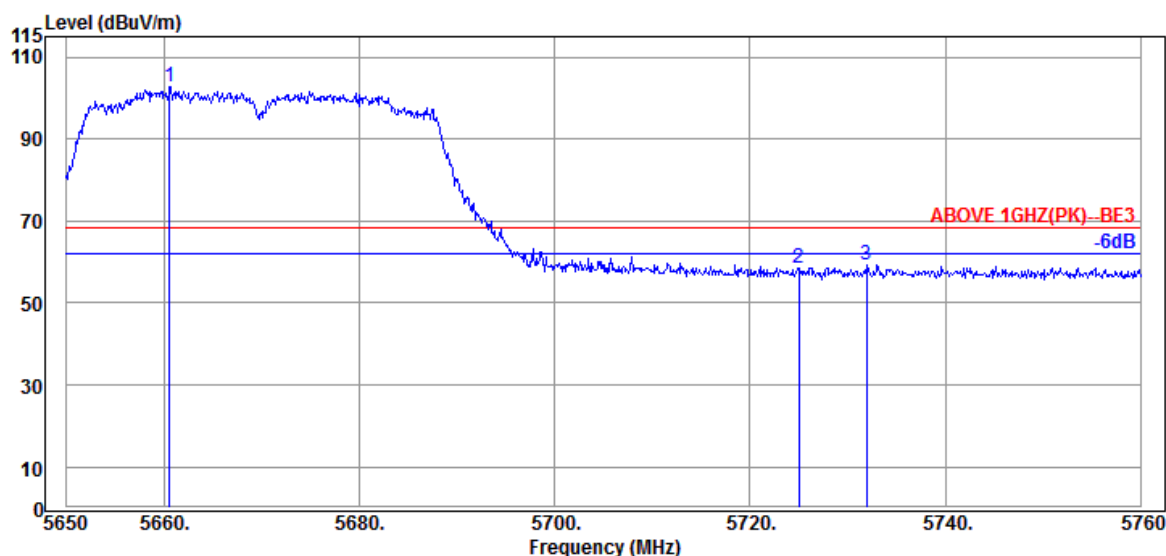

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5660.560	34.63	9.36	34.30	93.13	102.82	---	---	Peak
5725.020	34.57	9.42	34.32	48.89	58.56	68.20	9.64	Peak
5731.950	34.57	9.42	34.33	49.78	59.44	68.20	8.76	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233


Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

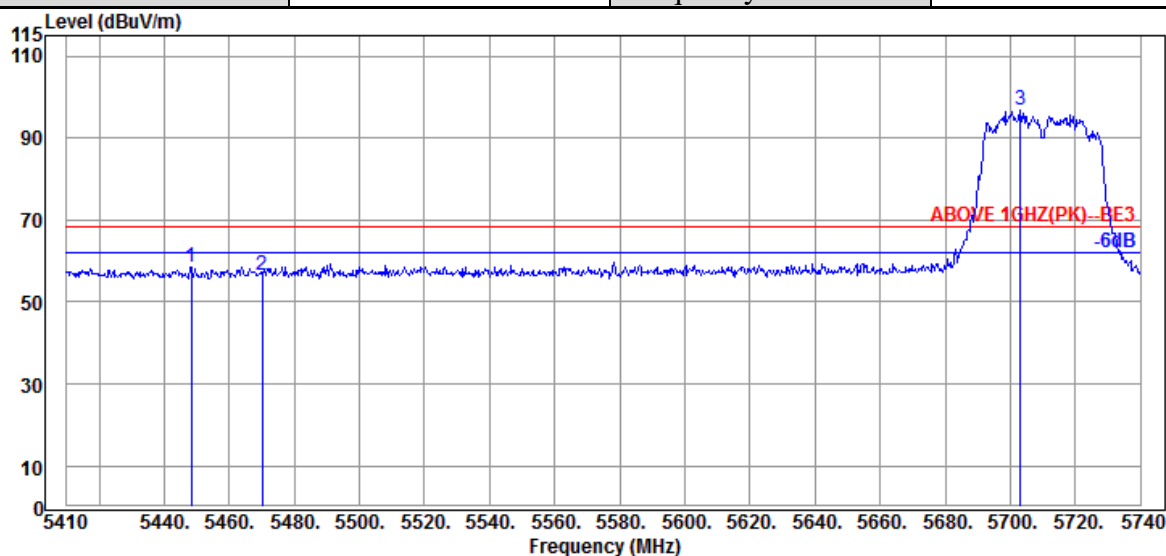

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5448.280	35.00	9.18	34.25	48.54	58.47	68.20	9.73	Peak
5470.060	34.97	9.20	34.24	46.68	56.61	68.20	11.59	Peak
@ 5703.040	34.50	9.40	34.31	87.19	96.78	---	---	Peak

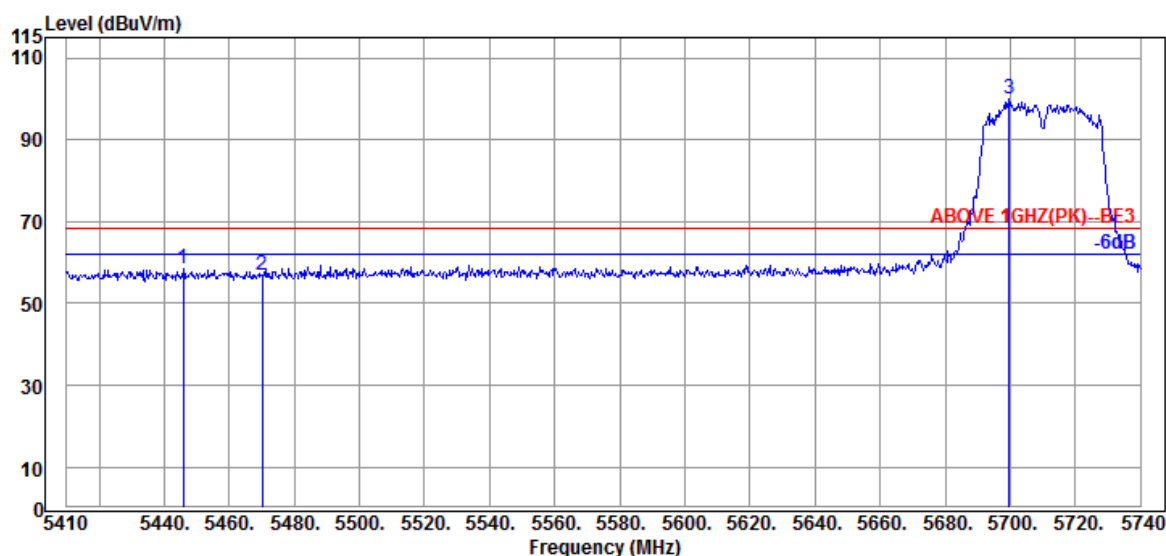

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.970	35.00	9.18	34.25	48.49	58.42	68.20	9.78	Peak
5470.060	34.97	9.20	34.24	46.99	56.92	68.20	11.28	Peak
@ 5699.740	34.50	9.39	34.31	90.56	100.14	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

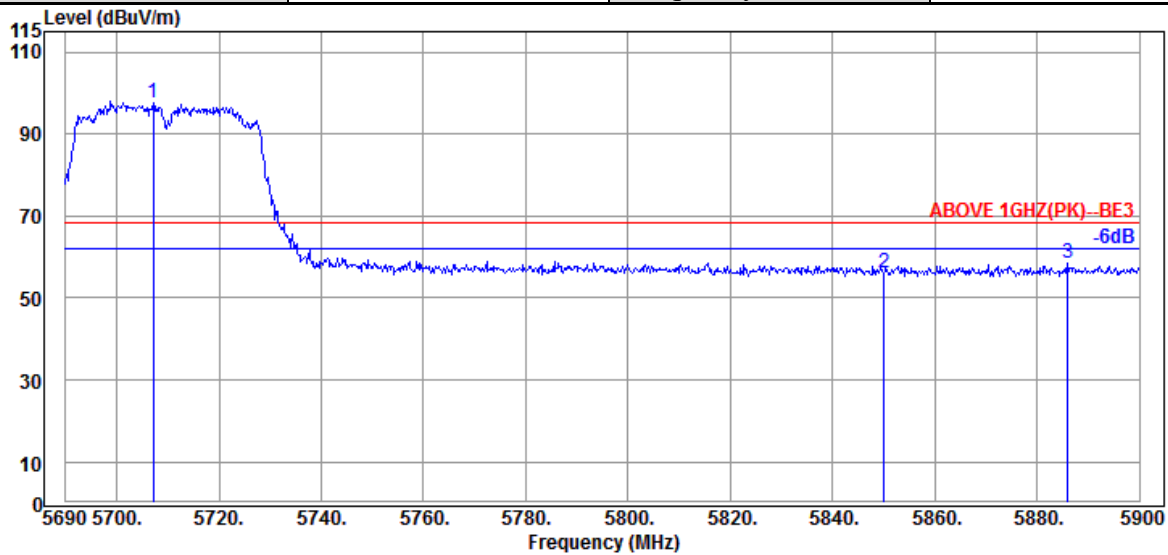

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.220	34.53	9.40	34.32	88.18	97.79	---	---	Peak
5850.020	34.60	9.52	34.38	46.36	56.10	68.20	12.10	Peak
5885.930	34.60	9.55	34.40	48.59	58.34	68.20	9.86	Peak

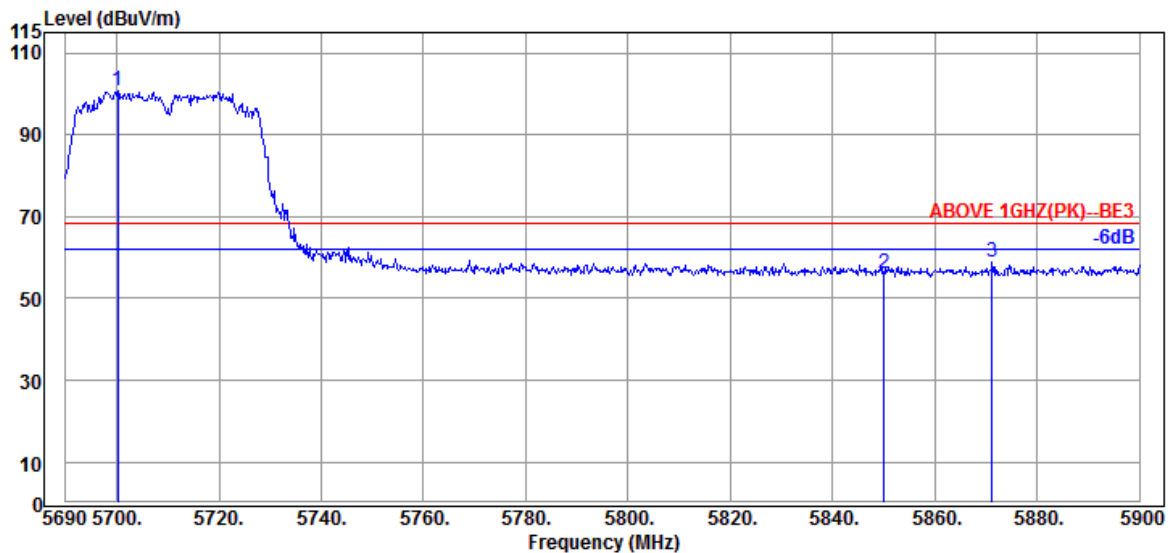

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5700.290	34.50	9.39	34.31	91.09	100.67	---	---	Peak
5850.020	34.60	9.52	34.38	46.49	56.23	68.20	11.97	Peak
5871.230	34.60	9.55	34.39	49.08	58.84	68.20	9.36	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

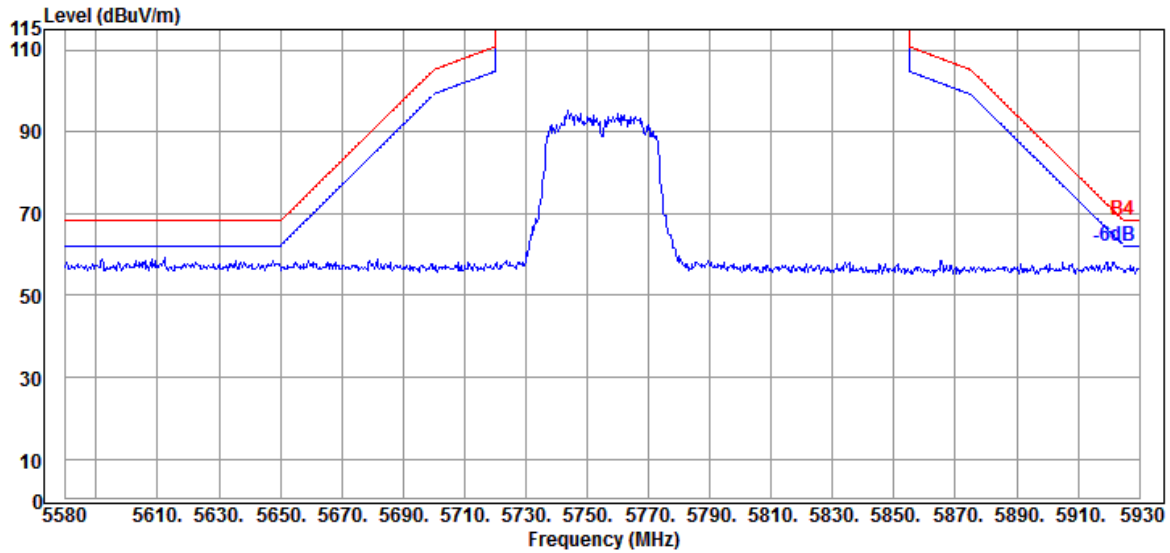

Antenna at Vertical Polarization

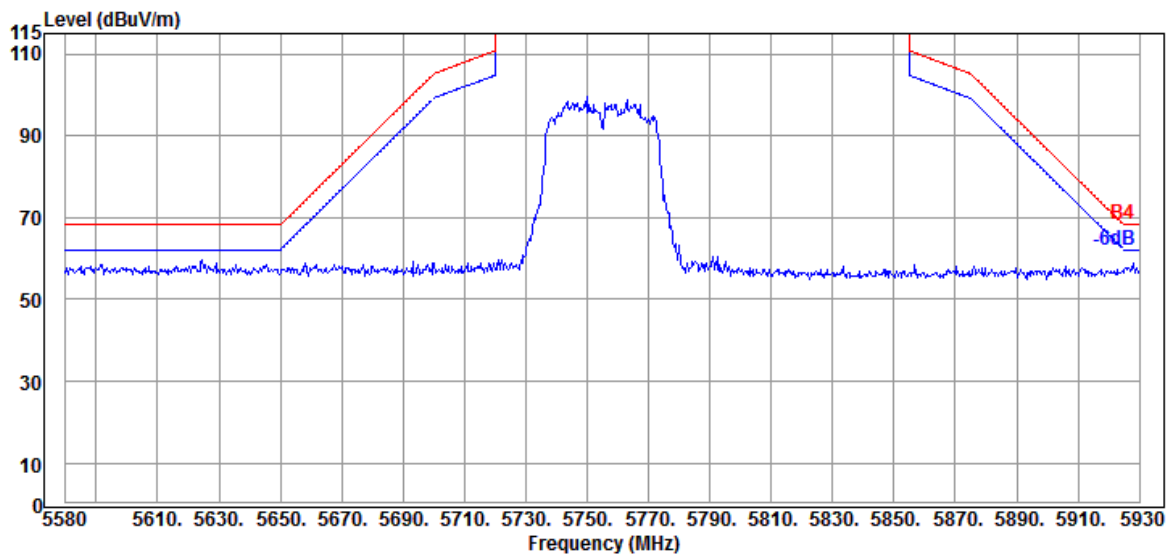


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5795MHz


Antenna at Horizontal Polarization

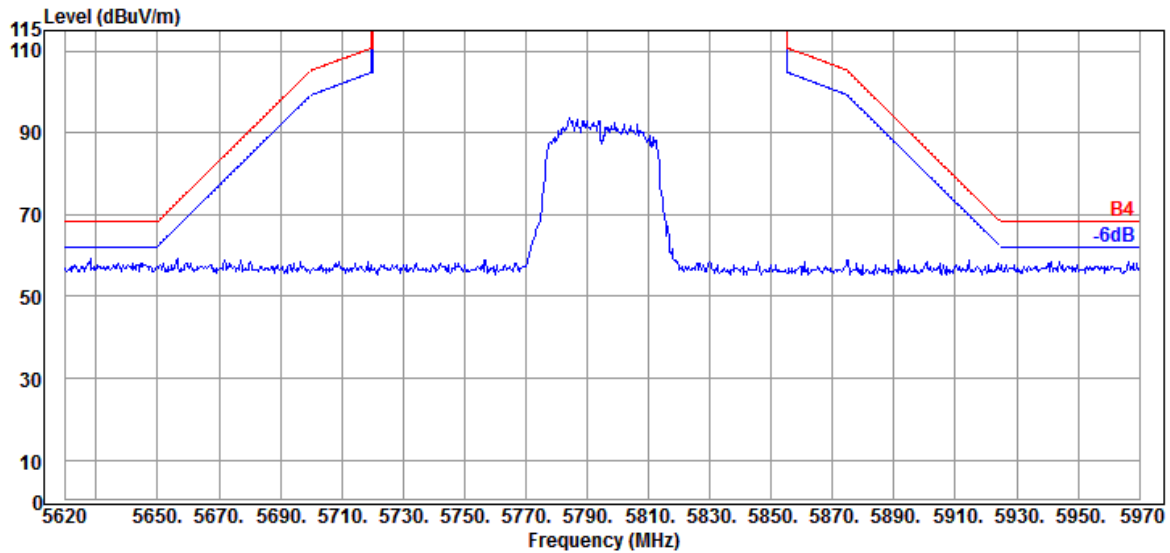

Antenna at Vertical Polarization

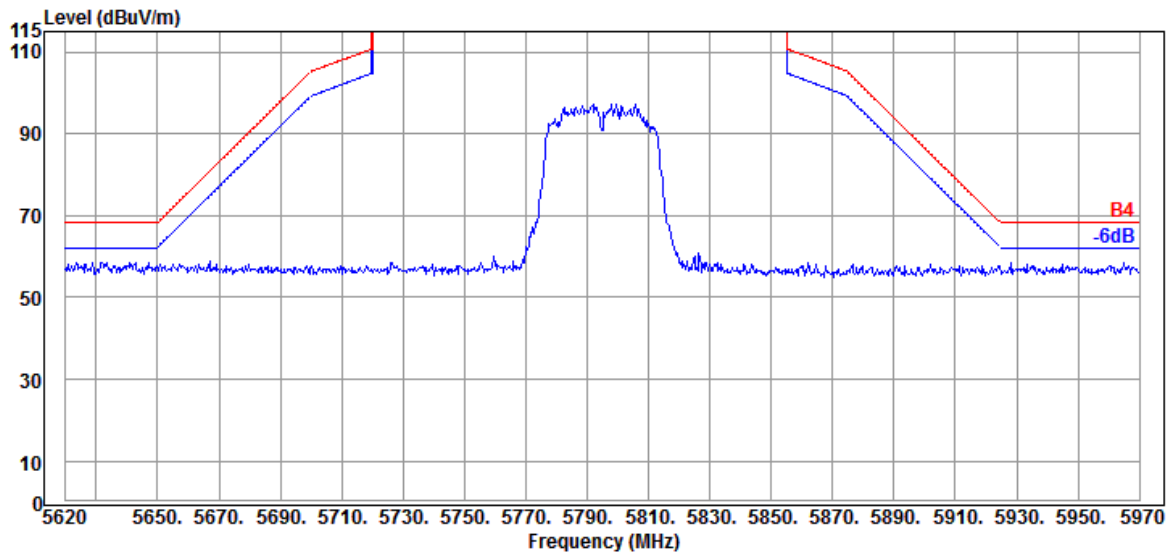


Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

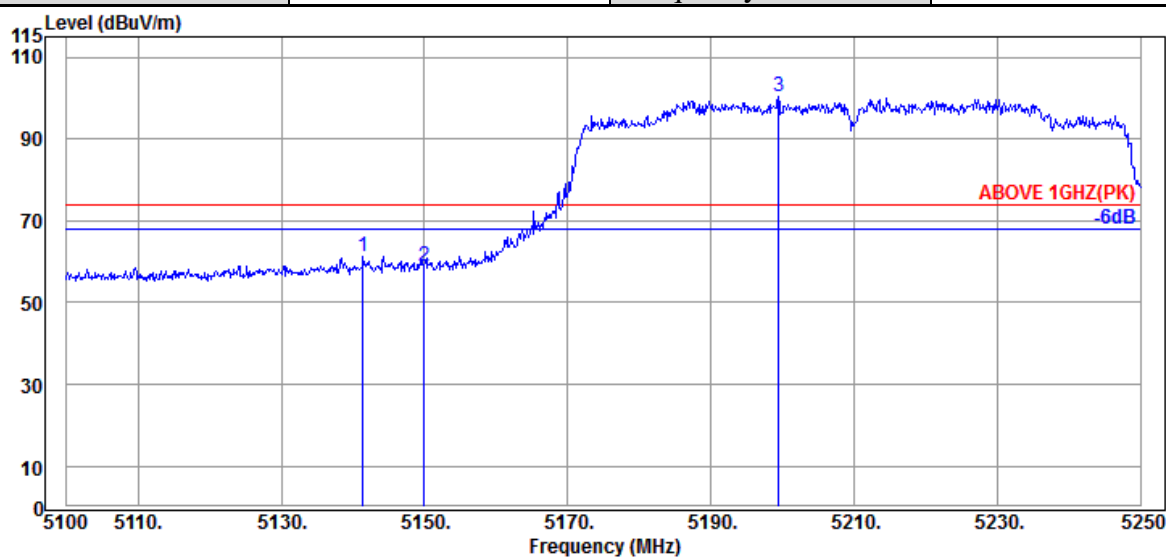

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.400	34.13	8.92	34.36	52.60	61.29	74.00	12.71	Peak
5149.950	34.20	8.92	34.35	50.14	58.91	74.00	15.09	Peak
@ 5199.450	34.40	8.96	34.33	91.24	100.27	---	---	Peak

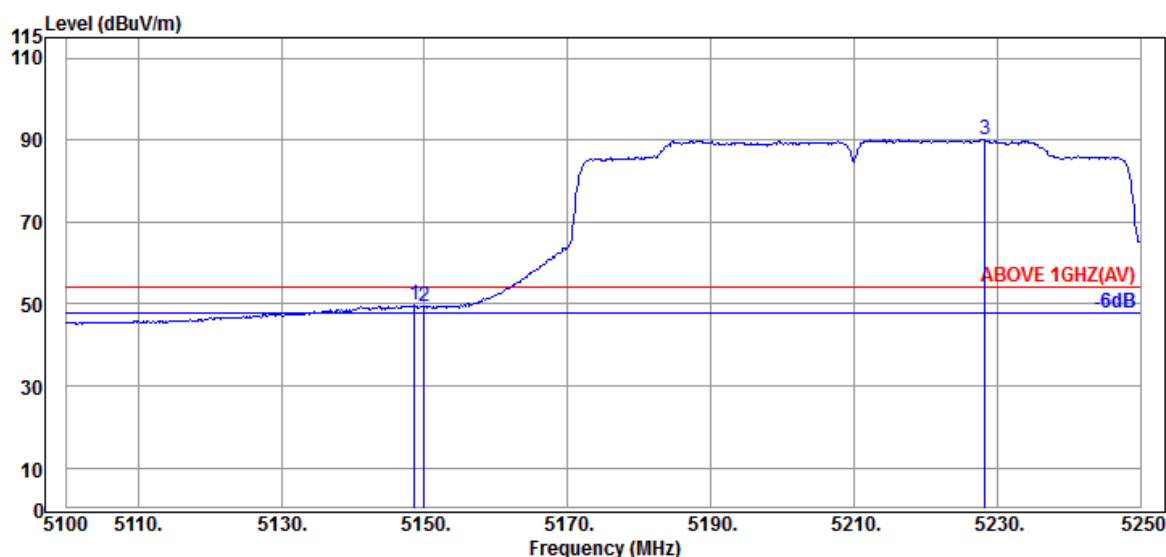


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.600	34.20	8.92	34.35	40.89	49.66	54.00	4.34	Average
5149.950	34.20	8.92	34.35	40.54	49.31	54.00	4.69	Average
@ 5228.250	34.40	8.99	34.32	81.05	90.12	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	I
		Frequency	TX 5210MHz

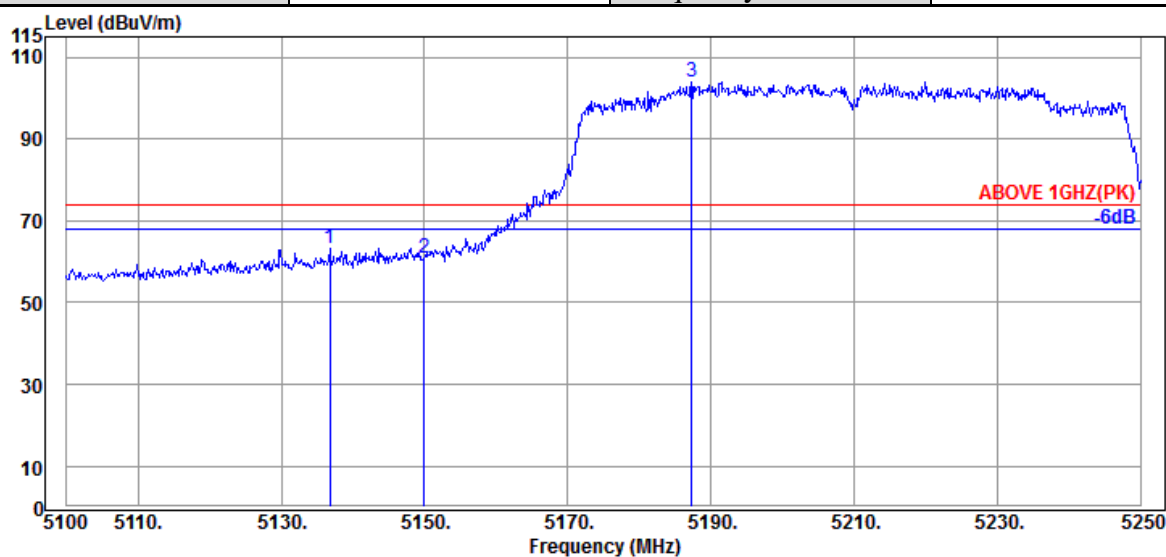

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5136.750	34.13	8.91	34.36	54.69	63.37	74.00	10.63	Peak
5149.950	34.20	8.92	34.35	51.91	60.68	74.00	13.32	Peak
@ 5187.300	34.40	8.95	34.34	94.90	103.91	---	---	Peak

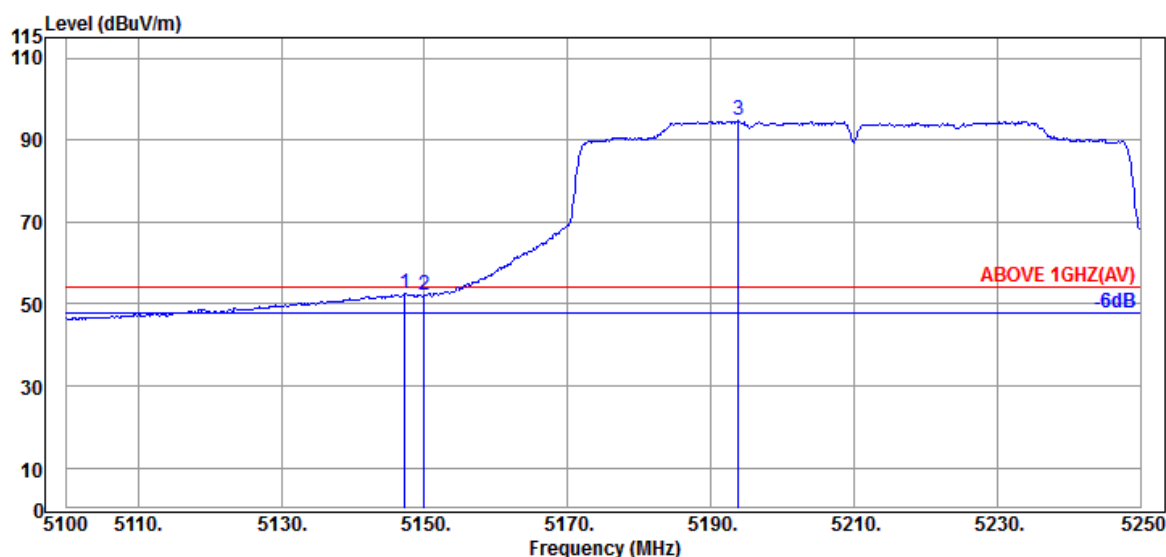


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.250	34.20	8.92	34.35	43.64	52.41	54.00	1.59	Average
5149.950	34.20	8.92	34.35	43.46	52.23	54.00	1.77	Average
@ 5193.900	34.40	8.96	34.34	85.68	94.70	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

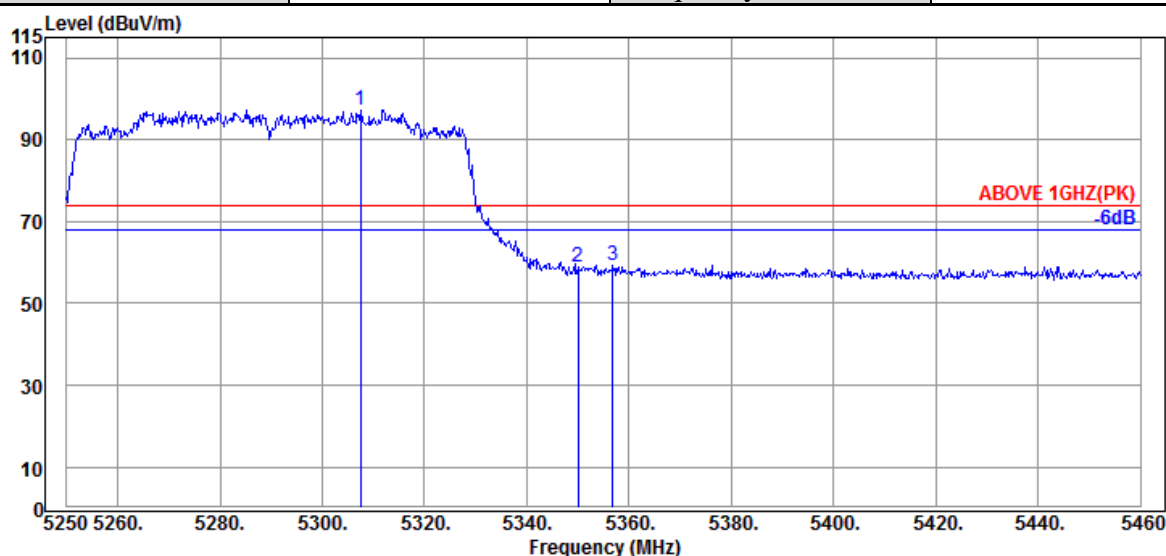

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5307.540	34.50	9.05	34.29	88.11	97.37	---	---	Peak
	5349.960	34.80	9.10	34.27	49.32	58.95	74.00	15.05	Peak
	5356.890	34.87	9.10	34.27	49.76	59.46	74.00	14.54	Peak

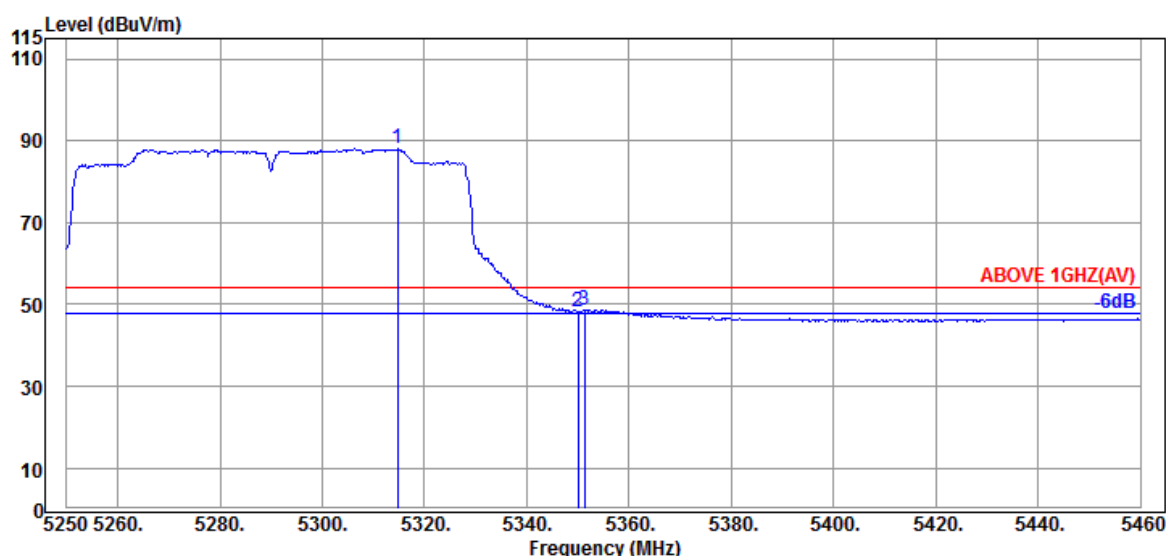

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5314.680	34.60	9.07	34.29	78.66	88.04	---	---	Average
	5349.960	34.80	9.10	34.27	38.64	48.27	54.00	5.73	Average
	5351.220	34.80	9.10	34.27	39.15	48.78	54.00	5.22	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

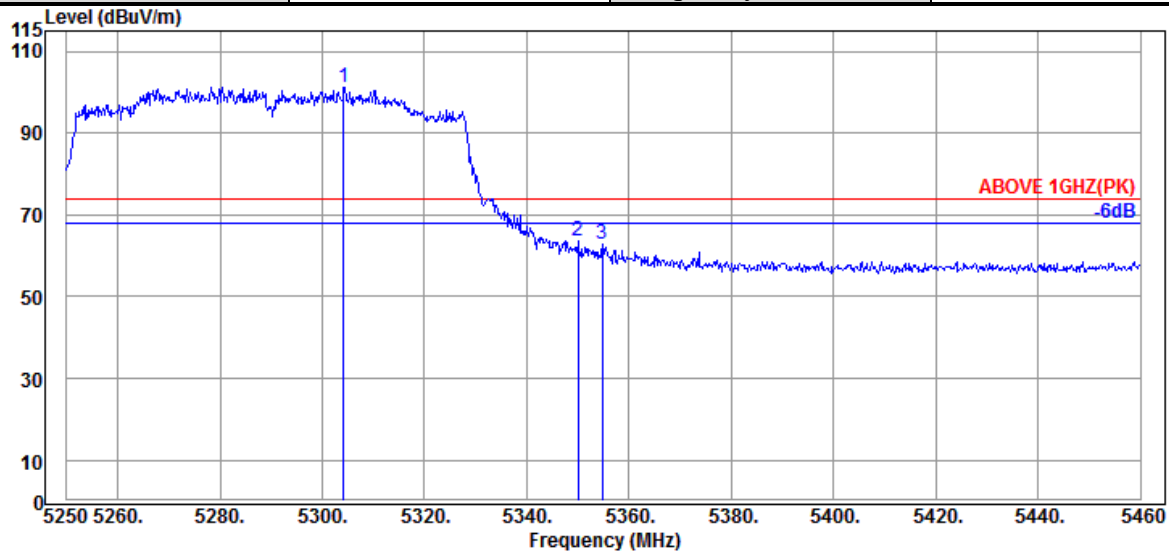

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5304.180	34.50	9.05	34.29	91.94	101.20	---	---	Peak
	5349.960	34.80	9.10	34.27	53.97	63.60	74.00	10.40	Peak
	5354.790	34.87	9.10	34.27	53.11	62.81	74.00	11.19	Peak

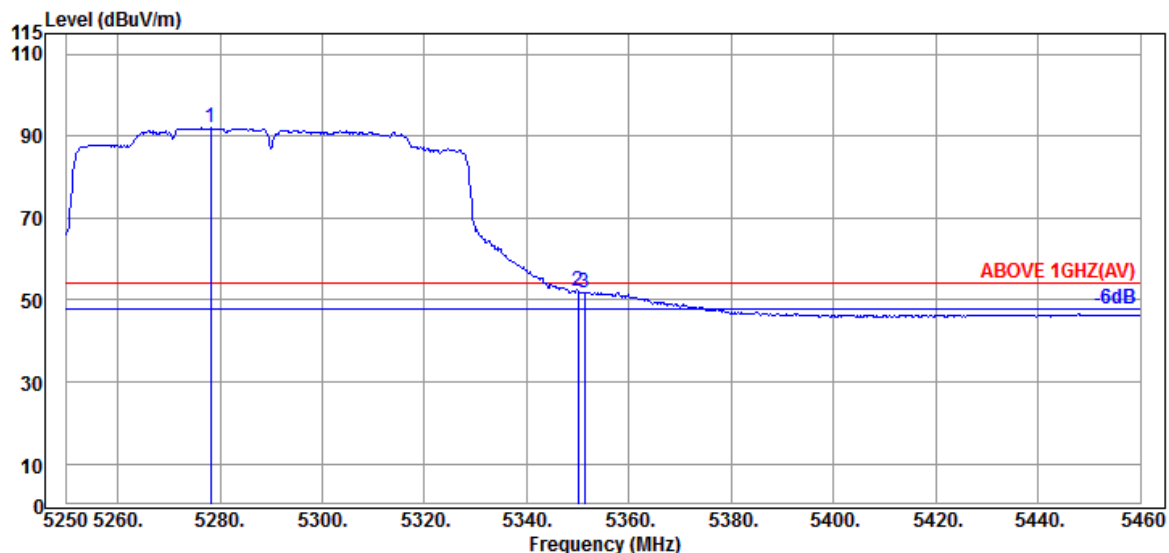

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5278.140	34.47	9.04	34.30	82.73	91.94	---	---	Average
	5349.960	34.80	9.10	34.27	42.57	52.20	54.00	1.80	Average
	5351.220	34.80	9.10	34.27	42.29	51.92	54.00	2.08	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

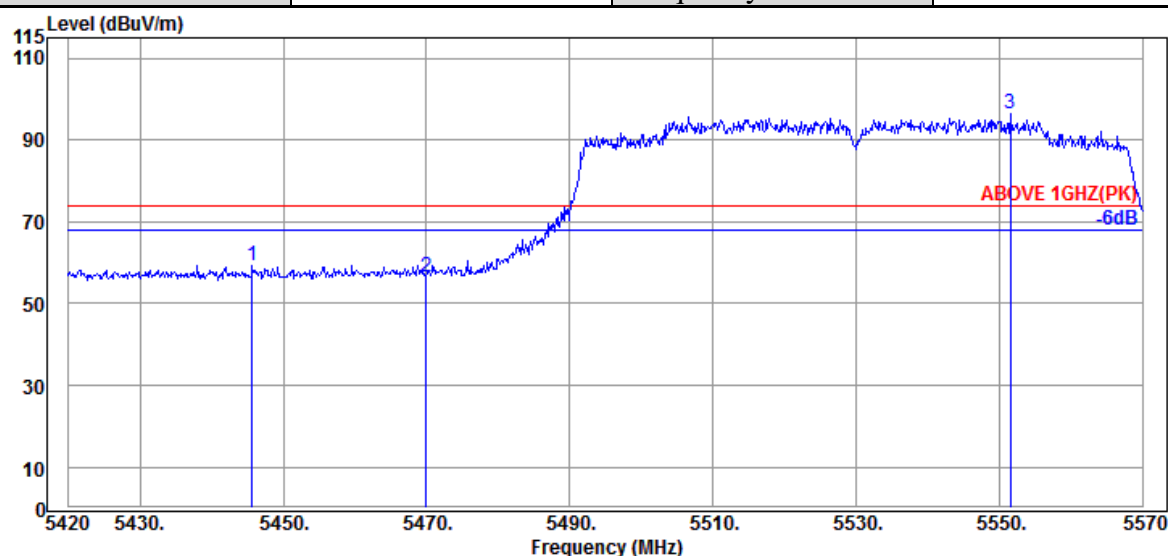

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5445.650	35.00	9.18	34.25	49.28	59.21	74.00	14.79	Peak
5469.950	34.97	9.20	34.24	46.48	56.41	74.00	17.59	Peak
@ 5551.550	34.80	9.27	34.25	86.53	96.35	---	---	Peak

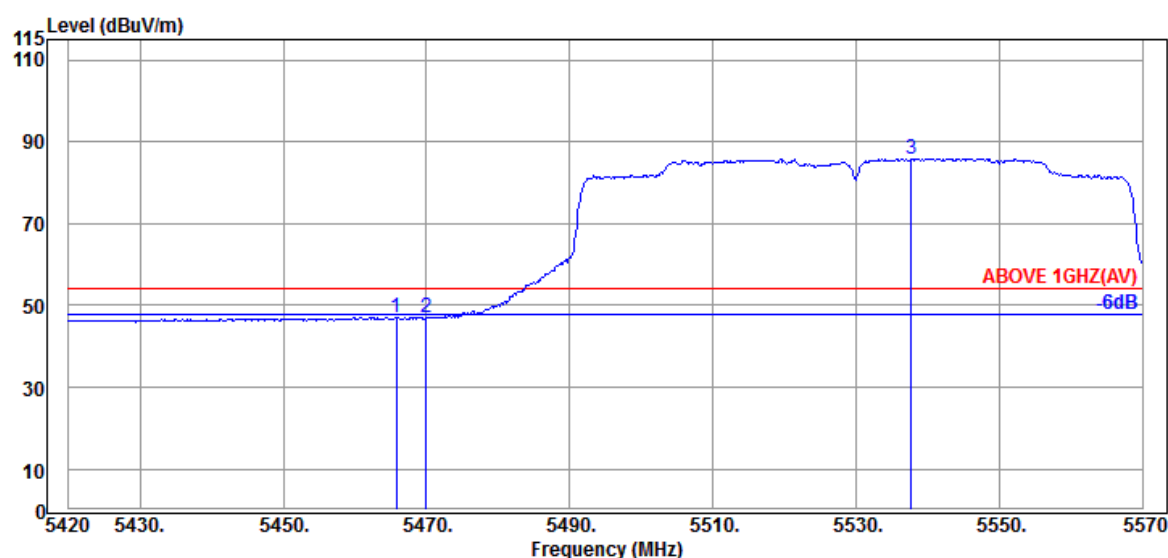

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.97	9.20	34.24	37.11	47.04	54.00	6.96	Average
5469.950	34.97	9.20	34.24	37.15	47.08	54.00	6.92	Average
@ 5537.750	34.83	9.26	34.25	76.11	85.95	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233


Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

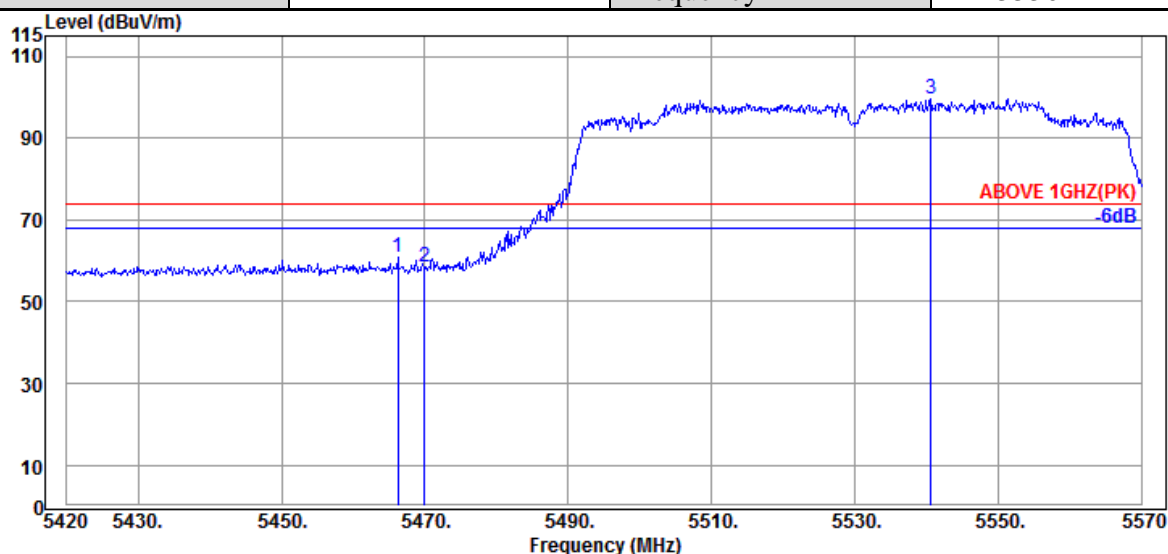

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.200	34.97	9.20	34.24	50.96	60.89	74.00	13.11	Peak
5469.950	34.97	9.20	34.24	48.50	58.43	74.00	15.57	Peak
@ 5540.600	34.83	9.26	34.25	89.72	99.56	---	---	Peak

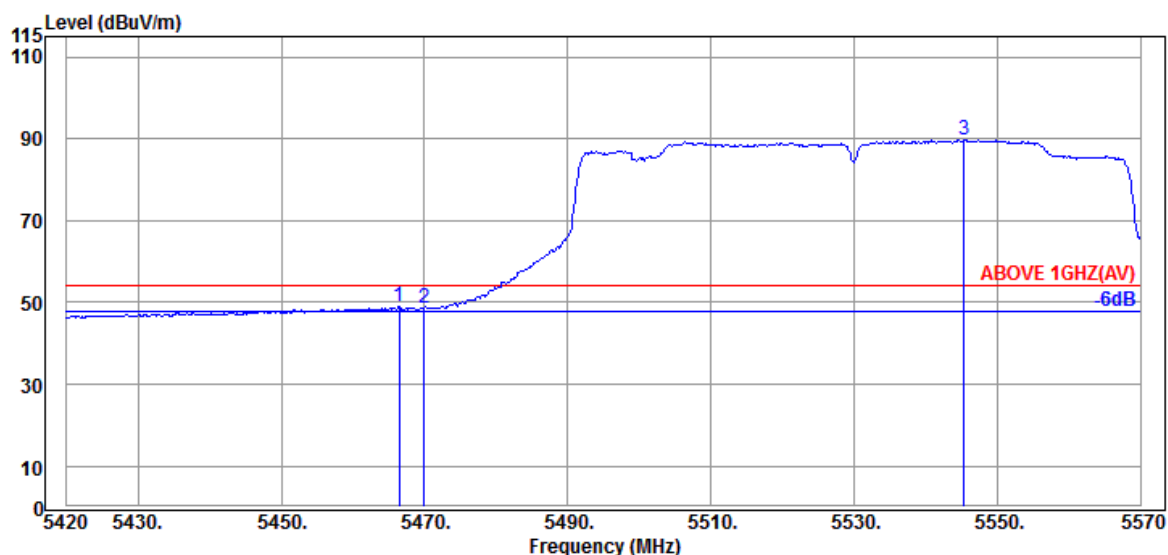

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.500	34.97	9.20	34.24	38.98	48.91	54.00	5.09	Average
5469.950	34.97	9.20	34.24	38.80	48.73	54.00	5.27	Average
@ 5545.400	34.80	9.26	34.25	79.96	89.77	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5610MHz

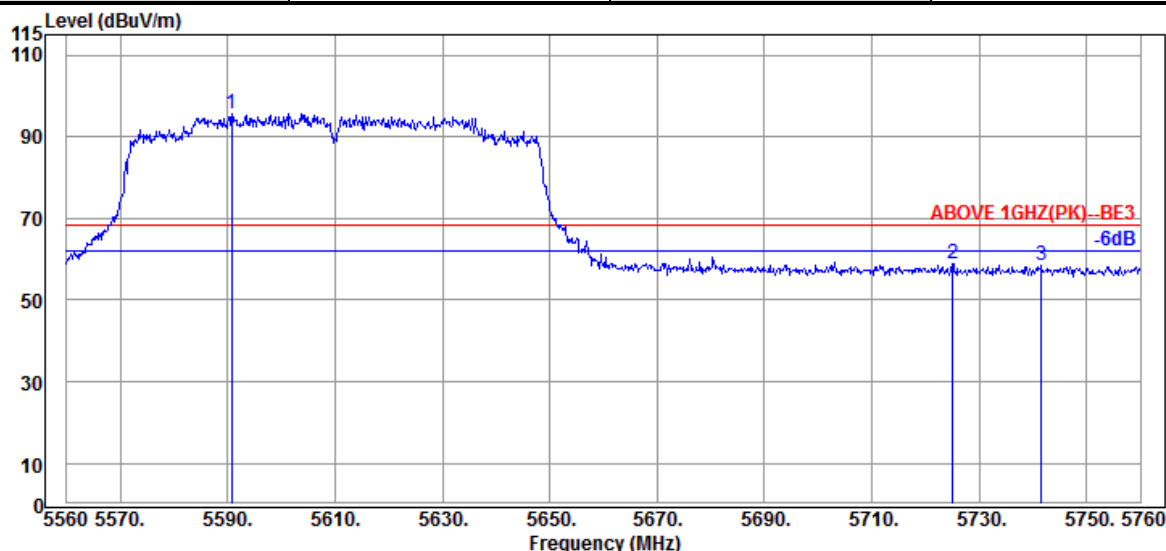

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5590.800	34.73	9.30	34.27	86.00	95.76	---	---	Peak
5725.000	34.57	9.42	34.32	49.27	58.94	68.20	9.26	Peak
5741.600	34.60	9.43	34.33	48.73	58.43	68.20	9.77	Peak

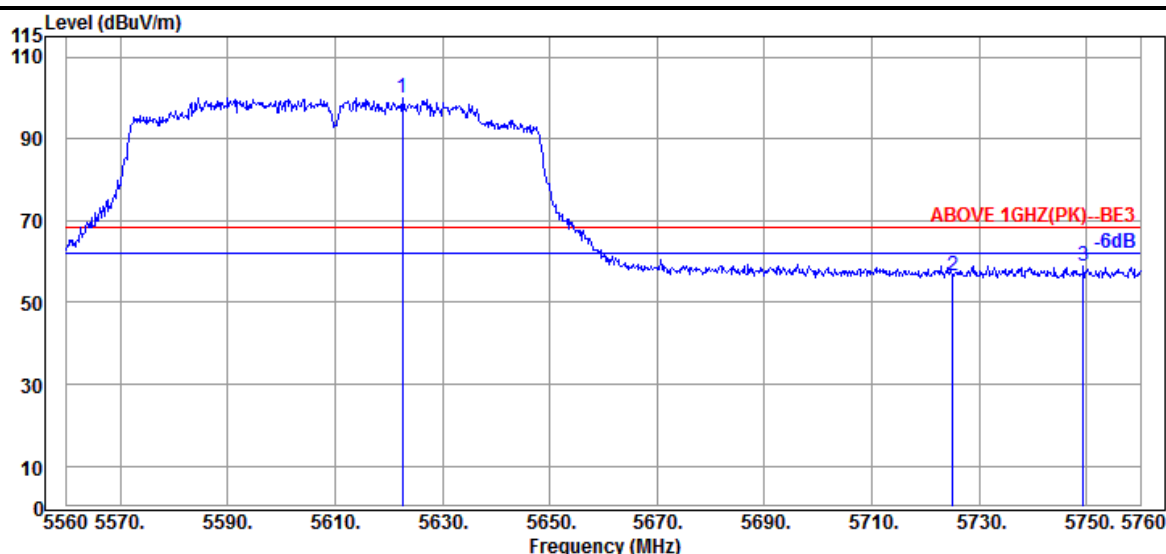


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5622.600	34.70	9.33	34.28	90.27	100.02	---	---	Peak
5725.000	34.57	9.42	34.32	46.85	56.52	68.20	11.68	Peak
5749.400	34.60	9.43	34.33	49.34	59.04	68.20	9.16	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

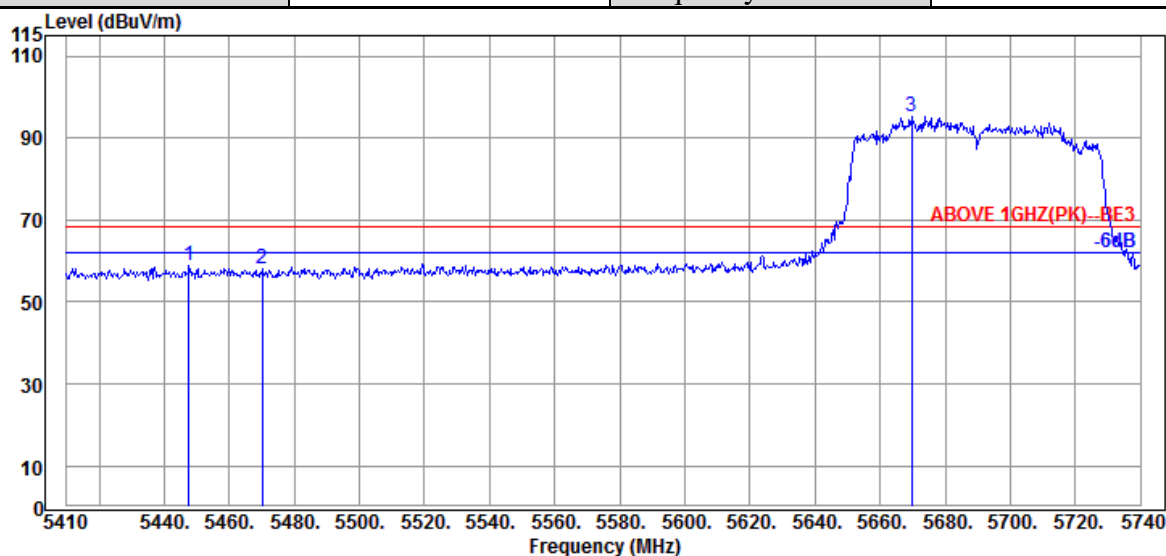

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5447.620	35.00	9.18	34.25	48.76	58.69	68.20	9.51	Peak
5470.060	34.97	9.20	34.24	48.29	58.22	68.20	9.98	Peak
@ 5669.710	34.63	9.37	34.30	85.50	95.20	---	---	Peak

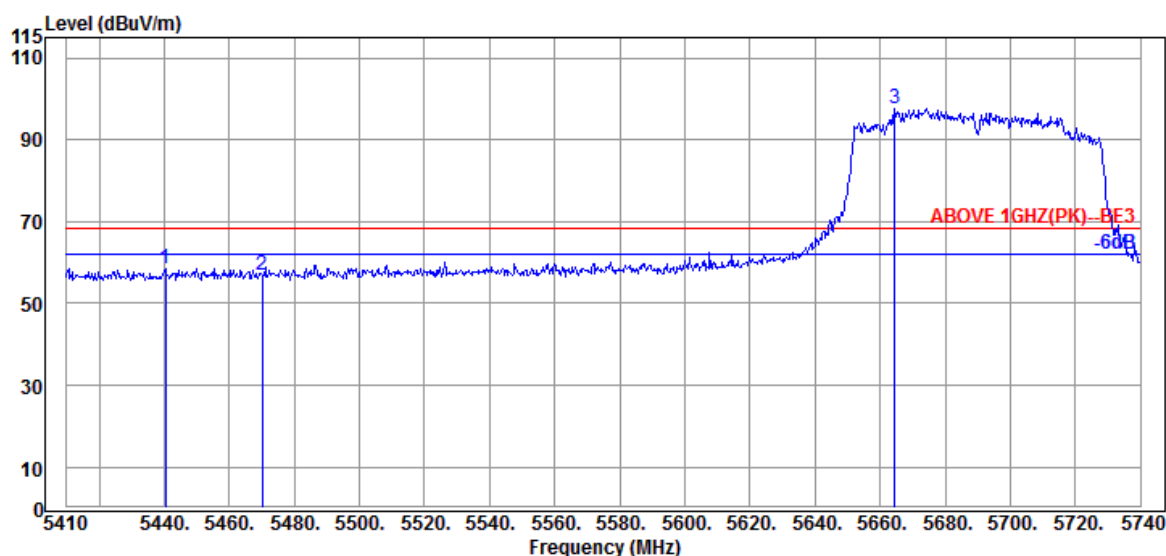

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.360	35.00	9.17	34.25	48.63	58.55	68.20	9.65	Peak
5470.060	34.97	9.20	34.24	46.82	56.75	68.20	11.45	Peak
@ 5664.430	34.63	9.36	34.30	87.87	97.56	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

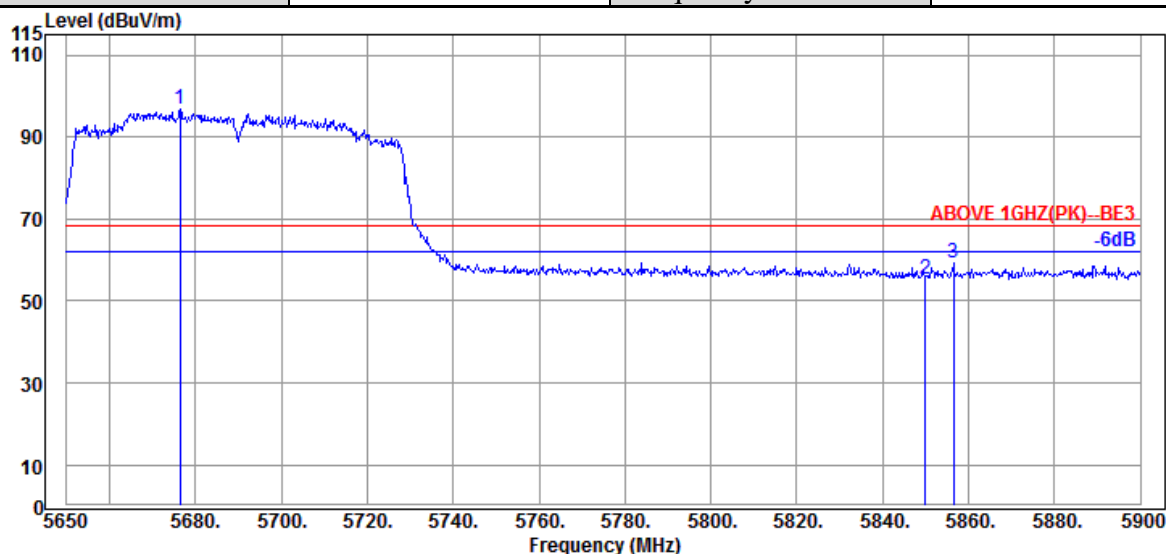

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5676.500	34.57	9.37	34.30	87.10	96.74	---	---	Peak
5850.000	34.60	9.52	34.38	45.76	55.50	68.20	12.70	Peak
5856.500	34.60	9.53	34.38	49.34	59.09	68.20	9.11	Peak

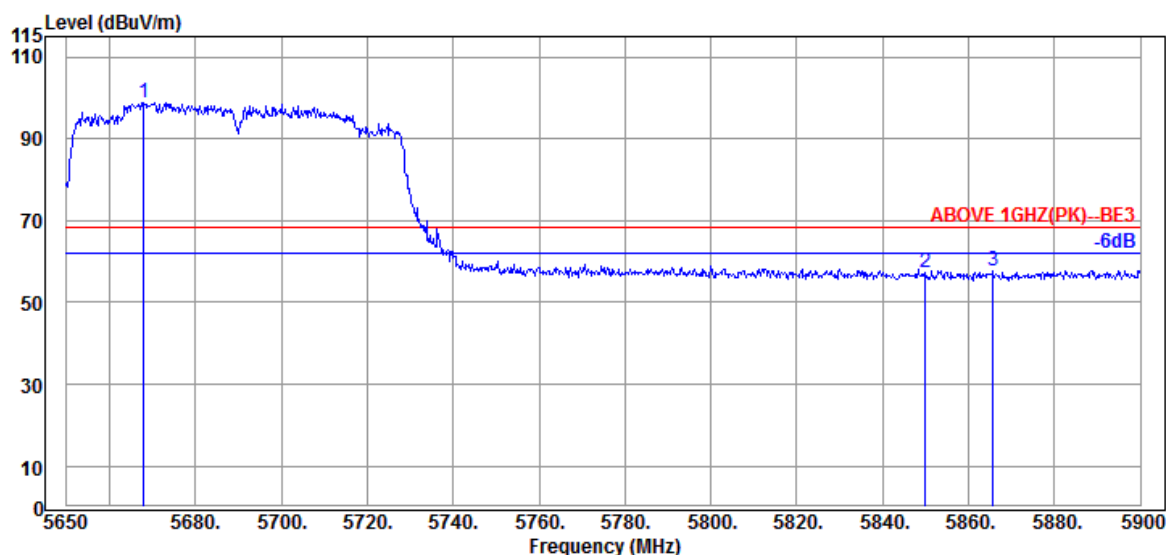

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
@ 5668.000	34.63	9.37	34.30	89.23	98.93	---	---	Peak
5850.000	34.60	9.52	34.38	47.55	57.29	68.20	10.91	Peak
5865.750	34.60	9.53	34.39	48.15	57.89	68.20	10.31	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz


Antenna at Horizontal Polarization

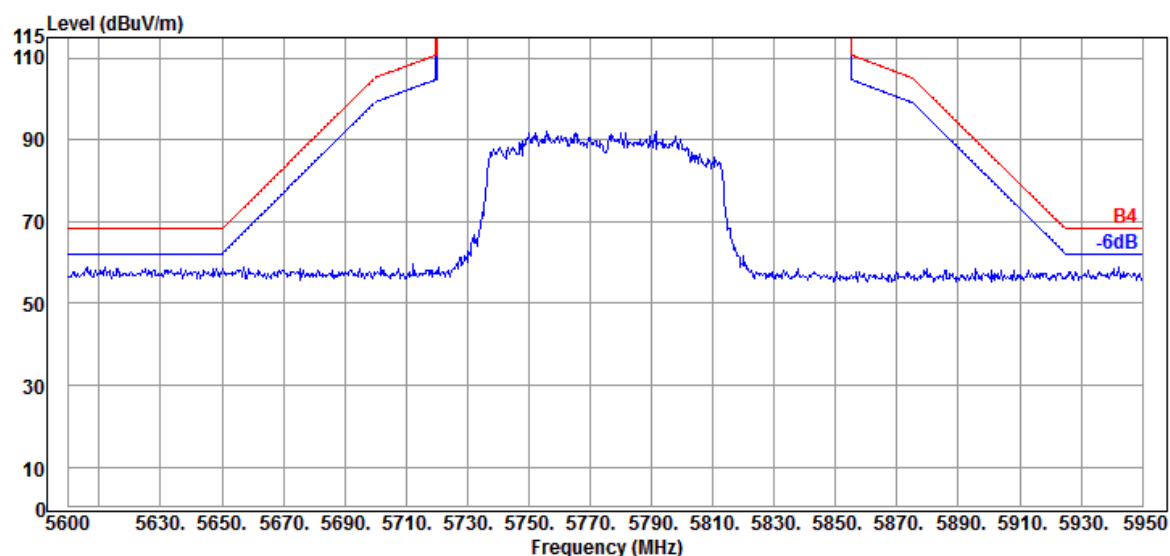

Antenna at Vertical Polarization

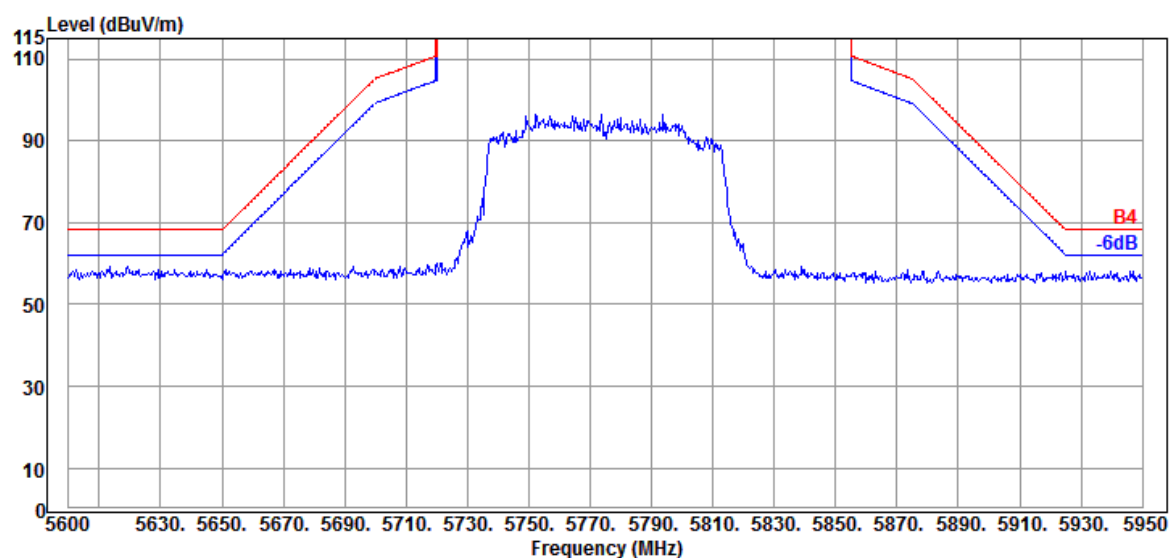


Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

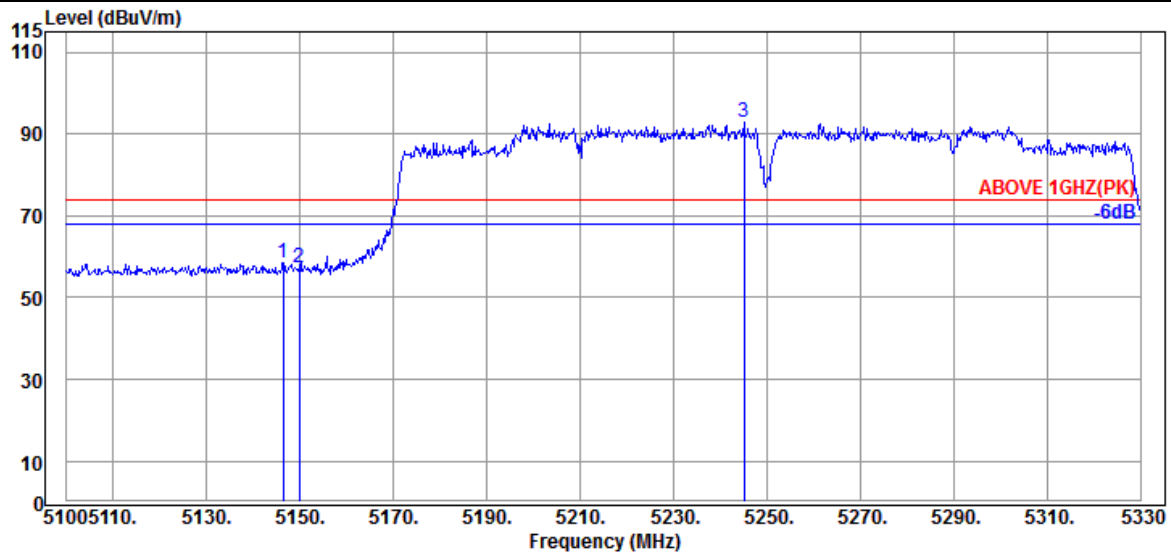

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.460	34.20	8.92	34.35	49.58	58.35	74.00	15.65	Peak
5149.910	34.20	8.92	34.35	48.66	57.43	74.00	16.57	Peak
@ 5245.130	34.40	9.01	34.32	83.79	92.88	---	---	Peak

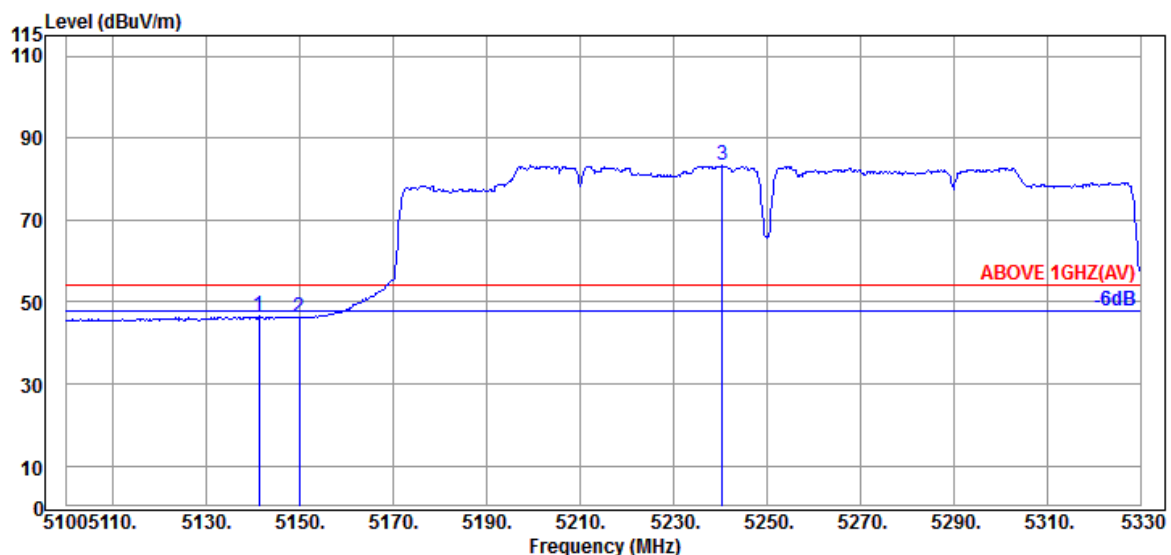


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5141.170	34.13	8.92	34.36	37.79	46.48	54.00	7.52	Average
5149.910	34.20	8.92	34.35	37.35	46.12	54.00	7.88	Average
@ 5240.530	34.40	8.99	34.32	74.22	83.29	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

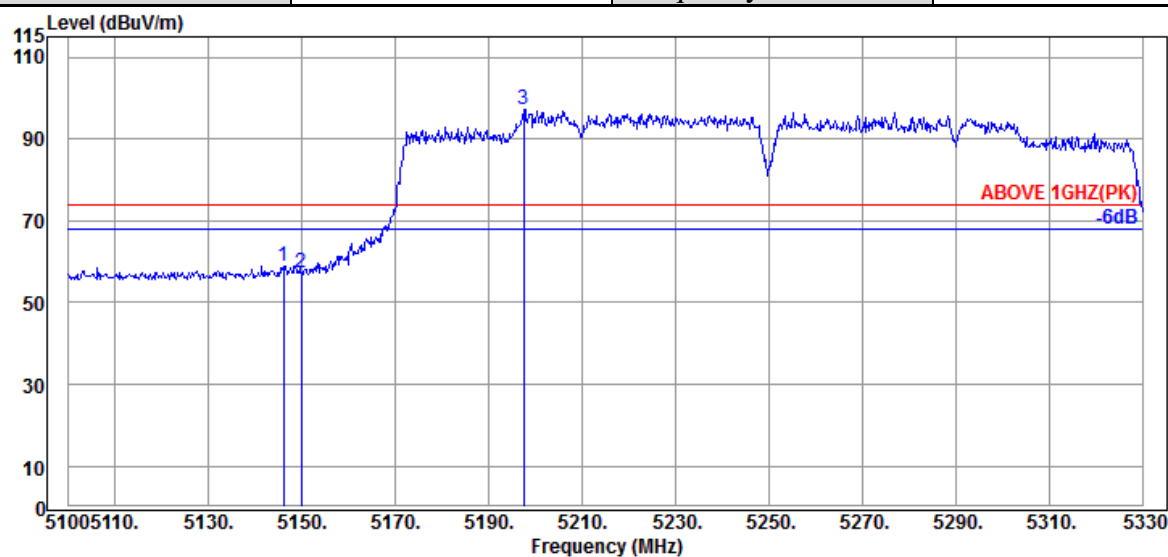

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.000	34.20	8.92	34.35	50.29	59.06	74.00	14.94	Peak
5149.910	34.20	8.92	34.35	48.42	57.19	74.00	16.81	Peak
@ 5197.520	34.40	8.96	34.33	88.17	97.20	---	---	Peak

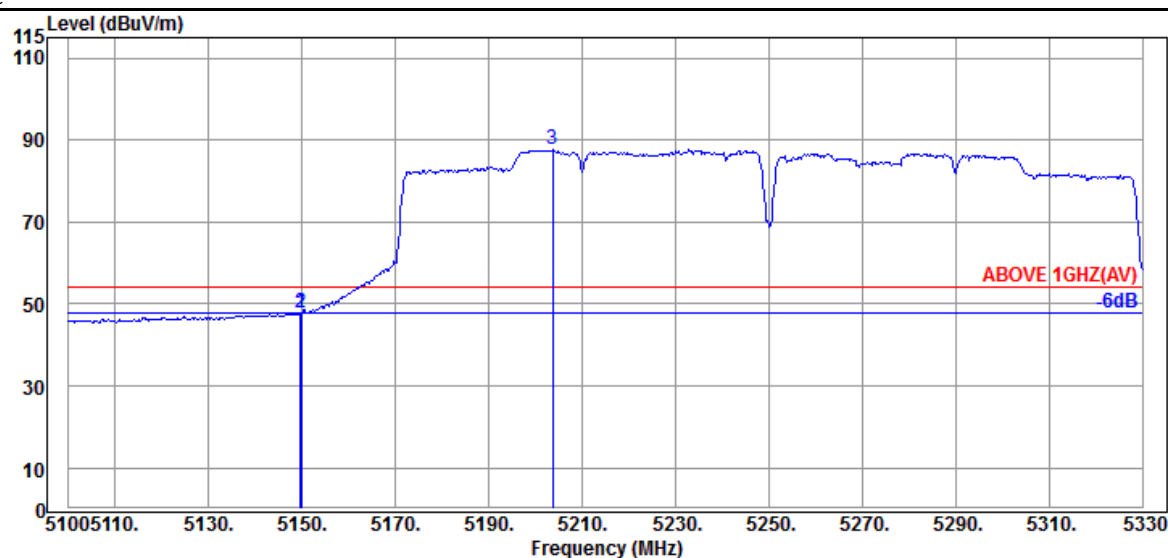


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.680	34.20	8.92	34.35	39.15	47.92	54.00	6.08	Average
5149.910	34.20	8.92	34.35	39.04	47.81	54.00	6.19	Average
@ 5203.730	34.40	8.96	34.33	78.67	87.70	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

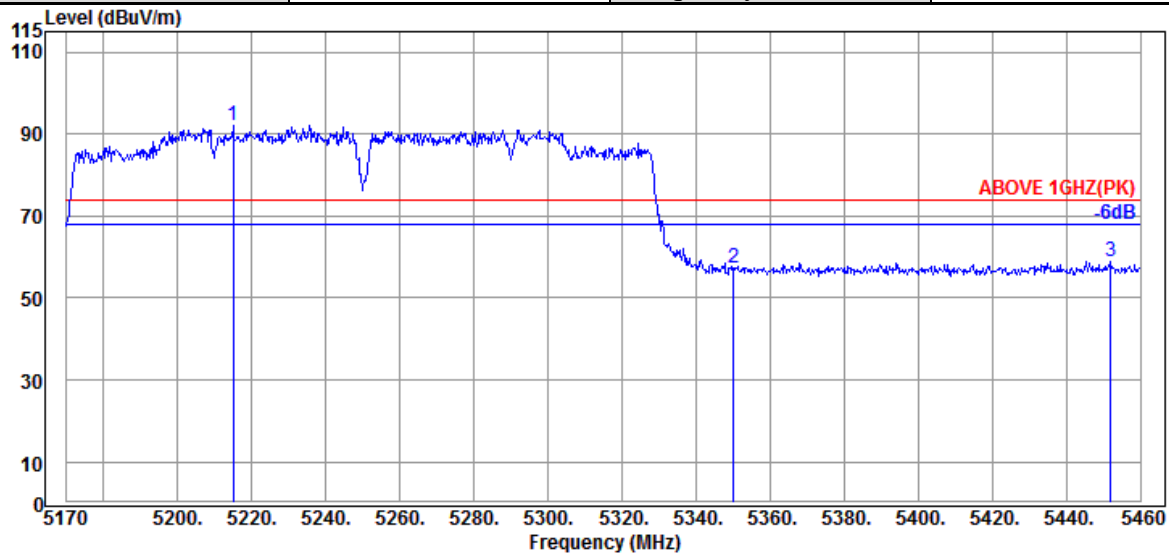

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5214.950	34.40	8.98	34.33	83.05	92.10	---	---	Peak
5350.090	34.80	9.10	34.27	47.83	57.46	74.00	16.54	Peak
5451.880	35.00	9.18	34.24	48.92	58.86	74.00	15.14	Peak

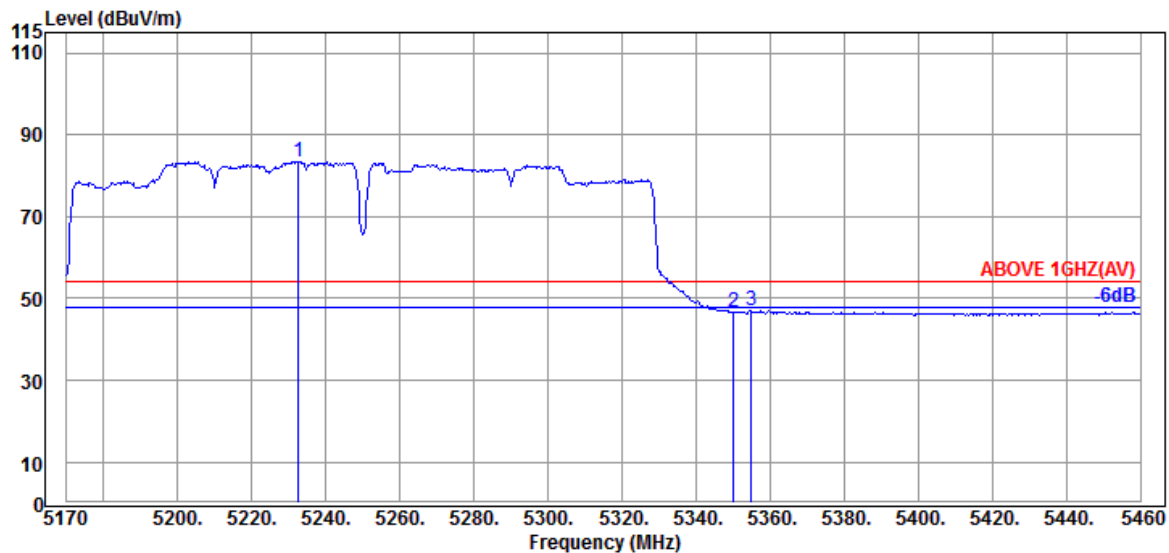


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5232.640	34.40	8.99	34.32	74.39	83.46	---	---	Average
5350.090	34.80	9.10	34.27	37.05	46.68	54.00	7.32	Average
5355.020	34.87	9.10	34.27	37.19	46.89	54.00	7.11	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

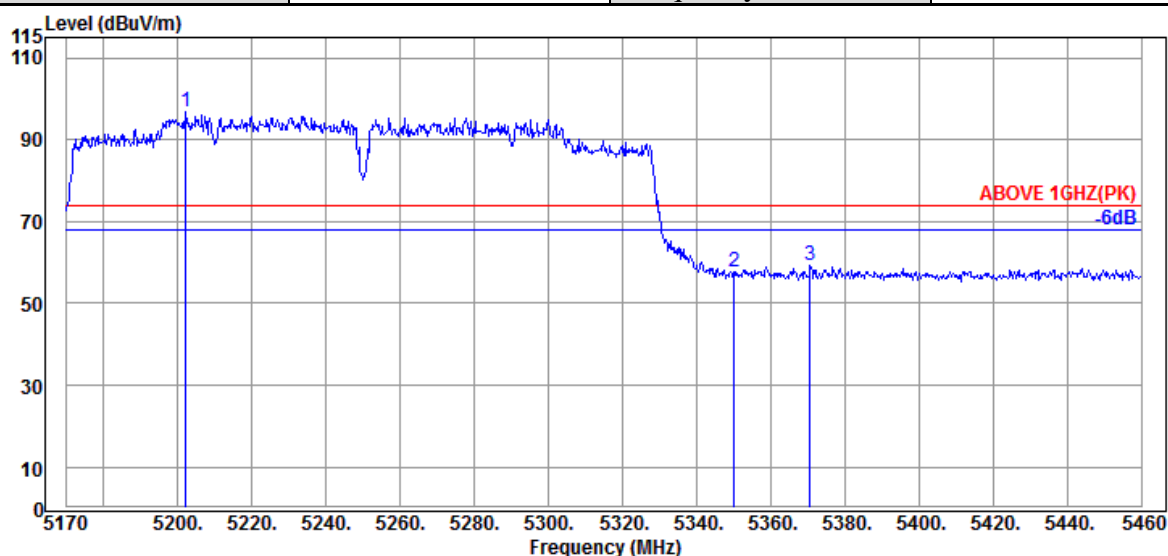

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5202.190	34.40	8.96	34.33	87.71	96.74	---	---	Peak
5350.090	34.80	9.10	34.27	48.14	57.77	74.00	16.23	Peak
5370.680	34.93	9.11	34.27	49.59	59.36	74.00	14.64	Peak

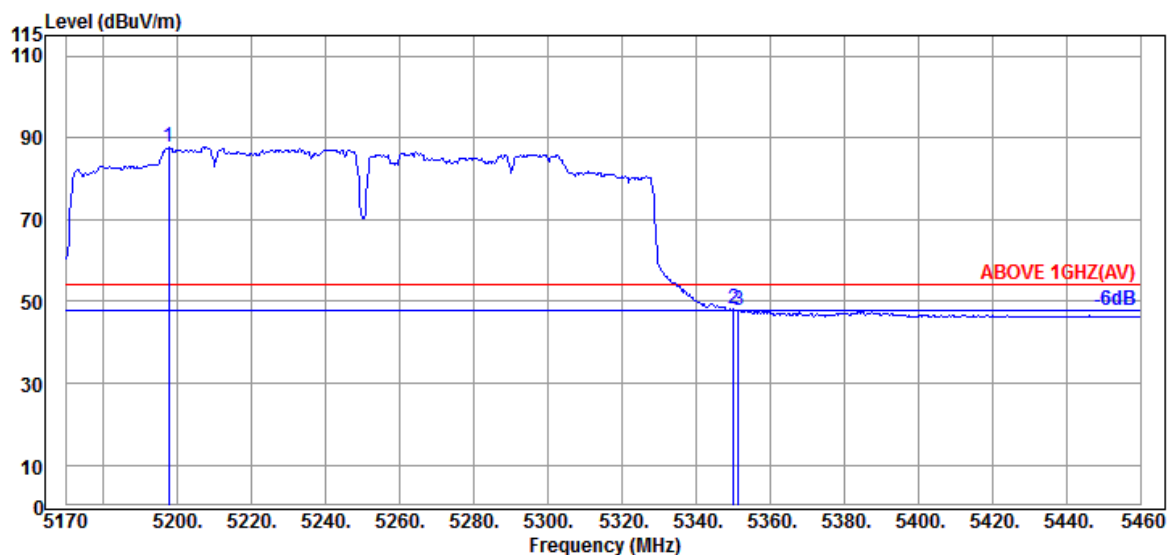


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5197.550	34.40	8.96	34.33	78.62	87.65	---	---	Average
5350.090	34.80	9.10	34.27	38.48	48.11	54.00	5.89	Average
5351.540	34.80	9.10	34.27	38.14	47.77	54.00	6.23	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

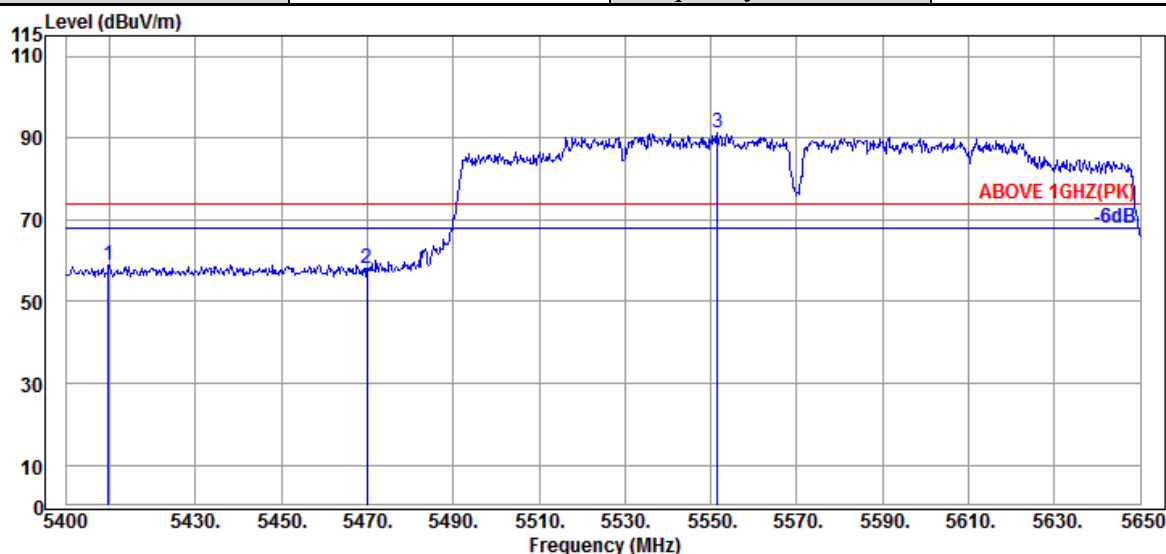

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5409.750	35.00	9.14	34.26	49.19	59.07	74.00	14.93	Peak
5470.000	34.97	9.20	34.24	48.18	58.11	74.00	15.89	Peak
@ 5551.500	34.80	9.27	34.25	81.66	91.48	---	---	Peak

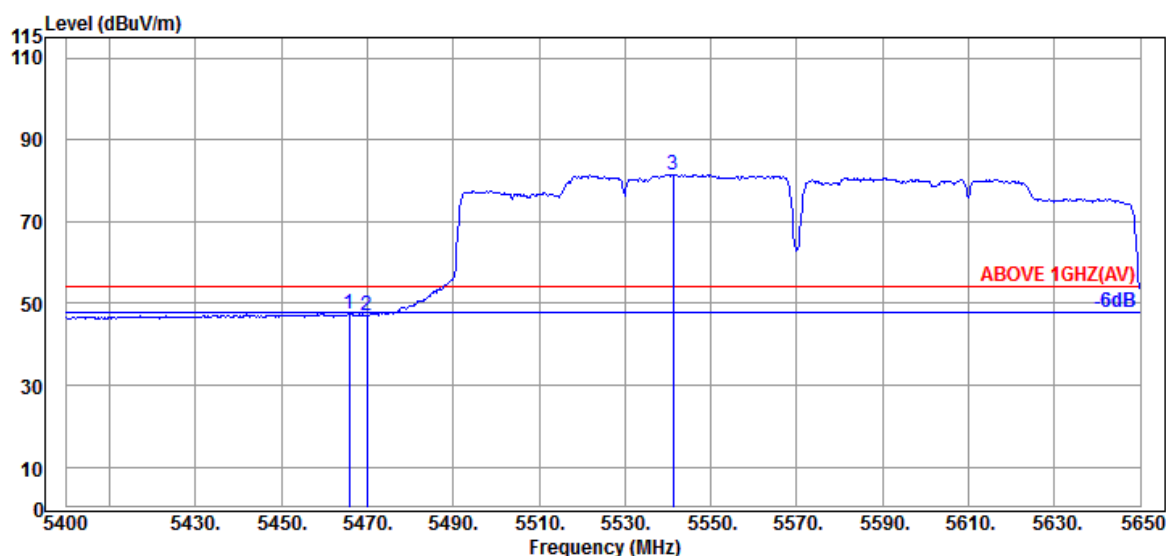

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.750	34.97	9.20	34.24	37.60	47.53	54.00	6.47	Average
5470.000	34.97	9.20	34.24	37.18	47.11	54.00	6.89	Average
@ 5541.250	34.83	9.26	34.25	71.64	81.48	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

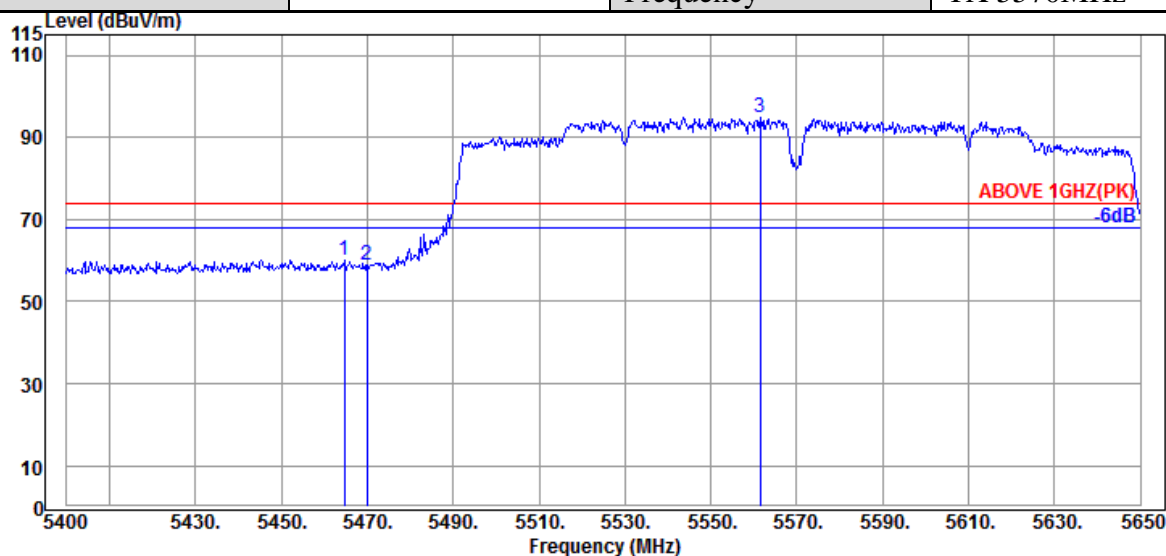

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.750	34.97	9.20	34.24	50.24	60.17	74.00	13.83	Peak
5470.000	34.97	9.20	34.24	49.03	58.96	74.00	15.04	Peak
@ 5561.500	34.77	9.27	34.26	84.95	94.73	---	---	Peak

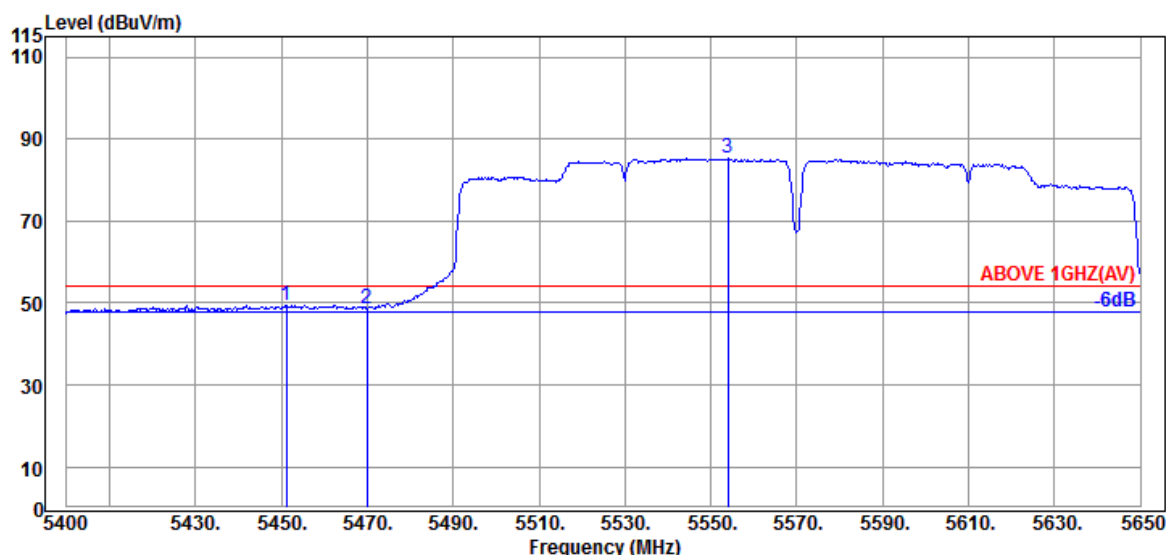


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5451.250	35.00	9.18	34.24	39.48	49.42	54.00	4.58	Average
5470.000	34.97	9.20	34.24	38.82	48.75	54.00	5.25	Average
@ 5554.000	34.80	9.27	34.26	75.50	85.31	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ac-VH160	U-NII Band	2C
		Frequency	TX 5570MHz

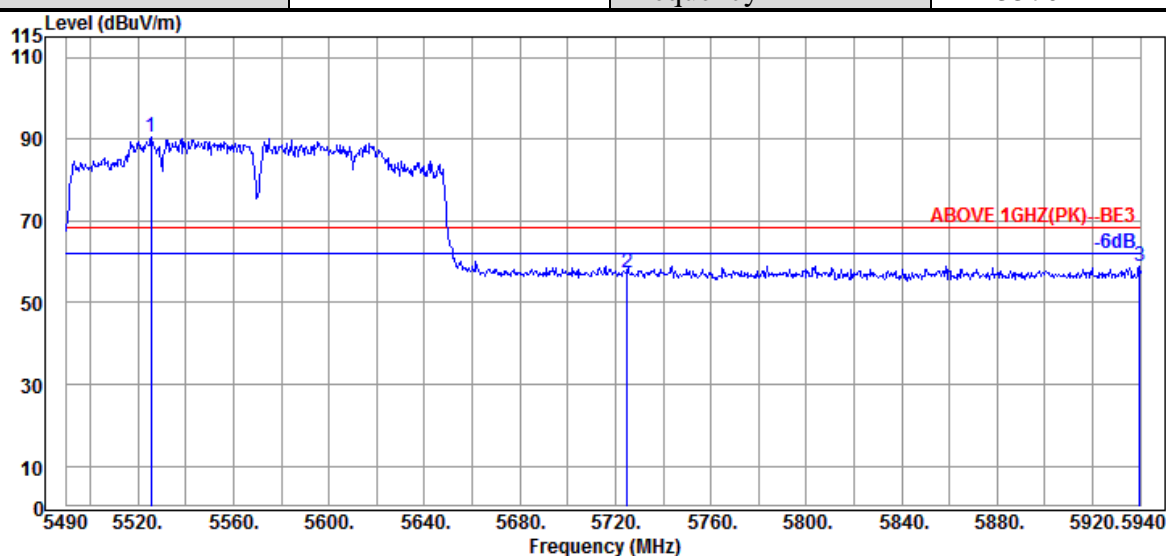

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5525.550	34.87	9.24	34.24	80.58	90.45	---	---	Peak
	5724.900	34.57	9.42	34.32	47.82	57.49	68.20	10.71	Peak
	5939.550	34.60	9.61	34.42	49.26	59.05	68.20	9.15	Peak

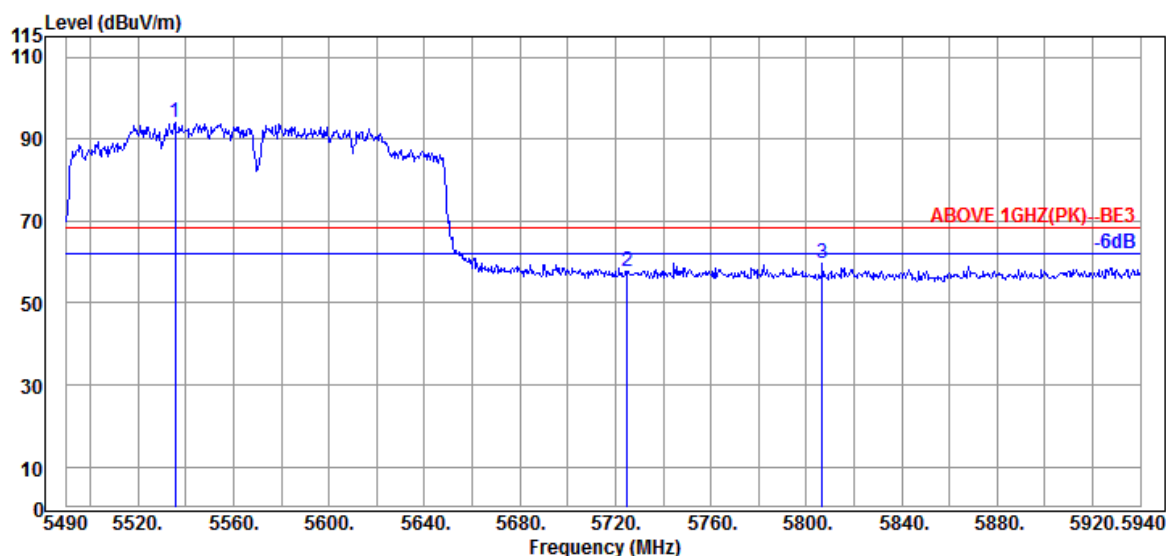

Antenna at Vertical Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5535.450	34.83	9.26	34.25	84.07	93.91	---	---	Peak
	5724.900	34.57	9.42	34.32	48.20	57.87	68.20	10.33	Peak
	5806.800	34.60	9.49	34.37	50.08	59.80	68.20	8.40	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

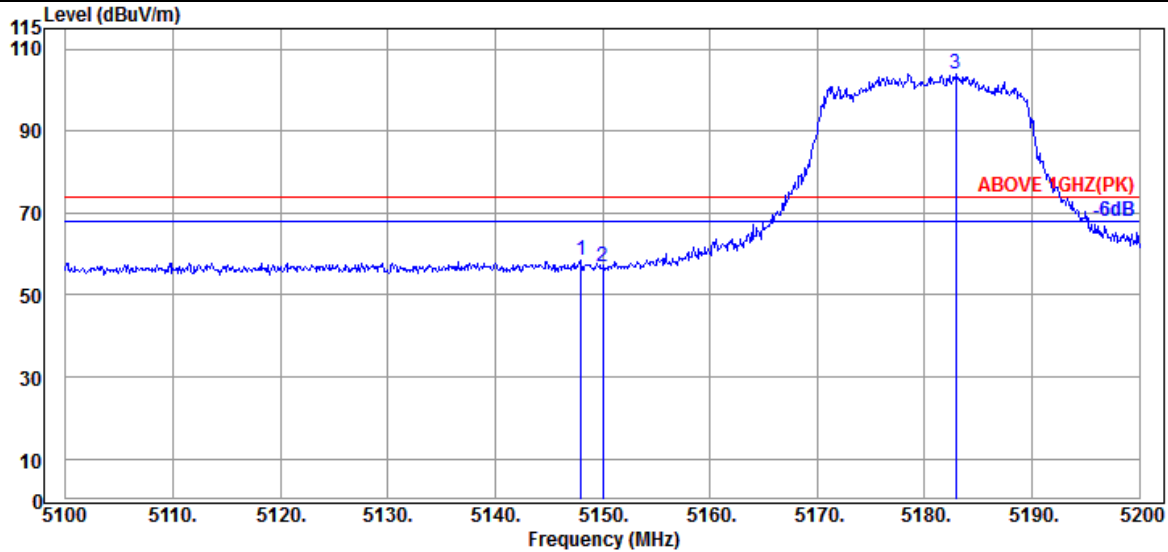

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.000	34.20	8.92	34.35	49.61	58.38	74.00	15.62	Peak
5150.000	34.20	8.92	34.35	48.18	56.95	74.00	17.05	Peak
@ 5182.900	34.33	8.95	34.34	95.09	104.03	---	---	Peak

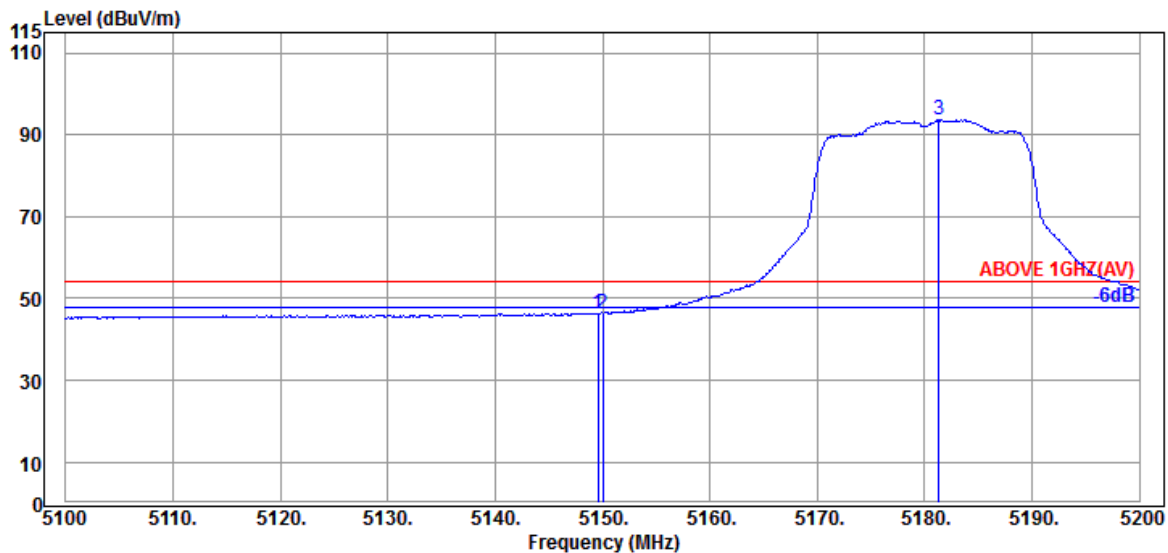

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.600	34.20	8.92	34.35	37.65	46.42	54.00	7.58	Average
5150.000	34.20	8.92	34.35	37.66	46.43	54.00	7.57	Average
@ 5181.300	34.33	8.95	34.34	84.80	93.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

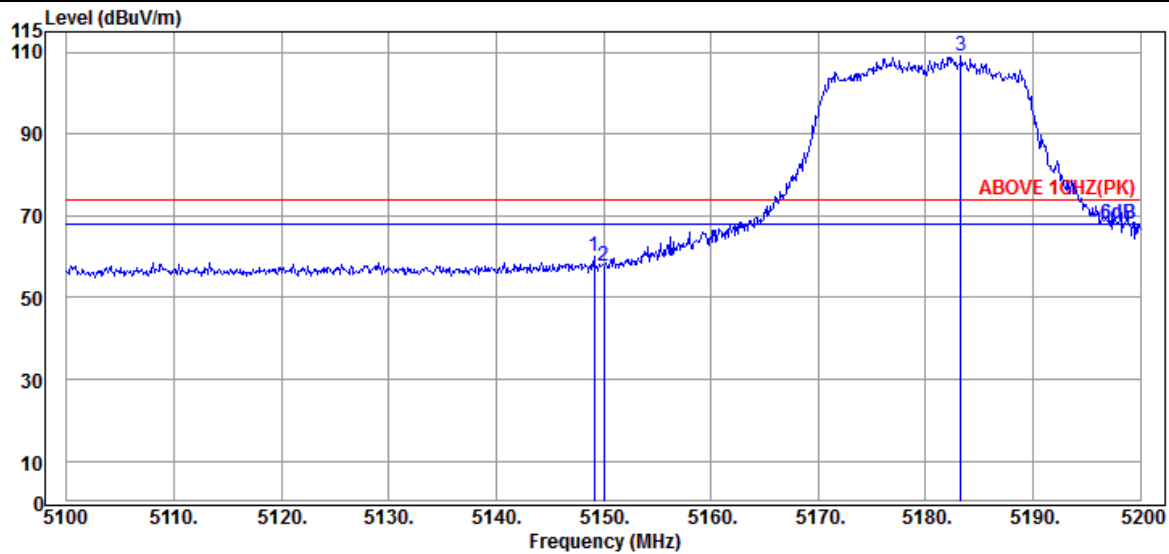

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.100	34.20	8.92	34.35	51.29	60.06	74.00	13.94	Peak
5150.000	34.20	8.92	34.35	48.90	57.67	74.00	16.33	Peak
@ 5183.300	34.33	8.95	34.34	100.20	109.14	---	---	Peak

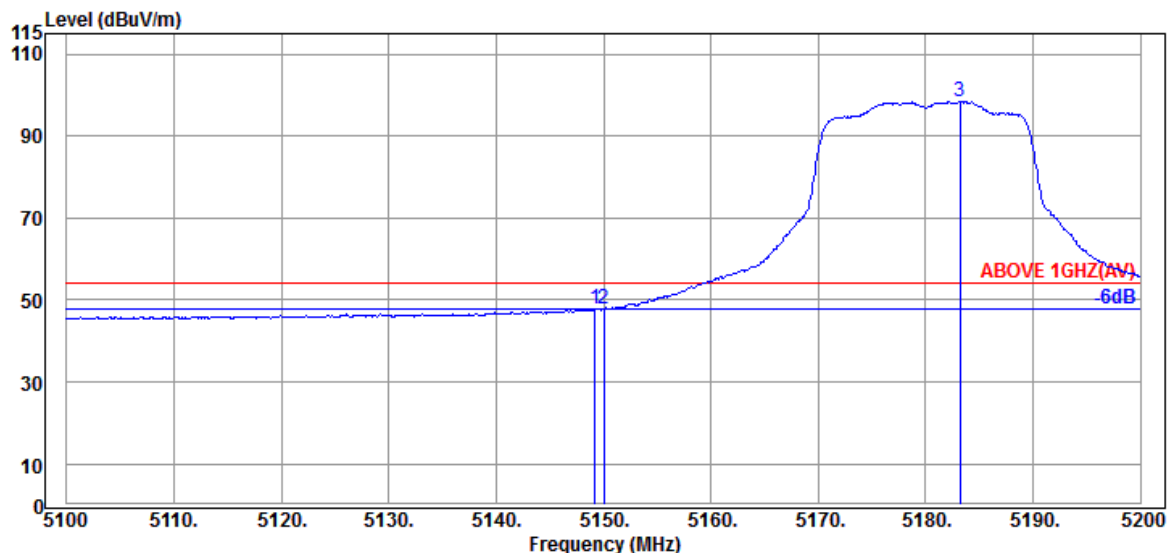


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.200	34.20	8.92	34.35	38.96	47.73	54.00	6.27	Average
5150.000	34.20	8.92	34.35	39.11	47.88	54.00	6.12	Average
@ 5183.200	34.33	8.95	34.34	89.35	98.29	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

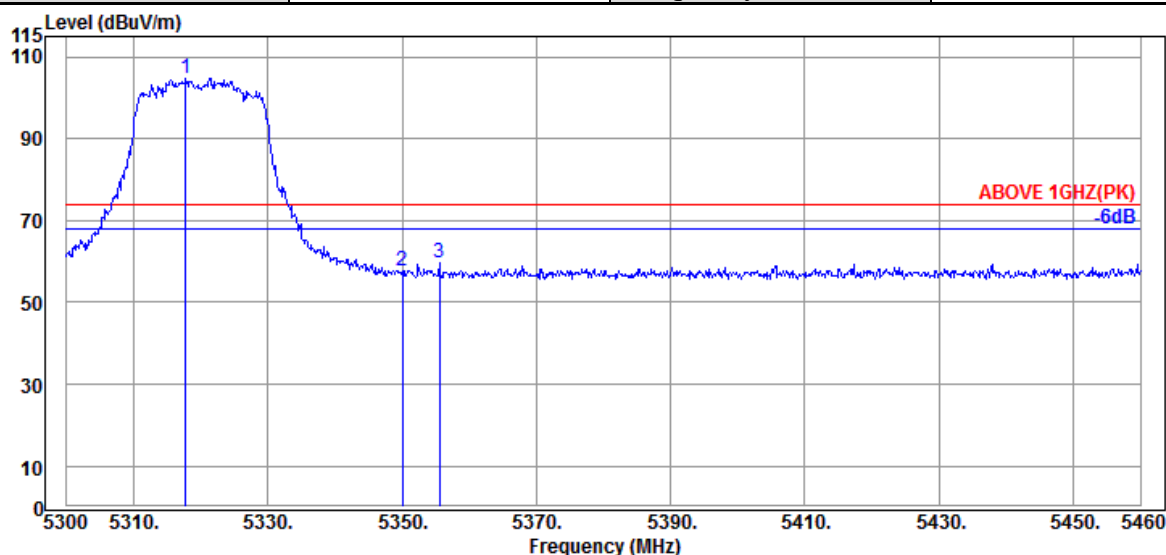

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.760	34.60	9.07	34.29	95.53	104.91	---	---	Peak
5350.080	34.80	9.10	34.27	47.91	57.54	74.00	16.46	Peak
5355.520	34.87	9.10	34.27	49.91	59.61	74.00	14.39	Peak

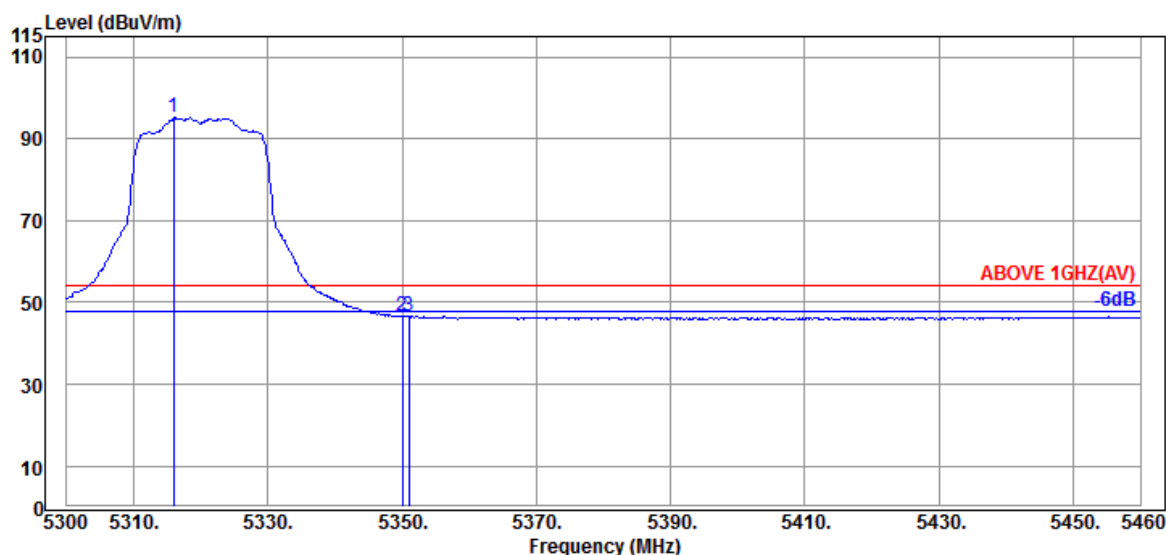


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.000	34.60	9.07	34.29	85.85	95.23	---	---	Average
5350.080	34.80	9.10	34.27	37.19	46.82	54.00	7.18	Average
5351.040	34.80	9.10	34.27	37.07	46.70	54.00	7.30	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

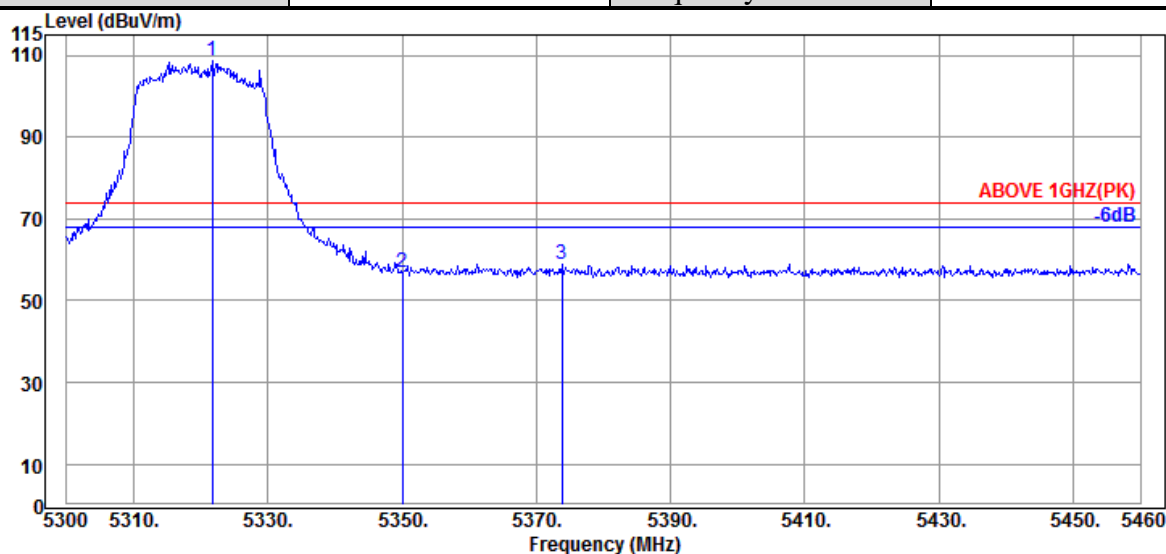

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5321.760	34.60	9.07	34.29	99.14	108.52	---	---	Peak
5350.080	34.80	9.10	34.27	47.28	56.91	74.00	17.09	Peak
5373.760	34.93	9.11	34.27	49.28	59.05	74.00	14.95	Peak

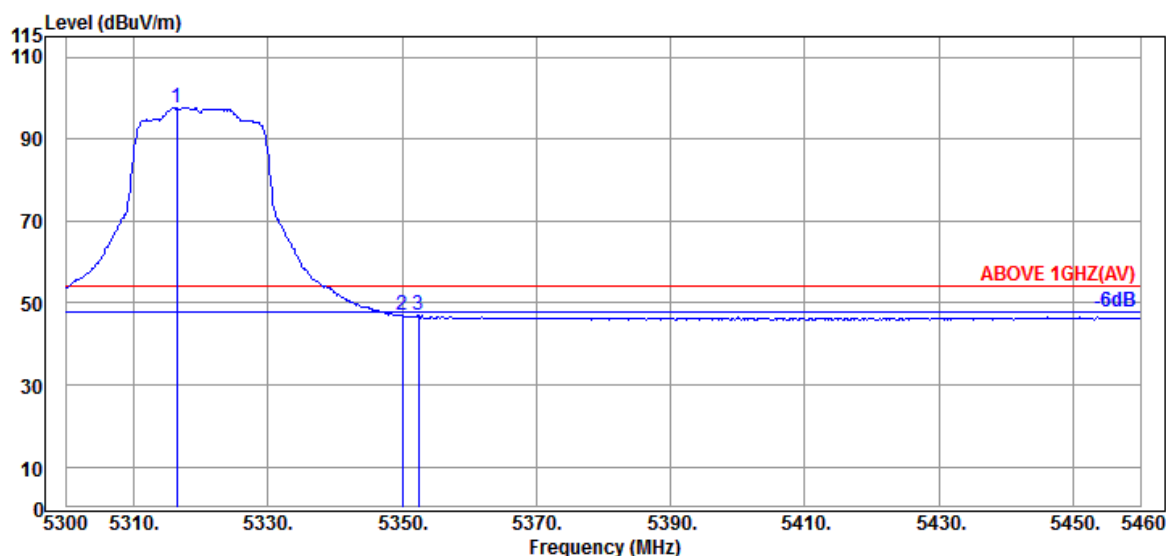

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5316.480	34.60	9.07	34.29	88.18	97.56	---	---	Average
5350.080	34.80	9.10	34.27	37.45	47.08	54.00	6.92	Average
5352.480	34.80	9.10	34.27	37.25	46.88	54.00	7.12	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

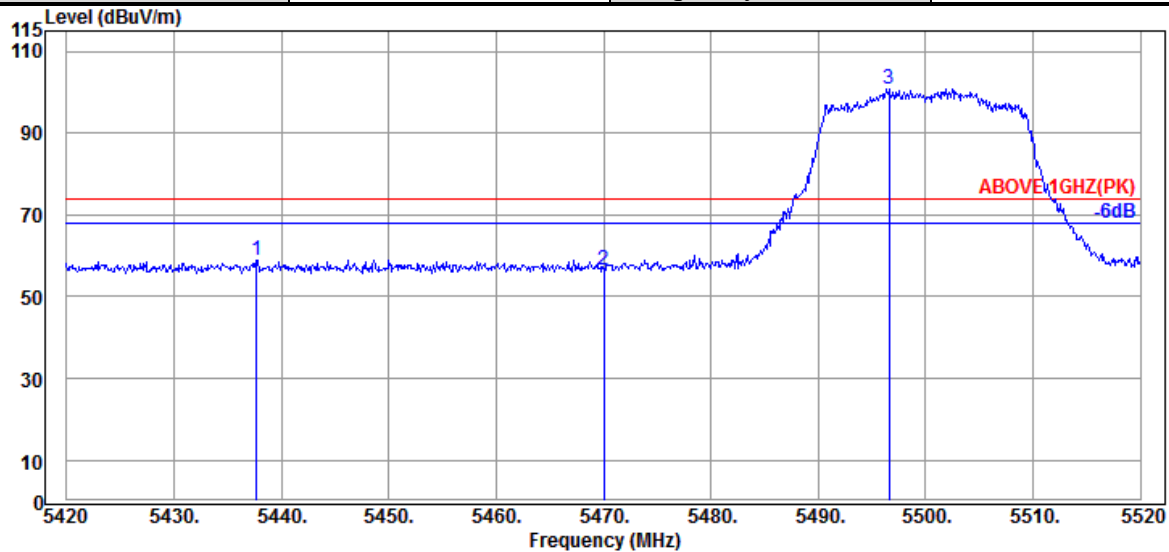

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5437.700	35.00	9.17	34.25	48.94	58.86	74.00	15.14	Peak
5470.000	34.97	9.20	34.24	46.57	56.50	74.00	17.50	Peak
@ 5496.600	34.90	9.23	34.23	90.78	100.68	---	---	Peak

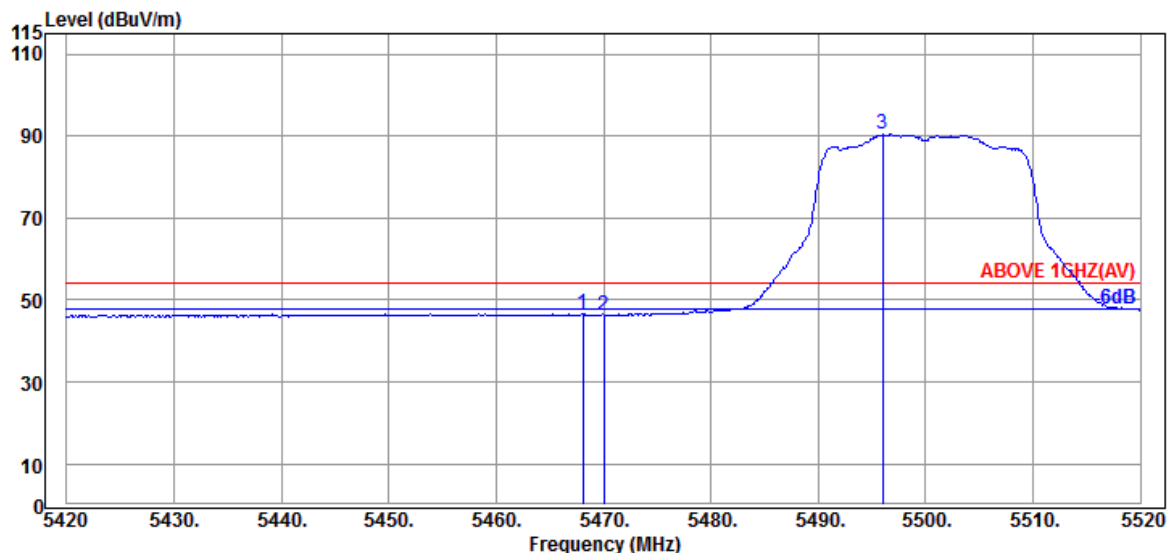


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5468.100	34.97	9.20	34.24	36.71	46.64	54.00	7.36	Average
5470.000	34.97	9.20	34.24	36.40	46.33	54.00	7.67	Average
@ 5496.000	34.90	9.21	34.23	80.51	90.39	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5500MHz

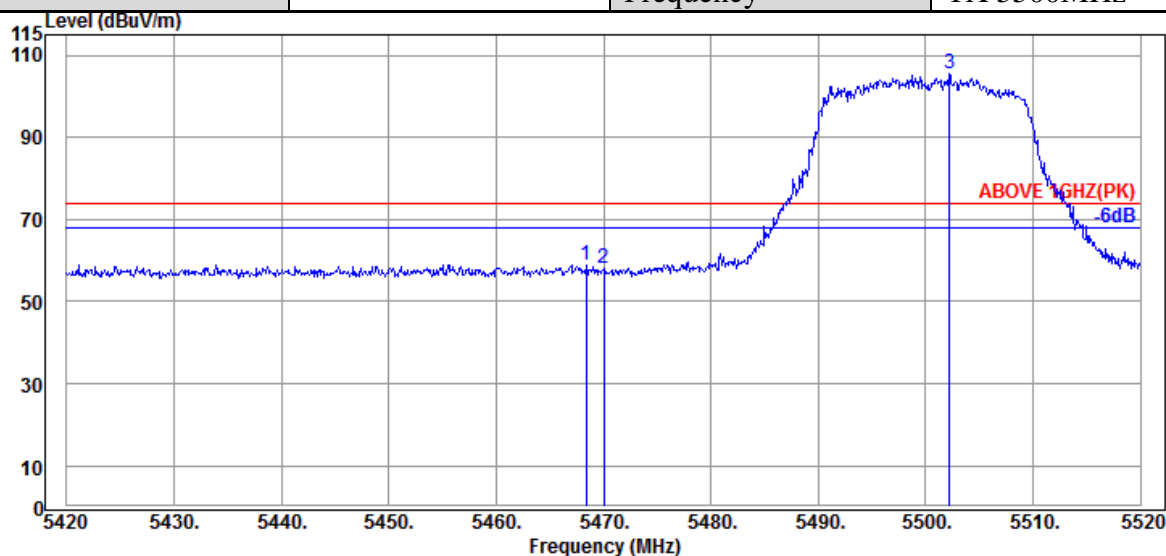

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.97	9.20	34.24	49.11	59.04	74.00	14.96	Peak
5470.000	34.97	9.20	34.24	48.30	58.23	74.00	15.77	Peak
@ 5502.200	34.90	9.23	34.24	95.51	105.40	---	---	Peak

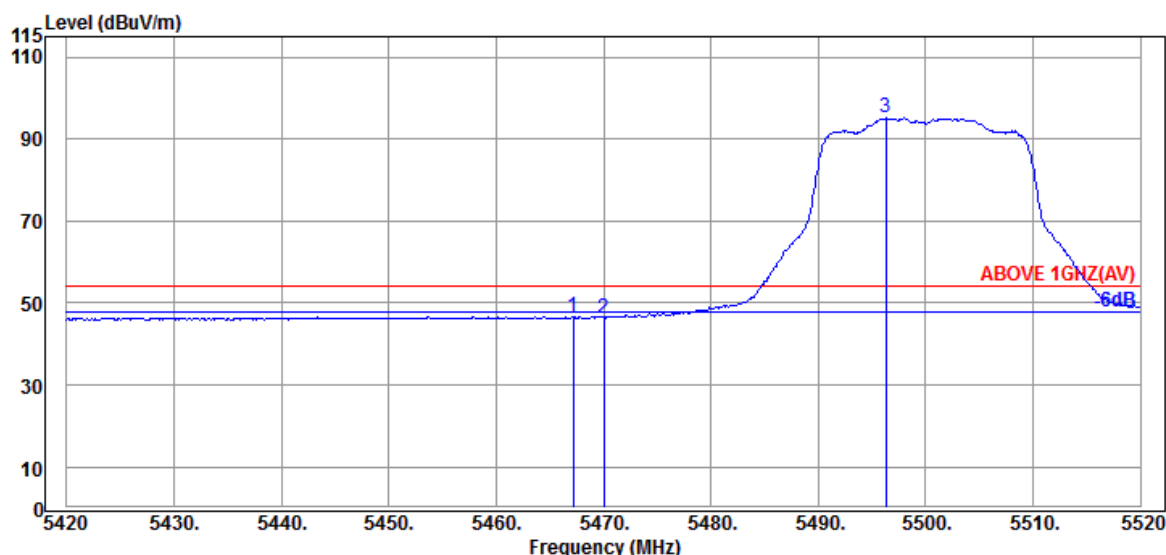

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.200	34.97	9.20	34.24	36.76	46.69	54.00	7.31	Average
5470.000	34.97	9.20	34.24	36.47	46.40	54.00	7.60	Average
@ 5496.300	34.90	9.21	34.23	85.26	95.14	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5700MHz

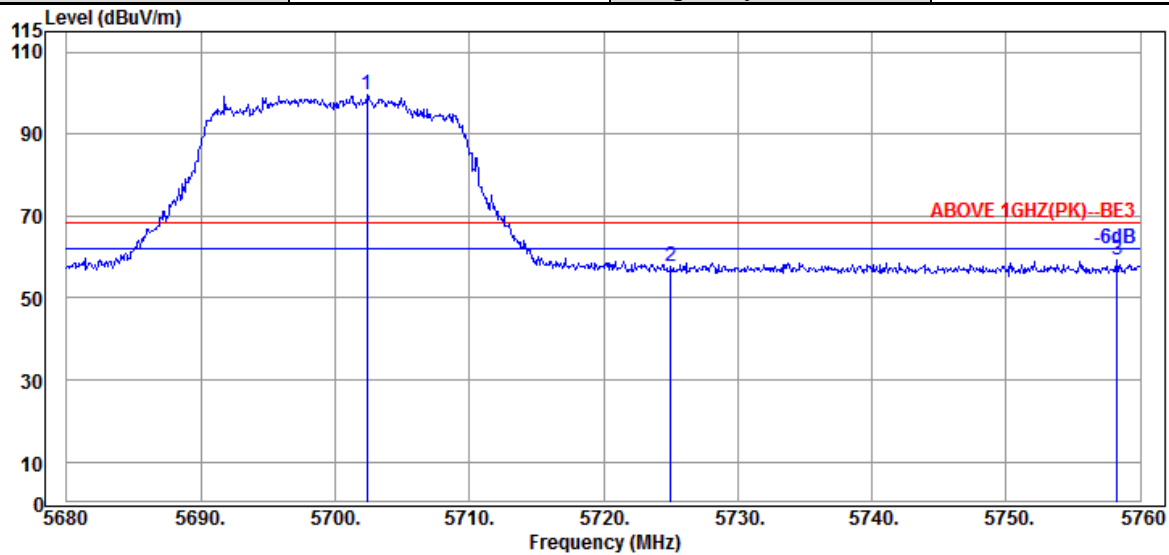

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5702.400	34.50	9.40	34.31	89.99	99.58	---	---	Peak
5725.040	34.57	9.42	34.32	48.05	57.72	68.20	10.48	Peak
5758.240	34.60	9.45	34.35	49.41	59.11	68.20	9.09	Peak

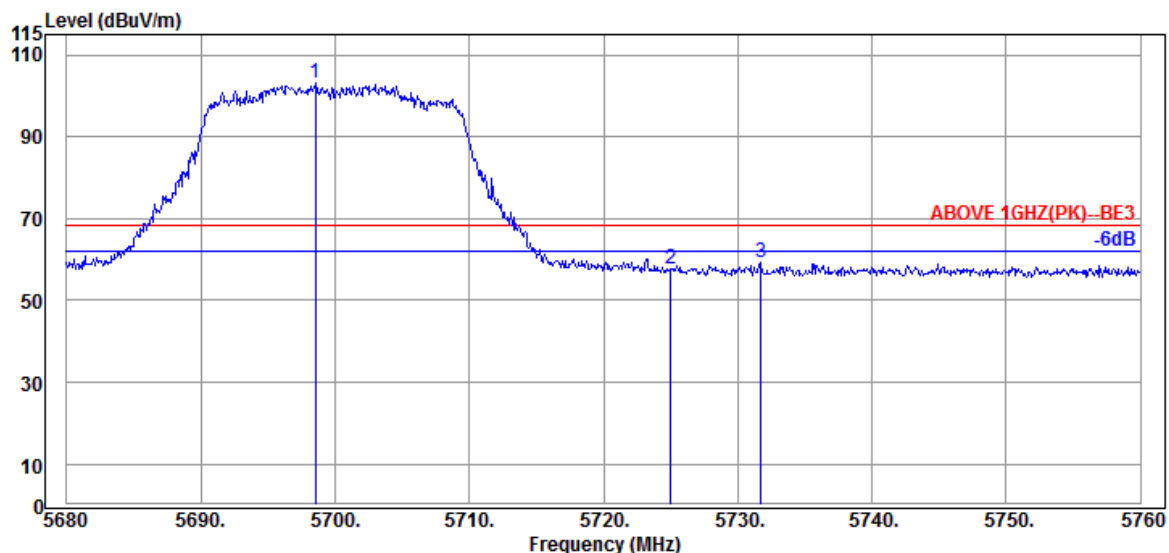

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5698.560	34.50	9.39	34.31	93.60	103.18	---	---	Peak
5725.040	34.57	9.42	34.32	48.18	57.85	68.20	10.35	Peak
5731.760	34.57	9.42	34.33	49.42	59.08	68.20	9.12	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

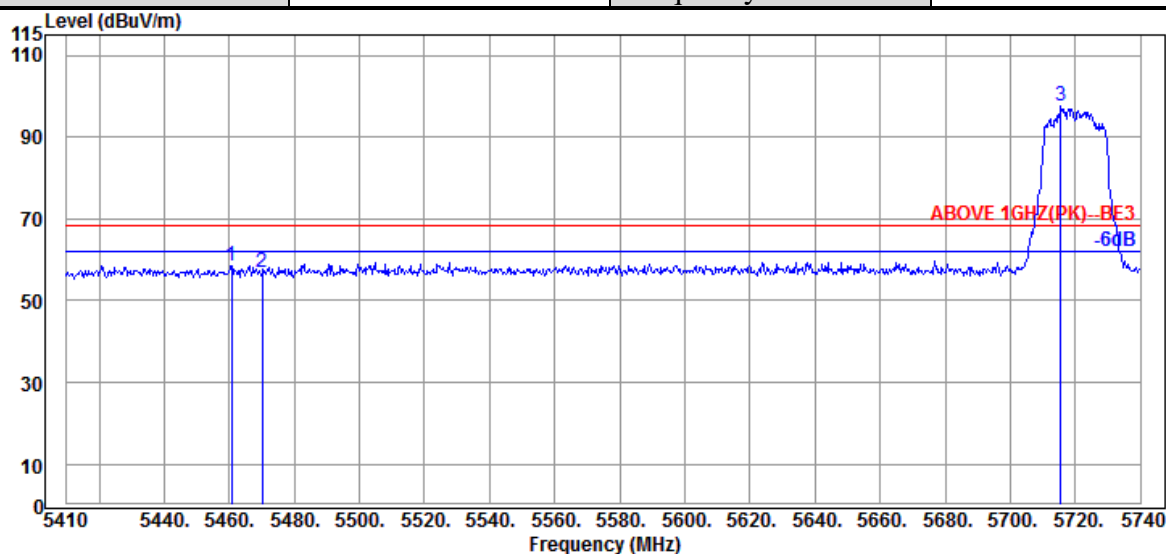

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.820	35.00	9.18	34.24	48.61	58.55	68.20	9.65	Peak
5470.060	34.97	9.20	34.24	47.15	57.08	68.20	11.12	Peak
@ 5715.580	34.53	9.40	34.32	88.19	97.80	---	---	Peak

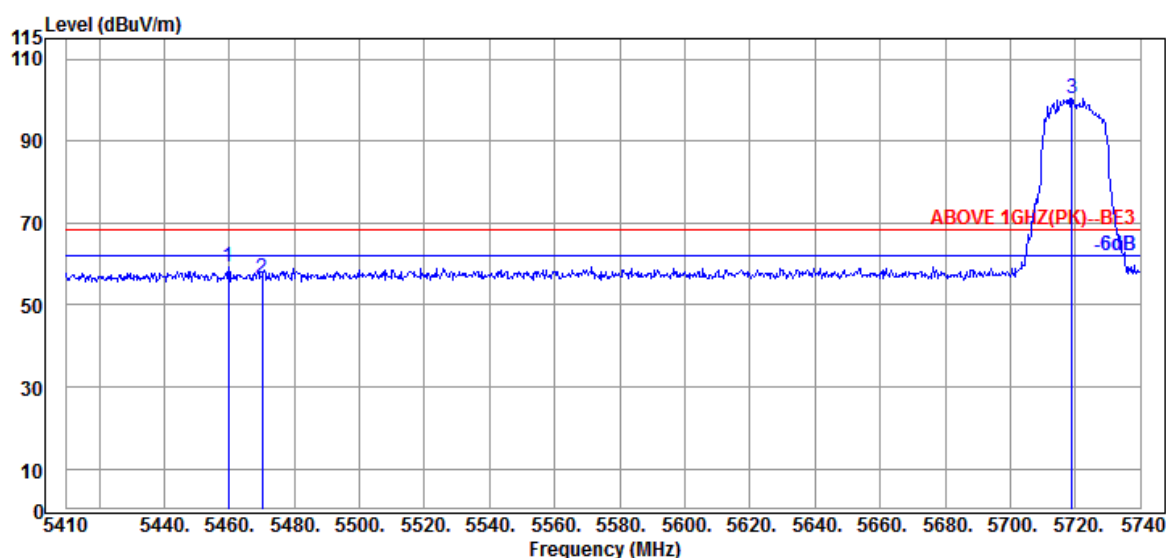

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5459.830	35.00	9.18	34.24	49.47	59.41	68.20	8.79	Peak
5470.060	34.97	9.20	34.24	46.39	56.32	68.20	11.88	Peak
@ 5718.880	34.53	9.42	34.32	90.82	100.45	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

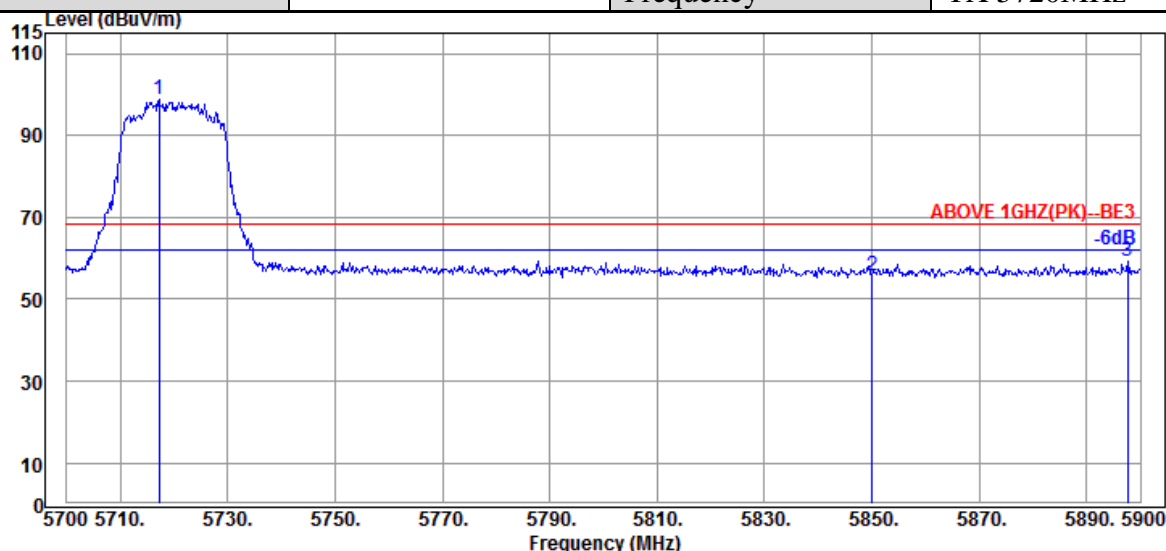

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5717.200	34.53	9.40	34.32	89.09	98.70	---	---	Peak
5850.000	34.60	9.52	34.38	45.88	55.62	68.20	12.58	Peak
5897.600	34.60	9.56	34.40	49.52	59.28	68.20	8.92	Peak

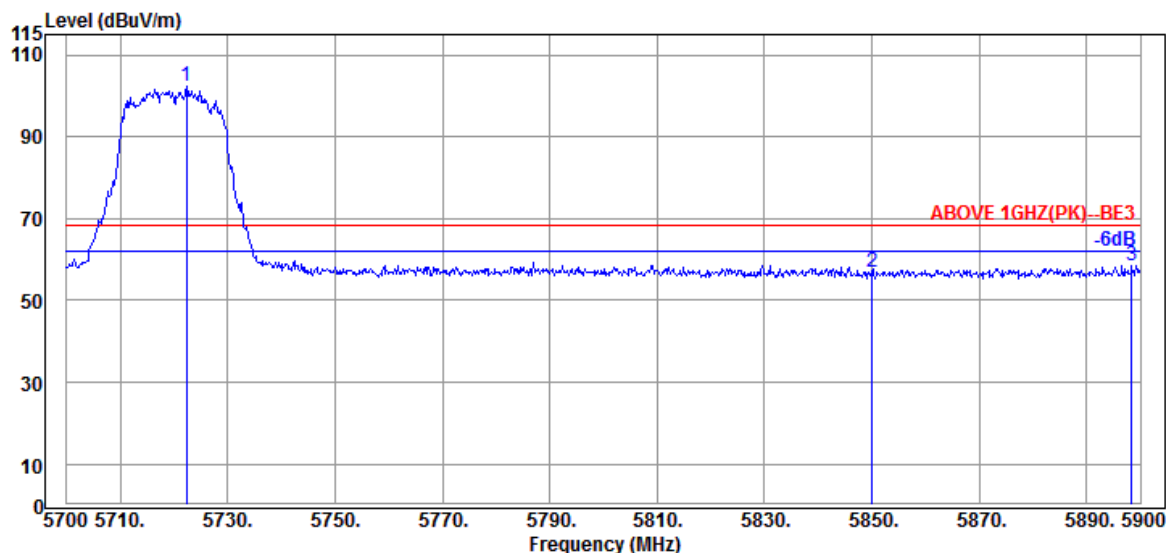

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5722.400	34.57	9.42	34.32	92.67	102.34	---	---	Peak
5850.000	34.60	9.52	34.38	46.98	56.72	68.20	11.48	Peak
5898.400	34.60	9.56	34.40	48.82	58.58	68.20	9.62	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

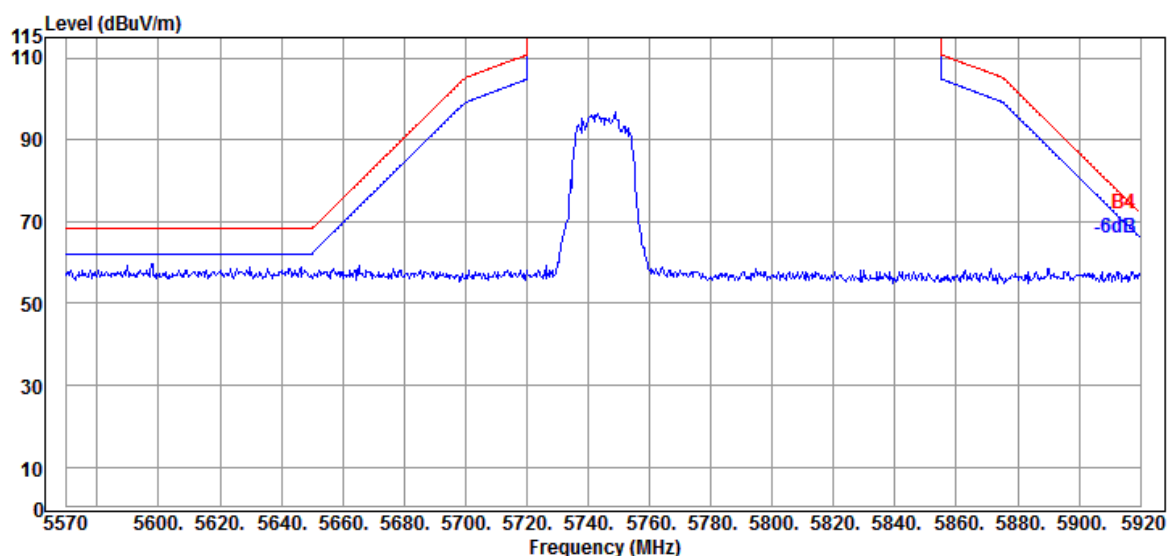

Antenna at Vertical Polarization

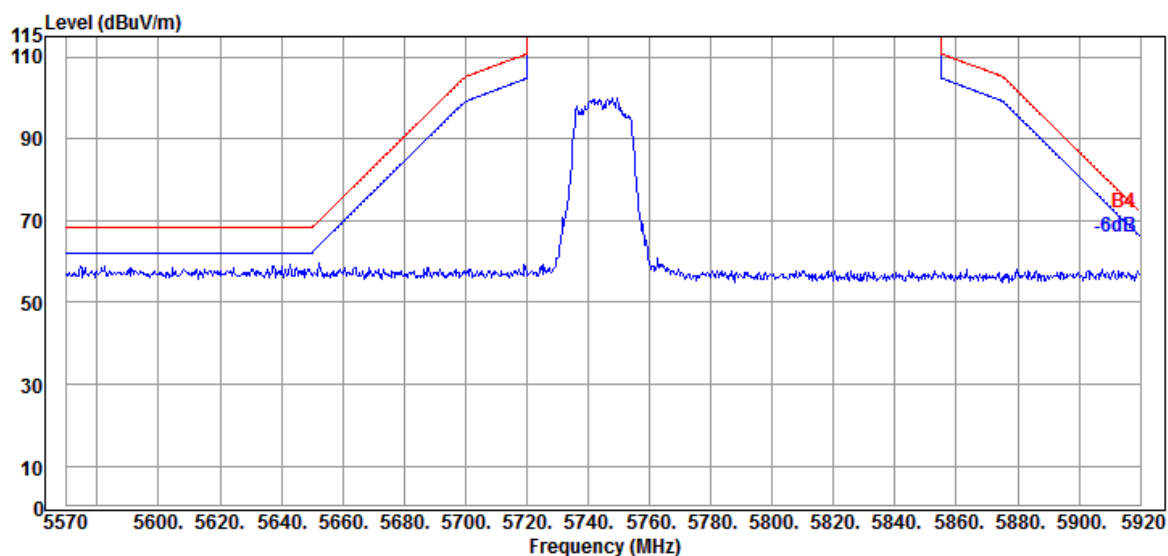


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE20	U-NII Band	3
		Frequency	TX 5825MHz


Antenna at Horizontal Polarization

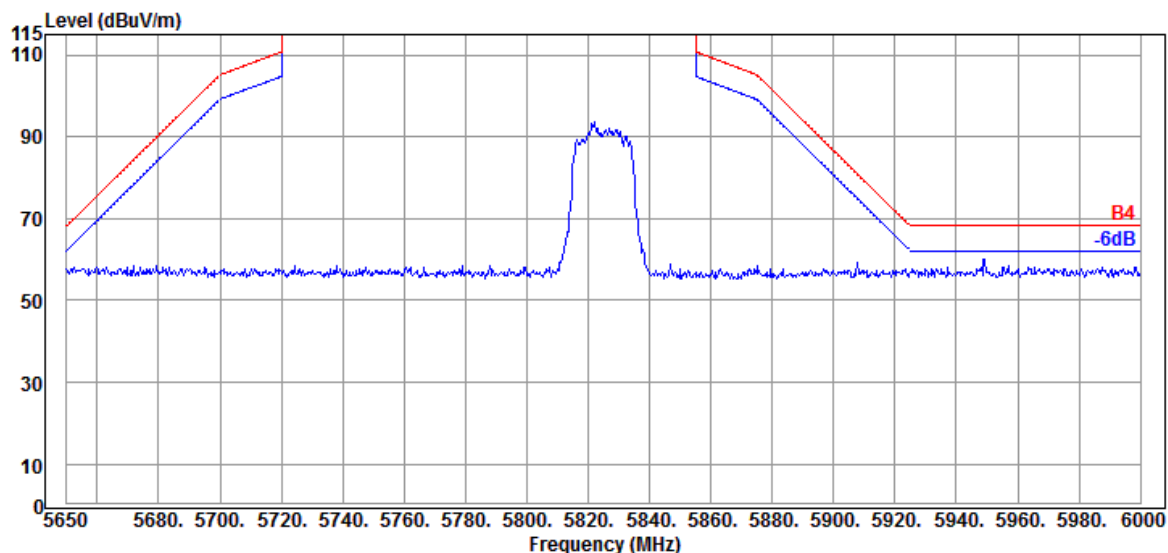

Antenna at Vertical Polarization

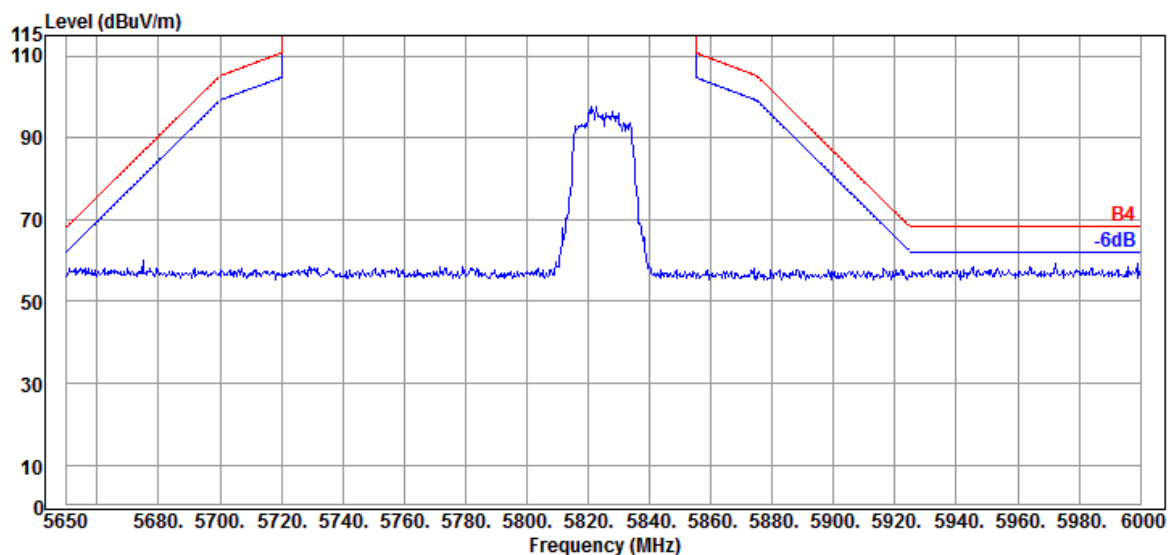


Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

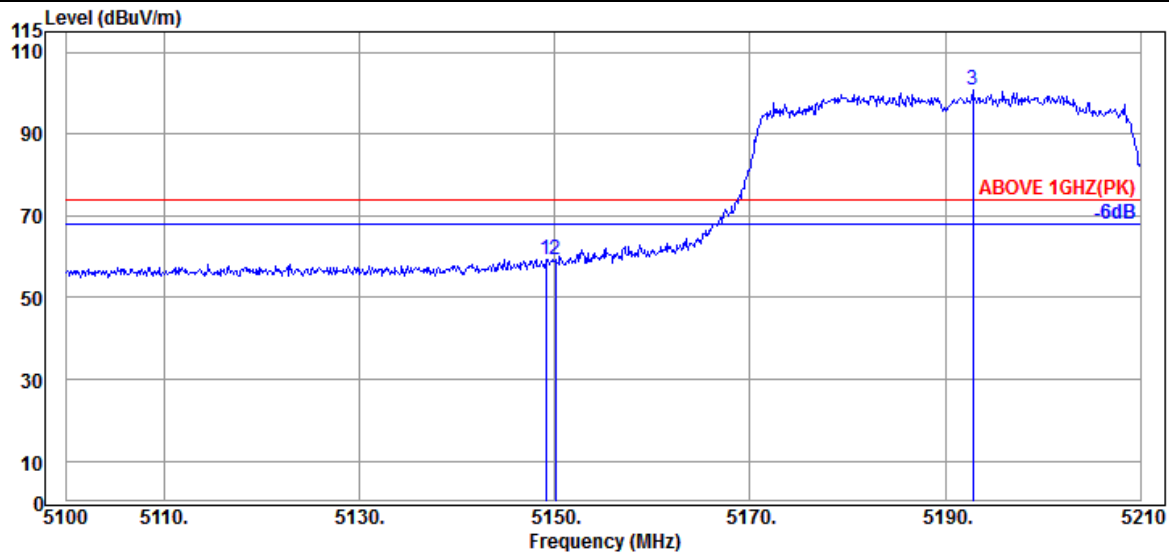

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	34.35	50.68	59.45	74.00	14.55	Peak
5150.050	34.20	8.92	34.35	50.47	59.24	74.00	14.76	Peak
@ 5192.840	34.40	8.96	34.34	91.92	100.94	---	---	Peak

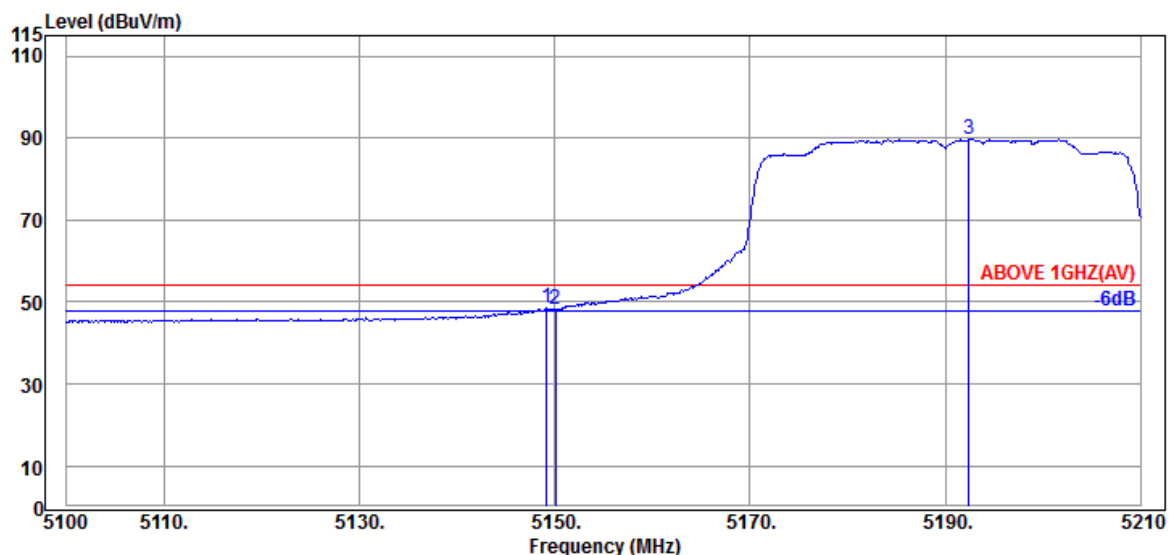

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.170	34.20	8.92	34.35	39.70	48.47	54.00	5.53	Average
5150.050	34.20	8.92	34.35	39.36	48.13	54.00	5.87	Average
@ 5192.400	34.40	8.96	34.34	80.70	89.72	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

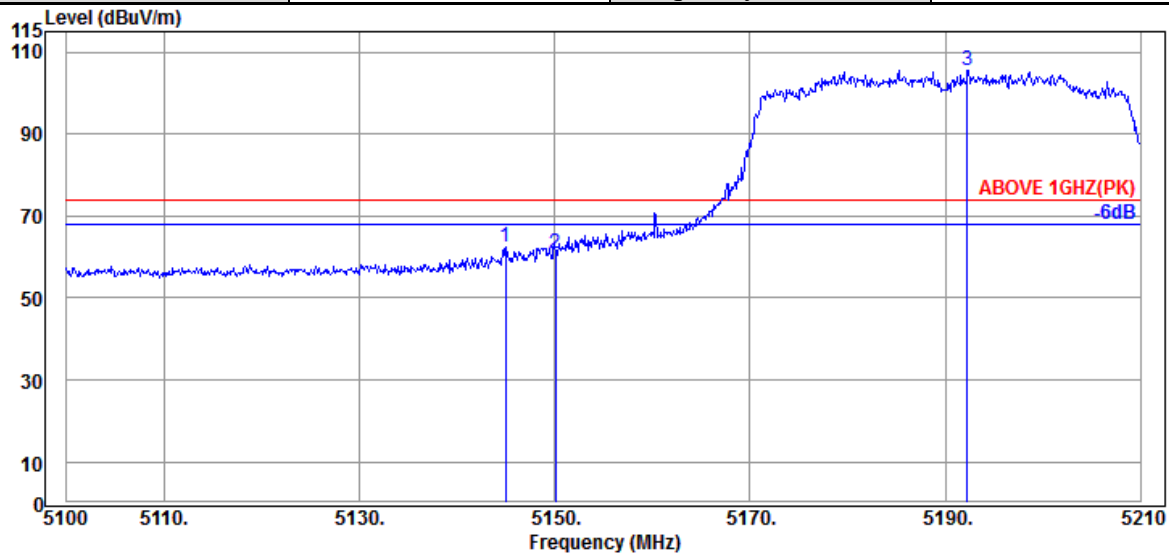

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.990	34.20	8.92	34.35	53.55	62.32	74.00	11.68	Peak
5150.050	34.20	8.92	34.35	52.13	60.90	74.00	13.10	Peak
@ 5192.290	34.40	8.96	34.34	96.48	105.50	---	---	Peak

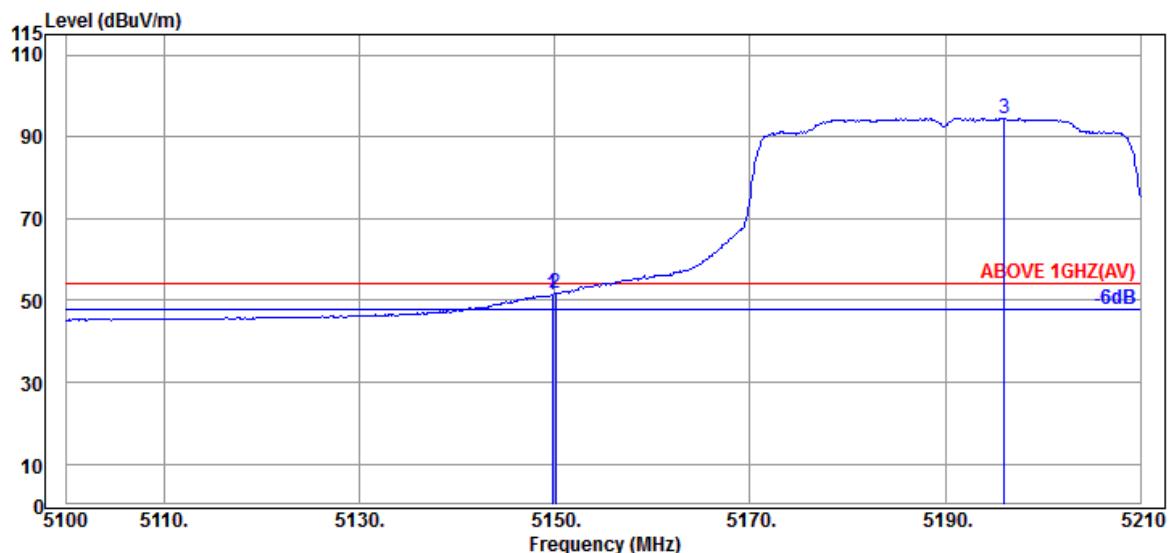

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.720	34.20	8.92	34.35	42.66	51.43	54.00	2.57	Average
5150.050	34.20	8.92	34.35	42.82	51.59	54.00	2.41	Average
@ 5196.030	34.40	8.96	34.33	85.52	94.55	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

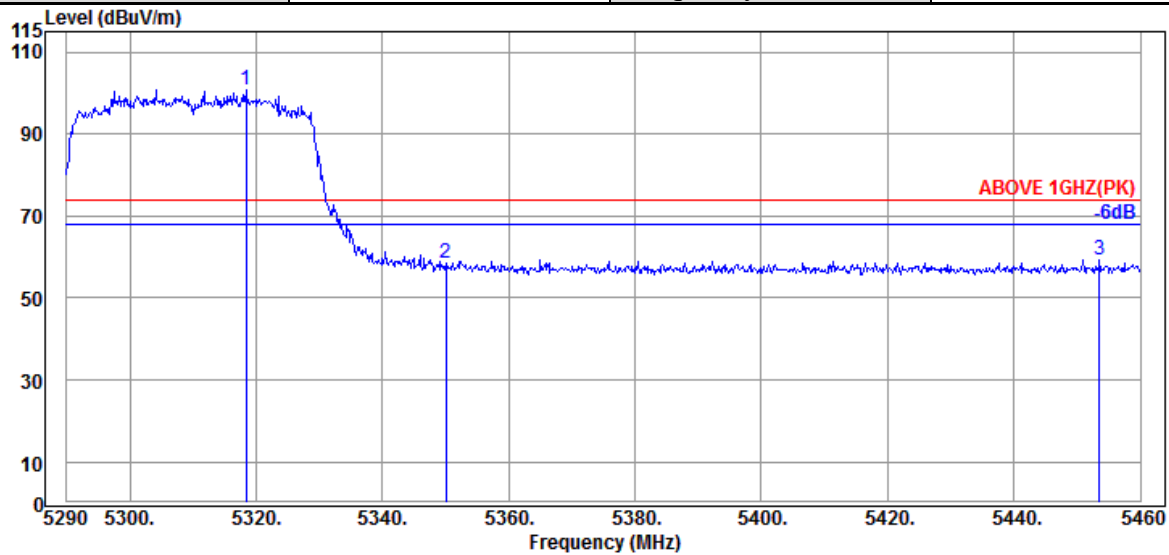

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.390	34.60	9.07	34.29	91.44	100.82	---	---	Peak
	5350.010	34.80	9.10	34.27	48.88	58.51	74.00	15.49	Peak
	5453.540	35.00	9.18	34.24	49.43	59.37	74.00	14.63	Peak

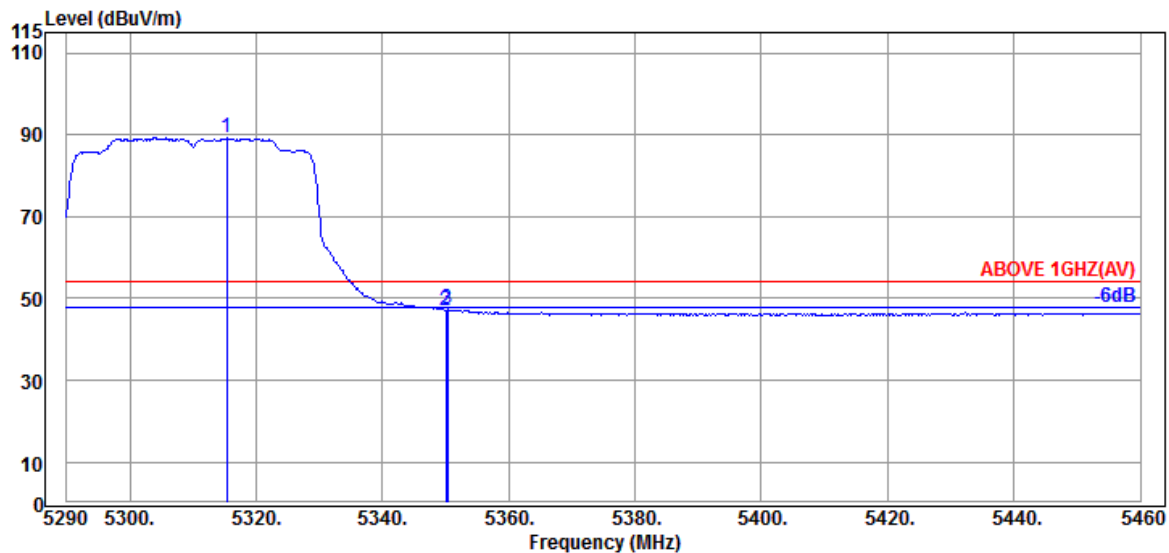

Antenna at Horizontal Polarization


	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5315.330	34.60	9.07	34.29	79.81	89.19	---	---	Average
	5350.010	34.80	9.10	34.27	37.54	47.17	54.00	6.83	Average
	5350.350	34.80	9.10	34.27	37.86	47.49	54.00	6.51	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5310MHz

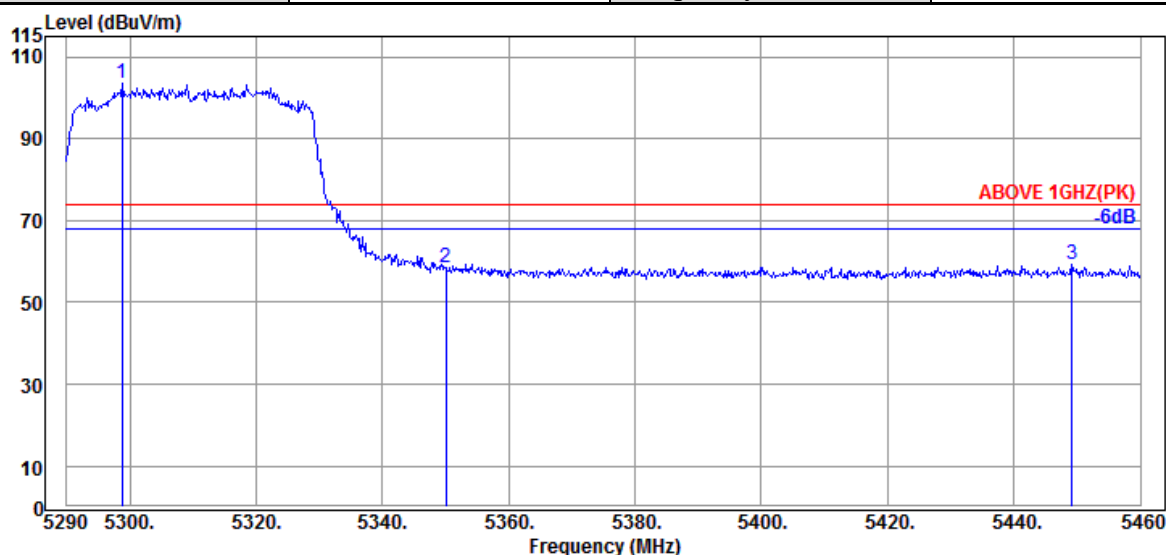

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.840	34.50	9.05	34.29	94.11	103.37	---	---	Peak
5350.010	34.80	9.10	34.27	49.00	58.63	74.00	15.37	Peak
5449.120	35.00	9.18	34.25	49.53	59.46	74.00	14.54	Peak

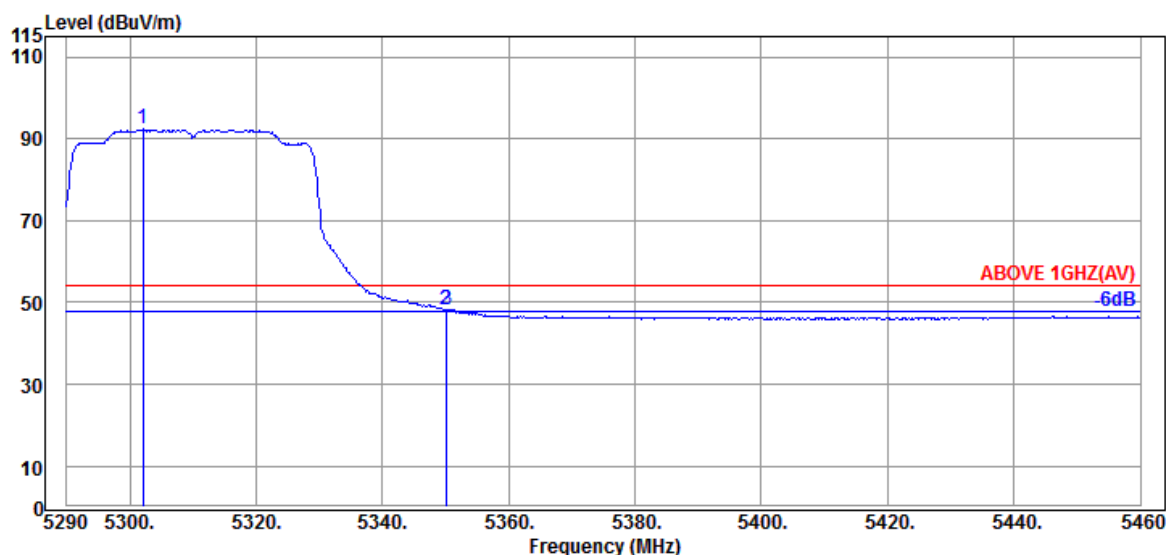

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5302.070	34.50	9.05	34.29	83.18	92.44	---	---	Average
5350.010	34.80	9.10	34.27	38.50	48.13	54.00	5.87	Average
5350.180	34.80	9.10	34.27	38.67	48.30	54.00	5.70	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

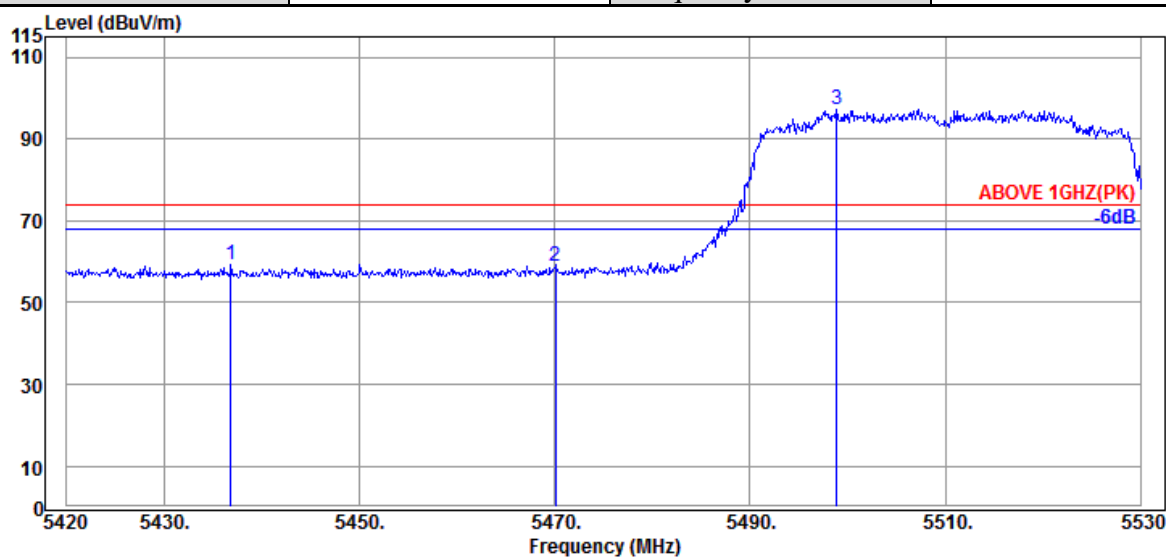

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.830	35.00	9.17	34.25	49.53	59.45	74.00	14.55	Peak
5470.050	34.97	9.20	34.24	49.04	58.97	74.00	15.03	Peak
@ 5498.870	34.90	9.23	34.23	87.23	97.13	---	---	Peak

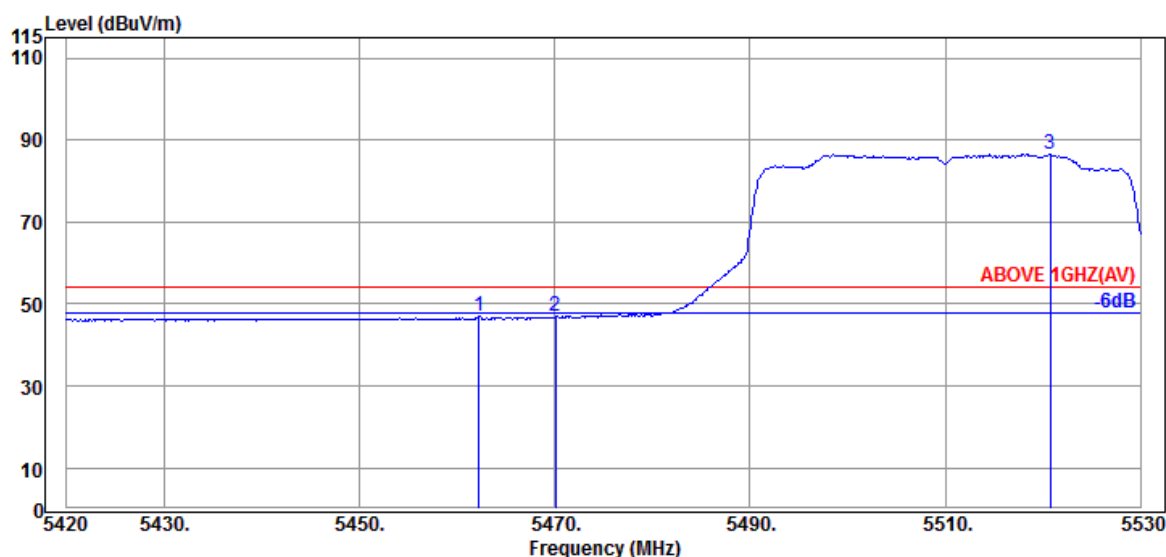

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.240	35.00	9.18	34.24	36.96	46.90	54.00	7.10	Average
5470.050	34.97	9.20	34.24	36.95	46.88	54.00	7.12	Average
@ 5520.760	34.87	9.24	34.24	76.59	86.46	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5510MHz

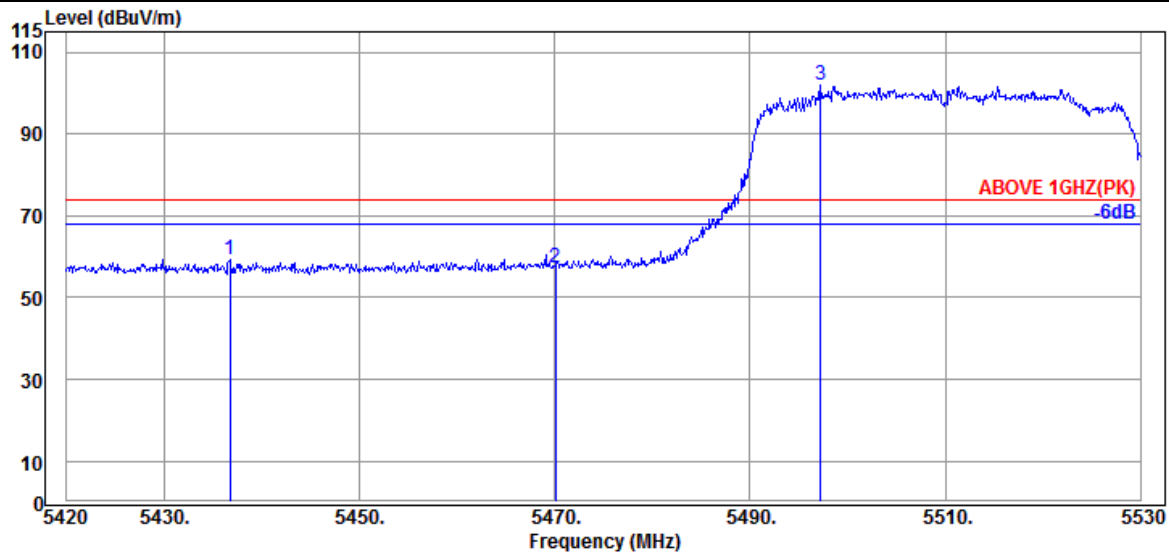

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5436.720	35.00	9.17	34.25	49.38	59.30	74.00	14.70	Peak
5470.050	34.97	9.20	34.24	47.32	57.25	74.00	16.75	Peak
@ 5497.220	34.90	9.23	34.23	92.00	101.90	---	---	Peak

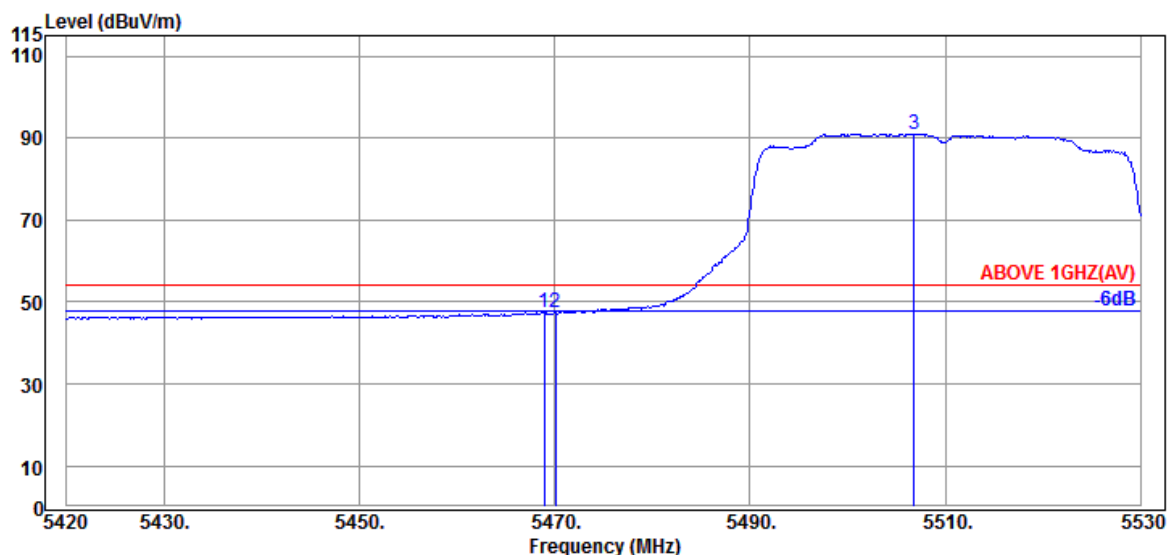

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.950	34.97	9.20	34.24	37.52	47.45	54.00	6.55	Average
5470.050	34.97	9.20	34.24	37.30	47.23	54.00	6.77	Average
@ 5506.790	34.90	9.23	34.24	81.15	91.04	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5670MHz

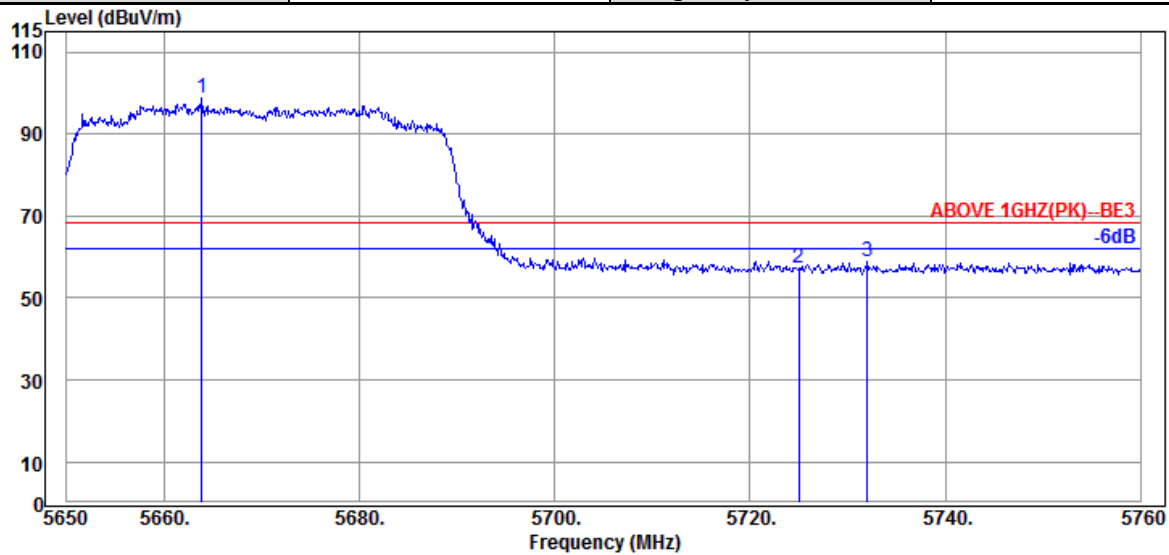

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.860	34.63	9.36	34.30	89.15	98.84	---	---	Peak
5725.020	34.57	9.42	34.32	47.83	57.50	68.20	10.70	Peak
5732.060	34.57	9.42	34.33	49.33	58.99	68.20	9.21	Peak

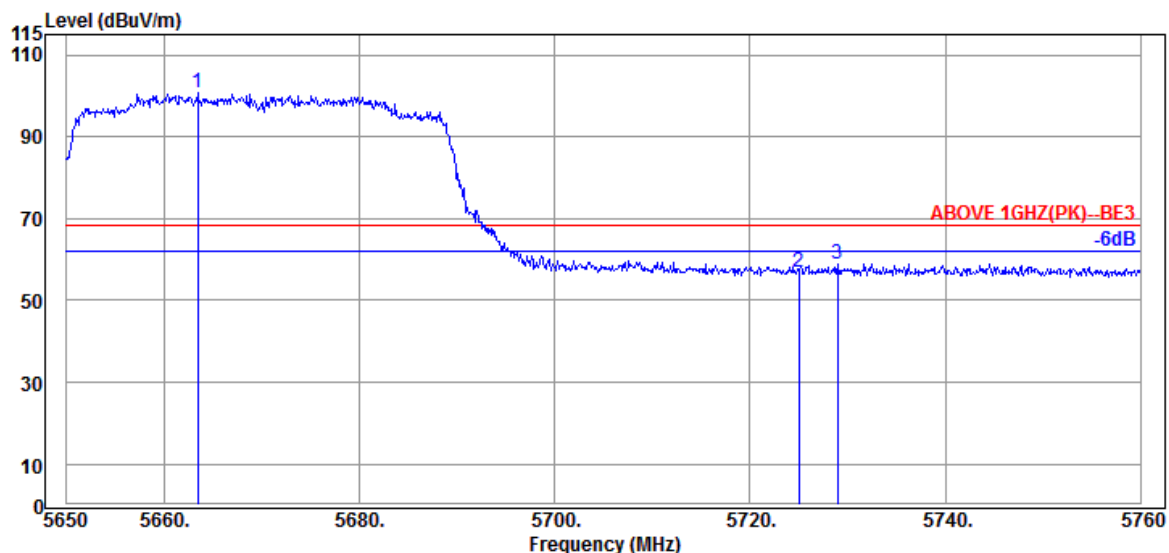

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5663.420	34.63	9.36	34.30	91.04	100.73	---	---	Peak
5725.020	34.57	9.42	34.32	47.31	56.98	68.20	11.22	Peak
5728.980	34.57	9.42	34.32	49.30	58.97	68.20	9.23	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

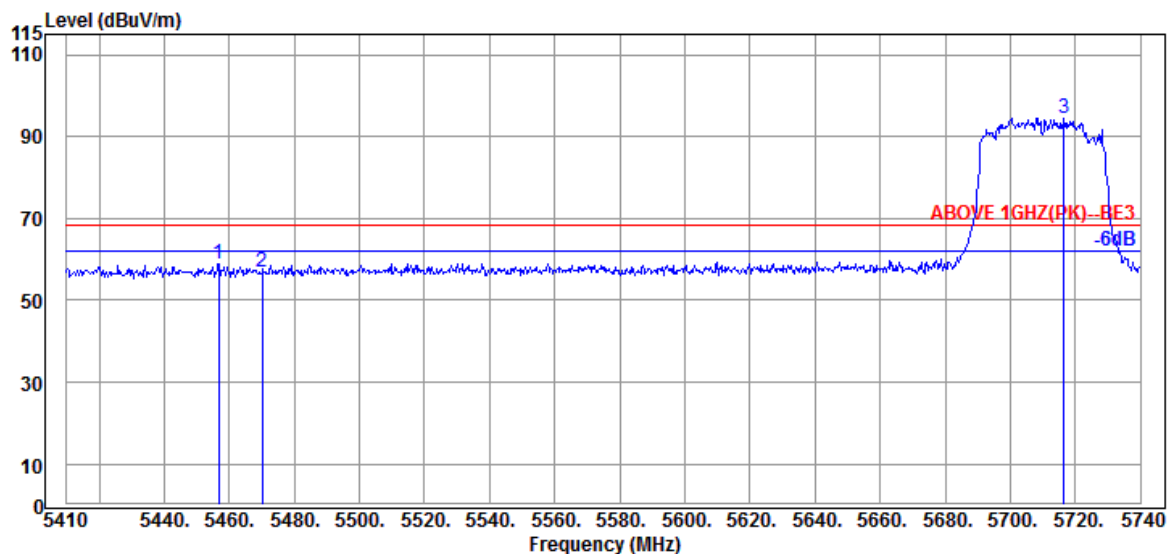

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5456.860	35.00	9.18	34.24	48.83	58.77	68.20	9.43	Peak
5470.060	34.97	9.20	34.24	47.06	56.99	68.20	11.21	Peak
@ 5716.570	34.53	9.40	34.32	84.85	94.46	---	---	Peak

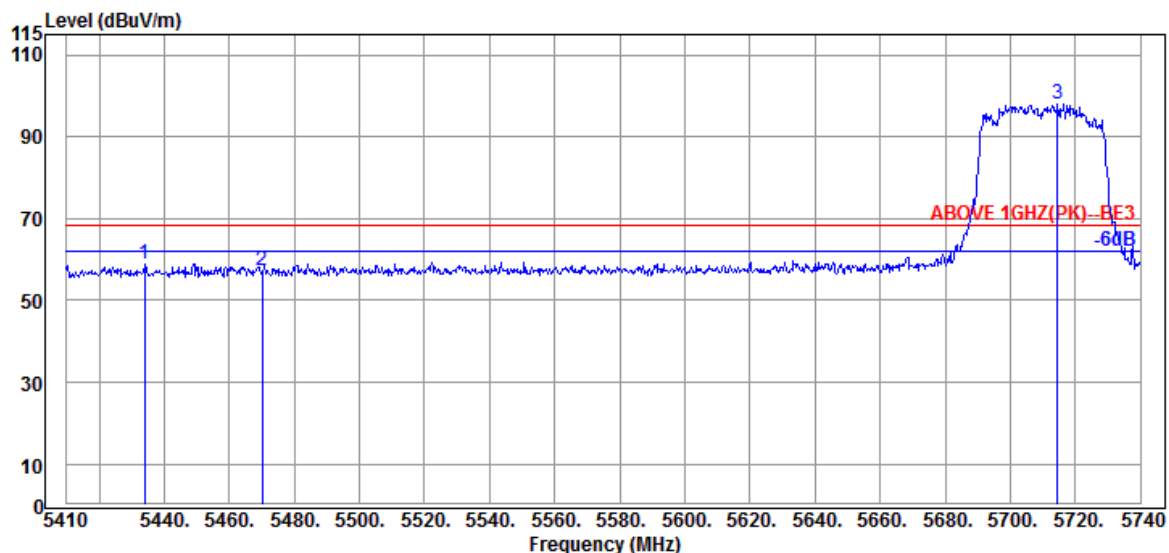

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.090	35.00	9.17	34.25	49.10	59.02	68.20	9.18	Peak
5470.060	34.97	9.20	34.24	47.48	57.41	68.20	10.79	Peak
@ 5714.590	34.53	9.40	34.32	88.54	98.15	---	---	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

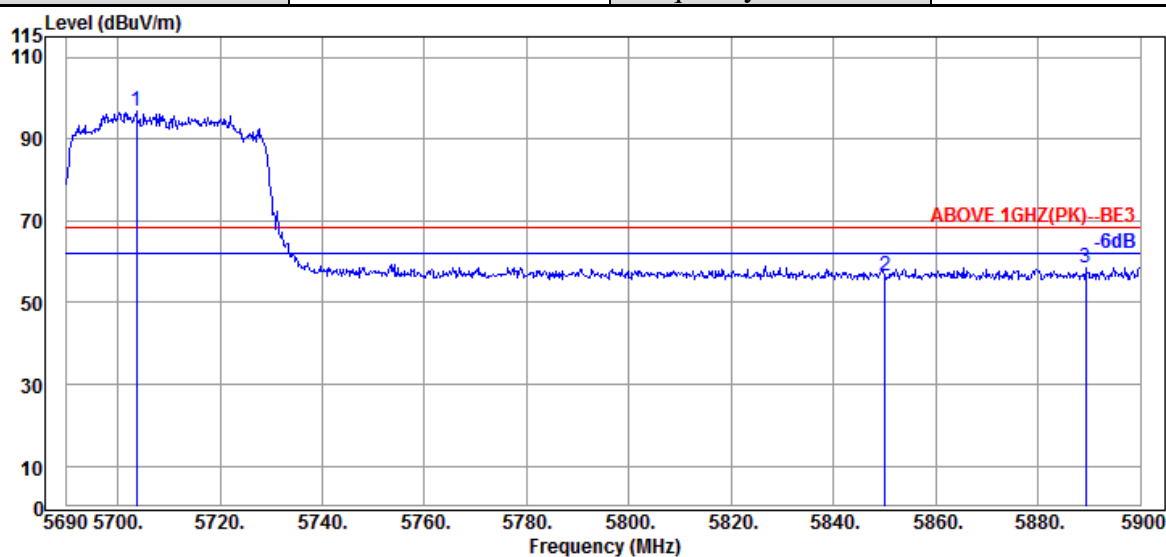

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5703.650	34.50	9.40	34.31	87.27	96.86	---	---	Peak
	5850.020	34.60	9.52	34.38	46.60	56.34	68.20	11.86	Peak
	5889.290	34.60	9.56	34.40	48.87	58.63	68.20	9.57	Peak

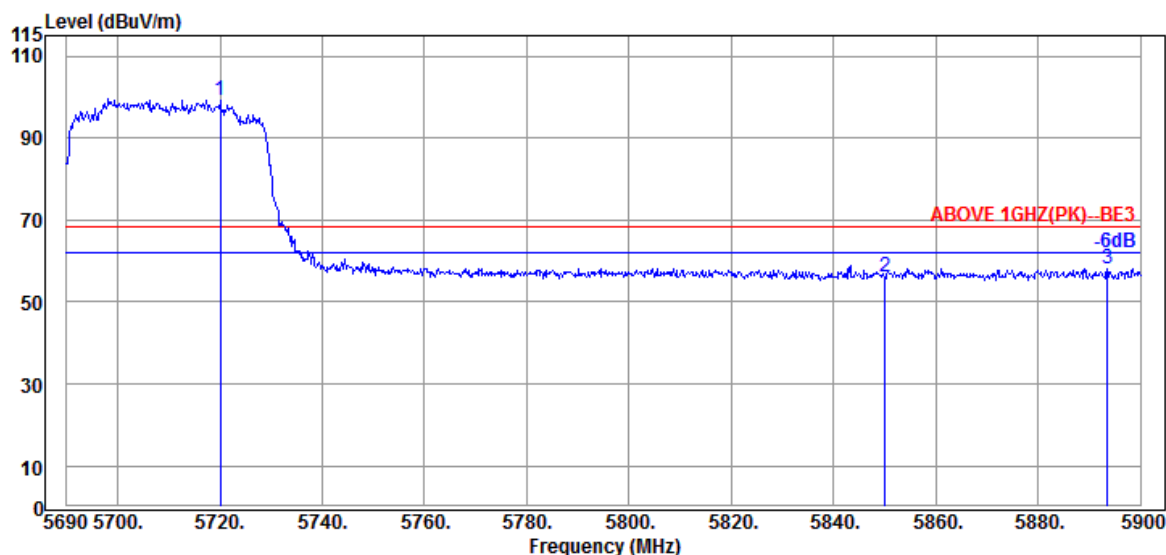

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5720.030	34.53	9.42	34.32	89.59	99.22	---	---	Peak
	5850.020	34.60	9.52	34.38	46.52	56.26	68.20	11.94	Peak
	5893.490	34.60	9.56	34.40	48.42	58.18	68.20	10.02	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

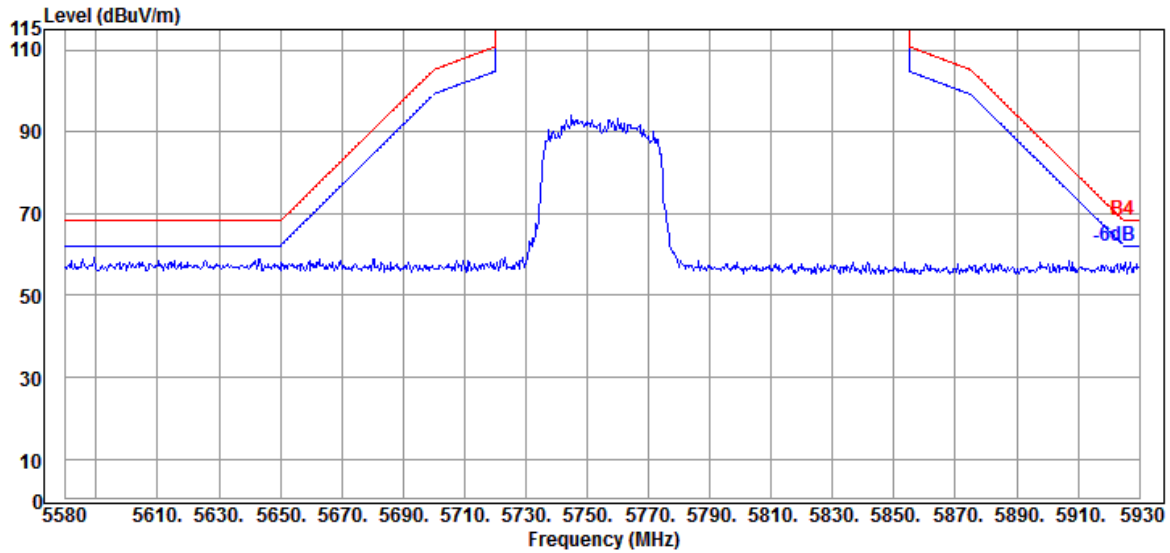

Antenna at Vertical Polarization

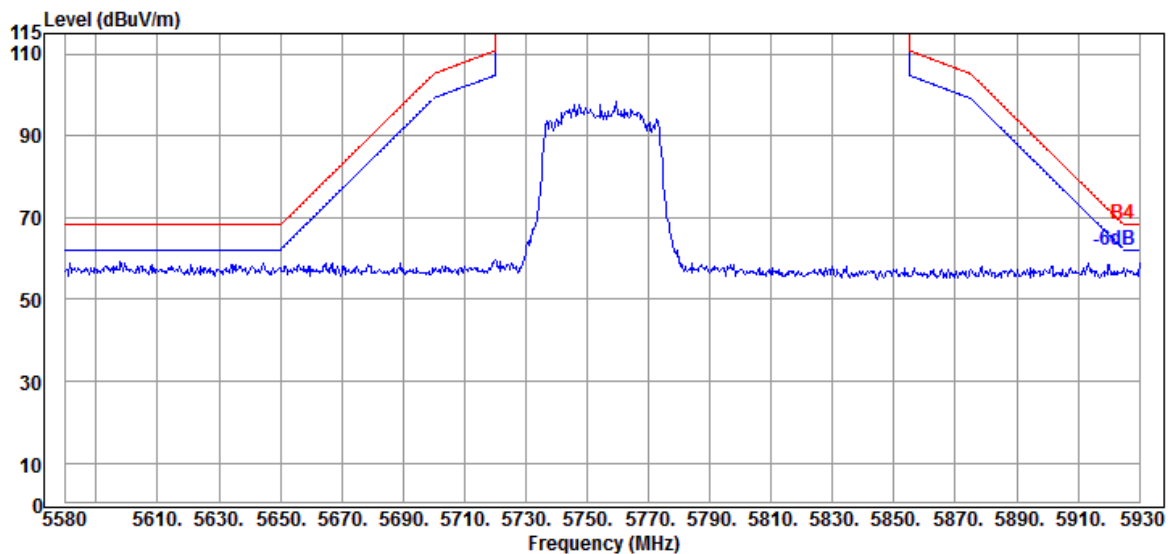


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5795MHz

Antenna at Horizontal Polarization

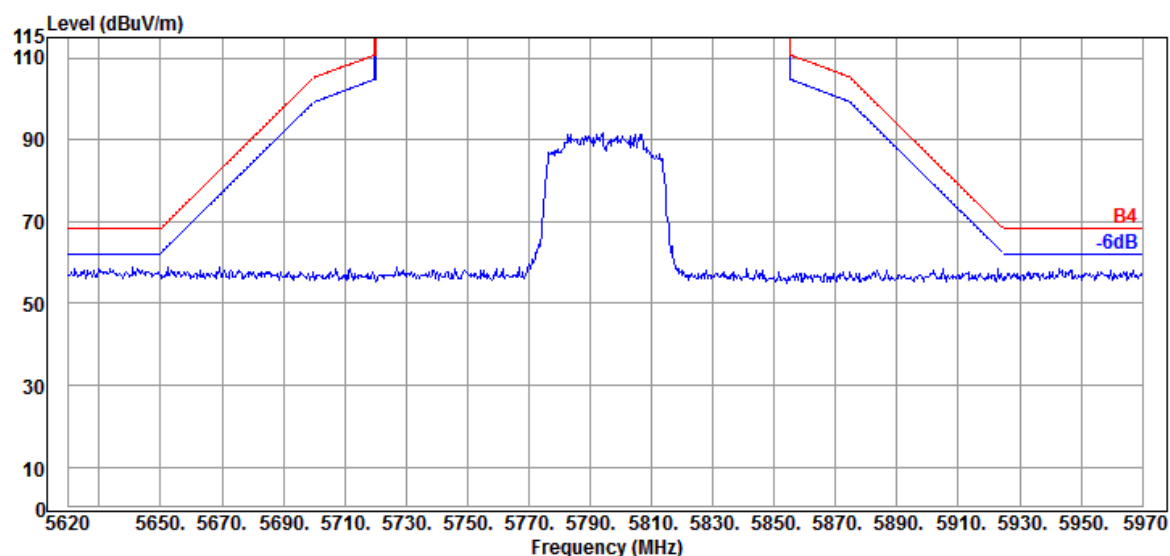


Antenna at Vertical Polarization

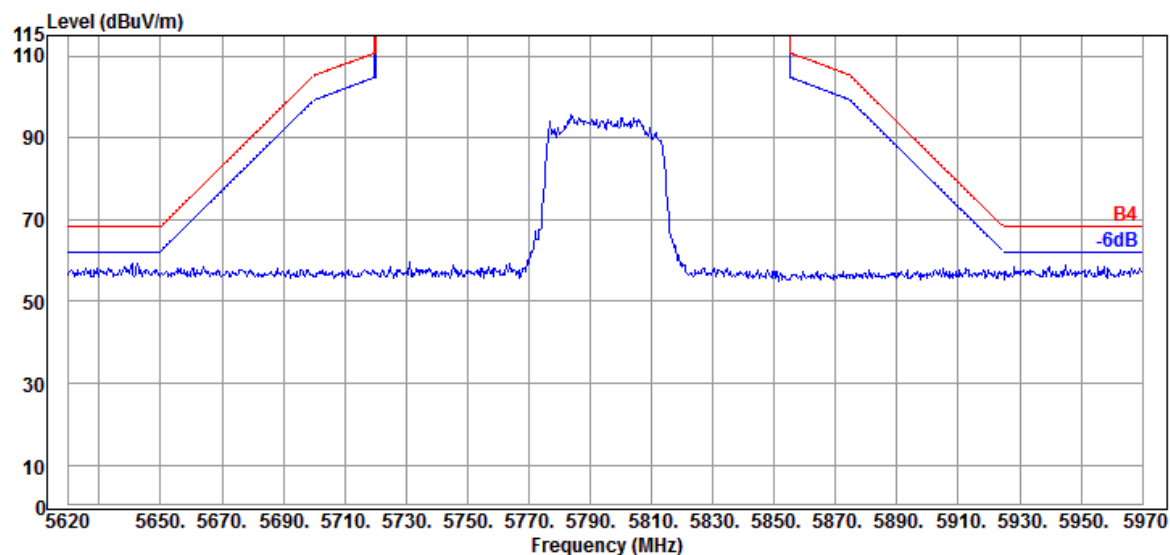

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

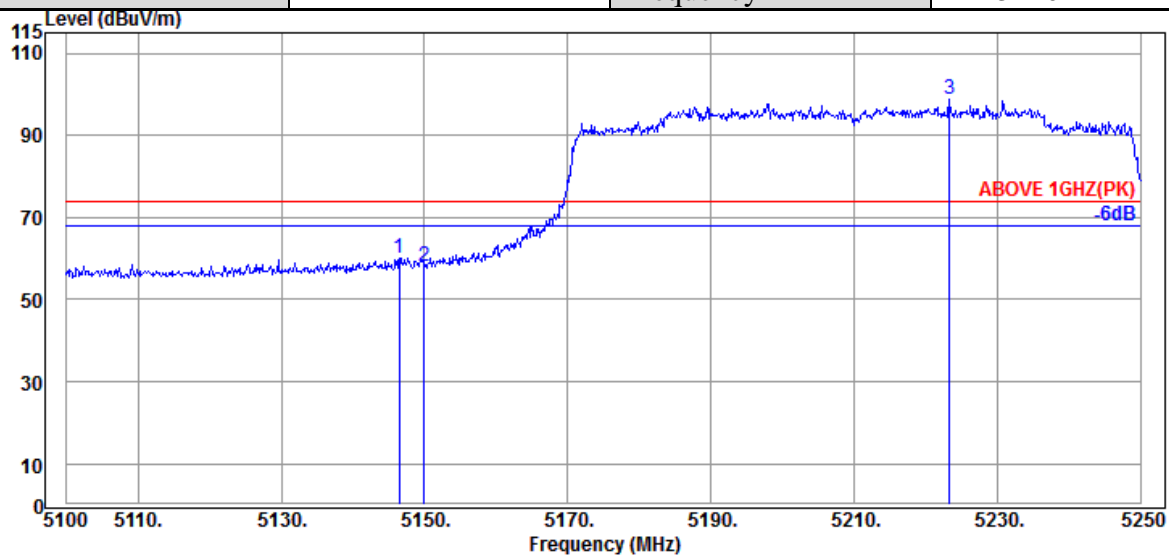

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.500	34.20	8.92	34.35	51.30	60.07	74.00	13.93	Peak
5149.950	34.20	8.92	34.35	49.25	58.02	74.00	15.98	Peak
@ 5223.300	34.40	8.98	34.32	89.81	98.87	---	---	Peak

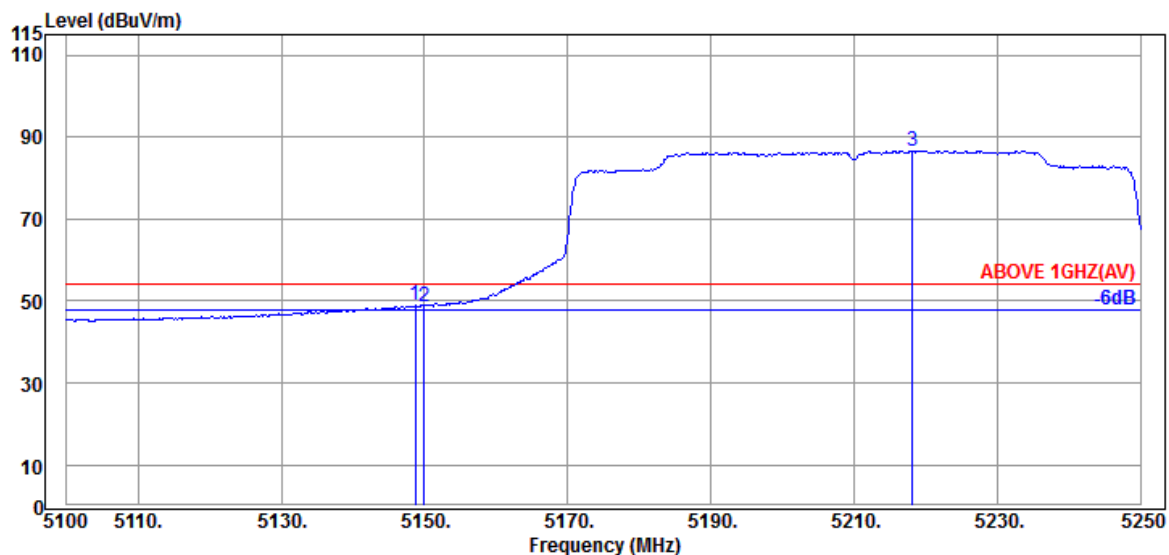

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.750	34.20	8.92	34.35	40.15	48.92	54.00	5.08	Average
5149.950	34.20	8.92	34.35	40.01	48.78	54.00	5.22	Average
@ 5218.200	34.40	8.98	34.33	77.64	86.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

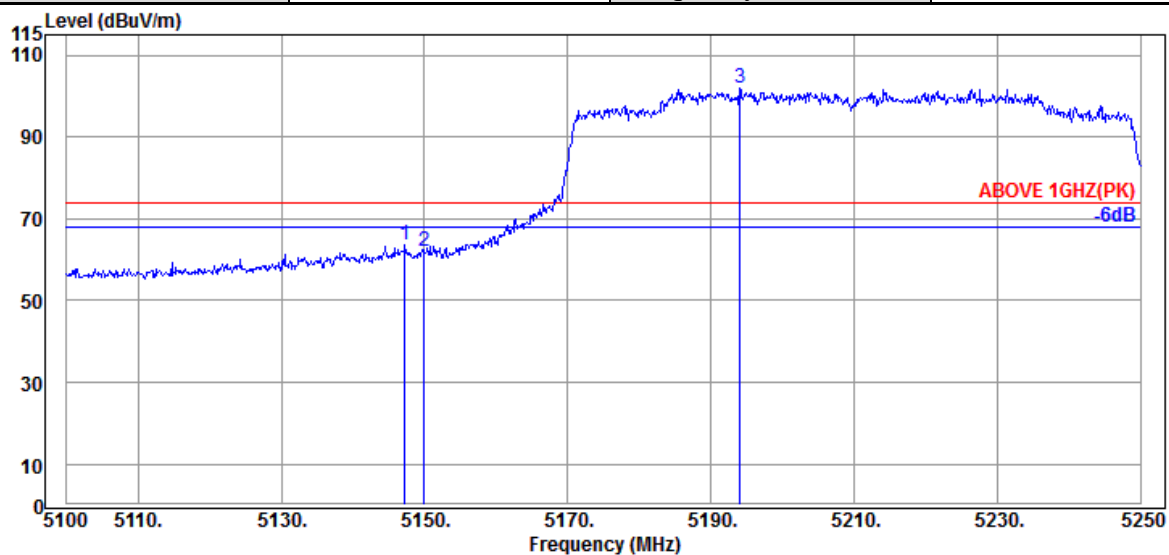

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.250	34.20	8.92	34.35	54.76	63.53	74.00	10.47	Peak
5149.950	34.20	8.92	34.35	53.26	62.03	74.00	11.97	Peak
@ 5194.050	34.40	8.96	34.34	92.86	101.88	---	---	Peak

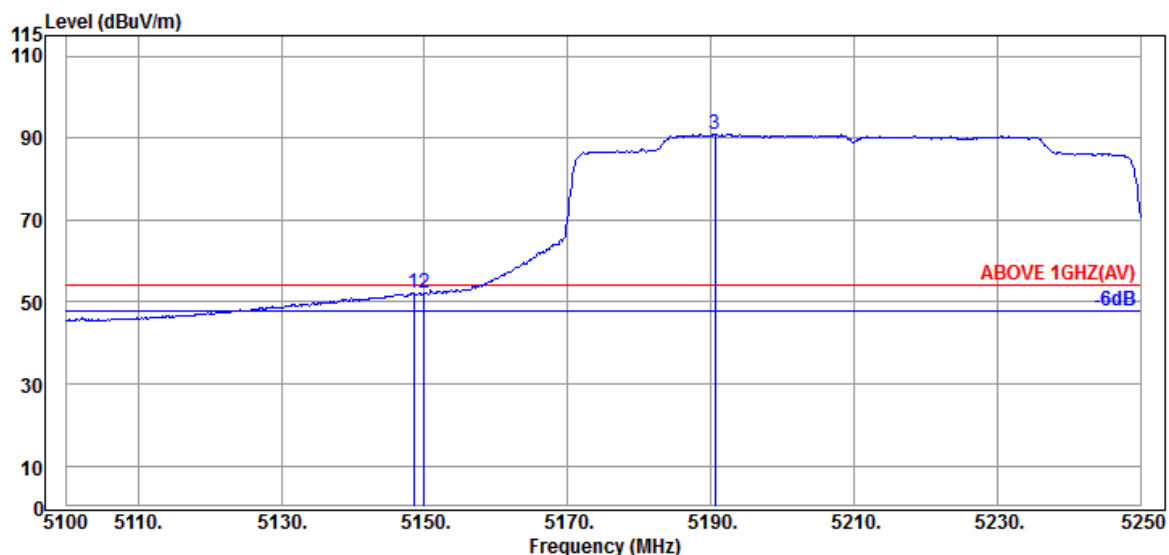

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.450	34.20	8.92	34.35	43.37	52.14	54.00	1.86	Average
5149.950	34.20	8.92	34.35	43.46	52.23	54.00	1.77	Average
@ 5190.600	34.40	8.96	34.34	81.87	90.89	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

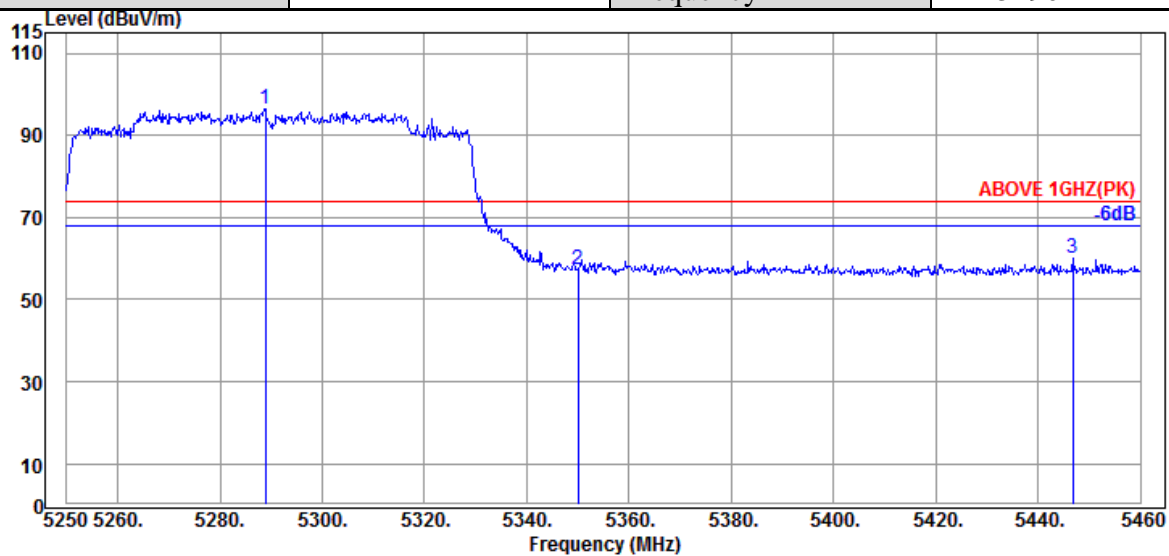

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5288.850	34.47	9.04	34.30	87.35	96.56	---	---	Peak
5349.960	34.80	9.10	34.27	47.81	57.44	74.00	16.56	Peak
5446.770	35.00	9.18	34.25	50.16	60.09	74.00	13.91	Peak

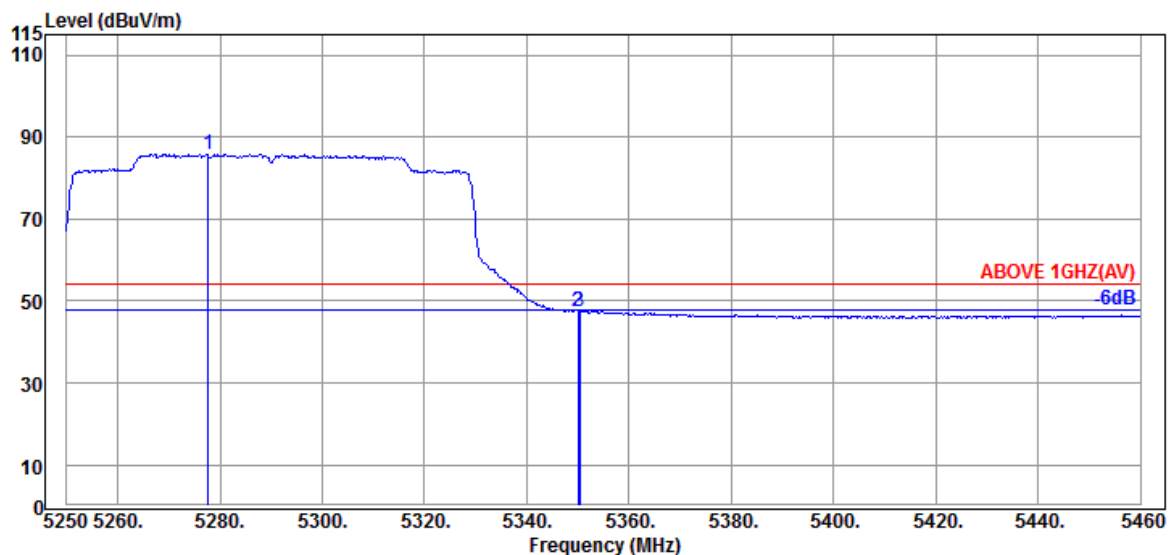

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5277.720	34.47	9.04	34.30	76.73	85.94	---	---	Average
5349.960	34.80	9.10	34.27	37.84	47.47	54.00	6.53	Average
5350.380	34.80	9.10	34.27	37.98	47.61	54.00	6.39	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

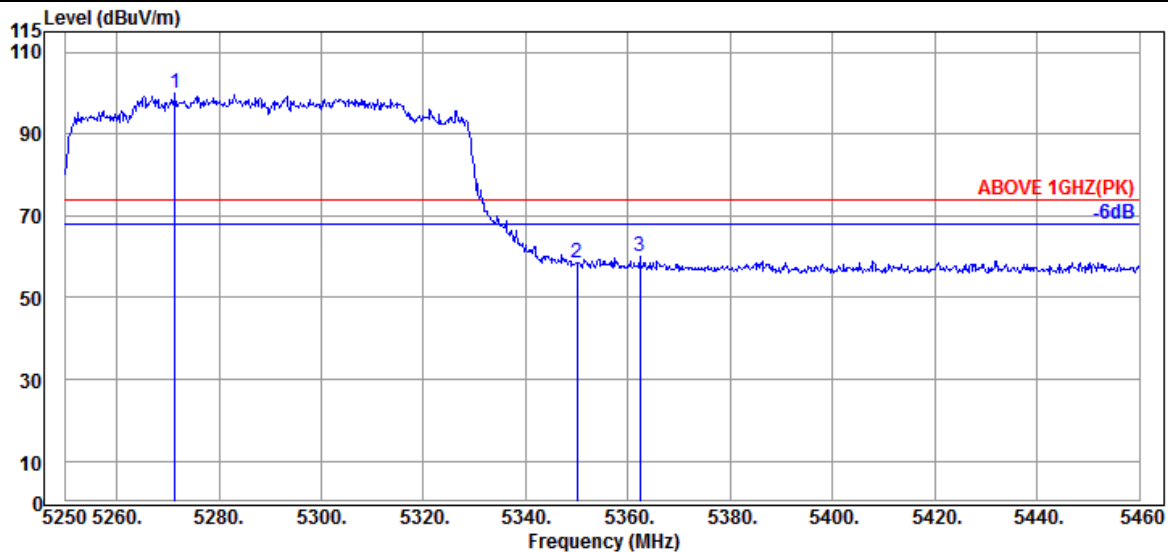

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5271.420	34.43	9.02	34.30	90.81	99.96	---	---	Peak
5349.960	34.80	9.10	34.27	48.80	58.43	74.00	15.57	Peak
5362.350	34.87	9.11	34.27	50.29	60.00	74.00	14.00	Peak

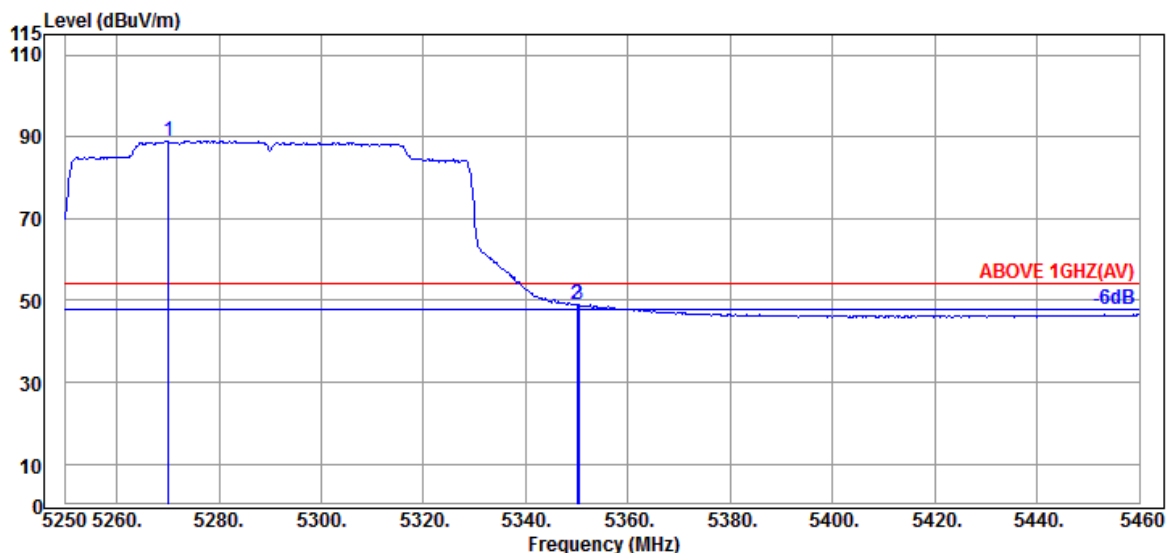


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5270.160	34.43	9.02	34.31	79.93	89.07	---	---	Average
5349.960	34.80	9.10	34.27	39.21	48.84	54.00	5.16	Average
5350.380	34.80	9.10	34.27	39.35	48.98	54.00	5.02	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

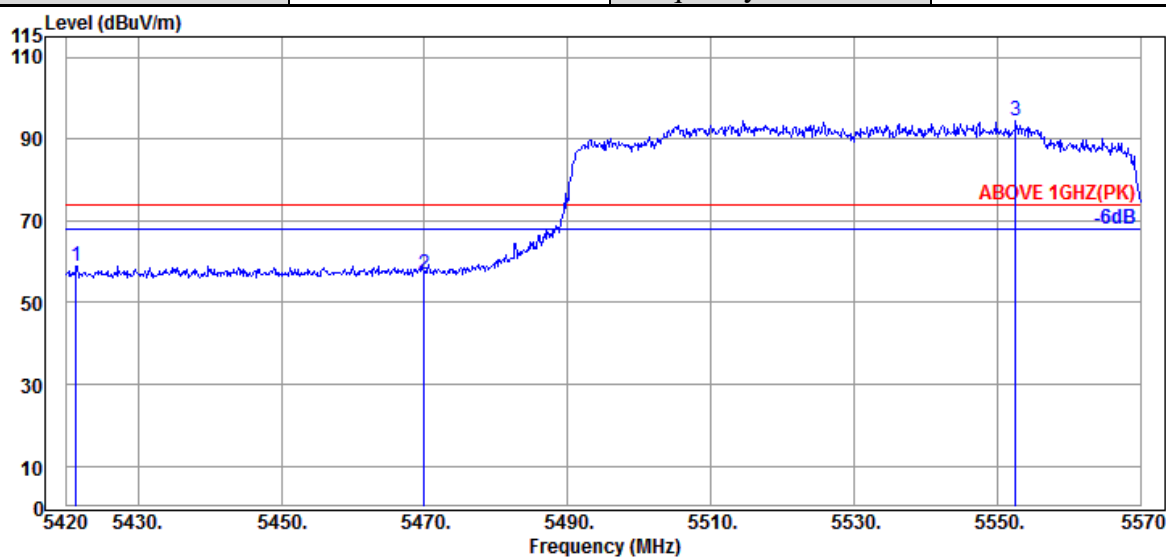

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5421.350	35.00	9.15	34.26	49.02	58.91	74.00	15.09	Peak
5469.950	34.97	9.20	34.24	47.00	56.93	74.00	17.07	Peak
@ 5552.600	34.80	9.27	34.26	84.53	94.34	---	---	Peak

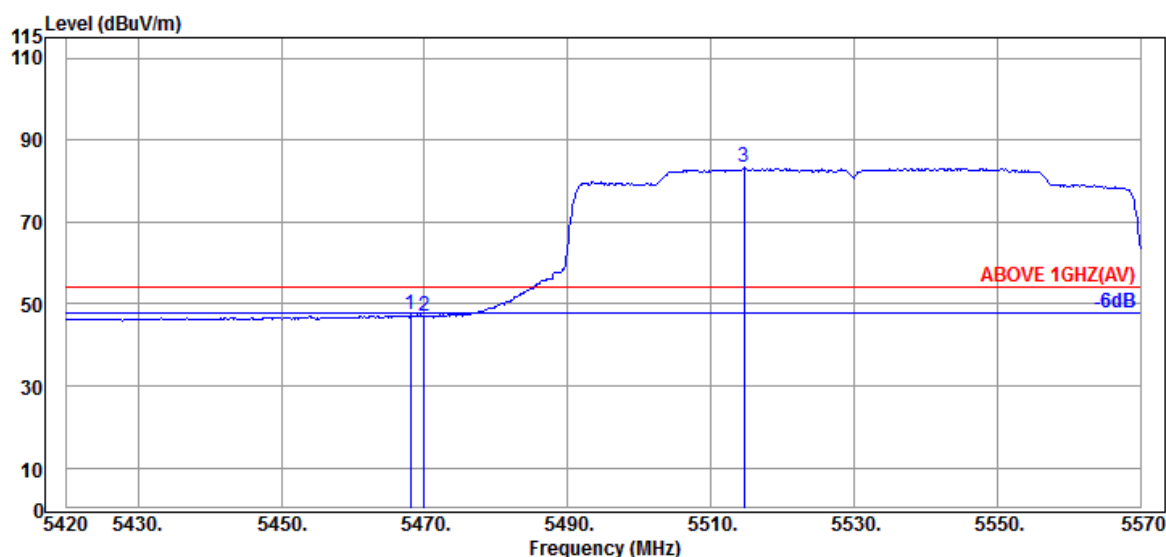

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.000	34.97	9.20	34.24	37.45	47.38	54.00	6.62	Average
5469.950	34.97	9.20	34.24	37.11	47.04	54.00	6.96	Average
@ 5514.650	34.87	9.24	34.24	73.35	83.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

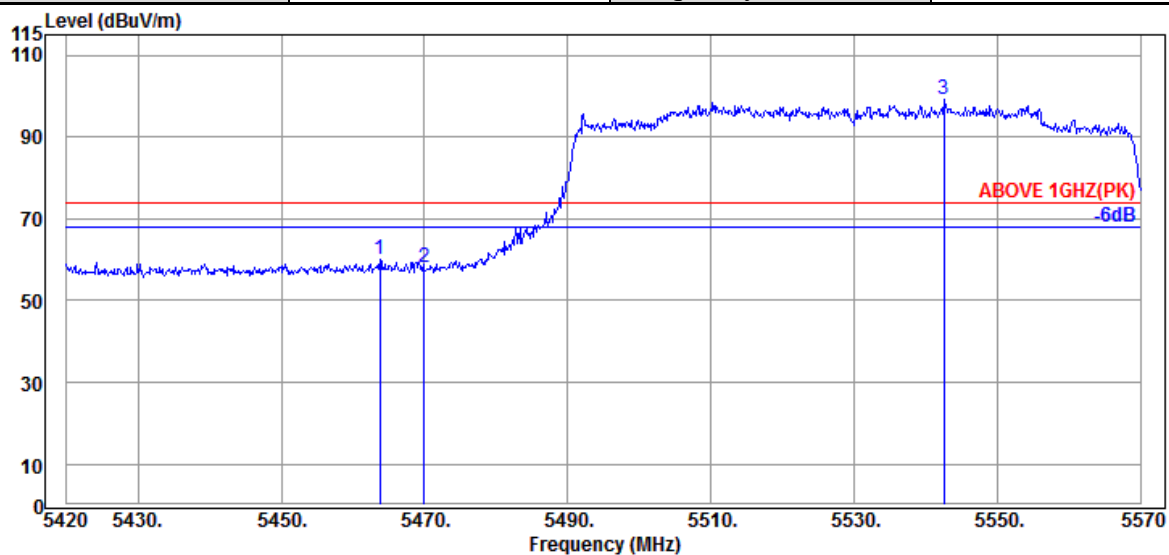

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.800	34.97	9.20	34.24	50.07	60.00	74.00	14.00	Peak
5469.950	34.97	9.20	34.24	48.00	57.93	74.00	16.07	Peak
@ 5542.550	34.83	9.26	34.25	89.40	99.24	---	---	Peak

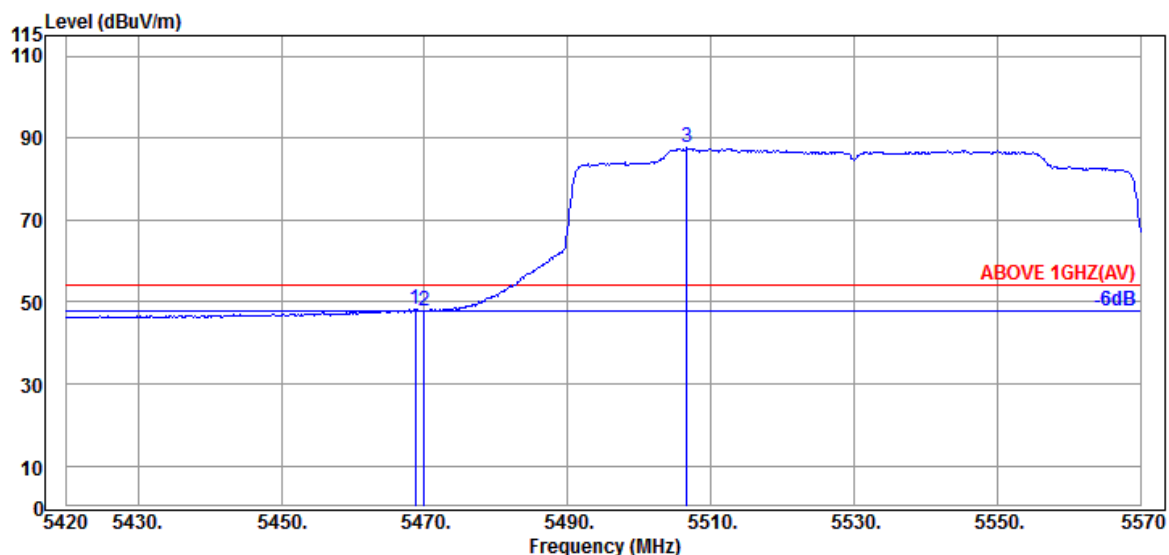

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.97	9.20	34.24	38.25	48.18	54.00	5.82	Average
5469.950	34.97	9.20	34.24	37.89	47.82	54.00	6.18	Average
@ 5506.700	34.90	9.23	34.24	77.72	87.61	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5610MHz

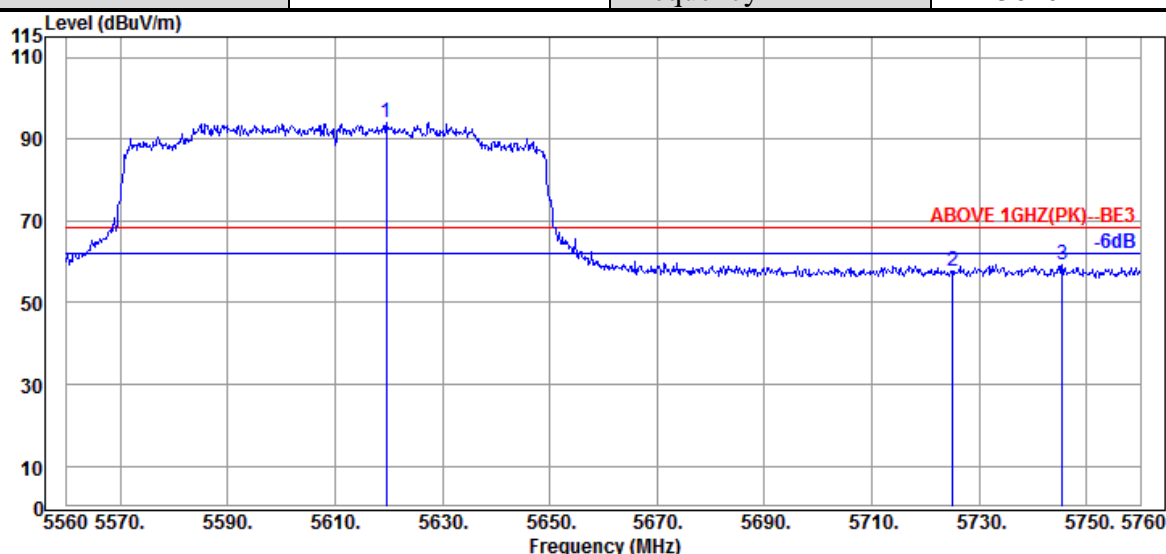

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5619.600	34.70	9.33	34.28	84.18	93.93	---	---	Peak
5725.000	34.57	9.42	34.32	48.04	57.71	68.20	10.49	Peak
5745.400	34.60	9.43	34.33	49.75	59.45	68.20	8.75	Peak

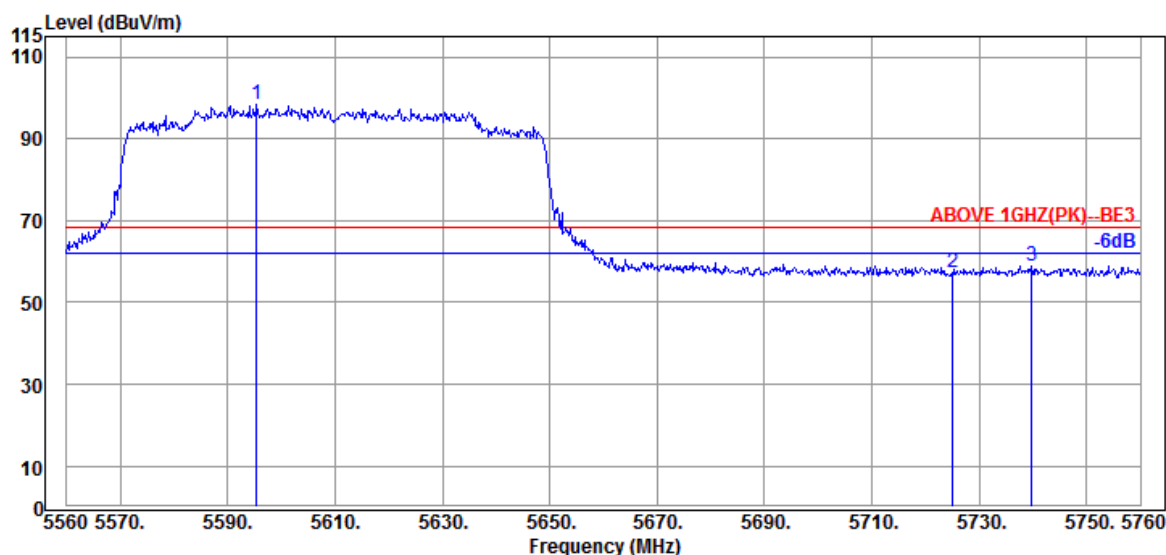

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5595.400	34.70	9.30	34.27	88.56	98.29	---	---	Peak
5725.000	34.57	9.42	34.32	47.75	57.42	68.20	10.78	Peak
5739.800	34.60	9.43	34.33	49.33	59.03	68.20	9.17	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

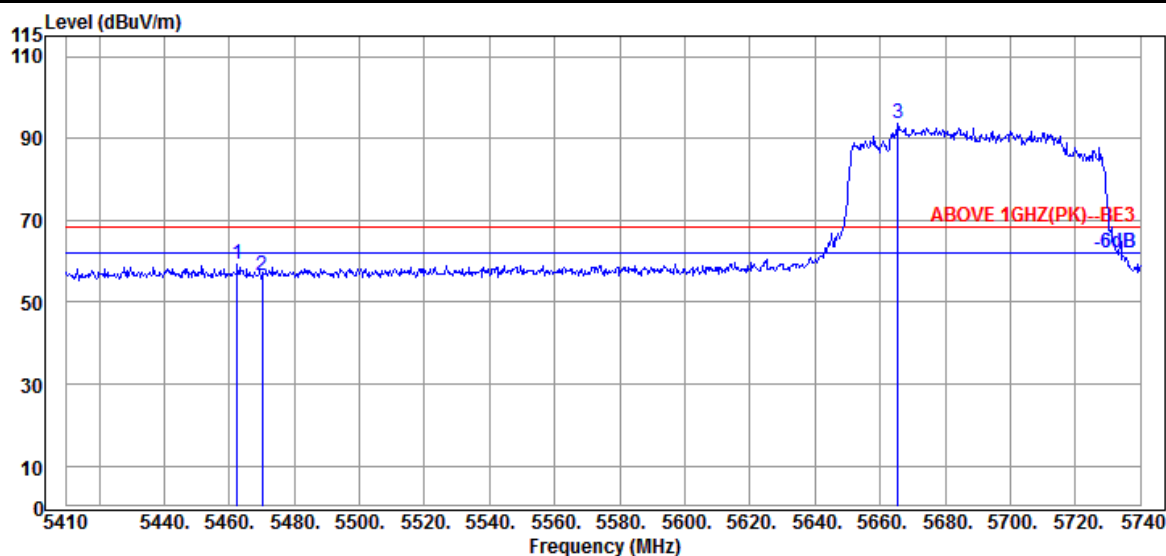

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5462.470	35.00	9.18	34.24	49.30	59.24	68.20	8.96	Peak
5470.060	34.97	9.20	34.24	46.76	56.69	68.20	11.51	Peak
@ 5665.420	34.63	9.36	34.30	83.94	93.63	---	---	Peak

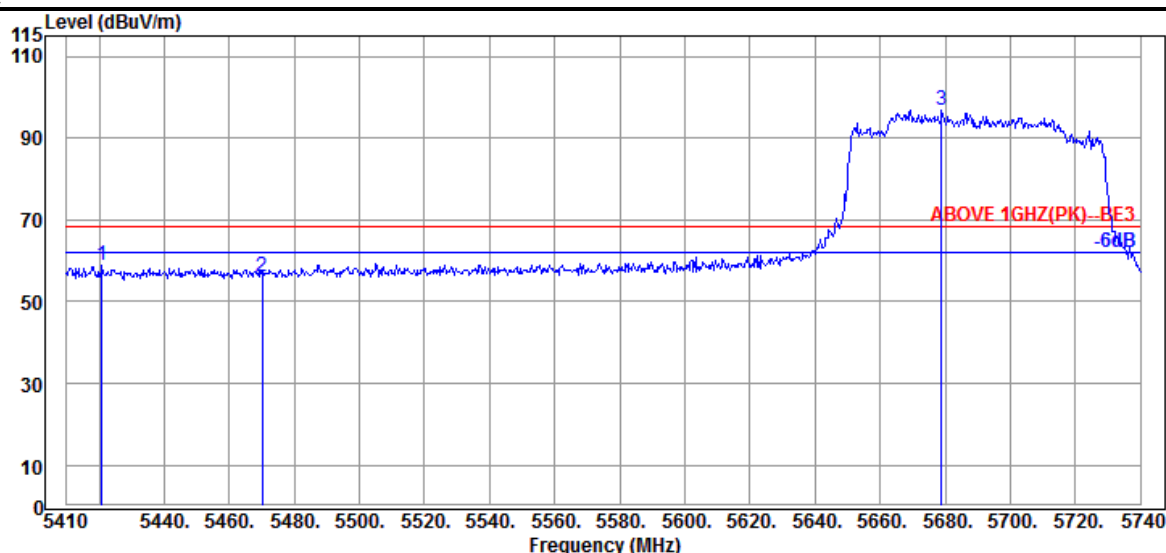

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5420.890	35.00	9.15	34.26	48.88	58.77	68.20	9.43	Peak
5470.060	34.97	9.20	34.24	46.30	56.23	68.20	11.97	Peak
@ 5678.950	34.57	9.37	34.30	87.37	97.01	---	---	Peak

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

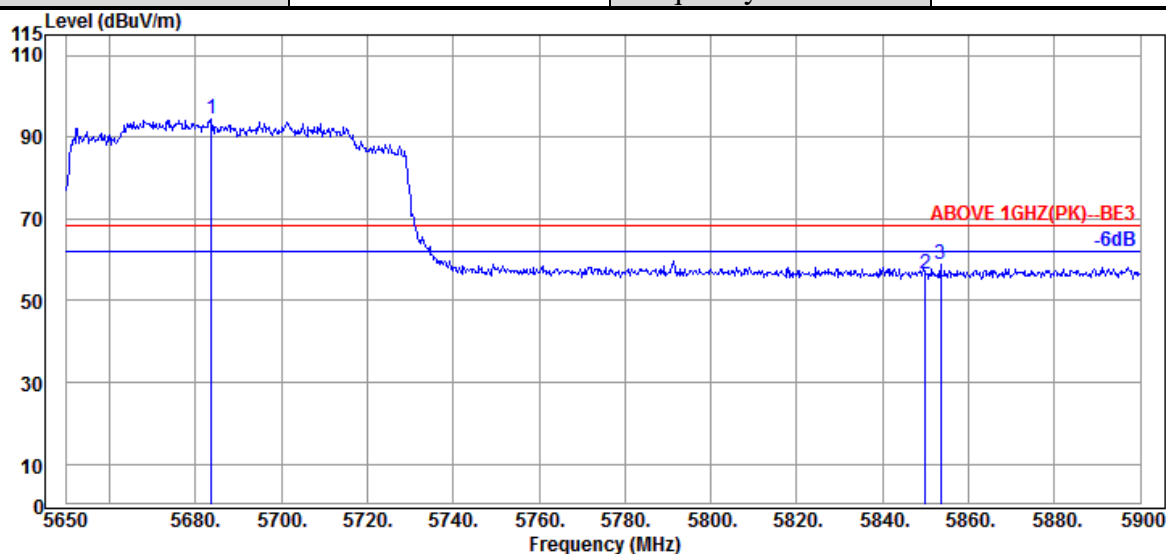

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5683.750	34.57	9.39	34.31	84.67	94.32	---	---	Peak
5850.000	34.60	9.52	34.38	46.58	56.32	68.20	11.88	Peak
5853.500	34.60	9.53	34.38	49.25	59.00	68.20	9.20	Peak

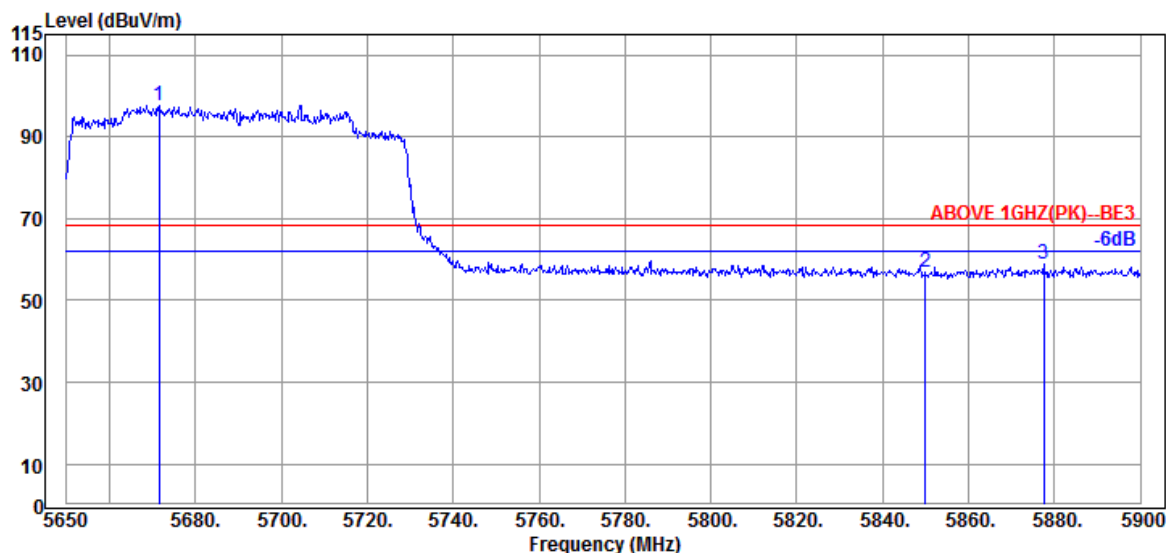

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5671.500	34.63	9.37	34.30	88.08	97.78	---	---	Peak
5850.000	34.60	9.52	34.38	47.01	56.75	68.20	11.45	Peak
5877.500	34.60	9.55	34.39	49.02	58.78	68.20	9.42	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ac-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

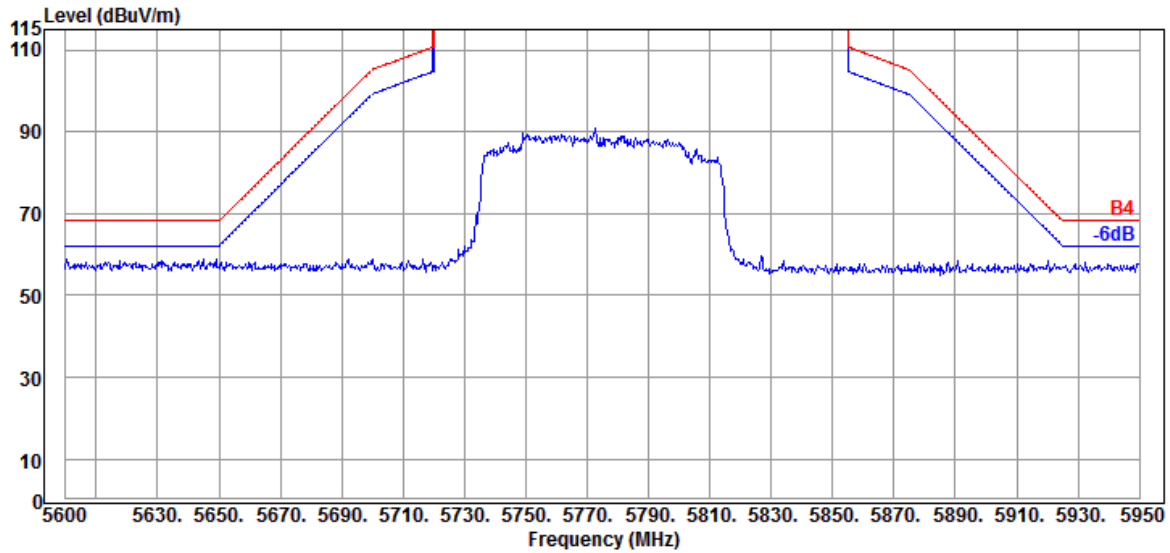


Antenna at Vertical Polarization

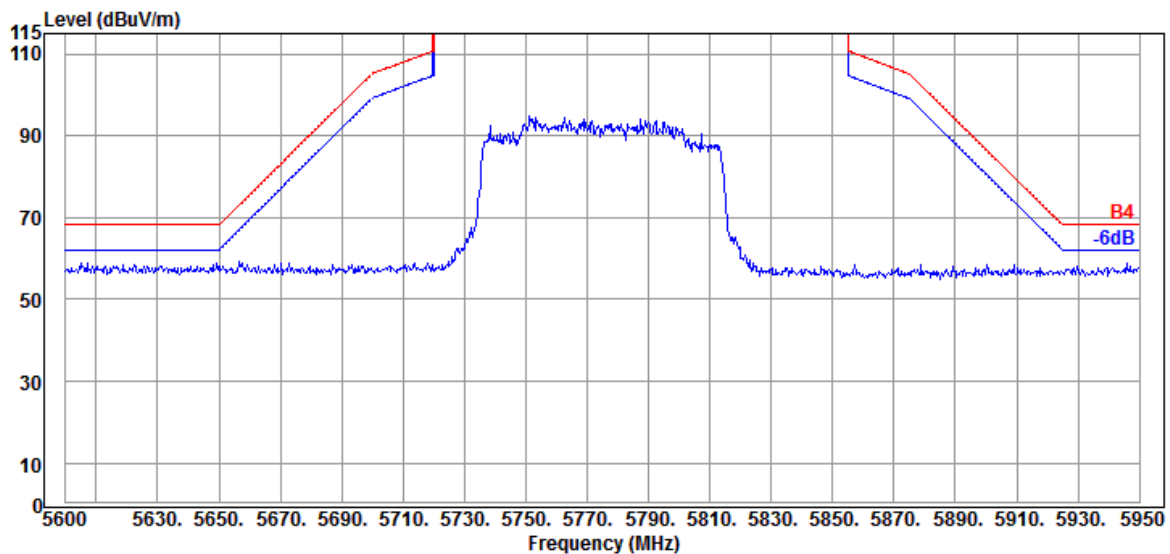

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

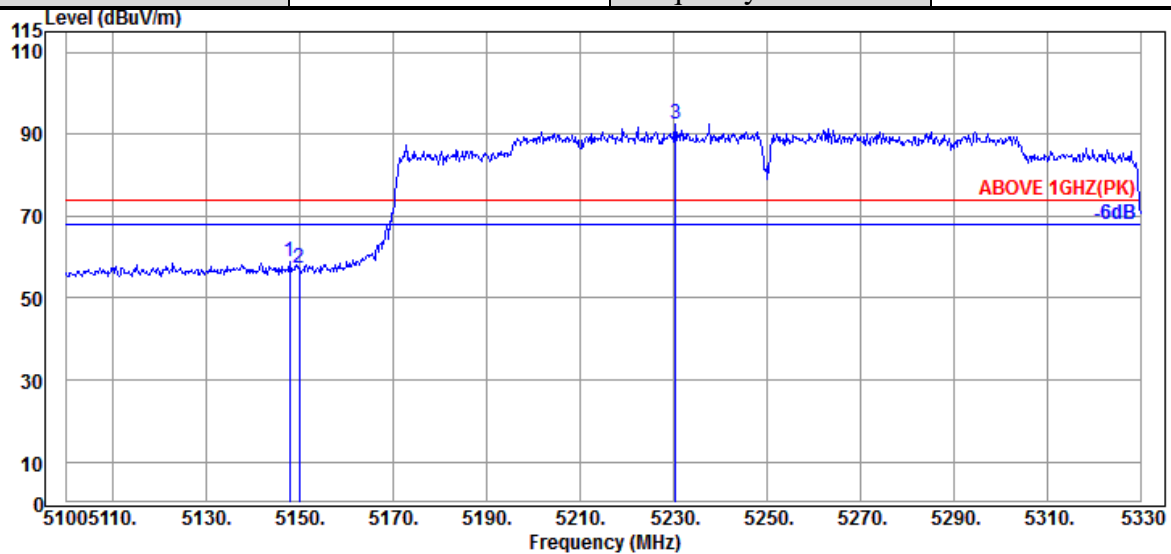

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.840	34.20	8.92	34.35	50.08	58.85	74.00	15.15	Peak
5149.910	34.20	8.92	34.35	48.43	57.20	74.00	16.80	Peak
@ 5230.410	34.40	8.99	34.32	83.45	92.52	---	---	Peak

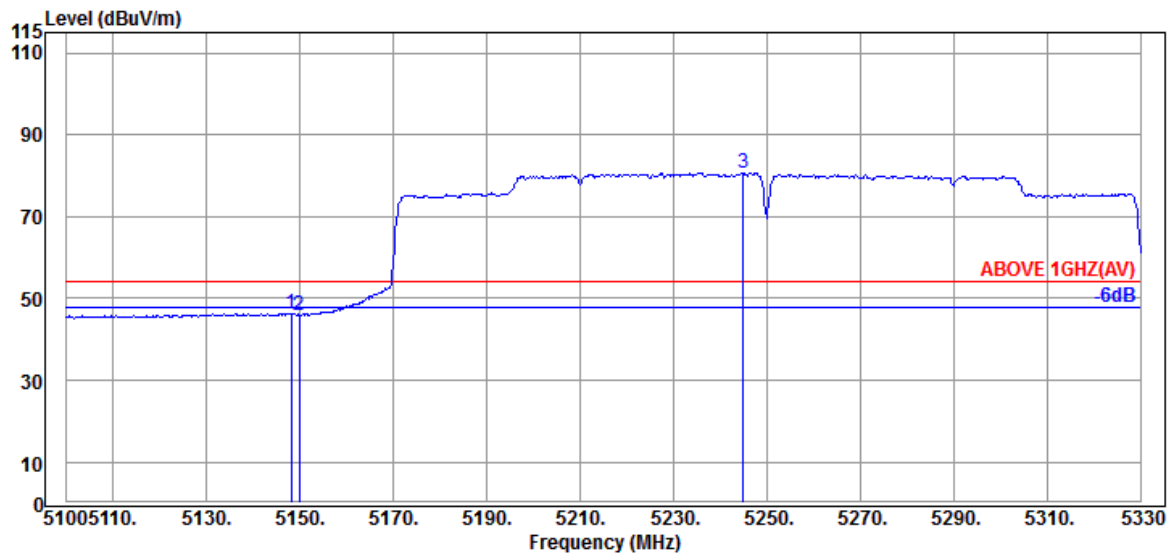


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.070	34.20	8.92	34.35	37.57	46.34	54.00	7.66	Average
5149.910	34.20	8.92	34.35	37.18	45.95	54.00	8.05	Average
@ 5244.900	34.40	9.01	34.32	71.68	80.77	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	I & 2A
		Frequency	TX 5250MHz

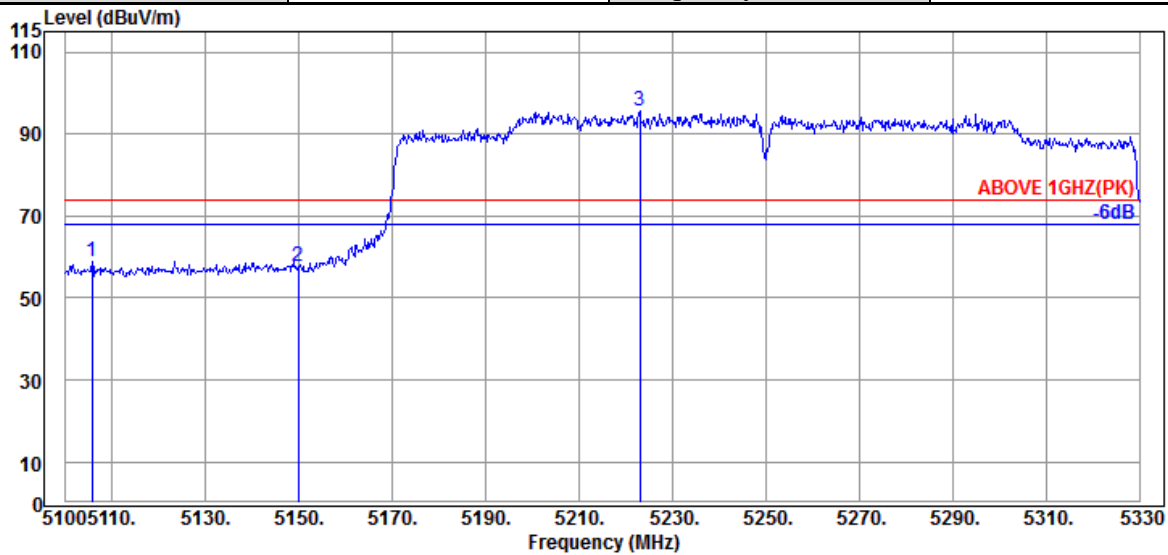

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5105.750	34.00	8.89	34.36	50.52	59.05	74.00	14.95	Peak
5149.910	34.20	8.92	34.35	48.78	57.55	74.00	16.45	Peak
@ 5223.050	34.40	8.98	34.32	86.42	95.48	---	---	Peak

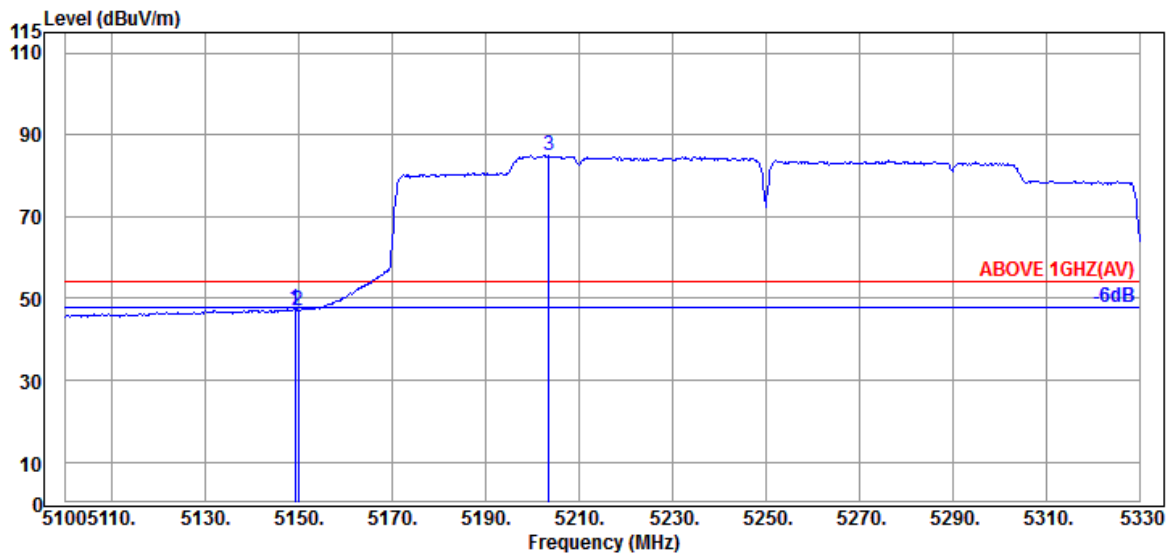

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.220	34.20	8.92	34.35	38.59	47.36	54.00	6.64	Average
5149.910	34.20	8.92	34.35	38.37	47.14	54.00	6.86	Average
@ 5203.500	34.40	8.96	34.33	75.80	84.83	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

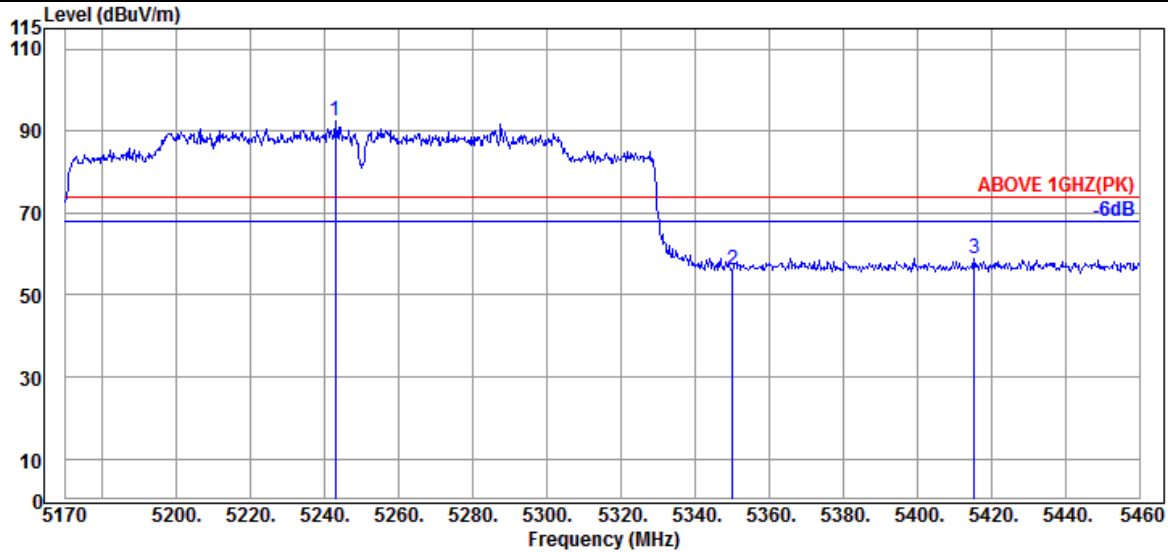

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5242.790	34.40	9.01	34.32	83.30	92.39	---	---	Peak
5350.090	34.80	9.10	34.27	46.57	56.20	74.00	17.80	Peak
5415.340	35.00	9.15	34.26	49.10	58.99	74.00	15.01	Peak

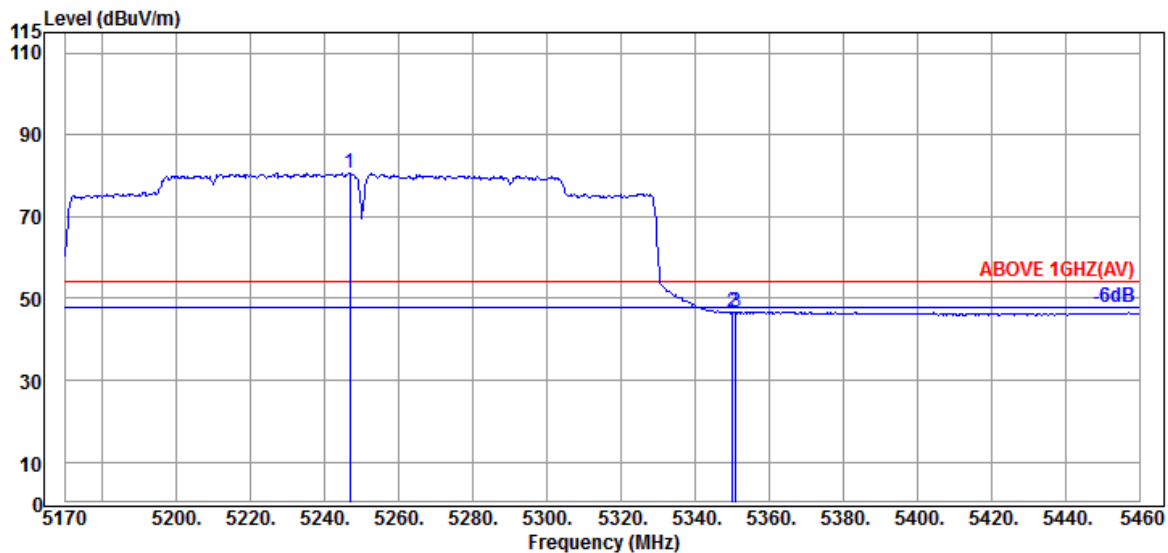

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5246.850	34.40	9.01	34.31	71.57	80.67	---	---	Average
5350.090	34.80	9.10	34.27	36.89	46.52	54.00	7.48	Average
5350.960	34.80	9.10	34.27	37.15	46.78	54.00	7.22	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
		Frequency	TX 5250MHz

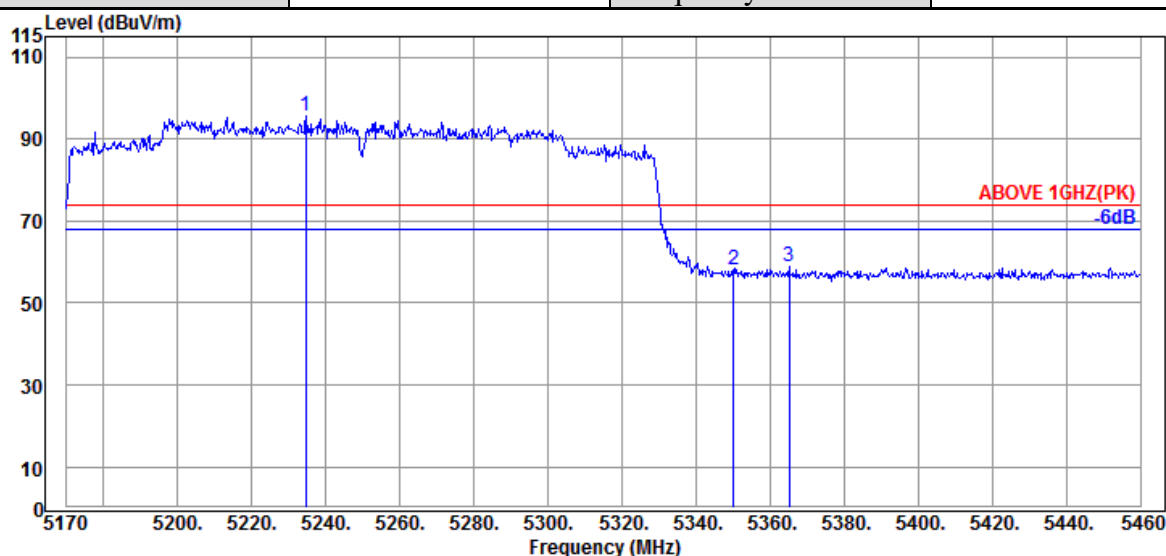

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5234.670	34.40	8.99	34.32	86.58	95.65	---	---	Peak
5350.090	34.80	9.10	34.27	48.39	58.02	74.00	15.98	Peak
5365.170	34.87	9.11	34.27	49.17	58.88	74.00	15.12	Peak

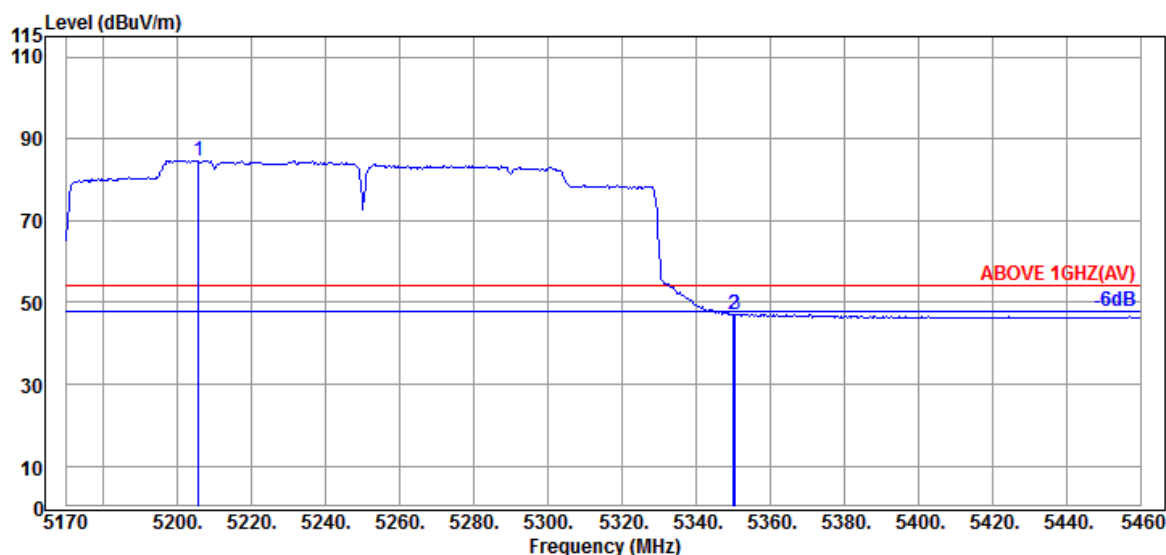

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5205.670	34.40	8.96	34.33	75.68	84.71	---	---	Average
5350.090	34.80	9.10	34.27	37.32	46.95	54.00	7.05	Average
5350.670	34.80	9.10	34.27	37.48	47.11	54.00	6.89	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

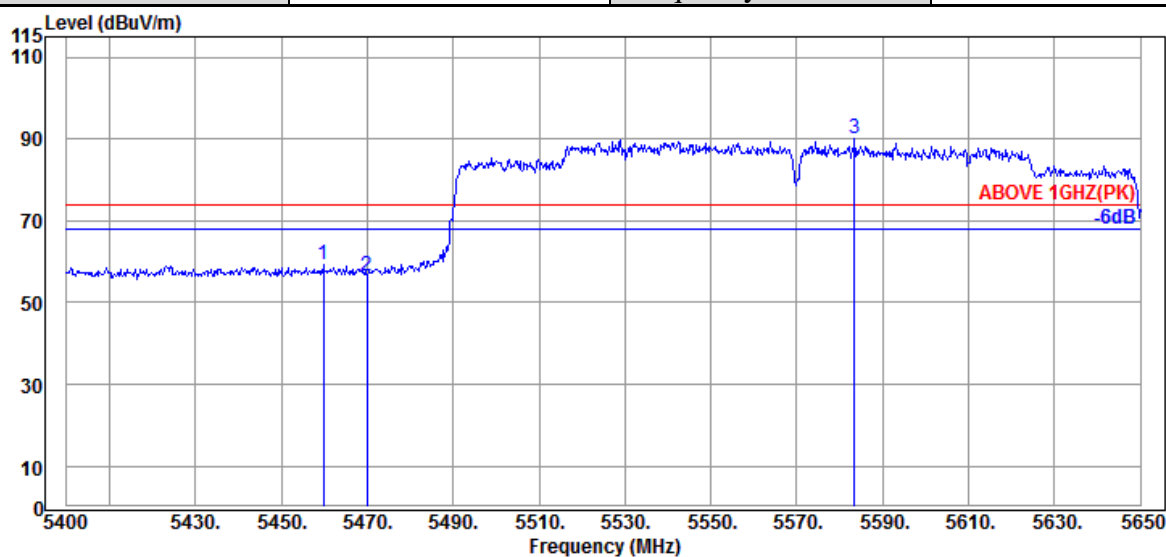

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5459.750	35.00	9.18	34.24	49.48	59.42	74.00	14.58	Peak
5470.000	34.97	9.20	34.24	46.76	56.69	74.00	17.31	Peak
@ 5583.500	34.73	9.30	34.27	80.40	90.16	---	---	Peak

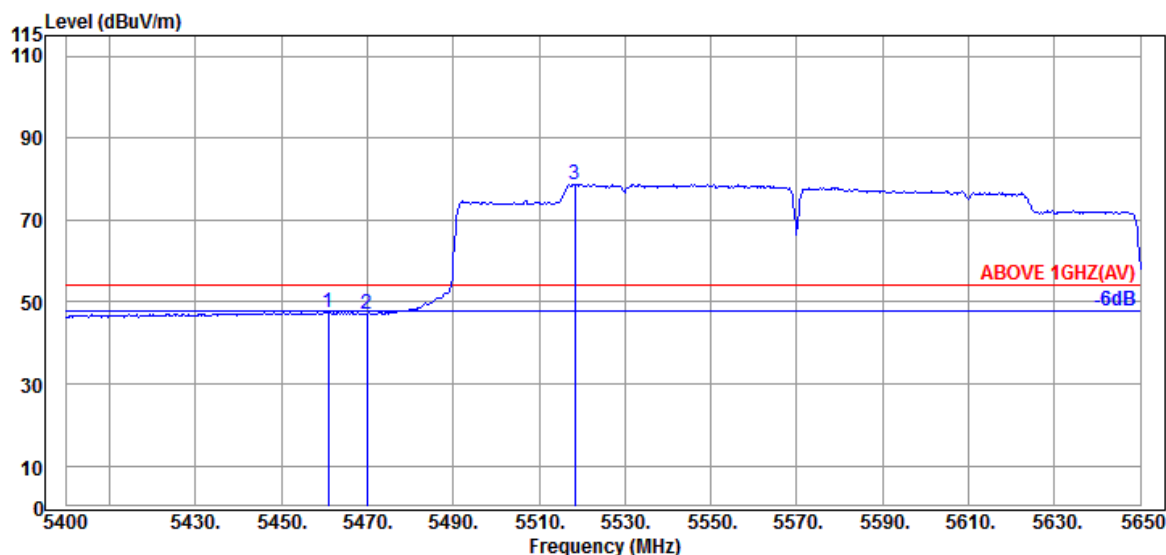


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5461.000	35.00	9.18	34.24	37.62	47.56	54.00	6.44	Average
5470.000	34.97	9.20	34.24	36.99	46.92	54.00	7.08	Average
@ 5518.250	34.87	9.24	34.24	68.91	78.78	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

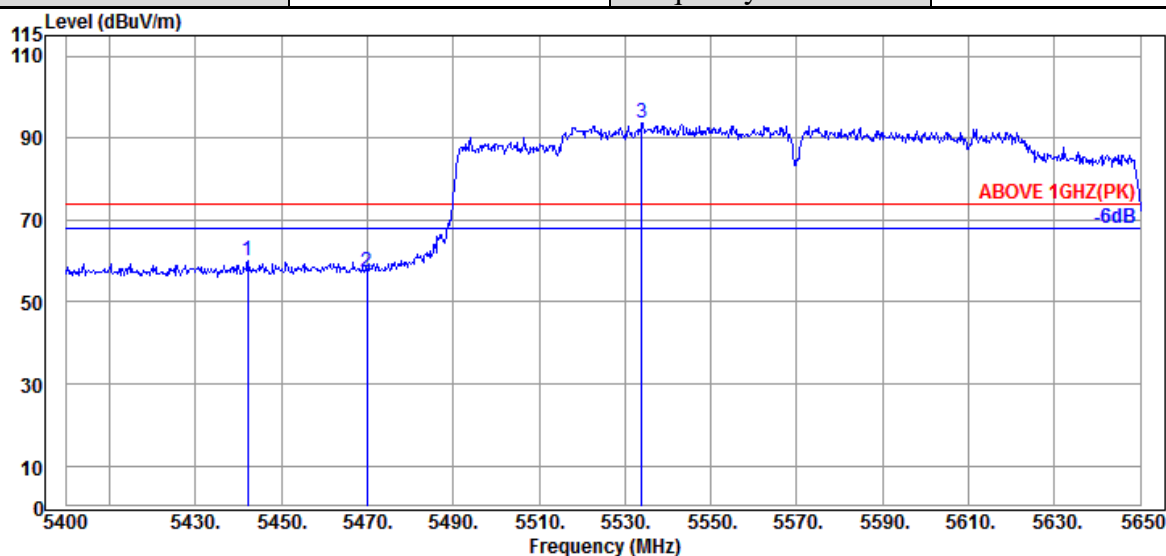

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5442.250	35.00	9.17	34.25	50.13	60.05	74.00	13.95	Peak
5470.000	34.97	9.20	34.24	47.33	57.26	74.00	16.74	Peak
@ 5534.000	34.83	9.26	34.25	83.72	93.56	---	---	Peak

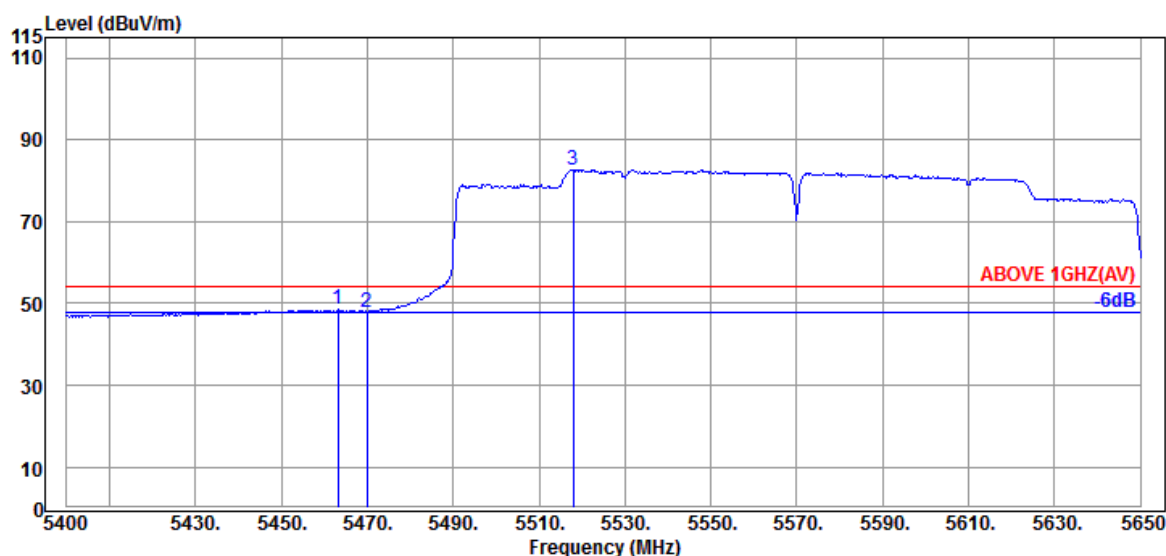

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.250	35.00	9.20	34.24	38.46	48.42	54.00	5.58	Average
5470.000	34.97	9.20	34.24	37.87	47.80	54.00	6.20	Average
@ 5518.000	34.87	9.24	34.24	72.79	82.66	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

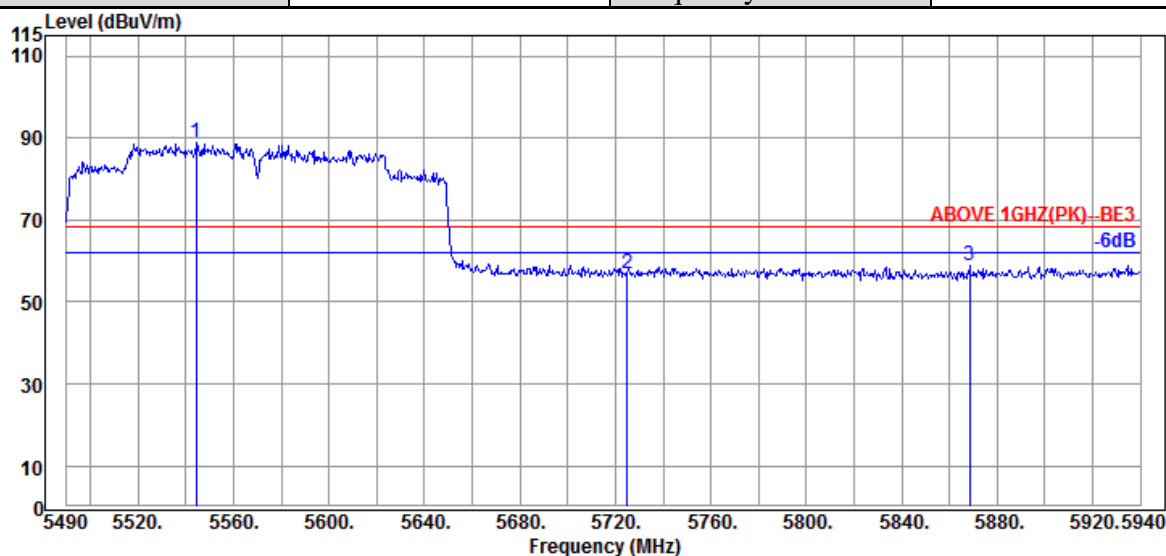

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5544.450	34.80	9.26	34.25	78.94	88.75	---	---	Peak
	5724.900	34.57	9.42	34.32	47.10	56.77	68.20	11.43	Peak
	5868.450	34.60	9.53	34.39	49.08	58.82	68.20	9.38	Peak

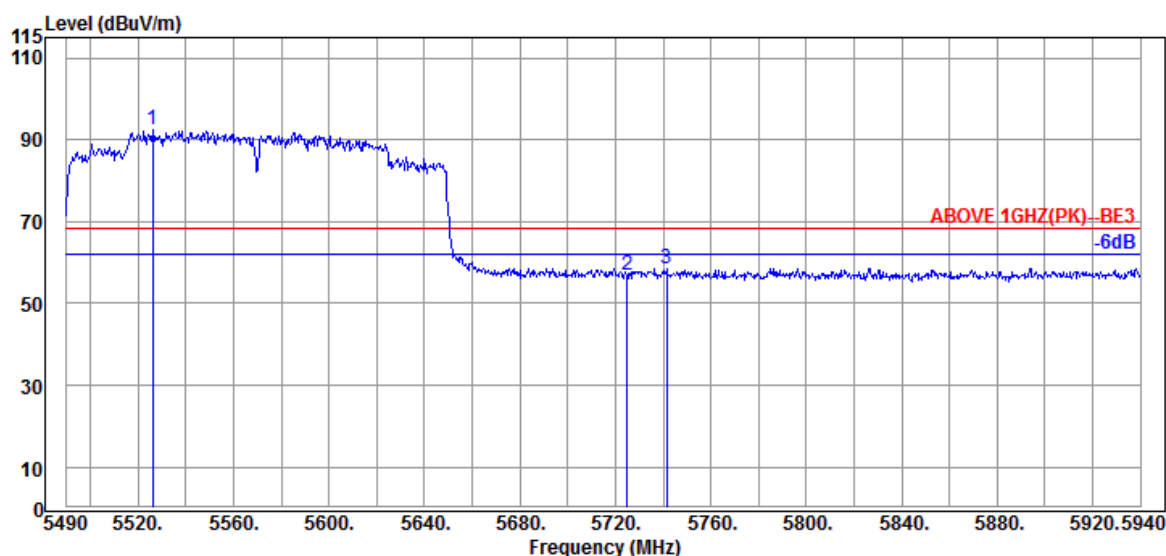

Antenna at Vertical Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5526.000	34.87	9.24	34.24	82.48	92.35	---	---	Peak
	5724.900	34.57	9.42	34.32	47.43	57.10	68.20	11.10	Peak
	5741.550	34.60	9.43	34.33	48.98	58.68	68.20	9.52	Peak


Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

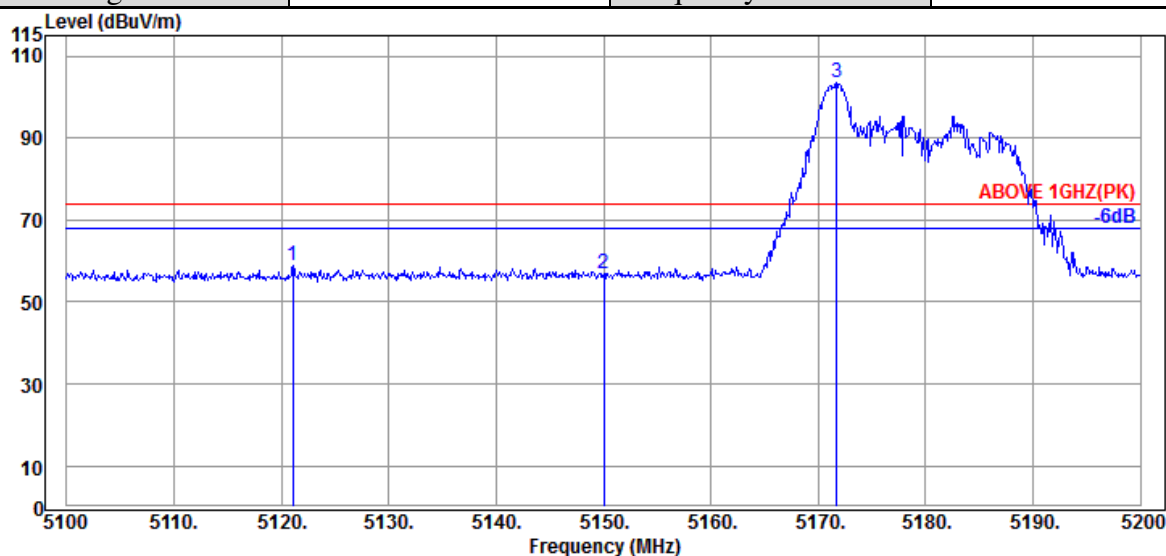

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5121.100	34.07	8.89	34.36	50.36	58.96	74.00	15.04	Peak
5150.000	34.20	8.92	34.35	48.19	56.96	74.00	17.04	Peak
@ 5171.700	34.33	8.94	34.34	94.45	103.38	---	---	Peak

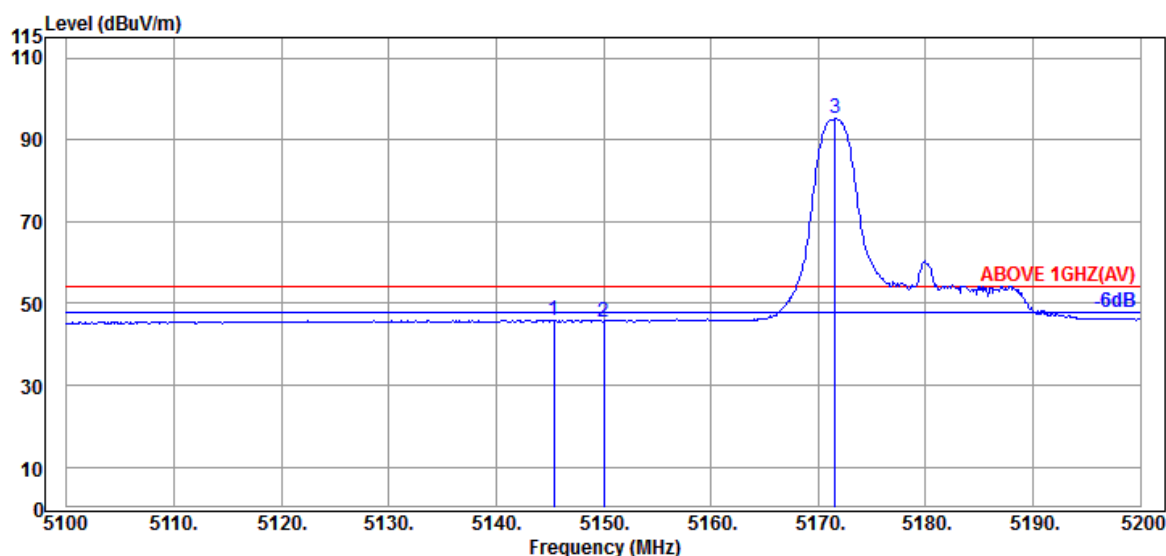


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5145.400	34.20	8.92	34.35	37.21	45.98	54.00	8.02	Average
5150.000	34.20	8.92	34.35	36.84	45.61	54.00	8.39	Average
@ 5171.600	34.33	8.94	34.34	86.35	95.28	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	26/0	Frequency	TX 5180MHz

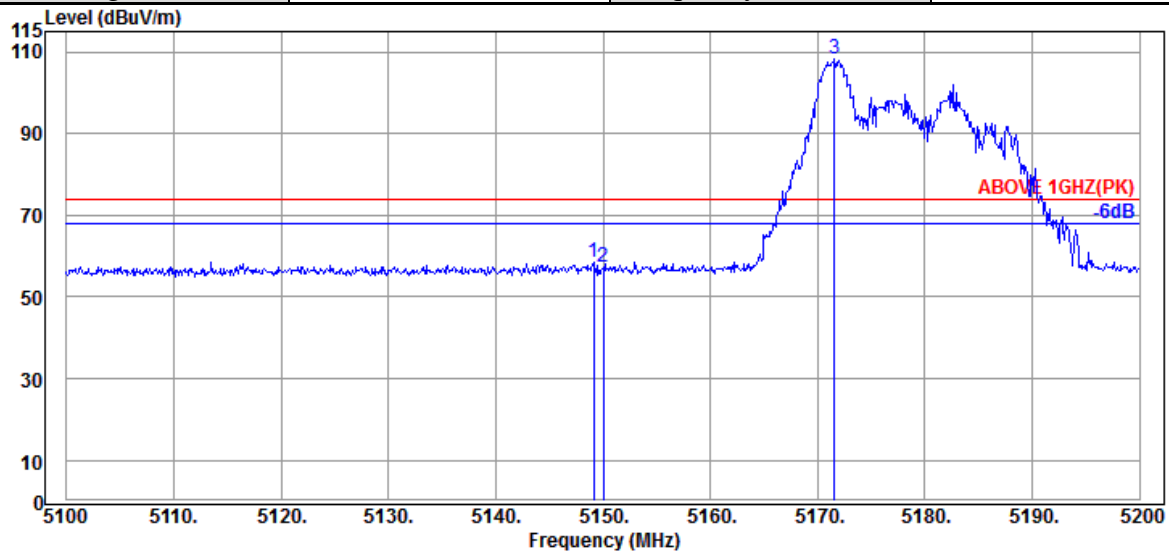

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.100	34.20	8.92	34.35	49.57	58.34	74.00	15.66	Peak
5150.000	34.20	8.92	34.35	48.53	57.30	74.00	16.70	Peak
@ 5171.600	34.33	8.94	34.34	99.42	108.35	---	---	Peak

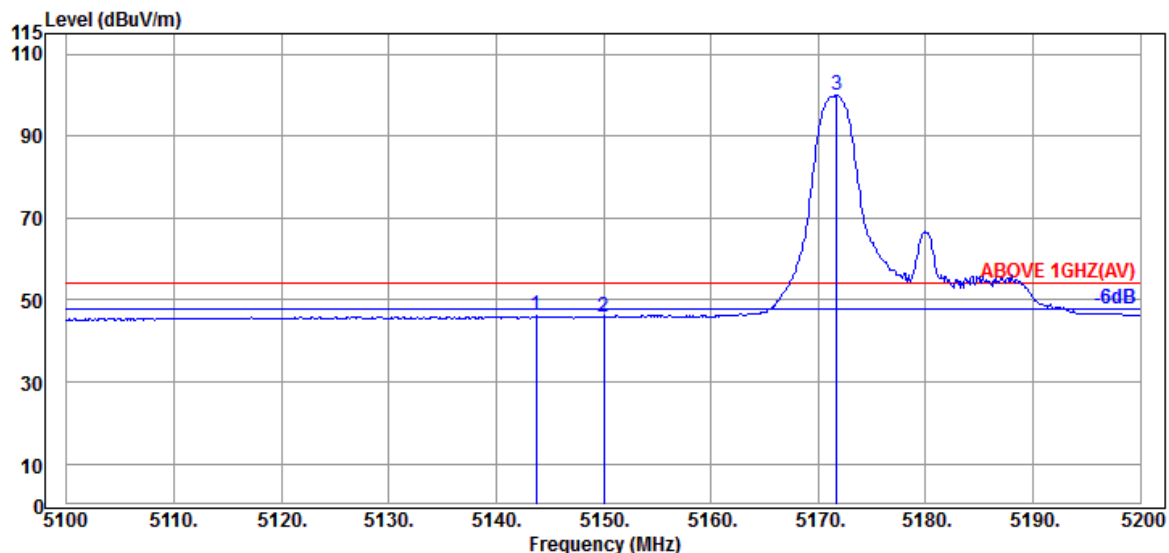


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5143.700	34.20	8.92	34.36	37.29	46.05	54.00	7.95	Average
5150.000	34.20	8.92	34.35	37.20	45.97	54.00	8.03	Average
@ 5171.700	34.33	8.94	34.34	90.95	99.88	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

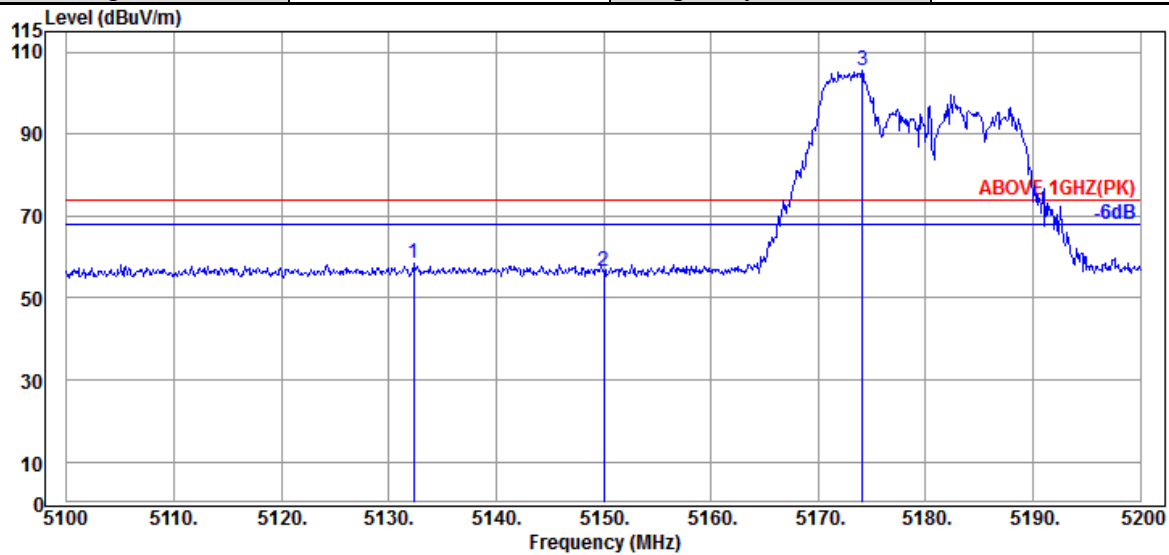

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5132.300	34.13	8.91	34.36	49.82	58.50	74.00	15.50	Peak
5150.000	34.20	8.92	34.35	47.66	56.43	74.00	17.57	Peak
@ 5174.100	34.33	8.95	34.34	96.42	105.36	---	---	Peak

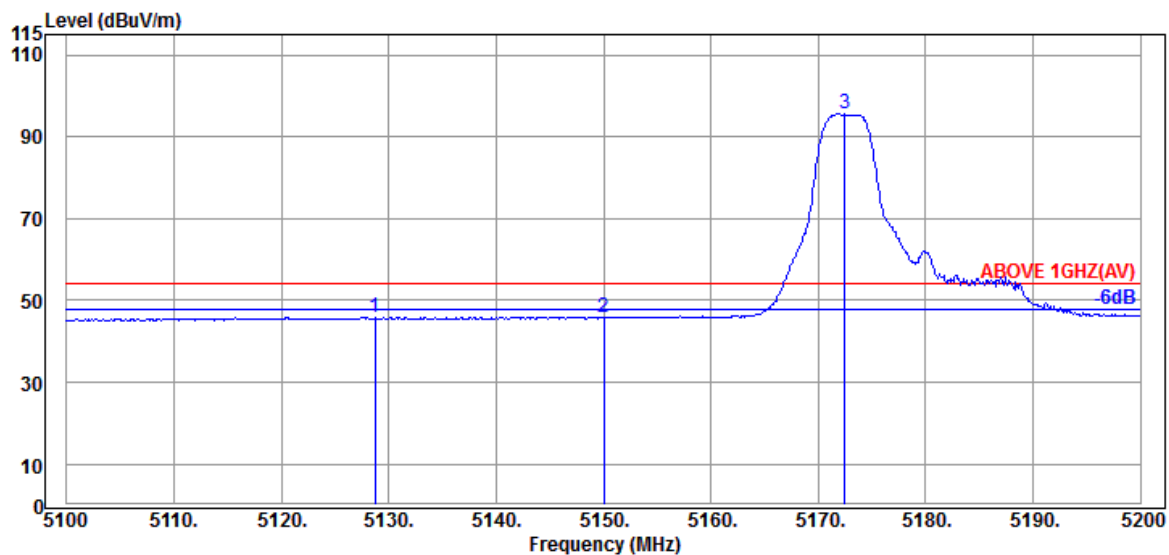

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5128.700	34.13	8.91	34.36	37.30	45.98	54.00	8.02	Average
5150.000	34.20	8.92	34.35	36.99	45.76	54.00	8.24	Average
@ 5172.500	34.33	8.94	34.34	86.66	95.59	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	52/37	Frequency	TX 5180MHz

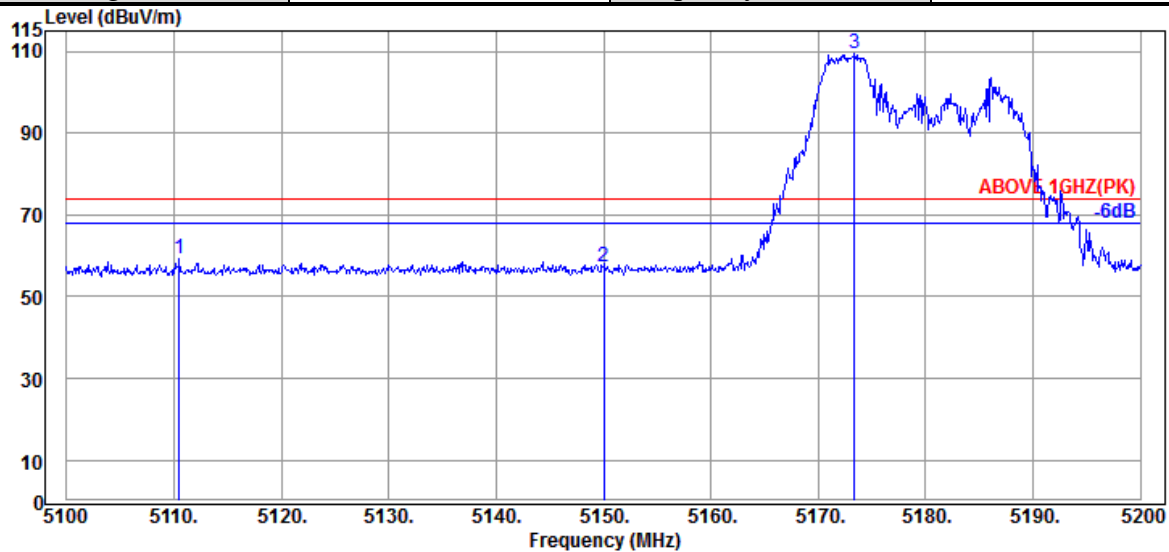

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5110.500	34.00	8.89	34.36	50.69	59.22	74.00	14.78	Peak
5150.000	34.20	8.92	34.35	48.48	57.25	74.00	16.75	Peak
@ 5173.400	34.33	8.94	34.34	100.45	109.38	---	---	Peak

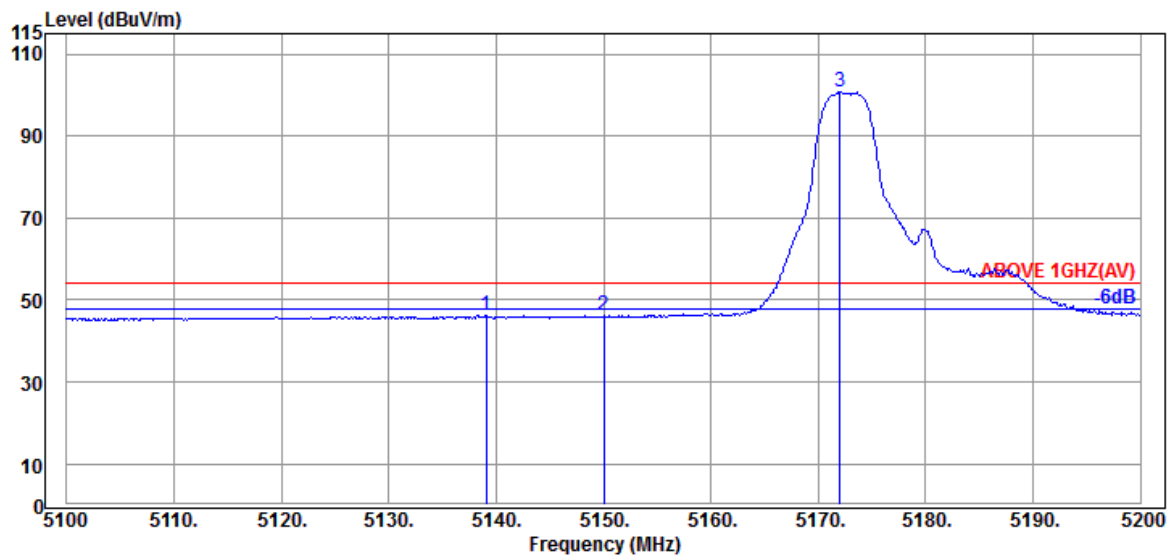


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5139.100	34.13	8.91	34.36	37.48	46.16	54.00	7.84	Average
5150.000	34.20	8.92	34.35	37.31	46.08	54.00	7.92	Average
@ 5172.000	34.33	8.94	34.34	91.95	100.88	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

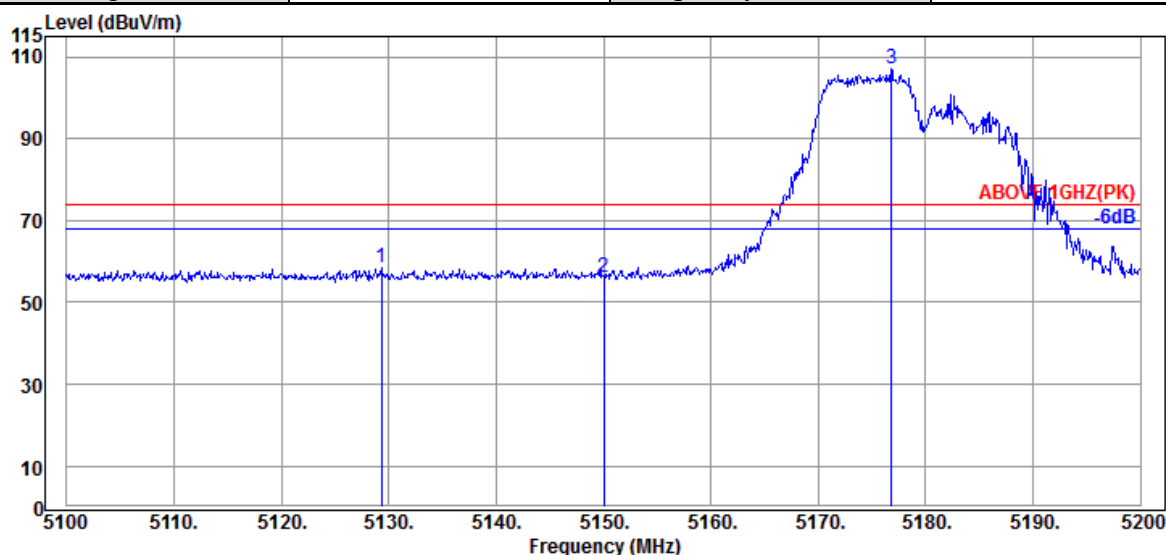

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5129.300	34.13	8.91	34.36	49.63	58.31	74.00	15.69	Peak
5150.000	34.20	8.92	34.35	47.36	56.13	74.00	17.87	Peak
@ 5176.800	34.33	8.95	34.34	98.11	107.05	---	---	Peak

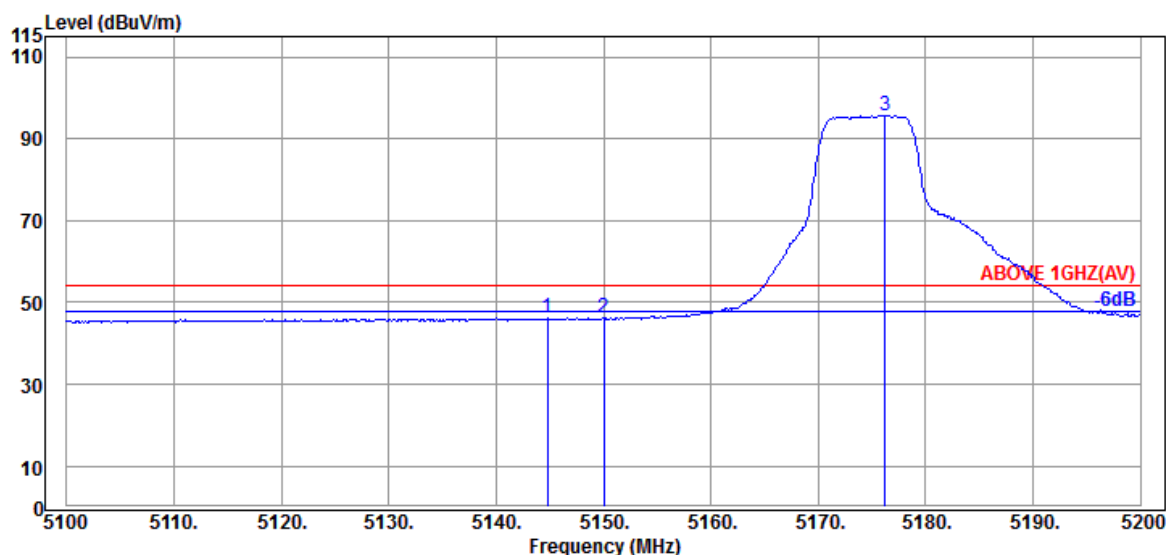

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5144.800	34.20	8.92	34.35	37.40	46.17	54.00	7.83	Average
5150.000	34.20	8.92	34.35	37.28	46.05	54.00	7.95	Average
@ 5176.200	34.33	8.95	34.34	86.80	95.74	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	1
RU Configuration	106/53	Frequency	TX 5180MHz

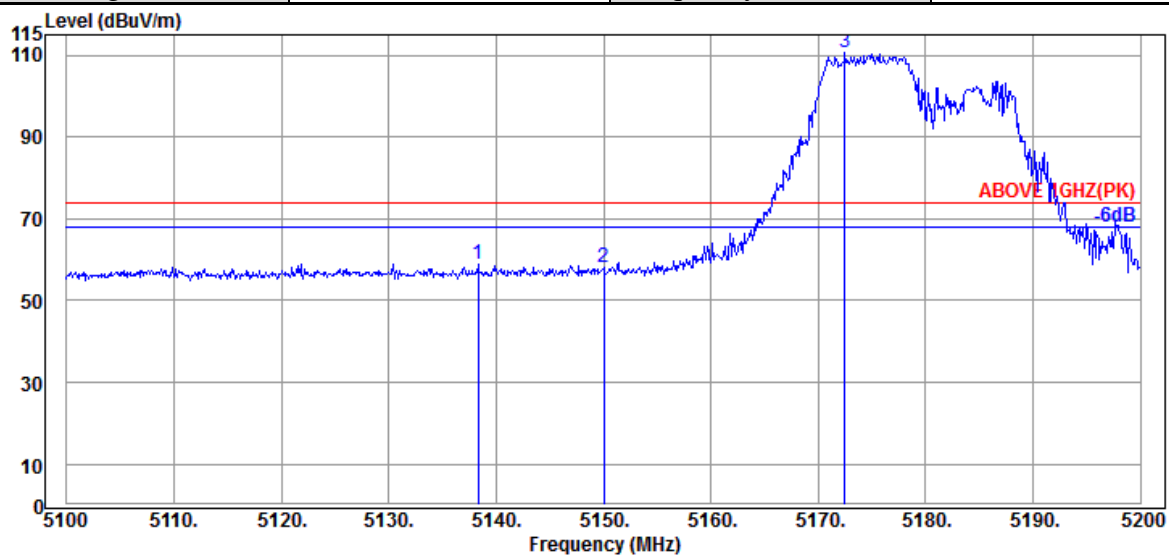

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5138.300	34.13	8.91	34.36	50.34	59.02	74.00	14.98	Peak
5150.000	34.20	8.92	34.35	49.22	57.99	74.00	16.01	Peak
@ 5172.500	34.33	8.94	34.34	101.71	110.64	---	---	Peak

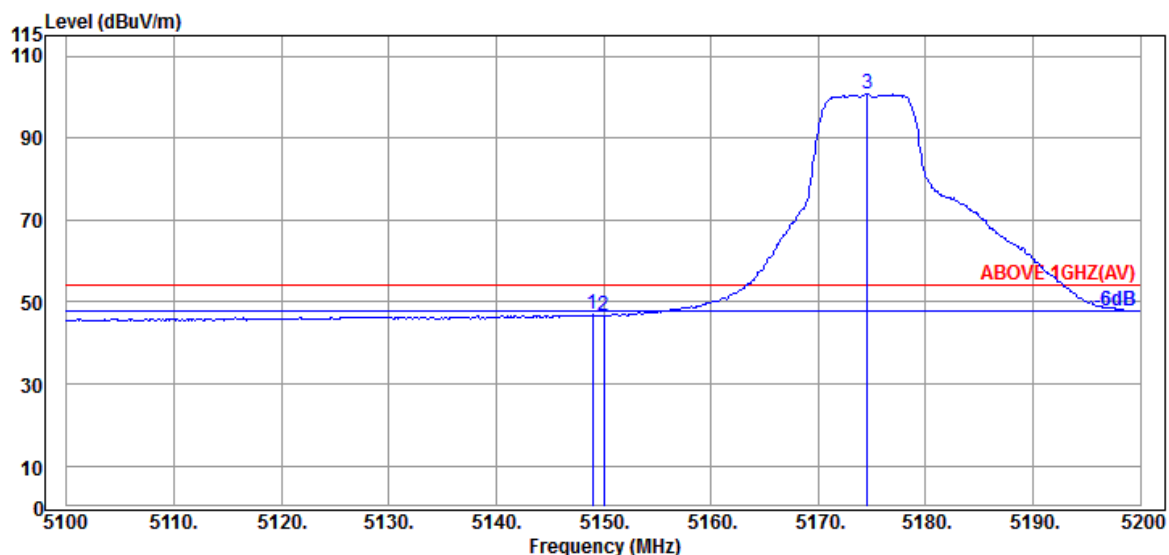

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5149.000	34.20	8.92	34.35	38.09	46.86	54.00	7.14	Average
5150.000	34.20	8.92	34.35	37.99	46.76	54.00	7.24	Average
@ 5174.600	34.33	8.95	34.34	91.93	100.87	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

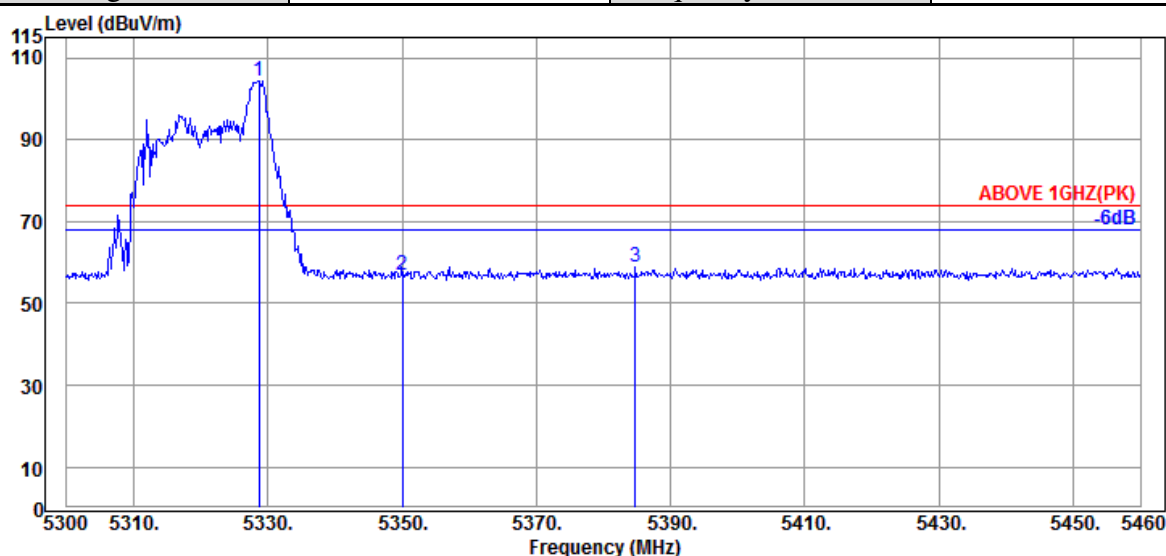

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.640	34.70	9.08	34.28	94.86	104.36	---	---	Peak
	5350.080	34.80	9.10	34.27	47.08	56.71	74.00	17.29	Peak
	5384.800	34.93	9.13	34.27	49.04	58.83	74.00	15.17	Peak

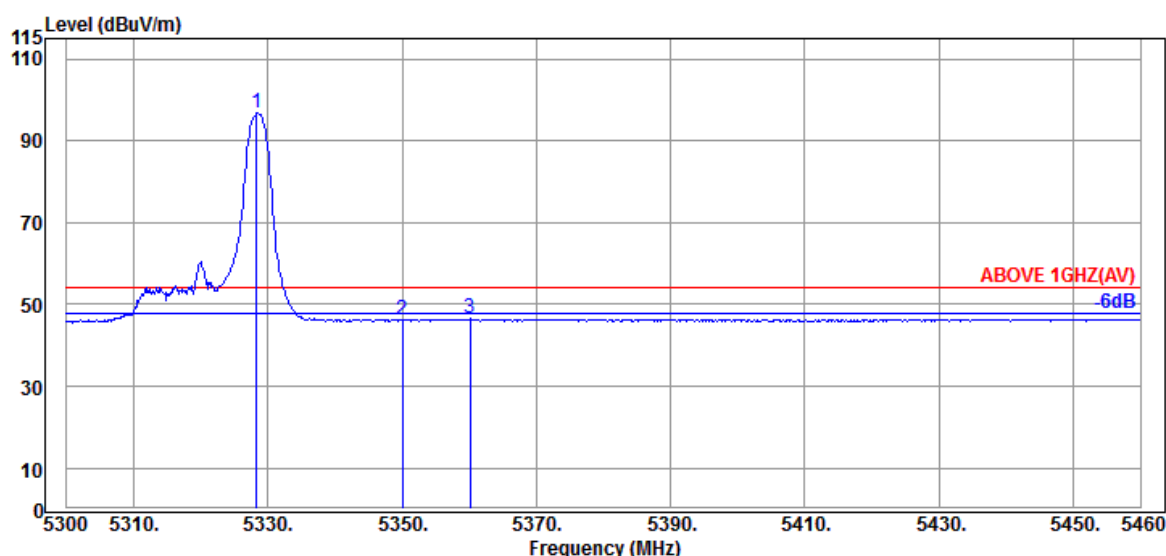

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5328.320	34.70	9.08	34.28	87.38	96.88	---	---	Average
	5350.080	34.80	9.10	34.27	36.42	46.05	54.00	7.95	Average
	5360.160	34.87	9.10	34.27	36.82	46.52	54.00	7.48	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	26/8	Frequency	TX 5320MHz

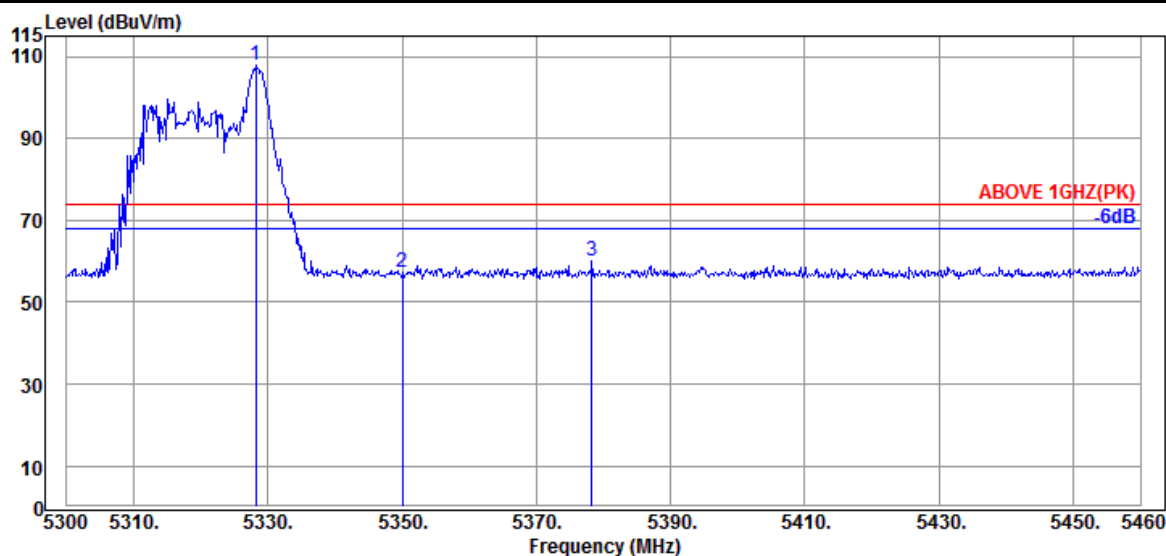

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.160	34.70	9.08	34.28	98.25	107.75	---	---	Peak
5350.080	34.80	9.10	34.27	47.70	57.33	74.00	16.67	Peak
5378.240	34.93	9.13	34.27	50.22	60.01	74.00	13.99	Peak

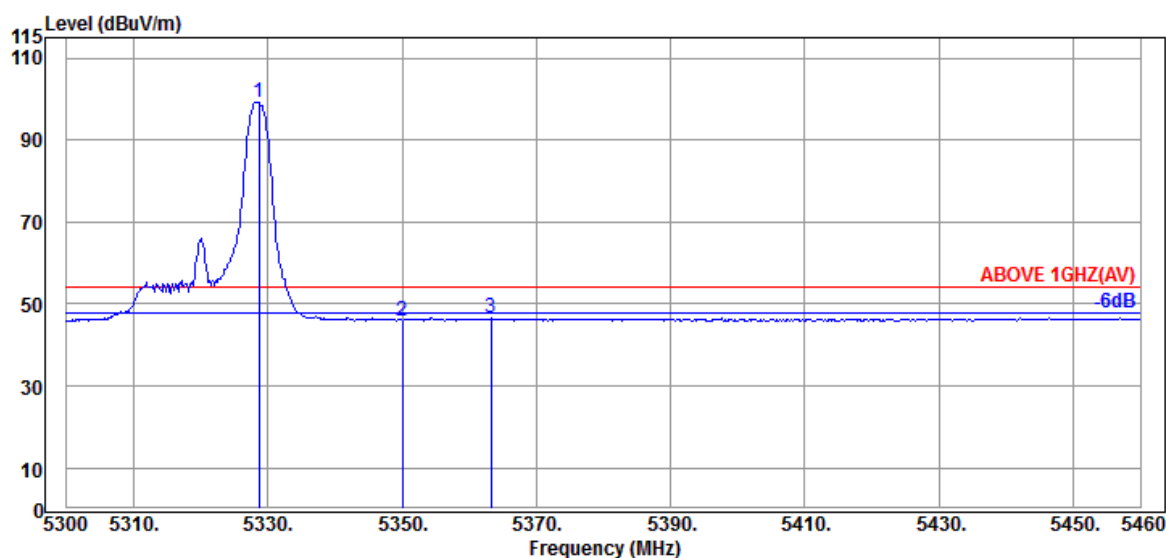

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.640	34.70	9.08	34.28	89.85	99.35	---	---	Average
5350.080	34.80	9.10	34.27	36.37	46.00	54.00	8.00	Average
5363.200	34.87	9.11	34.27	36.92	46.63	54.00	7.37	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

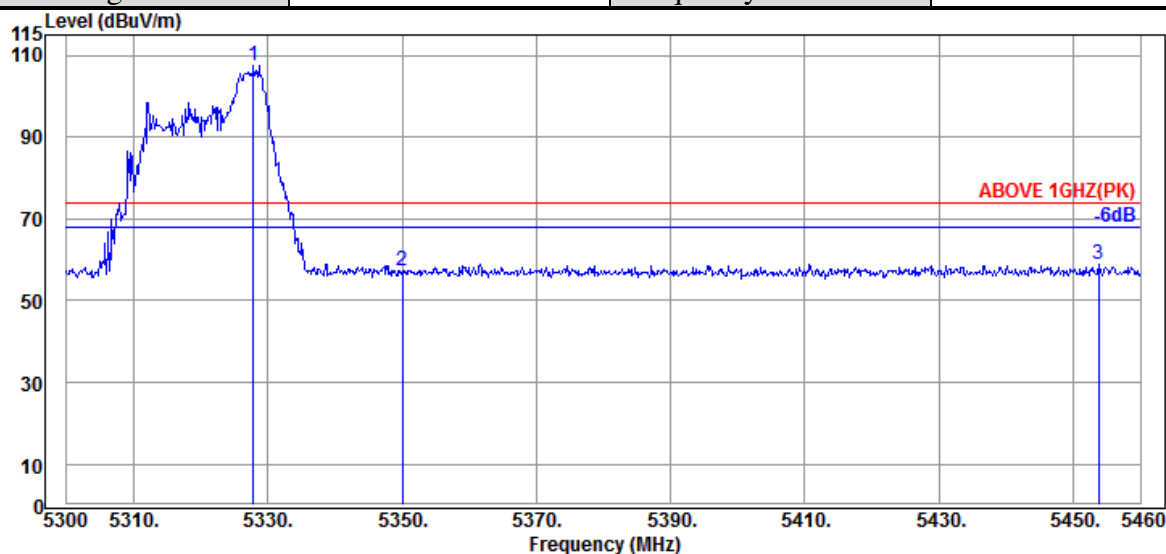

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.70	9.08	34.28	97.93	107.43	---	---	Peak
5350.080	34.80	9.10	34.27	47.81	57.44	74.00	16.56	Peak
5453.760	35.00	9.18	34.24	48.98	58.92	74.00	15.08	Peak

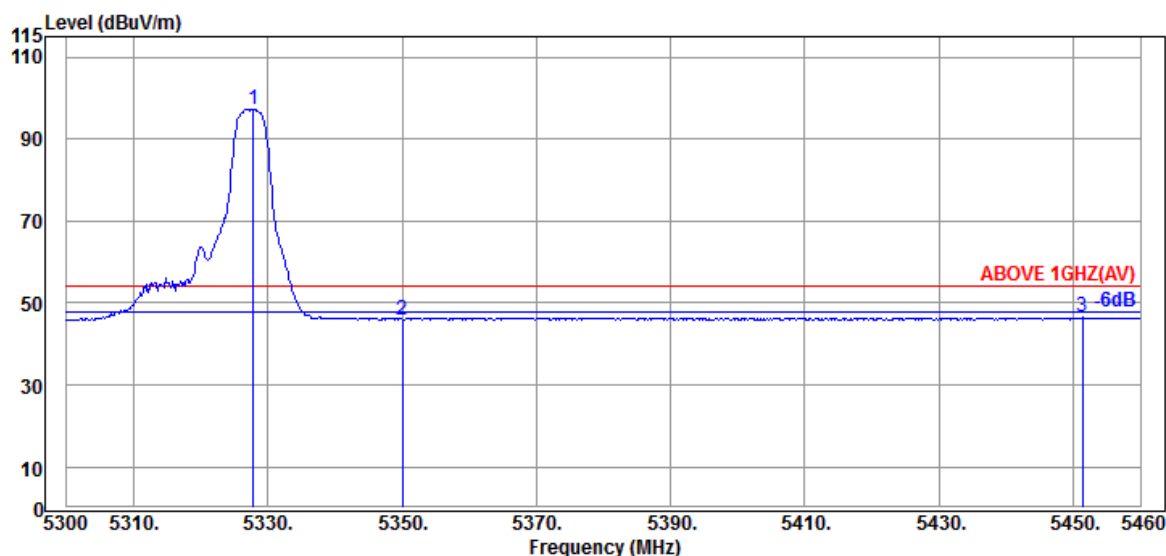

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.840	34.70	9.08	34.28	87.74	97.24	---	---	Average
5350.080	34.80	9.10	34.27	36.31	45.94	54.00	8.06	Average
5451.360	35.00	9.18	34.24	36.51	46.45	54.00	7.55	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	52/40	Frequency	TX 5320MHz

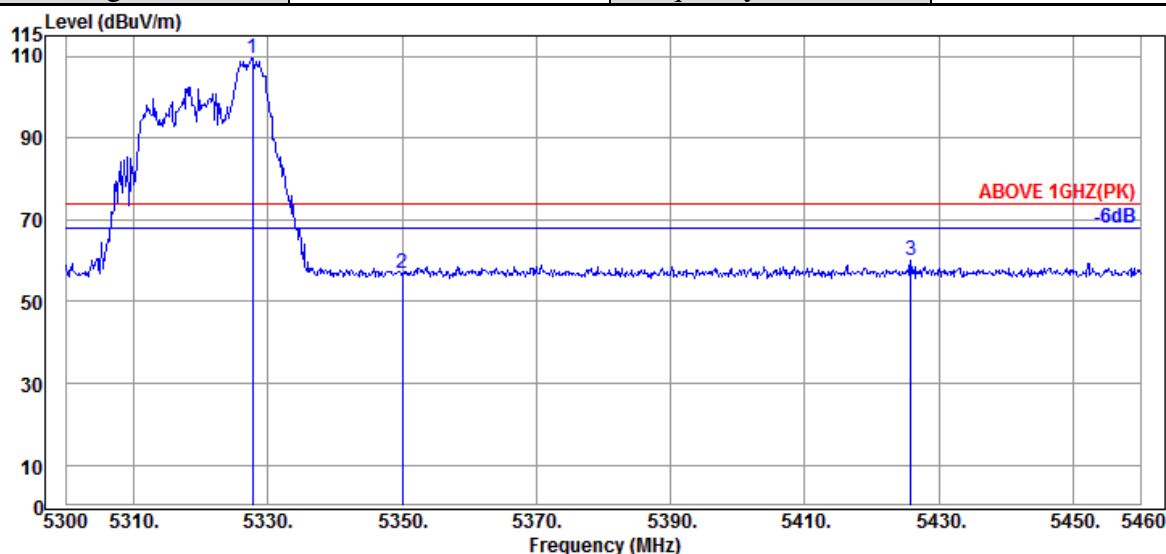

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.680	34.70	9.08	34.28	99.82	109.32	---	---	Peak
5350.080	34.80	9.10	34.27	47.14	56.77	74.00	17.23	Peak
5425.760	35.00	9.15	34.25	50.18	60.08	74.00	13.92	Peak

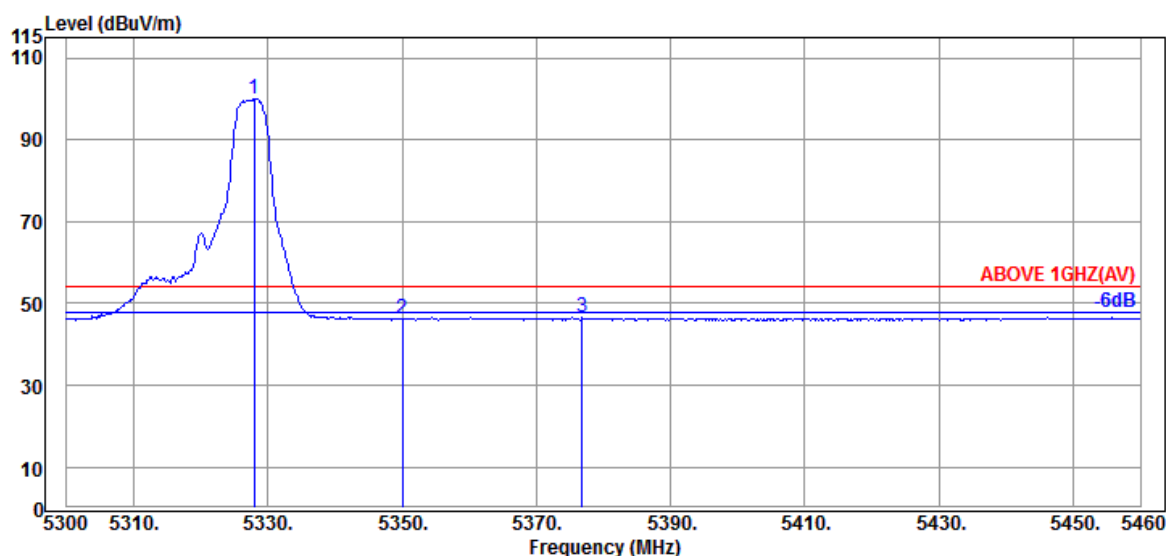

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5328.000	34.70	9.08	34.28	90.38	99.88	---	---	Average
5350.080	34.80	9.10	34.27	36.52	46.15	54.00	7.85	Average
5376.800	34.93	9.11	34.27	36.69	46.46	54.00	7.54	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

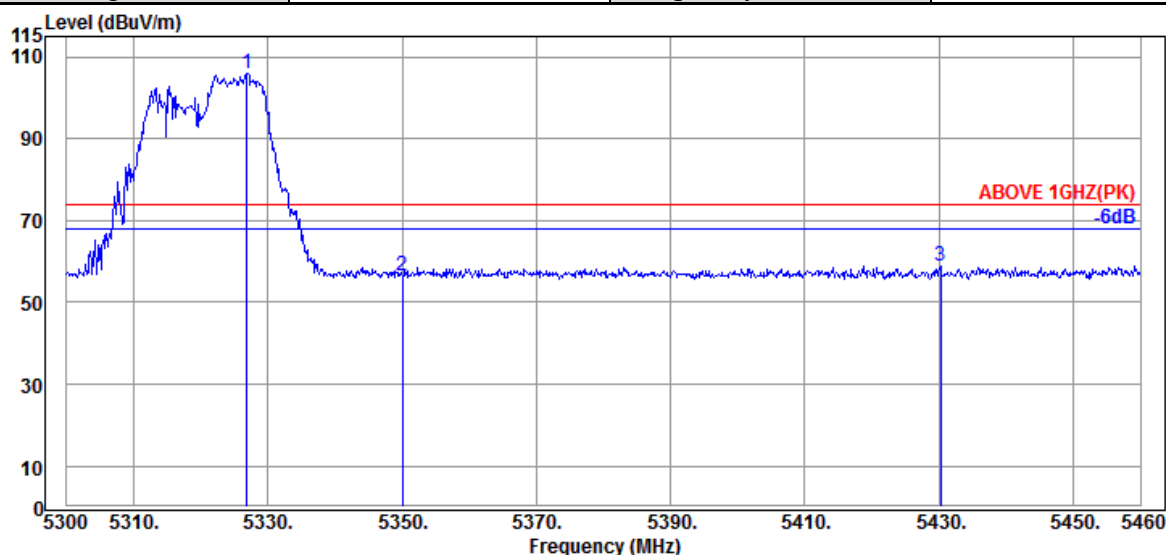

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5326.880	34.70	9.08	34.28	96.35	105.85	---	---	Peak
5350.080	34.80	9.10	34.27	46.91	56.54	74.00	17.46	Peak
5430.240	35.00	9.17	34.25	48.97	58.89	74.00	15.11	Peak

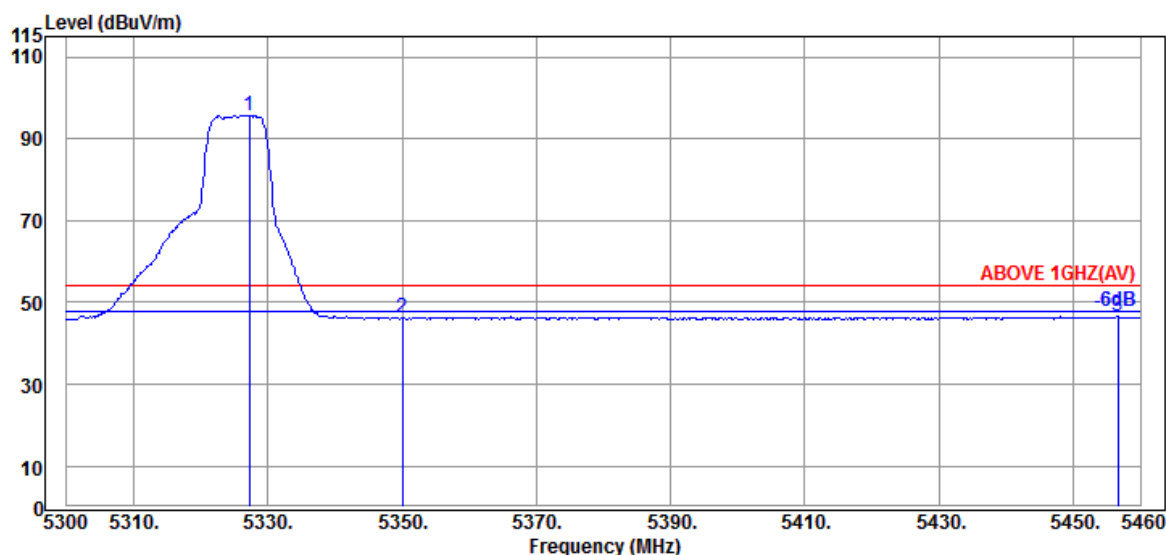

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.200	34.70	9.08	34.28	86.31	95.81	---	---	Average
5350.080	34.80	9.10	34.27	36.44	46.07	54.00	7.93	Average
5456.640	35.00	9.18	34.24	36.60	46.54	54.00	7.46	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2A
RU Configuration	106/54	Frequency	TX 5320MHz

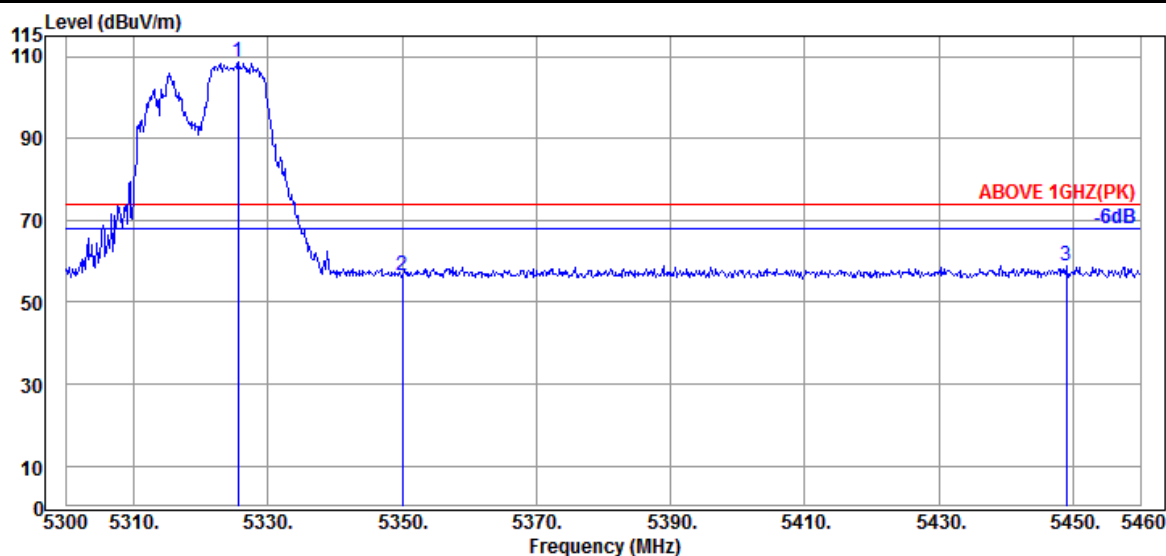

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5325.600	34.70	9.07	34.28	99.15	108.64	---	---	Peak
5350.080	34.80	9.10	34.27	47.03	56.66	74.00	17.34	Peak
5448.960	35.00	9.18	34.25	48.85	58.78	74.00	15.22	Peak

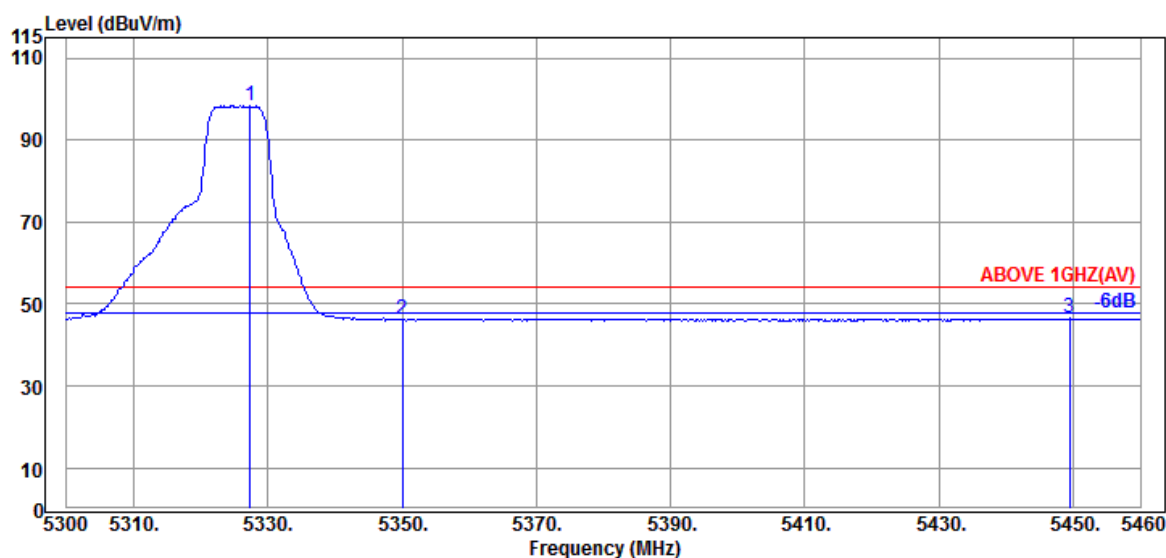

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5327.360	34.70	9.08	34.28	88.83	98.33	---	---	Average
5350.080	34.80	9.10	34.27	36.54	46.17	54.00	7.83	Average
5449.440	35.00	9.18	34.25	36.56	46.49	54.00	7.51	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

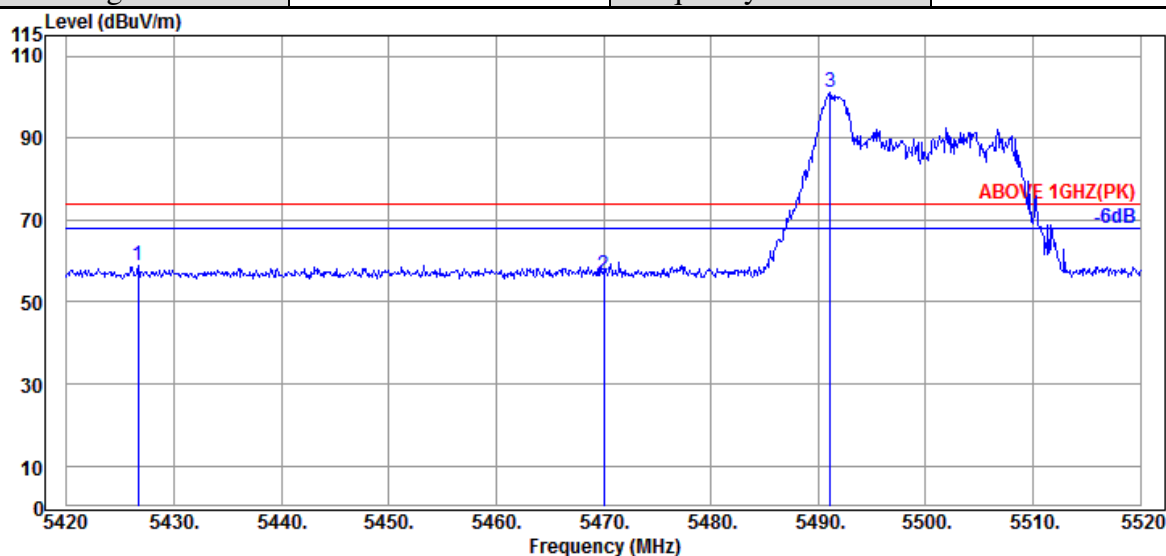

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.700	35.00	9.15	34.25	49.01	58.91	74.00	15.09	Peak
5470.000	34.97	9.20	34.24	46.58	56.51	74.00	17.49	Peak
@ 5491.100	34.93	9.21	34.23	91.20	101.11	---	---	Peak

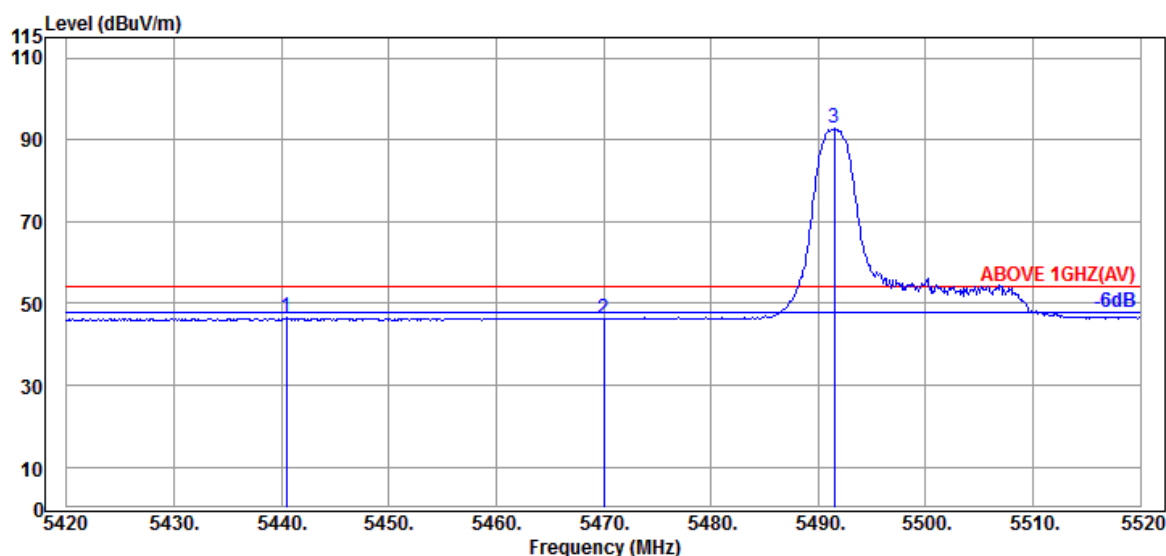

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.500	35.00	9.17	34.25	36.52	46.44	54.00	7.56	Average
5470.000	34.97	9.20	34.24	36.27	46.20	54.00	7.80	Average
@ 5491.500	34.93	9.21	34.23	82.78	92.69	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/0	Frequency	TX 5500MHz

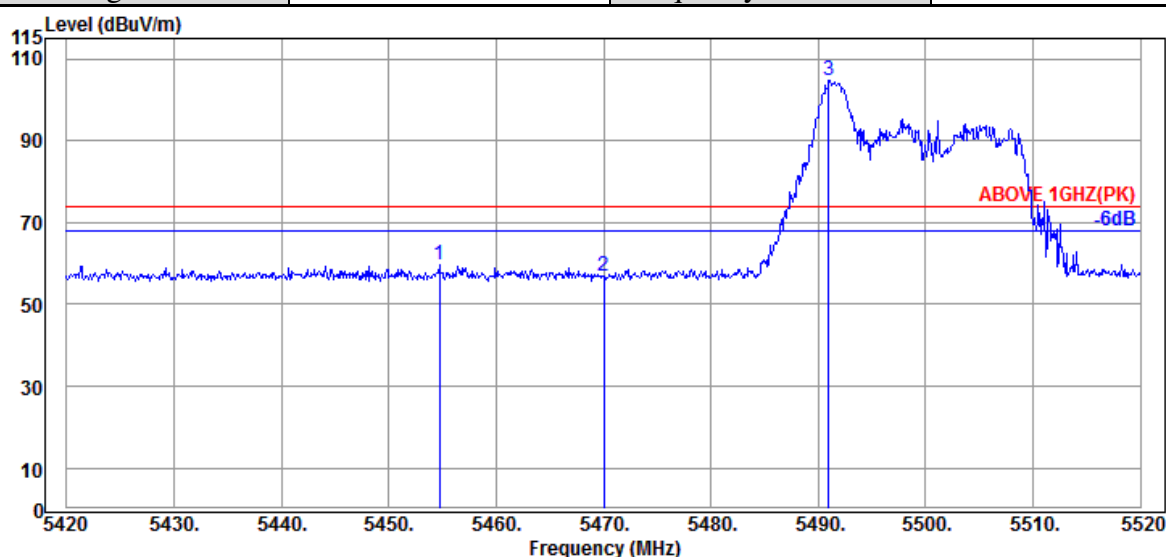

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5454.700	35.00	9.18	34.24	49.61	59.55	74.00	14.45	Peak
5470.000	34.97	9.20	34.24	47.11	57.04	74.00	16.96	Peak
@ 5491.000	34.93	9.21	34.23	95.00	104.91	---	---	Peak

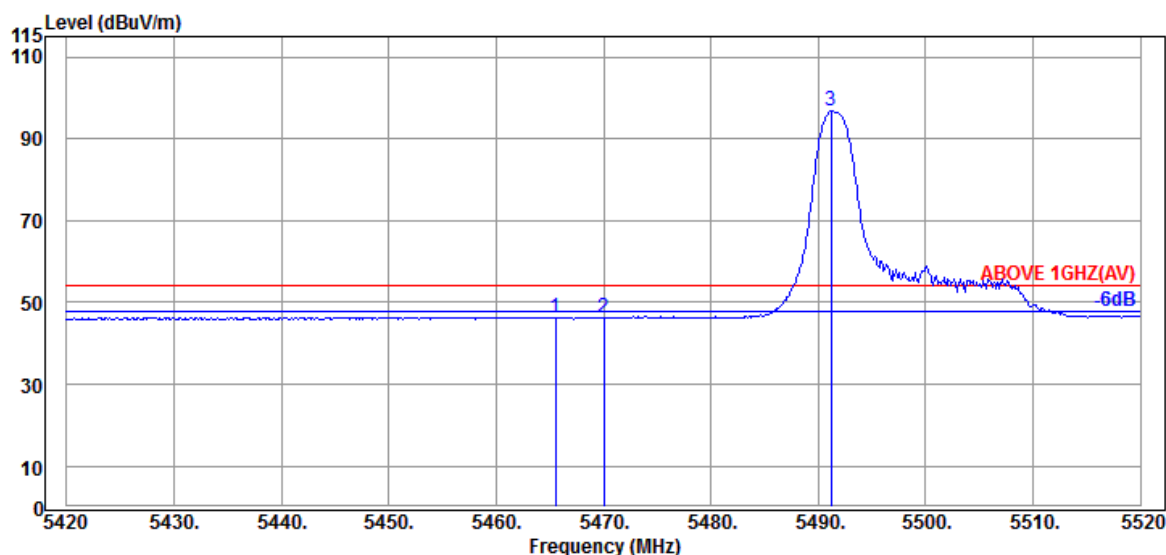

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.500	34.97	9.20	34.24	36.49	46.42	54.00	7.58	Average
5470.000	34.97	9.20	34.24	36.32	46.25	54.00	7.75	Average
@ 5491.200	34.93	9.21	34.23	86.89	96.80	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section..

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

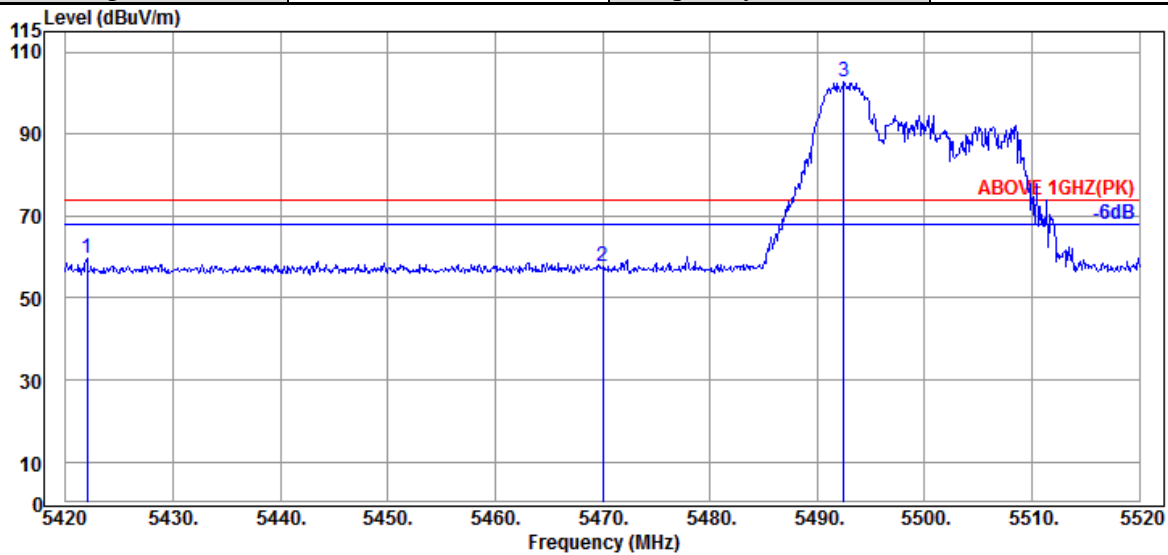

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5422.000	35.00	9.15	34.26	49.77	59.66	74.00	14.34	Peak
5470.000	34.97	9.20	34.24	47.60	57.53	74.00	16.47	Peak
@ 5492.500	34.93	9.21	34.23	92.97	102.88	---	---	Peak

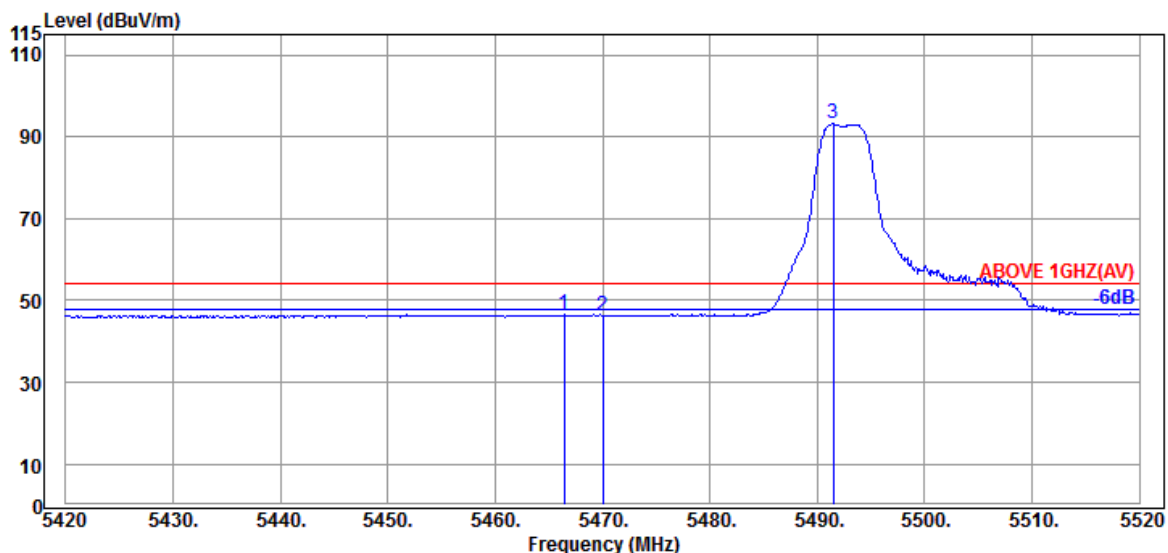

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5466.400	34.97	9.20	34.24	36.62	46.55	54.00	7.45	Average
5470.000	34.97	9.20	34.24	36.29	46.22	54.00	7.78	Average
@ 5491.500	34.93	9.21	34.23	83.32	93.23	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/37	Frequency	TX 5500MHz

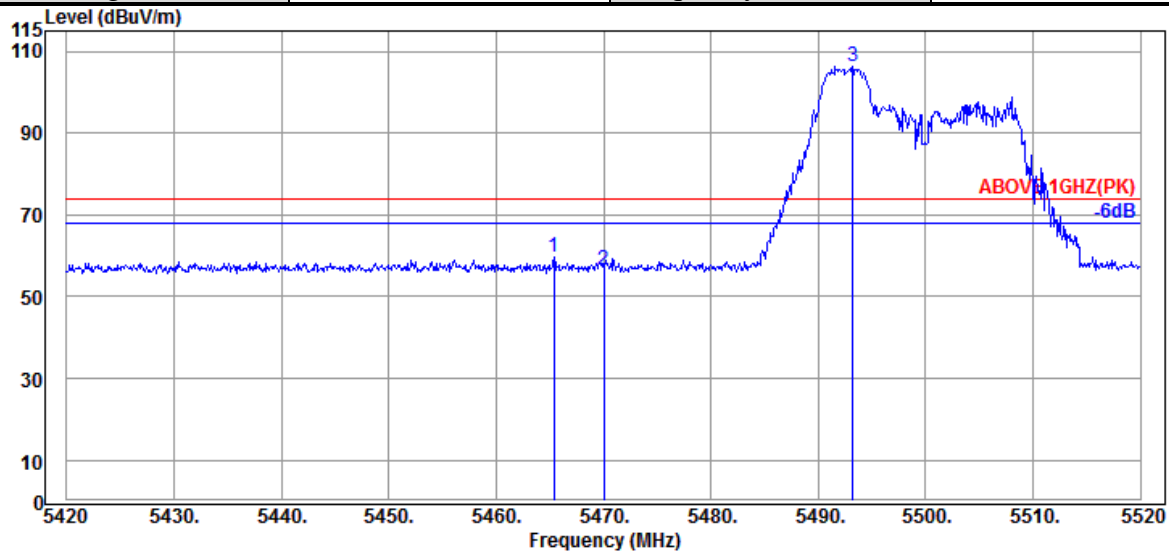

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5465.400	34.97	9.20	34.24	49.71	59.64	74.00	14.36	Peak
5470.000	34.97	9.20	34.24	46.44	56.37	74.00	17.63	Peak
@ 5493.200	34.93	9.21	34.23	96.47	106.38	---	---	Peak

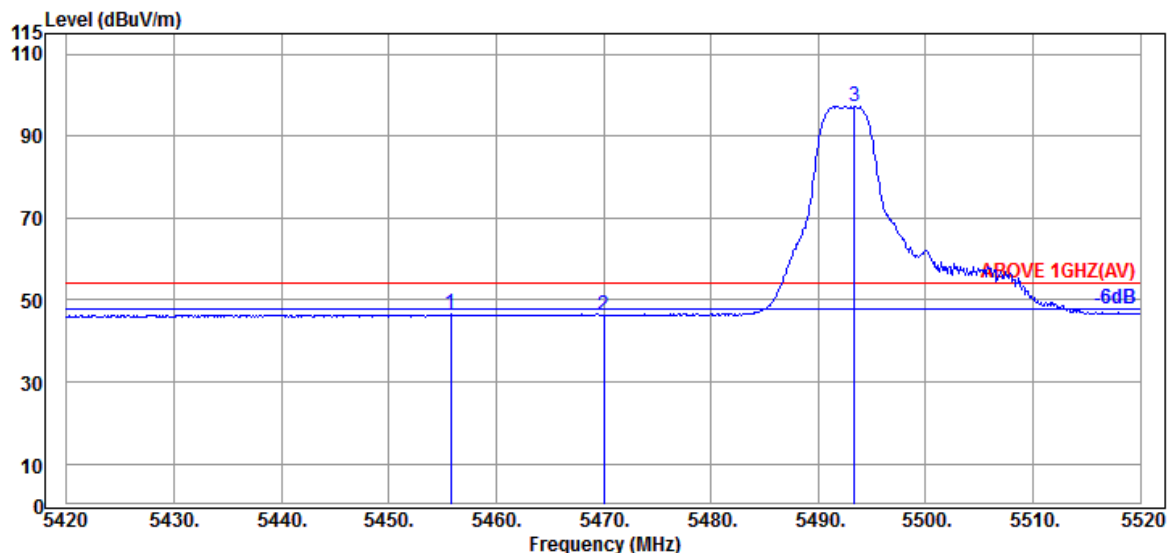

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5455.800	35.00	9.18	34.24	36.52	46.46	54.00	7.54	Average
5470.000	34.97	9.20	34.24	36.22	46.15	54.00	7.85	Average
@ 5493.400	34.93	9.21	34.23	87.38	97.29	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

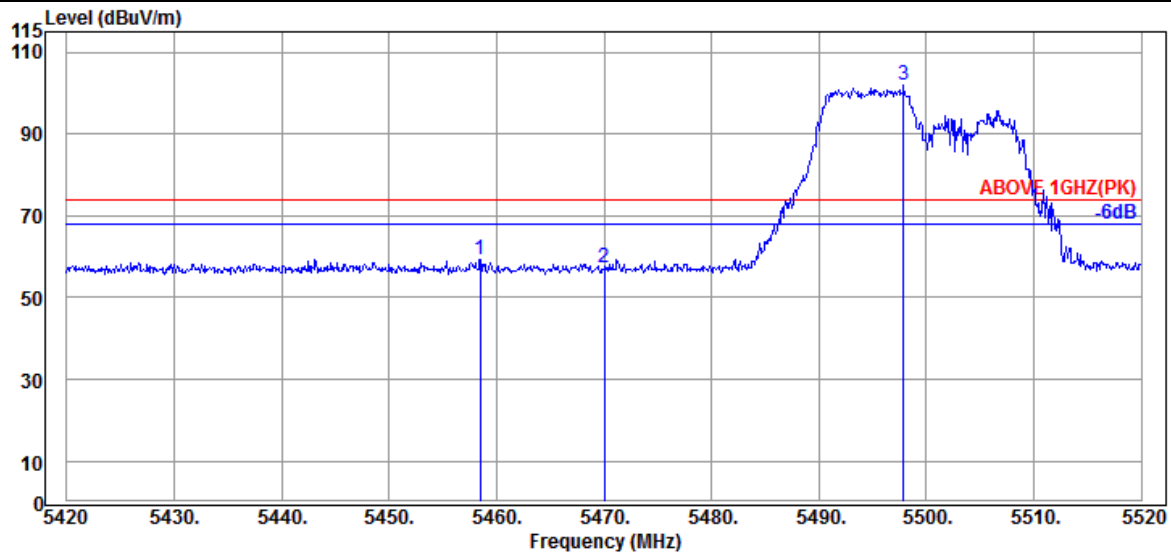

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5458.500	35.00	9.18	34.24	49.51	59.45	74.00	14.55	Peak
5470.000	34.97	9.20	34.24	47.56	57.49	74.00	16.51	Peak
@ 5497.900	34.90	9.23	34.23	92.08	101.98	---	---	Peak

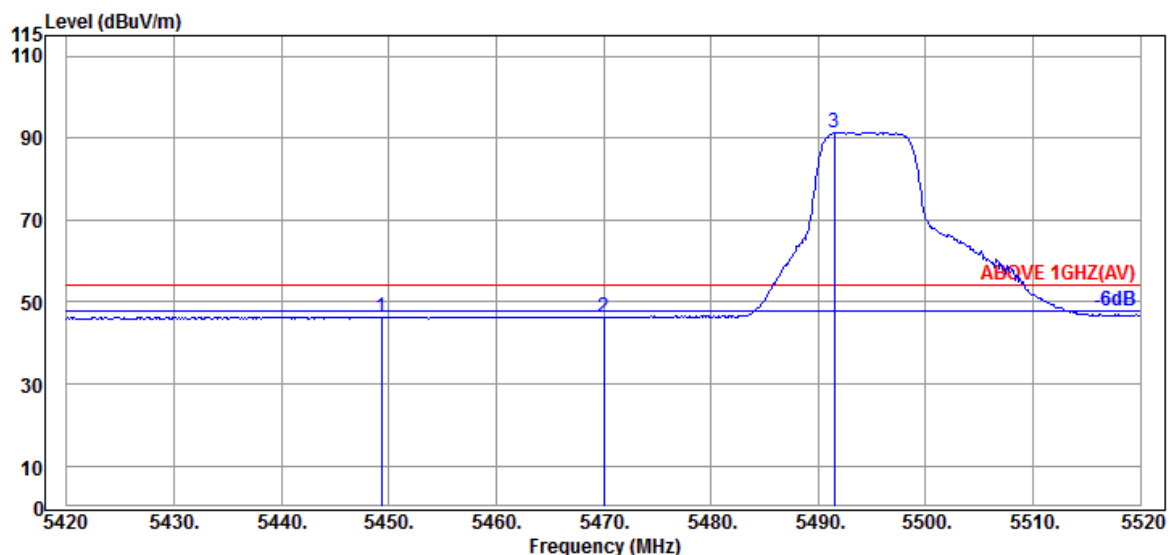


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5449.300	35.00	9.18	34.25	36.49	46.42	54.00	7.58	Average
5470.000	34.97	9.20	34.24	36.42	46.35	54.00	7.65	Average
@ 5491.500	34.93	9.21	34.23	81.56	91.47	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/53	Frequency	TX 5500MHz

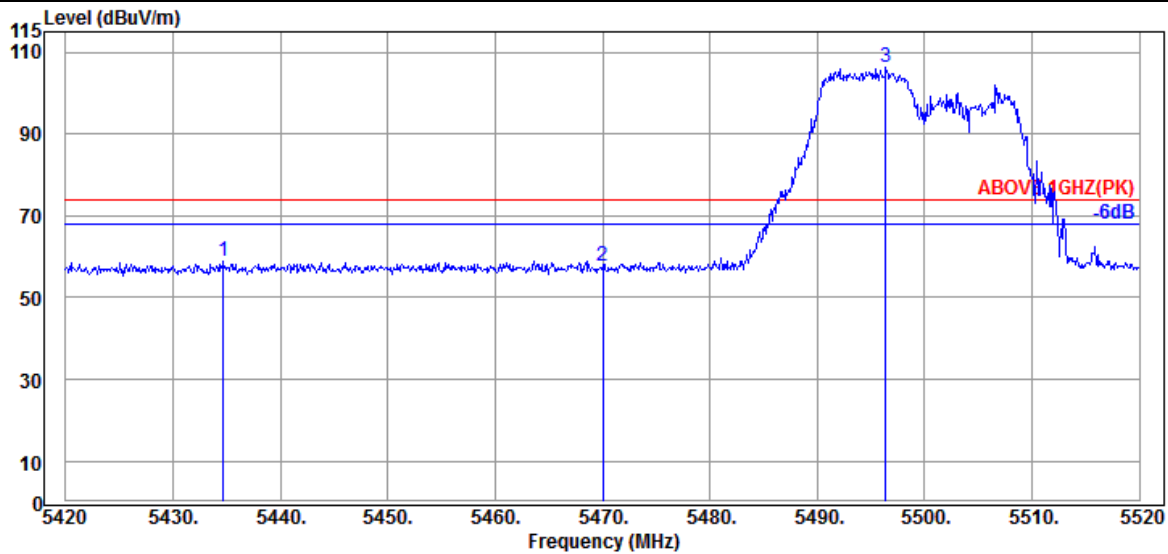

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5434.700	35.00	9.17	34.25	49.12	59.04	74.00	14.96	Peak
5470.000	34.97	9.20	34.24	47.61	57.54	74.00	16.46	Peak
@ 5496.400	34.90	9.21	34.23	96.29	106.17	---	---	Peak

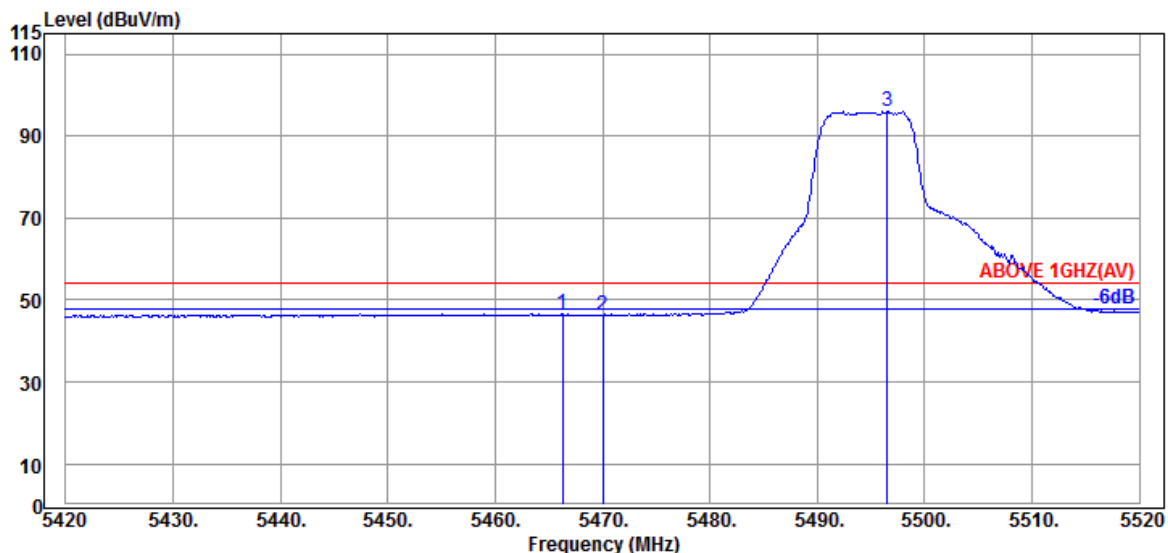

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5466.300	34.97	9.20	34.24	36.62	46.55	54.00	7.45	Average
5470.000	34.97	9.20	34.24	36.45	46.38	54.00	7.62	Average
@ 5496.500	34.90	9.21	34.23	86.09	95.97	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	26/8	Frequency	TX 5700MHz

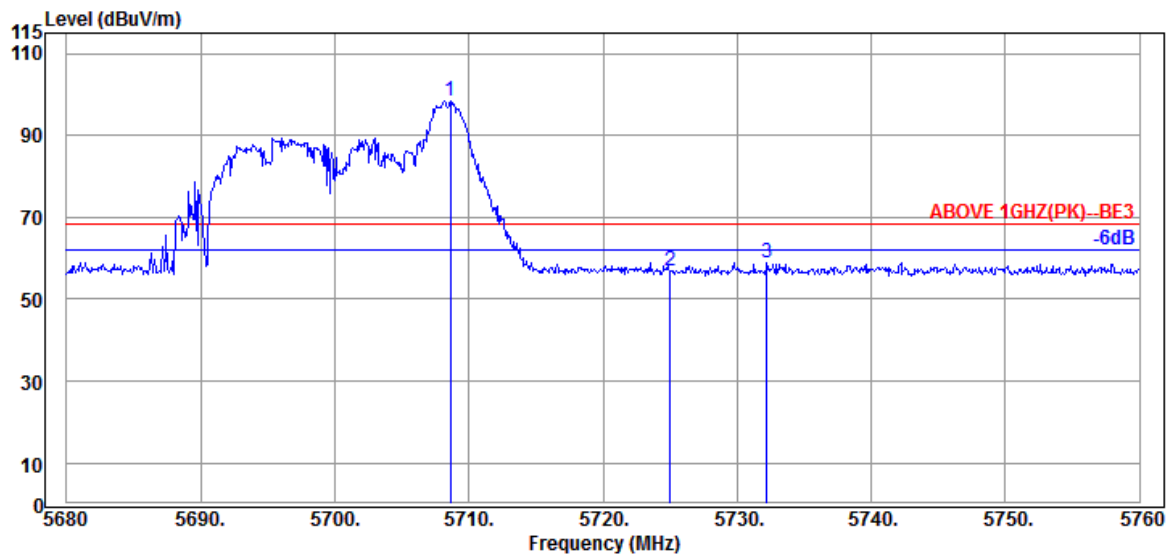

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5708.640	34.53	9.40	34.32	88.82	98.43	---	---	Peak
5725.040	34.57	9.42	34.32	47.27	56.94	68.20	11.26	Peak
5732.240	34.57	9.42	34.33	49.18	58.84	68.20	9.36	Peak

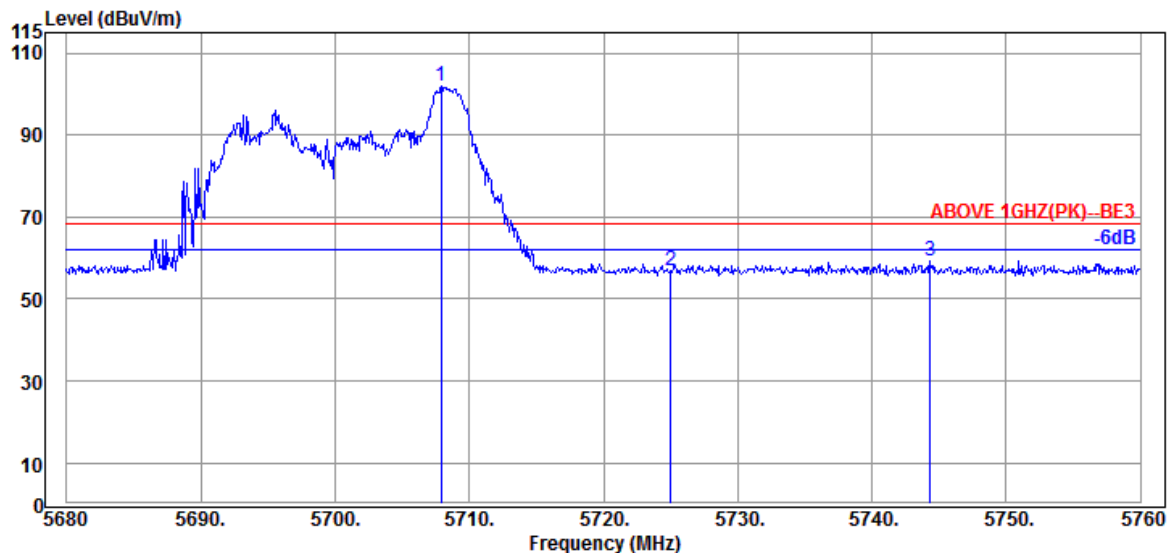

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.920	34.53	9.40	34.32	92.39	102.00	---	---	Peak
5725.040	34.57	9.42	34.32	47.39	57.06	68.20	11.14	Peak
5744.320	34.60	9.43	34.33	49.59	59.29	68.20	8.91	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	52/40	Frequency	TX 5700MHz

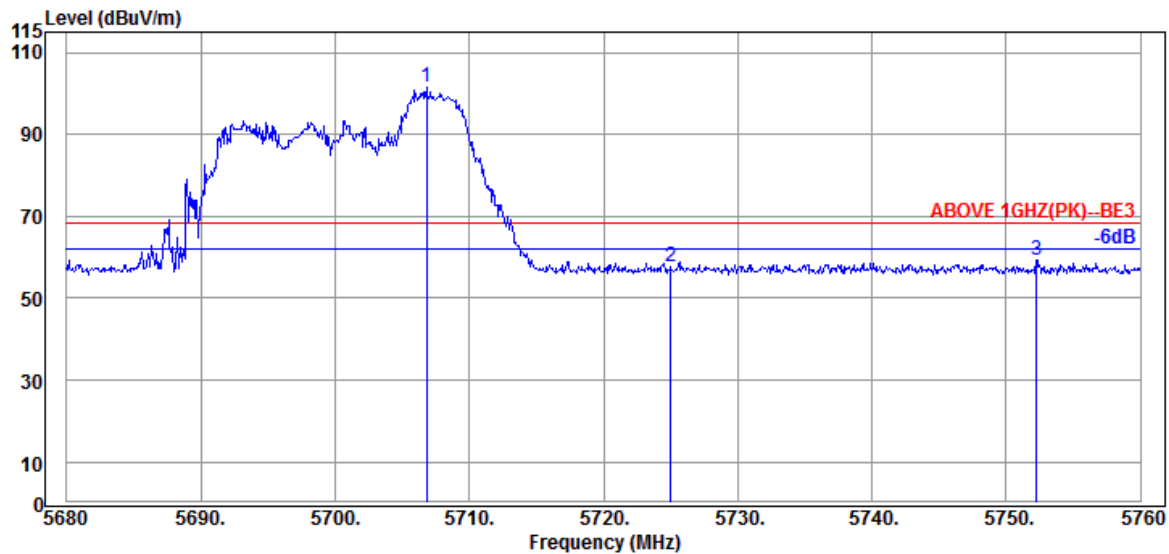

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5706.800	34.53	9.40	34.32	92.06	101.67	---	---	Peak
5725.040	34.57	9.42	34.32	48.01	57.68	68.20	10.52	Peak
5752.240	34.60	9.45	34.33	49.65	59.37	68.20	8.83	Peak

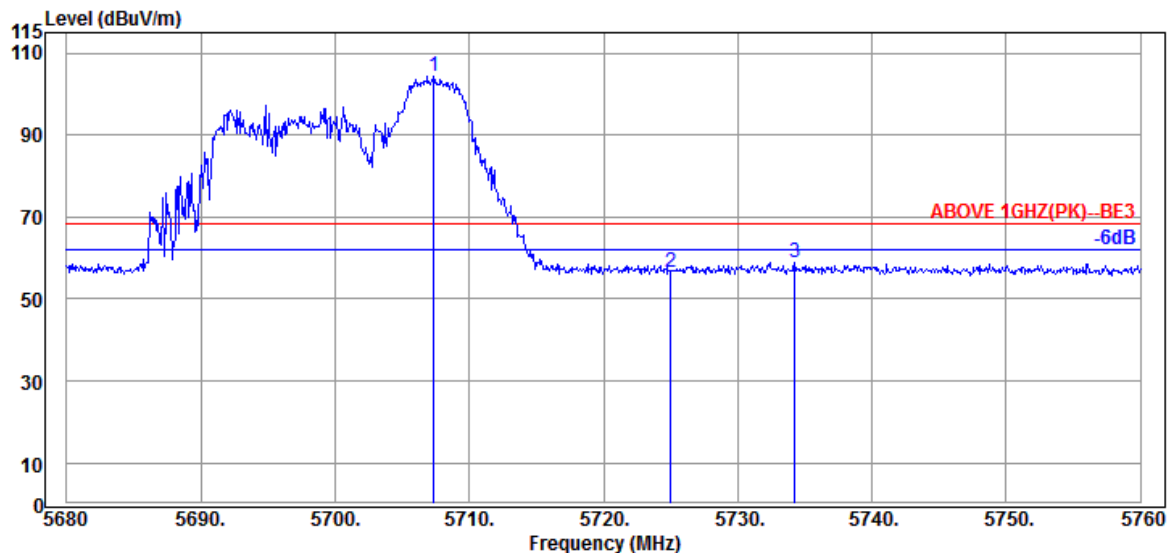

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5707.360	34.53	9.40	34.32	94.63	104.24	---	---	Peak
5725.040	34.57	9.42	34.32	46.65	56.32	68.20	11.88	Peak
5734.240	34.57	9.42	34.33	49.17	58.83	68.20	9.37	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	2C
RU Configuration	106/54	Frequency	TX 5700MHz

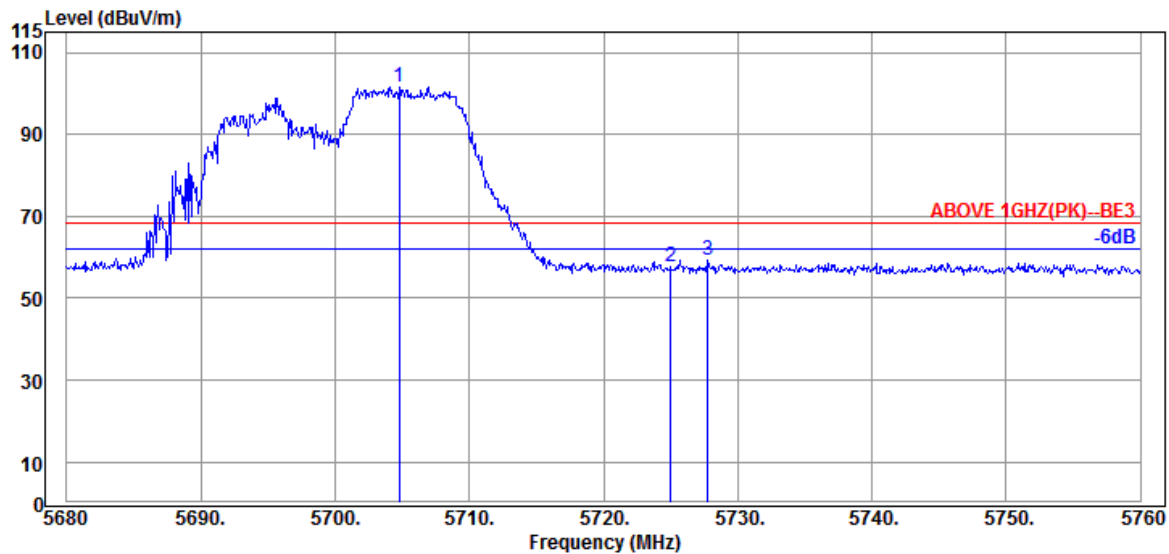

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5704.800	34.50	9.40	34.32	92.14	101.72	---	---	Peak
5725.040	34.57	9.42	34.32	47.96	57.63	68.20	10.57	Peak
5727.760	34.57	9.42	34.32	49.60	59.27	68.20	8.93	Peak

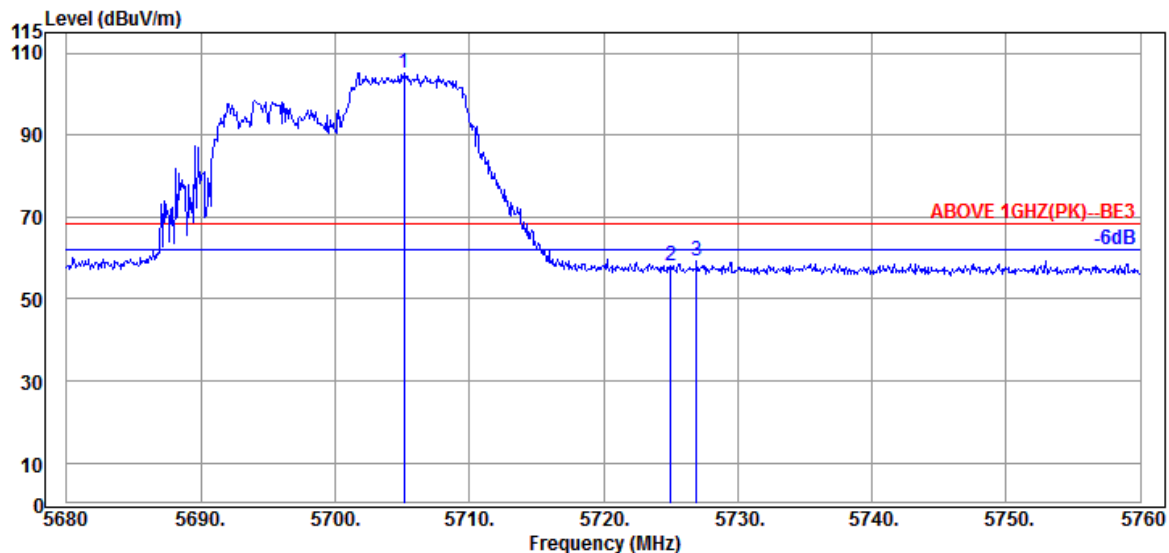

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5705.120	34.50	9.40	34.32	95.62	105.20	---	---	Peak
5725.040	34.57	9.42	34.32	48.61	58.28	68.20	9.92	Peak
5726.960	34.57	9.42	34.32	49.67	59.34	68.20	8.86	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/0	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

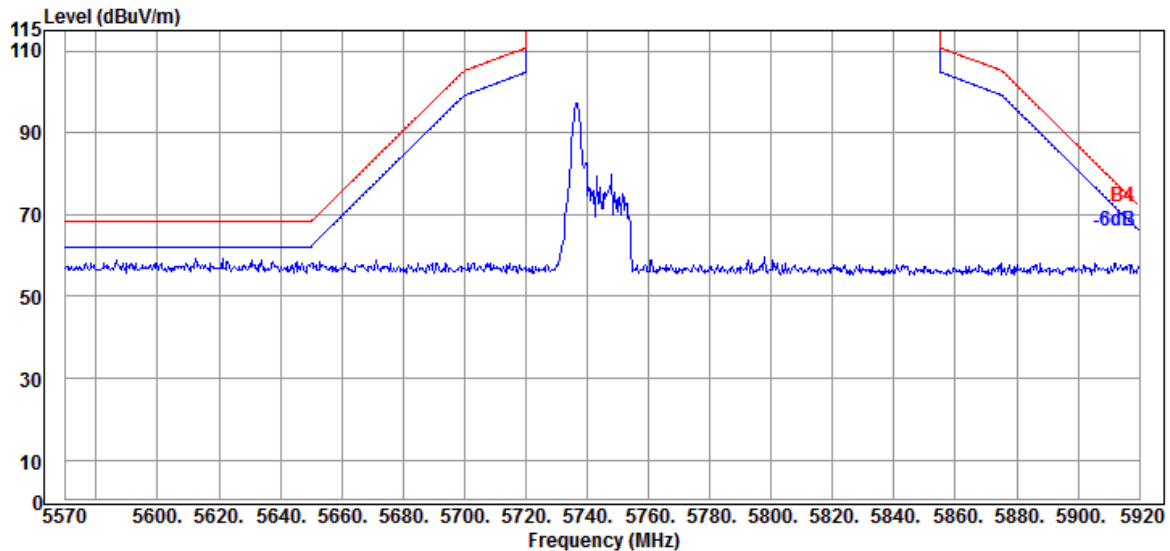

Antenna at Vertical Polarization

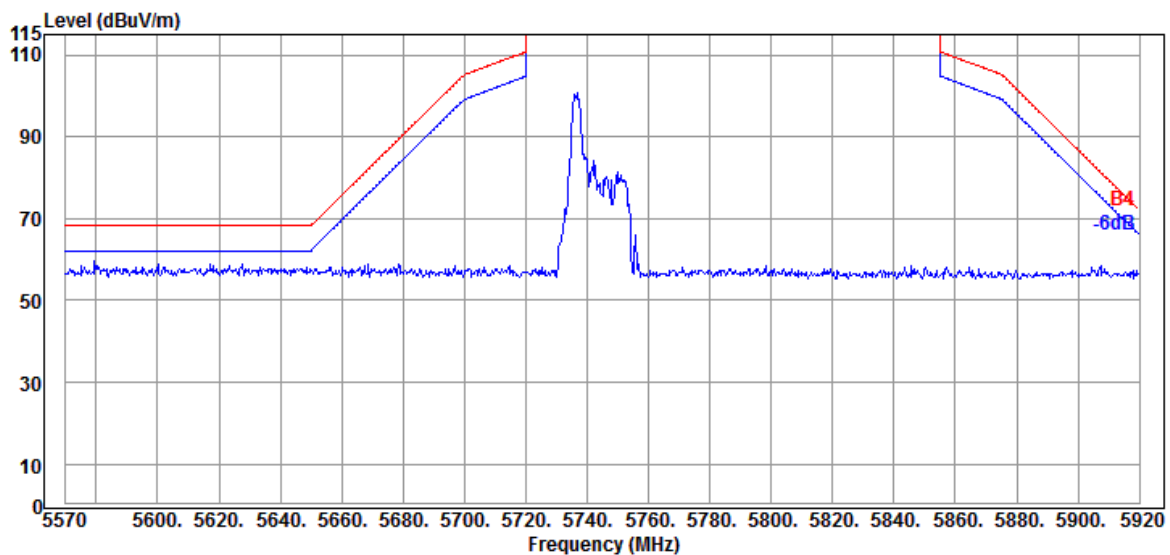


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/37	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

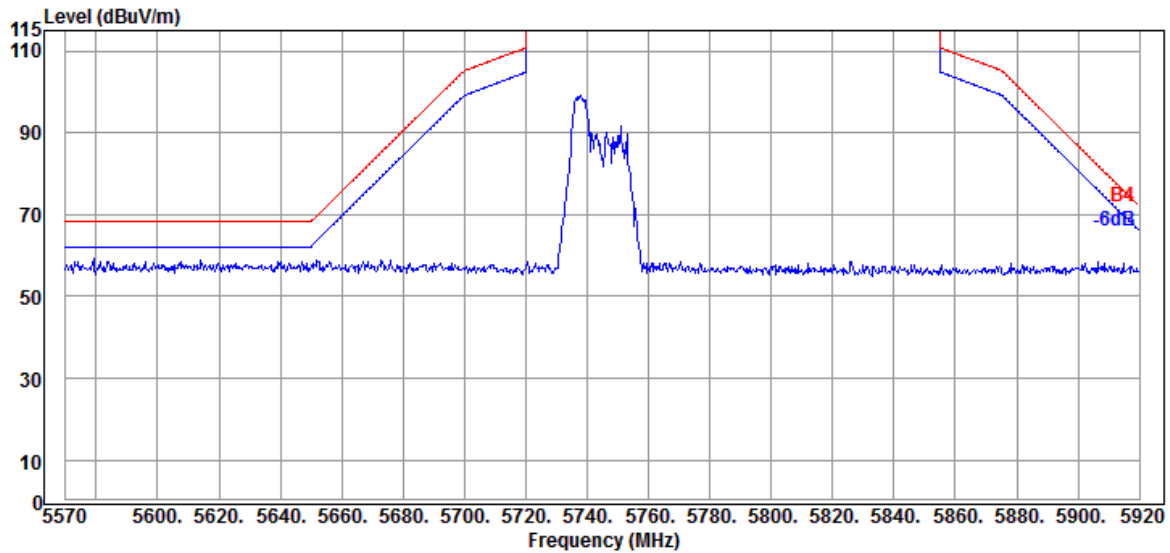

Antenna at Vertical Polarization

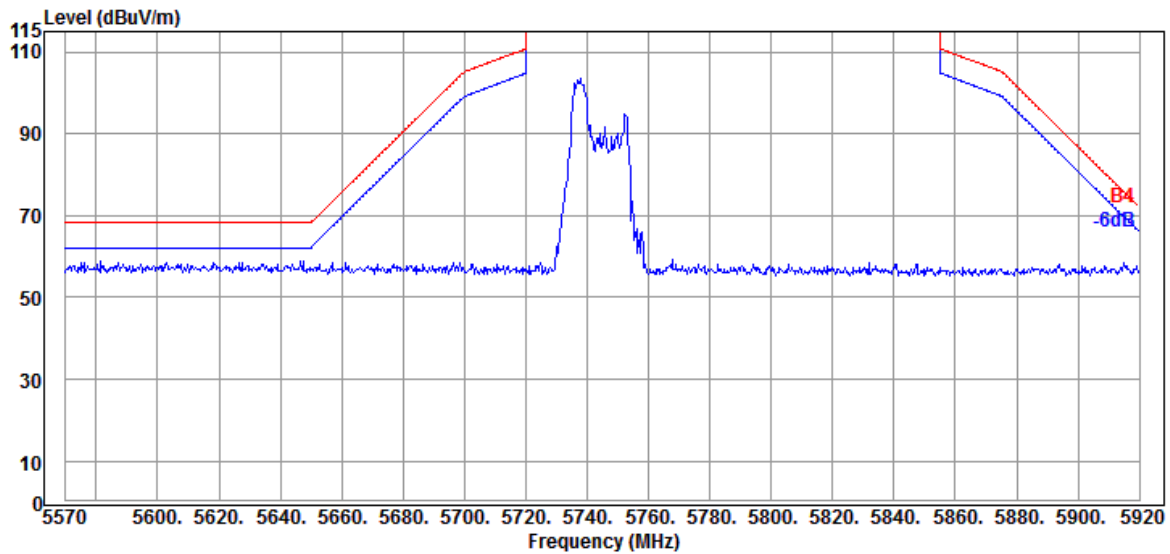


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/53	Frequency	TX 5745MHz

Antenna at Horizontal Polarization

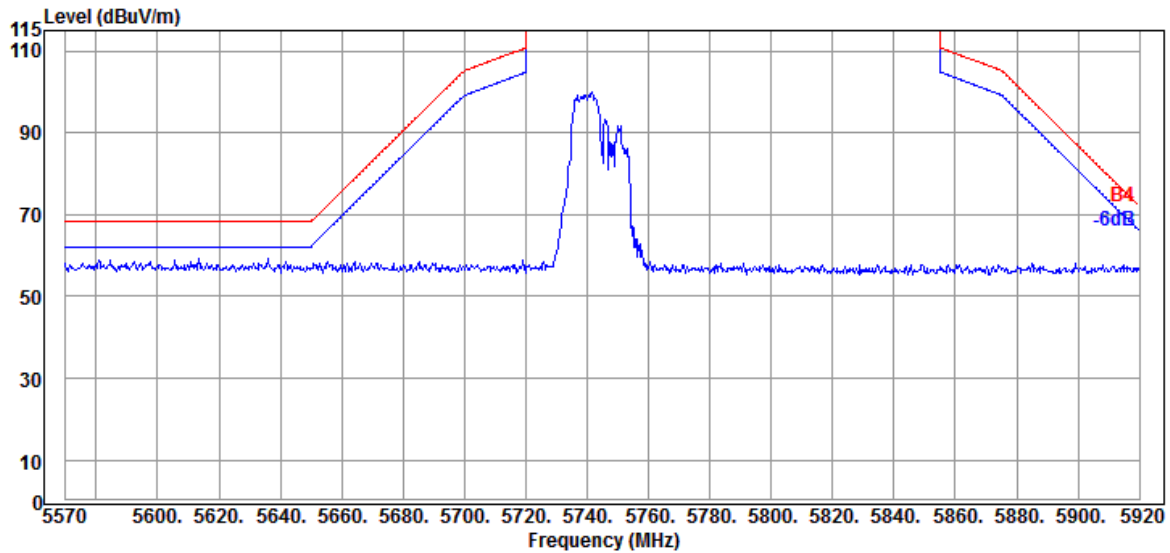

Antenna at Vertical Polarization

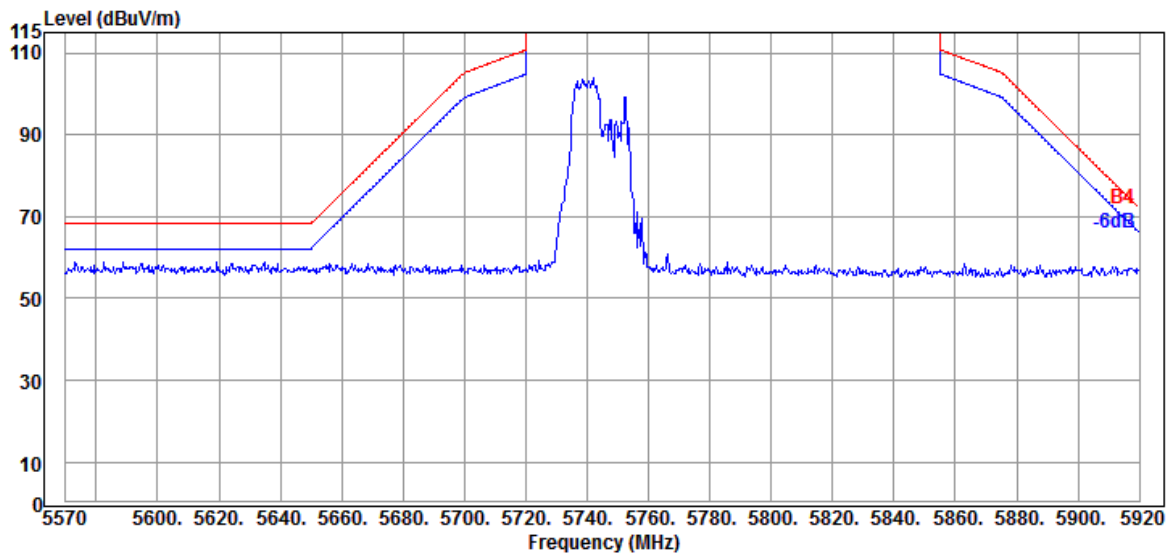


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	26/8	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

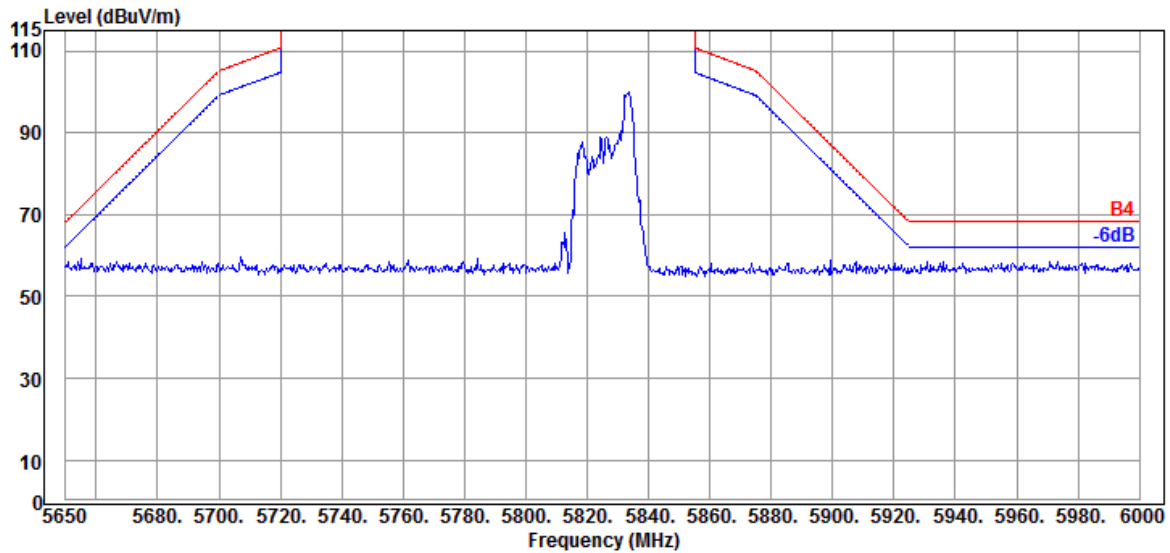

Antenna at Vertical Polarization

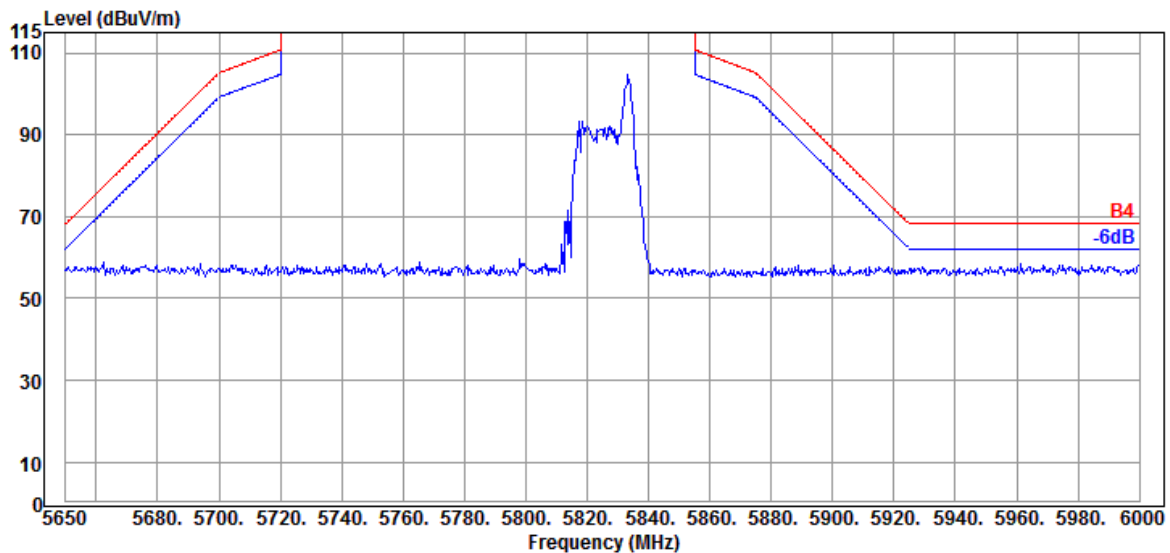


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	52/40	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

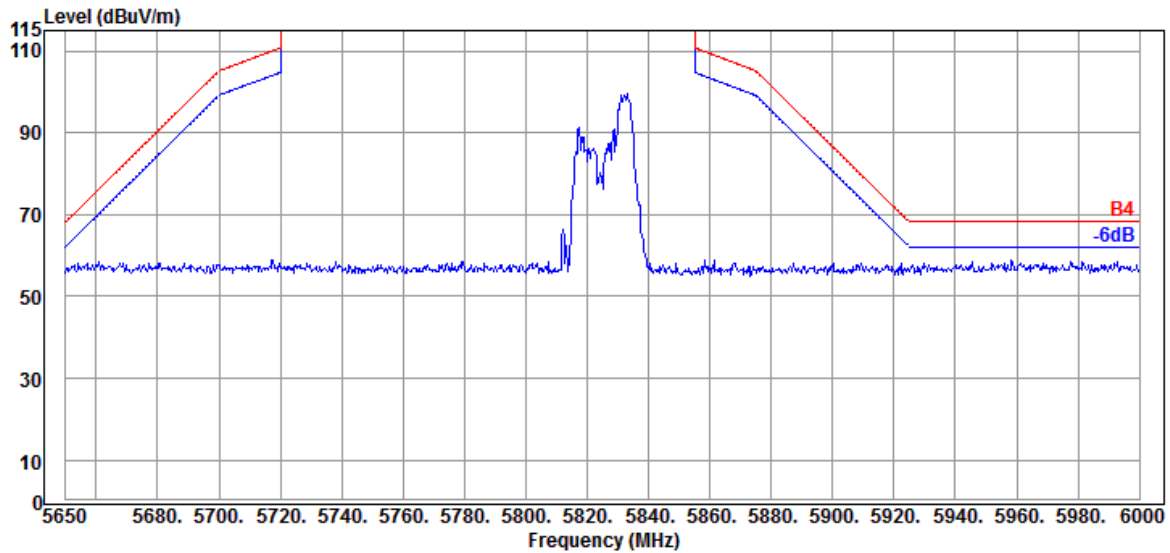

Antenna at Vertical Polarization

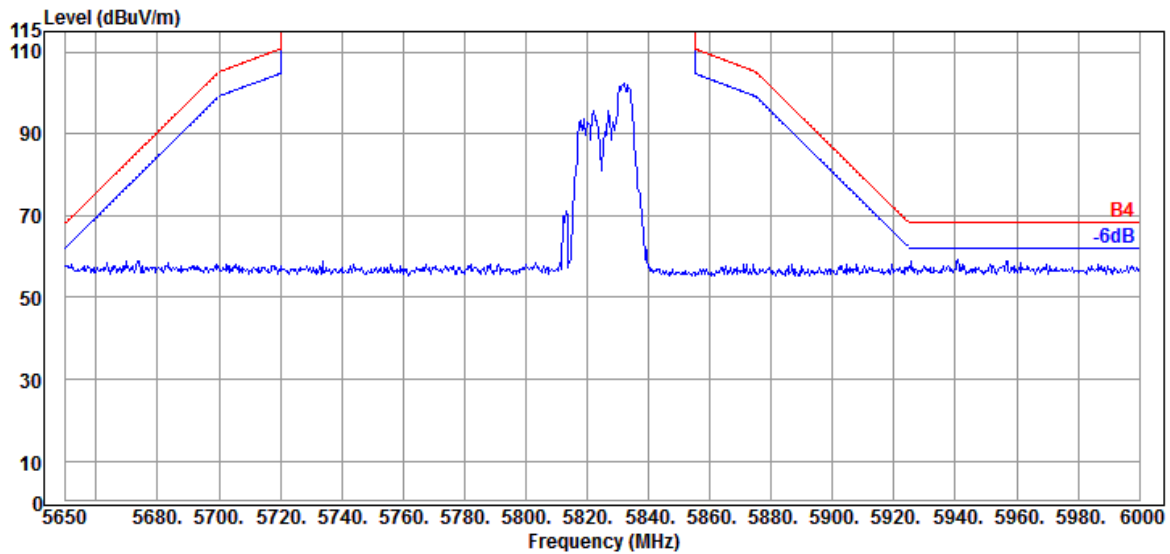


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE20	U-NII Band	3
RU Configuration	106/54	Frequency	TX 5825MHz

Antenna at Horizontal Polarization

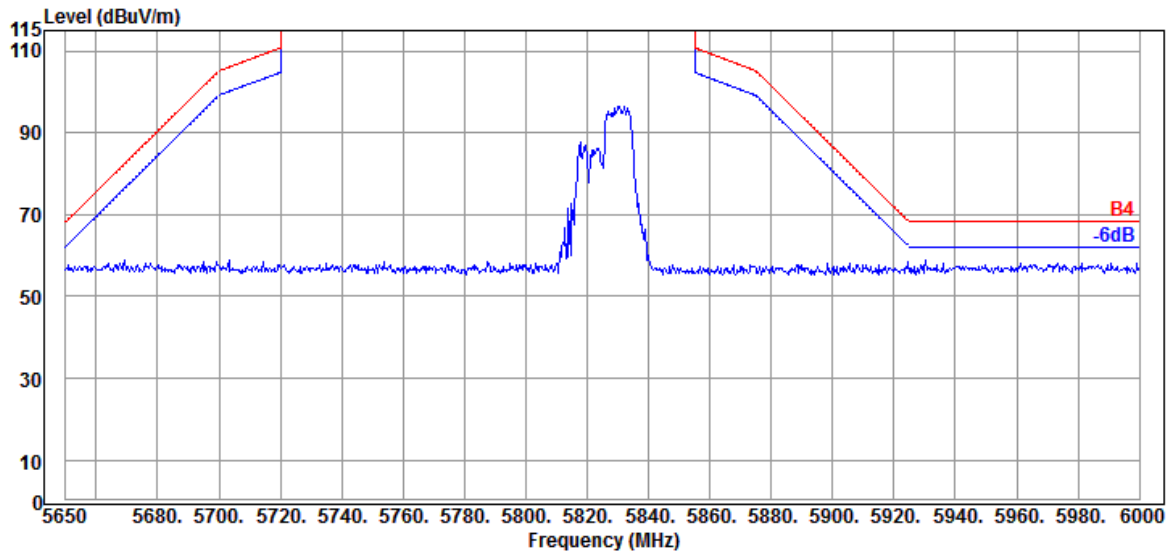


Antenna at Vertical Polarization

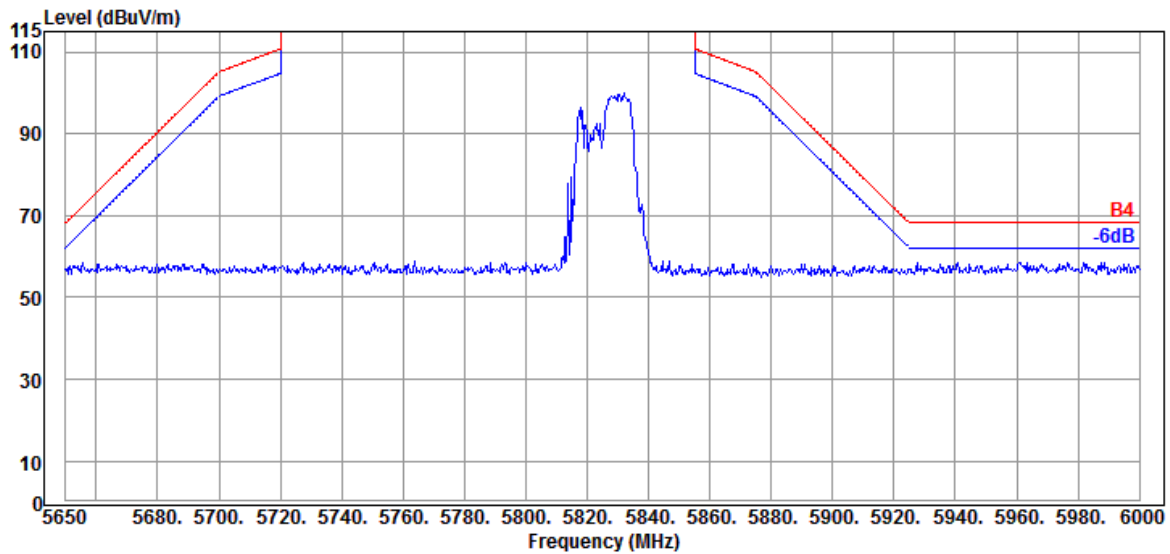

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

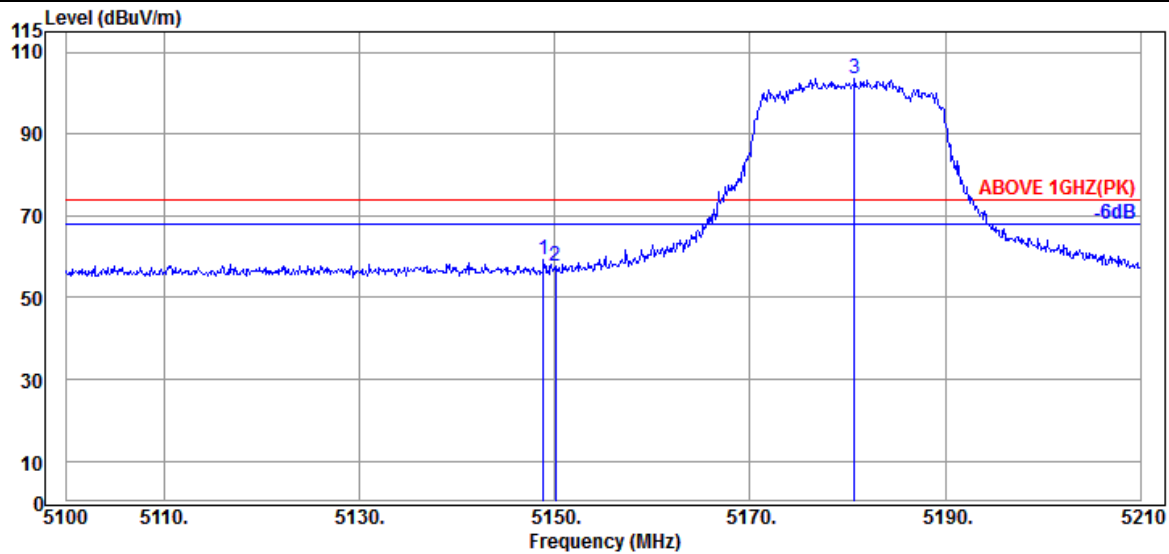

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.840	34.20	8.92	34.35	50.48	59.25	74.00	14.75	Peak
5150.050	34.20	8.92	34.35	49.02	57.79	74.00	16.21	Peak
@ 5180.740	34.33	8.95	34.34	94.59	103.53	---	---	Peak

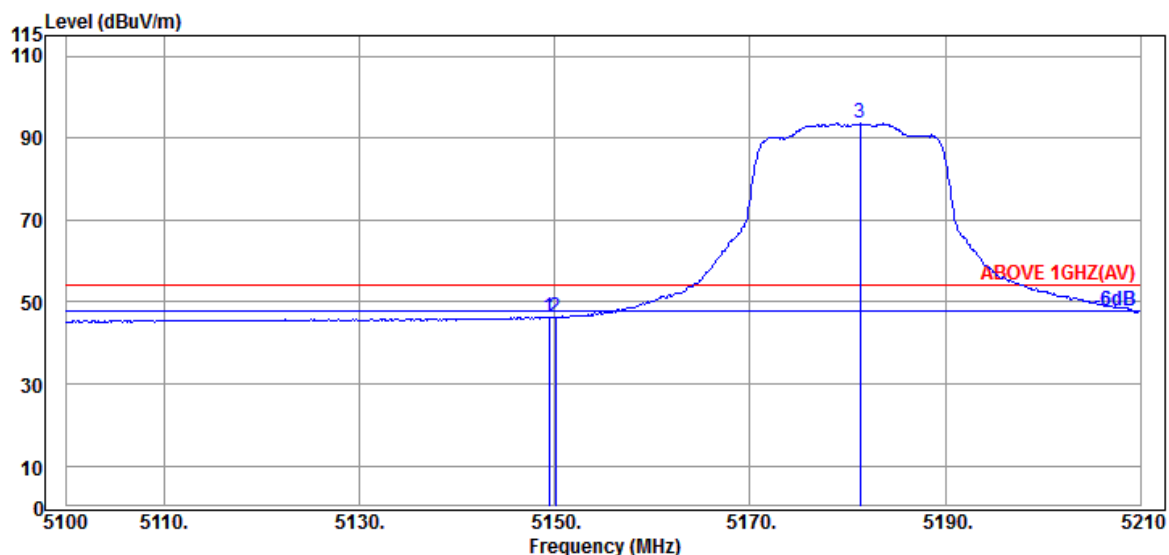

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.390	34.20	8.92	34.35	37.58	46.35	54.00	7.65	Average
5150.050	34.20	8.92	34.35	37.61	46.38	54.00	7.62	Average
@ 5181.290	34.33	8.95	34.34	84.65	93.59	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	1
RU Configuration	242/61	Frequency	TX 5190MHz

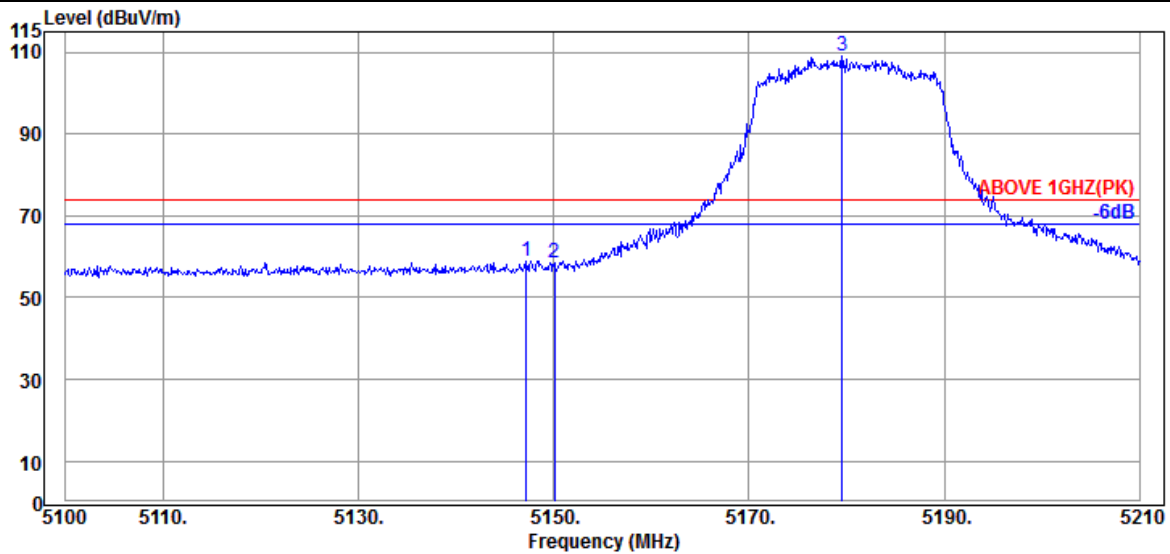

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.190	34.20	8.92	34.35	50.28	59.05	74.00	14.95	Peak
5150.050	34.20	8.92	34.35	49.54	58.31	74.00	15.69	Peak
@ 5179.530	34.33	8.95	34.34	100.24	109.18	---	---	Peak

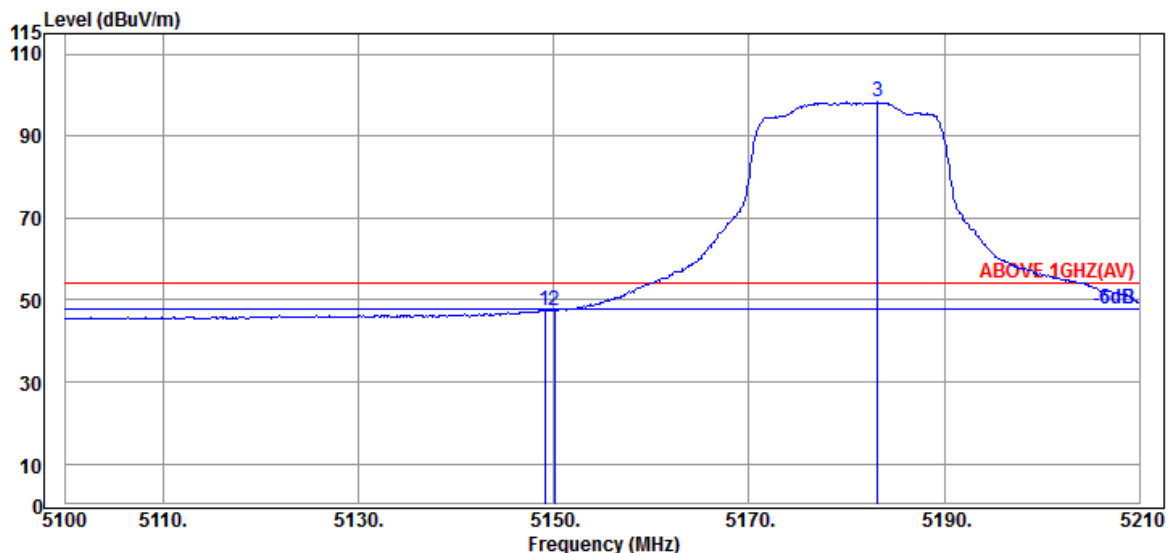

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.060	34.20	8.92	34.35	38.79	47.56	54.00	6.44	Average
5150.050	34.20	8.92	34.35	38.46	47.23	54.00	6.77	Average
@ 5183.160	34.33	8.95	34.34	89.28	98.22	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

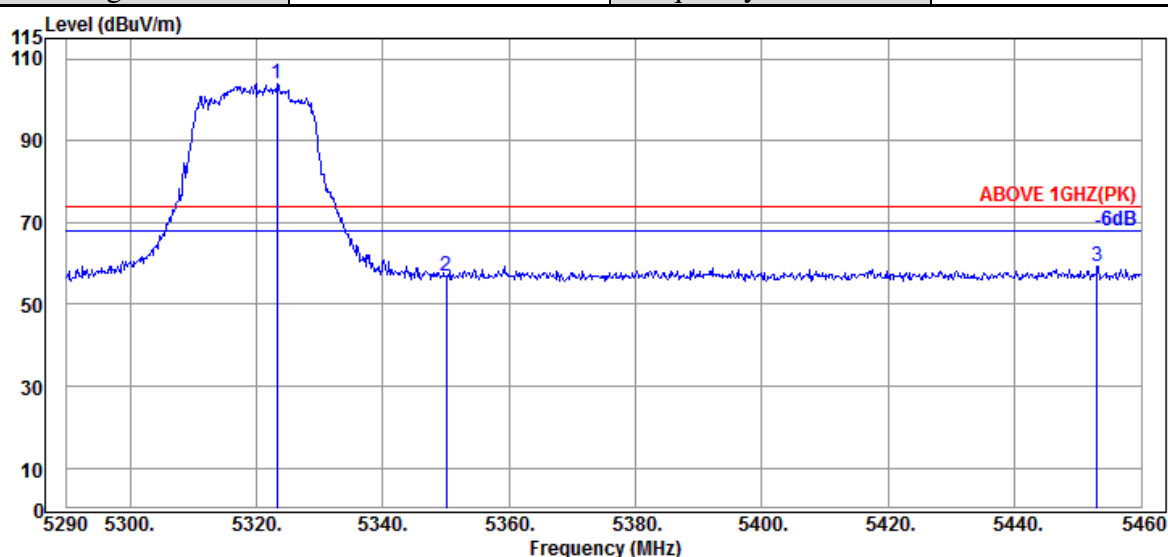

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5323.320	34.70	9.07	34.28	94.46	103.95	---	---	Peak
	5350.010	34.80	9.10	34.27	47.17	56.80	74.00	17.20	Peak
	5453.030	35.00	9.18	34.24	49.23	59.17	74.00	14.83	Peak

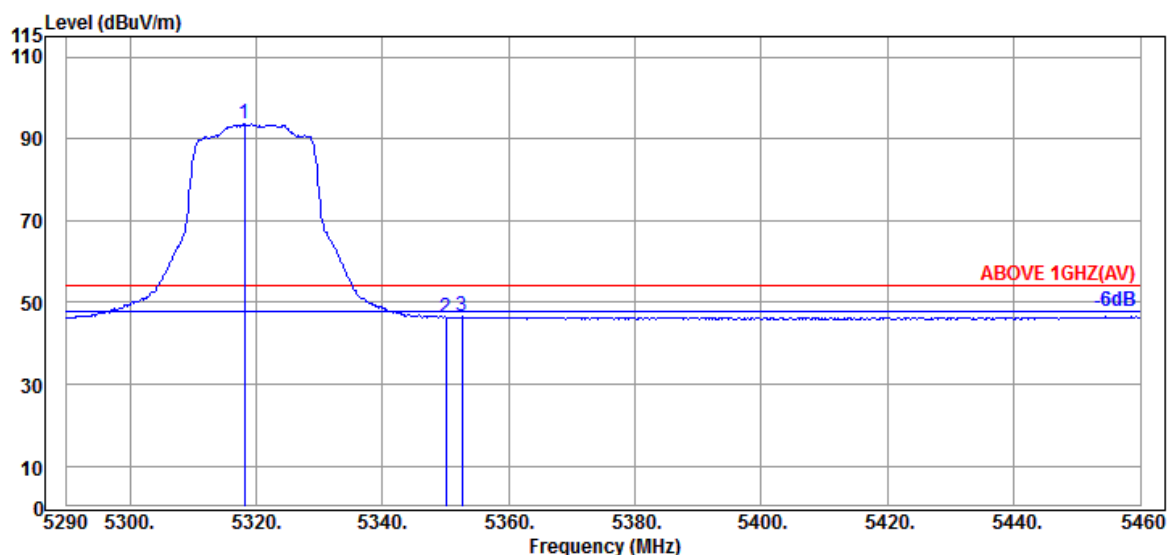

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5318.220	34.60	9.07	34.29	84.22	93.60	---	---	Average
	5350.010	34.80	9.10	34.27	36.68	46.31	54.00	7.69	Average
	5352.560	34.80	9.10	34.27	36.92	46.55	54.00	7.45	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2A
RU Configuration	242/62	Frequency	TX 5310MHz

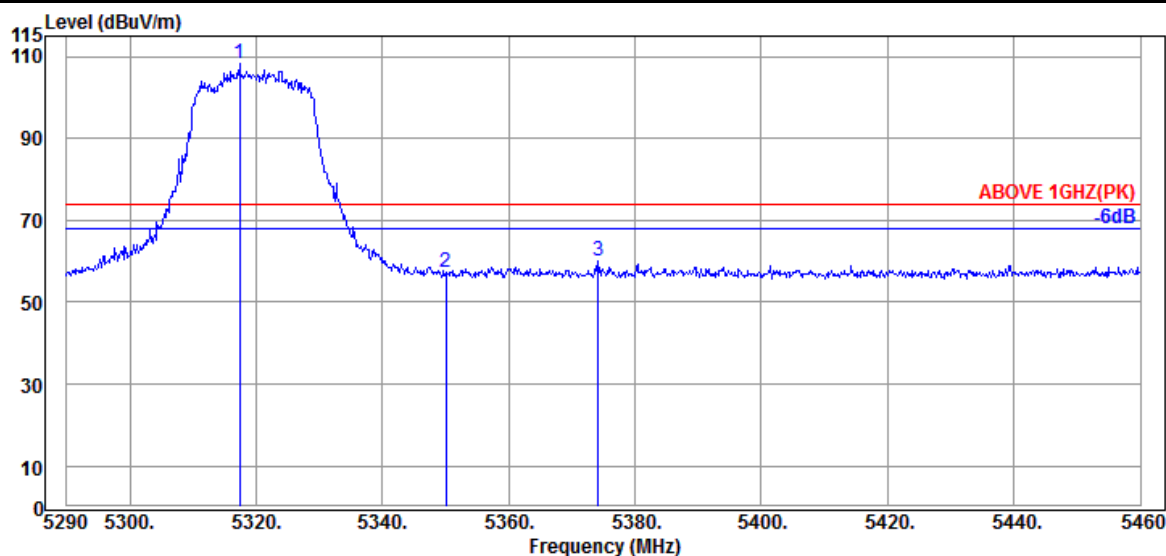

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.370	34.60	9.07	34.29	98.78	108.16	---	---	Peak
5350.010	34.80	9.10	34.27	47.77	57.40	74.00	16.60	Peak
5374.150	34.93	9.11	34.27	50.39	60.16	74.00	13.84	Peak

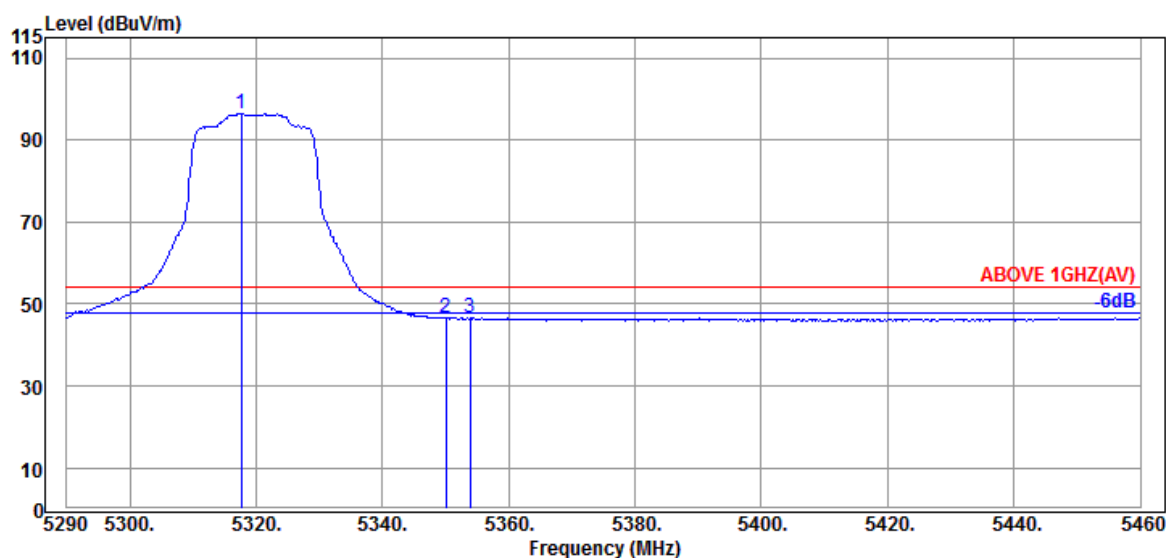

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5317.710	34.60	9.07	34.29	87.05	96.43	---	---	Average
5350.010	34.80	9.10	34.27	36.98	46.61	54.00	7.39	Average
5353.920	34.80	9.10	34.27	37.04	46.67	54.00	7.33	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

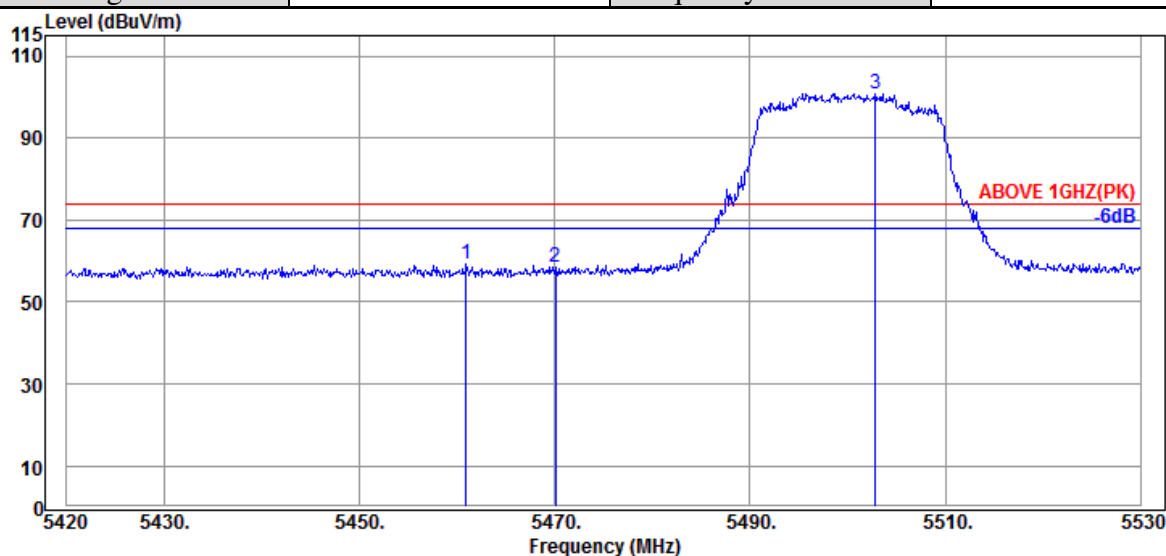

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5460.920	35.00	9.18	34.24	49.36	59.30	74.00	14.70	Peak
5470.050	34.97	9.20	34.24	48.39	58.32	74.00	15.68	Peak
@ 5502.830	34.90	9.23	34.24	90.95	100.84	---	---	Peak

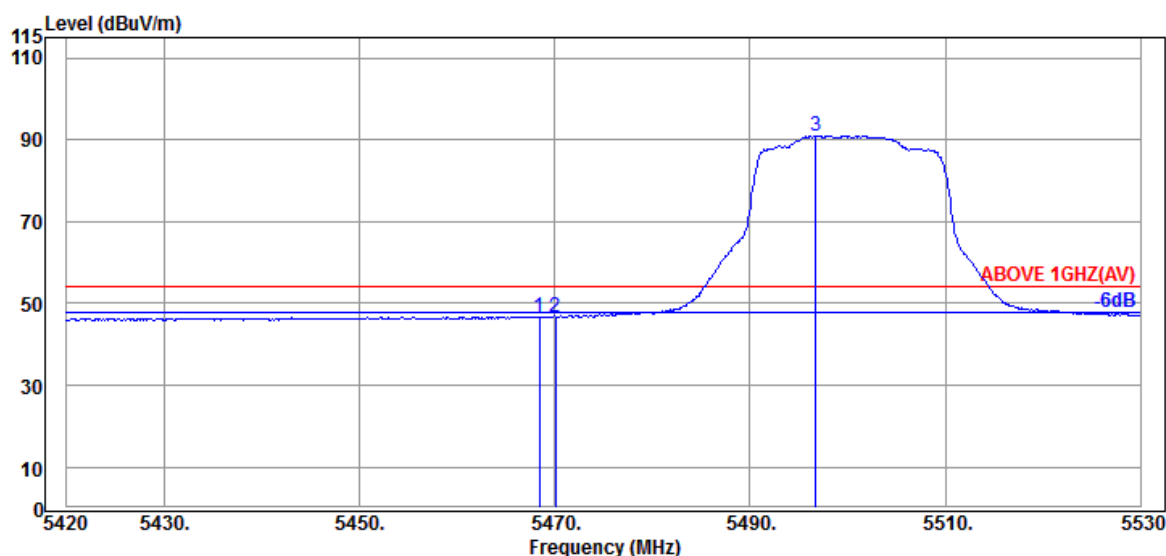


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.400	34.97	9.20	34.24	36.86	46.79	54.00	7.21	Average
5470.050	34.97	9.20	34.24	36.83	46.76	54.00	7.24	Average
@ 5496.780	34.90	9.23	34.23	81.15	91.05	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/61	Frequency	TX 5510MHz

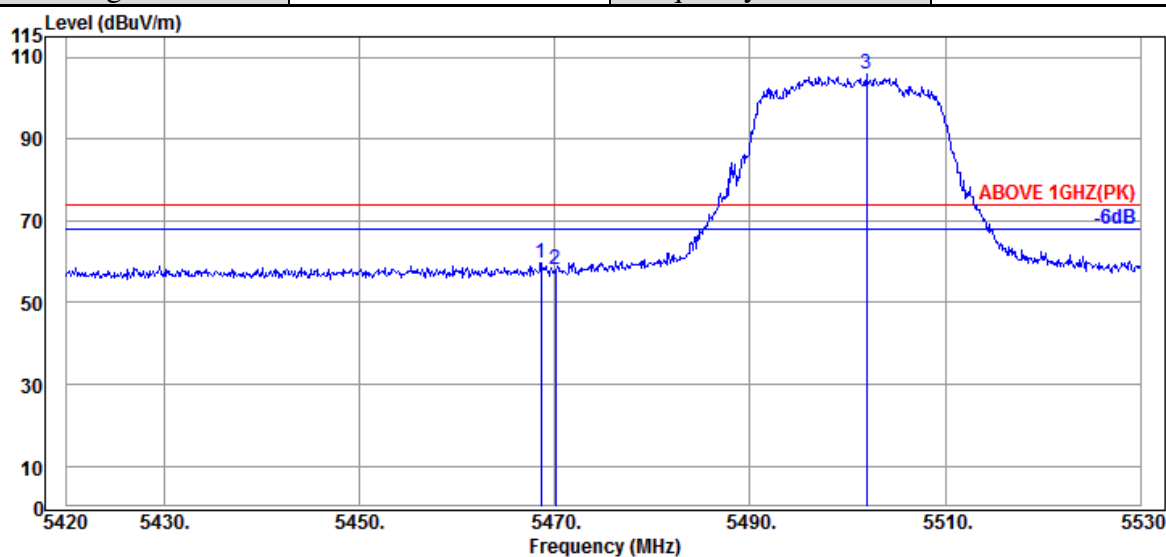

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.620	34.97	9.20	34.24	49.70	59.63	74.00	14.37	Peak
5470.050	34.97	9.20	34.24	48.03	57.96	74.00	16.04	Peak
@ 5501.950	34.90	9.23	34.24	95.84	105.73	---	---	Peak

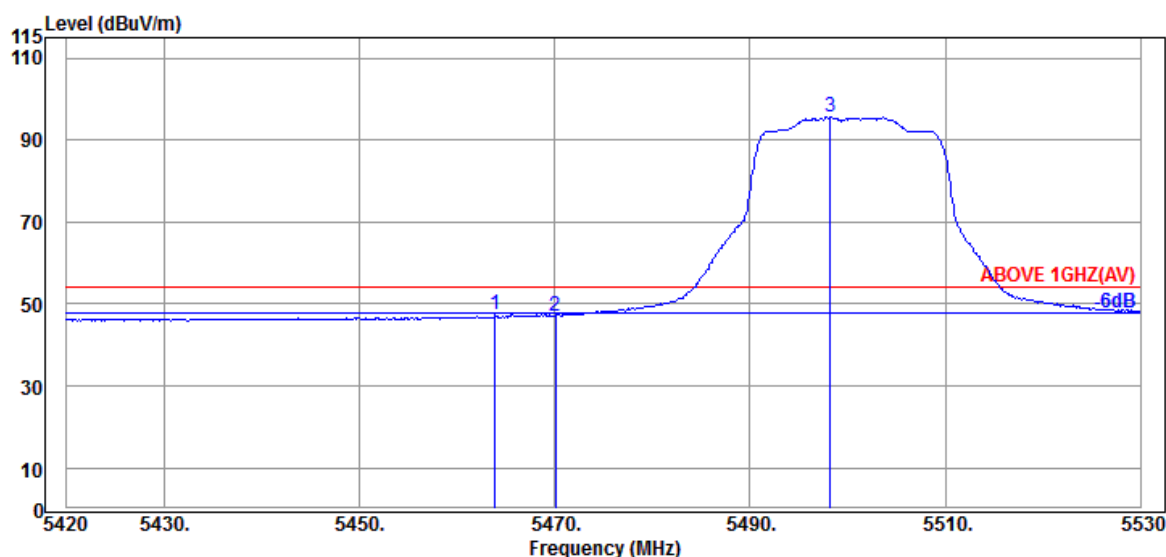

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.890	34.97	9.20	34.24	37.43	47.36	54.00	6.64	Average
5470.050	34.97	9.20	34.24	37.21	47.14	54.00	6.86	Average
@ 5498.210	34.90	9.23	34.23	85.80	95.70	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	2C
RU Configuration	242/62	Frequency	TX 5670MHz

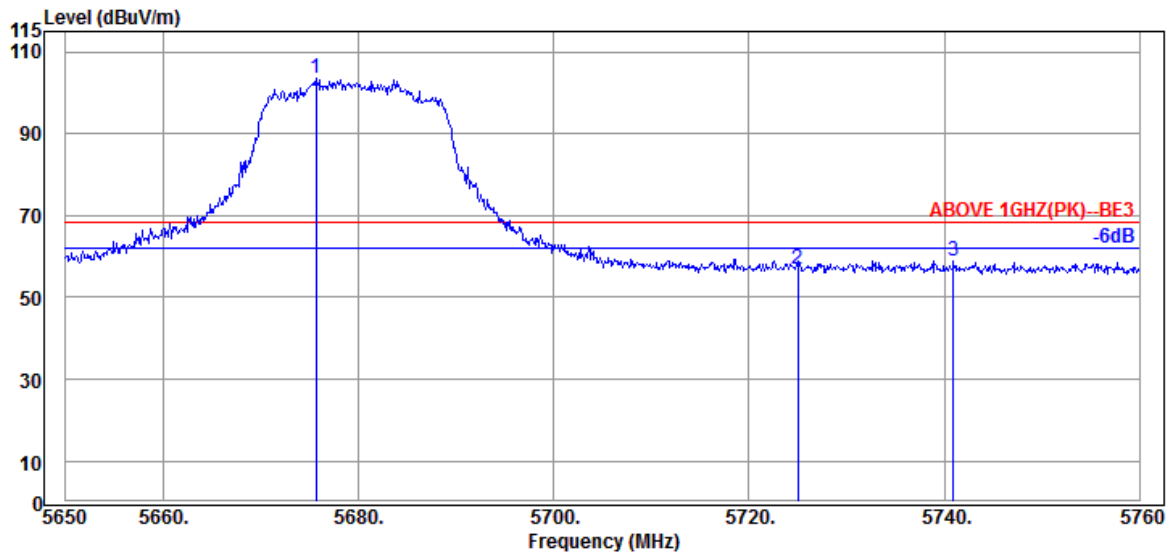

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5675.630	34.57	9.37	34.30	94.04	103.68	---	---	Peak
5725.020	34.57	9.42	34.32	47.36	57.03	68.20	11.17	Peak
5740.970	34.60	9.43	34.33	49.29	58.99	68.20	9.21	Peak

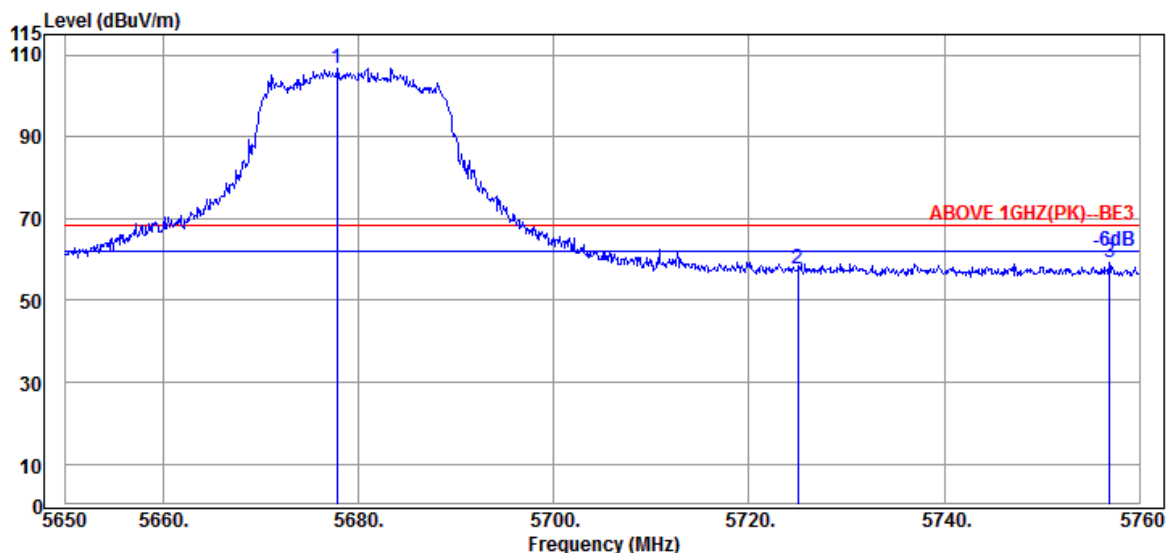

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5677.830	34.57	9.37	34.30	97.24	106.88	---	---	Peak
5725.020	34.57	9.42	34.32	47.89	57.56	68.20	10.64	Peak
5756.920	34.60	9.45	34.35	49.46	59.16	68.20	9.04	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181


This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/61	Frequency	TX 5755MHz

Antenna at Horizontal Polarization

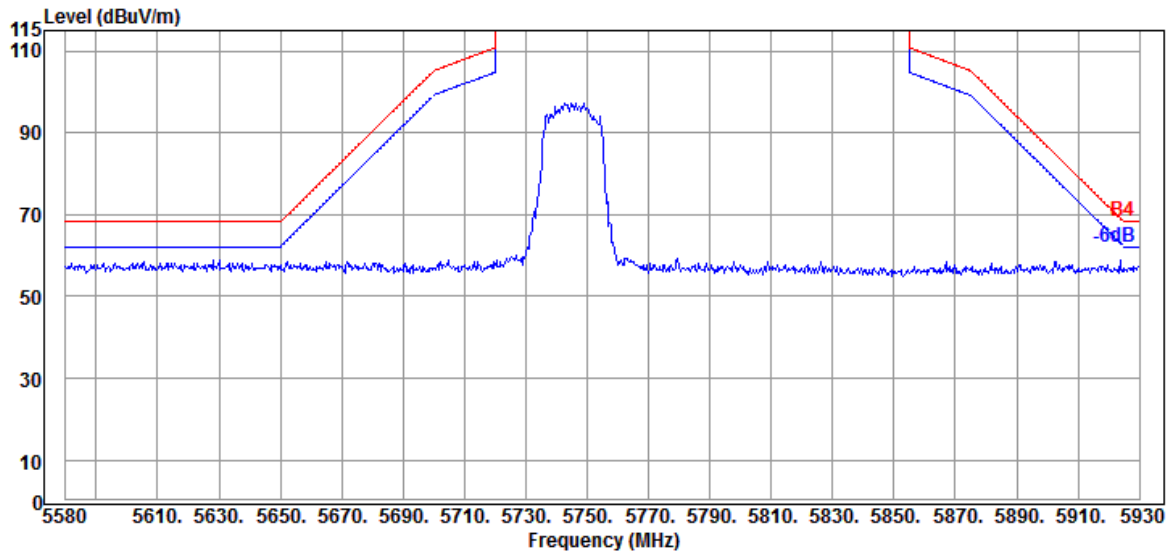

Antenna at Vertical Polarization

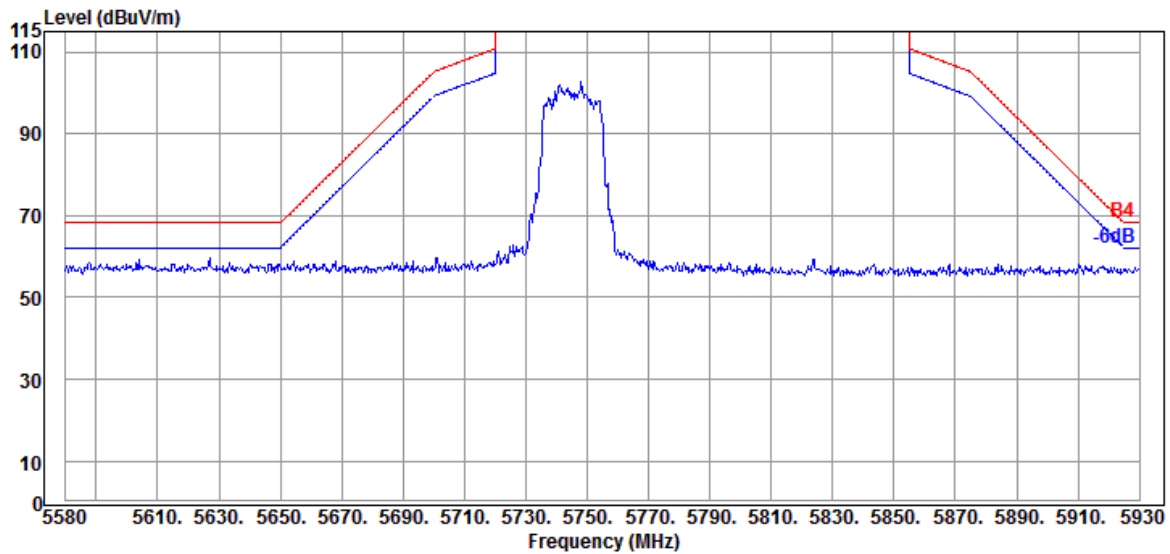


Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE40	U-NII Band	3
RU Configuration	242/62	Frequency	TX 5795MHz


Antenna at Horizontal Polarization

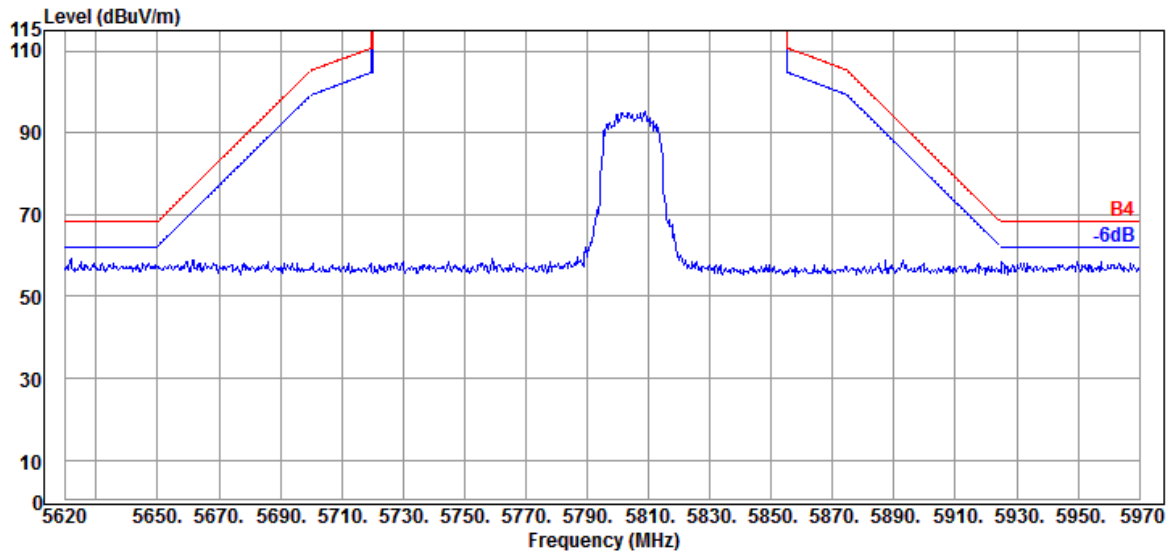

Antenna at Vertical Polarization

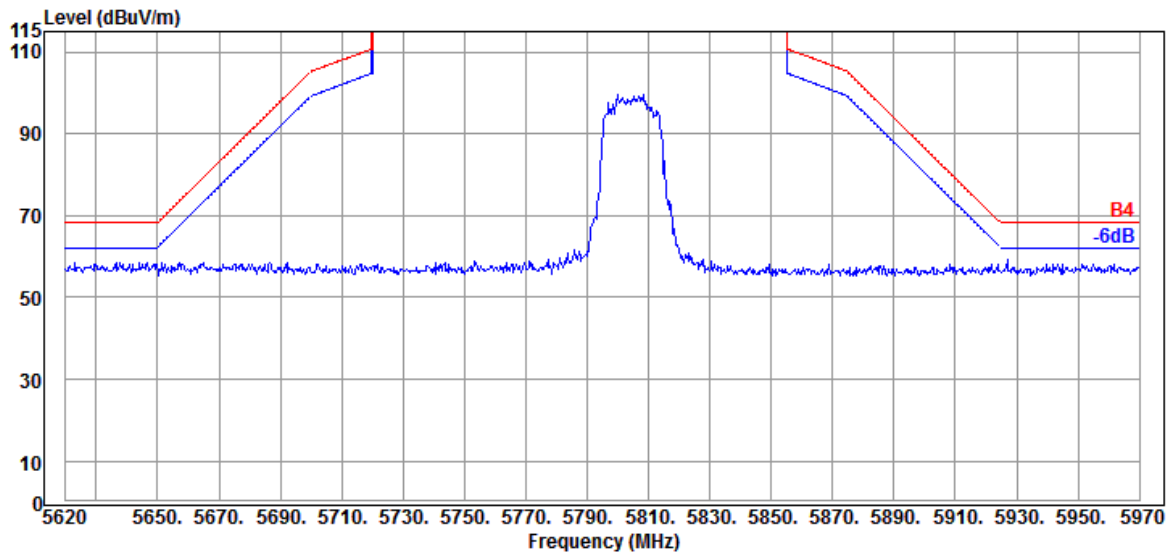


Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

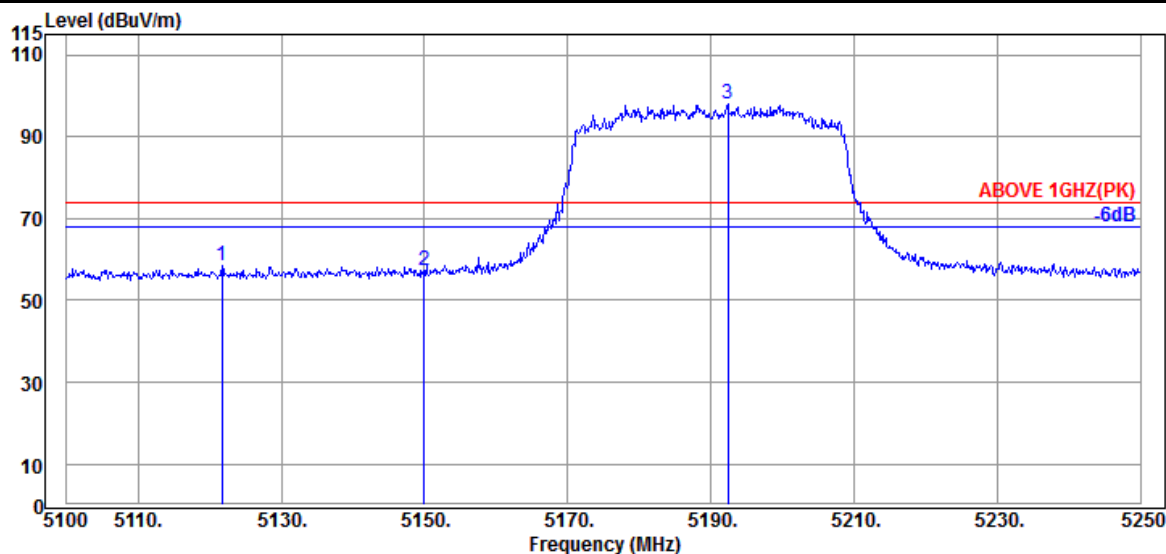

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5121.750	34.07	8.89	34.36	49.70	58.30	74.00	15.70	Peak
5149.950	34.20	8.92	34.35	48.43	57.20	74.00	16.80	Peak
@ 5192.400	34.40	8.96	34.34	89.11	98.13	---	---	Peak

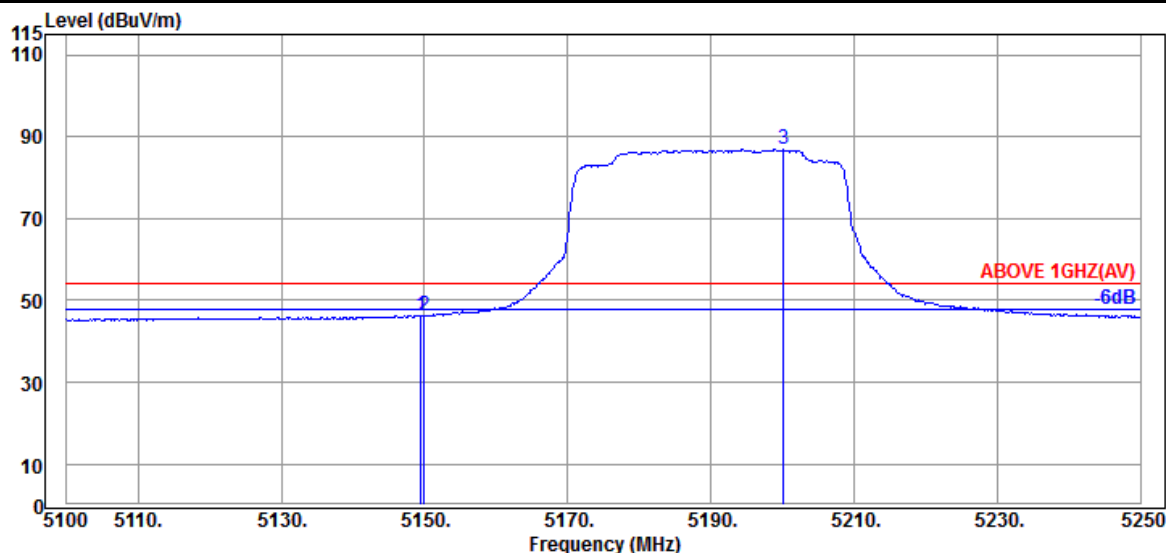


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	37.48	46.25	54.00	7.75	Average
5149.950	34.20	8.92	34.35	37.58	46.35	54.00	7.65	Average
@ 5200.200	34.40	8.96	34.33	78.07	87.10	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	1
RU Configuration	484/65	Frequency	TX 5210MHz

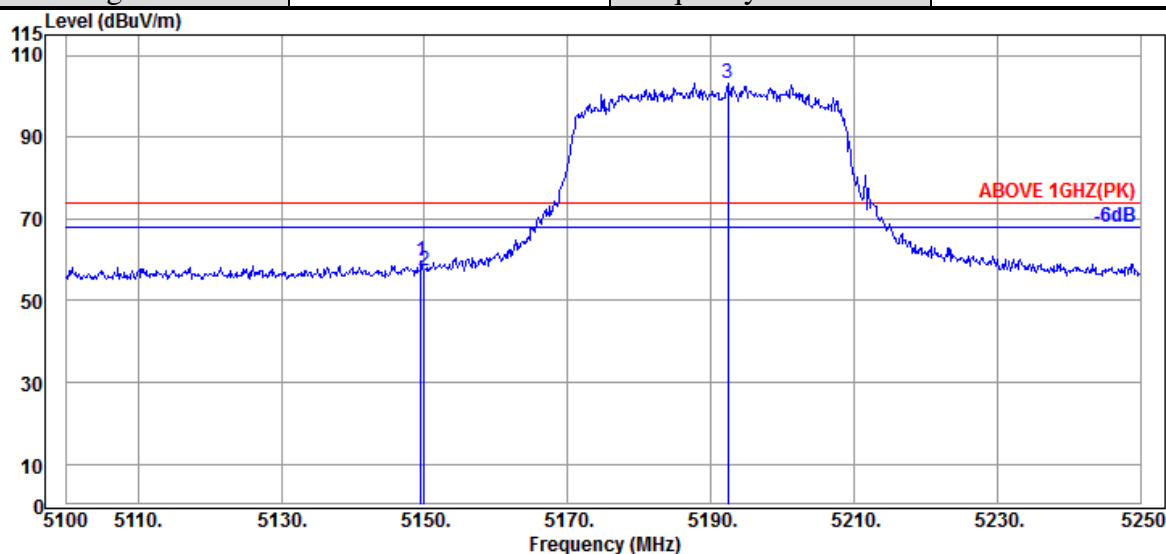

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.500	34.20	8.92	34.35	50.78	59.55	74.00	14.45	Peak
5149.950	34.20	8.92	34.35	48.68	57.45	74.00	16.55	Peak
@ 5192.400	34.40	8.96	34.34	94.25	103.27	---	---	Peak

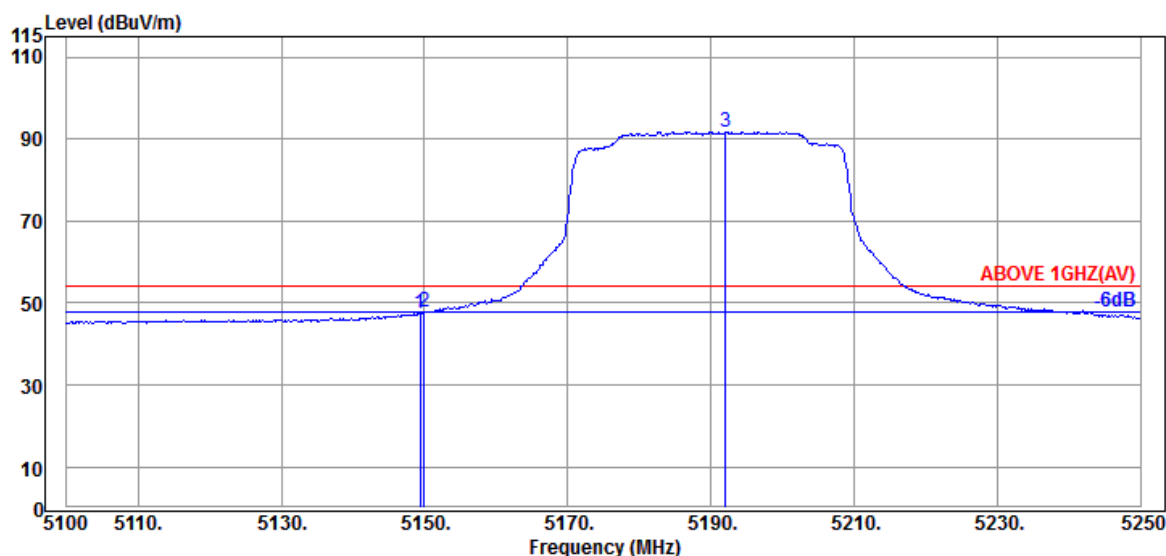

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.350	34.20	8.92	34.35	38.79	47.56	54.00	6.44	Average
5149.950	34.20	8.92	34.35	38.98	47.75	54.00	6.25	Average
@ 5192.100	34.40	8.96	34.34	82.66	91.68	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

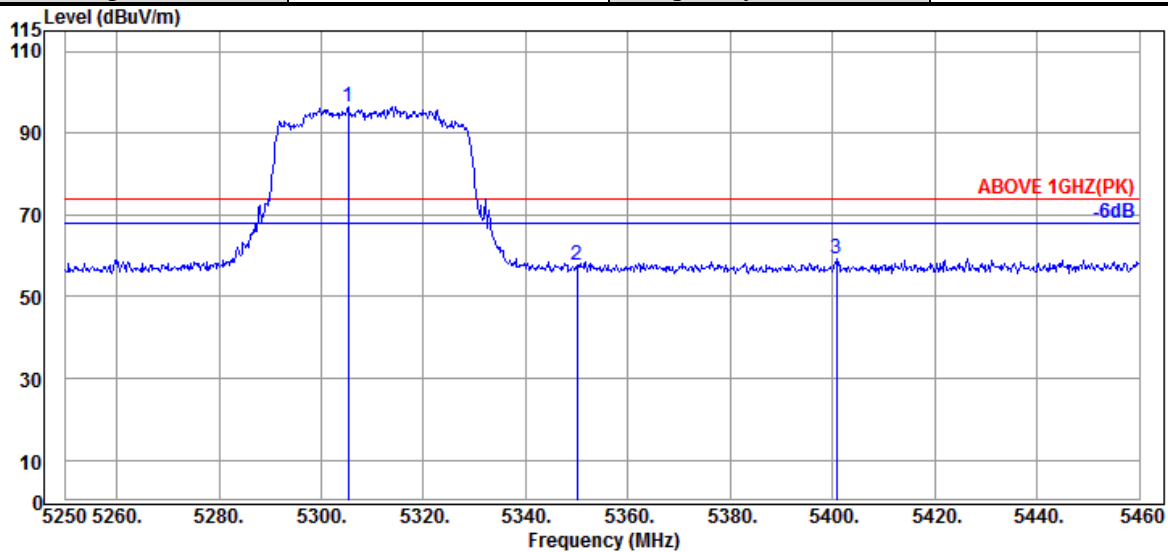

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5305.230	34.50	9.05	34.29	87.34	96.60	---	---	Peak
5349.960	34.80	9.10	34.27	48.22	57.85	74.00	16.15	Peak
5400.780	35.00	9.14	34.26	49.37	59.25	74.00	14.75	Peak

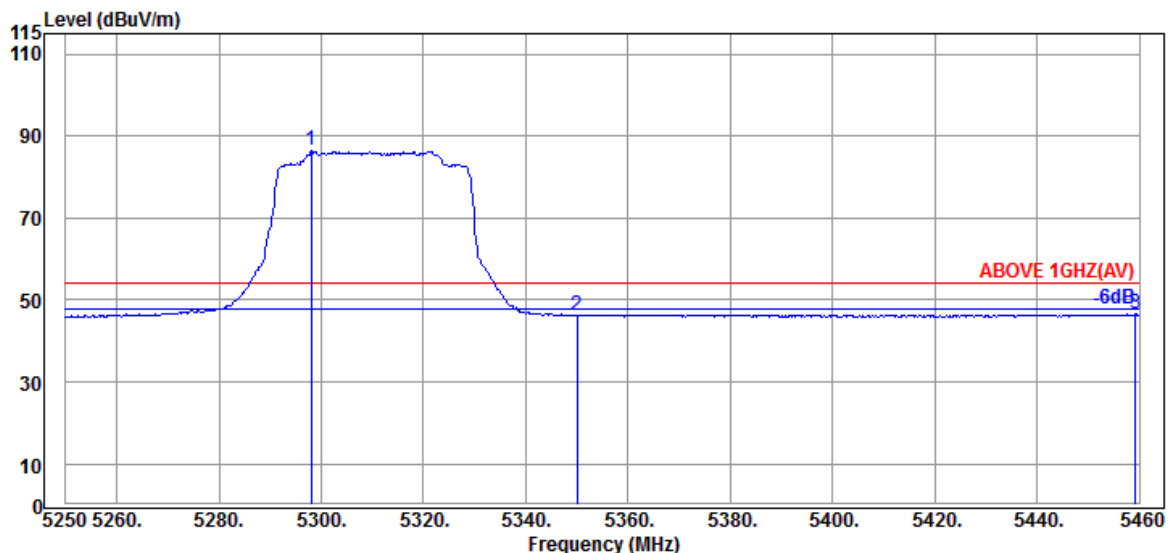

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5298.090	34.50	9.05	34.29	77.09	86.35	---	---	Average
5349.960	34.80	9.10	34.27	36.59	46.22	54.00	7.78	Average
5459.160	35.00	9.18	34.24	36.57	46.51	54.00	7.49	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2A
RU Configuration	484/66	Frequency	TX 5290MHz

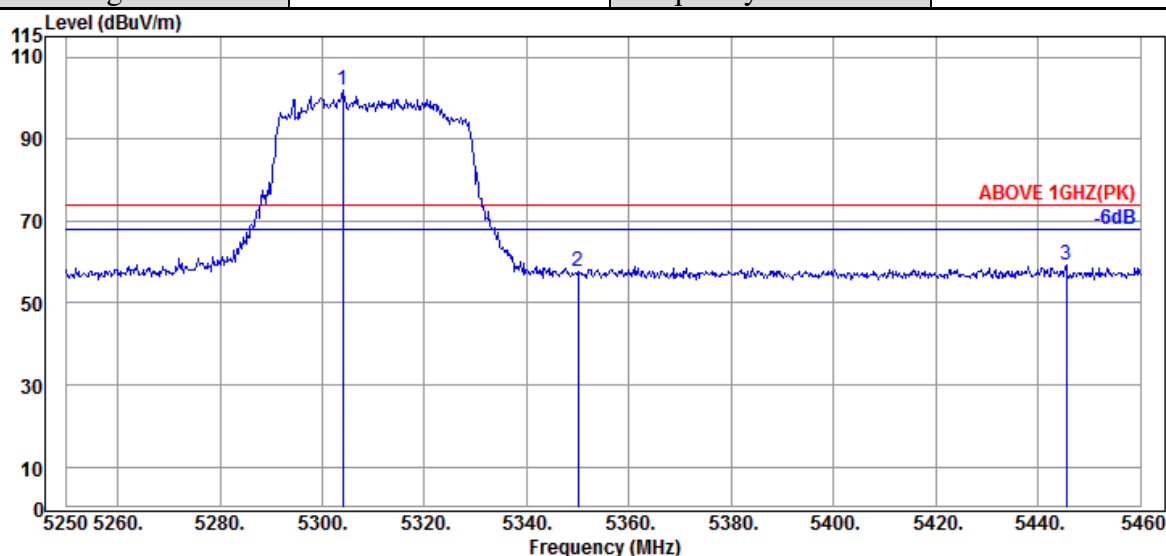

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5303.970	34.50	9.05	34.29	92.56	101.82	---	---	Peak
5349.960	34.80	9.10	34.27	48.09	57.72	74.00	16.28	Peak
5445.510	35.00	9.18	34.25	49.21	59.14	74.00	14.86	Peak

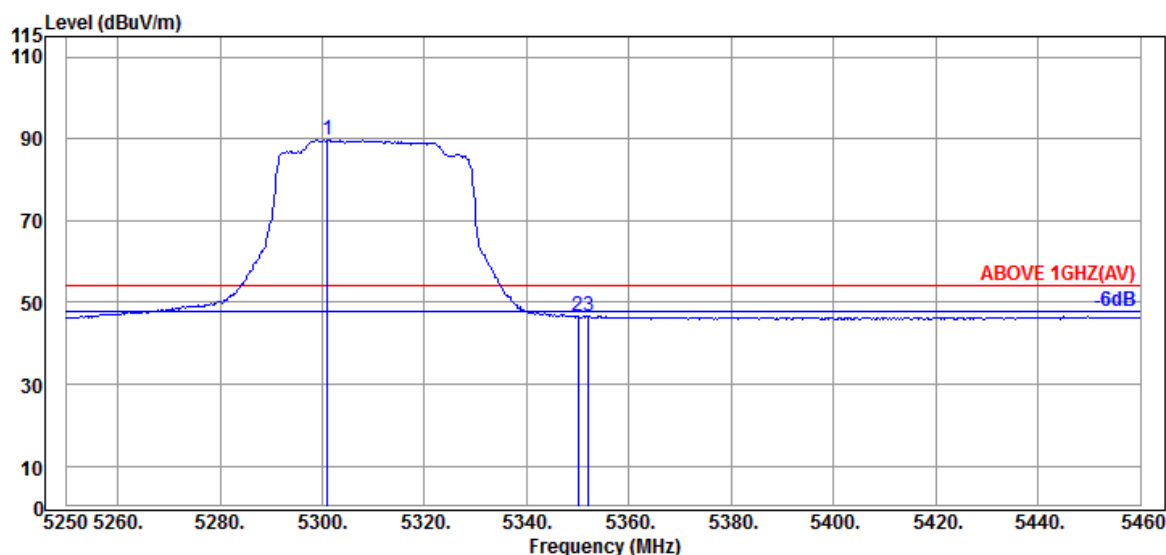

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5301.030	34.50	9.05	34.29	80.42	89.68	---	---	Average
5349.960	34.80	9.10	34.27	36.84	46.47	54.00	7.53	Average
5352.060	34.80	9.10	34.27	36.93	46.56	54.00	7.44	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

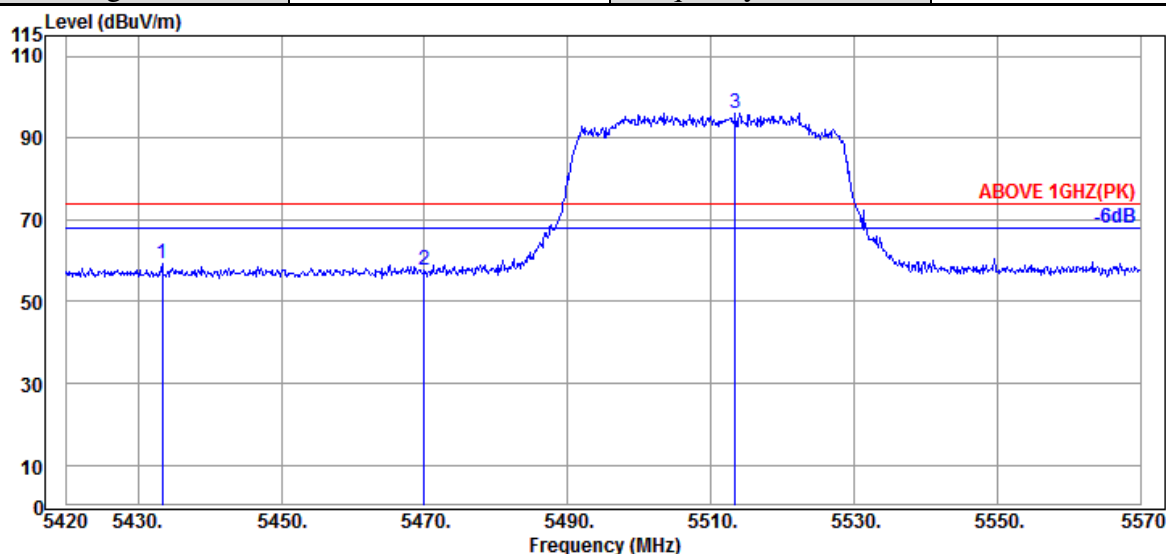

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5433.350	35.00	9.17	34.25	49.33	59.25	74.00	14.75	Peak
5469.950	34.97	9.20	34.24	47.86	57.79	74.00	16.21	Peak
@ 5513.450	34.87	9.23	34.24	86.36	96.22	---	---	Peak

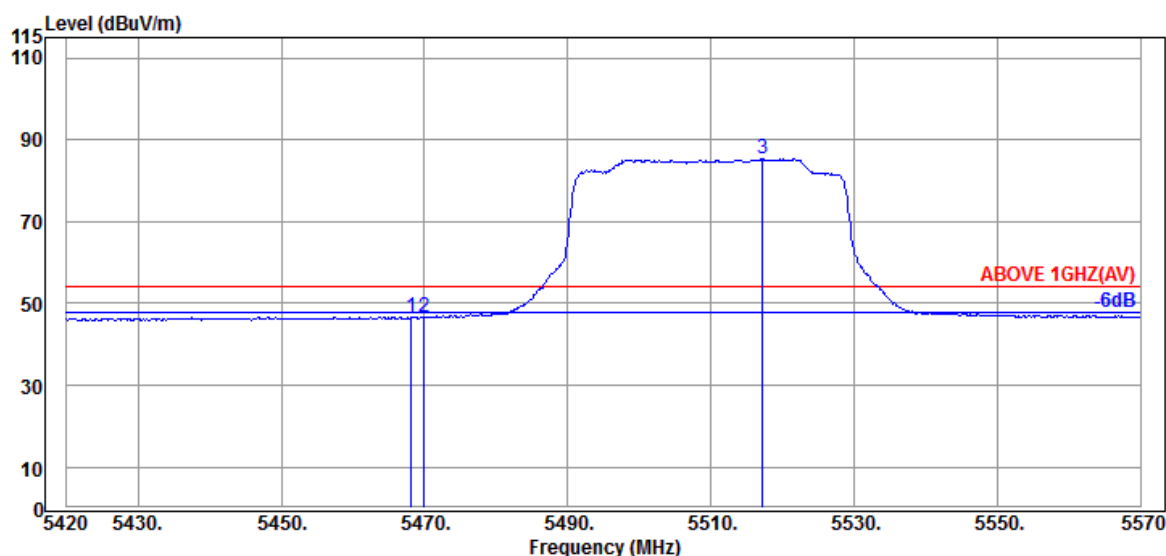


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.150	34.97	9.20	34.24	36.82	46.75	54.00	7.25	Average
5469.950	34.97	9.20	34.24	36.81	46.74	54.00	7.26	Average
@ 5517.200	34.87	9.24	34.24	75.37	85.24	---	---	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/65	Frequency	TX 5530MHz

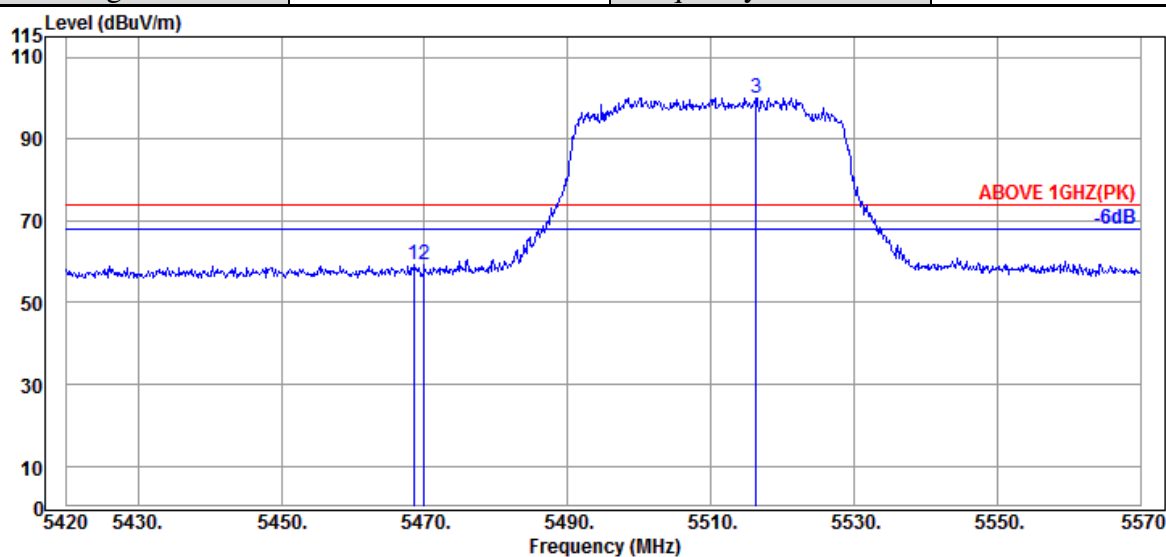

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.450	34.97	9.20	34.24	49.19	59.12	74.00	14.88	Peak
5469.950	34.97	9.20	34.24	49.54	59.47	74.00	14.53	Peak
@ 5516.300	34.87	9.24	34.24	90.29	100.16	---	---	Peak

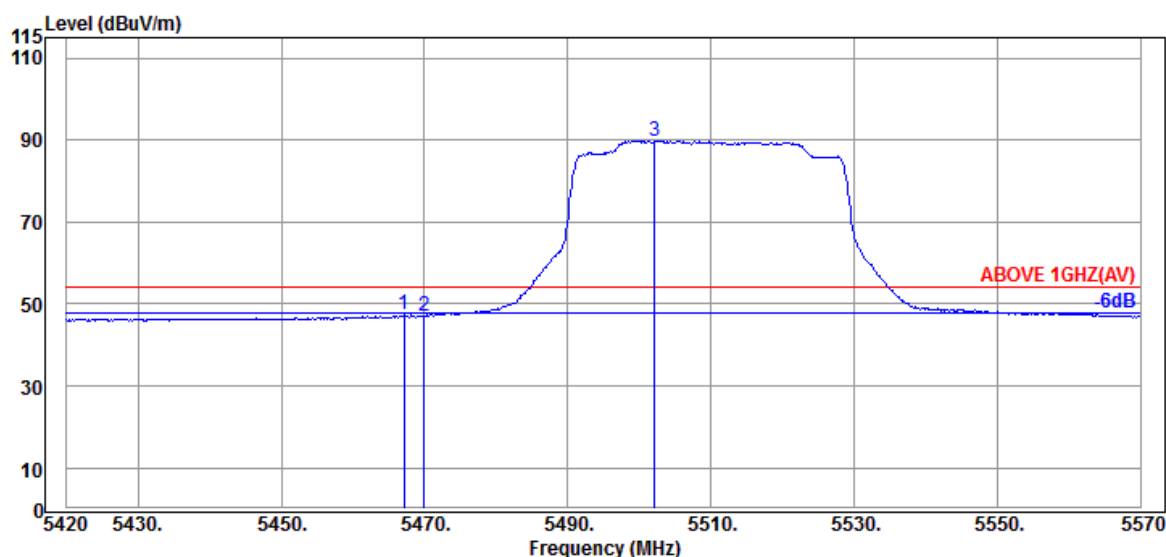

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.100	34.97	9.20	34.24	37.46	47.39	54.00	6.61	Average
5469.950	34.97	9.20	34.24	37.17	47.10	54.00	6.90	Average
@ 5502.200	34.90	9.23	34.24	80.01	89.90	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	2C
RU Configuration	484/66	Frequency	TX 5610MHz

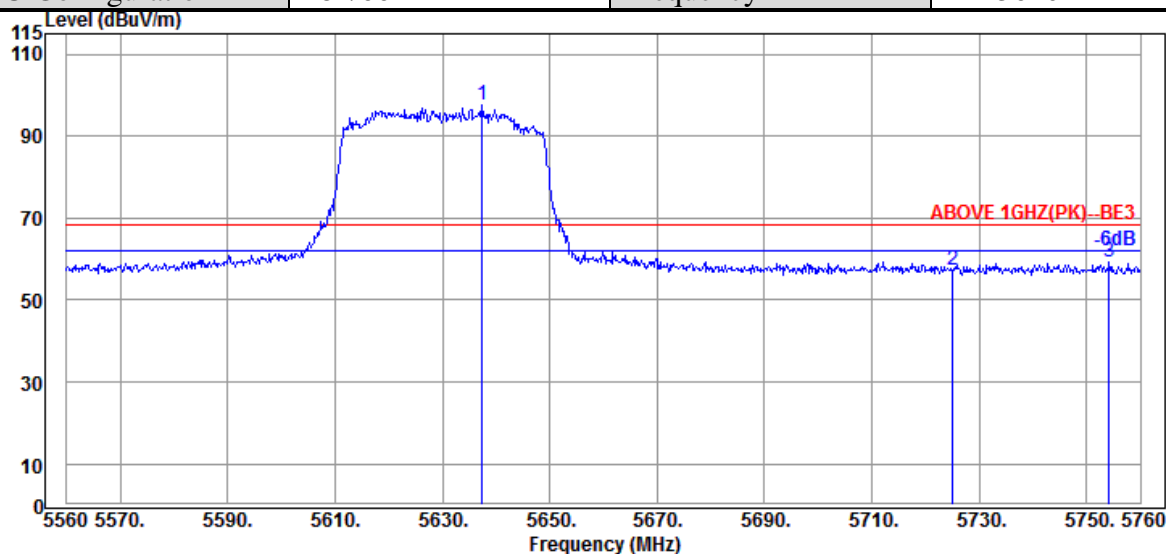

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5637.400	34.70	9.34	34.29	87.89	97.64	---	---	Peak
5725.000	34.57	9.42	34.32	47.44	57.11	68.20	11.09	Peak
5754.200	34.60	9.45	34.33	49.50	59.22	68.20	8.98	Peak

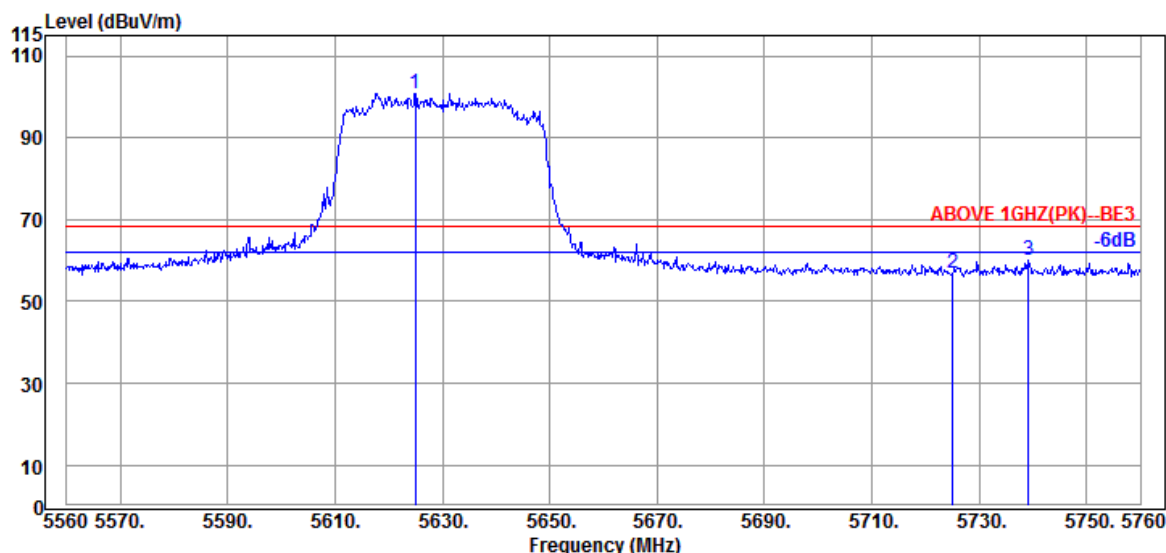

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5625.000	34.70	9.33	34.28	91.20	100.95	---	---	Peak
5725.000	34.57	9.42	34.32	47.22	56.89	68.20	11.31	Peak
5739.200	34.60	9.43	34.33	50.23	59.93	68.20	8.27	Peak


Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City244, Taiwan


Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/65	Frequency	TX 5775MHz

Antenna at Horizontal Polarization

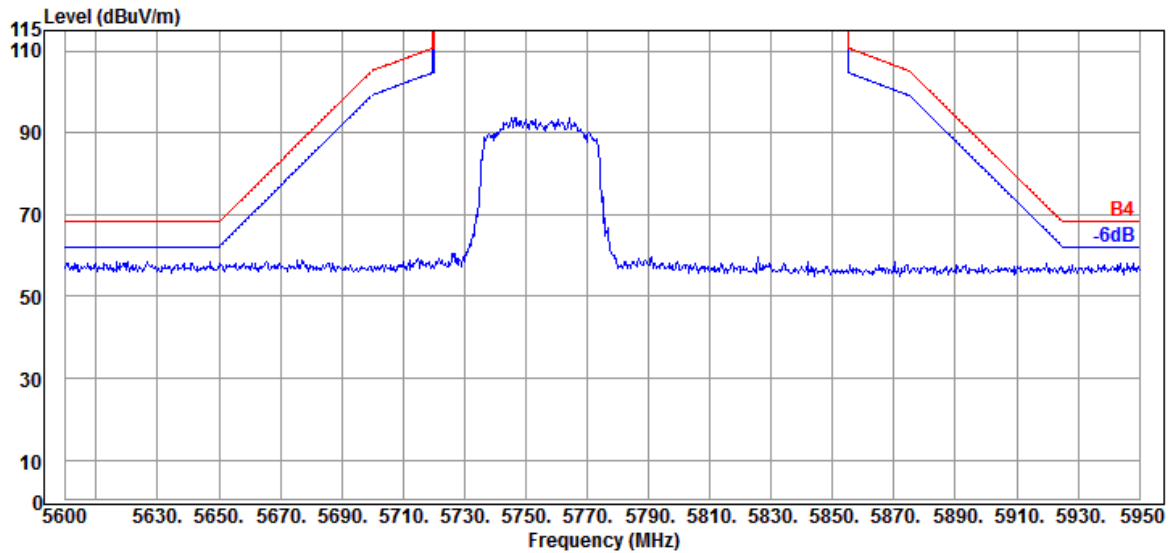


Antenna at Vertical Polarization

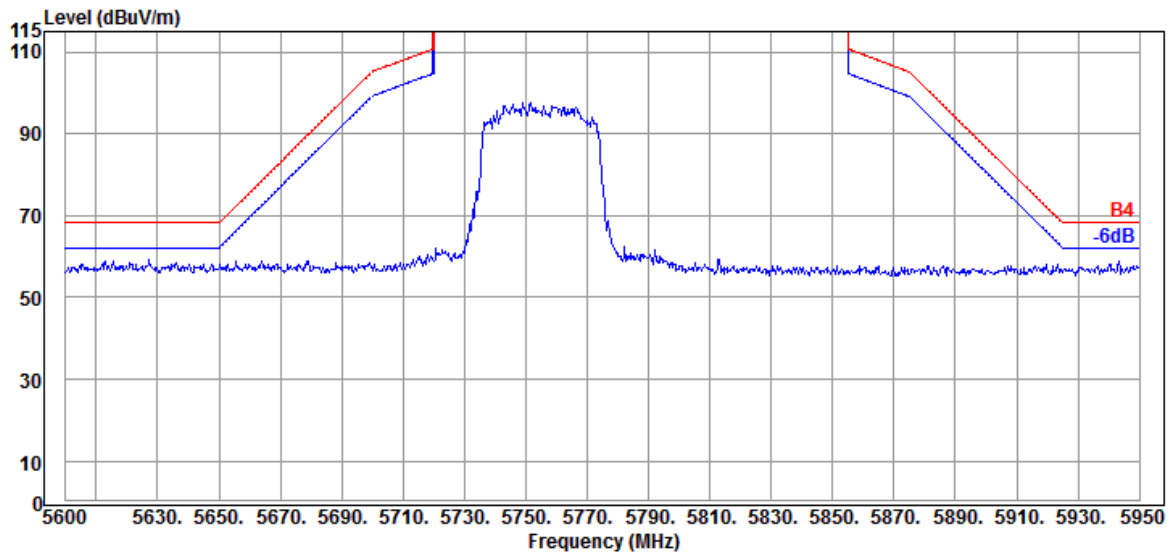


Mode	802.11ax-HE80	U-NII Band	3
RU Configuration	484/66	Frequency	TX 5775MHz


Antenna at Horizontal Polarization

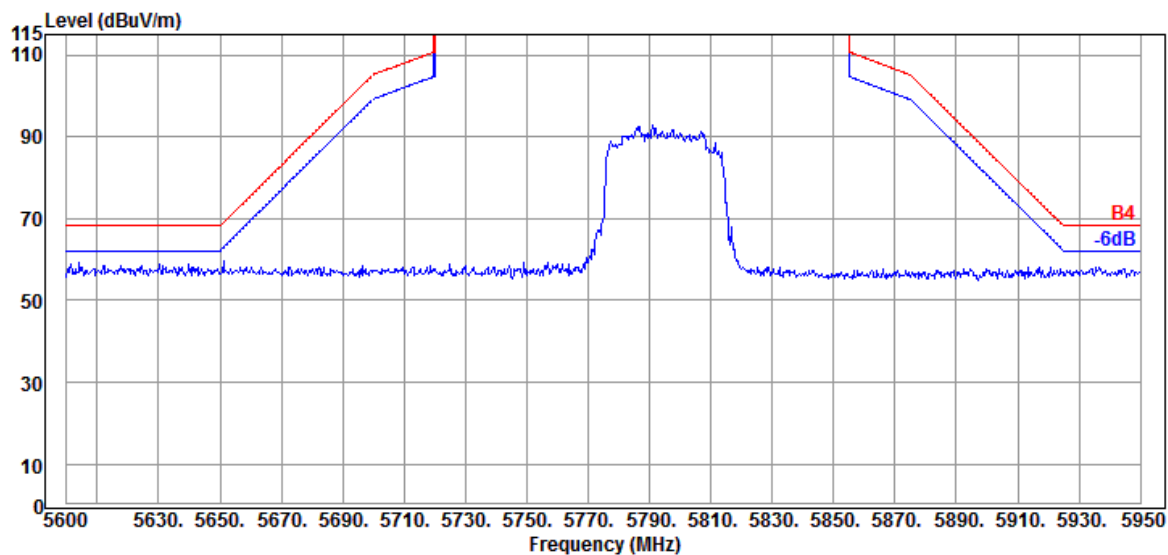

Antenna at Vertical Polarization

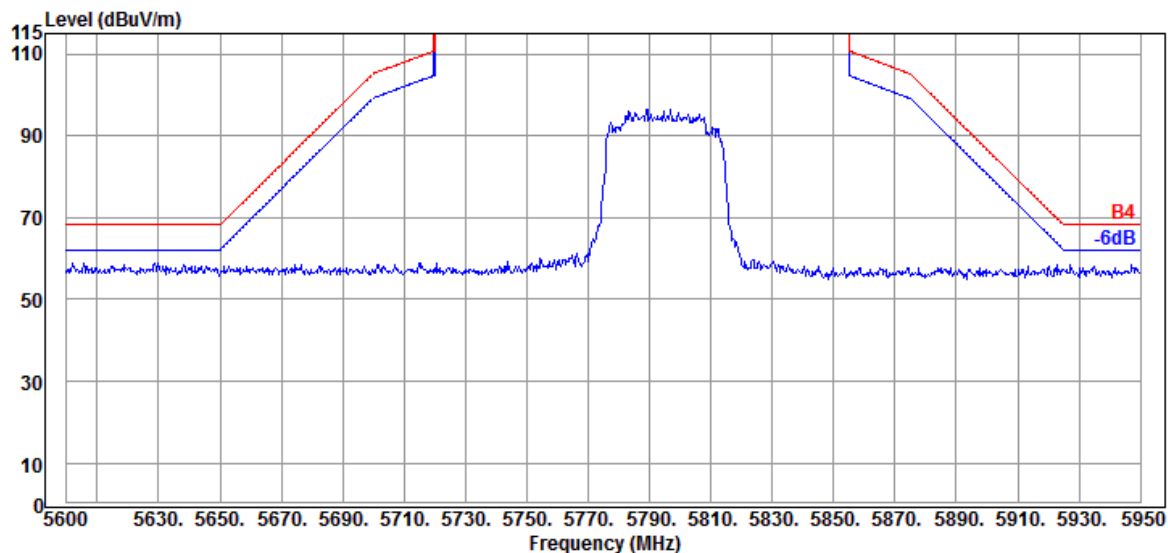


Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

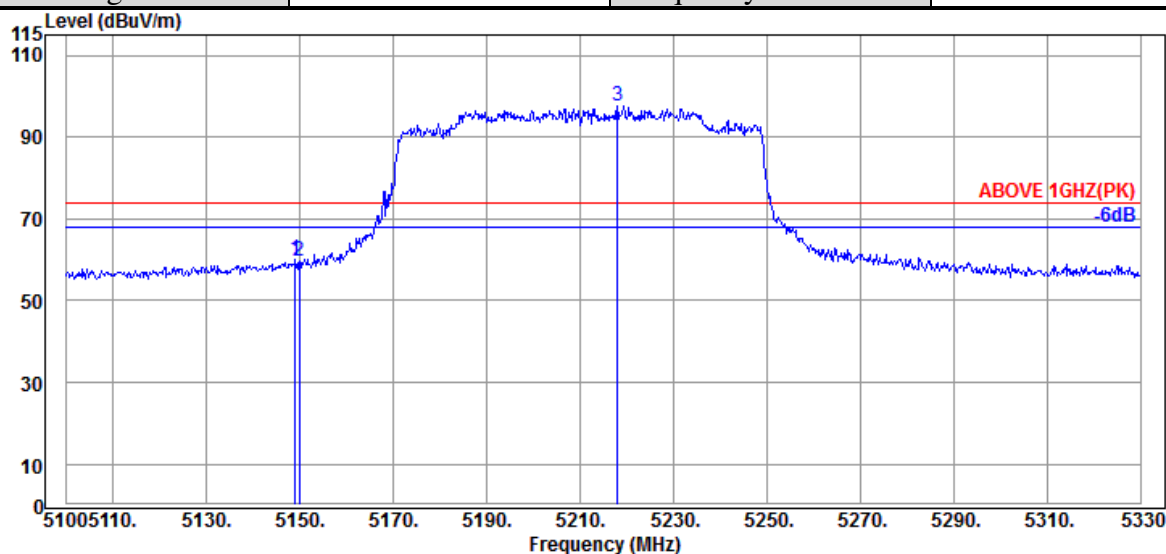

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.990	34.20	8.92	34.35	51.35	60.12	74.00	13.88	Peak
5149.910	34.20	8.92	34.35	50.81	59.58	74.00	14.42	Peak
@ 5217.990	34.40	8.98	34.33	88.58	97.63	---	---	Peak

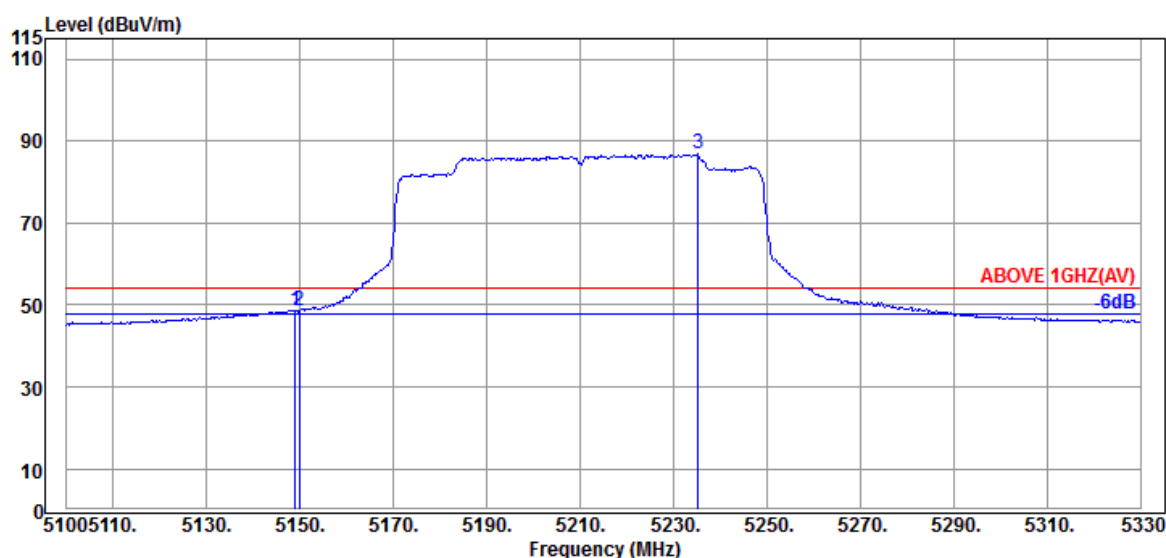


Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.990	34.20	8.92	34.35	39.95	48.72	54.00	5.28	Average
5149.910	34.20	8.92	34.35	39.93	48.70	54.00	5.30	Average
@ 5235.240	34.40	8.99	34.32	77.68	86.75	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/67	Frequency	TX 5250MHz

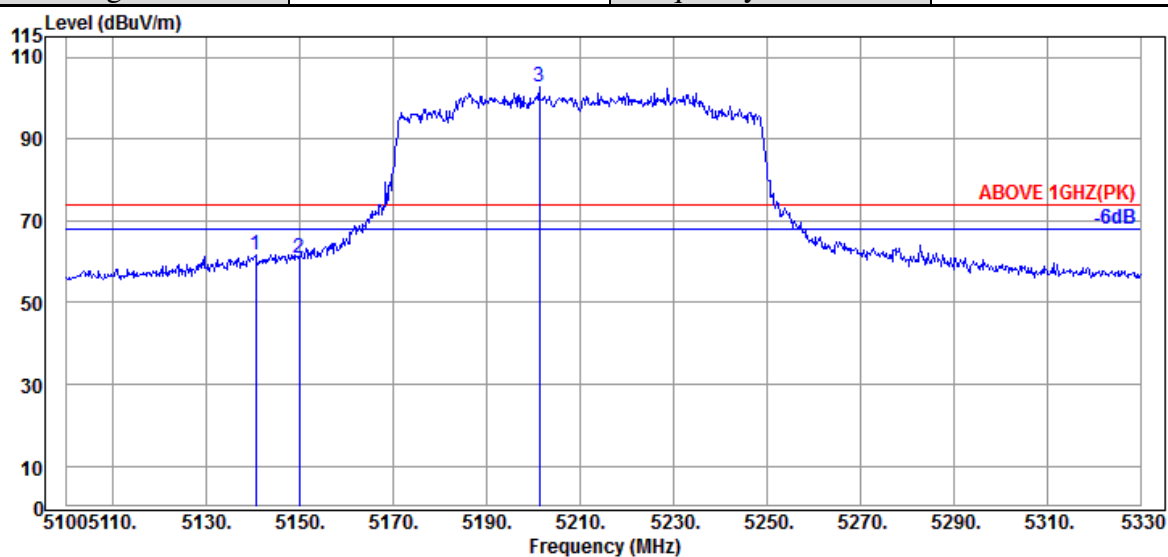

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5140.480	34.13	8.92	34.36	53.15	61.84	74.00	12.16	Peak
5149.910	34.20	8.92	34.35	52.22	60.99	74.00	13.01	Peak
@ 5201.200	34.40	8.96	34.33	93.61	102.64	---	---	Peak

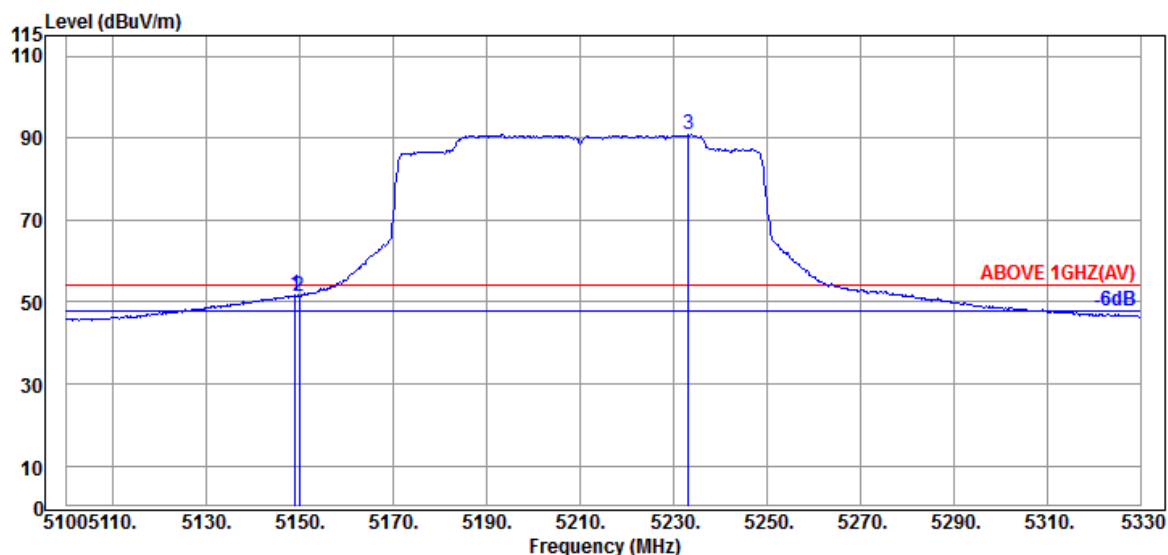


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5148.990	34.20	8.92	34.35	42.84	51.61	54.00	2.39	Average
5149.910	34.20	8.92	34.35	42.76	51.53	54.00	2.47	Average
@ 5233.170	34.40	8.99	34.32	81.72	90.79	---	---	Average


Remark: The "@" means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

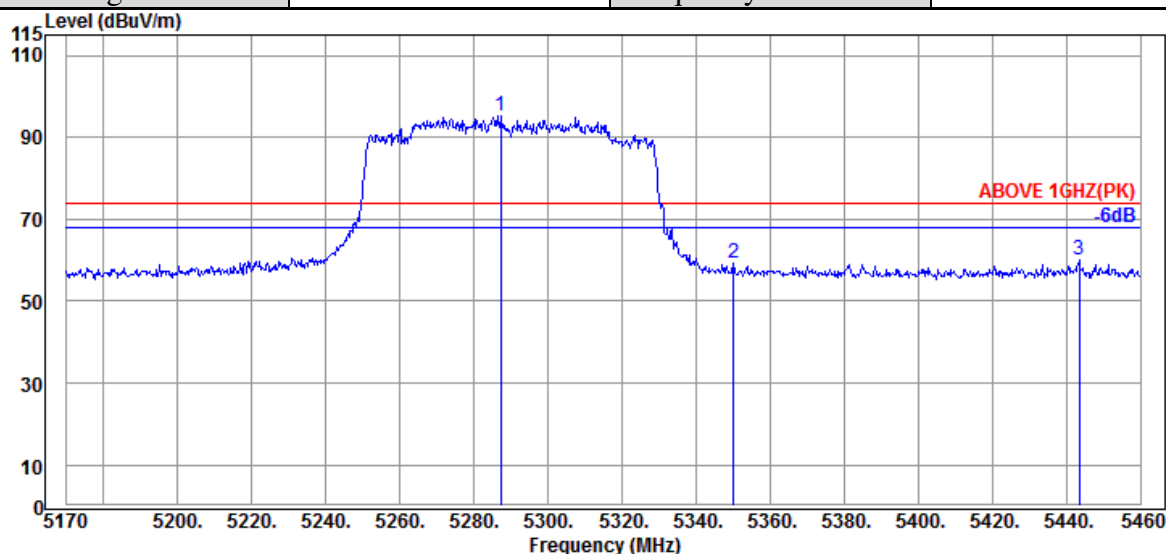

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5287.160	34.47	9.04	34.30	86.20	95.41	---	---	Peak
	5350.090	34.80	9.10	34.27	49.45	59.08	74.00	14.92	Peak
	5443.470	35.00	9.17	34.25	50.17	60.09	74.00	13.91	Peak

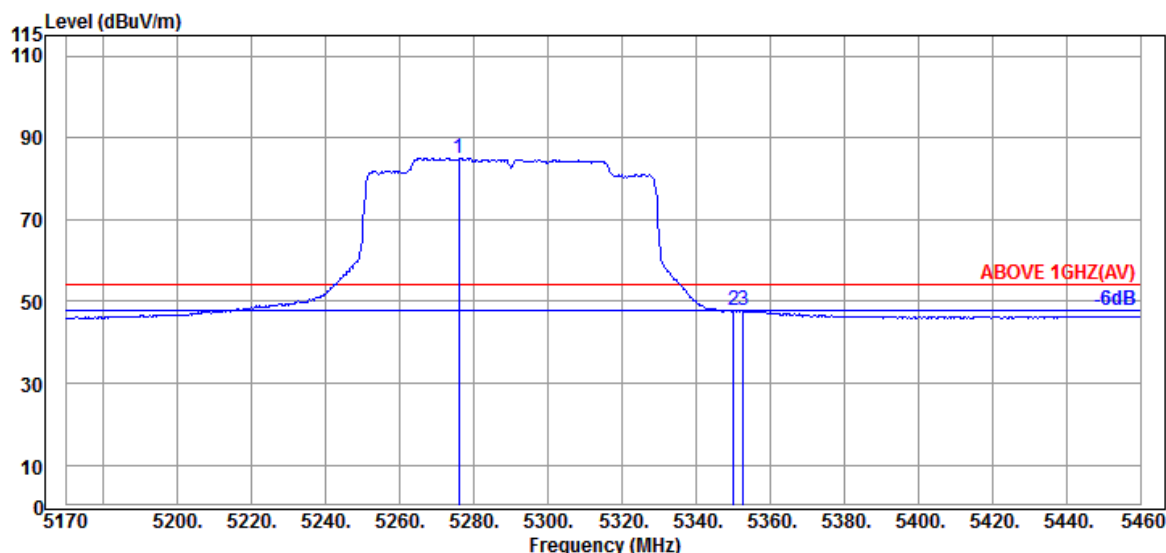

Antenna at Horizontal Polarization

	Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@	5275.850	34.43	9.04	34.30	75.89	85.06	---	---	Average
	5350.090	34.80	9.10	34.27	37.99	47.62	54.00	6.38	Average
	5352.700	34.80	9.10	34.27	38.08	47.71	54.00	6.29	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	1 & 2A
RU Configuration	996/S67	Frequency	TX 5250MHz

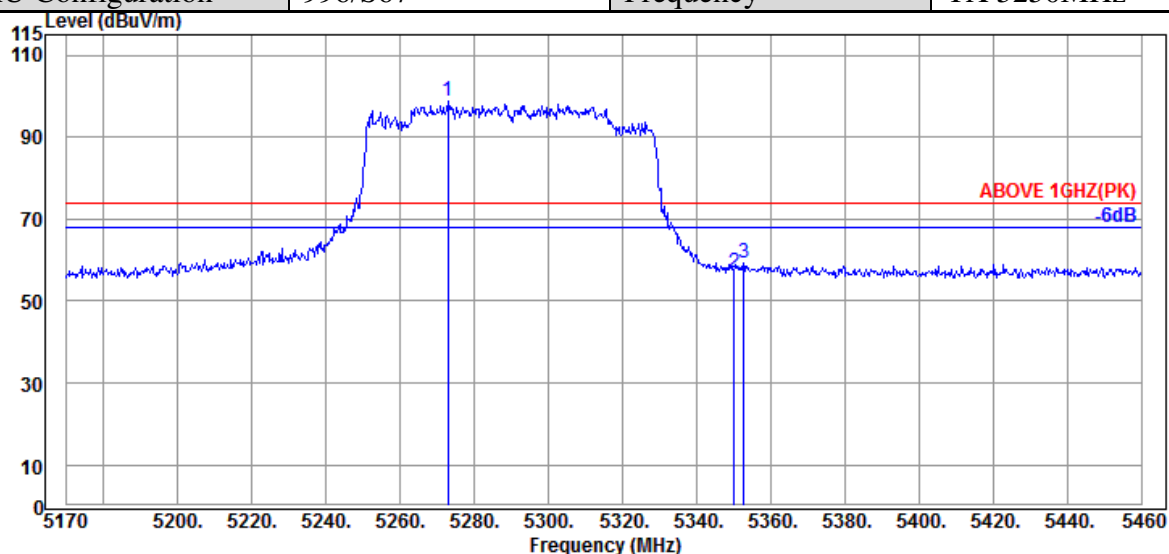

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5272.950	34.43	9.02	34.30	89.60	98.75	---	---	Peak
5350.090	34.80	9.10	34.27	47.42	57.05	74.00	16.95	Peak
5352.700	34.80	9.10	34.27	49.47	59.10	74.00	14.90	Peak

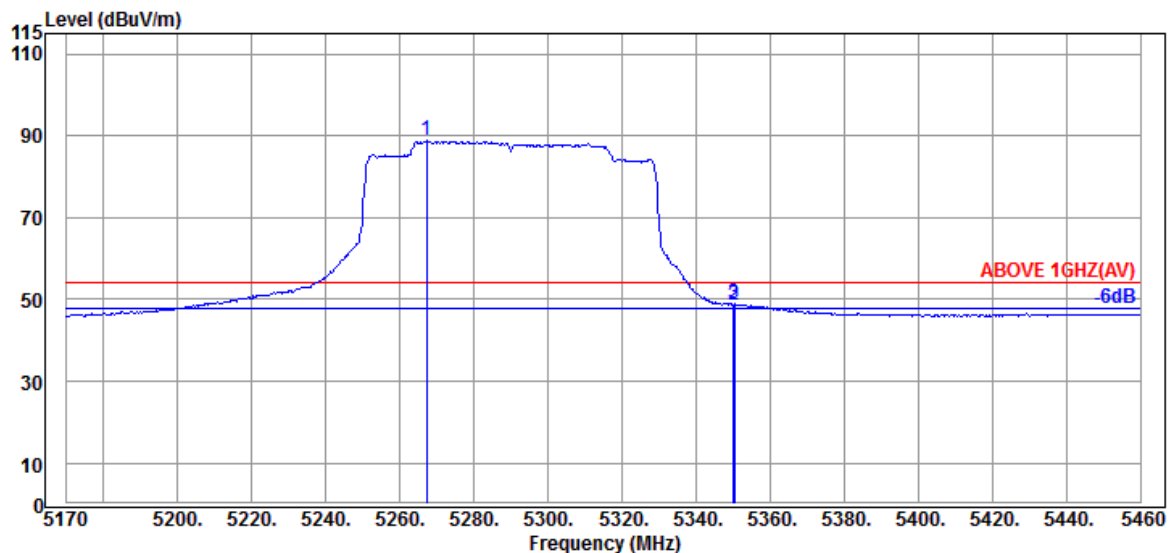


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5267.150	34.43	9.02	34.31	79.59	88.73	---	---	Average
5350.090	34.80	9.10	34.27	39.09	48.72	54.00	5.28	Average
5350.380	34.80	9.10	34.27	39.36	48.99	54.00	5.01	Average


Remark: The “@” means fundamental frequency, it is ignored in this section.

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

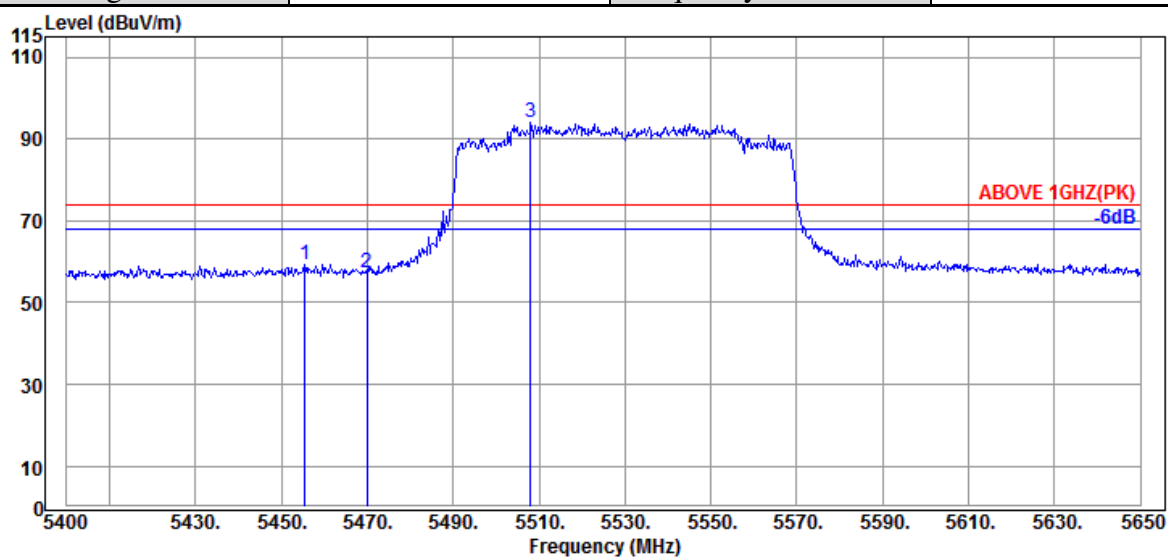

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5455.500	35.00	9.18	34.24	49.42	59.36	74.00	14.64	Peak
5470.000	34.97	9.20	34.24	47.46	57.39	74.00	16.61	Peak
@ 5508.000	34.90	9.23	34.24	84.34	94.23	---	---	Peak

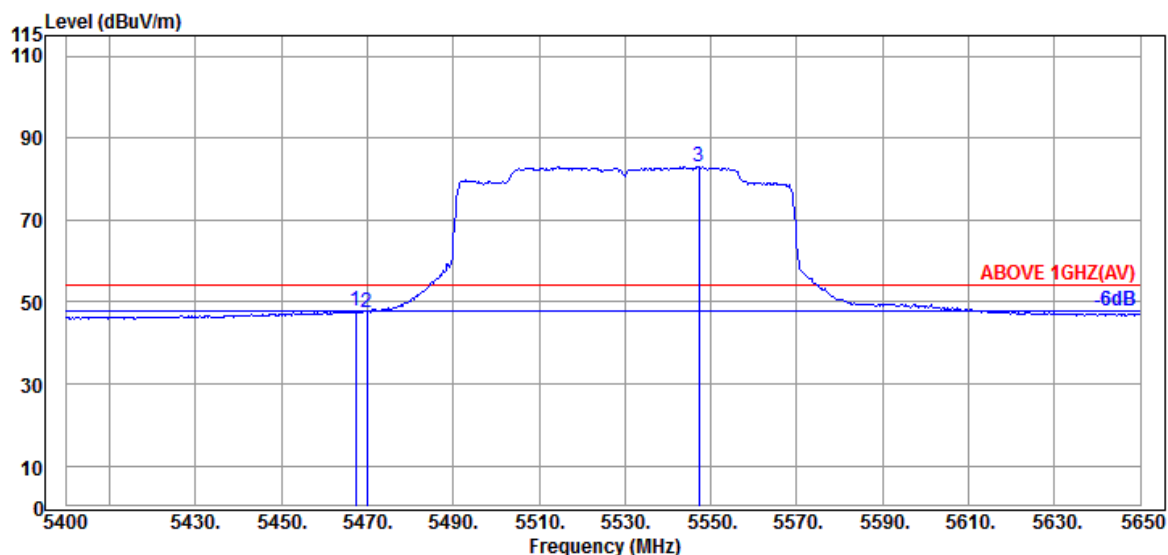

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5467.250	34.97	9.20	34.24	37.81	47.74	54.00	6.26	Average
5470.000	34.97	9.20	34.24	37.68	47.61	54.00	6.39	Average
@ 5547.250	34.80	9.26	34.25	73.23	83.04	---	---	Average

Remark: The "@" means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/67	Frequency	TX 5570MHz

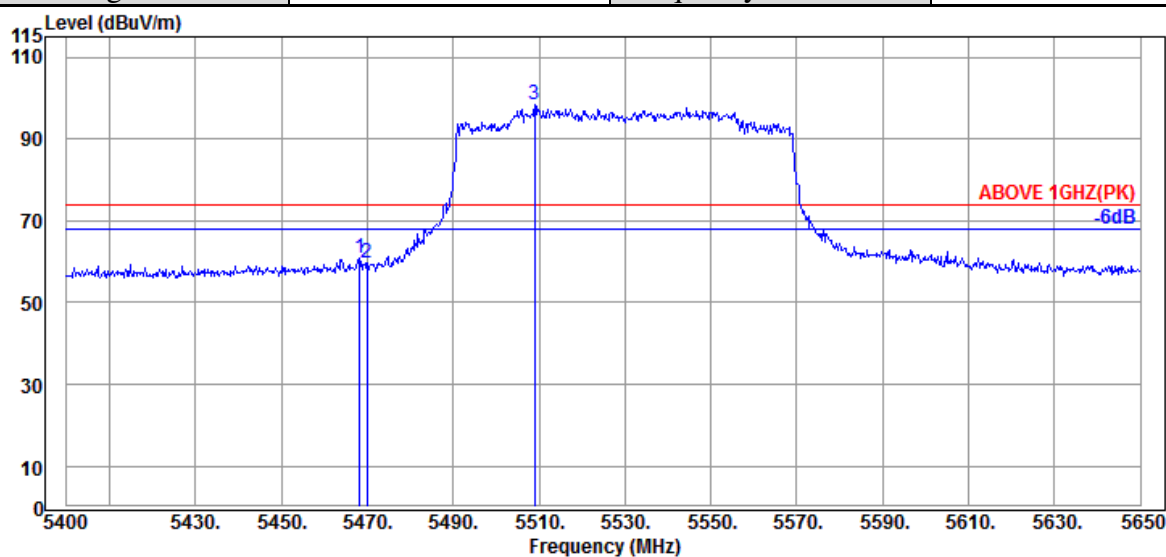

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.250	34.97	9.20	34.24	50.98	60.91	74.00	13.09	Peak
5470.000	34.97	9.20	34.24	49.57	59.50	74.00	14.50	Peak
@ 5509.000	34.90	9.23	34.24	88.38	98.27	---	---	Peak

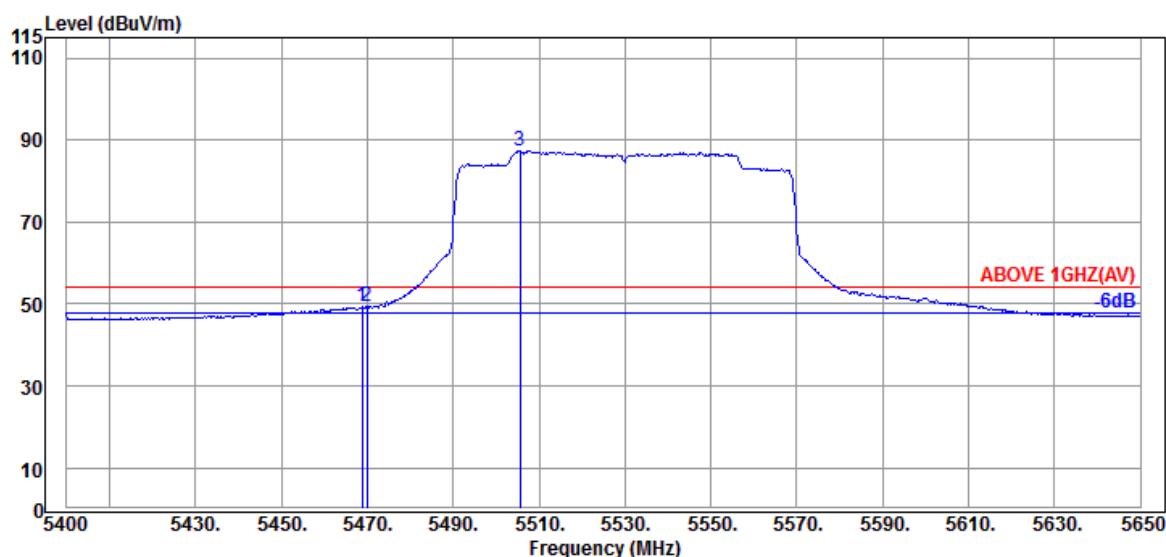

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.750	34.97	9.20	34.24	39.30	49.23	54.00	4.77	Average
5470.000	34.97	9.20	34.24	39.40	49.33	54.00	4.67	Average
@ 5505.500	34.90	9.23	34.24	77.53	87.42	---	---	Average

Remark: The “@” means fundamental frequency, it is ignored in this section.

Audix Technology Corp.


No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City244, Taiwan

Tel: +886 2 26099301


Fax: +886 2 26099303

Mode	802.11ax-HE160	U-NII Band	2C
RU Configuration	996/S67	Frequency	TX 5570MHz

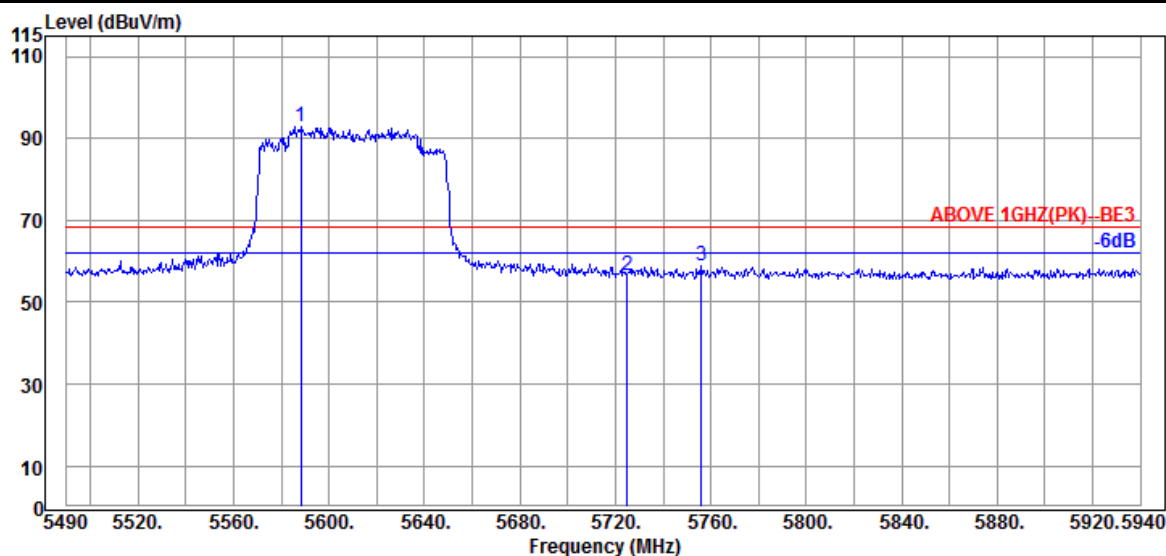

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5588.100	34.73	9.30	34.27	83.19	92.95	---	---	Peak
5724.900	34.57	9.42	34.32	46.92	56.59	68.20	11.61	Peak
5755.950	34.60	9.45	34.35	49.02	58.72	68.20	9.48	Peak

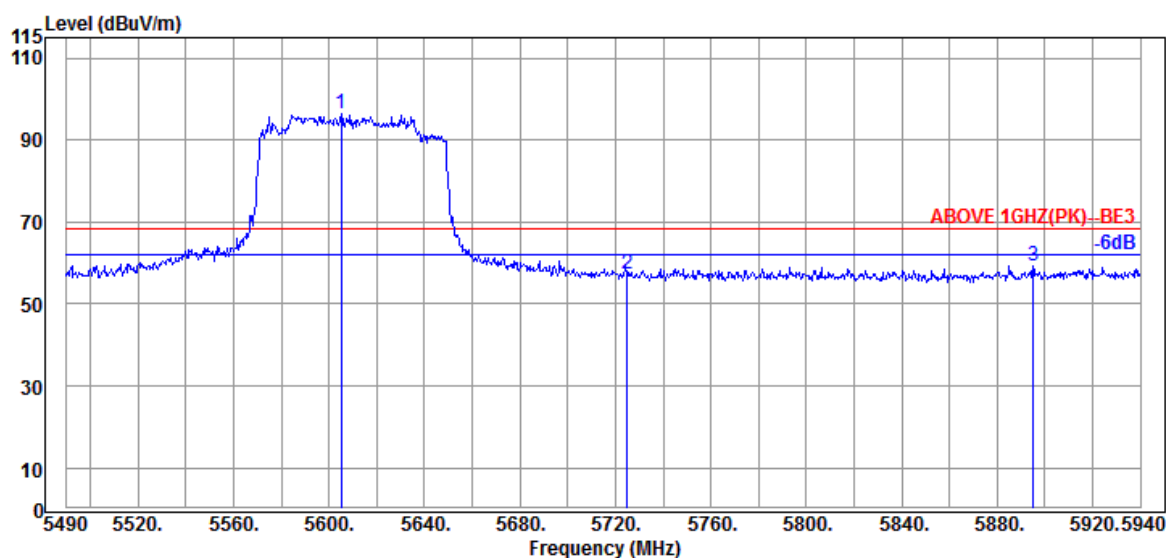

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
@ 5605.200	34.70	9.31	34.28	86.68	96.41	---	---	Peak
5724.900	34.57	9.42	34.32	47.63	57.30	68.20	10.90	Peak
5895.000	34.60	9.56	34.40	49.44	59.20	68.20	9.00	Peak

Remark: The “@” means fundamental frequency, it is ignored in this section.

File Number: CIM2203233

Report Number: EM-F220181

This test report may be reproduced in full only. The document may only be updated by Audix Technology Corp. personnel. Any changes will be noted in the Document History section of the report.

A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

Mode	802.11a	U-NII Band	I
		Frequency	TX 5240MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	14.98	34.71	28.50	47.17	54.00	6.83	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10480.000	38.40	14.98	34.71	27.76	46.43	54.00	7.57	Peak

Mode	802.11a	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	28.63	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	27.94	46.93	54.00	7.07	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.86	46.80	54.00	7.20	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.84	46.78	54.00	7.22	Peak

Mode	802.11a	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	27.65	48.20	54.00	5.80	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	27.89	48.44	54.00	5.56	Peak

Mode	802.11a	U-NII Band	3
		Frequency	TX 5785MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.80	15.82	34.61	28.17	49.18	54.00	4.82	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11570.000	39.80	15.82	34.61	28.08	49.09	54.00	4.91	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11n-HT20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.37	14.95	34.83	28.75	47.24	54.00	6.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.37	14.95	34.83	28.76	47.25	54.00	6.75	Peak

Mode	802.11n-HT20	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	28.17	47.16	54.00	6.84	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	28.07	47.06	54.00	6.94	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.98	46.92	54.00	7.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.45	46.39	54.00	7.61	Peak

Mode	802.11n-HT20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	27.46	48.01	54.00	5.99	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	28.01	48.56	54.00	5.44	Peak

Mode	802.11n-HT20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	15.74	34.59	27.49	48.24	54.00	5.76	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	15.74	34.59	28.25	49.00	54.00	5.00	Peak

Mode	802.11n-HT40	U-NII Band	I
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.40	14.95	34.81	28.12	46.66	54.00	7.34	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.40	14.95	34.81	28.06	46.60	54.00	7.40	Peak

Mode	802.11n-HT40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	15.02	34.68	27.25	46.06	54.00	7.94	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	15.02	34.68	28.24	47.05	54.00	6.95	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	39.00	15.30	34.57	28.03	47.76	54.00	6.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	39.00	15.30	34.57	27.68	47.41	54.00	6.59	Peak

Mode	802.11n-HT40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	15.67	34.59	27.97	48.52	54.00	5.48	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	15.67	34.59	27.63	48.18	54.00	5.82	Peak

Mode	802.11n-HT40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	15.74	34.59	28.85	49.60	54.00	4.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	15.74	34.59	27.99	48.74	54.00	5.26	Peak

Mode	802.11ac-VHT80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	14.98	34.78	29.02	47.62	54.00	6.38	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	14.98	34.78	27.45	46.05	54.00	7.95	Peak

Mode	802.11ac-VHT80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	15.05	34.67	27.78	46.69	54.00	7.31	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	15.05	34.67	27.62	46.53	54.00	7.47	Peak

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	15.30	34.56	27.31	47.12	54.00	6.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	15.30	34.56	27.69	47.50	54.00	6.50	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ac-VHT80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	15.60	34.58	26.76	47.11	54.00	6.89	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	15.60	34.58	27.51	47.86	54.00	6.14	Peak

Mode	802.11ac-VHT80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	15.82	34.60	27.49	48.41	54.00	5.59	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	15.82	34.60	27.83	48.75	54.00	5.25	Peak

Mode	802.11ac-VHT160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	15.02	34.69	27.83	46.56	54.00	7.44	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	15.02	34.69	27.15	45.88	54.00	8.12	Peak

Mode	802.11ac-VHT160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	15.38	34.57	27.04	46.92	54.00	7.08	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	15.38	34.57	27.54	47.42	54.00	6.58	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE20	U-NII Band	1
		Frequency	TX 5180MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.37	14.95	34.83	28.38	46.87	54.00	7.13	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10360.000	38.37	14.95	34.83	28.60	47.09	54.00	6.91	Peak

Mode	802.11ax-HE20	U-NII Band	2A
		Frequency	TX 5320MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	27.79	46.78	54.00	7.22	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10640.000	38.57	15.08	34.66	26.98	45.97	54.00	8.03	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5580MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.38	46.32	54.00	7.68	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11160.000	39.13	15.38	34.57	26.63	46.57	54.00	7.43	Peak

Mode	802.11ax-HE20	U-NII Band	2C
		Frequency	TX 5720MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	29.00	49.55	54.00	4.45	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11440.000	39.47	15.67	34.59	26.68	47.23	54.00	6.77	Peak

Mode	802.11ax-HE20	U-NII Band	3
		Frequency	TX 5745MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	15.74	34.59	28.23	48.98	54.00	5.02	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11490.000	39.60	15.74	34.59	27.80	48.55	54.00	5.45	Peak

Mode	802.11ax-HE40	U-NII Band	1
		Frequency	TX 5190MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.40	14.95	34.81	28.10	46.64	54.00	7.36	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10380.000	38.40	14.95	34.81	27.99	46.53	54.00	7.47	Peak

Mode	802.11ax-HE40	U-NII Band	2A
		Frequency	TX 5270MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	15.02	34.68	26.95	45.76	54.00	8.24	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10540.000	38.47	15.02	34.68	27.32	46.13	54.00	7.87	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5550MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	39.00	15.30	34.57	27.31	47.04	54.00	6.96	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11100.000	39.00	15.30	34.57	26.87	46.60	54.00	7.40	Peak

Mode	802.11ax-HE40	U-NII Band	2C
		Frequency	TX 5710MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	15.67	34.59	27.05	47.60	54.00	6.40	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11420.000	39.47	15.67	34.59	27.27	47.82	54.00	6.18	Peak

Mode	802.11ax-HE40	U-NII Band	3
		Frequency	TX 5755MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	15.74	34.59	28.02	48.77	54.00	5.23	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11510.000	39.60	15.74	34.59	28.14	48.89	54.00	5.11	Peak

Audix Technology Corp.
No. 491, Zhongfu Rd., Linkou Dist.,
New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

Mode	802.11ax-HE80	U-NII Band	1
		Frequency	TX 5210MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	14.98	34.78	28.43	47.03	54.00	6.97	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10420.000	38.40	14.98	34.78	27.72	46.32	54.00	7.68	Peak

Mode	802.11ax-HE80	U-NII Band	2A
		Frequency	TX 5290MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	15.05	34.67	28.02	46.93	54.00	7.07	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10580.000	38.53	15.05	34.67	27.85	46.76	54.00	7.24	Peak

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5530MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	15.30	34.56	27.89	47.70	54.00	6.30	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11060.000	39.07	15.30	34.56	27.77	47.58	54.00	6.42	Peak

Audix Technology Corp.

No. 491, Zhongfu Rd., Linkou Dist.,

New Taipei City 244, Taiwan

Tel: +886 2 26099301**Fax: +886 2 26099303**

Mode	802.11ax-HE80	U-NII Band	2C
		Frequency	TX 5690MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	15.60	34.58	27.11	47.46	54.00	6.54	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11380.000	39.33	15.60	34.58	27.37	47.72	54.00	6.28	Peak

Mode	802.11ax-HE80	U-NII Band	3
		Frequency	TX 5775MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	15.82	34.60	28.61	49.53	54.00	4.47	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11550.000	39.70	15.82	34.60	27.90	48.82	54.00	5.18	Peak

Mode	802.11ax-HE160	U-NII Band	1/2A
		Frequency	TX 5250MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	15.02	34.69	27.53	46.26	54.00	7.74	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
10500.000	38.40	15.02	34.69	27.74	46.47	54.00	7.53	Peak

Mode	802.11ax-HE160	U-NII Band	2C
		Frequency	TX 5570MHz

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	15.38	34.57	27.06	46.94	54.00	7.06	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
11140.000	39.07	15.38	34.57	26.89	46.77	54.00	7.23	Peak

A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.