

## FCC 15.407 NII 5 GHz Test Report

for

**LG Electronics Inc.**

**222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do,  
451-713, Korea**

**Product Name : Notebook Computer**  
**Model Name : (1)17Z990 (2)17ZD990**  
**(3)17ZB990 (4)17ZG990**  
**(5)LG17Z99**  
**Brand : LG**  
**FCC ID : BEJNT-17Z990**

**Prepared by: : AUDIX Technology Corporation,  
EMC Department**



The test report is based on a single evaluation of one sample of the above-mentioned products. It does not imply an assessment of the whole production and does not permit the use of the test lab logo.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

## TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
<b>1. REVISION RECORD OF TEST REPORT .....</b>	<b>5</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION .....</b>	<b>7</b>
3.1. Description of Application .....	7
3.2. Description of EUT .....	8
3.3. Antenna Information .....	9
3.4. EUT Specifications Assessed in Current Report .....	10
3.6. Description of Key Components .....	13
3.7. Data Rate Relative to Output Power.....	16
3.8. Test Configuration.....	17
3.9. Tested Supporting System List.....	21
3.10. Setup Configuration.....	21
3.11. Operating Condition of EUT .....	21
3.12. Description of Test Facility .....	22
3.13. Measurement Uncertainty .....	22
<b>4. MEASUREMENT EQUIPMENT LIST.....</b>	<b>23</b>
4.1. Conducted Emission Measurement .....	23
4.2. Radiated Emission Measurement .....	23
4.4. RF Conducted Measurement .....	24
<b>5. CONDUCTED EMISSION.....</b>	<b>25</b>
5.1. Block Diagram of Test Setup .....	25
5.2. Conducted Emission Limit .....	25
5.3. Test Procedure .....	25
5.4. Test Results .....	26
<b>6. RADIATED EMISSION .....</b>	<b>27</b>
6.1. Block Diagram of Test Setup .....	27
6.2. Radiated Emission Limits.....	28
6.3. Test Procedure .....	30
6.4. Measurement Result Explanation.....	31
6.5. Test Results .....	31
<b>7. EMISSION BANDWIDTH.....</b>	<b>32</b>
7.1. Block Diagram of Test Setup .....	32
7.2. Specification Limits.....	32
7.3. Test Procedure .....	32
7.4. Test Results .....	32
<b>8. MAXIMUM OUTPUT POWER .....</b>	<b>33</b>
8.1. Block Diagram of Test Setup .....	33
8.2. Specification Limits.....	33
8.3. Test Procedure .....	34
8.4. Test Results .....	34
<b>9. EMISSION LIMITATIONS MEASUREMENT .....</b>	<b>35</b>
9.1. Block Diagram of Test Setup .....	35
9.2. Specification Limits.....	35

---

9.3. Test Procedure .....	37
9.4. Test Results .....	37
<b>10. POWER SPECTRAL DENSITY .....</b>	<b>38</b>
10.1. Block Diagram of Test Setup .....	38
10.2. Specification Limits.....	38
10.3. Test Procedure .....	38
10.4. Test Results .....	38
<b>11. FREQUENCY STABILITY .....</b>	<b>39</b>
11.1. Block Diagram of Test Setup .....	39
11.2. Specification Limits.....	39
11.3. Test Procedure .....	39
11.4. Test Results .....	39
<b>12. DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>40</b>

APPENDIX A TEST DATA AND PLOTS  
APPENDIX B TEST PHOTOGRAPHS

## TEST REPORT CERTIFICATION

Applicant : LG Electronics Inc.  
Factory : LG Electronics Nanjing New Technology Co., Ltd.  
EUT Description  
(1) Product : Notebook Computer  
(2) Model : (1)17Z990 (2)17ZD990 (3)17ZB990 (4)17ZG990 (5)LG17Z99  
(3) Brand : LG  
(4) Power Supply: DC 19V, 2.53A

### Applicable Standards:

47 CFR FCC Part 15 Subpart E  
ANSI C63.10:2013  
KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Audix Technology Corp.** tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

**Audix Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2018. 11. 03

Reviewed by:  (Tina Huang/Administrator)

Approved by:  (Ben Cheng/Manager)

## 1. REVISION RECORD OF TEST REPORT

Edition No	Issued Date	Revision Summary	Report Number
0	2018. 11. 03	Original Report	EM-F180484

## 2. SUMMARY OF TEST RESULTS

Rule	Description	Results
15.207	Conducted Emission	PASS
15.205/15.209	Radiated Band Edge and Radiated Spurious Emission	PASS
15.407(a)(5)/15.407(e)	Emission Bandwidth Measurement	PASS
15.407(a)	Maximum Output Power	PASS
15.407(b)	Conducted Band Edges and Conducted Spurious Emission	PASS
15.407(a)	Power Spectral Density	PASS
15.203	Antenna Requirement	Compliance
15.407	Frequency Stability	PASS

### 3. GENERAL INFORMATION

#### 3.1. Description of Application

Applicant	LG Electronics Inc. 222, LG-ro Jinwi-myeon, Pyeongtaek-Si, Gyeonggi-Do, 451-713, Korea
Factory	LG Electronics Nanjing New Technology Co., Ltd. No.346, Yaoxin Road, Economic & Technical Development Zone, Nanjing, China.
Product	Notebook Computer
Model	(1)17Z990 (2)17ZD990 (3)17ZB990 (4)17ZG990 (5)LG17Z99 The difference between all models is different in the sales customers.
Brand	LG

### 3.2. Description of EUT

Test Model	17Z990																								
Serial Number	N/A																								
Power Rating	DC 19V, 2.53A																								
RF Features	WLAN:802.11 a/b/g/n/ac Bluetooth: BT and BLE																								
Transmit Type	<table border="1"> <thead> <tr> <th colspan="2">2.4 GHz</th> </tr> </thead> <tbody> <tr> <td>802.11b</td> <td>1T1R</td> </tr> <tr> <td>802.11g</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40</td> <td>2T2R</td> </tr> <tr> <td>BT/BLE</td> <td>1T1R</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th colspan="2">UNII Bands</th> </tr> </thead> <tbody> <tr> <td>802.11a</td> <td>1T1R</td> </tr> <tr> <td>802.11n-HT20/ 802.11ac-VHT20</td> <td>2T2R</td> </tr> <tr> <td>802.11n-HT40/ 802.11ac-VHT40</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT80</td> <td>2T2R</td> </tr> <tr> <td>802.11ac-VHT160</td> <td>2T2R</td> </tr> </tbody> </table>	2.4 GHz		802.11b	1T1R	802.11g	1T1R	802.11n-HT20	2T2R	802.11n-HT40	2T2R	BT/BLE	1T1R	UNII Bands		802.11a	1T1R	802.11n-HT20/ 802.11ac-VHT20	2T2R	802.11n-HT40/ 802.11ac-VHT40	2T2R	802.11ac-VHT80	2T2R	802.11ac-VHT160	2T2R
2.4 GHz																									
802.11b	1T1R																								
802.11g	1T1R																								
802.11n-HT20	2T2R																								
802.11n-HT40	2T2R																								
BT/BLE	1T1R																								
UNII Bands																									
802.11a	1T1R																								
802.11n-HT20/ 802.11ac-VHT20	2T2R																								
802.11n-HT40/ 802.11ac-VHT40	2T2R																								
802.11ac-VHT80	2T2R																								
802.11ac-VHT160	2T2R																								
Device Category	<input type="checkbox"/> Outdoor Access Point <input type="checkbox"/> Fixed point-to-point Access Point <input type="checkbox"/> Indoor Access Point <input checked="" type="checkbox"/> Mobile and Portable client device																								
Sample Status	Production																								
Date of Receipt	2018. 10. 15																								
Date of Test	2018. 10. 24 ~ 11. 03																								
Interface Ports of EUT	<ul style="list-style-type: none"> <li>● One Micro SD Card Slot</li> <li>● One Earphone Port</li> <li>● Three USB 3.0 Ports</li> <li>● One USB Type C Port</li> <li>● One HDMI Port</li> <li>● One DC Input Port</li> </ul>																								
Accessories Supplied	<ul style="list-style-type: none"> <li>● AC Adapter</li> <li>● LAN Gender</li> </ul>																								

### 3.3. Antenna Information

2.4G Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	WA-F-LBLB-04-064 (Main)	INPAQ	FPCB	2400	1.57
				2450	1.41
				2500	1.55
2	WA-F-LBLB-04-064 (AUX)	INPAQ	FPCB	2400	1.81
				2450	1.07
				2500	1.79

5G Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	WA-F-LBLB-04-064 (Main)	INPAQ	FPCB	5100	2.85
				5400	3.13
				5800	3.19
2	WA-F-LBLB-04-064 (AUX)	INPAQ	FPCB	5100	3.09
				5400	3.02
				5800	2.66

### 3.4. EUT Specifications Assessed in Current Report

Mode	UNII Band	Fundamental Range (MHz)	Channel Number
802.11a	I	5180-5240	4
	II-2A	5260-5320	4
	II-2C	5500-5700	11
	III	5745-5825	5
802.11n-HT20/ 802.11ac-VHT20	I	5180-5240	4
	II-2A	5260-5320	4
	II-2C	5500-5720	12
	III	5745-5825	5
802.11n-HT40/ 802.11ac-VHT40	I	5190-5230	2
	II-2A	5270-5310	2
	II-2C	5510-5710	6
	III	5755-5795	2
802.11ac-VHT80	I	5210	1
	II-2A	5290	1
	II-2C	5530-5690	3
	III	5775	1
802.11ac-VHT160	I	5250	1
	II-2C	5570	1
Remark: UNII Band II-2A and II-2C (DFS Function, Slave/no In service monitor, no Ad-Hoc mode)			

Mode	Modulation	Data Rate (Mbps)
802.11a	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 54
802.11n-HT20	OFDM (BPSK/QPSK/16QAM/64QAM)	Up to 144.4
802.11n-HT40		Up to 300
802.11ac-VHT20	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 173.3
802.11ac-VHT40		Up to 400
802.11ac-VHT80		Up to 866.7
802.11ac-VHT160	OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)	Up to 1733.3

Channel List						
802.11a						
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)	
I	36	5180	II-2C	120	5600	
	40	5200		124	5620	
	44	5220		128	5640	
	48	5240		132	5660	
II-2A	52	5260		136	5680	
	56	5280		140	5700	
	60	5300		III	149	5745
	64	5320			153	5765
II-2C	100	5500	157		5785	
	104	5520	161		5805	
	108	5540	165		5825	
	112	5560				
	116	5580				

Channel List					
802.11n-HT20/802.11ac-VHT20					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
I	36	5180	II-2C	120	5600
	40	5200		124	5620
	44	5220		128	5640
	48	5240		132	5660
II-2A	52	5260		136	5680
	56	5280		140	5700
	60	5300		144	5720
	64	5320		III	149
II-2C	100	5500	153		5765
	104	5520	157		5785
	108	5540	161		5805
	112	5560	165		5825
	116	5580			

Channel List					
802.11n-HT40/802.11ac-VHT40					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
I	38	5190	II-2C	118	5590
	46	5230		126	5630
II-2A	54	5270		134	5670
	62	5310		142	5710
II-2C	102	5510	III	151	5755
	110	5550		159	5795

Channel List					
802.11ac-VHT80					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
I	42	5210	II-2C	138	5690
II-2A	58	5290	III	155	5775
II-2C	106	5530			
	122	5610			

Channel List					
802.11ac-VHT160					
UNII Band	Channel Number	Frequency (MHz)	UNII Band	Channel Number	Frequency (MHz)
I	50	5250	II-2C	114	5570

Note Test modes are presented at section 3.7.

### 3.6. Description of Key Components

#### 3.6.1. For the All Component Lists

Item	Supplier	Model / Type	Character
System	Microsoft	Win10 Home	---
	Microsoft	Win10 Pro	---
Main Board	LG	PRIME Main B/D PCB	(without Thunderbolt) Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec & Eltek Company (MCO) Limited
	LG	PRIME Main B/D PCB	(with Thunderbolt) Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec & Eltek Company (MCO) Limited.
SUB Board	LG	PRIME SUB B/D	(with Finger Printer) Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec & Eltek Company (MCO) Limited.
	LG	PRIME SUB B/D	(without Finger Printer) Manufacturer: #1 Hannstar Board Tech (Jiang Yin) Corp., Ltd. #2 Elec & Eltek Company (MCO) Limited.
CPU (Socket: BGA1528)	Intel	i7-8565U	1.8GHz, up to 4.6GHz
	Intel	i5-8265U	1.6GHz, up to 3.9GHz
	Intel	I3-8145U	2.1GHz, up to 3.9GHz
17" LCD Panel	LG Display	LP170WQ1(SP)(A1)	Resolution: 2560 x 1600, 60Hz WQXGA IPS (Normal Non touch)
Storage (SSD)	Samsung	MZ-VLB5120 (P/N MZVLB512HAJQ-0000)	512GB (NVMe)
		MZ-NLN128C (P/N MZNLN128HAHQ-0000)	128GB (SATA)
	SK hynix	P/N HFS256G39TNF	256GB (SATA)
		P/N HFS512G39TNF	512GB (SATA)

Item	Supplier	Model / Type	Character
Memory (RAM)	Samsung	K4AAG16 5WB MCRC	8GB DDR4 (On Board)
		K4A8G16 5WC-BCTD	4GB DDR4 (On Board)
	SK hynix	H5ANAG6NAMR	8GB DDR4 (On Board)
		H5AN8G6NAFR	4GB DDR4 (On Board)
	Samsung	M471A5244CB0-CRC	4GB DDR4 SODIMM(on Card)
		M471A5244CB0-CTD	4GB DDR4 SODIMM(on Card)
		M471A1K43CB1-CTD	8GB DDR4 SODIMM (on Card)
		M471A1K43CB1-CRC	8GB DDR4 SODIMM (on Card)
SK hynix	HMA81GS6AFR8N-UH	8GB DDR4 SODIMM (on Card)	
	HMA851S6AFR6N-UH	4GB DDR4 SODIMM (on Card)	
Battery Pack	LG	LBS1224E	72Wh, DC7.7V, 9450mAh
WLAN Combo Card	Intel	9560D2W	802.11a/b/g/n/ac 2.4GHz/5GHz + BT+BLE 5.0
WLAN Combo Antenna	LG (INPAQ)	WA-F-LBLB-04-064	FPCB Type Main: Black, Aux: Gray
Keyboard	LG	SN3870BL	17Z990 Black KBD
		SN3870BL1	17Z990 White KBD
Web Camera	Chicony	CKFIH2821005290LH	With two microphones
		CKFIH28-121005290LH	With One microphone
	Luxvisions	7BF109N2DC	With two microphones
		7BF109N2DD	With One microphone
Finger Print	SUNTEL	SFPA-L002STA(White)	---
	SUNTEL	SFPA-L002STB(Black)	---
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS	80-5946-111 (White)	10/100 Megabit Ethernet
		80-5946-101 (Black)	
	ARIN TECH CO. LTD	GD-08MF-36-WH-LP10 (White)	10/100 Megabit Ethernet
		GD-08MF-36-BK-LP11 (Black)	
Type C to LAN: Shielded, Undetached, 0.12m			
AC Adapter (48W)	LG (HONOR)	ADS-48MS-19-2 19048E	I/P: AC 100-240V, 50-60Hz, 1.5A, O/P: DC 19V, 2.53A
	DC Power Cord: Non-Shielded, Undetached, 1.8m		
	AC Power Cord: Non-Shielded, Detached, 1.0m (2C) (For Other Countries) AC Power Cord: Non-Shielded, Detached, 1.55m (2C) (For US, Canada, Mexico)		

Remark: For more detailed features description, please refer to the manufacturer's specifications or the user manual.

3.6.2. The EUT collocates with following worst components, which are used to establish a basic configuration of system during test:

SKU	
Main Board	LG, PRIME Main B/D PCB (with Thunderbolt)
SUB Board	LG, PRIME Main B/D PCB (with Finger Printer)
CPU	Intel, i7-8565U
17" LCD Panel	LP170WQ1(SP)(A1) (Normal Non touch)
Storage (SSD )	Samsung, 512GB (NVMe)
	Samsung, 128GB (SATA)
Memory (RAM)	Samsung, 8GB (On Board)
	Samsung, 8GB (On Card)
Battery Pack	LG, LBS1224E
WLAN Combo Card	Intel, 9560D2W
WLAN Combo Antenna	LG (INPAQ), WA-F-LBLB-04-064
Keyboard	LG, SN3870BL
Web Camera	Chicony, CKFIH2821005290LH
Finger Print	SUNTEL, SFPA-L002STA(White)
LAN Gender (Type C to LAN)	SUZHOU MEC ELECTRONICS, 80-5946-111 (White)
AC Adapter	LG (HONOR), ADS-48MS-19-2 19048E

### 3.7. Data Rate Relative to Output Power

802.11a				802.11n-HT20			
Channel	Modulation	Date Rate	Power (dBm)	Channel	Modulation	Date Rate	Power (dBm)
36	BPSK	6	18.43	36	BPSK	HT MCS8	19.01
36	QPSK	9	18.32	36	QPSK	HT MCS9	18.84
36	QPSK	12	18.26	36	QPSK	HT MCS10	18.66
36	16-QAM	18	18.12	36	16-QAM	HT MCS11	18.49
36	16-QAM	24	18.03	36	16-QAM	HT MCS12	18.35
36	64-QAM	36	17.94	36	64-QAM	HT MCS13	18.21
36	64-QAM	48	17.87	36	64-QAM	HT MCS14	18.12
36	64-QAM	54	17.64	36	64-QAM	HT MCS15	18.06

802.11n-HT40				802.11ac-VHT80			
Channel	Modulation	Date Rate	Power (dBm)	Channel	Modulation	Date Rate	Power (dBm)
38	BPSK	HT MCS8	16.97	42	BPSK	VHT MCS0	12.94
38	QPSK	HT MCS9	16.82	42	QPSK	VHT MCS1	12.76
38	QPSK	HT MCS10	16.71	42	QPSK	VHT MCS2	12.69
38	16-QAM	HT MCS11	16.56	42	16-QAM	VHT MCS3	12.57
38	16-QAM	HT MCS12	16.34	42	16-QAM	VHT MCS4	12.48
38	64-QAM	HT MCS13	16.25	42	64-QAM	VHT MCS5	12.35
38	64-QAM	HT MCS14	16.12	42	64-QAM	VHT MCS6	12.28
38	64-QAM	HT MCS15	16.05	42	64-QAM	VHT MCS7	12.17
				42	256-QAM	VHT MCS8	12.08
				42	256-QAM	VHT MCS9	11.95


802.11ac-VHT160			
Channel	Modulation	Date Rate	Power (dBm)
50	BPSK	VHT MCS0	14.06
50	QPSK	VHT MCS1	13.97
50	QPSK	VHT MCS2	13.86
50	16-QAM	VHT MCS3	13.71
50	16-QAM	VHT MCS4	13.62
50	64-QAM	VHT MCS5	13.49
50	64-QAM	VHT MCS6	13.37
50	64-QAM	VHT MCS7	13.26
50	256-QAM	VHT MCS8	13.04
50	256-QAM	VHT MCS9	12.98


Note: Above results are assessed in average power.

### 3.8. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
802.11a	0.98	2.050	0
802.11n-HT20	0.96	0.980	0.18
802.11n-HT40	0.92	0.495	0.36
802.11ac-VHT80	0.84	0.257	0.76
802.11ac-VHT160	0.76	0.154	1.19

Note: When duty cycle is less than 98% (0.98) that duty cycle factor  $10\log(1/x)$  is needed to add in conducted test items measured in average detector.

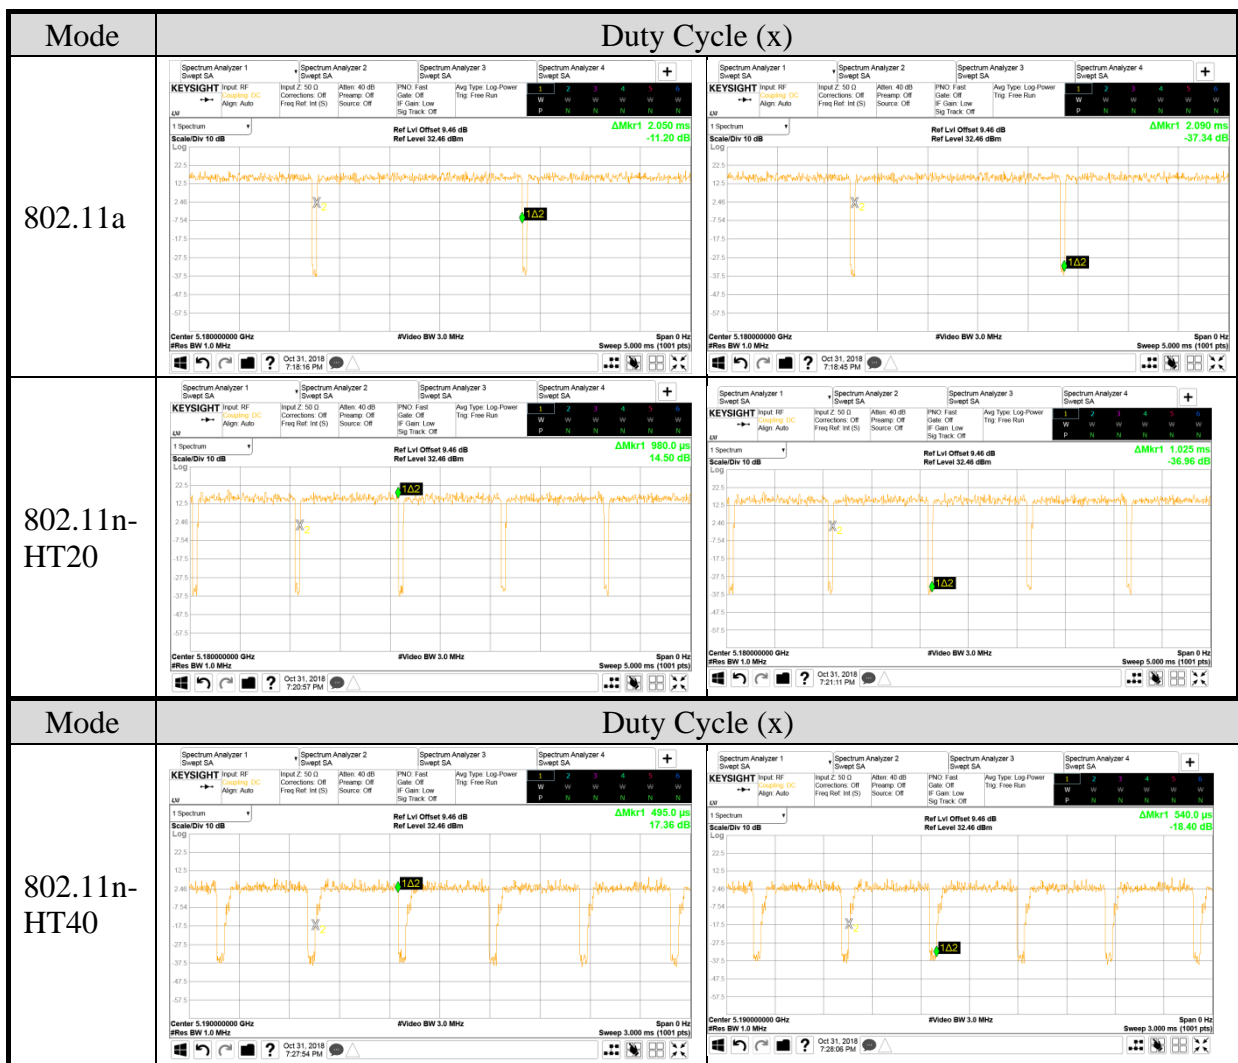

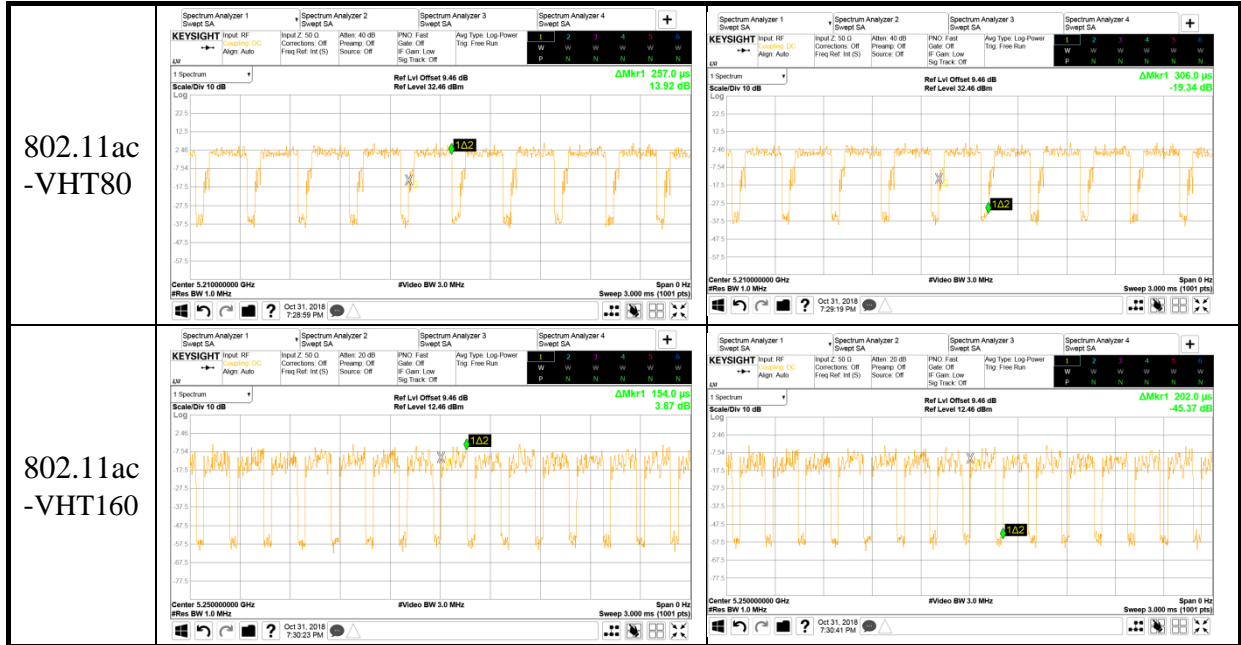

AC Conduction	
Test Case	Normal operation

Item	Mode	Data Rate	Test Channel	
Radiated Test Case	Radiated Band Edge <sup>Note1</sup>	802.11a	6 Mbps	36/64/100/140
		802.11n-HT20	HT MCS8	36/64/100/140/144
		802.11n-HT40	HT MCS8	38/62/102/134/142
		802.11ac-VHT80	VHT MCS0	42/58/106/138
		802.11ac-VHT160	VHT MCS0	50/114
	Radiated Spurious Emission <sup>Note1 &amp; 2</sup>	802.11a	6 Mbps	40/52/116/149
		802.11n-HT20	HT MCS8	40/52/116/144/165
		802.11n-HT40	HT MCS8	46/54/134/142/159
		802.11ac-VHT80	VHT MCS0	42/58/122/138/155
		802.11ac-VHT160	VHT MCS0	50/114
Conducted Test Case	Emission Bandwidth	802.11a	6 Mbps	36/40/48/52/60/64/100/116/140/149/157/165
		802.11n-HT20	HT MCS8	36/40/48/52/60/64/100/116/140/144/149/157/165
		802.11n-HT40	HT MCS8	38/46/54/62/102/110/134/142/151/159
		802.11ac-VHT80	HT MCS0	42/58/106/122/138/155
		802.11ac-VHT160	VHT MCS0	50/114

Item		Mode	Data Rate	Test Channel
Conducted Test Case	Maximum output power	802.11a	6 Mbps	36/40/48/52/60/64/100/116/140/149/157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/116/140/144/149/157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	VHT MCS0	50/114
	Emission Limitations	802.11a	6 Mbps	36/40/48/52/60/64/100/116/140/149/157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/116/140/144/149/157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	VHT MCS0	50/114
	Power spectral density	802.11a	6 Mbps	36/40/48/52/60/64/100/116/140/149/157/165
		802.11n-HT20	MCS8	36/40/48/52/60/64/100/116/140/144/149/157/165
		802.11n-HT40	MCS8	38/46/54/62/102/110/134/142/151/159
		802.11ac-VHT80	MCS0	42/58/106/122/138/155
		802.11ac-VHT160	VHT MCS0	50/114
	Frequency Stability	---	---	36

Note 1:  Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:  Lie  Side  Stand

Note 2: Low, mid, and high channels were measured, only the worst channel of each modulation was presented in this report.

### 3.9. Tested Supporting System List

#### 3.9.1. Support Peripheral Unit


No.	Product	Brand	Model No.	Serial No.	Approval
1.	LCD TV	LG	22LK330-DB	N/A	N/A
2.	USB Mouse	DELL	MS111-L	CN-09RRC7-48 723-2B7-0H3M	FCC By DoC
3.	Earphone	SAMPO	EK-Y1251MP	N/A	N/A

#### 3.9.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	HDMI Cable: Shielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.8m
2.	USB Cable: Unshielded, Undetachable, 1.8m
3.	Earphone Cable: Unshielded, Undetachable, 2.0m

### 3.10. Setup Configuration

#### 3.10.1. EUT Configuration for Power Line & Radiated Emission

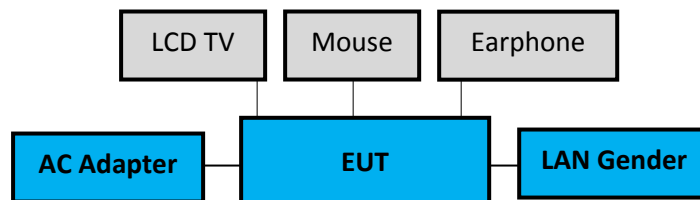

#### 3.10.2. EUT Configuration for RF Conducted Test Items



### 3.11. Operating Condition of EUT

Test program “DRTU” is used for enabling EUT WLAN function under continues transmitting and choosing data rate/ channel.

### 3.12. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: attemc_report@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724
Test Facilities	FCC OET Designation Number under APEC MRA by NCC is : TW1724 (1) No. 8 Shielding Room (2) Semi-Anechoic Chamber (IC Test Site Registration No.: 5183B-1) (3) Fully Anechoic Chamber (IC Test Site Registration No.: 5183B-4)

### 3.13. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.50dB
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty =  $ku_c(y)$

Test Item	Uncertainty
Emission Bandwidth	± 0.2kHz
Maximum output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

## 4. MEASUREMENT EQUIPMENT LIST

### 4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2018. 01. 24	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2017. 11. 12	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-855-9	2017. 12. 14	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	100354	2018. 01. 16	1 Year
5.	Signal Cable	Yeida	RG/58AU	CE-08	2018. 09. 21	1 Year
6.	Digital Thermo- Hygro Meter	iMax	HTC-1	No.8 S/R	2018. 04. 20	1 Year

### 4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2018. 09. 12	1 Year
2.	Spectrum Analyzer	Agilent	N9030A-526	MY53310269	2018. 01. 04	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2018. 06. 20	1 Year
4.	Amplifier	HP	8447D	2944A06305	2018. 01. 30	1 Year
5.	Amplifier	HP	8449B	3008A02678	2018. 03. 06	1 Year
6.	Bilog Antenna	CHASE	CBL6112D	33821	2018. 01. 21	1 Year
7.	Loop Antenna	R&S	HFH2-Z2	891847/27	2017. 12. 18	1 Year
8.	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00135902	2018. 03. 08	1 Year
9.	Horn Antenna	COM-POWER	AH-840	101092	2018. 05. 07	1 Year
10.	5G Notch Filter	Microwave Circuits	N0452502	459775	2018. 01. 05	1 Year
11.	5G Notch Filter	Microwave Circuits	N0555983	459481	2018. 05. 21	1 Year
12.	5G Notch Filter	Microwave Circuits	N0257881	459776	2018. 08. 22	1 Year
13.	Digital Thermo-Hygro Meter	IMax	HTC-1	No.1 3m A/C	2018. 04. 20	1 Year
14.	Digital Thermo-Hygro Meter	EVERY DAY	E-512	RF-02	2018. 04. 20	1 Year
15.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

#### 4.4. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2018. 04. 26	1 Year
2.	Power Meter	Anritsu	ML2495A	1145008	2017. 11. 03	1 Year
3.	Power Sensor	Anritsu	MA2411B	1126096	2017. 11. 03	1 Year
4.	Digital Thermo-Hygro Meter	Shenzhen Datronn Electronics	KT-905	RF	2018. 04. 20	1 Year


## 5. CONDUCTED EMISSION

### 5.1. Block Diagram of Test Setup

#### 5.1.1. Block Diagram of EUT

Indicated as section 3.9

#### 5.1.2. Shielded Room Setup Diagram

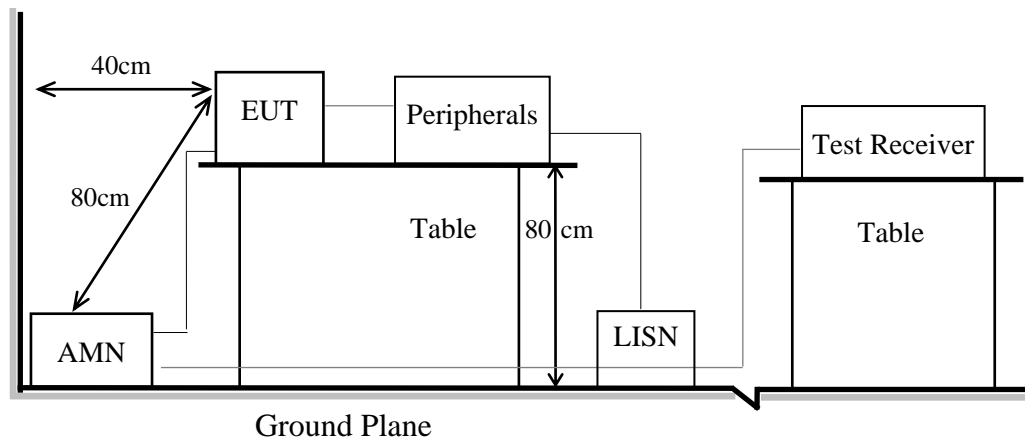

### 5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB $\mu$ V	56 ~ 46 dB $\mu$ V
500kHz ~ 5MHz	56 dB $\mu$ V	46 dB $\mu$ V
5MHz ~ 30MHz	60 dB $\mu$ V	50 dB $\mu$ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

### 5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

## **5.4. Test Results**

Please refer to Appendix A.


## 6. RADIATED EMISSION

### 6.1. Block Diagram of Test Setup


#### 6.1.1. Block Diagram of EUT

Indicated as section 3.9


#### 6.1.2. Setup Diagram for 9kHz-30MHz

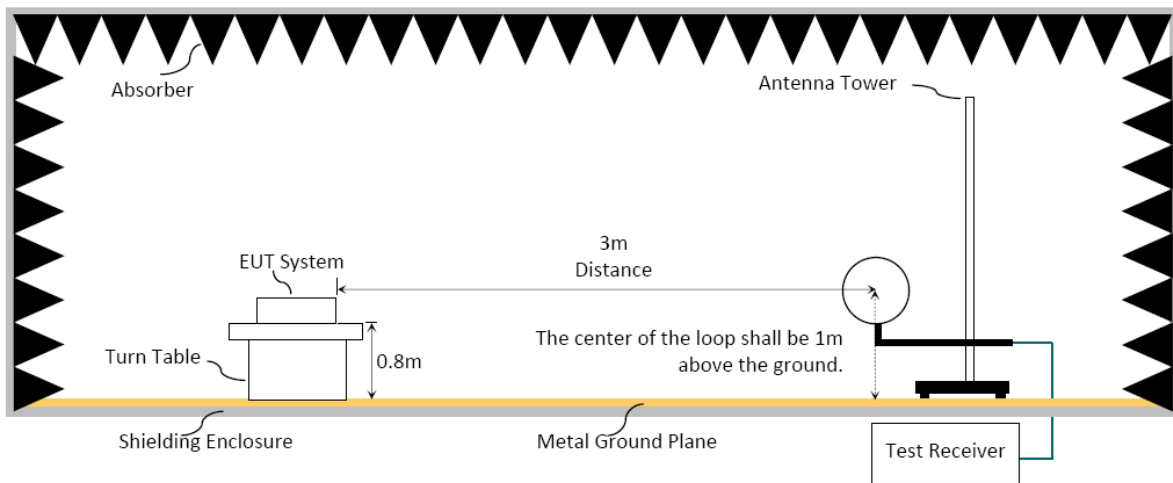

#### 6.1.3. Setup Diagram for 30-1000 MHz

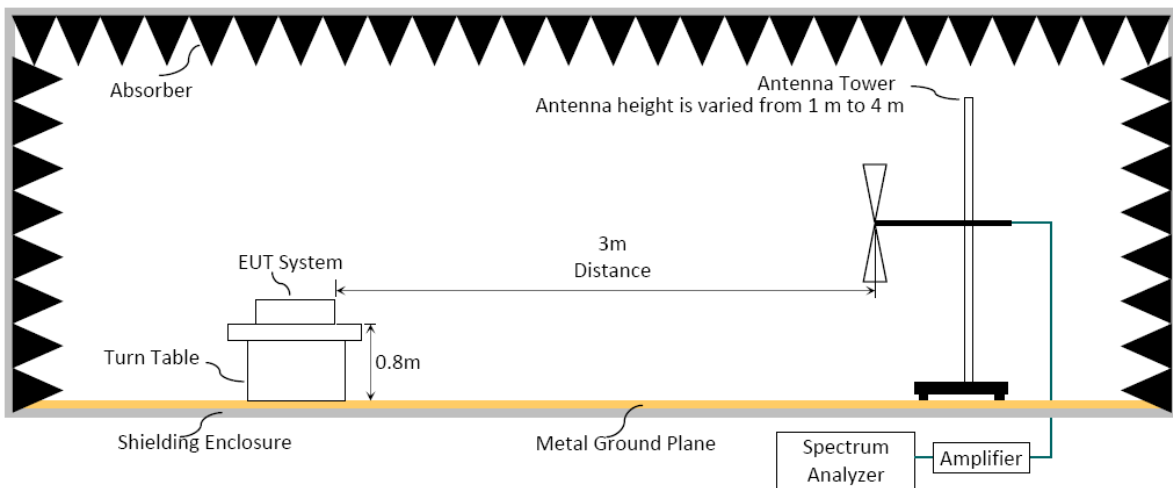

### 6.1.4. Setup Diagram for above 1GHz

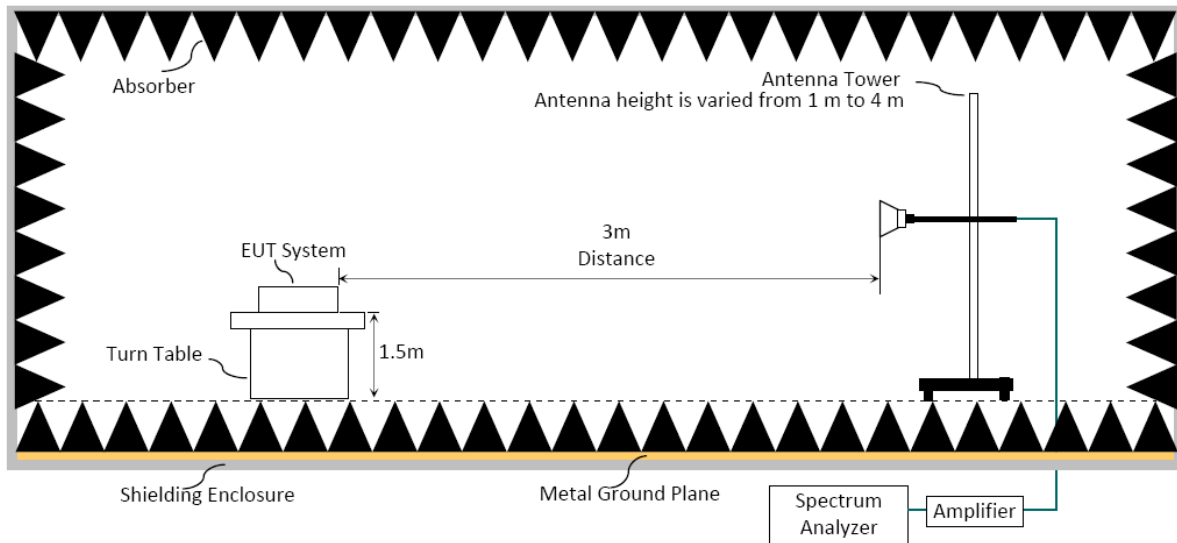

## 6.2. Radiated Emission Limits

Radiated emissions fall in restricted bands, as defined in Section 15.205 must be in compliance with the radiated emission limits specified in 15.209 as below.

### 6.2.1. General Limit

Frequency (MHz)	Distance (m)	Limits	
		dB $\mu$ V/m	$\mu$ V/m
0.009 - 0.490	300	67.6-20 log f(kHz)	2400/f kHz
0.490 - 1.705	30	87.6-20 log f(kHz)	24000/f kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB $\mu$ V/m (Peak) 54.0 dB $\mu$ V/m (Average)	

Remark : (1) dB $\mu$ V/m = 20 log ( $\mu$ V/m)


- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.2.2. Limit for non-restricted frequency above 1 GHz

Frequency Band (MHz)	E.I.R.P. Limit	Field Strength Limit at 3 m
5150 to 5250	-27 dBm	68.2
5250 to 5350		68.2
5470 to 5725		68.2

Note: Field Strength at 3 m= E.I.R.P. + 95.2 dB

Frequency Band (MHz)	Field Strength Limit at 3 m	
5725 to 5850	<input checked="" type="checkbox"/>	15.407(b)(4)(i) All emissions shall be limited to a level of 68.2 dB $\mu$ V/m at 75 MHz or more above or below the band edge increasing linearly to 105.2dB $\mu$ V/m at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 110.8 dB $\mu$ V/m at 5 MHz above or below the band edge increasing linearly to a level of 68.2 dB $\mu$ V/m at the band edge.
	<input type="checkbox"/>	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

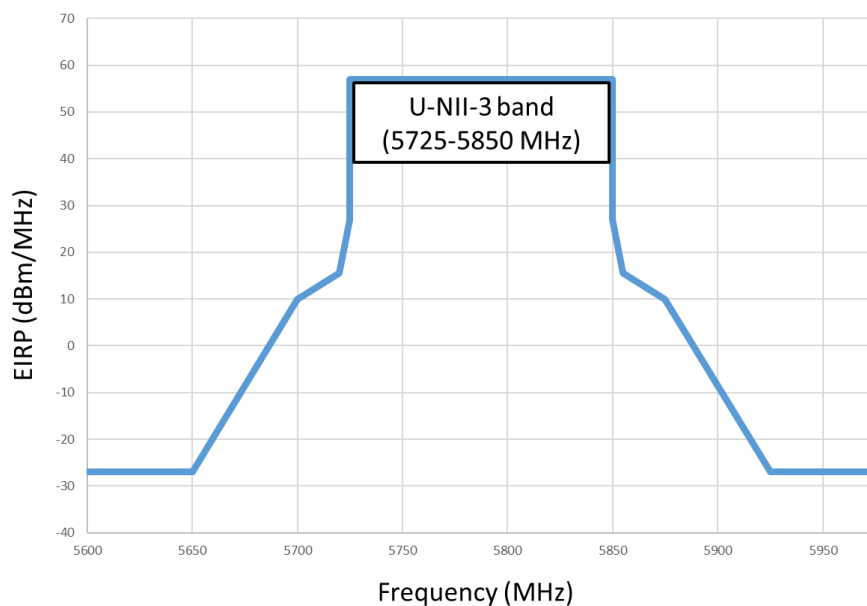

### 6.3. Test Procedure

#### Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)  
Q.P. (490kHz-30MHz)

#### Frequency Range 30MHz ~ 40GHz:

The EUT setup on the turn table which has 80cm (for 30-1000MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

#### Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required, otherwise using Q.P. for final measurement.

#### Frequency above 1GHz to 10th harmonic (up to 40 GHz):

##### Peak Detector:

- (1) RBW = 1MHz
- (2) VBW  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required, otherwise using average detector for final measurement.

### Average Detector:

#### Option 1:

- (1) RBW = 1MHz
- (2) VBW  $\geq$  1/ T.

Modulation Type	T (ms)	1/ T (kHz)	VBW Setting (kHz)
802.11a	2.050	0.488	10Hz
802.11n-HT20	0.980	1.020	1kHz
802.11n-HT40	0.495	2.020	2kHz
802.11ac-VHT80	0.257	3.890	3.9kHz
802.11ac-VHT160	0.154	6.494	6.8kHz

N/A: 1/ T is not implemented when duty cycle presented in section 3.7 is  $\geq$ 98 %.

- (1) Detector = Peak.
- (2) Sweep time = auto.
- (3) Trace mode = max hold.
- (4) Allow sweeps to continue until the trace stabilizes.

#### Option 2:

Average Emission Level= Peak Emission Level+ D.C.C.F.

## 6.4. Measurement Result Explanation

Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading

Average Emission Level=Antenna Factor + Cable Loss + Meter Reading

Average Emission Level= Peak Emission Level+ DCCF

Duty Cycle Correction Factor (DCCF)=  $20\log(TX_{on}/TX_{on+off})$  presented in section 3.7


ERP= Peak Emission Level-95.2dB-2.14dB

## 6.5. Test Results

Please refer to Appendix A.

## 7. EMISSION BANDWIDTH

### 7.1. Block Diagram of Test Setup

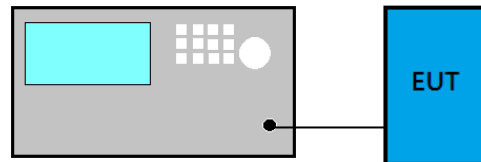

### 7.2. Specification Limits

Frequency Band (MHz)	Limit
5150 to 5250	Reference only
5250 to 5350	
5470 to 5725	
5725 to 5850	$\geq 500\text{kHz}$

### 7.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ Applicable to all bands except to 5725 MHz- 5850 MHz

- (1) Set RBW= 1% of the emission bandwidth
- (2) Set VBW > RBW
- (3) Detector = Peak
- (4) Trace mode = max hold
- (5) Setting channel bandwidth function x dB to -26 dB to record the final bandwidth.

■ 5725 MHz- 5850 MHz


- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 dB to record the final bandwidth.

### 7.4. Test Results


Please refer to Appendix A

## 8. MAXIMUM OUTPUT POWER

### 8.1. Block Diagram of Test Setup

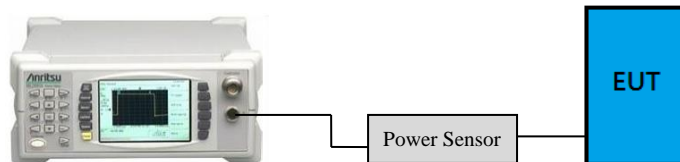

- For 802.11ac-VHT80/VHT160 modes only

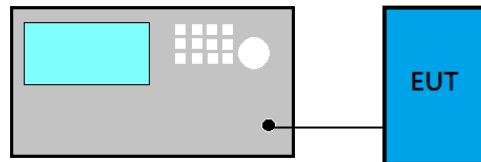

### 8.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	1 W(30 dBm)/ Max e.i.r.p. ≤125 mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon
	Fixed point-to-point Access Point	1 W(30 dBm)
	Indoor Access Point	1 W(30 dBm)
	Mobile and Portable client device	250 mW(24 dBm)
5250 to 5350	N/A	250 mW or 11 dBm + 10 log B <sup>Note1</sup>
5470 to 5725		250 mW or 11 dBm + 10 log B <sup>Note1</sup>
5725 to 5850		1 W(30 dBm)

Note 1: B is the 26 dB emission bandwidth, which presented in section 7 and appendix A.1.

### 8.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

■ **Method AVGPM (Measurement using an RF average power meter):**

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .

■ **Method AVGSA-2 (Spectrum channel power) for 802.11ac-VHT80/VHT 160 modes only**


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW)  $\geq 3$  MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is  $< 98\%$ .

### 8.4. Test Results

Please refer to Appendix A

## 9. EMISSION LIMITATIONS MEASUREMENT


### 9.1. Block Diagram of Test Setup

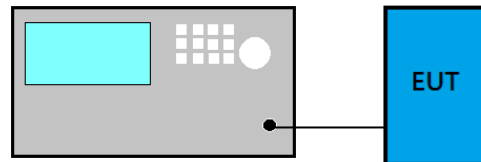

### 9.2. Specification Limits

Frequency Band (MHz)	E.I.R.P. Limit
5150 to 5250	-27 dBm
5250 to 5350	
5470 to 5725	

Frequency Band (MHz)	E.I.R.P. Limit	
5725 to 5850	<input checked="" type="checkbox"/>	15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
	<input type="checkbox"/>	15.407(b)(4)(ii) ,compliance with the emission limits in § 15.247(d) Shall be at least 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power,. Attenuation below the general limits specified in §15.209(a) is not required. In addition,radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

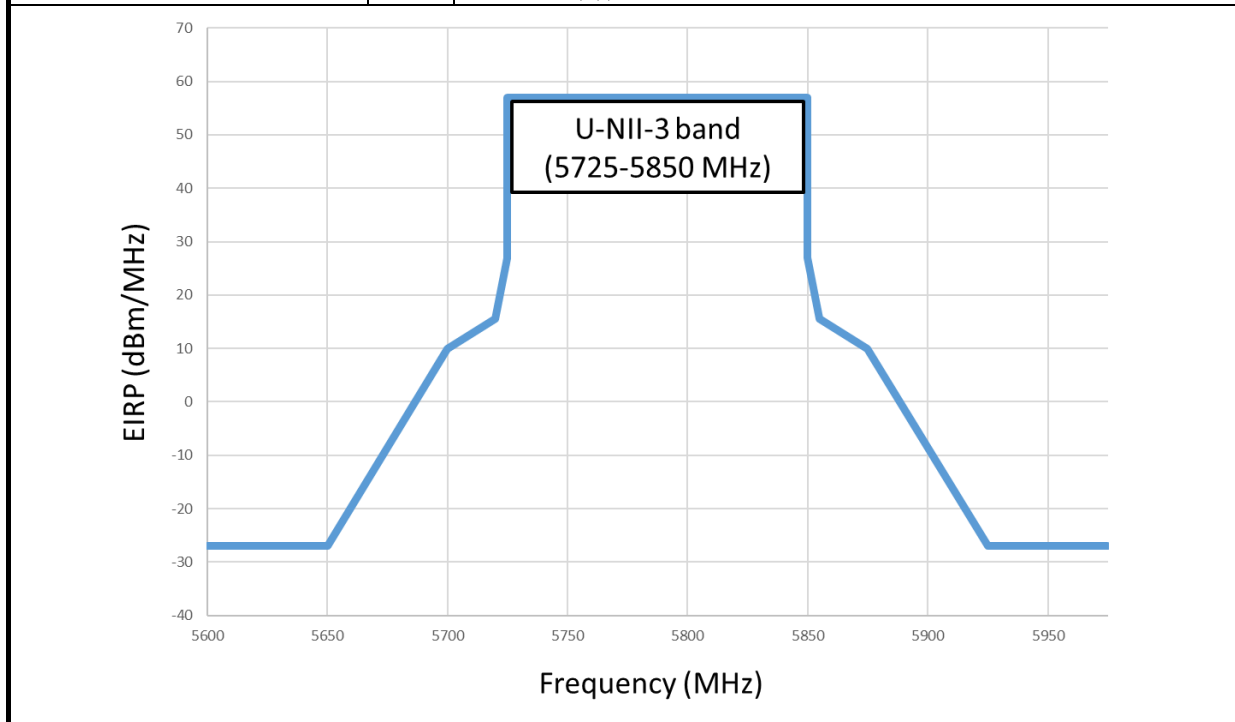

### **9.3. Test Procedure**

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:


- (1) RBW = 1 MHz
- (2) VBW  $\geq 3 \times$  RBW
- (3) Detector = Peak
- (4) Sweep time = auto
- (5) Trace mode = max hold
- (6) Allow sweeps to continue until the trace stabilizes.

### **9.4. Test Results**

Please refer to Appendix A

## 10. POWER SPECTRAL DENSITY

### 10.1. Block Diagram of Test Setup

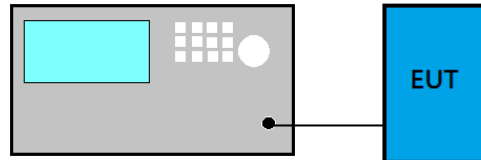

### 10.2. Specification Limits

Frequency Band (MHz)	Category	Limit
5150 to 5250	Outdoor Access Point	17dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz
5250 to 5350	N/A	11 dBm/MHz
5470 to 5725		11 dBm/MHz
5725 to 5850		30dBm/500 kHz

### 10.3. Test Procedure

Following measurement procedure is reference to KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

#### ■ Method AVGSA-2 (Spectrum channel power)


- (1) Set span to at least 1.5 times the OBW
- (2) Set RBW = 1 MHz
- (3) Set the video bandwidth (VBW)  $\geq$  3 MHz.
- (4) Detector = RMS.
- (5) Trace mode = trace average at least 100 traces
- (6) Sweep = auto couple.
- (7) Use peak search function to find out the maximum power density.
- (8) Duty cycle factor is added when duty cycle presented in section 3.7 is  $<$  98%.

### 10.4. Test Results

Please refer to Appendix A

## 11. FREQUENCY STABILITY

### 11.1. Block Diagram of Test Setup

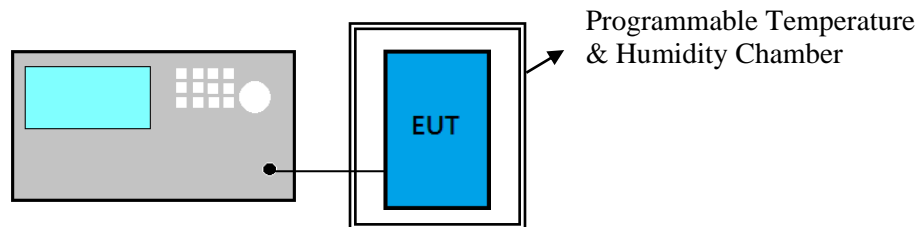

### 11.2. Specification Limits

NONE

### 11.3. Test Procedure

- (1) Frequency: Test frequency.
- (2) Span: enough to cover the complete power envelope
- (3) RBW: 1MHz(modulation ON) ; 10KHz(CW)
- (4) VBW: 1MHz(modulation ON) ; 10KHz(CW)
- (5) Detector Mode: Positive Peak
- (6) Indication mode: Max hold
- (7) Find the peak frequency and take calculate by the formula:  
(Measurement Value-declaration frequency)/ declaration frequency)

### 11.4. Test Results

Please refer to Appendix A



## 12. DEVIATION TO TEST SPECIFICATIONS

**【NONE】**



*Audix Technology Corp.  
No. 53-11, Dingfu, Linkou, Dist.,  
New Taipei City 244, Taiwan*

*Tel: +886 2 26099301  
Fax: +886 2 26099303*

---

# APPDNDIX A

## TEST DATA AND PLOTS


(Model: 17Z990)

## TABLE OF CONTENTS

<b>A.1 CONDUCTED EMISSION</b> .....	<b>2</b>
<b>A.2 RADIATED EMISSION</b> .....	<b>4</b>
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band.....	41
A.2.3 Emissions in Non-restricted Frequency Bands .....	41
<b>A.3 EMISSION BANDWIDTH</b> .....	<b>42</b>
A.3.1 Emission Bandwidth Result.....	42
A.3.2 Measurement Plots .....	44
<b>A.4 MAXIMUM OUTPUT POWER</b> .....	<b>54</b>
A.4.1 Average Output Power .....	54
A.4.2 Measurement Plots .....	56
<b>A.5 EMISSION LIMITATIONS MEASUREMENT</b> .....	<b>59</b>
<b>A.6 POWER SPECTRAL DENSITY</b> .....	<b>145</b>
A.6.1 Power Spectral Density Result .....	145
A.6.2 Measurement Plots .....	148
<b>A.7 FREQUENCY STABILITY</b> .....	<b>156</b>
A.7.1 Frequency stability Result .....	156

## A.1 CONDUCTED EMISSION

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

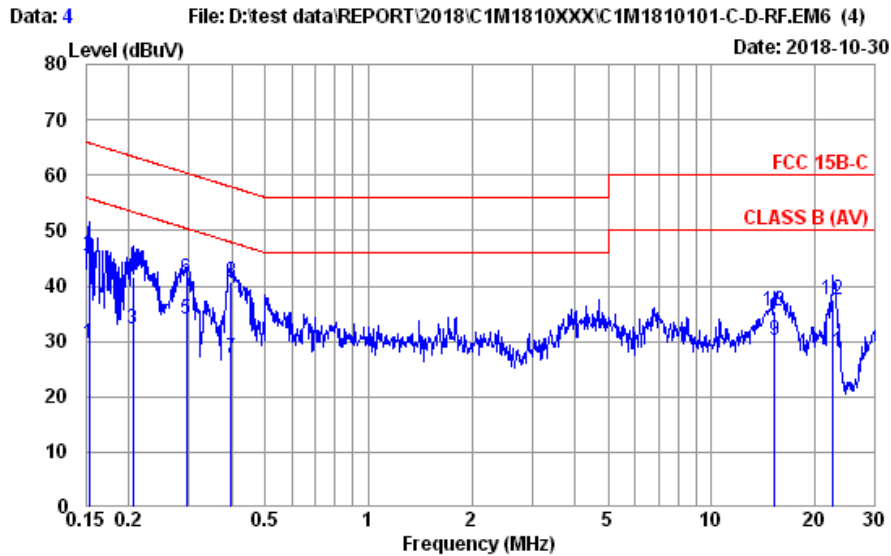


Site no. : No.8 Shielded Room Data no. : 4  
 Condition : ENV4200 100169 LISN Phase : NEUTRAL  
 Limit : FCC 15B-C  
 Env. / Ins. : 24°C / 49% ESR3(1774) Engineer : Nick Du  
 EUT : 17Z990  
 Power Rating : 120Vac/60Hz  
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBµV)	Emission Level (dBµV)	Limits (dBµV)	Margin (dB)	Remark
1	0.153	10.57	0.03	9.98	9.08	29.66	55.82	26.16	Average
2	0.153	10.57	0.03	9.98	24.78	45.36	65.82	20.46	QP
3	0.206	10.52	0.03	9.98	11.67	32.20	53.36	21.16	Average
4	0.206	10.52	0.03	9.98	21.13	41.66	63.36	21.70	QP
5	0.294	10.47	0.04	9.98	13.57	34.06	50.41	16.35	Average
6	0.294	10.47	0.04	9.98	20.82	41.31	60.41	19.10	QP
7	0.398	10.43	0.04	9.98	6.58	27.03	47.90	20.87	Average
8	0.398	10.43	0.04	9.98	20.18	40.63	57.90	17.27	QP
9	15.307	12.65	0.23	10.05	7.16	30.09	50.00	19.91	Average
10	15.307	12.65	0.23	10.05	12.41	35.34	60.00	24.66	QP
11	22.655	14.36	0.29	10.08	3.47	28.20	50.00	21.80	Average
12	22.655	14.36	0.29	10.08	12.91	37.64	60.00	22.36	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

Test Date	2018/10/30	Temp./Hum.	24°C/49%
Test Voltage	AC 120V 60Hz (Via AC Adapter)		

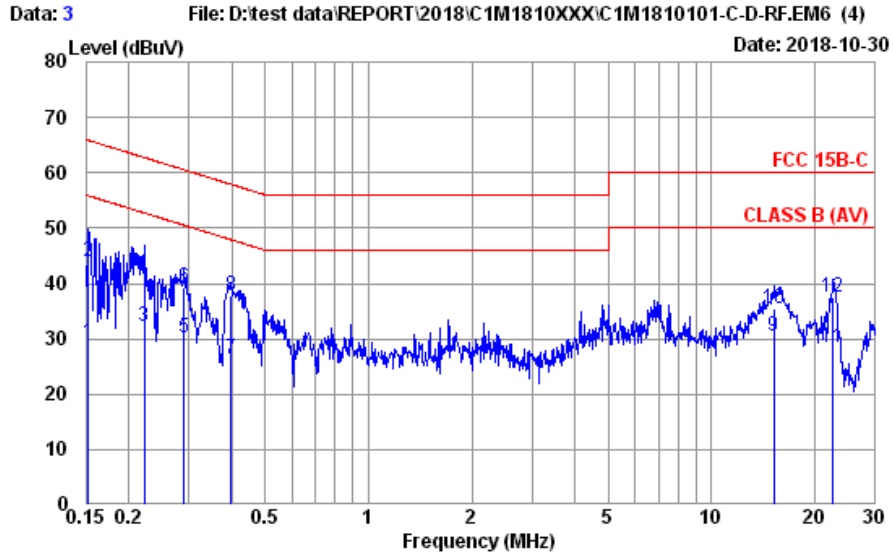

Site no. : No.8 Shielded Room      Data no. : 3  
 Condition : ENV4200 100169      LISN Phase : LINE  
 Limit : FCC 15B-C  
 Env. / Ins. : 24°C / 49% ESR3(1774)      Engineer : Nick Du  
 EUT : 17Z990  
 Power Rating : 120Vac/60Hz  
 Test Mode : Operating

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.152	10.63	0.03	9.98	8.65	29.29	55.87	26.58	Average
2	0.152	10.63	0.03	9.98	23.23	43.87	65.87	22.00	QP
3	0.222	10.54	0.03	9.98	11.72	32.27	52.74	20.47	Average
4	0.222	10.54	0.03	9.98	20.04	40.59	62.74	22.15	QP
5	0.289	10.50	0.04	9.98	9.52	30.04	50.54	20.50	Average
6	0.289	10.50	0.04	9.98	18.76	39.28	60.54	21.26	QP
7	0.398	10.45	0.04	9.98	5.76	26.23	47.90	21.67	Average
8	0.398	10.45	0.04	9.98	17.31	37.78	57.90	20.12	QP
9	15.146	12.65	0.23	10.05	7.52	30.45	50.00	19.55	Average
10	15.146	12.65	0.23	10.05	12.60	35.53	60.00	24.47	QP
11	22.655	14.42	0.29	10.08	3.58	28.37	50.00	21.63	Average
12	22.655	14.42	0.29	10.08	12.78	37.57	60.00	22.43	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.

## A.2 RADIATED EMISSION

Test Date	2018/11/01	Temp./Hum.	23°C/50%
Test Voltage	AC 120V, 60Hz (via AC Adapter)		

### A.2.1 Emissions within Restricted Frequency Bands

#### A.2.1.1 Frequency 9kHz~30MHz

**The emissions (9kHz~30MHz) not reported for there is no emission be found.**

#### A.2.1.2 Frequency Below 1 GHz

Mode	802.11n-HT20	UNII Band	III
		Frequency	TX 5745MHz

#### Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.9700	24.27	1.22	13.09	38.58	40.00	1.42	Peak
94.9900	16.56	2.21	12.61	31.38	43.50	12.12	Peak
168.7100	15.92	3.02	9.29	28.23	43.50	15.27	Peak
239.5200	18.47	3.71	5.23	27.41	46.00	18.59	Peak
326.8200	20.25	4.68	7.03	31.96	46.00	14.04	Peak
431.5800	22.43	5.85	4.45	32.73	46.00	13.27	Peak


#### Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
30.9700	24.27	1.22	4.42	29.91	40.00	10.09	Peak
101.7800	17.60	2.29	9.36	29.25	43.50	14.25	Peak
225.9400	17.61	3.60	6.73	27.94	46.00	18.06	Peak
428.6700	22.39	5.82	3.55	31.76	46.00	14.24	Peak
687.6600	24.84	7.04	3.29	35.17	46.00	10.83	Peak
928.2200	27.12	8.37	2.31	37.80	46.00	8.20	Peak

A.2.1.3 Frequency Above 1 GHz to 10<sup>th</sup> harmonics


**Band Edge:**

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

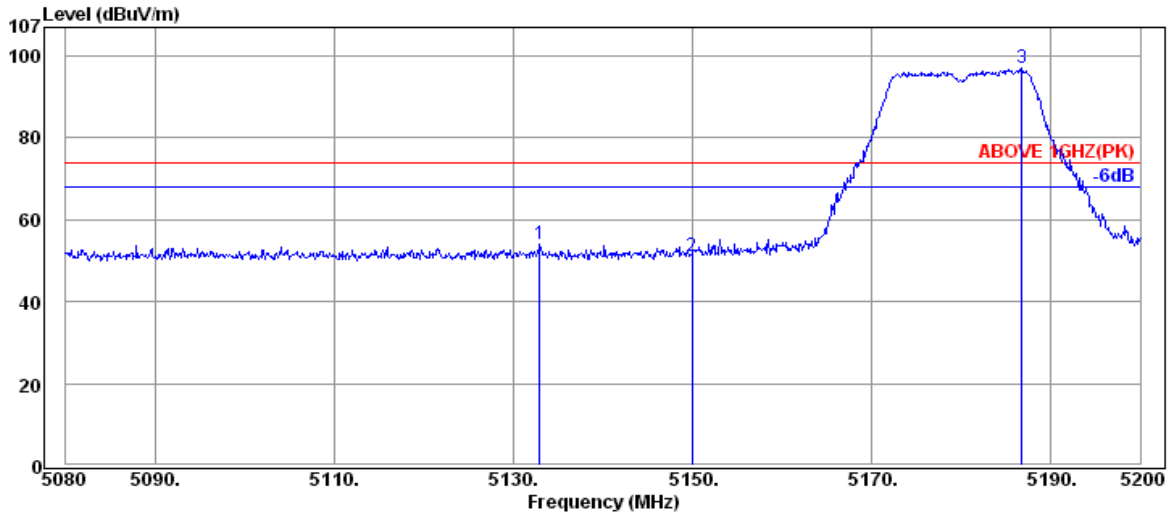

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5132.92	34.43	13.23	6.26	53.92	74.00	20.08	Peak
5149.96	34.45	13.22	3.37	51.04	74.00	22.96	Peak
5186.80	34.48	13.19	49.24	96.91	---	---	Peak

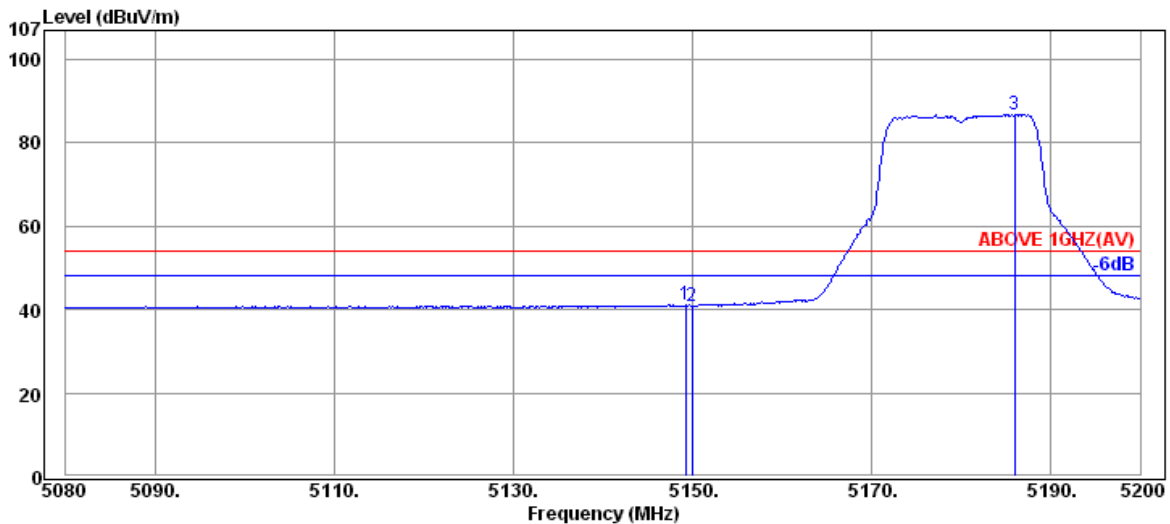

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.24	34.45	13.22	-6.60	41.07	54.00	12.93	Average
5149.96	34.45	13.22	-6.82	40.85	54.00	13.15	Average
5185.96	34.48	13.19	39.09	86.76	---	---	Average

Mode	802.11a	UNII Band	I
		Frequency	TX 5180MHz

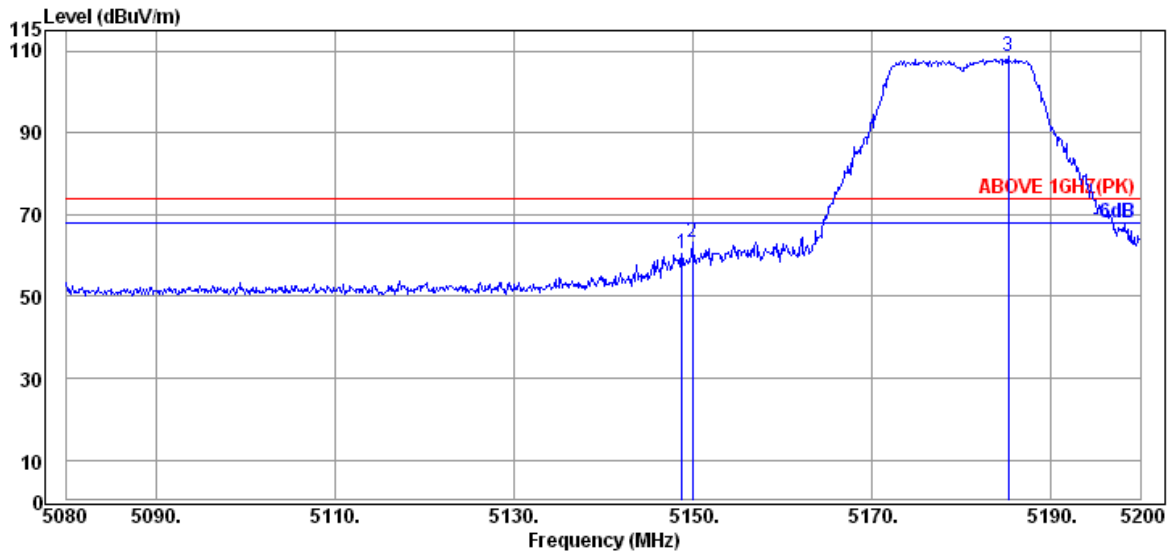

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.76	34.45	13.22	12.95	60.62	74.00	13.38	Peak
5149.96	34.45	13.22	15.46	63.13	74.00	10.87	Peak
5185.24	34.48	13.19	60.96	108.63	---	---	Peak

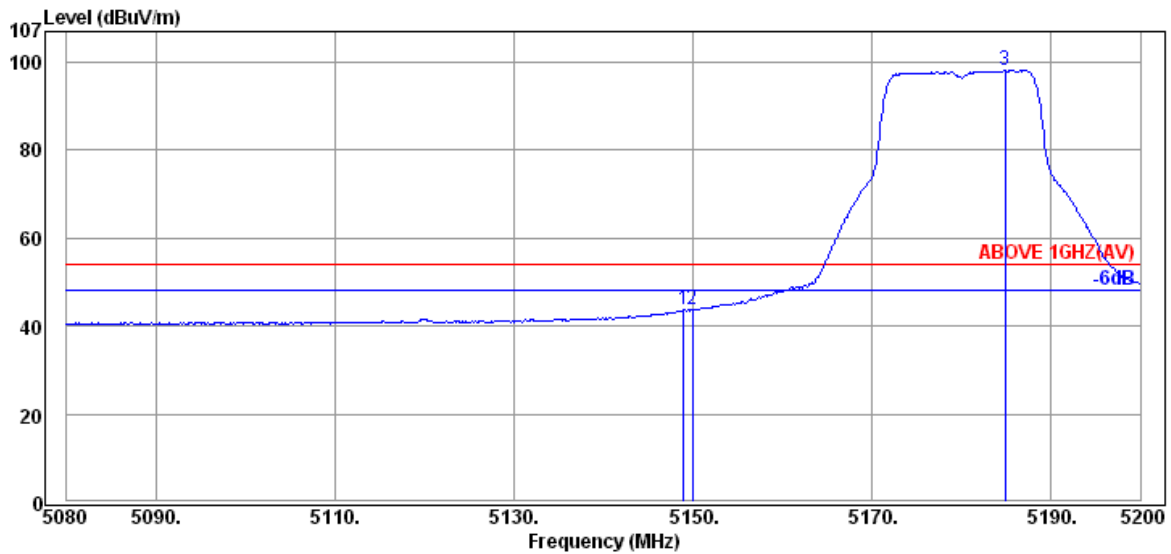

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.00	34.45	13.22	-4.04	43.63	54.00	10.37	Average
5149.96	34.45	13.22	-4.07	43.60	54.00	10.40	Average
5184.88	34.48	13.19	50.57	98.24	---	---	Average

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

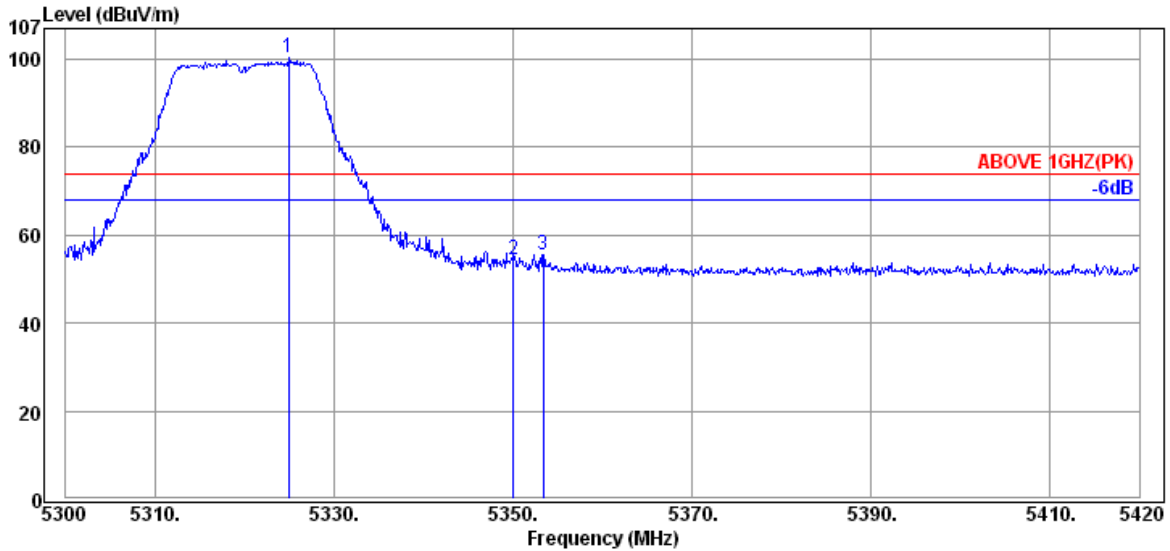

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5324.96	34.62	13.22	52.60	100.44	---	---	Peak
5350.04	34.65	13.31	6.38	54.34	74.00	19.66	Peak
5353.40	34.65	13.31	7.68	55.64	74.00	18.36	Peak

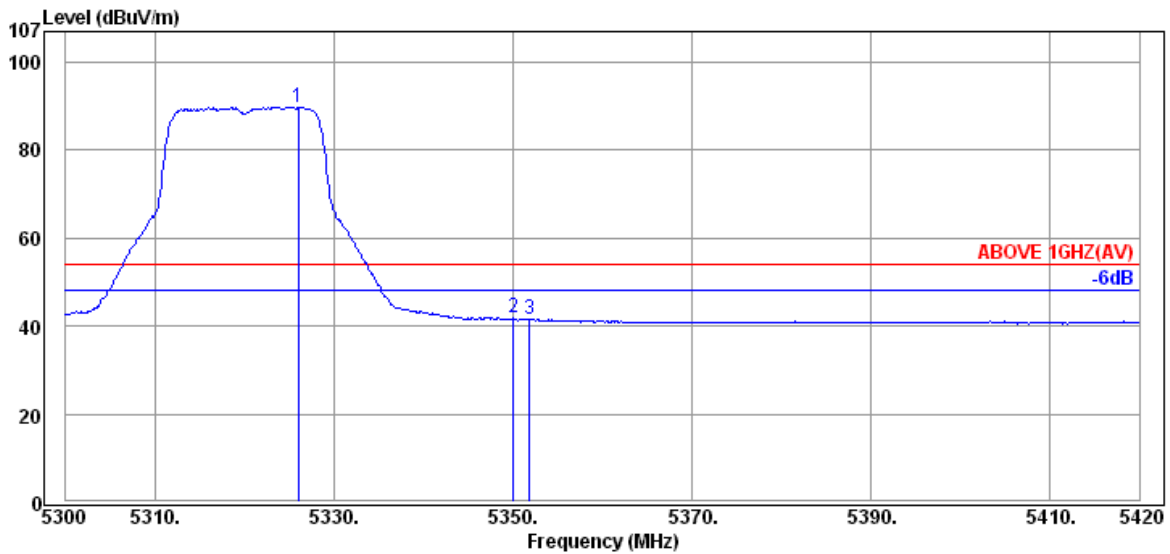

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5326.04	34.62	13.22	41.98	89.82	---	---	Average
5350.04	34.65	13.31	-6.22	41.74	54.00	12.26	Average
5351.84	34.65	13.31	-6.31	41.65	54.00	12.35	Average

Mode	802.11a	UNII Band	II-2A
		Frequency	TX 5320MHz

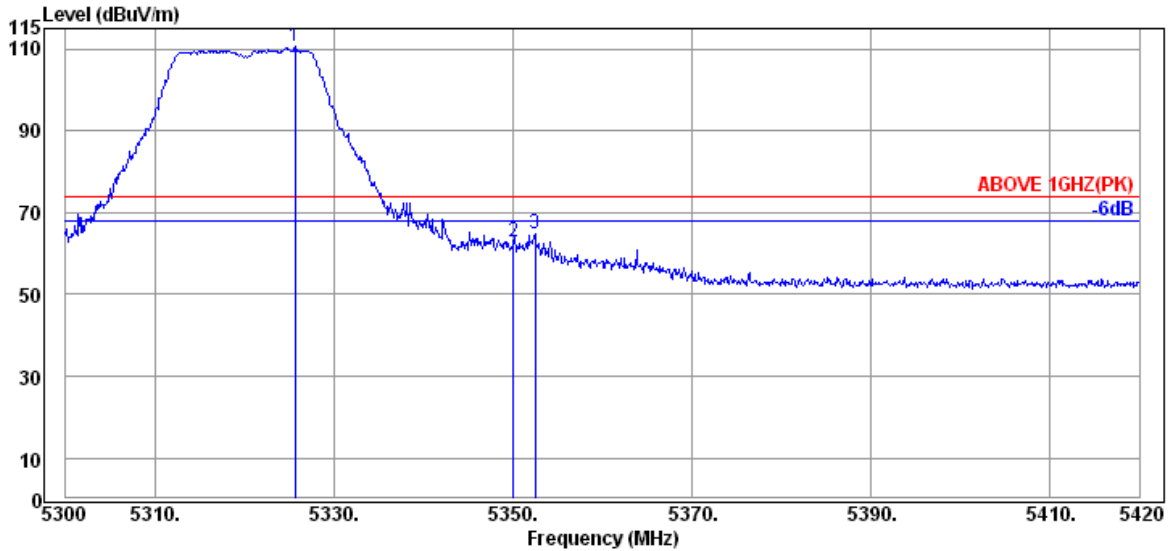

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.68	34.62	13.22	62.76	110.60	---	---	Peak
5350.04	34.65	13.31	15.01	62.97	74.00	11.03	Peak
5352.44	34.65	13.31	16.71	64.67	74.00	9.33	Peak

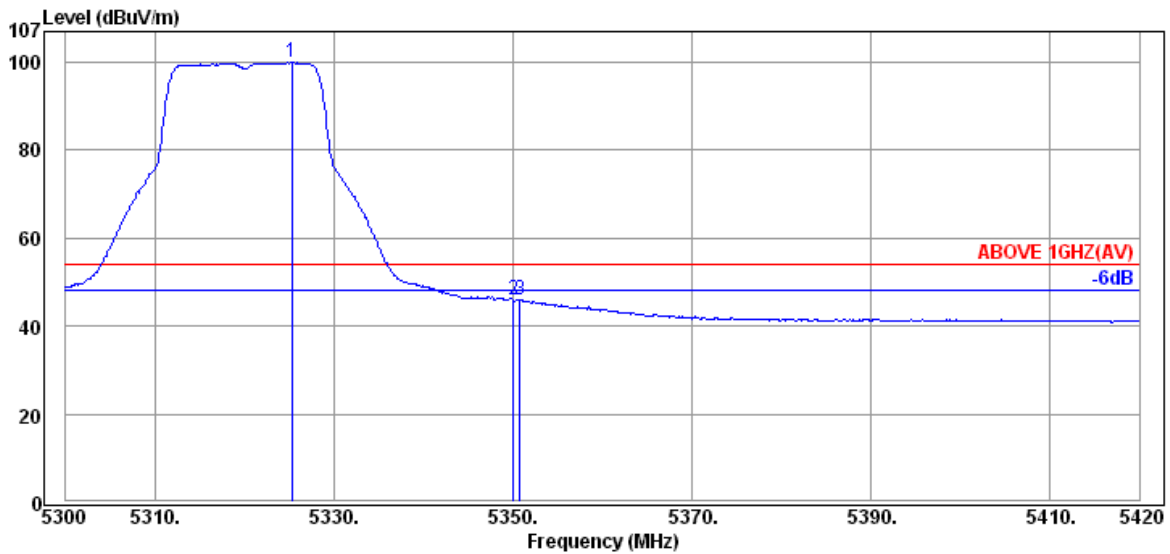

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.32	34.62	13.22	52.13	99.97	---	---	Average
5350.04	34.65	13.31	-2.05	45.91	54.00	8.09	Average
5350.76	34.65	13.31	-2.05	45.91	54.00	8.09	Average

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

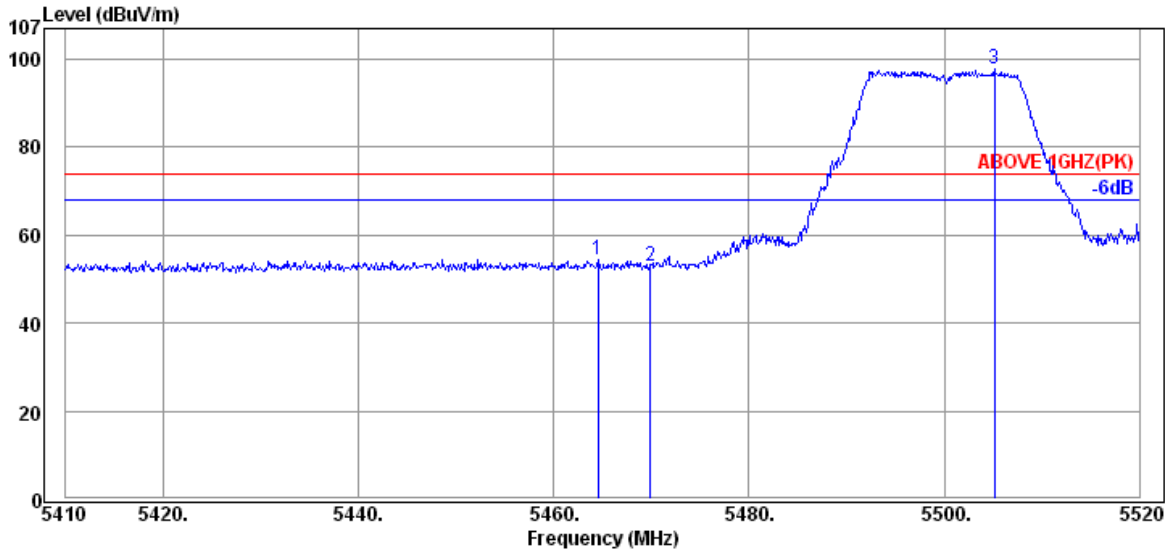

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.56	34.77	13.51	6.29	54.57	74.00	19.43	Peak
5469.95	34.77	13.51	4.75	53.03	74.00	20.97	Peak
5505.15	34.80	13.55	49.50	97.85	---	---	Peak

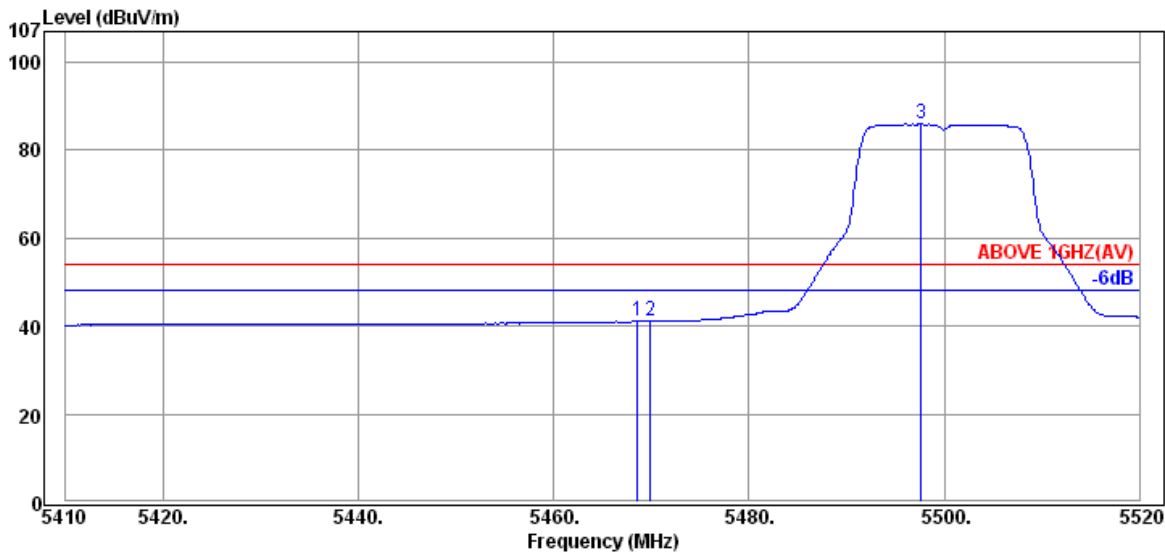

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.63	34.77	13.51	-7.20	41.08	54.00	12.92	Average
5469.95	34.77	13.51	-7.16	41.12	54.00	12.88	Average
5497.67	34.80	13.55	37.54	85.89	---	---	Average

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5500MHz

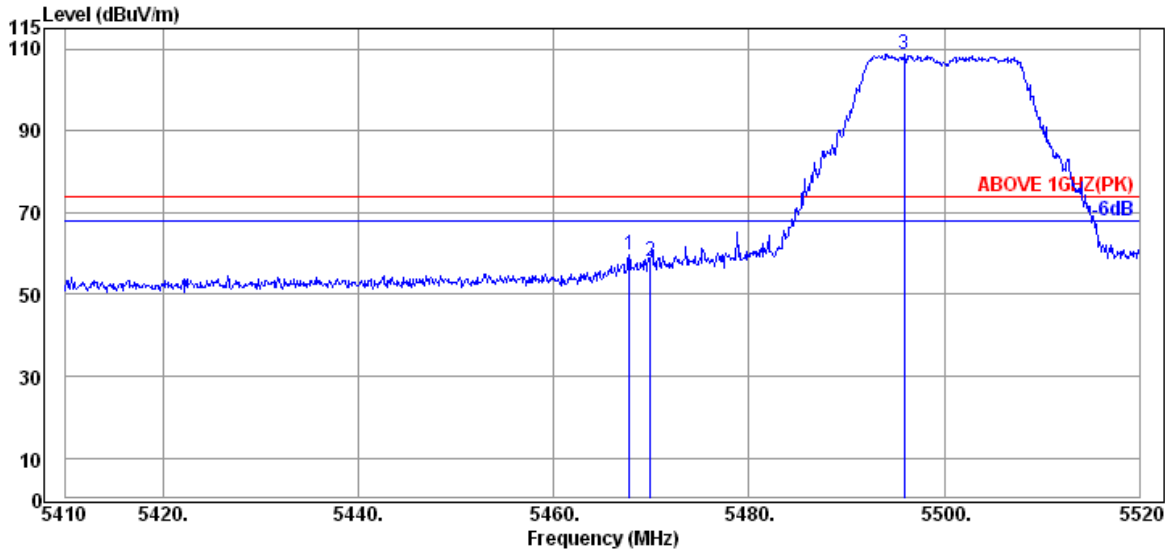

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.75	34.77	13.51	11.56	59.84	74.00	14.16	Peak
5469.95	34.77	13.51	9.62	57.90	74.00	16.10	Peak
5495.91	34.78	13.53	60.37	108.68	---	---	Peak

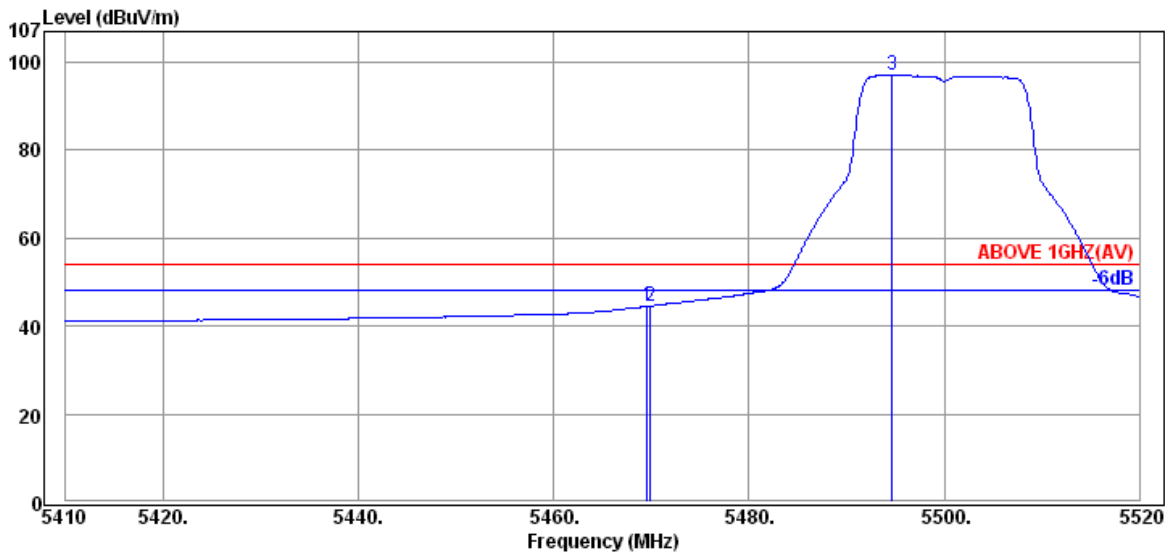

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.62	34.77	13.51	-3.79	44.49	54.00	9.51	Average
5469.95	34.77	13.51	-3.66	44.62	54.00	9.38	Average
5494.70	34.78	13.53	48.70	97.01	---	---	Average

Mode	802.11a	UNII Band	II-2C
		Frequency	TX 5700MHz

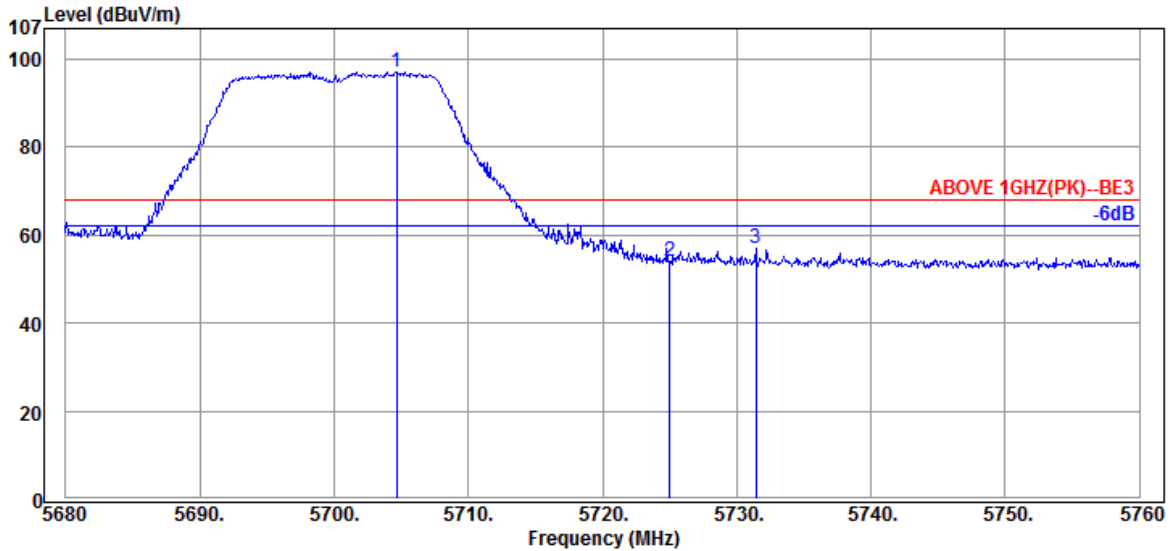

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5704.64	35.05	13.94	48.12	97.11	68.20	---	Peak
5725.04	35.07	13.98	5.13	54.18	68.20	14.02	Peak
5731.44	35.07	13.98	7.78	56.83	68.20	11.37	Peak

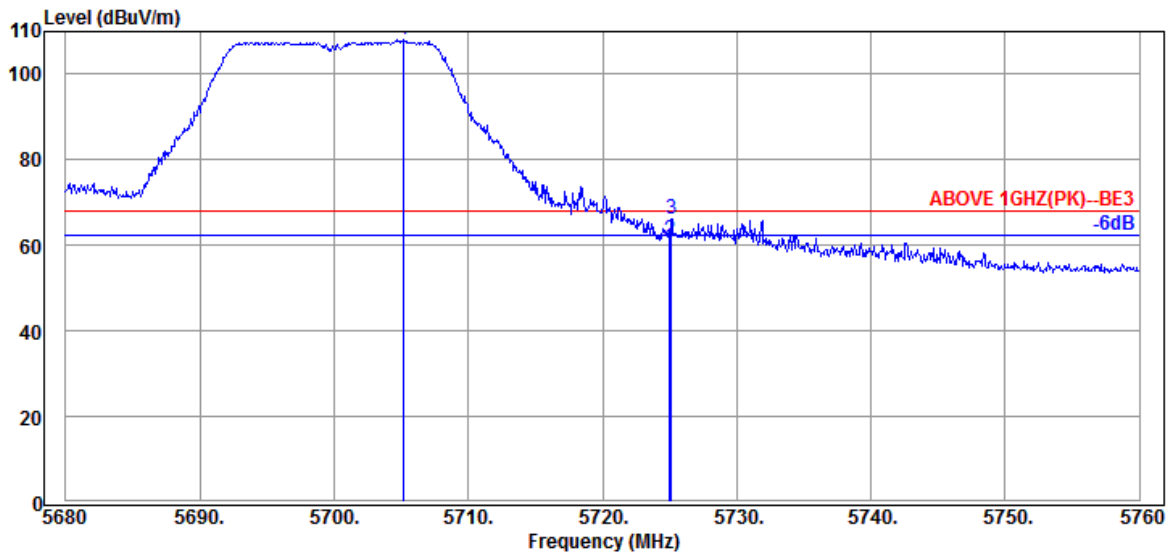

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5705.20	35.05	13.94	59.22	108.21	68.20	---	Peak
5725.04	35.07	13.98	12.23	61.28	68.20	6.92	Peak
5725.12	35.07	13.98	17.25	66.30	68.20	1.90	Peak

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

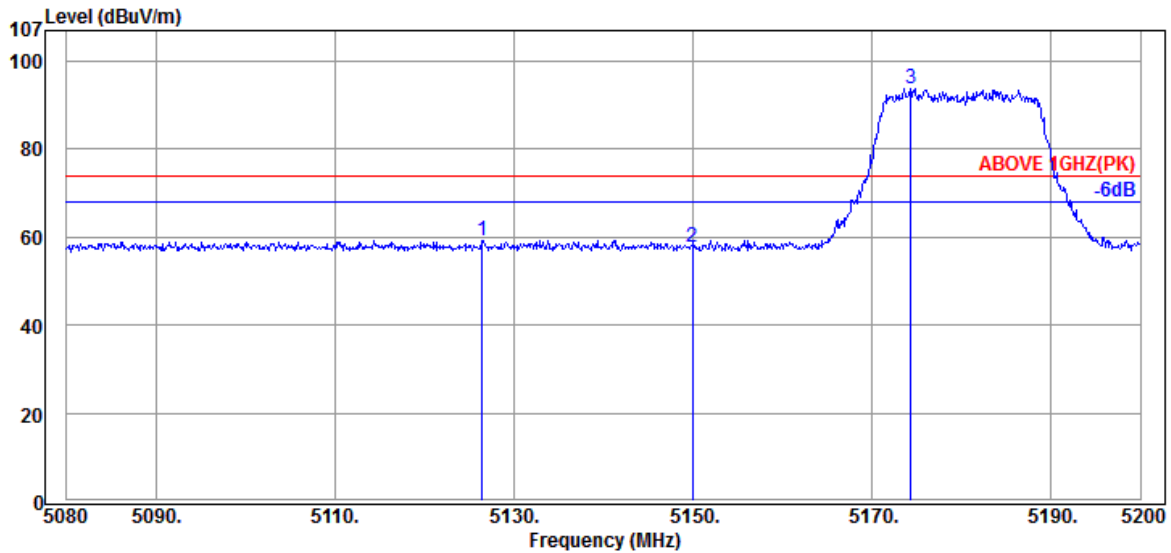

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
5126.4400	33.39	9.33	16.46	59.18	74.00	14.82	Peak
5149.9600	33.44	9.34	14.81	57.59	74.00	16.41	Peak
5174.3200	33.49	9.36	50.95	93.80	---	---	Peak

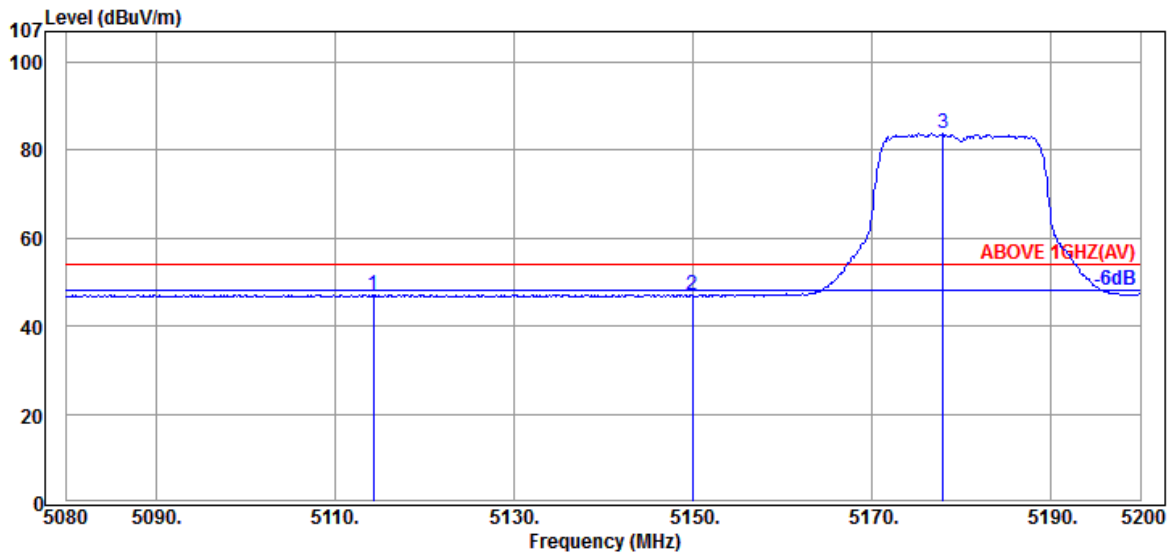

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector
5114.3200	33.39	9.32	4.40	47.11	54.00	6.89	Average
5149.9600	33.44	9.34	4.13	46.91	54.00	7.09	Average
5177.9200	33.49	9.36	40.98	83.83	---	---	Average

Mode	802.11n-HT20	UNII Band	I
		Frequency	TX 5180MHz

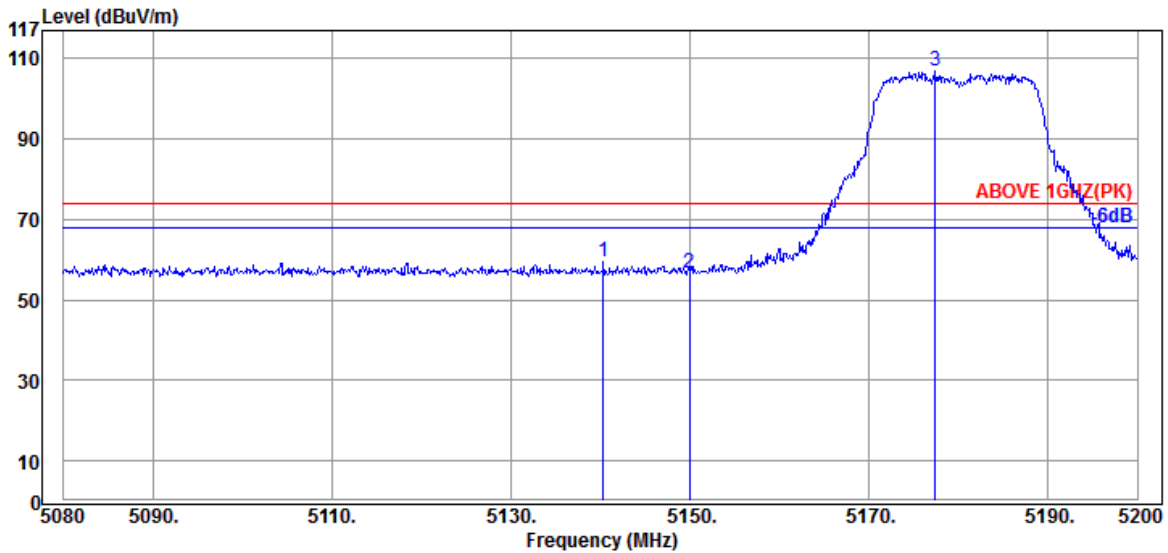

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5140.3600	33.42	9.33	16.91	59.66	74.00	14.34	Peak
5149.9600	33.44	9.34	14.00	56.78	74.00	17.22	Peak
5177.4400	33.49	9.36	64.06	106.91	---	---	Peak

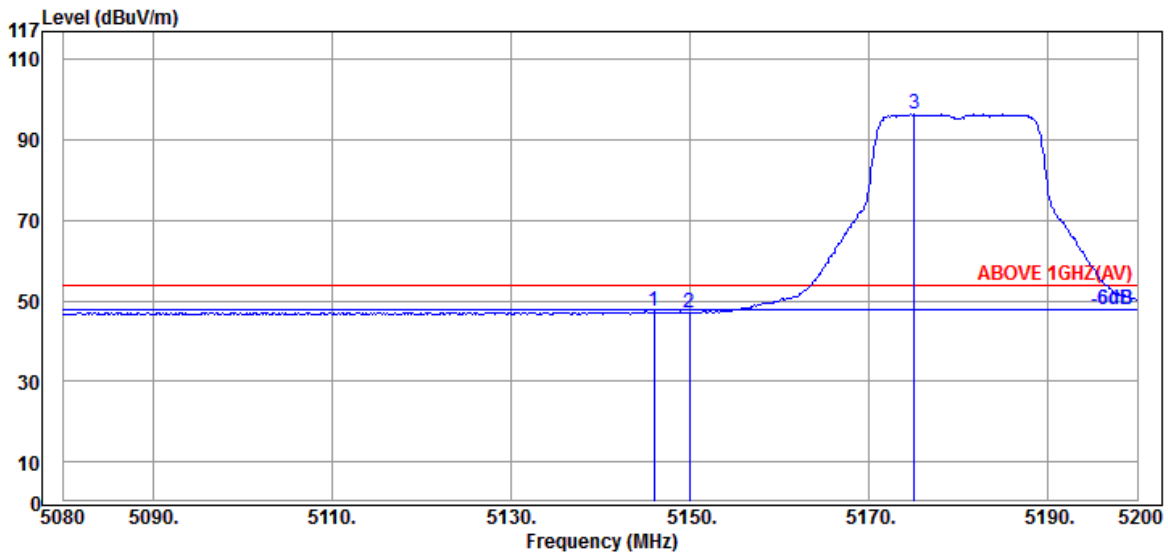

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.0000	33.44	9.34	4.59	47.37	54.00	6.63	Average
5149.9600	33.44	9.34	4.30	47.08	54.00	6.92	Average
5175.0400	33.49	9.36	53.51	96.36	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

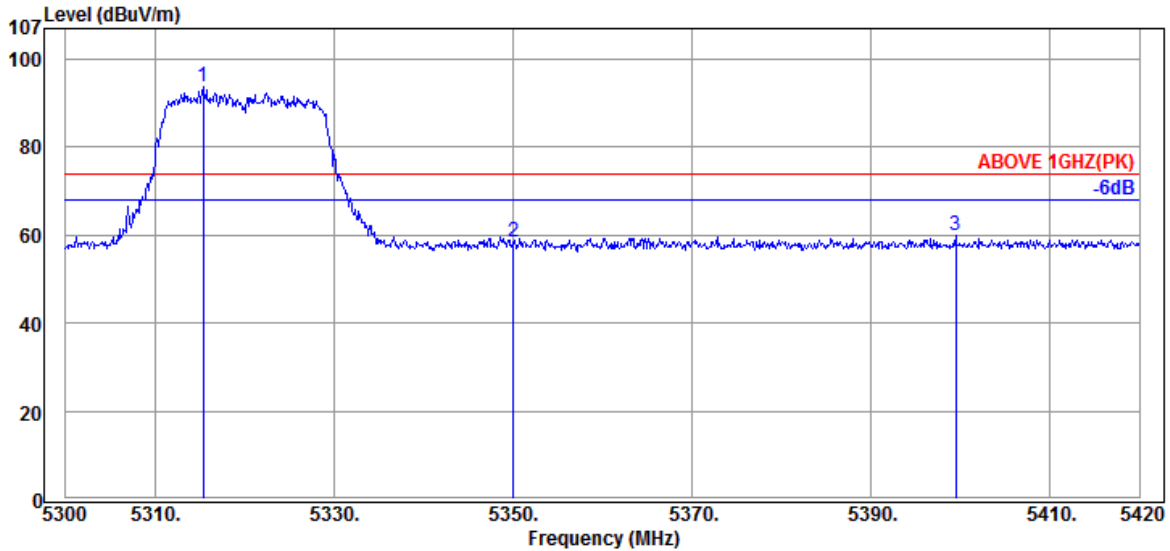

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5315.3600	33.71	9.44	50.60	93.75	---	---	Peak
5350.0400	33.76	9.46	15.42	58.64	74.00	15.36	Peak
5399.4800	33.83	9.49	16.48	59.80	74.00	14.20	Peak

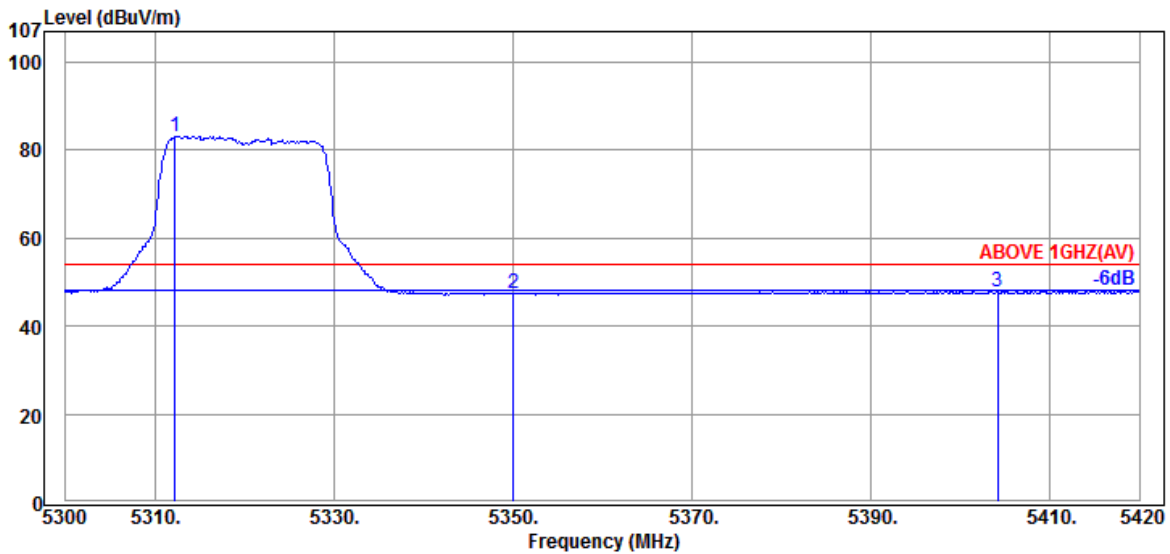

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5312.2400	33.71	9.43	40.10	83.24	---	---	Average
5350.0400	33.76	9.46	4.07	47.29	54.00	6.71	Average
5404.1600	33.85	9.49	4.60	47.94	54.00	6.06	Average

Mode	802.11n-HT20	UNII Band	II-2A
		Frequency	TX 5320MHz

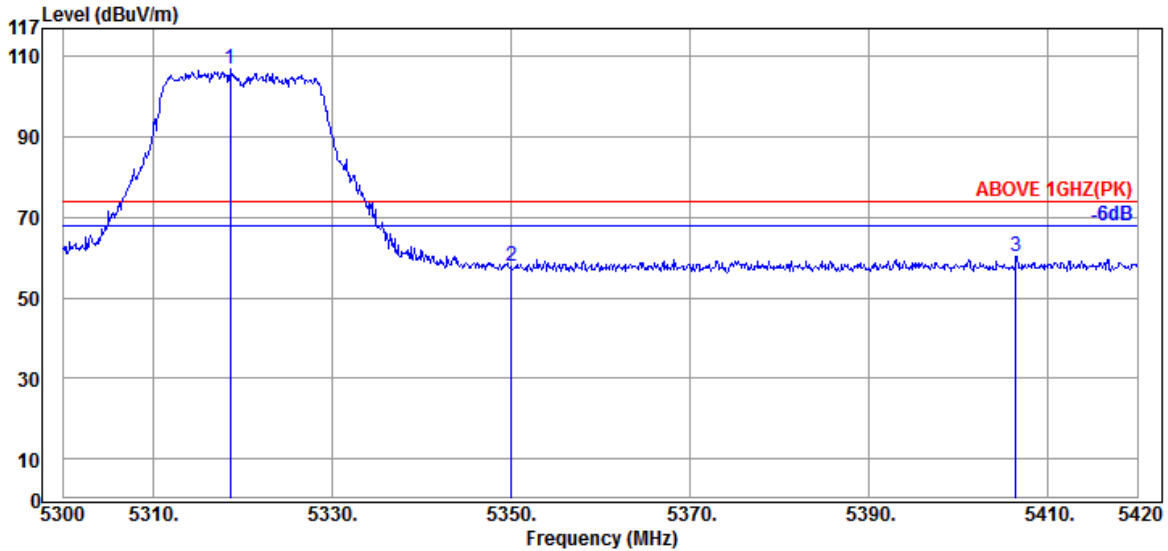

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5318.6000	33.71	9.44	63.63	106.78	---	---	Peak
5350.0400	33.76	9.46	14.56	57.78	74.00	16.22	Peak
5406.4400	33.85	9.49	16.98	60.32	74.00	13.68	Peak

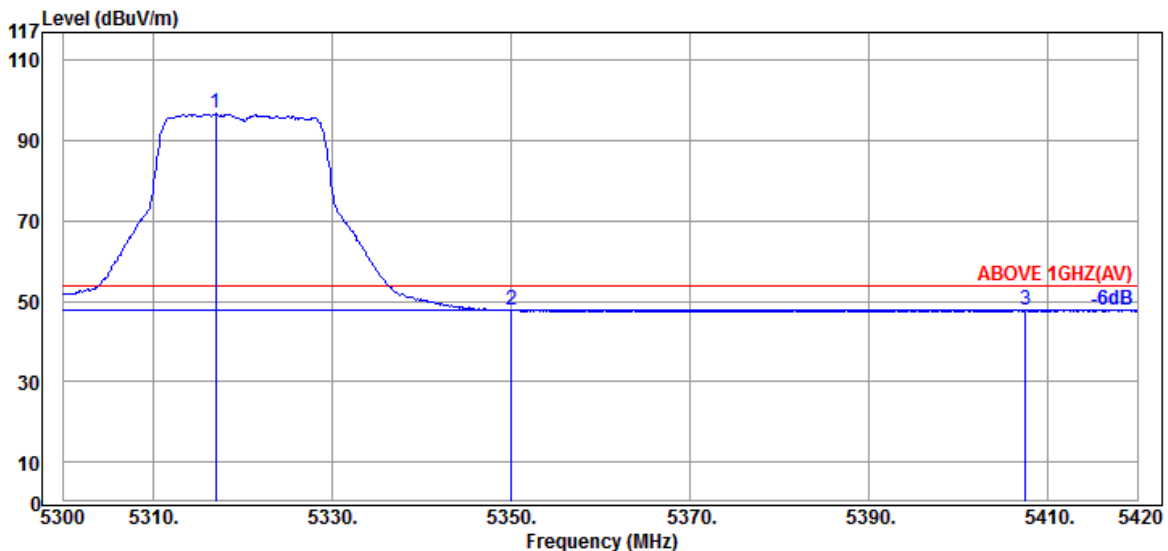

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5317.0400	33.71	9.44	53.61	96.76	54.00	---	Average
5350.0400	33.76	9.46	4.62	47.84	54.00	6.16	Average
5407.5200	33.85	9.49	4.63	47.97	54.00	6.03	Average

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

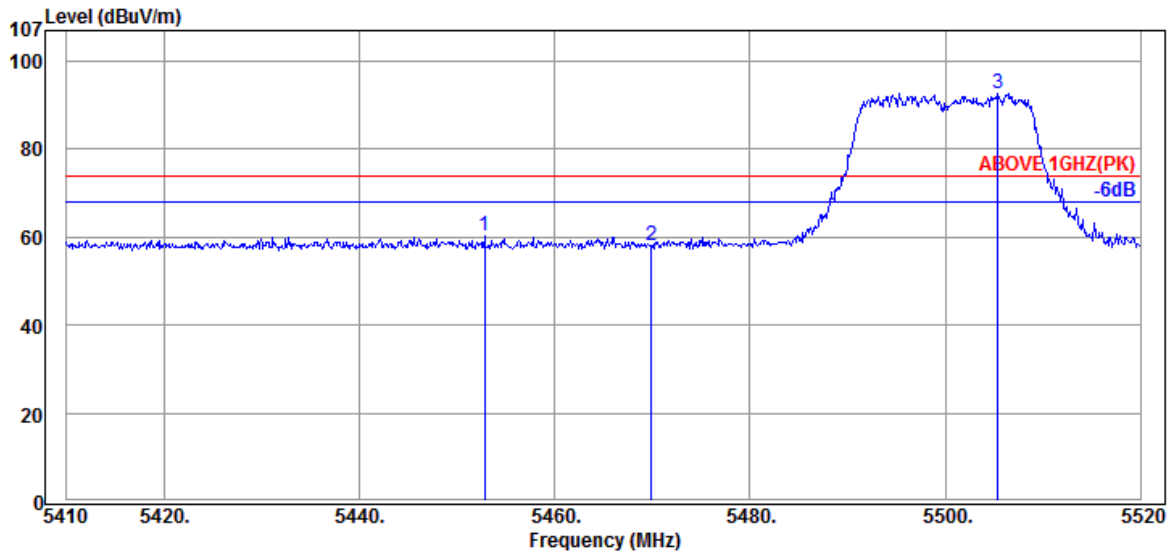

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5452.7900	33.93	9.52	16.77	60.22	74.00	13.78	Peak
5469.9500	33.95	9.53	14.61	58.09	74.00	15.91	Peak
5505.3700	34.00	9.55	49.03	92.58	---	---	Peak

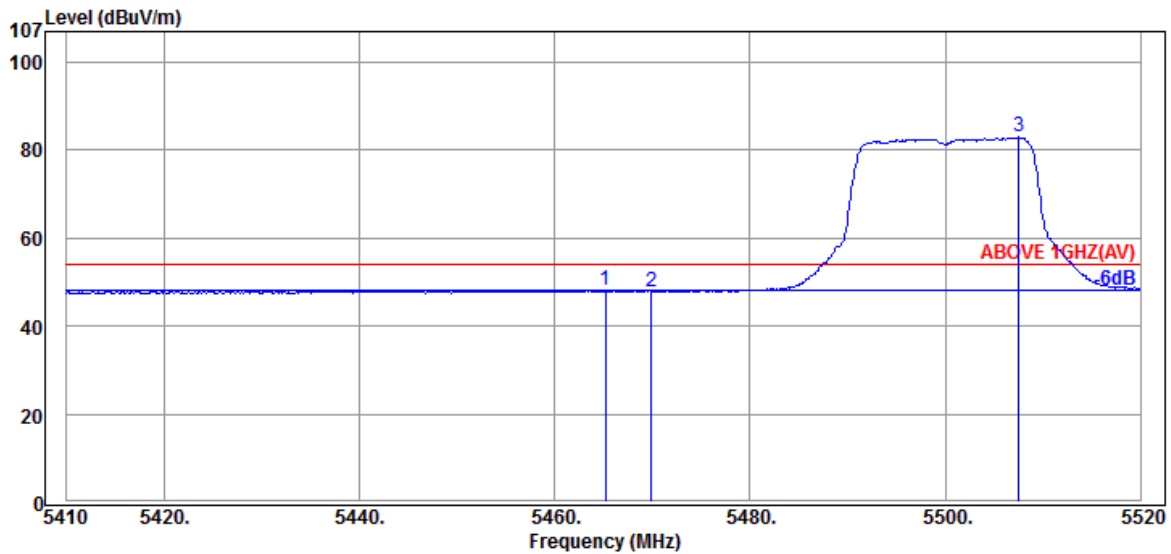

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5465.2200	33.95	9.53	4.81	48.29	54.00	5.71	Average
5469.9500	33.95	9.53	4.44	47.92	54.00	6.08	Average
5507.5700	34.00	9.56	39.45	83.01	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5500MHz

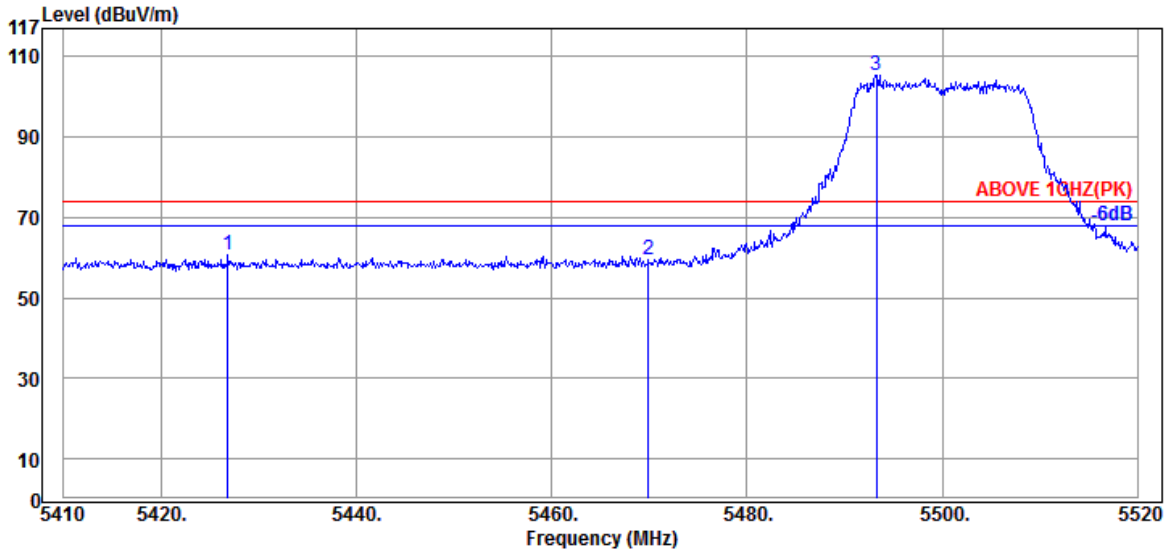

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5426.8300	33.88	9.51	17.28	60.67	74.00	13.33	Peak
5469.9500	33.95	9.53	16.03	59.51	74.00	14.49	Peak
5493.2700	33.98	9.55	61.66	105.19	---	---	Peak

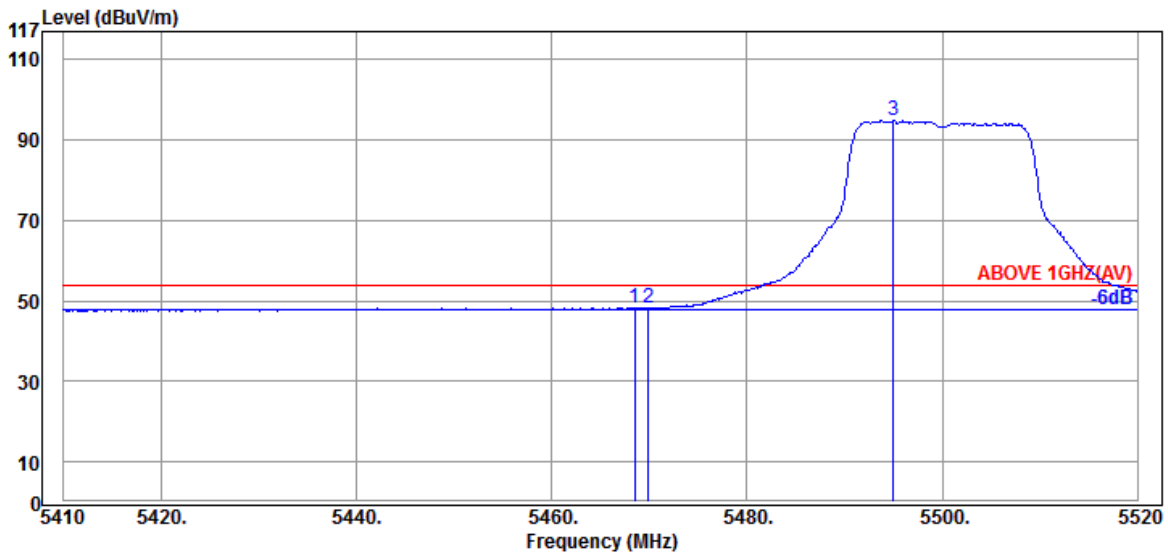

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5468.5200	33.95	9.53	4.89	48.37	54.00	5.63	Average
5469.9500	33.95	9.53	4.67	48.15	54.00	5.85	Average
5495.0300	33.98	9.55	51.38	94.91	---	---	Average

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5700MHz

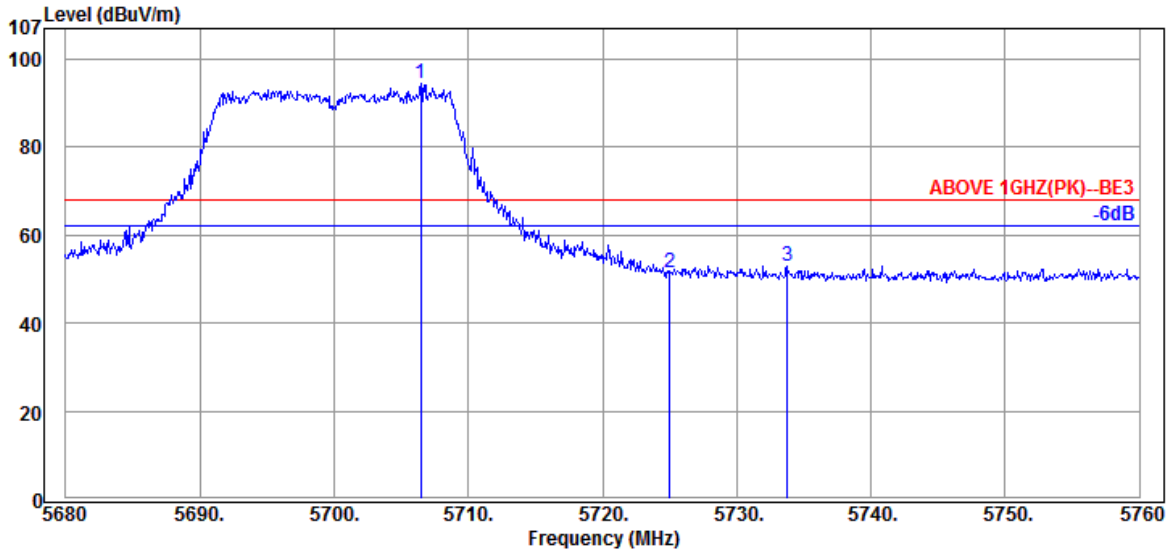

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5706.4800	34.04	9.67	50.68	94.39	68.20	---	Peak
5725.0400	34.05	9.68	7.59	51.32	68.20	16.88	Peak
5733.7600	34.05	9.68	9.26	52.99	68.20	15.21	Peak

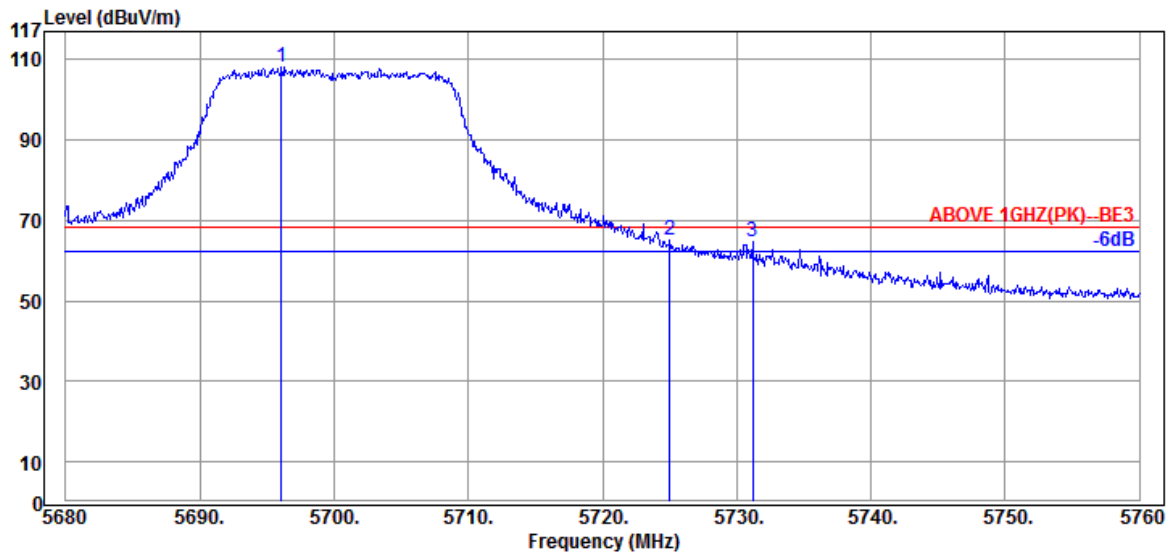

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5696.0800	34.04	9.67	64.46	108.17	68.20	---	Peak
5725.0400	34.05	9.68	21.54	65.27	68.20	2.93	Peak
5731.2000	34.05	9.68	21.19	64.92	68.20	3.28	Peak

Mode	802.11n-HT20	UNII Band	II-2C
		Frequency	TX 5720MHz

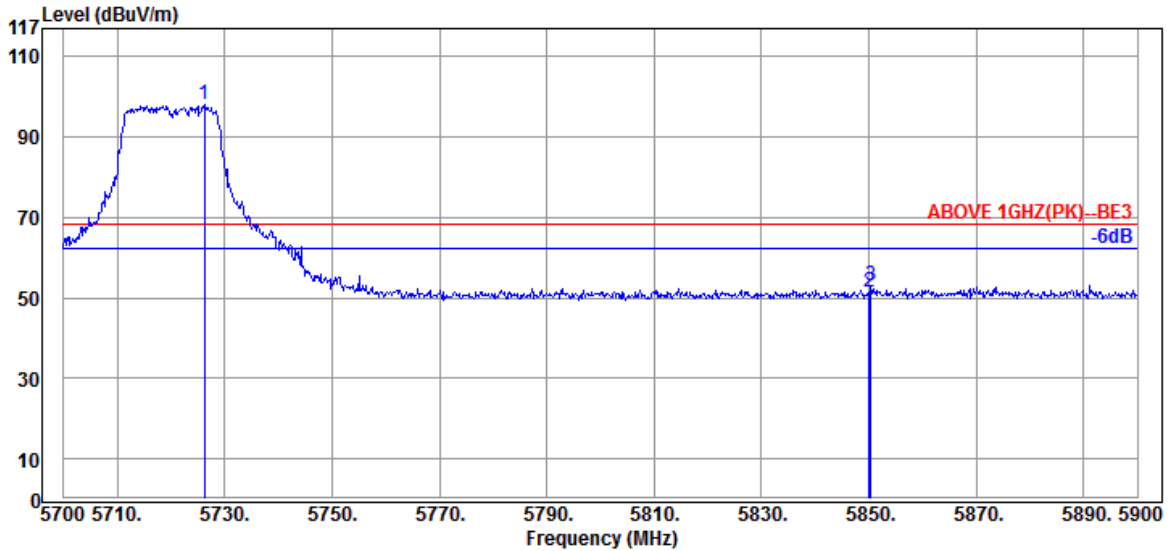

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5726.2000	34.05	9.68	54.41	98.14	68.20	---	Peak
5850.0000	34.07	9.75	7.53	51.35	68.20	16.85	Peak
5850.4000	34.07	9.75	9.34	53.16	68.20	15.04	Peak

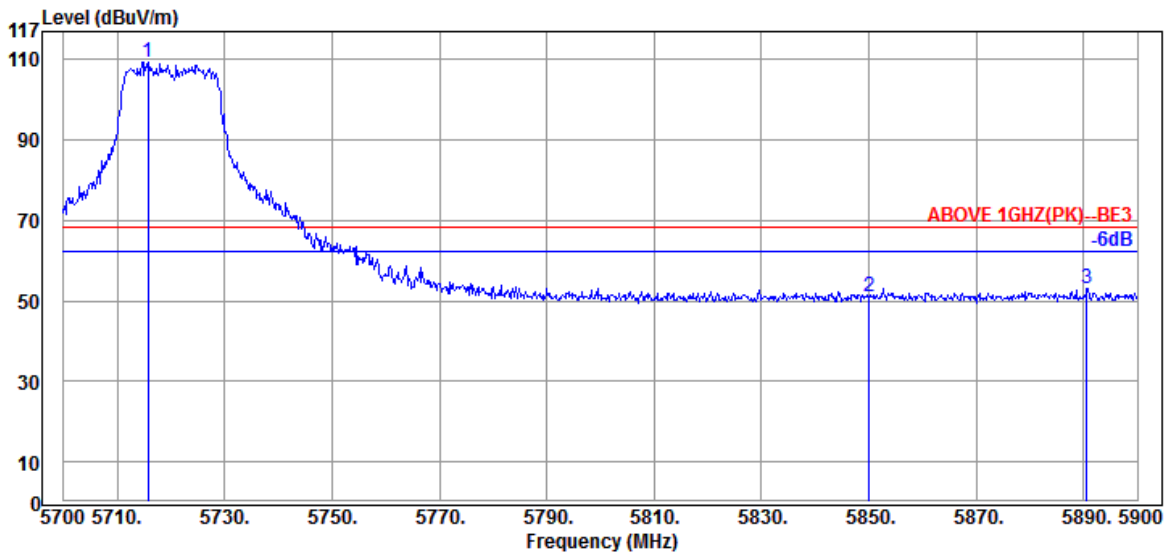

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5715.8000	34.04	9.68	65.66	109.38	68.20	---	Peak
5850.0000	34.07	9.75	7.21	51.03	68.20	17.17	Peak
5890.6000	34.08	9.77	9.39	53.24	68.20	14.96	Peak

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

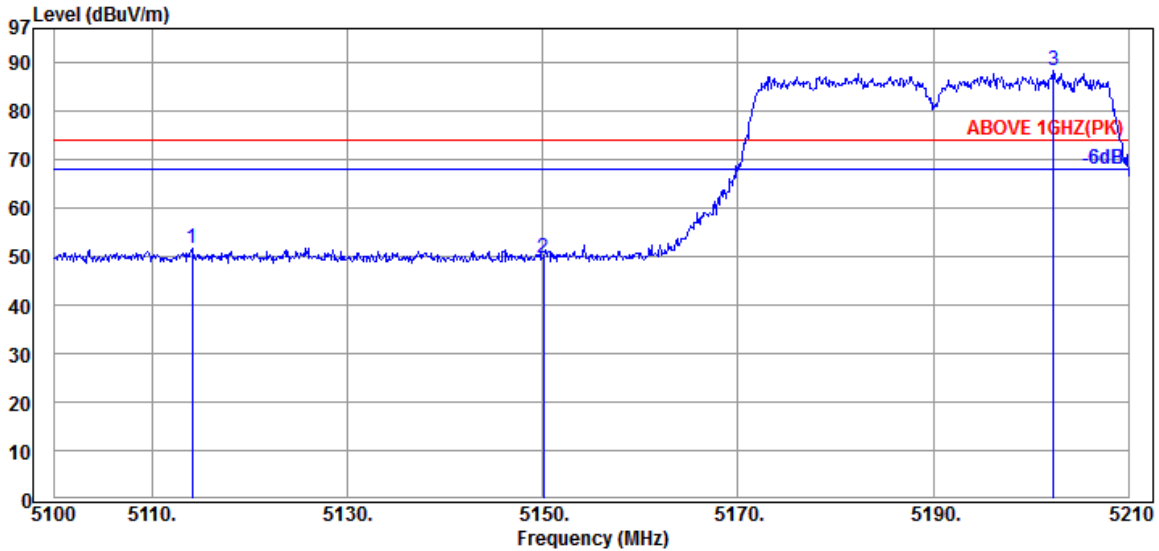

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5114.0800	33.39	9.32	9.11	51.82	74.00	22.18	Peak
5150.0500	33.44	9.34	6.76	49.54	74.00	24.46	Peak
5202.3000	33.54	9.37	45.27	88.18	---	---	Peak

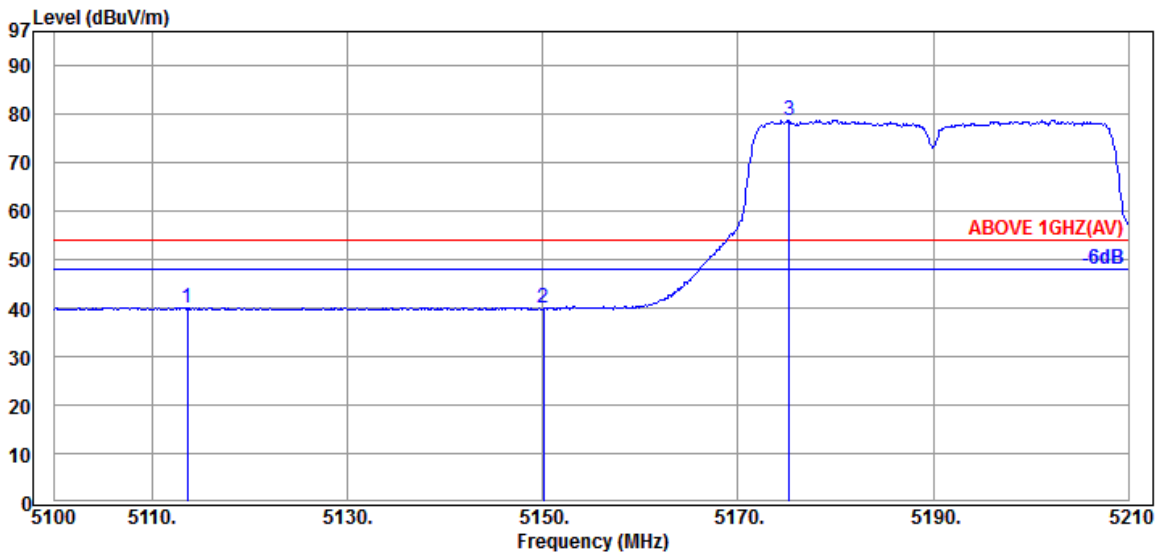

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector
5113.6400	33.39	9.32	-2.54	40.17	54.00	13.83	Average
5150.0500	33.44	9.34	-2.79	39.99	54.00	14.01	Average
5175.2400	33.49	9.36	35.96	78.81	---	---	Average

Mode	802.11n-HT40	UNII Band	I
		Frequency	TX 5190MHz

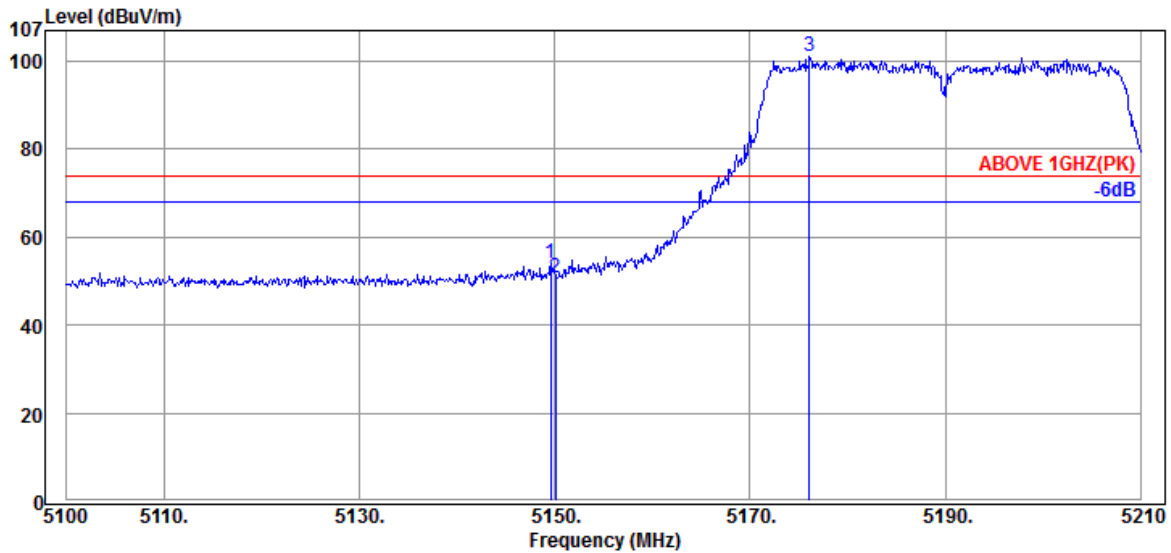

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.6100	33.44	9.34	11.12	53.90	74.00	20.10	Peak
5150.0500	33.44	9.34	8.11	50.89	74.00	23.11	Peak
5176.1200	33.49	9.36	58.13	100.98	---	---	Peak

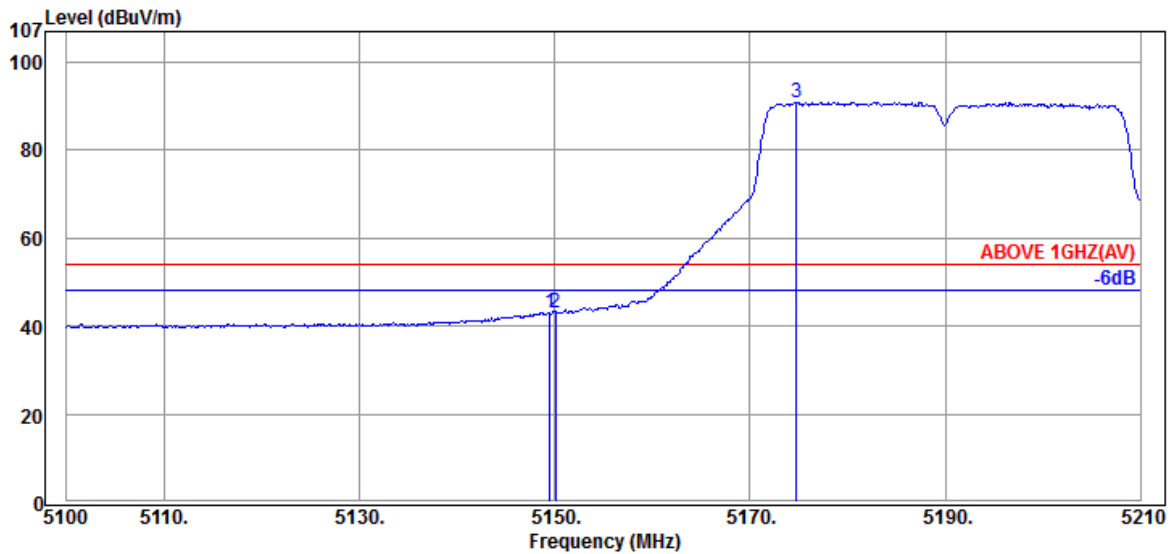

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5149.5000	33.44	9.34	0.27	43.05	54.00	10.95	Average
5150.0500	33.44	9.34	0.40	43.18	54.00	10.82	Average
5174.8000	33.49	9.36	48.16	91.01	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

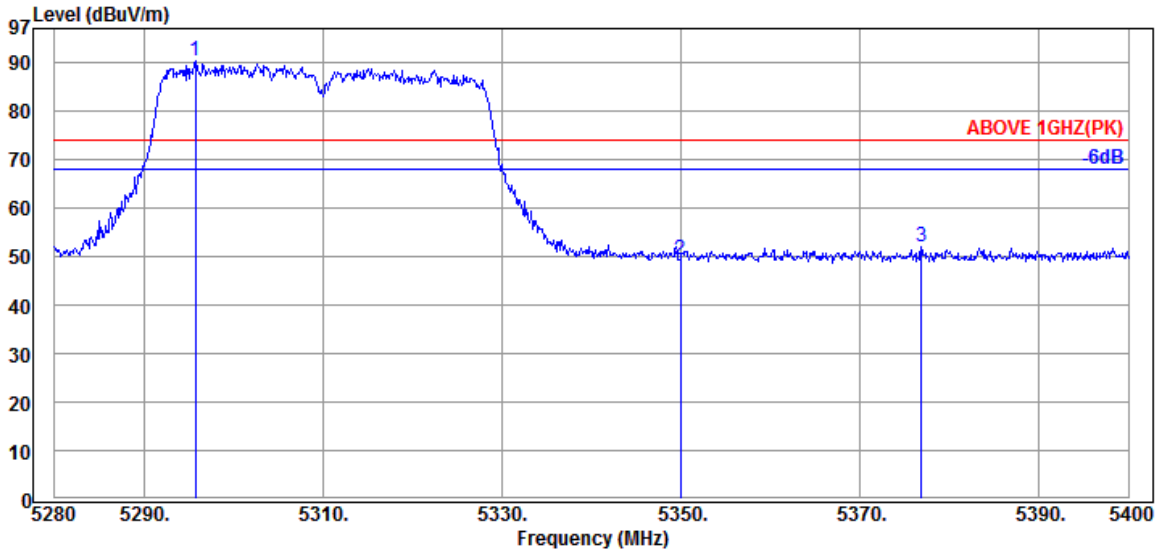

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5295.7200	33.68	9.42	47.36	90.46	---	---	Peak
5349.9600	33.76	9.46	6.15	49.37	74.00	24.63	Peak
5376.8400	33.81	9.47	8.59	51.87	74.00	22.13	Peak

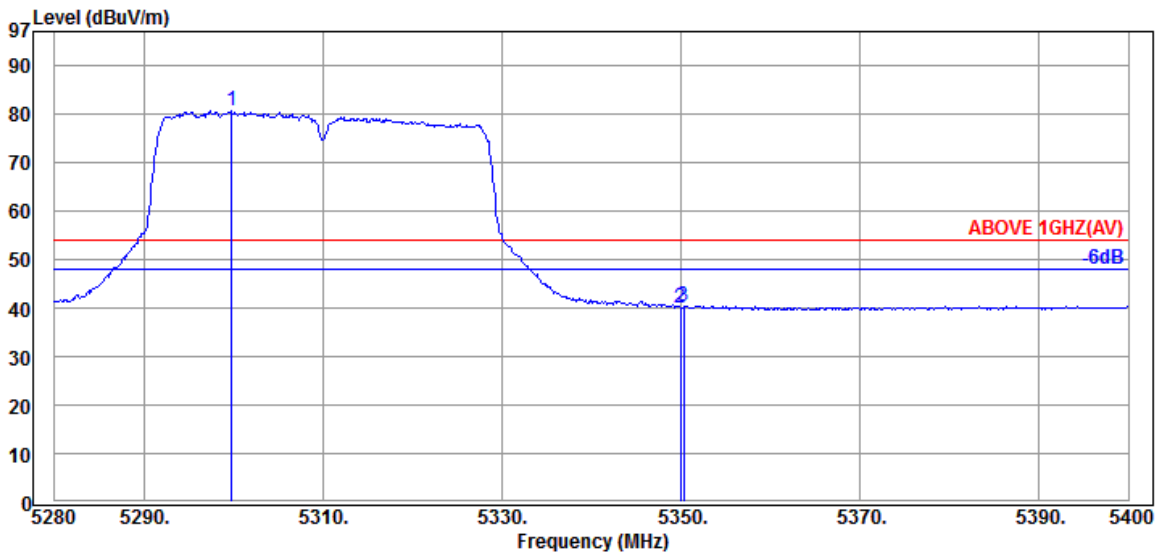

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5299.8000	33.68	9.43	37.47	80.58	---	---	Average
5349.9600	33.76	9.46	-3.20	40.02	54.00	13.98	Average
5350.3200	33.76	9.46	-2.80	40.42	54.00	13.58	Average

Mode	802.11n-HT40	UNII Band	II-2A
		Frequency	TX 5310MHz

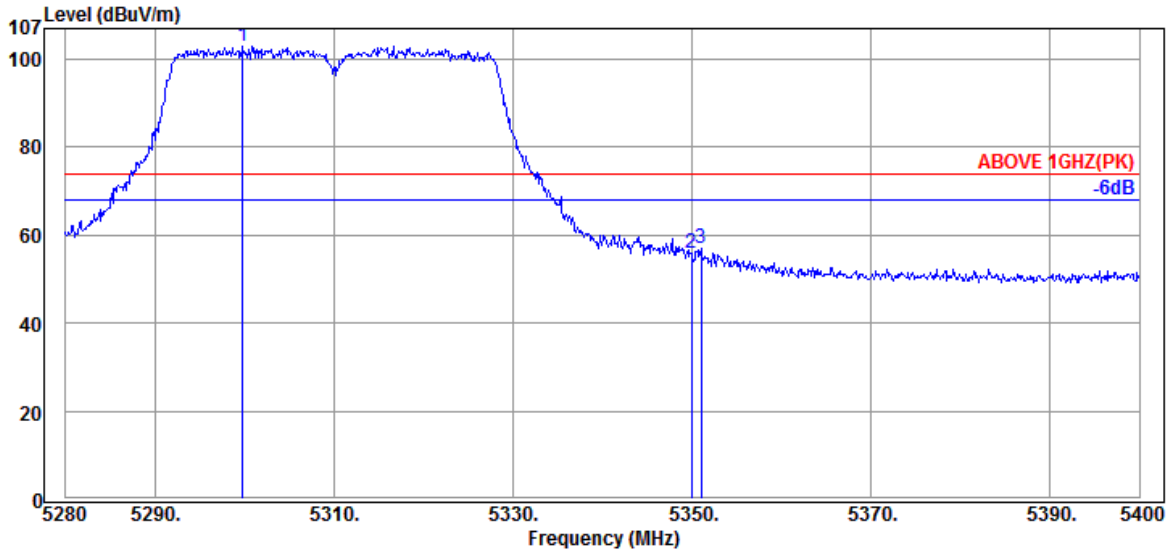

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5299.8000	33.68	9.43	59.83	102.94	---	---	Peak
5349.9600	33.76	9.46	12.76	55.98	74.00	18.02	Peak
5351.0400	33.76	9.46	13.60	56.82	74.00	17.18	Peak

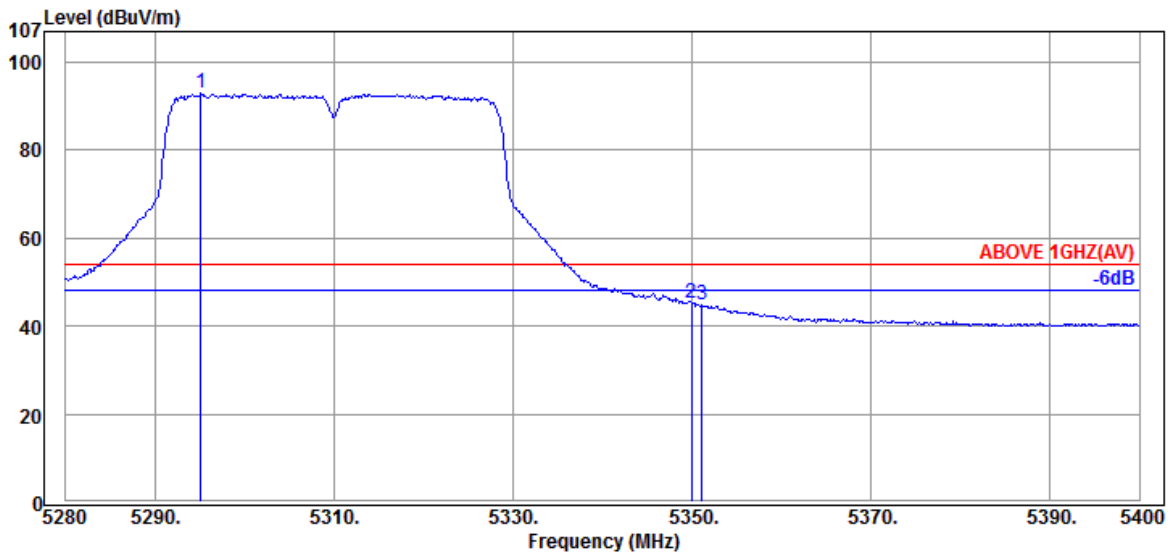

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5295.1200	33.68	9.42	49.80	92.90	---	---	Average
5349.9600	33.76	9.46	2.15	45.37	54.00	8.63	Average
5351.1600	33.76	9.46	1.64	44.86	54.00	9.14	Average

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

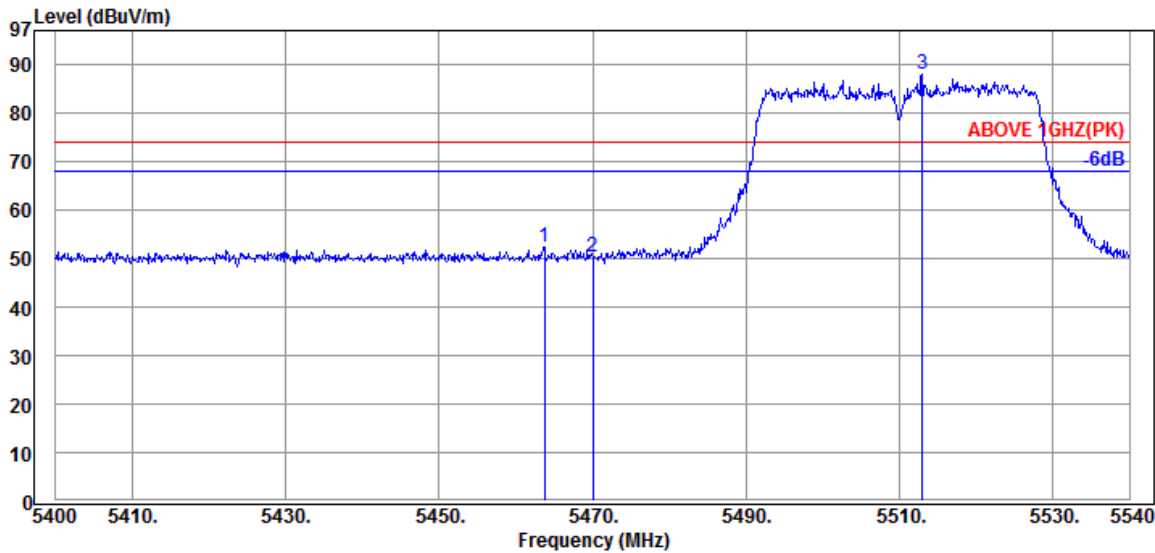

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5463.7000	33.95	9.53	8.71	52.19	74.00	21.81	Peak
5470.0000	33.95	9.53	6.74	50.22	74.00	23.78	Peak
5512.9800	34.00	9.56	44.31	87.87	---	---	Peak

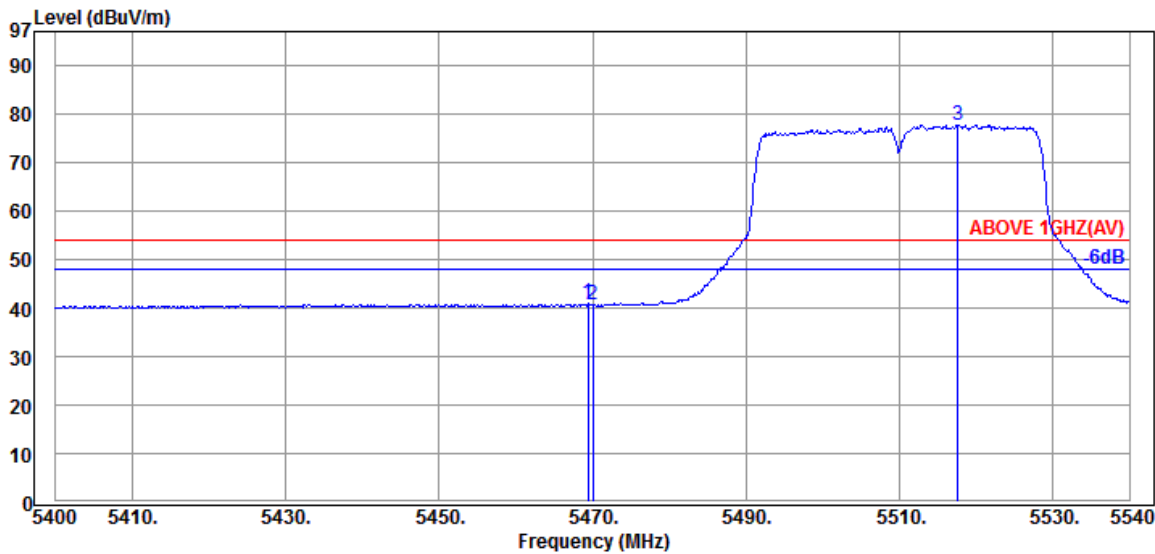

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.4400	33.95	9.53	-2.58	40.90	54.00	13.10	Average
5470.0000	33.95	9.53	-2.83	40.65	54.00	13.35	Average
5517.6000	34.00	9.56	34.07	77.63	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5510MHz

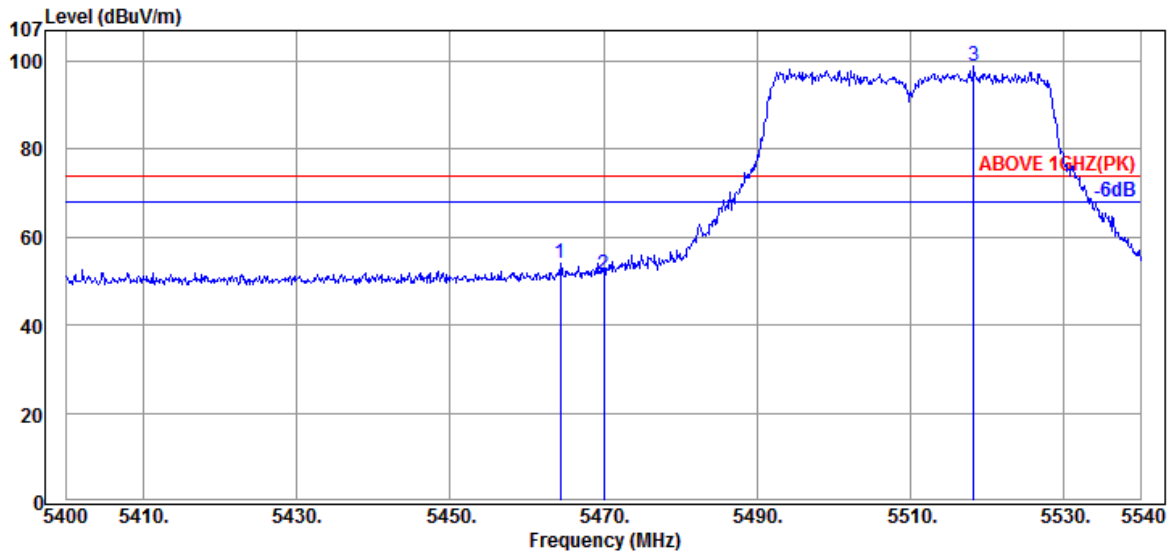

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5464.4000	33.95	9.53	10.50	53.98	74.00	20.02	Peak
5470.0000	33.95	9.53	8.05	51.53	74.00	22.47	Peak
5518.3000	34.00	9.56	55.18	98.74	---	---	Peak

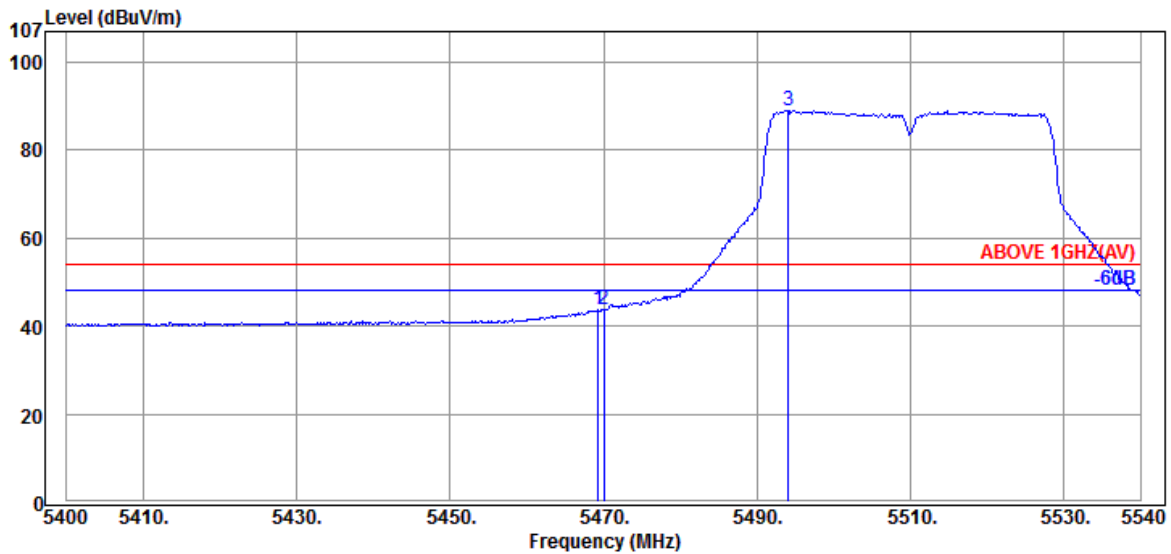

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.3000	33.95	9.53	0.34	43.82	54.00	10.18	Average
5470.0000	33.95	9.53	0.37	43.85	54.00	10.15	Average
5494.0800	33.98	9.55	45.62	89.15	---	---	Average

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5670MHz

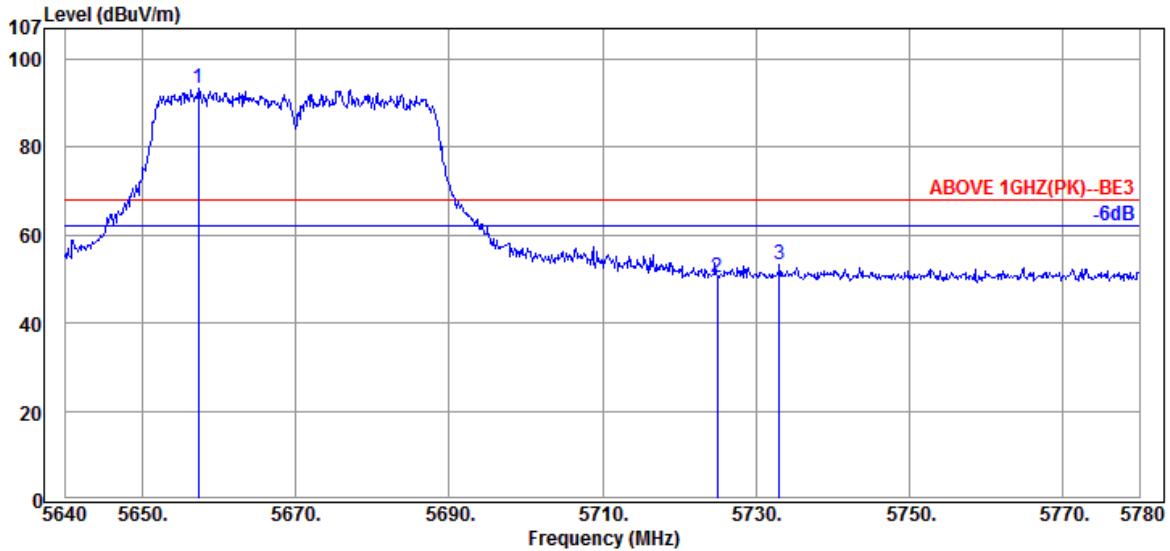

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5657.3600	34.03	9.64	49.60	93.27	68.20	---	Peak
5724.9800	34.05	9.68	6.54	50.27	68.20	17.93	Peak
5733.1000	34.05	9.68	9.43	53.16	68.20	15.04	Peak

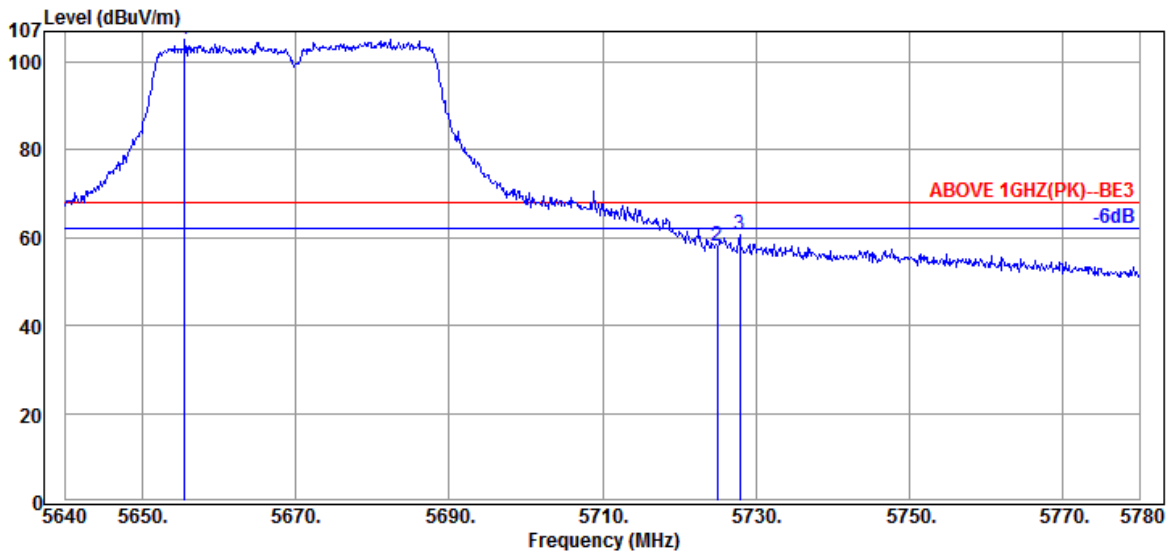

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5655.5400	34.03	9.64	61.47	105.14	68.20	---	Peak
5724.9800	34.05	9.68	14.41	58.14	68.20	10.06	Peak
5727.9200	34.05	9.68	16.85	60.58	68.20	7.62	Peak

Mode	802.11n-HT40	UNII Band	II-2C
		Frequency	TX 5710MHz

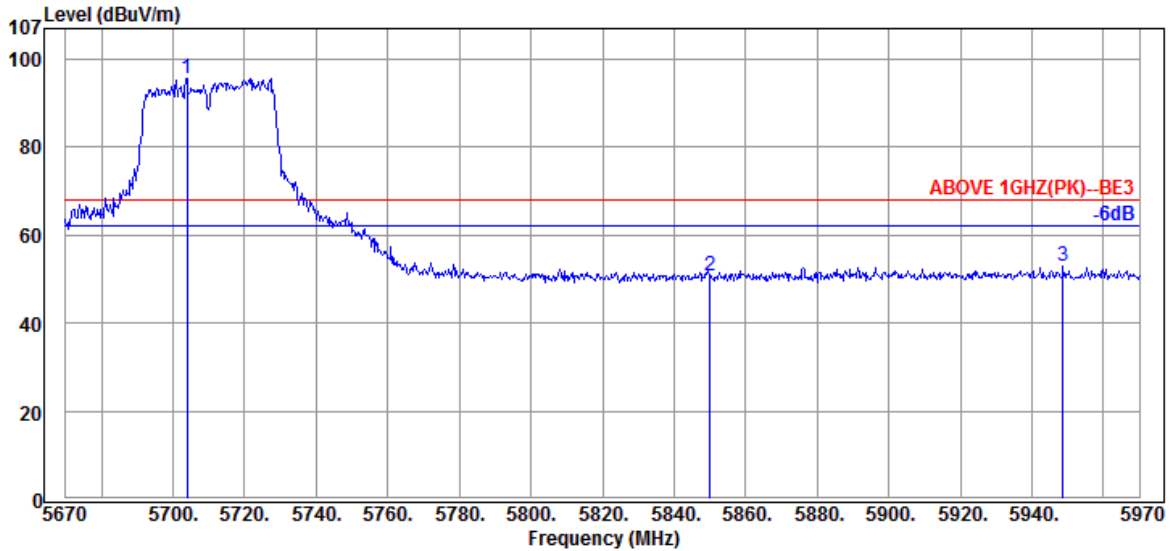

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5703.9000	34.04	9.67	52.00	95.71	68.20	---	Peak
5850.0000	34.07	9.75	6.83	50.65	68.20	17.55	Peak
5948.7000	34.09	9.80	8.90	52.79	68.20	15.41	Peak

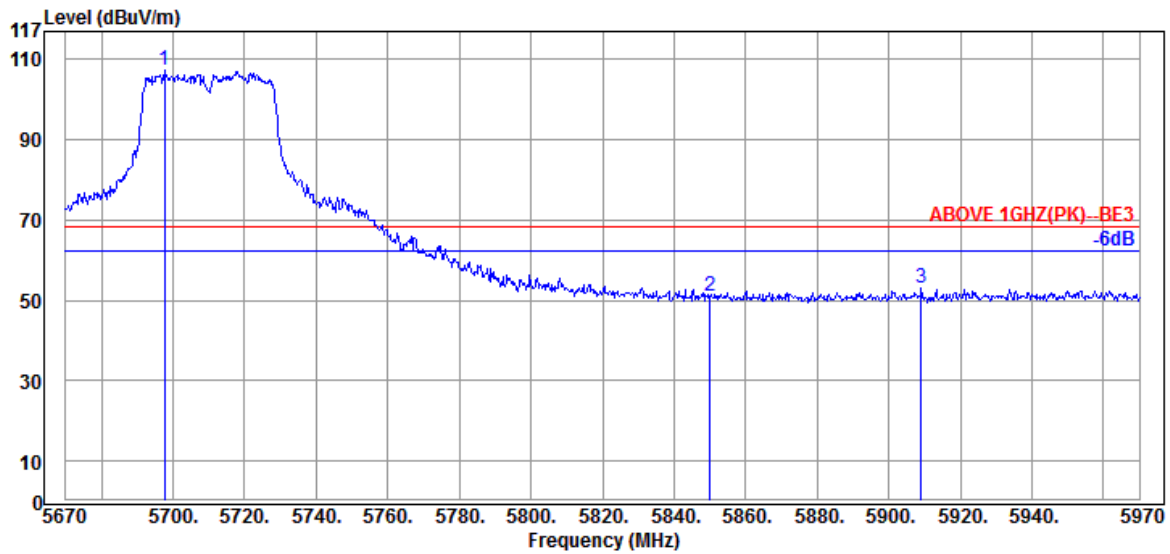

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5697.6000	34.04	9.67	63.76	107.47	68.20	---	Peak
5850.0000	34.07	9.75	7.17	50.99	68.20	17.21	Peak
5909.1000	34.08	9.78	9.22	53.08	68.20	15.12	Peak

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

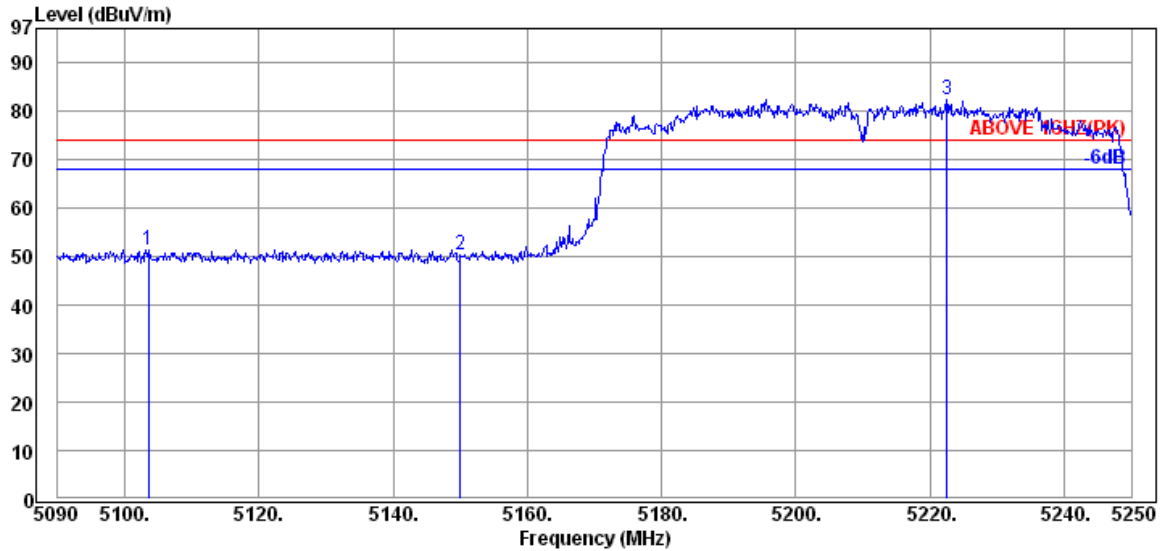

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5103.60	33.37	9.31	8.66	51.34	74.00	22.66	Peak
5150.00	33.44	9.34	7.50	50.28	74.00	23.72	Peak
5222.48	33.56	9.39	39.36	82.31	---	---	Peak

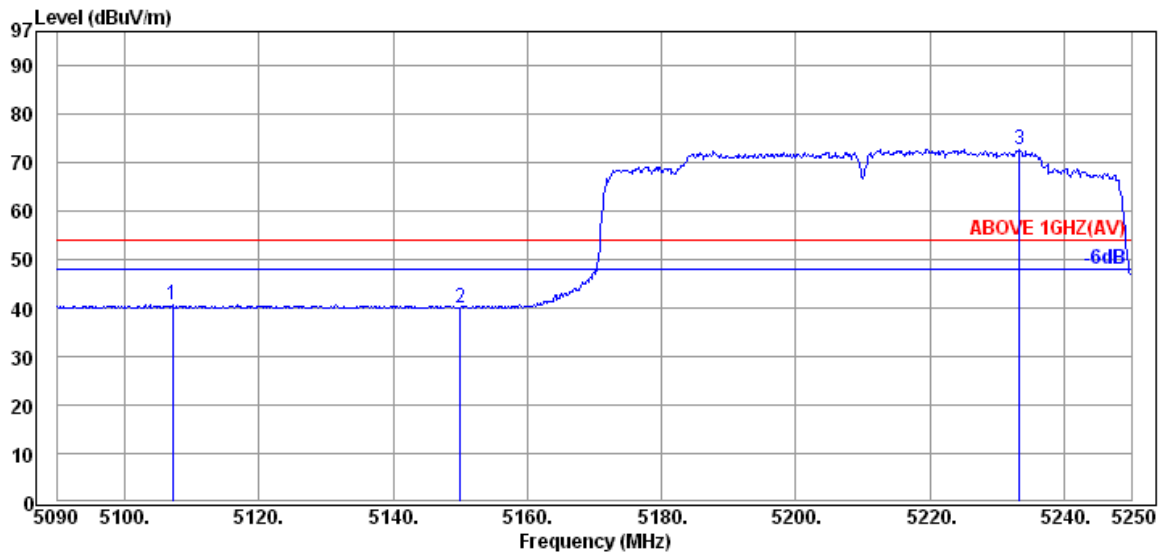

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5107.12	33.37	9.31	-2.13	40.55	54.00	13.45	Average
5150.00	33.44	9.34	-2.62	40.16	54.00	13.84	Average
5233.36	33.59	9.39	29.77	72.75	---	---	Average

Mode	802.11ac-VHT80	UNII Band	I
		Frequency	TX 5210MHz

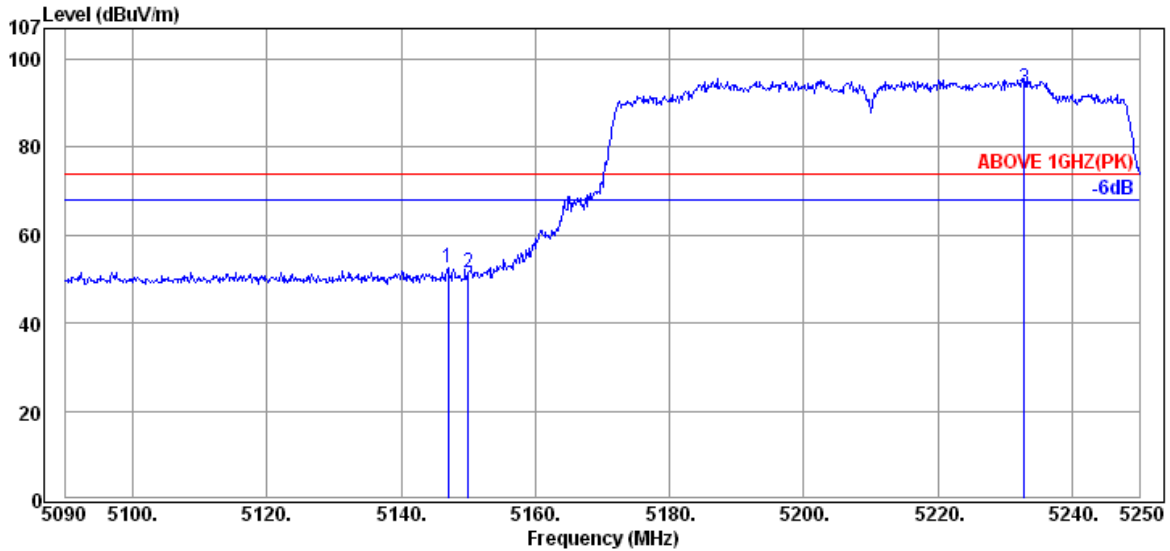

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5146.96	33.44	9.34	9.63	52.41	74.00	21.59	Peak
5150.00	33.44	9.34	8.57	51.35	74.00	22.65	Peak
5232.88	33.59	9.39	50.54	93.52	---	---	Peak

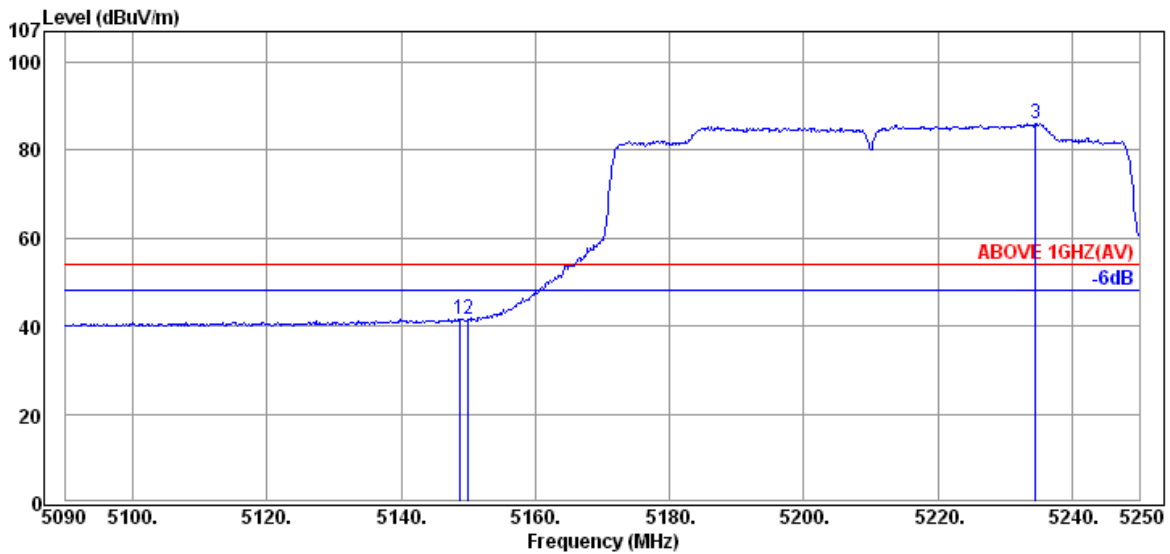

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5148.72	33.44	9.34	-1.23	41.55	54.00	12.45	Average
5150.00	33.44	9.34	-1.23	41.55	54.00	12.45	Average
5234.48	33.59	9.39	43.15	86.13	---	---	Average

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

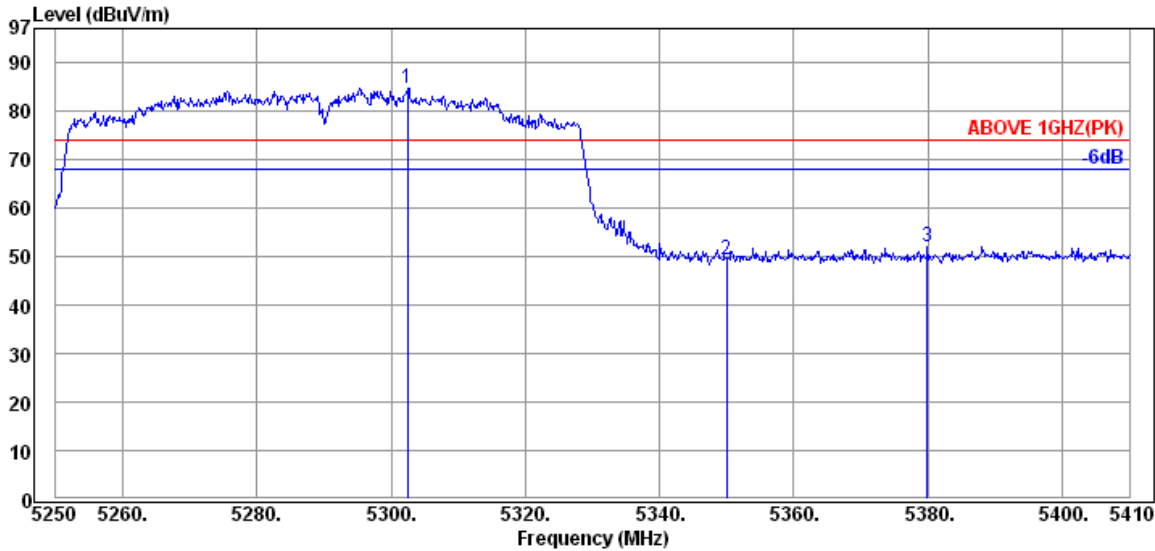

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5302.48	33.68	9.43	41.70	84.81	---	---	Peak
5350.00	33.76	9.46	6.05	49.27	74.00	24.73	Peak
5379.92	33.81	9.48	8.83	52.12	74.00	21.88	Peak

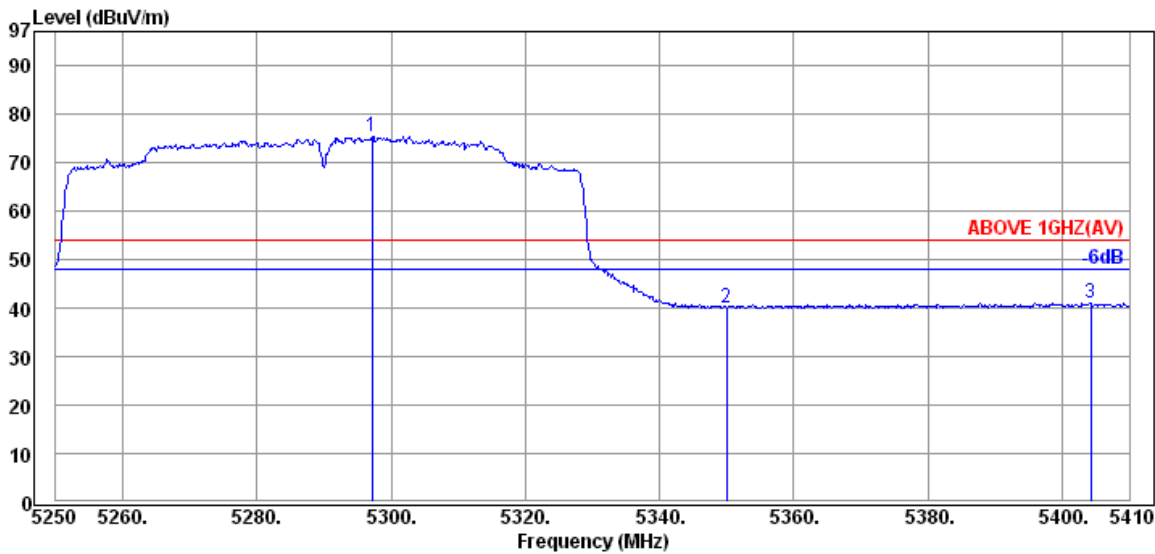

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5297.20	33.68	9.43	32.28	75.39	---	---	Average
5350.00	33.76	9.46	-3.25	39.97	54.00	14.03	Average
5404.24	33.85	9.49	-2.36	40.98	54.00	13.02	Average

Mode	802.11ac-VHT80	UNII Band	II-2A
		Frequency	TX 5290MHz

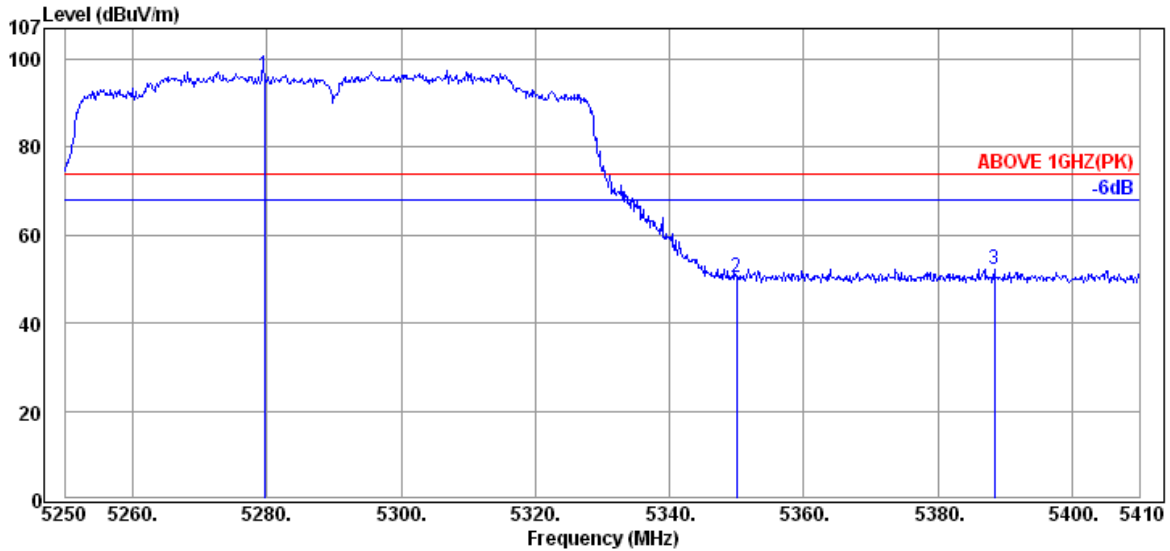

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5279.60	33.66	9.41	53.13	96.20	---	---	Peak
5350.00	33.76	9.46	6.99	50.21	74.00	23.79	Peak
5388.40	33.83	9.48	9.04	52.35	74.00	21.65	Peak

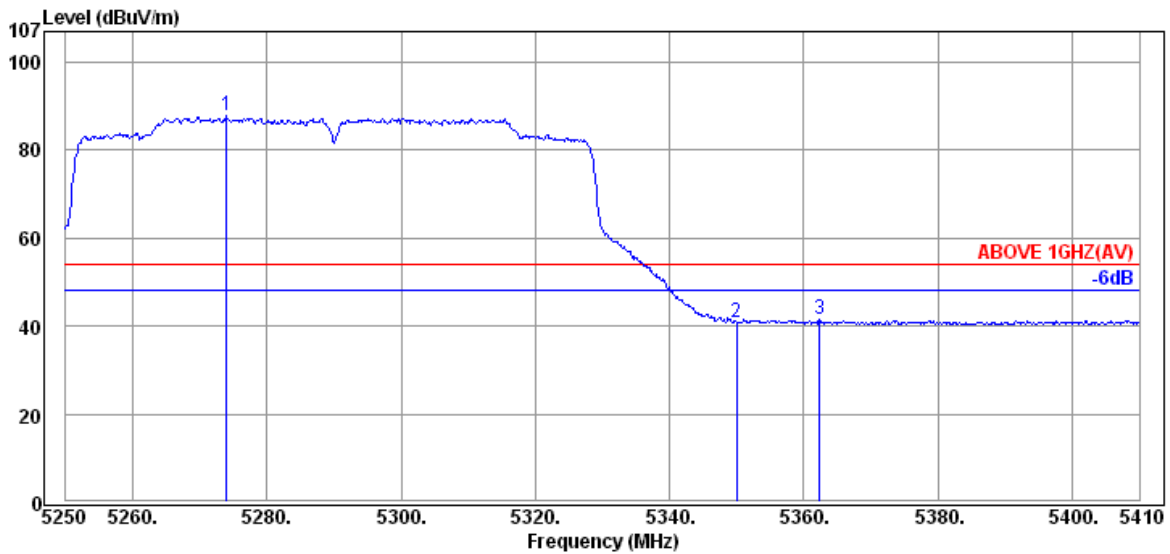

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5274.00	33.64	9.41	44.76	87.81	---	---	Average
5350.00	33.76	9.46	-2.44	40.78	54.00	13.22	Average
5362.32	33.78	9.47	-1.70	41.55	54.00	12.45	Average

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

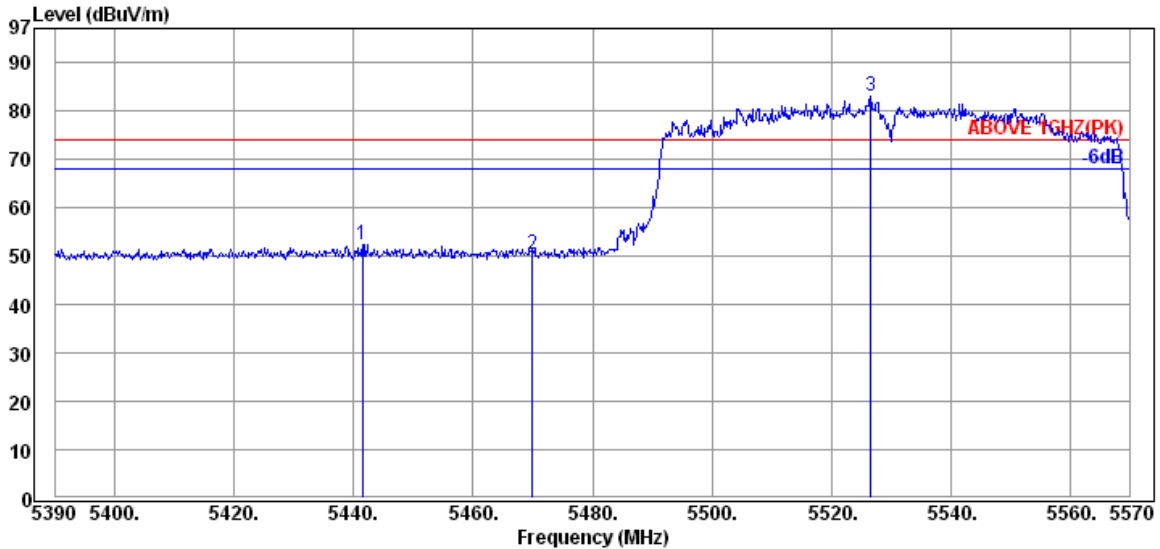

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5441.48	33.90	9.51	8.94	52.35	74.00	21.65	Peak
5469.92	33.95	9.53	6.98	50.46	74.00	23.54	Peak
5526.62	34.00	9.57	39.36	82.93	---	---	Peak

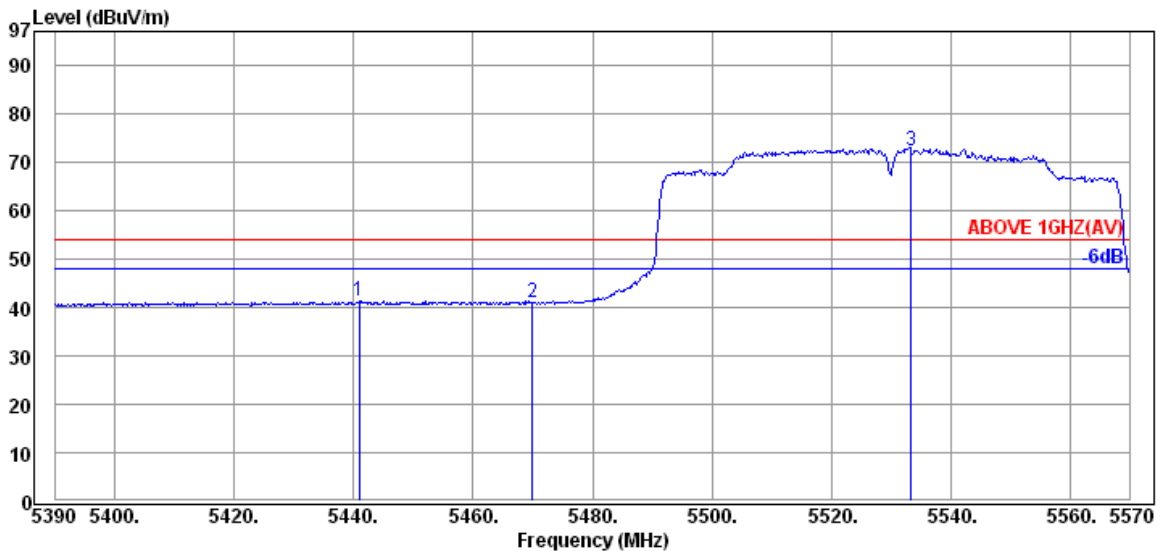

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5440.94	33.90	9.51	-2.15	41.26	54.00	12.74	Average
5469.92	33.95	9.53	-2.59	40.89	54.00	13.11	Average
5533.46	34.01	9.57	28.89	72.47	---	---	Average

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5530MHz

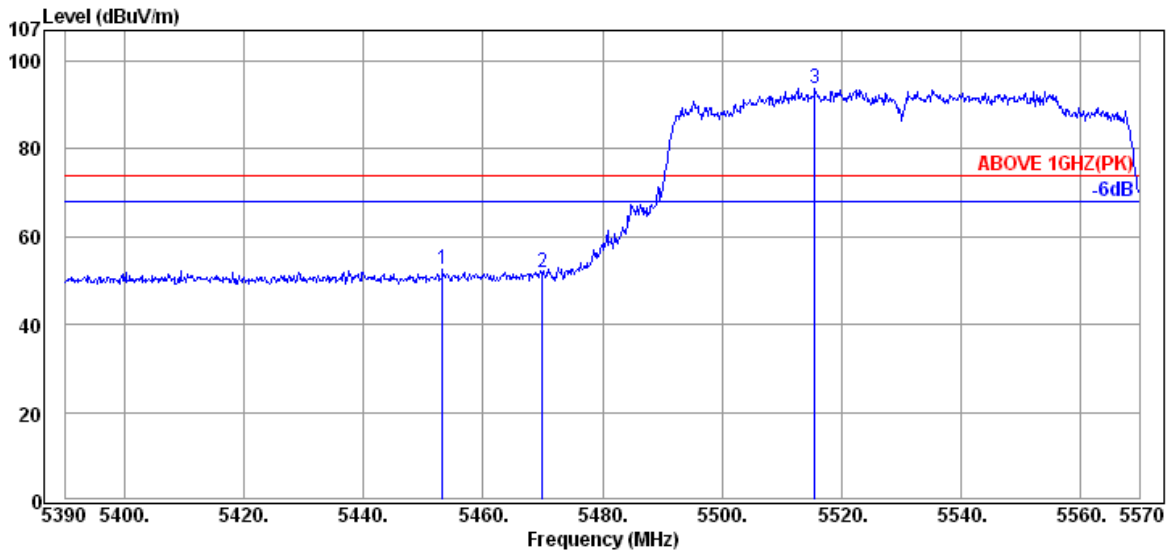

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5453.18	33.93	9.52	9.23	52.68	74.00	21.32	Peak
5469.92	33.95	9.53	8.30	51.78	74.00	22.22	Peak
5515.64	34.00	9.56	50.11	93.67	---	---	Peak

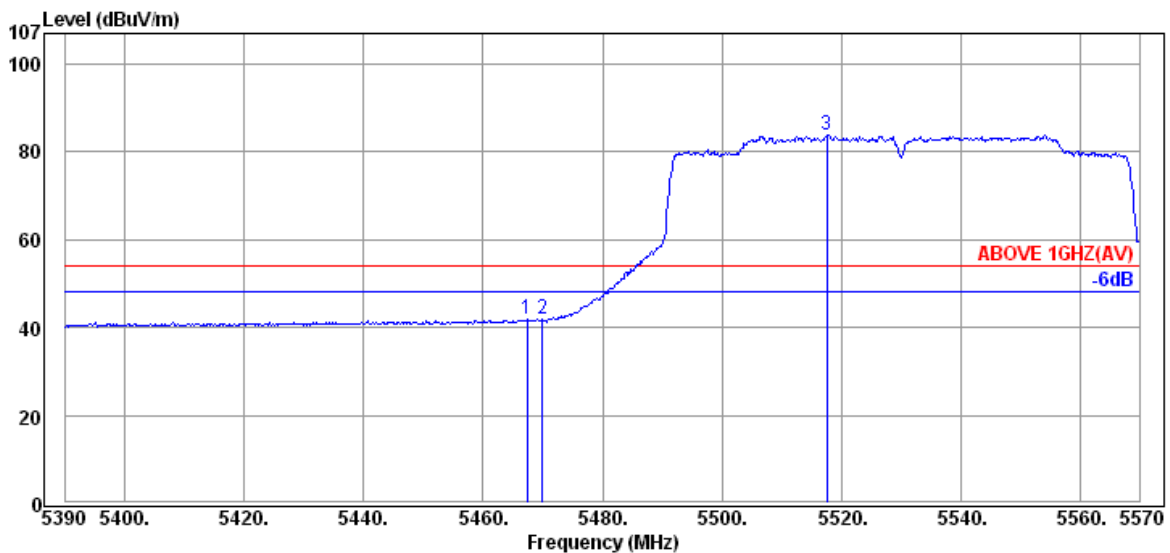

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5467.40	33.95	9.53	-1.70	41.78	54.00	12.22	Average
5469.92	33.95	9.53	-1.70	41.78	54.00	12.22	Average
5517.62	34.00	9.56	40.42	83.98	---	---	Average

Mode	802.11ac-VHT80	UNII Band	II-2C
		Frequency	TX 5690MHz

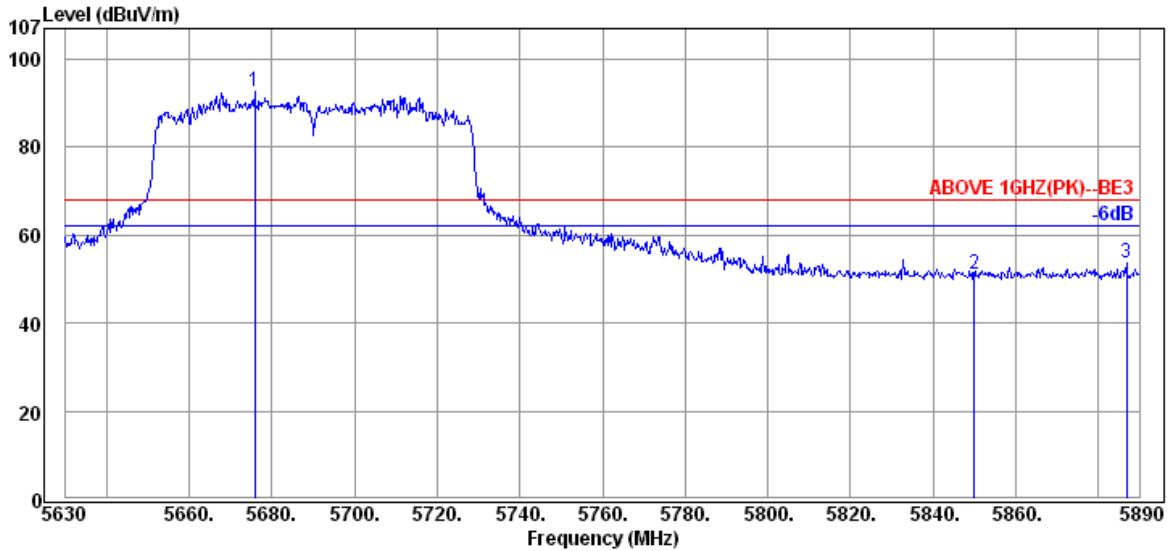

**Antenna at Horizontal Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5675.76	34.01	9.66	48.83	92.50	68.20	---	Peak
5849.96	34.11	9.75	7.38	51.24	68.20	16.96	Peak
5886.88	34.13	9.77	9.87	53.77	68.20	14.43	Peak

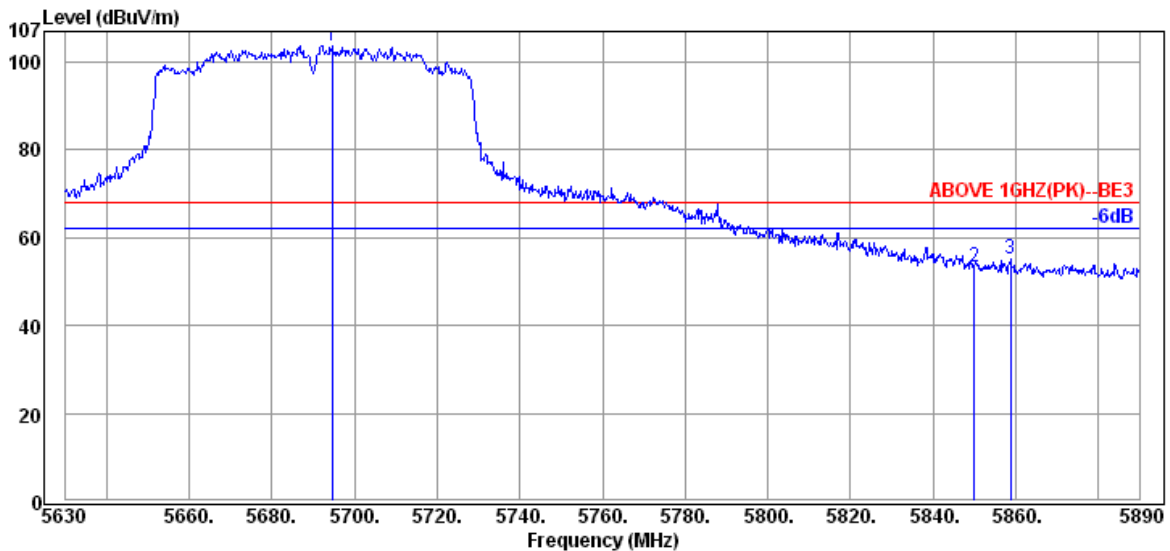

**Antenna at Vertical Polarization**


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5694.48	34.02	9.67	60.02	103.71	68.20	---	Peak
5849.96	34.11	9.75	9.35	53.21	68.20	14.99	Peak
5858.80	34.12	9.75	11.39	55.26	68.20	12.94	Peak

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

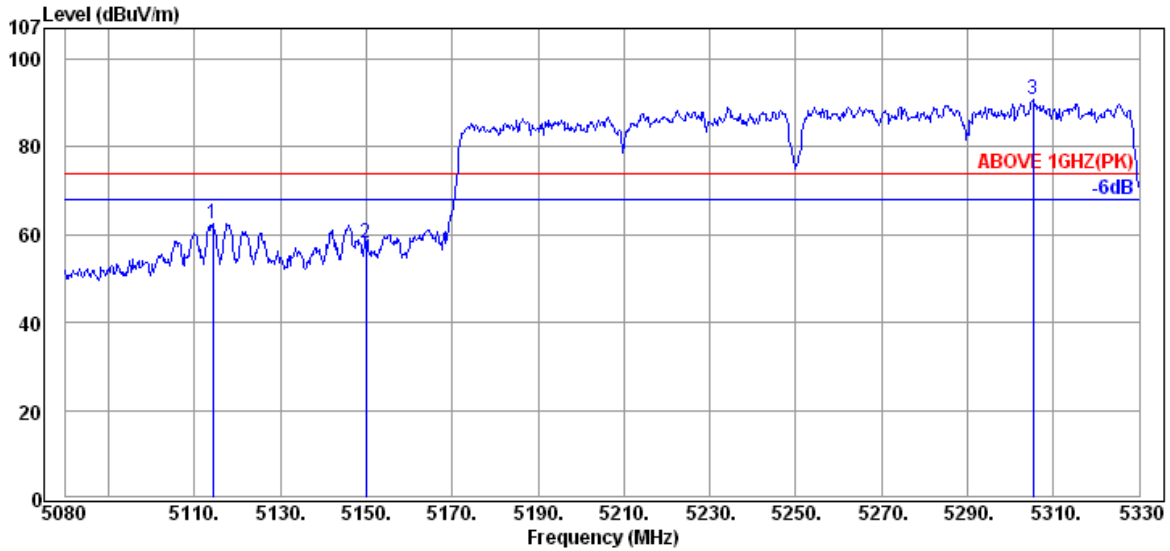

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.25	34.42	13.24	14.71	62.37	74.00	11.63	Peak
5150.00	34.45	13.22	10.40	58.07	74.00	15.93	Peak
5305.25	34.60	13.17	42.88	90.65	---	---	Peak

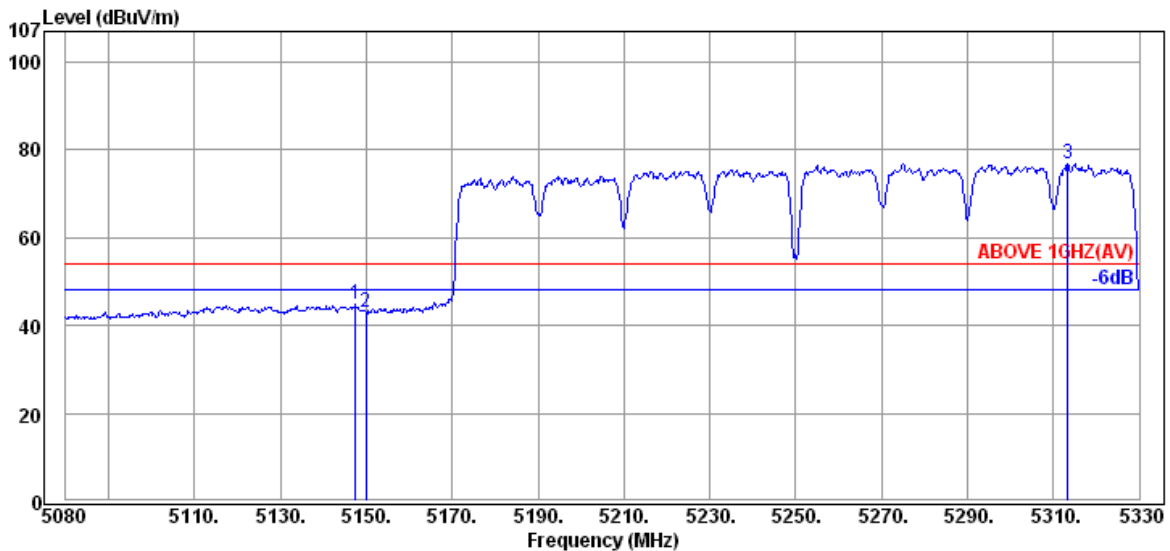

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.50	34.45	13.22	-2.72	44.95	54.00	9.05	Average
5150.00	34.45	13.22	-4.65	43.02	54.00	10.98	Average
5313.25	34.62	13.22	28.97	76.81	---	---	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

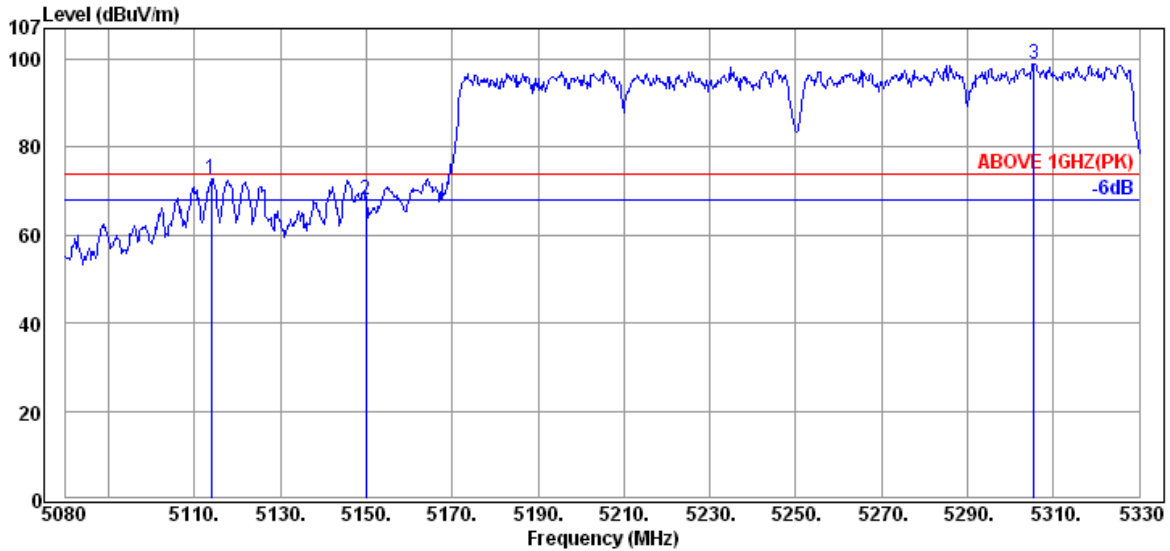

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5114.00	34.42	13.24	25.19	72.85	74.00	1.15	Peak
5150.00	34.45	13.22	20.33	68.00	74.00	6.00	Peak
5305.50	34.60	13.17	51.10	98.87	---	---	Peak

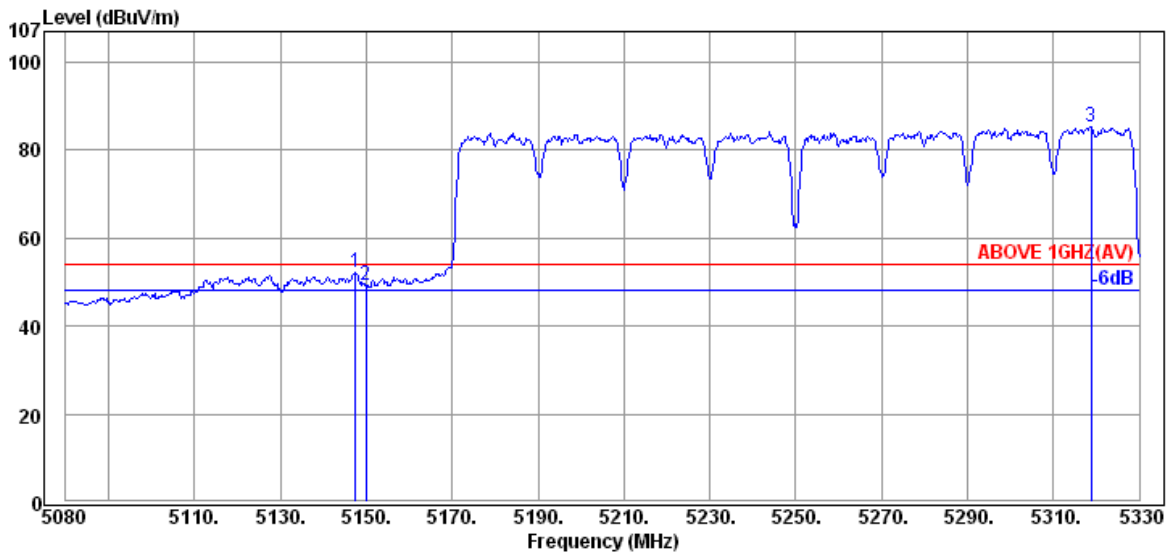

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5147.50	34.45	13.22	4.50	52.17	54.00	1.83	Average
5150.00	34.45	13.22	1.47	49.14	54.00	4.86	Average
5318.75	34.62	13.22	37.43	85.27	---	---	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

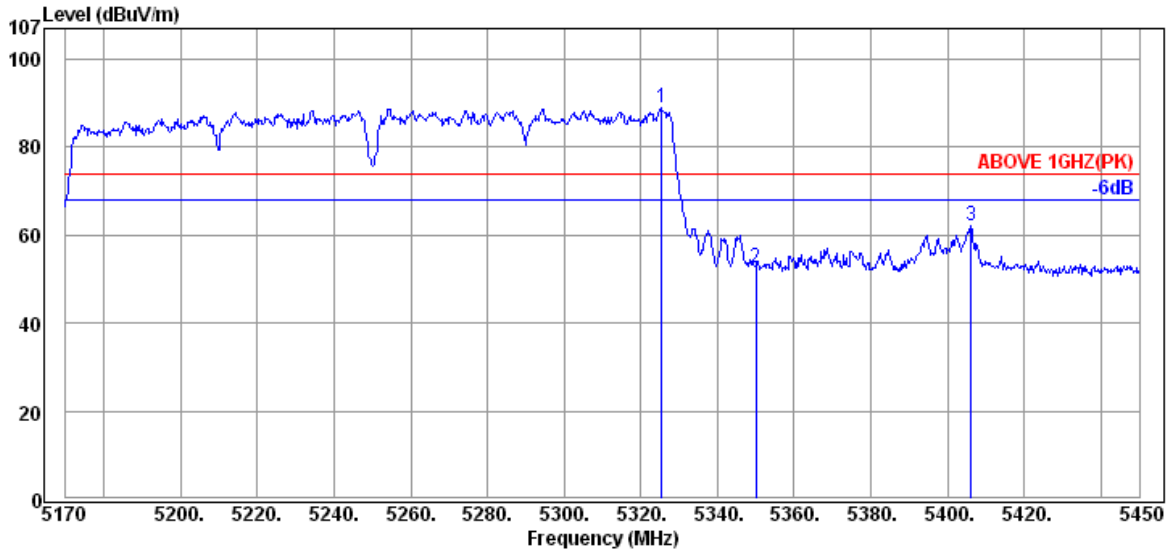

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5325.40	34.62	13.22	41.15	88.99	---	---	Peak
5350.04	34.65	13.31	4.46	52.42	74.00	21.58	Peak
5406.04	34.70	13.44	13.93	62.07	74.00	11.93	Peak

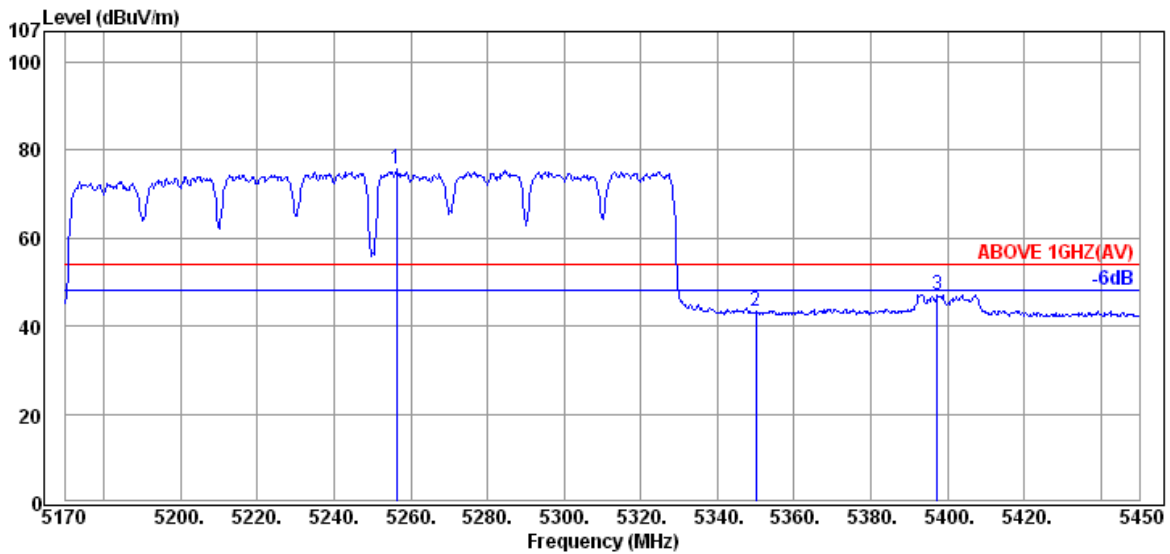

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5256.24	34.55	13.18	27.85	75.58	---	---	Average
5350.04	34.65	13.31	-4.75	43.21	54.00	10.79	Average
5397.36	34.70	13.44	-0.92	47.22	54.00	6.78	Average

Mode	802.11ac-VHT160	UNII Band	I
		Frequency	TX 5250MHz

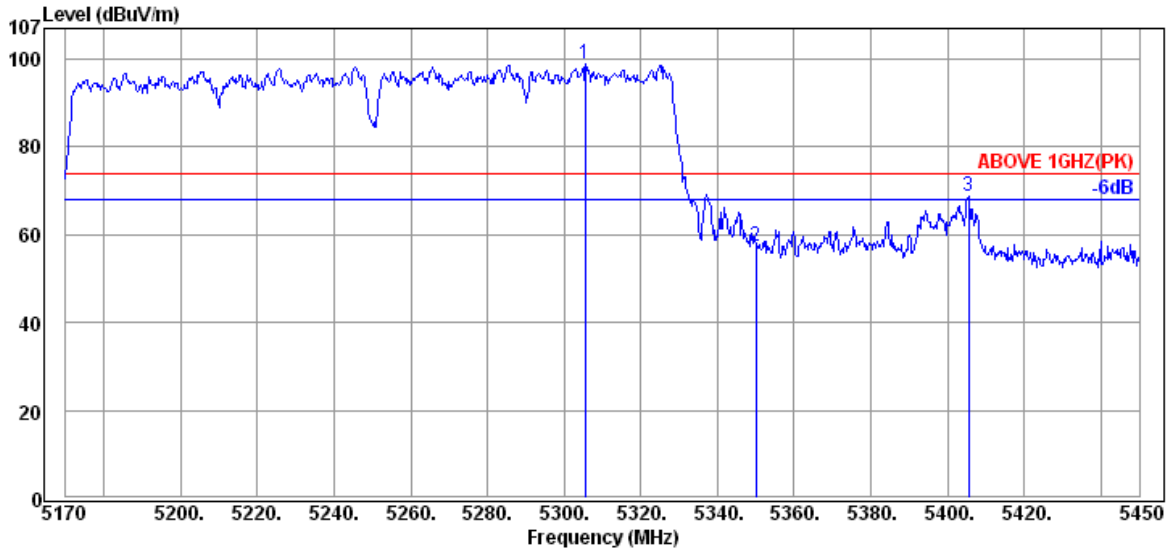

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5305.52	34.60	13.17	51.30	99.07	---	---	Peak
5350.04	34.65	13.31	9.35	57.31	74.00	16.69	Peak
5405.48	34.70	13.44	20.63	68.77	74.00	5.23	Peak

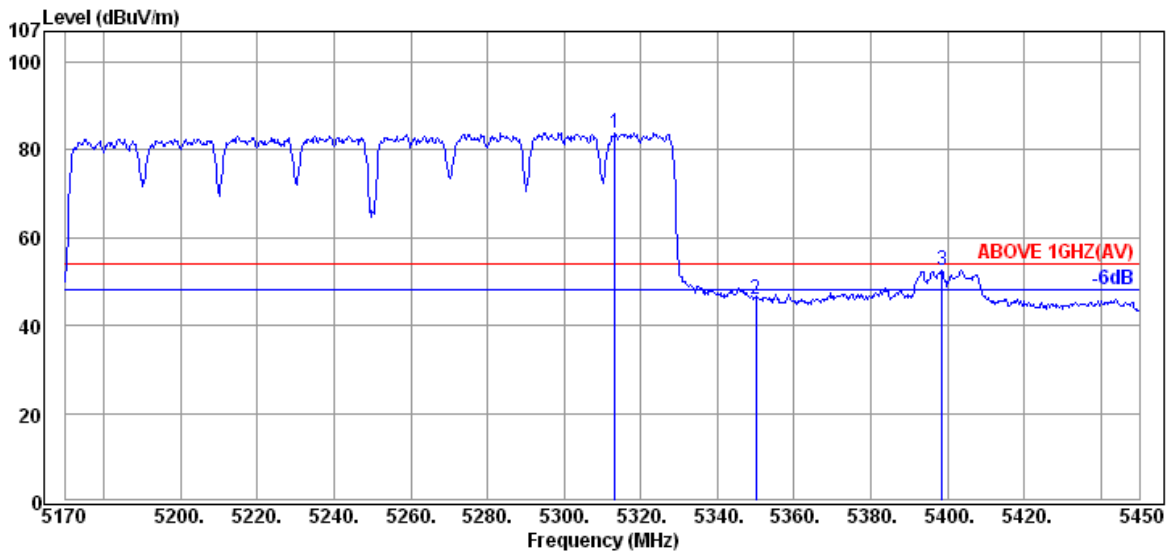

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5313.36	34.62	13.22	36.06	83.90	---	---	Average
5350.04	34.65	13.31	-1.89	46.07	54.00	7.93	Average
5398.48	34.70	13.44	4.49	52.63	54.00	1.37	Average

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

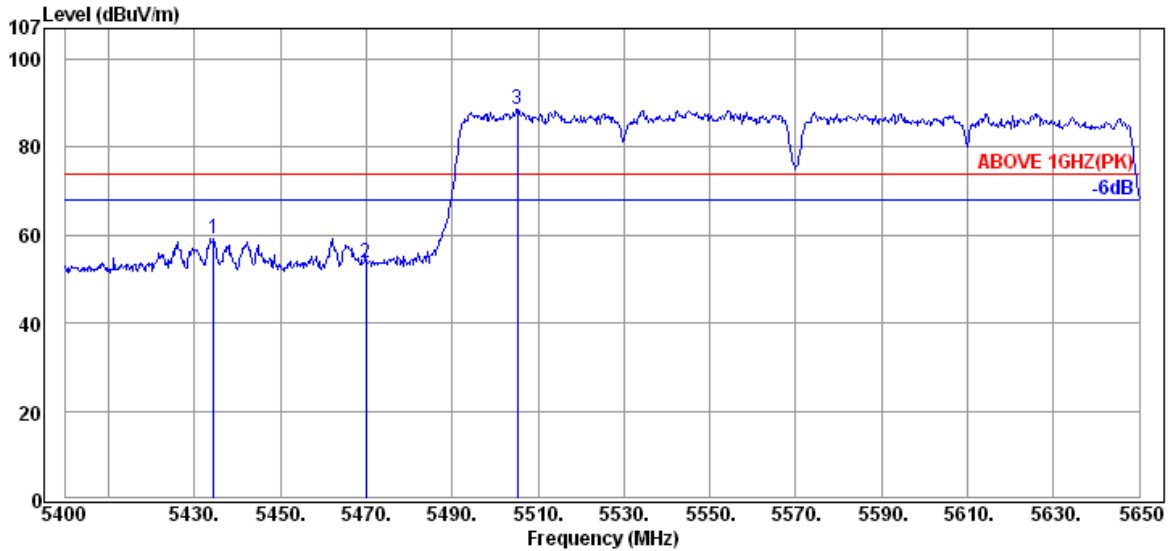

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.50	34.73	13.48	11.07	59.28	74.00	14.72	Peak
5470.00	34.77	13.51	5.22	53.50	74.00	20.50	Peak
5505.25	34.80	13.55	40.15	88.50	---	---	Peak

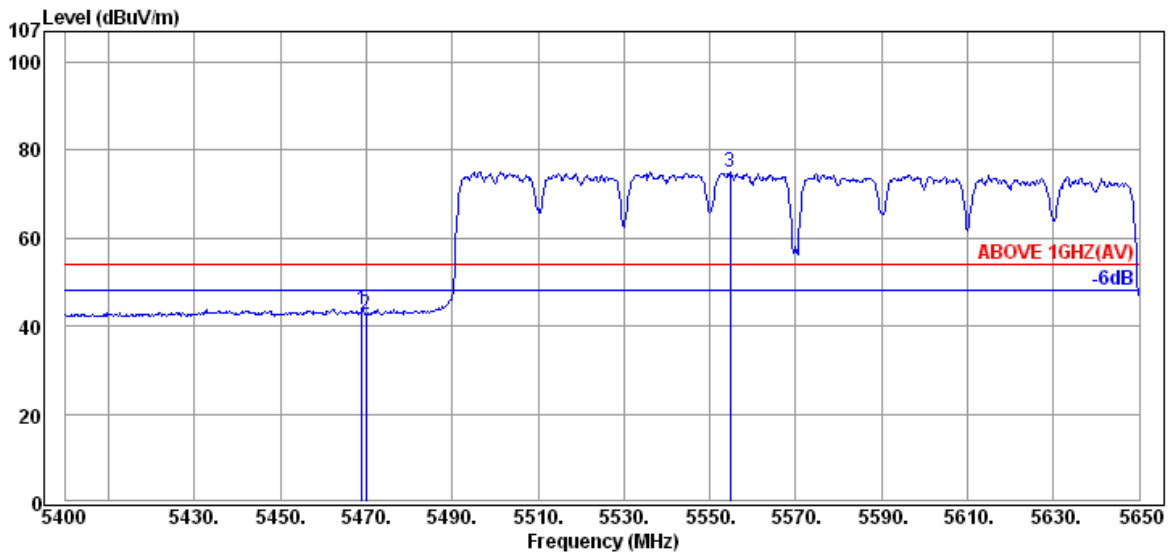

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5469.00	34.77	13.51	-4.43	43.85	54.00	10.15	Average
5470.00	34.77	13.51	-5.47	42.81	54.00	11.19	Average
5554.75	34.86	13.64	26.60	75.10	---	---	Average

Mode	802.11ac-VHT160	UNII Band	II-2C
		Frequency	TX 5570MHz

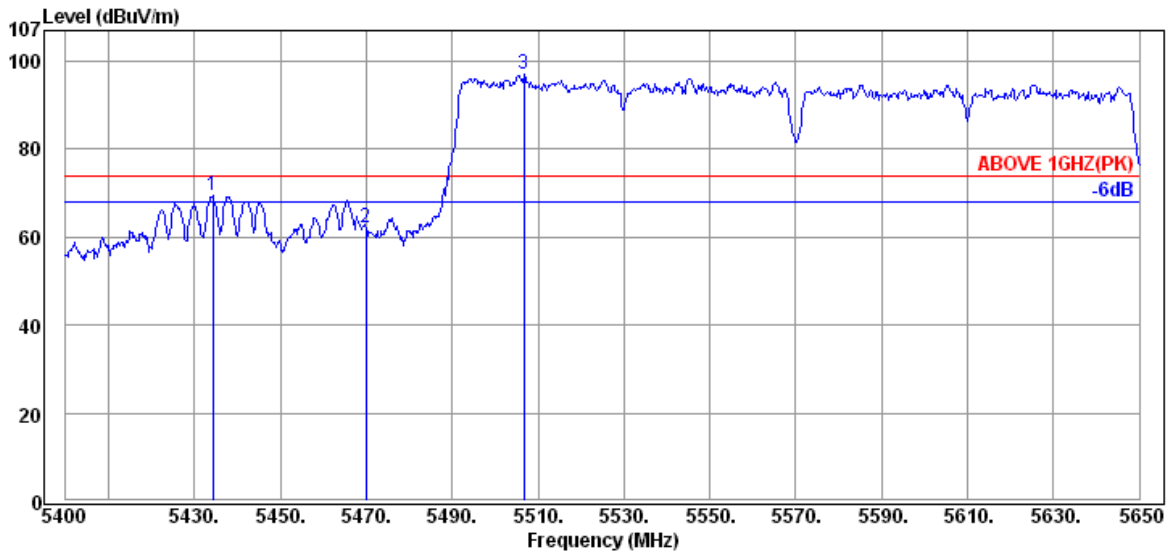

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5434.25	34.73	13.48	21.42	69.63	74.00	4.37	Peak
5470.00	34.77	13.51	13.97	62.25	74.00	11.75	Peak
5506.75	34.80	13.55	48.63	96.98	---	---	Peak

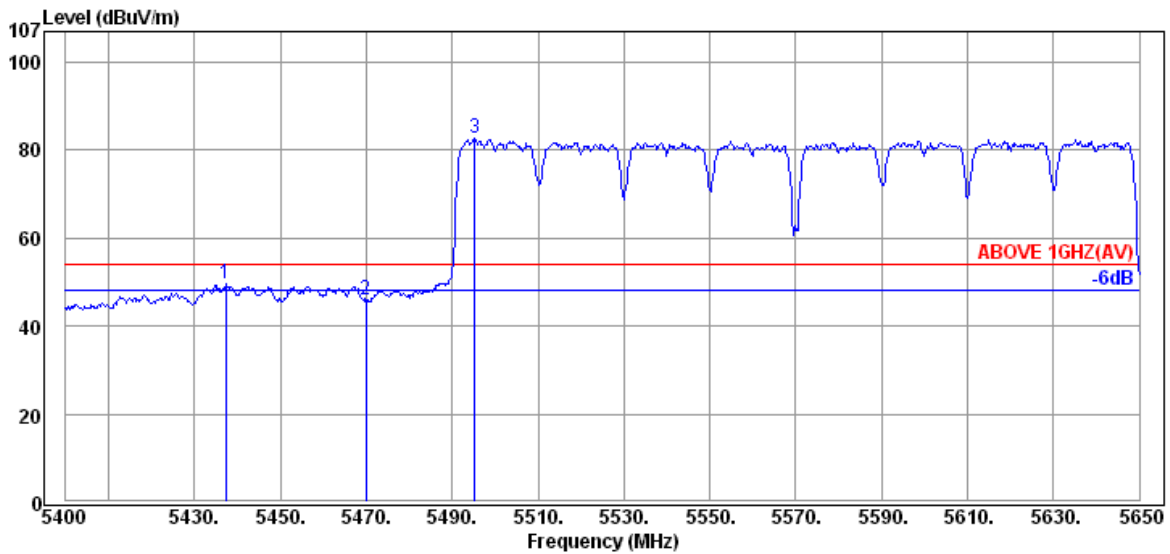

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
5437.25	34.73	13.48	1.30	49.51	54.00	4.49	Average
5470.00	34.77	13.51	-2.36	45.92	54.00	8.08	Average
5495.25	34.78	13.53	34.30	82.61	---	---	Average

#### A.2.2 Emissions outside the frequency band

The emissions (up to 40GHz) not reported for there is no emission be found.

#### A.2.3 Emissions in Non-restricted Frequency Bands

Pursuant to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 that emission levels below the 15.209 general radiated emissions limits is not required.