


FSG 2T Type Label

Attached on RIGHT CHASSIS SIDE

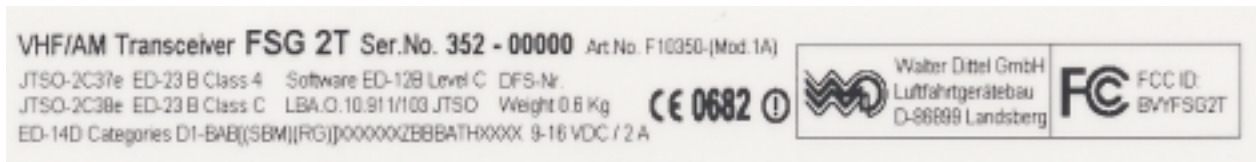

NOTE: In Attachment 1 (to the CETECOM Test Report 2-2603-B_01), there is an older yellow colored type label shown, which was a DRAFT Label only. The actual label content is if the same size, and it is now white with black writing.

Its content complies with the picture shown here.

FSG 2T Information Label

Attached on LEFT CHASSIS SIDE

| | | | | | |
|-------------------------------|-----------|-------------|---------------|--|--|
| Phone / Kopfhörer | OFF OFF V | OFF OFF V | Level / Pegel | Consult Manual! Einbauhandbuch beachten! 2 independent inputs / 2 unabhängige Eingänge: D = Dynamic; nonamplified, ohne Verstärker V = Amplified / Verstärker Mikrophone 10 mA, 8 mA, 2 mA, or OFF no current / AUS kein Strom | <input type="radio"/> AF EXTERN Mode |
| Ex factory setting: 2mA 8mA D | 2mA 8mA D | Mic 1 Mic 2 | | | <input type="radio"/> CH Blocking Mode |
| Mic1= Donly; set Mic2=V | Mic 1 | Mic 2 | | | |

NOTE: This information label is provided for your better information about the overall appearance of the FSG 2T VHF/AM airband transceiver.

This label also assists the installer about the possible audio leveling adjustments provided.

NOTE: Both label contents are also contained in the submitted DDP Declaration of Design and Performance, page 11.

Landsberg, 06 September 2002-09-06

Fritz Mössinger

Radio Systems