

**FCC PART 15 SUBPART C SECTION 15.249
TEST REPORT**

for

**DOOR CHIME BUTTON
Model: SW-ATT-DB (Fixed Mode)**

Prepared for

NORTEK SECURITY & CONTROLS LLC
1950 CAMINO VIDA ROBLE, SUITE 150
CARLSBAD, CA 92008

Prepared by: _____

MATT HARRISON

Approved by: _____

JEFF KLINGER

COMPATIBLE ELECTRONICS INC.
20621 PASCAL WAY
LAKE FOREST, CALIFORNIA 92630
(949) 587-0400

DATE: JANUARY 14, 2015

	REPORT BODY	APPENDICES					TOTAL
		A	B	C	D	E	
PAGES	18	2	2	2	15	17	56

This report shall not be reproduced except in full, without the written approval of Compatible Electronics.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample	7
2.6 Abbreviations and Acronyms	7
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration	9
4.1.1 Photograph Test Configuration	9
4.1.2 Cable Construction and Termination	10
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	11
5.1 EUT and Accessory List	11
5.2 EMI Test Equipment	12
6. TEST SITE DESCRIPTION	13
6.1 Test Facility Description	13
6.2 EUT Mounting, Bonding and Grounding	13
6.3 Facility Environmental Characteristics	13
7. CHARACTERISTICS OF THE TRANSMITTER	14
7.1 Channel Number and Frequencies	14
7.2 Antenna	14
8. TEST PROCEDURES	15
8.1 RF Emissions	15
8.1.1 Conducted Emissions Test	15
8.1.2 Radiated Emissions (Spurious and Harmonics) Test	16
8.1.3 Fundamental Field Strength	17
8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band	17
9. TEST PROCEDURE DEVIATIONS	18
10. CONCLUSIONS	18



LIST OF APPENDICES

APPENDIX	TITLE
A	Laboratory Accreditations and Recognitions
B	Modifications to the EUT
C	Additional Models Covered Under This Report
D	Diagrams, Charts, and Photos • Test Setup Diagrams • Antenna and Amplifier Factors • Radiated and Conducted Emissions Photos
E	Radiated and Conducted Emissions Data Sheets

LIST OF FIGURES

FIGURE	TITLE
1	Plot Map And Layout of Test Site Below 1GHz
2	Plot Map And Layout of Test Site Above 1GHz
3	Conducted Emissions Test Setup



GENERAL REPORT SUMMARY

This electromagnetic emission test report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form unless done so in full with the written permission of Compatible Electronics.

This report must not be used to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
S/N: N/A

Product Description: The EUT is designed to integrate with the AT&T Digital Life security system. The SW-ATT-DB is used to ring the door chime and send a power-up message to the security system.

Modifications: The EUT was not modified during testing.

Manufacturer: Nortek Security & Controls LLC
1950 Camino Vida Roble, Suite 150
Carlsbad, CA 92008

Test Date: January 13 & 14, 2015

Test Specifications: EMI requirements

CFR Title 47, Part 15 Subpart C Sections 15.205, 15.207, 15.209 and 15.249

Test Procedure: ANSI C63.10



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.207
2	Radiated RF Emissions & Harmonics, 9 kHz – 10,000 MHz.	Complies with the limits of CFR Title 47 Part 15 Subpart C Section 15.205, 15.209, & 15.249

SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)	Test Distance
1	Peak	H	918.78	92.29	93.97	-1.68	3-Meter
2	Peak	V	9187.8	52.13	53.98	-1.85	3-Meter
3	Peak	H	919.78	91.91	93.97	-2.06	3-Meter
4	Peak	H	7294.24	51.91	53.98	-2.07	3-Meter
5	Peak	H	3679.12	51.90	53.98	-2.08	3-Meter
6	Peak	H	3675.12	51.79	53.98	-2.19	3-Meter

SIX HIGHEST CONDUCTED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Line (Line / Neutral)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)
1	QP	N	0.60	17.13	56.00	-38.87
2	QP	L	0.60	16.72	56.00	-39.28
3	QP	N	29.77	18.64	60.00	-41.36
4	QP	L	28.71	18.20	60.00	-41.80
5	QP	L	28.19	17.97	60.00	-42.03
6	QP	L	28.97	17.52	60.00	-42.48



1. PURPOSE

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Door Chime Button Model: SW-ATT-DB (Fixed Mode). The EMI measurements were performed according to the measurement procedure described in ANSI C63.10. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT (equipment under test) hereafter, are within the specification limits defined by the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.209 and 15.249.



2. ADMINISTRATIVE DATA

2.1 Location of Testing

The tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way Lake Forest, California 92630.

2.2 Traceability Statement

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 Cognizant Personnel

Nortek Security & Controls LLC

Josh Hansen Regulatory Engineer

Compatible Electronics, Inc.

Matt Harrison Test Technician

Jeff Klinger Director of Engineering

2.4 Date Test Sample was Received

The test sample was received on January 13, 2015.

2.5 Disposition of the Test Sample

The test sample remains at Compatible Electronics, Inc. as of the date of this test report.

2.6 Abbreviations and Acronyms

The following abbreviations and acronyms may be used in this document.

RF	Radio Frequency
EMI	Electromagnetic Interference
EUT	Equipment Under Test
P/N	Part Number
S/N	Serial Number
HP	Hewlett Packard
ITE	Information Technology Equipment
CML	Corrected Meter Limit
LISN	Line Impedance Stabilization Network
NVLAP	National Voluntary Laboratory Accreditation Program
CFR	Code of Federal Regulations
PCB	Printed Circuit Board
TX	Transmit
RX	Receive



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this Test Report.

SPEC	TITLE
CFR Title 47, Part 15	FCC Rules – Radio frequency devices (including digital devices)
ANSI C63.10: 2009	American National Standard for Testing Unlicensed Wireless Devices



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration

The Door Chime Button Model: SW-ATT-DB (Fixed Mode) (EUT) was setup in a tabletop configuration. The EUT was connected to a Doorbell and a transformer. The EUT was checked in all 3-Axes and the worst case was found to be the X-Axis. The EUT was continuously transmitting a data stream during transmitter tests and continuously receiving during receiver tests.

The input voltage was varied $\pm 15\%$; the transmitting signal amplitude and frequency did not vary.

It was determined that the emissions were at their highest level when the EUT was transmitting in the configuration described above for Radiated Emissions. The final radiated data was taken in the above configuration. Please see Appendix E for the test data.

4.1.1 Photograph Test Configuration



4.1.2 Cable Construction and Termination

Cable 1

This is a 1 meter, unshielded, round cable that connects the EUT to the Doorbell. The cable is hardwired into both ends of the cable. This cable was not bundled.

Cable 2

This is a 1 meter, unshielded, round cable that connects the EUT to the Transformer. The cable is hardwired into both ends of the cable. This cable was not bundled.

Cable 3

This is a 1 meter, unshielded, round cable that connects the Transformer to the Doorbell. The cable is hardwired into both ends of the cable. This cable was not bundled.



5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT**5.1 EUT and Accessory List**

#	EQUIPMENT TYPE	MANU-FACTURER	MODEL	SERIAL NUMBER	FCC ID
1	DOOR CHIME BUTTON (EUT)	NORTEK SECURITY & CONTROLS LLC	SW-ATT-DB (Fixed Mode)	NONE	EF400127
2	DOORBELL	HEATHZENITH	WD-1 BASE	NONE	N/A
3	TRANSFORMER	HEATHZENITH	EM57580	NONE	N/A



5.2 EMI Test Equipment

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CAL. DATE	CAL. DUE DATE
Computer	Compatible Electronics	NONE	NONE	N/A	N/A
EMI Receiver	Rohde & Schwarz	ESIB40	100219	9/5/2014	9/2/2015
Antenna, Loop	Com Power	AL-130	121049	12/6/2013	12/6/2015
Antenna, CombiLog	Com Power	AC-220	25857	5/21/2014	5/21/2015
Antenna, Horn 1-18GHz	Com Power	AH-118	071250	7/1/2014	7/1/2016
Pre-Amp, 1-18GHz	Com Power	PAM-118	443013	4/24/2014	4/24/2015
Pre-Amp, 1-18GHz	Com Power	PAM-118	443011	4/24/2014	4/24/2015
Notch Filter	Microwave Circuits	N0309153	3709-01 DC0415	5/9/2013	5/9/2015
LISN	Com Power	LI-215	191944	4/18/2014	4/18/2015
Mast, Antenna Positioner	Sunol Science Corporation	TWR 95-4	081309-3	N/A	N/A
Antenna Mast	Sunol Science Corporation	TWR 95-4	081309-3	N/A	N/A
Turntable	Sunol Science Corporation	FM2011VS	N/A	N/A	N/A
Mast and Turntable Controller	Sunol Science Corporation	SC104V	020808-1	N/A	N/A



6. TEST SITE DESCRIPTION**6.1 Test Facility Description**

Please refer to section 2.1 and the figures in Appendix D of this report for test location.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 1.0 by 1.5 by 0.8 meter high non-conductive table, which was placed on the ground plane.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature, and barometric pressure.



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

There 4 operating channels and the EUT has GFSK modulation

1 == 911.78 MHz

2 == 913.28 MHz

3 == 918.78 MHz

4 == 919.78 MHz

7.2 Antenna

The antenna is made up of an integrated PCB antenna which is located on the PCB.



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 RF Emissions

8.1.1 Conducted Emissions Test

The EMI receiver was used as a measuring meter. A quasi-peak and/or average reading was taken only where indicated in the data sheets. The LISN output was measured using the EMI receiver. The output of the second LISN was terminated by a 50-ohm termination. The effective measurement bandwidth used for this test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding, and grounding of the EUT. The EUT received its power through the LISN, which was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI 63.4. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The conducted emissions from the EUT were maximized for operating mode as well as cable placement. The final data was collected under program control by the computer software. The final qualification data is located in Appendix E.

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C section 15.207.



8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps. Amplifiers were used to increase the sensitivity of the instrument. There was one Microwave Preamplifier used for frequencies above 1 GHz.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Harmonic emissions a linear average detector was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz
1000 to 10000	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.10, EN 50147-2, and CISPR 22. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart C sections 15.205, 15.209 and 15.249.



8.1.3 Fundamental Field Strength

The Peak Transmit Radiated Field Strength was measured at a 3-meter test distance using the EMI Receiver to obtain the final test data. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.

8.1.4 Emissions Radiated Outside of the Fundamental Frequency Band

The Band Edge measurement was measured using the EMI Receiver at a 3-meter test distance to obtain the final test data. The lower and upper channels were tuned during the low and high band edge tests. The final qualification data sheets are located in Appendix E.

Test Results:

The EUT complies with Part 15 Subpart C, Section 15.249.



9. TEST PROCEDURE DEVIATIONS

The test procedures were not deviated from throughout all tests.

10. CONCLUSIONS

The Door Chime Button Model: SW-ATT-DB (Fixed Mode) meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart C sections 15.205, 15.207, 15.209 and 15.249.



APPENDIX A***LABORATORY ACCREDITATIONS AND
RECOGNITIONS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

LABORATORY ACCREDITATIONS AND RECOGNITIONS



NVLAP LAB CODES 200063-0,
200528-0, 200527-0

For US, Canada, Australia/New Zealand, Taiwan and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025 an ISO 9002 equivalent. Please follow the link to the NIST site for each of our facilities NVLAP certificate and scope of accreditation.

NVLAP listing links

Agoura Division - <http://ts.nist.gov/Standards/scopes/2000630.htm>

Brea Division - <http://ts.nist.gov/Standards/scopes/2005280.htm>

Silverado/Lake Forest Division - <http://ts.nist.gov/Standards/scopes/2005270.htm>



ANSI listing

[CETCB](http://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4)

<https://www.ansica.org/wwwversion2/outside/ALLdirectoryDetails.asp?menuID=1&prgID=3&orgID=123&status=4>



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for EMC under the US/EU Mutual Recognition Agreement (MRA).



Compatible Electronics has been nominated as a Conformity Assessment Body (CAB) for Taiwan/BSMI under the US/APEC (Asia-Pacific Economic Cooperation) Mutual Recognition Agreement (MRA).

We are also certified/listed for IT products by the following country/agency:



VCCI Listing, from VCCI site

[Enter "Compatible" in search form](http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html) http://www.vcci.or.jp/vcci_e/activity/registration/setsubi.html



FCC Listing, from FCC OET site

[FCC test lab search](https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm) <https://fjallfoss.fcc.gov/oetcf/eas/reports/TestFirmSearch.cfm>



Compatible Electronics IC listing can be found at:

<http://www.ic.gc.ca/eic/site/ic1.nsf/eng/home>



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

APPENDIX B

MODIFICATIONS TO THE EUT



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

MODIFICATIONS TO THE EUT

There were no modifications made to the EUT during testing.



APPENDIX C***ADDITIONAL MODELS COVERED
UNDER THIS REPORT***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

ADDITIONAL MODELS COVERED UNDER THIS REPORT

USED FOR THE PRIMARY TEST

Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
S/N: None

No additional models were tested.



APPENDIX D

DIAGRAMS, CHARTS, AND PHOTOS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FIGURE 1: PLOT MAP AND LAYOUT OF TEST SITE BELOW 1GHZ

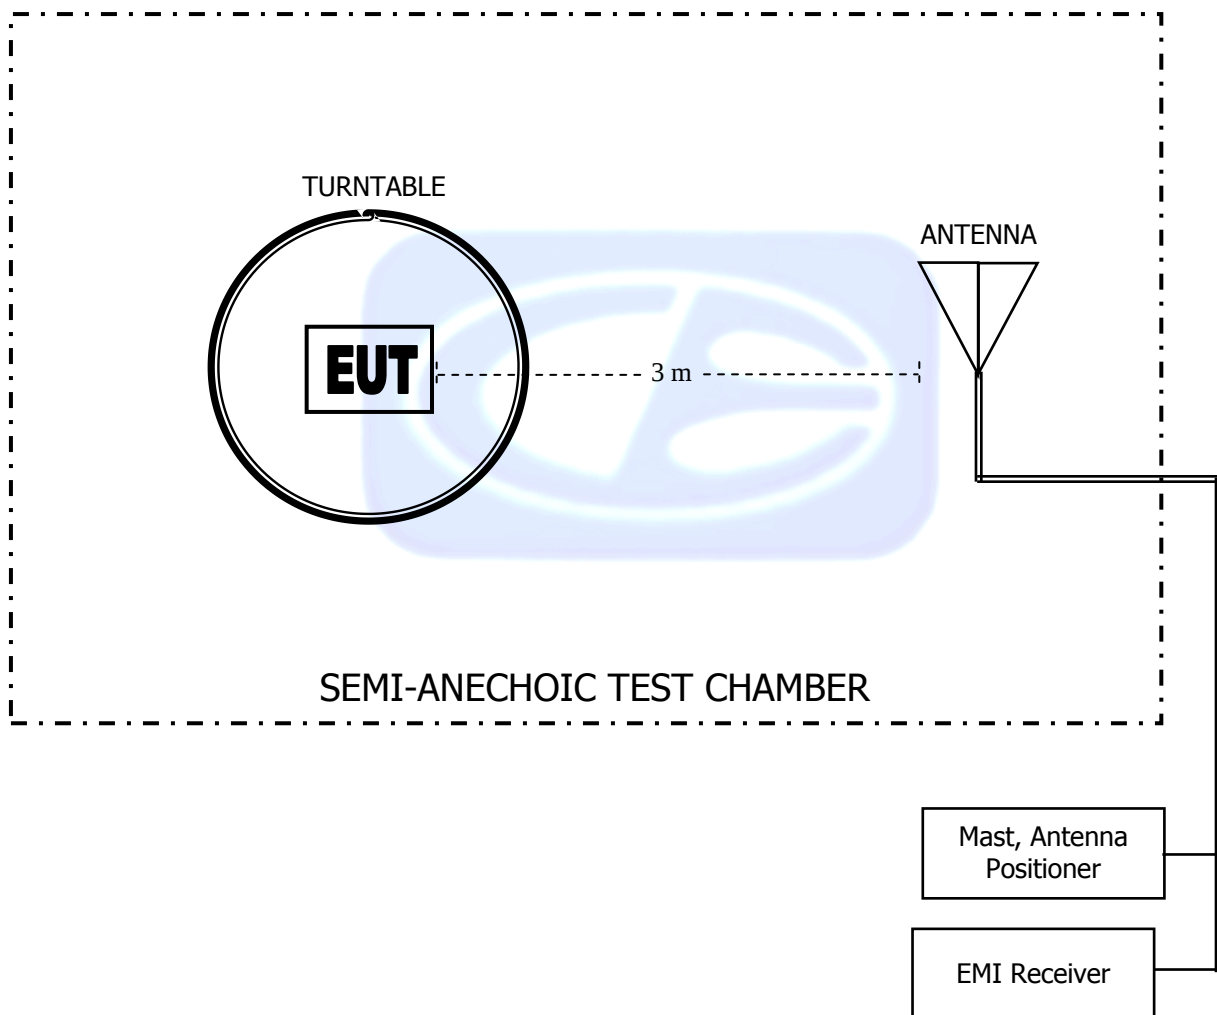


FIGURE 2: PLOT MAP AND LAYOUT OF TEST SITE ABOVE 1GHZ


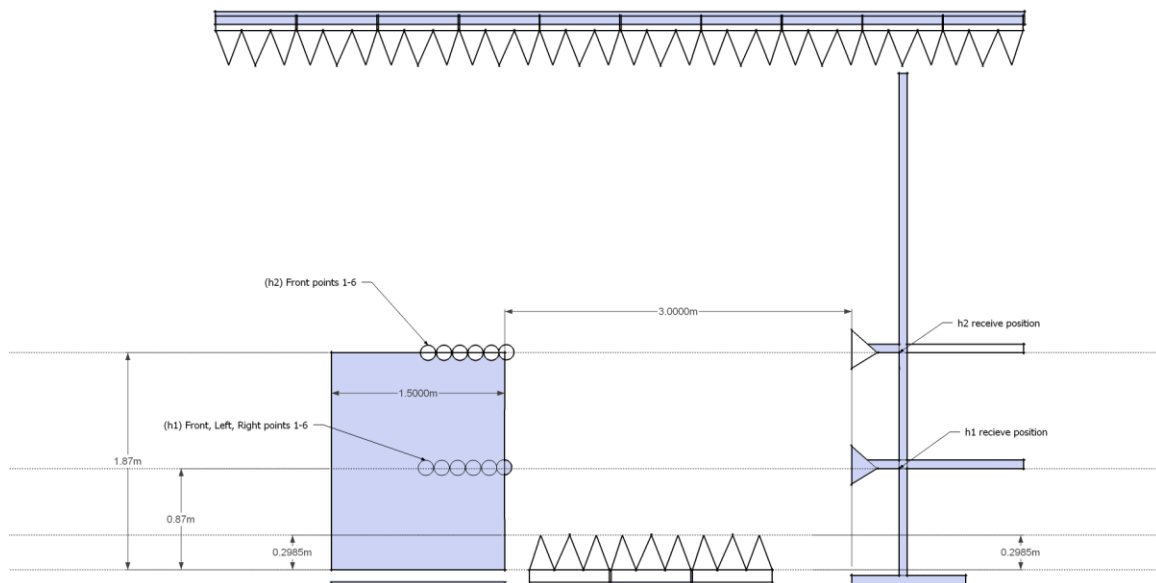


FIGURE 3: CONDUCTED EMISSIONS TEST SETUP

COM-POWER AL-130**LOOP ANTENNA****S/N: 121049****CALIBRATION DUE: DECEMBER 6, 2015**

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-34.64	16.86	0.8	-36.32	15.18
0.01	-34.78	16.72	0.9	-36.22	15.28
0.02	-35.91	15.59	1.0	-36.22	15.28
0.03	-35.48	16.02	2.0	-35.91	15.59
0.04	-35.82	15.68	3.0	-35.91	15.59
0.05	-36.49	15.01	4.0	-36.01	15.49
0.06	-36.30	15.20	5.0	-35.80	15.70
0.07	-36.43	15.07	6.0	-36.00	15.50
0.08	-36.30	15.20	7.0	-35.90	15.60
0.09	-36.39	15.11	8.0	-35.70	15.80
0.1	-36.41	15.09	9.0	-35.70	15.80
0.2	-36.61	14.89	10.0	-35.60	15.90
0.3	-36.63	14.87	15.0	-36.52	14.98
0.4	-36.52	14.99	20.0	-35.75	15.75
0.5	-36.63	14.87	25.0	-37.78	13.72
0.6	-36.62	14.88	30.0	-38.62	12.88
0.7	-36.53	14.97			

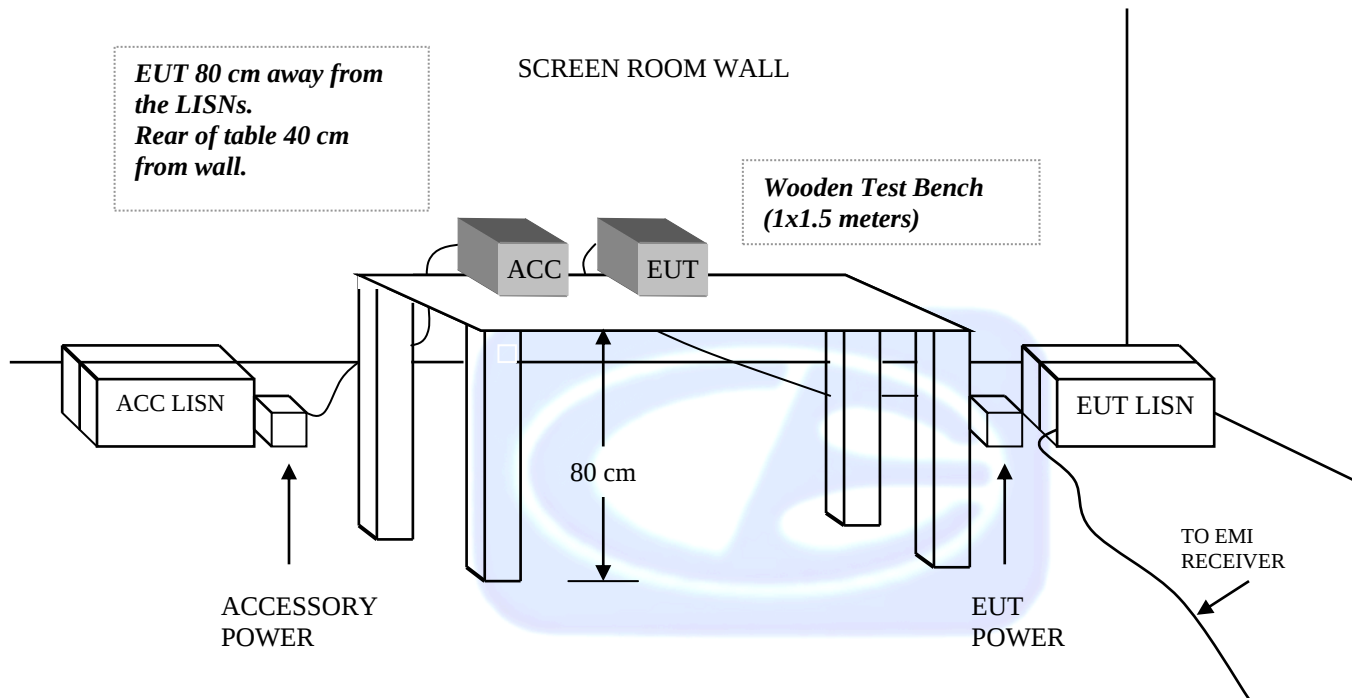

COM-POWER AC-220**LAB R - COMBILOG ANTENNA****S/N: 25857****CALIBRATION DUE: MAY 21, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
30	22.5	160	13.3
35	22.5	180	15.0
40	23.0	200	14.6
45	21.5	250	16.5
50	21.3	300	18.1
60	18.2	400	19.4
70	13.2	500	21.4
80	11.6	600	21.6
90	11.9	700	23.7
100	12.6	800	26.0
120	15.1	900	26.6
140	13.6	1000	28.5



COM-POWER AH-118**HORN ANTENNA****S/N: 071250****CALIBRATION DUE: JULY 1, 2016**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
1000	30.1	9500	44.2
1500	29.2	10000	43.4
2000	31.6	10500	44.6
2500	35.5	11000	45.1
3000	33.7	11500	45.7
3500	36.0	12000	46.2
4000	35.4	12500	45.4
4500	35.5	13000	44.8
5000	40.1	13500	46.7
5500	37.8	14000	47.8
6000	39.0	14500	46.4
6500	39.9	15000	47.2
7000	40.4	15500	45.5
7500	44.4	16000	45.0
8000	44.1	16500	44.5
8500	43.1	17000	47.0
9000	43.0	17500	47.8
		18000	44.2



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER****S/N: 443013****CALIBRATION DUE: APRIL 24, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
500	26.2	5500	25.3
1000	25.6	6000	25.0
1100	25.9	6500	24.7
1200	25.9	7000	23.6
1300	26.3	7500	23.3
1400	26.5	8000	23.7
1500	26.3	8500	24.0
1600	26.1	9000	24.3
1700	26.2	9500	24.1
1800	26.3	10000	23.7
1900	25.8	11000	24.2
2000	26.0	12000	23.2
2500	26.0	13000	22.8
3000	25.8	14000	22.6
3500	25.9	15000	22.9
4000	26.4	16000	22.3
4500	26.0	17000	22.6
5000	25.6	18000	23.9



COM-POWER PAM-118**1-18GHz - PREAMPLIFIER****S/N: 443011****CALIBRATION DUE: April 24, 2015**

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (GHz)	FACTOR (dB)
0.500	27.2	7.000	23.8
1.000	26.6	7.500	23.9
1.500	27.0	8.000	24.4
2.000	27.0	8.500	25.2
2.500	27.4	9.500	26.2
3.000	27.6	10.000	25.8
3.500	27.5	11.000	25.5
4.000	27.3	12.000	25.4
4.500	27.3	13.000	25.1
5.000	27.5	14.000	24.6
5.500	26.3	15.000	24.1
6.000	26.1	16.000	25.1
6.500	25.4	17.000	25.2
		18.000	24.4





FRONT VIEW

NORTEK SECURITY & CONTROLS LLC
Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**





REAR VIEW

NORTEK SECURITY & CONTROLS LLC
Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
FCC SUBPART C - RADIATED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

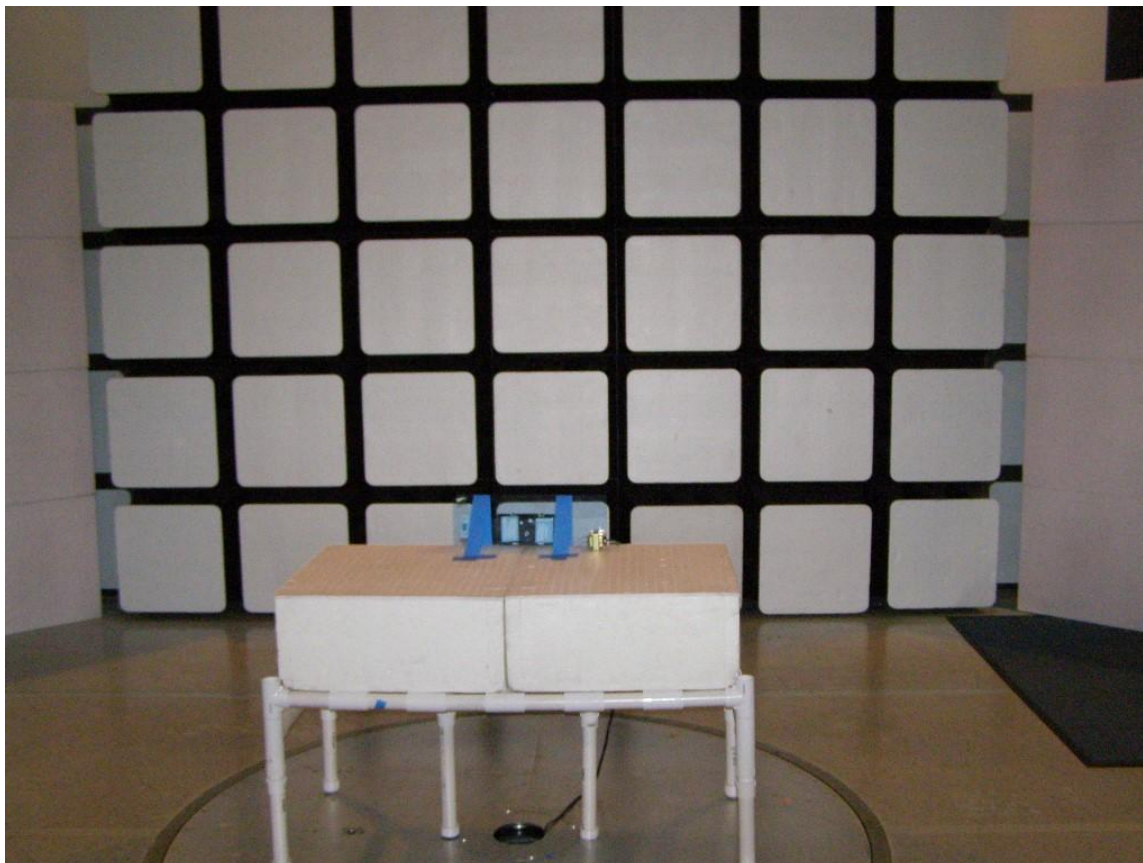

FRONT VIEW

NORTEK SECURITY & CONTROLS LLC
Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400



REAR VIEW

NORTEK SECURITY & CONTROLS LLC
Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
FCC SUBPART C - RADIATED EMISSIONS > 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

**FRONT VIEW**

NORTEK SECURITY & CONTROLS LLC

Door Chime Button

Model: SW-ATT-DB (Fixed Mode)

FCC SUBPART C - CONDUCTED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**




Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

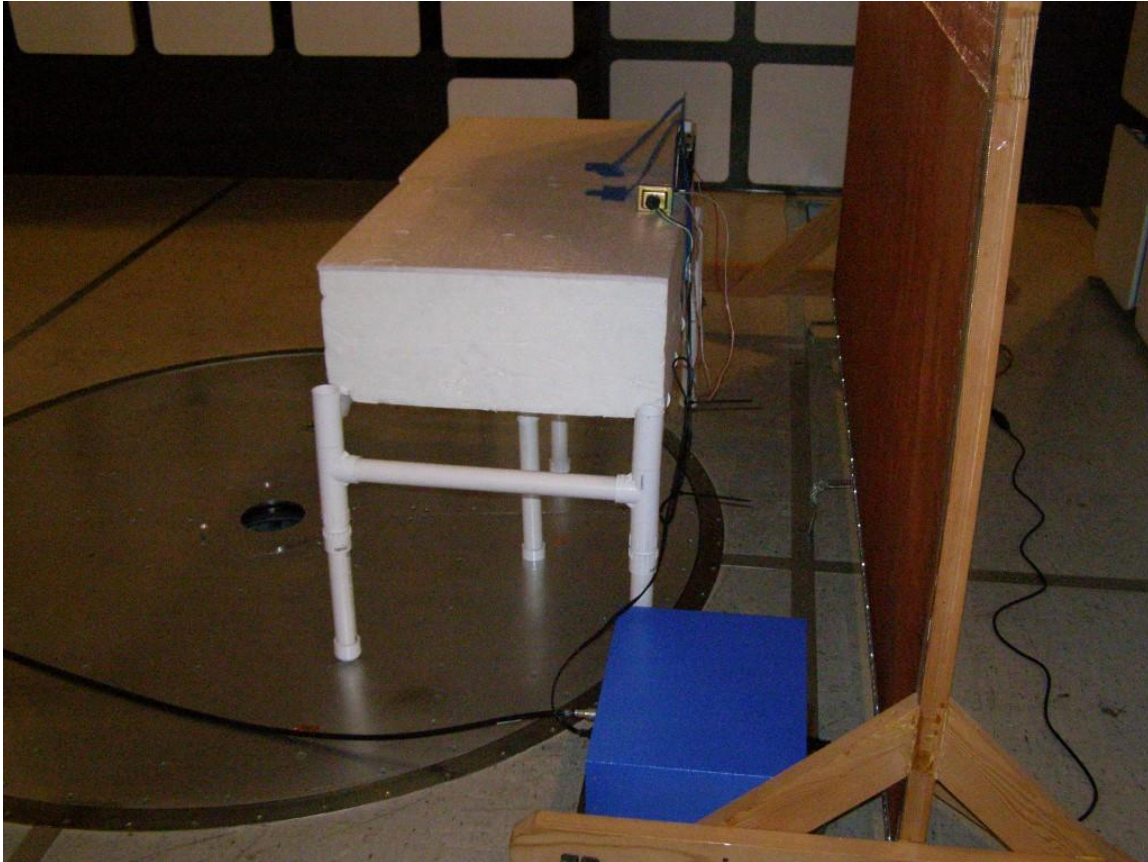

REAR VIEW

NORTEK SECURITY & CONTROLS LLC
Door Chime Button
Model: SW-ATT-DB (Fixed Mode)
FCC SUBPART C - CONDUCTED EMISSIONS < 1GHz

**PHOTOGRAPH SHOWING THE EUT CONFIGURATION
FOR MAXIMUM EMISSIONS**



APPENDIX E***RADIATED EMISSIONS DATA SHEETS***

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500


Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Pre-Scan 30-1000Mhz.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/13/2015 10:16:30 AM
Sequence: Preliminary Scan

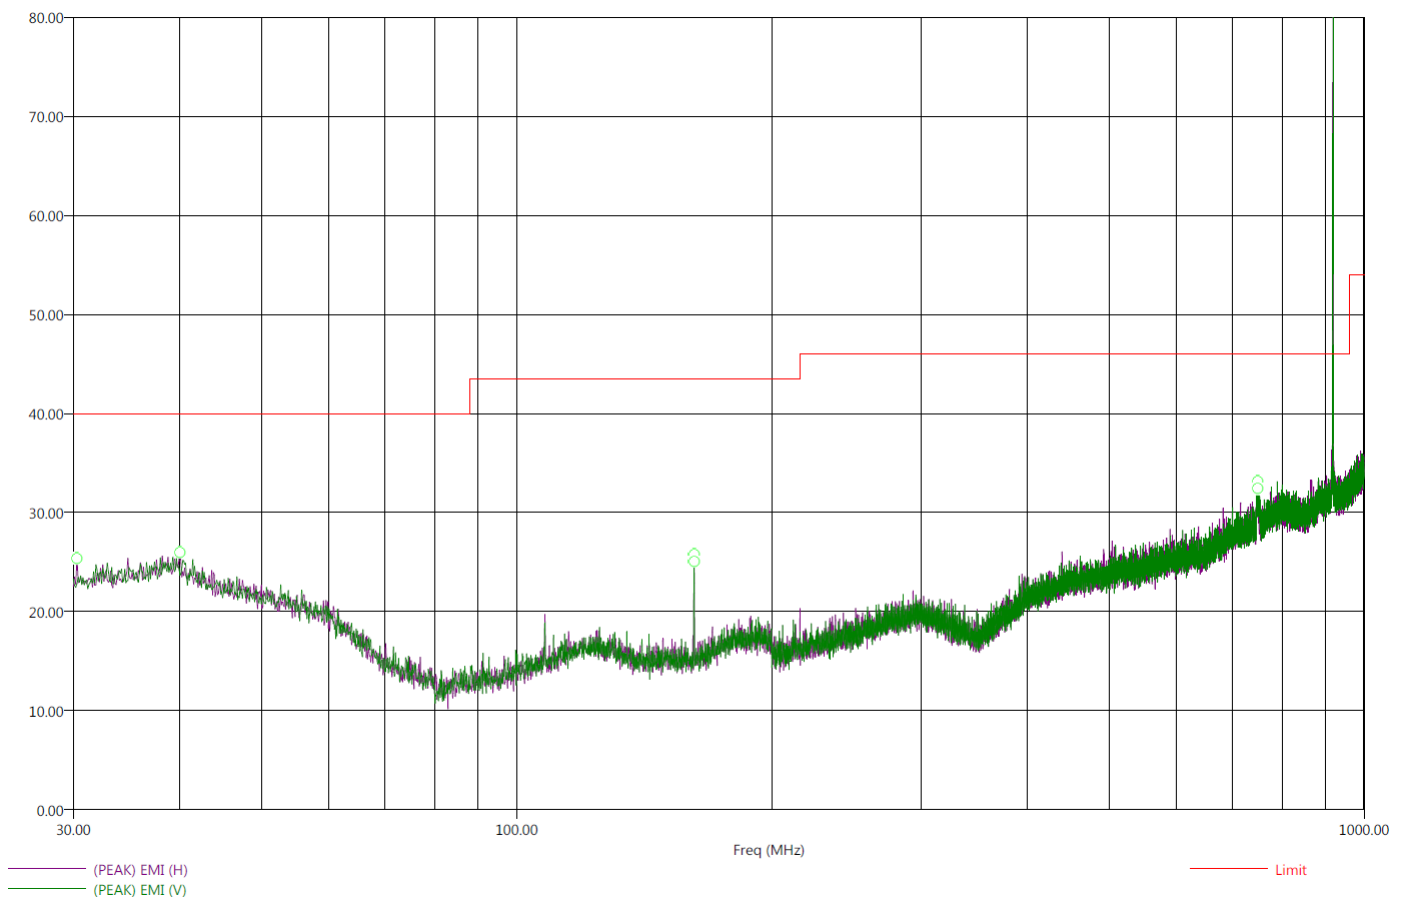Compatible Electronics, Inc. FAC-3 (Lab R)Electric Field Strength (dB μ V/m)

There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
There were no radiated emissions found in Receive Mode.



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.209
File: Radiated Final 30-1000Mhz.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/13/2015 10:38:04 AM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (Lab P)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBμV/m)	(PEAK) EMI (dBμV/m)	Limit (dBμV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable(dB)
30.30	-21.43	18.57	24.06	40.00	H	187.75	246.68	22.50	0.73
40.10	-20.01	19.99	25.07	40.00	H	2.25	126.68	22.98	1.29
162.00	-18.87	24.65	26.88	43.52	H	176.00	400.05	13.47	0.95
162.00	-17.59	25.93	28.13	43.52	V	235.50	99.82	13.46	0.95
749.10	-18.38	27.62	32.90	46.00	H	2.00	100.71	24.88	3.01
749.60	-18.05	27.95	33.85	46.00	V	288.25	395.10	24.89	3.01


*There were no radiated emissions other than harmonics found below 30 MHz or above 1000MHz
There were no radiated emissions found in Receive Mode.*



Title: FCC 15.207
File: Conducted Pre-Line.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/14/2015 2:12:41 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (LAB R)

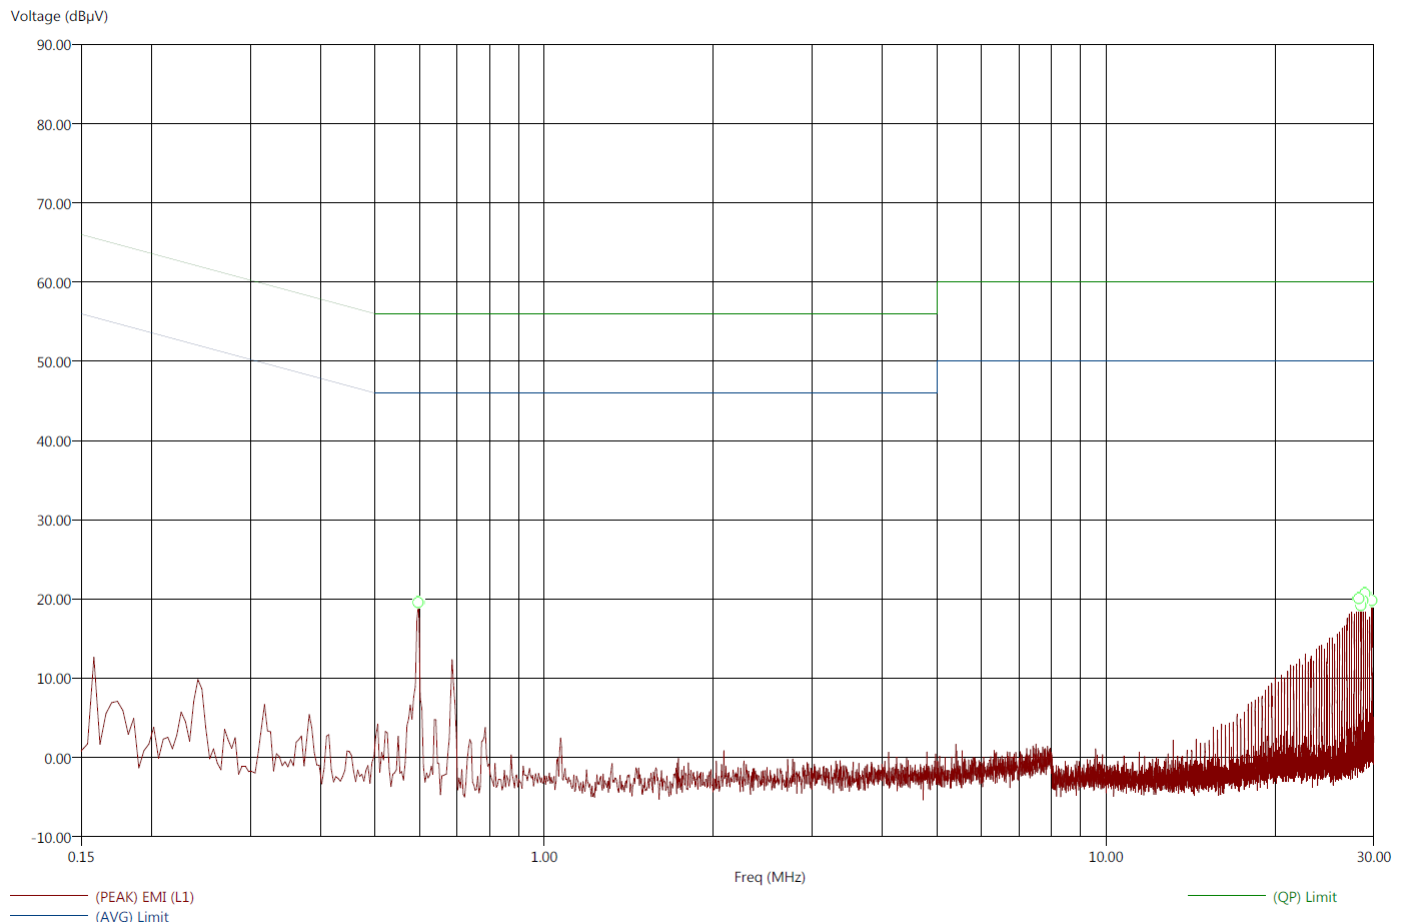

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Final-Line.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/14/2015 2:15:51 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB P)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBuV)	(QP) EMI (dBuV)	(PEAK) EMI (dBuV)	(AVG) Limit (dBuV)	(QP) Limit (dBuV)	Transducer (dB)	Cable (dB)
0.60	-35.17	-39.28	10.83	16.72	21.17	46.00	56.00	0.24	0.00
28.17	-38.99	-44.20	11.01	15.80	20.77	50.00	60.00	0.34	0.65
28.44	-38.74	-44.45	11.26	15.55	22.91	50.00	60.00	0.35	0.66
28.70	-38.58	-43.66	11.42	16.34	22.71	50.00	60.00	0.36	0.67
28.97	-38.09	-42.48	11.91	17.52	21.77	50.00	60.00	0.37	0.67
29.75	-41.00	-46.52	9.00	13.48	22.10	50.00	60.00	0.39	0.69



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600


Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Pre-Neutral.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/14/2015 2:26:14 PM
Sequence: Preliminary Scan

Compatible Electronics, Inc. FAC-3 (LAB R)

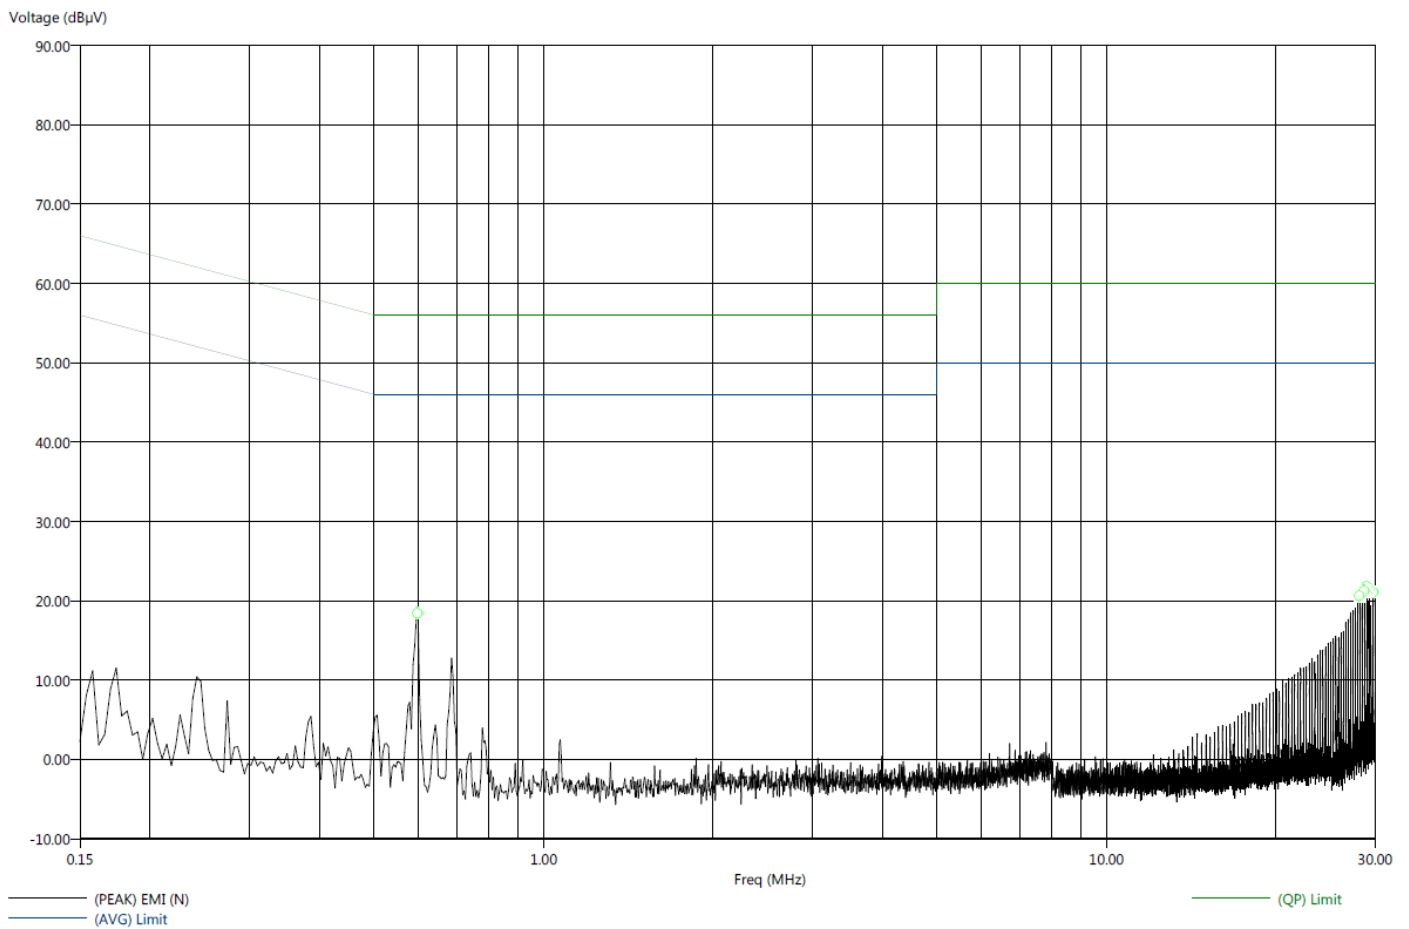

Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

Title: FCC 15.207
File: Conducted Final-Neutral.set
Operator: Matt Harrison
EUT Type: SW-ATT-DB.
EUT Condition: Transmitting 918.78 MHz.
Comments: Connected to Transformer and Doorbell.
Temp: 66f
Hum: 41%
120V 60Hz

1/14/2015 2:30:49 PM
Sequence: Final Measurements

Compatible Electronics, Inc. FAC-3 (LAB R)

Freq (MHz)	(AVG) Margin AVL (dB)	(QP) Margin QPL (dB)	(AVG) EMI (dBuV)	(QP) EMI (dBuV)	(PEAK) EMI (dBuV)	(AVG) Limit (dBuV)	(QP) Limit (dBuV)	Transducer (dB)	Cable (dB)
0.60	-34.58	-38.87	11.42	17.13	20.91	46.00	56.00	0.03	0.00
28.19	-37.17	-42.03	12.83	17.97	23.32	50.00	60.00	0.41	0.65
28.71	-37.76	-41.80	12.24	18.20	23.87	50.00	60.00	0.42	0.67
28.98	-37.81	-42.87	12.19	17.13	23.19	50.00	60.00	0.43	0.67
29.25	-41.43	-44.08	8.57	15.92	20.86	50.00	60.00	0.43	0.68
29.77	-36.27	-41.36	13.73	18.64	23.39	50.00	60.00	0.45	0.69



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

***FUNDAMENTAL & HARMONICS
DATA SHEETS***



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

FUNDAMENTAL FIELD STRENGTH

FCC 15.249

Company: Nortek
EUT: Key Fob
Model: SW-ATT-DB

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Compatible Electronics, Inc. FAC-3

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table	Tower	Comments
911.78	91.51	H	93.97	-2.46	Peak	155	1.13	
911.78	89.09	V	93.97	-4.88	Peak	160	1.10	
918.78	92.29	H	93.97	-1.68	Peak	155	1.02	
918.78	91.40	V	93.97	-2.57	Peak	160	1.05	
919.78	91.91	H	93.97	-2.06	Peak	155	1.12	
919.78	91.10	V	93.97	-2.87	Peak	165	1.08	

Test
distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS LOW CHANNEL HORIZONTAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margi n	Peak / QP / Avg	Ant. Heig ht (m)	Table Angle (deg)	Comments
1823.56	43.54	H	53.98	- 10.44	Peak	1.37	188	
2735.34	--	H	53.98	--	Peak	--	--	No Emissions Found
3647.12	49.82	H	53.98	-4.16	Peak	1.17	0	
4558.9	--	H	53.98	--	Peak	--	--	No Emissions Found
5470.68	49.14	H	53.98	-4.84	Peak	1.15	202	
6382.46	--	H	53.98	--	Peak	--	--	No Emissions Found
7294.24	51.91	H	53.98	-2.07	Peak	1.08	168	
8206.02	--	H	53.98	--	Peak	--	--	No Emissions Found
9117.8	50.10	H	53.98	-3.88	Peak	1.48	113	

Test distance
3 meter



HARMONIC EMISSIONS LOW CHANNEL VERTICAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1823.56	42.87	V	53.98	-11.11	Peak	2.13	360	
2735.34	--	V	53.98	--	Peak	--	--	No Emissions Found
3647.12	59.39	V	73.98	-14.59	Peak	1.00	184	
3647.12	31.16	V	53.98	-22.82	Avg	1.00	184	
4558.9	--	V	53.98	--	Peak	--	--	No Emissions Found
5470.68	49.88	V	53.98	-4.10	Peak	1.33	183	
6382.46	--	V	53.98	--	Peak	--	--	No Emissions Found
7294.24	55.10	V	73.98	-18.88	Peak	1.39	207	
7294.24	31.44	V	53.98	-22.54	Avg	1.39	207	
8206.02	--	V	53.98	--	Peak	--	--	No Emissions Found
9117.8	54.19	V	73.98	-19.79	Peak	1.09	140	
9117.8	30.53	V	53.98	-23.45	Avg	1.09	140	

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

HARMONIC EMISSIONS MID CHANNEL HORIZONTAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1837.56	47.68	H	53.98	-6.30	Peak	1.44	180	
2756.34	--	H	53.98	--	Peak	--	--	No Emissions Found
3675.12	51.79	H	53.98	-2.19	Peak	1.26	193	
4593.9	--	H	53.98	--	Peak	--	--	No Emissions Found
5512.68	50.04	H	53.98	-3.94	Peak	1.11	217	
6431.46	--	H	53.98	--	Peak	--	--	No Emissions Found
7350.24	51.38	H	53.98	-2.60	Peak	1.47	213	
8269.02	--	H	53.98	--	Peak	--	--	No Emissions Found
9187.8	53.58	H	73.98	-20.40	Peak	1.32	175	
9187.8	34.64	H	53.98	-19.34	Avg	1.32	175	

Test distance
3 meter



HARMONIC EMISSIONS MID CHANNEL VERTICAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1837.56	47.80	V	53.98	-6.18	Peak	1.57	191	
2756.34	--	V	53.98	--	Peak	--	--	No Emissions Found
3675.12	59.73	V	73.98	-14.25	Peak	1	164	
3675.12	40.87	V	53.98	-13.11	Avg	1	164	
4593.9	--	V	53.98	--	Peak	--	--	No Emissions Found
5512.68	51.18	V	53.98	-2.80	Peak	1.08	201	
6431.46	--	V	53.98	--	Peak	--	--	No Emissions Found
7350.24	49.40	V	53.98	-4.58	Peak	2.13	360	
8269.02	--	V	53.98	--	Peak	--	--	No Emissions Found
9187.8	52.13	V	53.98	-1.85	Peak	1.07	181	
9187.8	38.38	V	53.98	-15.60	Avg	1.07	181	

Test distance
3 meter



HARMONIC EMISSIONS HIGH CHANNEL HORIZONTAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1839.56	47.82	H	53.98	-6.16	Peak	1.42	181	
2759.34	--	H	53.98	--	Peak	--	--	No Emissions Found
3679.12	51.90	H	53.98	-2.08	Peak	1.26	194	
4598.9	--	H	53.98	--	Peak	--	--	No Emissions Found
5518.68	49.71	H	53.98	-4.27	Peak	1.27	183	
6438.46	--	H	53.98	--	Peak	--	--	No Emissions Found
7358.24	50.71	H	53.98	-3.27	Peak	1.14	172	
8278.02	--	H	53.98	--	Peak	--	--	No Emissions Found
9197.8	50.04	H	53.98	-3.94	Peak	1.01	205	

Test distance
3 meter



HARMONIC EMISSIONS HIGH CHANNEL VERTICAL

FCC 15.249

Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Tested By: Matt Harrison

Freq. (MHz)	Level (dBuV)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
1839.56	48.33	V	53.98	-5.65	Peak	1.16	171	
2759.34	--	V	53.98	--	Peak	--	--	No Emissions Found
3679.12	59.84	V	73.98	-14.14	Peak	1.00	27	
3679.12	40.59	V	53.98	-13.39	Avg	1.00	27	
4598.9	--	V	53.98	--	Peak	--	--	No Emissions Found
5518.68	51.60	V	53.98	-2.38	Peak	1.00	202	
6438.46	--	V	53.98	--	Peak	--	--	No Emissions Found
7358.24	53.82	V	73.98	-20.16	Peak	1.17	210	
7358.24	34.83	V	53.98	-19.15	Avg	1.17	210	
8278.02	--	V	53.98	--	Peak	--	--	No Emissions Found
9197.8	56.63	V	73.98	-17.35	Peak	1.01	121	
9197.8	37.50	V	53.98	-16.48	Avg	1.01	121	

Test distance
3 meter



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

***EMISSIONS RADIATED OUTSIDE OF THE FUNDAMENTAL
FREQUENCY BAND***

DATA SHEETS



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400

BAND EDGES

FCC 15.249


Company: Nortek
EUT: Door Chime Button
Model: SW-ATT-DB (Fixed Mode)

Date: 1/13/2015
Lab: R
Test ENG: Matt Harrison


Compatible Electronics, Inc. FAC-3 (Lab R)

Freq. (MHz)	Level (dBμV/m)	Pol	Limit (dBμV)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
902.00	30.97	H	46.00	-15.03	Peak	1	338	No Marker Delta Method
934.01	31.61	H	46.00	-14.39	Peak	1	300	No Marker Delta Method
899.29	31.05	V	46.00	-14.95	Peak	1.1	160	No Marker Delta Method
931.61	31.61	V	46.00	-14.39	Peak	1.08	165	No Marker Delta Method

Test distance
3 meter

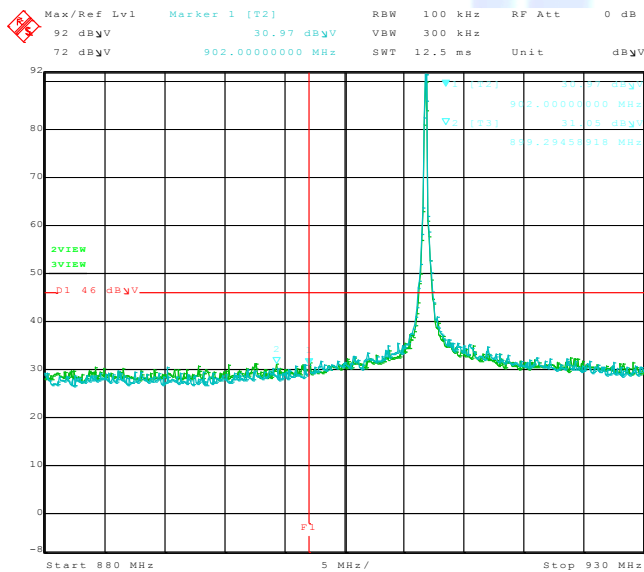

Title: SW-ATT-DB.
Comment A: Lower Band Edge.
Date: 13.JAN.2015 08:56:55

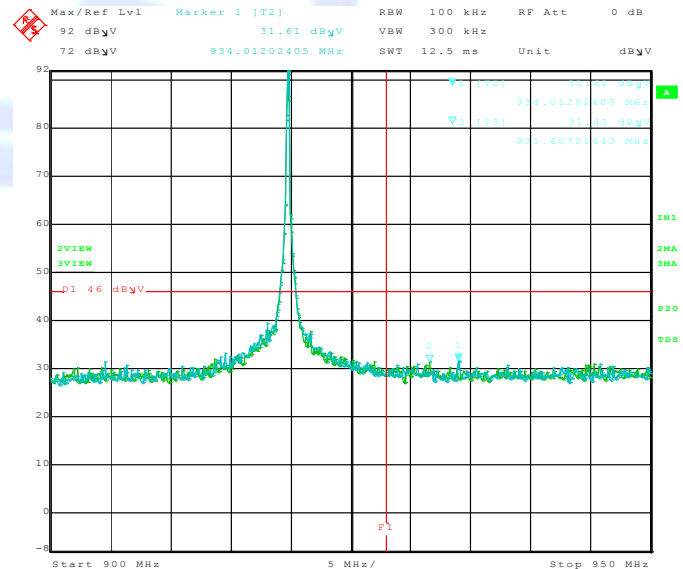

Title: SW-ATT-DB.
Comment A: Upper Band Edge.
Date: 13.JAN.2015 09:28:03



Brea Division
114 Olinda Drive
Brea, CA 92823
(714) 579-0500

Agoura Division
2337 Troutdale Drive
Agoura, CA 91301
(818) 597-0600

Silverado Division
19121 El Toro Road
Silverado, CA 92676
(949) 589-0700

Lake Forest Division
20621 Pascal Way
Lake Forest, CA 92630
(949) 587-0400