

# VARIANT FCC TEST REPORT

## (PART 22)



Applicant:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States

Manufacturer or Supplier:	Honeywell International Inc Honeywell Safety and Productivity Solutions
Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Product:	Mobile Computer
Brand Name:	Honeywell
Model Name:	CT45-L1N-G
FCC ID:	HD5-CT45L1NG
Date of tests:	Oct. 25, 2021 ~ Jan. 17, 2022

The tests have been carried out according to the requirements of the following standard:

- ☒ **FCC PART 22, Subpart H**    ☒ **FCC Part 2**  
☒ **ANSI/TIA/EIA-603-D**    ☒ **ANSI C63.26-2015**  
☒ **ANSI/TIA/EIA-603-E**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
	
Date: Jan. 18, 2022	Date: Jan. 18, 2022

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>3</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>4</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
1.2 TEST SITE AND INSTRUMENTS .....	6
<b>2 GENERAL INFORMATION .....</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT .....	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST .....	10
2.3 DESCRIPTION OF SUPPORT UNITS .....	11
2.4 EUT OPERATING CONDITIONS.....	11
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
<b>3 TEST TYPES AND RESULTS.....</b>	<b>12</b>
3.1 OUTPUT POWER MEASUREMENT .....	12
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT .....	12
3.1.2 TEST PROCEDURES .....	12
3.1.3 TEST SETUP .....	13
3.1.4 TEST RESULTS .....	13
3.2 RADIATED EMISSION MEASUREMENT .....	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	16
3.2.2 TEST PROCEDURES .....	16
3.2.3 DEVIATION FROM TEST STANDARD .....	16
3.2.4 TEST SETUP .....	17
3.2.5 TEST RESULTS .....	18
<b>3 PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>26</b>
<b>4 INFORMATION ON THE TESTING LABORATORIES .....</b>	<b>26</b>
<b>5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>27</b>

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P21080006RF15	Original release	Sep. 01, 2021
W7L-P21040030RF15	Based on the original report W7L-P21080006RF15 Changed LCM to screen HD(1280*720), removing a 2nd BLE and Supercap, Increase the RTC battery, Detail refer to Product Equality Declaration	Sep. 09, 2021
W7L-P21110009RF15	Based on the original report W7L-P21040030RF15 Changing components, add a new screen , added band CA_41C by Software.	Nov. 09, 2021
W7L-211129W003RF15	Based on the original report W7L-P21110009RF15 Changing components.	Jan. 18, 2022

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
2.1046 22.913 (a)	Effective Radiated Power	Compliance (See Note 1)
2.1055 22.355	Frequency Stability	(See Note 2)
2.1049 22.917 (b)	Occupied Bandwidth	(See Note 2)
22.913 (d)	Peak to average ratio*	(See Note 2)
22.917	Band Edge Measurements	(See Note 2)
2.1051 22.917	Conducted Spurious Emissions	(See Note 2)
2.1053 22.917	Radiated Spurious Emissions	Compliance (See Note 1)

**NOTE:**

\* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

1. Per the change notice provide by manufactory, the difference is changing components, all the change no effect any RF parameter, Therefore only verify the power and radiated emission worse case. The report only show the verify test data.
2. Please refer to original report W7L-P21110009RF15.

## 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	$\pm 2.06\text{dB}$
Radiated emissions (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Apr. 22,21	Apr. 21,22
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Jun. 03,21	Jun. 02,22
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Mar. 05,21	Mar. 04,22
Horn Antenna	ETS-LINDGREN	3117	00168728	Apr. 02,21	Apr. 01,22
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Aug. 25, 21	Aug. 24, 22
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25,21	Feb. 24,22
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jun. 02,21	Jun. 01,22
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jun. 03,21	Jun. 02,22
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Apr. 22,21	Apr. 21,22
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V 7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jun. 03,21	Jun. 02,22
Power Meter	Anritsu	ML2495A	1506002	Apr. 07,21	Apr. 06,22
Power Sensor	Anritsu	MA2411B	1339352	May. 07,21	May. 06,22
Temperature Chamber	ESPEC	SH-242	93000855	Jun. 02,21	Jun. 01,22
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 05,21	Mar. 04,22
Power Divider	MCLI/USA	PS2-15	24880	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
  2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
  3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Mobile Computer	
<b>BRAND NAME</b>	Honeywell	
<b>MODEL NAME</b>	CT45-L1N-G	
<b>NOMINAL VOLTAGE</b>	3.85Vdc (Lithium-ion cell, battery)	
<b>MODULATION TYPE</b>	<b>GSM/GPRS/EDGE</b>	GMSK, 8PSK
	<b>WCDMA</b>	BPSK,QPSK
	<b>LTE</b>	QPSK, 16QAM, 64QAM
<b>FREQUENCY RANGE</b>	<b>GSM/GPRS/EDGE</b>	824.2MHz ~ 848.8MHz
	<b>WCDMA</b>	826.4MHz ~ 846.6MHz
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	824.7MHz ~ 848.3MHz
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	825.5MHz ~ 847.5MHz
	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	826.5MHz ~ 846.5MHz
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	829MHz ~ 844MHz
	<b>LTE Band 26 (Channel Bandwidth: 1.4MHz)</b>	814.7MHz ~ 848.3MHz
	<b>LTE Band 26 (Channel Bandwidth: 3MHz)</b>	815.5MHz ~ 847.5MHz
	<b>LTE Band 26 (Channel Bandwidth: 5MHz)</b>	816.5MHz ~ 846.5MHz
	<b>LTE Band 26 (Channel Bandwidth: 10MHz)</b>	819MHz ~ 844MHz
	<b>LTE Band 26 (Channel Bandwidth: 15MHz)</b>	821.5MHz ~ 841.5MHz
<b>MAX. ERP POWER</b>	<b>GSM</b>	835.60mW
	<b>EDGE</b>	214.78mW
	<b>WCDMA</b>	119.12mW
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	111.43mW
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	110.41mW
	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	110.66mW
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	111.94mW



**BUREAU  
VERITAS**

Test Report No.: W7L-211129W003RF15

<b>MAX. ERP POWER</b>	<b>LTE Band 26 (Channel Bandwidth: 1.4MHz)</b>	215.77mW
	<b>LTE Band 26 (Channel Bandwidth: 3MHz)</b>	213.30mW
	<b>LTE Band 26 (Channel Bandwidth: 5MHz)</b>	215.28mW
	<b>LTE Band 26 (Channel Bandwidth: 10MHz)</b>	215.77mW
	<b>LTE Band 26 (Channel Bandwidth: 15MHz)</b>	218.27mW
<b>EMISSION DESIGNATOR GOGN</b>	<b>GSM</b>	240KGXW
	<b>EDGE</b>	240KG7W
	<b>WCDMA</b>	4M15F9W
	<b>LTE Band 5 (Channel Bandwidth: 1.4MHz)</b>	QPSK: 1M09G7D
		16QAM: 1M09W7D
		64QAM: 1M09W7D
	<b>LTE Band 5 (Channel Bandwidth: 3MHz)</b>	QPSK: 2M70G7D
		16QAM: 2M68W7D
		64QAM: 2M69W7D
	<b>LTE Band 5 (Channel Bandwidth: 5MHz)</b>	QPSK: 4M49G7D
		16QAM: 4M48W7D
		64QAM: 4M58W7D
	<b>LTE Band 5 (Channel Bandwidth: 10MHz)</b>	QPSK: 8M95G7D
		16QAM: 8M95W7D
		64QAM: 8M95W7D
	<b>LTE Band 26 (Channel Bandwidth: 1.4MHz)</b>	QPSK: 1M08G7D
		16QAM: 1M09W7D
		64QAM: 1M09W7D
	<b>LTE Band 26 (Channel Bandwidth: 3MHz)</b>	QPSK: 2M70G7D
		16QAM: 2M69W7D
		64QAM: 2M69W7D
	<b>LTE Band 26 (Channel Bandwidth: 5MHz)</b>	QPSK: 4M47G7D
		16QAM: 4M48W7D
		64QAM: 4M49W7D
	<b>LTE Band 26 (Channel Bandwidth: 10MHz)</b>	QPSK: 8M95G7D
		16QAM: 8M94W7D
		64QAM: 8M94W7D
	<b>LTE Band 26 (Channel Bandwidth: 15MHz)</b>	QPSK: 13M4G7D
		16QAM: 13M4W7D
		64QAM: 13M5W7D
<b>ANTENNA TYPE</b>	PIFA Antenna with -0.56dBi gain for GSM850/ WCDMA5/LTE band 5 PIFA Antenna with 2.67dBi gain for LTE band 26	
<b>HW VERSION</b>	V1.0	





<b>SW VERSION</b>	OS.11.002-HON.11.002
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB CUP: unshielded without ferrite, 1.25 meter Earphone cable: unshielded without ferrite, 1.27 meter
<b>EXTREME TEMPERATURE</b>	-10-55 °C
<b>EXTREME VOLTAGE</b>	3.4V- 4.4V

**NOTE:**

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- This product includes the following six SKU which hardware is exactly same, the difference is described as following, Sample 1 was full test, sample 2 verify the worst case, check worst case Radiated emission:


SAMPLE	EUT CONFIGURATION INFORMATION
1	SKU ID:CT45-L1N-27D120G ,Assembled Scanner Imager: <a href="#">7-S0703</a>
2	SKU ID:CT45-L1N-28D120G ,Assembled Scanner Imager: <a href="#">8 - N6803/S0803</a>
3	SKU ID: CT45-L1N-28D120T, Assembled with Scanner: 8 - N6803/S0803 for Turkey Only
4	SKU ID: CT45-L1N-27D120T, Assembled with Scanner: 7-S0703 for Turkey Only
5	SKU ID:CT45-L1N-28D220C, Assembled with Scanner: 8 - N6803/S0803 for China Only with Android non-GMS
6	SKU ID:CT45-L1N-27D220C, Assembled with Scanner: 7-S0703 for China Only with Android non-GMS

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**List of Accessory:**

ACCESSORIES	BRAND	MODEL	SPECIFICATION
Battery	Honeywell	CT50-BTSC	Capacity : 3.85vdc 4020mAh
AC Adapter	HONOR	ADS-12B-06 05010E	I/P:100-240Vac, 0.3A O/P: 5Vdc, 2A
USB CUP	Honeywell	CT40-SN	Shielded, 1.25meter
Earphone	VIVO	N/A	Shielded, 1.27meter
LCD Panel 1	TZD	TS5099	5.0" HD(1280*720)
LCD Panel 2	TIANMA	TM050JVZG53	5.0" HD(1280*720)

## 2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

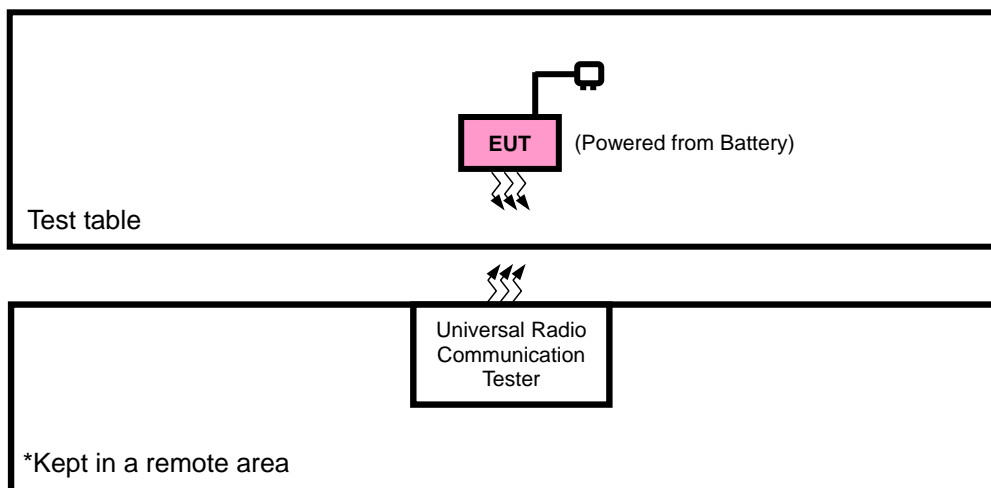

## 2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m

## 2.4 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

## 2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 22**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-D**

**ANSI/TIA/EIA-603-E**

**ANSI C63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

### 3 TEST TYPES AND RESULTS

#### 3.1 OUTPUT POWER MEASUREMENT

##### 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

##### 3.1.2 TEST PROCEDURES

###### EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

###### CONDUCTED POWER MEASUREMENT:

The EUT was set up for the maximum power with WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

### 3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



### 3.1.4 TEST RESULTS

Retested Data(For reference only,it's lower than the original report)

#### CONDUCTED OUTPUT POWER (dBm)

Band	GSM850			Max. Tune-up Power
Channel	128	189	251	
Frequency	824.2	836.4	848.8	
GSM (GMSK, 1Tx-slot)	31.84	31.89	31.89	32.0
GPRS (GMSK, 1Tx-slot)	31.79	31.83	<b>31.91</b>	32.0
GPRS (GMSK, 2Tx-slot)	30.33	30.21	30.40	30.5
GPRS (GMSK, 3Tx-slot)	27.33	27.33	27.43	28.0
GPRS (GMSK, 4Tx-slot)	25.26	25.29	25.32	25.5
EDGE (8PSK, 1Tx-slot)	25.82	25.90	25.97	26.5
EDGE (8PSK, 2Tx-slot)	24.73	24.56	24.76	25.0
EDGE (8PSK, 3Tx-slot)	22.43	22.61	22.56	23.0
EDGE (8PSK, 4Tx-slot)	20.93	20.83	20.81	21.0

Band	WCDMA V			Max. Tune-up Power
Channel	4132	4182	4233	
Frequency	826.4	836.4	846.6	
RMC 12.2K	23.37	23.31	<b>23.42</b>	24.0
HSDPA Subtest-1	22.46	22.37	22.48	23.0
HSDPA Subtest-2	22.40	22.31	22.49	23.0
HSDPA Subtest-3	22.02	21.91	22.02	22.5
HSDPA Subtest-4	21.91	21.82	22.01	22.5
DC-HSDPA Subtest-1	22.45	22.32	22.47	23.0
DC-HSDPA Subtest-2	22.42	22.34	22.43	23.0
DC-HSDPA Subtest-3	21.92	21.81	21.98	22.5
DC-HSDPA Subtest-4	21.89	21.83	21.96	22.5
HSUPA Subtest-1	22.50	22.34	22.55	23.0
HSUPA Subtest-2	20.47	20.41	20.54	21.0
HSUPA Subtest-3	21.55	21.42	21.60	22.0
HSUPA Subtest-4	20.52	20.38	20.49	21.0
HSUPA Subtest-5	22.50	22.43	22.56	23.0



**LTE Band 5**

Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600	MPR
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz	
5/ 10	QPSK	1	0	22.87	22.67	22.75	0
		1	24	22.72	22.40	22.60	0
		1	49	<b>23.10</b>	22.87	23.10	0
		25	0	21.95	21.78	21.80	1
		25	12	21.74	21.81	21.71	1
		25	25	21.93	21.76	21.90	1
		50	0	21.79	21.77	21.70	1
	16QAM	1	0	22.14	22.06	22.17	1
		1	24	21.82	21.86	21.79	1
		1	49	22.42	22.10	22.30	1
		25	0	20.69	20.61	20.57	2
		25	12	20.82	20.80	20.70	2
		25	25	20.86	20.78	20.89	2
		50	0	20.87	20.70	20.78	2
	64QAM	1	0	20.95	20.87	20.98	2
		1	24	20.75	20.79	20.69	2
		1	49	21.15	21.22	21.21	2
		25	0	19.76	19.59	19.52	3
		25	12	19.77	19.84	19.83	3
		25	25	19.96	19.79	19.72	3
		50	0	19.83	19.81	19.80	3

**LTE BAND 26**

Band/BW	Modulation	RB Size	RB Offset	Low CH 26865	Mid CH 26915	High CH 26965	MPR
				Frequency 831.5 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz	
26/ 15	QPSK	1	0	22.40	22.52	22.55	0
		1	37	22.54	22.32	22.63	0
		1	74	22.57	22.68	<b>22.76</b>	0
		36	0	21.66	21.58	21.74	1
		36	19	21.38	21.32	21.38	1
		36	39	21.34	21.29	21.55	1
		75	0	21.52	21.55	21.65	1
	16QAM	1	0	21.61	21.62	21.75	1
		1	37	21.62	21.61	21.74	1
		1	74	22.06	21.87	22.03	1
		36	0	20.49	20.47	20.67	2
		36	19	20.45	20.33	20.54	2
		36	39	20.02	20.18	20.22	2
		75	0	20.51	20.34	20.61	2
	64QAM	1	0	20.58	20.74	20.78	2
		1	37	20.43	20.42	20.54	2
		1	74	20.93	20.87	20.96	2
		36	0	19.55	19.50	19.69	3
		36	19	19.38	19.44	19.29	3
		36	39	19.13	19.05	19.12	3
		75	0	19.51	19.42	19.57	3

## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to  $-13\text{dBm}$ .

### 3.2.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c.  $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$ .

**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


### 3.2.3 DEVIATION FROM TEST STANDARD

No deviation




### 3.2.4 TEST SETUP

#### < Frequency Range 30MHz~1GHz >

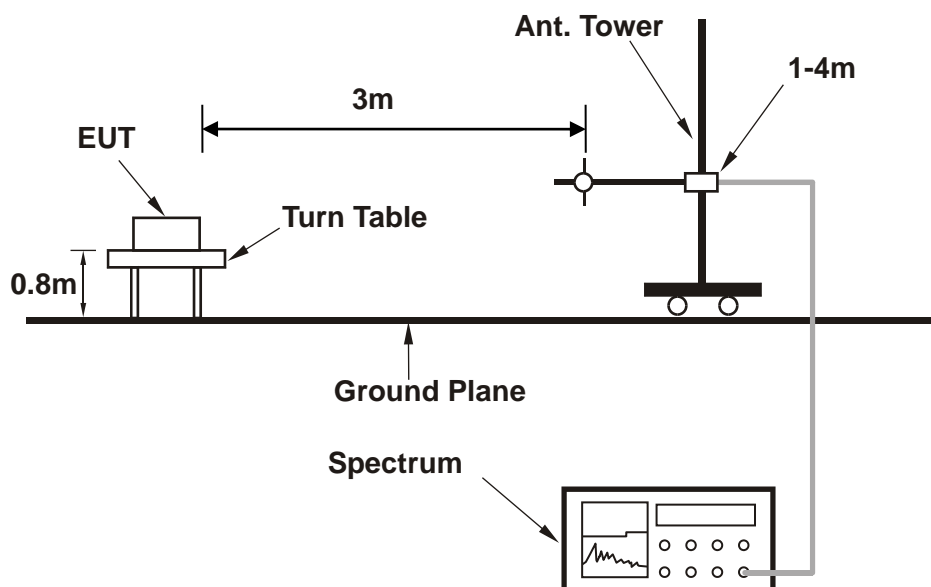

#### <Frequency Range above 1GHz>

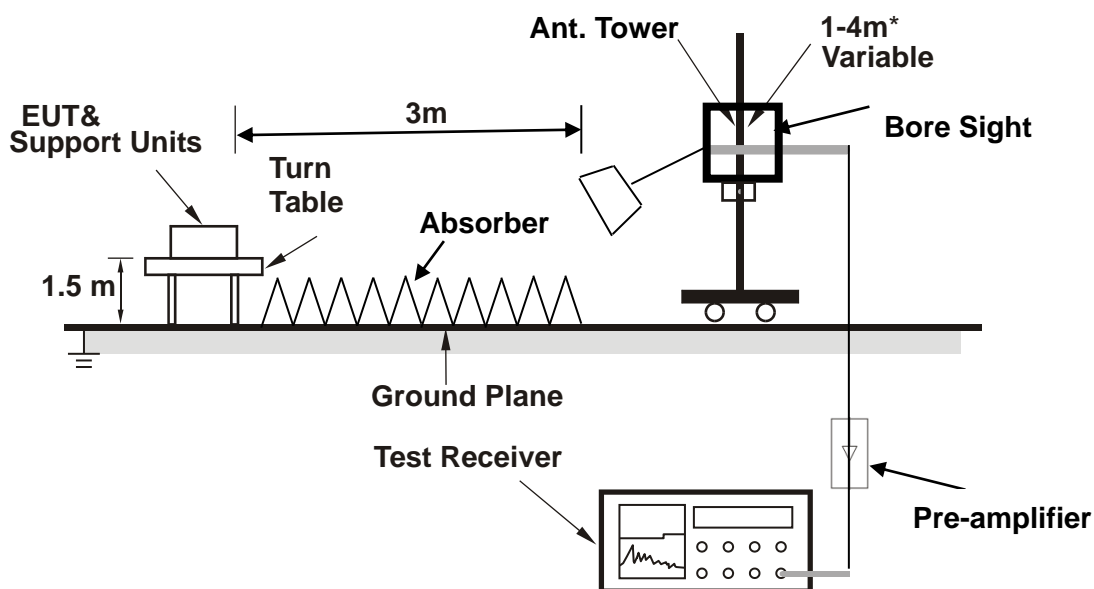

**Note:** Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.2.5 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

GSM 850

CHANNEL: 128


MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	44.550	-20.74	-32.22	-13.00	-7.74	11.48	Peak	Horizontal
2	90.048	-23.45	-31.25	-13.00	-10.45	7.80	Peak	Horizontal
3	175.210	-20.87	-31.24	-13.00	-7.87	10.37	Peak	Horizontal
4	272.580	-27.69	-41.25	-13.00	-14.69	13.56	Peak	Horizontal
5	430.859	-37.71	-55.17	-13.00	-24.71	17.46	Peak	Horizontal
6	492.348	-34.79	-53.35	-13.00	-21.79	18.56	Peak	Horizontal

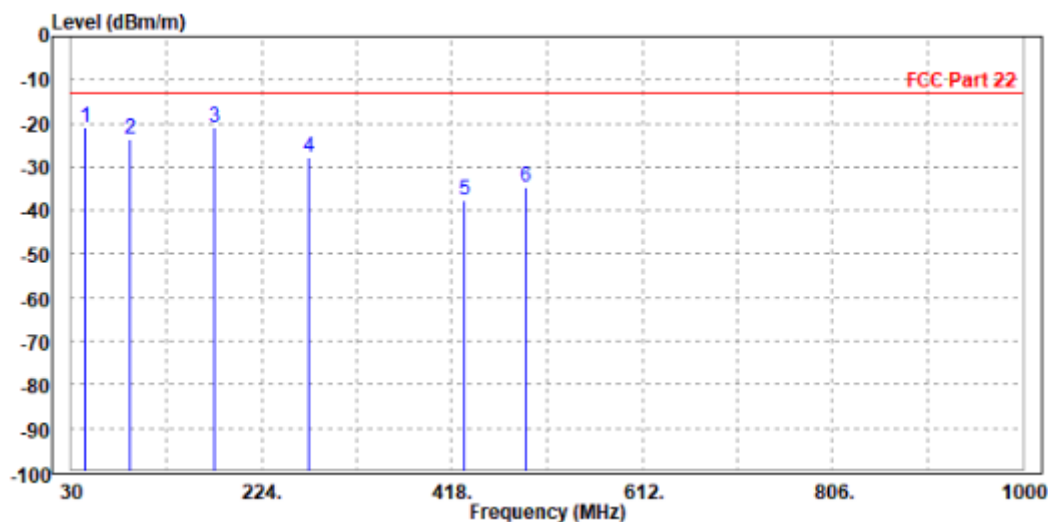

MODE	TX channel 128	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	32.648	-26.45	-45.48	-13.00	-13.45	19.03	Peak	Vertical
2 PP	80.648	-22.17	-30.48	-13.00	-9.17	8.31	Peak	Vertical
3	180.364	-32.23	-42.55	-13.00	-19.23	10.32	Peak	Vertical
4	234.480	-32.13	-45.22	-13.00	-19.13	13.09	Peak	Vertical
5	310.580	-34.82	-50.05	-13.00	-21.82	15.23	Peak	Vertical
6	397.418	-34.40	-51.54	-13.00	-21.40	17.14	Peak	Vertical

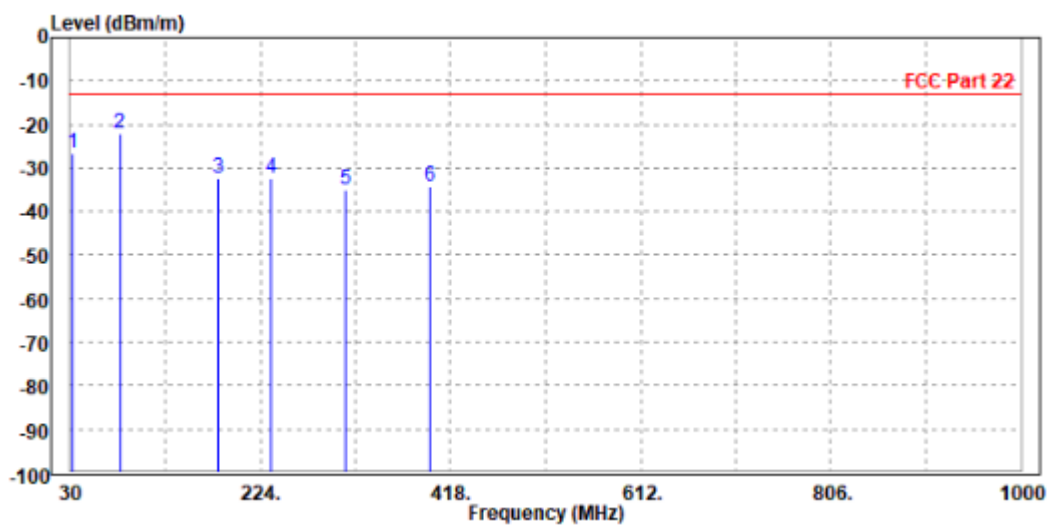



**BUREAU  
VERITAS**

**Test Report No.: W7L-211129W003RF15**

## ABOVE 1GHz DATA


**Note:** For higher frequency, the emission is too low to be detected.

**GSM 850**

**CH 128:**


MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1648.400	-25.11	-28.37	-13.00	-12.11	3.26	Peak	Horizontal
2		2476.000	-37.19	-45.22	-13.00	-24.19	8.03	Peak	Horizontal

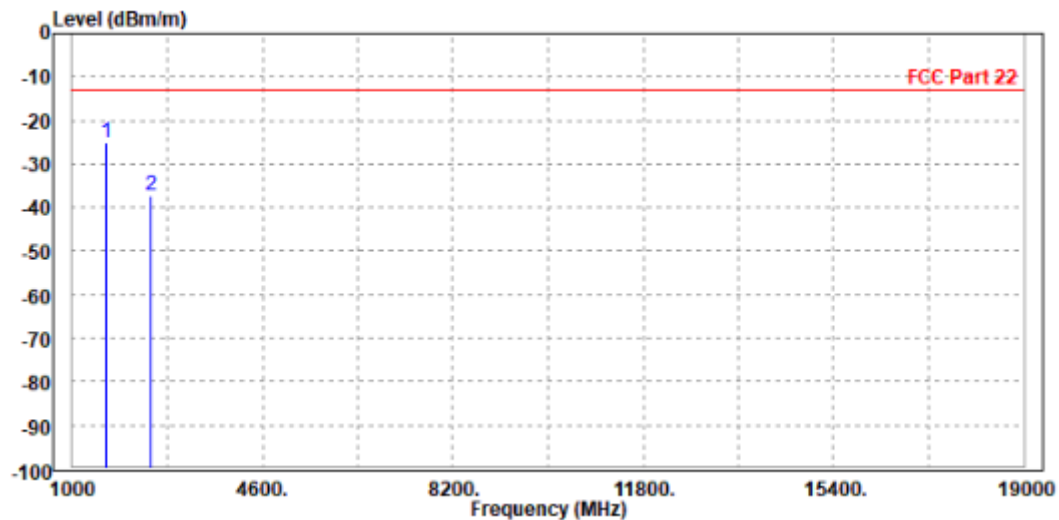

MODE	TX channel 128	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1648.000	-31.44	-34.82	-13.00	-18.44	3.38	Peak	Vertical
2		2476.000	-32.31	-39.35	-13.00	-19.31	7.04	Peak	Vertical

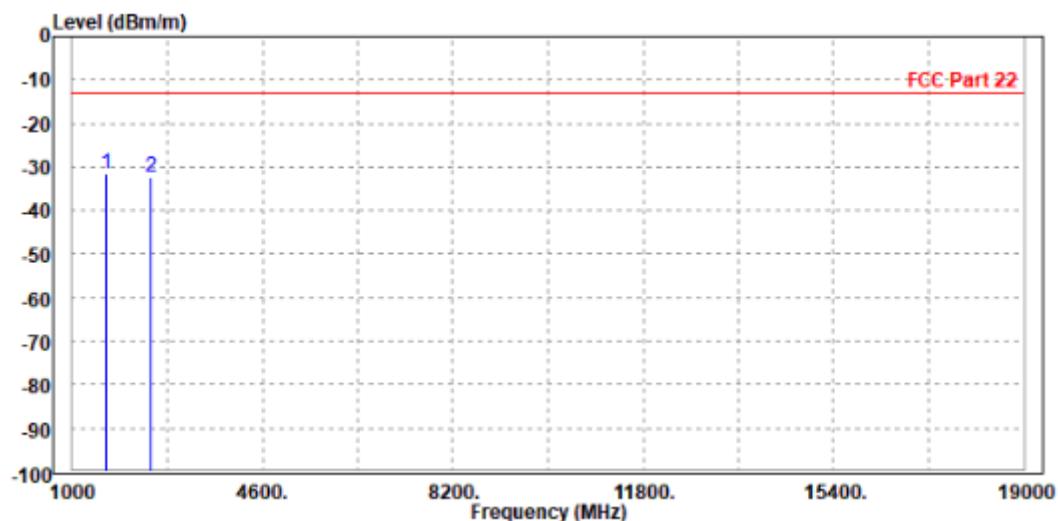

CH 189:


MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1666.000	-26.88	-30.35	-13.00	-13.88	3.47	Peak	Horizontal
2		2509.200	-42.49	-50.55	-13.00	-29.49	8.06	Peak	Horizontal

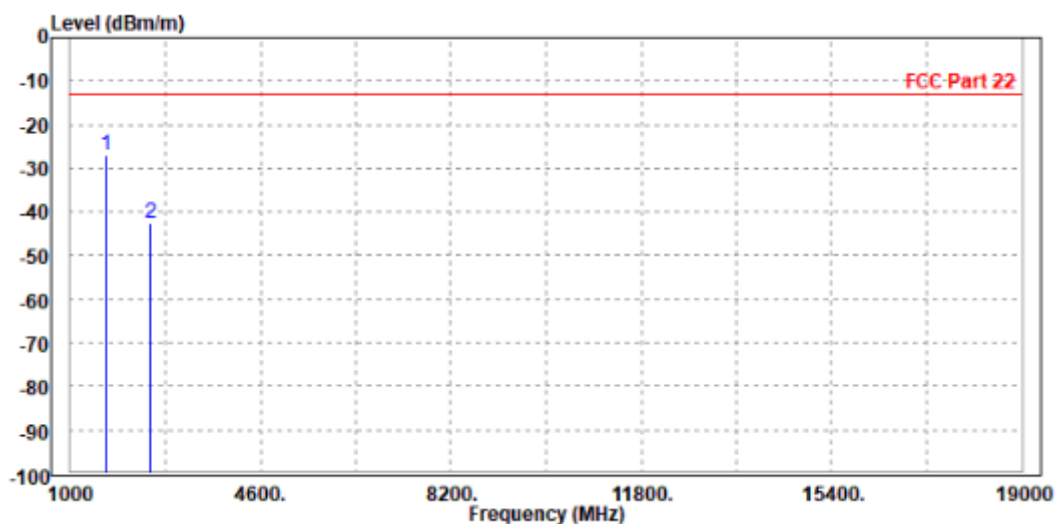

MODE	TX channel 189	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1672.800	-25.74	-29.35	-13.00	-12.74	3.61	Peak	Vertical
2	2512.000	-44.24	-51.35	-13.00	-31.24	7.11	Peak	Vertical

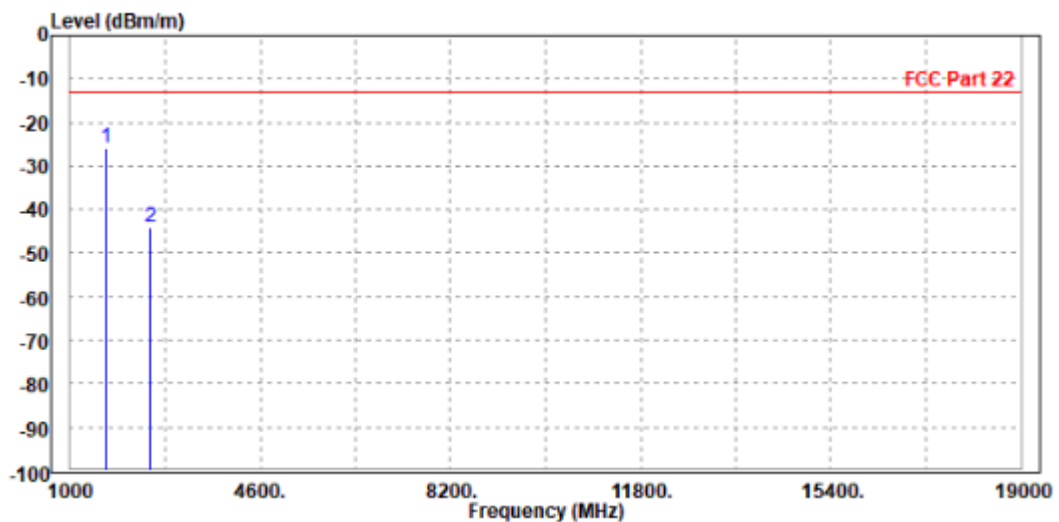

CH 251:

MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1702.000	-38.74	-42.65	-13.00	-25.74	3.91	Peak	Horizontal
2	2546.400	-45.53	-53.64	-13.00	-32.53	8.11	Peak	Horizontal

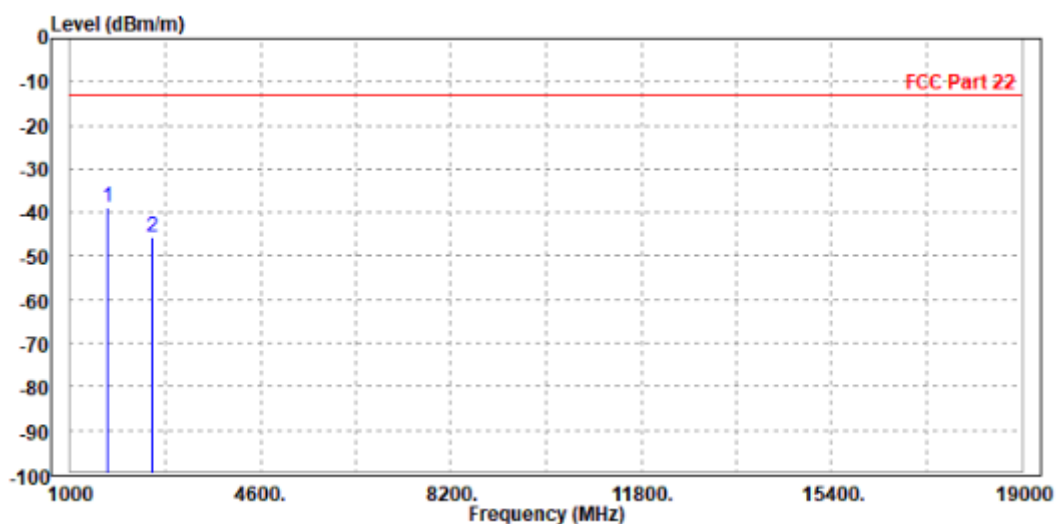



MODE	TX channel 251	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60Hz
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1697.600	-28.52	-32.35	-13.00	-15.52	3.83	Peak	Vertical
2	2548.000	-48.09	-55.31	-13.00	-35.09	7.22	Peak	Vertical

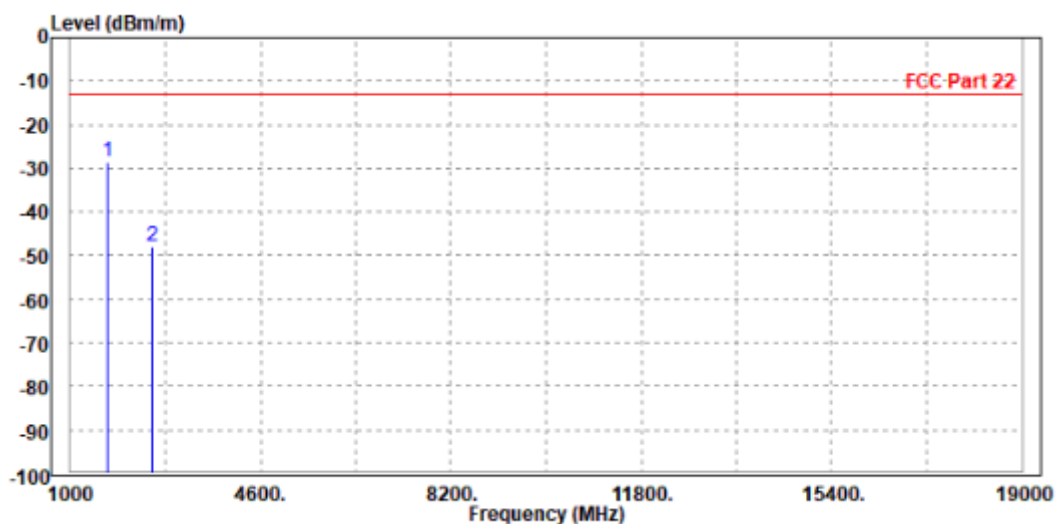



Test Report No.: W7L-211129W003RF15

### 3 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

### 4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Shenzhen EMC/RF Lab:**

Tel: +86-755-88696566

Fax: +86-755-88696577

**Email:** [customerservice.sw@cn.bureauveritas.com](mailto:customerservice.sw@cn.bureauveritas.com)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.

## **5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**