

FCC SAR Test Report

<Hotspot>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front	0.20	0.05	0.31	0.02	0.26	0.53
	Back	0.57	0.07	0.71	0.01	0.65	1.30
	Left side	0.16				0.16	0.16
	Right side	0.30	0.07	0.76	0.02	0.36	1.08
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.26				0.26	0.26
GSM1900	Front	0.68	0.05	0.31	0.02	0.73	1.01
	Back	0.70	0.07	0.71	0.01	0.77	1.43
	Left side	0.09				0.09	0.09
	Right side	0.16	0.07	0.76	0.02	0.23	0.95
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.71				0.71	0.71
WCDMA II	Front	0.62	0.05	0.31	0.02	0.68	0.95
	Back	1.06	0.07	0.71	0.01	1.13	1.78
	Left side	0.07				0.07	0.07
	Right side	0.12	0.07	0.76	0.02	0.18	0.90
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.72				0.72	0.72
WCDMA IV	Front	0.46	0.05	0.31	0.02	0.52	0.79
	Back	1.09	0.07	0.71	0.01	1.17	1.82
	Left side	0.06				0.06	0.06
	Right side	0.12	0.07	0.76	0.02	0.19	0.91
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.64				0.64	0.64
WCDMA V	Front	0.35	0.05	0.31	0.02	0.40	0.68
	Back	0.48	0.07	0.71	0.01	0.55	1.20
	Left side	0.22				0.22	0.22
	Right side	0.34	0.07	0.76	0.02	0.41	1.13
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.37				0.37	0.37
LTE Band 5	Front	0.33	0.05	0.31	0.02	0.38	0.65
	Back	0.18	0.07	0.71	0.01	0.26	0.91
	Left side	0.20				0.20	0.20
	Right side	0.35	0.07	0.76	0.02	0.41	1.13
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.33				0.33	0.33
LTE Band 7	Front	0.97	0.05	0.31	0.02	1.03	1.30
	Back	1.02	0.07	0.71	0.01	1.10	1.75

FCC SAR Test Report

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Left side	0.25				0.25	0.25
	Right side	0.17	0.07	0.76	0.02	0.24	0.96
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	1.02				1.02	1.02
LTE Band 12	Front	0.28	0.05	0.31	0.02	0.33	0.61
	Back	0.07	0.07	0.71	0.01	0.14	0.79
	Left side	0.28				0.28	0.28
	Right side	0.43	0.07	0.76	0.02	0.50	1.22
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.14				0.14	0.14
LTE Band 13	Front	0.25	0.05	0.31	0.02	0.30	0.58
	Back	0.16	0.07	0.71	0.01	0.24	0.89
	Left side	0.15				0.15	0.15
	Right side	0.32	0.07	0.76	0.02	0.38	1.10
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.27				0.27	0.27
LTE Band 14	Front	0.26	0.05	0.31	0.02	0.31	0.58
	Back	0.27	0.07	0.71	0.01	0.34	0.99
	Left side	0.14				0.14	0.14
	Right side	0.29	0.07	0.76	0.02	0.36	1.08
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.20				0.20	0.20
LTE Band 25	Front	0.64	0.05	0.31	0.02	0.69	0.96
	Back	0.95	0.07	0.71	0.01	1.03	1.68
	Left side	0.07				0.07	0.07
	Right side	0.12	0.07	0.76	0.02	0.19	0.91
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.77				0.77	0.77
LTE Band 26	Front	0.30	0.05	0.31	0.02	0.35	0.63
	Back	0.21	0.07	0.71	0.01	0.29	0.94
	Left side	0.29				0.29	0.29
	Right side	0.40	0.07	0.76	0.02	0.47	1.19
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.31				0.31	0.31
LTE Band 30	Front	0.82	0.05	0.31	0.02	0.87	1.15
	Back	0.91	0.07	0.71	0.01	0.99	1.64
	Left side	0.21				0.21	0.21
	Right side	0.12	0.07	0.76	0.02	0.19	0.91
	Top side		0.04	0.15	0.01	0.04	0.16

FCC SAR Test Report

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN	Bluetooth		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
	Bottom side	1.00				1.00	1.00
LTE Band 41	Front	0.57	0.05	0.31	0.02	0.62	0.89
	Back	0.77	0.07	0.71	0.01	0.84	1.50
	Left side	0.17				0.17	0.17
	Right side	0.09	0.07	0.76	0.02	0.15	0.87
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.74				0.74	0.74
LTE Band 66	Front	0.43	0.05	0.31	0.02	0.48	0.75
	Back	0.96	0.07	0.71	0.01	1.03	1.69
	Left side	0.19				0.19	0.19
	Right side	0.09	0.07	0.76	0.02	0.16	0.88
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.61				0.61	0.61
LTE Band 71	Front	0.29	0.05	0.31	0.02	0.34	0.62
	Back	0.52	0.07	0.71	0.01	0.59	1.25
	Left side	0.13				0.13	0.13
	Right side	0.29	0.07	0.76	0.02	0.35	1.07
	Top side		0.04	0.15	0.01	0.04	0.16
	Bottom side	0.16				0.16	0.16

<Extremity>

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN Ant 1	5GHz WLAN Ant 1	Bluetooth Ant 1		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
LTE Band 7	Front Face			0.54		0.00	0.54
	Rear Face			1.03		0.00	1.03
	Right Side			1.67		0.00	1.67
	Top Side			0.23		0.00	0.23
	Bottom Side	1.97				1.97	1.97

Note: Except for verified data, all of the data use for the Simultaneous Transmission analysis on this report was copied from the original report (W7L-P21040030SA02, FCC ID: HD5-CT45L1NG).

<SAR to Peak Location Separation Ratio Analysis>

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula.

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula.

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$



Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

FCC SAR Test Report


< Body worn >

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
WCDMA II	Rear Face	1.06	10	-0.0245	-0.073	-0.203	127.0	1.81	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
WCDMA II	Rear Face	1.06	10	-0.0245	-0.073	-0.203	122.3	1.07	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

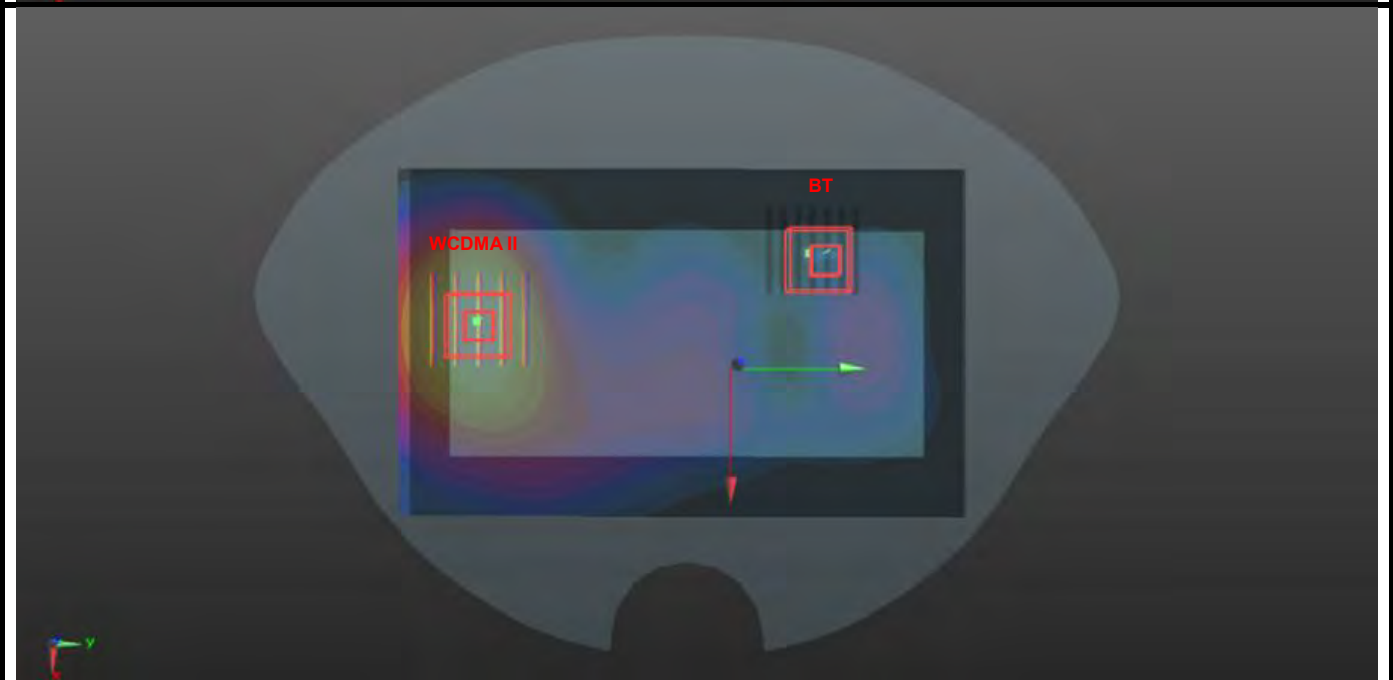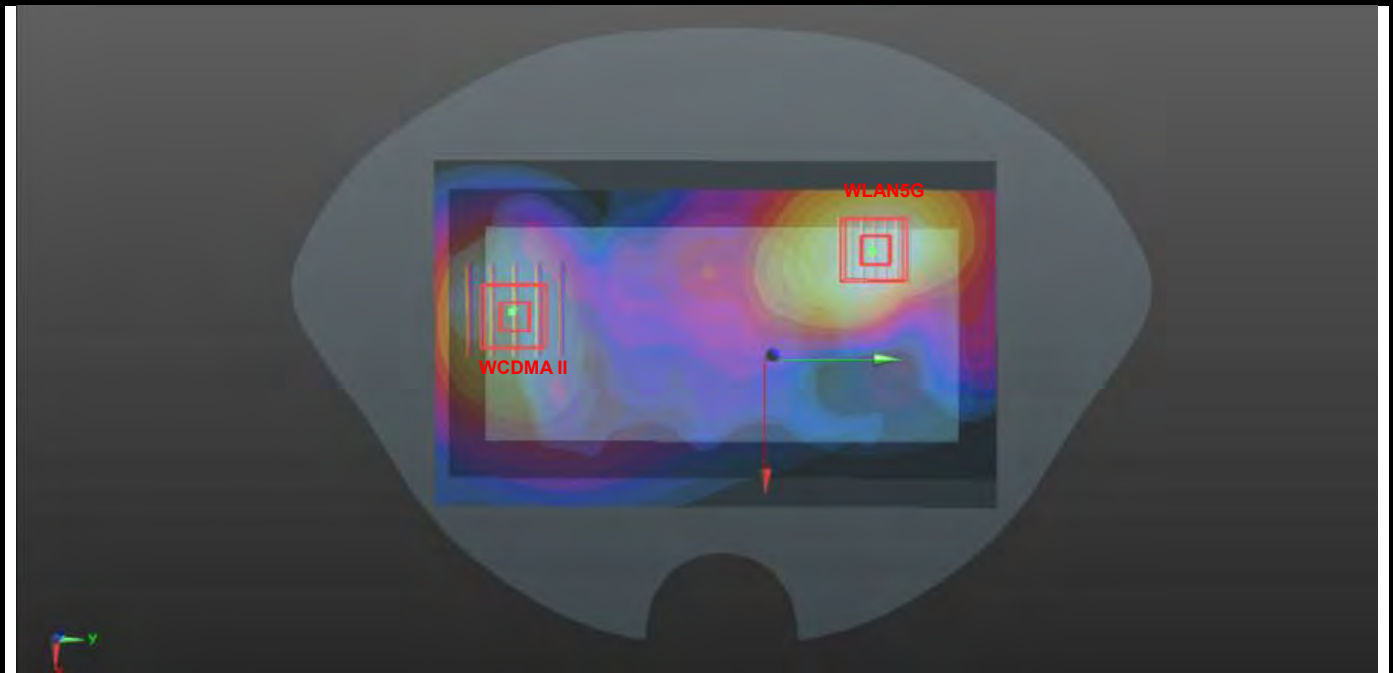



FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
WCDMA IV	Rear Face	1.09	10	-0.023	-0.0745	-0.203	128.8	1.85	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
WCDMA IV	Rear Face	1.09	10	-0.023	-0.0745	-0.203	124.1	1.11	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

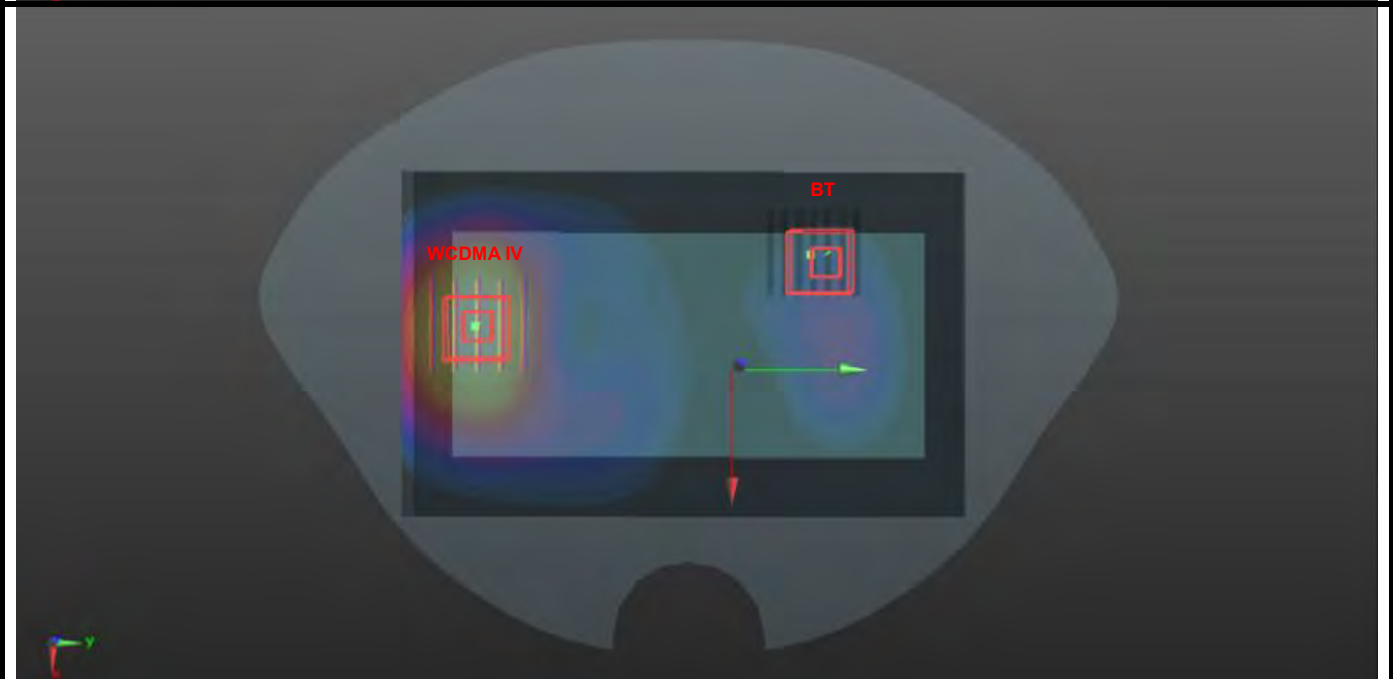



FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 7	Rear Face	1.02	10	-0.0266	-0.0724	-0.203	126.1	1.78	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
LTE Band 7	Rear Face	1.02	10	-0.0266	-0.0724	-0.203	121.3	1.04	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

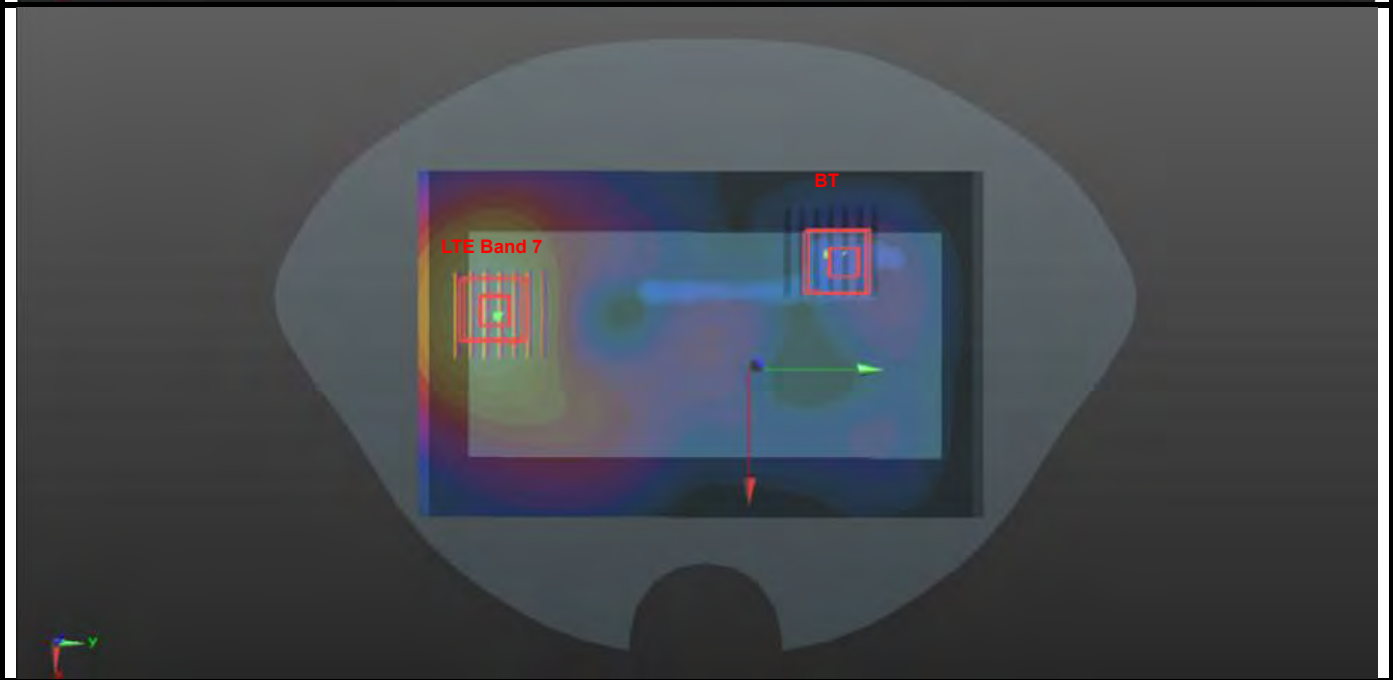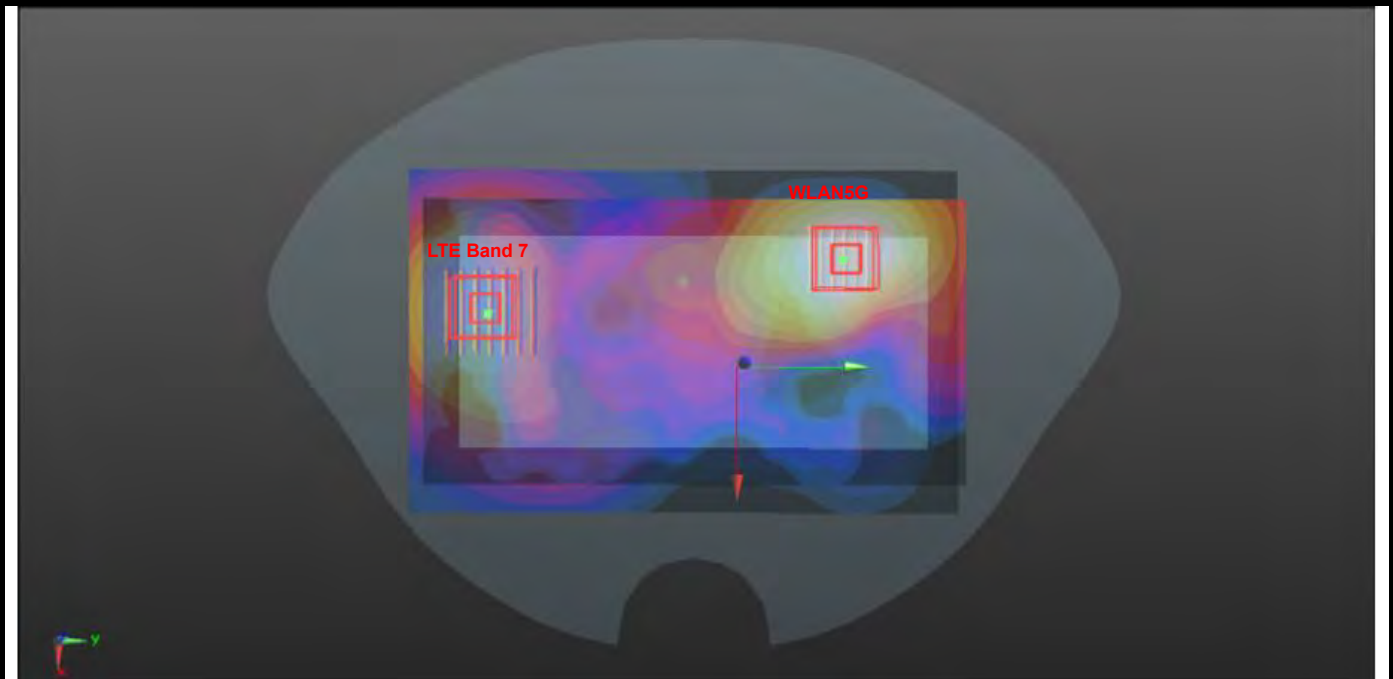


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 25	Rear Face	0.95	10	-0.0335	-0.0745	-0.203	127.3	1.71	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
LTE Band 25	Rear Face	0.95	10	-0.0335	-0.0745	-0.203	122.4	0.97	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

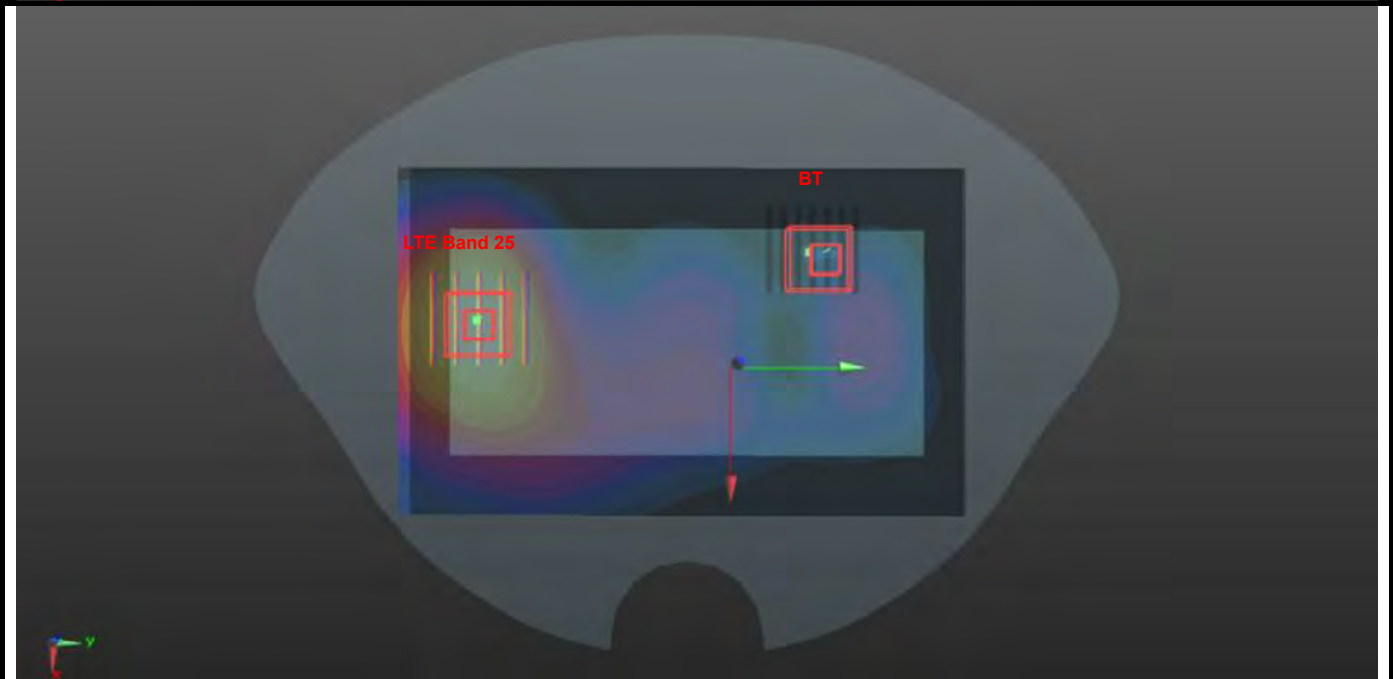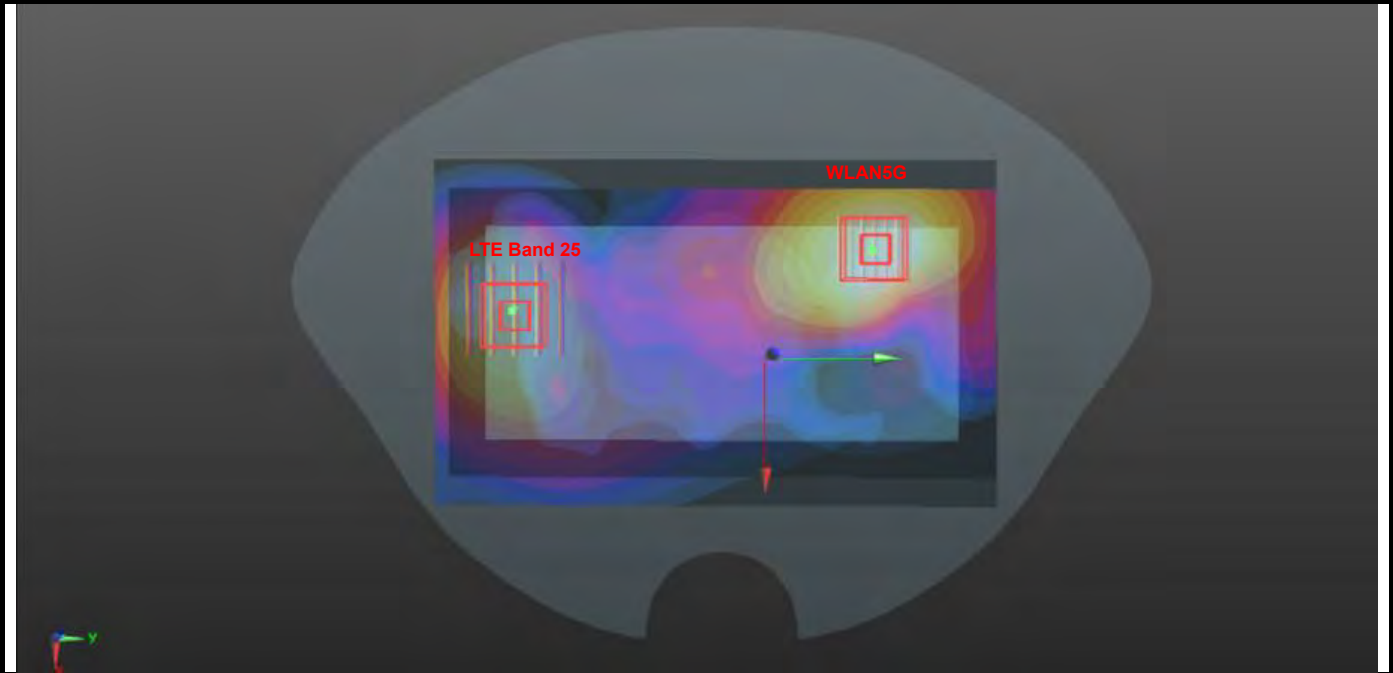



FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 30	Rear Face	0.91	10	-0.0192	-0.0772	-0.203	132.1	1.67	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
LTE Band 30	Rear Face	0.91	10	-0.0192	-0.0772	-0.203	127.5	0.93	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

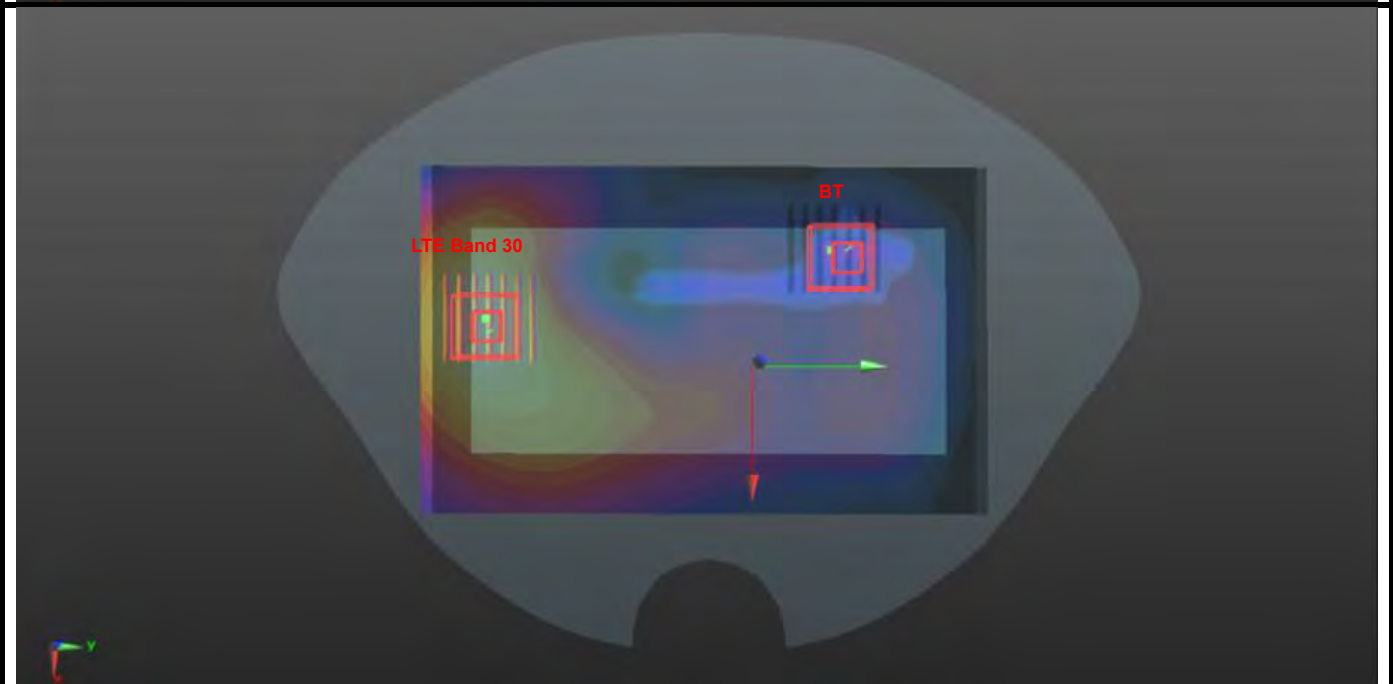


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 66	Rear Face	0.96	10	-0.0275	-0.0745	-0.203	128.0	1.71	0.02	Not required
WLAN5G		0.75	10	-0.046	0.052	-0.21				
LTE Band 66	Rear Face	0.96	10	-0.0275	-0.0745	-0.203	123.3	0.97	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

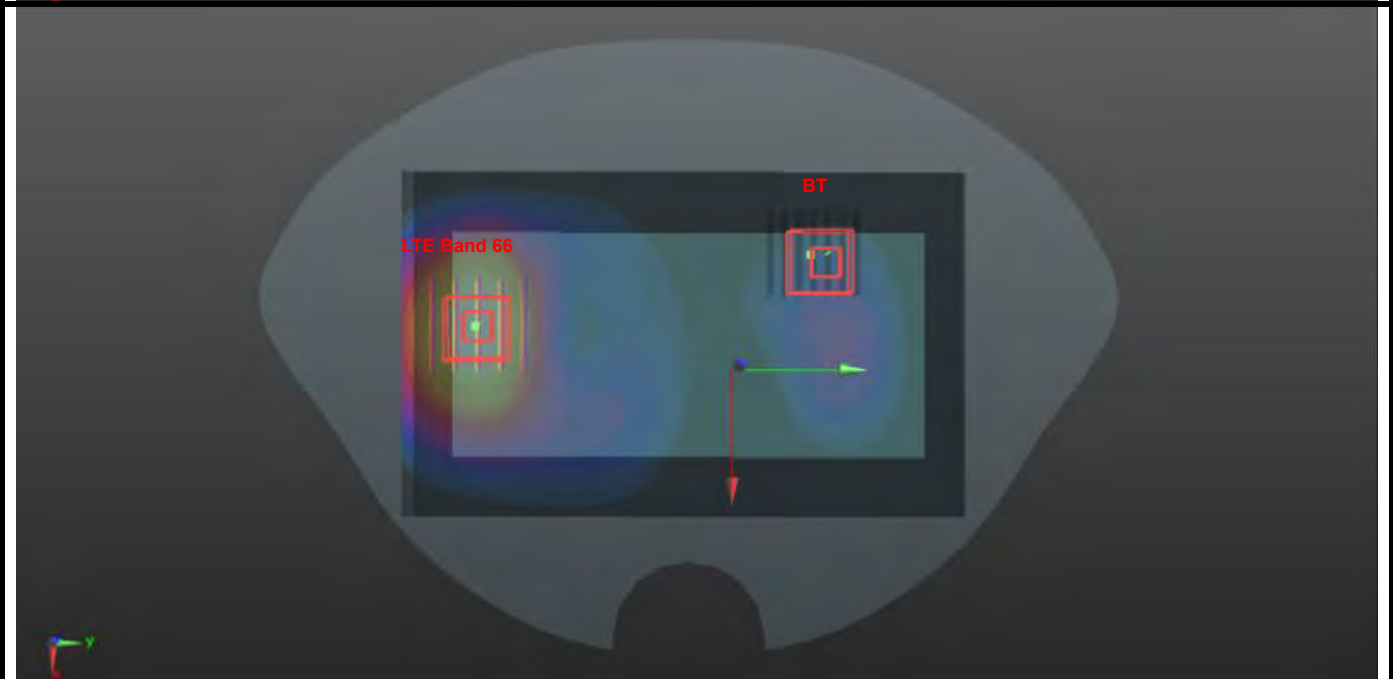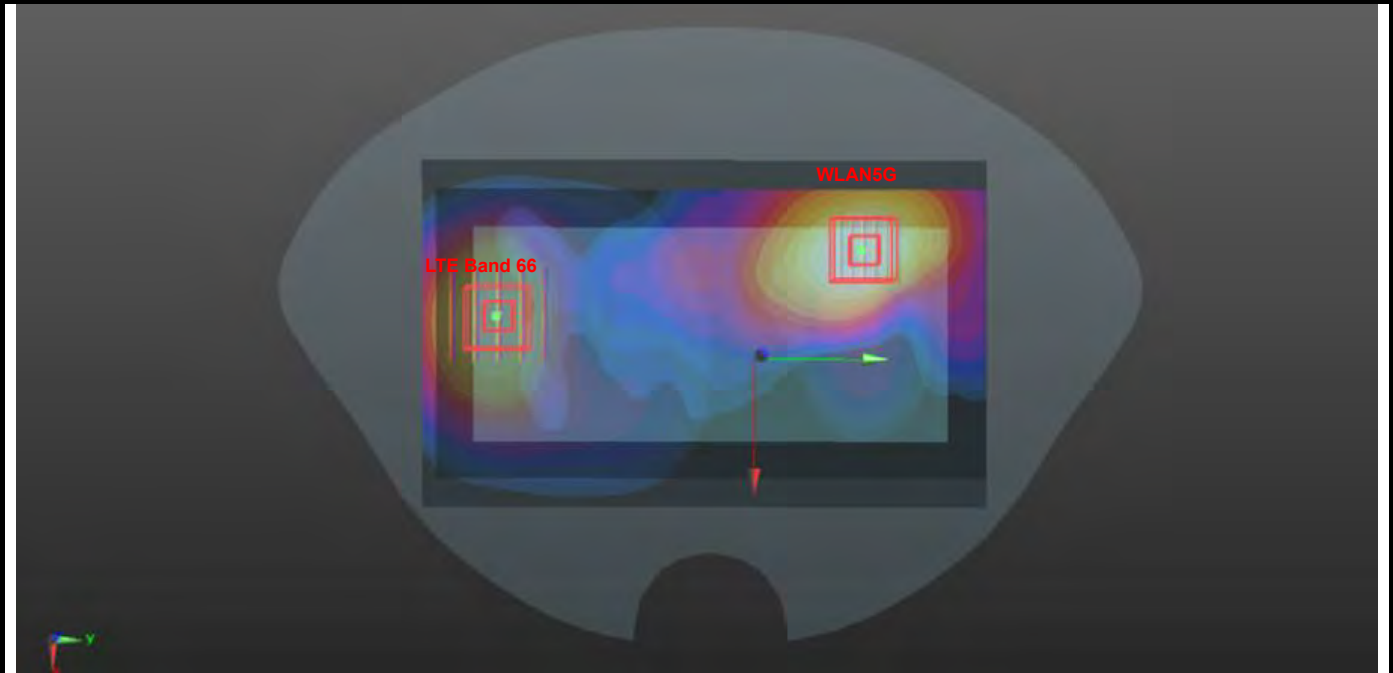



< Hotspot >

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
WCDMA II	Rear Face	1.06	10	-0.0245	-0.073	-0.203	127.0	1.77	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
WCDMA II	Rear Face	1.06	10	-0.0245	-0.073	-0.203	122.3	1.07	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

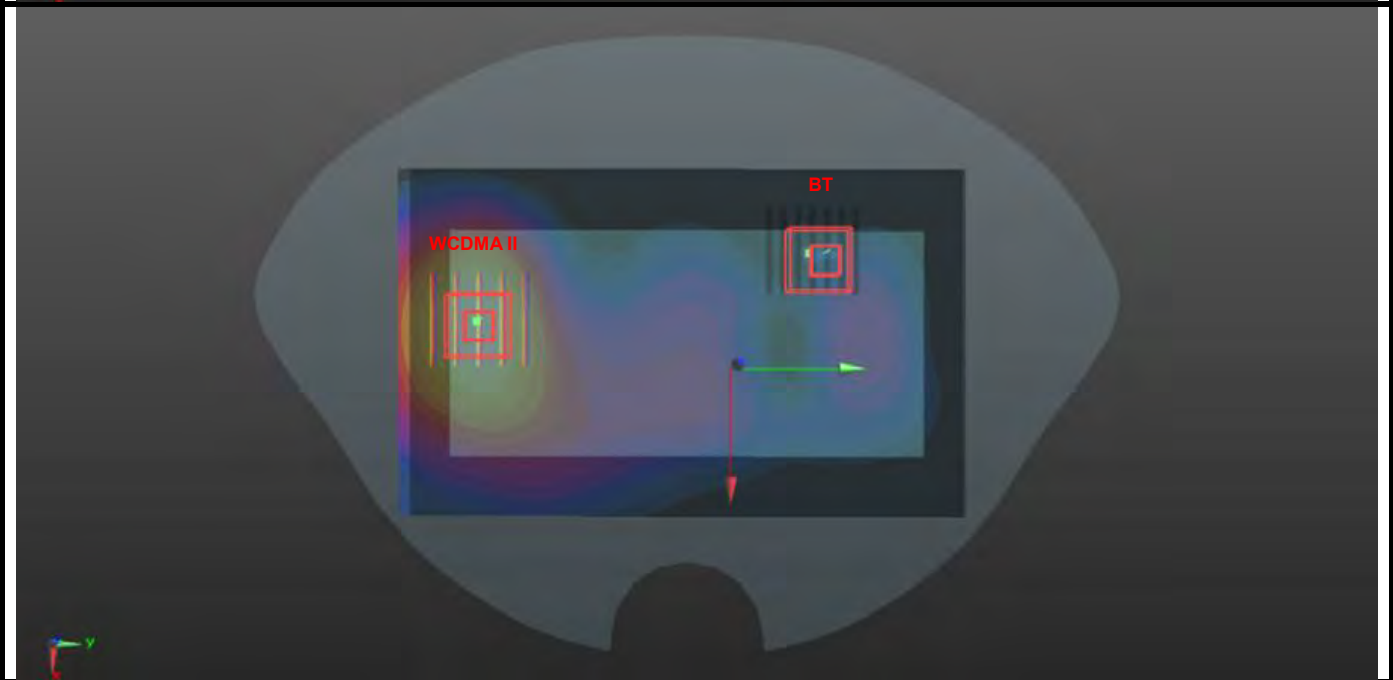


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
WCDMA IV	Rear Face	1.09	10	-0.023	-0.0745	-0.203	128.8	1.80	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
WCDMA IV	Rear Face	1.09	10	-0.023	-0.0745	-0.203	124.1	1.11	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

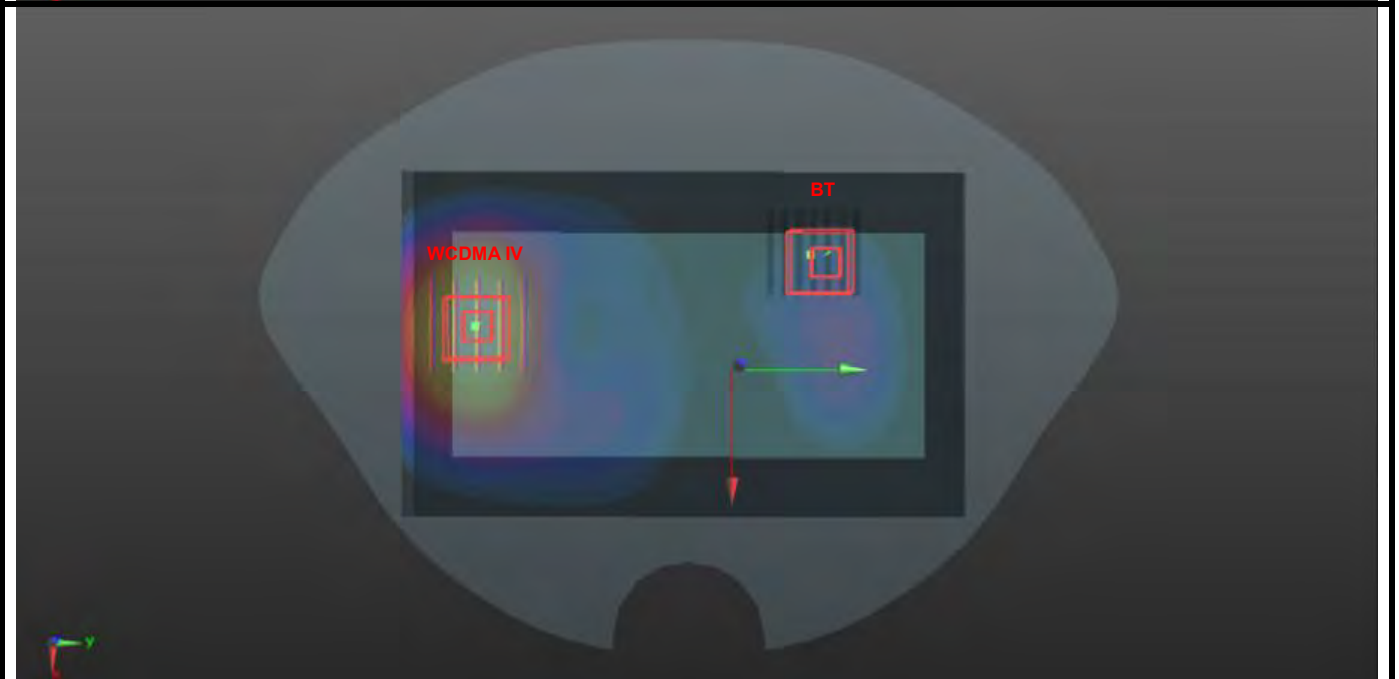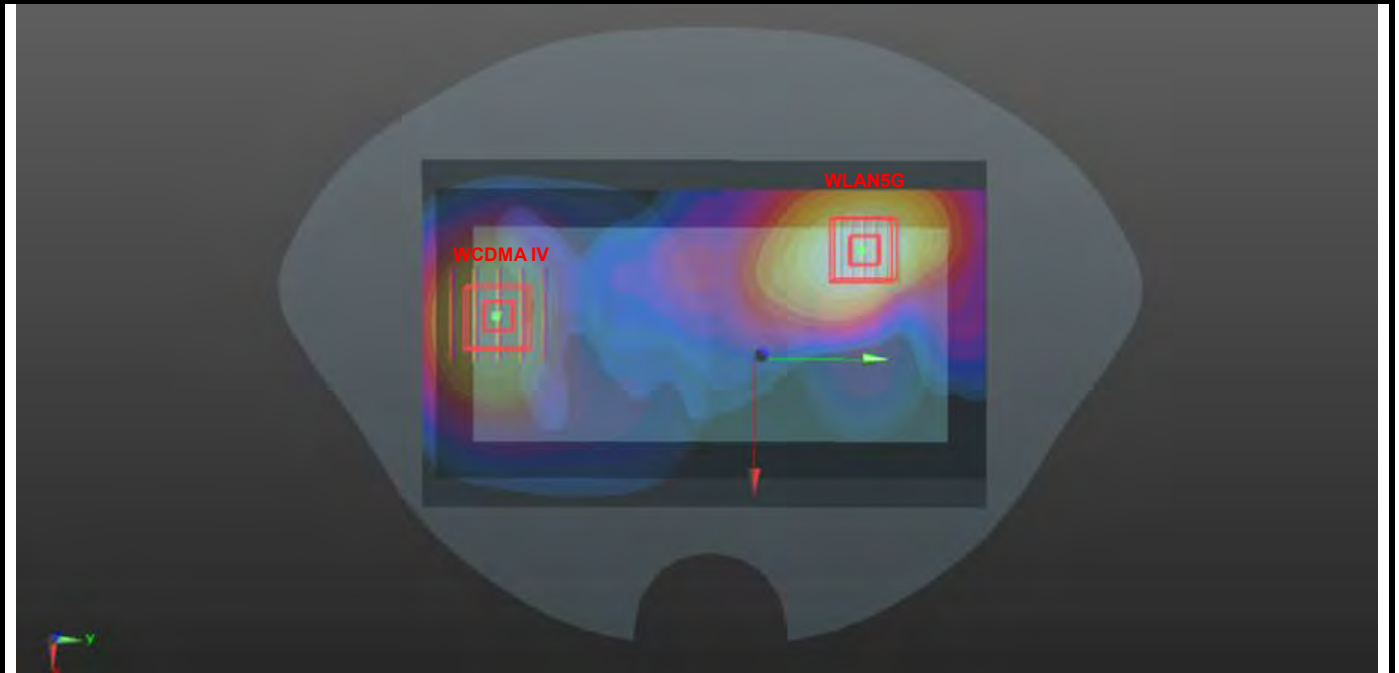



FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 7	Rear Face	1.02	10	-0.0266	-0.0724	-0.203	126.1	1.73	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
LTE Band 7	Rear Face	1.02	10	-0.0266	-0.0724	-0.203	121.3	1.04	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

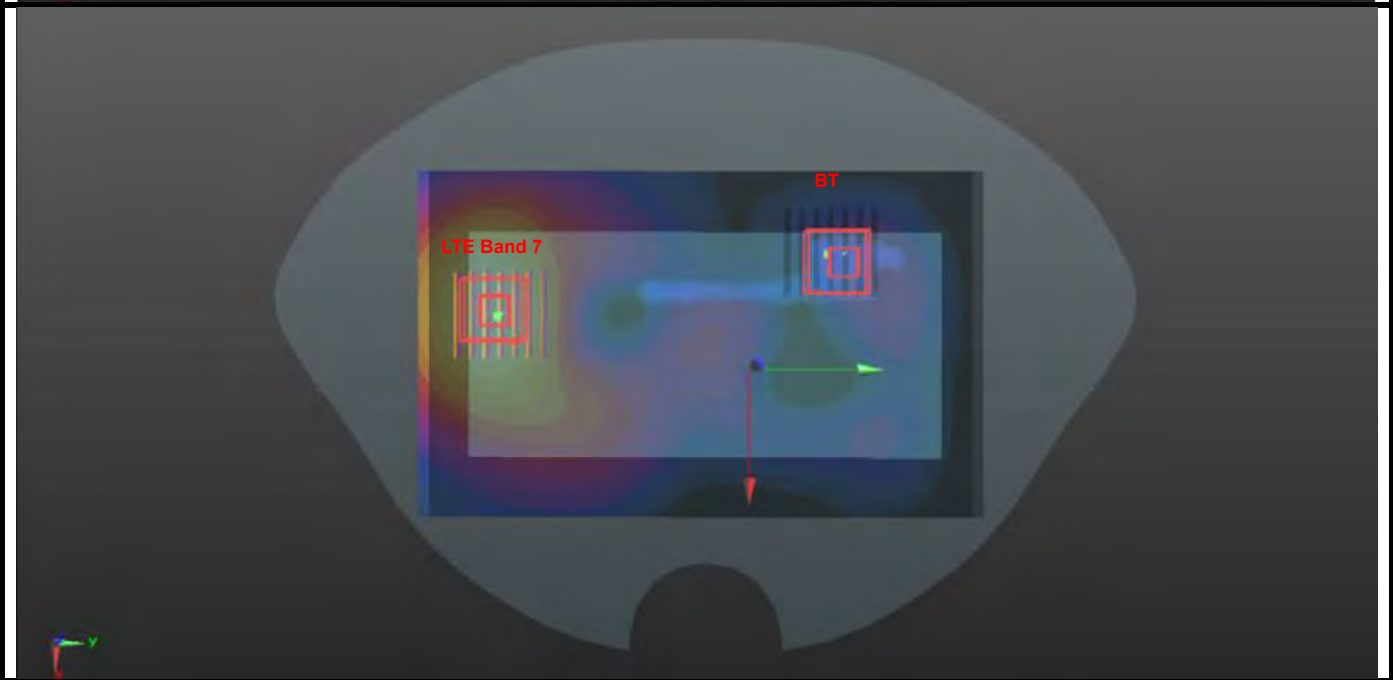


FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 25	Rear Face	0.95	10	-0.0335	-0.0745	-0.203	127.3	1.66	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
LTE Band 25	Rear Face	0.95	10	-0.0335	-0.0745	-0.203	122.4	0.97	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

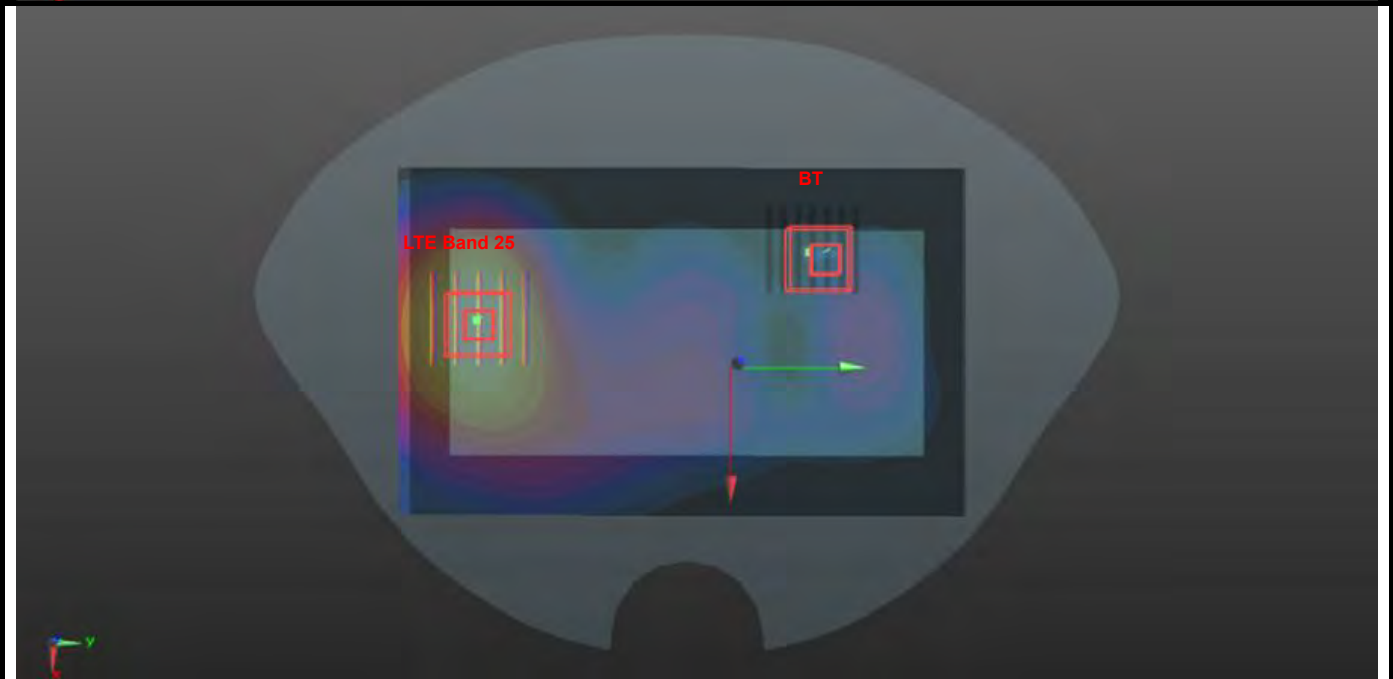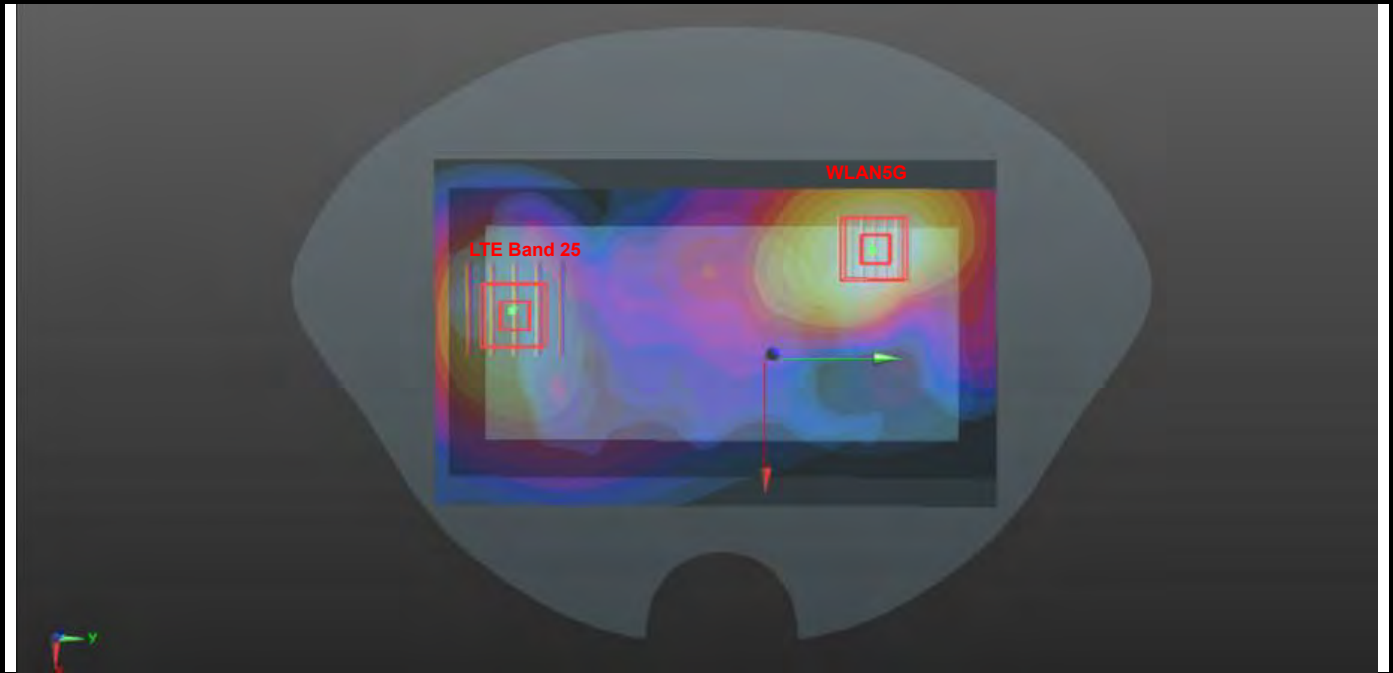



FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 30	Rear Face	0.91	10	-0.0192	-0.0772	-0.203	132.1	1.62	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
LTE Band 30	Rear Face	0.91	10	-0.0192	-0.0772	-0.203	127.5	0.93	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

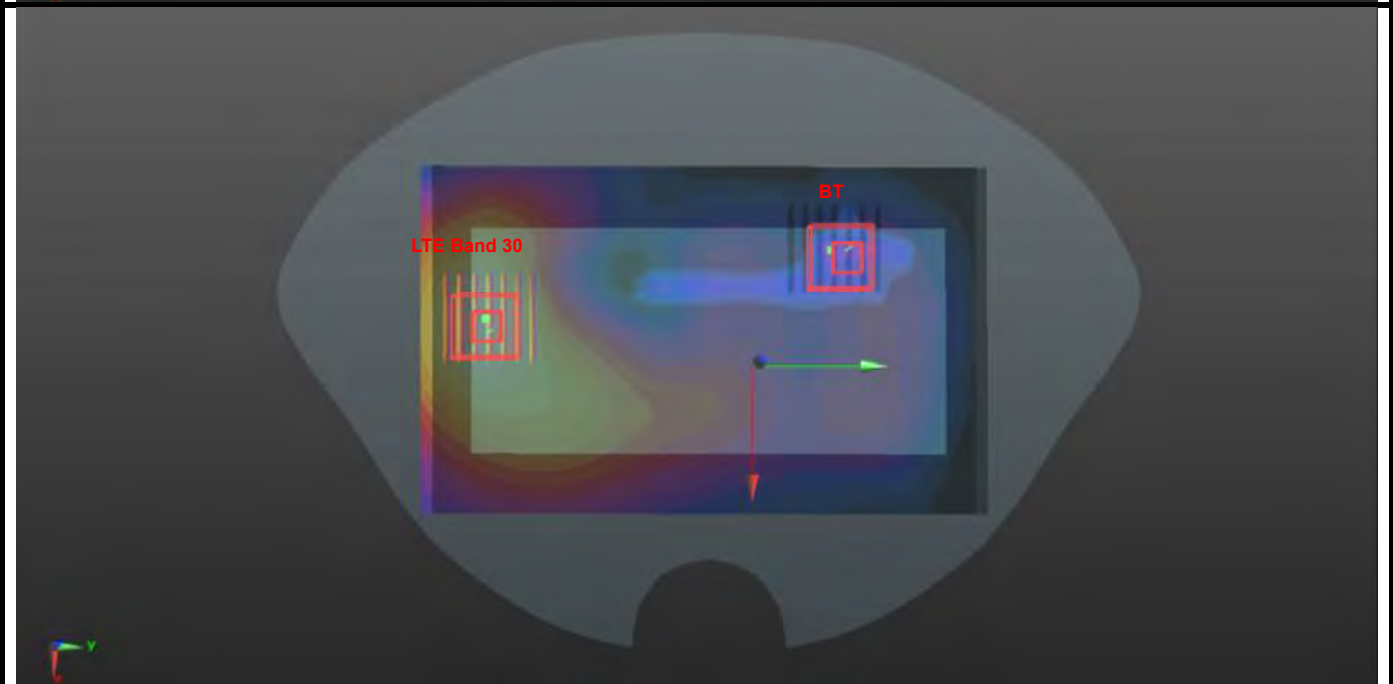

FCC SAR Test Report

Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
LTE Band 66	Rear Face	0.96	10	-0.0275	-0.0745	-0.203	128.0	1.67	0.02	Not required
WLAN5G		0.71	10	-0.046	0.052	-0.21				
LTE Band 66	Rear Face	0.96	10	-0.0275	-0.0745	-0.203	123.3	0.97	0.01	Not required
BT		0.01	10	-0.0482	0.047	-0.203				

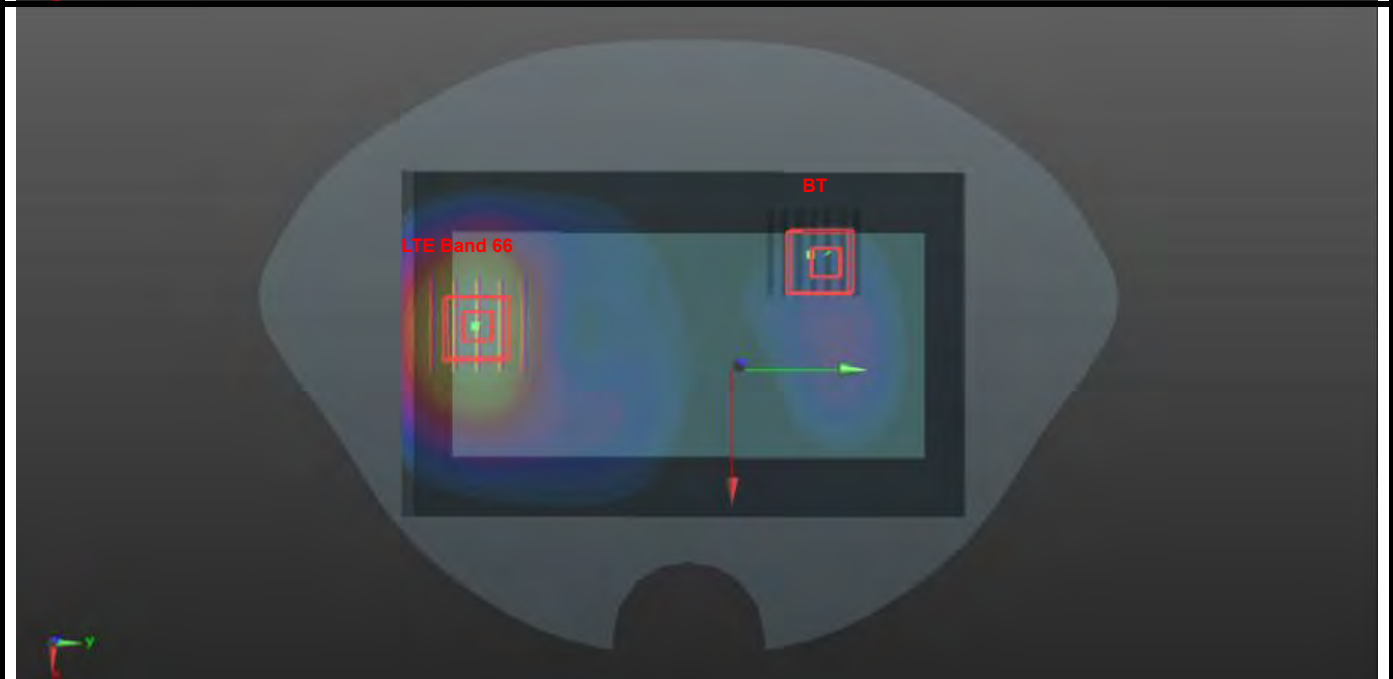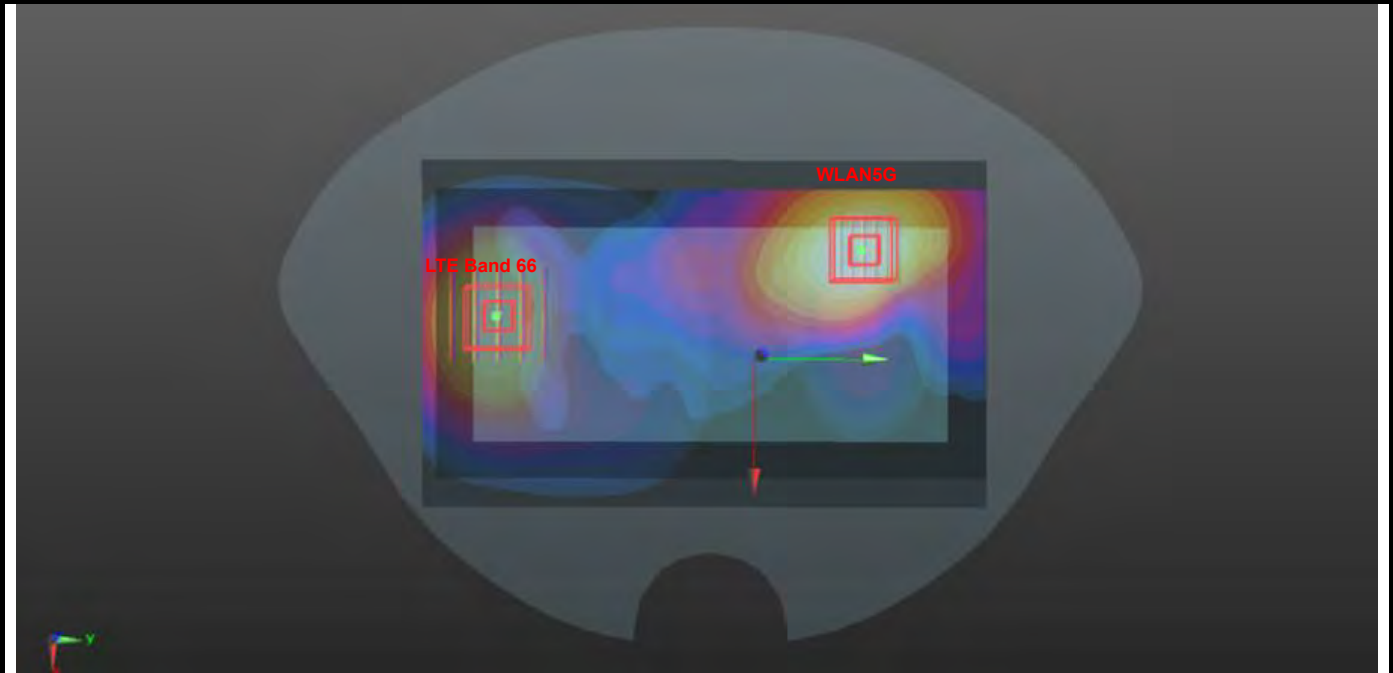

Test Engineer : Rikou Lu, and Dennis Ye

5. Calibration of Test Equipment

Equipment	Manufacturer	Model	SN	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1067	Sep. 16, 2021	1 Year
System Validation Dipole	SPEAG	D835V2	4d139	Sep. 17, 2021	1 Year
System Validation Dipole	SPEAG	D1750V2	1071	Sep. 18, 2021	1 Year
System Validation Dipole	SPEAG	D1900V2	5d159	Sep. 16, 2021	1 Year
System Validation Dipole	SPEAG	D2300V2	1053	Sep. 22, 2021	1 Year
System Validation Dipole	SPEAG	D2450V2	893	Sep. 18, 2021	1 Year
System Validation Dipole	SPEAG	D2600V2	1110	Sep. 16, 2021	1 Year
System Validation Dipole	SPEAG	D5GHzV2	1133	Sep. 14, 2021	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1288	Aug. 20, 2021	1 Year
Data Acquisition Electronics	SPEAG	DAE4	1389	Oct. 26, 2021	1 Year
Dosimetric E-Field Probe	SPEAG	ES3DV3	3268	Aug. 24, 2021	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	3873	Aug. 25, 2021	1 Year
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 25, 2021	1 Year
Wireless Communication Test Set	Agilent	E5515C	MY50260600	Jun. 02, 2021	1 Year
ENA Series Network Analyzer	Agilent	E5071C	MY46214638	Jun. 03, 2021	1 Year
Spectrum Analyzer	KEYSIGHT	N9010A	MY54510355	Jun. 03, 2021	1Year
MXG Analog Signal Generator	KEYSIGHT	N5183A	MY50143024	Mar. 09, 2021	1 Year
Power Meter	Agilent	N1914A	MY52180044	Mar. 02, 2021	1 Year
Power Sensor	Agilent	E9304A H18	MY52050011	Feb. 25, 2021	1 Year
Power Meter	ANRITSU	ML2495A	1506002	Apr. 07, 2021	1 Year
Power Sensor	ANRITSU	MA2411B	1339353	May. 07, 2021	1 Year
Temp. & Humi. Recorder	CLOCK	HTC-1	157248	Jun. 02, 2021	1 Year
Electronic Thermometer	YONGFA	YF-160A	120100323	Jun. 02, 2021	1 Year
Coupler	Woken	0110A056020-10	COM27RW1A3	Jun. 02, 2021	1 Year

6. Measurement Uncertainty

DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.0	N	1	1	1	6.0	6.0	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7	∞
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						11.4%	11.4%	1013
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						22.9%	22.7%	

Uncertainty budget for frequency range 30 MHz to 3 GHz

FCC SAR Test Report

DASY5 Uncertainty Budget								
Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)	(Vi) Veff
Measurement System								
Probe Calibration	6.55	N	1	1	1	6.5	6.5	∞
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9	∞
Boundary Effects	2.0	R	1.732	1	1	1.2	1.2	∞
Linearity	4.7	R	1.732	1	1	2.7	2.7	∞
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6	∞
Modulation Response	3.2	R	1.732	1	1	1.8	1.8	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.0	R	1.732	1	1	0.0	0.0	∞
Integration Time	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7	∞
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2	∞
Probe Positioning	6.7	R	1.732	1	1	3.9	3.9	∞
Max. SAR Eval.	4.0	R	1.732	1	1	2.3	2.3	∞
Test Sample Related								
Device Positioning	3.0	N	1	1	1	3.0	3.0	35
Device Holder	3.6	N	1	1	1	3.6	3.6	12
Power Drift	5.0	R	1.732	1	1	2.9	2.9	∞
Power Scaling	0.0	R	1.732	1	1	0.0	0.0	∞
Phantom and Setup								
Phantom Uncertainty	6.6	R	1.732	1	1	3.8	3.8	∞
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0	∞
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1	5
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0	∞
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0	∞
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0	5
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8	∞
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4	∞
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1	∞
Combined Std. Uncertainty						12.5%	12.5%	1458
Coverage Factor for 95 %						K=2	K=2	
Expanded STD Uncertainty						25.0%	24.9%	

Uncertainty budget for frequency range 3 GHz to 6 GHz

7. Information on the Testing Laboratories

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Add: No. B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industry Park, Nanshan District, Shenzhen, Guangdong, China

Tel: 86-755-8869-6566

Fax: 86-755-8869-6577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.bureauveritas.com

The road map of all our labs can be found in our web site also.

---END---



Appendix A. SAR Plots of System Verification

The plots for system verification with largest deviation for each SAR system combination are shown as follows.

System Check_HSL750_211029

DUT: Dipole:750 MHz;Type:D750V3

Communication System: CW; Frequency: 750 MHz;Duty Cycle: 1:1

Medium: HSL750_1029 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 42.342$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.77 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 55.714 V/m ; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 3.21 W/kg
SAR(1 g) = 2.1 W/kg ; SAR(10 g) = 1.38 W/kg
Maximum value of SAR (measured) = 2.83 W/kg

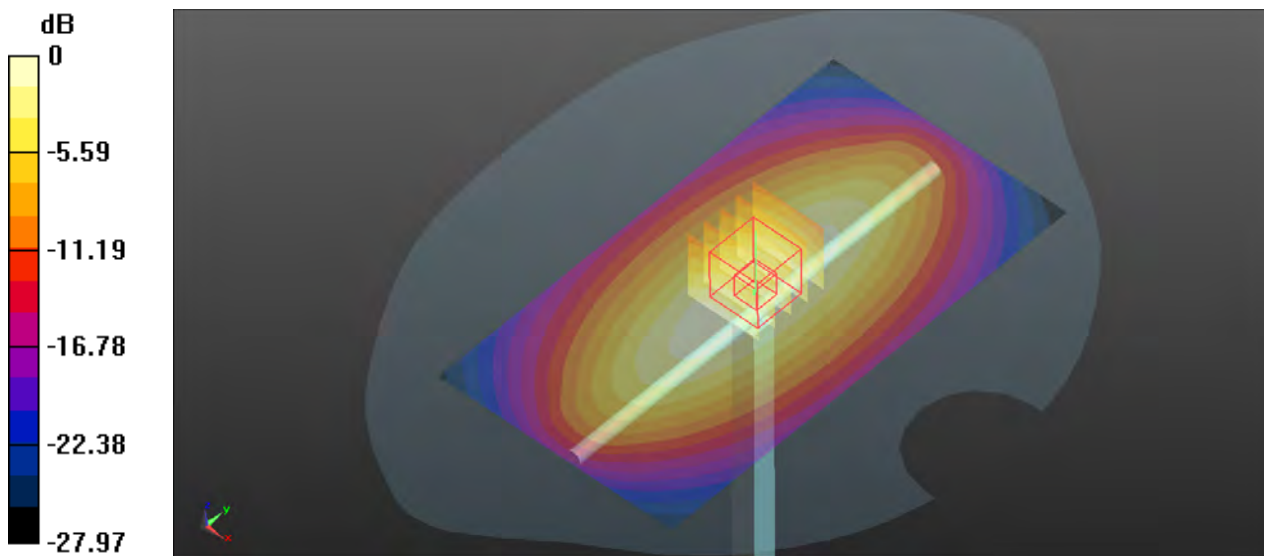

0 dB = 2.77 W/kg

System Check_HSL835_211029

DUT: Dipole:835 MHz;Type:D835V2

Communication System: UID 0, CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium: HSL835_1029 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 42.395$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.7°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 3.26 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 59.151 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 3.71 W/kg
SAR(1 g) = 2.45 W/kg ; SAR(10 g) = 1.6 W/kg
Maximum value of SAR (measured) = 3.29 W/kg

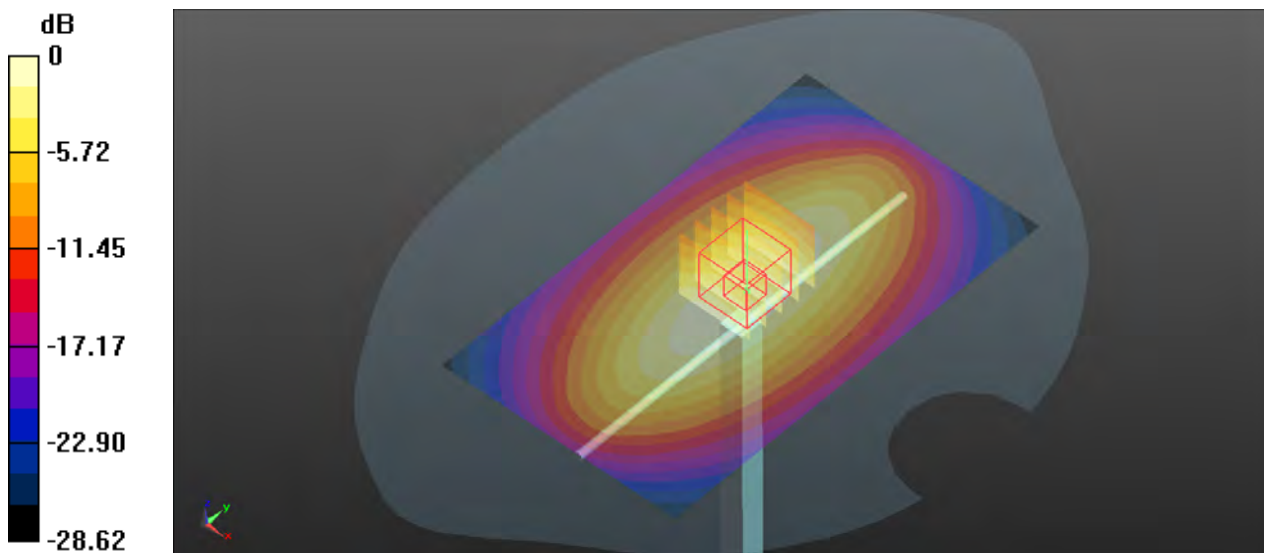

0 dB = 3.26 W/kg

System Check_HSL1750_211030

DUT: Dipole:1750 MHz;Type:D1750V2

Communication System: CW; Frequency: 1750 MHz;Duty Cycle: 1:1

Medium: HSL1750_1030 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.328$ S/m; $\epsilon_r = 39.657$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.8°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.43, 5.43, 5.43); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.1 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 102.9 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 16.0 W/kg
SAR(1 g) = 8.51 W/kg; SAR(10 g) = 4.51 W/kg
Maximum value of SAR (measured) = 13.3 W/kg

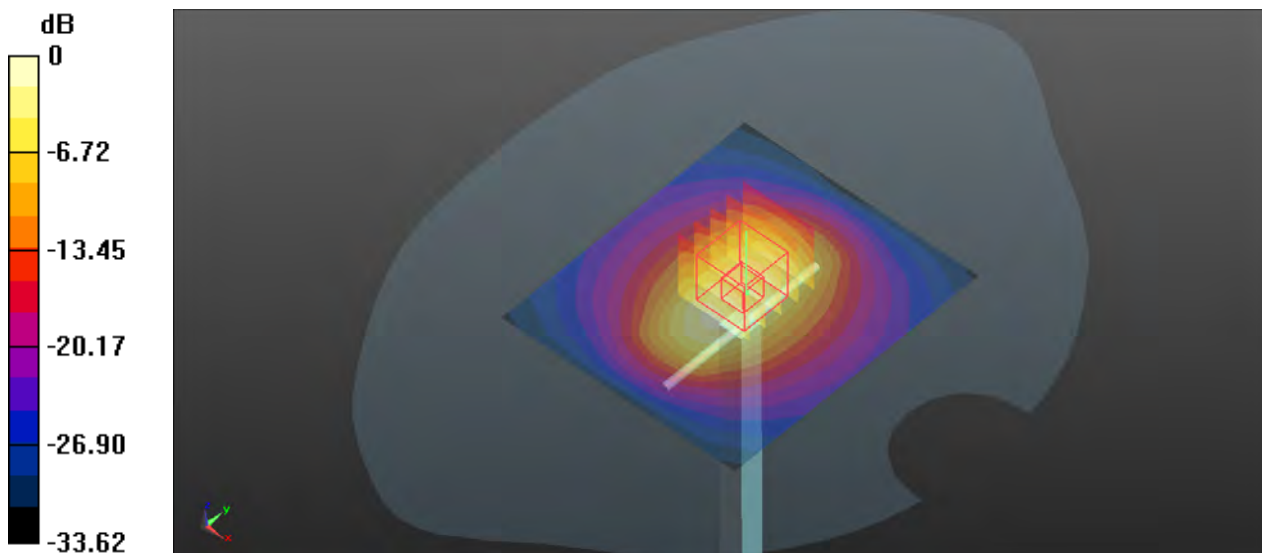

0 dB = 13.1 W/kg

System Check_HSL1900_211101

DUT: Dipole:1900MHz;Type:D1900V2


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL1900_1101 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.421$ S/m; $\epsilon_r = 39.735$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (61x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 16.8 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 101.9 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 18.8 W/kg
SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.24 W/kg
Maximum value of SAR (measured) = 15.7 W/kg

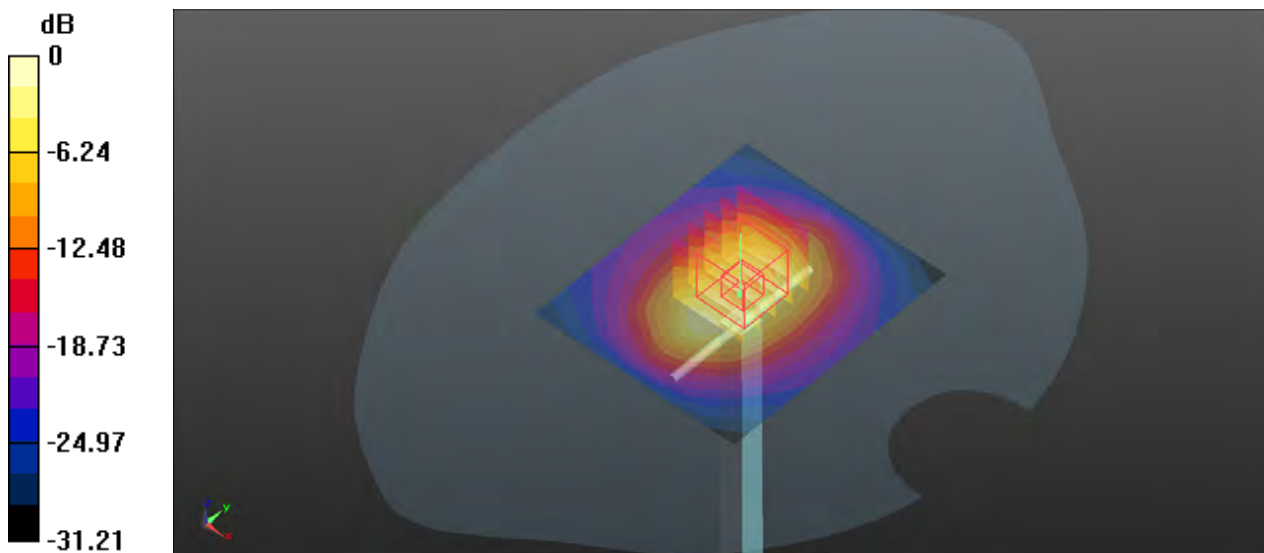

0 dB = 16.8 W/kg

System Check_HSL2300_211102

DUT: Dipole:2300 MHz;Type:D2300V2

Communication System: CW; Frequency: 2300 MHz;Duty Cycle: 1:1

Medium: HSL2300_1102 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.675$ S/m; $\epsilon_r = 39.619$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.86, 4.86, 4.86); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)


Pin=250mW/Area Scan (81x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 18.1 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 103.5 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 21.7 W/kg

SAR(1 g) = 11.3 W/kg; SAR(10 g) = 5.54 W/kg

Maximum value of SAR (measured) = 18.1 W/kg

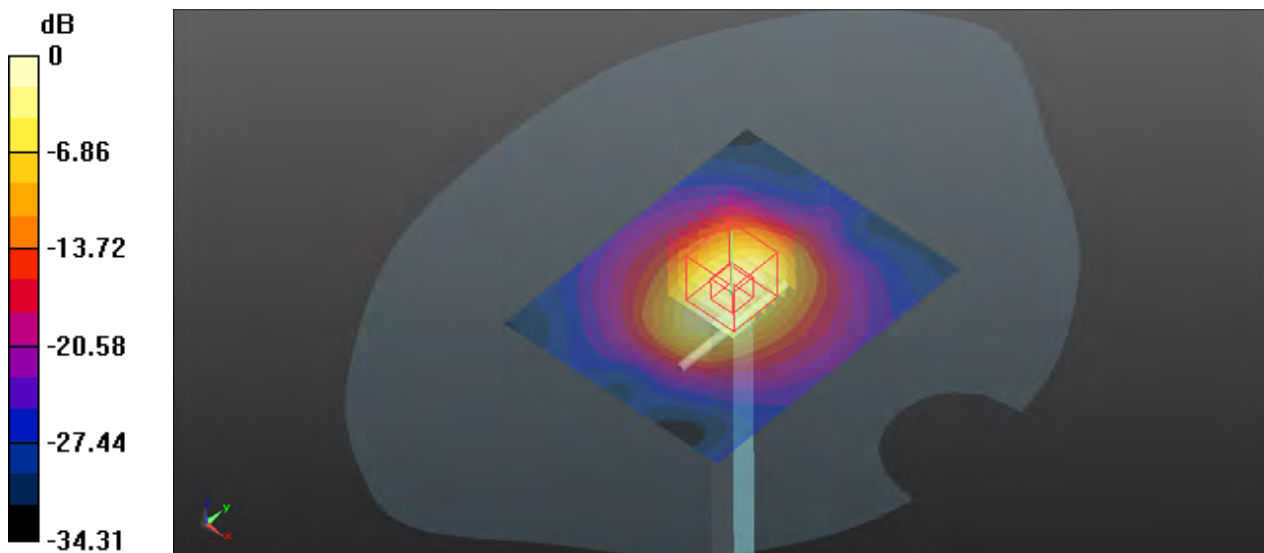

0 dB = 18.1 W/kg

System Check_HSL2450_211102

DUT: Dipole:2450 MHz;Type:D2450V2

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: HSL2450_1102 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.781$ S/m; $\epsilon_r = 39.367$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.4°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.56, 4.56, 4.56); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 20.2 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 109.7 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 25.0 W/kg
SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.73 W/kg
Maximum value of SAR (measured) = 20.3 W/kg

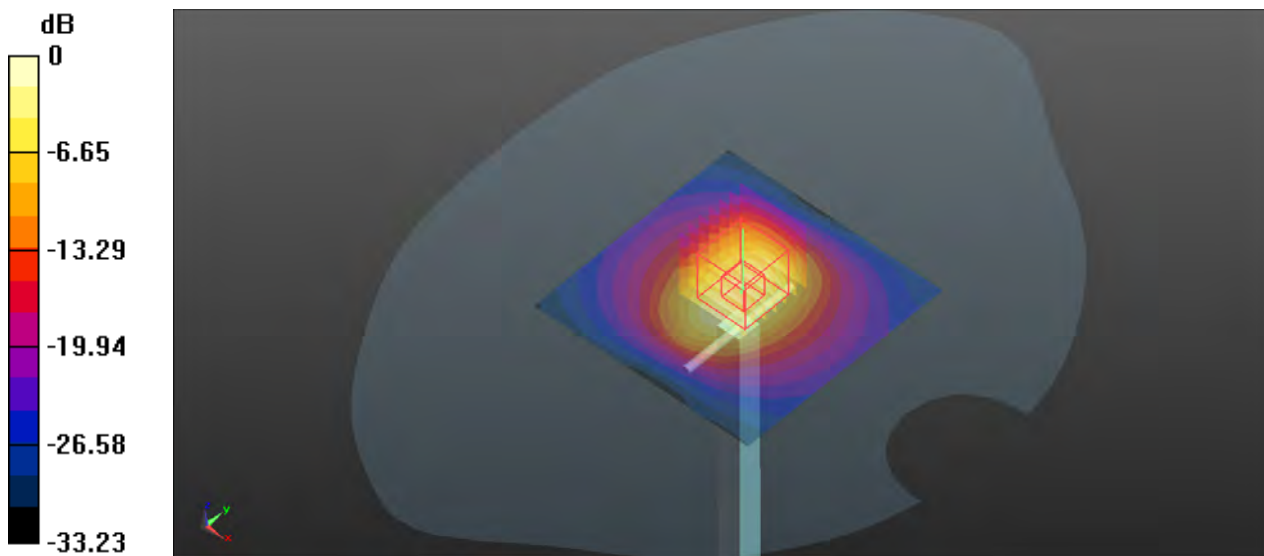

0 dB = 20.2 W/kg

System Check_HSL2600_211103

DUT: Dipole:2600 MHz;Type:D2600V2


Communication System: CW; Frequency: 2600 MHz;Duty Cycle: 1:1
Medium: HSL2600_1103 Medium parameters used: $f = 2600$ MHz; $\sigma = 1.9$ S/m; $\epsilon_r = 39.349$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.42, 4.42, 4.42); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 22.1 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 108.6 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 28.1 W/kg
SAR(1 g) = 13.1 W/kg; SAR(10 g) = 5.93 W/kg
Maximum value of SAR (measured) = 22.4 W/kg

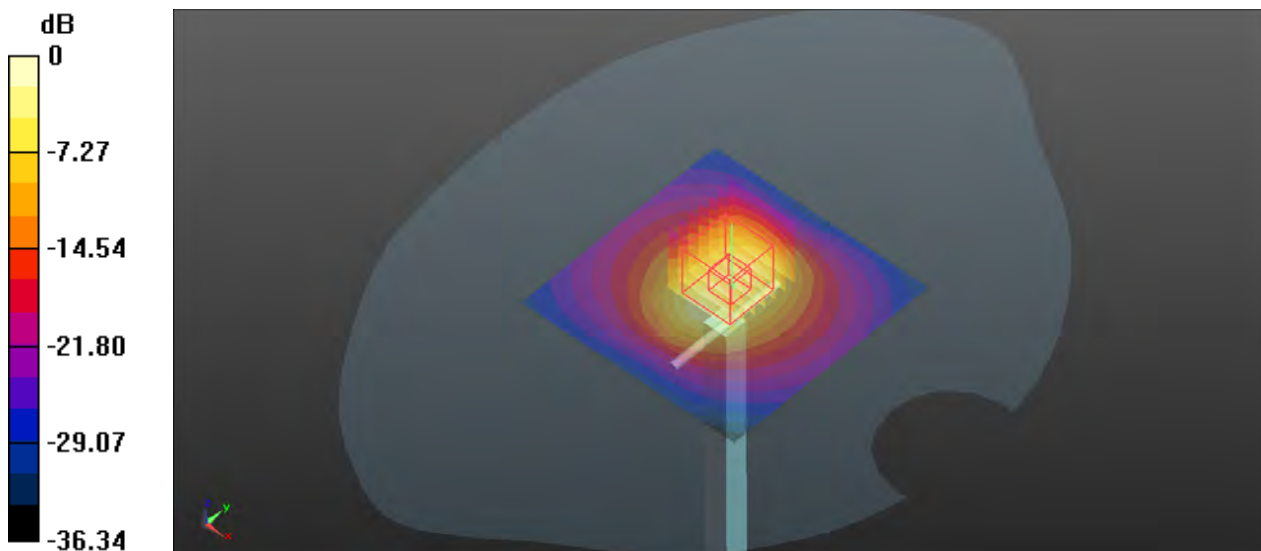

0 dB = 22.1 W/kg

System Check_HSL5250_211103

DUT: Dipole 5GHzV2;Type:D5GHzV2


Communication System: CW; Frequency: 5250 MHz;Duty Cycle: 1:1
Medium: HSL5G_1103 Medium parameters used: $f = 5250$ MHz; $\sigma = 4.748$ S/m; $\epsilon_r = 36.885$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 20.5 W/kg

Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 59.959 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 33.8 W/kg
SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.36 W/kg
Maximum value of SAR (measured) = 21.2 W/kg

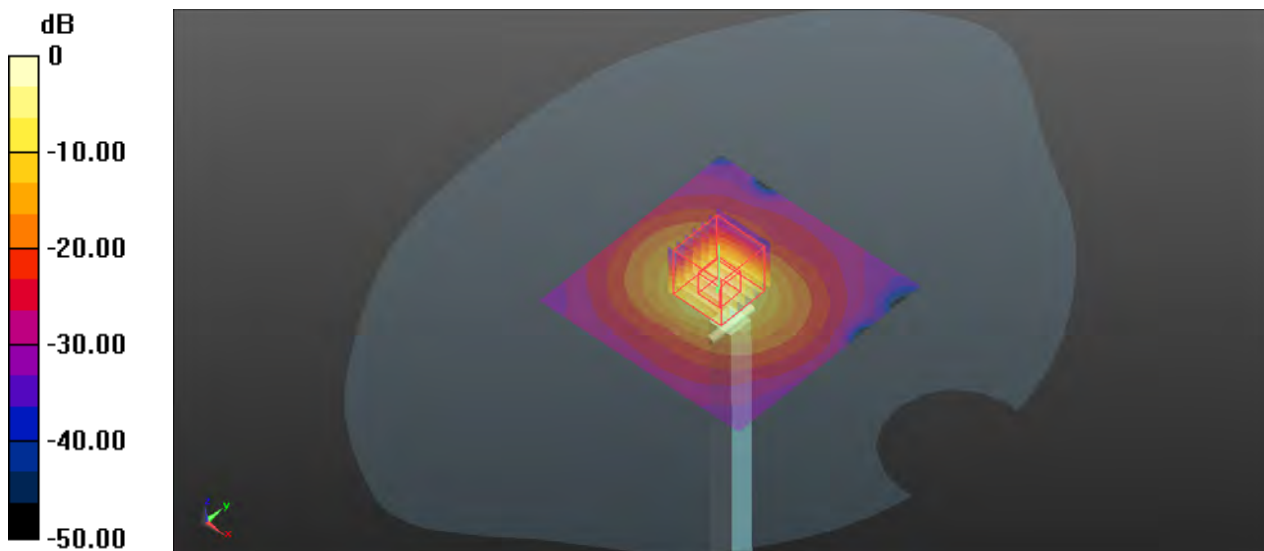

0 dB = 20.5 W/kg

System Check_HSL5800_211104

DUT: Dipole 5GHzV2;Type:D5GHzV2

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium: HSL5G_1104 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.422$ S/m; $\epsilon_r = 35.687$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.8 W/kg


Pin=100mW/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 52.501 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 33.5 W/kg

SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

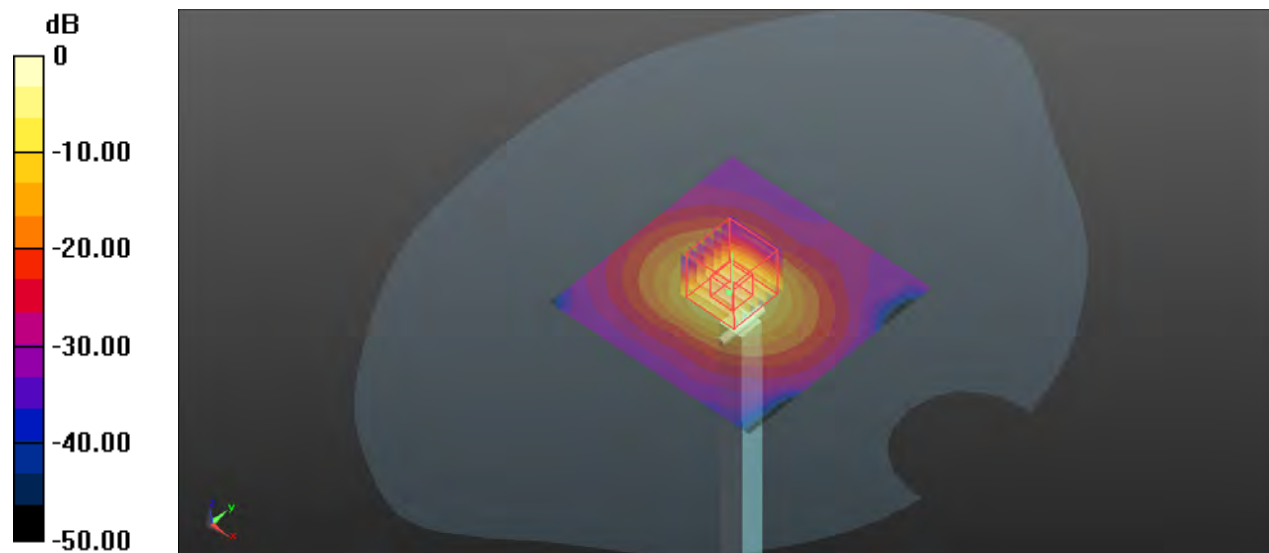

0 dB = 17.8 W/kg

Appendix B. SAR Plots of SAR Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.

P01 GSM850_GPRS10_Right Cheek_Ch128


Communication System: GPRS10; Frequency: 824.2 MHz; Duty Cycle: 1:4.15
Medium: HSL835_1029 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.426$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.448 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.643 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.519 W/kg
SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.326 W/kg
Maximum value of SAR (measured) = 0.445 W/kg

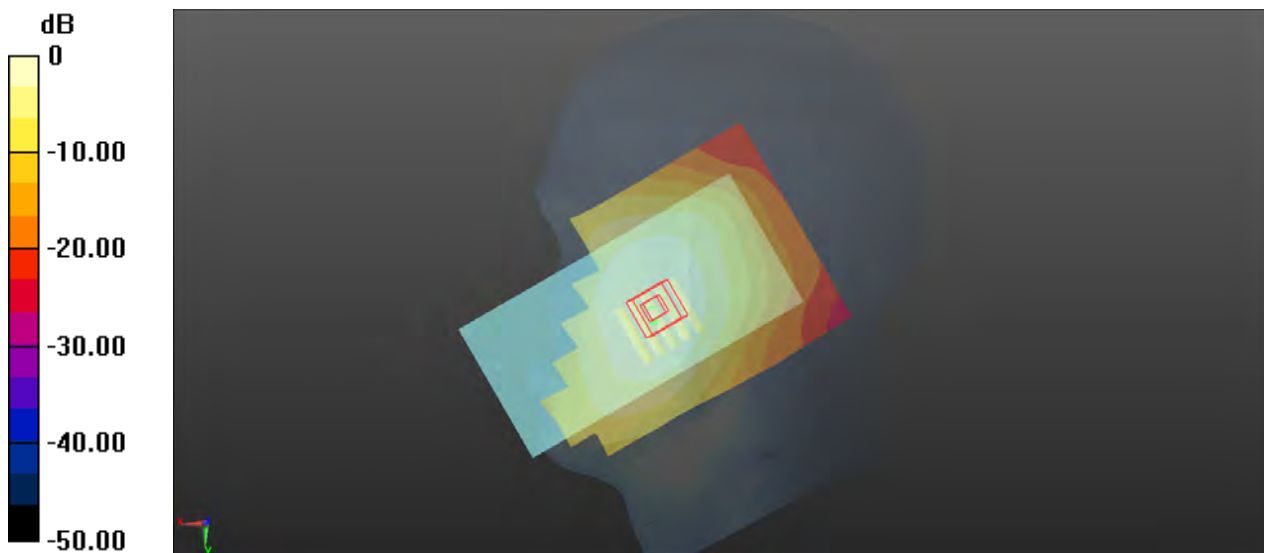

P02 GSM1900_GPRS11_Right Cheek_Ch810

Communication System: GPRS11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77

Medium: HSL1900_1101 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 39.739$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.108 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.778 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.0934 W/kg

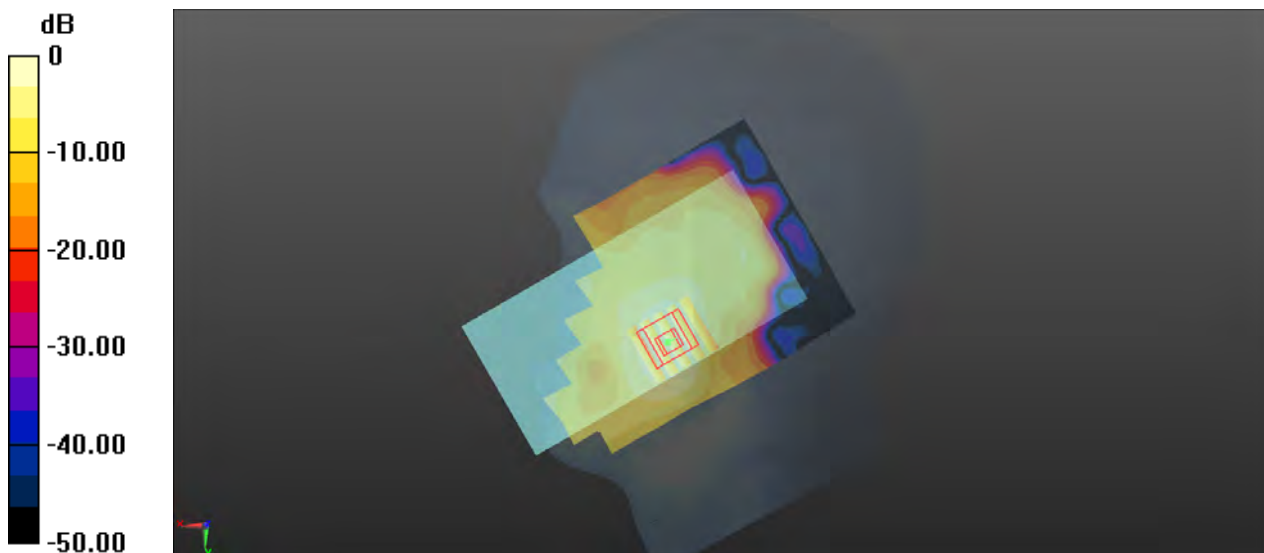

0 dB = 0.108 W/kg

P03 WCDMA II_RMC12.2K_Right Cheek_Ch9538


Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL1900_1101 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.427 \text{ S/m}$; $\epsilon_r = 39.739$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.6°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.137 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.581 V/m ; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.182 W/kg
SAR(1 g) = 0.116 W/kg ; SAR(10 g) = 0.070 W/kg
 Maximum value of SAR (measured) = 0.126 W/kg

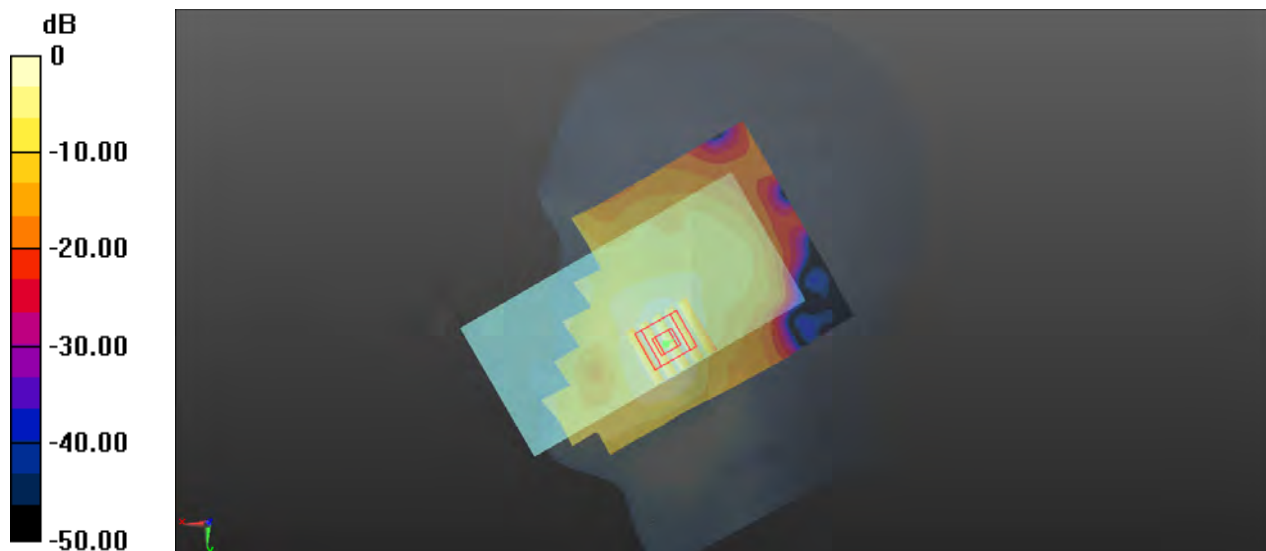

0 dB = 0.137 W/kg

P04 WCDMA IV_RMC12.2K_Right Cheek_Ch1312


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1030 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.782$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.43, 5.43, 5.43); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.183 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.190 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.253 W/kg
SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.105 W/kg
Maximum value of SAR (measured) = 0.180 W/kg

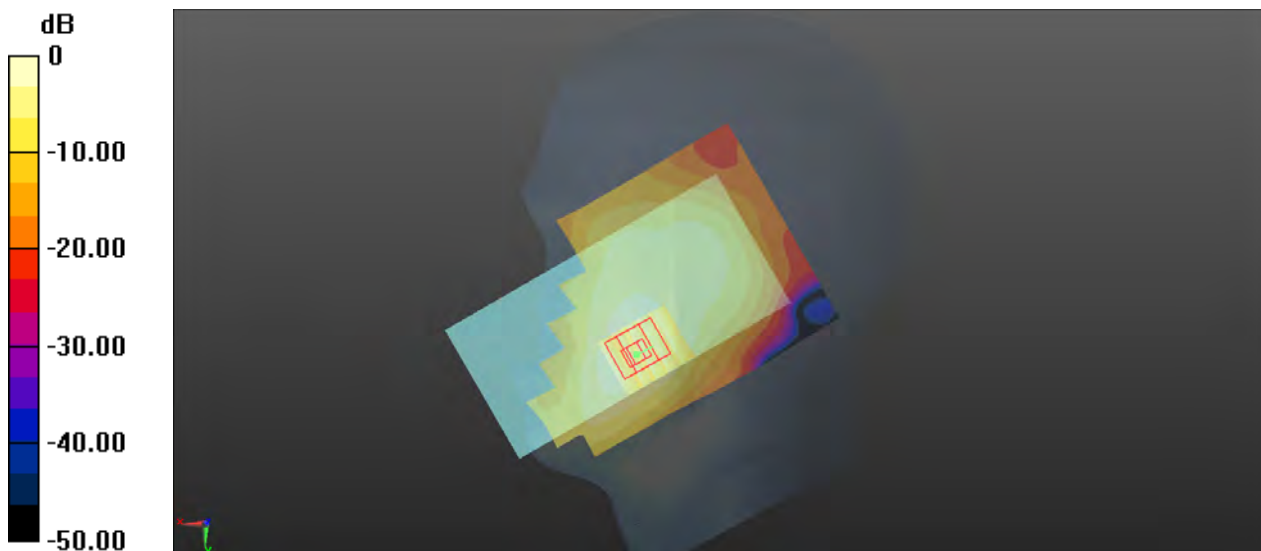

0 dB = 0.183 W/kg

P05 WCDMA V_RMC12.2K_Right Cheek_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL835_1029 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.419$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.376 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.773 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.440 W/kg
SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.276 W/kg
Maximum value of SAR (measured) = 0.377 W/kg

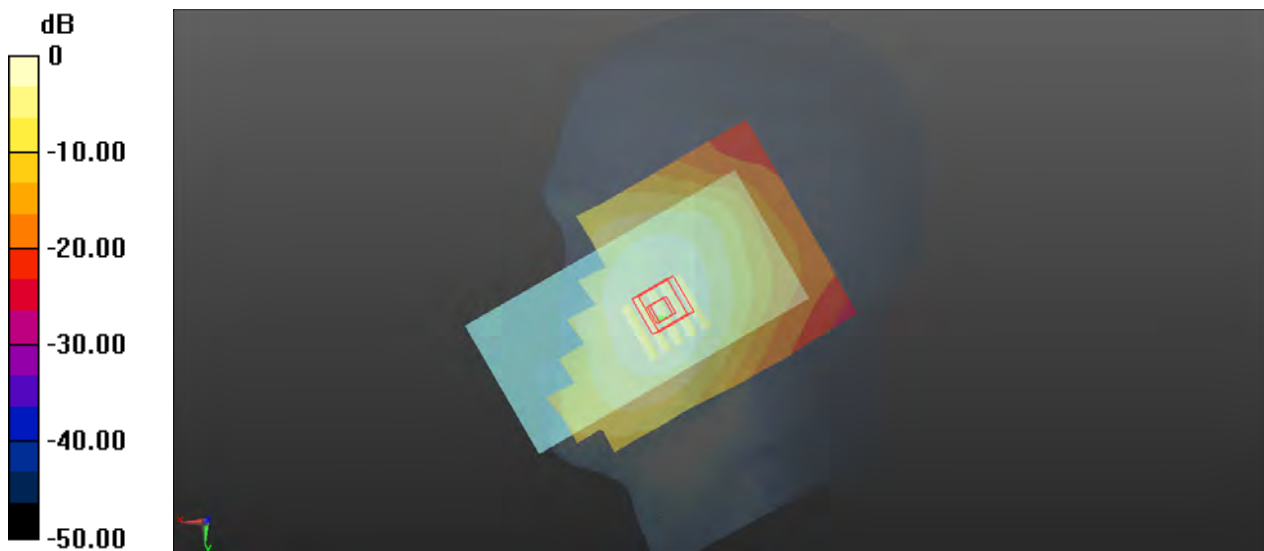

0 dB = 0.376 W/kg

P06 LTE 5_QPSK10M_Left Cheek_Ch20525_1RB_OS49


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL835_1029 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.391$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0824 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.276 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.0990 W/kg
SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.058 W/kg
Maximum value of SAR (measured) = 0.0805 W/kg

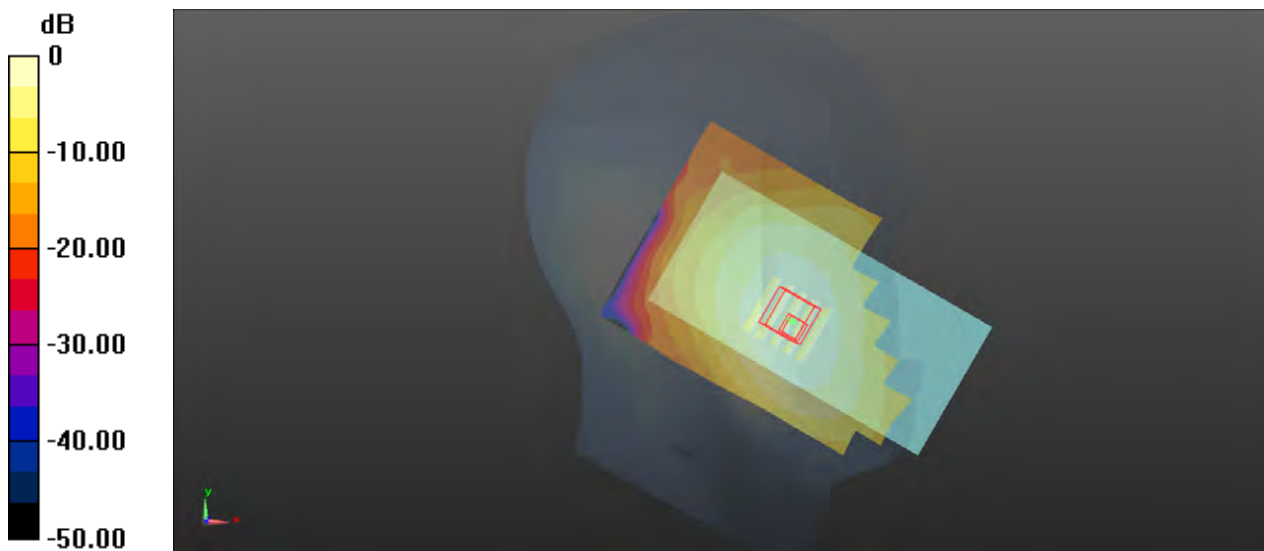

0 dB = 0.0824 W/kg

P07 LTE 7_QPSK20M_Left Cheek_Ch21100_1RB_OS0


Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: HSL2600_1103 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.849 \text{ S/m}$; $\epsilon_r = 39.463$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.42, 4.42, 4.42); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x161x1)**: Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
Maximum value of SAR (interpolated) = 0.188 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.029 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.317 W/kg
SAR(1 g) = 0.168 W/kg ; SAR(10 g) = 0.088 W/kg
Maximum value of SAR (measured) = 0.189 W/kg

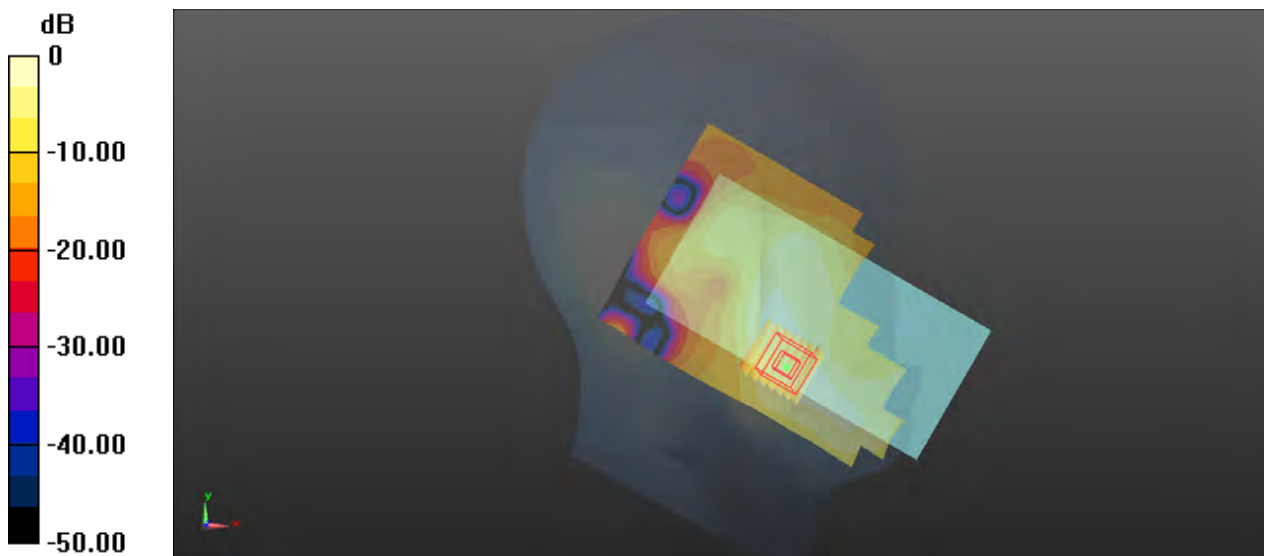

0 dB = 0.188 W/kg

P08 LTE 12_QPSK10M_Left Cheek_Ch23060_1RB_OS0


Communication System: LTE; Frequency: 704 MHz; Duty Cycle: 1:1
Medium: HSL750_1029 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.866 \text{ S/m}$; $\epsilon_r = 42.431$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0203 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 0.757 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0250 W/kg
SAR(1 g) = 0.019 W/kg ; SAR(10 g) = 0.015 W/kg
Maximum value of SAR (measured) = 0.0203 W/kg

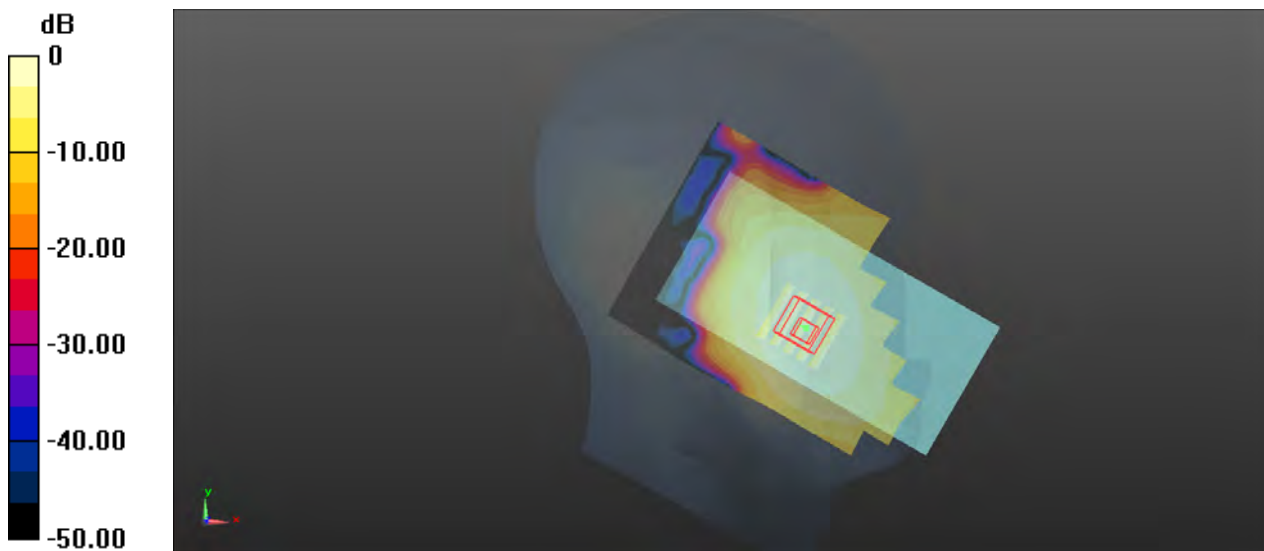

0 dB = 0.0203 W/kg

P09 LTE 13_QPSK10M_Right Cheek_Ch23230_1RB_OS0


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL750_1029 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 42.235$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0708 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.147 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.0850 W/kg
SAR(1 g) = 0.069 W/kg ; SAR(10 g) = 0.053 W/kg
Maximum value of SAR (measured) = 0.0719 W/kg

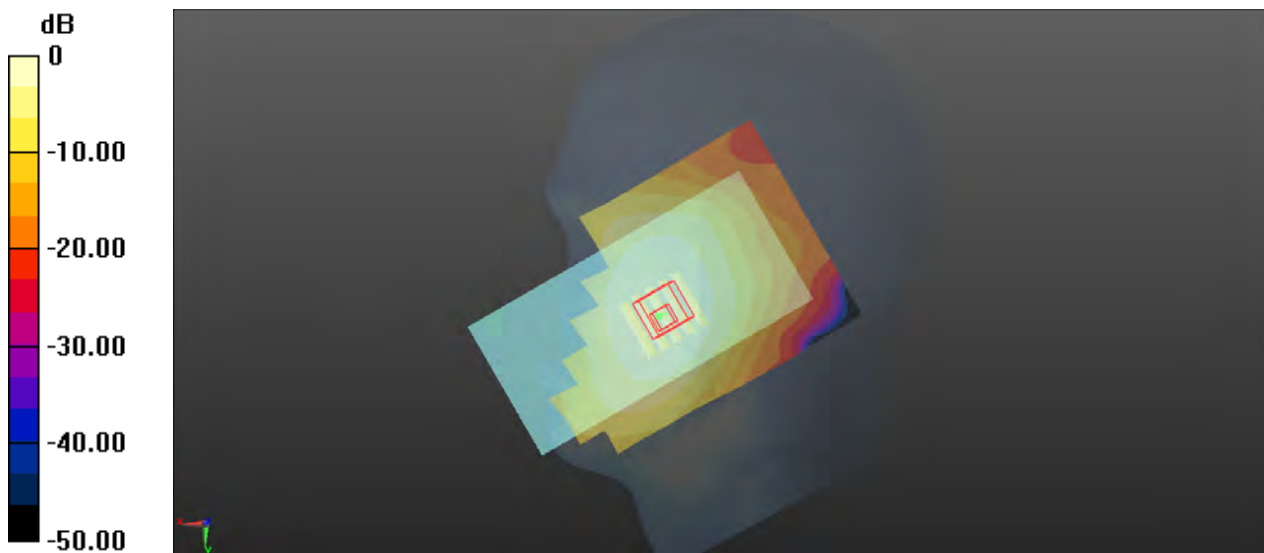

0 dB = 0.0708 W/kg

P10 LTE 14_QPSK10M_Right Cheek_Ch23330_1RB_OS0

Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750_1029 Medium parameters used: $f = 793$ MHz; $\sigma = 0.897$ S/m; $\epsilon_r = 42.194$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0651 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.335 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0945 W/kg

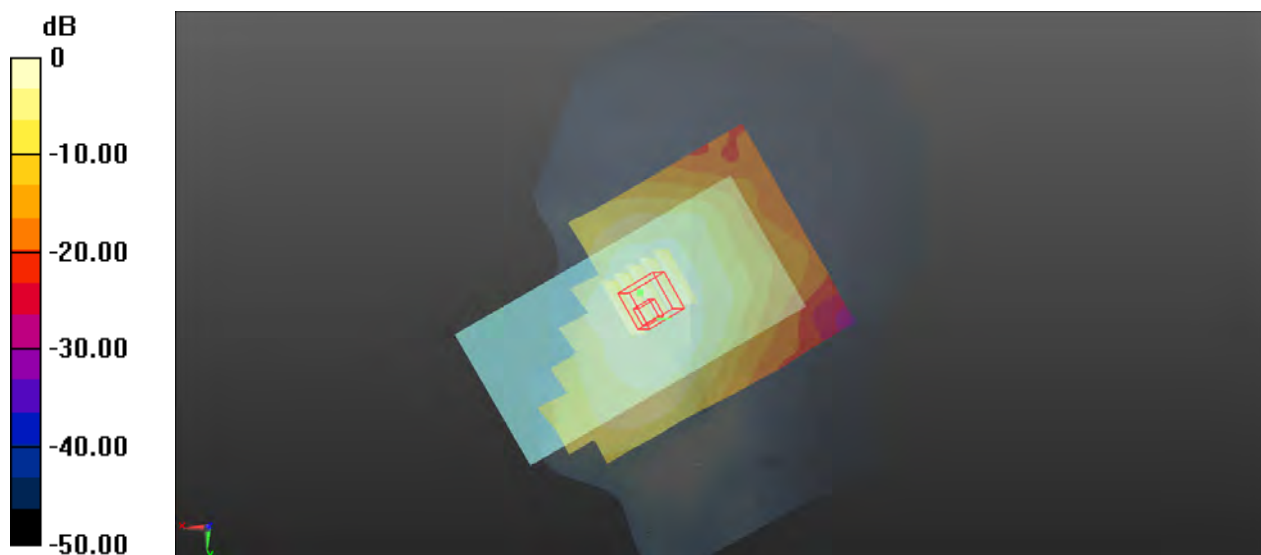

0 dB = 0.0651 W/kg

P11 LTE 25_QPSK20M_Right Cheek_Ch26590_1RB_OS0

Communication System: LTE; Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL1900_1101 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.425$ S/m; $\epsilon_r = 39.737$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.152 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.780 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

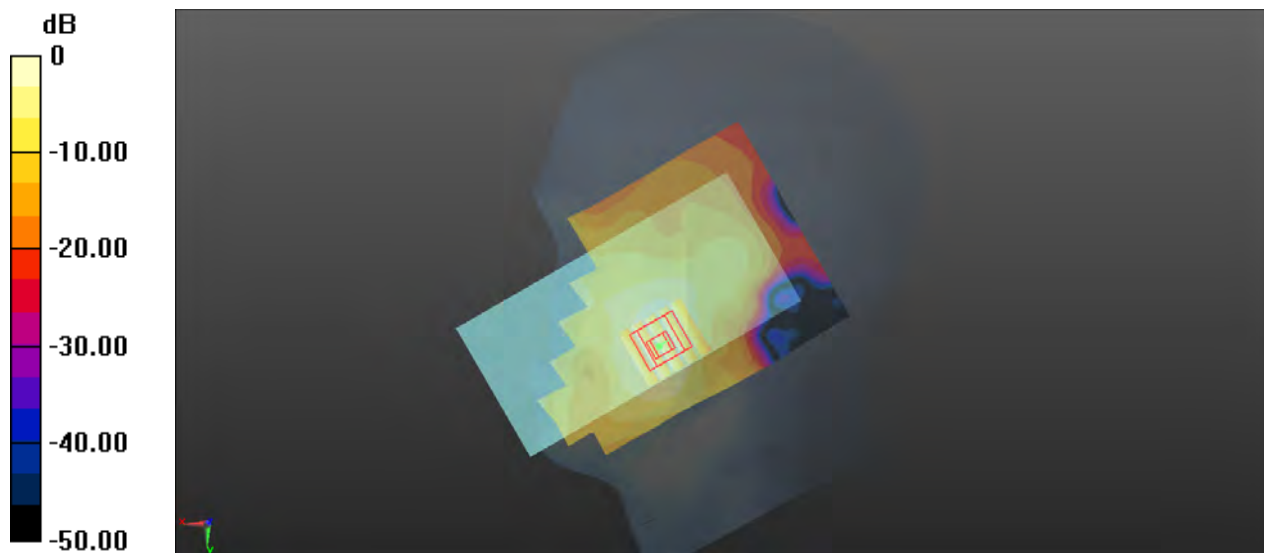

0 dB = 0.152 W/kg

P12 LTE 26_QPSK15M_Left Cheek_Ch26965_1RB_OS74


Communication System: LTE; Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: HSL835_1029 Medium parameters used: $f = 841.5 \text{ MHz}$; $\sigma = 0.918 \text{ S/m}$; $\epsilon_r = 42.377$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.7°C ; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0586 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 1.975 V/m ; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.0710 W/kg
SAR(1 g) = 0.056 W/kg ; SAR(10 g) = 0.042 W/kg
Maximum value of SAR (measured) = 0.0598 W/kg

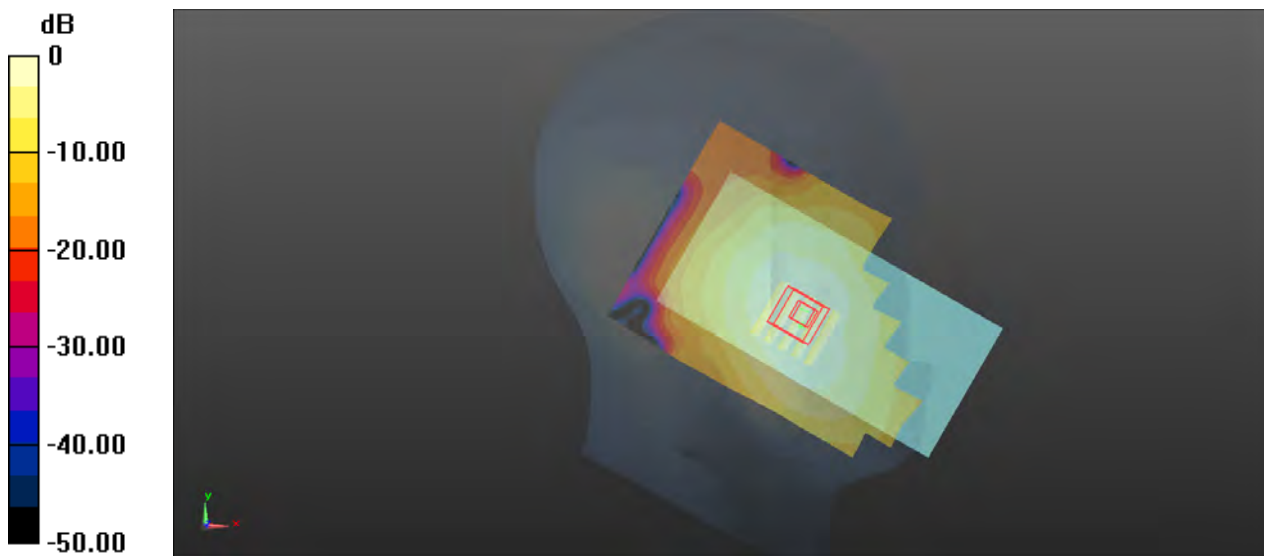

0 dB = 0.0586 W/kg

P13 LTE 30_QPSK10M_Left Cheek_Ch27710_1RB_OS0


Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: HSL2300_1102 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.682$ S/m; $\epsilon_r = 39.608$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.86, 4.86, 4.86); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.253 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.821 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.418 W/kg
SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.124 W/kg
Maximum value of SAR (measured) = 0.259 W/kg

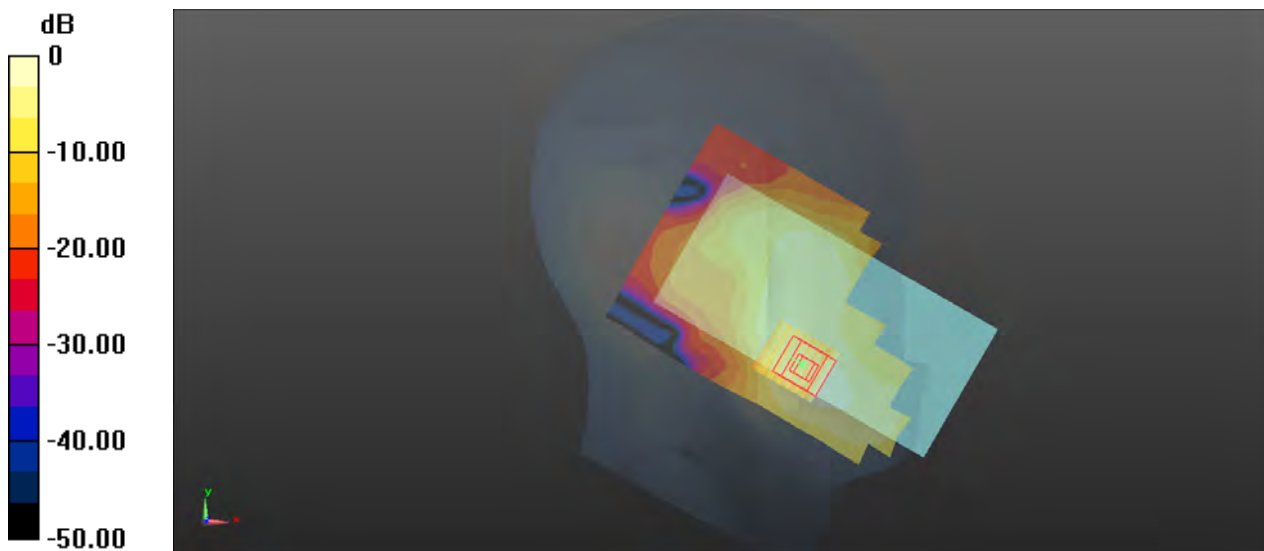

0 dB = 0.253 W/kg

P14 LTE 41_QPSK20M_Left Cheek_Ch41055_1RB_OS0


Communication System: LTE TDD; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59
Medium: HSL2600_1103 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.929$ S/m; $\epsilon_r = 39.298$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.42, 4.42, 4.42); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.164 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.177 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.267 W/kg
SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.076 W/kg
Maximum value of SAR (measured) = 0.159 W/kg

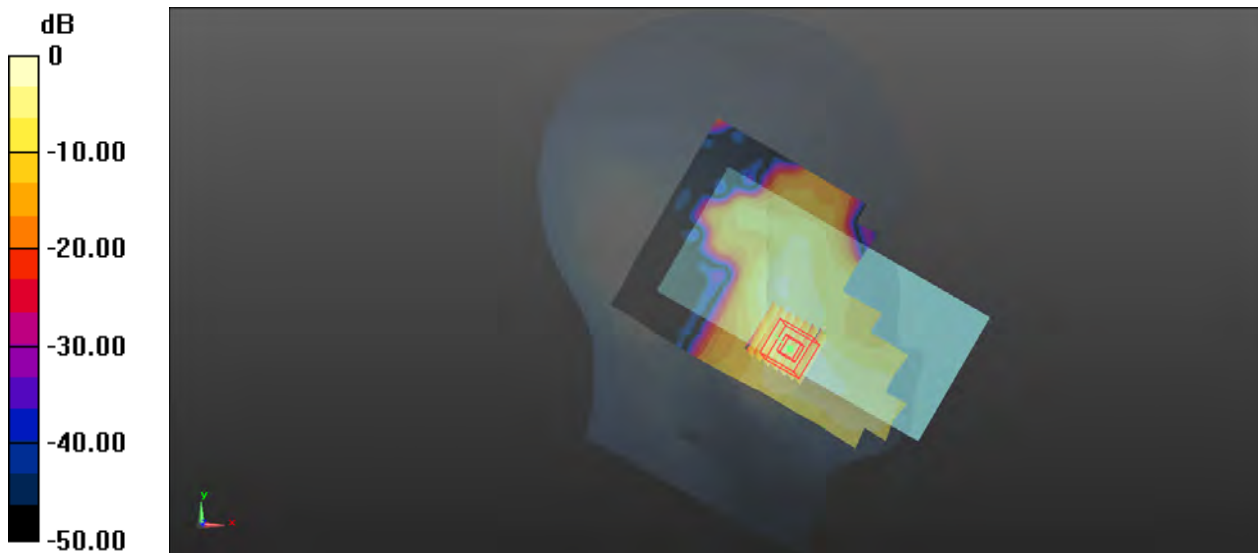

0 dB = 0.164 W/kg

P15 LTE 66_QPSK20M_Right Cheek_Ch132072_1RB_OS50


Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: HSL1750_1030 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.319$ S/m; $\epsilon_r = 39.764$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.43, 5.43, 5.43); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.165 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.811 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.215 W/kg
SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.089 W/kg
Maximum value of SAR (measured) = 0.153 W/kg

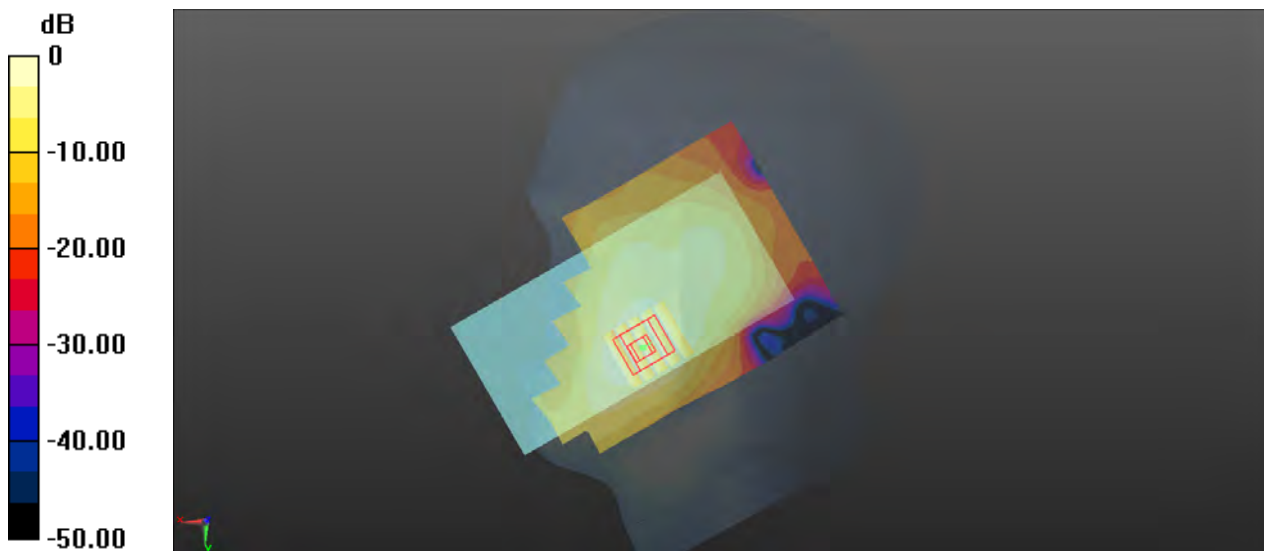

0 dB = 0.165 W/kg

P16 LTE 71_QPSK20M_Right Cheek_Ch133322_1RB_OS50

Communication System: LTE; Frequency: 673 MHz; Duty Cycle: 1:1

Medium: HSL750_1029 Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.856 \text{ S/m}$; $\epsilon_r = 42.495$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (71x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.304 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.279 V/m ; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.322 W/kg
SAR(1 g) = 0.259 W/kg ; SAR(10 g) = 0.202 W/kg
Maximum value of SAR (measured) = 0.301 W/kg

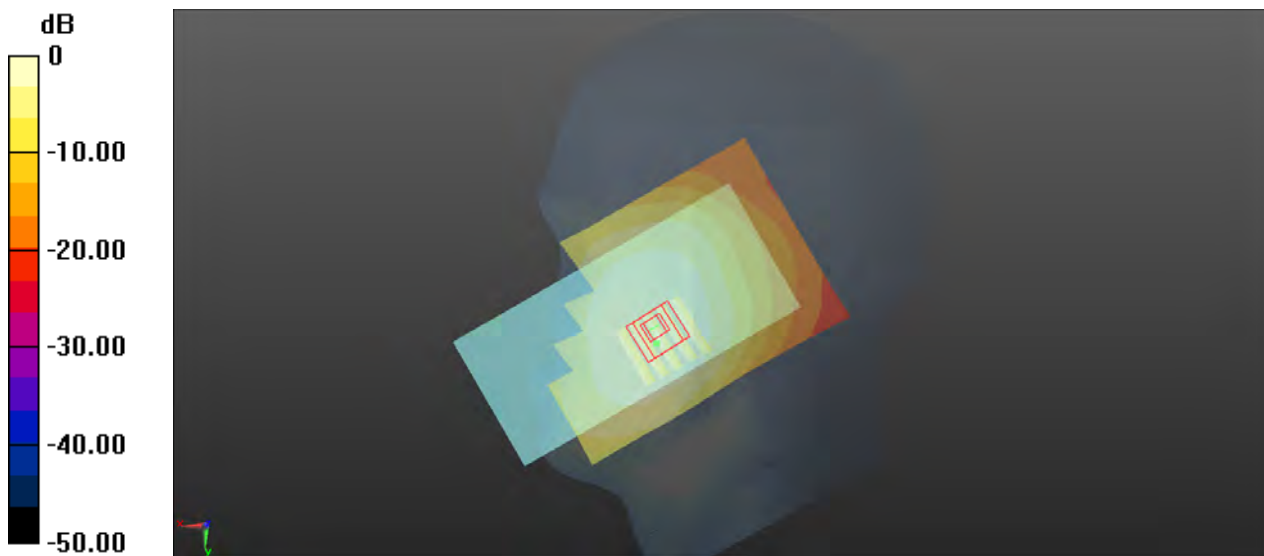

0 dB = 0.304 W/kg

P17 WLAN2.4G_802.11b_Left Cheek_Ch11


Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: HSL2450_1102 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.789$ S/m; $\epsilon_r = 39.351$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.56, 4.56, 4.56); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.254 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.432 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.508 W/kg
SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.106 W/kg
Maximum value of SAR (measured) = 0.268 W/kg

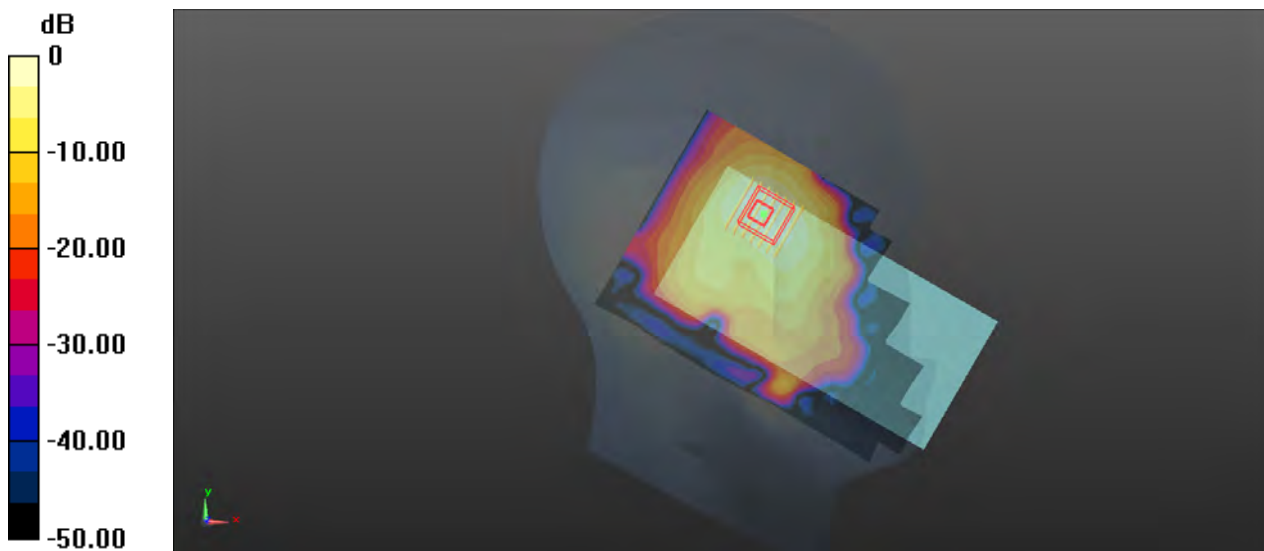

0 dB = 0.254 W/kg

P18 WLAN5G_802.11a_Left Cheek_Ch60


Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium: HSL5G_1103 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.809$ S/m; $\epsilon_r = 36.791$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.8, 4.8, 4.8); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x191x1)**: Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.22 W/kg

- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.731 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.554 W/kg; SAR(10 g) = 0.182 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

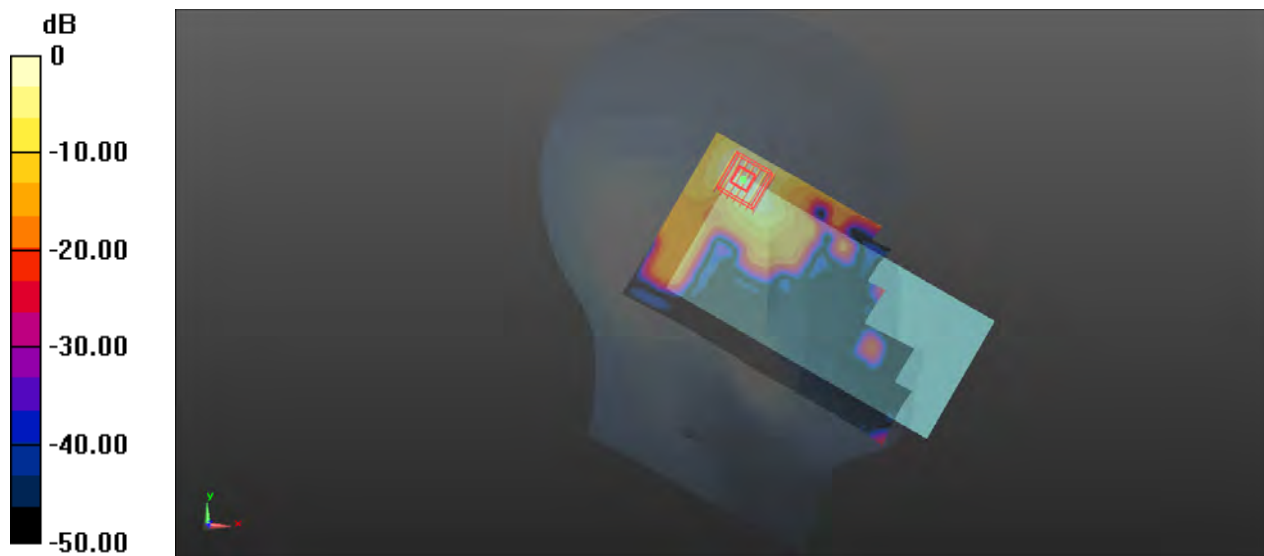

0 dB = 1.22 W/kg

P19 WLAN5G_802.11a_Left Cheek_Ch144


Communication System: 802.11a; Frequency: 5720 MHz; Duty Cycle: 1:1
Medium: HSL5G_1104 Medium parameters used: $f = 5720$ MHz; $\sigma = 5.337$ S/m; $\epsilon_r = 35.895$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.09 W/kg

- **Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.865 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 1.97 W/kg
SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.155 W/kg
Maximum value of SAR (measured) = 1.14 W/kg

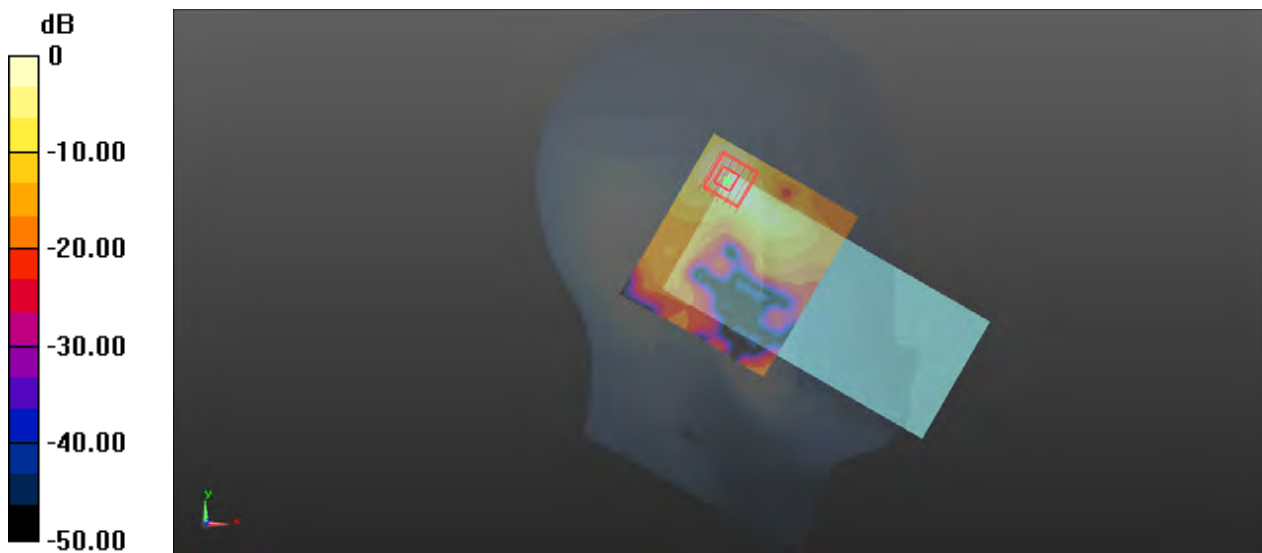

0 dB = 1.09 W/kg

P20 WLAN5G_802.11a_Left Cheek_Ch157


Communication System: 802.11a; Frequency: 5785 MHz; Duty Cycle: 1:1
Medium: HSL5G_1104 Medium parameters used: $f = 5785$ MHz; $\sigma = 5.397$ S/m; $\epsilon_r = 35.745$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.49, 4.49, 4.49); Calibrated: 2021/8/25;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2021/10/26
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1610
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x191x1)**: Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.46 W/kg

- **Zoom Scan (7x7x12)/Cube 0**: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0.961 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 2.89 W/kg
SAR(1 g) = 0.618 W/kg; SAR(10 g) = 0.178 W/kg
Maximum value of SAR (measured) = 1.63 W/kg

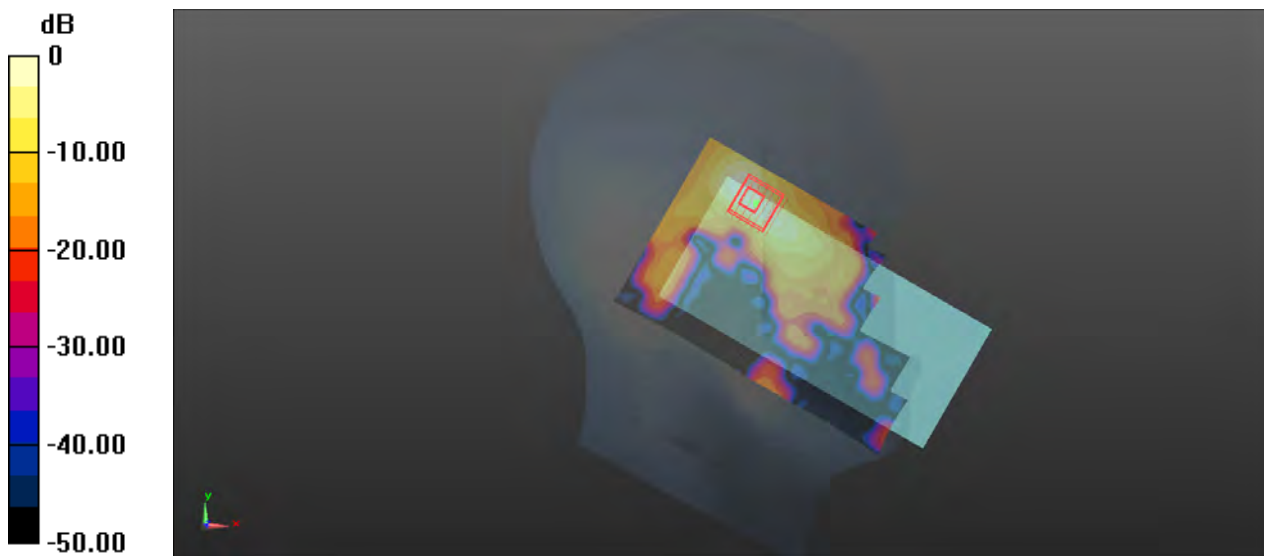

0 dB = 1.46 W/kg

P21 BT_GFSK_Left Cheek_Ch78

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.2

Medium: HSL2450_1102 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.801$ S/m; $\epsilon_r = 39.325$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.56, 4.56, 4.56); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0523 W/kg


- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.615 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.101 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0556 W/kg

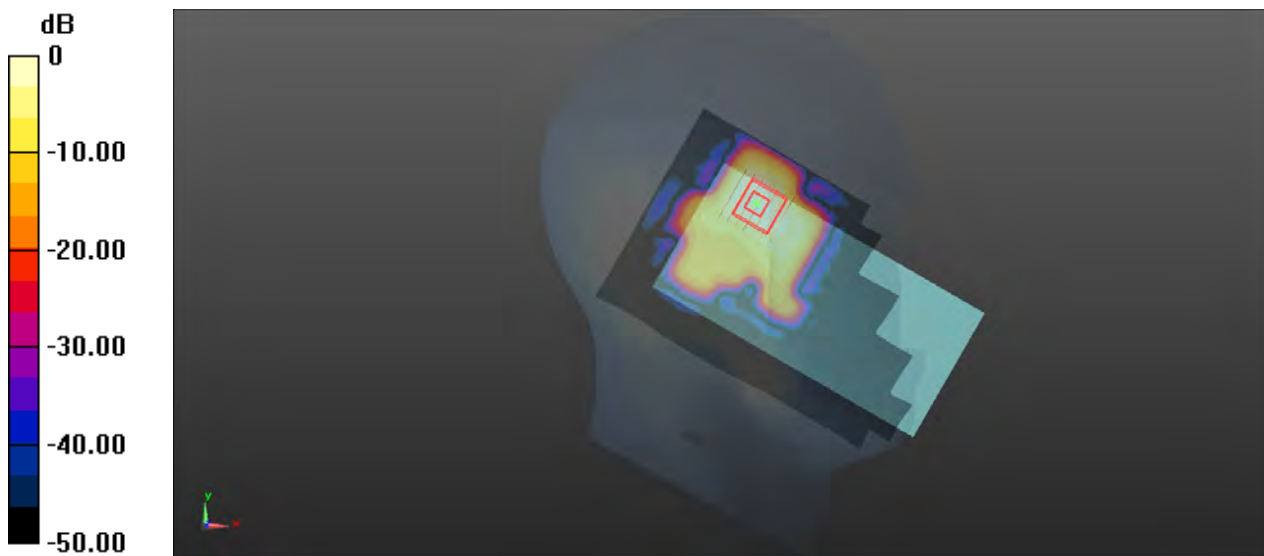

P22 GSM850_GPRS10_Rear Face_1cm_Ch128

Communication System: GPRS10; Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: HSL835_1029 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.426$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.581 W/kg


- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.080 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.416 W/kg

Maximum value of SAR (measured) = 0.576 W/kg

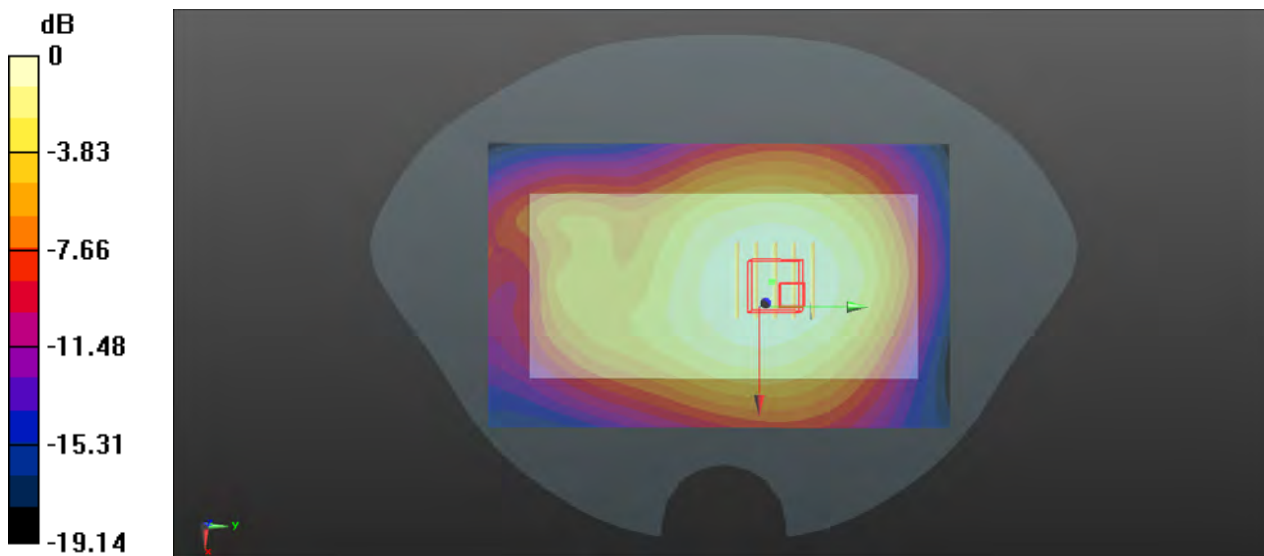

0 dB = 0.581 W/kg

P23 GSM1900_GPRS11_Rear Face_1cm_Ch810


Communication System: GPRS11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.77
Medium: HSL1900_1101 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.428$ S/m; $\epsilon_r = 39.739$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.773 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.235 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.680 W/kg; SAR(10 g) = 0.369 W/kg
Maximum value of SAR (measured) = 0.752 W/kg

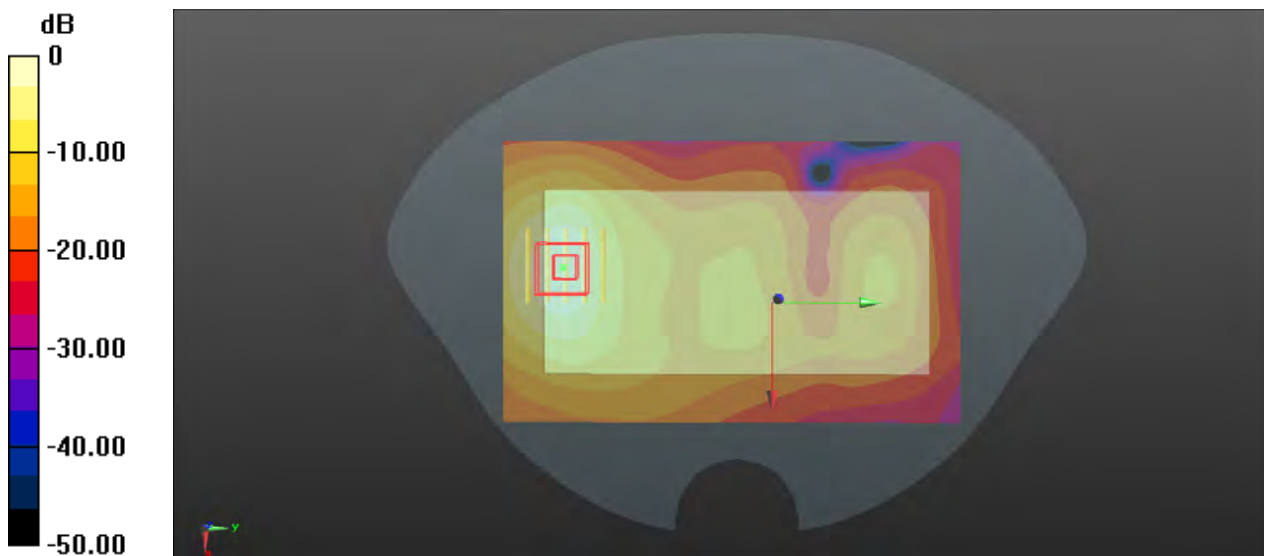

P24 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9400


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL1900_1101 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.73$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.19, 5.19, 5.19); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.05 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.310 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.63 W/kg
SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.515 W/kg
Maximum value of SAR (measured) = 1.03 W/kg

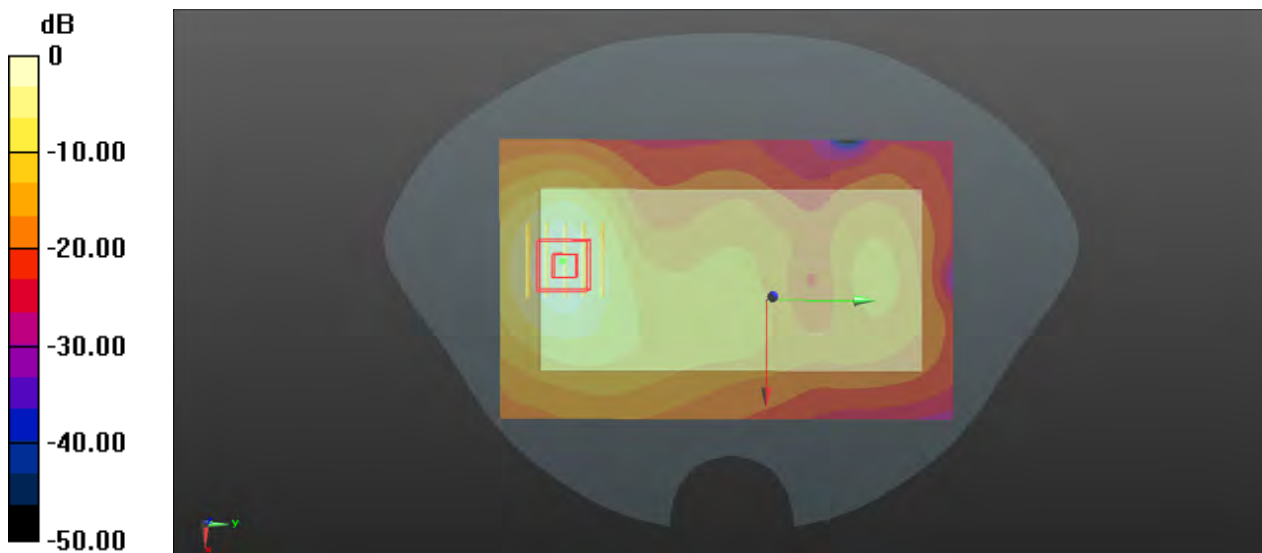

0 dB = 1.05 W/kg

P25 WCDMA IV_RMC12.2K_Rear Face_1cm_Ch1312


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL1750_1030 Medium parameters used: $f = 1712.4$ MHz; $\sigma = 1.318$ S/m; $\epsilon_r = 39.782$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.8°C; Liquid Temperature : 22.7°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(5.43, 5.43, 5.43); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1)**: Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.23 W/kg

- **Zoom Scan (5x5x7)/Cube 0**: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 4.538 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.577 W/kg
Maximum value of SAR (measured) = 1.16 W/kg

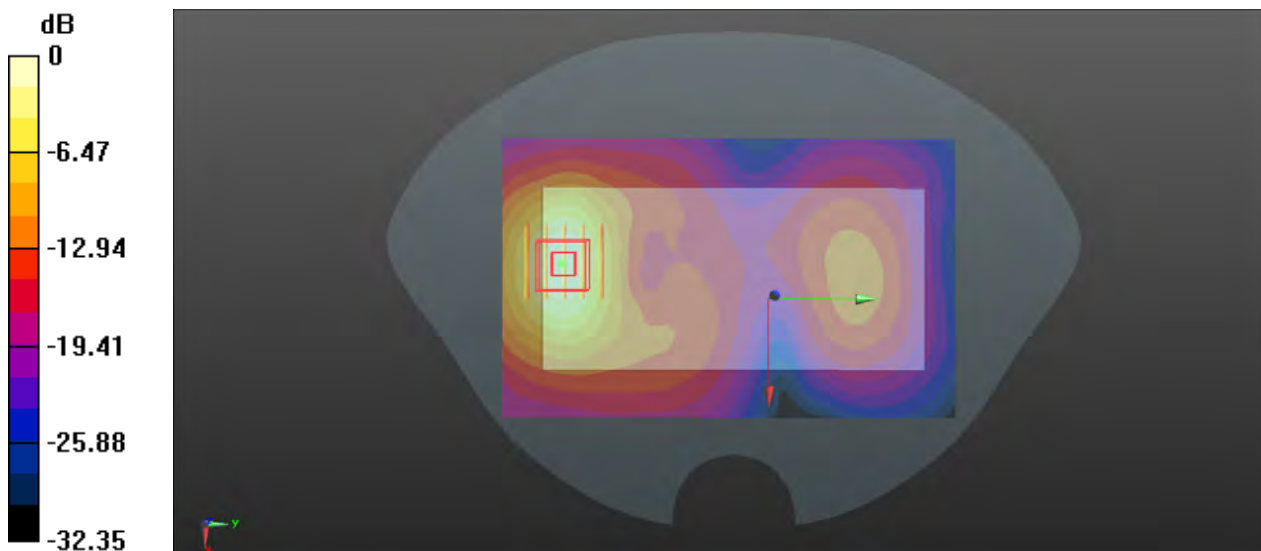

0 dB = 1.23 W/kg

P26 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4132


Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: HSL835_1029 Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.419$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.441 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.275 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.521 W/kg
SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.314 W/kg
Maximum value of SAR (measured) = 0.440 W/kg

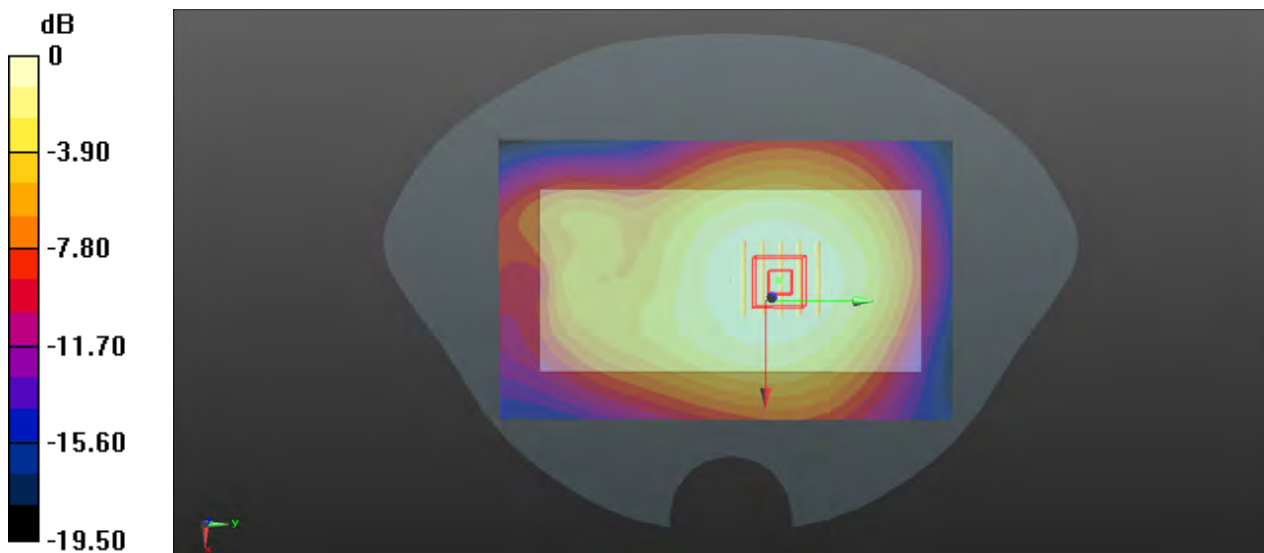

P27 LTE 5_QPSK10M_Rear Face_1cm_Ch20525_1RB_OS49


Communication System: LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL835_1029 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 42.391$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.7°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.04, 6.04, 6.04); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.156 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.015 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 0.188 W/kg
SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.155 W/kg

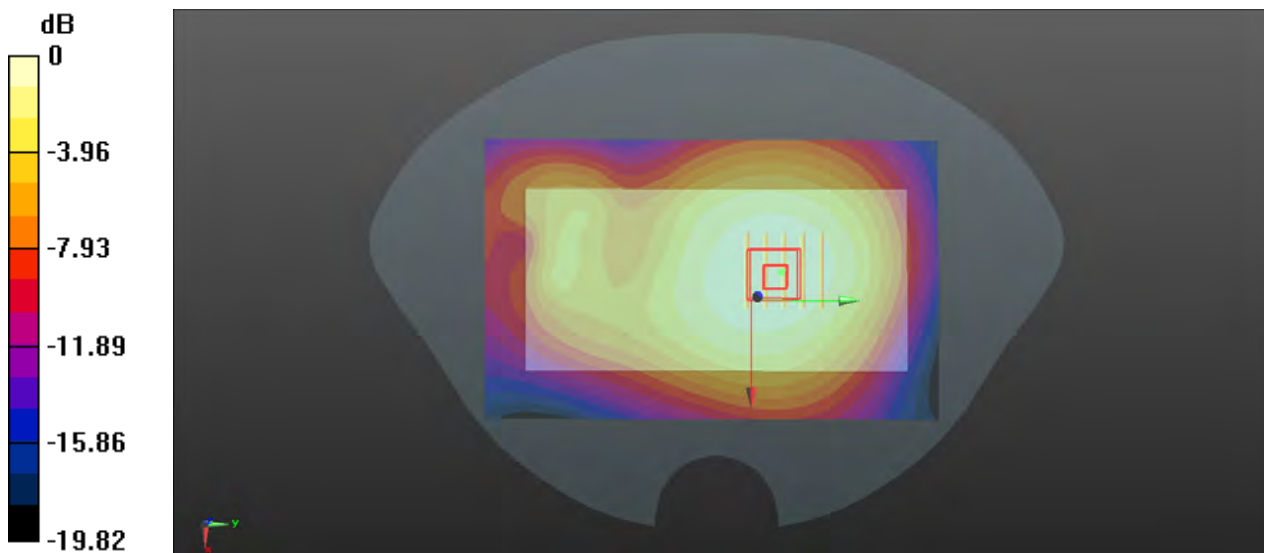

0 dB = 0.156 W/kg

P28 LTE 7_QPSK20M_Rear Face_1cm_Ch21350_1RB_OS0


Communication System: LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: HSL2600_1103 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.417$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(4.42, 4.42, 4.42); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (101x161x1)**: Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.987 W/kg

- **Zoom Scan (7x7x7)/Cube 0**: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.363 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 1.70 W/kg
SAR(1 g) = 0.911 W/kg; SAR(10 g) = 0.467 W/kg
Maximum value of SAR (measured) = 1.01 W/kg

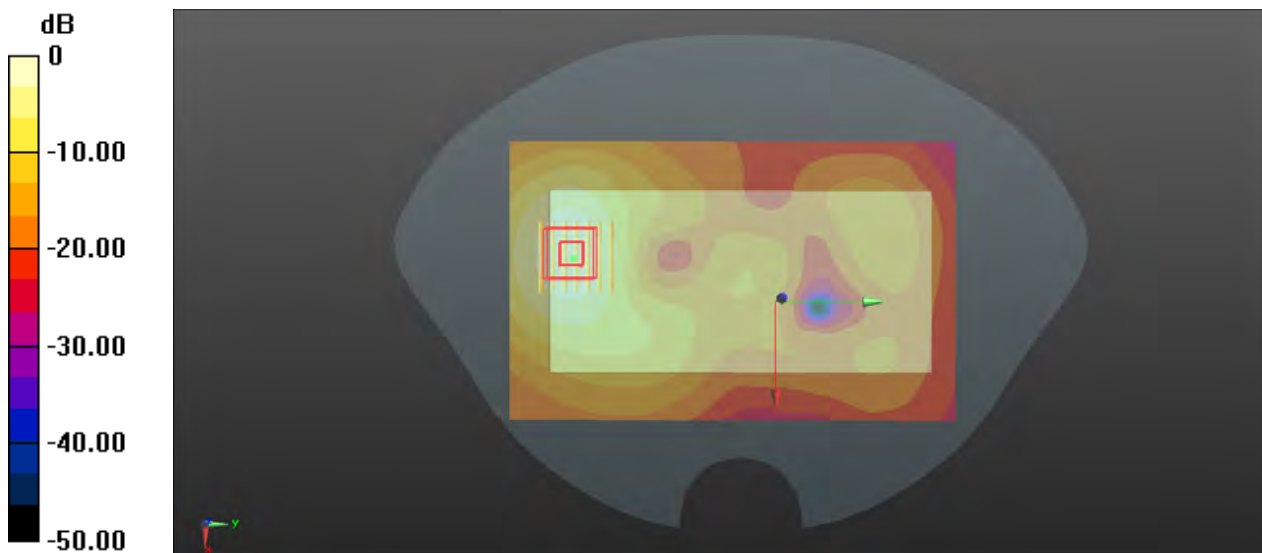

0 dB = 0.987 W/kg

P29 LTE 12_QPSK10M_Rear Face_1cm_Ch23060_1RB_OS0


Communication System: LTE; Frequency: 704 MHz; Duty Cycle: 1:1
Medium: HSL750_1029 Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.866 \text{ S/m}$; $\epsilon_r = 42.431$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.0646 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 8.499 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.0780 W/kg
SAR(1 g) = 0.062 W/kg ; SAR(10 g) = 0.047 W/kg
Maximum value of SAR (measured) = 0.0648 W/kg

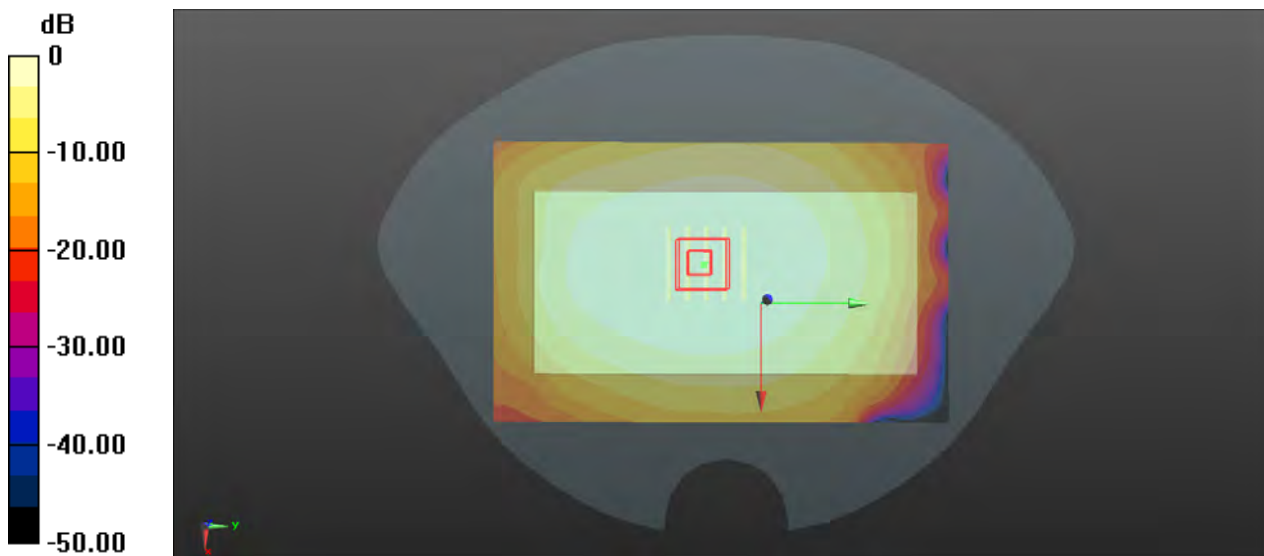

0 dB = 0.0646 W/kg

P30 LTE 13_QPSK10M_Rear Face_1cm_Ch23230_1RB_OS0


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL750_1029 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.893 \text{ S/m}$; $\epsilon_r = 42.235$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.155 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 13.277 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.191 W/kg
SAR(1 g) = 0.151 W/kg ; SAR(10 g) = 0.112 W/kg
Maximum value of SAR (measured) = 0.162 W/kg

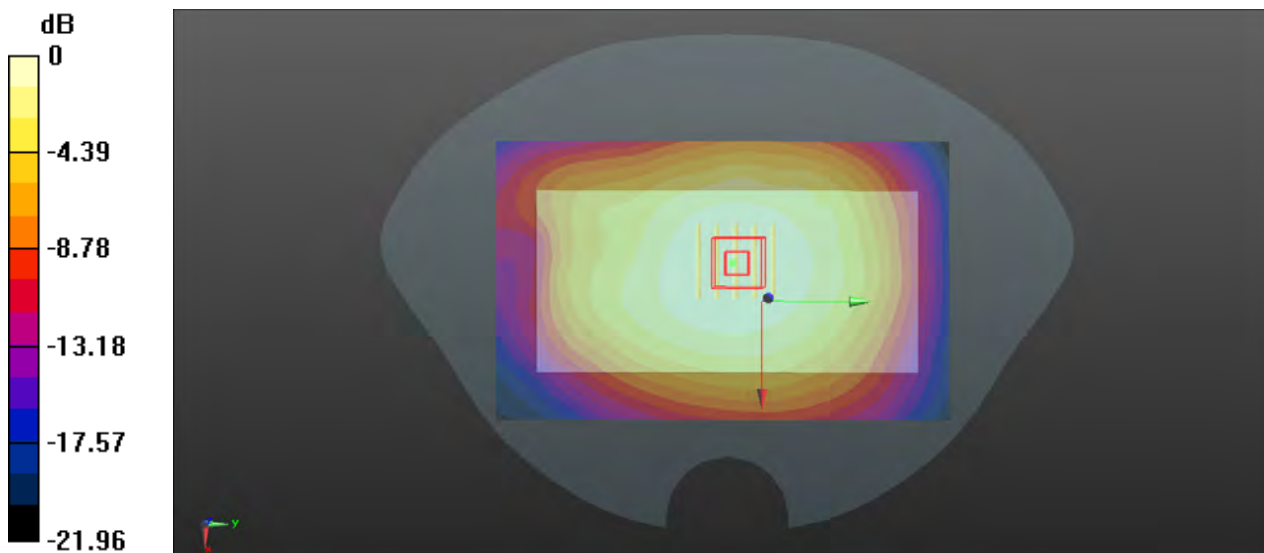

0 dB = 0.155 W/kg

P31 LTE 14_QPSK10M_Rear Face_1cm_Ch23330_1RB_OS0


Communication System: LTE; Frequency: 793 MHz; Duty Cycle: 1:1
Medium: HSL750_1029 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.897 \text{ S/m}$; $\epsilon_r = 42.194$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.3°C ; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: ES3DV3 - SN3268; ConvF(6.6, 6.6, 6.6); Calibrated: 2021/8/24;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1288; Calibrated: 2021/8/20
- Phantom: SAM (30deg probe tilt) with CRP v5.0; Type: QD000P40CD; Serial: TP:1781
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

- **Area Scan (81x131x1):** Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.255 W/kg

- **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 16.463 V/m ; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.241 W/kg ; SAR(10 g) = 0.182 W/kg
Maximum value of SAR (measured) = 0.253 W/kg

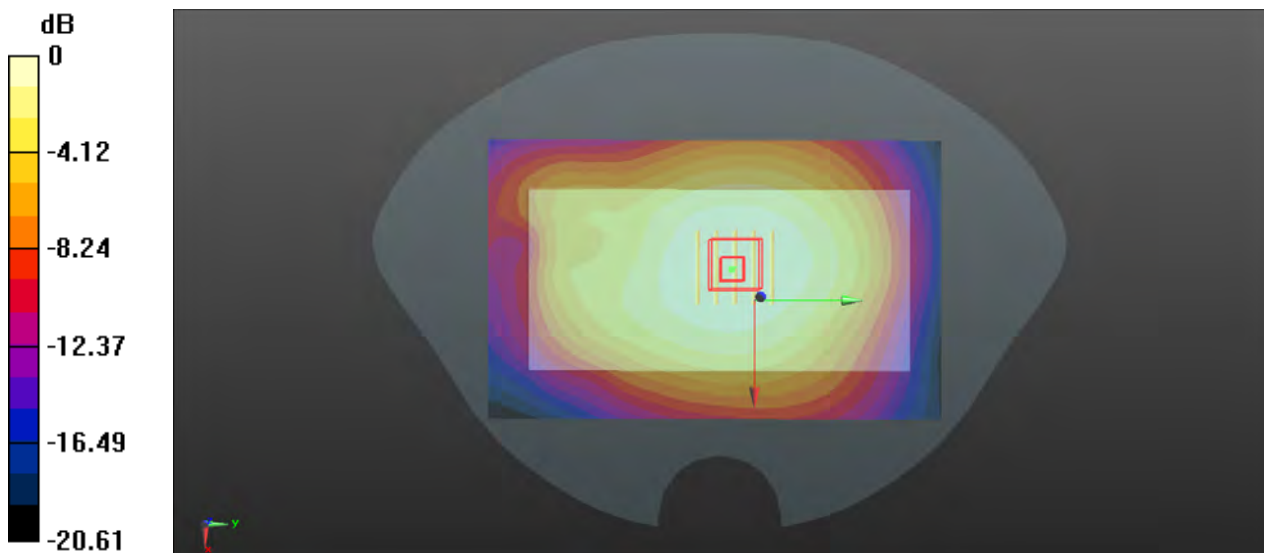

0 dB = 0.255 W/kg