





Test Report No.: W7L-P21080006RF18




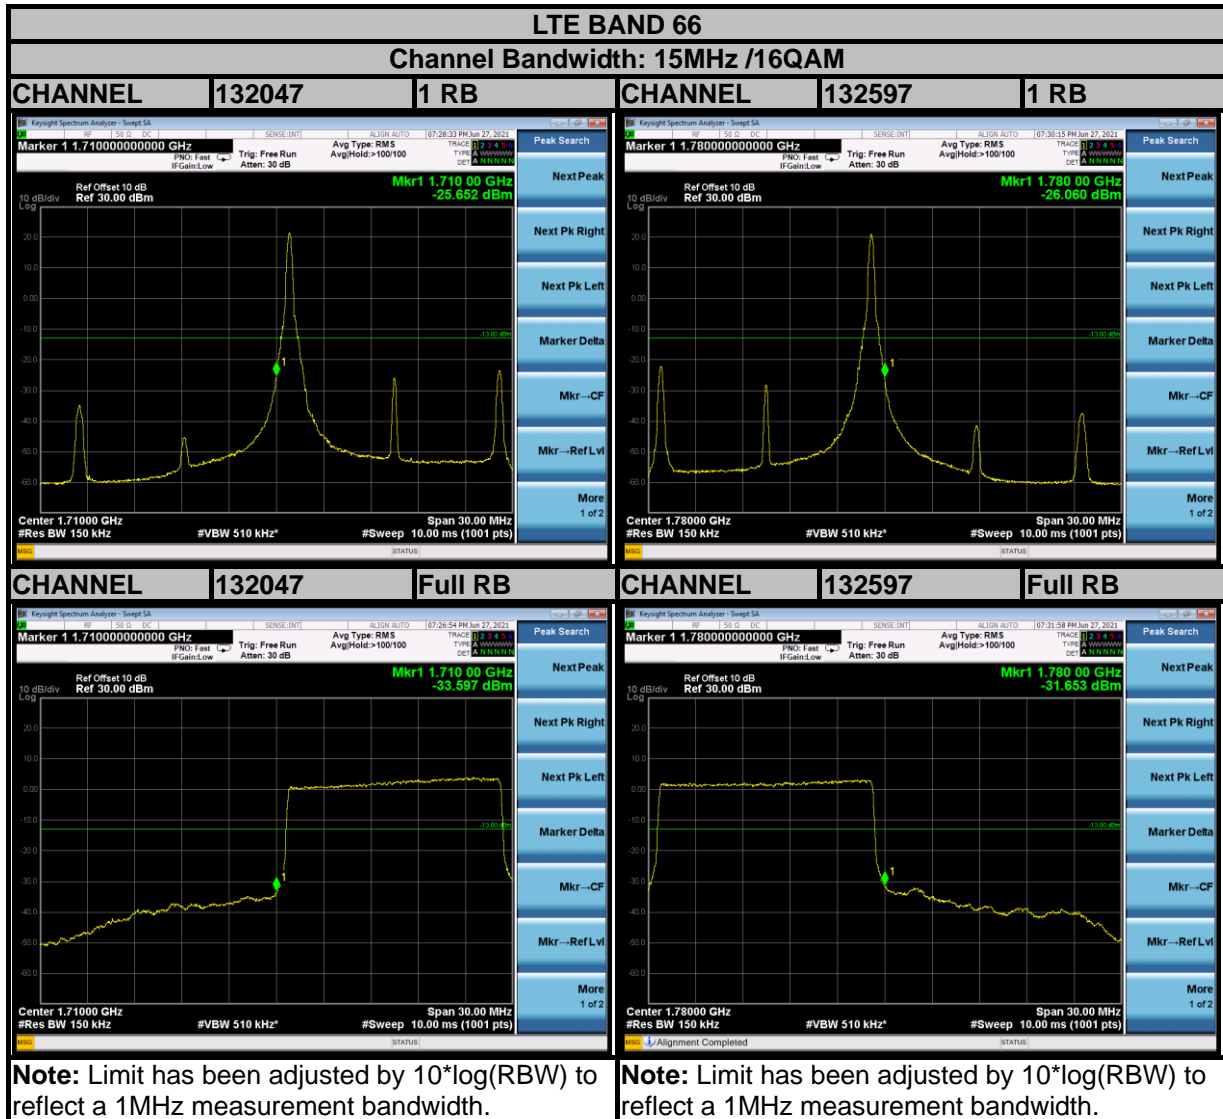

BUREAU VERITAS

Test Report No.: W7L-P21080006RF18

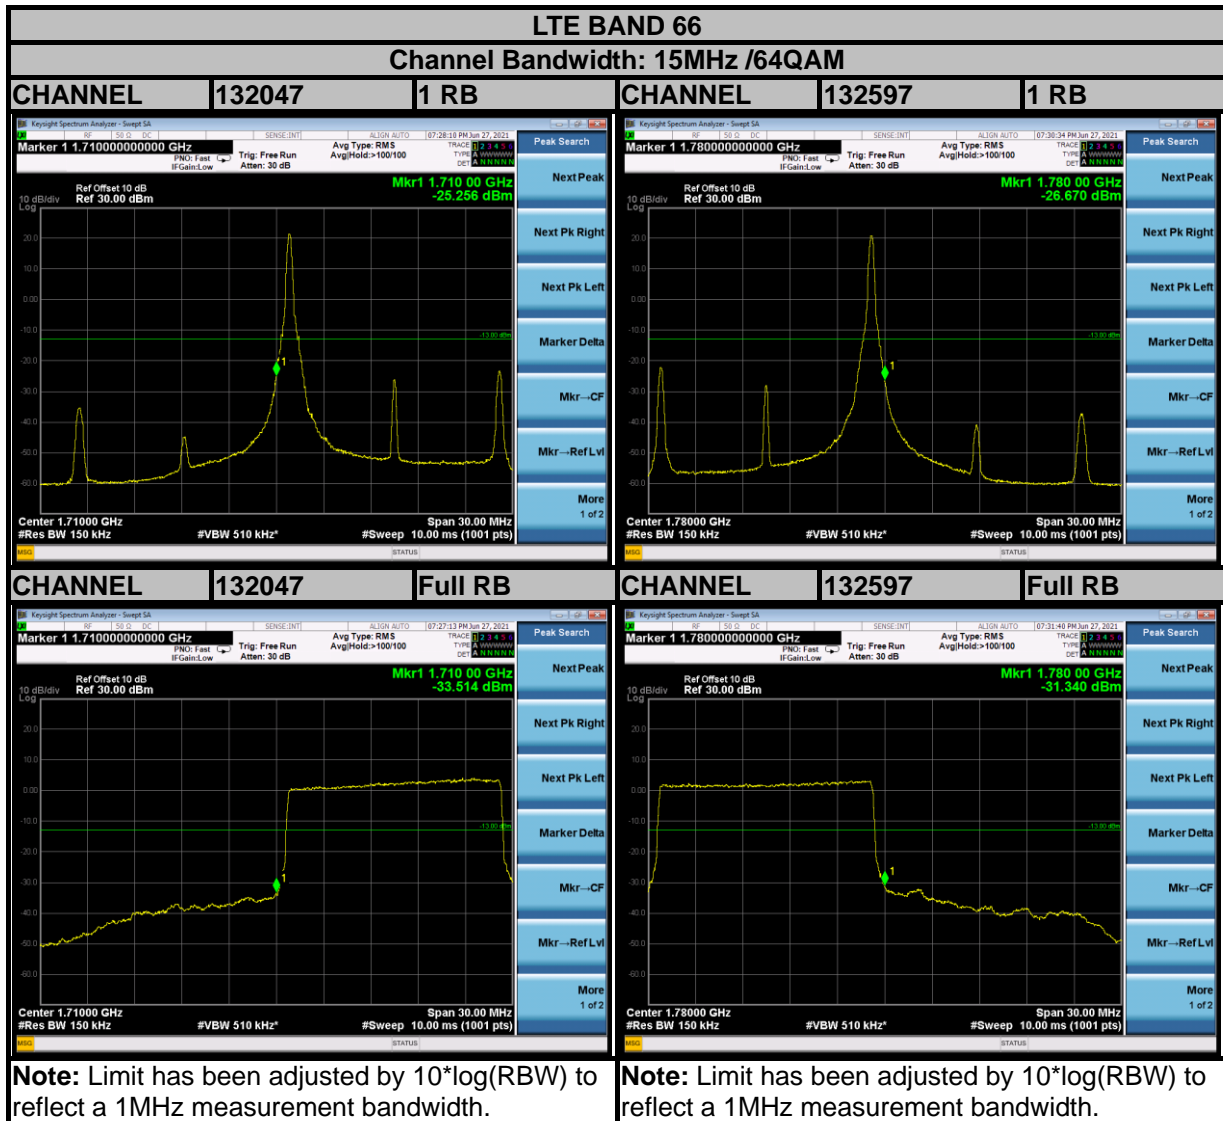


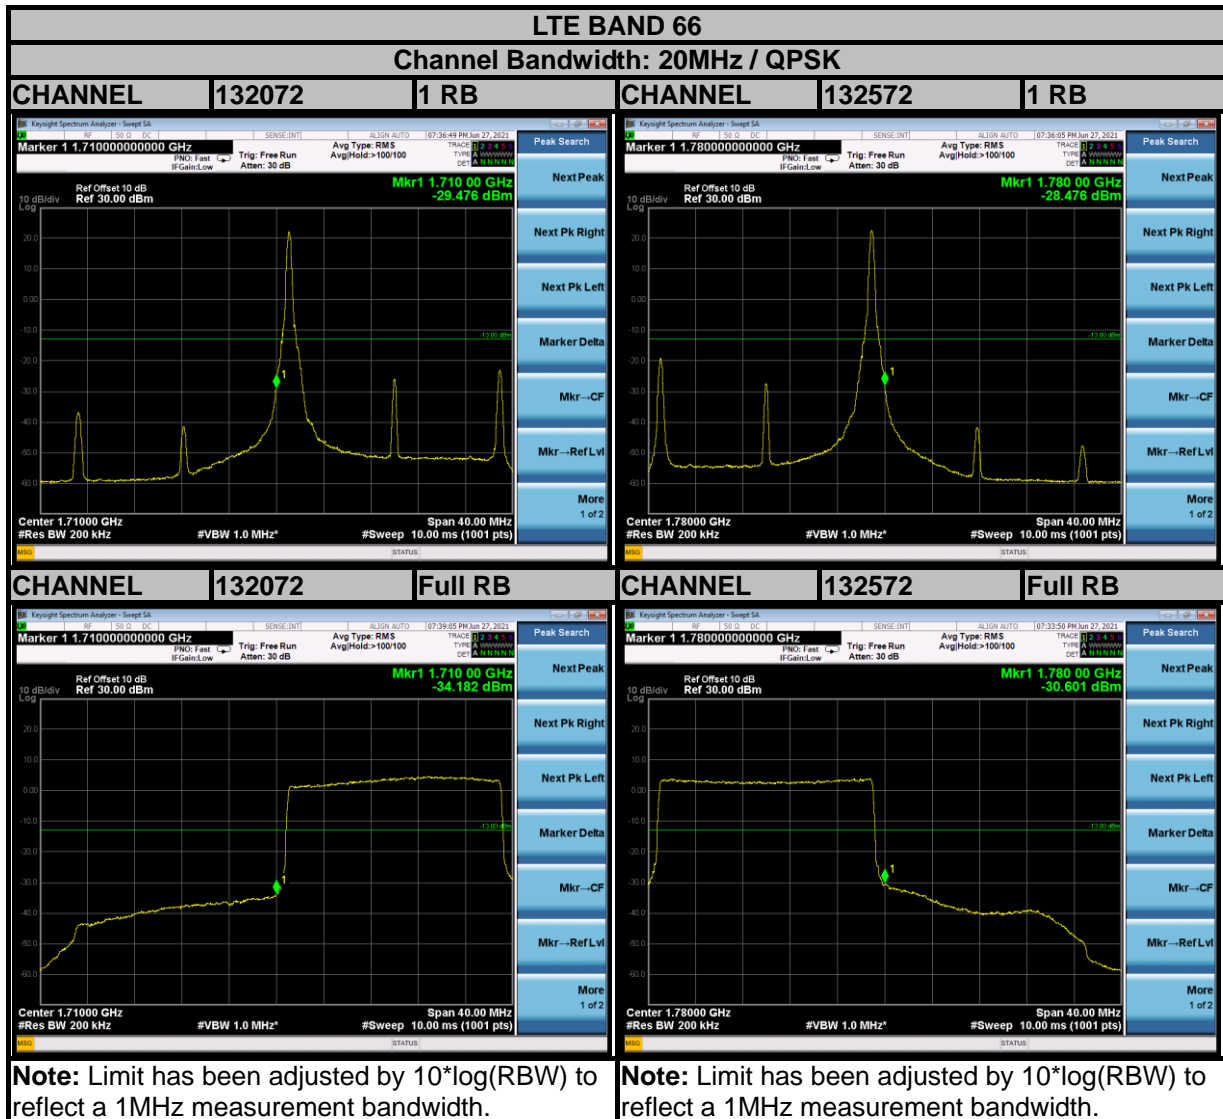



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

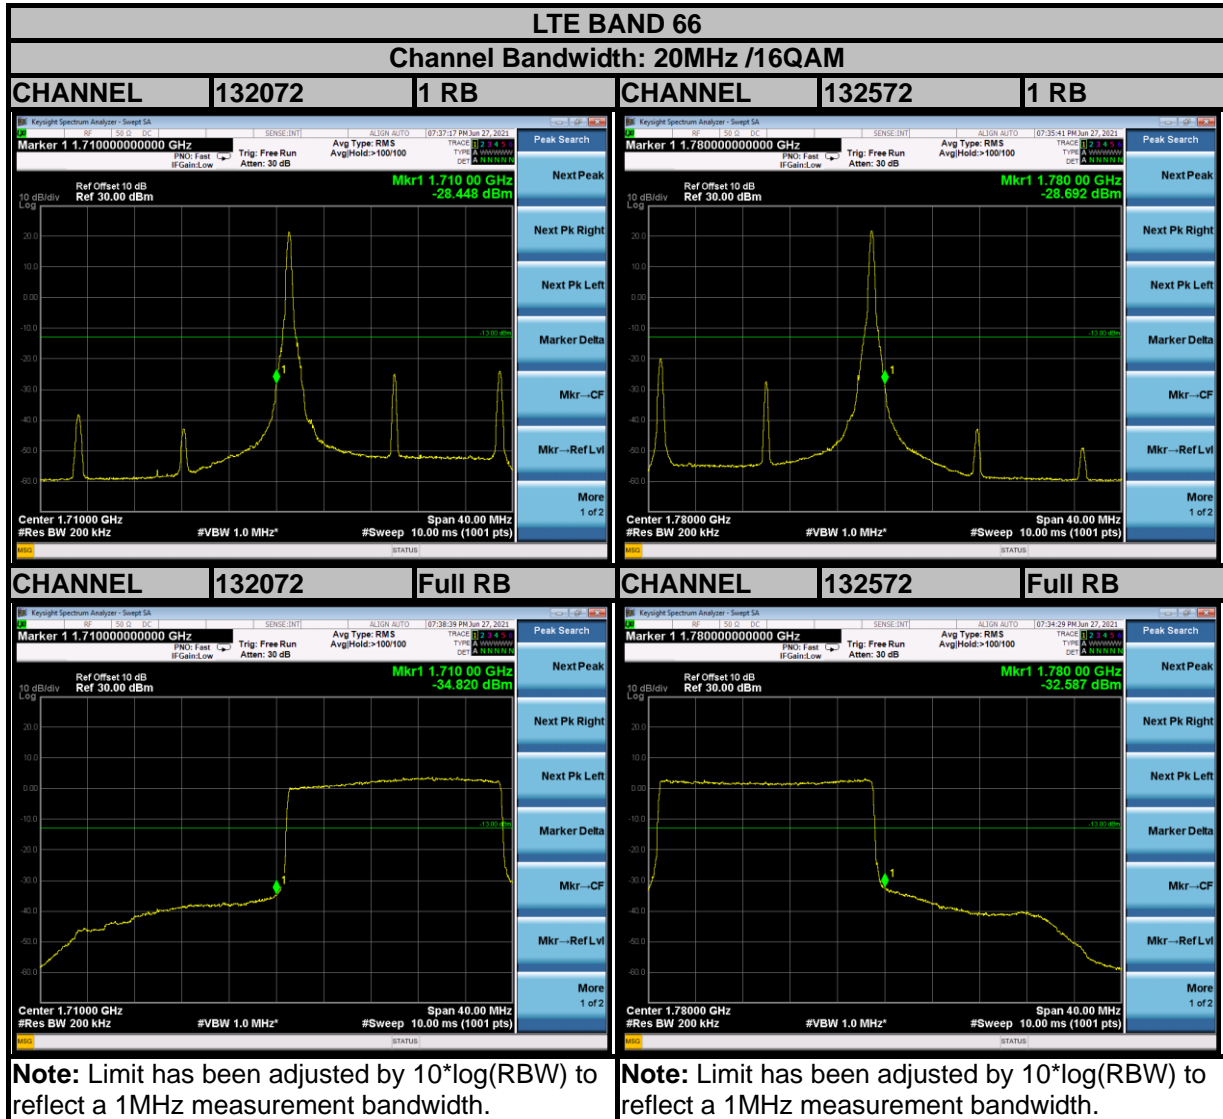



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

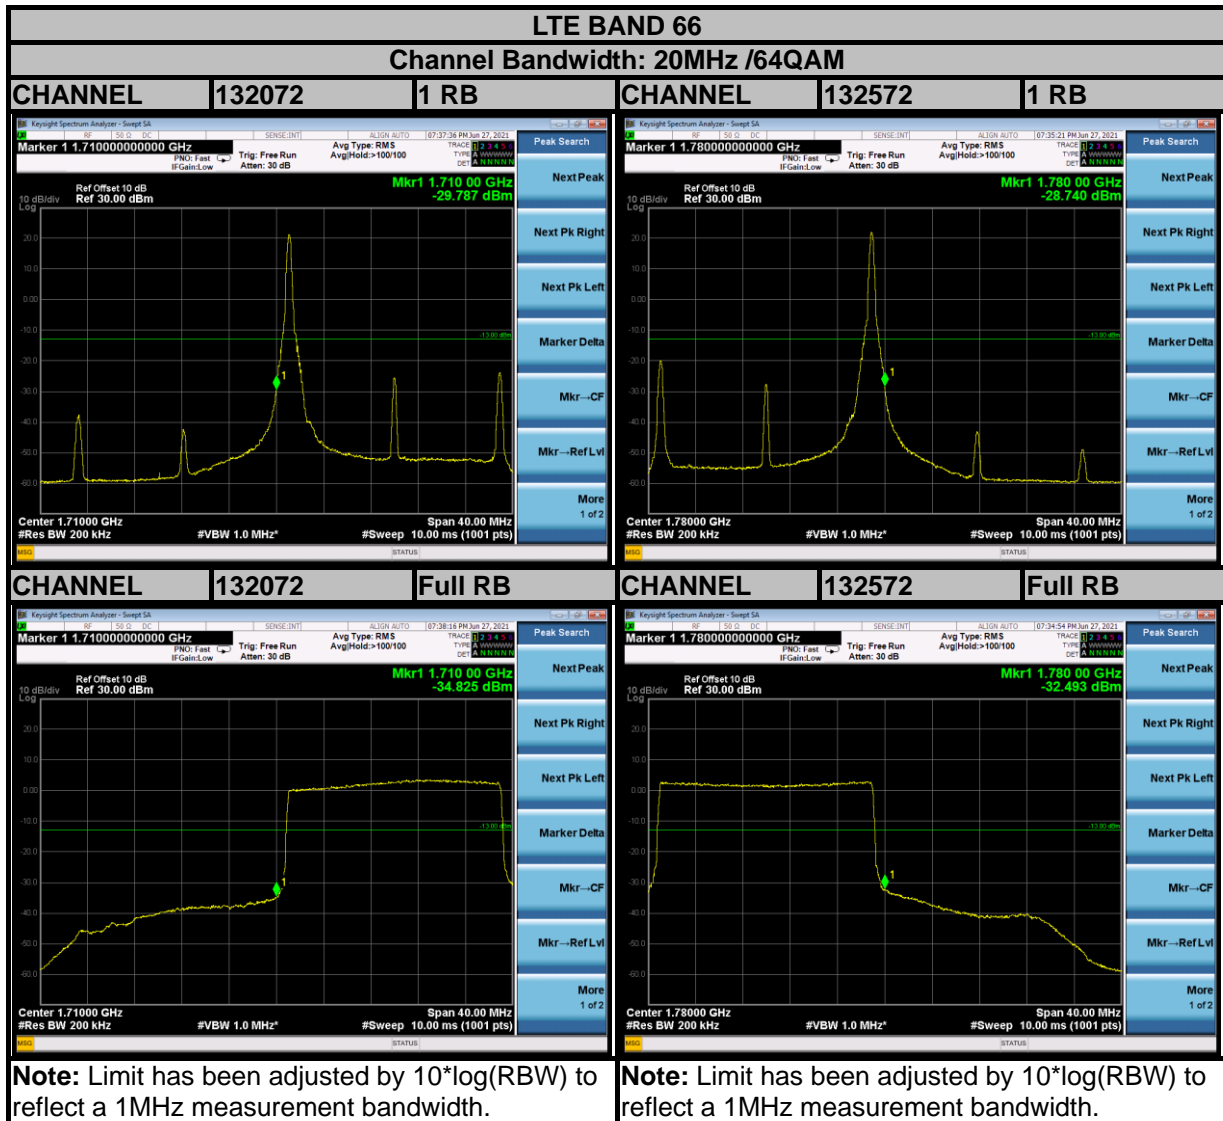




BUREAU VERITAS

Test Report No.: W7L-P21080006RF18

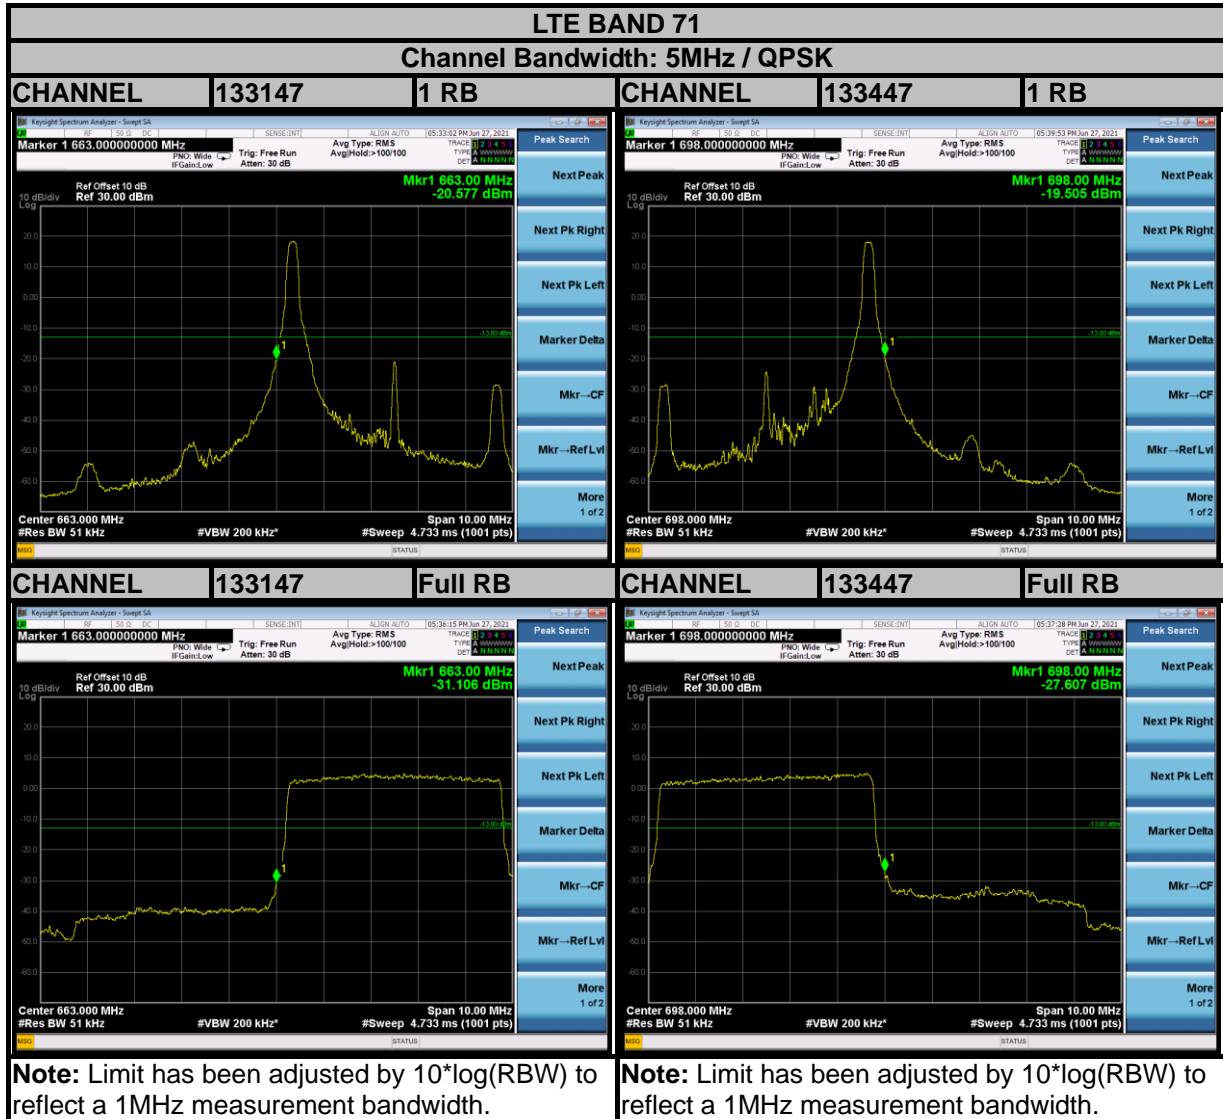




Test Report No.: W7L-P21080006RF18

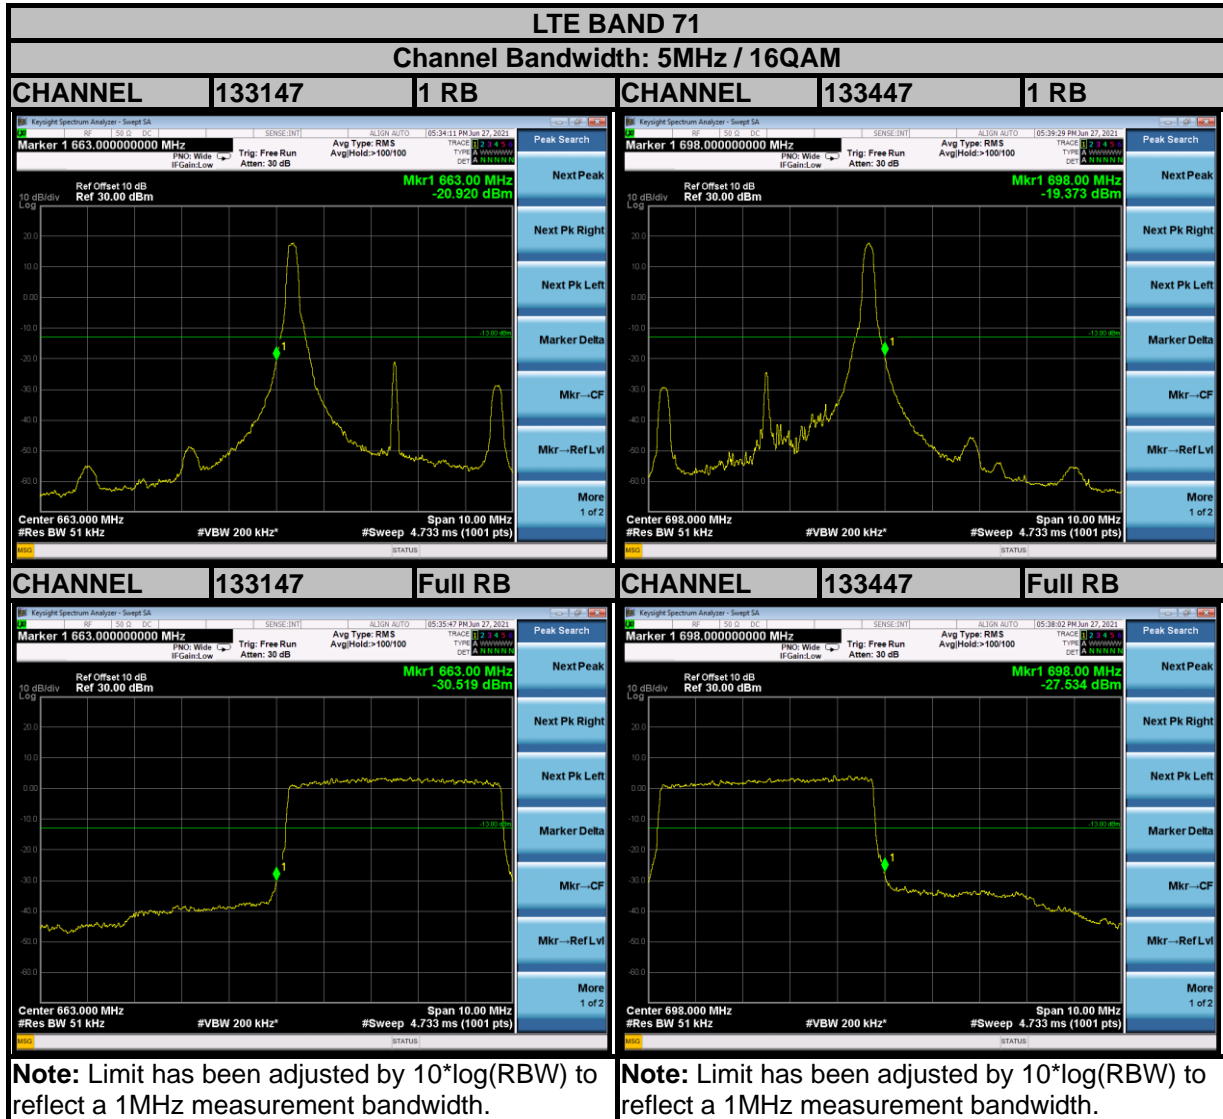



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

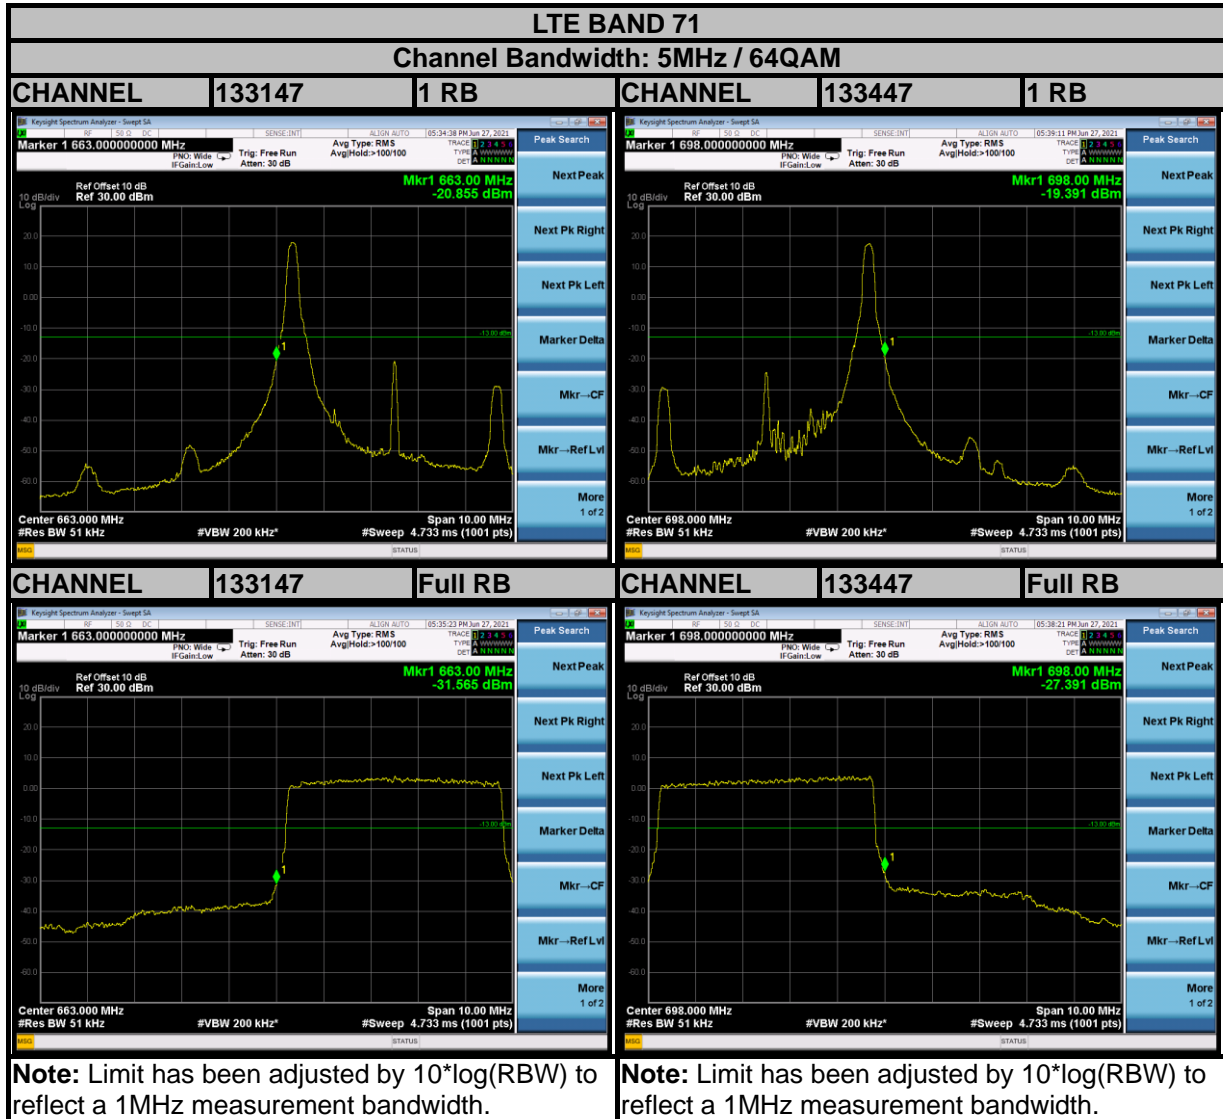



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

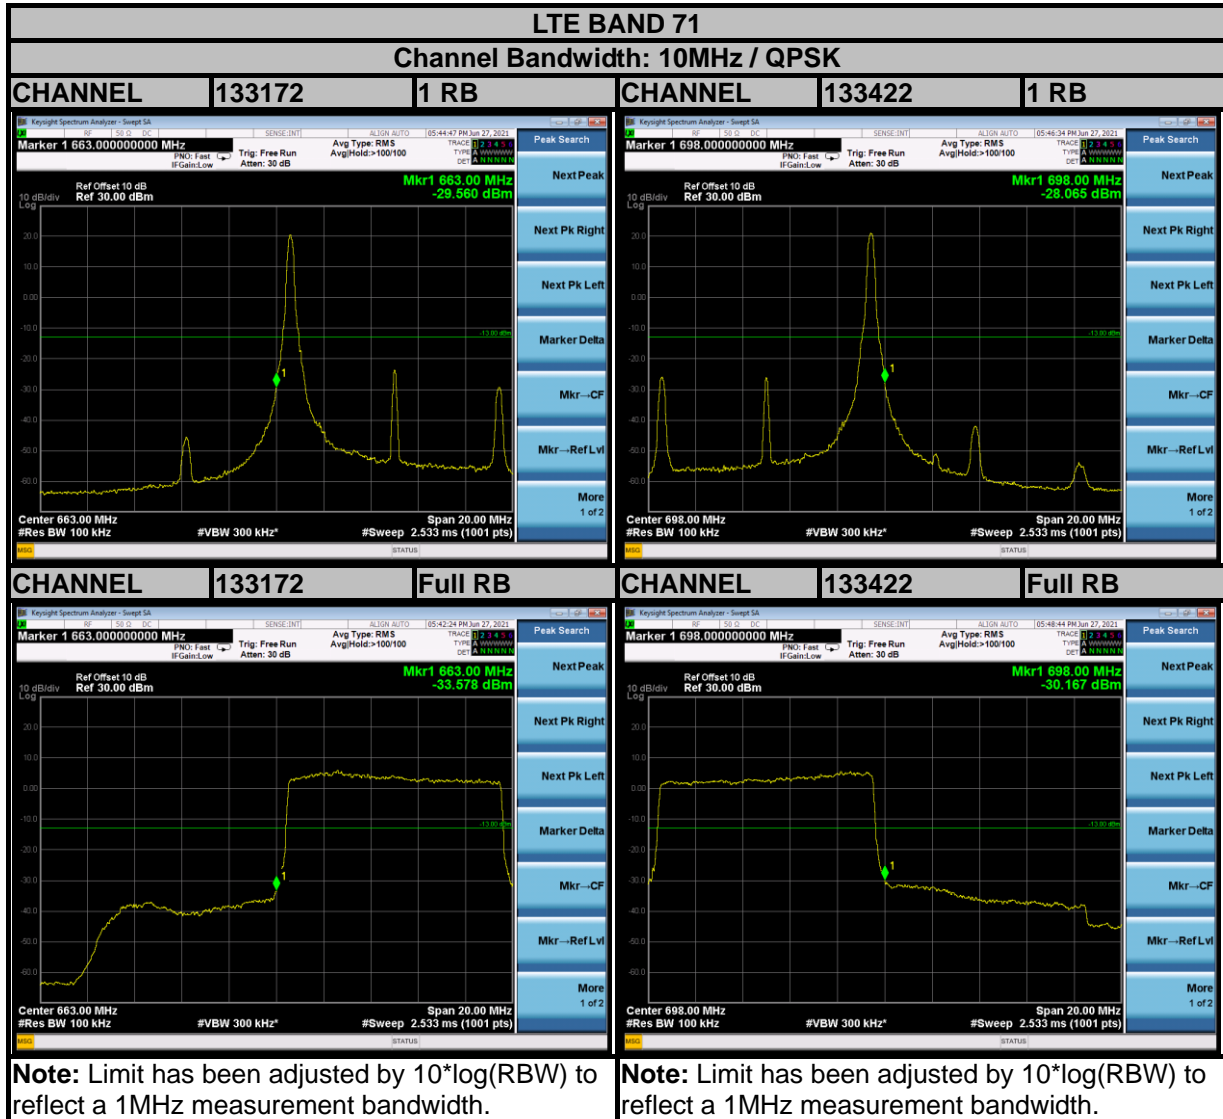



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

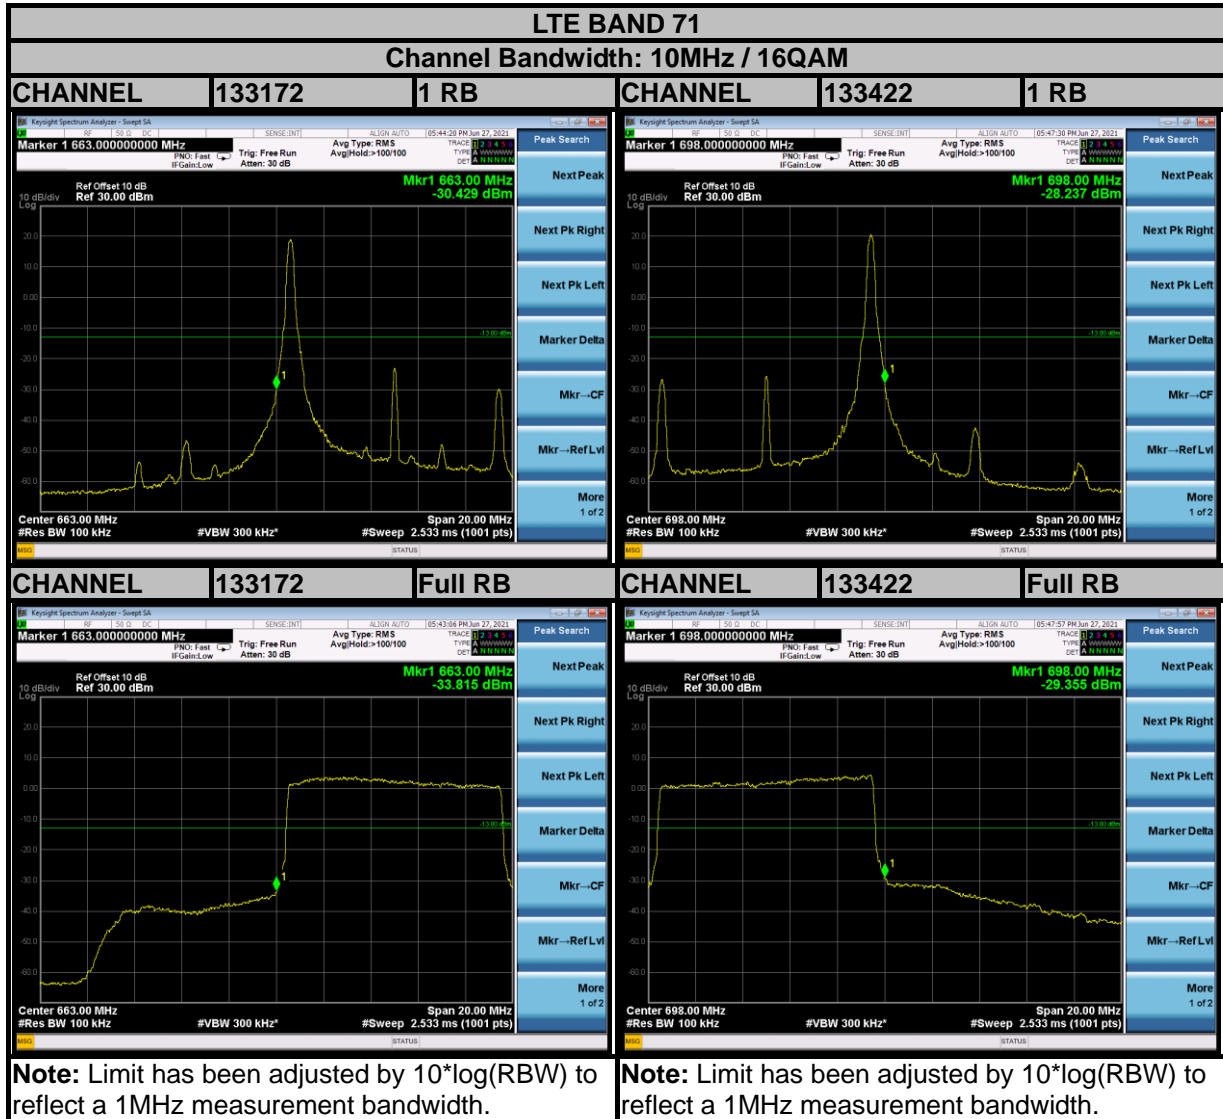



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

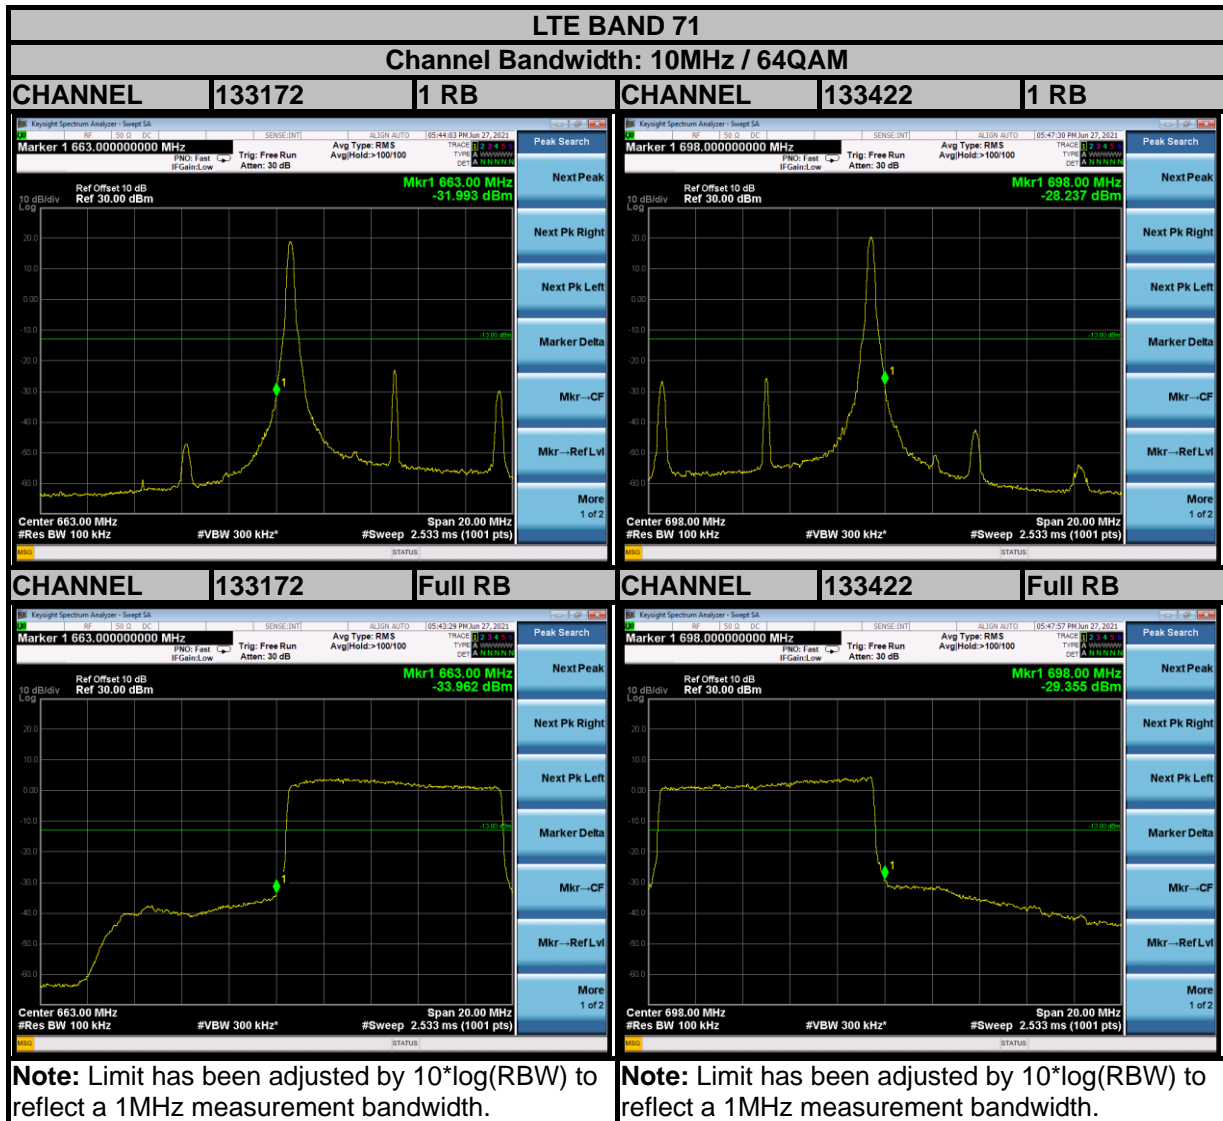



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

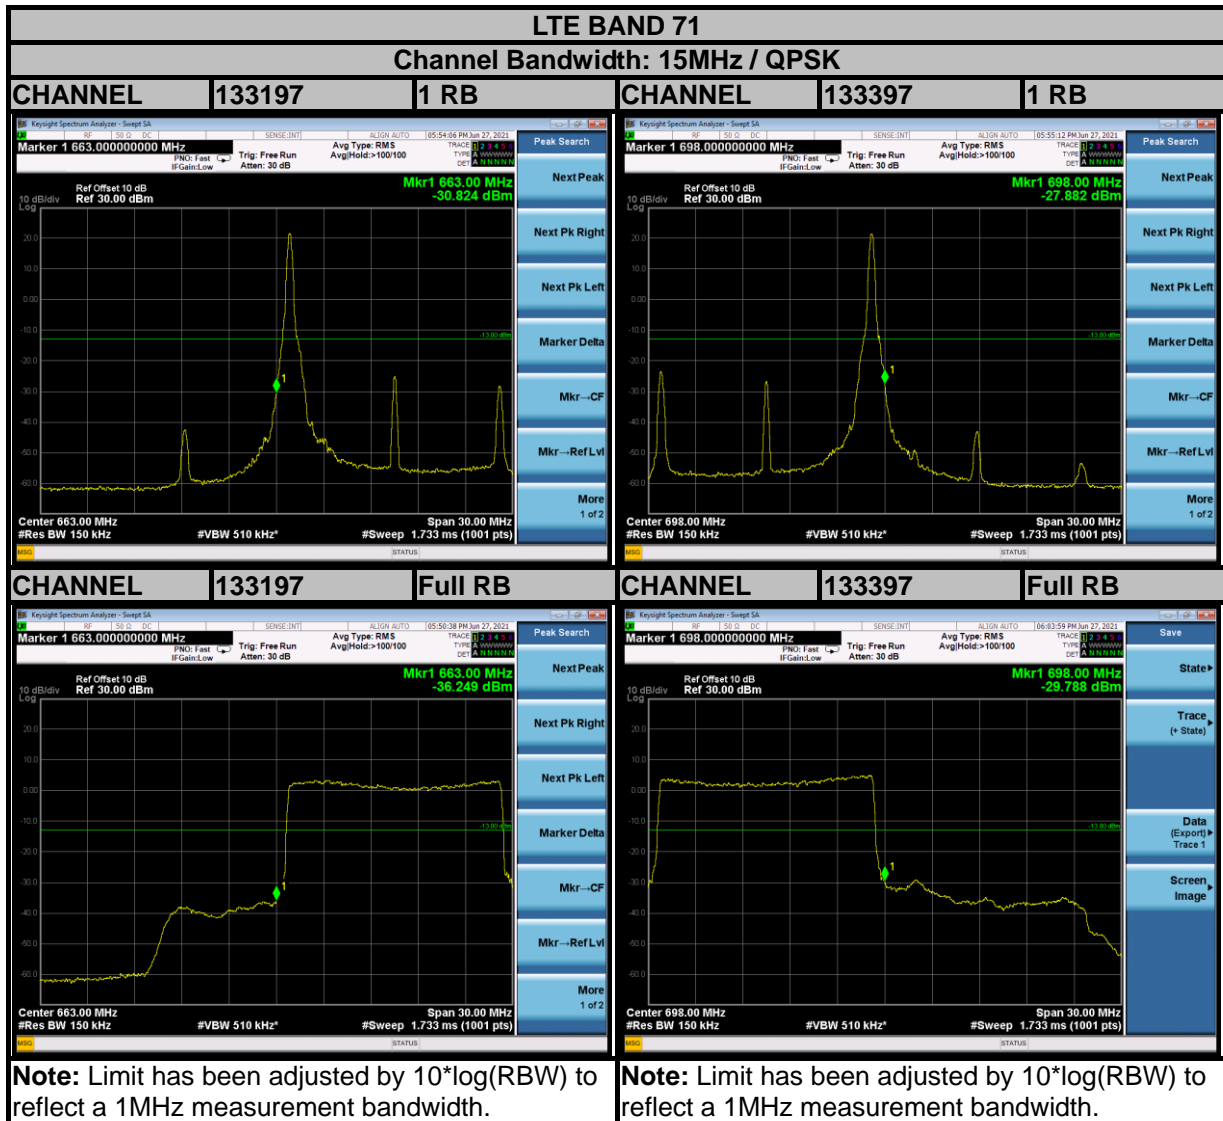



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

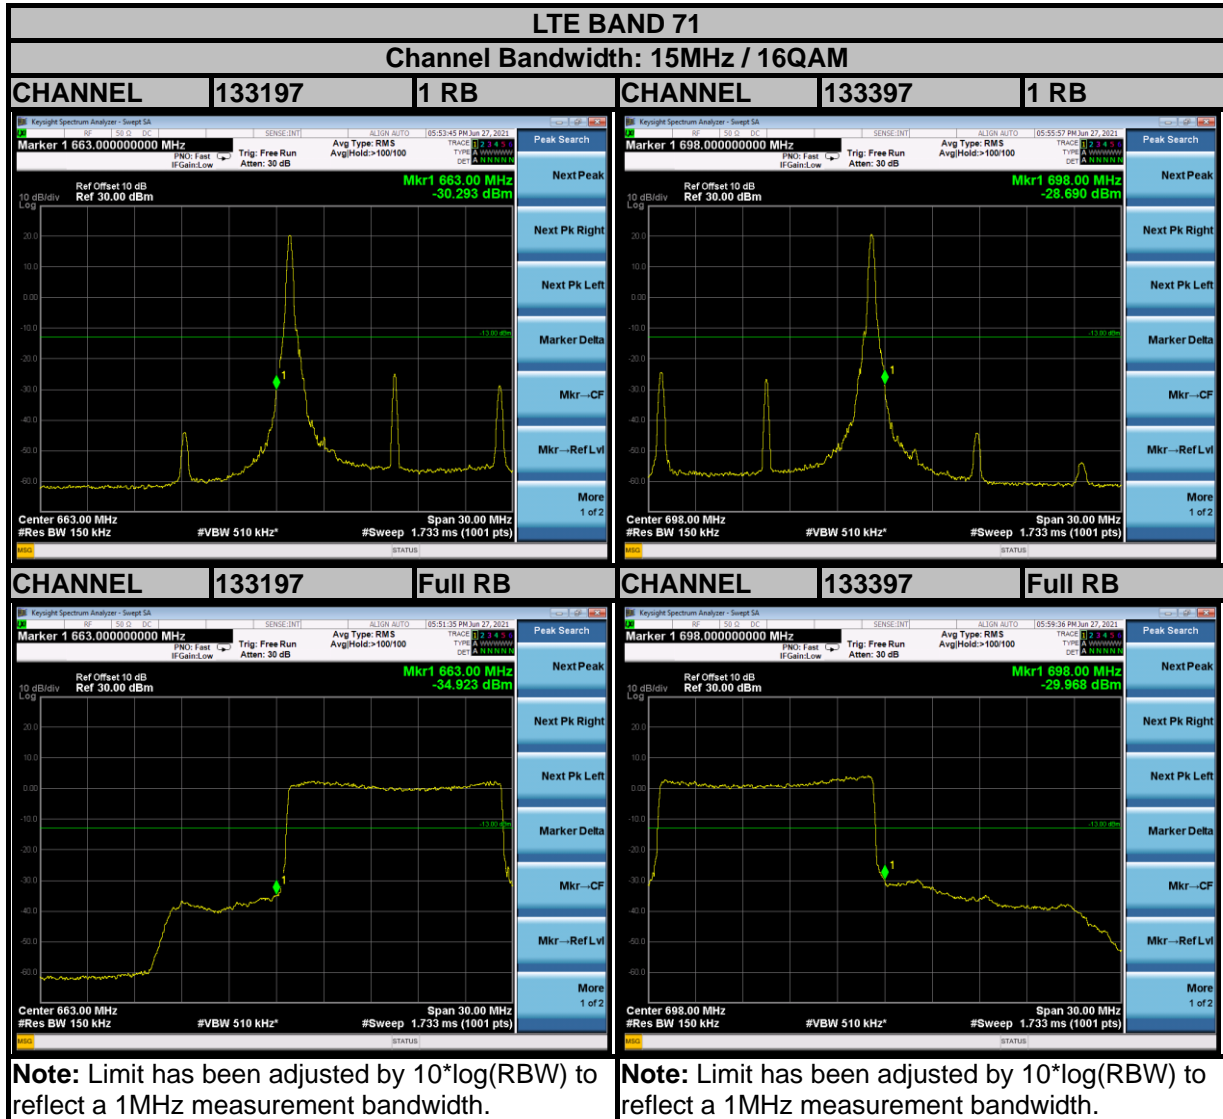



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

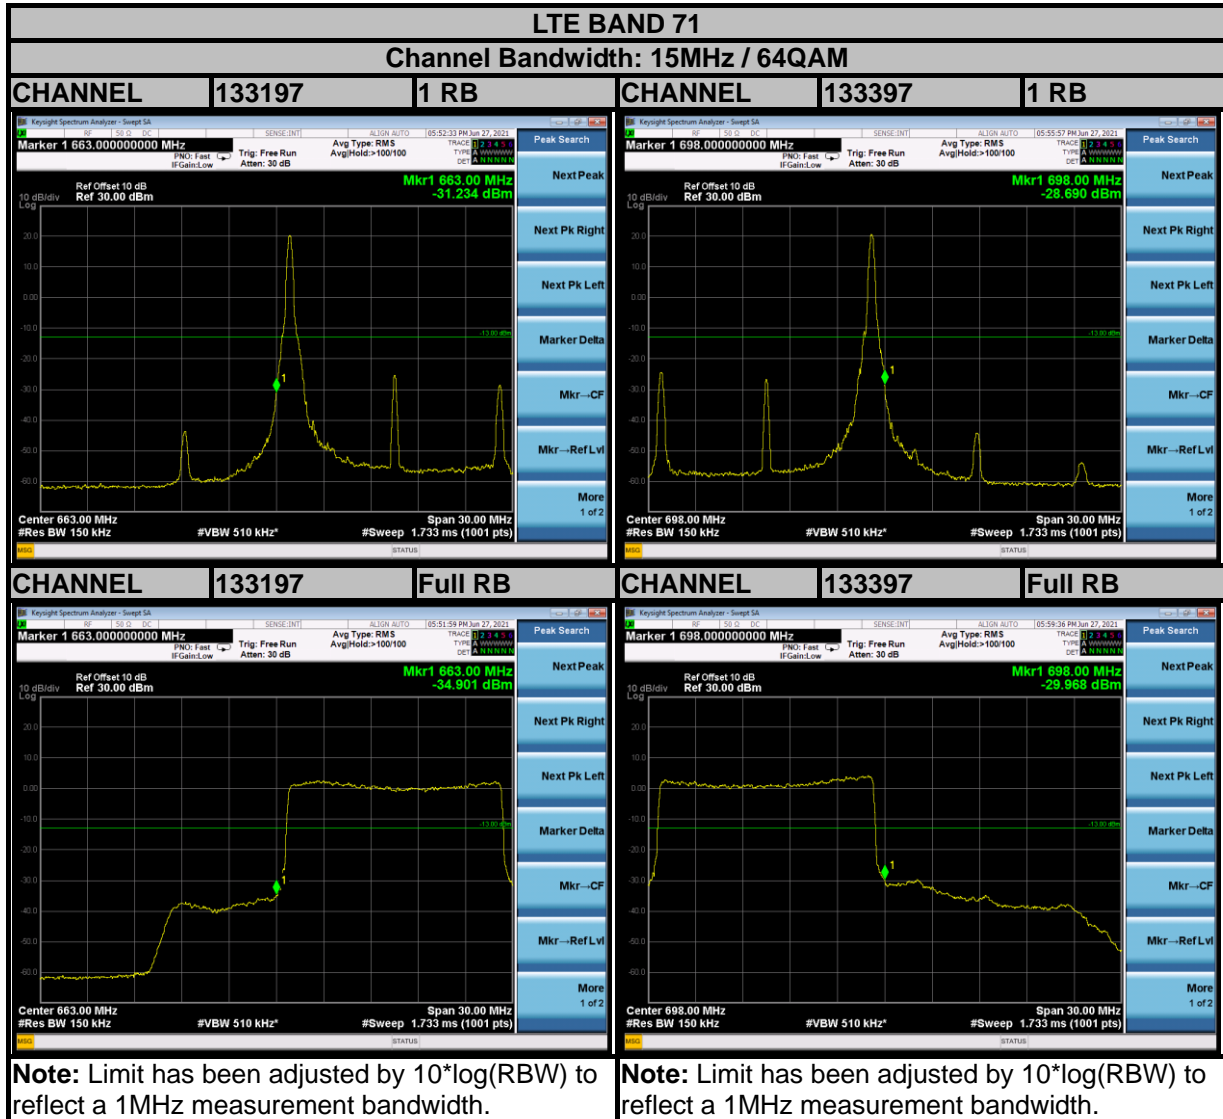



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

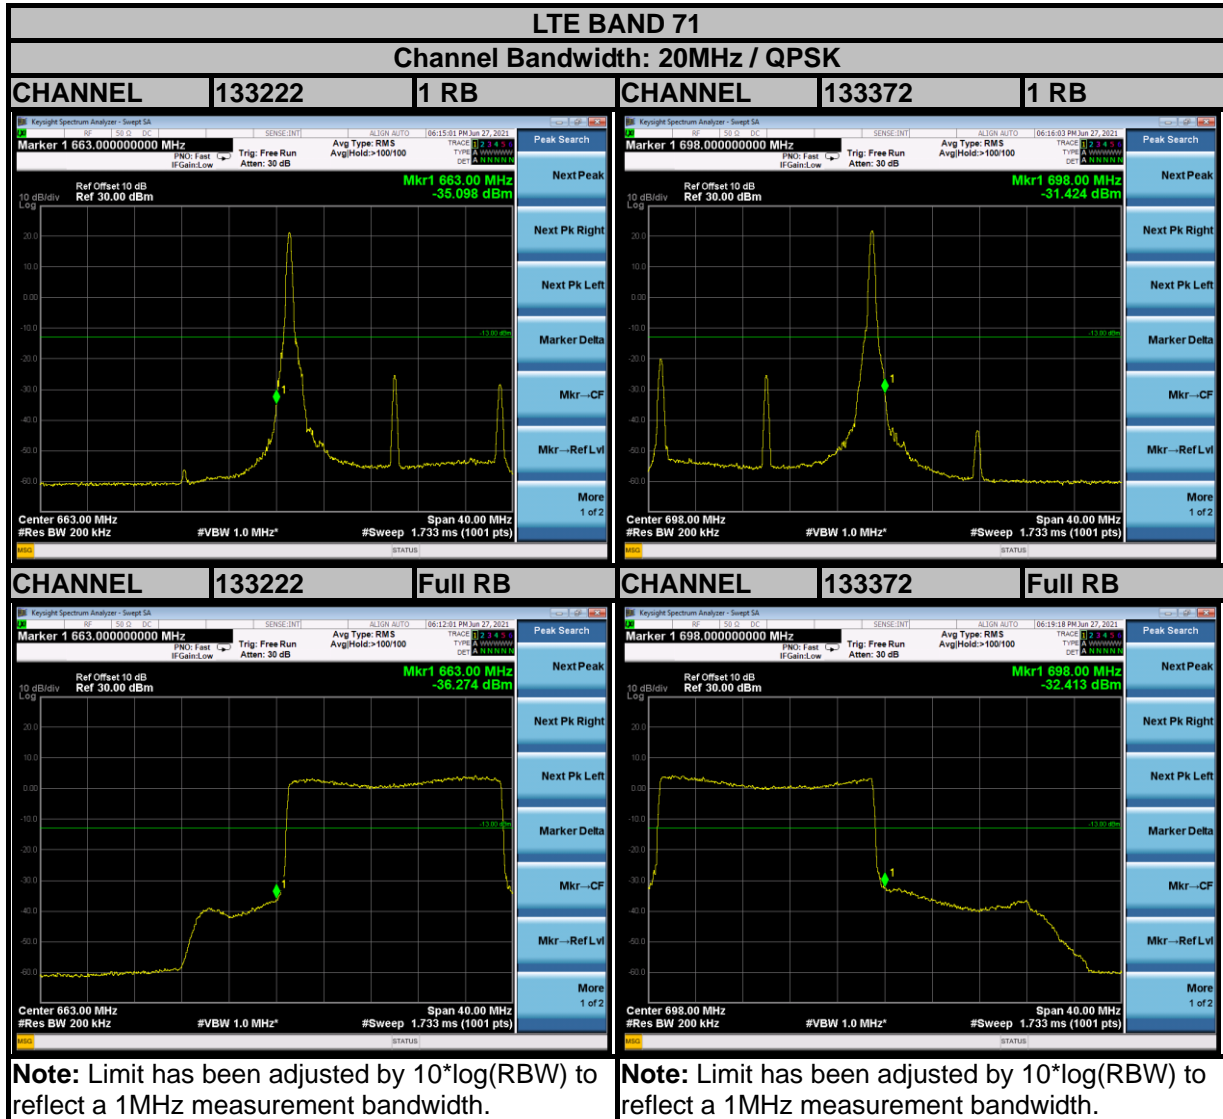



BUREAU VERITAS


Test Report No.: W7L-P21080006RF18

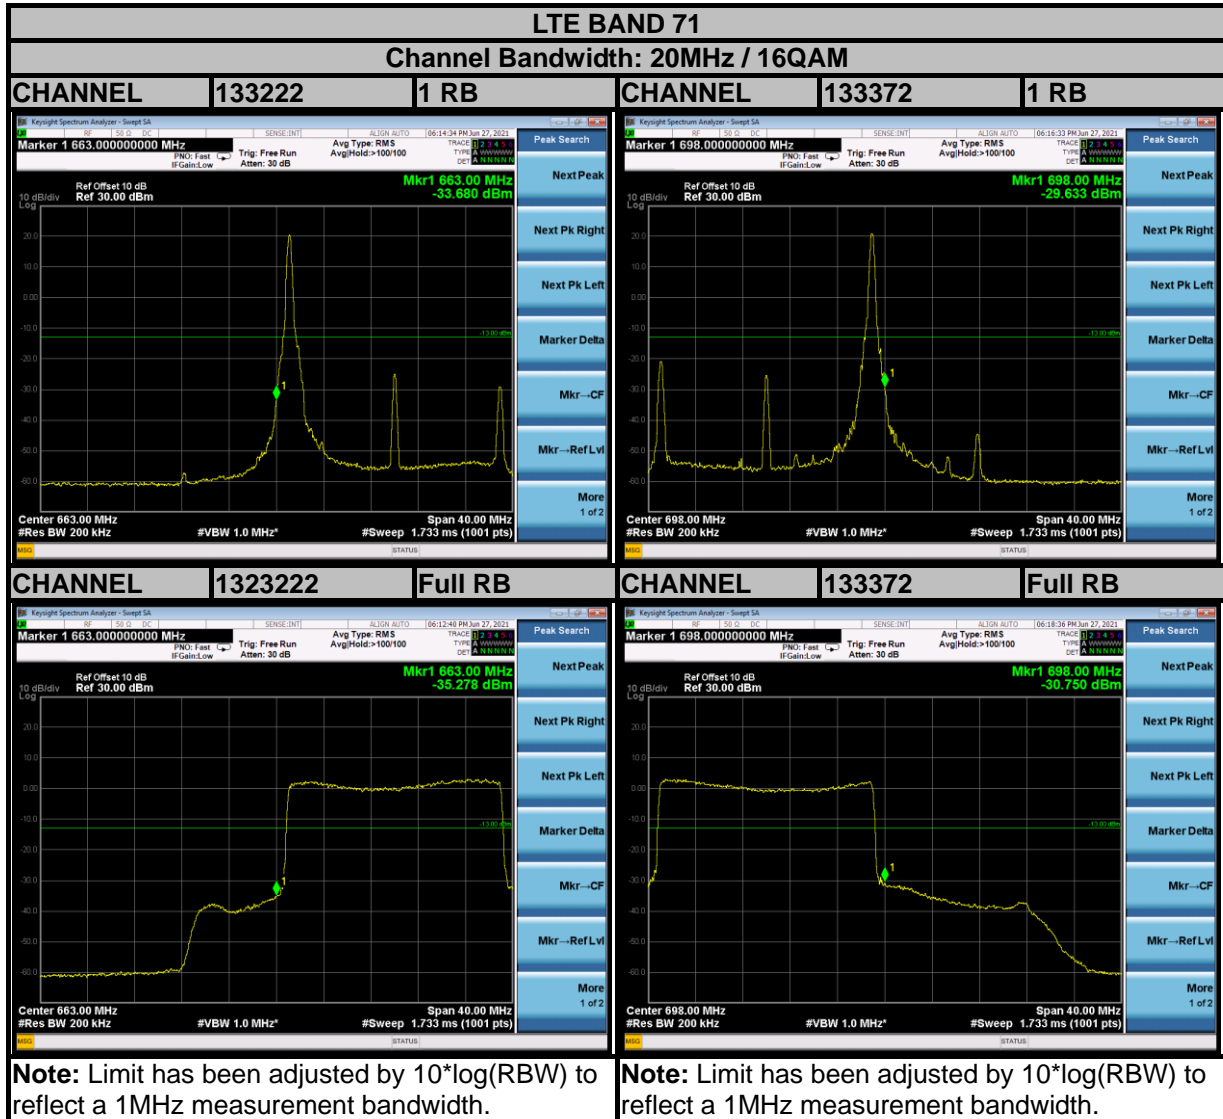



BUREAU VERITAS

Test Report No.: W7L-P21080006RF18

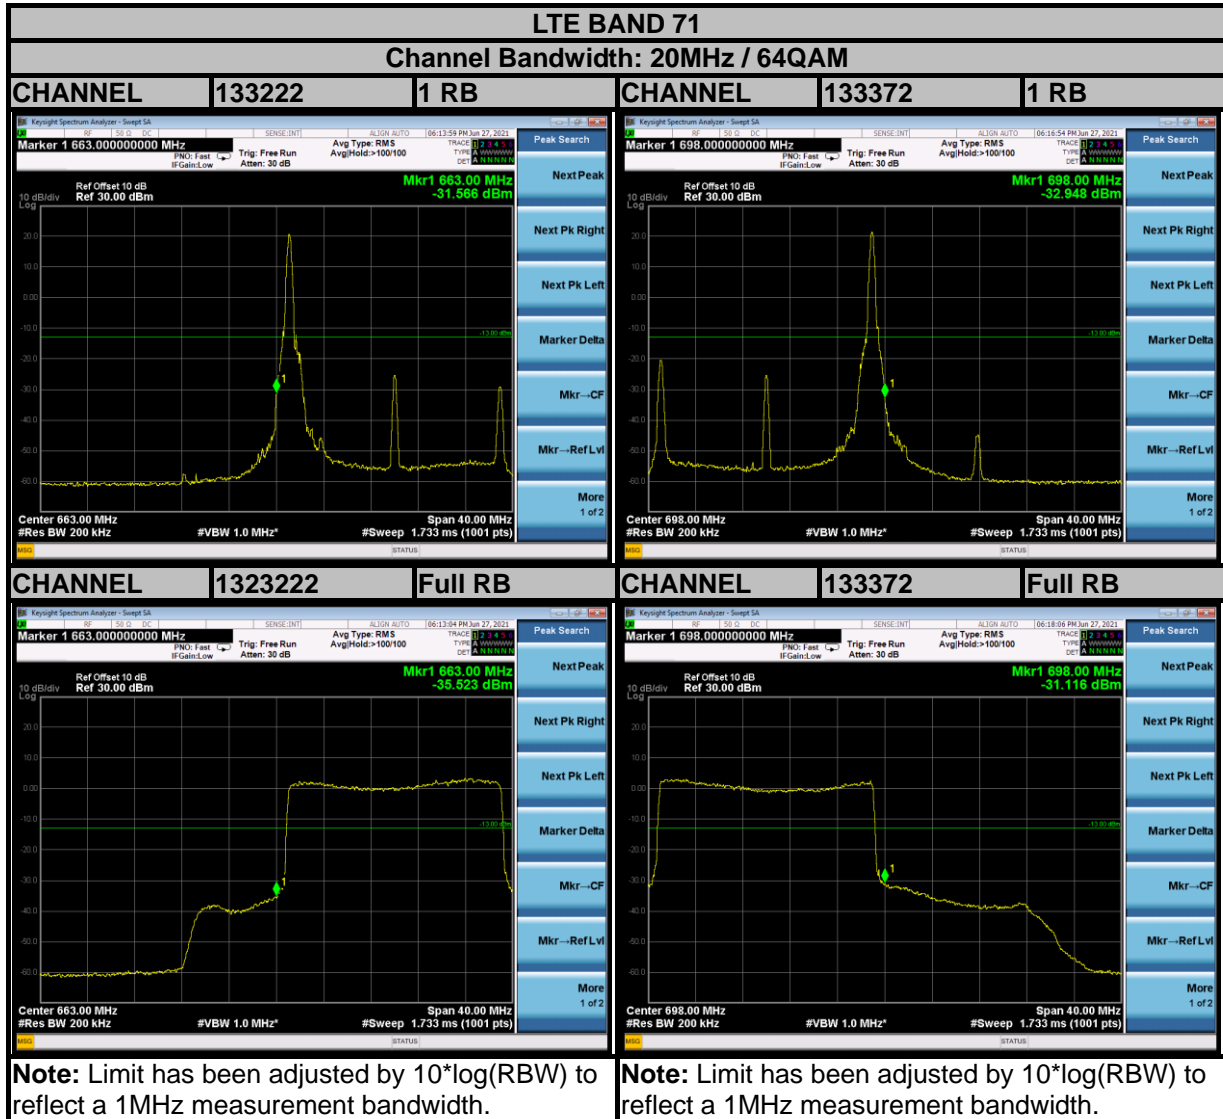

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm.

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz~27GHz for LTE Band 7 & 30MHz~26.2GHz for LTE Band 38, 30MHz~27GHz for LTE Band 41. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

3.5.3 TEST SETUP

