


|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:45 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5320MHz |                               |

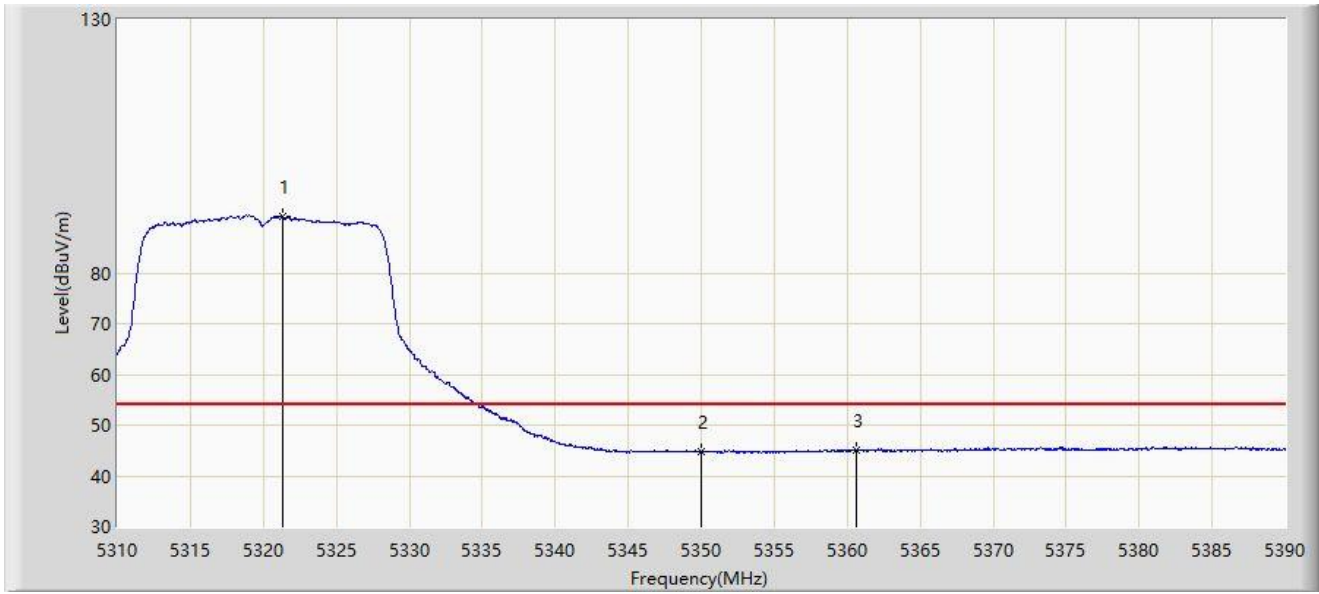


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5321.280        | 91.047                 | 89.572               | N/A         | N/A            | 1.475         | AV   |
| 2  |      |      | 5350.000        | 44.683                 | 43.473               | -9.317      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5360.640        | 45.081                 | 43.648               | -8.919      | 54.000         | 1.433         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:46 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5320MHz |                               |

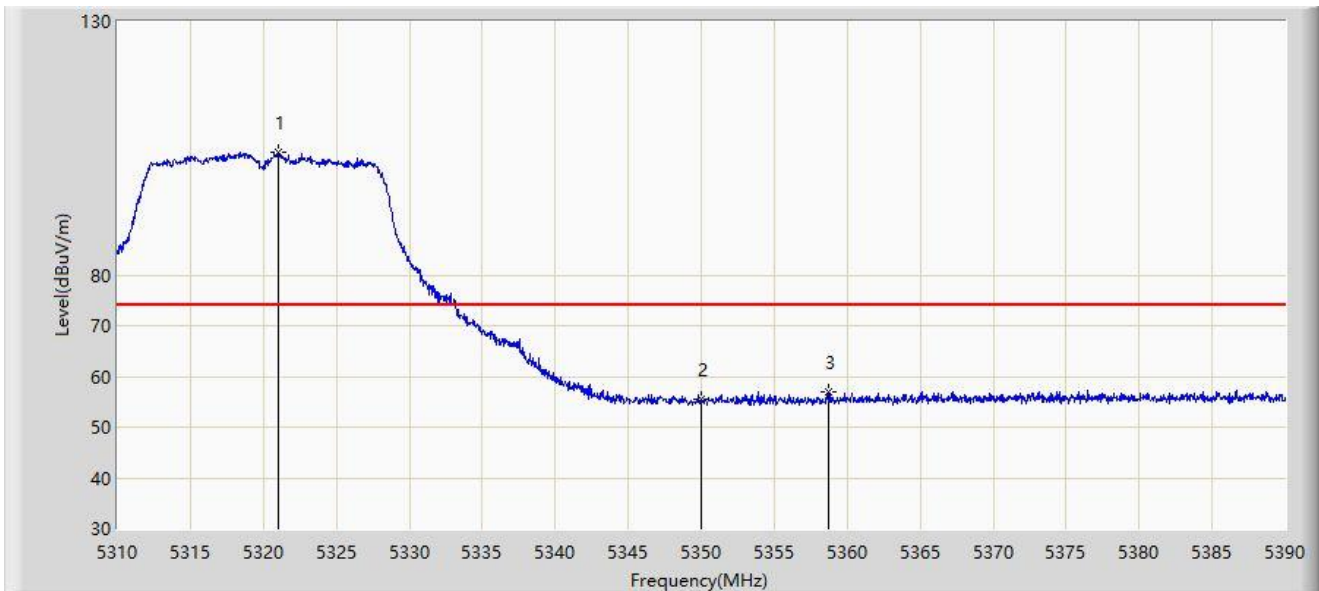


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5321.040        | 104.175                | 102.699              | N/A         | N/A            | 1.476         | PK   |
| 2  |      |      | 5350.000        | 55.454                 | 54.244               | -18.546     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5358.680        | 56.976                 | 55.600               | -17.024     | 74.000         | 1.376         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:49 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5320MHz |                               |

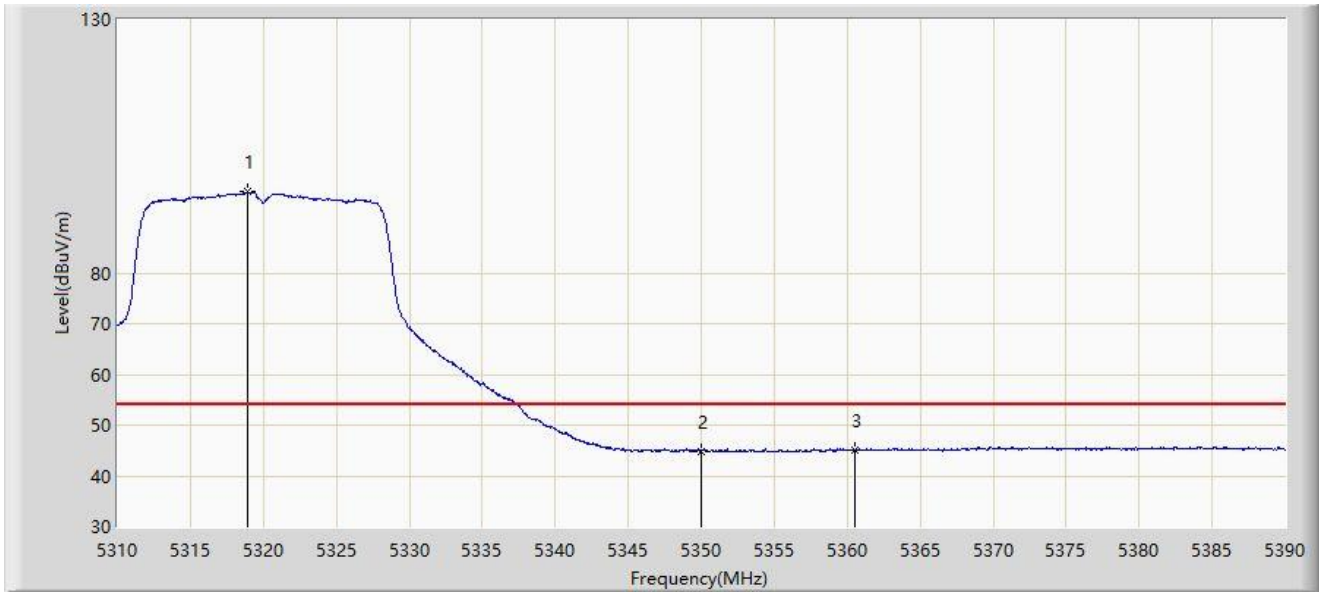


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5318.920        | 96.058                 | 94.573               | N/A         | N/A            | 1.484         | AV   |
| 2  |      |      | 5350.000        | 44.908                 | 43.698               | -9.092      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5360.480        | 45.068                 | 43.640               | -8.932      | 54.000         | 1.429         | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:52 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5500MHz |                               |

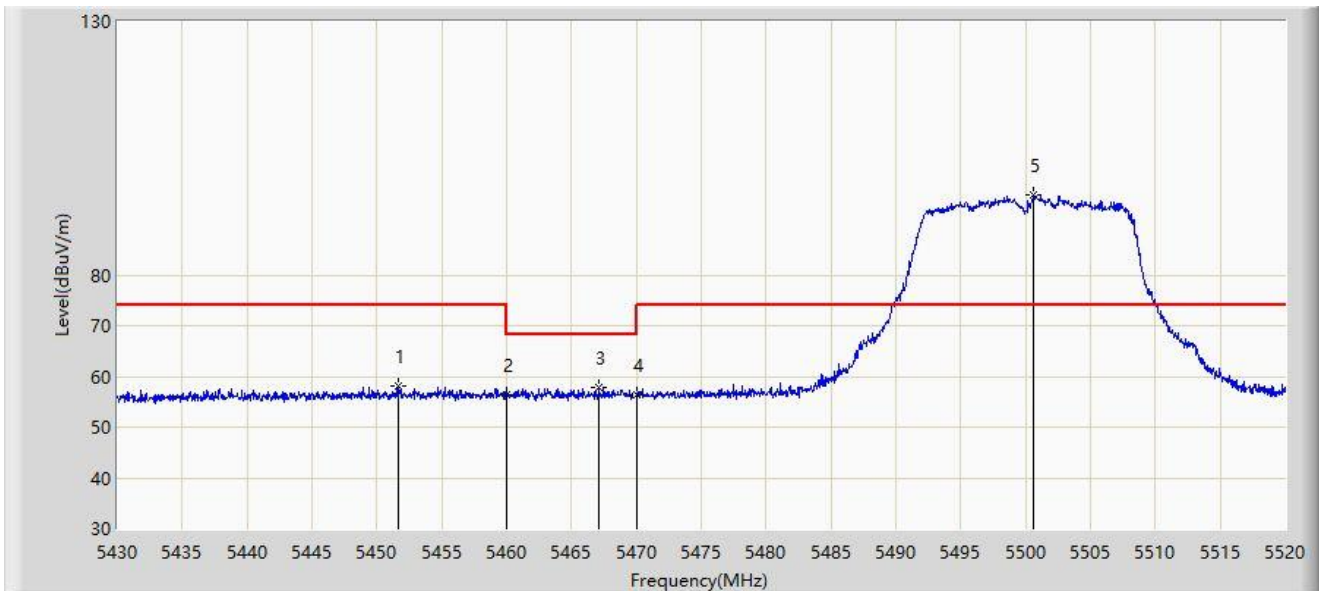


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5451.600        | 58.003                 | 55.785               | -15.997     | 74.000         | 2.218         | PK   |
| 2  |      |      | 5460.000        | 56.473                 | 54.248               | -17.527     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5467.125        | 57.769                 | 55.569               | -10.431     | 68.200         | 2.200         | PK   |
| 4  |      |      | 5470.000        | 56.314                 | 54.124               | -11.886     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5500.560        | 95.722                 | 93.394               | N/A         | N/A            | 2.328         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:54 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5500MHz |                               |

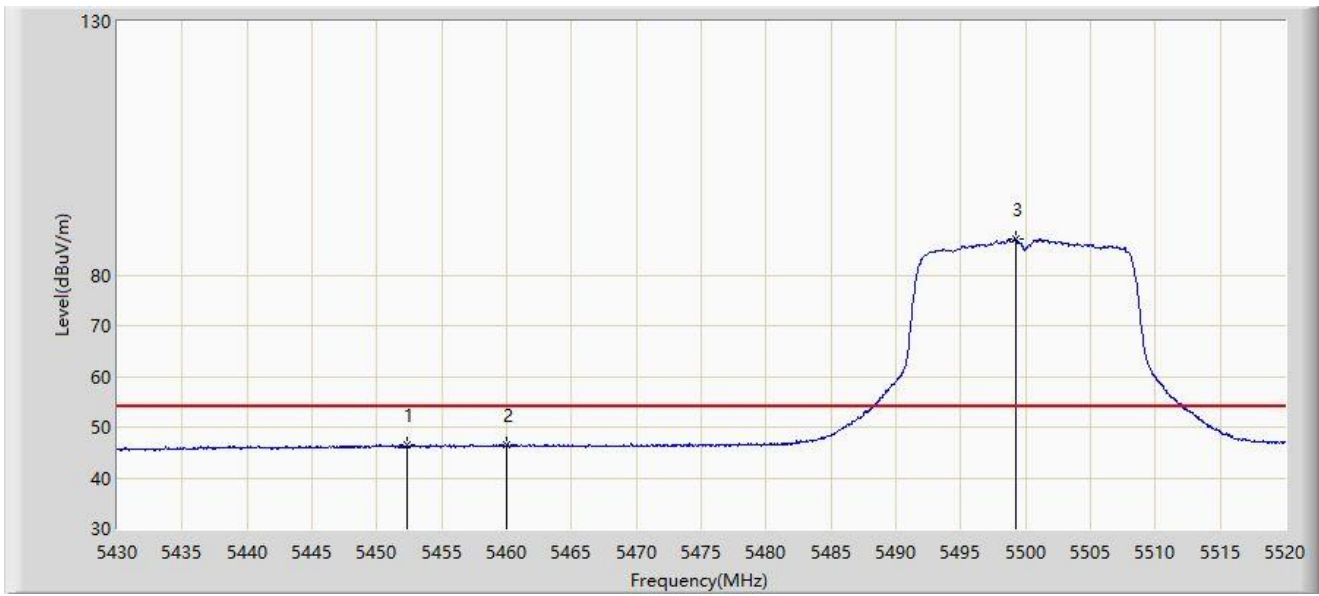


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5452.320        | 46.397                 | 44.170               | -7.603      | 54.000         | 2.227         | AV   |
| 2  |      |      | 5460.000        | 46.481                 | 44.256               | -7.519      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5499.255        | 87.014                 | 84.671               | N/A         | N/A            | 2.343         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:56 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5500MHz |                               |

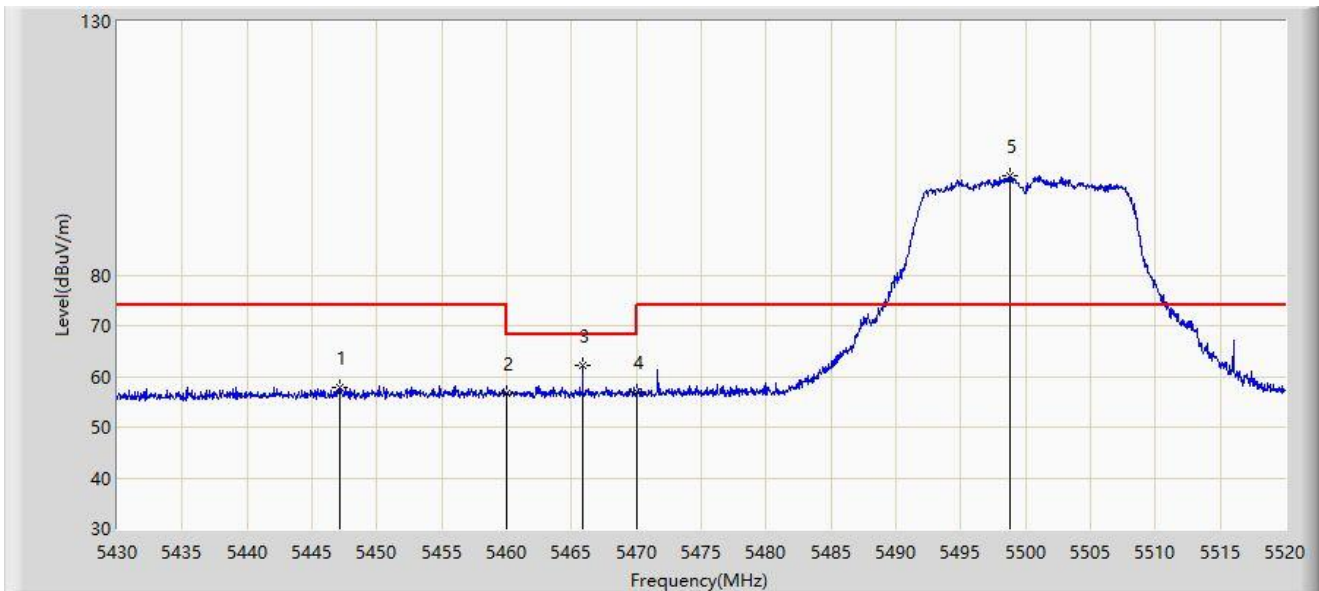


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5447.100        | 57.772                 | 55.605               | -16.228     | 74.000         | 2.167         | PK   |
| 2  |      |      | 5460.000        | 56.720                 | 54.495               | -17.280     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5465.865        | 62.232                 | 60.027               | -5.968      | 68.200         | 2.205         | PK   |
| 4  |      |      | 5470.000        | 56.952                 | 54.762               | -11.248     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5498.850        | 99.439                 | 97.092               | N/A         | N/A            | 2.347         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 09:58 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5500MHz |                               |

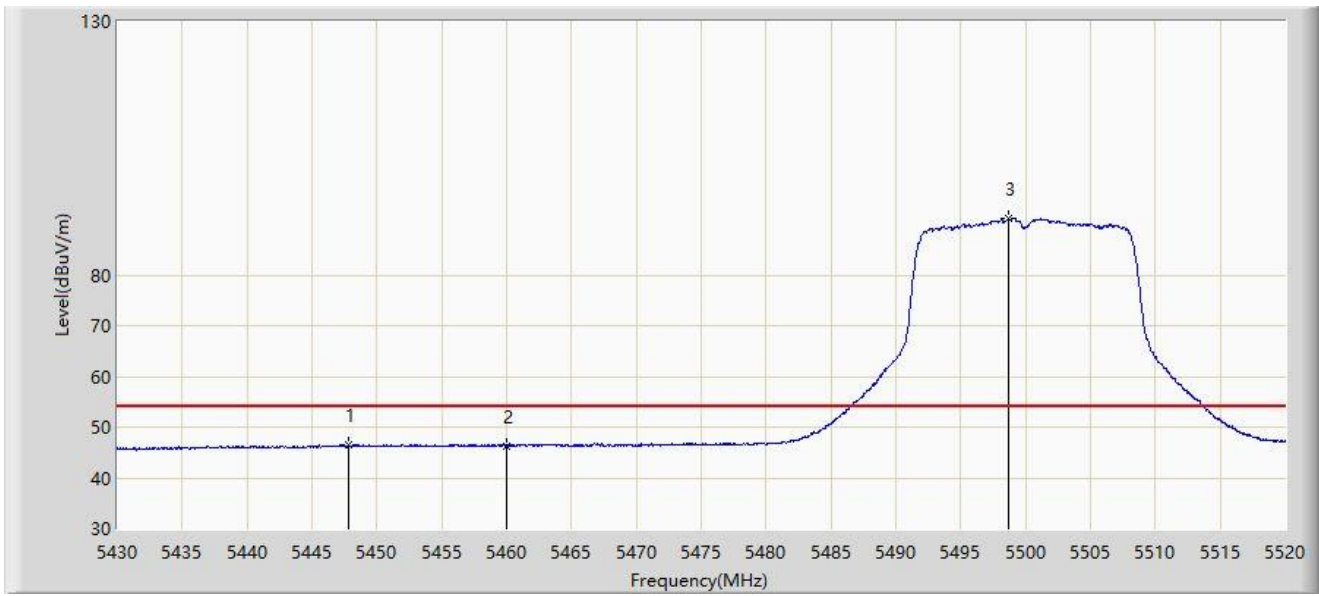


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5447.865        | 46.397                 | 44.222               | -7.603      | 54.000         | 2.176         | AV   |
| 2  |      |      | 5460.000        | 46.358                 | 44.133               | -7.642      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5498.670        | 91.119                 | 88.770               | N/A         | N/A            | 2.349         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 11:39 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5700MHz |                               |

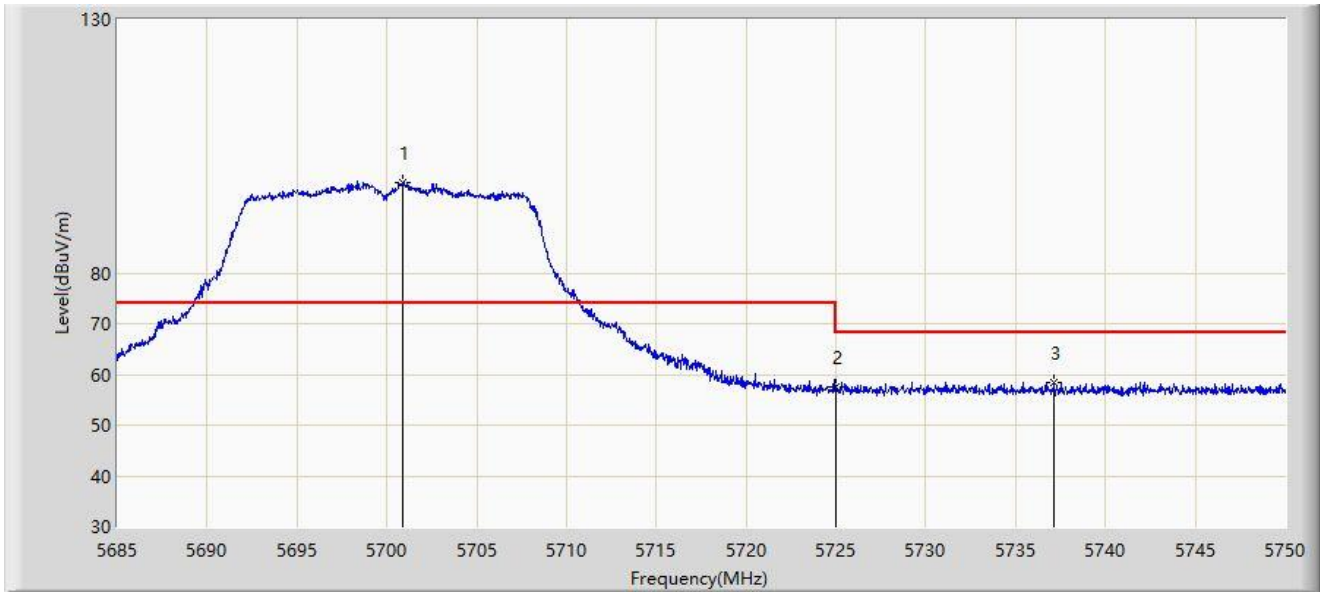


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5700.893        | 97.958                 | 95.022               | N/A         | N/A            | 2.937         | PK   |
| 2  |      |      | 5725.000        | 57.614                 | 54.701               | -10.586     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5737.163        | 58.277                 | 55.518               | -9.923      | 68.200         | 2.759         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 11:41 |
| Limit: FCC_Part 15.209_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5700MHz |                               |

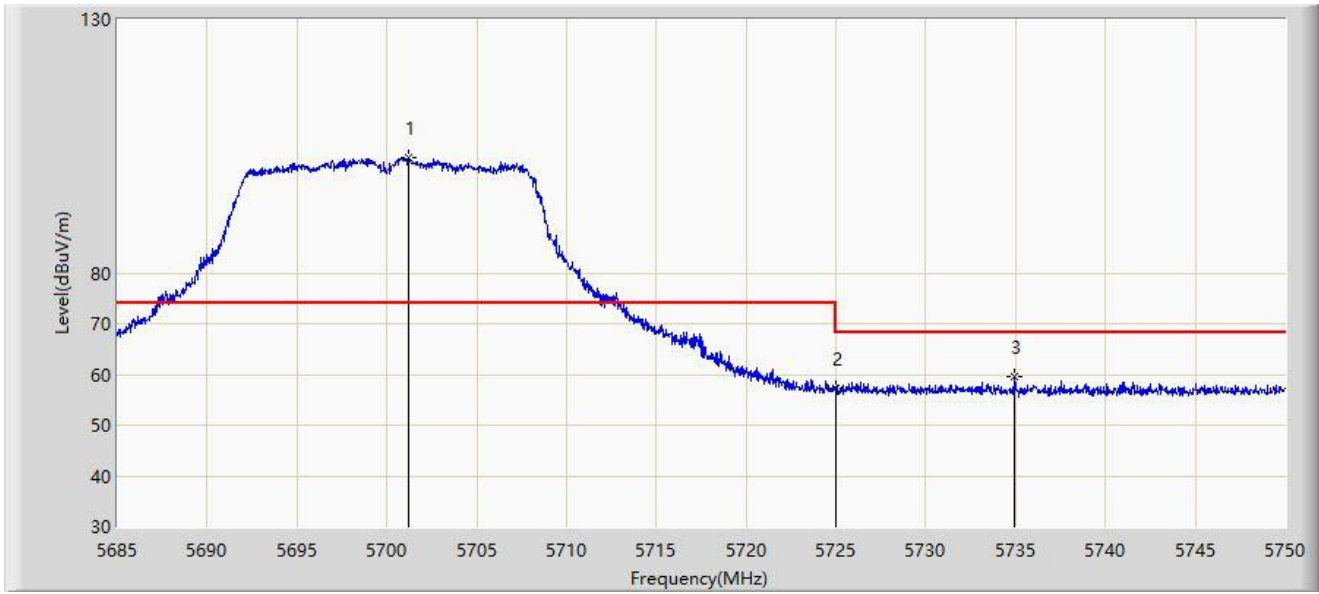


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5701.185        | 102.833                | 99.892               | N/A         | N/A            | 2.941         | PK   |
| 2  |      |      | 5725.000        | 57.323                 | 54.410               | -10.877     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5734.953        | 59.532                 | 56.745               | -8.668      | 68.200         | 2.788         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 10:03 |
| Limit: FCC_Part 15.407_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5745MHz |                               |

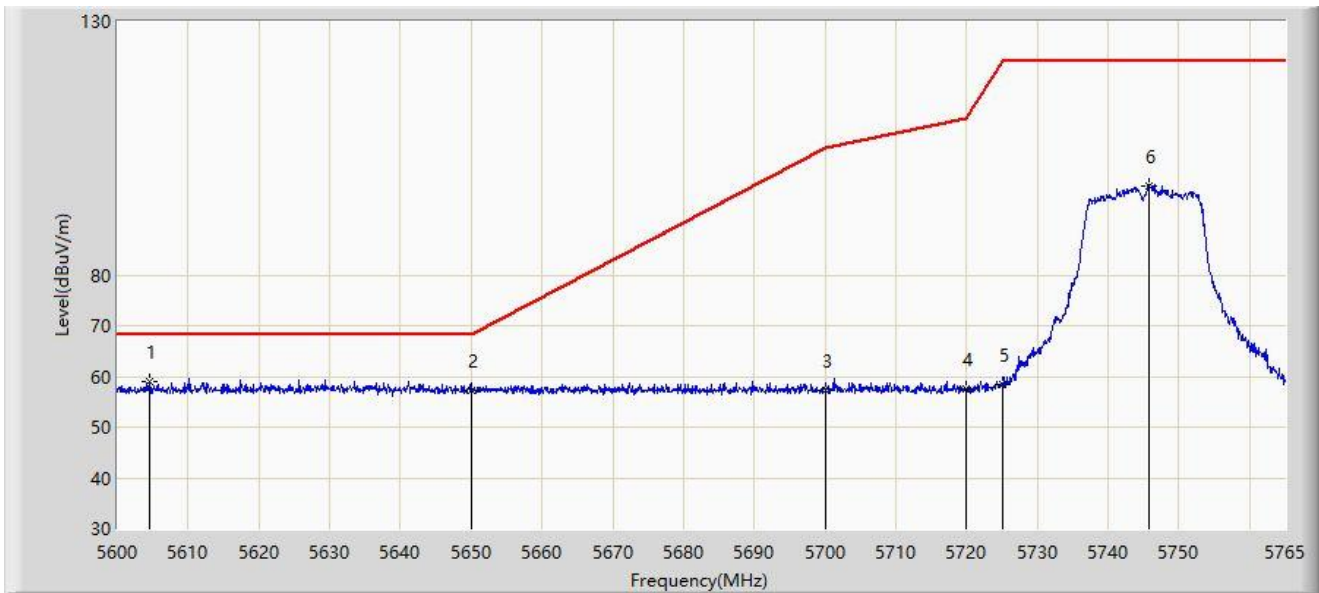


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5604.455        | 59.004                 | 56.500               | -9.196      | 68.200         | 2.504         | PK   |
| 2  |      |      | 5650.000        | 57.269                 | 54.616               | -10.931     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.185                 | 54.264               | -48.015     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.614                 | 54.651               | -53.186     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 58.344                 | 55.431               | -63.856     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5745.777        | 97.590                 | 94.859               | N/A         | N/A            | 2.730         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 10:07 |
| Limit: FCC_Part 15.407_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5745MHz |                               |

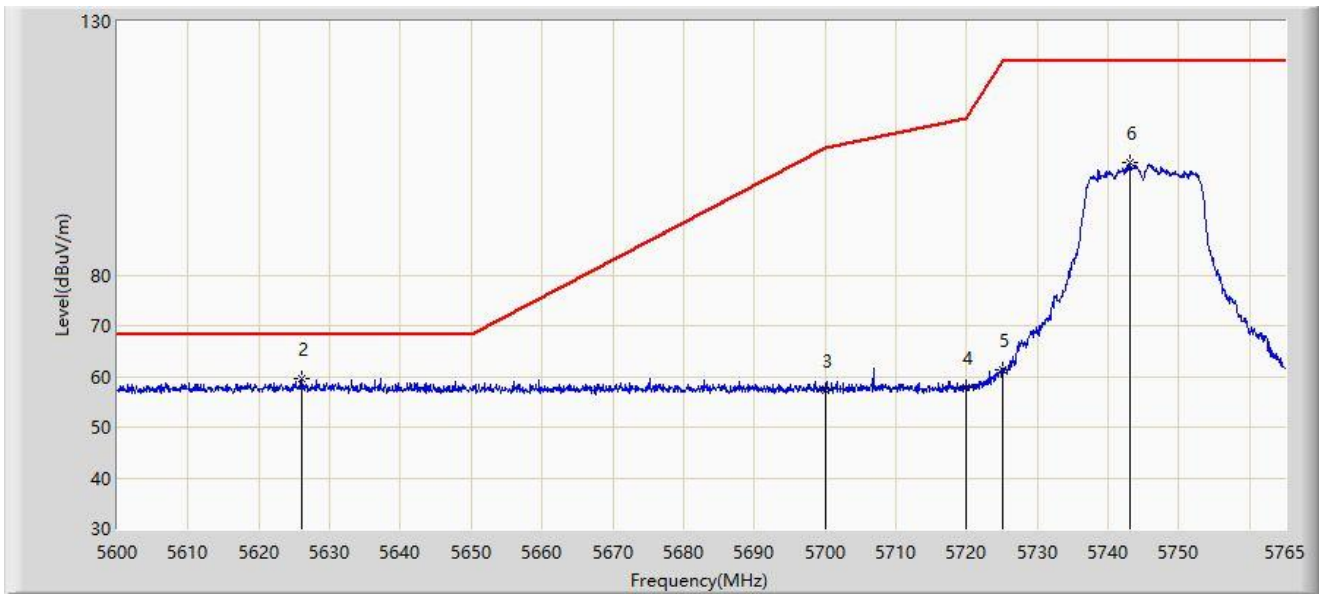


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5626.152        | 59.508                 | 56.706               | -8.692      | 68.200         | 2.802         | PK   |
| 2  |      |      | 5650.000        | 57.492                 | 54.839               | -10.708     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.364                 | 54.443               | -47.836     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.747                 | 54.784               | -53.053     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 61.187                 | 58.274               | -61.013     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5743.055        | 102.067                | 99.383               | N/A         | N/A            | 2.685         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 11:42 |
| Limit: FCC_Part 15.407_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Horizontal          |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5825MHz |                               |

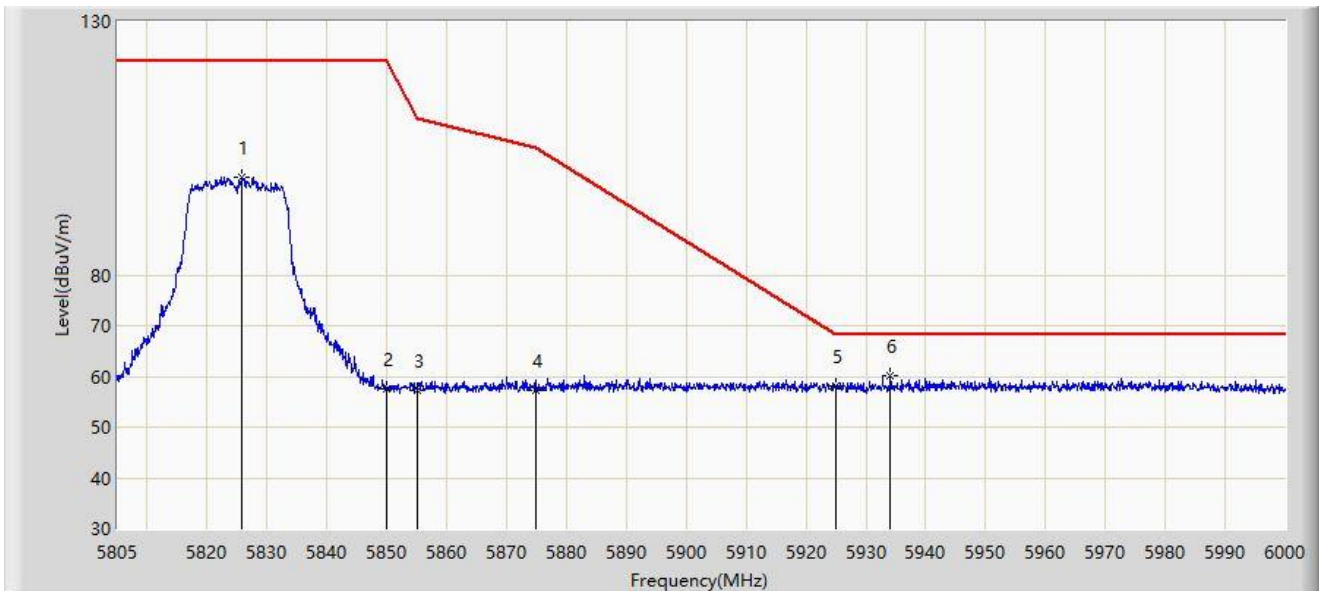


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5825.865        | 99.153                 | 95.890               | N/A         | N/A            | 3.263         | PK   |
| 2  |      |      | 5850.000        | 57.548                 | 54.273               | -64.652     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.298                 | 54.022               | -53.502     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.152                 | 53.697               | -48.048     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 58.041                 | 54.526               | -10.159     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5934.090        | 60.037                 | 56.468               | -8.163      | 68.200         | 3.568         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                   |                               |
|---------------------------------------------------|-------------------------------|
| Site: NS-AC1                                      | Test Date: 2021/12/28 - 11:43 |
| Limit: FCC_Part 15.407_RE(3m)                     | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                           | Polarity: Vertical            |
| EUT: Mobile Computer                              | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11a at channel 5825MHz |                               |

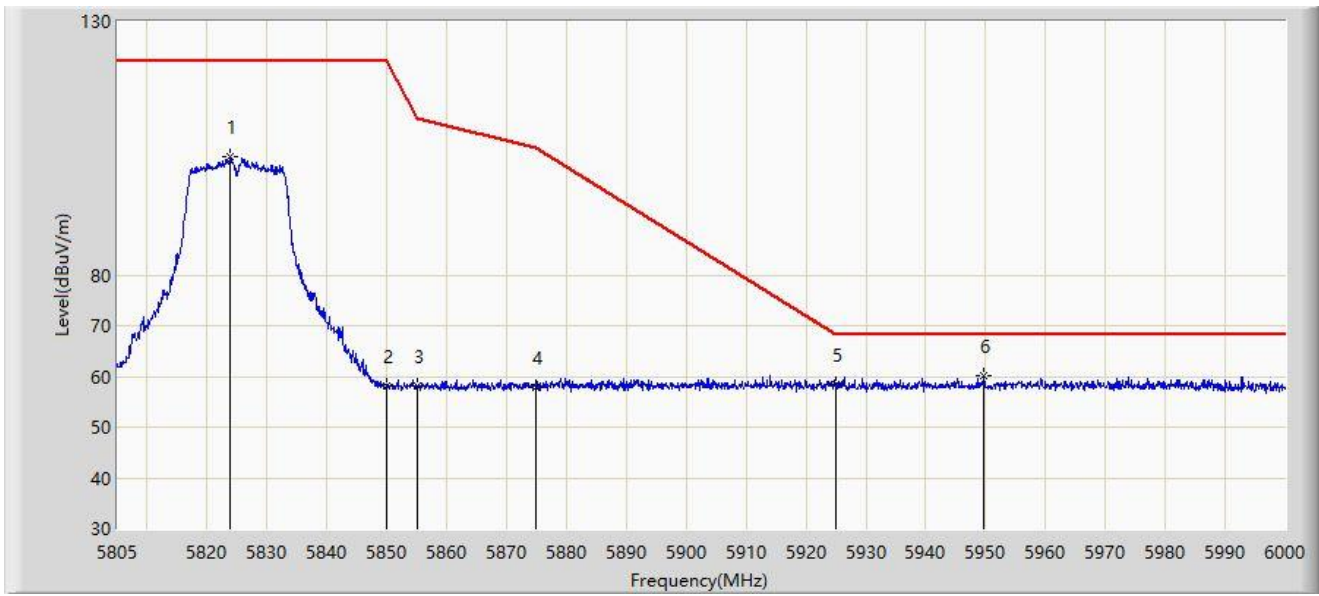


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5823.915        | 103.190                | 99.920               | N/A         | N/A            | 3.270         | PK   |
| 2  |      |      | 5850.000        | 58.220                 | 54.945               | -63.980     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 58.238                 | 54.962               | -52.562     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.771                 | 54.316               | -47.429     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 58.466                 | 54.951               | -9.734      | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5949.690        | 60.006                 | 56.197               | -8.194      | 68.200         | 3.808         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:11 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz |                               |

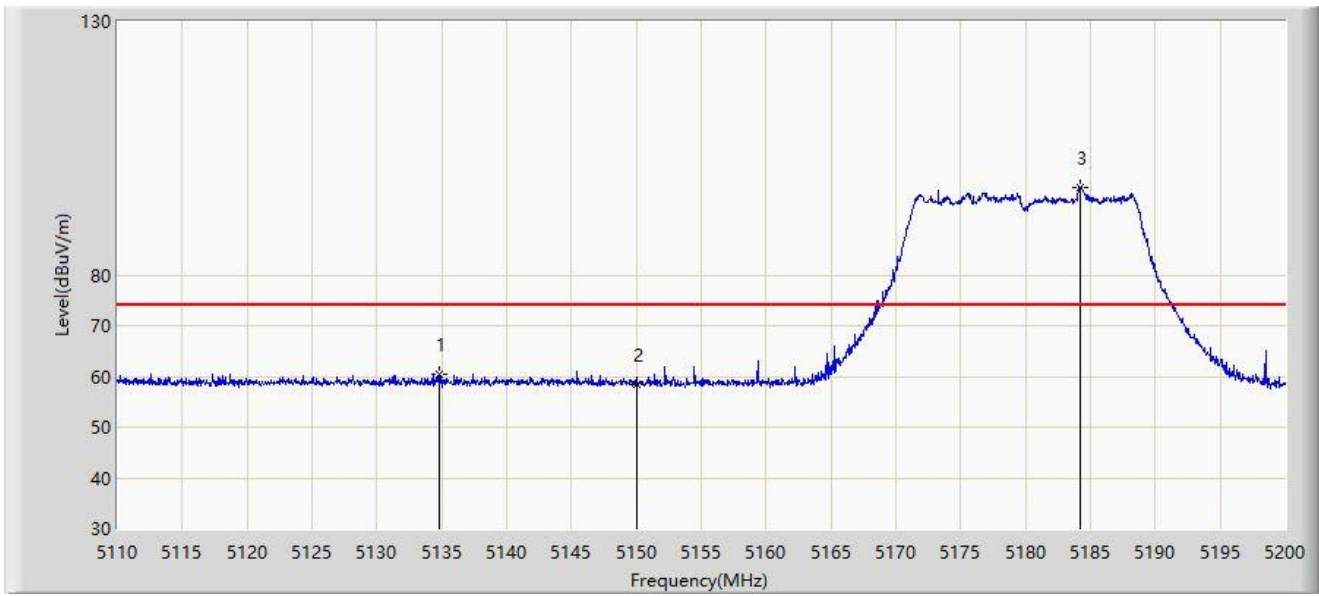


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5134.795        | 60.329                 | 57.984               | -13.671     | 74.000         | 2.346         | PK   |
| 2  |      |      | 5150.000        | 58.444                 | 56.078               | -15.556     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5184.205        | 97.280                 | 95.035               | N/A         | N/A            | 2.246         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:23 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz |                               |

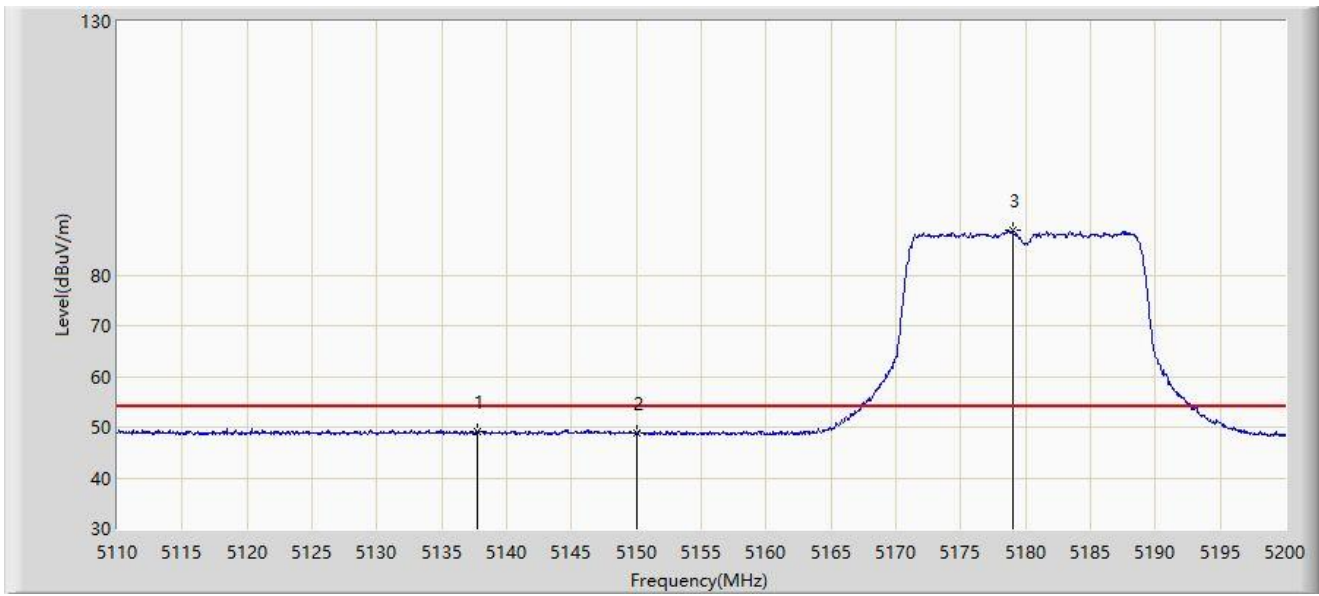


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5137.720        | 49.170                 | 46.816               | -4.830      | 54.000         | 2.354         | AV   |
| 2  |      |      | 5150.000        | 48.717                 | 46.351               | -5.283      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5179.030        | 88.874                 | 86.612               | N/A         | N/A            | 2.262         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:26 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz |                               |

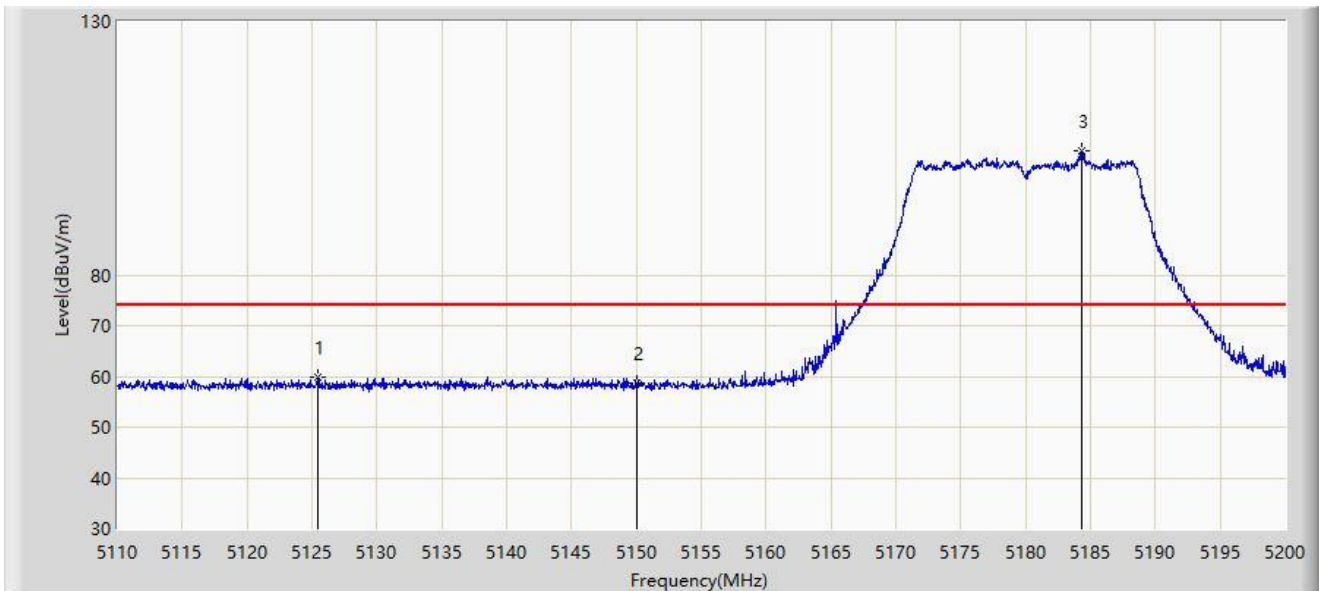


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5125.435        | 59.806                 | 57.500               | -14.194     | 74.000         | 2.307         | PK   |
| 2  |      |      | 5150.000        | 58.569                 | 56.203               | -15.431     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5184.340        | 104.631                | 102.387              | N/A         | N/A            | 2.244         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:28 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5180MHz |                               |

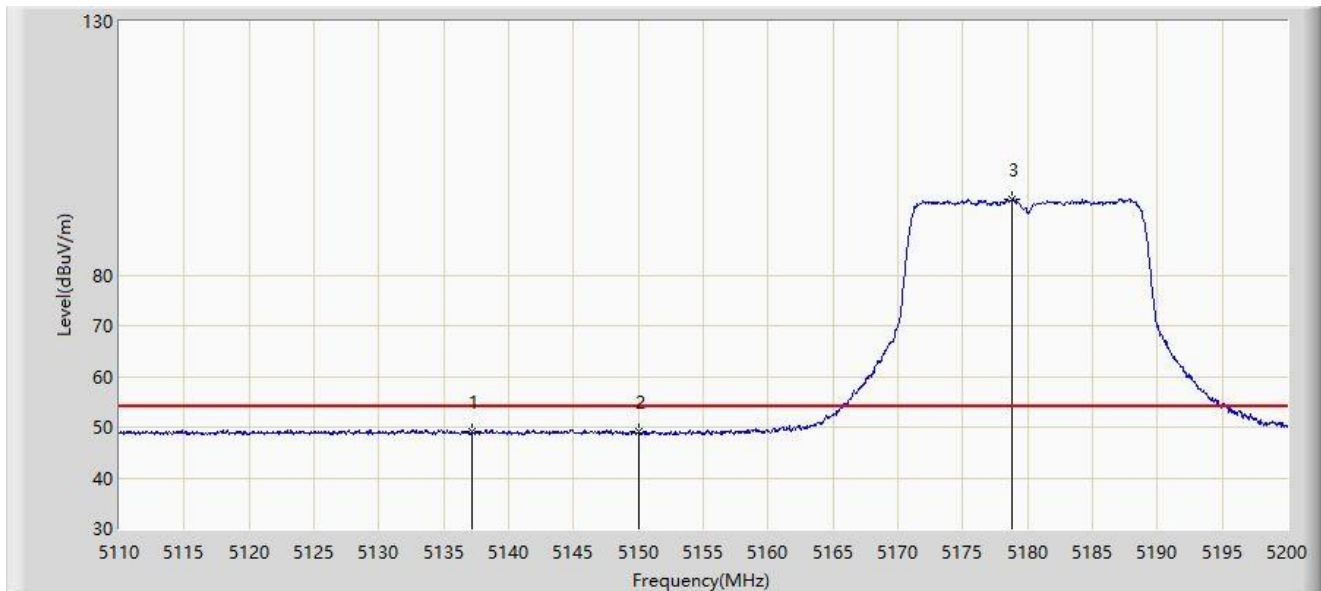


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5137.180        | 49.195                 | 46.843               | -4.805      | 54.000         | 2.351         | AV   |
| 2  |      |      | 5150.000        | 49.019                 | 46.653               | -4.981      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5178.805        | 94.820                 | 92.559               | N/A         | N/A            | 2.262         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:30 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz |                               |

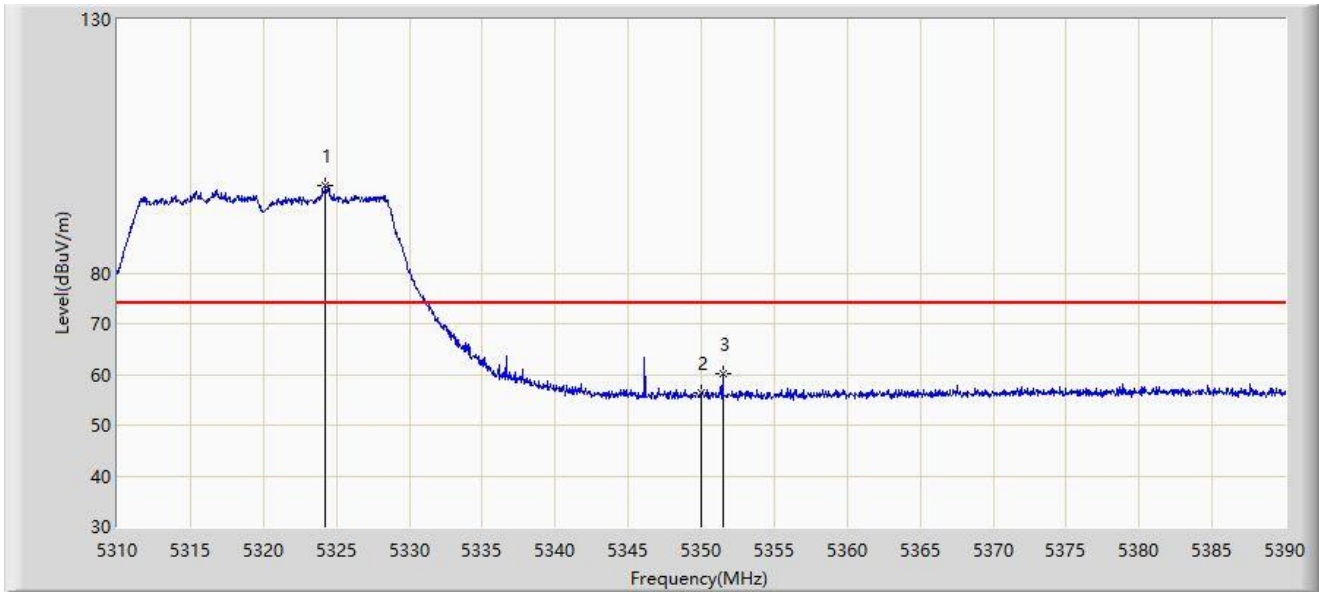


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5324.240        | 97.134                 | 95.671               | N/A         | N/A            | 1.464         | PK   |
| 2  |      |      | 5350.000        | 56.265                 | 55.055               | -17.735     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5351.480        | 60.280                 | 59.091               | -13.720     | 74.000         | 1.189         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:39 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz |                               |

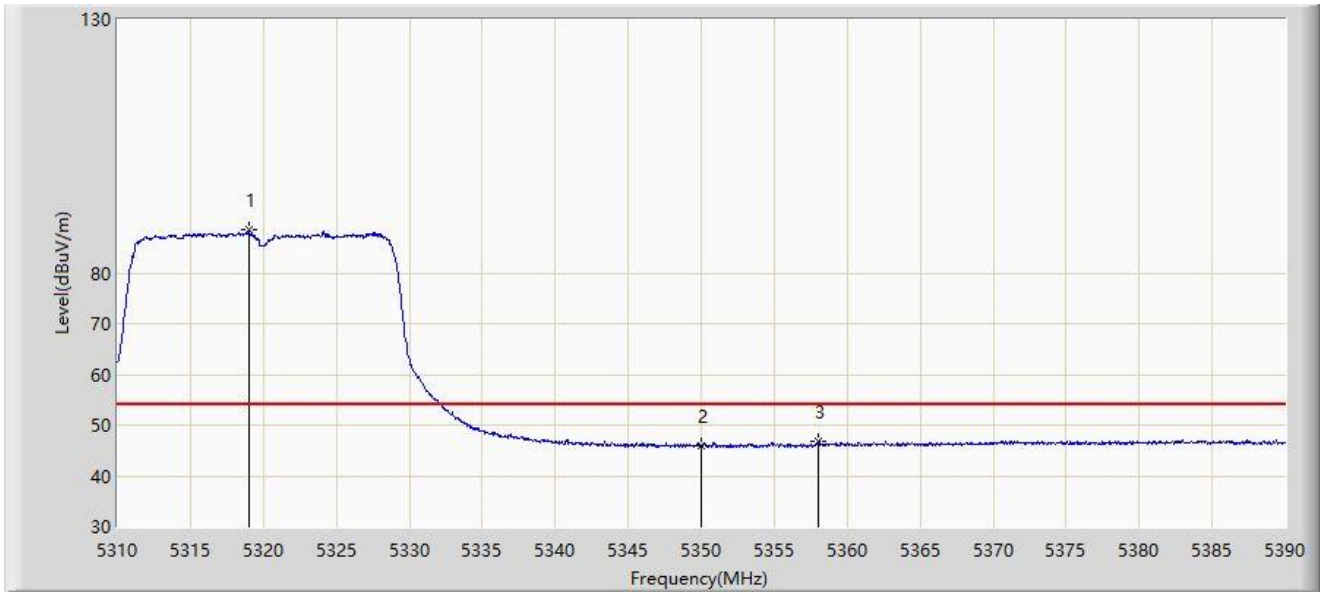


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5319.000        | 88.449                 | 86.965               | N/A         | N/A            | 1.485         | AV   |
| 2  |      |      | 5350.000        | 46.086                 | 44.876               | -7.914      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5358.040        | 46.706                 | 45.348               | -7.294      | 54.000         | 1.358         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:44 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz |                               |

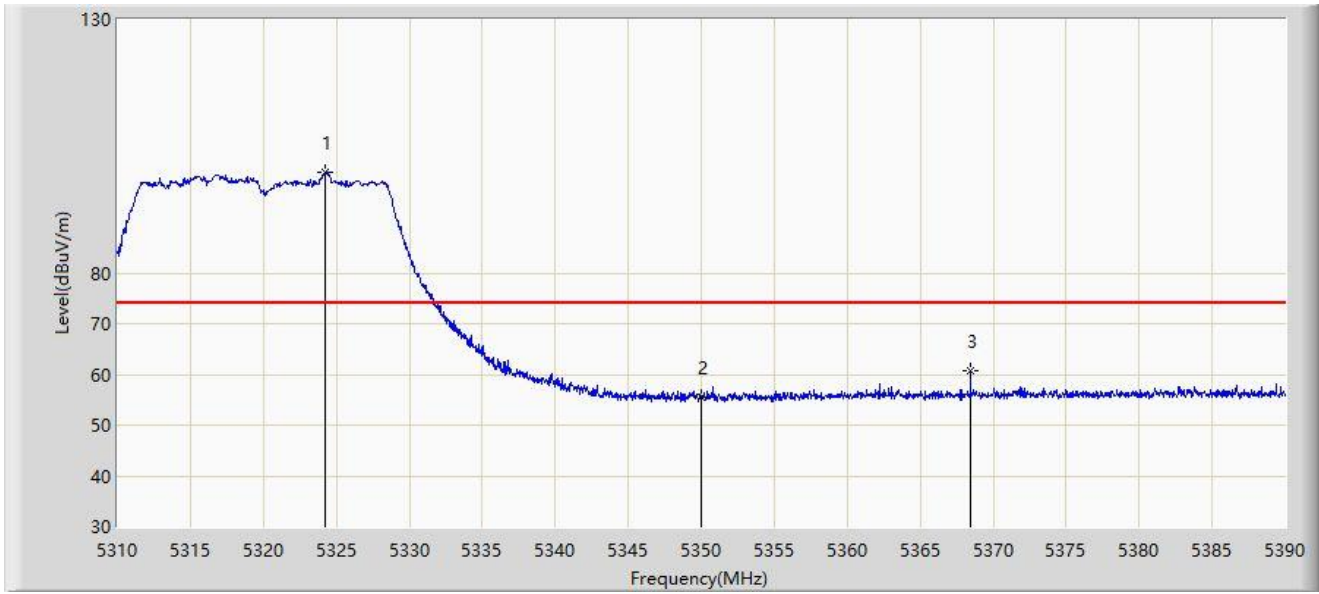


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5324.240        | 99.869                 | 98.406               | N/A         | N/A            | 1.464         | PK   |
| 2  |      |      | 5350.000        | 55.386                 | 54.176               | -18.614     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5368.440        | 60.597                 | 58.937               | -13.403     | 74.000         | 1.659         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:47 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5320MHz |                               |

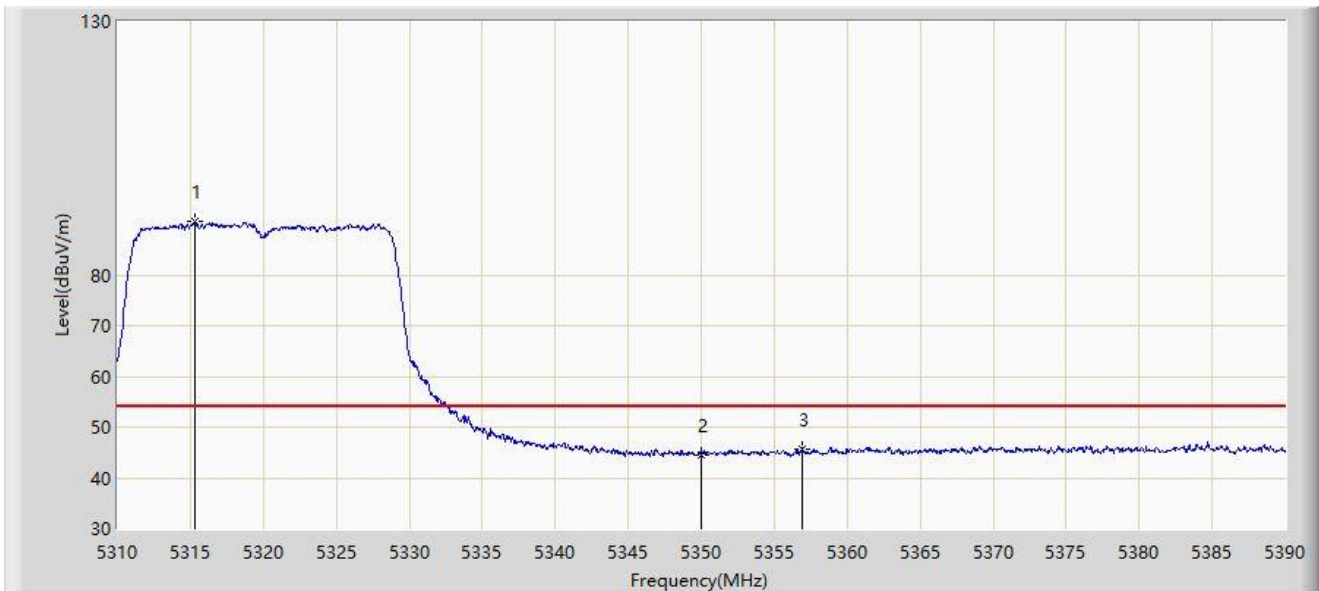


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5315.360        | 90.443                 | 88.950               | N/A         | N/A            | 1.493         | AV   |
| 2  |      |      | 5350.000        | 44.419                 | 43.209               | -9.581      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5356.920        | 45.706                 | 44.381               | -8.294      | 54.000         | 1.325         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:50 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                               |

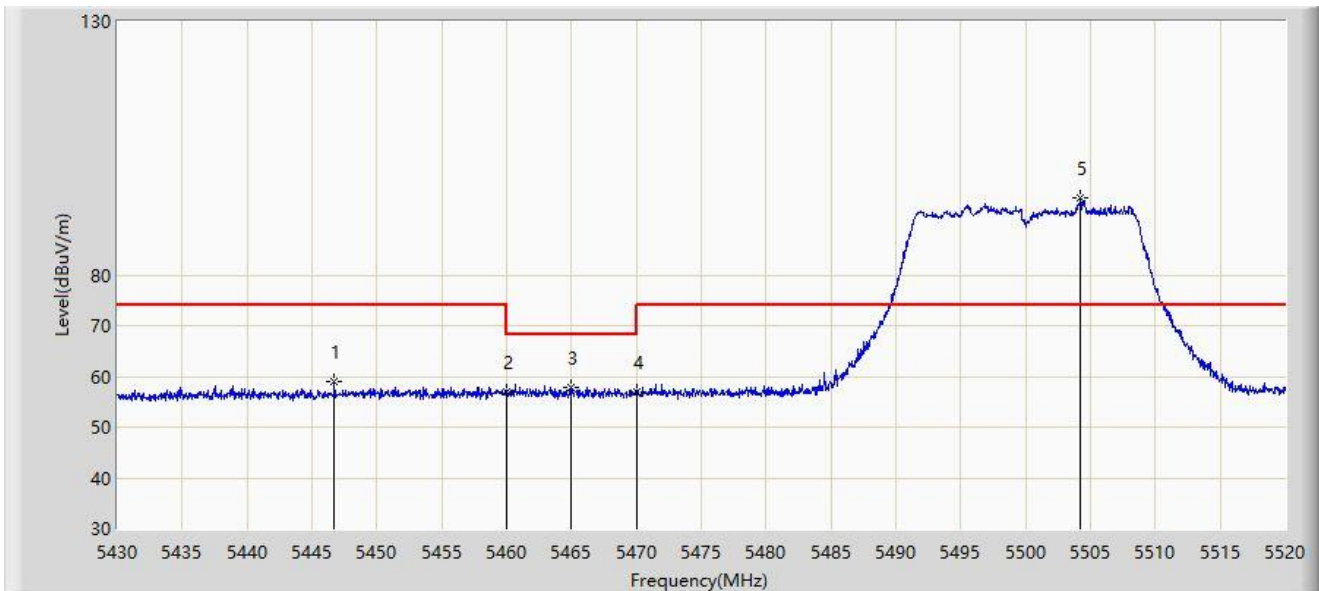


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5446.740        | 58.919                 | 56.756               | -15.081     | 74.000         | 2.163         | PK   |
| 2  |      |      | 5460.000        | 57.011                 | 54.786               | -16.989     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5464.920        | 57.762                 | 55.554               | -10.438     | 68.200         | 2.208         | PK   |
| 4  |      |      | 5470.000        | 57.026                 | 54.836               | -11.174     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5504.205        | 95.288                 | 93.001               | N/A         | N/A            | 2.287         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:52 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                               |

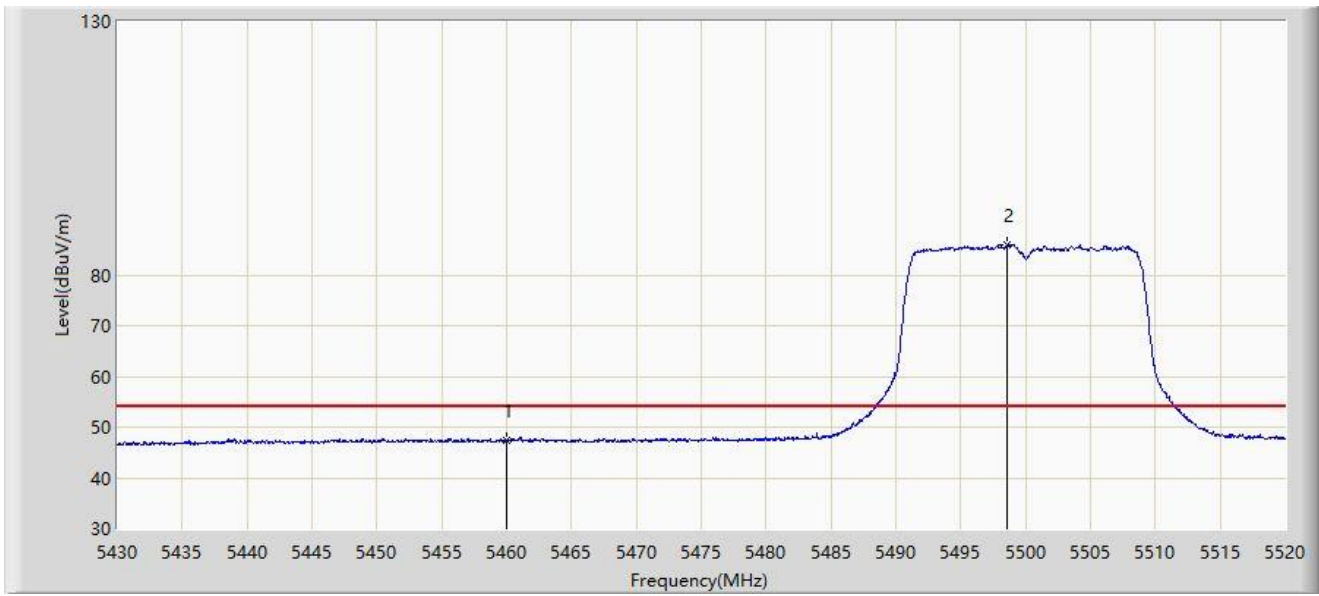


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5460.000        | 47.340                 | 45.115               | -6.660      | 54.000         | 2.225         | AV   |
| 2  |      | *    | 5498.580        | 85.799                 | 83.449               | N/A         | N/A            | 2.350         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:55 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                               |

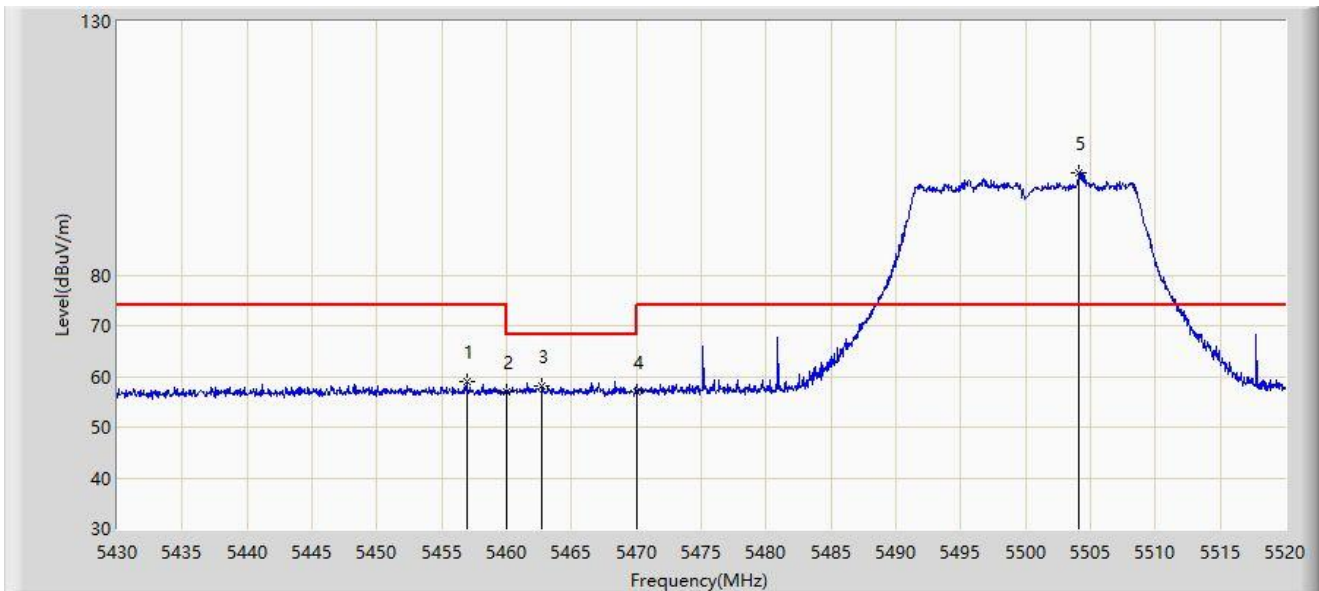


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5456.910        | 58.854                 | 56.618               | -15.146     | 74.000         | 2.236         | PK   |
| 2  |      |      | 5460.000        | 56.893                 | 54.668               | -17.107     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5462.760        | 58.193                 | 55.978               | -10.007     | 68.200         | 2.216         | PK   |
| 4  |      |      | 5470.000        | 56.902                 | 54.712               | -11.298     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5504.115        | 100.031                | 97.743               | N/A         | N/A            | 2.288         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 10:59 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5500MHz |                               |

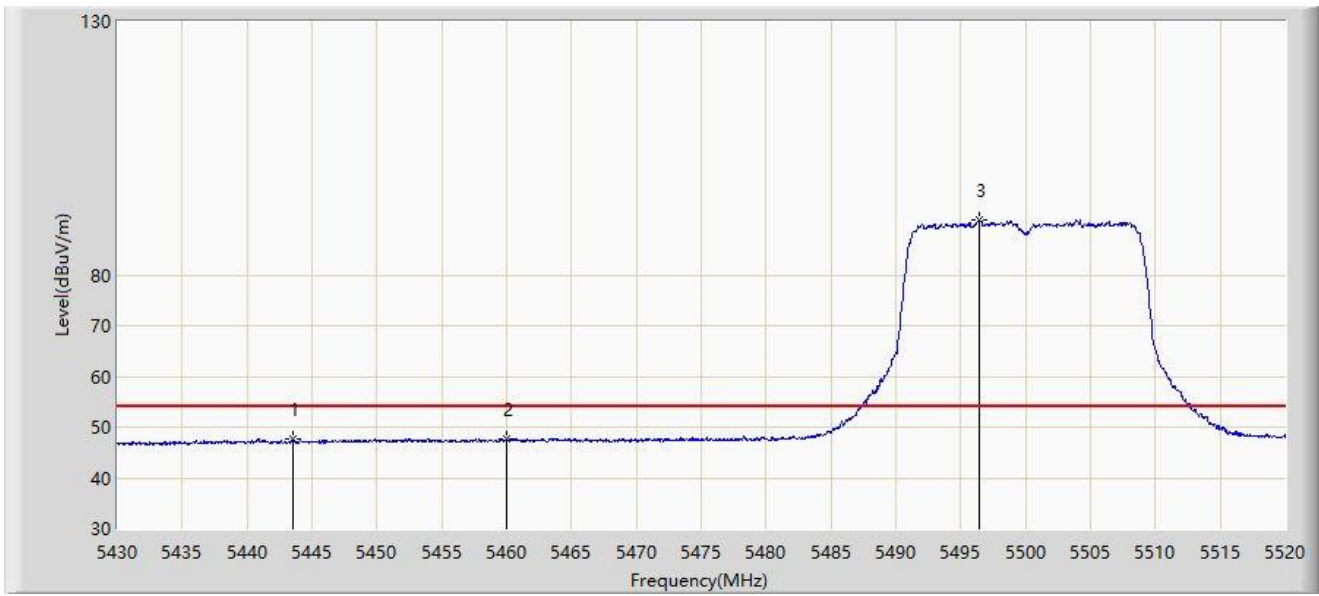


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5443.545        | 47.615                 | 45.489               | -6.385      | 54.000         | 2.126         | AV   |
| 2  |      |      | 5460.000        | 47.789                 | 45.564               | -6.211      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5496.375        | 90.775                 | 88.400               | N/A         | N/A            | 2.375         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:28 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                               |

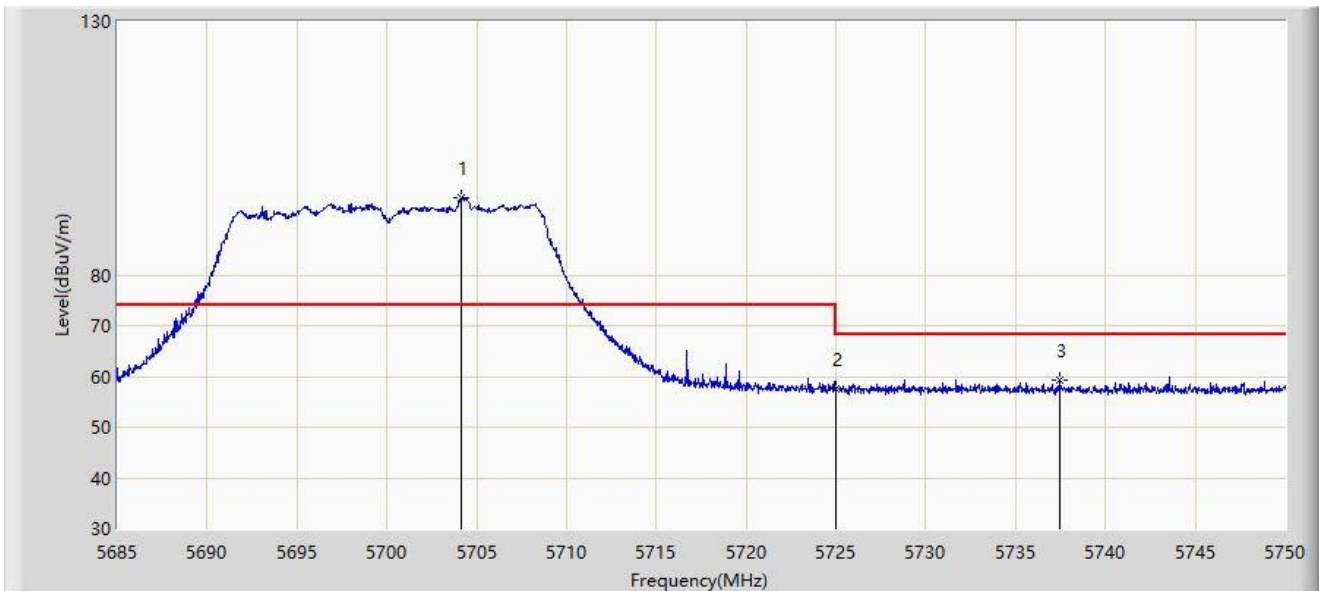


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5704.175        | 95.119                 | 92.128               | N/A         | N/A            | 2.991         | PK   |
| 2  |      |      | 5725.000        | 57.598                 | 54.685               | -10.602     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5737.487        | 59.361                 | 56.606               | -8.839      | 68.200         | 2.754         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:32 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5700MHz |                               |

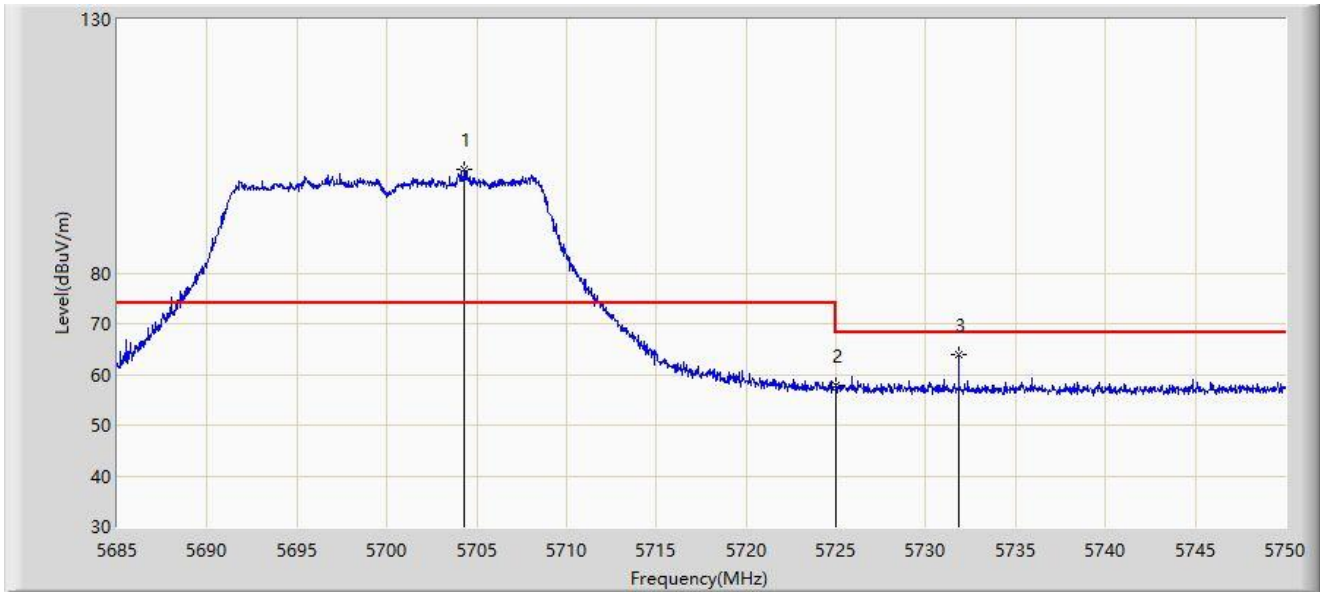


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5704.305        | 100.456                | 97.463               | N/A         | N/A            | 2.993         | PK   |
| 2  |      |      | 5725.000        | 57.788                 | 54.875               | -10.412     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5731.833        | 63.833                 | 61.005               | -4.367      | 68.200         | 2.828         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:33 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                               |

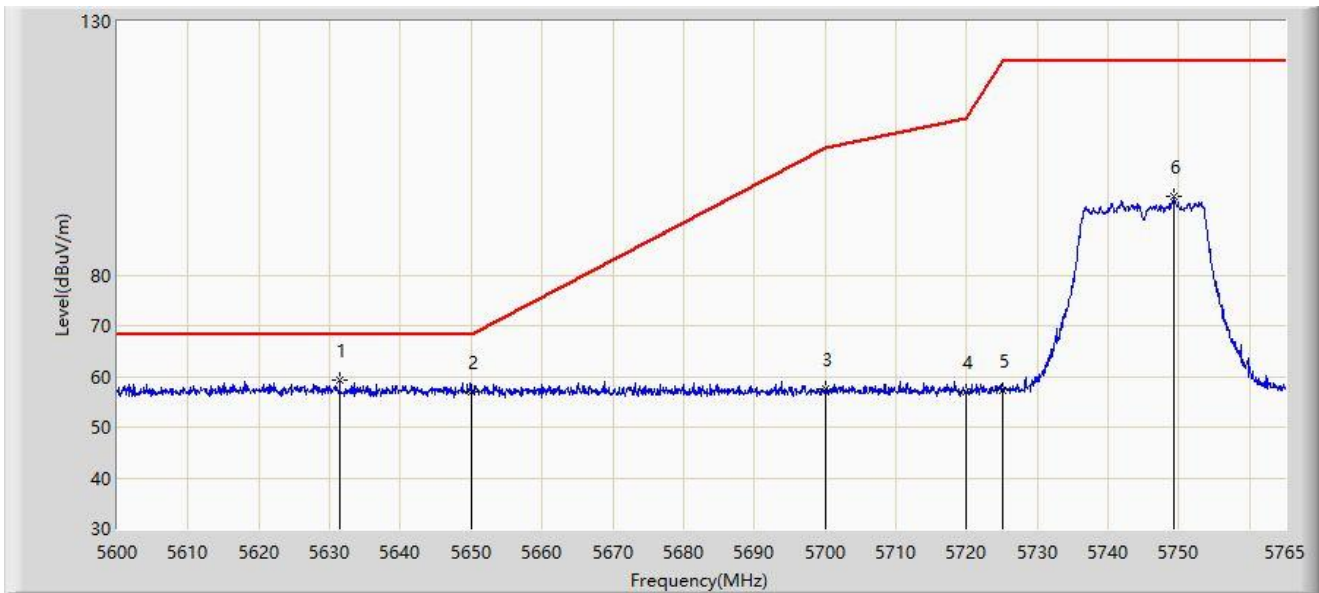


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5631.433        | 59.269                 | 56.510               | -8.931      | 68.200         | 2.759         | PK   |
| 2  |      |      | 5650.000        | 57.040                 | 54.387               | -11.160     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.454                 | 54.533               | -47.746     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 56.956                 | 53.993               | -53.844     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 57.299                 | 54.386               | -64.901     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5749.325        | 95.549                 | 92.758               | N/A         | N/A            | 2.791         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:35 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5745MHz |                               |

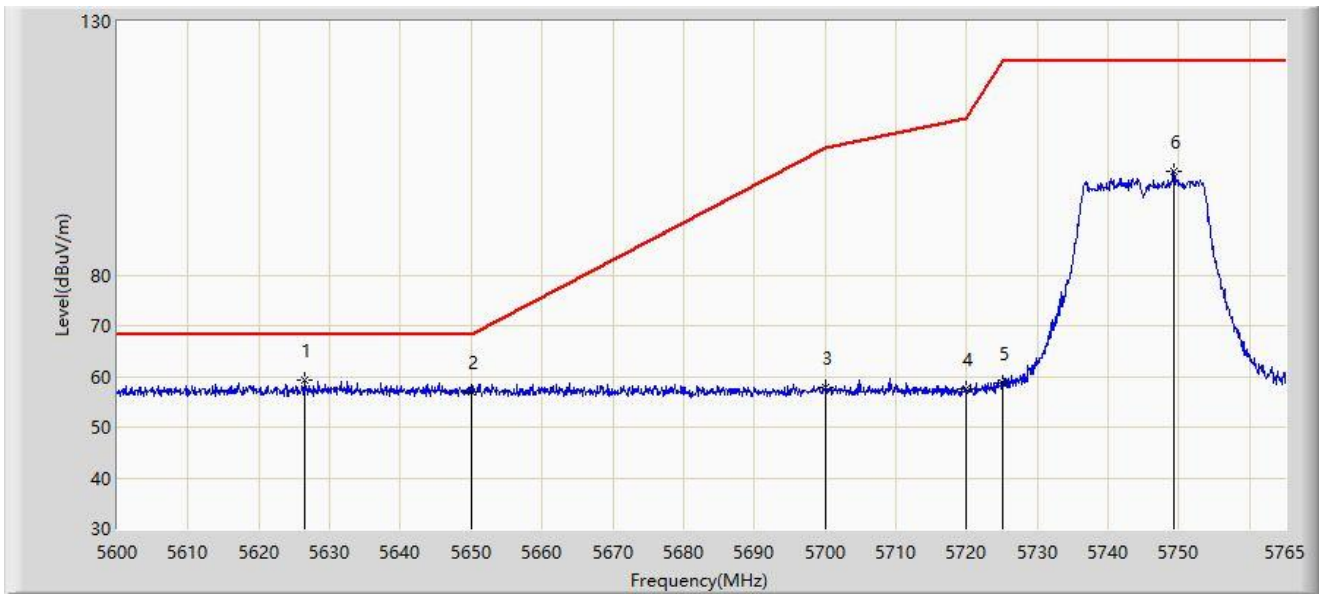


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5626.565        | 59.174                 | 56.376               | -9.026      | 68.200         | 2.798         | PK   |
| 2  |      |      | 5650.000        | 57.080                 | 54.427               | -11.120     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.809                 | 54.888               | -47.391     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.440                 | 54.477               | -53.360     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 58.666                 | 55.753               | -63.534     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5749.325        | 100.479                | 97.688               | N/A         | N/A            | 2.791         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:36 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                               |

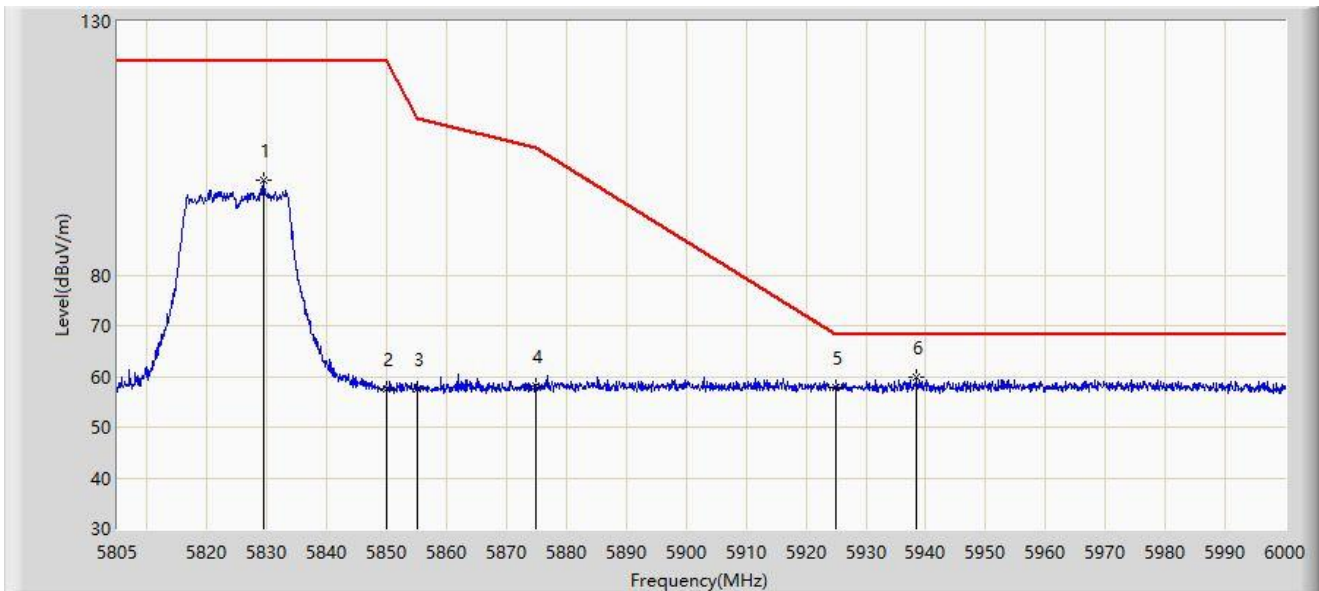


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5829.375        | 98.578                 | 95.320               | N/A         | N/A            | 3.258         | PK   |
| 2  |      |      | 5850.000        | 57.608                 | 54.333               | -64.592     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.602                 | 54.326               | -53.198     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.981                 | 54.526               | -47.219     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.892                 | 54.377               | -10.308     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5938.478        | 59.715                 | 56.071               | -8.485      | 68.200         | 3.644         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:37 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT20 at channel 5825MHz |                               |

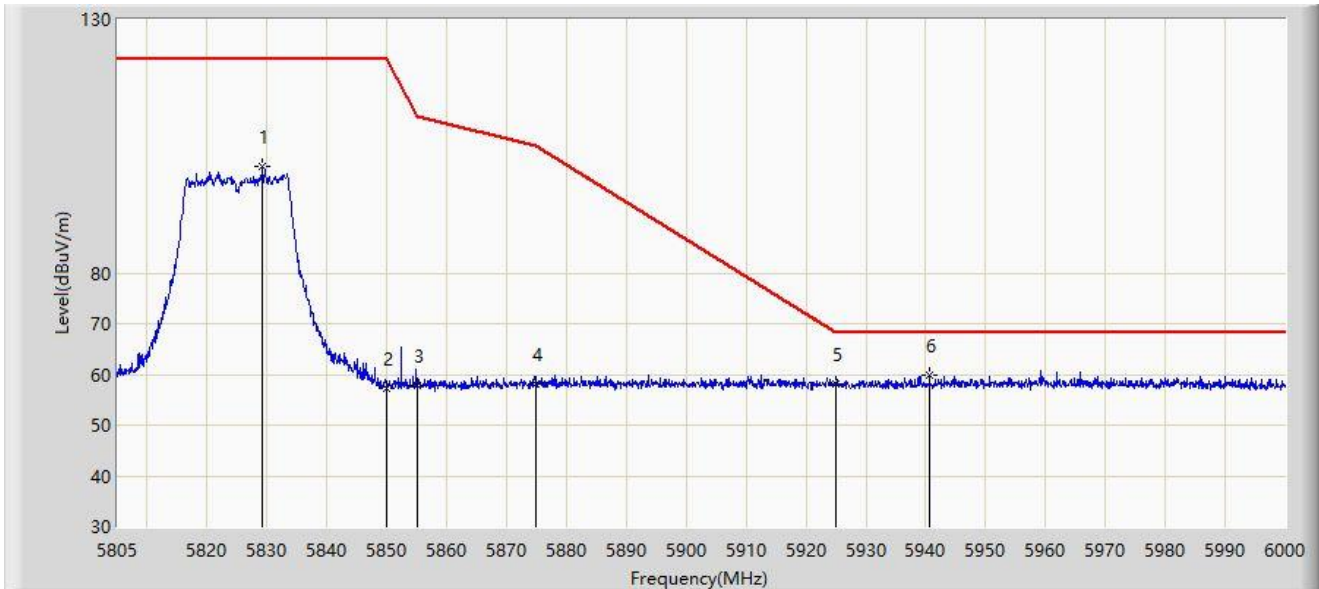


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5829.277        | 101.068                | 97.810               | N/A         | N/A            | 3.258         | PK   |
| 2  |      |      | 5850.000        | 57.137                 | 53.862               | -65.063     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.964                 | 54.688               | -52.836     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.977                 | 54.522               | -47.223     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.976                 | 54.461               | -10.224     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5940.623        | 59.871                 | 56.190               | -8.329      | 68.200         | 3.681         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:46 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                               |

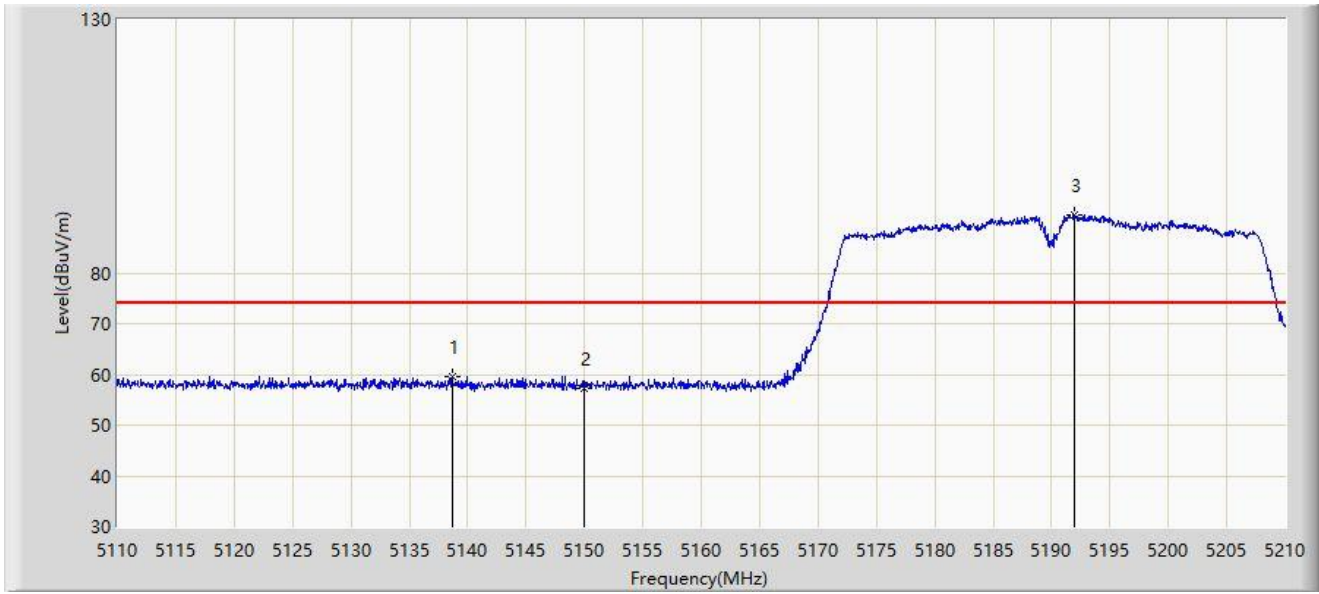


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5138.700        | 59.457                 | 57.100               | -14.543     | 74.000         | 2.357         | PK   |
| 2  |      |      | 5150.000        | 57.103                 | 54.737               | -16.897     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5192.000        | 91.467                 | 89.299               | N/A         | N/A            | 2.167         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:48 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                               |

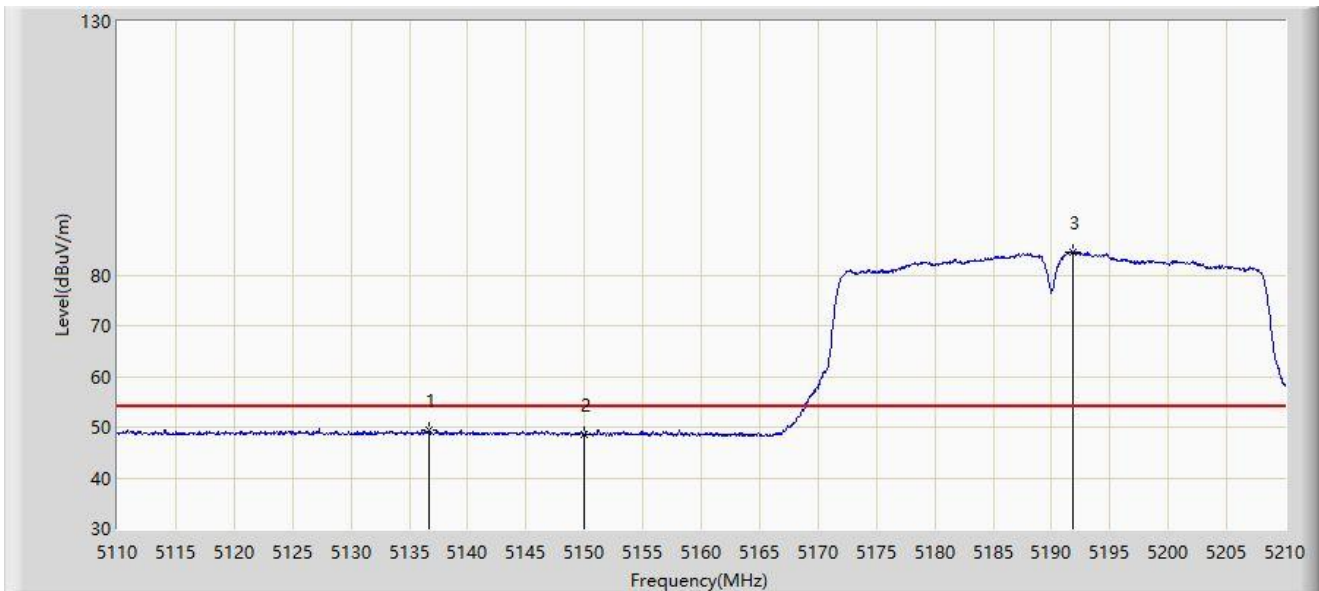


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5136.750        | 49.473                 | 47.122               | -4.527      | 54.000         | 2.351         | AV   |
| 2  |      |      | 5150.000        | 48.694                 | 46.328               | -5.306      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5191.800        | 84.556                 | 82.386               | N/A         | N/A            | 2.169         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:49 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                               |

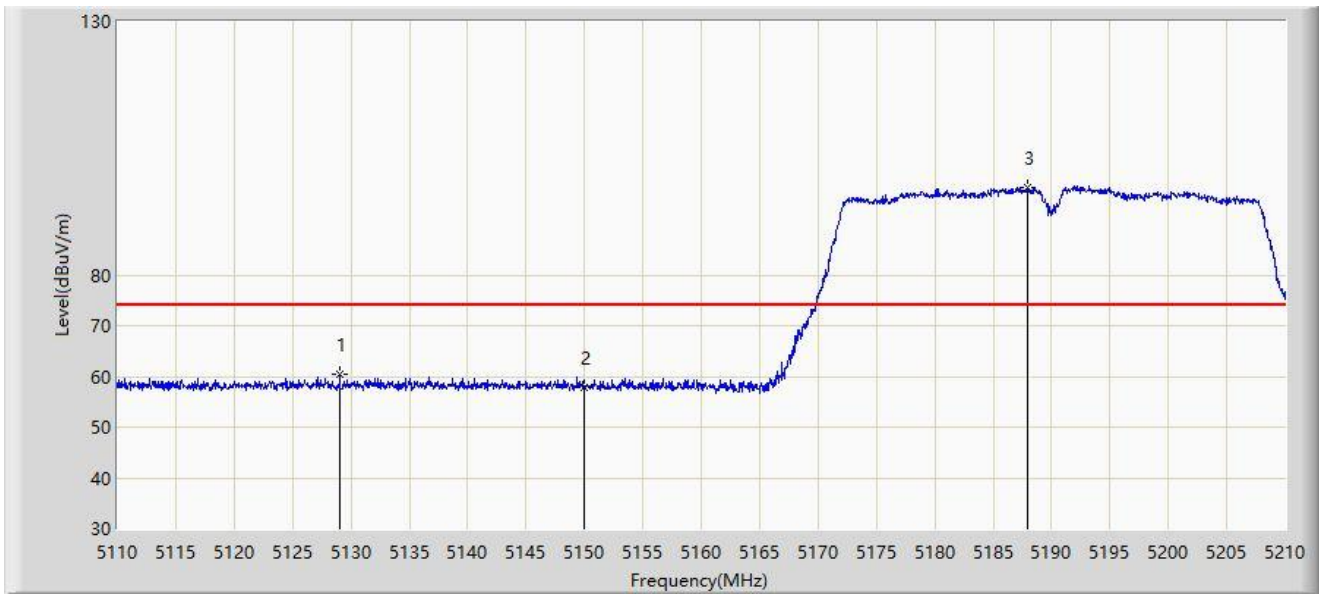


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5129.050        | 60.378                 | 58.053               | -13.622     | 74.000         | 2.325         | PK   |
| 2  |      |      | 5150.000        | 57.971                 | 55.605               | -16.029     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5187.950        | 97.325                 | 95.117               | N/A         | N/A            | 2.209         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:51 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5190MHz |                               |

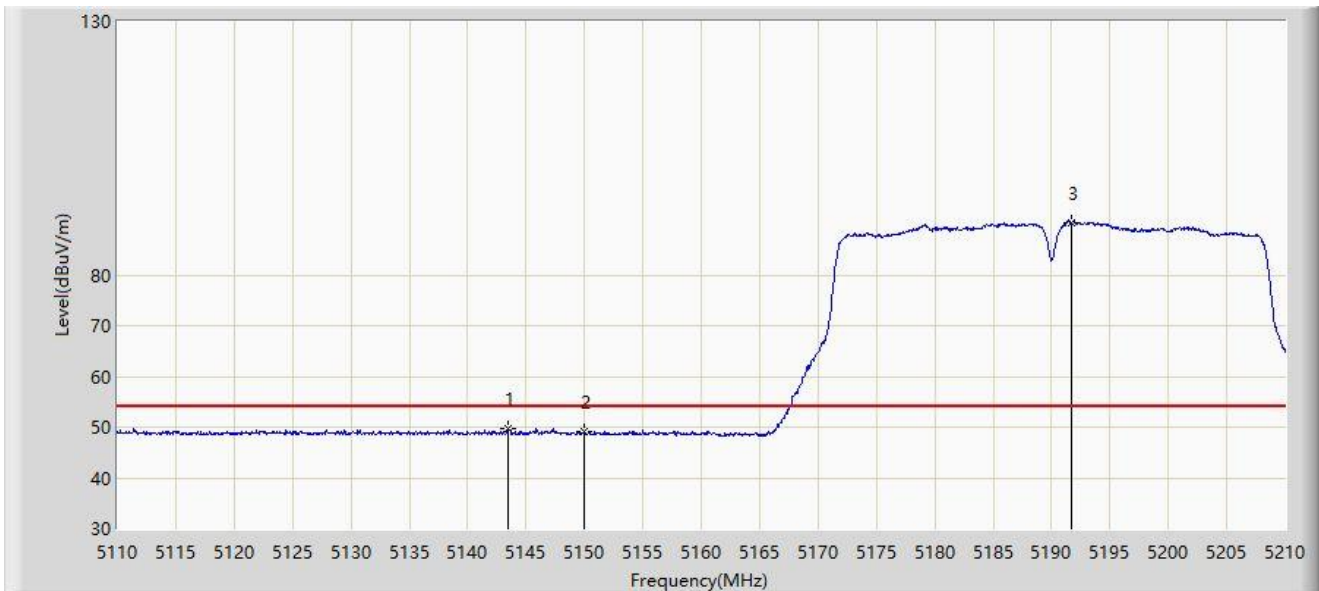


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5143.450        | 49.723                 | 47.353               | -4.277      | 54.000         | 2.369         | AV   |
| 2  |      |      | 5150.000        | 49.200                 | 46.834               | -4.800      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5191.750        | 90.431                 | 88.261               | N/A         | N/A            | 2.169         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:54 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                               |

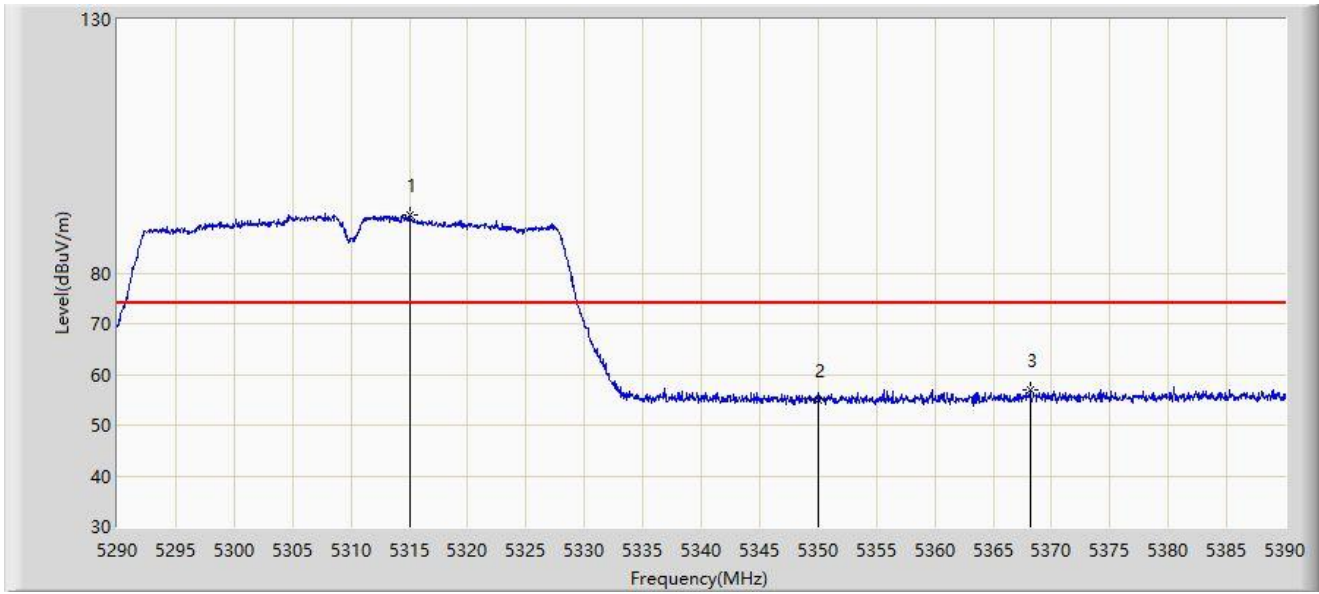


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5315.050        | 91.418                 | 89.924               | N/A         | N/A            | 1.493         | PK   |
| 2  |      |      | 5350.000        | 54.909                 | 53.699               | -19.091     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5368.200        | 56.906                 | 55.253               | -17.094     | 74.000         | 1.653         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:55 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                               |

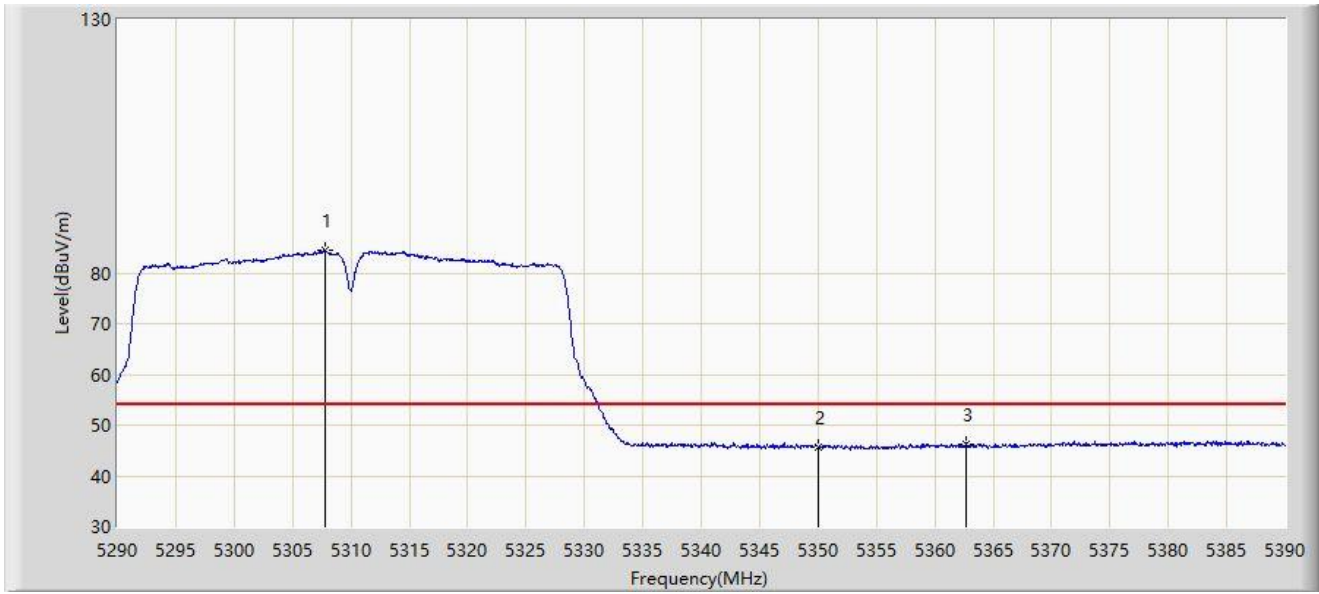


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5307.850        | 84.382                 | 82.875               | N/A         | N/A            | 1.507         | AV   |
| 2  |      |      | 5350.000        | 45.679                 | 44.469               | -8.321      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5362.650        | 46.375                 | 44.883               | -7.625      | 54.000         | 1.491         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:56 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                               |

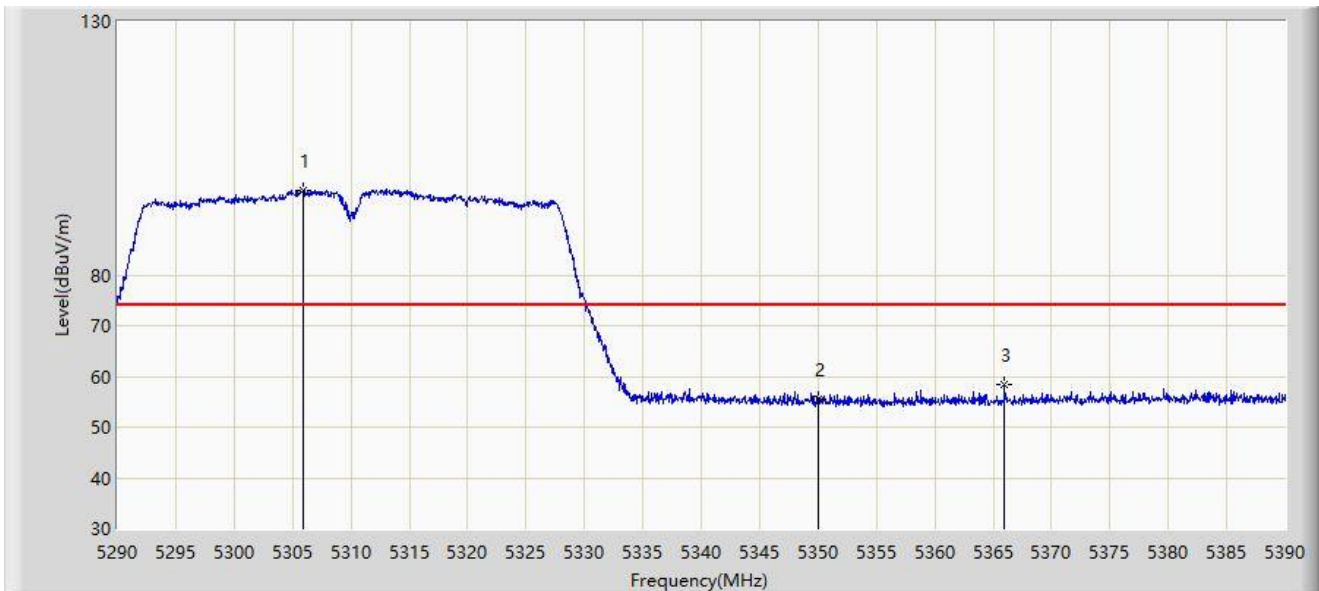


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5305.950        | 96.727                 | 95.217               | N/A         | N/A            | 1.510         | PK   |
| 2  |      |      | 5350.000        | 55.479                 | 54.269               | -18.521     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5365.950        | 58.423                 | 56.836               | -15.577     | 74.000         | 1.588         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 11:57 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5310MHz |                               |

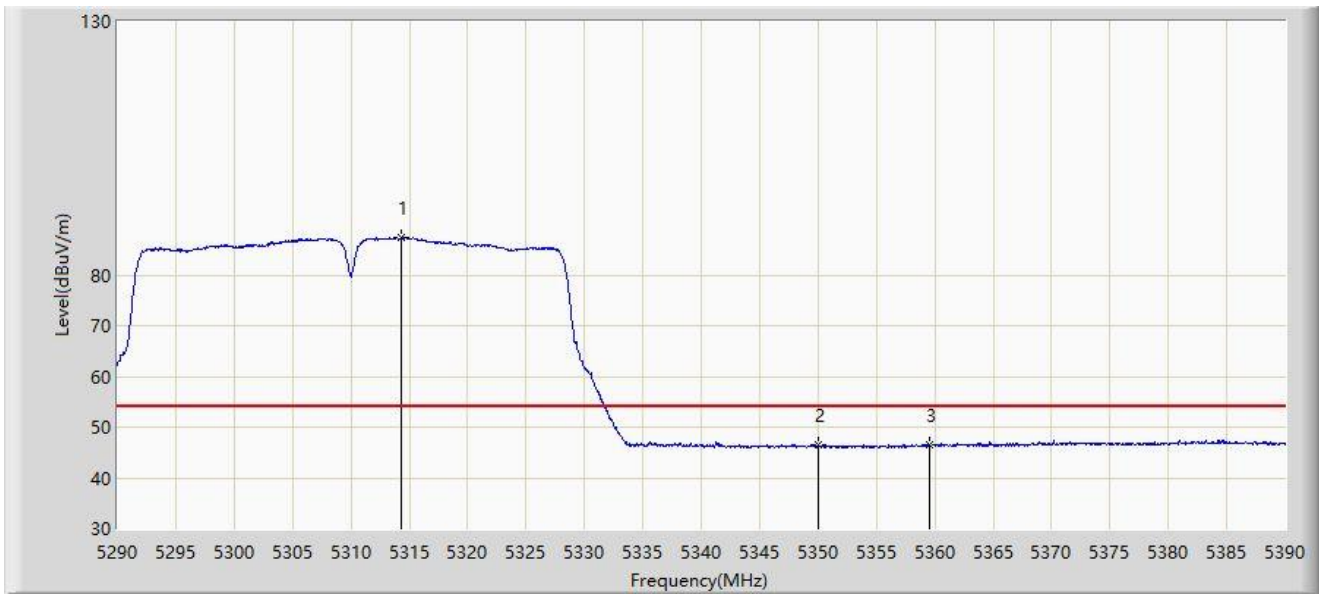


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5314.350        | 87.303                 | 85.808               | N/A         | N/A            | 1.495         | AV   |
| 2  |      |      | 5350.000        | 46.474                 | 45.264               | -7.526      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5359.600        | 46.617                 | 45.214               | -7.383      | 54.000         | 1.403         | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:19 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                               |

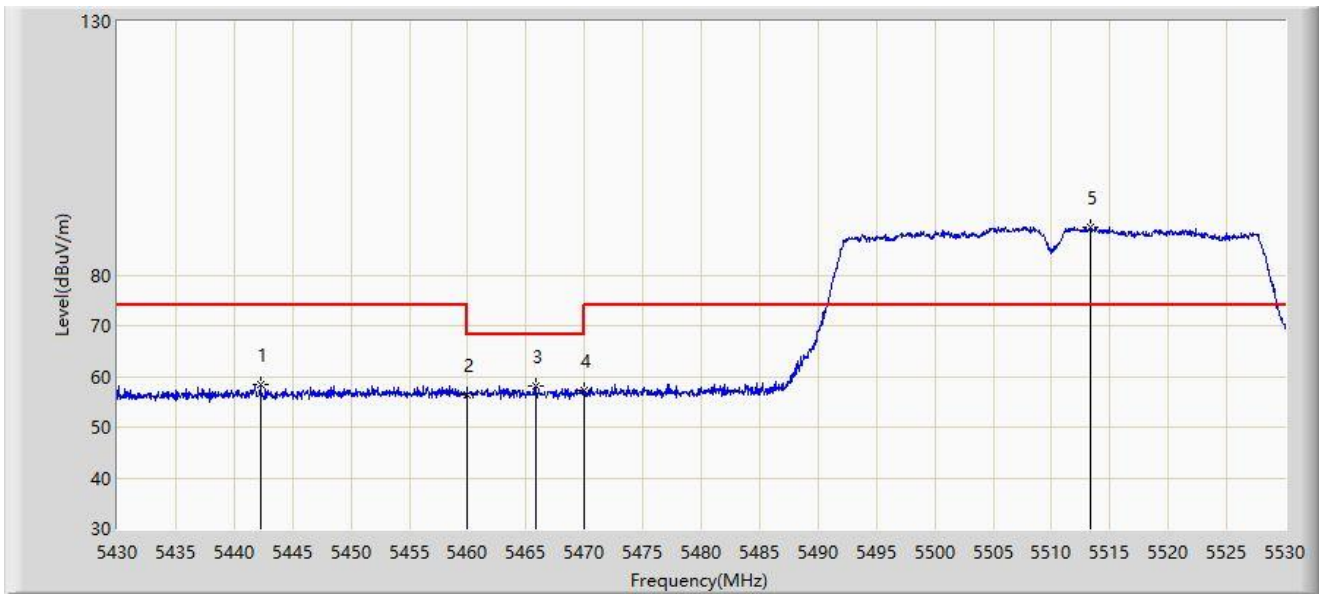


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5442.250        | 58.542                 | 56.431               | -15.458     | 74.000         | 2.110         | PK   |
| 2  |      |      | 5460.000        | 56.455                 | 54.230               | -17.545     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5465.900        | 57.976                 | 55.771               | -10.224     | 68.200         | 2.205         | PK   |
| 4  |      |      | 5470.000        | 57.221                 | 55.031               | -10.979     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5513.300        | 89.284                 | 87.008               | N/A         | N/A            | 2.277         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:22 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                               |

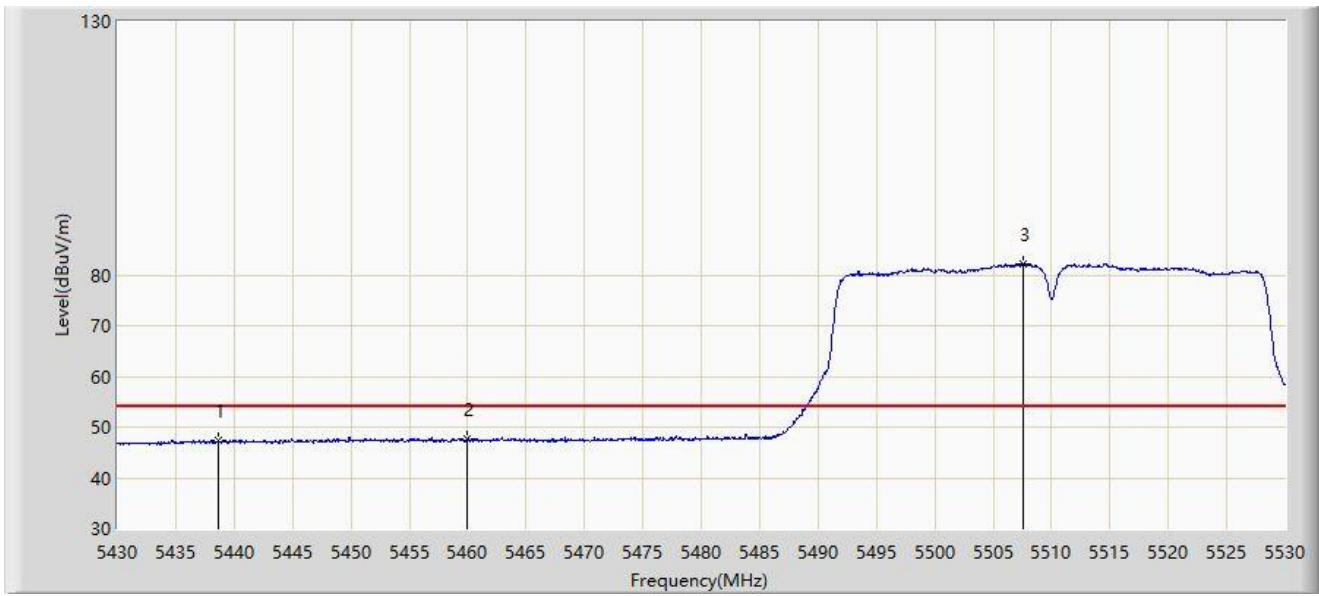


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5438.650        | 47.271                 | 45.201               | -6.729      | 54.000         | 2.069         | AV   |
| 2  |      |      | 5460.000        | 47.589                 | 45.364               | -6.411      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5507.550        | 82.034                 | 79.756               | N/A         | N/A            | 2.277         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:27 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                               |

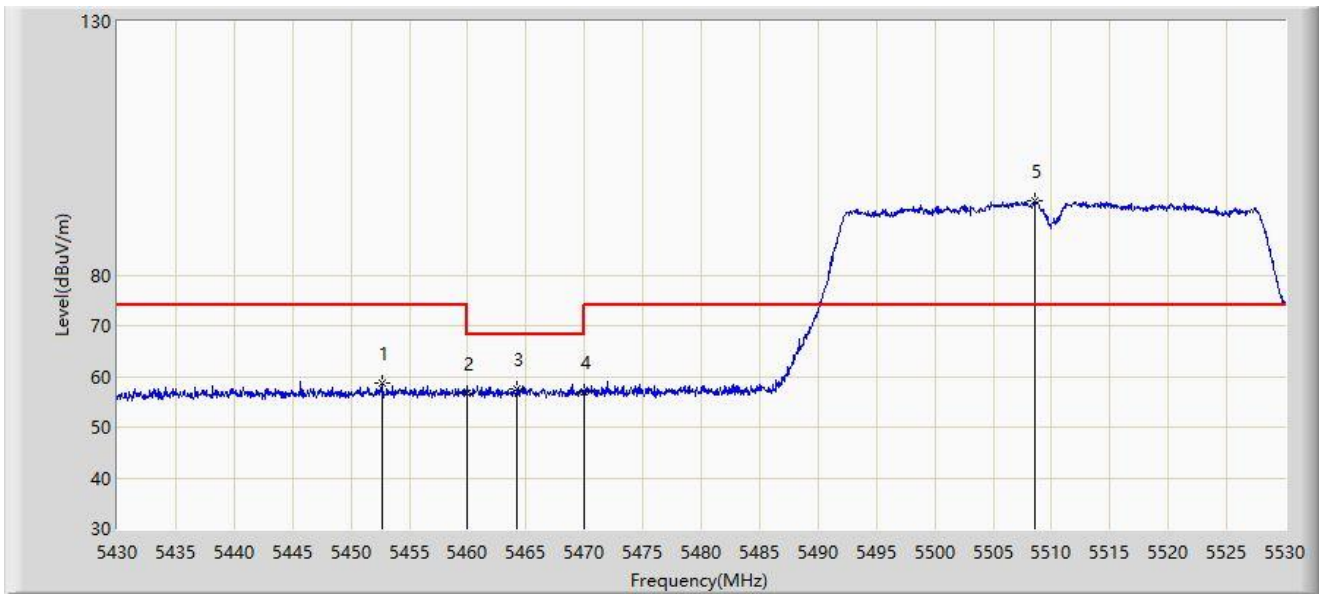


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5452.700        | 58.798                 | 56.567               | -15.202     | 74.000         | 2.231         | PK   |
| 2  |      |      | 5460.000        | 56.641                 | 54.416               | -17.359     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5464.150        | 57.501                 | 55.290               | -10.699     | 68.200         | 2.210         | PK   |
| 4  |      |      | 5470.000        | 56.849                 | 54.659               | -11.351     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5508.600        | 94.503                 | 92.226               | N/A         | N/A            | 2.277         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:29 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5510MHz |                               |

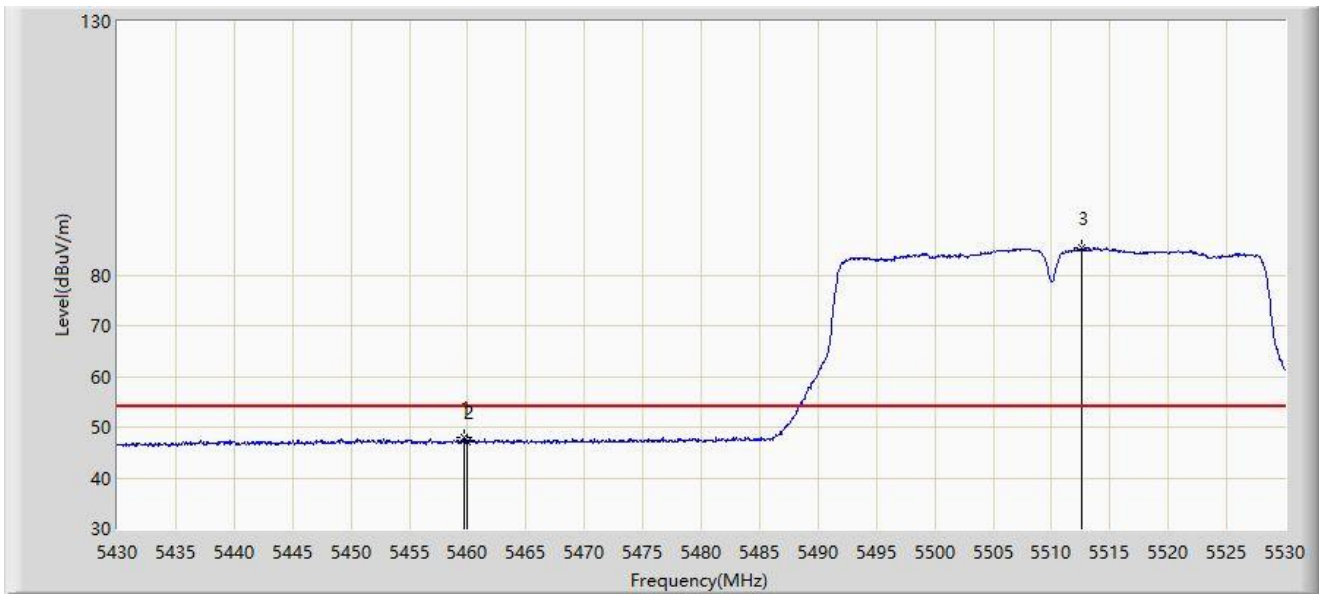


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5459.650        | 47.968                 | 45.742               | -6.032      | 54.000         | 2.226         | AV   |
| 2  |      |      | 5460.000        | 47.152                 | 44.927               | -6.848      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5512.600        | 85.227                 | 82.950               | N/A         | N/A            | 2.276         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:31 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                               |

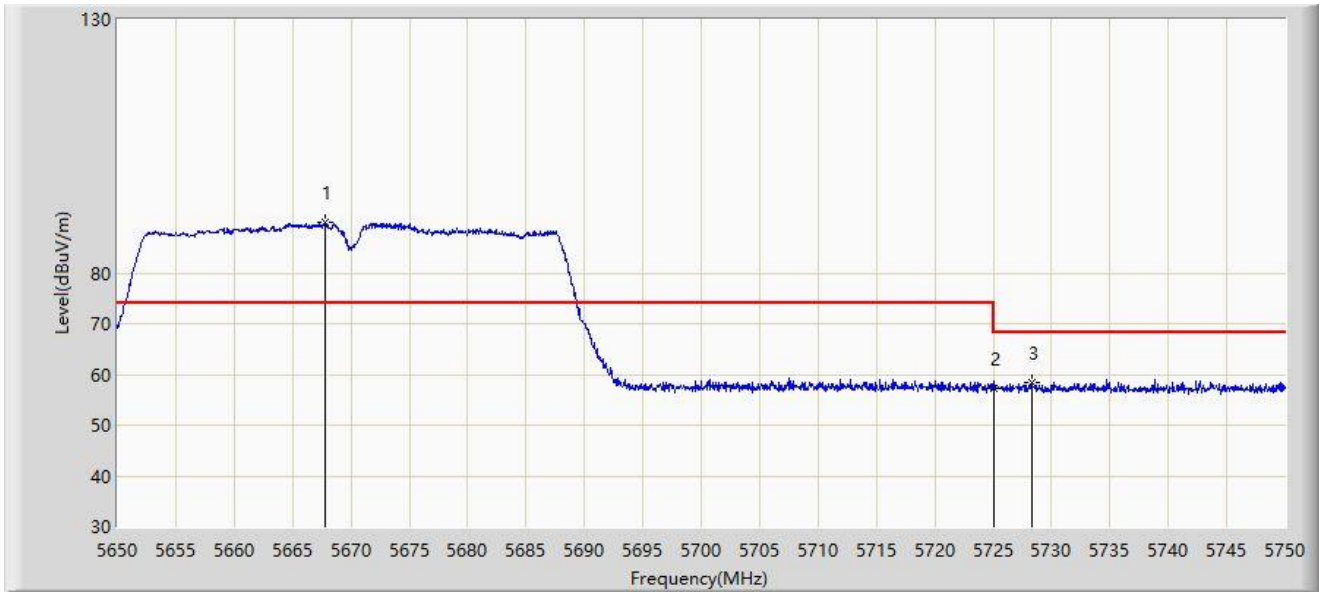


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5667.800        | 89.996                 | 87.291               | N/A         | N/A            | 2.705         | PK   |
| 2  |      |      | 5725.000        | 57.160                 | 54.247               | -11.040     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5728.300        | 58.514                 | 55.641               | -9.686      | 68.200         | 2.874         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:33 |
| Limit: FCC_Part 15.209_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5670MHz |                               |

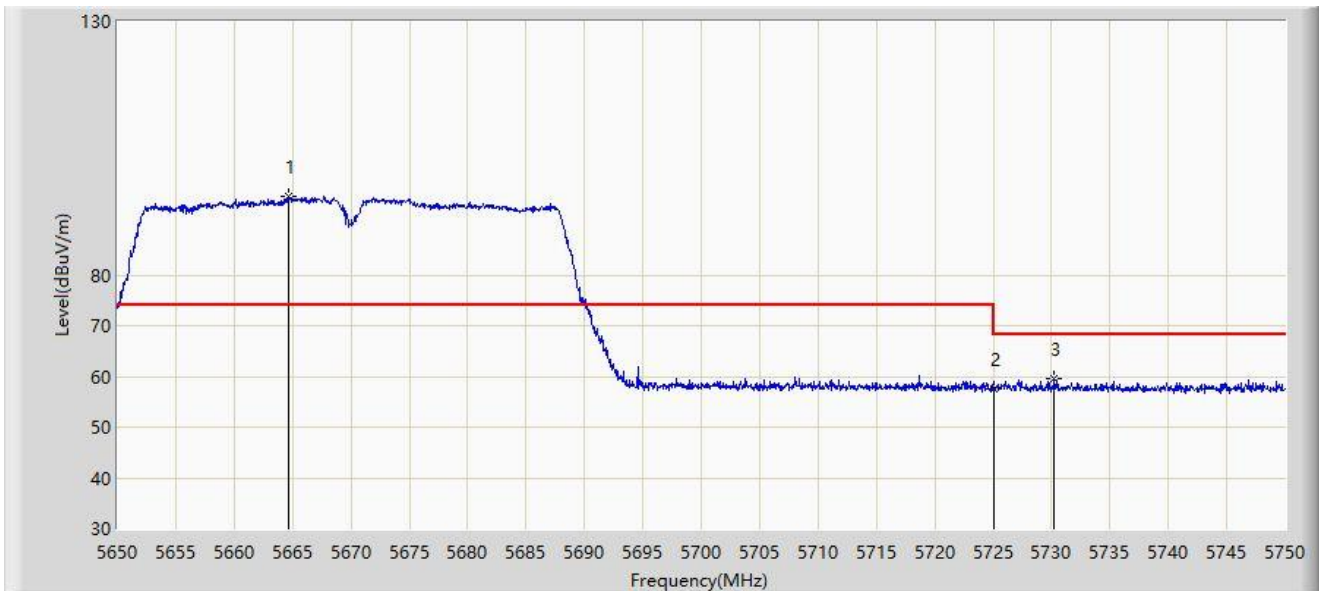


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5664.700        | 95.435                 | 92.754               | N/A         | N/A            | 2.681         | PK   |
| 2  |      |      | 5725.000        | 57.548                 | 54.635               | -10.652     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5730.250        | 59.553                 | 56.705               | -8.647      | 68.200         | 2.849         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:39 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                               |

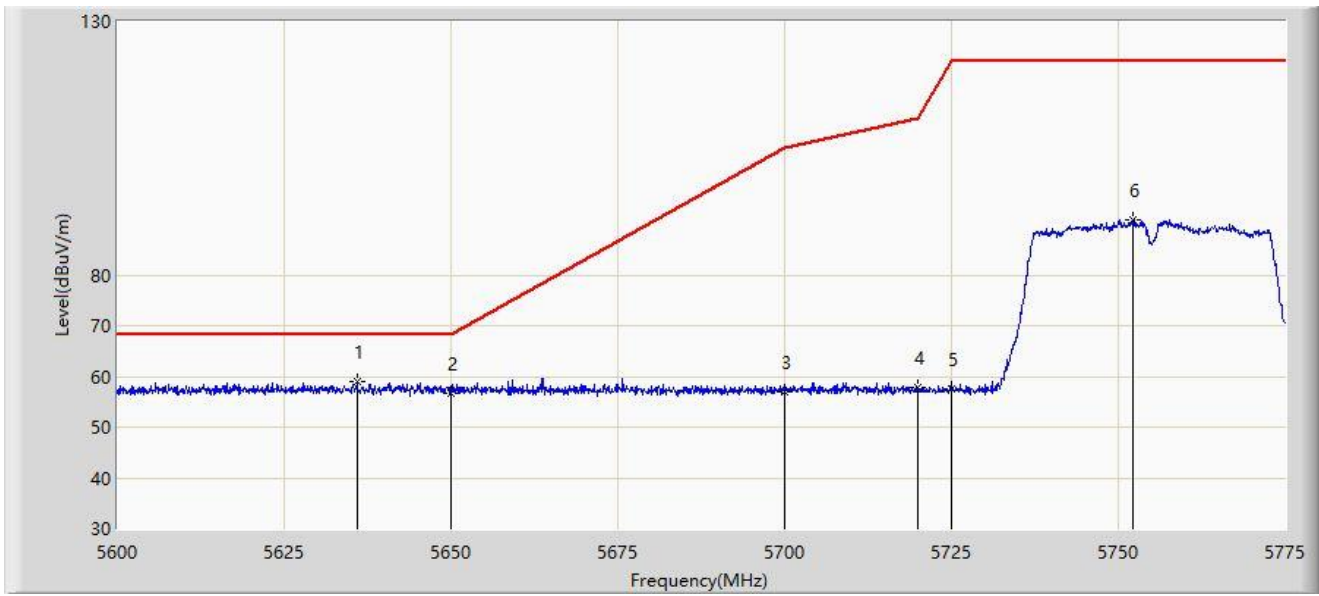


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5635.962        | 59.126                 | 56.404               | -9.074      | 68.200         | 2.722         | PK   |
| 2  |      |      | 5650.000        | 56.610                 | 53.957               | -11.590     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.083                 | 54.162               | -48.117     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.764                 | 54.801               | -53.036     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 57.633                 | 54.720               | -64.567     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5752.250        | 90.923                 | 88.083               | N/A         | N/A            | 2.841         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:42 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5755MHz |                               |

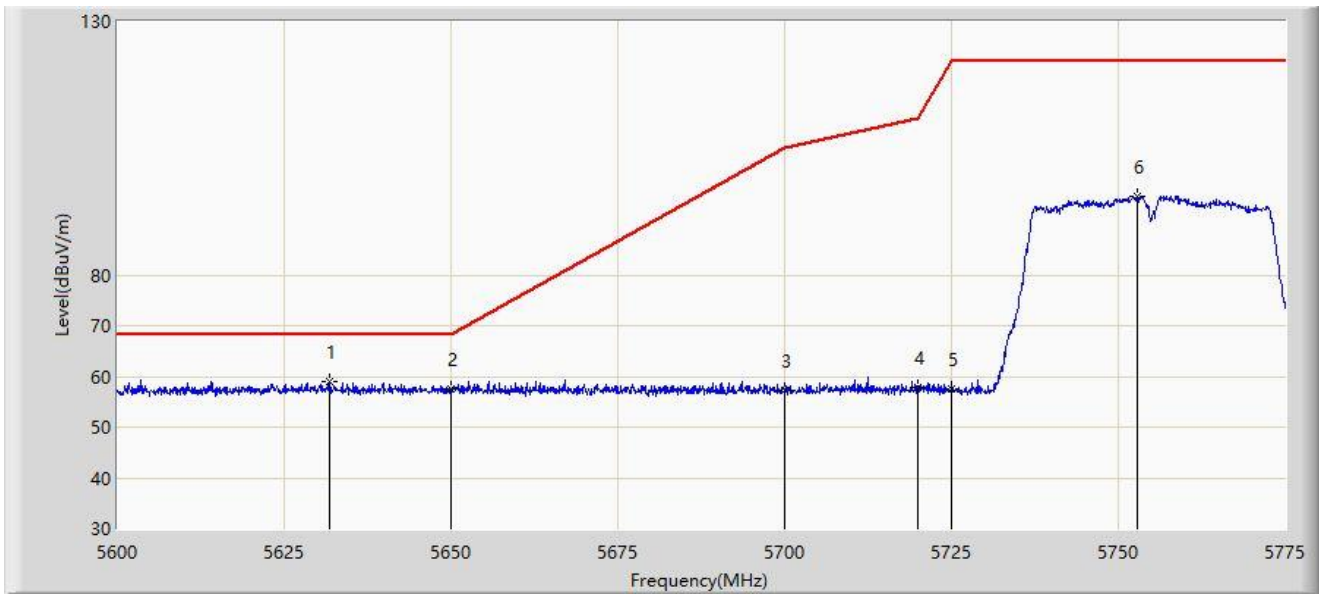


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5631.763        | 58.879                 | 56.123               | -9.321      | 68.200         | 2.757         | PK   |
| 2  |      |      | 5650.000        | 57.593                 | 54.940               | -10.607     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.187                 | 54.266               | -48.013     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.971                 | 55.008               | -52.829     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 57.642                 | 54.729               | -64.558     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5752.775        | 95.449                 | 92.600               | N/A         | N/A            | 2.849         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:44 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Horizontal          |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz |                               |

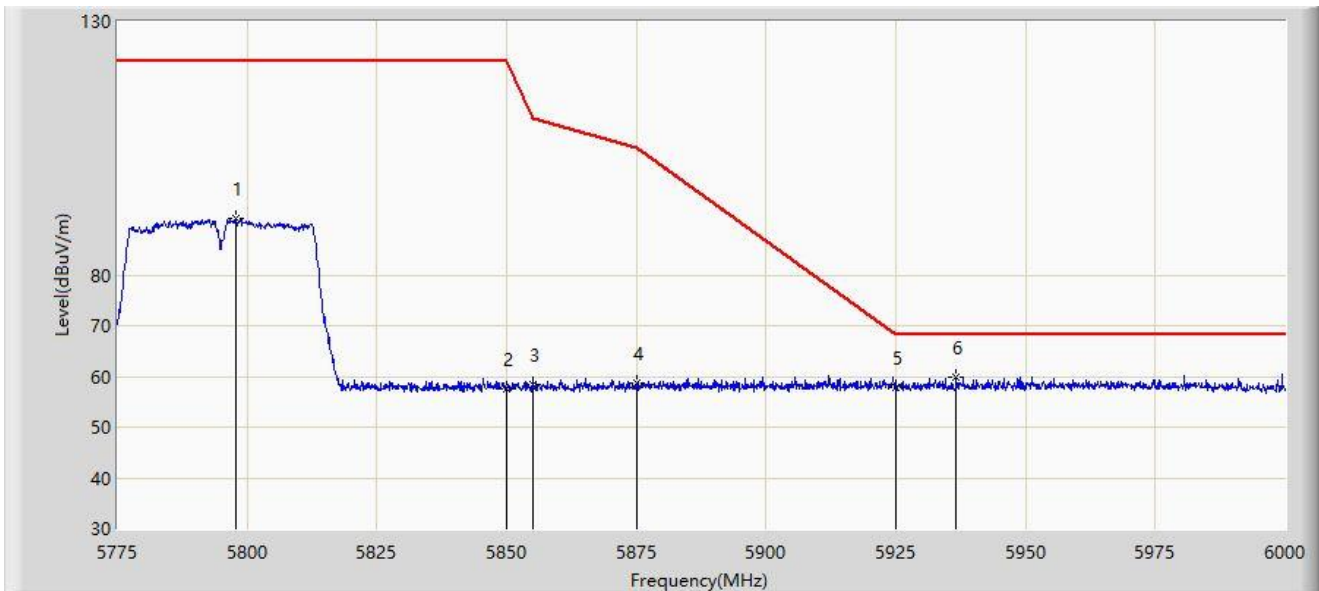


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5797.950        | 91.045                 | 88.020               | N/A         | N/A            | 3.025         | PK   |
| 2  |      |      | 5850.000        | 57.457                 | 54.182               | -64.743     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 58.266                 | 54.990               | -52.534     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 58.585                 | 55.130               | -46.615     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.766                 | 54.251               | -10.434     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5936.550        | 59.787                 | 56.176               | -8.413      | 68.200         | 3.611         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                        |                               |
|--------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                           | Test Date: 2021/12/28 - 13:45 |
| Limit: FCC_Part 15.407_RE(3m)                          | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                | Polarity: Vertical            |
| EUT: Mobile Computer                                   | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11n-HT40 at channel 5795MHz |                               |

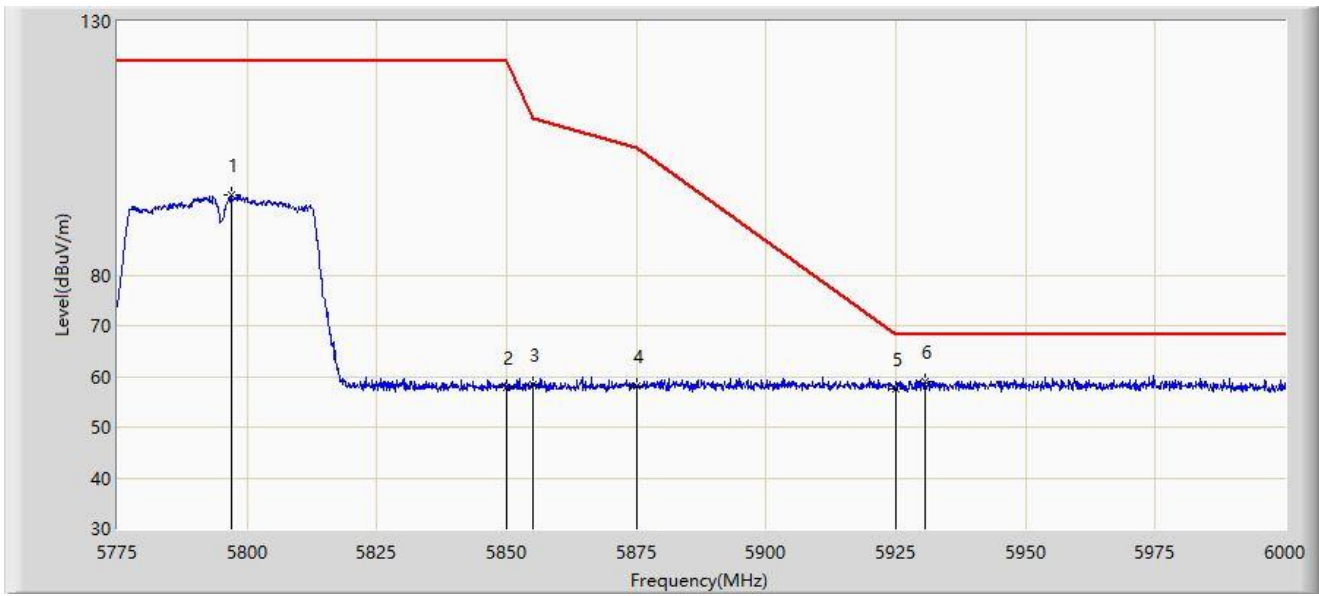


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5796.937        | 95.715                 | 92.712               | N/A         | N/A            | 3.003         | PK   |
| 2  |      |      | 5850.000        | 57.805                 | 54.530               | -64.395     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 58.534                 | 55.258               | -52.266     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 58.114                 | 54.659               | -47.086     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.504                 | 53.989               | -10.696     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5930.700        | 59.107                 | 55.596               | -9.093      | 68.200         | 3.511         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:47 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                               |

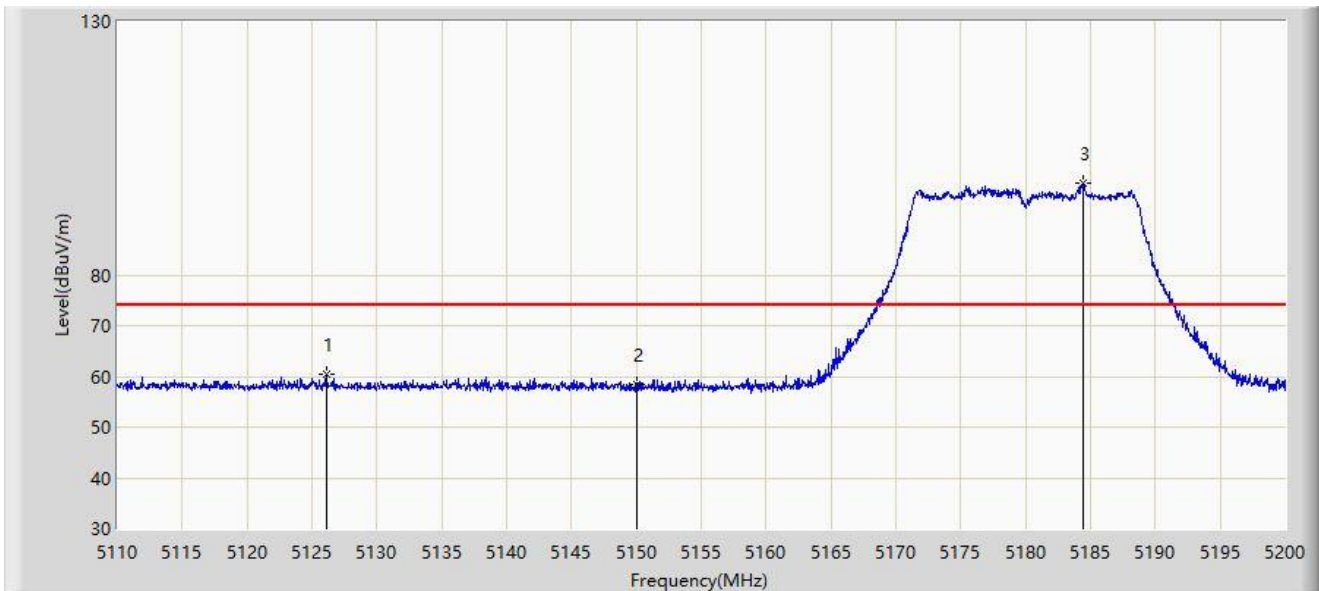


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5126.110        | 60.521                 | 58.211               | -13.479     | 74.000         | 2.310         | PK   |
| 2  |      |      | 5150.000        | 58.532                 | 56.166               | -15.468     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5184.430        | 98.219                 | 95.976               | N/A         | N/A            | 2.244         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:49 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                               |

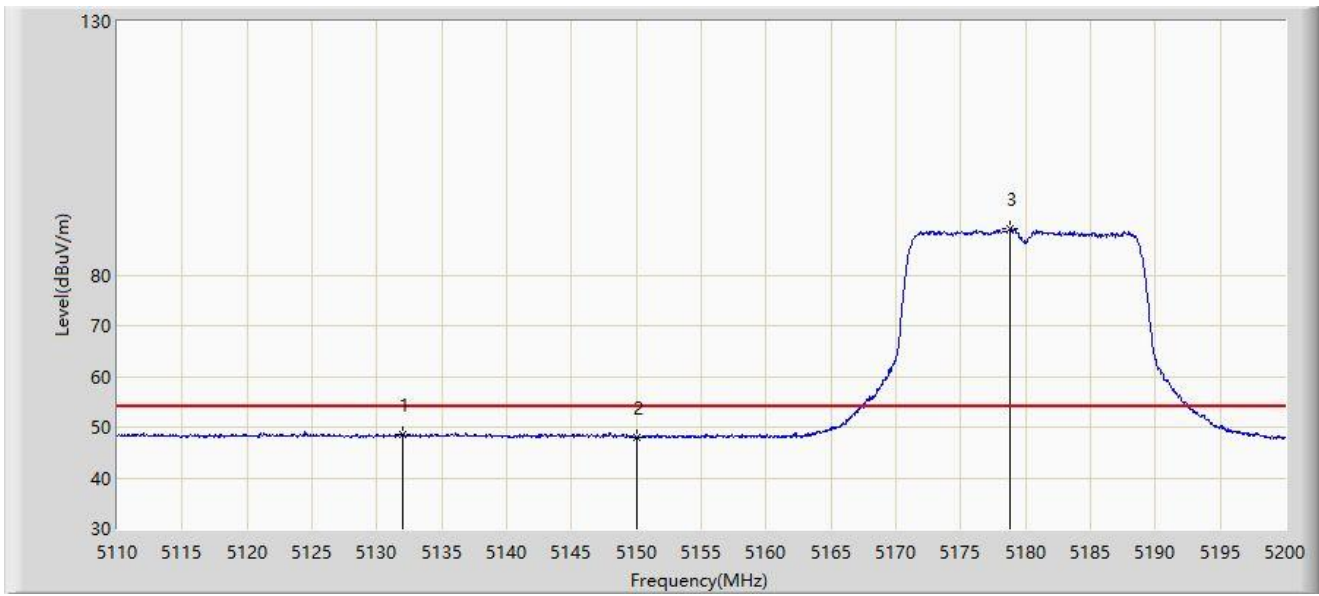


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5132.005        | 48.551                 | 46.214               | -5.449      | 54.000         | 2.337         | AV   |
| 2  |      |      | 5150.000        | 48.025                 | 45.659               | -5.975      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5178.850        | 89.252                 | 86.990               | N/A         | N/A            | 2.262         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:51 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                               |

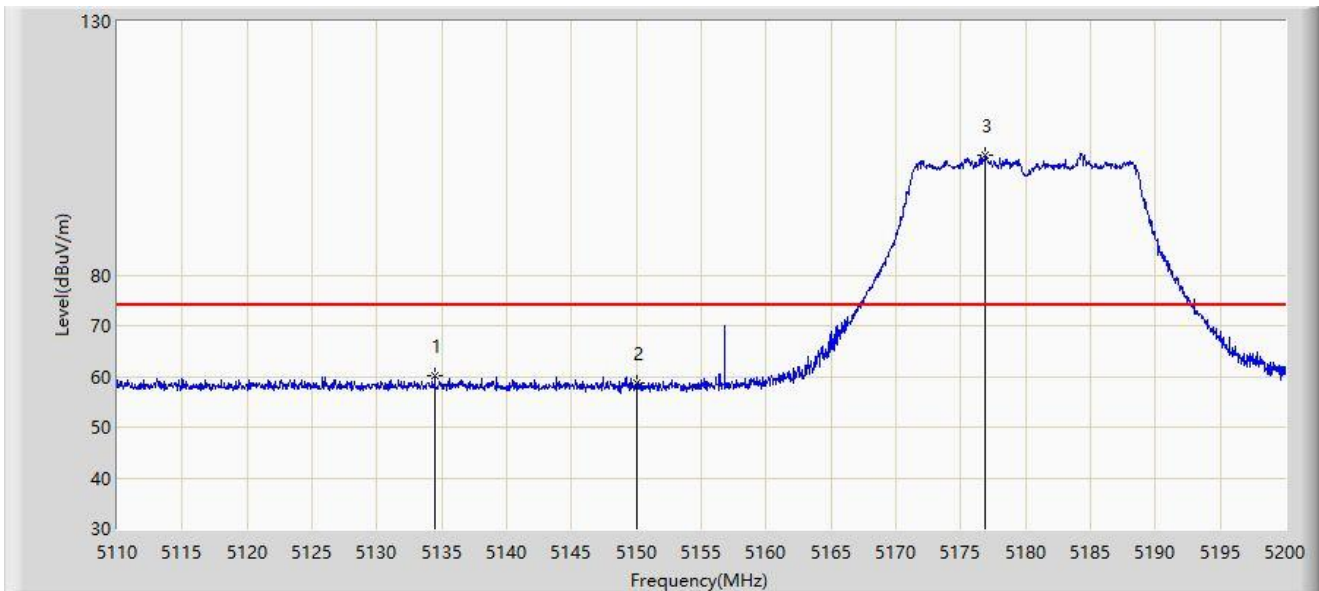


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5134.480        | 60.059                 | 57.715               | -13.941     | 74.000         | 2.344         | PK   |
| 2  |      |      | 5150.000        | 58.649                 | 56.283               | -15.351     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5176.870        | 103.634                | 101.376              | N/A         | N/A            | 2.259         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:52 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5180MHz |                               |

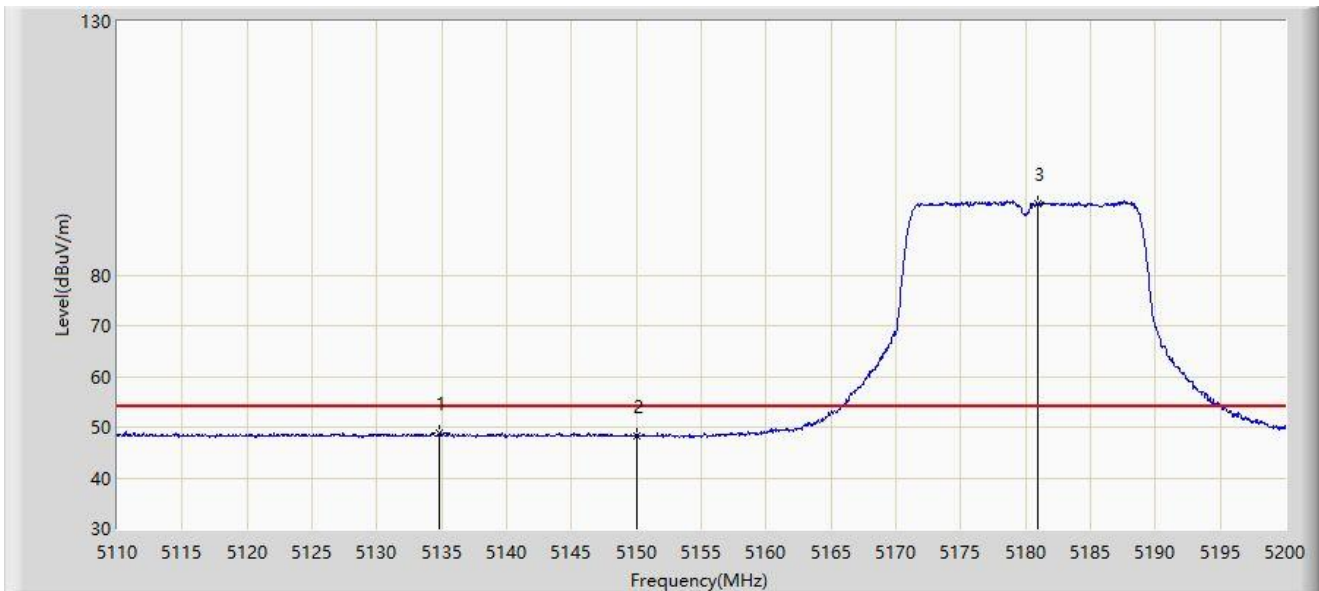


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5134.840        | 48.862                 | 46.517               | -5.138      | 54.000         | 2.346         | AV   |
| 2  |      |      | 5150.000        | 48.293                 | 45.927               | -5.707      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5180.920        | 93.944                 | 91.679               | N/A         | N/A            | 2.266         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:54 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                               |

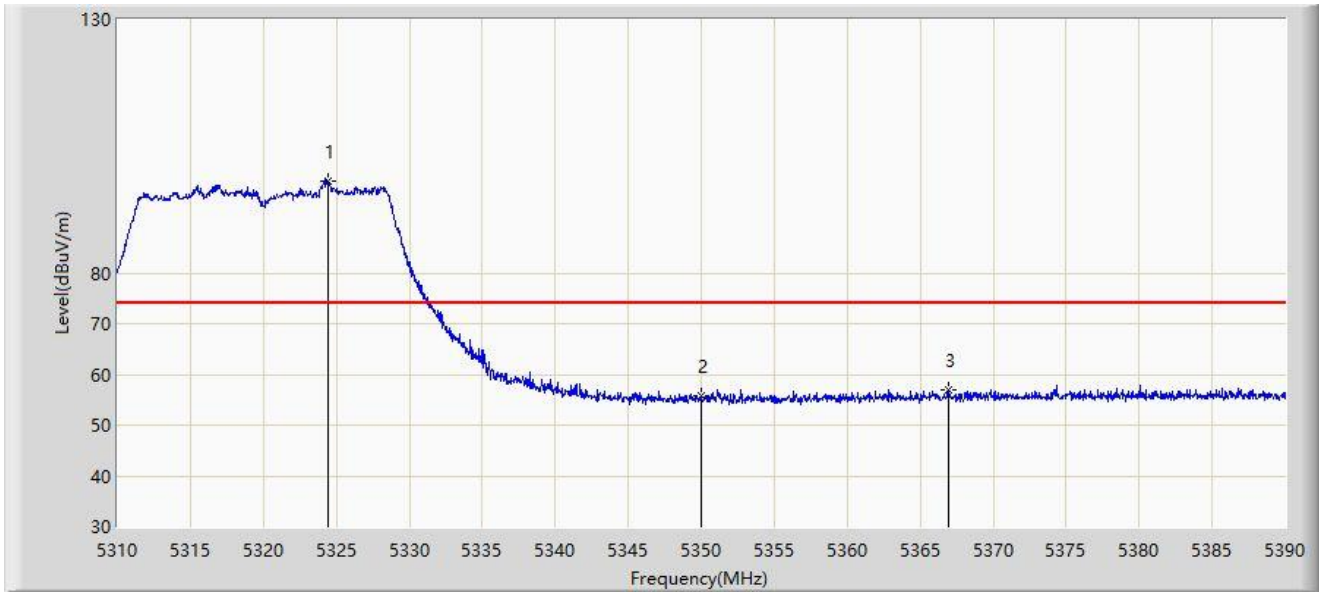


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5324.440        | 98.174                 | 96.712               | N/A         | N/A            | 1.463         | PK   |
| 2  |      |      | 5350.000        | 55.747                 | 54.537               | -18.253     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5366.920        | 56.881                 | 55.265               | -17.119     | 74.000         | 1.616         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:56 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                               |

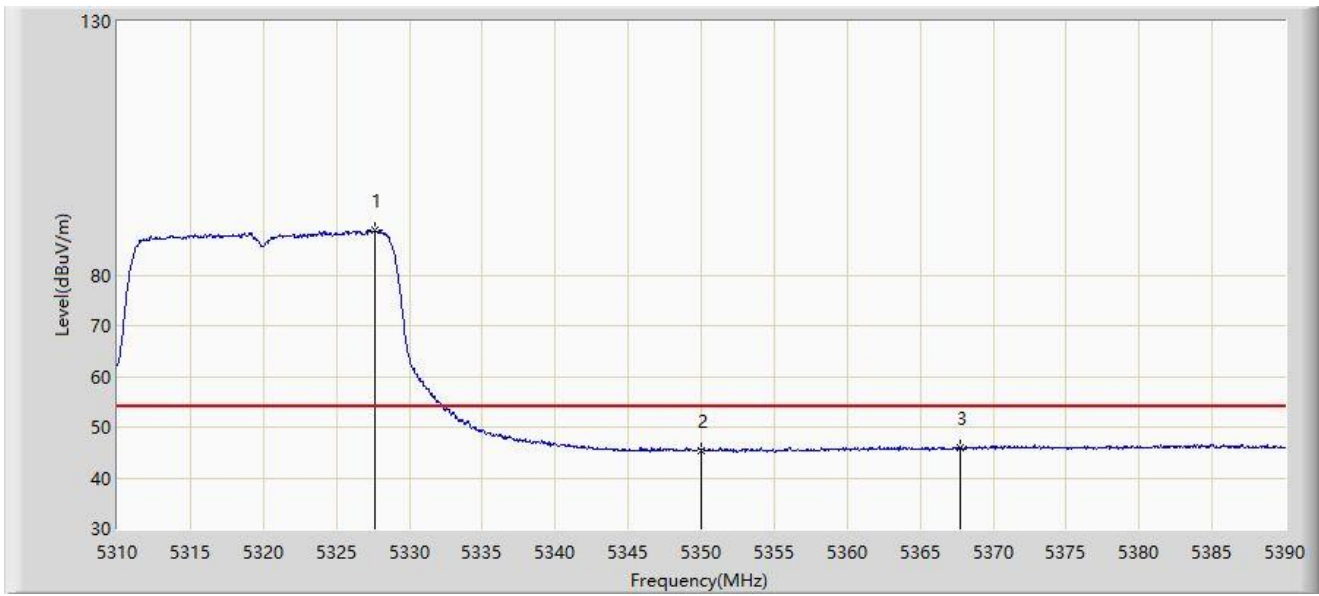


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5327.680        | 88.895                 | 87.446               | N/A         | N/A            | 1.449         | AV   |
| 2  |      |      | 5350.000        | 45.446                 | 44.236               | -8.554      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5367.720        | 46.029                 | 44.390               | -7.971      | 54.000         | 1.639         | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 13:59 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                               |

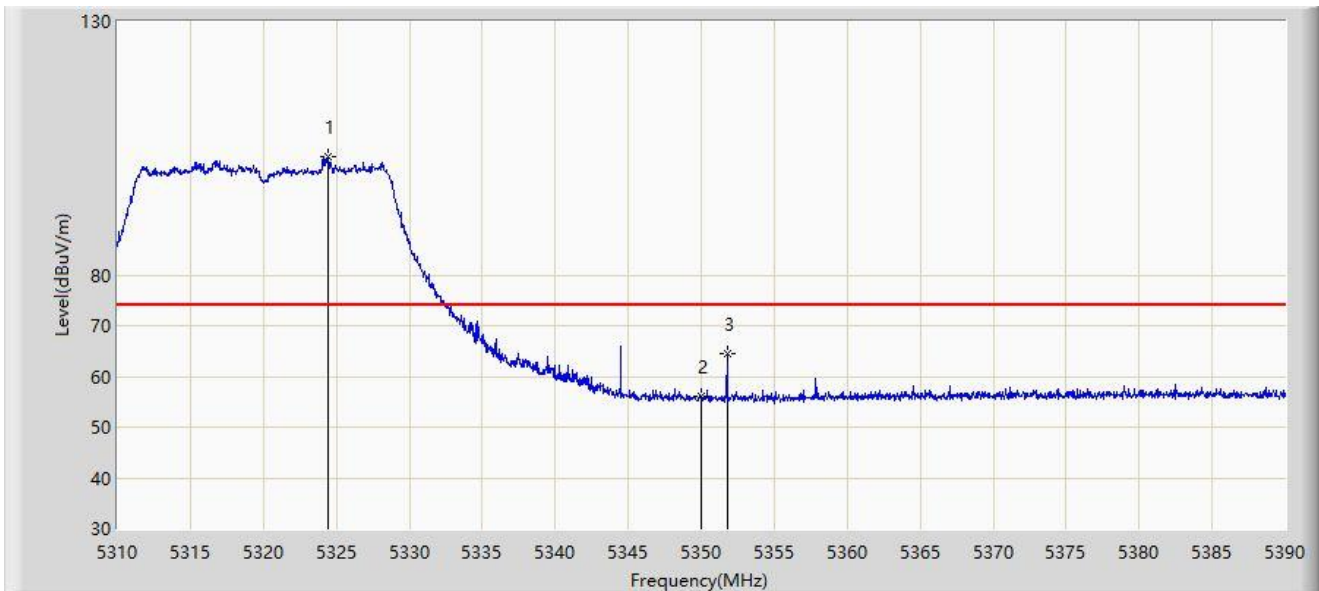


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5324.400        | 103.328                | 101.865              | N/A         | N/A            | 1.462         | PK   |
| 2  |      |      | 5350.000        | 55.959                 | 54.749               | -18.041     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5351.760        | 64.614                 | 63.429               | -9.386      | 74.000         | 1.185         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:04 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5320MHz |                               |

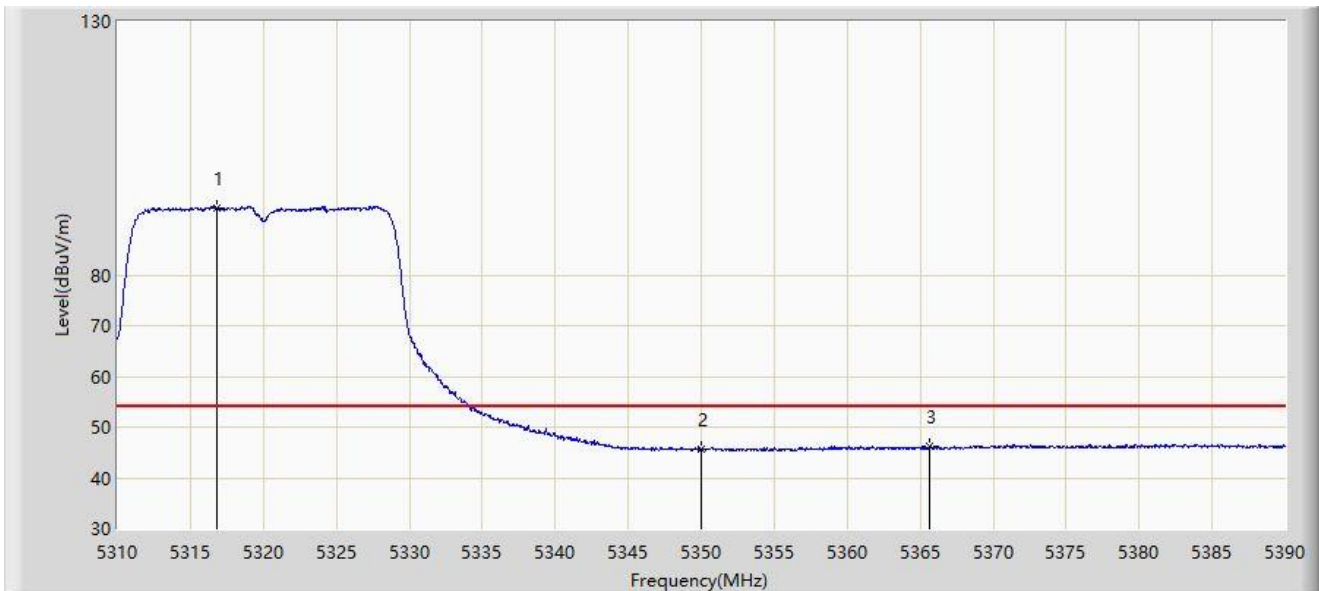


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5316.840        | 93.267                 | 91.777               | N/A         | N/A            | 1.490         | AV   |
| 2  |      |      | 5350.000        | 45.621                 | 44.411               | -8.379      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5365.640        | 46.310                 | 44.732               | -7.690      | 54.000         | 1.578         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:08 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                               |

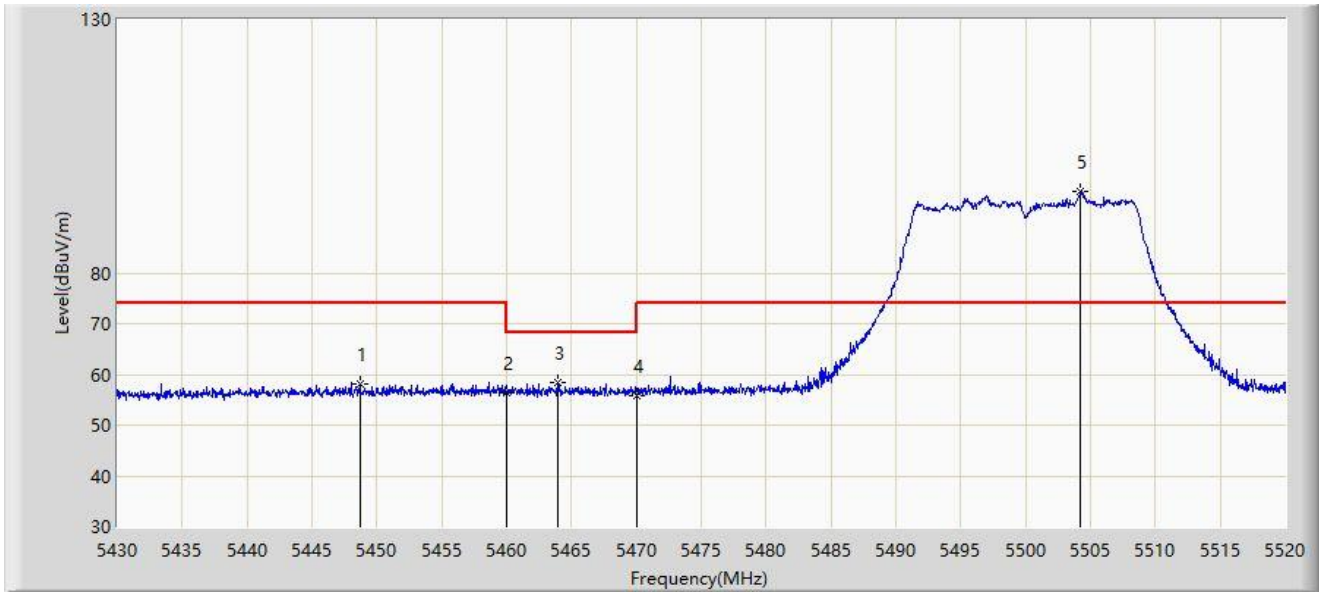


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5448.675        | 58.137                 | 55.952               | -15.863     | 74.000         | 2.185         | PK   |
| 2  |      |      | 5460.000        | 56.497                 | 54.272               | -17.503     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5463.930        | 58.367                 | 56.156               | -9.833      | 68.200         | 2.211         | PK   |
| 4  |      |      | 5470.000        | 55.937                 | 53.747               | -12.263     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5504.250        | 96.033                 | 93.746               | N/A         | N/A            | 2.287         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:09 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                               |

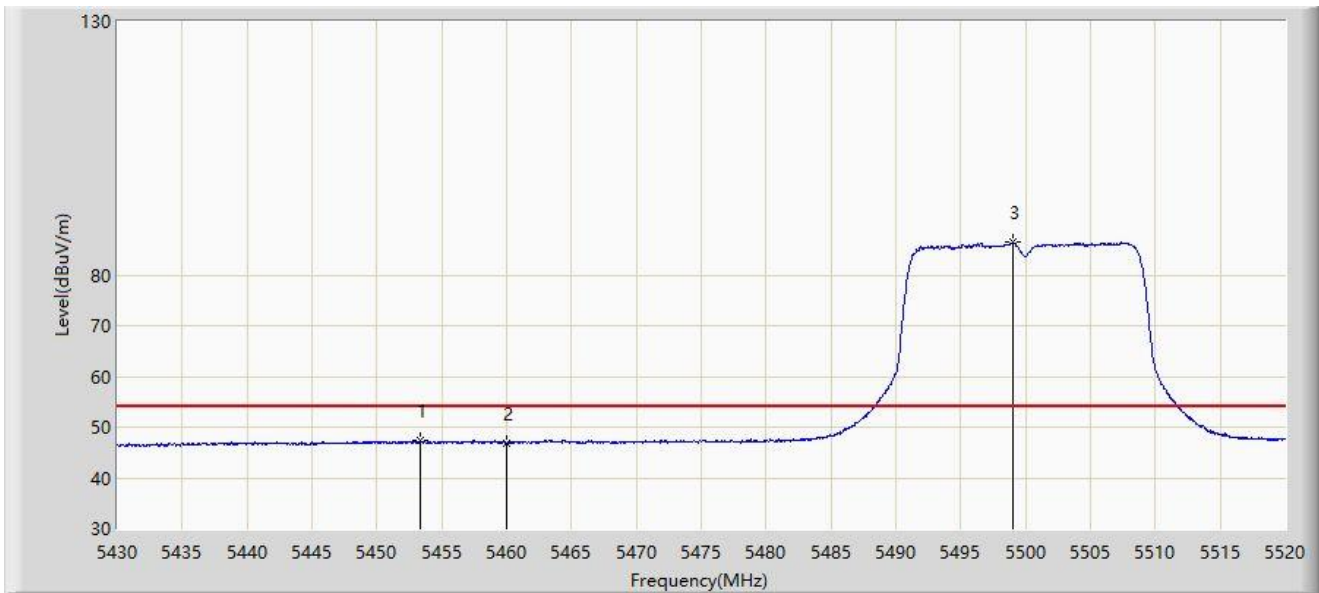


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5453.355        | 47.456                 | 45.218               | -6.544      | 54.000         | 2.238         | AV   |
| 2  |      |      | 5460.000        | 46.835                 | 44.610               | -7.165      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5499.075        | 86.412                 | 84.067               | N/A         | N/A            | 2.345         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:16 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                               |

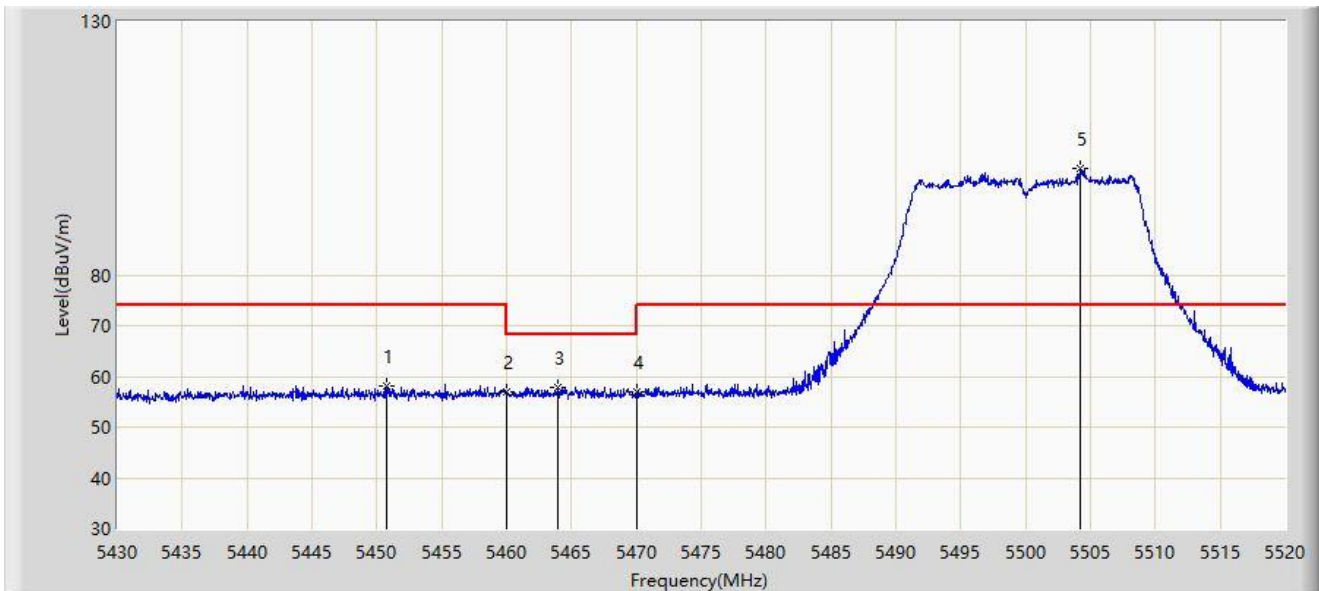


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5450.790        | 58.037                 | 55.828               | -15.963     | 74.000         | 2.210         | PK   |
| 2  |      |      | 5460.000        | 56.826                 | 54.601               | -17.174     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5463.975        | 57.966                 | 55.755               | -10.234     | 68.200         | 2.211         | PK   |
| 4  |      |      | 5470.000        | 56.840                 | 54.650               | -11.360     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5504.250        | 101.136                | 98.849               | N/A         | N/A            | 2.287         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:17 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5500MHz |                               |

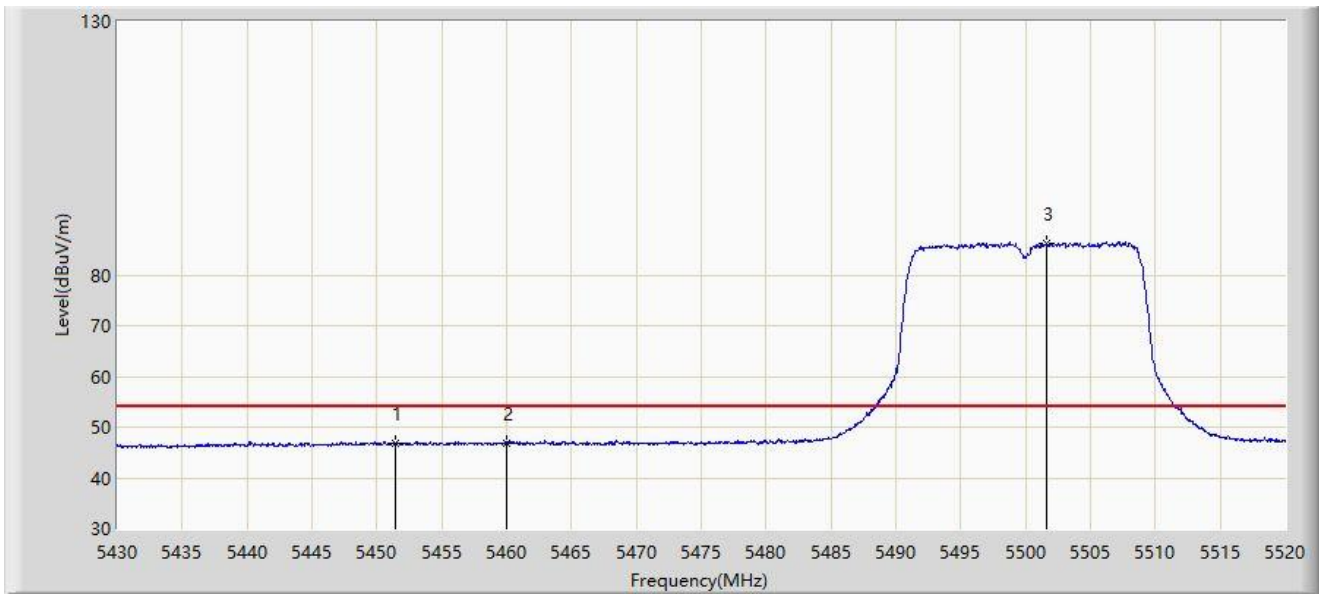


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5451.375        | 46.941                 | 44.725               | -7.059      | 54.000         | 2.216         | AV   |
| 2  |      |      | 5460.000        | 46.820                 | 44.595               | -7.180      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5501.595        | 86.087                 | 83.771               | N/A         | N/A            | 2.316         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:19 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                               |

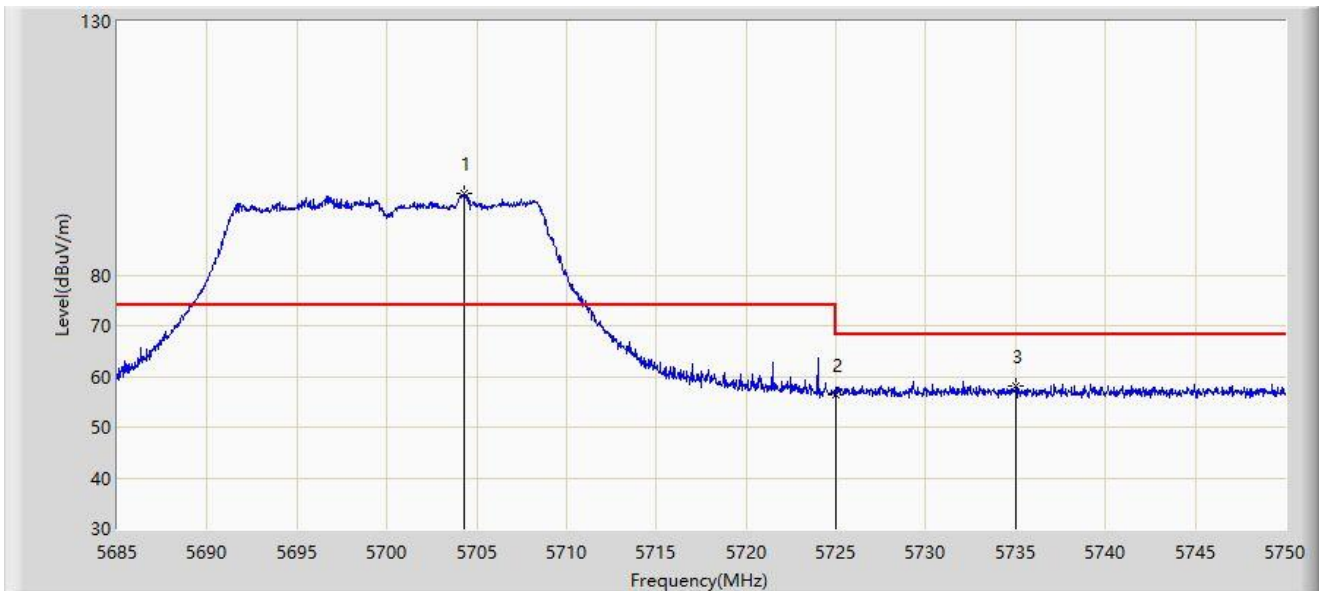


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5704.305        | 96.002                 | 93.009               | N/A         | N/A            | 2.993         | PK   |
| 2  |      |      | 5725.000        | 56.332                 | 53.419               | -11.868     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5735.050        | 58.241                 | 55.455               | -9.959      | 68.200         | 2.786         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:20 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5700MHz |                               |

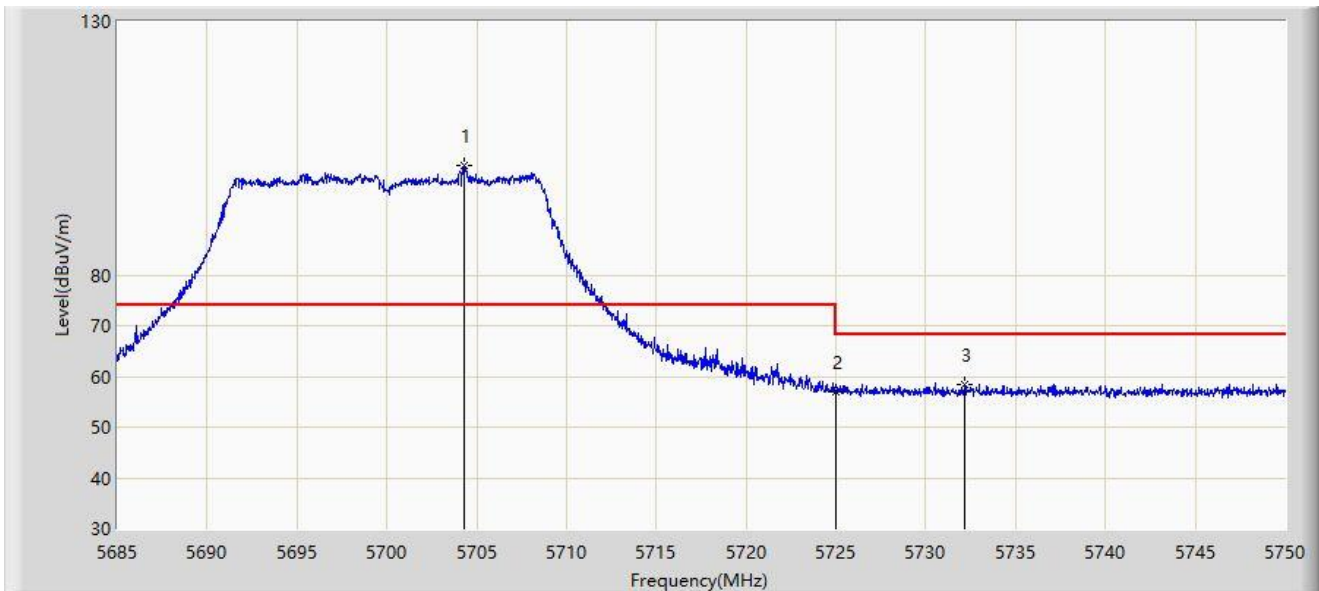


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5704.272        | 101.471                | 98.479               | N/A         | N/A            | 2.992         | PK   |
| 2  |      |      | 5725.000        | 56.816                 | 53.903               | -11.384     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5732.158        | 58.528                 | 55.704               | -9.672      | 68.200         | 2.824         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:22 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz |                               |

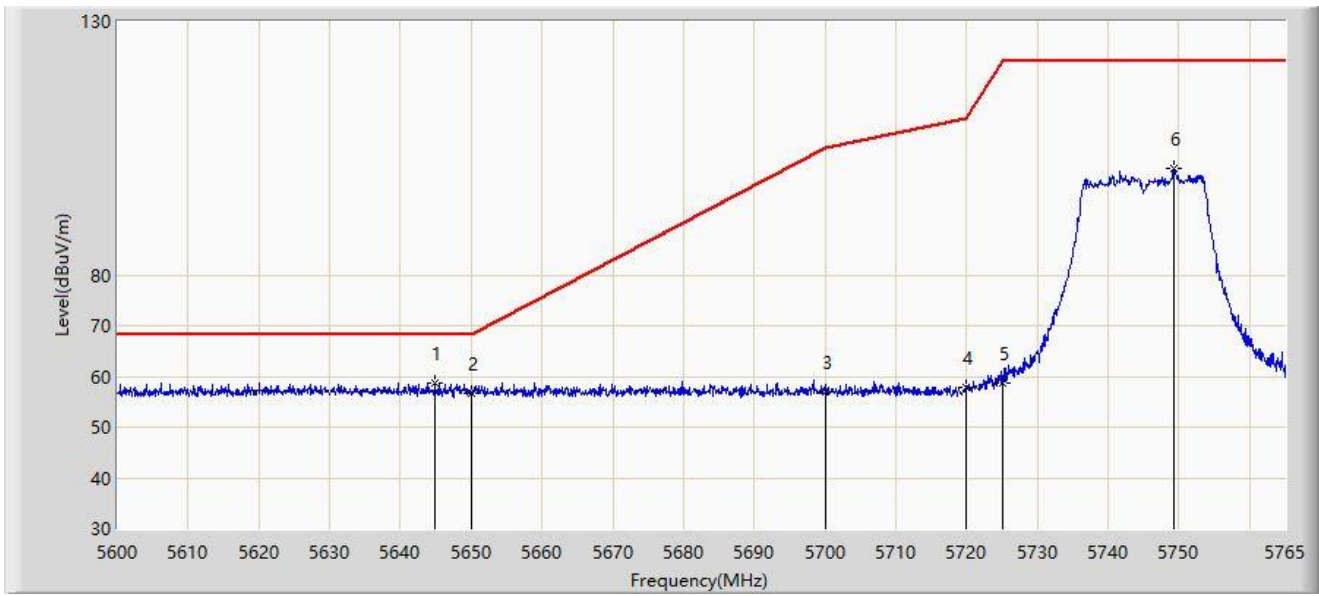


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5644.880        | 58.837                 | 56.168               | -9.363      | 68.200         | 2.669         | PK   |
| 2  |      |      | 5650.000        | 56.757                 | 54.104               | -11.443     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.100                 | 54.179               | -48.100     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.950                 | 54.987               | -52.850     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 58.721                 | 55.808               | -63.479     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5749.243        | 101.148                | 98.359               | N/A         | N/A            | 2.790         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:24 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5745MHz |                               |

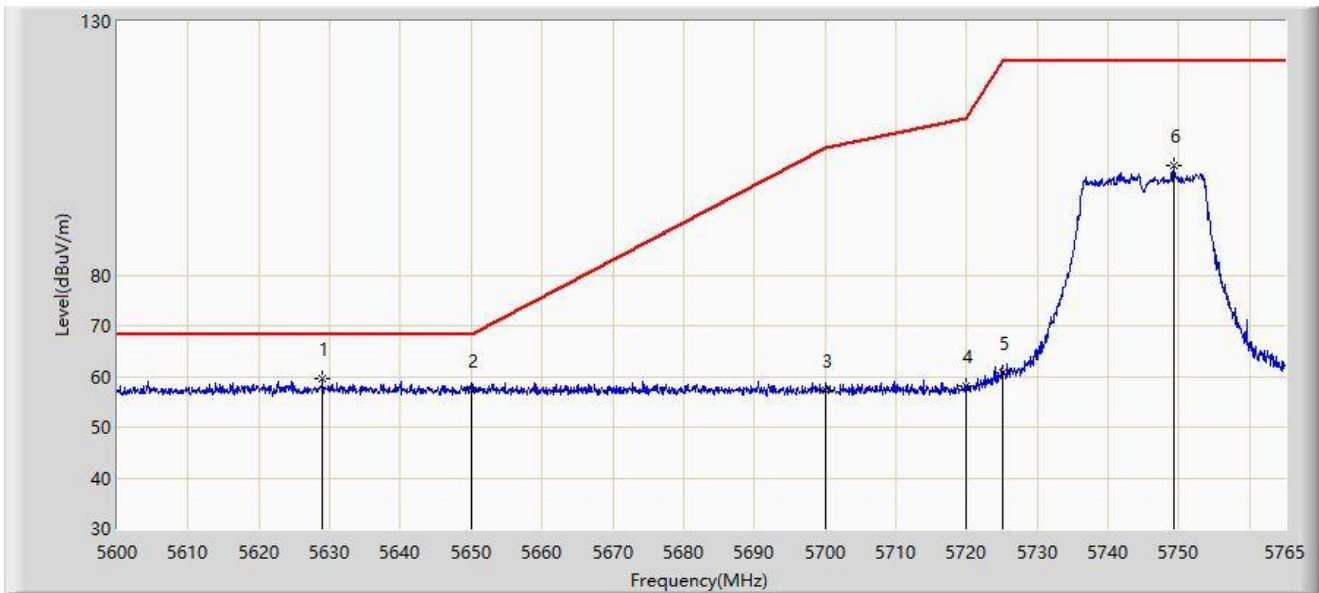


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5628.958        | 59.428                 | 56.649               | -8.772      | 68.200         | 2.779         | PK   |
| 2  |      |      | 5650.000        | 57.322                 | 54.669               | -10.878     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.352                 | 54.431               | -47.848     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 58.009                 | 55.046               | -52.791     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 60.609                 | 57.696               | -61.591     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5749.243        | 101.720                | 98.931               | N/A         | N/A            | 2.790         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:26 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz |                               |

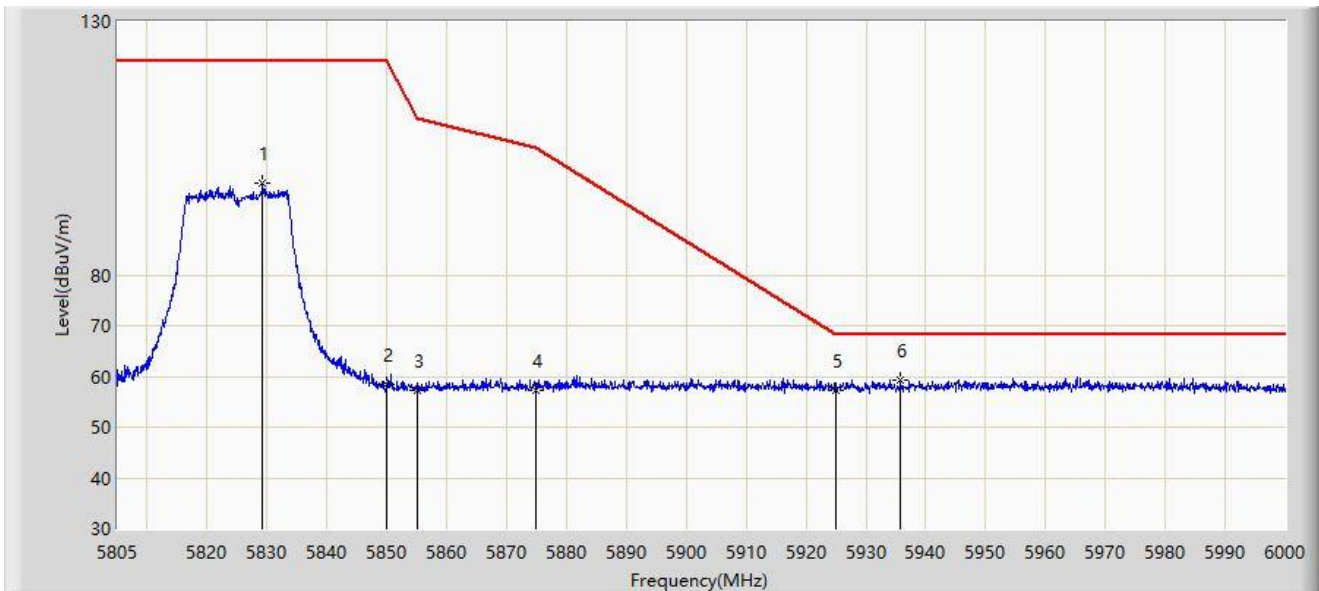


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5829.277        | 98.225                 | 94.967               | N/A         | N/A            | 3.258         | PK   |
| 2  |      |      | 5850.000        | 58.409                 | 55.134               | -63.791     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.169                 | 53.893               | -53.631     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.295                 | 53.840               | -47.905     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.299                 | 53.784               | -10.901     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5935.748        | 59.373                 | 55.776               | -8.827      | 68.200         | 3.598         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:27 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT20 at channel 5825MHz |                               |

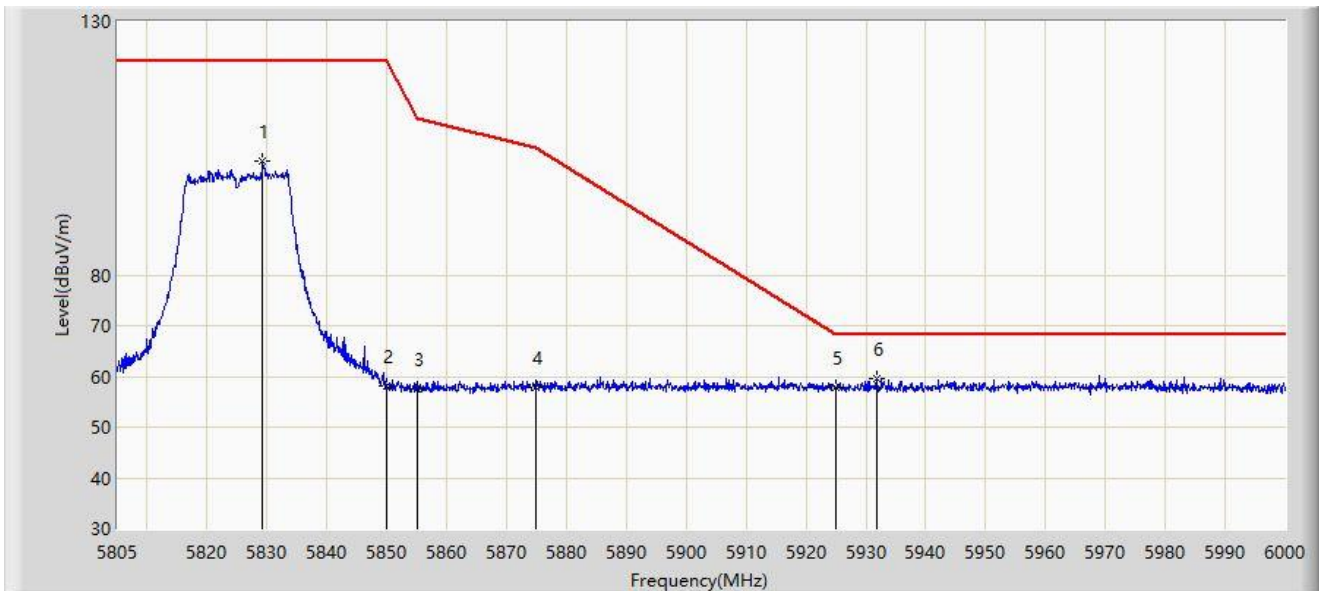


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5829.180        | 102.344                | 99.087               | N/A         | N/A            | 3.257         | PK   |
| 2  |      |      | 5850.000        | 58.122                 | 54.847               | -64.078     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.493                 | 54.217               | -53.307     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 57.707                 | 54.252               | -47.493     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.904                 | 54.389               | -10.296     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5931.750        | 59.654                 | 56.125               | -8.546      | 68.200         | 3.529         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:29 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                               |

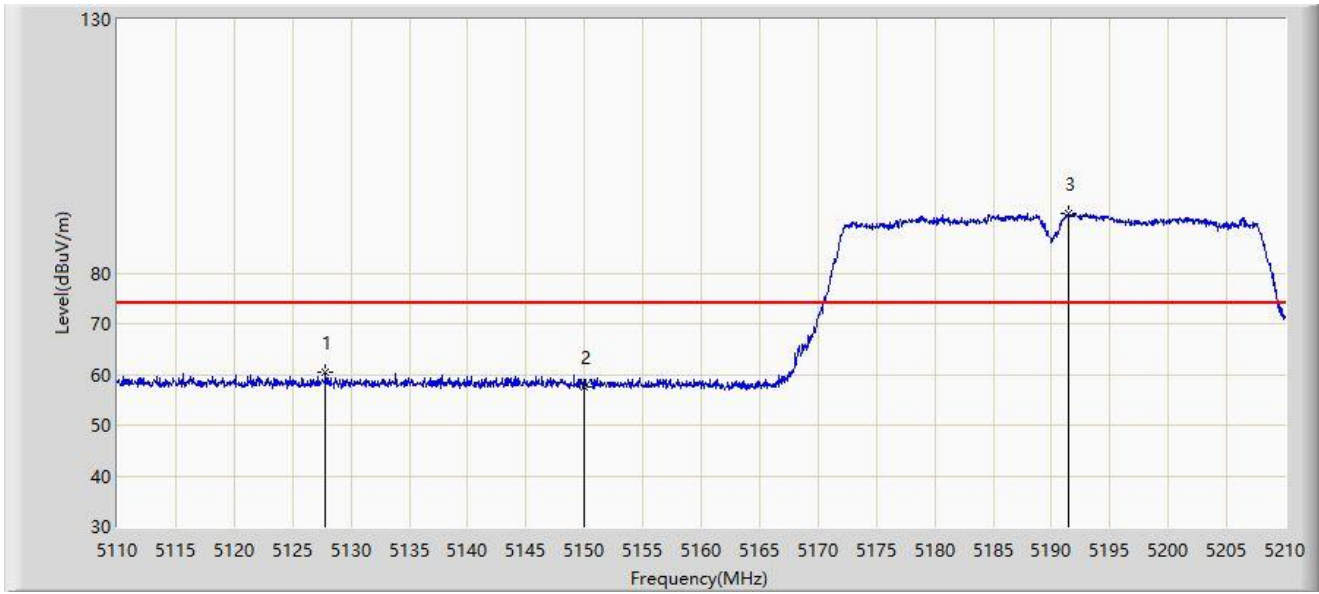


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5127.800        | 60.567                 | 58.249               | -13.433     | 74.000         | 2.318         | PK   |
| 2  |      |      | 5150.000        | 57.521                 | 55.155               | -16.479     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5191.500        | 91.666                 | 89.493               | N/A         | N/A            | 2.172         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:31 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                               |

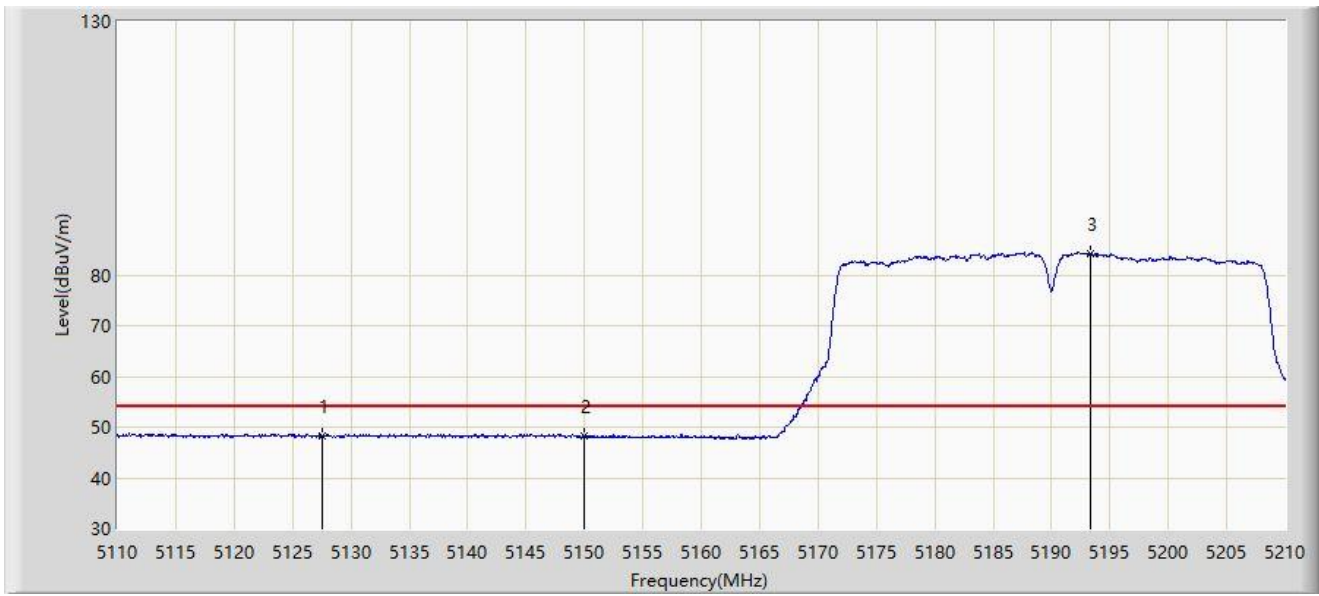


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5127.500        | 48.292                 | 45.975               | -5.708      | 54.000         | 2.317         | AV   |
| 2  |      |      | 5150.000        | 48.166                 | 45.800               | -5.834      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5193.300        | 84.313                 | 82.158               | N/A         | N/A            | 2.154         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:33 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                               |

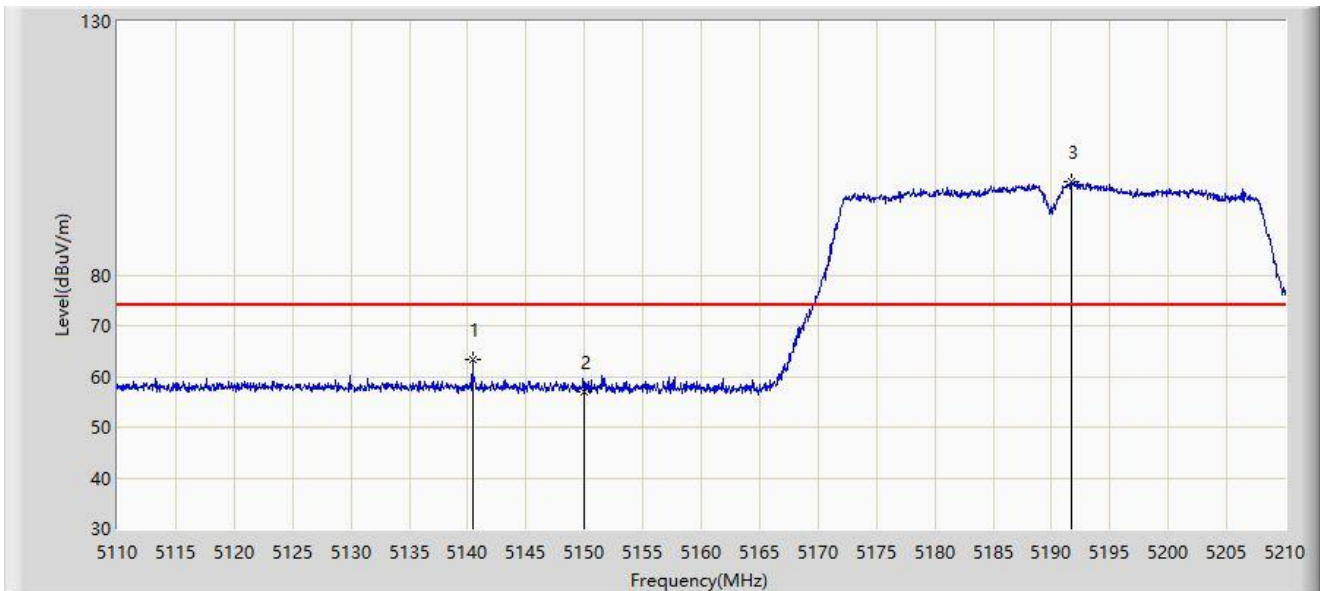


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5140.400        | 63.444                 | 61.083               | -10.556     | 74.000         | 2.362         | PK   |
| 2  |      |      | 5150.000        | 57.063                 | 54.697               | -16.937     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5191.650        | 98.281                 | 96.110               | N/A         | N/A            | 2.172         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:34 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5190MHz |                               |

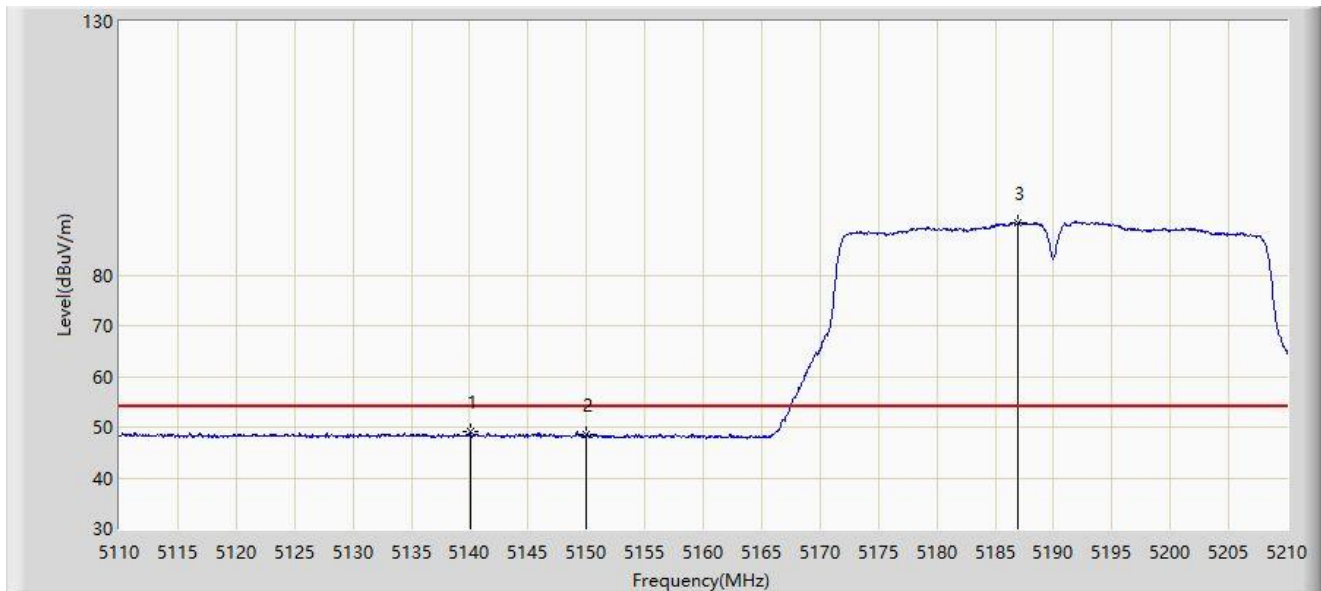


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5140.050        | 48.990                 | 46.630               | -5.010      | 54.000         | 2.360         | AV   |
| 2  |      |      | 5150.000        | 48.647                 | 46.281               | -5.353      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5187.000        | 90.417                 | 88.199               | N/A         | N/A            | 2.218         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:35 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                               |

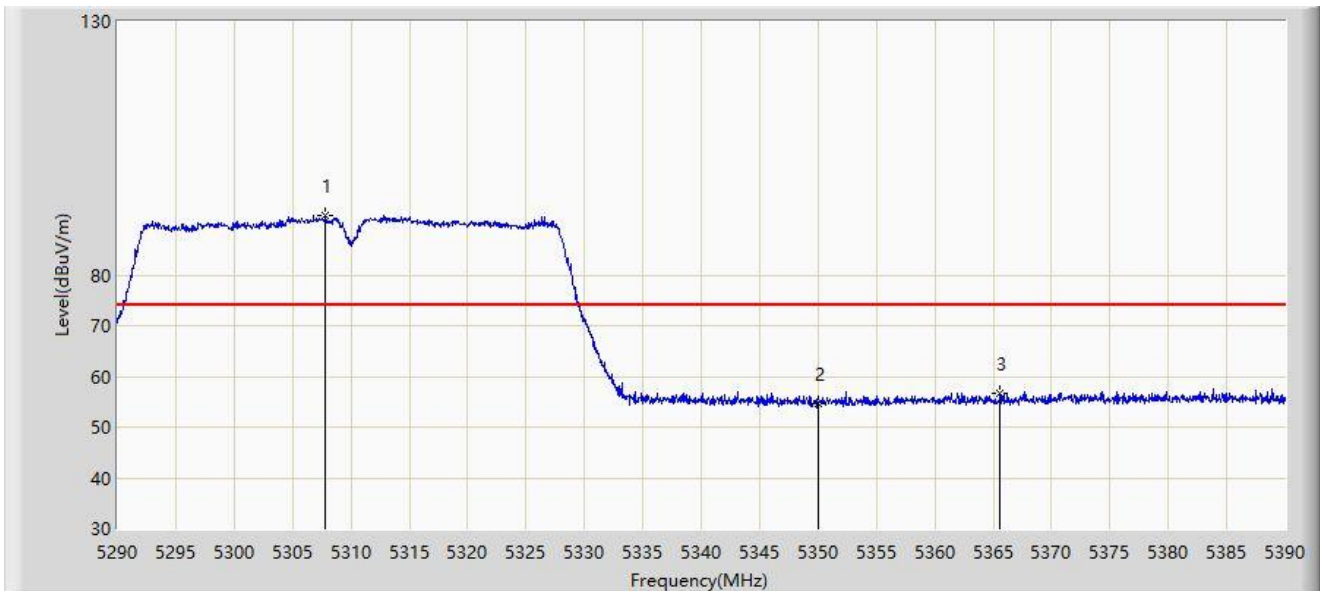


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5307.800        | 91.744                 | 90.237               | N/A         | N/A            | 1.507         | PK   |
| 2  |      |      | 5350.000        | 54.720                 | 53.510               | -19.280     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5365.600        | 56.560                 | 54.983               | -17.440     | 74.000         | 1.577         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:37 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                               |

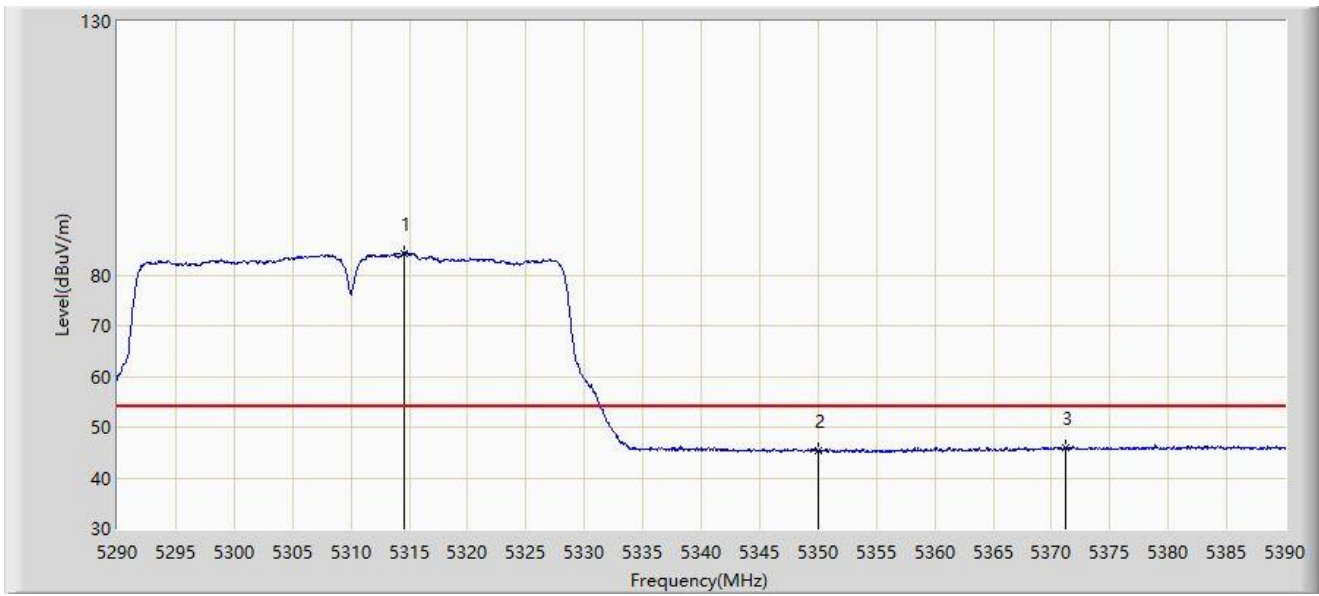


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5314.500        | 84.310                 | 82.815               | N/A         | N/A            | 1.494         | AV   |
| 2  |      |      | 5350.000        | 45.322                 | 44.112               | -8.678      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5371.200        | 46.031                 | 44.330               | -7.969      | 54.000         | 1.700         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:38 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                               |

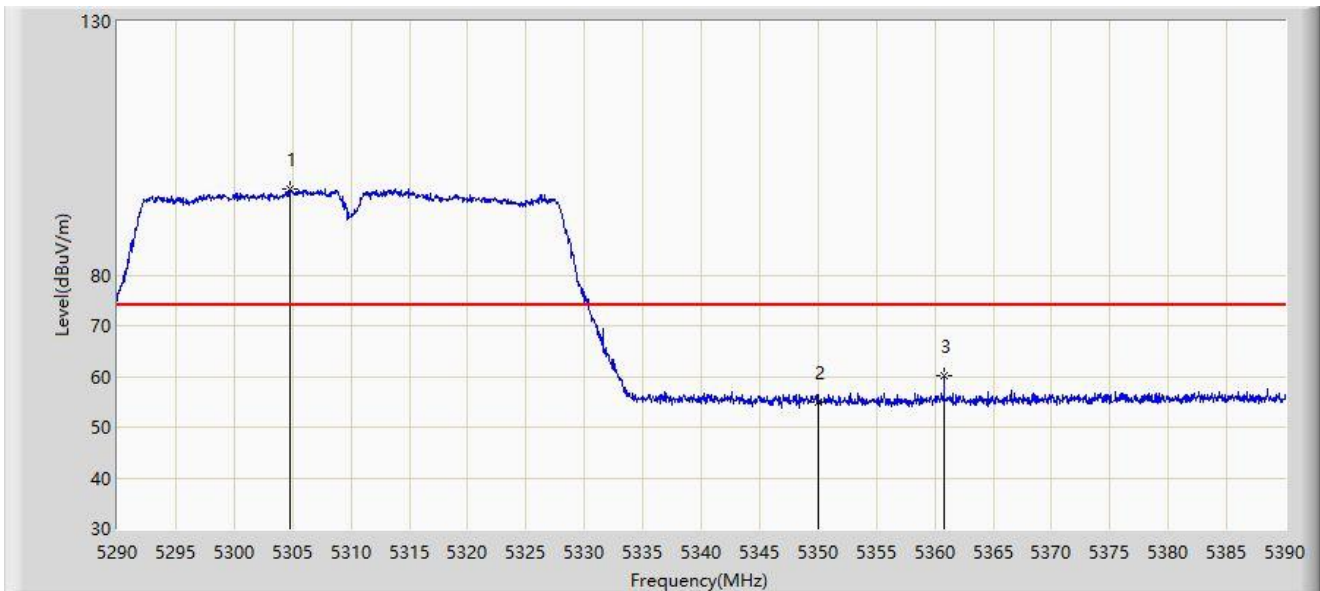


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5304.750        | 97.048                 | 95.536               | N/A         | N/A            | 1.513         | PK   |
| 2  |      |      | 5350.000        | 54.787                 | 53.577               | -19.213     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5360.800        | 60.056                 | 58.618               | -13.944     | 74.000         | 1.437         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:39 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5310MHz |                               |

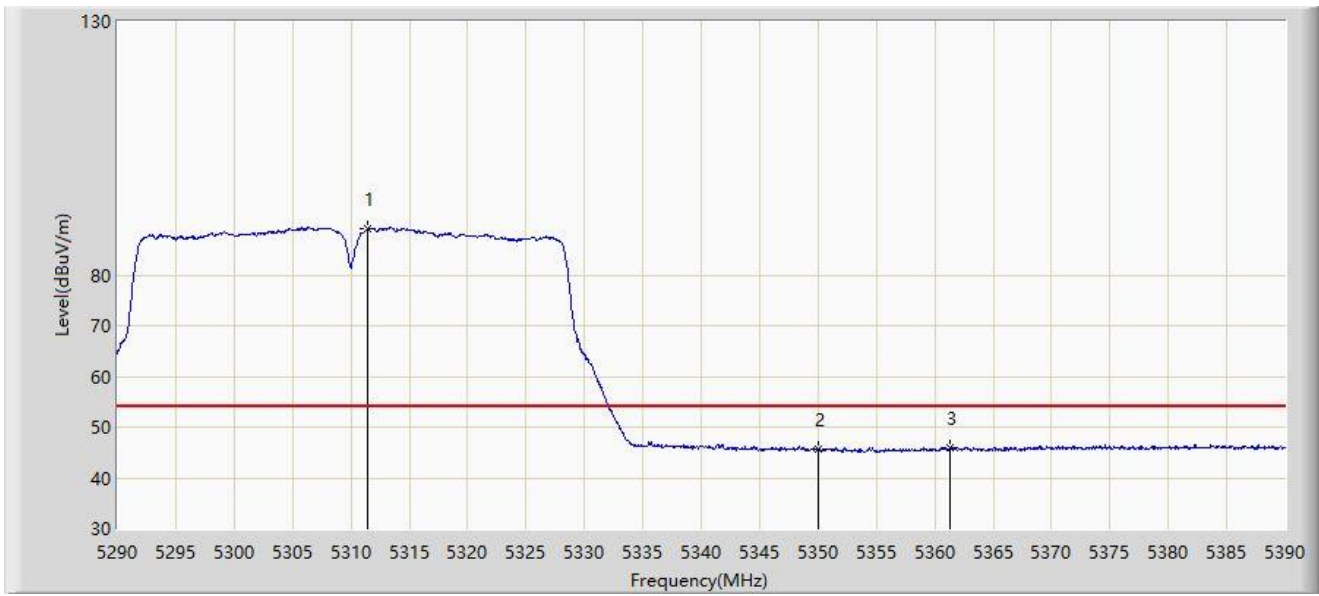


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5311.450        | 89.175                 | 87.675               | N/A         | N/A            | 1.500         | AV   |
| 2  |      |      | 5350.000        | 45.638                 | 44.428               | -8.362      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5361.300        | 46.024                 | 44.572               | -7.976      | 54.000         | 1.453         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:40 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                               |

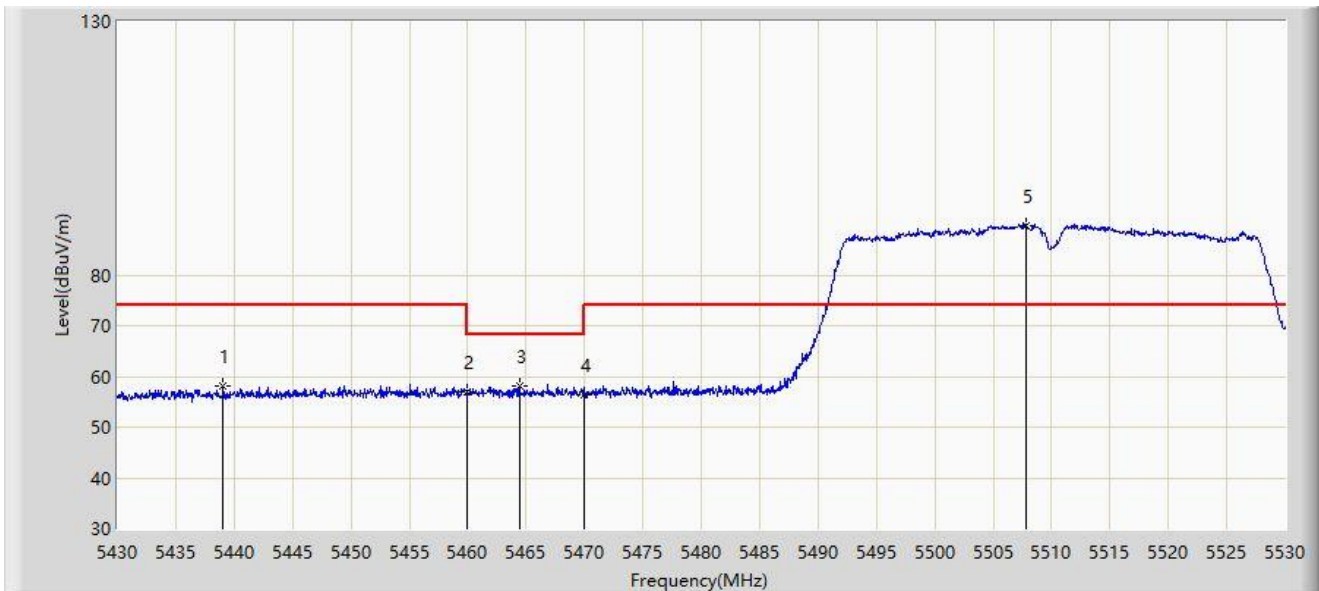


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5439.050        | 58.170                 | 56.096               | -15.830     | 74.000         | 2.074         | PK   |
| 2  |      |      | 5460.000        | 56.843                 | 54.618               | -17.157     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5464.400        | 58.018                 | 55.808               | -10.182     | 68.200         | 2.210         | PK   |
| 4  |      |      | 5470.000        | 56.342                 | 54.152               | -11.858     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5507.850        | 89.827                 | 87.549               | N/A         | N/A            | 2.277         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:42 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                               |

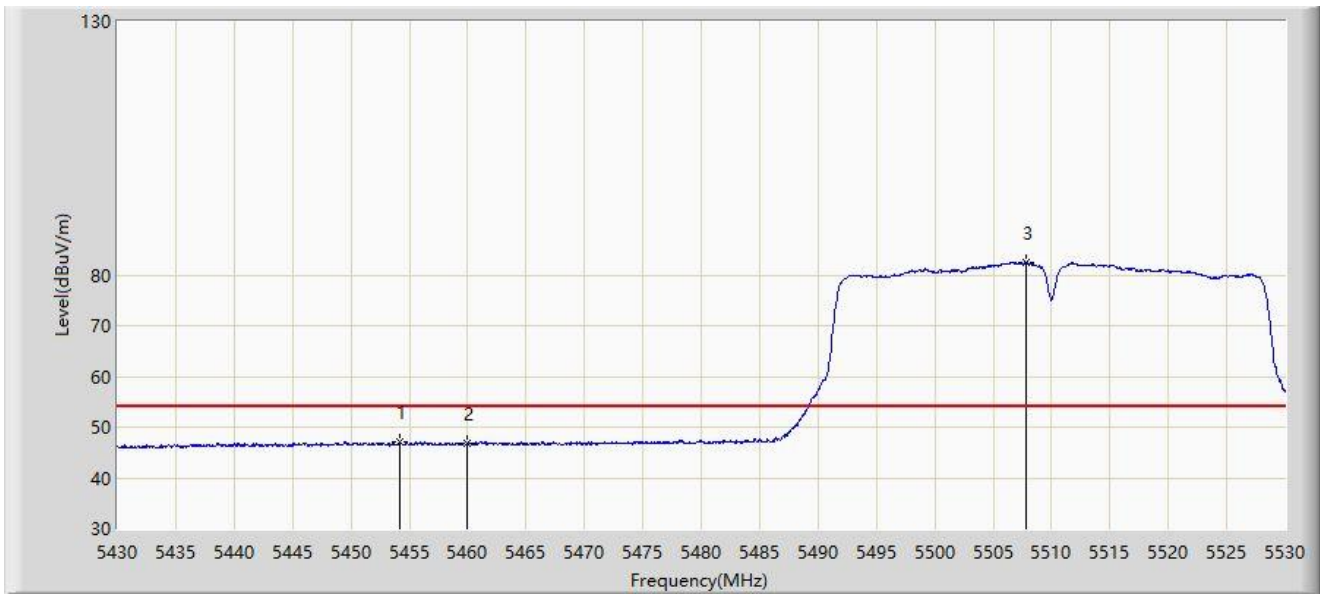


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5454.150        | 47.162                 | 44.917               | -6.838      | 54.000         | 2.246         | AV   |
| 2  |      |      | 5460.000        | 46.746                 | 44.521               | -7.254      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5507.850        | 82.479                 | 80.201               | N/A         | N/A            | 2.277         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:43 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                               |

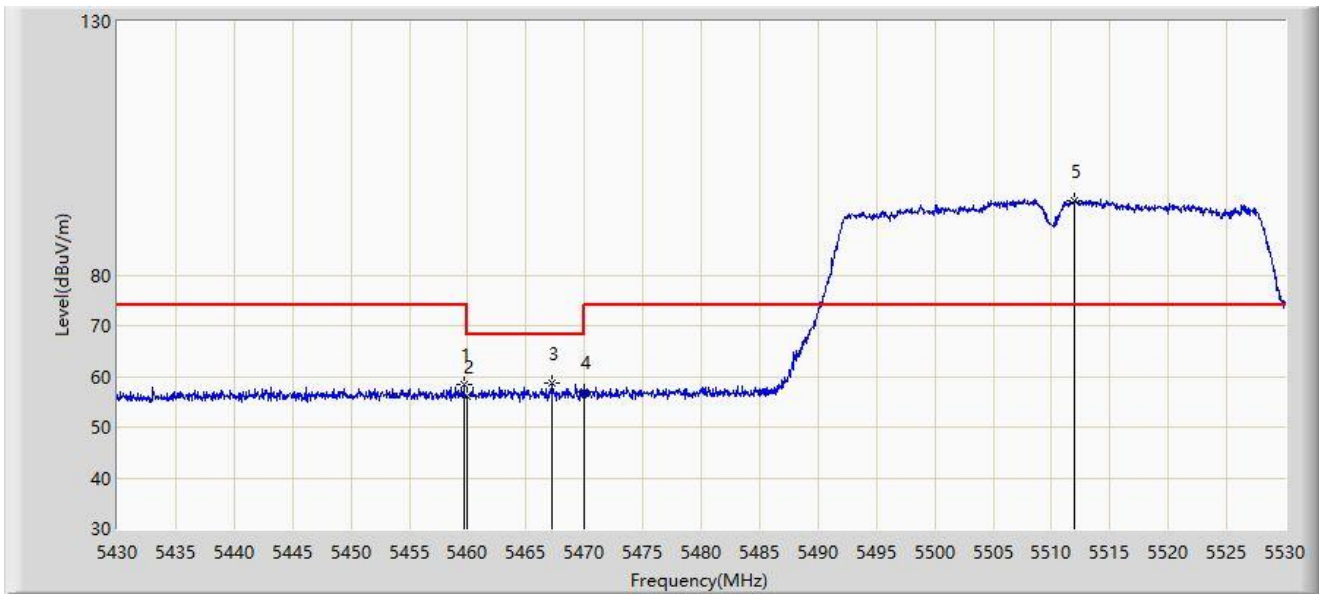


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5459.650        | 58.463                 | 56.237               | -15.537     | 74.000         | 2.226         | PK   |
| 2  |      |      | 5460.000        | 56.115                 | 53.890               | -17.885     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5467.200        | 58.697                 | 56.497               | -9.503      | 68.200         | 2.200         | PK   |
| 4  |      |      | 5470.000        | 57.082                 | 54.892               | -11.118     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5512.000        | 94.781                 | 92.504               | N/A         | N/A            | 2.277         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:44 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5510MHz |                               |

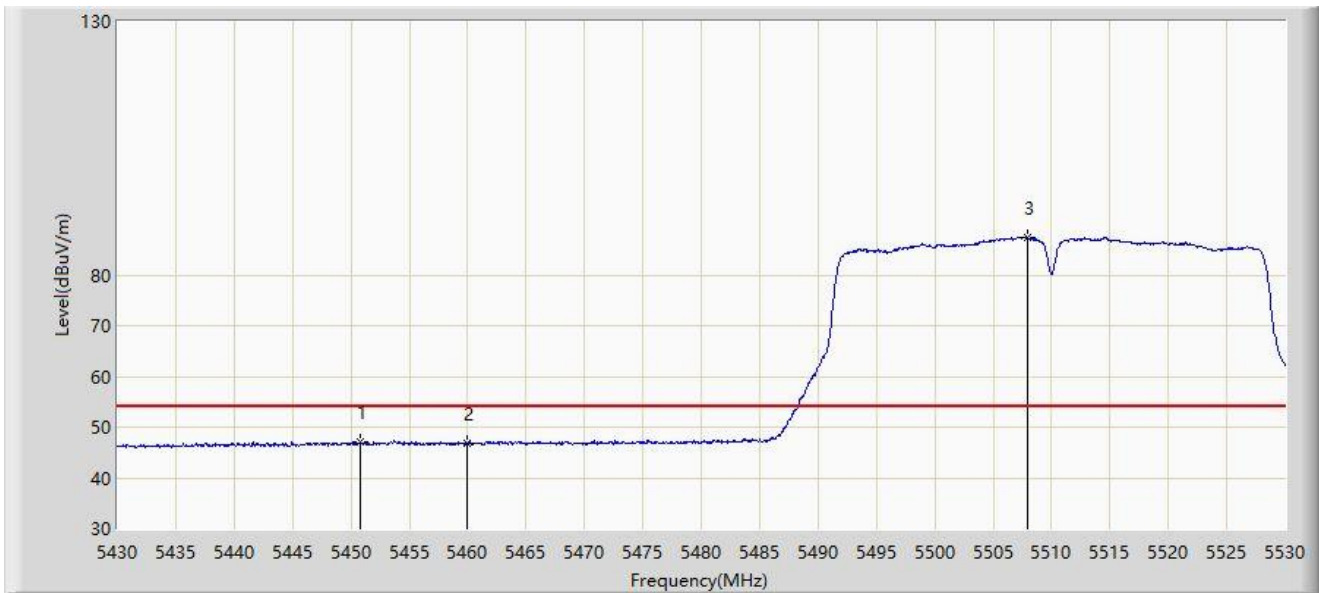


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5450.800        | 47.101                 | 44.892               | -6.899      | 54.000         | 2.210         | AV   |
| 2  |      |      | 5460.000        | 46.700                 | 44.475               | -7.300      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5508.000        | 87.342                 | 85.064               | N/A         | N/A            | 2.278         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:46 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                               |

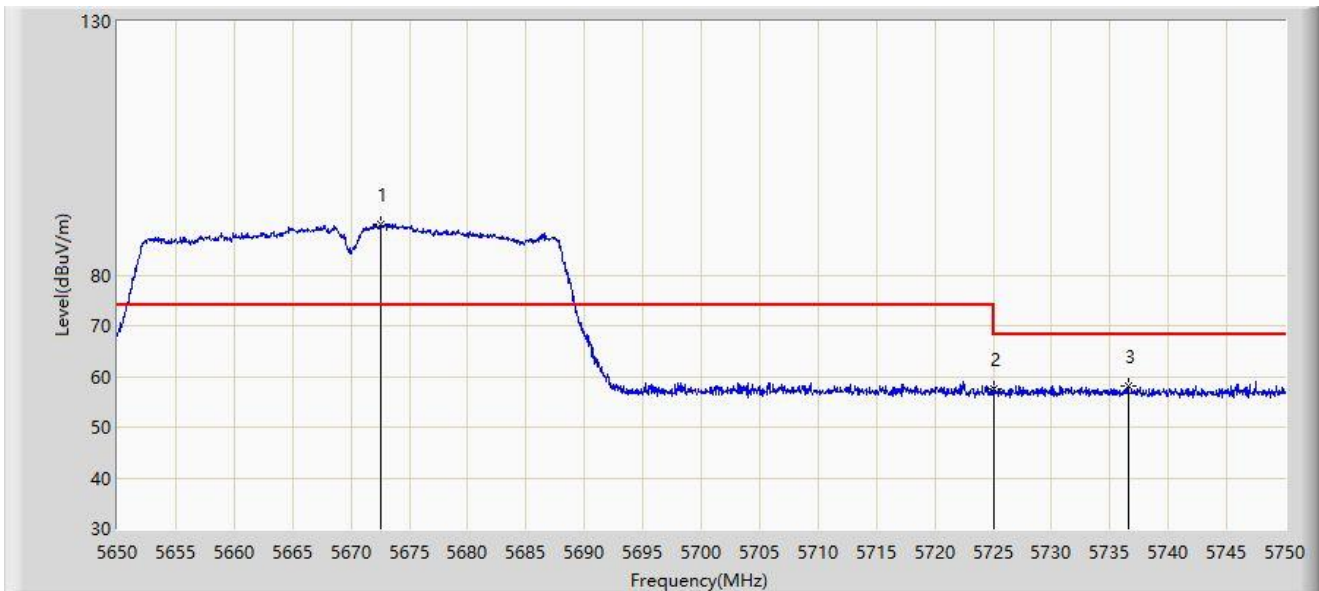


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5672.600        | 89.895                 | 87.152               | N/A         | N/A            | 2.743         | PK   |
| 2  |      |      | 5725.000        | 57.565                 | 54.652               | -10.635     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5736.550        | 57.978                 | 55.211               | -10.222     | 68.200         | 2.767         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:48 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5670MHz |                               |

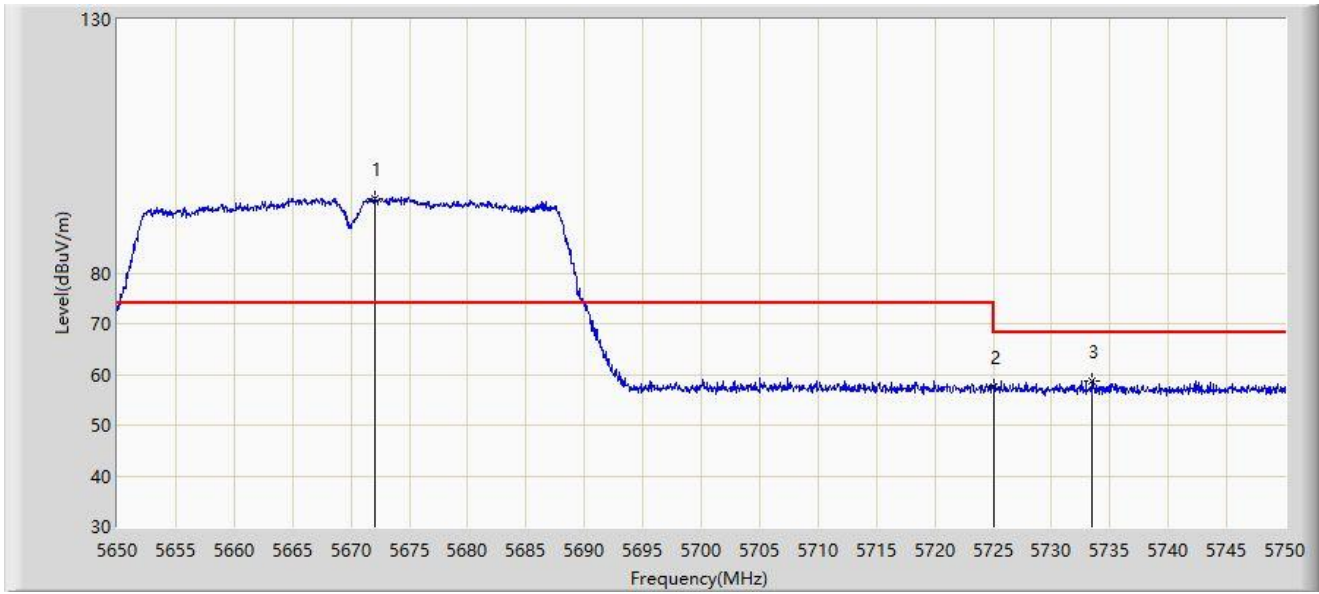


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5672.050        | 94.781                 | 92.042               | N/A         | N/A            | 2.739         | PK   |
| 2  |      |      | 5725.000        | 57.602                 | 54.689               | -10.598     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5733.400        | 58.780                 | 55.972               | -9.420      | 68.200         | 2.808         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:49 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz |                               |

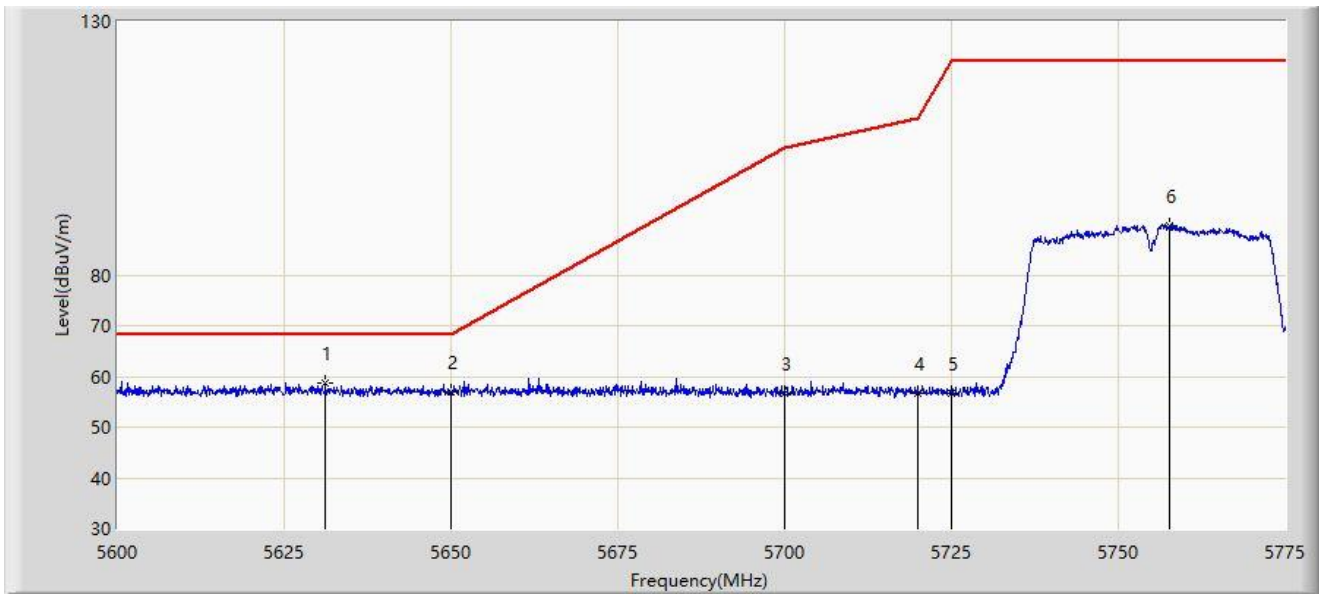


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5631.150        | 58.833                 | 56.072               | -9.367      | 68.200         | 2.762         | PK   |
| 2  |      |      | 5650.000        | 56.832                 | 54.179               | -11.368     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 56.639                 | 53.718               | -48.561     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 56.685                 | 53.722               | -54.115     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 56.760                 | 53.847               | -65.440     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5757.587        | 89.788                 | 86.857               | N/A         | N/A            | 2.931         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:51 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5755MHz |                               |

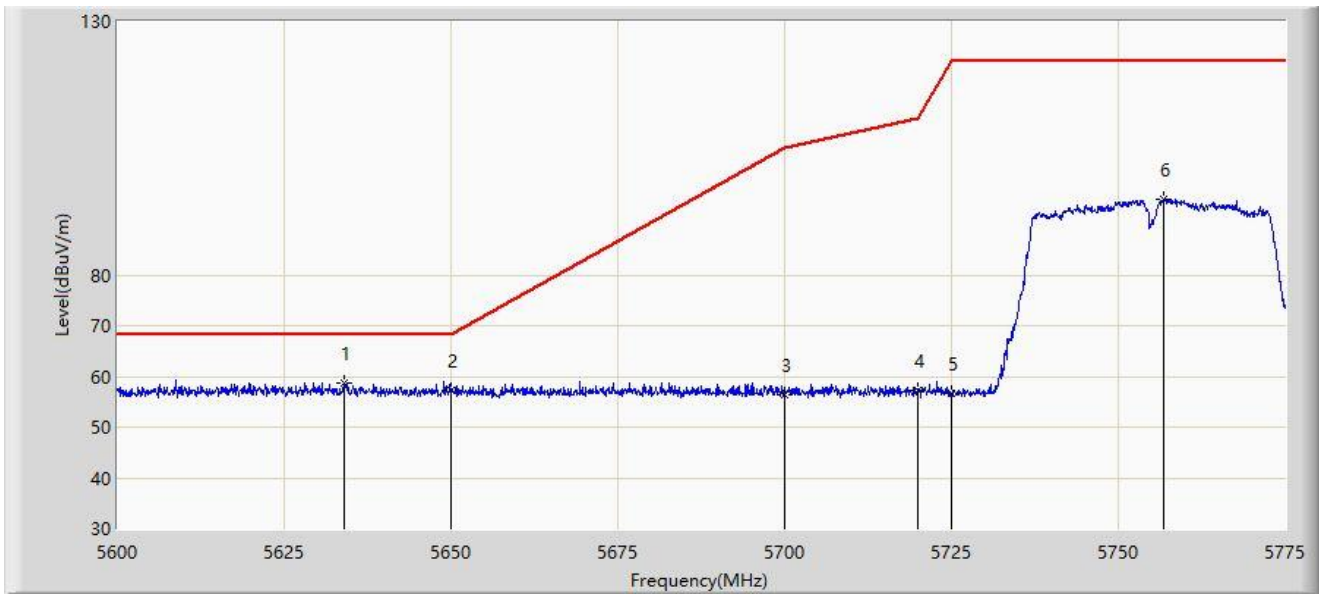


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5634.038        | 58.800                 | 56.062               | -9.400      | 68.200         | 2.738         | PK   |
| 2  |      |      | 5650.000        | 57.151                 | 54.498               | -11.049     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 56.471                 | 53.550               | -48.729     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.259                 | 54.296               | -53.541     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 56.549                 | 53.636               | -65.651     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5756.712        | 94.884                 | 91.968               | N/A         | N/A            | 2.916         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:52 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz |                               |

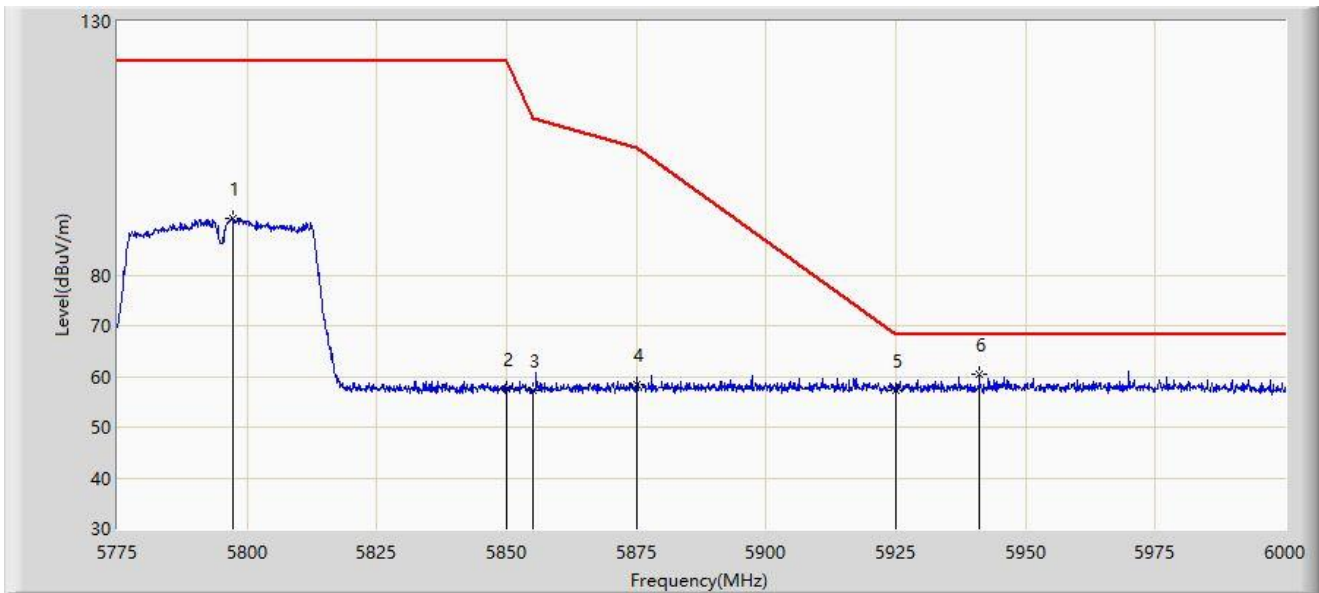


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5797.388        | 91.154                 | 88.141               | N/A         | N/A            | 3.012         | PK   |
| 2  |      |      | 5850.000        | 57.643                 | 54.368               | -64.557     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.254                 | 53.978               | -53.546     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 58.332                 | 54.877               | -46.868     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.209                 | 53.694               | -10.991     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5941.050        | 60.359                 | 56.671               | -7.841      | 68.200         | 3.688         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:53 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT40 at channel 5795MHz |                               |

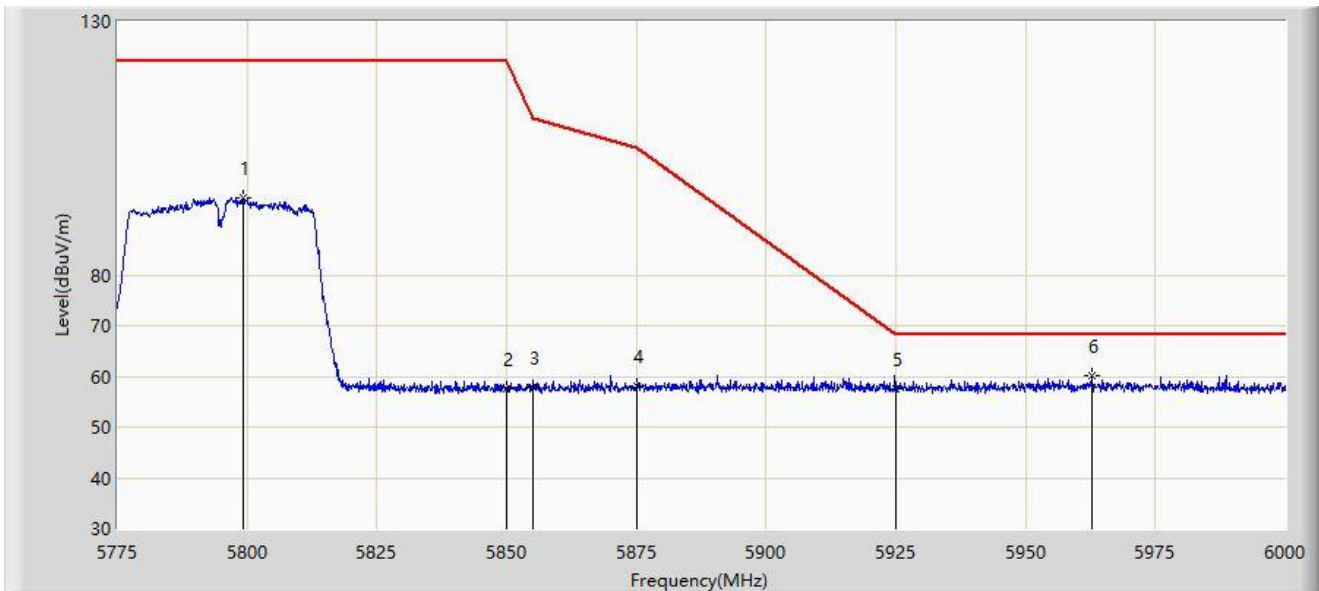


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV/m) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5799.300        | 95.216                 | 92.161               | N/A         | N/A            | 3.055         | PK   |
| 2  |      |      | 5850.000        | 57.498                 | 54.223               | -64.702     | 122.200        | 3.275         | PK   |
| 3  |      |      | 5855.000        | 57.950                 | 54.674               | -52.850     | 110.800        | 3.276         | PK   |
| 4  |      |      | 5875.000        | 58.206                 | 54.751               | -46.994     | 105.200        | 3.455         | PK   |
| 5  |      |      | 5925.000        | 57.664                 | 54.149               | -10.536     | 68.200         | 3.515         | PK   |
| 6  |      | *    | 5962.650        | 60.211                 | 56.313               | -7.989      | 68.200         | 3.897         | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:55 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                               |

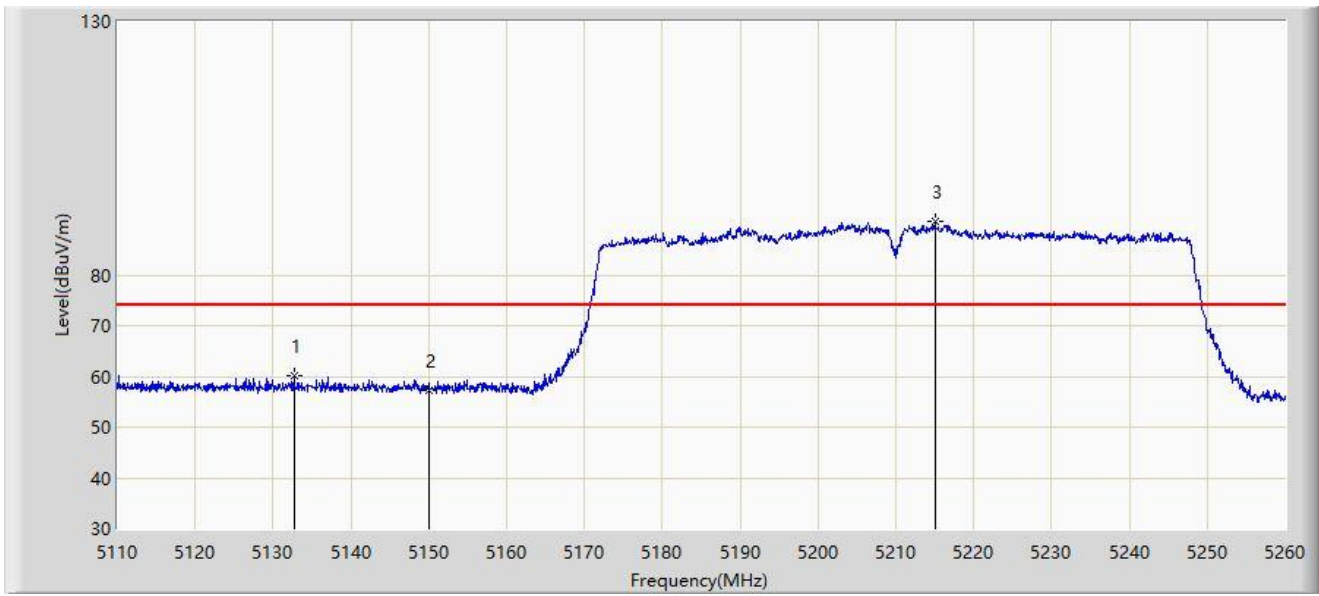

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5132.725        | 60.072                 | 57.733               | -13.928     | 74.000         | 2.340         | PK   |
| 2  |      |      | 5150.000        | 57.129                 | 54.763               | -16.871     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5215.000        | 90.435                 | 88.650               | N/A         | N/A            | 1.784         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:56 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                               |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5126.725        | 49.218                 | 46.905               | -4.782      | 54.000         | 2.313         | AV   |
| 2  |      |      | 5150.000        | 48.565                 | 46.199               | -5.435      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5215.150        | 82.366                 | 80.584               | N/A         | N/A            | 1.781         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:57 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                               |

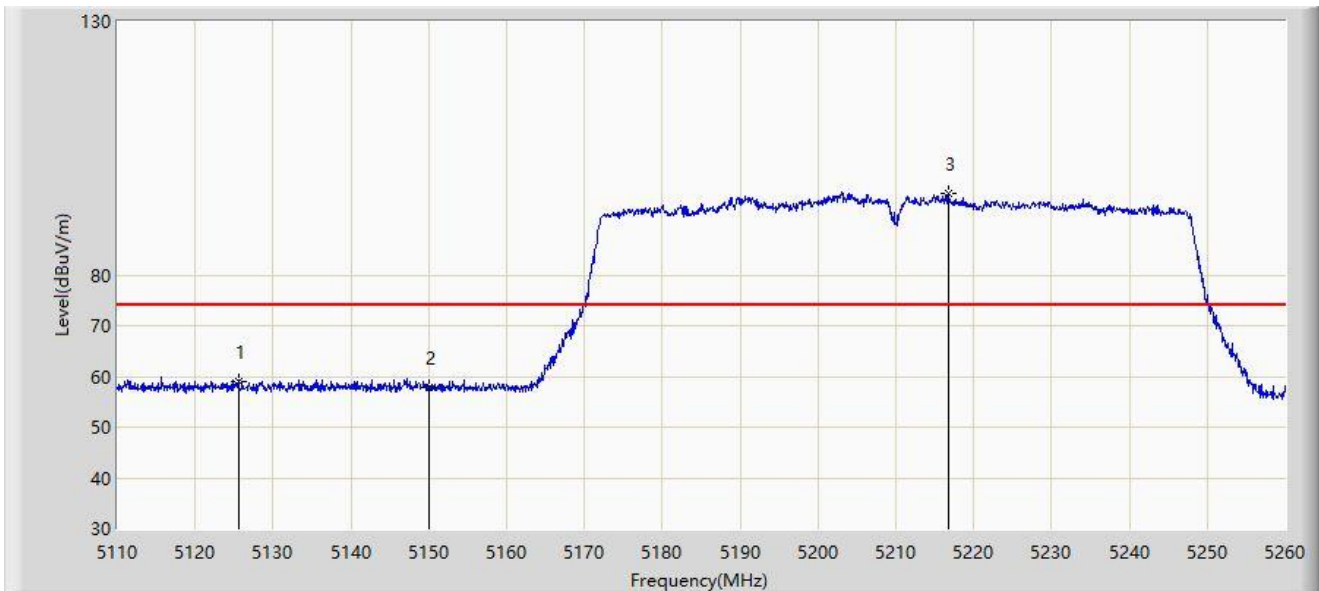


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5125.525        | 59.090                 | 56.783               | -14.910     | 74.000         | 2.306         | PK   |
| 2  |      |      | 5150.000        | 57.943                 | 55.577               | -16.057     | 74.000         | 2.365         | PK   |
| 3  |      | *    | 5216.725        | 96.095                 | 94.335               | N/A         | N/A            | 1.761         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 14:58 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5210MHz |                               |

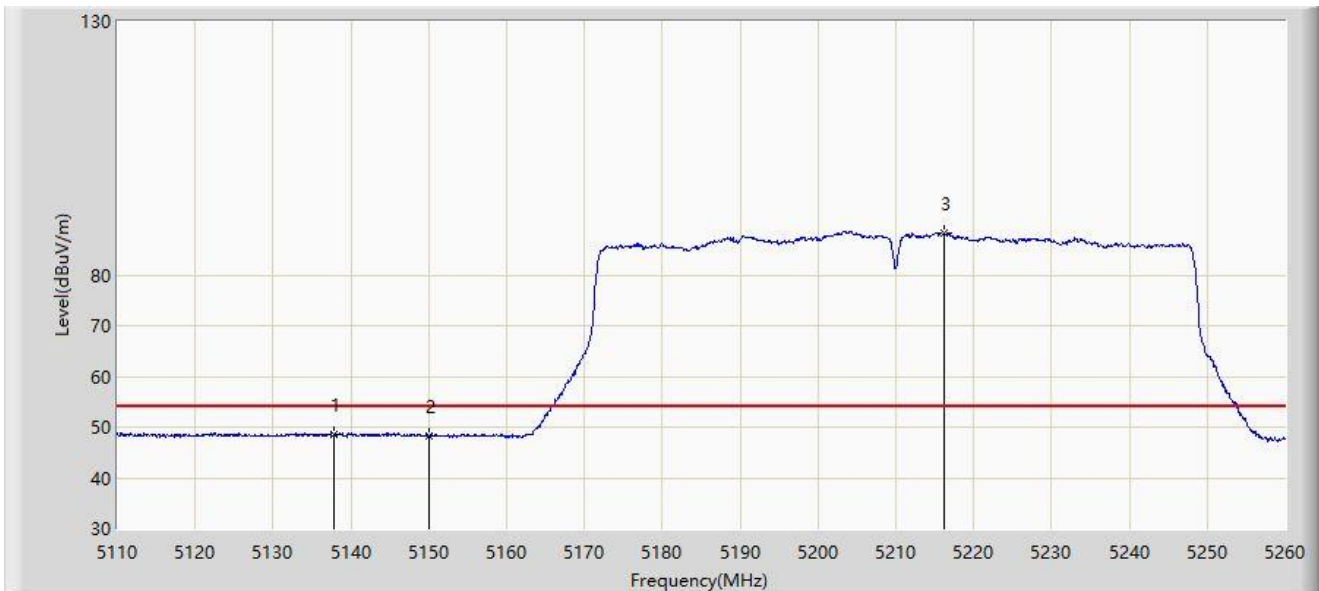


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5137.750        | 48.493                 | 46.139               | -5.507      | 54.000         | 2.353         | AV   |
| 2  |      |      | 5150.000        | 48.247                 | 45.881               | -5.753      | 54.000         | 2.365         | AV   |
| 3  |      | *    | 5216.200        | 88.317                 | 86.553               | N/A         | N/A            | 1.763         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:00 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                               |

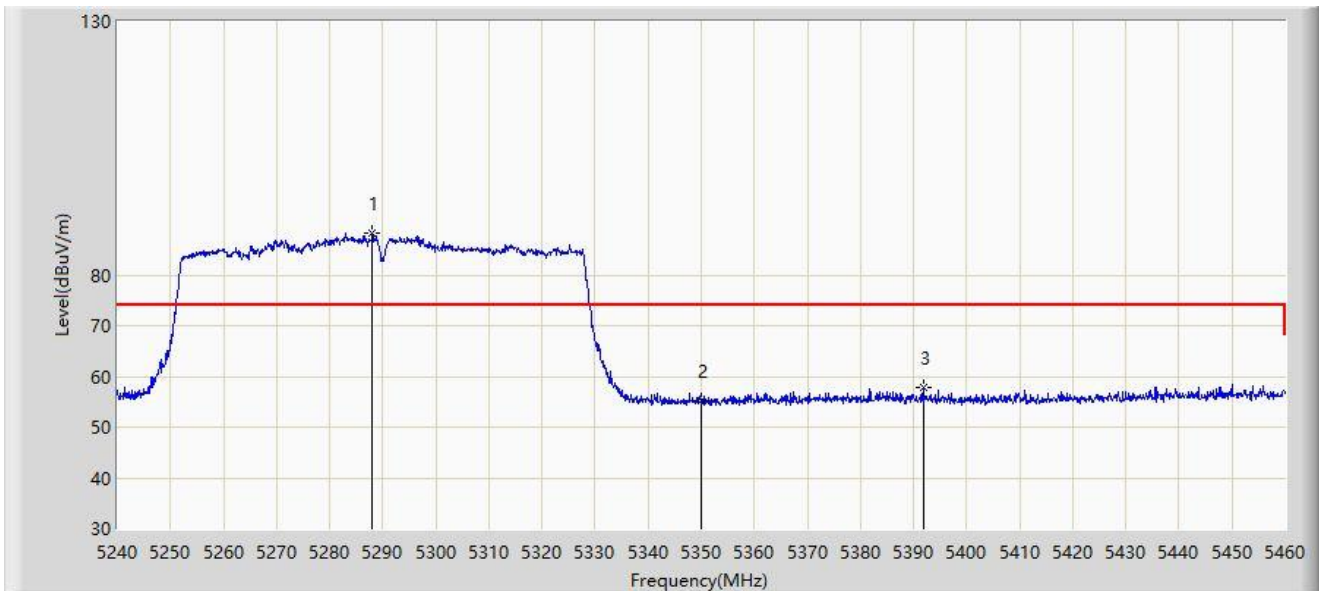


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5288.070        | 88.324                 | 86.999               | N/A         | N/A            | 1.324         | PK   |
| 2  |      |      | 5350.000        | 55.284                 | 54.074               | -18.716     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5391.910        | 57.853                 | 56.082               | -16.147     | 74.000         | 1.771         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:01 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                               |

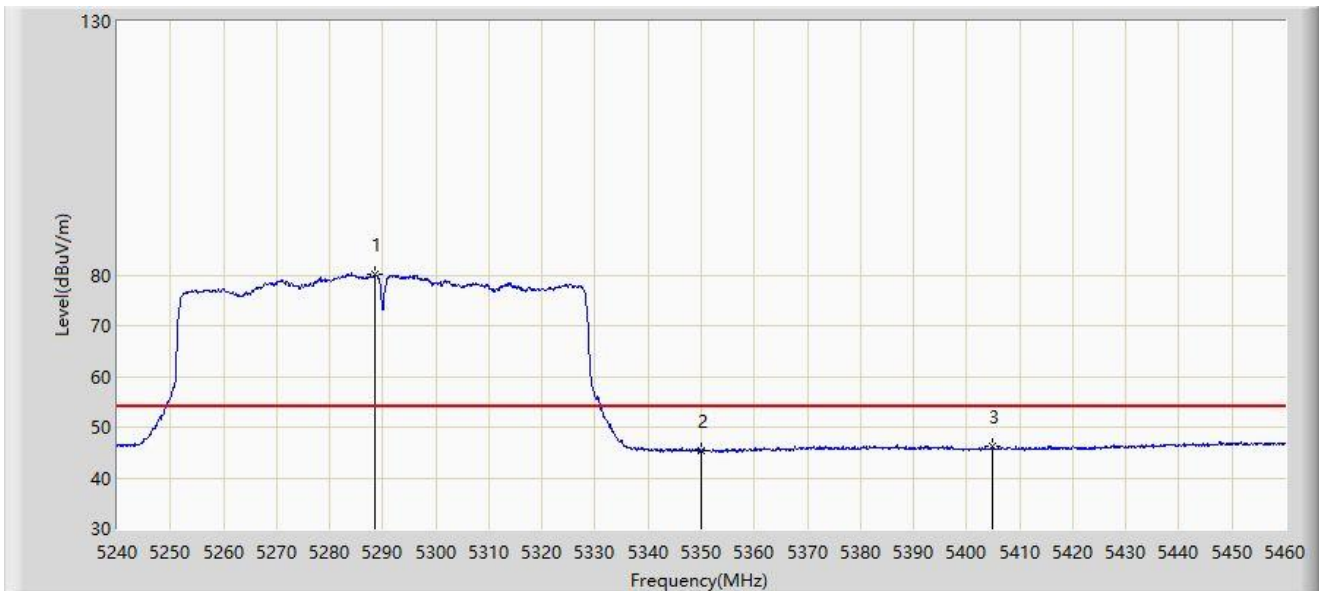


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5288.510        | 80.092                 | 78.760               | N/A         | N/A            | 1.332         | AV   |
| 2  |      |      | 5350.000        | 45.291                 | 44.081               | -8.709      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5404.780        | 46.143                 | 44.556               | -7.857      | 54.000         | 1.588         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:03 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                               |

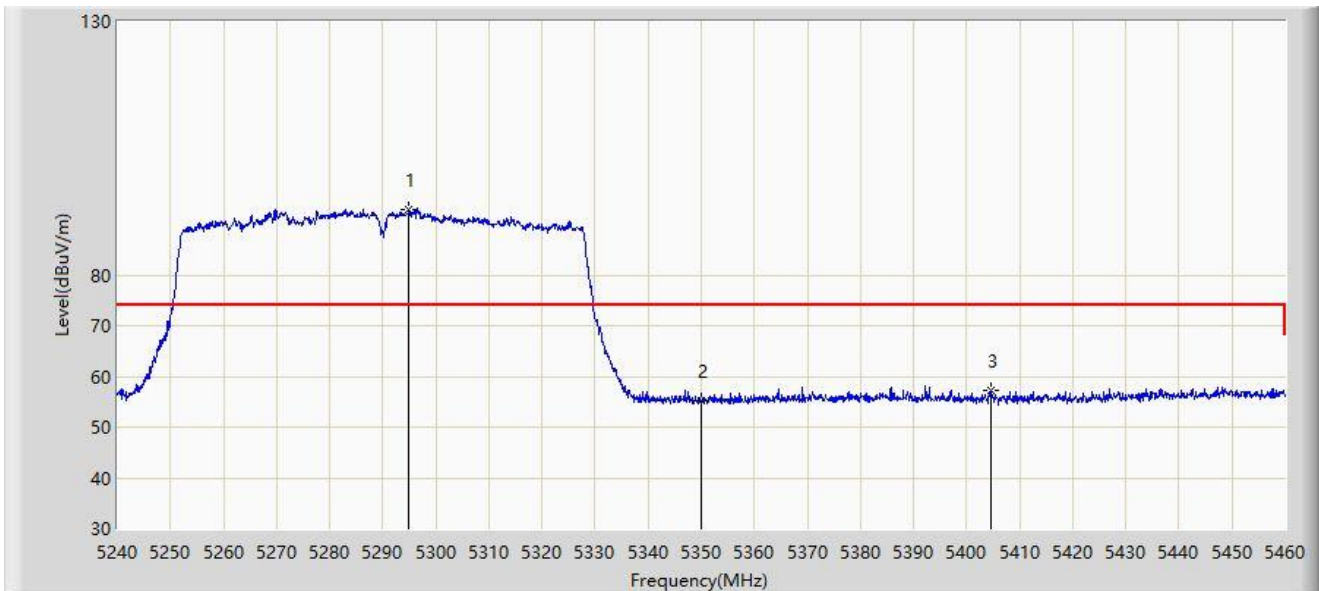


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5294.890        | 92.976                 | 91.548               | N/A         | N/A            | 1.428         | PK   |
| 2  |      |      | 5350.000        | 55.253                 | 54.043               | -18.747     | 74.000         | 1.210         | PK   |
| 3  |      |      | 5404.450        | 57.234                 | 55.647               | -16.766     | 74.000         | 1.588         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:04 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz |                               |

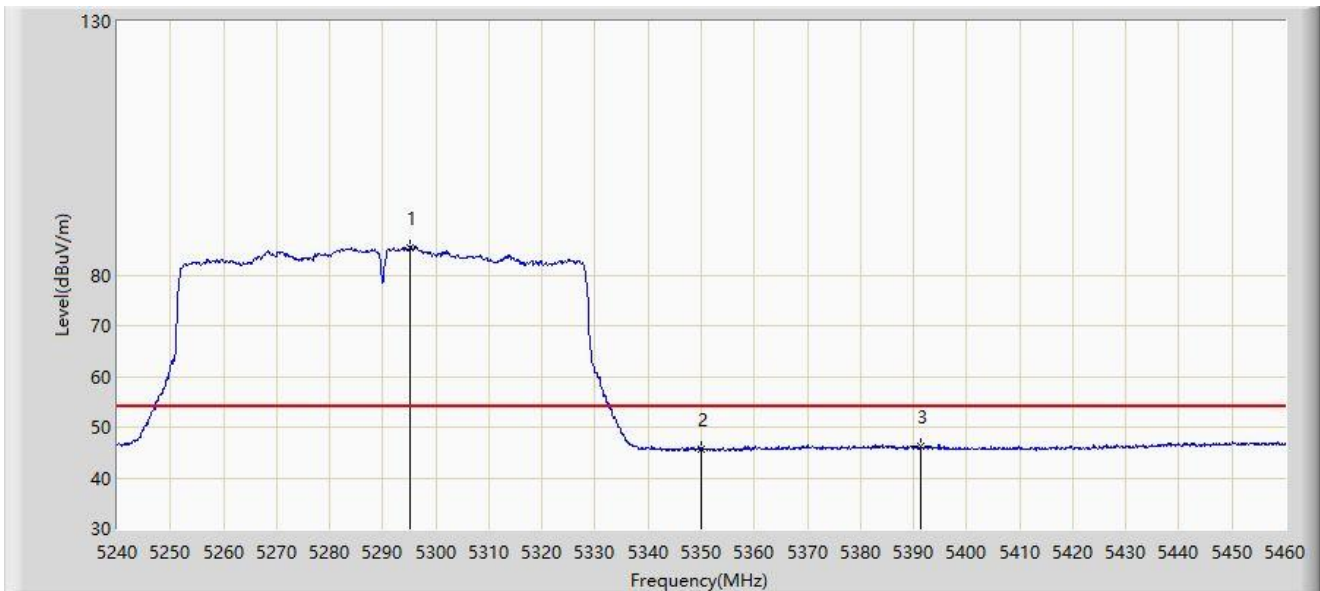


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5295.000        | 85.442                 | 84.013               | N/A         | N/A            | 1.429         | AV   |
| 2  |      |      | 5350.000        | 45.617                 | 44.407               | -8.383      | 54.000         | 1.210         | AV   |
| 3  |      |      | 5391.470        | 46.335                 | 44.557               | -7.665      | 54.000         | 1.779         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:06 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz |                               |

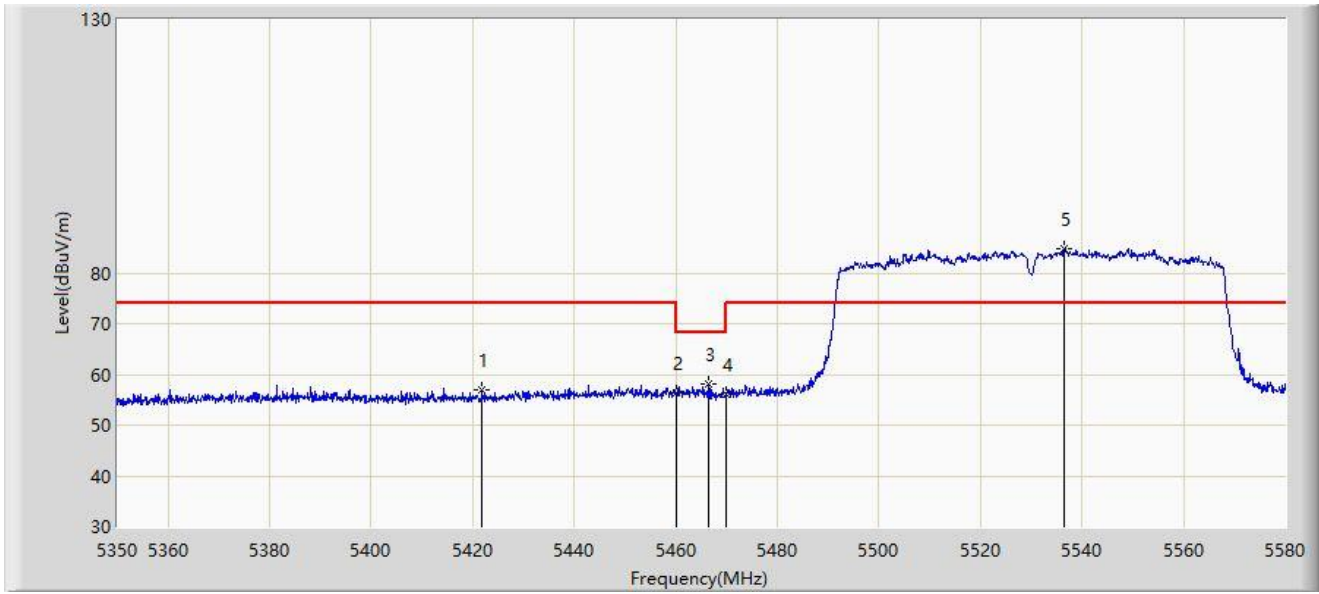


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5421.760        | 56.904                 | 55.273               | -17.096     | 74.000         | 1.632         | PK   |
| 2  |      |      | 5460.000        | 56.247                 | 54.022               | -17.753     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5466.495        | 58.019                 | 55.817               | -10.181     | 68.200         | 2.202         | PK   |
| 4  |      |      | 5470.000        | 56.215                 | 54.025               | -11.985     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5536.415        | 84.854                 | 82.608               | N/A         | N/A            | 2.246         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:07 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz |                               |

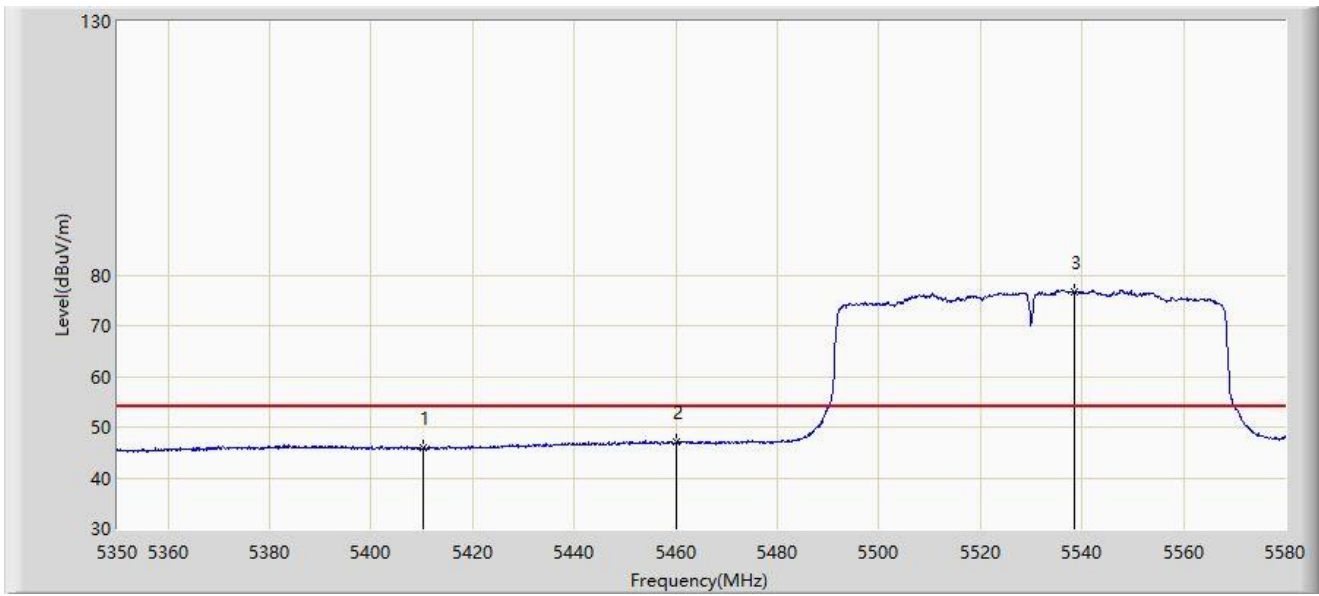


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5410.375        | 46.025                 | 44.440               | -7.975      | 54.000         | 1.585         | AV   |
| 2  |      |      | 5460.000        | 47.059                 | 44.834               | -6.941      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5538.370        | 76.778                 | 74.535               | N/A         | N/A            | 2.243         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:11 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz |                               |

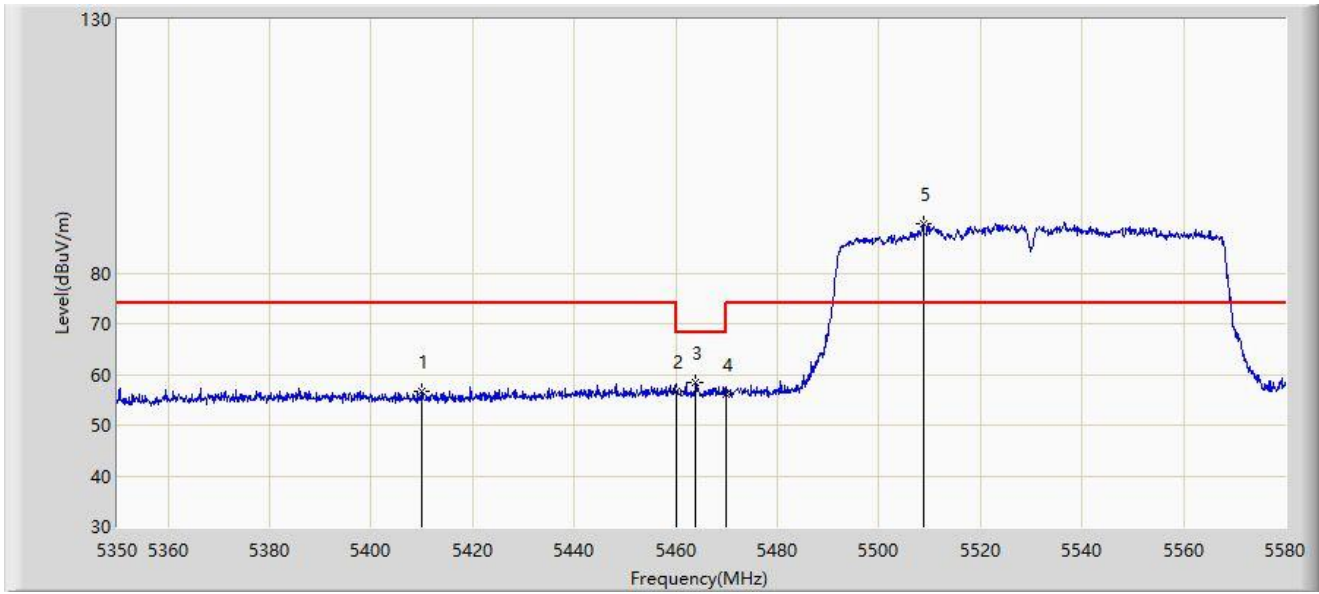


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5409.915        | 56.755                 | 55.170               | -17.245     | 74.000         | 1.586         | PK   |
| 2  |      |      | 5460.000        | 56.574                 | 54.349               | -17.426     | 74.000         | 2.225         | PK   |
| 3  |      |      | 5463.965        | 58.312                 | 56.101               | -9.888      | 68.200         | 2.211         | PK   |
| 4  |      |      | 5470.000        | 56.074                 | 53.884               | -12.126     | 68.200         | 2.190         | PK   |
| 5  |      | *    | 5508.700        | 89.690                 | 87.413               | N/A         | N/A            | 2.277         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:12 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz |                               |

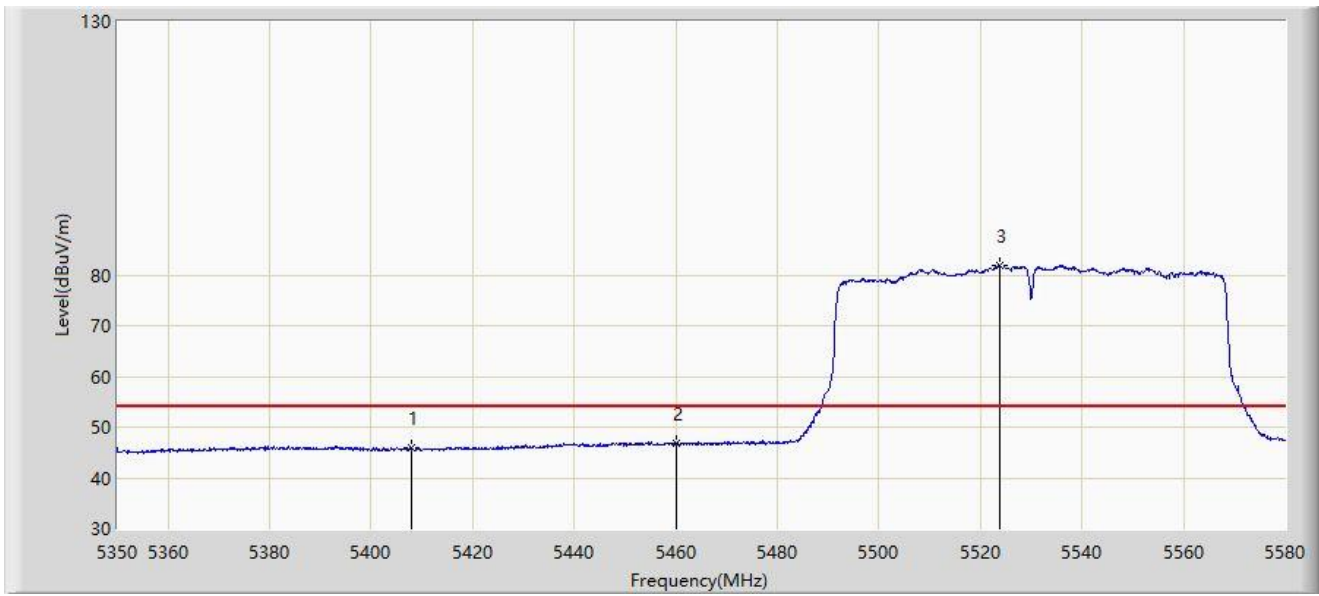


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5407.845        | 46.016                 | 44.430               | -7.984      | 54.000         | 1.585         | AV   |
| 2  |      |      | 5460.000        | 46.919                 | 44.694               | -7.081      | 54.000         | 2.225         | AV   |
| 3  |      | *    | 5523.880        | 81.804                 | 79.533               | N/A         | N/A            | 2.271         | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:14 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz |                               |

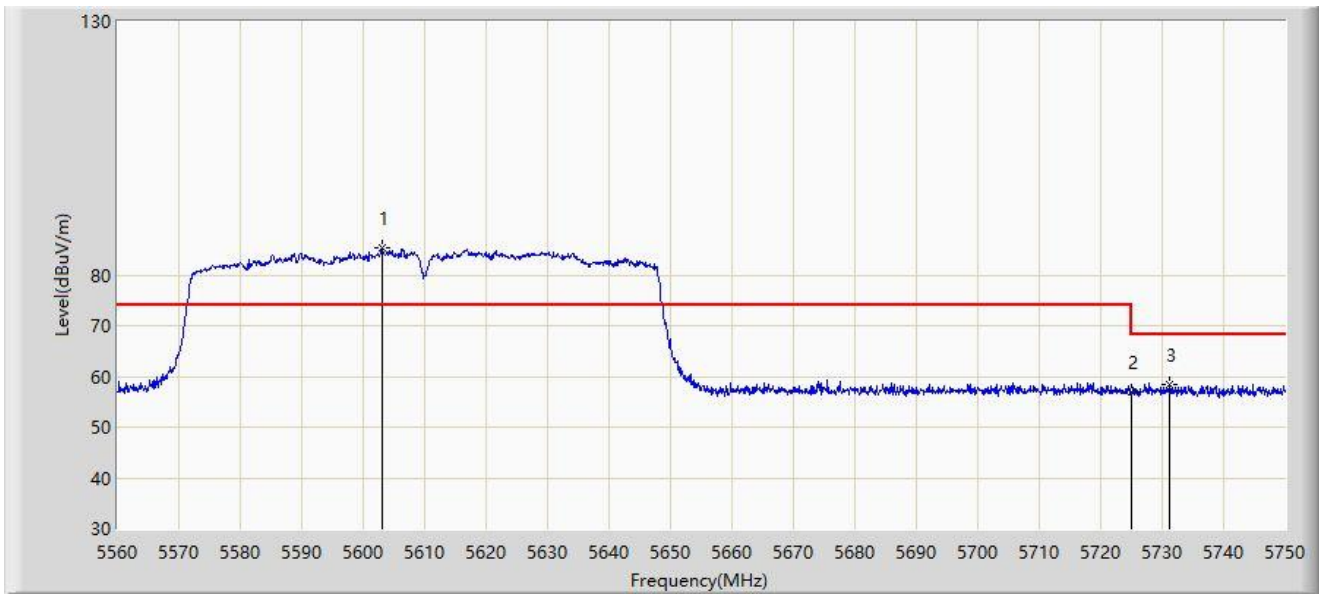


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5603.035        | 85.342                 | 82.843               | N/A         | N/A            | 2.500         | PK   |
| 2  |      |      | 5725.000        | 56.818                 | 53.905               | -11.382     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5731.190        | 58.467                 | 55.631               | -9.733      | 68.200         | 2.836         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:16 |
| Limit: FCC_Part 15.209_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz |                               |

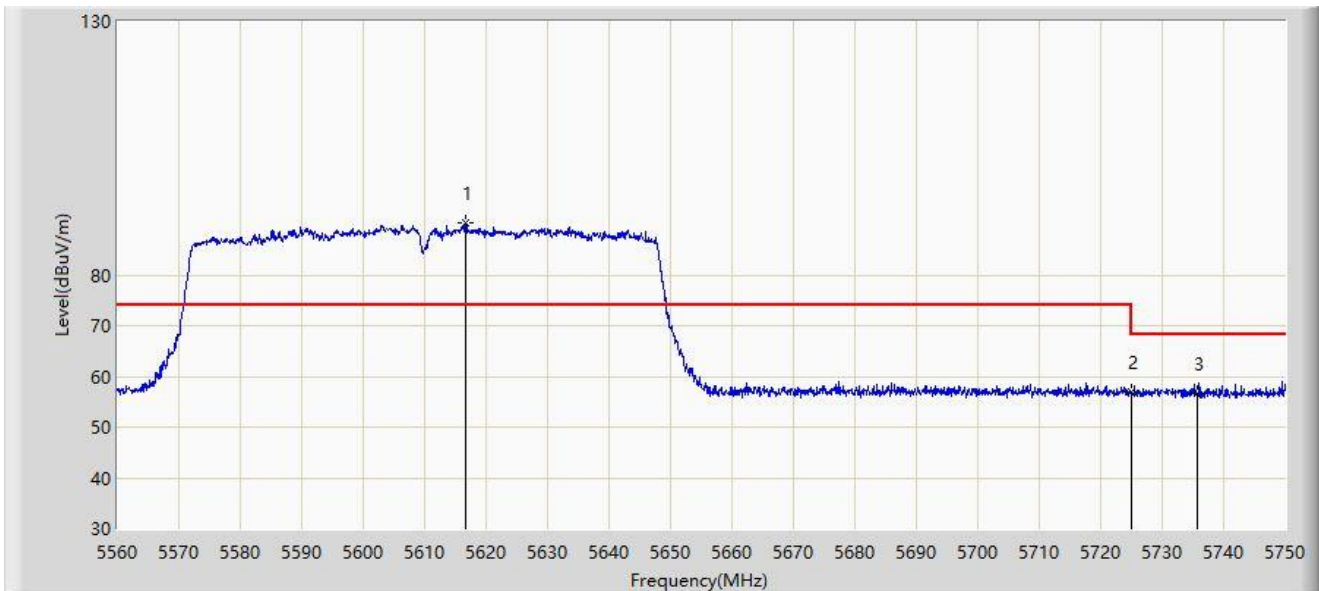


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      | *    | 5616.620        | 90.414                 | 87.727               | N/A         | N/A            | 2.687         | PK   |
| 2  |      |      | 5725.000        | 56.910                 | 53.997               | -11.290     | 68.200         | 2.913         | PK   |
| 3  |      |      | 5735.750        | 56.694                 | 53.917               | -11.506     | 68.200         | 2.777         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:17 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Horizontal          |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz |                               |

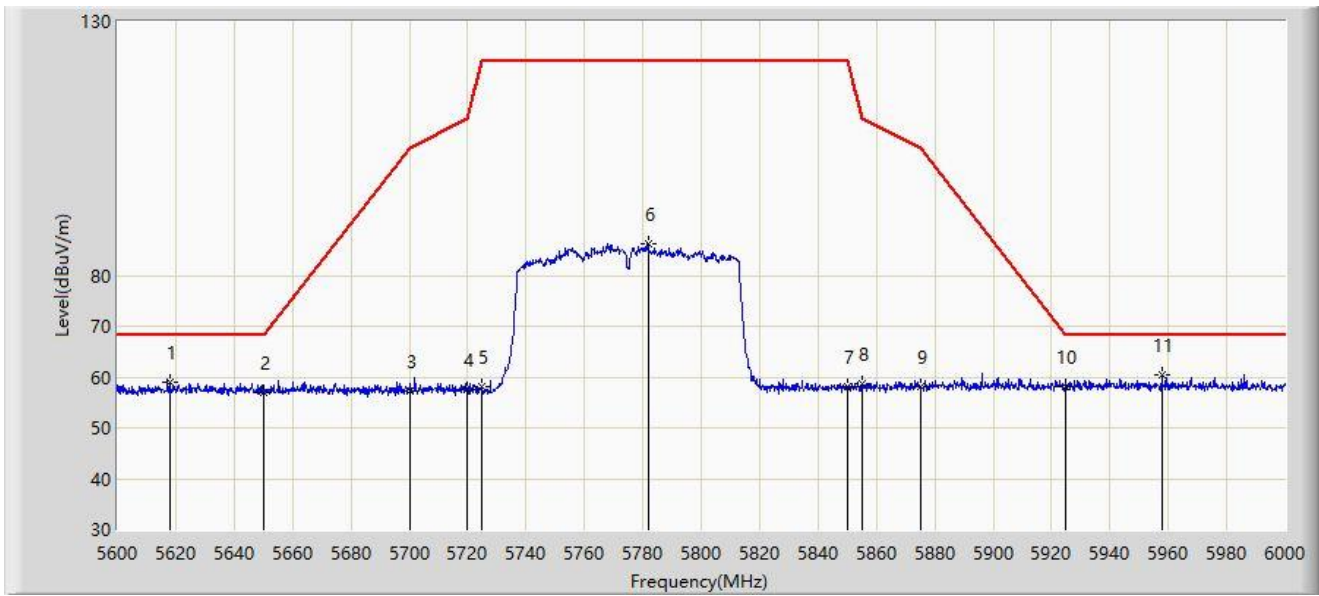


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5617.800        | 59.109                 | 56.401               | -9.091      | 68.200         | 2.708         | PK   |
| 2  |      |      | 5650.000        | 57.100                 | 54.447               | -11.100     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.268                 | 54.347               | -47.932     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.471                 | 54.508               | -53.329     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 57.995                 | 55.082               | -64.205     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5782.000        | 86.161                 | 83.213               | N/A         | N/A            | 2.948         | PK   |
| 7  |      |      | 5850.000        | 58.239                 | 54.964               | -63.961     | 122.200        | 3.275         | PK   |
| 8  |      |      | 5855.000        | 58.560                 | 55.284               | -52.240     | 110.800        | 3.276         | PK   |
| 9  |      |      | 5875.000        | 58.202                 | 54.747               | -46.998     | 105.200        | 3.455         | PK   |
| 10 |      |      | 5925.000        | 58.031                 | 54.516               | -10.169     | 68.200         | 3.515         | PK   |
| 11 |      | *    | 5957.800        | 60.511                 | 56.647               | -7.689      | 68.200         | 3.864         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|                                                          |                               |
|----------------------------------------------------------|-------------------------------|
| Site: NS-AC1                                             | Test Date: 2021/12/28 - 15:19 |
| Limit: FCC_Part 15.407_RE(3m)                            | Engineer: Dillon Diao         |
| Probe: NS-AC1_BBHA9120D                                  | Polarity: Vertical            |
| EUT: Mobile Computer                                     | Power: AC 120V/60Hz           |
| Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz |                               |

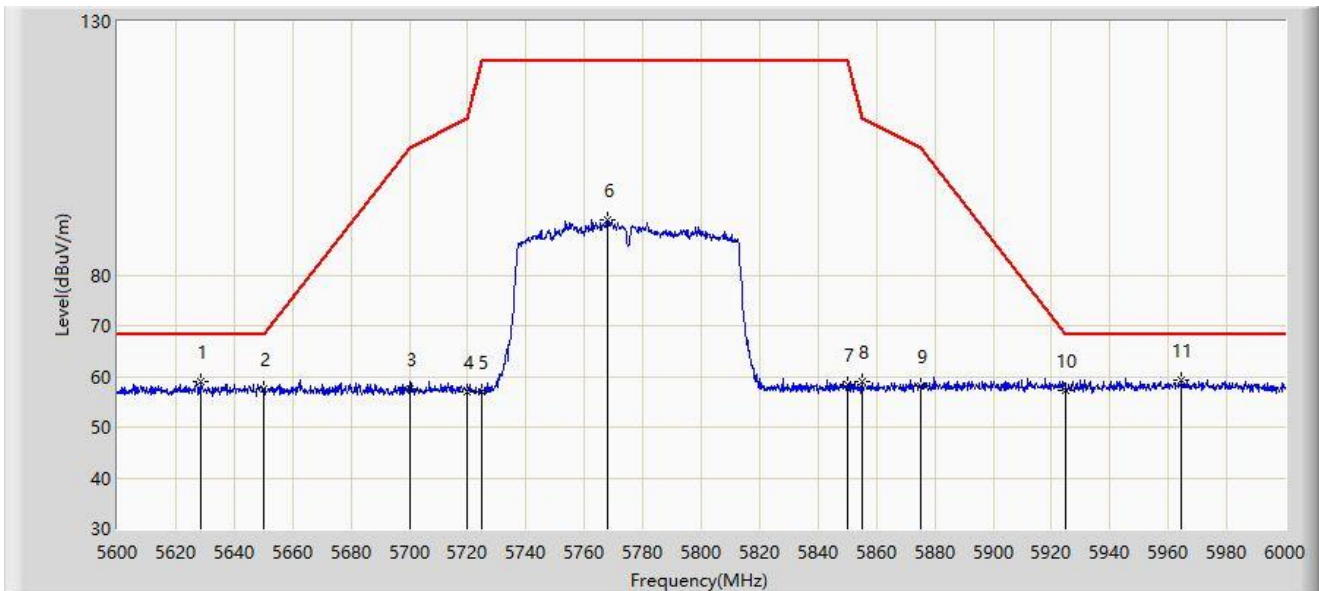


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB/m) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|---------------|------|
| 1  |      |      | 5628.800        | 58.945                 | 56.165               | -9.255      | 68.200         | 2.781         | PK   |
| 2  |      |      | 5650.000        | 57.418                 | 54.765               | -10.782     | 68.200         | 2.652         | PK   |
| 3  |      |      | 5700.000        | 57.565                 | 54.644               | -47.635     | 105.200        | 2.921         | PK   |
| 4  |      |      | 5720.000        | 57.100                 | 54.137               | -53.700     | 110.800        | 2.963         | PK   |
| 5  |      |      | 5725.000        | 56.955                 | 54.042               | -65.245     | 122.200        | 2.913         | PK   |
| 6  |      |      | 5767.800        | 90.785                 | 87.822               | N/A         | N/A            | 2.963         | PK   |
| 7  |      |      | 5850.000        | 58.317                 | 55.042               | -63.883     | 122.200        | 3.275         | PK   |
| 8  |      |      | 5855.000        | 58.864                 | 55.588               | -51.936     | 110.800        | 3.276         | PK   |
| 9  |      |      | 5875.000        | 58.076                 | 54.621               | -47.124     | 105.200        | 3.455         | PK   |
| 10 |      |      | 5925.000        | 57.265                 | 53.750               | -10.935     | 68.200         | 3.515         | PK   |
| 11 |      | *    | 5964.600        | 59.195                 | 55.284               | -9.005      | 68.200         | 3.911         | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### A.9 AC Conducted Emissions Test Result

|                                                         |                       |
|---------------------------------------------------------|-----------------------|
| Site: NS-SR2                                            | Test Date: 2021/12/28 |
| Limit: FCC_Part15.207_CE_AC Power                       | Engineer: Dillon Diao |
| Probe: ENV216_102493_150KHz~30MHz                       | Polarity: Line        |
| EUT: Mobile Computer                                    | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by n-HT20 at channel 5500MHz |                       |

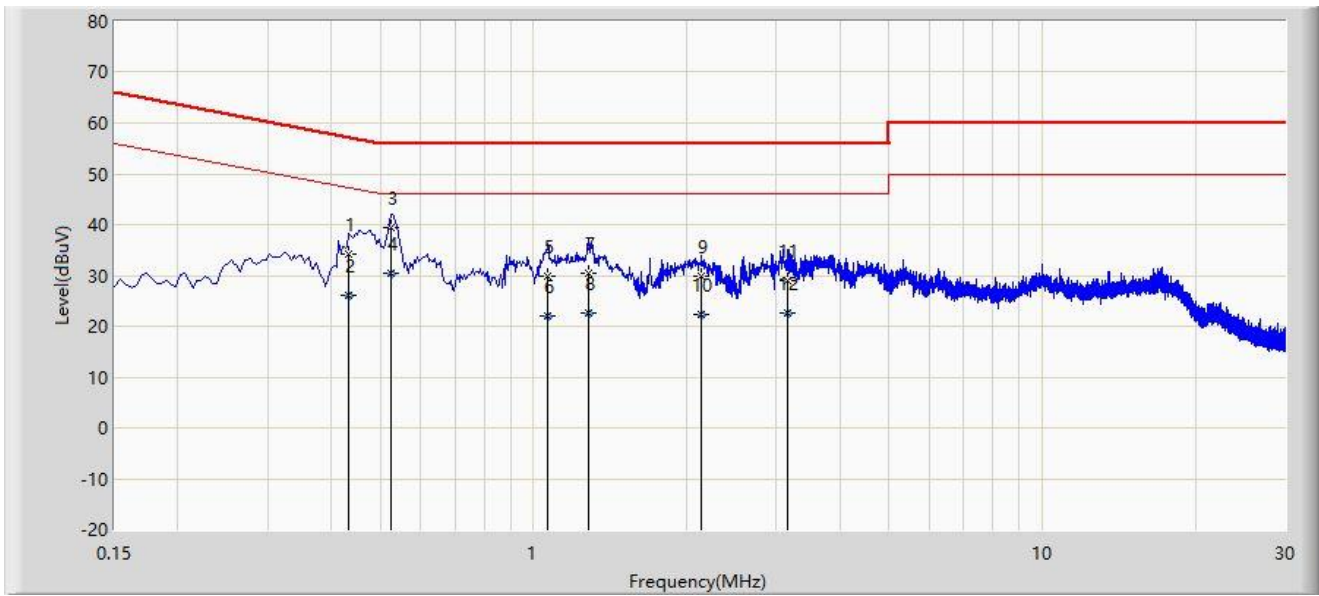


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.434           | 34.183               | 24.366               | -22.993     | 57.176       | 9.817       | QP   |
| 2  |      |      | 0.434           | 26.063               | 16.246               | -21.113     | 47.176       | 9.817       | AV   |
| 3  |      |      | 0.526           | 39.342               | 29.637               | -16.658     | 56.000       | 9.705       | QP   |
| 4  |      | *    | 0.526           | 30.449               | 20.744               | -15.551     | 46.000       | 9.705       | AV   |
| 5  |      |      | 1.066           | 29.872               | 20.141               | -26.128     | 56.000       | 9.731       | QP   |
| 6  |      |      | 1.066           | 22.024               | 12.293               | -23.976     | 46.000       | 9.731       | AV   |
| 7  |      |      | 1.286           | 30.301               | 20.563               | -25.699     | 56.000       | 9.738       | QP   |
| 8  |      |      | 1.286           | 22.706               | 12.968               | -23.294     | 46.000       | 9.738       | AV   |
| 9  |      |      | 2.142           | 29.753               | 19.989               | -26.247     | 56.000       | 9.764       | QP   |
| 10 |      |      | 2.142           | 22.192               | 12.429               | -23.808     | 46.000       | 9.764       | AV   |
| 11 |      |      | 3.150           | 28.974               | 19.169               | -27.026     | 56.000       | 9.805       | QP   |
| 12 |      |      | 3.150           | 22.695               | 12.890               | -23.305     | 46.000       | 9.805       | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                                         |                       |
|---------------------------------------------------------|-----------------------|
| Site: NS-SR2                                            | Test Date: 2021/12/28 |
| Limit: FCC_Part15.207_CE_AC Power                       | Engineer: Dillon Diao |
| Probe: ENV216_102493_150KHz~30MHz                       | Polarity: Neutral     |
| EUT: Mobile Computer                                    | Power: AC 120V/60Hz   |
| <b>Test Mode:</b> Transmit by n-HT20 at channel 5500MHz |                       |

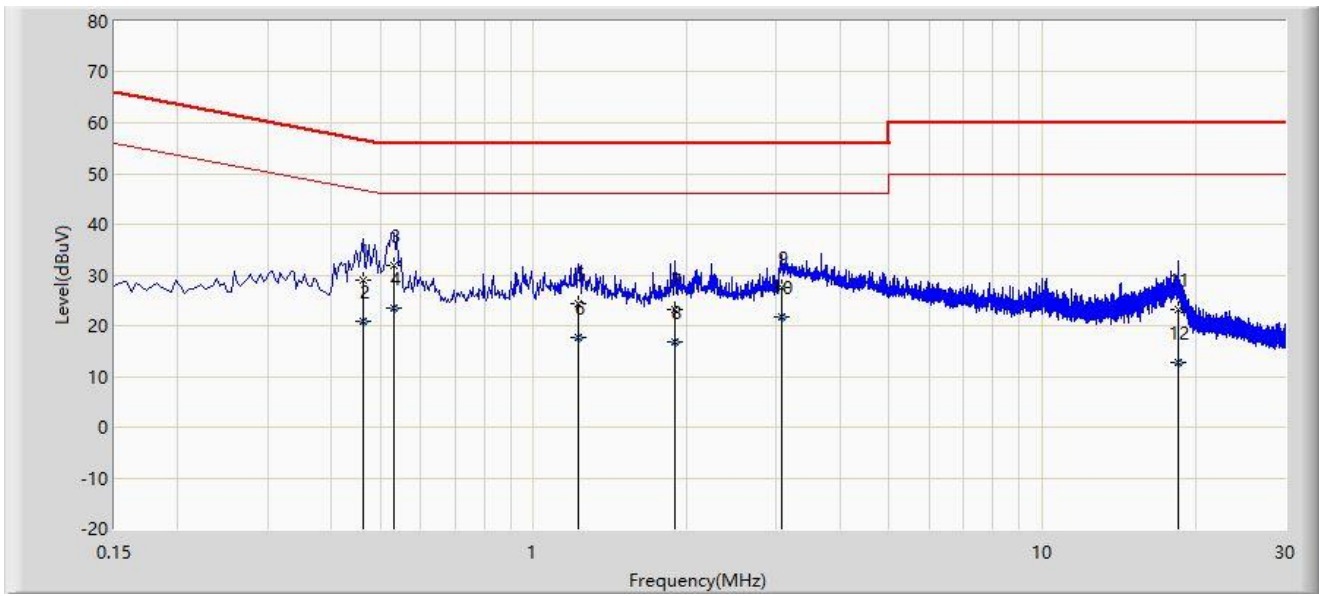

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBμV) | Reading Level (dBμV) | Margin (dB) | Limit (dBμV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.462           | 28.890               | 19.150               | -27.767     | 56.657       | 9.740       | QP   |
| 2  |      |      | 0.462           | 20.744               | 11.005               | -25.912     | 46.657       | 9.740       | AV   |
| 3  |      |      | 0.530           | 31.860               | 22.213               | -24.140     | 56.000       | 9.647       | QP   |
| 4  |      | *    | 0.530           | 23.424               | 13.776               | -22.576     | 46.000       | 9.647       | AV   |
| 5  |      |      | 1.222           | 24.414               | 14.739               | -31.586     | 56.000       | 9.675       | QP   |
| 6  |      |      | 1.222           | 17.583               | 7.908                | -28.417     | 46.000       | 9.675       | AV   |
| 7  |      |      | 1.894           | 23.161               | 13.467               | -32.839     | 56.000       | 9.694       | QP   |
| 8  |      |      | 1.894           | 16.905               | 7.211                | -29.095     | 46.000       | 9.694       | AV   |
| 9  |      |      | 3.066           | 27.565               | 17.824               | -28.435     | 56.000       | 9.742       | QP   |
| 10 |      |      | 3.066           | 21.664               | 11.922               | -24.336     | 46.000       | 9.742       | AV   |
| 11 |      |      | 18.474          | 23.310               | 12.949               | -36.690     | 60.000       | 10.362      | QP   |
| 12 |      |      | 18.474          | 12.621               | 2.259                | -37.379     | 50.000       | 10.362      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## **Appendix B – Test Setup Photograph**

Refer to “2111RSU063-UT” file.

## **Appendix C – EUT Photograph**

Refer to “2111RSU063-UE” file.