



FCC RADIO TEST REPORT

FCC ID : HLZA24004
Equipment : Tablet PC
Brand Name : acer
Model Name : A24004
Marketing Name : Acer Iconia Tab P10, P10-21
Applicant : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 22181, Taiwan (R.O.C)
Manufacturer : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 22181, Taiwan (R.O.C)
Standard : FCC Part 15 Subpart E §15.407

The product was received on May 21, 2024 and testing was performed from May 29, 2024 to Jun. 17, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum Conducted Output Power Measurement	12
3.3 Power Spectral Density Measurement	13
3.4 Unwanted Emissions Measurement.....	15
3.5 AC Conducted Emission Measurement.....	20
3.6 Antenna Requirements.....	22
4 List of Measuring Equipment.....	23
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	6.33 dB under the limit at 30.97 MHz
3.5	15.207	AC Conducted Emission	Pass	13.39 dB under the limit at 0.49 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Michelle Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac, and GNSS.		
Antenna Type WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / Glonass / BDS: FPC Antenna		
Antenna information		
5725 MHz ~ 5850 MHz	Peak Gain (dBi)	-0.88

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

SKU List			
	SKU1_4G+64G	SKU2_4G+64G	SKU3_6G+128G
PCB	GuangDong Kingshine Electronic Technology Co., Ltd. M100TCR110	GuangDong Kingshine Electronic Technology Co., Ltd. M100TCR110	GuangDong Kingshine Electronic Technology Co.ltd M100TCR110
Front Camera	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2
Rear Camera	HIVAC Technology Group OV13850R2A	HIVAC Technology Group OV13850R2A	HIVAC Technology Group OV13850R2A
DDR	Shenzhen Longsys Electronics Co., Ltd. MLXC4004G-W6	ChangXin Memory Electronics, INC. KL4X321CQ-C7A	Shenzhen Longsys Electronics Co., Ltd. FLXC4006G-63
UFS	Shenzhen Longsys Electronics Co., Ltd. FEUDNN64G-C2G07	Shenzhen Longsys Electronics Co., Ltd. FEUDNN64G-C2G07	Shenzhen Longsys Electronics Co., Ltd. FEUDNN128G-C2G07

SKU List			
	SKU4_6G+128G	SKU5_6G+256G	SKU6_6G+256G
PCB	GuangDong Kingshine Electronic Technology Co., Ltd. M100TCR110	GuangDong Kingshine Electronic Technology Co.ltd M100TCR110	GuangDong Kingshine Electronic Technology Co., Ltd. M100TCR110
Front Camera	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2	Shenzhen GALAXYCORE Electronic Co., Ltd. GC05A2
Rear Camera	HIVAC Technology Group OV13850R2A	HIVAC Technology Group OV13850R2A	HIVAC Technology Group OV13850R2A
DDR	ChangXin Memory Electronics, INC. KL4X480CO-D2M	Shenzhen Longsys Electronics Co., Ltd. FLXC4006G-63	ChangXin Memory Electronics, INC. KL4X480CO-D2M
UFS	SHENZHEN SHICHUANGYI ELECTRONICS Co., Ltd. U128EYNW2AFE00	Shenzhen Longsys Electronics Co., Ltd. FEUDNN256G-C2G07	SHENZHEN SHICHUANGYI ELECTRONICS Co., Ltd. U256EYNW4AFE00



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH23-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80.



2.2 Test Mode

The power for 802.11ac VHT20/ VHT40 mode is smaller than 802.11n mode, so all other conducted and radiated test is covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.


Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + Battery + USB Cable (Charging from Adapter) for SKU5
Remark: For Radiated Test Cases, the tests were performed with SKU5 and SKU6.	

Ch. #	Band IV : 5725-5850 MHz			
	802.11a	802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L Low	149	149	151	-
M Middle	157	157	-	155
H High	165	165	159	-

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

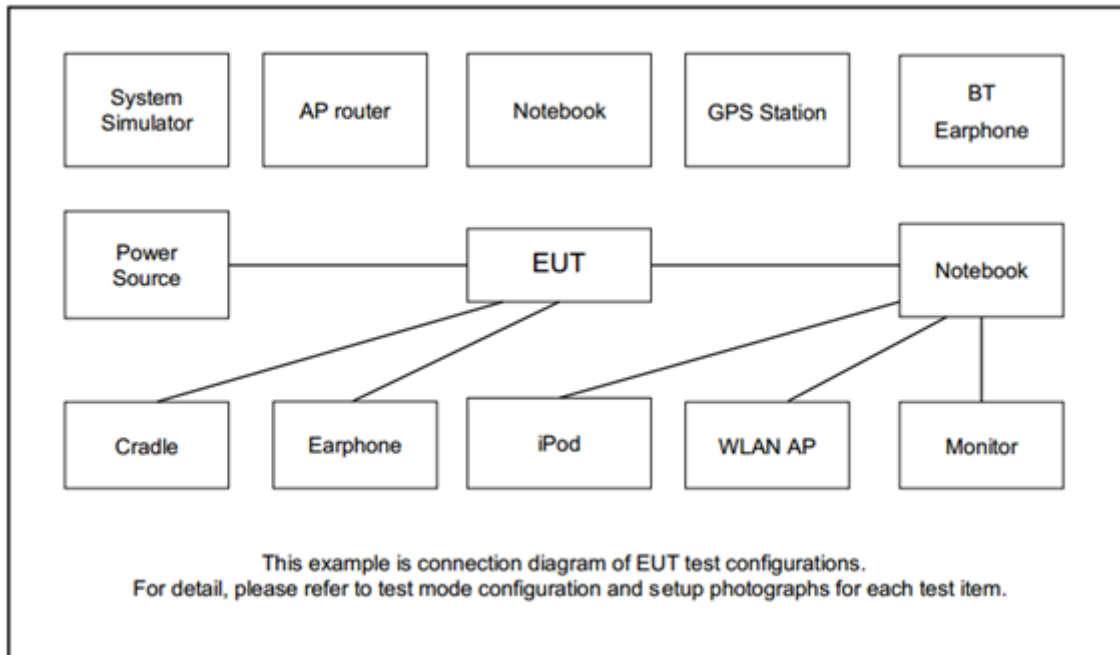

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	MW600	PY7DDA-2029	N/A	N/A
2.	Bluetooth Earphone	Sony	SBH20	N/A	N/A	N/A
3.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
4.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
5.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, make the EUT (SW: Acer_AV0U0_P10-21_1.001.00_PAPAP_GEN1) get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth for the band 5.725-5.85 GHz
2. Set RBW = 100 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.

3.1.4 Test Setup

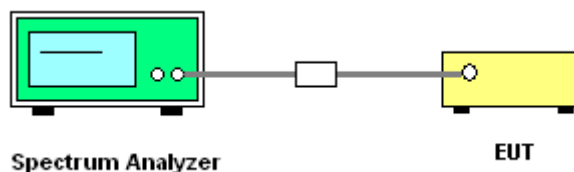

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

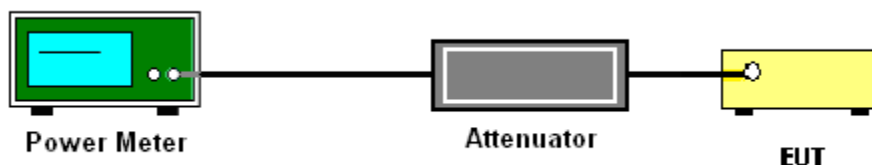

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300kHz.
 - Set VBW \geq 1 MHz.
 - Add $10 \log(500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement
 - Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

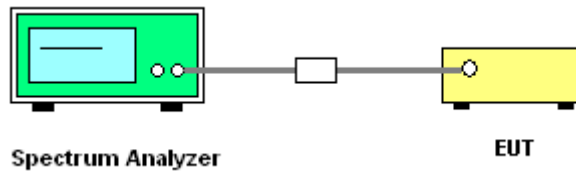

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.



3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

3.4.4 Test Setup


For radiated emissions below 30MHz

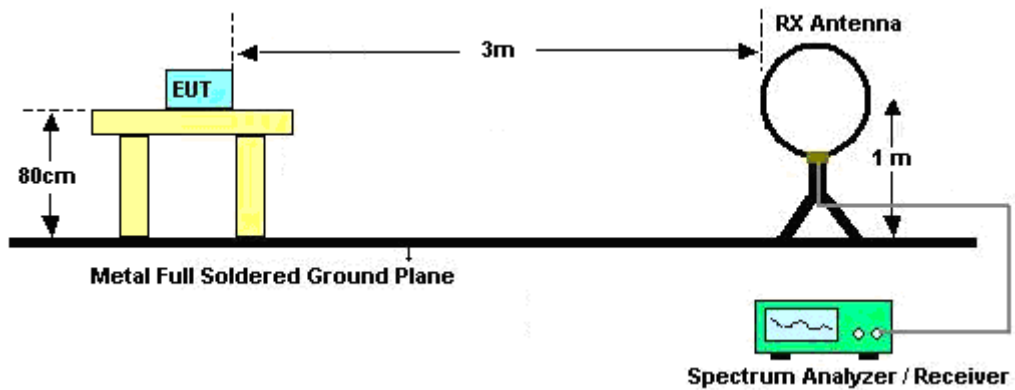


For radiated emissions from 30MHz to 1GHz

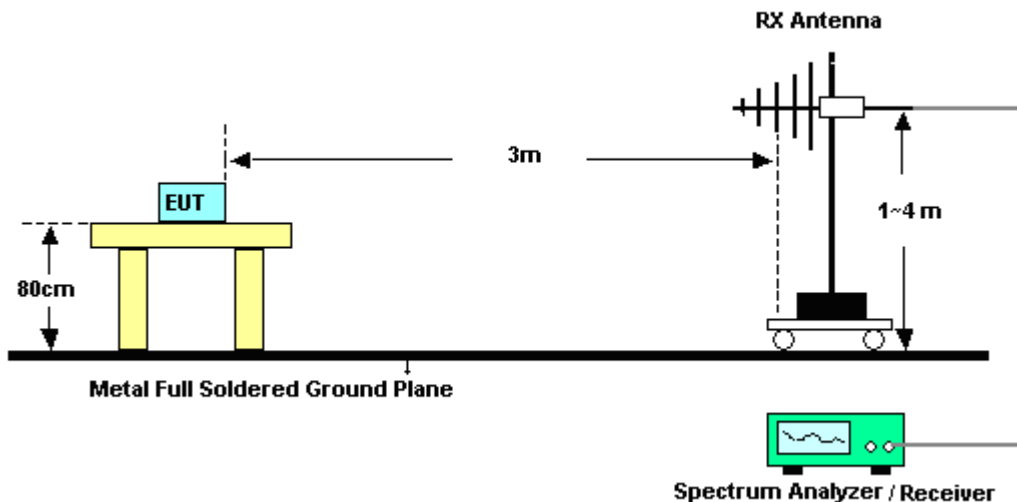

For radiated test from 1GHz to 18GHz

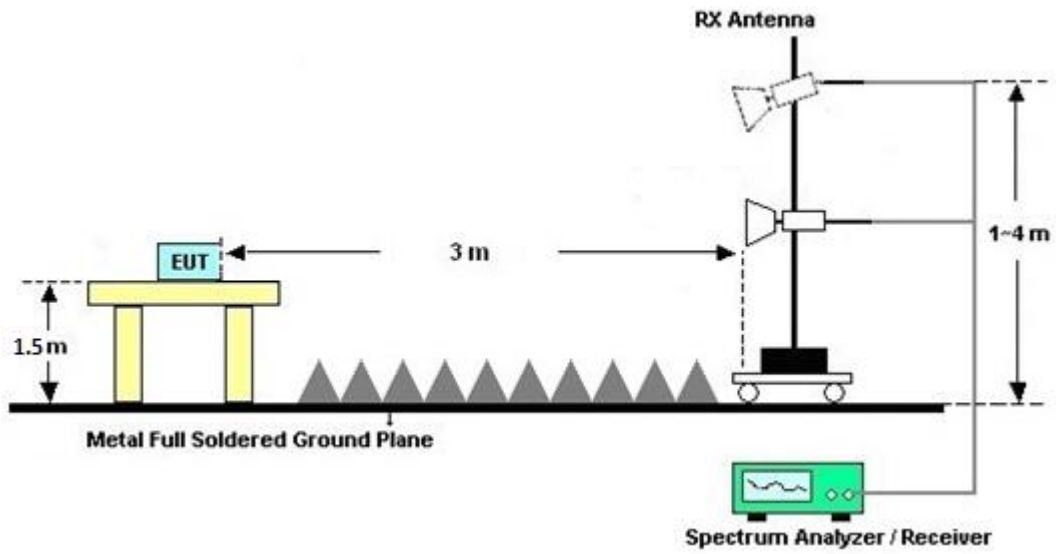

For radiated test above 18GHz

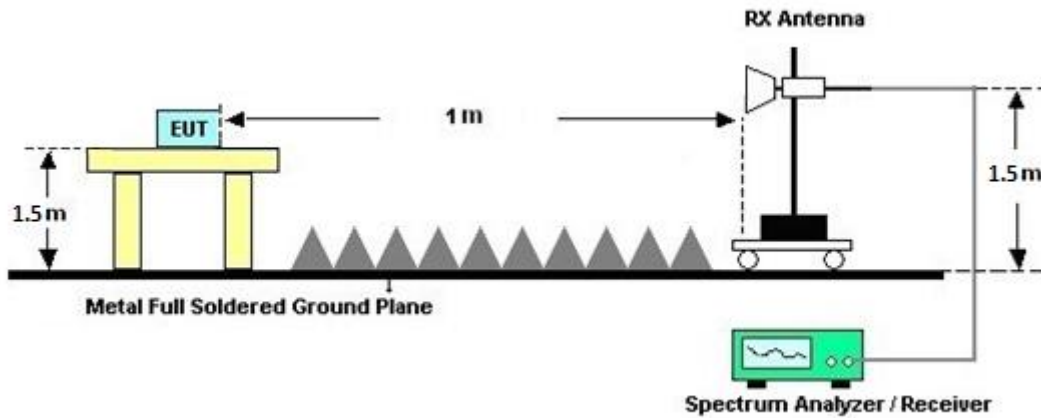



3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

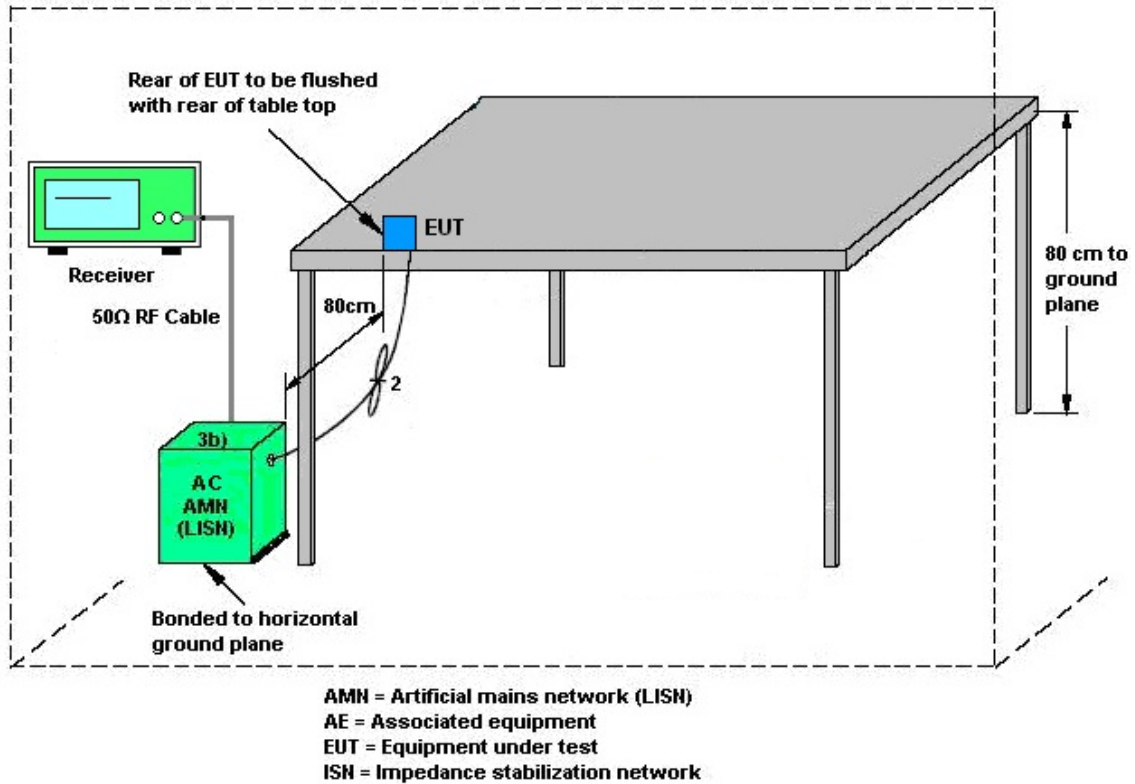

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May 31, 2024~ Jun. 01, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17100015SNO 36 (NO:35_ 144)	10MHz~6GHz	Aug. 23, 2023	May 31, 2024~ Jun. 01, 2024	Aug. 22, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101564	10Hz ~ 40GHz	Sep. 12, 2023	May 31, 2024~ Jun. 01, 2024	Sep. 11, 2024	Conducted (TH05-HY)
Switch Box & RF Cable	E-Instument	ETF-1405-0	EC1900067	N/A	Jul. 10, 2023	May 31, 2024~ Jun. 01, 2024	Jul. 09, 2024	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion1.0	N/A	N/A	N/A	May 31, 2024~ Jun. 01, 2024	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	May 29, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 29, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	May 29, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	May 29, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	May 29, 2024	Mar. 09, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	May 29, 2024	Sep. 19, 2024	Conduction (CO07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Jun. 05, 2024~ Jun. 17, 2024	Sep. 11, 2024	Radiation (03CH23-HY)
Bilog Antenna with 6dB pad	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	62028 & 003	N/A	Oct. 15, 2023	Jun. 05, 2024~ Jun. 17, 2024	Oct. 14, 2024	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	N/A	Jul. 15, 2023	Jun. 05, 2024~ Jun. 17, 2024	Jul. 14, 2024	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18EN	1GHz~18GHz	Jul. 12, 2023	Jun. 05, 2024~ Jun. 17, 2024	Jul. 11, 2024	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	1223	18GHz~40GHz	Jul. 10, 2023	Jun. 05, 2024~ Jun. 17, 2024	Jul. 09, 2024	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	N/A	Sep. 28, 2023	Jun. 05, 2024~ Jun. 17, 2024	Sep. 27, 2024	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060871	18-40GHz	Sep. 06, 2023	Jun. 05, 2024~ Jun. 17, 2024	Sep. 05, 2024	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	N/A	Aug. 17, 2023	Jun. 05, 2024~ Jun. 17, 2024	Aug. 16, 2024	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303B	TP211542	N/A	Oct. 30, 2023	Jun. 05, 2024~ Jun. 17, 2024	Oct. 29, 2024	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 05, 2024~ Jun. 17, 2024	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jun. 05, 2024~ Jun. 17, 2024	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jun. 05, 2024~ Jun. 17, 2024	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_20191 22	RK-002348	N/A	N/A	Jun. 05, 2024~ Jun. 17, 2024	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Jun. 05, 2024~ Jun. 17, 2024	Mar. 05, 2025	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	N/A	Nov. 27, 2023	Jun. 05, 2024~ Jun. 17, 2024	Nov. 26, 2024	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/231119 /231122	N/A	Nov. 27, 2023	Jun. 05, 2024~ Jun. 17, 2024	Nov. 26, 2024	Radiation (03CH23-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.30 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2024/05/31~2024/06/01	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	149	5745	16.83	-	20.68	-	15.10	-	0.5	Pass
11a	6Mbps	1	157	5785	16.88	-	20.98	-	15.10	-	0.5	Pass
11a	6Mbps	1	165	5825	16.93	-	20.51	-	15.13	-	0.5	Pass
HT20	MCS0	1	149	5745	17.83	-	24.22	-	15.11	-	0.5	Pass
HT20	MCS0	1	157	5785	17.93	-	24.93	-	15.09	-	0.5	Pass
HT20	MCS0	1	165	5825	17.93	-	25.86	-	15.13	-	0.5	Pass
HT40	MCS0	1	151	5755	36.96	-	69.06	-	35.11	-	0.5	Pass
HT40	MCS0	1	159	5795	37.16	-	67.42	-	35.11	-	0.5	Pass
VHT80	MCS0	1	155	5775	75.16	-	91.62	-	75.12	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	14.50	-		30.00	-	-0.88	-	Pass
11a	6Mbps	1	157	5785	14.50	-		30.00	-	-0.88	-	Pass
11a	6Mbps	1	165	5825	14.50	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	149	5745	14.70	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	157	5785	14.90	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	165	5825	14.90	-		30.00	-	-0.88	-	Pass
HT40	MCS0	1	151	5755	14.50	-		30.00	-	-0.88	-	Pass
HT40	MCS0	1	159	5795	14.50	-		30.00	-	-0.88	-	Pass
VHT20	MCS0	1	149	5745	14.60	-		30.00	-	-0.88	-	Pass
VHT20	MCS0	1	157	5785	14.80	-		30.00	-	-0.88	-	Pass
VHT20	MCS0	1	165	5825	14.80	-		30.00	-	-0.88	-	Pass
VHT40	MCS0	1	151	5755	14.40	-		30.00	-	-0.88	-	Pass
VHT40	MCS0	1	159	5795	14.40	-		30.00	-	-0.88	-	Pass
VHT80	MCS0	1	155	5775	14.60	-		30.00	-	-0.88	-	Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-3 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		10log (500kHz /RBW) Factor (dB)		Average Power Density with Duty Factor (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	0.12		2.22	-	1.04	-		30.00	-	-0.88	-	Pass
11a	6Mbps	1	157	5785	0.12		2.22	-	1.45	-		30.00	-	-0.88	-	Pass
11a	6Mbps	1	165	5825	0.12		2.22	-	1.89	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	149	5745	0.13		2.22	-	0.71	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	157	5785	0.13		2.22	-	1.05	-		30.00	-	-0.88	-	Pass
HT20	MCS0	1	165	5825	0.13		2.22	-	1.50	-		30.00	-	-0.88	-	Pass
HT40	MCS0	1	151	5755	0.23		2.22	-	-1.83	-		30.00	-	-0.88	-	Pass
HT40	MCS0	1	159	5795	0.23		2.22	-	-1.92	-		30.00	-	-0.88	-	Pass
VHT80	MCS0	1	155	5775	0.43		2.22	-	-4.65	-		30.00	-	-0.88	-	Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)



Test Result of 6dB and 26dB and 99% Occupied Bandwidth


<802.11a>

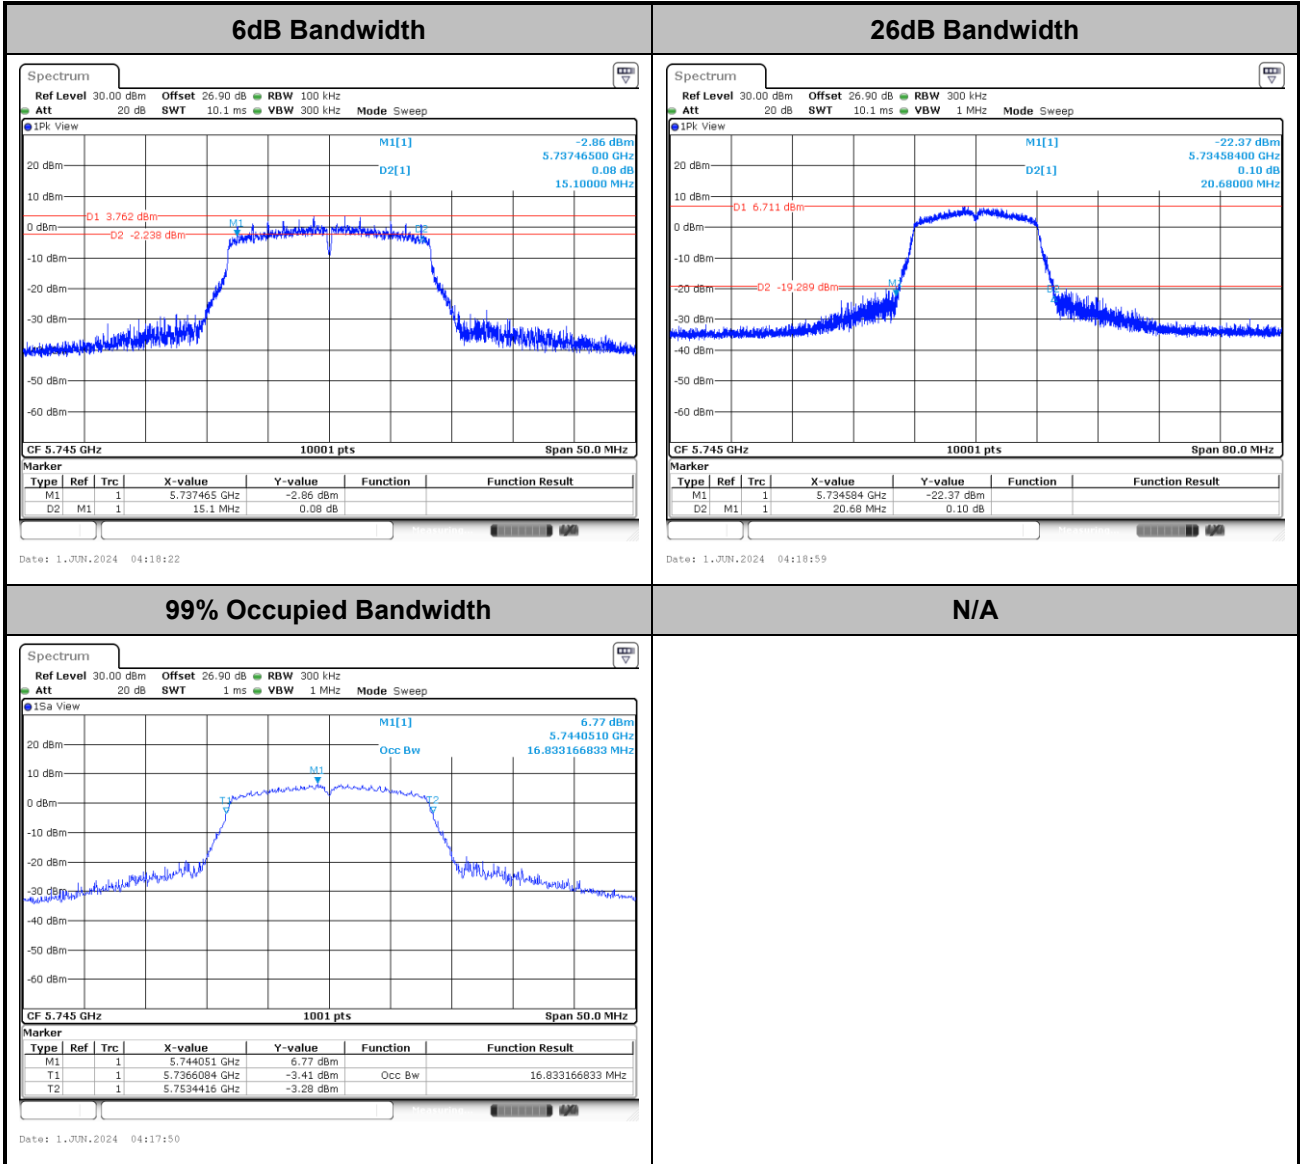




<802.11n HT20>


6dB Bandwidth

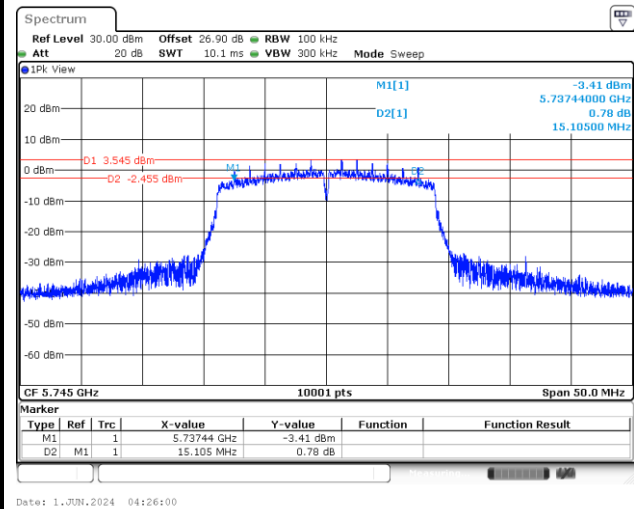

26dB Bandwidth

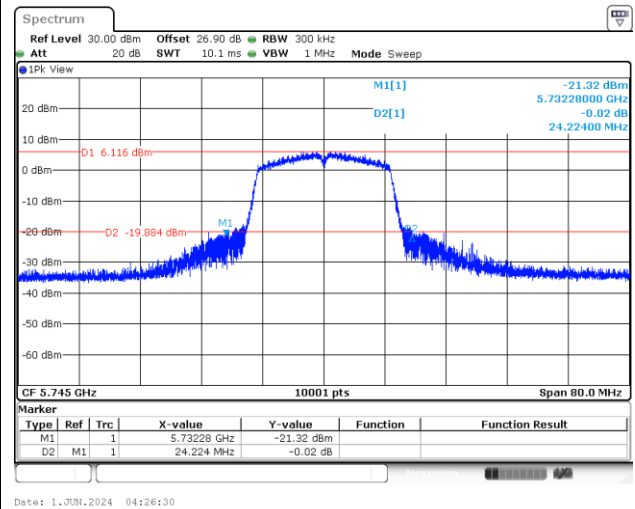


99% Occupied Bandwidth

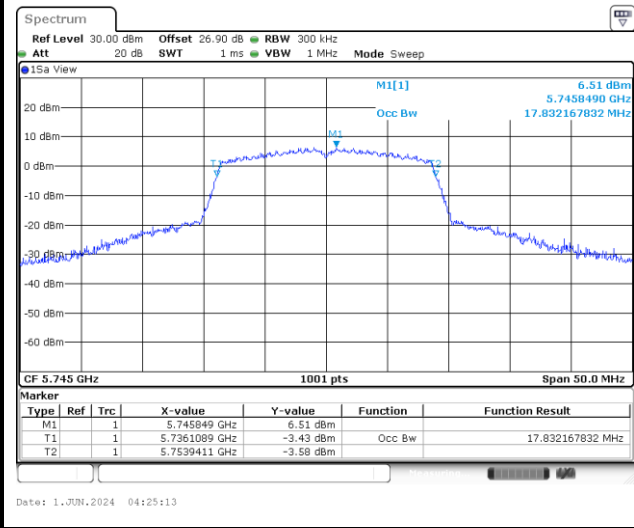

N/A




<802.11n HT40>

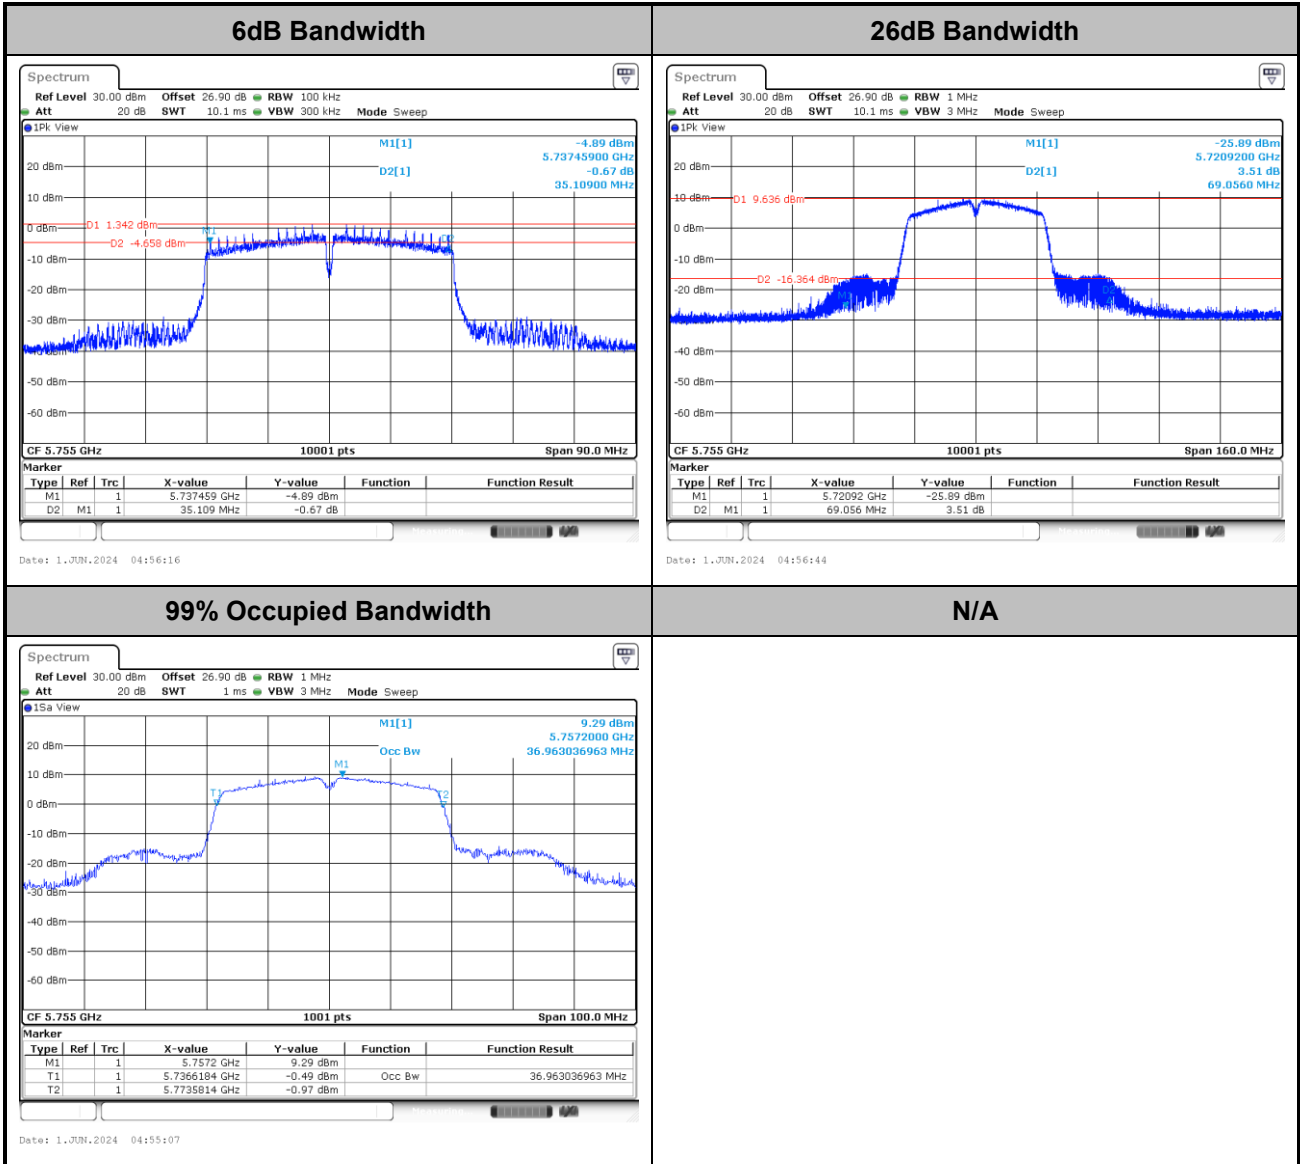



<802.11ac VHT80>

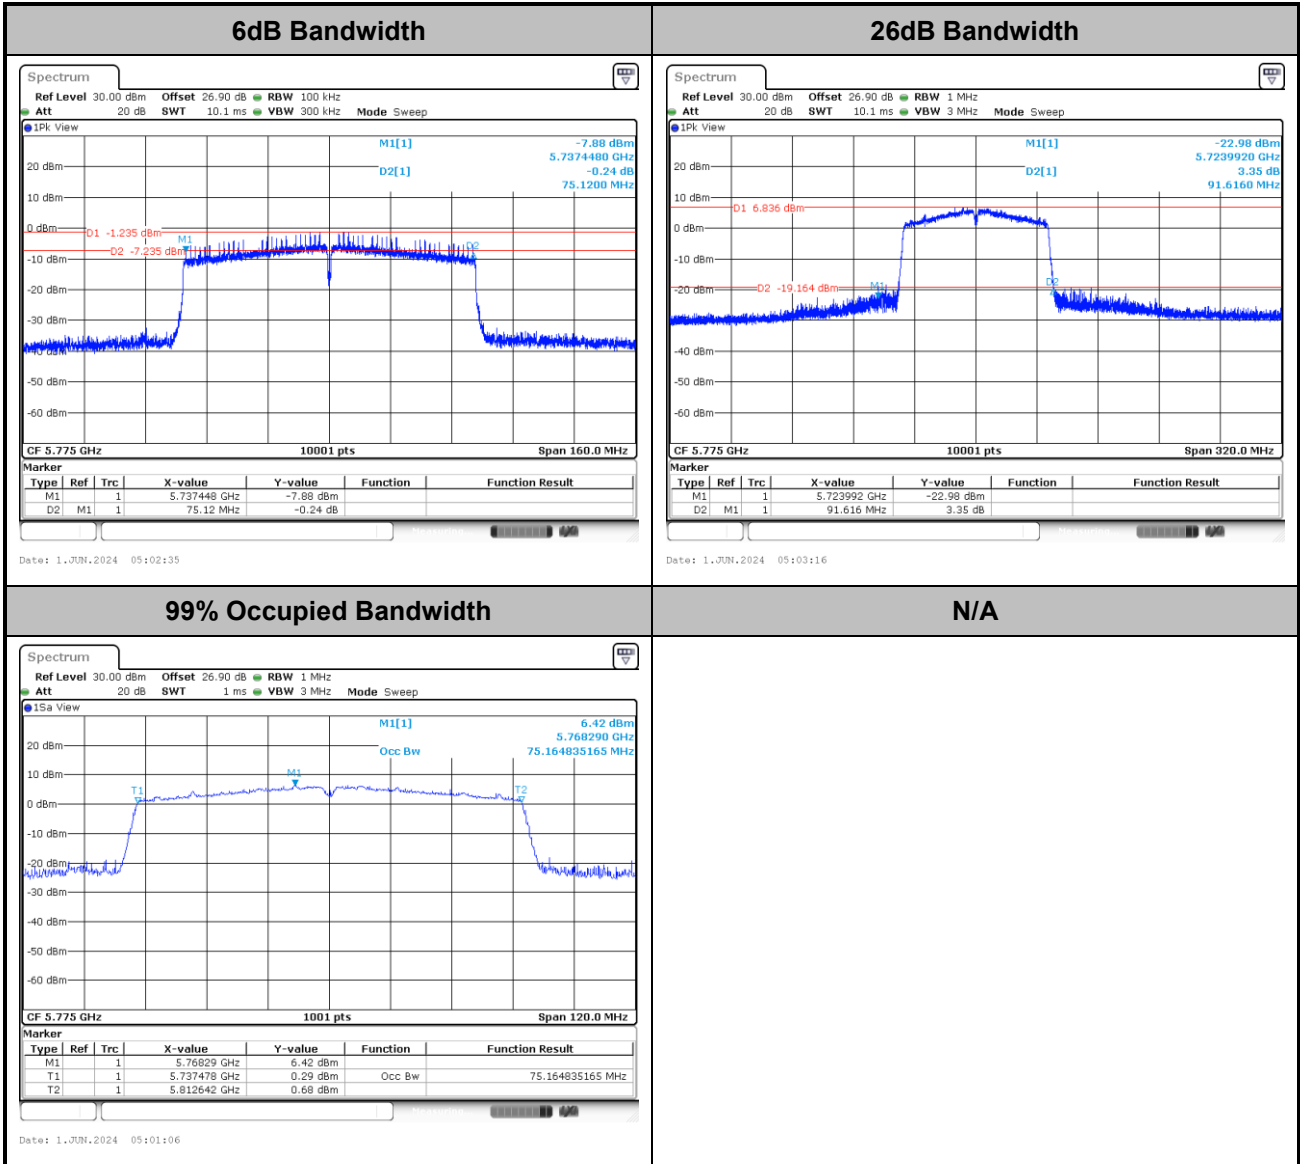




Test Result of Power Spectral Density

<802.11a>

Maximum Power Density Plot (dBm/MHz)

Ant1

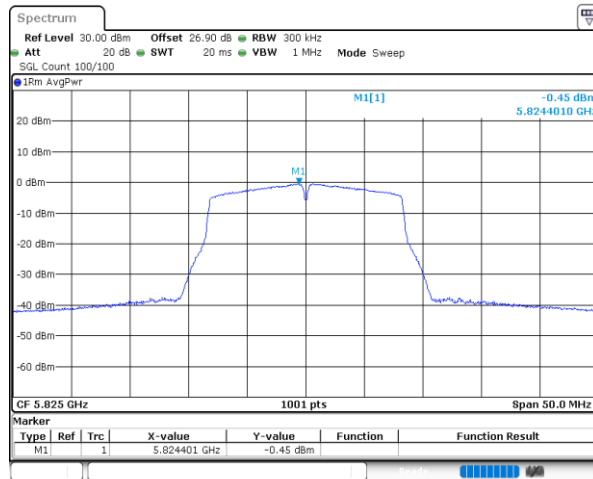

Date: 1.JUN.2024 04:23:39

Note:


1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.



<802.11n HT20>

Maximum Power Density Plot (dBm/MHz)

Ant1

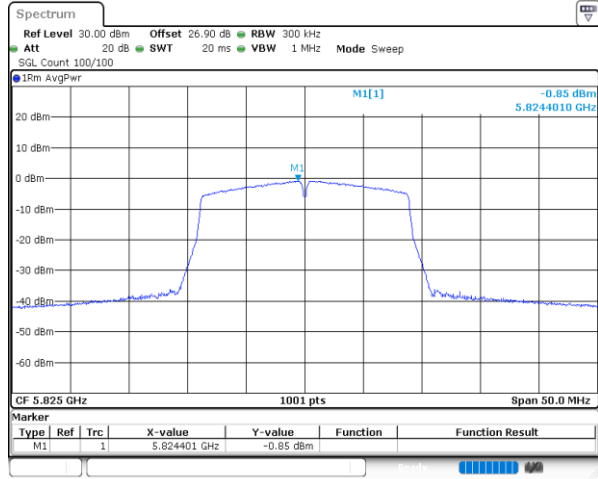

Note:


1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.



<802.11an HT40>

Maximum Power Density Plot (dBm/MHz)

Ant1

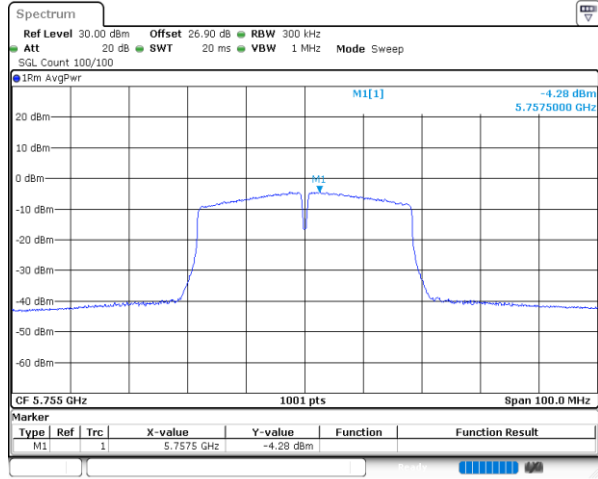


Note:

1. EIRP Power Density (dBm/MHz) = Measured value+ Duty Factor + Directional Gain
2. The test plot is showing a bin by bin combined result mathematically adds two traces.



<802.11ac VHT80>

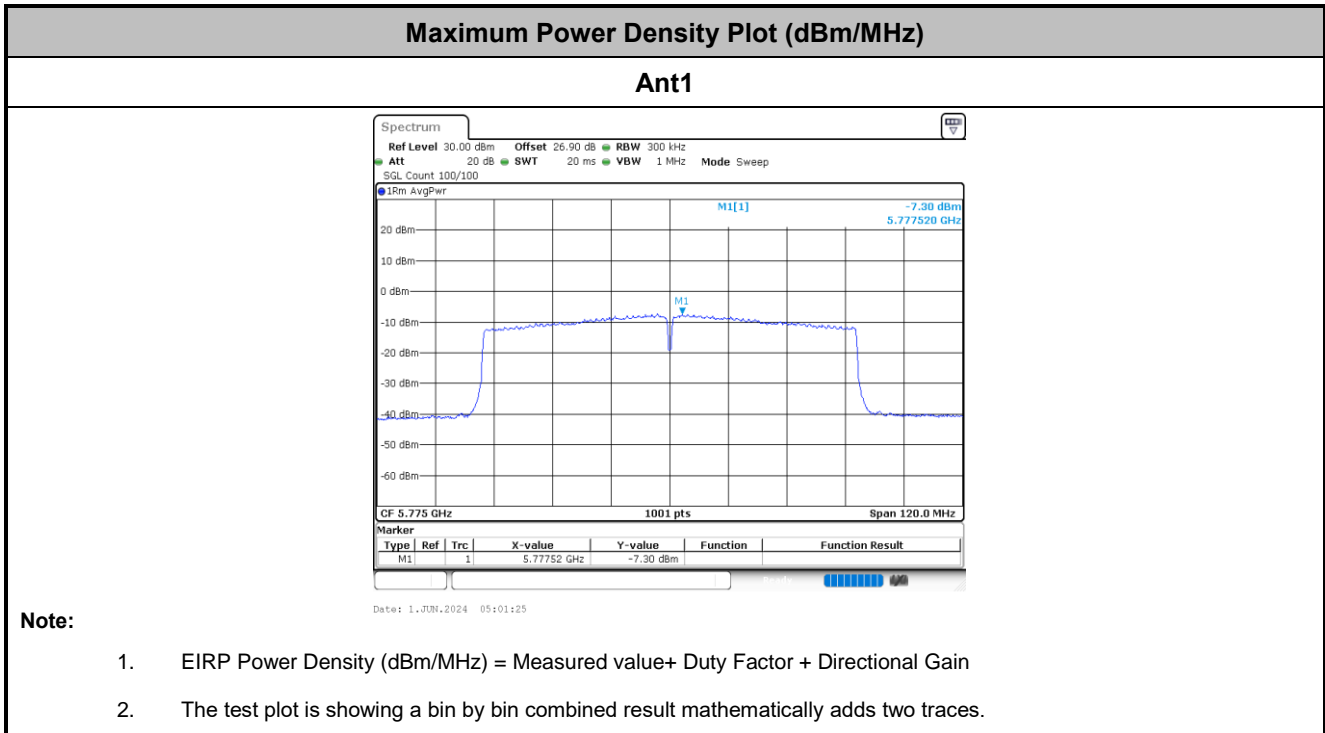




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	20.4~25.6°C
		Relative Humidity :	46.7~58.3%

EUT Information

Report NO : 450907
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

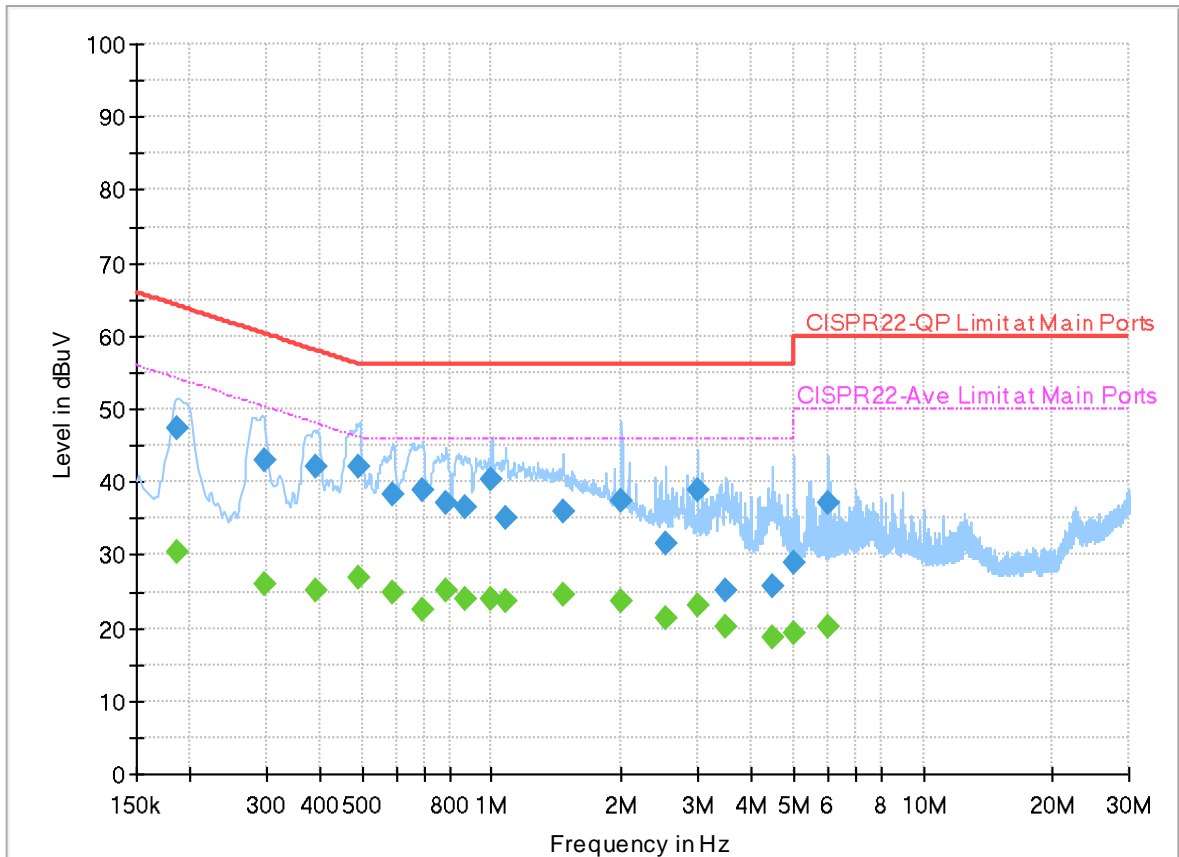

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186360	---	30.50	54.20	23.70	L1	OFF	19.9
0.186360	47.51	---	64.20	16.69	L1	OFF	19.9
0.297690	---	25.92	50.31	24.39	L1	OFF	19.9
0.297690	43.05	---	60.31	17.26	L1	OFF	19.9
0.389130	---	25.29	48.08	22.79	L1	OFF	19.9
0.389130	42.06	---	58.08	16.02	L1	OFF	19.9
0.493170	---	26.79	46.11	19.32	L1	OFF	19.9
0.493170	42.23	---	56.11	13.88	L1	OFF	19.9
0.590010	---	24.98	46.00	21.02	L1	OFF	19.9
0.590010	38.29	---	56.00	17.71	L1	OFF	19.9
0.690000	---	22.37	46.00	23.63	L1	OFF	19.9
0.690000	38.90	---	56.00	17.10	L1	OFF	19.9
0.780000	---	25.29	46.00	20.71	L1	OFF	19.9
0.780000	37.12	---	56.00	18.88	L1	OFF	19.9
0.866310	---	24.10	46.00	21.90	L1	OFF	19.9
0.866310	36.60	---	56.00	19.40	L1	OFF	19.9
0.997350	---	23.84	46.00	22.16	L1	OFF	19.9
0.997350	40.45	---	56.00	15.55	L1	OFF	19.9
1.072500	---	23.71	46.00	22.29	L1	OFF	19.9

1.072500	35.13	---	56.00	20.87	L1	OFF	19.9
1.461660	---	24.60	46.00	21.40	L1	OFF	19.9
1.461660	36.05	---	56.00	19.95	L1	OFF	19.9
1.995000	---	23.68	46.00	22.32	L1	OFF	19.9
1.995000	37.51	---	56.00	18.49	L1	OFF	19.9
2.540580	---	21.26	46.00	24.74	L1	OFF	20.0
2.540580	31.64	---	56.00	24.36	L1	OFF	20.0
3.001020	---	23.02	46.00	22.98	L1	OFF	20.0
3.001020	38.92	---	56.00	17.08	L1	OFF	20.0
3.495750	---	20.07	46.00	25.93	L1	OFF	20.0
3.495750	25.26	---	56.00	30.74	L1	OFF	20.0
4.457040	---	18.61	46.00	27.39	L1	OFF	20.0
4.457040	25.77	---	56.00	30.23	L1	OFF	20.0
5.005500	---	19.21	50.00	30.79	L1	OFF	20.0
5.005500	28.89	---	60.00	31.11	L1	OFF	20.0
5.997210	---	20.23	50.00	29.77	L1	OFF	20.0
5.997210	37.01	---	60.00	22.99	L1	OFF	20.0

EUT Information

Report NO : 450907
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

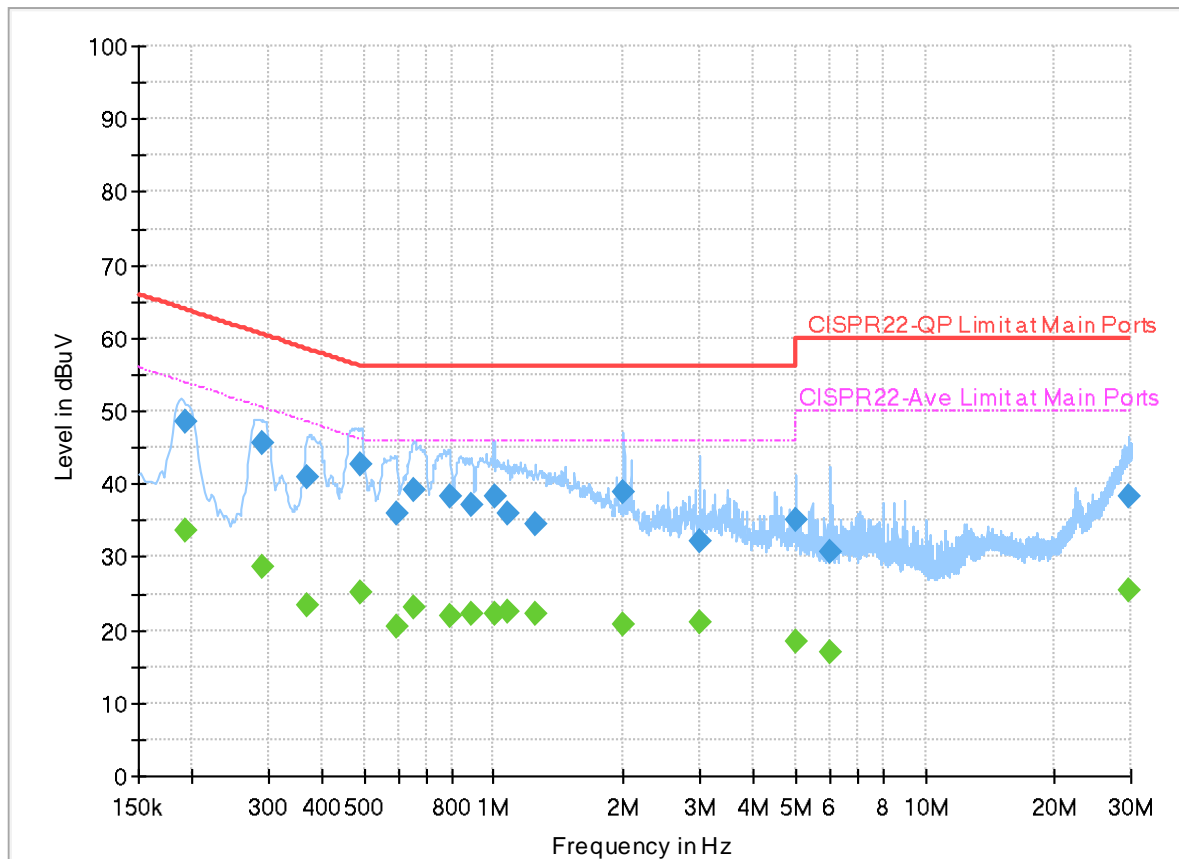

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.192750	---	33.66	53.92	20.26	N	OFF	19.9
0.192750	48.59	---	63.92	15.33	N	OFF	19.9
0.289500	---	28.53	50.54	22.01	N	OFF	19.9
0.289500	45.54	---	60.54	15.00	N	OFF	19.9
0.370950	---	23.53	48.48	24.95	N	OFF	19.9
0.370950	40.87	---	58.48	17.61	N	OFF	19.9
0.493080	---	25.13	46.12	20.99	N	OFF	19.9
0.493080	42.73	---	56.12	13.39	N	OFF	19.9
0.595500	---	20.61	46.00	25.39	N	OFF	19.9
0.595500	35.94	---	56.00	20.06	N	OFF	19.9
0.654450	---	23.13	46.00	22.87	N	OFF	19.9
0.654450	39.09	---	56.00	16.91	N	OFF	19.9
0.789630	---	22.07	46.00	23.93	N	OFF	19.9
0.789630	38.28	---	56.00	17.72	N	OFF	19.9
0.883500	---	22.19	46.00	23.81	N	OFF	19.9
0.883500	37.17	---	56.00	18.83	N	OFF	19.9
1.000230	---	22.20	46.00	23.80	N	OFF	19.9
1.000230	38.22	---	56.00	17.78	N	OFF	19.9
1.078710	---	22.41	46.00	23.59	N	OFF	19.9

1.078710	36.07	---	56.00	19.93	N	OFF	19.9
1.254480	---	22.21	46.00	23.79	N	OFF	19.9
1.254480	34.58	---	56.00	21.42	N	OFF	19.9
2.000130	---	20.89	46.00	25.11	N	OFF	20.0
2.000130	38.80	---	56.00	17.20	N	OFF	20.0
2.996250	---	21.02	46.00	24.98	N	OFF	20.0
2.996250	32.22	---	56.00	23.78	N	OFF	20.0
5.001180	---	18.33	50.00	31.67	N	OFF	20.0
5.001180	35.05	---	60.00	24.95	N	OFF	20.0
5.995500	---	17.10	50.00	32.90	N	OFF	20.0
5.995500	30.57	---	60.00	29.43	N	OFF	20.0
29.764410	---	25.29	50.00	24.71	N	OFF	20.2
29.764410	38.41	---	60.00	21.59	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li and Lucifer Jiang	Temperature :	21.7~22.5°C
		Relative Humidity :	51.0~57.0%

Note symbol

-L	Low channel location
-R	High channel location



C1. Radiated Spurious Emission Test Modes

<SKU5>

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 2	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 3	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 4	U-NII-3	5.725-5.85	1	802.11n HT20	149	5745	MCS0	-	-
Mode 5	U-NII-3	5.725-5.85	1	802.11n HT20	157	5785	MCS0	-	-
Mode 6	U-NII-3	5.725-5.85	1	802.11n HT20	165	5825	MCS0	-	-
Mode 7	U-NII-3	5.725-5.85	1	802.11n HT40	151	5755	MCS0	-	-
Mode 8	U-NII-3	5.725-5.85	1	802.11n HT40	159	5795	MCS0	-	-
Mode 9	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	-
Mode 10	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	LF

<SKU6>

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 11	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	-
	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	LF



C2. Summary of each worse mode

<SKU5>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	149	5640.60	54.43	68.20	-13.77	V	Peak	Pass	-	Band Edge
	802.11a	149	11490.00	42.18	54.00	-11.82	H	Avg.	Pass	-	Harmonic
2	802.11a	157	5938.62	54.21	68.20	-13.99	V	Peak	Pass	-	Band Edge
	802.11a	157	11570.00	42.38	54.00	-11.62	H	Avg.	Pass	-	Harmonic
3	802.11a	165	5935.25	54.08	68.20	-14.12	V	Peak	Pass	-	Band Edge
	802.11a	165	11650.00	41.76	54.00	-12.24	H	Avg.	Pass	-	Harmonic
4	802.11n HT20	149	5612.76	54.52	68.20	-13.68	V	Peak	Pass	-	Band Edge
	802.11n HT20	149	11490.00	41.38	54.00	-12.62	V	Avg.	Pass	-	Harmonic
5	802.11n HT20	157	5924.92	54.03	68.26	-14.23	V	Peak	Pass	-	Band Edge
	802.11n HT20	157	11570.00	41.33	54.00	-12.67	H	Avg.	Pass	-	Harmonic
6	802.11n HT20	165	5949.25	53.50	68.20	-14.70	V	Peak	Pass	-	Band Edge
	802.11n HT20	165	17475.00	56.16	68.20	-12.04	V	Peak	Pass	-	Harmonic
7	802.11n HT40	151	5633.79	54.33	68.20	-13.87	V	Peak	Pass	-	Band Edge
	802.11n HT40	151	11510.00	42.52	54.00	-11.48	V	Avg.	Pass	-	Harmonic
8	802.11n HT40	159	5623.79	53.73	68.20	-14.47	V	Peak	Pass	-	Band Edge
	802.11n HT40	159	11590.00	42.47	54.00	-11.53	V	Avg.	Pass	-	Harmonic
9	802.11ac VHT80	155	5650.05	59.58	68.24	-8.66	V	Peak	Pass	-	Band Edge
	802.11ac VHT80	155	11550.00	42.35	54.00	-11.65	H	Avg.	Pass	-	Harmonic
10	LF	155	30.97	33.67	40.00	-6.33	V	Peak	Pass	-	LF






<SKU6>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
11	802.11ac VHT80	155	5938.28	52.83	68.20	-15.37	V	Peak	Pass	-	Band Edge
	802.11ac VHT80	155	11550.00	40.45	54.00	-13.55	H	Avg.	Pass	-	Harmonic
	LF	155	137.67	36.79	43.50	-6.71	V	Peak	Pass	-	LF



<SKU5>

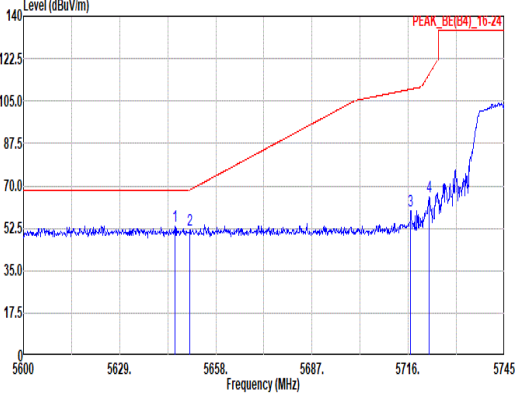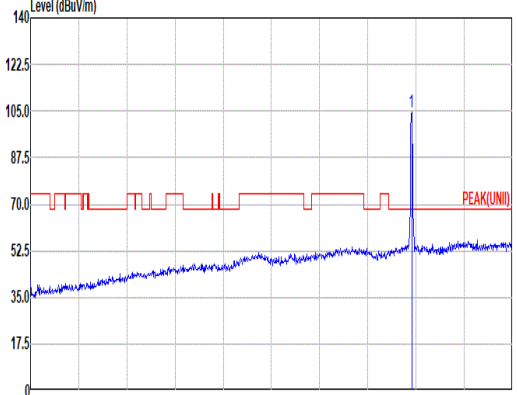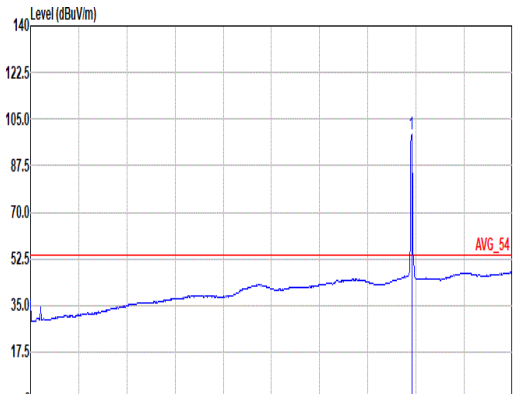Mode	1																																																																																																										
	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1" data-bbox="279 1131 774 1288"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5645.68</td> <td>53.28</td> <td>68.20</td> <td>-14.92</td> <td>38.42</td> <td>33.37</td> <td>11.15</td> <td>33.83</td> <td>4.17</td> <td>345</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.17</td> <td>51.82</td> <td>68.33</td> <td>-16.51</td> <td>36.94</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>345</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.73</td> <td>59.70</td> <td>109.88</td> <td>-50.18</td> <td>44.58</td> <td>33.77</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>345</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5722.38</td> <td>65.28</td> <td>116.23</td> <td>-50.95</td> <td>50.15</td> <td>33.79</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>345</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5645.68	53.28	68.20	-14.92	38.42	33.37	11.15	33.83	4.17	345	149	PEAK	2	5650.17	51.82	68.33	-16.51	36.94	33.40	11.14	33.83	4.17	345	149	PEAK	3	5716.73	59.70	109.88	-50.18	44.58	33.77	11.04	33.87	4.18	345	149	PEAK	4	5722.38	65.28	116.23	-50.95	50.15	33.79	11.03	33.87	4.18	345	149	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1" data-bbox="917 1131 1412 1288"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>104.75</td> <td>-----</td> <td>-----</td> <td>89.58</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>345</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5745.00	104.75	-----	-----	89.58	33.88	10.99	33.89	4.19	345	149	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5645.68	53.28	68.20	-14.92	38.42	33.37	11.15	33.83	4.17	345	149	PEAK																																																																																															
2	5650.17	51.82	68.33	-16.51	36.94	33.40	11.14	33.83	4.17	345	149	PEAK																																																																																															
3	5716.73	59.70	109.88	-50.18	44.58	33.77	11.04	33.87	4.18	345	149	PEAK																																																																																															
4	5722.38	65.28	116.23	-50.95	50.15	33.79	11.03	33.87	4.18	345	149	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5745.00	104.75	-----	-----	89.58	33.88	10.99	33.89	4.19	345	149	PEAK																																																																																															
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1" data-bbox="917 1803 1412 1960"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.11</td> <td>-----</td> <td>-----</td> <td>83.94</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>345</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	1	5745.00	99.11	-----	-----	83.94	33.88	10.99	33.89	4.19	345	149	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																																																		
1	5745.00	99.11	-----	-----	83.94	33.88	10.99	33.89	4.19	345	149	AVERAGE																																																																																															



Mode	1																																																																																																																											
	Band Edge																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Vertical	Fundamental																																																																																																																										
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5640.60</td> <td>54.43</td> <td>68.20</td> <td>-13.77</td> <td>39.58</td> <td>33.34</td> <td>11.16</td> <td>33.02</td> <td>4.17</td> <td>136</td> <td>157 PEAK</td> </tr> <tr> <td>2</td> <td>5650.90</td> <td>54.45</td> <td>68.87</td> <td>-14.42</td> <td>39.56</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>136</td> <td>157 PEAK</td> </tr> <tr> <td>3</td> <td>5719.92</td> <td>65.98</td> <td>110.78</td> <td>-44.80</td> <td>50.86</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>136</td> <td>157 PEAK</td> </tr> <tr> <td>4</td> <td>5721.37</td> <td>65.22</td> <td>113.91</td> <td>-48.69</td> <td>50.09</td> <td>33.79</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>136</td> <td>157 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5640.60	54.43	68.20	-13.77	39.58	33.34	11.16	33.02	4.17	136	157 PEAK	2	5650.90	54.45	68.87	-14.42	39.56	33.41	11.14	33.83	4.17	136	157 PEAK	3	5719.92	65.98	110.78	-44.80	50.86	33.78	11.03	33.87	4.18	136	157 PEAK	4	5721.37	65.22	113.91	-48.69	50.09	33.79	11.03	33.87	4.18	136	157 PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.94</td> <td>-----</td> <td>-----</td> <td>93.77</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>136</td> <td>157 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	108.94	-----	-----	93.77	33.88	10.99	33.89	4.19	136	157 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5640.60	54.43	68.20	-13.77	39.58	33.34	11.16	33.02	4.17	136	157 PEAK																																																																																																																	
2	5650.90	54.45	68.87	-14.42	39.56	33.41	11.14	33.83	4.17	136	157 PEAK																																																																																																																	
3	5719.92	65.98	110.78	-44.80	50.86	33.78	11.03	33.87	4.18	136	157 PEAK																																																																																																																	
4	5721.37	65.22	113.91	-48.69	50.09	33.79	11.03	33.87	4.18	136	157 PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	108.94	-----	-----	93.77	33.88	10.99	33.89	4.19	136	157 PEAK																																																																																																																	
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.21</td> <td>-----</td> <td>-----</td> <td>87.04</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>136</td> <td>157 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5745.00	102.21	-----	-----	87.04	33.88	10.99	33.89	4.19	136	157 AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	5745.00	102.21	-----	-----	87.04	33.88	10.99	33.89	4.19	136	157 AVERAGE																																																																																																																	



Mode	1																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-3_5.725-5.85_802.11a_CH149_5745MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal	Vertical																																																																																																																										
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>50.17</td> <td>74.00</td> <td>-23.83</td> <td>33.45</td> <td>38.52</td> <td>15.62</td> <td>39.62</td> <td>2.20</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 11490.00</td> <td>42.18</td> <td>54.00</td> <td>-11.82</td> <td>25.46</td> <td>38.52</td> <td>15.63</td> <td>39.63</td> <td>2.20</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3 17235.00</td> <td>55.23</td> <td>68.20</td> <td>-12.97</td> <td>39.10</td> <td>39.96</td> <td>18.97</td> <td>46.13</td> <td>3.33</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	50.17	74.00	-23.83	33.45	38.52	15.62	39.62	2.20	--	Peak	2 11490.00	42.18	54.00	-11.82	25.46	38.52	15.63	39.63	2.20	--	Average	3 17235.00	55.23	68.20	-12.97	39.10	39.96	18.97	46.13	3.33	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11490.00</td> <td>51.42</td> <td>74.00</td> <td>-22.58</td> <td>34.70</td> <td>38.52</td> <td>15.62</td> <td>39.62</td> <td>2.20</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 11490.00</td> <td>42.15</td> <td>54.00</td> <td>-11.85</td> <td>25.43</td> <td>38.52</td> <td>15.63</td> <td>39.63</td> <td>2.20</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3 17235.00</td> <td>54.90</td> <td>68.20</td> <td>-13.30</td> <td>38.77</td> <td>39.96</td> <td>18.97</td> <td>46.13</td> <td>3.33</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11490.00	51.42	74.00	-22.58	34.70	38.52	15.62	39.62	2.20	--	Peak	2 11490.00	42.15	54.00	-11.85	25.43	38.52	15.63	39.63	2.20	--	Average	3 17235.00	54.90	68.20	-13.30	38.77	39.96	18.97	46.13	3.33	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1 11490.00	50.17	74.00	-23.83	33.45	38.52	15.62	39.62	2.20	--	Peak																																																																																																																		
2 11490.00	42.18	54.00	-11.82	25.46	38.52	15.63	39.63	2.20	--	Average																																																																																																																		
3 17235.00	55.23	68.20	-12.97	39.10	39.96	18.97	46.13	3.33	--	Peak																																																																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1 11490.00	51.42	74.00	-22.58	34.70	38.52	15.62	39.62	2.20	--	Peak																																																																																																																		
2 11490.00	42.15	54.00	-11.85	25.43	38.52	15.63	39.63	2.20	--	Average																																																																																																																		
3 17235.00	54.90	68.20	-13.30	38.77	39.96	18.97	46.13	3.33	--	Peak																																																																																																																		



Mode	2																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.50</td> <td>53.41</td> <td>68.20</td> <td>-14.79</td> <td>38.64</td> <td>33.24</td> <td>11.18</td> <td>33.81</td> <td>4.16</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.14</td> <td>51.14</td> <td>68.30</td> <td>-17.16</td> <td>36.26</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5702.68</td> <td>53.39</td> <td>105.95</td> <td>-52.56</td> <td>38.30</td> <td>33.71</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.62</td> <td>51.51</td> <td>112.21</td> <td>-60.70</td> <td>36.39</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.50	53.41	68.20	-14.79	38.64	33.24	11.18	33.81	4.16	314	155	PEAK	2	5650.14	51.14	68.30	-17.16	36.26	33.40	11.14	33.83	4.17	314	155	PEAK	3	5702.68	53.39	105.95	-52.56	38.30	33.71	11.06	33.86	4.18	314	155	PEAK	4	5720.62	51.51	112.21	-60.70	36.39	33.78	11.03	33.87	4.18	314	155	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>104.26</td> <td>-----</td> <td>-----</td> <td>89.06</td> <td>33.98</td> <td>10.93</td> <td>33.91</td> <td>4.20</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	104.26	-----	-----	89.06	33.98	10.93	33.91	4.20	314	155	PEAK
Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5623.50	53.41	68.20	-14.79	38.64	33.24	11.18	33.81	4.16	314	155	PEAK																																																																																															
2	5650.14	51.14	68.30	-17.16	36.26	33.40	11.14	33.83	4.17	314	155	PEAK																																																																																															
3	5702.68	53.39	105.95	-52.56	38.30	33.71	11.06	33.86	4.18	314	155	PEAK																																																																																															
4	5720.62	51.51	112.21	-60.70	36.39	33.78	11.03	33.87	4.18	314	155	PEAK																																																																																															
Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5785.00	104.26	-----	-----	89.06	33.98	10.93	33.91	4.20	314	155	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>97.64</td> <td>-----</td> <td>-----</td> <td>82.45</td> <td>33.96</td> <td>10.94</td> <td>33.91</td> <td>4.20</td> <td>314</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5785.00	97.64	-----	-----	82.45	33.96	10.94	33.91	4.20	314	155	AVERAGE																																																																								
Peak	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5785.00	97.64	-----	-----	82.45	33.96	10.94	33.91	4.20	314	155	AVERAGE																																																																																															



Mode	2																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																															
ANT	1																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.80</td> <td>52.58</td> <td>111.27</td> <td>-58.69</td> <td>37.35</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.49</td> <td>53.74</td> <td>107.02</td> <td>-53.28</td> <td>38.47</td> <td>33.90</td> <td>11.17</td> <td>33.96</td> <td>4.16</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.92</td> <td>52.05</td> <td>68.26</td> <td>-16.21</td> <td>36.59</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5940.10</td> <td>53.22</td> <td>68.20</td> <td>-14.98</td> <td>37.69</td> <td>33.98</td> <td>11.44</td> <td>34.00</td> <td>4.11</td> <td>314</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.80	52.58	111.27	-58.69	37.35	33.90	11.12	33.95	4.16	314	155	PEAK	2	5868.49	53.74	107.02	-53.28	38.47	33.90	11.17	33.96	4.16	314	155	PEAK	3	5924.92	52.05	68.26	-16.21	36.59	33.95	11.38	33.99	4.12	314	155	PEAK	4	5940.10	53.22	68.20	-14.98	37.69	33.98	11.44	34.00	4.11	314	155	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.80	52.58	111.27	-58.69	37.35	33.90	11.12	33.95	4.16	314	155	PEAK																																																																				
2	5868.49	53.74	107.02	-53.28	38.47	33.90	11.17	33.96	4.16	314	155	PEAK																																																																				
3	5924.92	52.05	68.26	-16.21	36.59	33.95	11.38	33.99	4.12	314	155	PEAK																																																																				
4	5940.10	53.22	68.20	-14.98	37.69	33.98	11.44	34.00	4.11	314	155	PEAK																																																																				



Mode	2																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5633.67</td> <td>53.39</td> <td>68.20</td> <td>-14.81</td> <td>38.57</td> <td>33.30</td> <td>11.17</td> <td>33.02</td> <td>4.17</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.51</td> <td>52.67</td> <td>68.58</td> <td>-15.91</td> <td>37.79</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.09</td> <td>52.33</td> <td>105.22</td> <td>-52.89</td> <td>37.25</td> <td>33.70</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.44</td> <td>52.72</td> <td>111.79</td> <td>-59.07</td> <td>37.60</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5633.67	53.39	68.20	-14.81	38.57	33.30	11.17	33.02	4.17	266	163	PEAK	2	5650.51	52.67	68.58	-15.91	37.79	33.40	11.14	33.83	4.17	266	163	PEAK	3	5700.09	52.33	105.22	-52.89	37.25	33.70	11.06	33.86	4.18	266	163	PEAK	4	5720.44	52.72	111.79	-59.07	37.60	33.78	11.03	33.87	4.18	266	163	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>107.09</td> <td>-----</td> <td>-----</td> <td>91.90</td> <td>33.96</td> <td>10.94</td> <td>33.91</td> <td>4.20</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	107.09	-----	-----	91.90	33.96	10.94	33.91	4.20	266	163	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5633.67	53.39	68.20	-14.81	38.57	33.30	11.17	33.02	4.17	266	163	PEAK																																																																																																											
2	5650.51	52.67	68.58	-15.91	37.79	33.40	11.14	33.83	4.17	266	163	PEAK																																																																																																											
3	5700.09	52.33	105.22	-52.89	37.25	33.70	11.06	33.86	4.18	266	163	PEAK																																																																																																											
4	5720.44	52.72	111.79	-59.07	37.60	33.78	11.03	33.87	4.18	266	163	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5785.00	107.09	-----	-----	91.90	33.96	10.94	33.91	4.20	266	163	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5785.00</td> <td>100.62</td> <td>-----</td> <td>-----</td> <td>85.43</td> <td>33.96</td> <td>10.94</td> <td>33.91</td> <td>4.20</td> <td>266</td> <td>163</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5785.00	100.62	-----	-----	85.43	33.96	10.94	33.91	4.20	266	163	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5785.00	100.62	-----	-----	85.43	33.96	10.94	33.91	4.20	266	163	AVERAGE																																																																																																											



Mode	2																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.47</td> <td>52.46</td> <td>112.02</td> <td>-59.56</td> <td>37.24</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>2 5871.30</td> <td>53.20</td> <td>106.24</td> <td>-53.04</td> <td>37.93</td> <td>33.90</td> <td>11.18</td> <td>33.96</td> <td>4.15</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>3 5924.59</td> <td>51.38</td> <td>68.50</td> <td>-17.12</td> <td>35.92</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> <tr> <td>4 5938.62</td> <td>54.21</td> <td>68.20</td> <td>-13.99</td> <td>38.69</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>266</td> <td>163</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.47	52.46	112.02	-59.56	37.24	33.90	11.11	33.95	4.16	266	163	PEAK	2 5871.30	53.20	106.24	-53.04	37.93	33.90	11.18	33.96	4.15	266	163	PEAK	3 5924.59	51.38	68.50	-17.12	35.92	33.95	11.38	33.99	4.12	266	163	PEAK	4 5938.62	54.21	68.20	-13.99	38.69	33.98	11.43	34.00	4.11	266	163	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	dB	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 5854.47	52.46	112.02	-59.56	37.24	33.90	11.11	33.95	4.16	266	163	PEAK																																																																					
2 5871.30	53.20	106.24	-53.04	37.93	33.90	11.18	33.96	4.15	266	163	PEAK																																																																					
3 5924.59	51.38	68.50	-17.12	35.92	33.95	11.38	33.99	4.12	266	163	PEAK																																																																					
4 5938.62	54.21	68.20	-13.99	38.69	33.98	11.43	34.00	4.11	266	163	PEAK																																																																					






Mode	2																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11a_CH157_5785MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>51.82</td> <td>74.00</td> <td>-22.18</td> <td>35.16</td> <td>38.47</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>42.38</td> <td>54.00</td> <td>-11.62</td> <td>25.73</td> <td>38.46</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>55.31</td> <td>68.20</td> <td>-12.89</td> <td>39.28</td> <td>39.90</td> <td>19.04</td> <td>46.28</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	51.82	74.00	-22.18	35.16	38.47	15.70	39.71	2.20	--	--	Peak	2	11570.00	42.38	54.00	-11.62	25.73	38.46	15.70	39.71	2.20	--	--	Average	3	17355.00	55.31	68.20	-12.89	39.28	39.90	19.04	46.28	3.37	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>52.45</td> <td>74.00</td> <td>-21.55</td> <td>35.79</td> <td>38.47</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>42.36</td> <td>54.00</td> <td>-11.64</td> <td>25.71</td> <td>38.46</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>55.46</td> <td>68.20</td> <td>-12.74</td> <td>39.43</td> <td>39.90</td> <td>19.04</td> <td>46.28</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	52.45	74.00	-21.55	35.79	38.47	15.70	39.71	2.20	--	--	Peak	2	11570.00	42.36	54.00	-11.64	25.71	38.46	15.70	39.71	2.20	--	--	Average	3	17355.00	55.46	68.20	-12.74	39.43	39.90	19.04	46.28	3.37	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11570.00	51.82	74.00	-22.18	35.16	38.47	15.70	39.71	2.20	--	--	Peak																																																																																																																										
2	11570.00	42.38	54.00	-11.62	25.73	38.46	15.70	39.71	2.20	--	--	Average																																																																																																																										
3	17355.00	55.31	68.20	-12.89	39.28	39.90	19.04	46.28	3.37	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11570.00	52.45	74.00	-21.55	35.79	38.47	15.70	39.71	2.20	--	--	Peak																																																																																																																										
2	11570.00	42.36	54.00	-11.64	25.71	38.46	15.70	39.71	2.20	--	--	Average																																																																																																																										
3	17355.00	55.46	68.20	-12.74	39.43	39.90	19.04	46.28	3.37	--	--	Peak																																																																																																																										



Mode	3																																																																																																										
	Band Edge																																																																																																										
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																										
ANT	1																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																									
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.50</td> <td>55.65</td> <td>111.94</td> <td>-56.29</td> <td>40.43</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>304</td> <td>156</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.25</td> <td>52.64</td> <td>105.41</td> <td>-52.77</td> <td>37.36</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>304</td> <td>156</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.50</td> <td>53.11</td> <td>68.57</td> <td>-15.46</td> <td>37.65</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>304</td> <td>156</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.88</td> <td>53.25</td> <td>68.20</td> <td>-14.95</td> <td>37.73</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>304</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5854.50	55.65	111.94	-56.29	40.43	33.90	11.11	33.95	4.16	304	156	PEAK	2	5874.25	52.64	105.41	-52.77	37.36	33.90	11.19	33.96	4.15	304	156	PEAK	3	5924.50	53.11	68.57	-15.46	37.65	33.95	11.38	33.99	4.12	304	156	PEAK	4	5938.88	53.25	68.20	-14.95	37.73	33.98	11.43	34.00	4.11	304	156	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U11) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>103.90</td> <td>-----</td> <td>-----</td> <td>88.70</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>304</td> <td>156</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	103.90	-----	-----	88.70	33.95	11.00	33.93	4.18	304	156	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5854.50	55.65	111.94	-56.29	40.43	33.90	11.11	33.95	4.16	304	156	PEAK																																																																																															
2	5874.25	52.64	105.41	-52.77	37.36	33.90	11.19	33.96	4.15	304	156	PEAK																																																																																															
3	5924.50	53.11	68.57	-15.46	37.65	33.95	11.38	33.99	4.12	304	156	PEAK																																																																																															
4	5938.88	53.25	68.20	-14.95	37.73	33.98	11.43	34.00	4.11	304	156	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	103.90	-----	-----	88.70	33.95	11.00	33.93	4.18	304	156	PEAK																																																																																															
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.03</td> <td>-----</td> <td>-----</td> <td>81.83</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>304</td> <td>156</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5825.00	97.03	-----	-----	81.83	33.95	11.00	33.93	4.18	304	156	AVERAGE																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																		
1	5825.00	97.03	-----	-----	81.83	33.95	11.00	33.93	4.18	304	156	AVERAGE																																																																																															

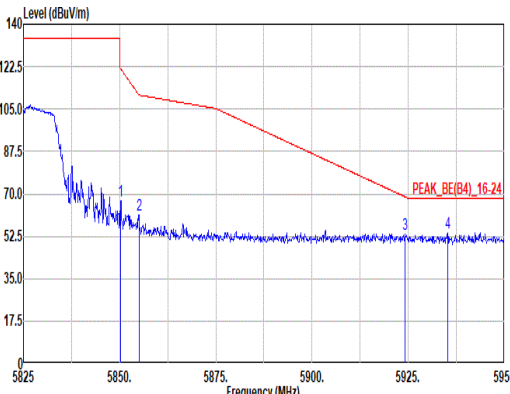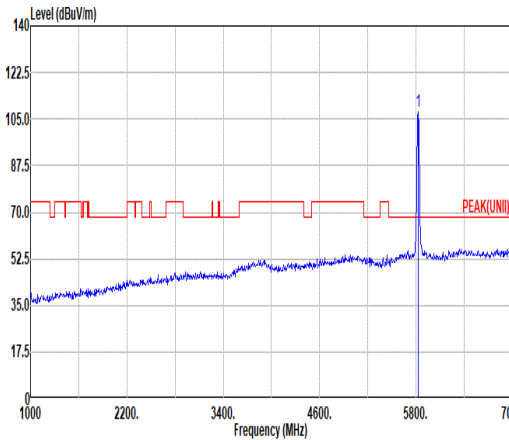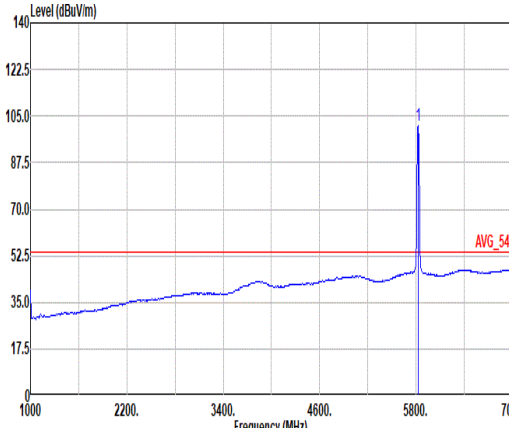

Mode	3																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.25</td> <td>67.05</td> <td>121.63</td> <td>-54.58</td> <td>51.83</td> <td>33.90</td> <td>11.10</td> <td>33.95</td> <td>4.17</td> <td>245</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.00</td> <td>61.21</td> <td>110.80</td> <td>-49.59</td> <td>45.98</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>245</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.25</td> <td>53.61</td> <td>68.75</td> <td>-15.14</td> <td>38.15</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>245</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5935.25</td> <td>54.08</td> <td>68.20</td> <td>-14.12</td> <td>38.58</td> <td>33.97</td> <td>11.42</td> <td>34.00</td> <td>4.11</td> <td>245</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5850.25	67.05	121.63	-54.58	51.83	33.90	11.10	33.95	4.17	245	155	PEAK	2	5855.00	61.21	110.80	-49.59	45.98	33.90	11.12	33.95	4.16	245	155	PEAK	3	5924.25	53.61	68.75	-15.14	38.15	33.95	11.38	33.99	4.12	245	155	PEAK	4	5935.25	54.08	68.20	-14.12	38.58	33.97	11.42	34.00	4.11	245	155	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>107.90</td> <td>-----</td> <td>-----</td> <td>92.70</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>245</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5825.00	107.90	-----	-----	92.70	33.95	11.00	33.93	4.18	245	155	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5850.25	67.05	121.63	-54.58	51.83	33.90	11.10	33.95	4.17	245	155	PEAK																																																																																																											
2	5855.00	61.21	110.80	-49.59	45.98	33.90	11.12	33.95	4.16	245	155	PEAK																																																																																																											
3	5924.25	53.61	68.75	-15.14	38.15	33.95	11.38	33.99	4.12	245	155	PEAK																																																																																																											
4	5935.25	54.08	68.20	-14.12	38.58	33.97	11.42	34.00	4.11	245	155	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5825.00	107.90	-----	-----	92.70	33.95	11.00	33.93	4.18	245	155	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>101.63</td> <td>-----</td> <td>-----</td> <td>86.43</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>245</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5825.00	101.63	-----	-----	86.43	33.95	11.00	33.93	4.18	245	155	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5825.00	101.63	-----	-----	86.43	33.95	11.00	33.93	4.18	245	155	AVERAGE																																																																																																											



Mode	3																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-3_5.725-5.85_802.11a_CH165_5825MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>51.99</td> <td>74.00</td> <td>-22.01</td> <td>35.31</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>41.76</td> <td>54.00</td> <td>-12.24</td> <td>25.08</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>54.22</td> <td>68.20</td> <td>-13.98</td> <td>38.23</td> <td>39.90</td> <td>19.10</td> <td>46.43</td> <td>3.42</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	51.99	74.00	-22.01	35.31	38.50	15.78	39.81	2.21	--	--	Peak	2	11650.00	41.76	54.00	-12.24	25.08	38.50	15.78	39.81	2.21	--	--	Average	3	17475.00	54.22	68.20	-13.98	38.23	39.90	19.10	46.43	3.42	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>51.58</td> <td>74.00</td> <td>-22.42</td> <td>34.90</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>24.65</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>54.36</td> <td>68.20</td> <td>-13.84</td> <td>38.37</td> <td>39.90</td> <td>19.10</td> <td>46.43</td> <td>3.42</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11650.00	51.58	74.00	-22.42	34.90	38.50	15.78	39.81	2.21	--	--	Peak	2	11650.00	41.33	54.00	-12.67	24.65	38.50	15.78	39.81	2.21	--	--	Average	3	17475.00	54.36	68.20	-13.84	38.37	39.90	19.10	46.43	3.42	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11650.00	51.99	74.00	-22.01	35.31	38.50	15.78	39.81	2.21	--	--	Peak																																																																																																																																		
2	11650.00	41.76	54.00	-12.24	25.08	38.50	15.78	39.81	2.21	--	--	Average																																																																																																																																		
3	17475.00	54.22	68.20	-13.98	38.23	39.90	19.10	46.43	3.42	--	--	Peak																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	11650.00	51.58	74.00	-22.42	34.90	38.50	15.78	39.81	2.21	--	--	Peak																																																																																																																																		
2	11650.00	41.33	54.00	-12.67	24.65	38.50	15.78	39.81	2.21	--	--	Average																																																																																																																																		
3	17475.00	54.36	68.20	-13.84	38.37	39.90	19.10	46.43	3.42	--	--	Peak																																																																																																																																		



Mode	4																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11n_HT20_CH149_5745MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5649.01</td> <td>53.25</td> <td>68.20</td> <td>-14.95</td> <td>38.38</td> <td>33.39</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>317</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.62</td> <td>53.00</td> <td>69.40</td> <td>-16.40</td> <td>38.11</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>317</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.71</td> <td>64.46</td> <td>109.60</td> <td>-45.14</td> <td>49.35</td> <td>33.76</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>317</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.50</td> <td>63.52</td> <td>111.93</td> <td>-48.41</td> <td>48.40</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>317</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5649.01	53.25	68.20	-14.95	38.38	33.39	11.14	33.83	4.17	317	150	PEAK	2	5651.62	53.00	69.40	-16.40	38.11	33.41	11.14	33.83	4.17	317	150	PEAK	3	5715.71	64.46	109.60	-45.14	49.35	33.76	11.04	33.87	4.18	317	150	PEAK	4	5720.50	63.52	111.93	-48.41	48.40	33.78	11.03	33.87	4.18	317	150	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>105.63</td> <td>-----</td> <td>-----</td> <td>90.46</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>317</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	105.63	-----	-----	90.46	33.88	10.99	33.89	4.19	317	150	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5649.01	53.25	68.20	-14.95	38.38	33.39	11.14	33.83	4.17	317	150	PEAK																																																																																																											
2	5651.62	53.00	69.40	-16.40	38.11	33.41	11.14	33.83	4.17	317	150	PEAK																																																																																																											
3	5715.71	64.46	109.60	-45.14	49.35	33.76	11.04	33.87	4.18	317	150	PEAK																																																																																																											
4	5720.50	63.52	111.93	-48.41	48.40	33.78	11.03	33.87	4.18	317	150	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	105.63	-----	-----	90.46	33.88	10.99	33.89	4.19	317	150	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>99.69</td> <td>-----</td> <td>-----</td> <td>84.52</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>317</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	99.69	-----	-----	84.52	33.88	10.99	33.89	4.19	317	150	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	99.69	-----	-----	84.52	33.88	10.99	33.89	4.19	317	150	AVERAGE																																																																																																											



Mode	4																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11n_HT20_CH149_5745MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5612.76</td> <td>54.52</td> <td>68.20</td> <td>-13.68</td> <td>39.79</td> <td>33.18</td> <td>11.20</td> <td>33.81</td> <td>4.16</td> <td>227</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.46</td> <td>52.86</td> <td>68.54</td> <td>-15.68</td> <td>37.98</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>227</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5715.57</td> <td>66.73</td> <td>109.56</td> <td>-42.83</td> <td>51.62</td> <td>33.76</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>227</td> <td>155</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.93</td> <td>68.94</td> <td>112.92</td> <td>-43.98</td> <td>53.82</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>227</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5612.76	54.52	68.20	-13.68	39.79	33.18	11.20	33.81	4.16	227	155	PEAK	2	5650.46	52.86	68.54	-15.68	37.98	33.40	11.14	33.83	4.17	227	155	PEAK	3	5715.57	66.73	109.56	-42.83	51.62	33.76	11.04	33.87	4.18	227	155	PEAK	4	5720.93	68.94	112.92	-43.98	53.82	33.78	11.03	33.87	4.18	227	155	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>108.72</td> <td>-----</td> <td>-----</td> <td>93.55</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>227</td> <td>155</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	108.72	-----	-----	93.55	33.88	10.99	33.89	4.19	227	155	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5612.76	54.52	68.20	-13.68	39.79	33.18	11.20	33.81	4.16	227	155	PEAK																																																																																																											
2	5650.46	52.86	68.54	-15.68	37.98	33.40	11.14	33.83	4.17	227	155	PEAK																																																																																																											
3	5715.57	66.73	109.56	-42.83	51.62	33.76	11.04	33.87	4.18	227	155	PEAK																																																																																																											
4	5720.93	68.94	112.92	-43.98	53.82	33.78	11.03	33.87	4.18	227	155	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	108.72	-----	-----	93.55	33.88	10.99	33.89	4.19	227	155	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5745.00</td> <td>102.09</td> <td>-----</td> <td>-----</td> <td>86.92</td> <td>33.88</td> <td>10.99</td> <td>33.89</td> <td>4.19</td> <td>227</td> <td>155</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5745.00	102.09	-----	-----	86.92	33.88	10.99	33.89	4.19	227	155	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5745.00	102.09	-----	-----	86.92	33.88	10.99	33.89	4.19	227	155	AVERAGE																																																																																																											



Mode	4																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH149_5745MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																		
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>51.60</td> <td>74.00</td> <td>-22.40</td> <td>34.88</td> <td>38.52</td> <td>15.62</td> <td>39.62</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>41.34</td> <td>54.00</td> <td>-12.66</td> <td>24.62</td> <td>38.52</td> <td>15.63</td> <td>39.63</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>54.26</td> <td>68.20</td> <td>-13.94</td> <td>38.13</td> <td>39.96</td> <td>18.97</td> <td>46.13</td> <td>3.33</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	1	11490.00	51.60	74.00	-22.40	34.88	38.52	15.62	39.62	2.20	--	--	Peak	2	11490.00	41.34	54.00	-12.66	24.62	38.52	15.63	39.63	2.20	--	--	Average	3	17235.00	54.26	68.20	-13.94	38.13	39.96	18.97	46.13	3.33	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11490.00</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>34.89</td> <td>38.52</td> <td>15.62</td> <td>39.62</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11490.00</td> <td>41.38</td> <td>54.00</td> <td>-12.62</td> <td>24.66</td> <td>38.52</td> <td>15.63</td> <td>39.63</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17235.00</td> <td>53.70</td> <td>68.20</td> <td>-14.50</td> <td>37.57</td> <td>39.96</td> <td>18.97</td> <td>46.13</td> <td>3.33</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	1	11490.00	51.61	74.00	-22.39	34.89	38.52	15.62	39.62	2.20	--	--	Peak	2	11490.00	41.38	54.00	-12.62	24.66	38.52	15.63	39.63	2.20	--	--	Average	3	17235.00	53.70	68.20	-14.50	37.57	39.96	18.97	46.13	3.33	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
1	11490.00	51.60	74.00	-22.40	34.88	38.52	15.62	39.62	2.20	--	--	Peak																																																																																																								
2	11490.00	41.34	54.00	-12.66	24.62	38.52	15.63	39.63	2.20	--	--	Average																																																																																																								
3	17235.00	54.26	68.20	-13.94	38.13	39.96	18.97	46.13	3.33	--	--	Peak																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
1	11490.00	51.61	74.00	-22.39	34.89	38.52	15.62	39.62	2.20	--	--	Peak																																																																																																								
2	11490.00	41.38	54.00	-12.62	24.66	38.52	15.63	39.63	2.20	--	--	Average																																																																																																								
3	17235.00	53.70	68.20	-14.50	37.57	39.96	18.97	46.13	3.33	--	--	Peak																																																																																																								



Mode	5																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5603.33</td> <td>53.43</td> <td>68.20</td> <td>-14.77</td> <td>38.74</td> <td>33.12</td> <td>11.21</td> <td>33.00</td> <td>4.16</td> <td>309</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>2 5650.88</td> <td>52.75</td> <td>68.85</td> <td>-16.10</td> <td>37.86</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>309</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>3 5703.05</td> <td>53.83</td> <td>106.05</td> <td>-52.22</td> <td>38.74</td> <td>33.71</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>309</td> <td>150</td> <td>PEAK</td> </tr> <tr> <td>4 5720.07</td> <td>49.96</td> <td>110.95</td> <td>-60.99</td> <td>34.84</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>309</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5603.33	53.43	68.20	-14.77	38.74	33.12	11.21	33.00	4.16	309	150	PEAK	2 5650.88	52.75	68.85	-16.10	37.86	33.41	11.14	33.83	4.17	309	150	PEAK	3 5703.05	53.83	106.05	-52.22	38.74	33.71	11.06	33.86	4.18	309	150	PEAK	4 5720.07	49.96	110.95	-60.99	34.84	33.78	11.03	33.87	4.18	309	150	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>103.09</td> <td>-----</td> <td>-----</td> <td>88.69</td> <td>33.98</td> <td>10.93</td> <td>33.91</td> <td>4.20</td> <td>309</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5785.00	103.09	-----	-----	88.69	33.98	10.93	33.91	4.20	309	150	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5603.33	53.43	68.20	-14.77	38.74	33.12	11.21	33.00	4.16	309	150	PEAK																																																																																																											
2 5650.88	52.75	68.85	-16.10	37.86	33.41	11.14	33.83	4.17	309	150	PEAK																																																																																																											
3 5703.05	53.83	106.05	-52.22	38.74	33.71	11.06	33.86	4.18	309	150	PEAK																																																																																																											
4 5720.07	49.96	110.95	-60.99	34.84	33.78	11.03	33.87	4.18	309	150	PEAK																																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5785.00	103.09	-----	-----	88.69	33.98	10.93	33.91	4.20	309	150	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>98.38</td> <td>-----</td> <td>-----</td> <td>83.19</td> <td>33.96</td> <td>10.94</td> <td>33.91</td> <td>4.20</td> <td>309</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5785.00	98.38	-----	-----	83.19	33.96	10.94	33.91	4.20	309	150	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1 5785.00	98.38	-----	-----	83.19	33.96	10.94	33.91	4.20	309	150	AVERAGE																																																																																																											



Mode	5																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.96</td> <td>51.65</td> <td>110.09</td> <td>-59.24</td> <td>36.42</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>309</td> <td>150 PEAK</td> </tr> <tr> <td>2 5873.77</td> <td>52.22</td> <td>105.54</td> <td>-53.32</td> <td>36.94</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>309</td> <td>150 PEAK</td> </tr> <tr> <td>3 5924.10</td> <td>52.81</td> <td>68.87</td> <td>-16.06</td> <td>37.35</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>309</td> <td>150 PEAK</td> </tr> <tr> <td>4 5939.28</td> <td>52.60</td> <td>68.20</td> <td>-15.60</td> <td>37.08</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>309</td> <td>150 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.96	51.65	110.09	-59.24	36.42	33.90	11.12	33.95	4.16	309	150 PEAK	2 5873.77	52.22	105.54	-53.32	36.94	33.90	11.19	33.96	4.15	309	150 PEAK	3 5924.10	52.81	68.87	-16.06	37.35	33.95	11.38	33.99	4.12	309	150 PEAK	4 5939.28	52.60	68.20	-15.60	37.08	33.98	11.43	34.00	4.11	309	150 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 5854.96	51.65	110.09	-59.24	36.42	33.90	11.12	33.95	4.16	309	150 PEAK																																																																
2 5873.77	52.22	105.54	-53.32	36.94	33.90	11.19	33.96	4.15	309	150 PEAK																																																																
3 5924.10	52.81	68.87	-16.06	37.35	33.95	11.38	33.99	4.12	309	150 PEAK																																																																
4 5939.28	52.60	68.20	-15.60	37.08	33.98	11.43	34.00	4.11	309	150 PEAK																																																																



Mode	5																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical	Fundamental																																																																																																
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5623.50</td> <td>53.75</td> <td>68.20</td> <td>-14.45</td> <td>38.98</td> <td>33.24</td> <td>11.18</td> <td>33.81</td> <td>4.16</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2 5650.32</td> <td>52.63</td> <td>68.44</td> <td>-15.81</td> <td>37.75</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>3 5704.34</td> <td>54.00</td> <td>106.42</td> <td>-52.42</td> <td>38.90</td> <td>33.72</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>4 5720.07</td> <td>51.92</td> <td>110.95</td> <td>-59.03</td> <td>36.80</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5623.50	53.75	68.20	-14.45	38.98	33.24	11.18	33.81	4.16	239	153	PEAK	2 5650.32	52.63	68.44	-15.81	37.75	33.40	11.14	33.83	4.17	239	153	PEAK	3 5704.34	54.00	106.42	-52.42	38.90	33.72	11.06	33.86	4.18	239	153	PEAK	4 5720.07	51.92	110.95	-59.03	36.80	33.78	11.03	33.87	4.18	239	153	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U)11 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>108.57</td> <td>-----</td> <td>-----</td> <td>93.38</td> <td>33.96</td> <td>10.94</td> <td>33.91</td> <td>4.20</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5785.00	108.57	-----	-----	93.38	33.96	10.94	33.91	4.20	239	153	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																									
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																										
1 5623.50	53.75	68.20	-14.45	38.98	33.24	11.18	33.81	4.16	239	153	PEAK																																																																																							
2 5650.32	52.63	68.44	-15.81	37.75	33.40	11.14	33.83	4.17	239	153	PEAK																																																																																							
3 5704.34	54.00	106.42	-52.42	38.90	33.72	11.06	33.86	4.18	239	153	PEAK																																																																																							
4 5720.07	51.92	110.95	-59.03	36.80	33.78	11.03	33.87	4.18	239	153	PEAK																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																										
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																										
1 5785.00	108.57	-----	-----	93.38	33.96	10.94	33.91	4.20	239	153	PEAK																																																																																							
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5785.00</td> <td>102.06</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>33.98</td> <td>10.93</td> <td>33.91</td> <td>4.20</td> <td>239</td> <td>153</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg	1 5785.00	102.06	-----	-----	86.86	33.98	10.93	33.91	4.20	239	153	AVERAGE																																																																		
Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos	Remark																																																																																										
Freq Level Line Margin	Level	Factor	Loss	Factor	Factor	dB	cm	deg																																																																																										
1 5785.00	102.06	-----	-----	86.86	33.98	10.93	33.91	4.20	239	153	AVERAGE																																																																																							






Mode	5																																																																															
	Band Edge - R																																																																															
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.96</td> <td>51.21</td> <td>110.09</td> <td>-59.68</td> <td>35.98</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5874.60</td> <td>52.55</td> <td>105.31</td> <td>-52.76</td> <td>37.27</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.92</td> <td>54.03</td> <td>68.26</td> <td>-14.23</td> <td>38.57</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5925.09</td> <td>53.87</td> <td>68.20</td> <td>-14.33</td> <td>38.42</td> <td>33.95</td> <td>11.38</td> <td>34.00</td> <td>4.12</td> <td>239</td> <td>153</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5854.96	51.21	110.09	-59.68	35.98	33.90	11.12	33.95	4.16	239	153	PEAK	2	5874.60	52.55	105.31	-52.76	37.27	33.90	11.19	33.96	4.15	239	153	PEAK	3	5924.92	54.03	68.26	-14.23	38.57	33.95	11.38	33.99	4.12	239	153	PEAK	4	5925.09	53.87	68.20	-14.33	38.42	33.95	11.38	34.00	4.12	239	153	PEAK	Blank
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																					
1	5854.96	51.21	110.09	-59.68	35.98	33.90	11.12	33.95	4.16	239	153	PEAK																																																																				
2	5874.60	52.55	105.31	-52.76	37.27	33.90	11.19	33.96	4.15	239	153	PEAK																																																																				
3	5924.92	54.03	68.26	-14.23	38.57	33.95	11.38	33.99	4.12	239	153	PEAK																																																																				
4	5925.09	53.87	68.20	-14.33	38.42	33.95	11.38	34.00	4.12	239	153	PEAK																																																																				



Mode	5																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH157_5785MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>51.55</td> <td>74.00</td> <td>-22.45</td> <td>34.09</td> <td>38.47</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>24.68</td> <td>38.46</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>54.25</td> <td>68.20</td> <td>-13.95</td> <td>38.22</td> <td>39.90</td> <td>19.04</td> <td>46.28</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	51.55	74.00	-22.45	34.09	38.47	15.70	39.71	2.20	--	--	Peak	2	11570.00	41.33	54.00	-12.67	24.68	38.46	15.70	39.71	2.20	--	--	Average	3	17355.00	54.25	68.20	-13.95	38.22	39.90	19.04	46.28	3.37	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11570.00</td> <td>51.29</td> <td>74.00</td> <td>-22.71</td> <td>34.63</td> <td>38.47</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11570.00</td> <td>41.04</td> <td>54.00</td> <td>-12.96</td> <td>24.39</td> <td>38.46</td> <td>15.70</td> <td>39.71</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17355.00</td> <td>54.06</td> <td>68.20</td> <td>-14.14</td> <td>38.03</td> <td>39.90</td> <td>19.04</td> <td>46.28</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11570.00	51.29	74.00	-22.71	34.63	38.47	15.70	39.71	2.20	--	--	Peak	2	11570.00	41.04	54.00	-12.96	24.39	38.46	15.70	39.71	2.20	--	--	Average	3	17355.00	54.06	68.20	-14.14	38.03	39.90	19.04	46.28	3.37	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11570.00	51.55	74.00	-22.45	34.09	38.47	15.70	39.71	2.20	--	--	Peak																																																																																																																										
2	11570.00	41.33	54.00	-12.67	24.68	38.46	15.70	39.71	2.20	--	--	Average																																																																																																																										
3	17355.00	54.25	68.20	-13.95	38.22	39.90	19.04	46.28	3.37	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11570.00	51.29	74.00	-22.71	34.63	38.47	15.70	39.71	2.20	--	--	Peak																																																																																																																										
2	11570.00	41.04	54.00	-12.96	24.39	38.46	15.70	39.71	2.20	--	--	Average																																																																																																																										
3	17355.00	54.06	68.20	-14.14	38.03	39.90	19.04	46.28	3.37	--	--	Peak																																																																																																																										

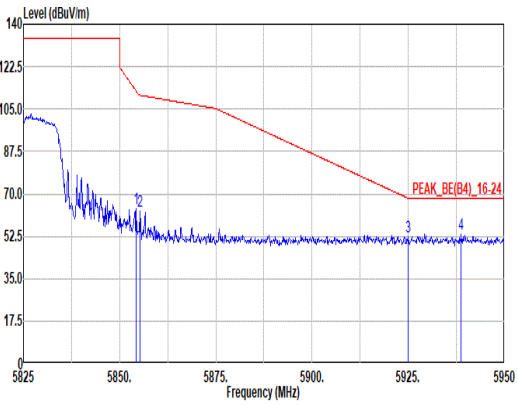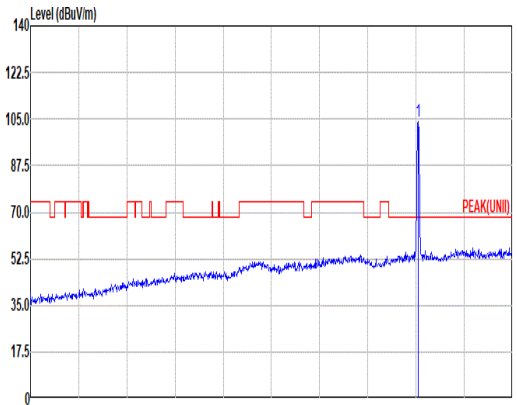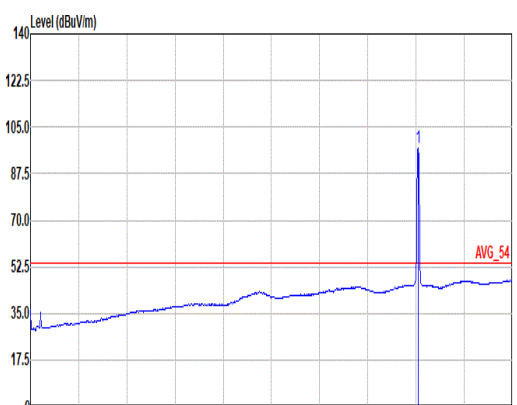

Mode	6																																																																																																																						
	Band Edge																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.25</td> <td>64.00</td> <td>112.51</td> <td>-48.51</td> <td>48.78</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>320</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5855.38</td> <td>62.72</td> <td>110.69</td> <td>-47.97</td> <td>47.49</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>320</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5925.00</td> <td>52.09</td> <td>68.20</td> <td>-16.11</td> <td>36.63</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>320</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5938.75</td> <td>53.16</td> <td>68.20</td> <td>-15.04</td> <td>37.64</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>320</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5854.25	64.00	112.51	-48.51	48.78	33.90	11.11	33.95	4.16	320	154	PEAK	2	5855.38	62.72	110.69	-47.97	47.49	33.90	11.12	33.95	4.16	320	154	PEAK	3	5925.00	52.09	68.20	-16.11	36.63	33.95	11.38	33.99	4.12	320	154	PEAK	4	5938.75	53.16	68.20	-15.04	37.64	33.98	11.43	34.00	4.11	320	154	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>104.04</td> <td>-----</td> <td>-----</td> <td>88.84</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>320</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5825.00	104.04	-----	-----	88.84	33.95	11.00	33.93	4.18	320	154	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5854.25	64.00	112.51	-48.51	48.78	33.90	11.11	33.95	4.16	320	154	PEAK																																																																																																											
2	5855.38	62.72	110.69	-47.97	47.49	33.90	11.12	33.95	4.16	320	154	PEAK																																																																																																											
3	5925.00	52.09	68.20	-16.11	36.63	33.95	11.38	33.99	4.12	320	154	PEAK																																																																																																											
4	5938.75	53.16	68.20	-15.04	37.64	33.98	11.43	34.00	4.11	320	154	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5825.00	104.04	-----	-----	88.84	33.95	11.00	33.93	4.18	320	154	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5825.00</td> <td>97.37</td> <td>-----</td> <td>-----</td> <td>82.17</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>320</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5825.00	97.37	-----	-----	82.17	33.95	11.00	33.93	4.18	320	154	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5825.00	97.37	-----	-----	82.17	33.95	11.00	33.93	4.18	320	154	AVERAGE																																																																																																											



Mode	6																																																																																																																			
	Band Edge																																																																																																																			
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Vertical	Fundamental																																																																																																																		
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5854.88</td> <td>66.88</td> <td>111.00</td> <td>-44.20</td> <td>51.65</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>201</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>2 5855.75</td> <td>66.18</td> <td>110.59</td> <td>-44.41</td> <td>50.95</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>201</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>3 5924.63</td> <td>51.94</td> <td>68.48</td> <td>-16.54</td> <td>36.48</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>201</td> <td>158</td> <td>PEAK</td> </tr> <tr> <td>4 5949.25</td> <td>53.50</td> <td>68.20</td> <td>-14.70</td> <td>37.94</td> <td>34.00</td> <td>11.47</td> <td>34.01</td> <td>4.10</td> <td>201</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5854.88	66.88	111.00	-44.20	51.65	33.90	11.12	33.95	4.16	201	158	PEAK	2 5855.75	66.18	110.59	-44.41	50.95	33.90	11.12	33.95	4.16	201	158	PEAK	3 5924.63	51.94	68.48	-16.54	36.48	33.95	11.38	33.99	4.12	201	158	PEAK	4 5949.25	53.50	68.20	-14.70	37.94	34.00	11.47	34.01	4.10	201	158	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U11) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5825.00</td> <td>108.16</td> <td>-----</td> <td>-----</td> <td>92.96</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>201</td> <td>158</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5825.00	108.16	-----	-----	92.96	33.95	11.00	33.93	4.18	201	158	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																												
1 5854.88	66.88	111.00	-44.20	51.65	33.90	11.12	33.95	4.16	201	158	PEAK																																																																																																									
2 5855.75	66.18	110.59	-44.41	50.95	33.90	11.12	33.95	4.16	201	158	PEAK																																																																																																									
3 5924.63	51.94	68.48	-16.54	36.48	33.95	11.38	33.99	4.12	201	158	PEAK																																																																																																									
4 5949.25	53.50	68.20	-14.70	37.94	34.00	11.47	34.01	4.10	201	158	PEAK																																																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																												
1 5825.00	108.16	-----	-----	92.96	33.95	11.00	33.93	4.18	201	158	PEAK																																																																																																									
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.820kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5825.00</td> <td>101.31</td> <td>-----</td> <td>-----</td> <td>86.11</td> <td>33.95</td> <td>11.00</td> <td>33.93</td> <td>4.18</td> <td>201</td> <td>158</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5825.00	101.31	-----	-----	86.11	33.95	11.00	33.93	4.18	201	158	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																												
1 5825.00	101.31	-----	-----	86.11	33.95	11.00	33.93	4.18	201	158	AVERAGE																																																																																																									



Mode	6																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT20_CH165_5825MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>51.85</td> <td>74.00</td> <td>-22.15</td> <td>35.17</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>41.62</td> <td>54.00</td> <td>-12.38</td> <td>24.94</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>53.69</td> <td>68.20</td> <td>-14.51</td> <td>37.70</td> <td>39.90</td> <td>19.10</td> <td>46.43</td> <td>3.42</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	51.85	74.00	-22.15	35.17	38.50	15.78	39.81	2.21	--	--	Peak	2	11650.00	41.62	54.00	-12.38	24.94	38.50	15.78	39.81	2.21	--	--	Average	3	17475.00	53.69	68.20	-14.51	37.70	39.90	19.10	46.43	3.42	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11650.00</td> <td>52.01</td> <td>74.00</td> <td>-21.99</td> <td>35.33</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11650.00</td> <td>41.77</td> <td>54.00</td> <td>-12.23</td> <td>25.09</td> <td>38.50</td> <td>15.78</td> <td>39.81</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17475.00</td> <td>56.16</td> <td>68.20</td> <td>-12.04</td> <td>40.17</td> <td>39.90</td> <td>19.10</td> <td>46.43</td> <td>3.42</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11650.00	52.01	74.00	-21.99	35.33	38.50	15.78	39.81	2.21	--	--	Peak	2	11650.00	41.77	54.00	-12.23	25.09	38.50	15.78	39.81	2.21	--	--	Average	3	17475.00	56.16	68.20	-12.04	40.17	39.90	19.10	46.43	3.42	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11650.00	51.85	74.00	-22.15	35.17	38.50	15.78	39.81	2.21	--	--	Peak																																																																																																																										
2	11650.00	41.62	54.00	-12.38	24.94	38.50	15.78	39.81	2.21	--	--	Average																																																																																																																										
3	17475.00	53.69	68.20	-14.51	37.70	39.90	19.10	46.43	3.42	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11650.00	52.01	74.00	-21.99	35.33	38.50	15.78	39.81	2.21	--	--	Peak																																																																																																																										
2	11650.00	41.77	54.00	-12.23	25.09	38.50	15.78	39.81	2.21	--	--	Average																																																																																																																										
3	17475.00	56.16	68.20	-12.04	40.17	39.90	19.10	46.43	3.42	--	--	Peak																																																																																																																										



Mode	7																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5622.32</td> <td>54.26</td> <td>68.20</td> <td>-13.94</td> <td>39.49</td> <td>33.23</td> <td>11.19</td> <td>33.81</td> <td>4.16</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.53</td> <td>52.40</td> <td>68.59</td> <td>-16.19</td> <td>37.52</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5719.97</td> <td>74.31</td> <td>110.79</td> <td>-36.48</td> <td>59.19</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5724.31</td> <td>76.06</td> <td>120.63</td> <td>-44.57</td> <td>60.92</td> <td>33.80</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>331</td> <td>146</td> <td></td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5622.32	54.26	68.20	-13.94	39.49	33.23	11.19	33.81	4.16	331	146	PEAK	2	5650.53	52.40	68.59	-16.19	37.52	33.40	11.14	33.83	4.17	331	146	PEAK	3	5719.97	74.31	110.79	-36.48	59.19	33.78	11.03	33.87	4.18	331	146	PEAK	4	5724.31	76.06	120.63	-44.57	60.92	33.80	11.03	33.87	4.18	331	146		<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>102.10</td> <td>-----</td> <td>-----</td> <td>86.92</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	102.10	-----	-----	86.92	33.90	10.98	33.89	4.19	331	146	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5622.32	54.26	68.20	-13.94	39.49	33.23	11.19	33.81	4.16	331	146	PEAK																																																																																																											
2	5650.53	52.40	68.59	-16.19	37.52	33.40	11.14	33.83	4.17	331	146	PEAK																																																																																																											
3	5719.97	74.31	110.79	-36.48	59.19	33.78	11.03	33.87	4.18	331	146	PEAK																																																																																																											
4	5724.31	76.06	120.63	-44.57	60.92	33.80	11.03	33.87	4.18	331	146																																																																																																												
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	102.10	-----	-----	86.92	33.90	10.98	33.89	4.19	331	146	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>96.01</td> <td>-----</td> <td>-----</td> <td>80.83</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>331</td> <td>146</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	96.01	-----	-----	80.83	33.90	10.98	33.89	4.19	331	146	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	96.01	-----	-----	80.83	33.90	10.98	33.89	4.19	331	146	AVERAGE																																																																																																											



Mode	7																																																																					
	Band Edge - R																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																					
ANT	1																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.84</td> <td>50.98</td> <td>111.17</td> <td>-60.19</td> <td>35.75</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>2 5873.17</td> <td>51.91</td> <td>105.71</td> <td>-53.80</td> <td>36.64</td> <td>33.90</td> <td>11.18</td> <td>33.96</td> <td>4.15</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>3 5921.92</td> <td>53.74</td> <td>70.47</td> <td>-16.73</td> <td>38.30</td> <td>33.94</td> <td>11.37</td> <td>33.99</td> <td>4.12</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> <tr> <td>4 5932.65</td> <td>53.73</td> <td>68.20</td> <td>-14.47</td> <td>38.24</td> <td>33.97</td> <td>11.41</td> <td>34.00</td> <td>4.11</td> <td>331</td> <td>146</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5854.84	50.98	111.17	-60.19	35.75	33.90	11.12	33.95	4.16	331	146	PEAK	2 5873.17	51.91	105.71	-53.80	36.64	33.90	11.18	33.96	4.15	331	146	PEAK	3 5921.92	53.74	70.47	-16.73	38.30	33.94	11.37	33.99	4.12	331	146	PEAK	4 5932.65	53.73	68.20	-14.47	38.24	33.97	11.41	34.00	4.11	331	146	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																												
1 5854.84	50.98	111.17	-60.19	35.75	33.90	11.12	33.95	4.16	331	146	PEAK																																																											
2 5873.17	51.91	105.71	-53.80	36.64	33.90	11.18	33.96	4.15	331	146	PEAK																																																											
3 5921.92	53.74	70.47	-16.73	38.30	33.94	11.37	33.99	4.12	331	146	PEAK																																																											
4 5932.65	53.73	68.20	-14.47	38.24	33.97	11.41	34.00	4.11	331	146	PEAK																																																											



Mode	7																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5633.79</td> <td>54.33</td> <td>68.20</td> <td>-13.87</td> <td>39.51</td> <td>33.30</td> <td>11.17</td> <td>33.02</td> <td>4.17</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.69</td> <td>54.07</td> <td>68.71</td> <td>-14.64</td> <td>39.19</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5717.65</td> <td>75.45</td> <td>110.14</td> <td>-34.69</td> <td>60.33</td> <td>33.77</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.90</td> <td>73.74</td> <td>112.85</td> <td>-39.11</td> <td>58.62</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5633.79	54.33	68.20	-13.87	39.51	33.30	11.17	33.02	4.17	104	159	PEAK	2	5650.69	54.07	68.71	-14.64	39.19	33.40	11.14	33.83	4.17	104	159	PEAK	3	5717.65	75.45	110.14	-34.69	60.33	33.77	11.04	33.87	4.18	104	159	PEAK	4	5720.90	73.74	112.85	-39.11	58.62	33.78	11.03	33.87	4.18	104	159	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>106.28</td> <td>-----</td> <td>-----</td> <td>91.10</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	106.28	-----	-----	91.10	33.90	10.98	33.89	4.19	104	159	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5633.79	54.33	68.20	-13.87	39.51	33.30	11.17	33.02	4.17	104	159	PEAK																																																																																																											
2	5650.69	54.07	68.71	-14.64	39.19	33.40	11.14	33.83	4.17	104	159	PEAK																																																																																																											
3	5717.65	75.45	110.14	-34.69	60.33	33.77	11.04	33.87	4.18	104	159	PEAK																																																																																																											
4	5720.90	73.74	112.85	-39.11	58.62	33.78	11.03	33.87	4.18	104	159	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	106.28	-----	-----	91.10	33.90	10.98	33.89	4.19	104	159	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5755.00</td> <td>99.97</td> <td>-----</td> <td>-----</td> <td>84.79</td> <td>33.90</td> <td>10.98</td> <td>33.89</td> <td>4.19</td> <td>104</td> <td>159</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5755.00	99.97	-----	-----	84.79	33.90	10.98	33.89	4.19	104	159	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5755.00	99.97	-----	-----	84.79	33.90	10.98	33.89	4.19	104	159	AVERAGE																																																																																																											






Mode	7																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.84</td> <td>51.82</td> <td>111.17</td> <td>-59.35</td> <td>36.59</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>2 5873.37</td> <td>55.46</td> <td>105.66</td> <td>-50.20</td> <td>40.18</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>3 5923.29</td> <td>53.49</td> <td>69.46</td> <td>-15.97</td> <td>38.04</td> <td>33.95</td> <td>11.37</td> <td>33.99</td> <td>4.12</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> <tr> <td>4 5927.58</td> <td>53.15</td> <td>68.20</td> <td>-15.05</td> <td>37.68</td> <td>33.96</td> <td>11.39</td> <td>34.00</td> <td>4.12</td> <td>104</td> <td>159</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.84	51.82	111.17	-59.35	36.59	33.90	11.12	33.95	4.16	104	159	PEAK	2 5873.37	55.46	105.66	-50.20	40.18	33.90	11.19	33.96	4.15	104	159	PEAK	3 5923.29	53.49	69.46	-15.97	38.04	33.95	11.37	33.99	4.12	104	159	PEAK	4 5927.58	53.15	68.20	-15.05	37.68	33.96	11.39	34.00	4.12	104	159	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5854.84	51.82	111.17	-59.35	36.59	33.90	11.12	33.95	4.16	104	159	PEAK																																																																			
2 5873.37	55.46	105.66	-50.20	40.18	33.90	11.19	33.96	4.15	104	159	PEAK																																																																			
3 5923.29	53.49	69.46	-15.97	38.04	33.95	11.37	33.99	4.12	104	159	PEAK																																																																			
4 5927.58	53.15	68.20	-15.05	37.68	33.96	11.39	34.00	4.12	104	159	PEAK																																																																			



Mode	7																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH151_5755MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>51.82</td> <td>74.00</td> <td>-22.18</td> <td>35.12</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>42.43</td> <td>54.00</td> <td>-11.57</td> <td>25.73</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>54.62</td> <td>68.20</td> <td>-13.58</td> <td>38.46</td> <td>40.00</td> <td>18.99</td> <td>46.17</td> <td>3.34</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11510.00	51.82	74.00	-22.18	35.12	38.50	15.64	39.64	2.20	--	--	Peak	2	11510.00	42.43	54.00	-11.57	25.73	38.50	15.64	39.64	2.20	--	--	Average	3	17265.00	54.62	68.20	-13.58	38.46	40.00	18.99	46.17	3.34	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11510.00</td> <td>51.29</td> <td>74.00</td> <td>-22.71</td> <td>34.59</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11510.00</td> <td>42.52</td> <td>54.00</td> <td>-11.48</td> <td>25.82</td> <td>38.50</td> <td>15.64</td> <td>39.64</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17265.00</td> <td>54.26</td> <td>68.20</td> <td>-13.94</td> <td>38.10</td> <td>40.00</td> <td>18.99</td> <td>46.17</td> <td>3.34</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11510.00	51.29	74.00	-22.71	34.59	38.50	15.64	39.64	2.20	--	--	Peak	2	11510.00	42.52	54.00	-11.48	25.82	38.50	15.64	39.64	2.20	--	--	Average	3	17265.00	54.26	68.20	-13.94	38.10	40.00	18.99	46.17	3.34	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11510.00	51.82	74.00	-22.18	35.12	38.50	15.64	39.64	2.20	--	--	Peak																																																																																																																										
2	11510.00	42.43	54.00	-11.57	25.73	38.50	15.64	39.64	2.20	--	--	Average																																																																																																																										
3	17265.00	54.62	68.20	-13.58	38.46	40.00	18.99	46.17	3.34	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11510.00	51.29	74.00	-22.71	34.59	38.50	15.64	39.64	2.20	--	--	Peak																																																																																																																										
2	11510.00	42.52	54.00	-11.48	25.82	38.50	15.64	39.64	2.20	--	--	Average																																																																																																																										
3	17265.00	54.26	68.20	-13.94	38.10	40.00	18.99	46.17	3.34	--	--	Peak																																																																																																																										

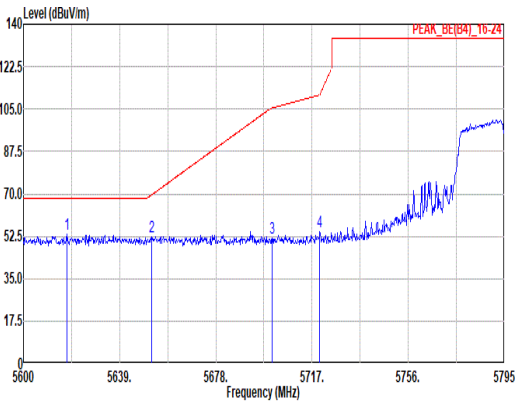
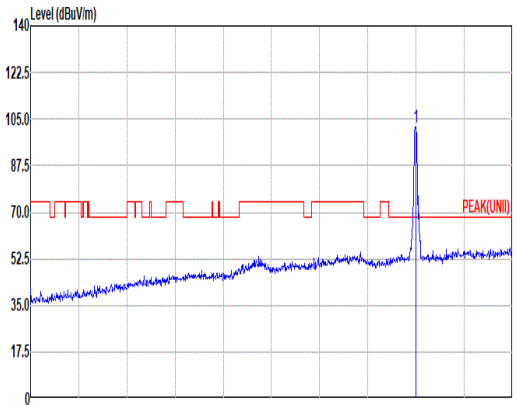
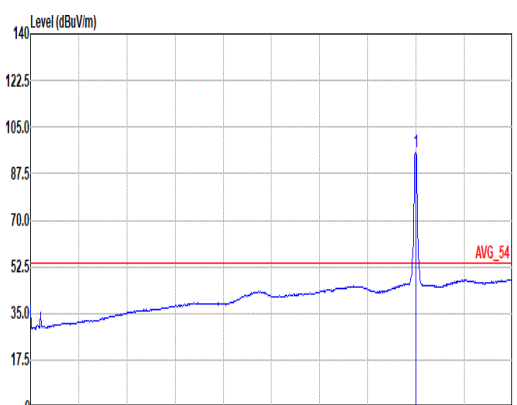


Mode	8																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11n_HT40_CH159_5795MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5617.55</td> <td>53.46</td> <td>68.20</td> <td>-14.74</td> <td>38.71</td> <td>33.21</td> <td>11.19</td> <td>33.81</td> <td>4.16</td> <td>322</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5652.07</td> <td>52.40</td> <td>69.73</td> <td>-17.33</td> <td>37.51</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>322</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.82</td> <td>52.01</td> <td>105.43</td> <td>-53.42</td> <td>36.93</td> <td>33.70</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>322</td> <td>149</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.12</td> <td>54.39</td> <td>111.07</td> <td>-56.68</td> <td>39.27</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>322</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5617.55	53.46	68.20	-14.74	38.71	33.21	11.19	33.81	4.16	322	149	PEAK	2	5652.07	52.40	69.73	-17.33	37.51	33.41	11.14	33.83	4.17	322	149	PEAK	3	5700.82	52.01	105.43	-53.42	36.93	33.70	11.06	33.86	4.18	322	149	PEAK	4	5720.12	54.39	111.07	-56.68	39.27	33.78	11.03	33.87	4.18	322	149	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>101.97</td> <td>-----</td> <td>-----</td> <td>86.78</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>322</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5795.00	101.97	-----	-----	86.78	33.99	10.92	33.92	4.20	322	149	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5617.55	53.46	68.20	-14.74	38.71	33.21	11.19	33.81	4.16	322	149	PEAK																																																																																																											
2	5652.07	52.40	69.73	-17.33	37.51	33.41	11.14	33.83	4.17	322	149	PEAK																																																																																																											
3	5700.82	52.01	105.43	-53.42	36.93	33.70	11.06	33.86	4.18	322	149	PEAK																																																																																																											
4	5720.12	54.39	111.07	-56.68	39.27	33.78	11.03	33.87	4.18	322	149	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5795.00	101.97	-----	-----	86.78	33.99	10.92	33.92	4.20	322	149	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>95.88</td> <td>-----</td> <td>-----</td> <td>80.69</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>322</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5795.00	95.88	-----	-----	80.69	33.99	10.92	33.92	4.20	322	149	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5795.00	95.88	-----	-----	80.69	33.99	10.92	33.92	4.20	322	149	AVERAGE																																																																																																											



Mode	8																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal	Fundamental																																																																			
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5854.99</td> <td>58.35</td> <td>110.83</td> <td>-52.48</td> <td>43.12</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>322 149 PEAK</td> </tr> <tr> <td>2 5872.66</td> <td>54.41</td> <td>105.86</td> <td>-51.45</td> <td>39.14</td> <td>33.90</td> <td>11.18</td> <td>33.96</td> <td>4.15</td> <td>322 149 PEAK</td> </tr> <tr> <td>3 5924.43</td> <td>51.78</td> <td>68.62</td> <td>-16.84</td> <td>36.32</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>322 149 PEAK</td> </tr> <tr> <td>4 5925.67</td> <td>53.00</td> <td>68.20</td> <td>-15.20</td> <td>37.55</td> <td>33.95</td> <td>11.38</td> <td>34.00</td> <td>4.12</td> <td>322 149 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5854.99	58.35	110.83	-52.48	43.12	33.90	11.12	33.95	4.16	322 149 PEAK	2 5872.66	54.41	105.86	-51.45	39.14	33.90	11.18	33.96	4.15	322 149 PEAK	3 5924.43	51.78	68.62	-16.84	36.32	33.95	11.38	33.99	4.12	322 149 PEAK	4 5925.67	53.00	68.20	-15.20	37.55	33.95	11.38	34.00	4.12	322 149 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																													
1 5854.99	58.35	110.83	-52.48	43.12	33.90	11.12	33.95	4.16	322 149 PEAK																																																												
2 5872.66	54.41	105.86	-51.45	39.14	33.90	11.18	33.96	4.15	322 149 PEAK																																																												
3 5924.43	51.78	68.62	-16.84	36.32	33.95	11.38	33.99	4.12	322 149 PEAK																																																												
4 5925.67	53.00	68.20	-15.20	37.55	33.95	11.38	34.00	4.12	322 149 PEAK																																																												

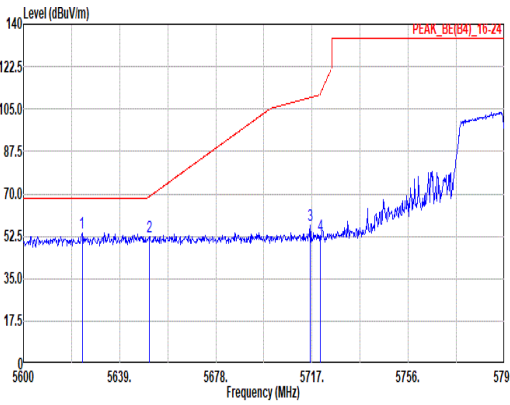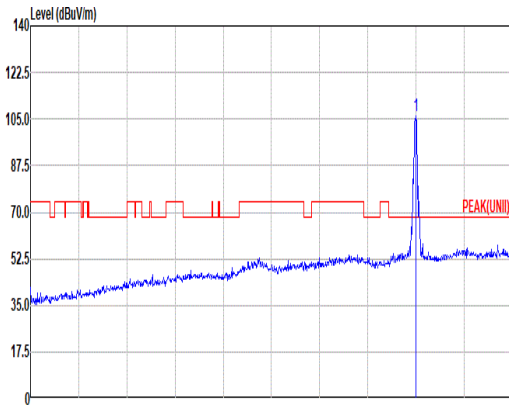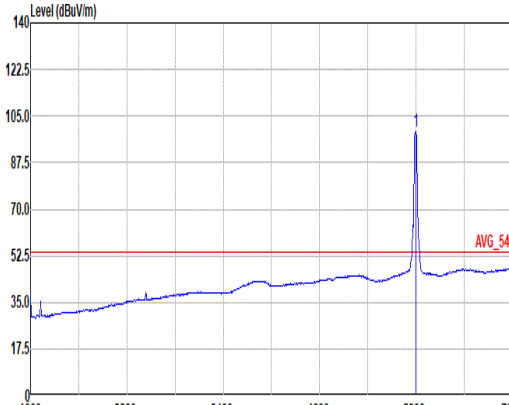

	8																																																																																																																															
Mode	Band Edge - L																																																																																																																															
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Vertical	Fundamental																																																																																																																														
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5623.79</td> <td>53.73</td> <td>68.20</td> <td>-14.47</td> <td>38.96</td> <td>33.24</td> <td>11.18</td> <td>33.81</td> <td>4.16</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.09</td> <td>52.49</td> <td>69.01</td> <td>-16.52</td> <td>37.60</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5716.22</td> <td>56.99</td> <td>109.74</td> <td>-52.75</td> <td>41.88</td> <td>33.76</td> <td>11.04</td> <td>33.87</td> <td>4.18</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.32</td> <td>52.89</td> <td>111.52</td> <td>-58.63</td> <td>37.77</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5623.79	53.73	68.20	-14.47	38.96	33.24	11.18	33.81	4.16	200	164	PEAK	2	5651.09	52.49	69.01	-16.52	37.60	33.41	11.14	33.83	4.17	200	164	PEAK	3	5716.22	56.99	109.74	-52.75	41.88	33.76	11.04	33.87	4.18	200	164	PEAK	4	5720.32	52.89	111.52	-58.63	37.77	33.78	11.03	33.87	4.18	200	164	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>106.01</td> <td>-----</td> <td>-----</td> <td>90.82</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	106.01	-----	-----	90.82	33.99	10.92	33.92	4.20	200	164	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5623.79	53.73	68.20	-14.47	38.96	33.24	11.18	33.81	4.16	200	164	PEAK																																																																																																																				
2	5651.09	52.49	69.01	-16.52	37.60	33.41	11.14	33.83	4.17	200	164	PEAK																																																																																																																				
3	5716.22	56.99	109.74	-52.75	41.88	33.76	11.04	33.87	4.18	200	164	PEAK																																																																																																																				
4	5720.32	52.89	111.52	-58.63	37.77	33.78	11.03	33.87	4.18	200	164	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5795.00	106.01	-----	-----	90.82	33.99	10.92	33.92	4.20	200	164	PEAK																																																																																																																				
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.600kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5795.00</td> <td>99.33</td> <td>-----</td> <td>-----</td> <td>84.14</td> <td>33.99</td> <td>10.92</td> <td>33.92</td> <td>4.20</td> <td>200</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5795.00	99.33	-----	-----	84.14	33.99	10.92	33.92	4.20	200	164	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	Apos	Tpos																																																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Remark																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5795.00	99.33	-----	-----	84.14	33.99	10.92	33.92	4.20	200	164	AVERAGE																																																																																																																				






Mode	8																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5854.83</td> <td>60.38</td> <td>111.19</td> <td>-50.81</td> <td>45.15</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>2 5874.67</td> <td>57.99</td> <td>105.29</td> <td>-47.30</td> <td>42.71</td> <td>33.90</td> <td>11.19</td> <td>33.96</td> <td>4.15</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>3 5923.96</td> <td>52.14</td> <td>68.97</td> <td>-16.83</td> <td>36.69</td> <td>33.95</td> <td>11.37</td> <td>33.99</td> <td>4.12</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>4 5927.53</td> <td>53.37</td> <td>68.20</td> <td>-14.83</td> <td>37.90</td> <td>33.96</td> <td>11.39</td> <td>34.00</td> <td>4.12</td> <td>200</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5854.83	60.38	111.19	-50.81	45.15	33.90	11.12	33.95	4.16	200	164	PEAK	2 5874.67	57.99	105.29	-47.30	42.71	33.90	11.19	33.96	4.15	200	164	PEAK	3 5923.96	52.14	68.97	-16.83	36.69	33.95	11.37	33.99	4.12	200	164	PEAK	4 5927.53	53.37	68.20	-14.83	37.90	33.96	11.39	34.00	4.12	200	164	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5854.83	60.38	111.19	-50.81	45.15	33.90	11.12	33.95	4.16	200	164	PEAK																																																																			
2 5874.67	57.99	105.29	-47.30	42.71	33.90	11.19	33.96	4.15	200	164	PEAK																																																																			
3 5923.96	52.14	68.97	-16.83	36.69	33.95	11.37	33.99	4.12	200	164	PEAK																																																																			
4 5927.53	53.37	68.20	-14.83	37.90	33.96	11.39	34.00	4.12	200	164	PEAK																																																																			



Mode	8																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11n HT40_CH159_5795MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>52.72</td> <td>74.00</td> <td>-21.28</td> <td>36.09</td> <td>38.43</td> <td>15.72</td> <td>39.73</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>42.32</td> <td>54.00</td> <td>-11.68</td> <td>25.71</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>56.08</td> <td>68.20</td> <td>-12.12</td> <td>40.05</td> <td>39.90</td> <td>19.06</td> <td>46.32</td> <td>3.39</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	52.72	74.00	-21.28	36.09	38.43	15.72	39.73	2.21	--	--	Peak	2	11590.00	42.32	54.00	-11.68	25.71	38.42	15.72	39.74	2.21	--	--	Average	3	17385.00	56.08	68.20	-12.12	40.05	39.90	19.06	46.32	3.39	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11590.00</td> <td>52.97</td> <td>74.00</td> <td>-21.03</td> <td>36.34</td> <td>38.43</td> <td>15.72</td> <td>39.73</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11590.00</td> <td>42.47</td> <td>54.00</td> <td>-11.53</td> <td>25.86</td> <td>38.42</td> <td>15.72</td> <td>39.74</td> <td>2.21</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17385.00</td> <td>54.91</td> <td>68.20</td> <td>-13.29</td> <td>38.88</td> <td>39.90</td> <td>19.06</td> <td>46.32</td> <td>3.39</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11590.00	52.97	74.00	-21.03	36.34	38.43	15.72	39.73	2.21	--	--	Peak	2	11590.00	42.47	54.00	-11.53	25.86	38.42	15.72	39.74	2.21	--	--	Average	3	17385.00	54.91	68.20	-13.29	38.88	39.90	19.06	46.32	3.39	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11590.00	52.72	74.00	-21.28	36.09	38.43	15.72	39.73	2.21	--	--	Peak																																																																																																																										
2	11590.00	42.32	54.00	-11.68	25.71	38.42	15.72	39.74	2.21	--	--	Average																																																																																																																										
3	17385.00	56.08	68.20	-12.12	40.05	39.90	19.06	46.32	3.39	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11590.00	52.97	74.00	-21.03	36.34	38.43	15.72	39.73	2.21	--	--	Peak																																																																																																																										
2	11590.00	42.47	54.00	-11.53	25.86	38.42	15.72	39.74	2.21	--	--	Average																																																																																																																										
3	17385.00	54.91	68.20	-13.29	38.88	39.90	19.06	46.32	3.39	--	--	Peak																																																																																																																										

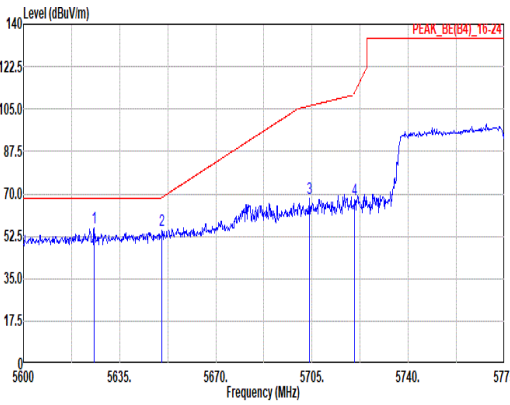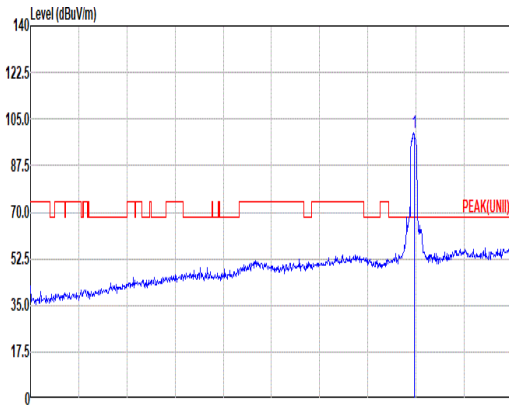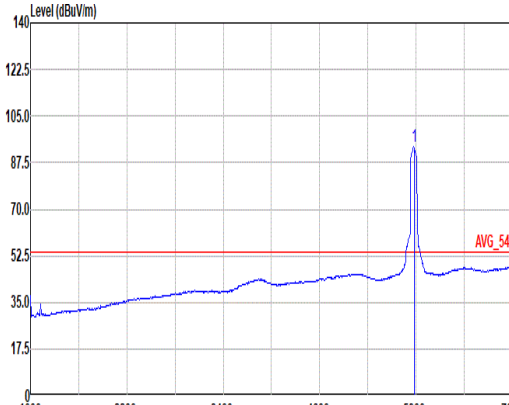

	9																																																																																																																						
Mode	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Horizontal	Fundamental																																																																																																																					
Peak	 <p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5625.73</td> <td>56.08</td> <td>68.20</td> <td>-12.12</td> <td>41.30</td> <td>33.25</td> <td>11.18</td> <td>33.02</td> <td>4.17</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.40</td> <td>54.90</td> <td>68.50</td> <td>-13.60</td> <td>40.02</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.95</td> <td>68.01</td> <td>106.31</td> <td>-38.30</td> <td>52.91</td> <td>33.72</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.40</td> <td>67.58</td> <td>111.71</td> <td>-44.13</td> <td>52.46</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5625.73	56.08	68.20	-12.12	41.30	33.25	11.18	33.02	4.17	316	152	PEAK	2	5650.40	54.90	68.50	-13.60	40.02	33.40	11.14	33.83	4.17	316	152	PEAK	3	5703.95	68.01	106.31	-38.30	52.91	33.72	11.06	33.86	4.18	316	152	PEAK	4	5720.40	67.58	111.71	-44.13	52.46	33.78	11.03	33.87	4.18	316	152	PEAK	 <p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>99.96</td> <td>-----</td> <td>-----</td> <td>84.77</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5775.00	99.96	-----	-----	84.77	33.94	10.96	33.90	4.19	316	152	PEAK
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5625.73	56.08	68.20	-12.12	41.30	33.25	11.18	33.02	4.17	316	152	PEAK																																																																																																											
2	5650.40	54.90	68.50	-13.60	40.02	33.40	11.14	33.83	4.17	316	152	PEAK																																																																																																											
3	5703.95	68.01	106.31	-38.30	52.91	33.72	11.06	33.86	4.18	316	152	PEAK																																																																																																											
4	5720.40	67.58	111.71	-44.13	52.46	33.78	11.03	33.87	4.18	316	152	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5775.00	99.96	-----	-----	84.77	33.94	10.96	33.90	4.19	316	152	PEAK																																																																																																											
Avg	Blank	 <p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.35</td> <td>-----</td> <td>-----</td> <td>78.16</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>316</td> <td>152</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5775.00	93.35	-----	-----	78.16	33.94	10.96	33.90	4.19	316	152	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5775.00	93.35	-----	-----	78.16	33.94	10.96	33.90	4.19	316	152	AVERAGE																																																																																																											



Mode	9																																																																									
	Band Edge - R																																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.45</td> <td>61.76</td> <td>112.05</td> <td>-50.29</td> <td>46.54</td> <td>33.90</td> <td>11.11</td> <td>33.95</td> <td>4.16</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5868.45</td> <td>61.65</td> <td>107.03</td> <td>-45.38</td> <td>46.38</td> <td>33.90</td> <td>11.17</td> <td>33.96</td> <td>4.16</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5924.63</td> <td>52.18</td> <td>68.48</td> <td>-16.30</td> <td>36.72</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5930.58</td> <td>53.85</td> <td>68.20</td> <td>-14.35</td> <td>38.37</td> <td>33.96</td> <td>11.40</td> <td>34.00</td> <td>4.12</td> <td>316</td> <td>152</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg	1	5854.45	61.76	112.05	-50.29	46.54	33.90	11.11	33.95	4.16	316	152	PEAK	2	5868.45	61.65	107.03	-45.38	46.38	33.90	11.17	33.96	4.16	316	152	PEAK	3	5924.63	52.18	68.48	-16.30	36.72	33.95	11.38	33.99	4.12	316	152	PEAK	4	5930.58	53.85	68.20	-14.35	38.37	33.96	11.40	34.00	4.12	316	152	PEAK	Blank
Peak	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
MHz	Level	Line	Level	Loss	Factor	Factor	dB	cm	deg																																																																	
1	5854.45	61.76	112.05	-50.29	46.54	33.90	11.11	33.95	4.16	316	152	PEAK																																																														
2	5868.45	61.65	107.03	-45.38	46.38	33.90	11.17	33.96	4.16	316	152	PEAK																																																														
3	5924.63	52.18	68.48	-16.30	36.72	33.95	11.38	33.99	4.12	316	152	PEAK																																																														
4	5930.58	53.85	68.20	-14.35	38.37	33.96	11.40	34.00	4.12	316	152	PEAK																																																														



Mode	9																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5631.85</td> <td>57.63</td> <td>68.20</td> <td>-10.57</td> <td>42.82</td> <td>33.29</td> <td>11.17</td> <td>33.82</td> <td>4.17</td> <td>204</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.05</td> <td>59.58</td> <td>68.24</td> <td>-8.66</td> <td>44.70</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>204</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.45</td> <td>70.01</td> <td>105.33</td> <td>-35.32</td> <td>54.93</td> <td>33.70</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>204</td> <td>164</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.05</td> <td>71.85</td> <td>110.91</td> <td>-39.06</td> <td>56.73</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>204</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5631.85	57.63	68.20	-10.57	42.82	33.29	11.17	33.82	4.17	204	164	PEAK	2	5650.05	59.58	68.24	-8.66	44.70	33.40	11.14	33.83	4.17	204	164	PEAK	3	5700.45	70.01	105.33	-35.32	54.93	33.70	11.06	33.86	4.18	204	164	PEAK	4	5720.05	71.85	110.91	-39.06	56.73	33.78	11.03	33.87	4.18	204	164	PEAK	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>103.20</td> <td>-----</td> <td>-----</td> <td>88.01</td> <td>33.95</td> <td>10.95</td> <td>33.91</td> <td>4.20</td> <td>204</td> <td>164</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	103.20	-----	-----	88.01	33.95	10.95	33.91	4.20	204	164	PEAK
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5631.85	57.63	68.20	-10.57	42.82	33.29	11.17	33.82	4.17	204	164	PEAK																																																																																																											
2	5650.05	59.58	68.24	-8.66	44.70	33.40	11.14	33.83	4.17	204	164	PEAK																																																																																																											
3	5700.45	70.01	105.33	-35.32	54.93	33.70	11.06	33.86	4.18	204	164	PEAK																																																																																																											
4	5720.05	71.85	110.91	-39.06	56.73	33.78	11.03	33.87	4.18	204	164	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	103.20	-----	-----	88.01	33.95	10.95	33.91	4.20	204	164	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>96.70</td> <td>-----</td> <td>-----</td> <td>81.51</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>204</td> <td>164</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	96.70	-----	-----	81.51	33.94	10.96	33.90	4.19	204	164	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	96.70	-----	-----	81.51	33.94	10.96	33.90	4.19	204	164	AVERAGE																																																																																																											



Mode	9																																																																				
	Band Edge - R																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																				
ANT	1																																																																				
Pol.	Vertical	Fundamental																																																																			
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5854.98</td> <td>62.37</td> <td>110.86</td> <td>-48.49</td> <td>47.14</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>204 164 PEAK</td> </tr> <tr> <td>2 5869.15</td> <td>66.91</td> <td>106.84</td> <td>-39.93</td> <td>51.64</td> <td>33.90</td> <td>11.17</td> <td>33.96</td> <td>4.16</td> <td>204 164 PEAK</td> </tr> <tr> <td>3 5924.98</td> <td>53.90</td> <td>68.22</td> <td>-14.32</td> <td>38.44</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>204 164 PEAK</td> </tr> <tr> <td>4 5927.25</td> <td>55.43</td> <td>68.20</td> <td>-12.77</td> <td>39.97</td> <td>33.95</td> <td>11.39</td> <td>34.00</td> <td>4.12</td> <td>204 164 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5854.98	62.37	110.86	-48.49	47.14	33.90	11.12	33.95	4.16	204 164 PEAK	2 5869.15	66.91	106.84	-39.93	51.64	33.90	11.17	33.96	4.16	204 164 PEAK	3 5924.98	53.90	68.22	-14.32	38.44	33.95	11.38	33.99	4.12	204 164 PEAK	4 5927.25	55.43	68.20	-12.77	39.97	33.95	11.39	34.00	4.12	204 164 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																													
1 5854.98	62.37	110.86	-48.49	47.14	33.90	11.12	33.95	4.16	204 164 PEAK																																																												
2 5869.15	66.91	106.84	-39.93	51.64	33.90	11.17	33.96	4.16	204 164 PEAK																																																												
3 5924.98	53.90	68.22	-14.32	38.44	33.95	11.38	33.99	4.12	204 164 PEAK																																																												
4 5927.25	55.43	68.20	-12.77	39.97	33.95	11.39	34.00	4.12	204 164 PEAK																																																												



Mode	9																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>51.85</td> <td>74.00</td> <td>-22.15</td> <td>35.16</td> <td>38.49</td> <td>15.69</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.35</td> <td>54.00</td> <td>-11.65</td> <td>25.66</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>55.49</td> <td>68.20</td> <td>-12.71</td> <td>39.41</td> <td>39.94</td> <td>19.02</td> <td>46.25</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	51.85	74.00	-22.15	35.16	38.49	15.69	39.69	2.20	--	--	Peak	2	11550.00	42.35	54.00	-11.65	25.66	38.50	15.68	39.69	2.20	--	--	Average	3	17325.00	55.49	68.20	-12.71	39.41	39.94	19.02	46.25	3.37	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>51.27</td> <td>74.00</td> <td>-22.73</td> <td>34.58</td> <td>38.49</td> <td>15.69</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>42.29</td> <td>54.00</td> <td>-11.71</td> <td>25.60</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>54.07</td> <td>68.20</td> <td>-14.13</td> <td>37.99</td> <td>39.94</td> <td>19.02</td> <td>46.25</td> <td>3.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	51.27	74.00	-22.73	34.58	38.49	15.69	39.69	2.20	--	--	Peak	2	11550.00	42.29	54.00	-11.71	25.60	38.50	15.68	39.69	2.20	--	--	Average	3	17325.00	54.07	68.20	-14.13	37.99	39.94	19.02	46.25	3.37	--	--	Peak
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11550.00	51.85	74.00	-22.15	35.16	38.49	15.69	39.69	2.20	--	--	Peak																																																																																																																										
2	11550.00	42.35	54.00	-11.65	25.66	38.50	15.68	39.69	2.20	--	--	Average																																																																																																																										
3	17325.00	55.49	68.20	-12.71	39.41	39.94	19.02	46.25	3.37	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11550.00	51.27	74.00	-22.73	34.58	38.49	15.69	39.69	2.20	--	--	Peak																																																																																																																										
2	11550.00	42.29	54.00	-11.71	25.60	38.50	15.68	39.69	2.20	--	--	Average																																																																																																																										
3	17325.00	54.07	68.20	-14.13	37.99	39.94	19.02	46.25	3.37	--	--	Peak																																																																																																																										



Mode	10																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>72.68</td><td>25.58</td><td>40.00</td><td>-14.42</td><td>43.86</td><td>12.88</td><td>1.48</td><td>32.72</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>141.55</td><td>34.23</td><td>43.50</td><td>-9.27</td><td>47.47</td><td>17.46</td><td>1.84</td><td>32.70</td><td>0.16</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>264.74</td><td>29.85</td><td>46.00</td><td>-16.15</td><td>40.04</td><td>19.90</td><td>2.44</td><td>32.76</td><td>0.15</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>347.19</td><td>39.13</td><td>46.00</td><td>-6.87</td><td>48.79</td><td>20.29</td><td>2.76</td><td>32.81</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>757.50</td><td>29.62</td><td>46.00</td><td>-16.38</td><td>30.01</td><td>28.38</td><td>3.92</td><td>32.83</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>959.26</td><td>32.63</td><td>46.00</td><td>-13.37</td><td>28.39</td><td>31.20</td><td>4.32</td><td>31.54</td><td>0.26</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	72.68	25.58	40.00	-14.42	43.86	12.88	1.48	32.72	0.08	--	--	Peak	2	141.55	34.23	43.50	-9.27	47.47	17.46	1.84	32.70	0.16	--	--	Peak	3	264.74	29.85	46.00	-16.15	40.04	19.90	2.44	32.76	0.15	--	--	Peak	4	347.19	39.13	46.00	-6.87	48.79	20.29	2.76	32.81	0.10	--	--	Peak	5	757.50	29.62	46.00	-16.38	30.01	28.38	3.92	32.83	0.14	--	--	Peak	6	959.26	32.63	46.00	-13.37	28.39	31.20	4.32	31.54	0.26	--	--	Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.97</td><td>33.67</td><td>40.00</td><td>-6.33</td><td>41.32</td><td>24.03</td><td>1.07</td><td>32.75</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>136.70</td><td>36.18</td><td>43.50</td><td>-7.32</td><td>49.23</td><td>17.69</td><td>1.82</td><td>32.70</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>258.92</td><td>29.26</td><td>46.00</td><td>-16.74</td><td>39.69</td><td>19.75</td><td>2.41</td><td>32.75</td><td>0.16</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>347.19</td><td>33.31</td><td>46.00</td><td>-12.69</td><td>42.97</td><td>20.29</td><td>2.76</td><td>32.81</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>735.19</td><td>31.45</td><td>46.00</td><td>-14.55</td><td>32.19</td><td>28.14</td><td>3.86</td><td>32.88</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>958.29</td><td>34.27</td><td>46.00</td><td>-11.73</td><td>30.06</td><td>31.19</td><td>4.31</td><td>31.55</td><td>0.26</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	30.97	33.67	40.00	-6.33	41.32	24.03	1.07	32.75	0.00	--	--	Peak	2	136.70	36.18	43.50	-7.32	49.23	17.69	1.82	32.70	0.14	--	--	Peak	3	258.92	29.26	46.00	-16.74	39.69	19.75	2.41	32.75	0.16	--	--	Peak	4	347.19	33.31	46.00	-12.69	42.97	20.29	2.76	32.81	0.10	--	--	Peak	5	735.19	31.45	46.00	-14.55	32.19	28.14	3.86	32.88	0.14	--	--	Peak	6	958.29	34.27	46.00	-11.73	30.06	31.19	4.31	31.55	0.26	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	72.68	25.58	40.00	-14.42	43.86	12.88	1.48	32.72	0.08	--	--	Peak																																																																																																																																																																												
2	141.55	34.23	43.50	-9.27	47.47	17.46	1.84	32.70	0.16	--	--	Peak																																																																																																																																																																												
3	264.74	29.85	46.00	-16.15	40.04	19.90	2.44	32.76	0.15	--	--	Peak																																																																																																																																																																												
4	347.19	39.13	46.00	-6.87	48.79	20.29	2.76	32.81	0.10	--	--	Peak																																																																																																																																																																												
5	757.50	29.62	46.00	-16.38	30.01	28.38	3.92	32.83	0.14	--	--	Peak																																																																																																																																																																												
6	959.26	32.63	46.00	-13.37	28.39	31.20	4.32	31.54	0.26	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	30.97	33.67	40.00	-6.33	41.32	24.03	1.07	32.75	0.00	--	--	Peak																																																																																																																																																																												
2	136.70	36.18	43.50	-7.32	49.23	17.69	1.82	32.70	0.14	--	--	Peak																																																																																																																																																																												
3	258.92	29.26	46.00	-16.74	39.69	19.75	2.41	32.75	0.16	--	--	Peak																																																																																																																																																																												
4	347.19	33.31	46.00	-12.69	42.97	20.29	2.76	32.81	0.10	--	--	Peak																																																																																																																																																																												
5	735.19	31.45	46.00	-14.55	32.19	28.14	3.86	32.88	0.14	--	--	Peak																																																																																																																																																																												
6	958.29	34.27	46.00	-11.73	30.06	31.19	4.31	31.55	0.26	--	--	Peak																																																																																																																																																																												



<SKU6>

Mode	11																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal	Fundamental																																																																																																																															
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5601.05</td> <td>52.09</td> <td>68.20</td> <td>-16.11</td> <td>37.40</td> <td>33.11</td> <td>11.22</td> <td>33.00</td> <td>4.16</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5651.28</td> <td>52.14</td> <td>69.15</td> <td>-17.01</td> <td>37.25</td> <td>33.41</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5700.80</td> <td>54.92</td> <td>105.42</td> <td>-50.50</td> <td>39.84</td> <td>33.70</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.85</td> <td>56.95</td> <td>110.91</td> <td>-53.96</td> <td>41.83</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5601.05	52.09	68.20	-16.11	37.40	33.11	11.22	33.00	4.16	305	319	PEAK	2	5651.28	52.14	69.15	-17.01	37.25	33.41	11.14	33.83	4.17	305	319	PEAK	3	5700.80	54.92	105.42	-50.50	39.84	33.70	11.06	33.86	4.18	305	319	PEAK	4	5720.85	56.95	110.91	-53.96	41.83	33.78	11.03	33.87	4.18	305	319	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>93.94</td> <td>-----</td> <td>-----</td> <td>78.75</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	93.94	-----	-----	78.75	33.94	10.96	33.90	4.19	305	319	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5601.05	52.09	68.20	-16.11	37.40	33.11	11.22	33.00	4.16	305	319	PEAK																																																																																																																					
2	5651.28	52.14	69.15	-17.01	37.25	33.41	11.14	33.83	4.17	305	319	PEAK																																																																																																																					
3	5700.80	54.92	105.42	-50.50	39.84	33.70	11.06	33.86	4.18	305	319	PEAK																																																																																																																					
4	5720.85	56.95	110.91	-53.96	41.83	33.78	11.03	33.87	4.18	305	319	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	93.94	-----	-----	78.75	33.94	10.96	33.90	4.19	305	319	PEAK																																																																																																																					
Avg	Blank																																																																																																																																
	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>86.70</td> <td>-----</td> <td>-----</td> <td>71.51</td> <td>33.95</td> <td>10.95</td> <td>33.91</td> <td>4.20</td> <td>305</td> <td>319</td> <td>AVERAGE</td> </tr> </tbody> </table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	86.70	-----	-----	71.51	33.95	10.95	33.91	4.20	305	319	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	5775.00	86.70	-----	-----	71.51	33.95	10.95	33.91	4.20	305	319	AVERAGE																																																																																																																					



Mode	11																																																																												
	Band Edge - R																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																												
ANT	1																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5854.98</td> <td>49.83</td> <td>110.86</td> <td>-61.03</td> <td>34.60</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>2 5872.30</td> <td>51.74</td> <td>105.95</td> <td>-54.21</td> <td>36.47</td> <td>33.90</td> <td>11.18</td> <td>33.96</td> <td>4.15</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>3 5924.28</td> <td>51.28</td> <td>68.73</td> <td>-17.45</td> <td>35.82</td> <td>33.95</td> <td>11.38</td> <td>33.99</td> <td>4.12</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> <tr> <td>4 5940.73</td> <td>52.08</td> <td>68.20</td> <td>-16.12</td> <td>36.55</td> <td>33.98</td> <td>11.44</td> <td>34.00</td> <td>4.11</td> <td>305</td> <td>319</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5854.98	49.83	110.86	-61.03	34.60	33.90	11.12	33.95	4.16	305	319	PEAK	2 5872.30	51.74	105.95	-54.21	36.47	33.90	11.18	33.96	4.15	305	319	PEAK	3 5924.28	51.28	68.73	-17.45	35.82	33.95	11.38	33.99	4.12	305	319	PEAK	4 5940.73	52.08	68.20	-16.12	36.55	33.98	11.44	34.00	4.11	305	319	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																					
1 5854.98	49.83	110.86	-61.03	34.60	33.90	11.12	33.95	4.16	305	319	PEAK																																																																		
2 5872.30	51.74	105.95	-54.21	36.47	33.90	11.18	33.96	4.15	305	319	PEAK																																																																		
3 5924.28	51.28	68.73	-17.45	35.82	33.95	11.38	33.99	4.12	305	319	PEAK																																																																		
4 5940.73	52.08	68.20	-16.12	36.55	33.98	11.44	34.00	4.11	305	319	PEAK																																																																		



Mode	11																																																																																																																						
	Band Edge - L																																																																																																																						
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																						
ANT	1																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5626.60</td> <td>52.64</td> <td>68.20</td> <td>-15.56</td> <td>37.85</td> <td>33.26</td> <td>11.18</td> <td>33.82</td> <td>4.17</td> <td>311</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5650.23</td> <td>52.15</td> <td>68.37</td> <td>-16.22</td> <td>37.27</td> <td>33.40</td> <td>11.14</td> <td>33.83</td> <td>4.17</td> <td>311</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>5703.08</td> <td>59.23</td> <td>106.06</td> <td>-46.83</td> <td>44.14</td> <td>33.71</td> <td>11.06</td> <td>33.86</td> <td>4.18</td> <td>311</td> <td>154</td> <td>PEAK</td> </tr> <tr> <td>4</td> <td>5720.23</td> <td>59.16</td> <td>111.31</td> <td>-52.15</td> <td>44.04</td> <td>33.78</td> <td>11.03</td> <td>33.87</td> <td>4.18</td> <td>311</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5626.60	52.64	68.20	-15.56	37.85	33.26	11.18	33.82	4.17	311	154	PEAK	2	5650.23	52.15	68.37	-16.22	37.27	33.40	11.14	33.83	4.17	311	154	PEAK	3	5703.08	59.23	106.06	-46.83	44.14	33.71	11.06	33.86	4.18	311	154	PEAK	4	5720.23	59.16	111.31	-52.15	44.04	33.78	11.03	33.87	4.18	311	154	PEAK	<p>Site : 03CH23-HY Condition: PEAK(U-NII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>98.74</td> <td>-----</td> <td>-----</td> <td>83.55</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>311</td> <td>154</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	98.74	-----	-----	83.55	33.94	10.96	33.90	4.19	311	154	PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5626.60	52.64	68.20	-15.56	37.85	33.26	11.18	33.82	4.17	311	154	PEAK																																																																																																											
2	5650.23	52.15	68.37	-16.22	37.27	33.40	11.14	33.83	4.17	311	154	PEAK																																																																																																											
3	5703.08	59.23	106.06	-46.83	44.14	33.71	11.06	33.86	4.18	311	154	PEAK																																																																																																											
4	5720.23	59.16	111.31	-52.15	44.04	33.78	11.03	33.87	4.18	311	154	PEAK																																																																																																											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	98.74	-----	-----	83.55	33.94	10.96	33.90	4.19	311	154	PEAK																																																																																																											
Avg	Blank	<p>Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5775.00</td> <td>91.90</td> <td>-----</td> <td>-----</td> <td>76.79</td> <td>33.94</td> <td>10.96</td> <td>33.90</td> <td>4.19</td> <td>311</td> <td>154</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5775.00	91.90	-----	-----	76.79	33.94	10.96	33.90	4.19	311	154	AVERAGE																																																																														
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																												
1	5775.00	91.90	-----	-----	76.79	33.94	10.96	33.90	4.19	311	154	AVERAGE																																																																																																											



Mode	11																																																																	
	Band Edge - R																																																																	
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																	
ANT	1																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<p>Site : 03CH23-HY Condition: PEAK_BE(B4)_16-24 3m DRH18-E_LE2C05A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th colspan="2">Limit</th> <th rowspan="2">Read Level</th> <th rowspan="2">Ant Factor</th> <th rowspan="2">Cable Loss</th> <th rowspan="2">Preamp Factor</th> <th rowspan="2">Aux Factor</th> <th rowspan="2">APos</th> <th rowspan="2">TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5854.98</td> <td>53.50</td> <td>110.86</td> <td>-57.36</td> <td>38.27</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>311</td> <td>154 PEAK</td> </tr> <tr> <td>2</td> <td>5857.25</td> <td>61.50</td> <td>110.17</td> <td>-48.67</td> <td>46.27</td> <td>33.90</td> <td>11.12</td> <td>33.95</td> <td>4.16</td> <td>311</td> <td>154 PEAK</td> </tr> <tr> <td>3</td> <td>5923.58</td> <td>51.73</td> <td>69.25</td> <td>-17.52</td> <td>36.28</td> <td>33.95</td> <td>11.37</td> <td>33.99</td> <td>4.12</td> <td>311</td> <td>154 PEAK</td> </tr> <tr> <td>4</td> <td>5938.28</td> <td>52.83</td> <td>68.20</td> <td>-15.37</td> <td>37.31</td> <td>33.98</td> <td>11.43</td> <td>34.00</td> <td>4.11</td> <td>311</td> <td>154 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dB	dBuV	dB/m	1	5854.98	53.50	110.86	-57.36	38.27	33.90	11.12	33.95	4.16	311	154 PEAK	2	5857.25	61.50	110.17	-48.67	46.27	33.90	11.12	33.95	4.16	311	154 PEAK	3	5923.58	51.73	69.25	-17.52	36.28	33.95	11.37	33.99	4.12	311	154 PEAK	4	5938.28	52.83	68.20	-15.37	37.31	33.98	11.43	34.00	4.11	311	154 PEAK	Blank
Freq	Level			Limit										Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																													
		dBuV/m	dB	dBuV	dB/m																																																													
1	5854.98	53.50	110.86	-57.36	38.27	33.90	11.12	33.95	4.16	311	154 PEAK																																																							
2	5857.25	61.50	110.17	-48.67	46.27	33.90	11.12	33.95	4.16	311	154 PEAK																																																							
3	5923.58	51.73	69.25	-17.52	36.28	33.95	11.37	33.99	4.12	311	154 PEAK																																																							
4	5938.28	52.83	68.20	-15.37	37.31	33.98	11.43	34.00	4.11	311	154 PEAK																																																							



Mode	11																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																				
Peak Avg	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>50.71</td> <td>74.00</td> <td>-23.29</td> <td>34.02</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>40.45</td> <td>54.00</td> <td>-13.55</td> <td>23.76</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>51.55</td> <td>68.20</td> <td>-16.65</td> <td>35.47</td> <td>39.95</td> <td>19.02</td> <td>46.25</td> <td>3.36</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	50.71	74.00	-23.29	34.02	38.50	15.68	39.69	2.20	--	--	Peak	2	11550.00	40.45	54.00	-13.55	23.76	38.50	15.68	39.69	2.20	--	--	Average	3	17325.00	51.55	68.20	-16.65	35.47	39.95	19.02	46.25	3.36	--	--	Peak	<p>Site : 03CH23-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C05A18EN_230712 VERTICAL</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11550.00</td> <td>50.09</td> <td>74.00</td> <td>-23.91</td> <td>33.40</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>11550.00</td> <td>39.76</td> <td>54.00</td> <td>-14.24</td> <td>23.07</td> <td>38.50</td> <td>15.68</td> <td>39.69</td> <td>2.20</td> <td>--</td> <td>--</td> <td>Average</td> </tr> <tr> <td>3</td> <td>17325.00</td> <td>50.90</td> <td>68.20</td> <td>-17.30</td> <td>34.82</td> <td>39.95</td> <td>19.02</td> <td>46.25</td> <td>3.36</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	11550.00	50.09	74.00	-23.91	33.40	38.50	15.68	39.69	2.20	--	--	Peak	2	11550.00	39.76	54.00	-14.24	23.07	38.50	15.68	39.69	2.20	--	--	Average	3	17325.00	50.90	68.20	-17.30	34.82	39.95	19.02	46.25	3.36	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11550.00	50.71	74.00	-23.29	34.02	38.50	15.68	39.69	2.20	--	--	Peak																																																																																																																										
2	11550.00	40.45	54.00	-13.55	23.76	38.50	15.68	39.69	2.20	--	--	Average																																																																																																																										
3	17325.00	51.55	68.20	-16.65	35.47	39.95	19.02	46.25	3.36	--	--	Peak																																																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																														
1	11550.00	50.09	74.00	-23.91	33.40	38.50	15.68	39.69	2.20	--	--	Peak																																																																																																																										
2	11550.00	39.76	54.00	-14.24	23.07	38.50	15.68	39.69	2.20	--	--	Average																																																																																																																										
3	17325.00	50.90	68.20	-17.30	34.82	39.95	19.02	46.25	3.36	--	--	Peak																																																																																																																										





Mode	11																																																																																																																																																																																							
	LF																																																																																																																																																																																							
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																																																																							
ANT	1																																																																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																																																																						
QP/ Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>72.68</td><td>25.43</td><td>40.00</td><td>-14.57</td><td>43.71</td><td>12.88</td><td>1.48</td><td>32.72</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>96.93</td><td>32.01</td><td>43.50</td><td>-11.49</td><td>47.18</td><td>15.86</td><td>1.57</td><td>32.69</td><td>0.09</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>135.73</td><td>32.97</td><td>43.50</td><td>-10.53</td><td>45.99</td><td>17.73</td><td>1.81</td><td>32.70</td><td>0.14</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>296.75</td><td>35.76</td><td>46.00</td><td>-10.24</td><td>46.70</td><td>19.15</td><td>2.59</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>347.19</td><td>38.02</td><td>46.00</td><td>-7.98</td><td>47.68</td><td>20.29</td><td>2.76</td><td>32.81</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>896.21</td><td>32.35</td><td>46.00</td><td>-13.65</td><td>31.00</td><td>29.05</td><td>4.24</td><td>32.15</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	72.68	25.43	40.00	-14.57	43.71	12.88	1.48	32.72	0.08	--	--	Peak	2	96.93	32.01	43.50	-11.49	47.18	15.86	1.57	32.69	0.09	--	--	Peak	3	135.73	32.97	43.50	-10.53	45.99	17.73	1.81	32.70	0.14	--	--	Peak	4	296.75	35.76	46.00	-10.24	46.70	19.15	2.59	32.78	0.10	--	--	Peak	5	347.19	38.02	46.00	-7.98	47.68	20.29	2.76	32.81	0.10	--	--	Peak	6	896.21	32.35	46.00	-13.65	31.00	29.05	4.24	32.15	0.21	--	--	Peak	<p>Site : 03CH23-HY Condition: QP 3m LF_633038001_231015 VERTICAL</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Factor (dB)</th> <th>Aux Factor (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>33.28</td><td>40.00</td><td>-6.72</td><td>41.57</td><td>23.40</td><td>1.06</td><td>32.75</td><td>0.00</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>2</td><td>72.68</td><td>29.67</td><td>40.00</td><td>-10.33</td><td>47.95</td><td>12.88</td><td>1.48</td><td>32.72</td><td>0.08</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>3</td><td>137.67</td><td>36.79</td><td>43.50</td><td>-6.71</td><td>49.91</td><td>17.61</td><td>1.82</td><td>32.70</td><td>0.15</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>4</td><td>296.75</td><td>32.31</td><td>46.00</td><td>-13.69</td><td>43.25</td><td>19.15</td><td>2.59</td><td>32.78</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>5</td><td>347.19</td><td>32.12</td><td>46.00</td><td>-13.88</td><td>41.78</td><td>20.29</td><td>2.76</td><td>32.81</td><td>0.10</td><td>--</td><td>--</td><td>Peak</td></tr> <tr><td>6</td><td>896.21</td><td>35.88</td><td>46.00</td><td>-10.12</td><td>34.53</td><td>29.05</td><td>4.24</td><td>32.15</td><td>0.21</td><td>--</td><td>--</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark	1	32.91	33.28	40.00	-6.72	41.57	23.40	1.06	32.75	0.00	--	--	Peak	2	72.68	29.67	40.00	-10.33	47.95	12.88	1.48	32.72	0.08	--	--	Peak	3	137.67	36.79	43.50	-6.71	49.91	17.61	1.82	32.70	0.15	--	--	Peak	4	296.75	32.31	46.00	-13.69	43.25	19.15	2.59	32.78	0.10	--	--	Peak	5	347.19	32.12	46.00	-13.88	41.78	20.29	2.76	32.81	0.10	--	--	Peak	6	896.21	35.88	46.00	-10.12	34.53	29.05	4.24	32.15	0.21	--	--	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	72.68	25.43	40.00	-14.57	43.71	12.88	1.48	32.72	0.08	--	--	Peak																																																																																																																																																																												
2	96.93	32.01	43.50	-11.49	47.18	15.86	1.57	32.69	0.09	--	--	Peak																																																																																																																																																																												
3	135.73	32.97	43.50	-10.53	45.99	17.73	1.81	32.70	0.14	--	--	Peak																																																																																																																																																																												
4	296.75	35.76	46.00	-10.24	46.70	19.15	2.59	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	347.19	38.02	46.00	-7.98	47.68	20.29	2.76	32.81	0.10	--	--	Peak																																																																																																																																																																												
6	896.21	32.35	46.00	-13.65	31.00	29.05	4.24	32.15	0.21	--	--	Peak																																																																																																																																																																												
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Aux Factor (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																																												
1	32.91	33.28	40.00	-6.72	41.57	23.40	1.06	32.75	0.00	--	--	Peak																																																																																																																																																																												
2	72.68	29.67	40.00	-10.33	47.95	12.88	1.48	32.72	0.08	--	--	Peak																																																																																																																																																																												
3	137.67	36.79	43.50	-6.71	49.91	17.61	1.82	32.70	0.15	--	--	Peak																																																																																																																																																																												
4	296.75	32.31	46.00	-13.69	43.25	19.15	2.59	32.78	0.10	--	--	Peak																																																																																																																																																																												
5	347.19	32.12	46.00	-13.88	41.78	20.29	2.76	32.81	0.10	--	--	Peak																																																																																																																																																																												
6	896.21	35.88	46.00	-10.12	34.53	29.05	4.24	32.15	0.21	--	--	Peak																																																																																																																																																																												



Appendix D. Duty Cycle Plots

<SKU5>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11a	97.54	1390	0.72	750Hz
5GHz 802.11n HT20	97.38	1300	0.77	820Hz
5GHz 802.11n HT40	94.74	648	1.54	1.6kHz
5GHz 802.11ac VHT80	90.25	324	3.09	3.3KHz

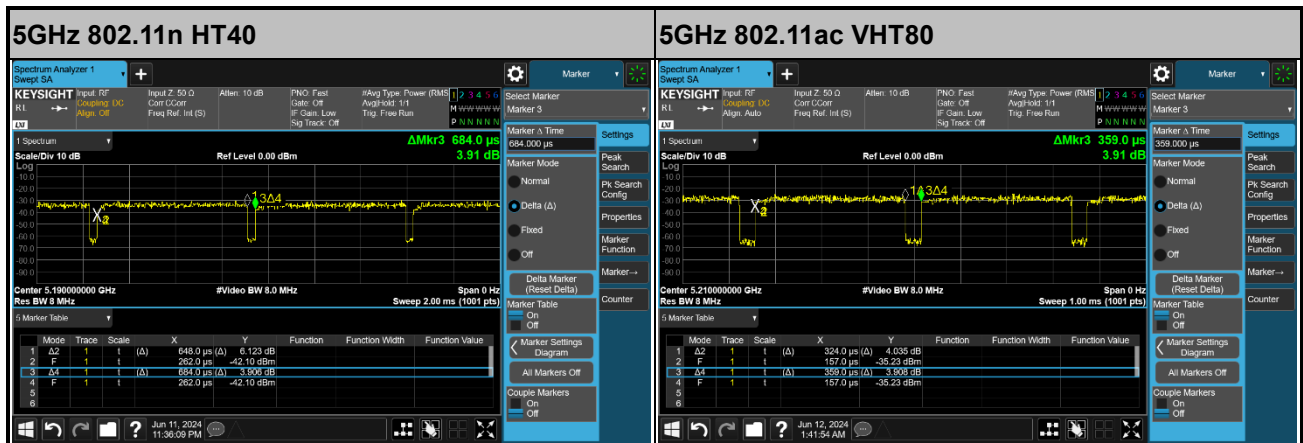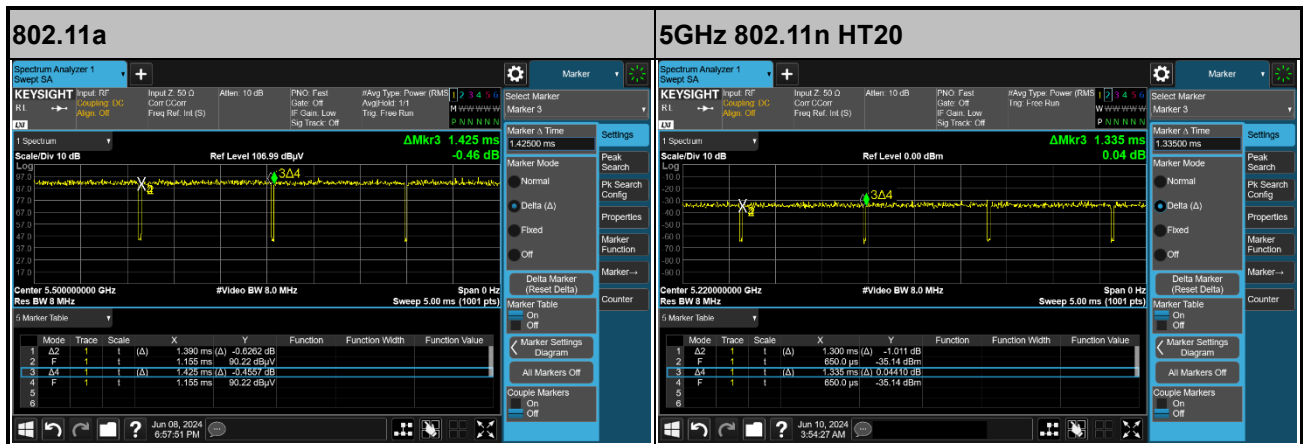



<SKU6>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
5GHz 802.11ac VHT80	90.50	324	3.09	3.3KHz

