

ELITE ELECTRONIC ENGINEERING CO

MKR 843.8 MHz
-4.10 dBm

REF 7.0 dBm


ATTEN 20 dB + 20 dB EXT

10 dB/

OFFSET
-10.0
dB

DL
-33.0
dBm

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED : FCC-22 ANTENNA CONDUCTED EMISSIONS
MODE : FM @ 836.5MHz
NOTES : INPUT

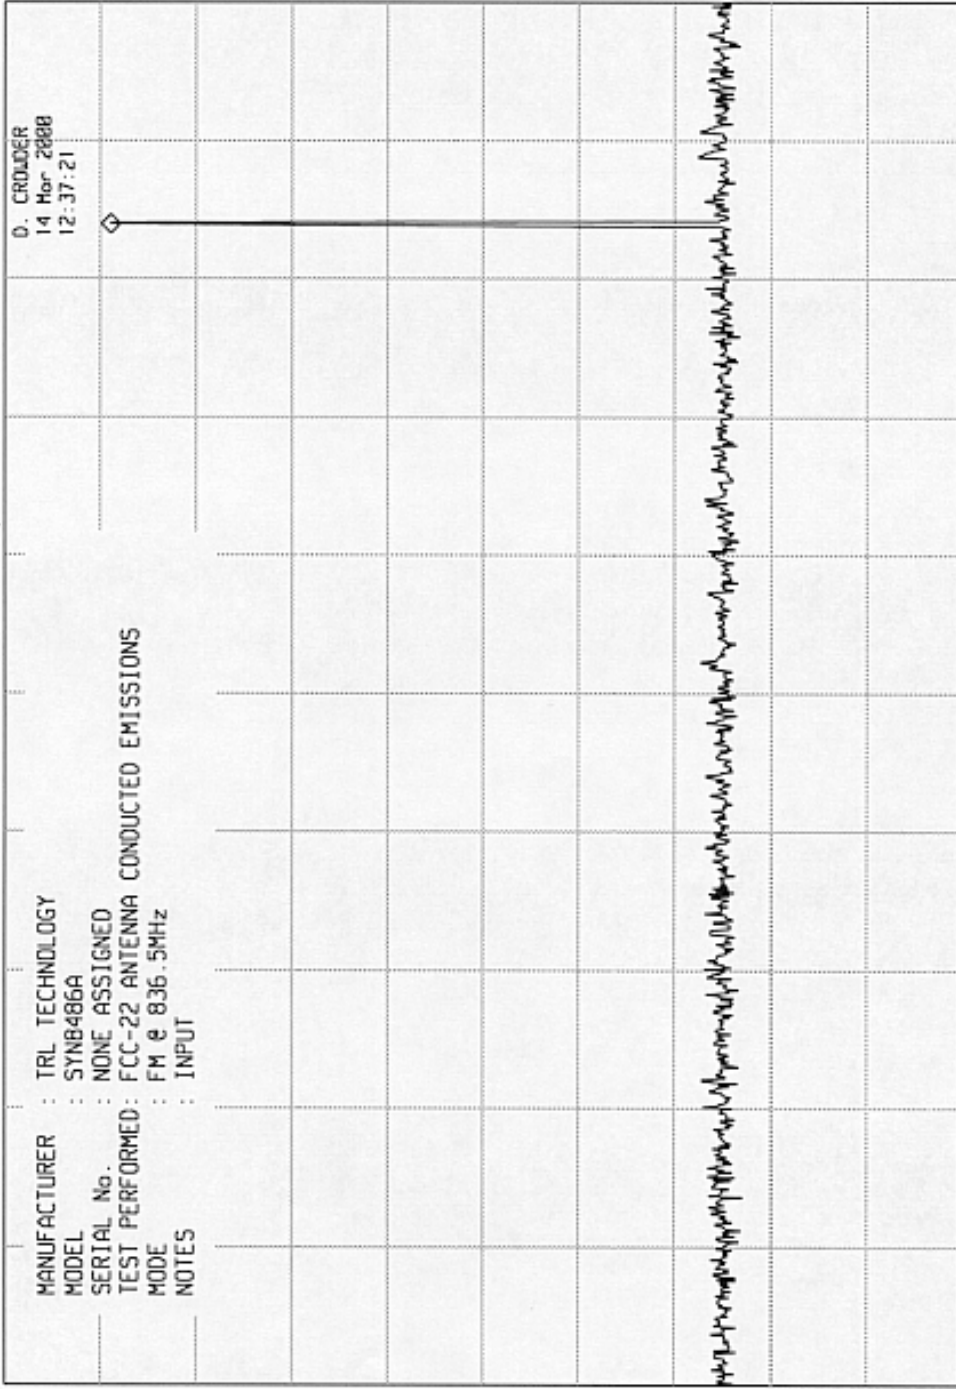

D. CROUDER
14 Mar 2000
12:37:21

Handwritten notes: The signal is a narrowband FM signal. The carrier frequency is 843.8 MHz. The modulation is FM. The signal is received from an antenna. The signal is strong and clear.

START 30 MHz RES BW 100 kHz UBW 300 kHz STOP 1.000 GHz
SWP 291 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 1.677 GHz
-15.50 dBm

REF 7.0 dBm ATTN 20 dB + 20 dB EXT


hP

10 dB/

OFFSET
-10.0
dB

DL
-33.0
dBm

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED : FCC-22 ANTENNA CONDUCTED EMISSIONS
MODE : FM @ 836.5MHz
NOTES : INPUT

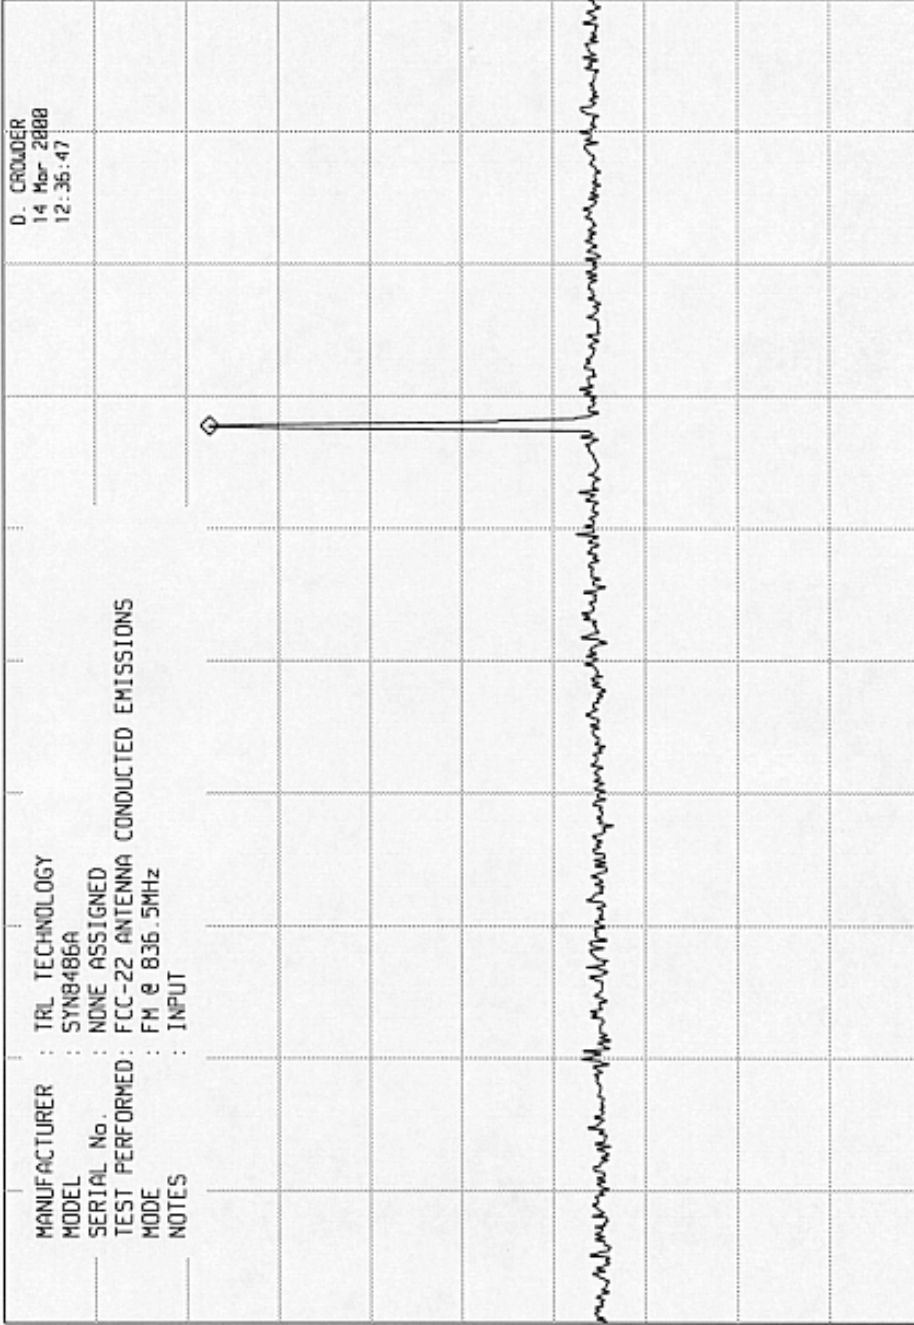

START 1.00 GHz
RES BW 1 MHz


UBW 3 MHz

STOP 2.00 GHz
SWP 25.0 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 17.55 GHz
-47.50 dBm

REF 7.0 dBm ATTN 20 dB Ext

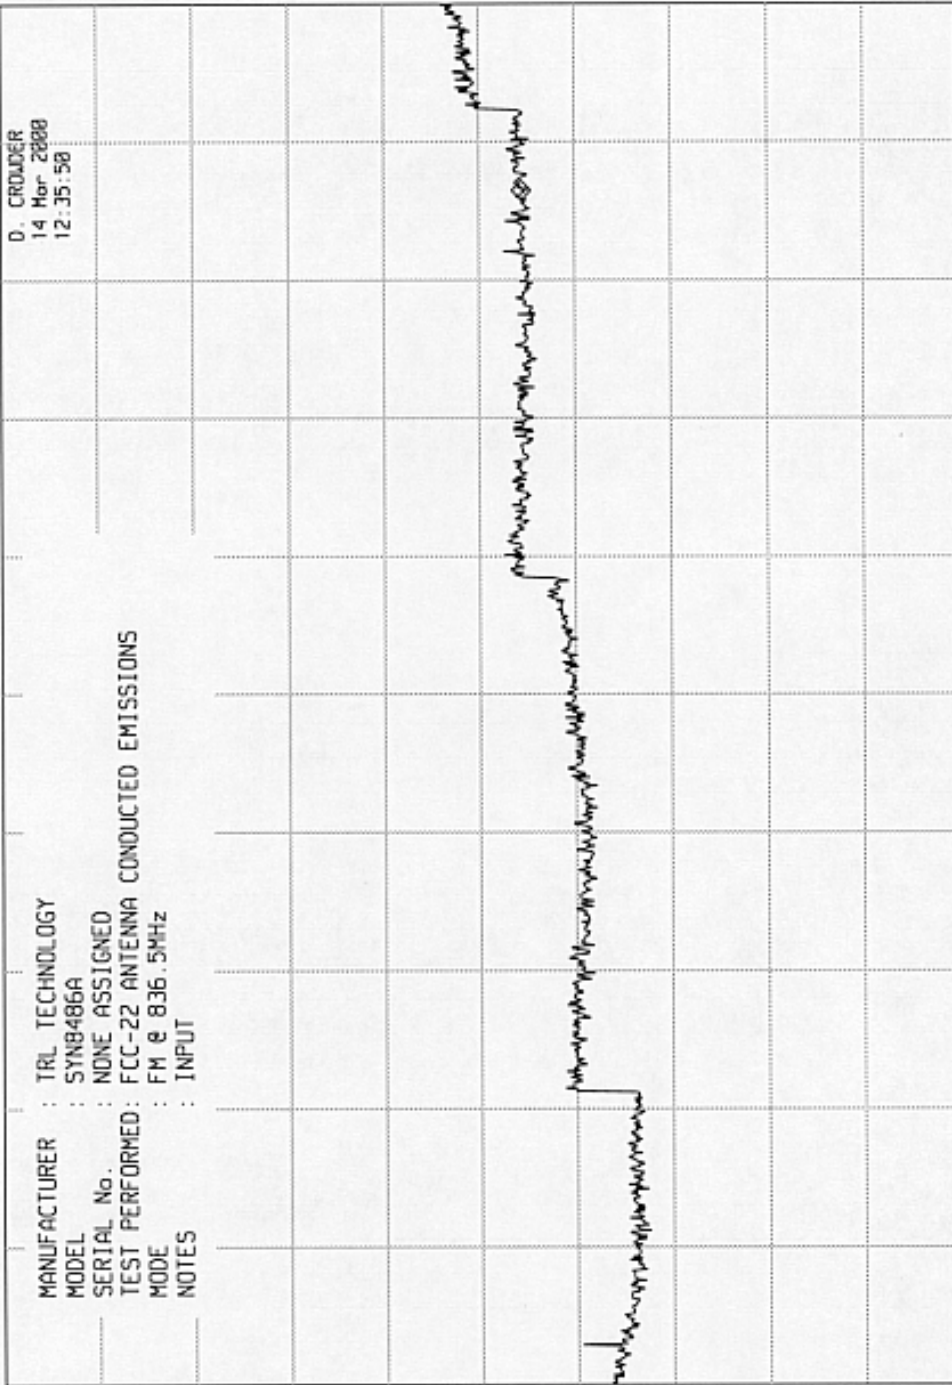

D. CROUDER
14 Mar 2008
12:35:58

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED : FCC-22 ANTENNA CONDUCTED EMISSIONS
MODE : FM @ 836.5MHz
NOTES : INPUT

hp

10 dB/

OFFSET
-10.0
dB

DL
-33.0
dBm


START 2.0 GHz RES BW 1 MHz STOP 20.0 GHz
UBW 3 MHz SWP 450 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 868.1 MHz
-67.40 dBm

ATTEN 20 dB + 40 dB Ext

REF 7.0 dBm

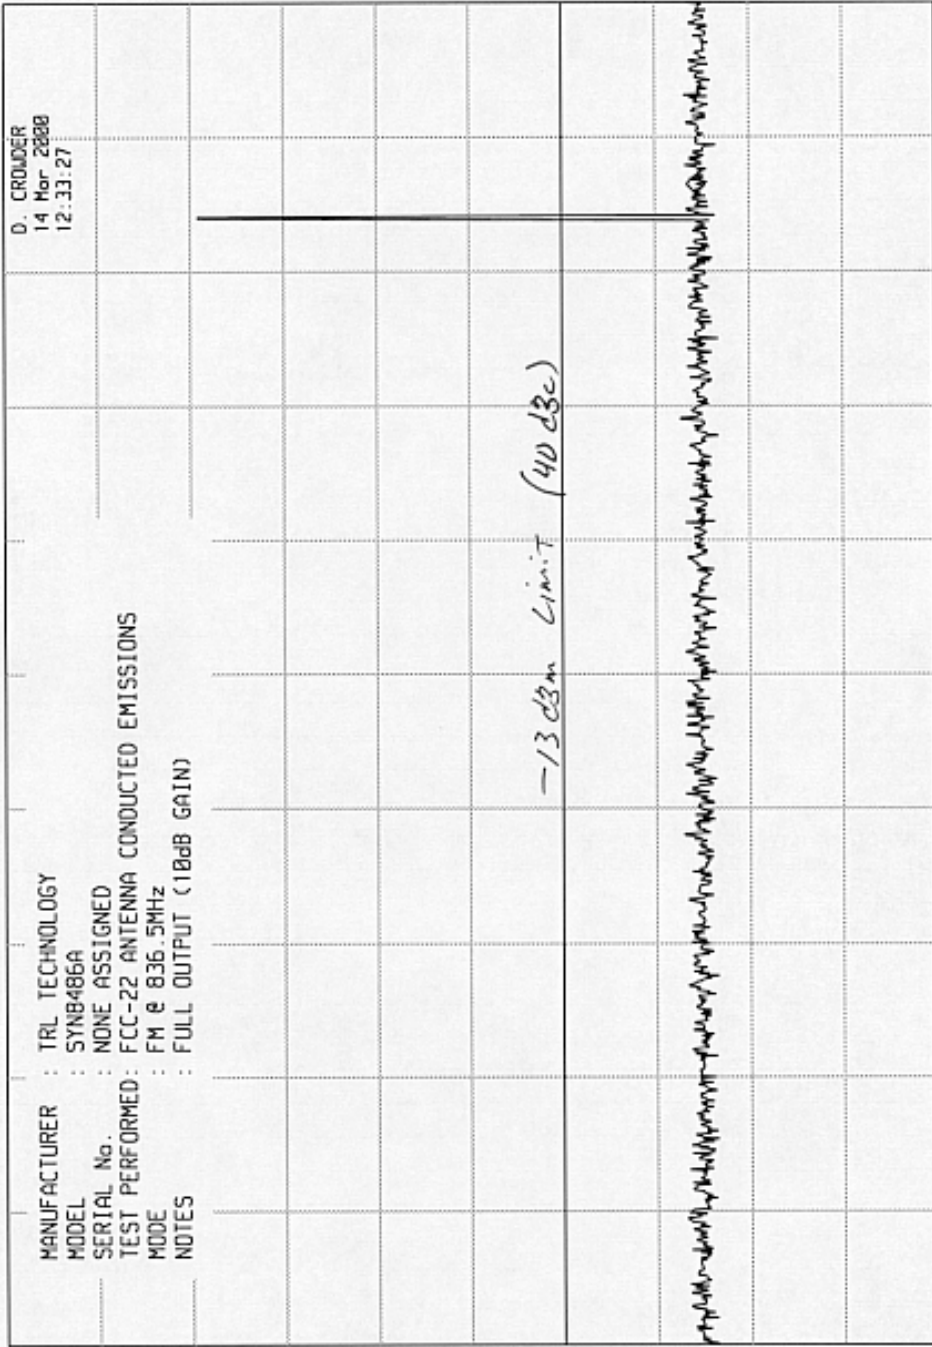

hp

10 dB/

OFFSET

-10.0

dB

DL

-53.0

dBm

START 30 MHz

RES BW 100 kHz

UBW 300 kHz

STOP 1.000 GHz

SWP 291 msec