


ELITE ELECTRONIC ENGINEERING CO

MKR 17.55 GHz  
-46.50 dBm

REF 7.0 dBm      ATTN 20 dB + 20 dB EXT

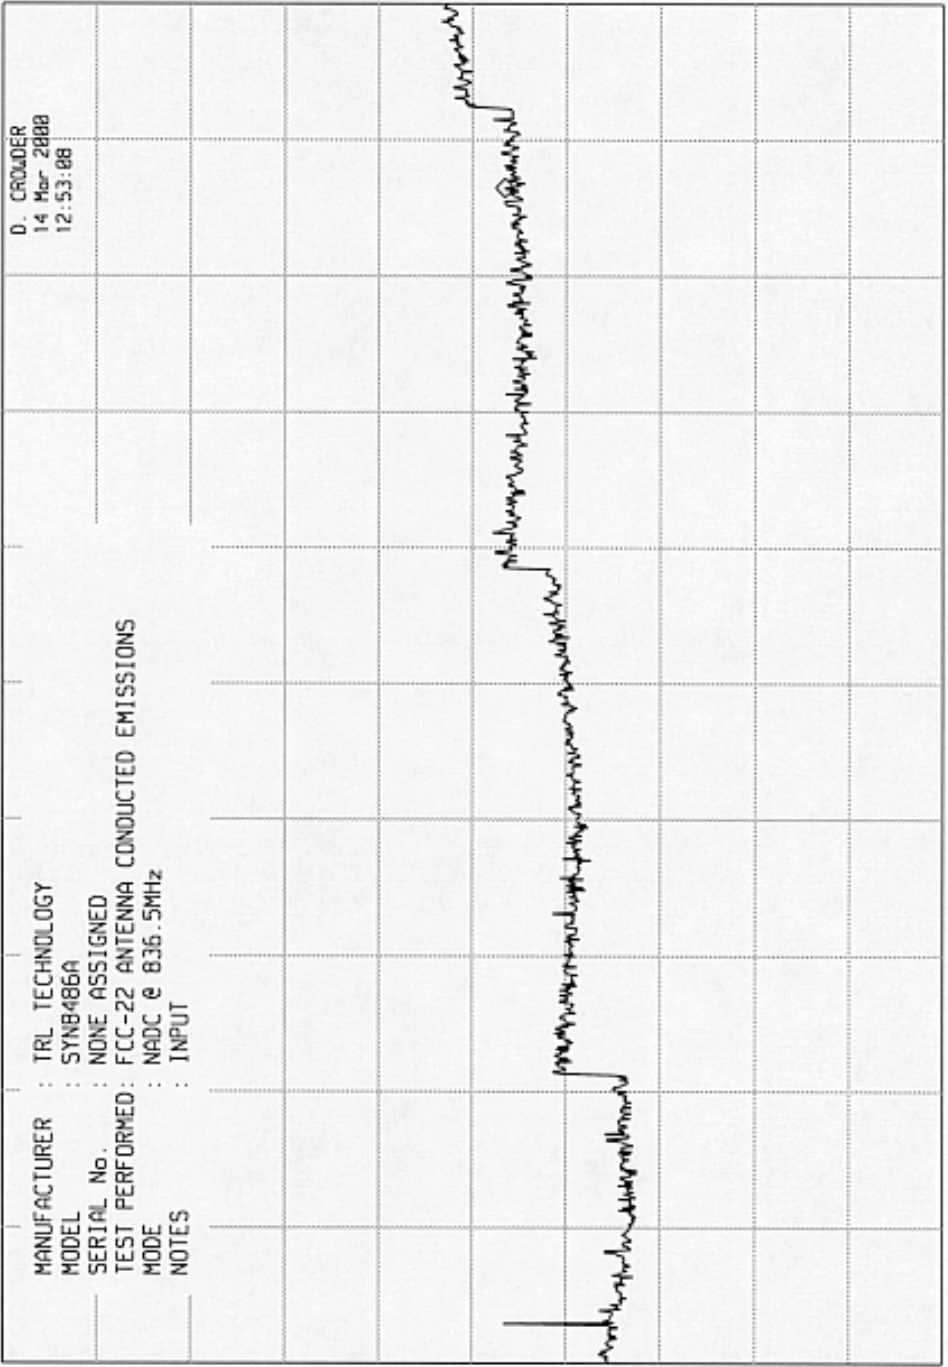

MANUFACTURER : TRL TECHNOLOGY  
 MODEL : SYNB486A  
 SERIAL No. : NONE ASSIGNED  
 TEST PERFORMED : FCC-22 ANTENNA CONDUCTED EMISSIONS  
 MODE : NADC @ 836.5MHz  
 NOTES : INPUT

D. CROWDER  
 14 Mar 2008  
 12:53:08

hp

10 dB/

OFFSET  
-10.0  
dB

DL  
-33.0  
dBm

START 2.0 GHz  
RES BW 1 MHz


UBW 3 MHz

STOP 20.0 GHz  
SUP 450 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 868.1 MHz  
-66.30 dBm

REF 7.0 dBm  
ATTEN 20 dB + 40 dB EXT

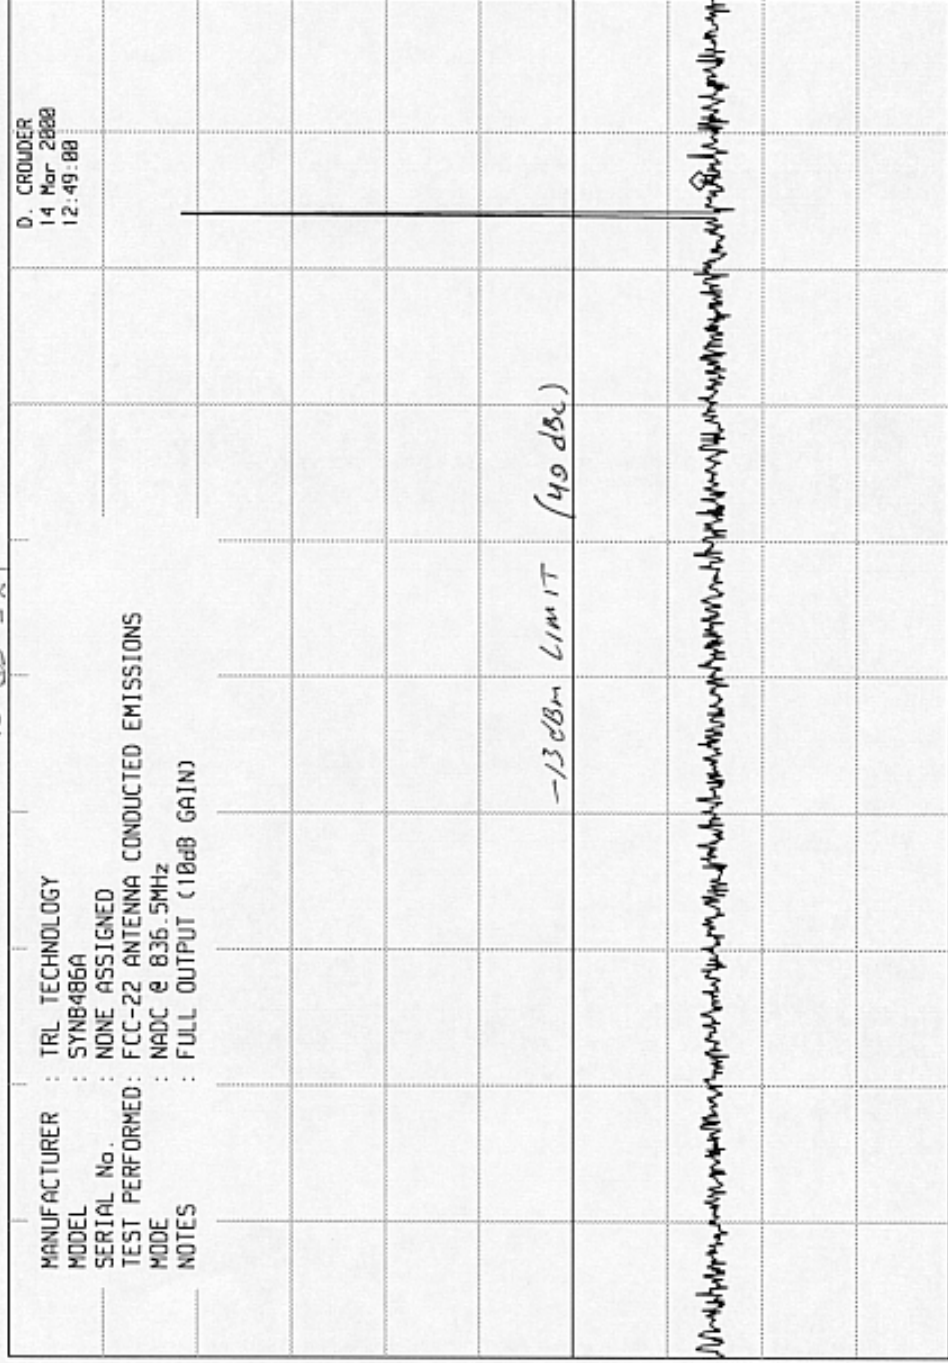

hp

10 dB/

OFFSET  
-10.0  
dB


DL  
-53.0  
dBm

START 30 MHz  
RES BW 100 kHz  
STOP 1.000 GHz  
SWP 291 msec  
VBW 300 kHz

ELITE ELECTRONIC ENGINEERING CO

MKR 1.864 GHz  
-57.30 dBm

REF 7.0 dBm      ATTN 20 dB + 40 dB Ext

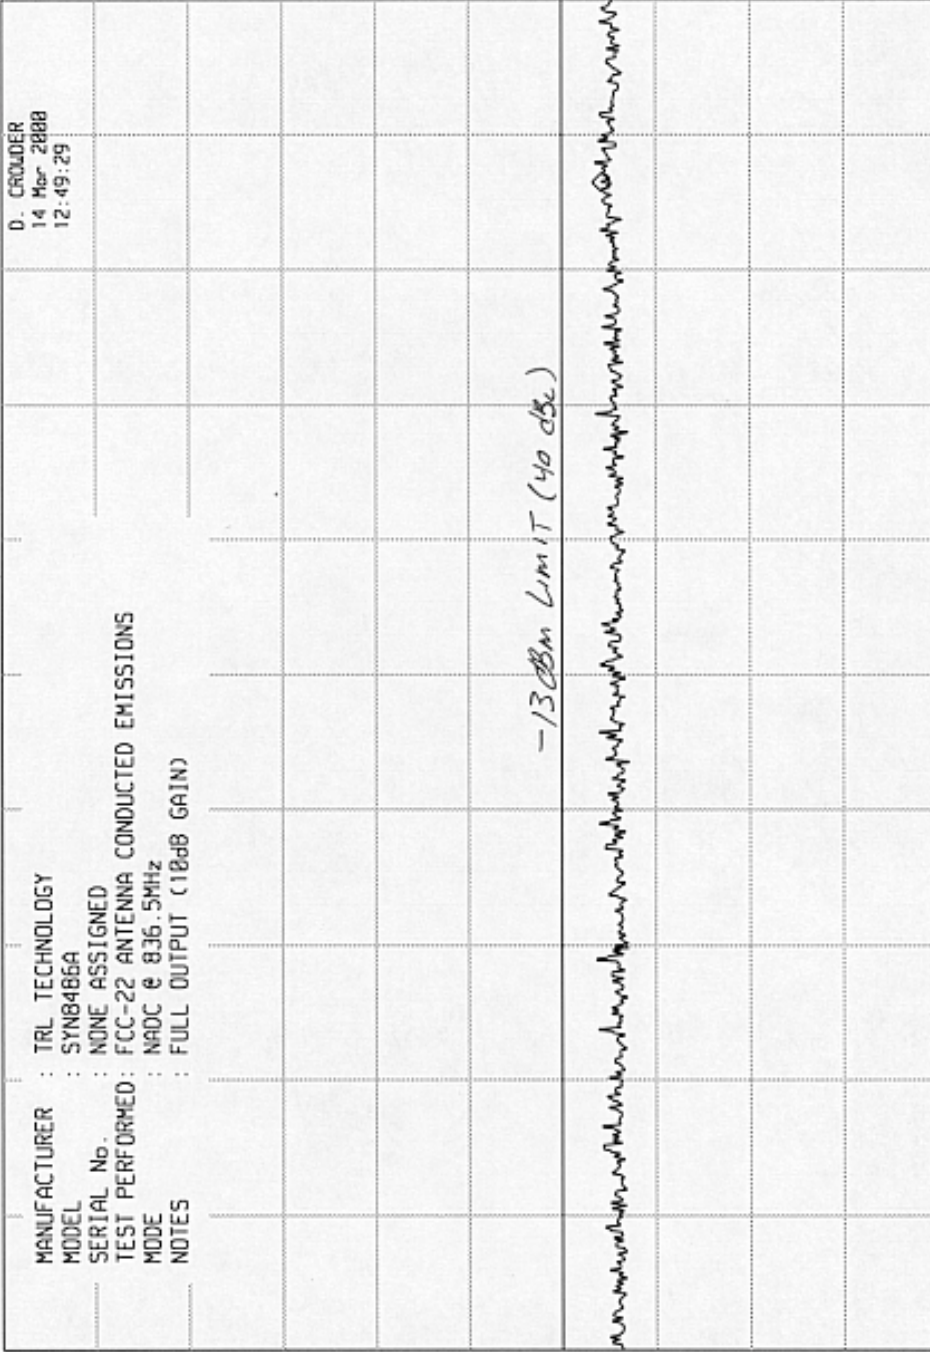

D. CROWDER  
14 Mar 2000  
12:49:29

MANUFACTURER : TRL TECHNOLOGY  
 MODEL : SYN8486A  
 SERIAL No. : NONE ASSIGNED  
 TEST PERFORMED : FCC-22 ANTENNA CONDUCTED EMISSIONS  
 MODE : NADC @ 836.5MHz  
 NOTES : FULL OUTPUT (18dB GAIN)

hp 10 dB/  
 OFFSET -10.0 dB  
 DL -53.0 dBm

START 1.00 GHz      RES BW 1 MHz      UBW 3 MHz      STOP 2.00 GHz  
 SWP 25.0 msec

ELITE ELECTRONIC ENGINEERING CO


MKR 17.55 GHz  
-47.50 dBm

REF 7.0 dBm      ATTN 20 dB + 20 dB EXT

hp  
10 dB/

OFFSET  
-10.0  
dB

DL  
-33.0  
dBm

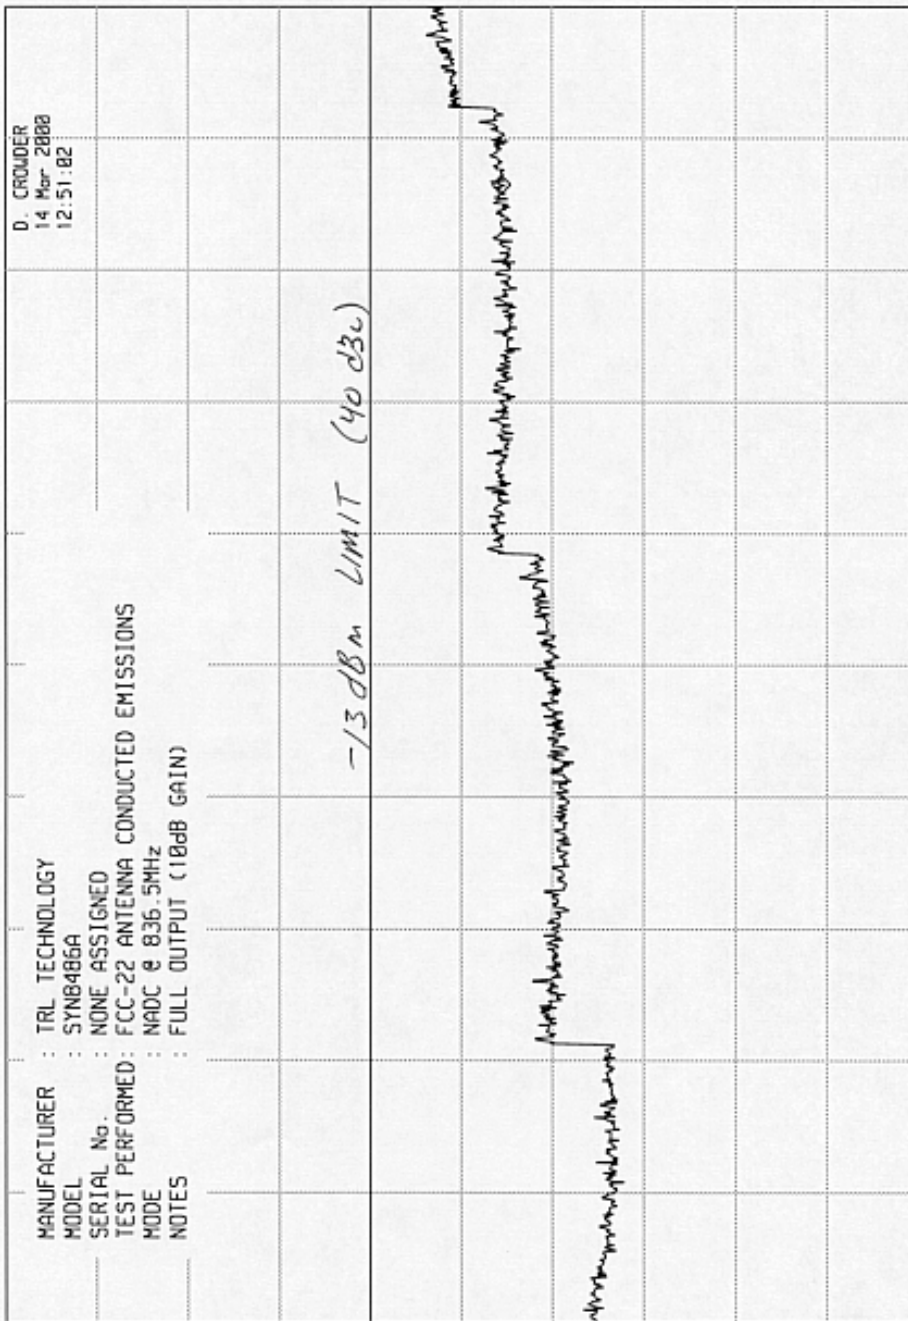

D. CROUWER  
14 Mar 2000  
12:51:02

MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYNB486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED: FCC-22 ANTENNA CONDUCTED EMISSIONS  
MODE : NADC @ 836.5MHz  
NOTES : FULL OUTPUT (10dB GAIN)

START 2.0 GHz      RES BW 1 MHz      UBW 3 MHz      STOP 20.0 GHz  
SUP 450 msec