


ELITE ELECTRONIC ENGINEERING CO

MKR 1.850 030 0 GHz
-24.80 dBm

REF 18.0 dBm
ATTEN 30 dB +4.0 dB EXPT

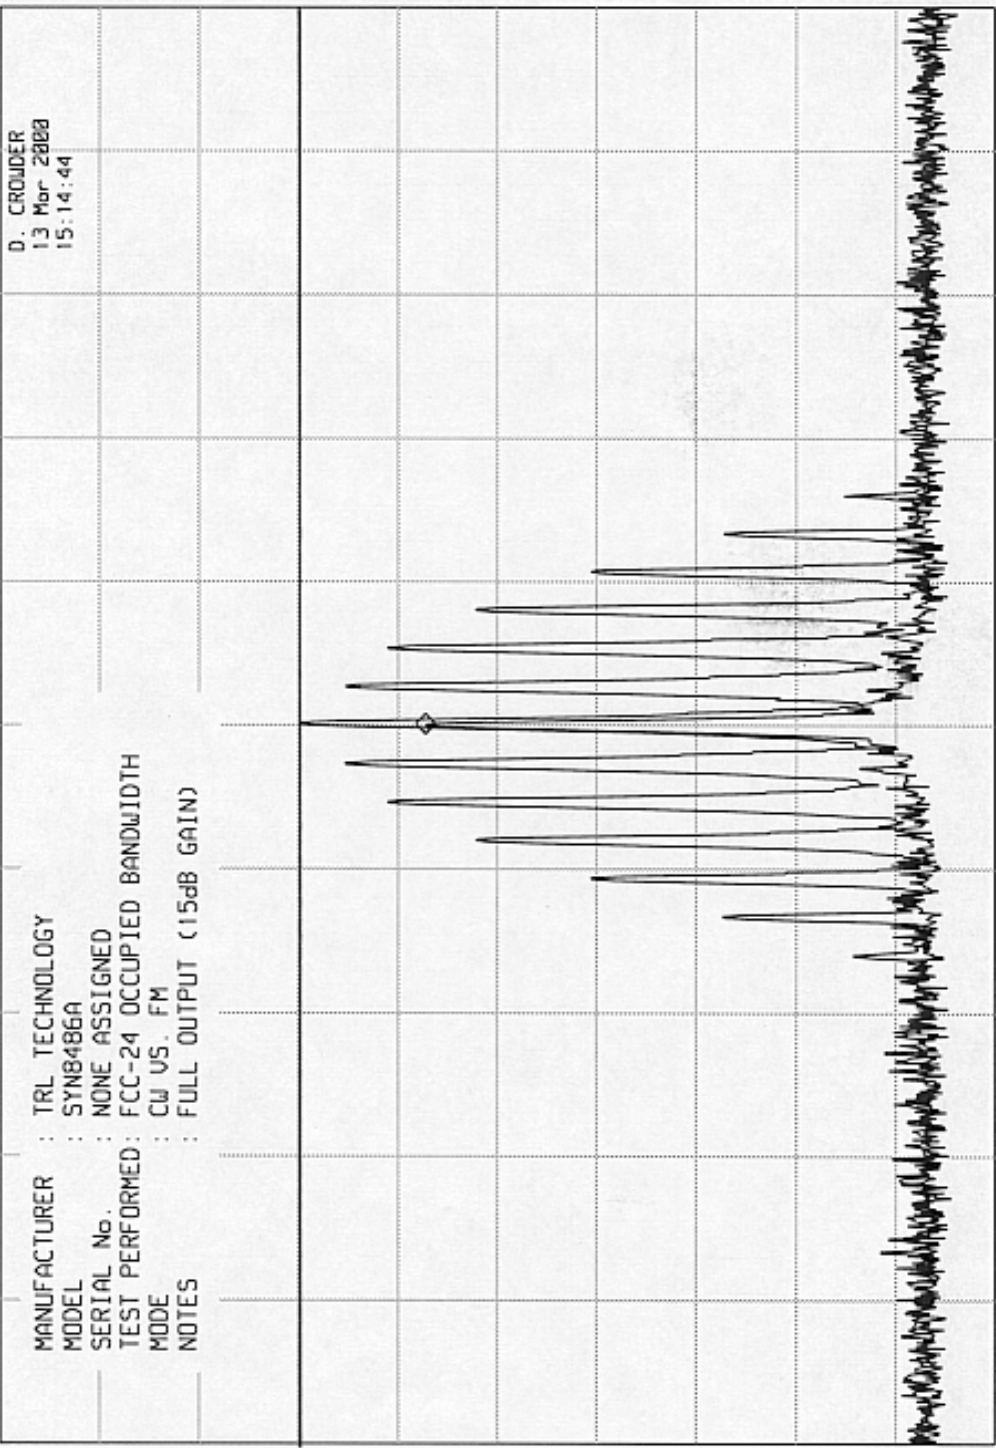

hp 10 dB/

~~0.0 dBm~~

SPAN 150 kHz
SWP 4.50 sec

UBW 1 kHz

Hz


CENTER 1.850 030 GHz
RES BW 300

ELITE ELECTRONIC ENGINEERING CO

MKR 1.850 030 0 GHz
-19.40 dBm

REF 18.0 dBm

ATTEN 30 dB + 20 dB Ext

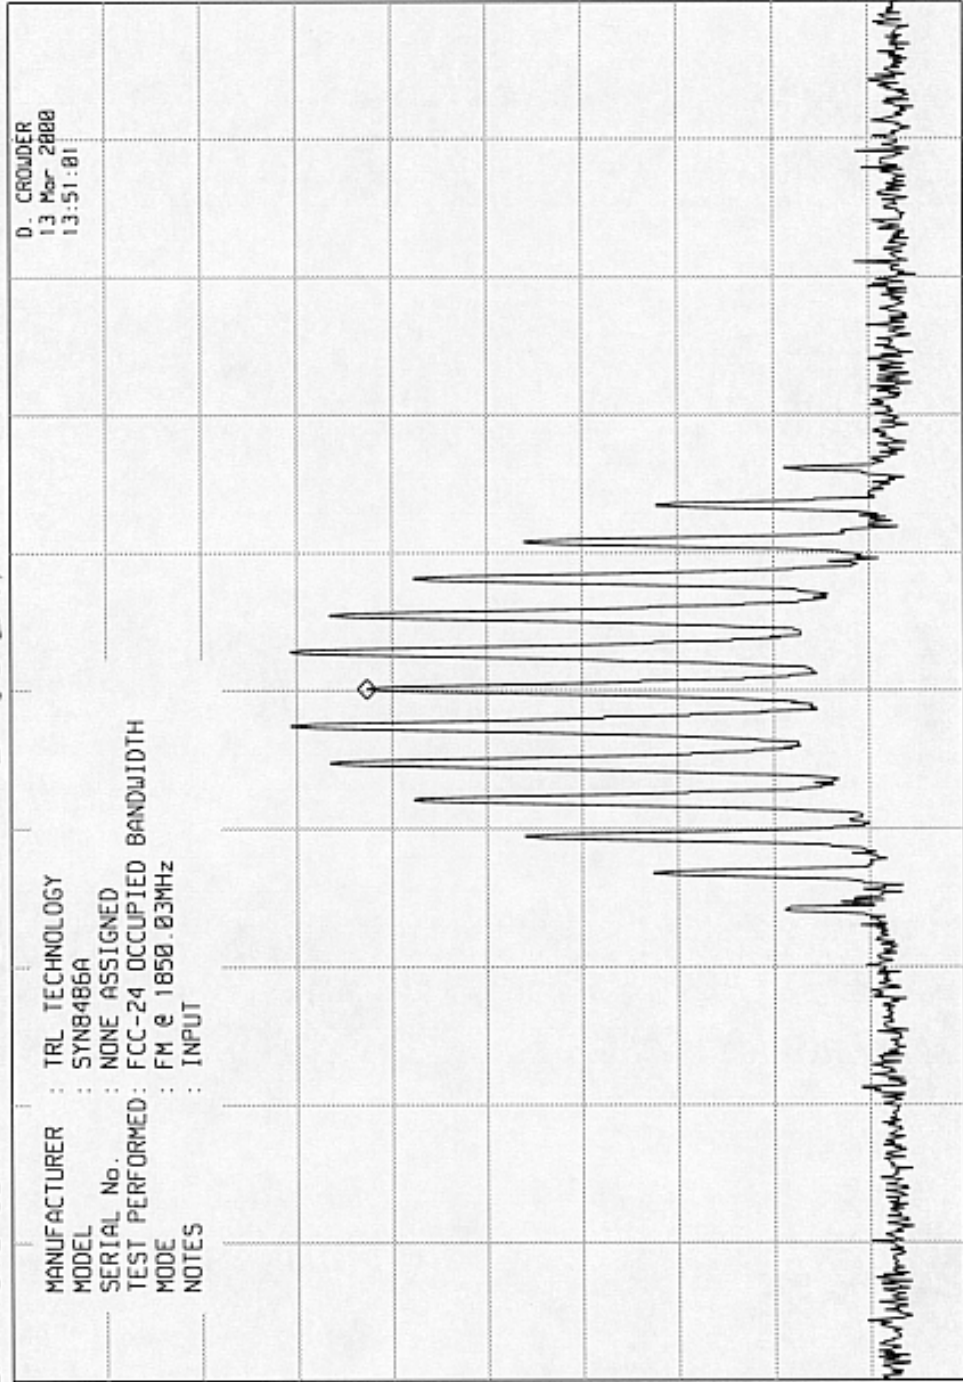

D. CROUDER
13 Mar 2008
13:51:01

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH
 MODE : FM @ 1850.03MHz
 NOTES : INPUT

hp 10 dB/

DL -12.0 dBm

SPAN 150 kHz
SWP 4.50 sec

VBW 1 kHz

Hz

CENTER 1.850 030 GHz
RES BW 300 Hz

ELITE ELECTRONIC ENGINEERING CO

MKR 1.869 970 0 GHz
-19.20 dBm


ATTEN 30 dB +20 dB BT

REF 18.0 dBm

hp


10 dB/

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED: FCC-24 OCCUPIED BANDWIDTH
MODE : FM @ 1869.97MHz
NOTES : INPUT

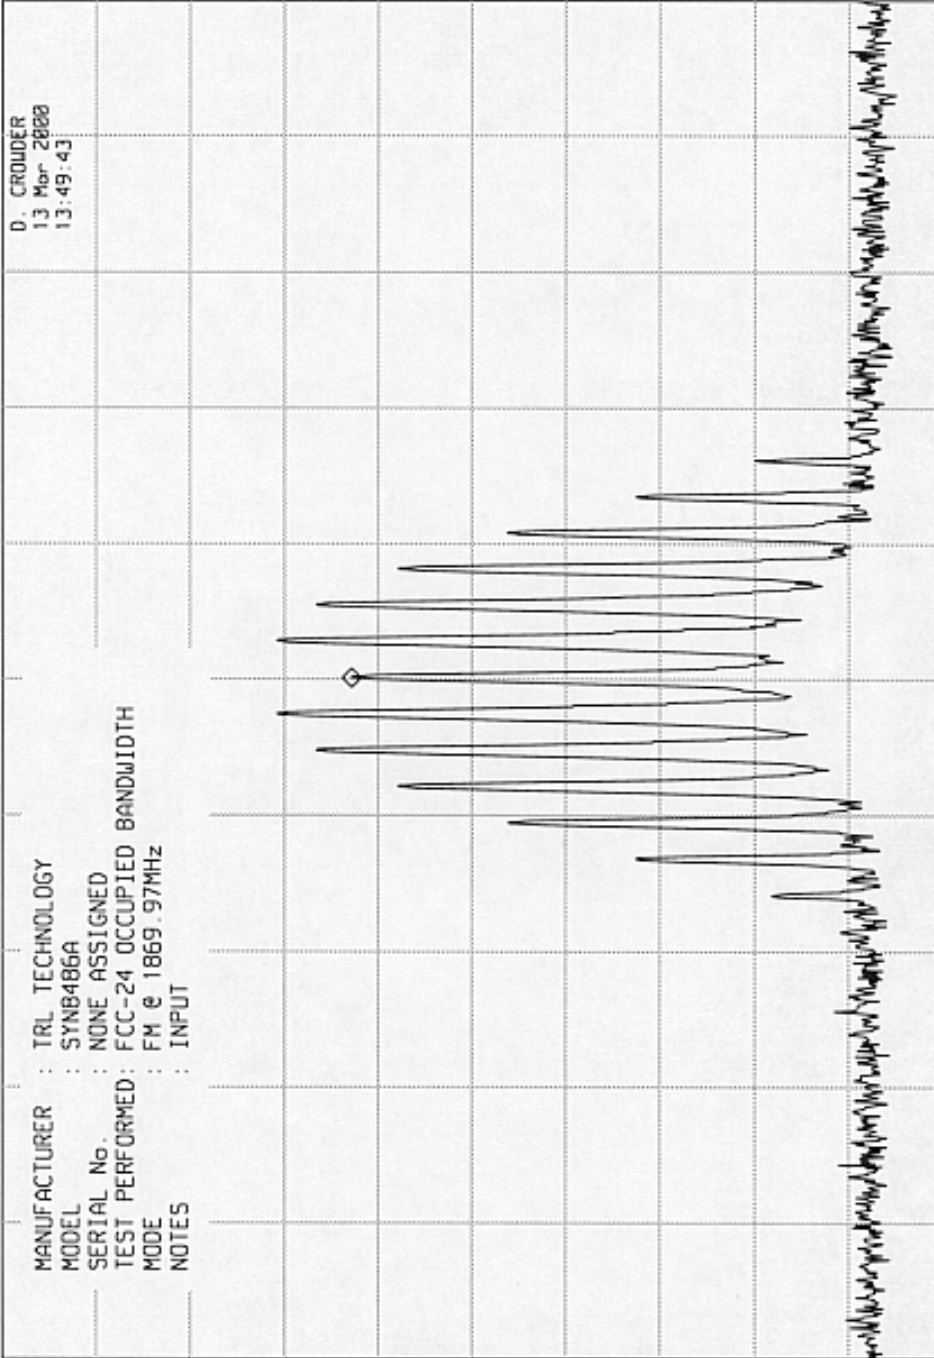

ELITE ELECTRONIC ENGINEERING CO

hp REF 18.0 dBm ATTN 30 dB \uparrow 20 dB EXT MKR 1.870 030 0 GHz -19.20 dBm

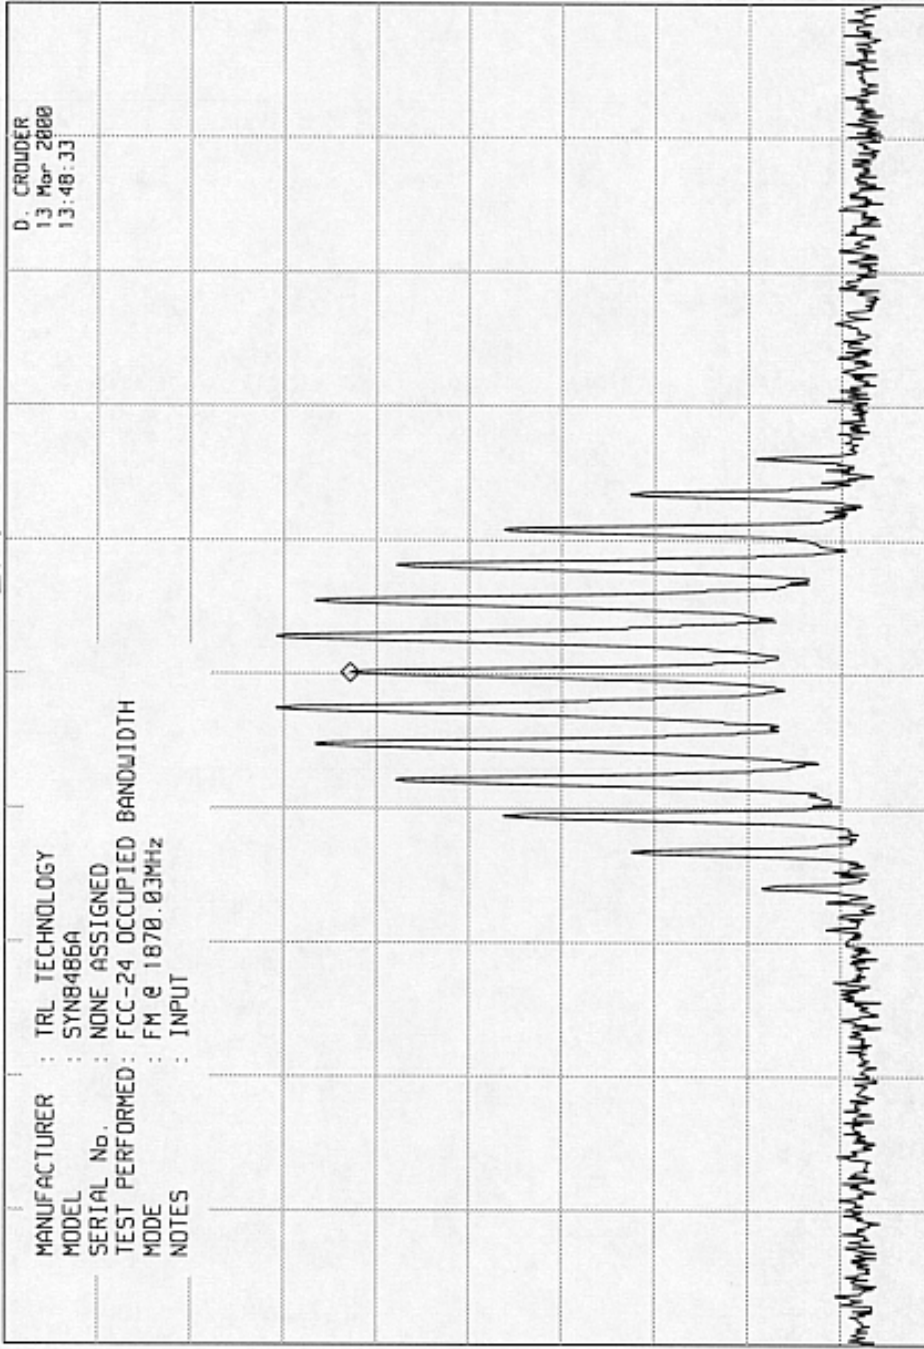

CENTER 1.870 030 GHz RES BW 300 Hz UBW 1 kHz SPAN 150 kHz SWP 4.50 sec