


ELITE ELECTRONIC ENGINEERING CO

MKR 1.889 970 0 GHz  
-18.50 dBm

REF 18.0 dBm  
ATTEN 30 dB + 20dB EXT

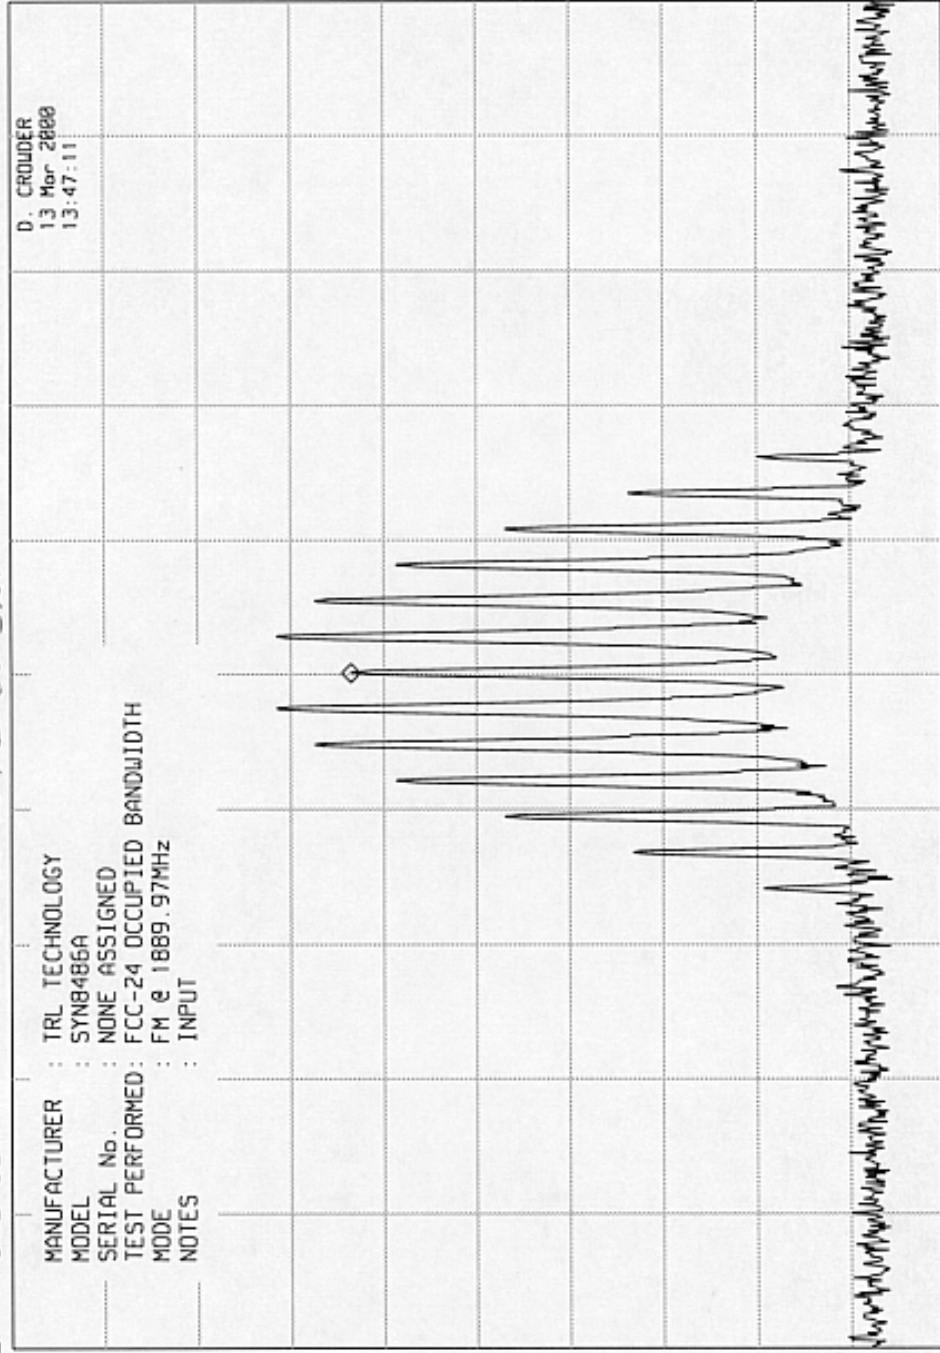

MANUFACTURER : TRL TECHNOLOGY  
 MODEL : SYN8486A  
 SERIAL No. : NONE ASSIGNED  
 TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH  
 MODE : FM @ 1889.97MHz  
 NOTES : INPUT

D. CROWDER  
 13 Mar 2000  
 13:47:11

hp 10 dB/

DL -12.0 dBm


CENTER 1.889 970 GHz  
 RES BW 300 Hz  
 UBW 1 kHz  
 SPAN 150 kHz  
 SWP 4.50 sec

ELITE ELECTRONIC ENGINEERING CO

MKR 1.890 030 0 GHz  
-18.50 dBm

REF 18.0 dBm

ATTEN 30 dB + 20dB SAT.

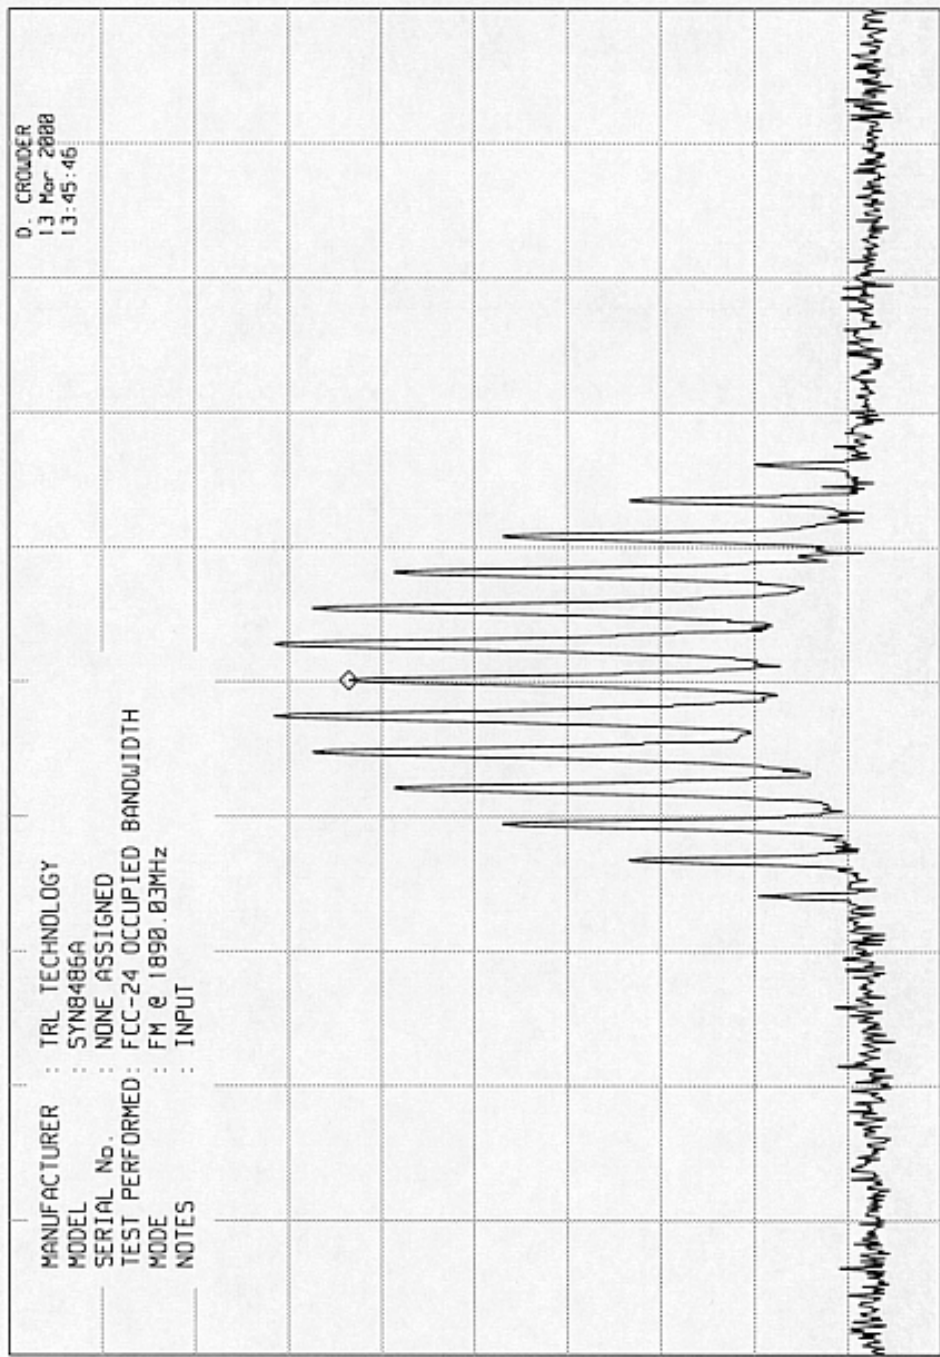

D. CROWDER  
13 Mar 2000  
13:45:46

MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYN8486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH  
MODE : FM @ 1890.03MHz  
NOTES : INPUT

hp 10 dB/

DL -12.0 dBm


CENTER 1.890 030 GHz  
RES BW 300 Hz  
SPAN 150 kHz  
SWP 4.50 sec  
UBW 1 kHz

ELITE ELECTRONIC ENGINEERING CO

MKR 1.989 970 0 GHz  
-18.40 dBm

REF 18.0 dBm

ATTEN 30 dB + 20dB EXT

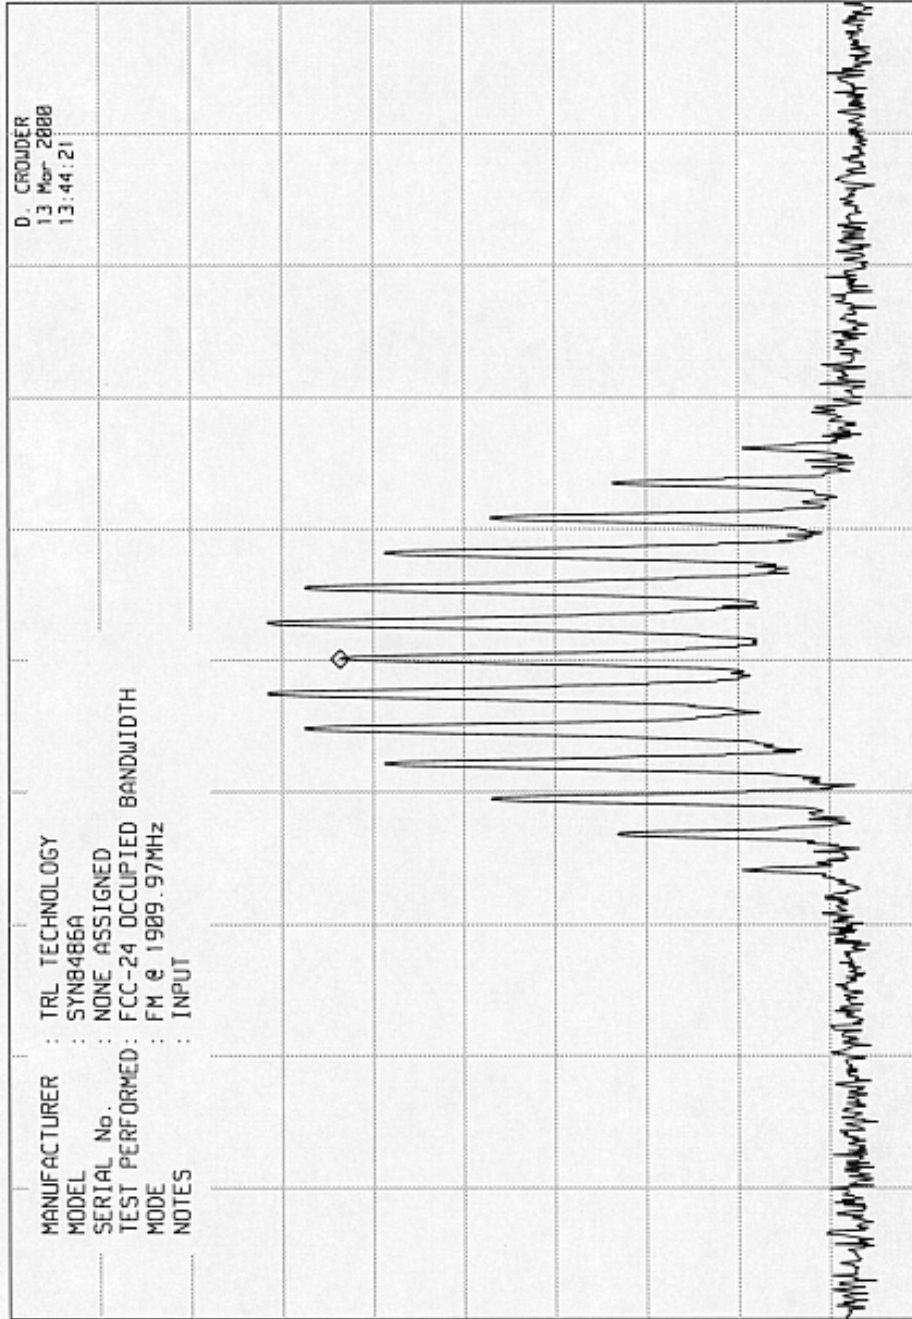

SPAN 150 kHz  
SWP 4.50 sec

UBW 1 kHz

CENTER 1.989 970 GHz  
RES BW 300 Hz

ELITE ELECTRONIC ENGINEERING CO

MRK 1.850 029 4 GHz  
-45.60 dBm

REF 18.0 dBm  
ATTEN 30 dB + 40 dB EXT


MANUFACTURER : TRL TECHNOLOGY  
MODEL : SYN8486A  
SERIAL No. : NONE ASSIGNED  
TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH  
MODE : FM @ 1850.03MHz  
NOTES : FULL OUTPUT (15dB GAIN)

D. CROUDER  
13 Mar 2000  
13:26:12

hp

10 dB/

DL -12.0 dBm

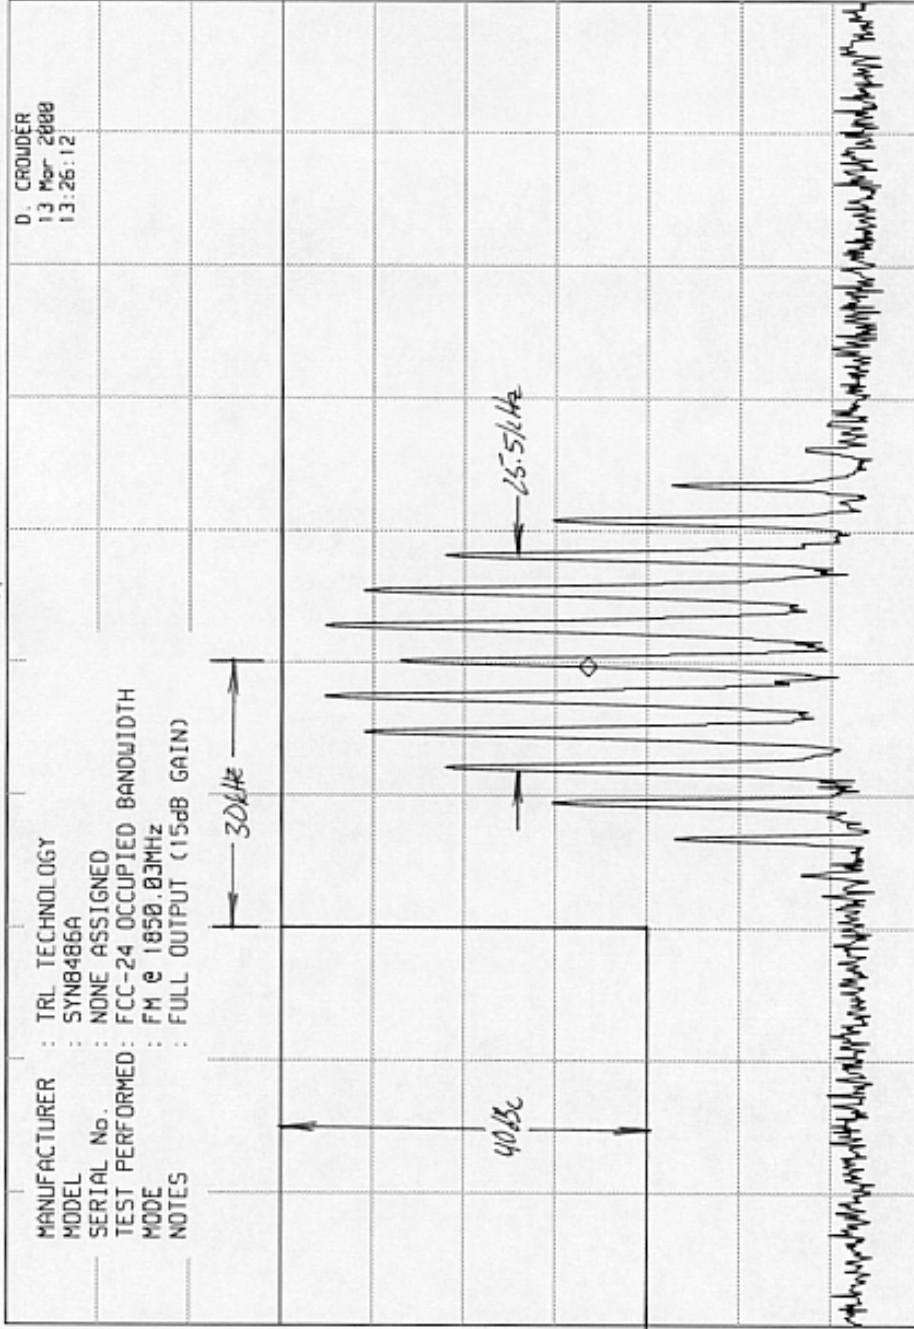

SPAN 150 kHz  
SWP 4.50 sec

UBW 1 kHz

CENTER 1.850 030 GHz  
RES BW 300 Hz