


ELITE ELECTRONIC ENGINEERING CO

MKR 1.850 030 0 GHz
-24.60 dBm

REF 17.0 dBm
ATTEN 30 dB + 40 dB Ext

hp 10 dB/
DL -13.0 dBm

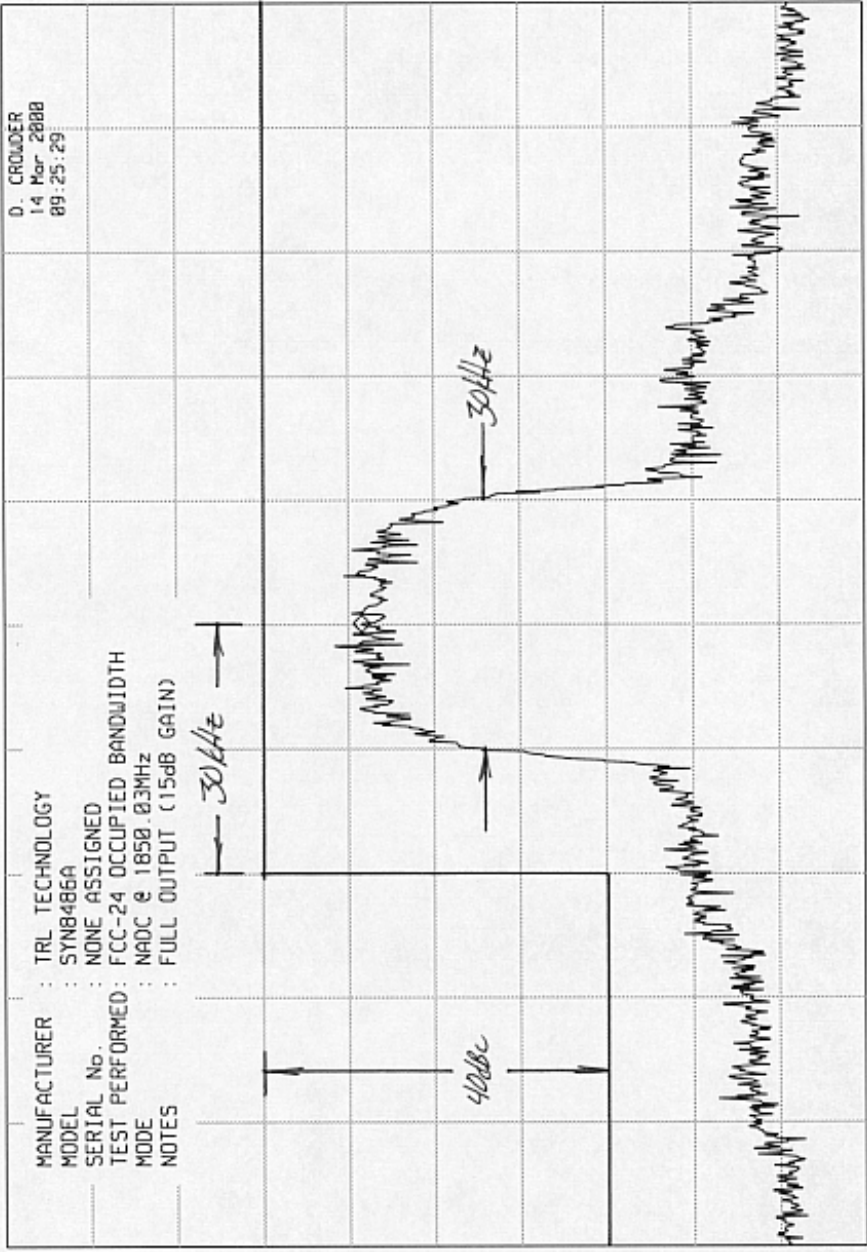

SPAN 150 kHz
SWP 4.50 sec


UBW 1 kHz

CENTER 1.850 030 GHz
RES BW 300 Hz

ELITE ELECTRONIC ENGINEERING CO

MKR 1.869 970 0 GHz
-25.70 dBm

REF 17.0 dBm ATTN 30 dB + 40 dB EXT

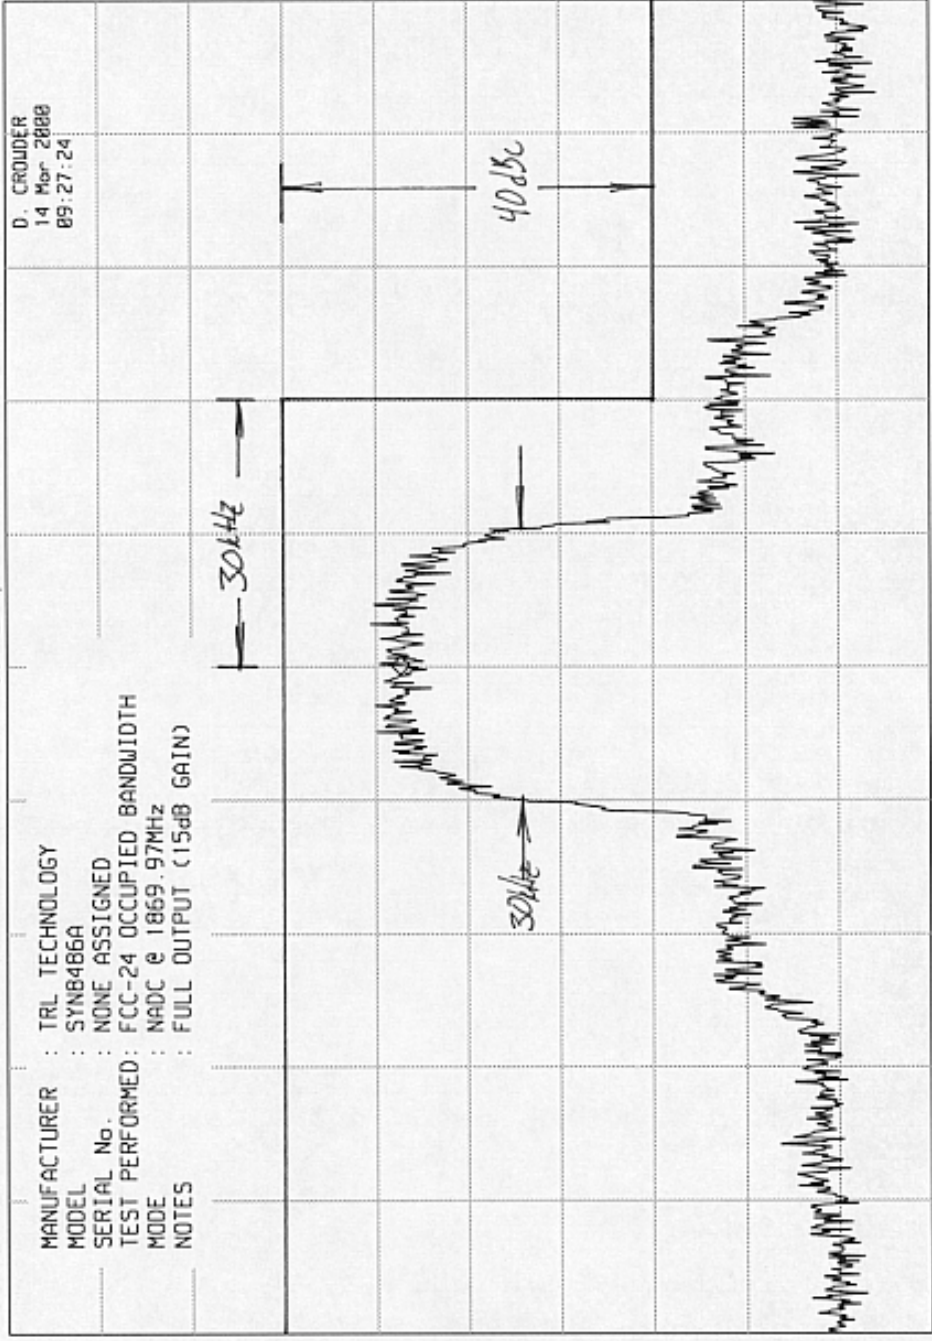

D. CROUDER
14 Mar 2000
09:27:24

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED: FCC-24 OCCUPIED BANDWIDTH
MODE : NADC e 1869.97MHz
NOTES : FULL OUTPUT (15dB GAIN)

10 dB/


DL
-13.0
dBm

CENTER 1.869 970 GHz RES BW 300 Hz UBW 1 kHz SPAN 150 kHz
SUP 4.50 sec

ELITE ELECTRONIC ENGINEERING CO

MKR 1.870 030 0 GHz
-26.30 dBm

REF 17.0 dBm ATTN 30 dB +40 dB EXT

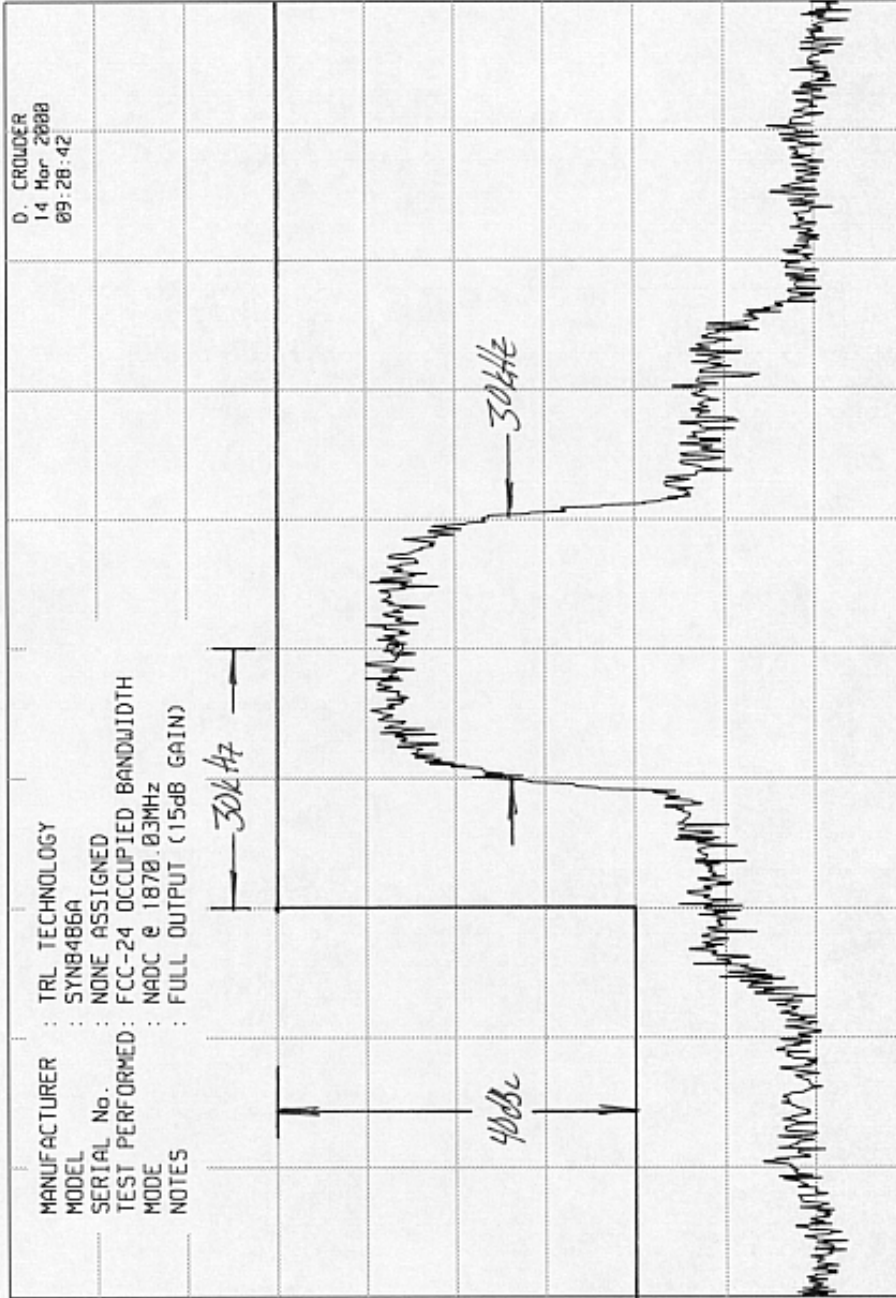

10 dB/
DL -13.0 dBm

SPAN 150 kHz
SWP 4.50 sec

UBW 1 kHz


CENTER 1.870 030 GHz
RES BW 300 Hz

ELITE ELECTRONIC ENGINEERING CO

MKR 1.889 970 0 GHz
-26.70 dBm

REF 17.0 dBm
ATTEN 30 dB +40 dB EXT

hp 10 dB/

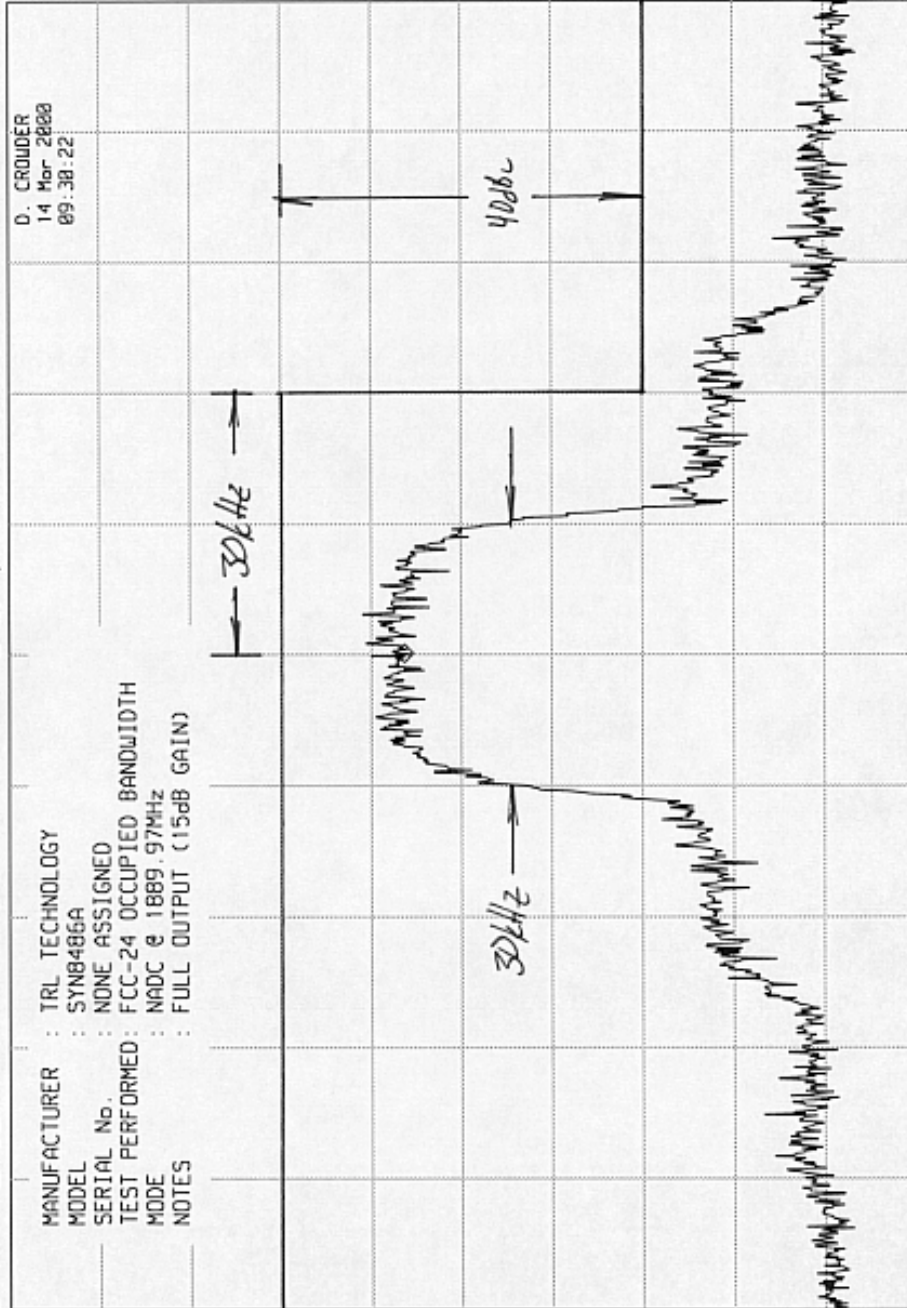

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL NO. : NONE ASSIGNED
 TEST PERFORMED : FCC-24 OCCUPIED BANDWIDTH
 MODE : NADC @ 1889.97MHz
 NOTES : FULL OUTPUT (15dB GAIN)

D. CROWDER
 14 Mar 2008
 09:38:22

DL -13.0 dBm

CENTER 1.889 970 GHz
RES BW 300 Hz
SPAN 150 kHz
SWP 4.50 sec

UBW 1 kHz