



ELITE ELECTRONIC ENGINEERING CO

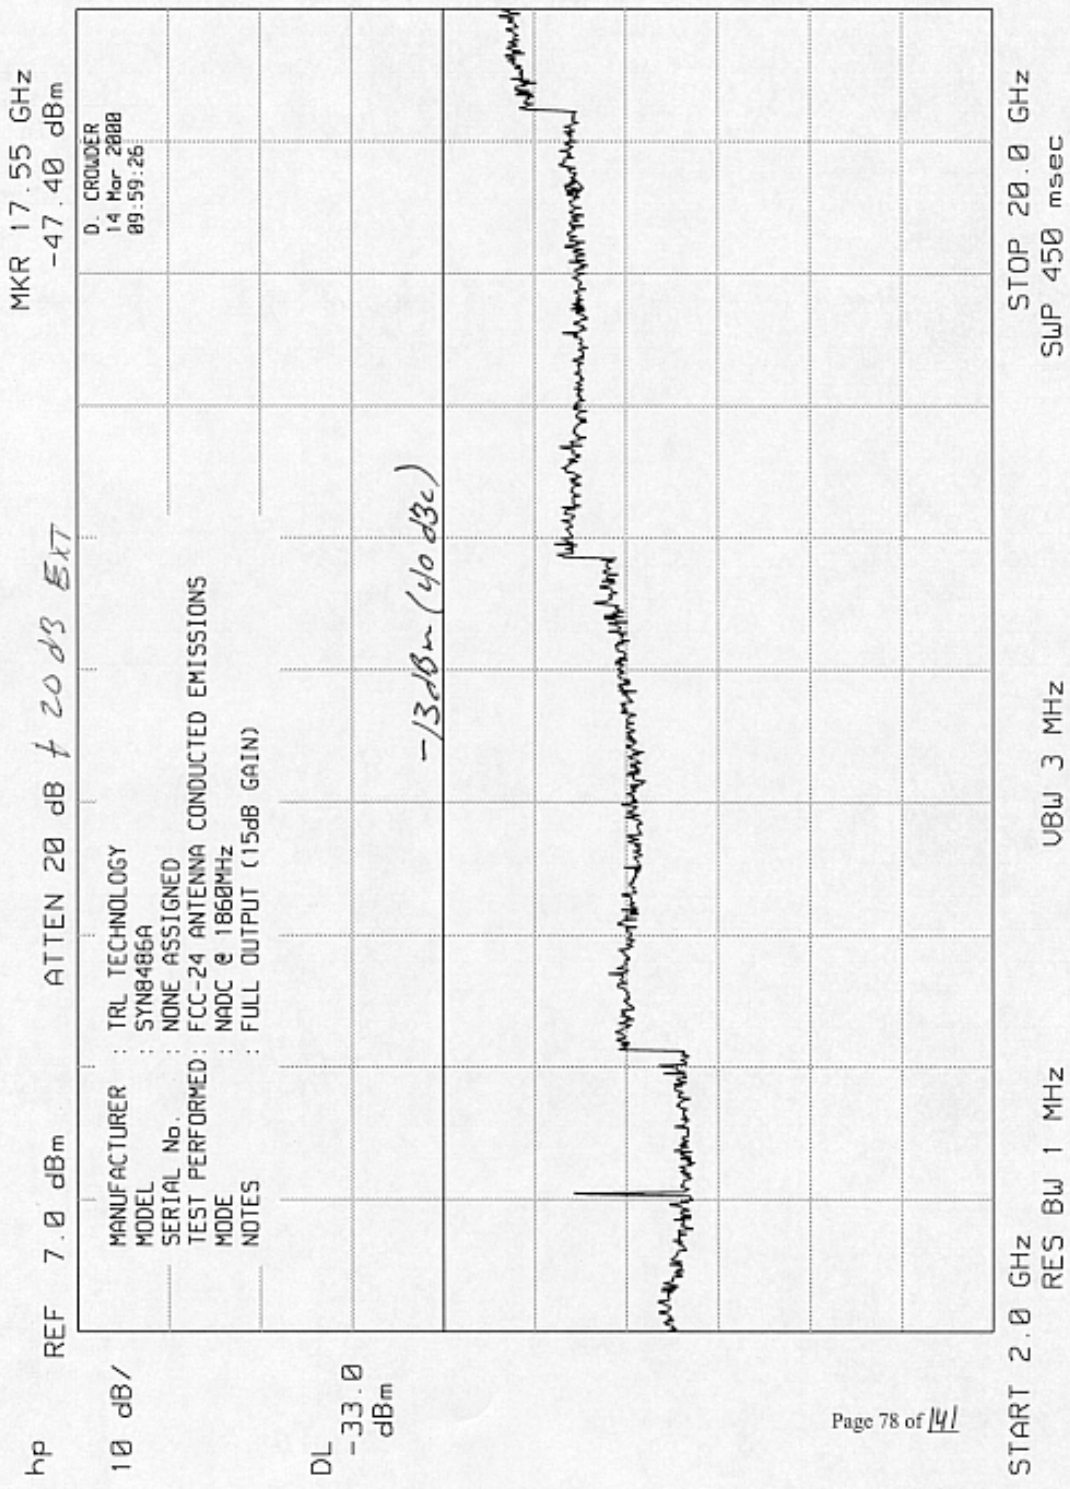

ELITE ELECTRONIC ENGINEERING CO

MKR 868.1 MHz
-68.30 dBm

REF 7.0 dBm ATTN 20 dB +20 dB EXT

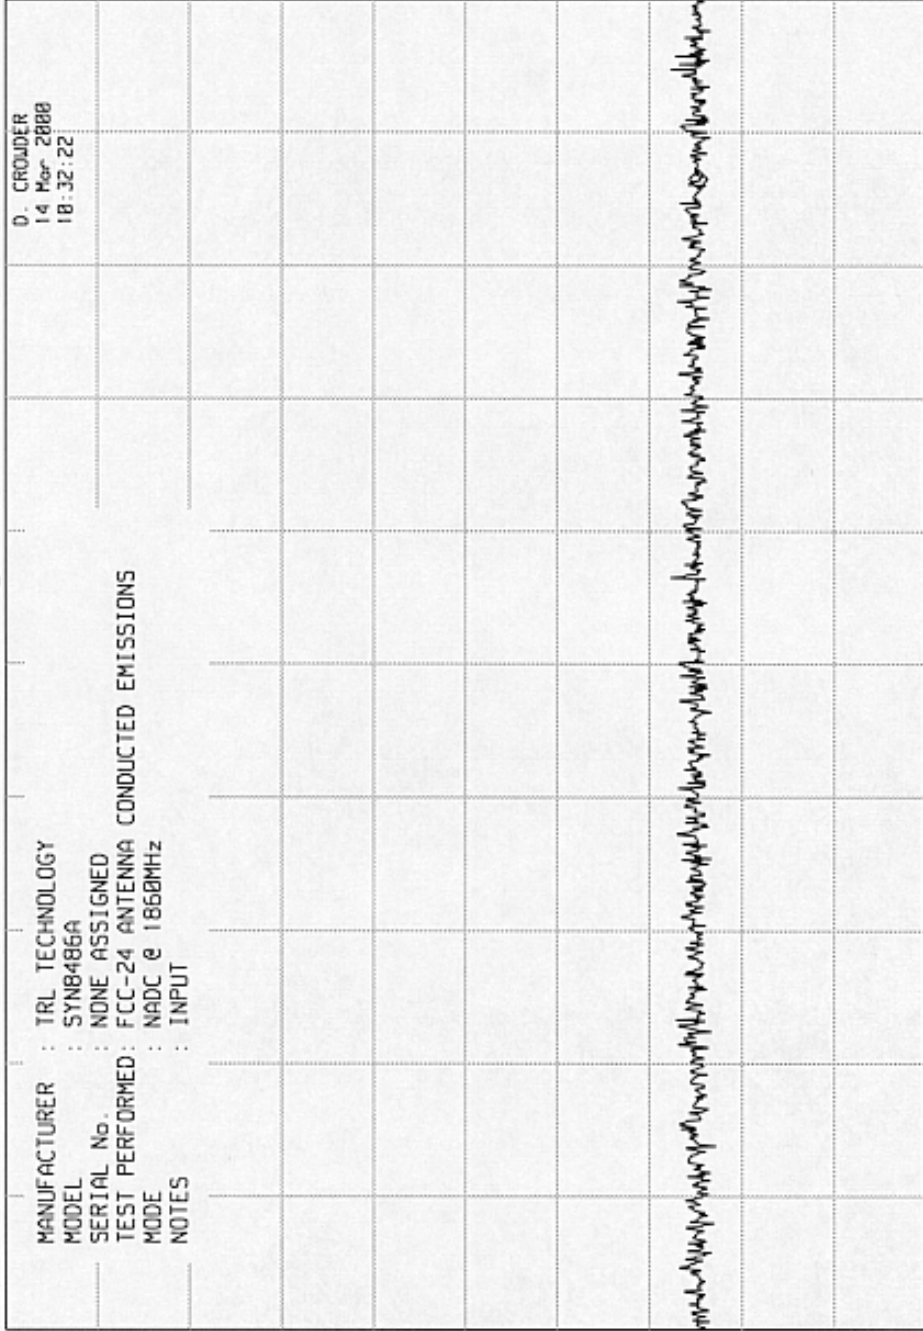

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED: FCC-24 ANTENNA CONDUCTED EMISSIONS
 MODE : NADC @ 1860MHz
 NOTES : INPUT

D. CROWDER
 14 Mar 2000
 18:32:22

hp 10 dB/
 OFFSET -10.0 dB


DL -53.0 dBm

START 30 MHz RES BW 100 kHz UBW 300 kHz STOP 1.000 GHz
 SWP 291 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 1.864 GHz
-6.80 dBm

REF 7.0 dBm ATTEN 20 dB + 20 dB EXT

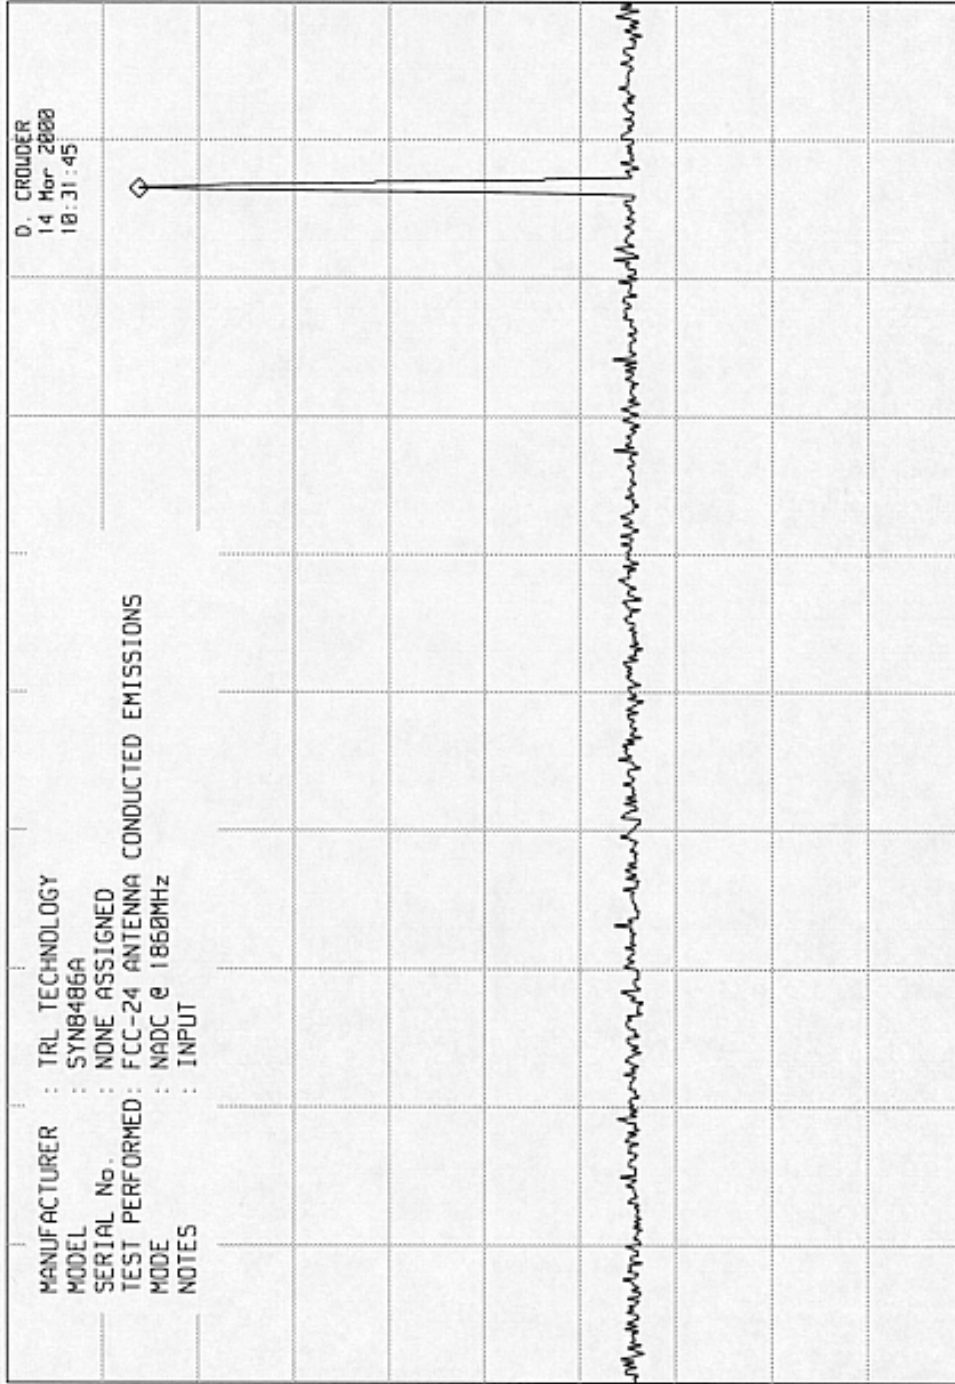

hp

10 dB/

OFFSET
-10.0
dB

DL
-53.0
dBm

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED : FCC-24 ANTENNA CONDUCTED EMISSIONS
 MODE : NADC @ 1860MHz
 NOTES : INPUT

START 1.00 GHz
RES BW 1 MHz


VBW 3 MHz

STOP 2.00 GHz
SWP 25.0 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 17.55 GHz
-47.10 dBm

REF 7.0 dBm ATTN 20 dB + 20 dB EXT

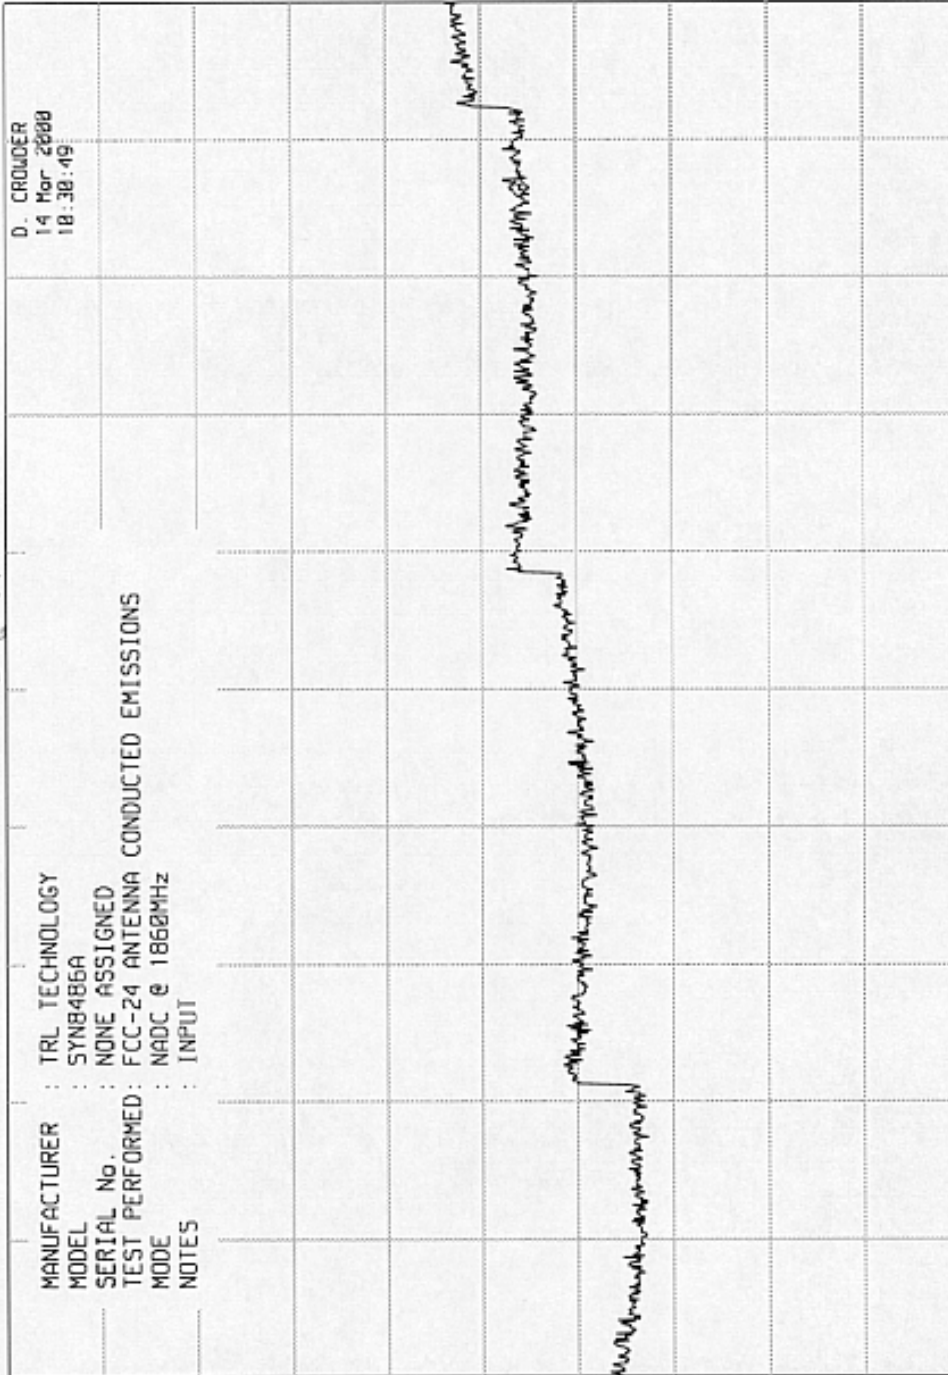

hp 10 dB/
 OFFSET -10.0 dB
 DL -33.0 dBm

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED : FCC-24 ANTENNA CONDUCTED EMISSIONS
 MODE : NADC @ 1860MHz
 NOTES : INPUT

D. CROWDER
 14 Mar 2000
 10:30:49

START 2.0 GHz RES BW 1 MHz UBW 3 MHz STOP 20.0 GHz
 SWP 450 msec