

ELITE ELECTRONIC ENGINEERING CO

MKR 1.864 GHz
-58.40 dBm

hp


10 dB/

OFFSET
-10.0
dB

DL
-53.0
dBm

REF 7.0 dBm ATTN 20 dB + 40 dB EXT

MANUFACTURER : TRL TECHNOLOGY
MODEL : SYN8486A
SERIAL No. : NONE ASSIGNED
TEST PERFORMED: FCC-24 ANTENNA CONDUCTED EMISSIONS
MODE : COMA @ 1900MHz
NOTES : FULL OUTPUT (15dB GAIN)

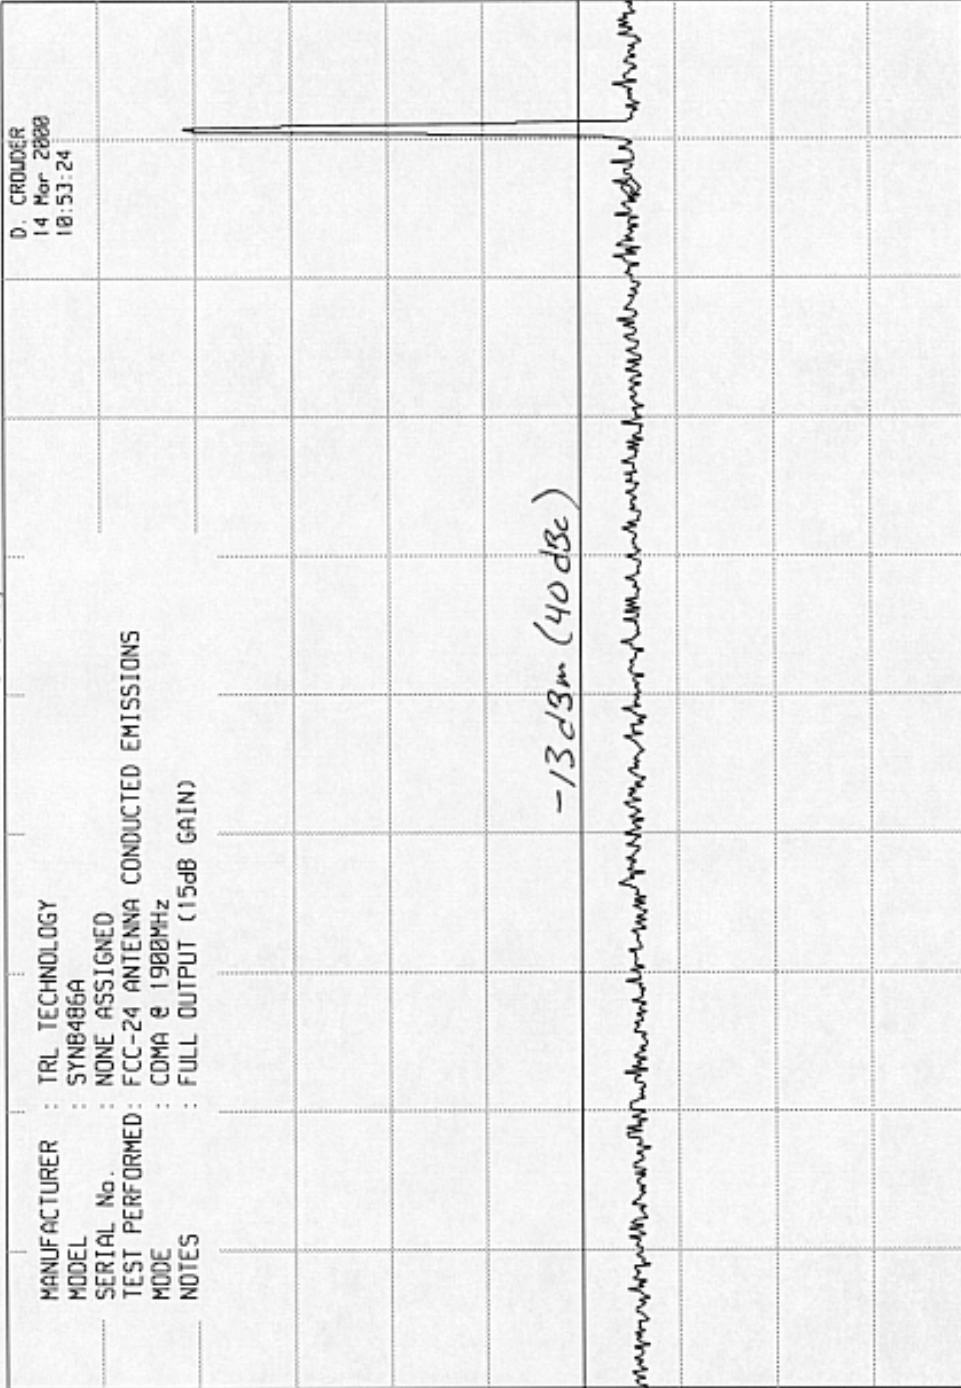

START 1.00 GHz
RES BW 1 MHz


UBW 3 MHz

STOP 2.00 GHz
SWP 25.0 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 17.55 GHz
-46.90 dBm

REF 7.0 dBm ATTEN 20 dB +20 dB EXT

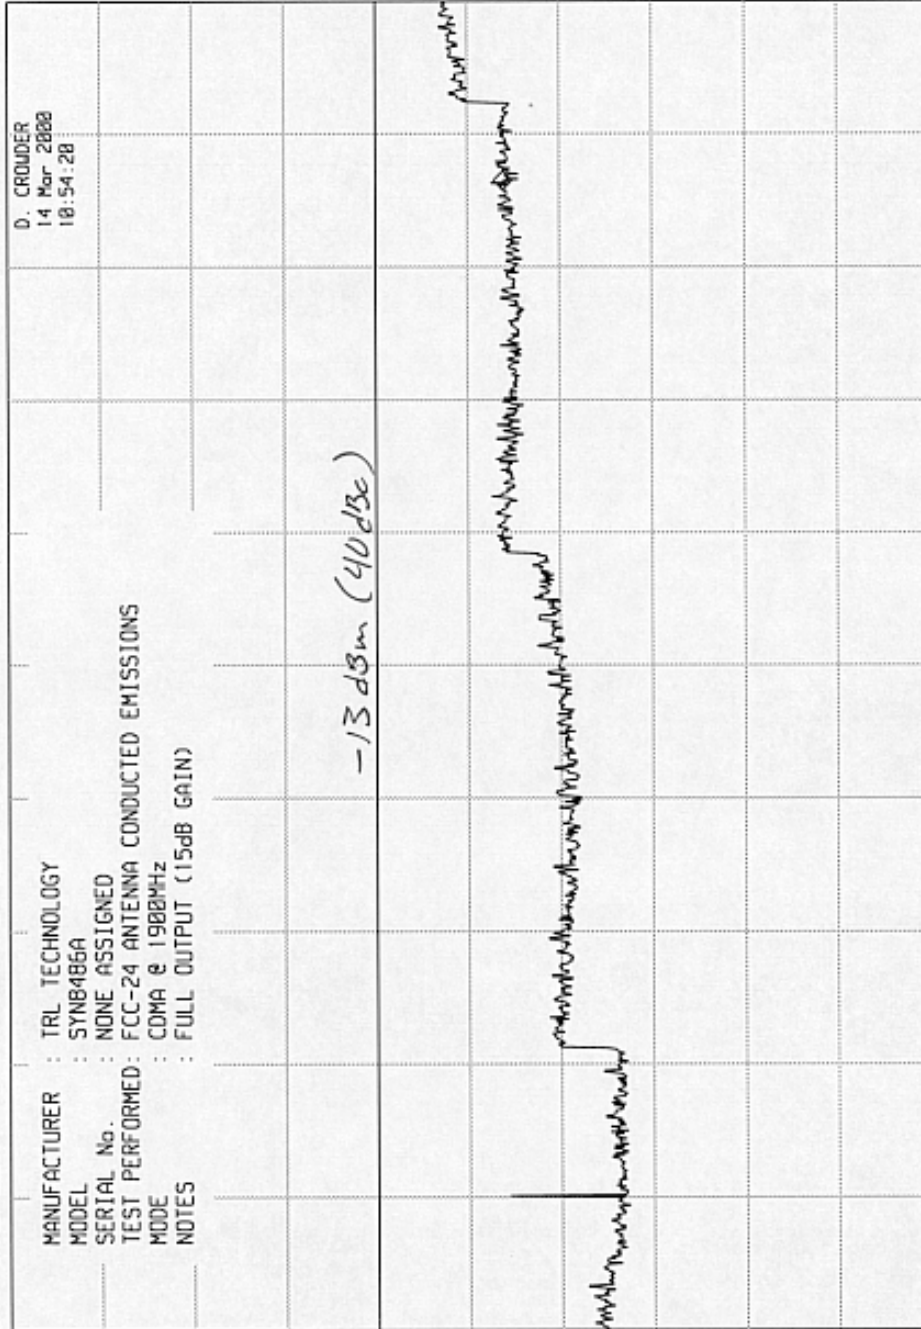

hp

10 dB/

OFFSET
-10.0
dB

DL
-33.0
dBm

MANUFACTURER : TRL TECHNOLOGY
 MODEL : SYN8486A
 SERIAL No. : NONE ASSIGNED
 TEST PERFORMED: FCC-24 ANTENNA CONDUCTED EMISSIONS
 MODE : COMA @ 1988MHz
 NOTES : FULL OUTPUT (15dB GAIN)

-13 dBm (40 dBc)

START 2.0 GHz RES BW 1 MHz VBW 3 MHz STOP 20.0 GHz
 SWP 450 msec

ELITE ELECTRONIC ENGINEERING CO

MKR 868.1 MHz
-68.50 dBm

ATTEN 20 dB + 20 dB EXT

REF 7.0 dBm

MANUFACTURER : MODEL :	TRL TECHNOLOGY SYNB486A
SERIAL No. :	NONE ASSIGNED
TEST PERFORMED :	FCC-24 ANTENNA CONDUCTED EMISSIONS
MODE :	CDMA @ 1900MHz
NOTES :	INPUT

D. CROUDER
14 Mar 2008
11:04:34

hp 10 dB/

OFFSET -10.0 dB

DL -53.0 dBm

START 30 MHz RES BW 100 kHz UBW 300 kHz STOP 1.000 GHz SWP 291 msec

[Handwritten notes and a spectrum plot are visible in this area, but they are illegible due to the image's orientation.]