

TEST REPORT

ACCORDING TO: FCC part 15 subpart C, §15.247 and subpart B; RSS-210 issue 5

FOR:

Motorola Communication Israel Ltd.

X-PAD handheld data terminal

Model:F4423A

FCC ID:AZ489FT7010

This report is in conformity with ISO/ IEC 17025. The A2LA logo endorsement applies only to the test methods and the standards that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Operating frequencies	5
6.3	Changes made in the EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements (DTS)	9
7.1	Minimum 6 dB bandwidth	9
7.2	Peak output power	17
7.3	Field strength of spurious emissions	23
7.4	Peak spectral power density	59
8	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements (FHSS)	68
8.1	Frequency hopping requirements	68
8.2	20 dB bandwidth	69
8.3	Carrier frequency separation	72
8.4	Number of hopping frequencies	74
8.5	Average time of occupancy	76
8.6	Peak output power	79
8.7	Band edge radiated emissions	84
8.8	Field strength of spurious emissions	89
8.9	Antenna requirements	138
9	Emission tests according to 47CFR part 15 subpart B requirements	139
9.1	Radiated emission measurements	139
10	APPENDIX A Test equipment and ancillaries used for tests	144
11	APPENDIX B Measurement uncertainties	145
12	APPENDIX C Test facility description	146
13	APPENDIX D Specification references	146
14	APPENDIX E Abbreviations and acronyms	147
15	APPENDIX F Test equipment correction factors	148

1 Applicant information

Client name: Motorola Communication Israel Ltd.
Address: 3 Kremenetski street, P.O.B. 25016, 67899 Tel Aviv, Israel
Telephone: +972 3565 8888
Fax: +972 3565 8888
E-mail: yaron.haim@motorola.com
Contact name: Mr. Yaron Haim

2 Equipment under test attributes

Product name: X-PAD handheld data terminal
Model(s): F4423A
Serial number: PXX5020068
Receipt date 3/24/2005

3 Manufacturer information

Manufacturer name: Motorola Communication Israel Ltd.
Address: 3 Kremenetski street, P.O.B. 25016, 67899 Tel Aviv, Israel
Telephone: +972 3565 8888
Fax: +972 3565 8888
E-Mail: yaron.haim@motorola.com
Contact name: Mr. Yaron Haim

4 Test details





Project ID: 16387
Location: Hermon Laboratories Ltd. P.O.Box 23, Binyamina 30500, Israel
Test started: 3/24/2005
Test completed: 4/14/2005
Test specification(s): FCC part 15, subpart C, §15.247(DTS), §15.247(FHSS) and subpart B; RSS-210 issue 5, section 6.2.2 (o)
Test suite: FCC_15.247 and RSS-210_DTS_without_RF_connector (7/22/2004 5:08:51 PM, modified)

5 Tests summary

Test	Status
Transmitter characteristics according to §15.247 (DTS)	
FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth	Pass
FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power	Pass
FCC section 15.247(b)5, RSS-210 section 11, RF exposure	Not required
FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions	Pass
FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density	Pass
FCC section 15.207(a), RSS-210 section 6.6, Conducted emission	Not required
Transmitter characteristics according to §15.247 (FHSS)	
Section 15.247(a)1, (g), (h), RSS-210 section 6.2.2(o)(a3), Frequency hopping requirements	Pass
Section 15.247(a)1, RSS-210 section 6.2.2(o)(a3), 20 dB bandwidth	Pass
Section 15.247(a)1, RSS-210 section 6.2.2(o)(a), Frequency separation	Pass
Section 15.247(a)1, RSS-210 section 6.2.2(o)(a3), Number of hopping frequencies	Pass
Section 15.247(a)1, RSS-210 section 6.2.2(o)(a3), Average time of occupancy	Pass
Section 15.247(b), RSS-210 section 6.2.2(o)(a3), Peak output power	Pass
Section 15.247(b)5, RF exposure	Not required
Section 15.247(c), RSS-210 section 6.2.2(o)(e1), Emissions at band edges	Pass
Section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions	Pass
Section 15.203, RSS-210 section 5.5, Antenna requirements	Pass
Section 15.207(a), RSS-210 section 6.6, Conducted emission	Not required
Unintentional emissions	
FCC section 15.107, ICES-03, RSS-210 section 5.17, conducted emission at AC power port	Not required
FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. Y. Neuman, test engineer	April 14, 2005	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	April 17, 2005	
	Mr. M. Nikishin, EMC group leader	April 18, 2005	
Approved by:	Mr. A. Usoskin, CEO	April 18, 2005	



6 EUT description

6.1 General information

The X-Pad handheld data terminal is a rugged device, designed for field applications where fast data acquisition is required.

The X-Pad carries the functionality of a state-of-the-art Personal Digital Assistant (PDA) that enables portable access to mobile applications, such as mobile messaging, queries and Computer Aided Dispatch.

It contains a variety of options, including built-in CMOS imager for barcode labels and image capture, Bluetooth®, Wi-Fi® LAN (Local Area Network) and General Packet Radio Service (GPRS) wireless radios, all with internal antennas for increased ruggedization.

The GPRS module has its own approval grant (FCC ID:IHDT56DB1) and therefore was not tested.

6.2 Operating frequencies

Source	Frequency, MHz			
Digital portion	13	15.36	22	24.576
Processor	416	NA	NA	NA
CDRAM	104	NA	NA	NA
AC97	12.288	NA	NA	NA
Receiver	2412 - 2462	2402 - 2480	NA	NA
Transmitter	2412 - 2462	2402 - 2480	NA	NA
LO (GPRS) low band	695.36 – 715.04	NA	NA	NA
LO (GPRS) high band	772.08 -795.92	NA	NA	NA

6.3 Changes made in the EUT

No changes were implemented.



6.4 Transmitter characteristics

6.4.1 Bluetooth module characteristics (module BCM 2035)

Type of equipment								
Stand-alone (Equipment with or without its own control provisions)								
X	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
Plug-in card (Equipment intended for a variety of host systems)								
Intended use			Condition of use					
fixed			Always at a distance more than 2 m from all people					
mobile			Always at a distance more than 20 cm from all people					
X	portable		May operate at a distance closer than 20 cm to human body					
Assigned frequency range			2400 – 2483.5 MHz					
Operating frequency range			2402 - 2480 MHz					
RF channel spacing			1000 kHz					
Maximum rated output power			At transmitter 50 Ω RF output connector			1.77 dBm		
			Effective radiated power (for equipment with no RF connector)			4.27 dBm		
Is transmitter output power variable?			X	No				
			Yes	continuous variable				
				stepped variable with stepsize				
				minimum RF power				
				maximum RF power				
Antenna connection								
unique coupling		standard connector		X	integral			
				X	without temporary RF connector			
Antenna/s technical characteristics								
Type		Manufacturer		Model number		Gain		
Monopole		Motorola		8508851K37		+2.5 dBi		
Transmitter 99% power bandwidth			1000 kHz					
Transmitter aggregate data rate/s			1.0 Mbps					
Transmitter aggregate symbol (baud) rate/s			0.125 Msymbols (MBAud) per second					
Type of modulation			GFSK					
Type of multiplexing			TDD					
Modulating test signal (baseband)			PRBS					
Maximum transmitter duty cycle in normal use			91.8 %	Tx ON time	0.458 msec	Period	1.278 msec	
Transmitter duty cycle supplied for test			100 %	Tx ON time	msec	Period	msec	
Transmitter power source								
X	Battery	Nominal rated voltage	7.2 VDC	Battery type	Lithium			
		Nominal rated voltage						
Common power source for transmitter and receiver				X	yes	no		
Emission designator			1M00F1D					
Spread spectrum parameters for transmitters tested per FCC 15.247 only								
FHSS	total number of hops		79					
	dwell time		0.458 msec					
	bandwidth per hop		1.0 MHz					
	max. separation of hops		1.0 MHz					



6.4.2 Wireless LAN module characteristics (module Samsung 2350)

Type of equipment						
Stand-alone (Equipment with or without its own control provisions)						
X Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
Plug-in card (Equipment intended for a variety of host systems)						
Intended use		Condition of use				
fixed		Always at a distance more than 2 m from all people				
mobile		Always at a distance more than 20 cm from all people				
X portable		May operate at a distance closer than 20 cm to human body				
Assigned frequency range		2400 – 2483.5 MHz				
Operating frequency range		2412 - 2462 MHz				
RF channel spacing		5 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector		17.47 dBm		
		Effective radiated power (for equipment with no RF connector)		20.17 dBm		
Is transmitter output power variable?		X No				
		Yes		continuous variable		
				stepped variable with stepsize		
				dB		
		minimum RF power		dBm		
		maximum RF power		dBm		
Antenna connection						
unique coupling		standard connector		X integral		
				with temporary RF connector		
				X without temporary RF connector		
Antenna/s technical characteristics						
Type	Manufacturer		Model number		Gain	
Couple folded dipole $\frac{1}{2}$ lambda	Motorola		8508851K38		+2.7 dBi	
Transmitter 99% power bandwidth		1, 2, 5.5 and 11.5 MHz				
Transmitter aggregate data rate/s		1.0, 2.0, 5.5 and 11.0 Mbps				
Transmitter aggregate symbol (baud) rate/s		0.125, 0.25, 06785 and 1.375 Msymbols (Mbaud) per second				
Type of modulation		DSSS:1M – DBPSK, 2M – DQPSK and CCK: 5.5M – DQPSK, 11M - QPSK				
Type of multiplexing		TDD				
Modulating test signal (baseband)		PRBS				
Maximum transmitter duty cycle in normal use		1M – 99.9%	Tx ON time	18.8 msec	Period	18.8126 msec
		2M – 99.8%		9.5 msec		9.5126 msec
		5.5M – 99.6 %		3.6 msec		3.6126 msec
		11M – 99.3%		1.9 msec		1.9126 msec
Transmitter duty cycle supplied for test		100 %	Tx ON time	msec	Period	msec
Transmitter power source						
X	Battery	Nominal rated voltage	7.2 VDC	Battery type	Lithium	
Common power source for transmitter and receiver						
X yes no						
Emission designator		11M5G1D				
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
DSSS	Chip sequence length		8 bits			
	Spectrum width		22 MHz			

**6.4.3 G20, PCS 1900 transmitter under the FCC ID: IHDT56DB1, manufactured by Motorola, Inc**

Type of equipment								
X	Stand-alone (Equipment with or without its own control provisions)							
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)							
	Plug-in card (Equipment intended for a variety of host systems)							
Intended use		Condition of use						
	fixed	Always at a distance more than 2 m from all people						
	mobile	Always at a distance more than 20 cm from all people						
X	portable	May operate at a distance closer than 20 cm to human body						
Assigned frequency range		824 – 849 MHz/1850 – 1910 MHz						
Operating frequency range		824.2 – 848.8 MHz/1850.2 – 1909.8 MHz						
RF channel spacing		200 kHz						
Maximum rated output power		At transmitter 50 Ω RF output connector				850 – 28.7 dBm 1900 – 29.8 dBm		
		Effective radiated power (for equipment with no RF connector)				850 – 29.2 dBm 1900 – 31.8 dBm		
Is transmitter output power variable?		No						
		X	Yes	continuous variable				
				X	stepped variable with stepsize			2 dB
				minimum RF power			850 – 5 dBm 1900 – 0 dBm	
				maximum RF power			850 – 28.7 dBm 1900 – 29.8 dBm	
Antenna connection								
unique coupling		standard connector		X	integral	with temporary RF connector X without temporary RF connector		
Antenna/s technical characteristics								
Type		Manufacturer		Model number		Gain		
PIFA Quad-Band, 850/900/2; 1800/1900/4		Motorola		8587526V07		850/900 +0.5 dBi 1800/1900 +2.0 dBi		
Transmitter 99% power bandwidth				245 kHz				
Transmitter aggregate data rate/s				21 kbps				
Transmitter aggregate symbol (baud) rate/s				21 ksymbols (kBaud) per second				
Type of modulation				GMSK				
Type of multiplexing				TDMA				
Modulating test signal (baseband)				GSM				
Maximum transmitter duty cycle in normal use				12.5 %	Tx ON time	0.576 msec	Period	4.7 msec
Transmitter duty cycle supplied for test				12.5 %	Tx ON time	0.576 msec	Period	4.7 msec
Transmitter power source								
X	Battery	Nominal rated voltage	7.2 VDC	Battery type	Lithium			
		Nominal rated voltage						
Common power source for transmitter and receiver								
				yes	X	no		



Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements (DTS)

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits according to FCC part 15 section 15.247(a)2 and RSS-210 section 6.2.2(o)(iv) are given in Table 7.1.1.

Table 7.1.1 The 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
902.0 – 928.0	6.0	500.0
2400.0 – 2483.5		
5725.0 – 5850.0		

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.

7.1.2.2 The EUT was set to transmit modulated carrier.

7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.

Figure 7.1.1 The 6 dB bandwidth test setup





Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.1.2 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz
 DETECTOR USED: Peak
 SWEEP MODE: Single
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 MODULATION ENVELOPE REFERENCE POINTS: 6.0 dBc
 MODULATION: DBPSK, DQPSK, DQPSK and QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1, 2, 5.5 and 11 Mbps

Carrier frequency, MHz	6 dB bandwidth, MHz	Limit, kHz	Margin, MHz	Verdict
Low frequency				
1 Mbps				
2412	12.10	>500	11.60	Pass
2 Mbps				
2412	12.30	>500	11.80	Pass
5.5 Mbps				
2412	12.25	>500	11.75	Pass
11 Mbps				
2412	12.40	>500	11.90	Pass
Mid frequency				
1 Mbps				
2437	12.60	>500	12.10	Pass
2 Mbps				
2437	12.40	>500	11.90	Pass
5.5 Mbps				
2437	12.35	>500	11.85	Pass
11 Mbps				
2437	12.40	>500	11.90	Pass
High frequency				
1 Mbps				
2462	12.10	>500	11.60	Pass
2 Mbps				
2462	12.50	>500	12.00	Pass
5.5 Mbps				
2462	12.10	>500	11.60	Pass
11 Mbps				
2462	12.45	>500	11.95	Pass

Reference numbers of test equipment used

HL 0038	HL 0287	HL 1365	HL 1430	HL 1947	HL 2432			
---------	---------	---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.



Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.1.1 The 6 dB bandwidth test result at low frequency, bitrate 1 Mbit/s

14:10:09 APR 05, 2005

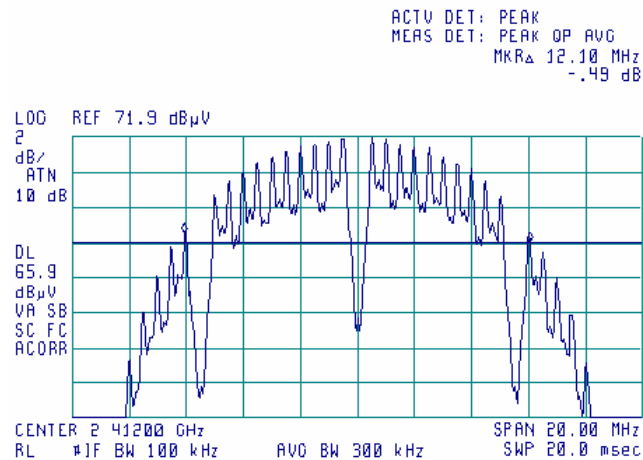

Plot 7.1.2 The 6 dB bandwidth test result at low frequency, bitrate 2 Mbit/s


15:53:06 APR 05, 2005

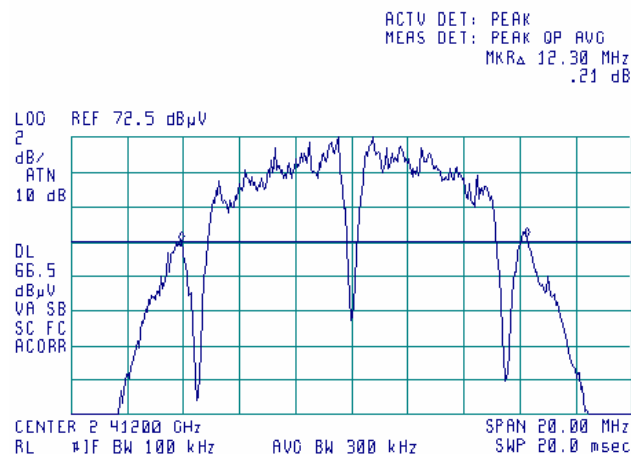




Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.1.3 The 6 dB bandwidth test result at low frequency, bitrate 5.5 Mbit/s

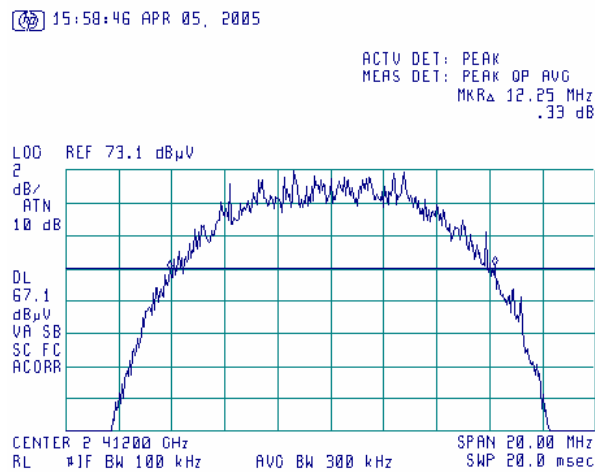


Plot 7.1.4 The 6 dB bandwidth test result at low frequency, bitrate 11 Mbit/s

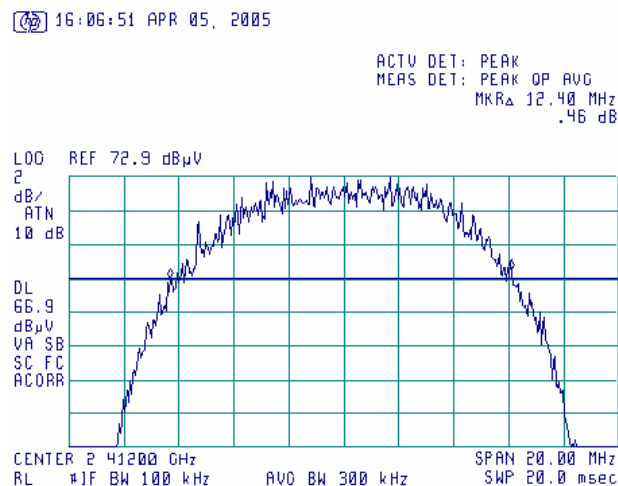




Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.1.5 The 6 dB bandwidth test result at mid frequency, bitrate 1 Mbit/s

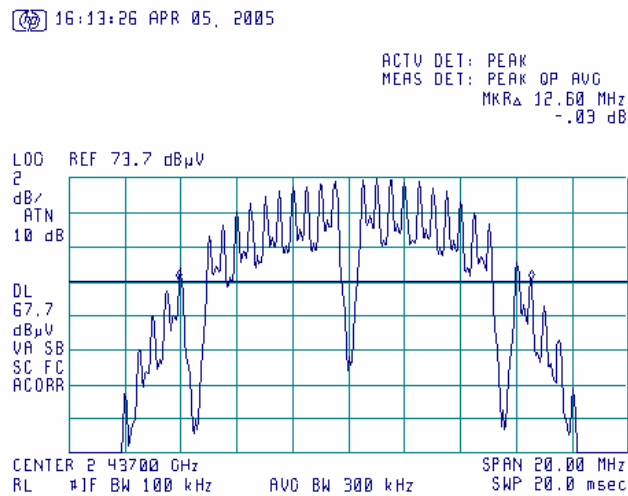


Plot 7.1.6 The 6 dB bandwidth test result at mid frequency, bitrate 2 Mbit/s

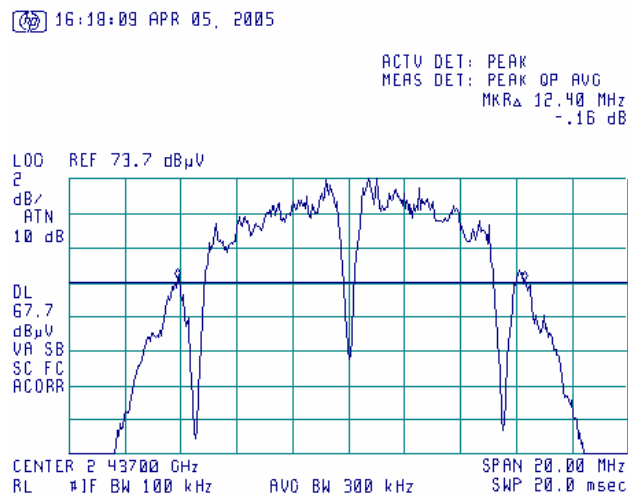




Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.1.7 The 6 dB bandwidth test result at mid frequency, bitrate 5.5 Mbit/s

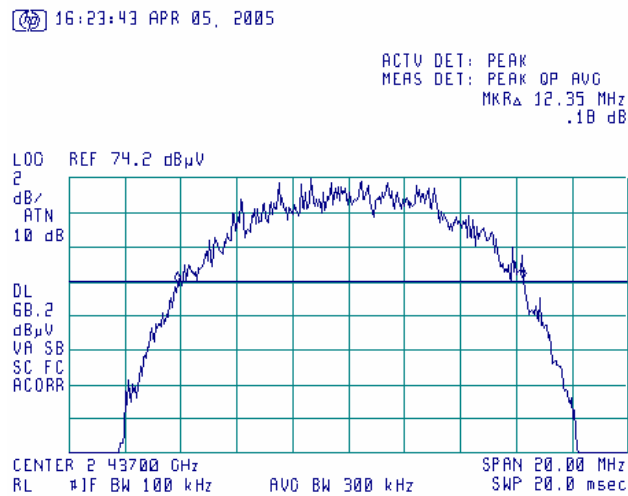

Plot 7.1.8 The 6 dB bandwidth test result at mid frequency, bitrate 11 Mbit/s

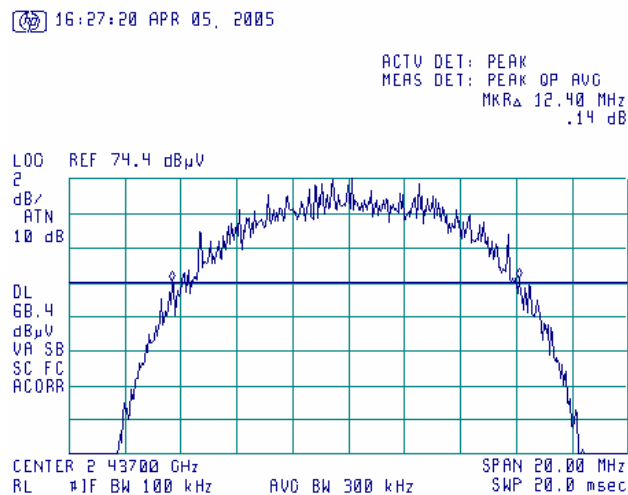




Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.1.9 The 6 dB bandwidth test result at high frequency, bitrate 1 Mbit/s

16:35:45 APR 05, 2005

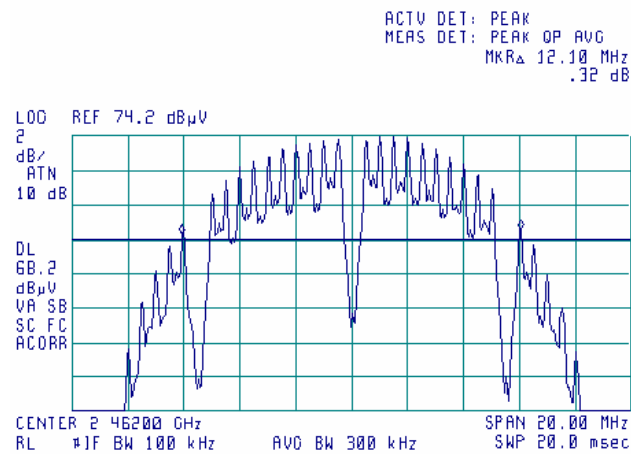

Plot 7.1.10 The 6 dB bandwidth test result at high frequency, bitrate 2 Mbit/s


16:40:22 APR 05, 2005

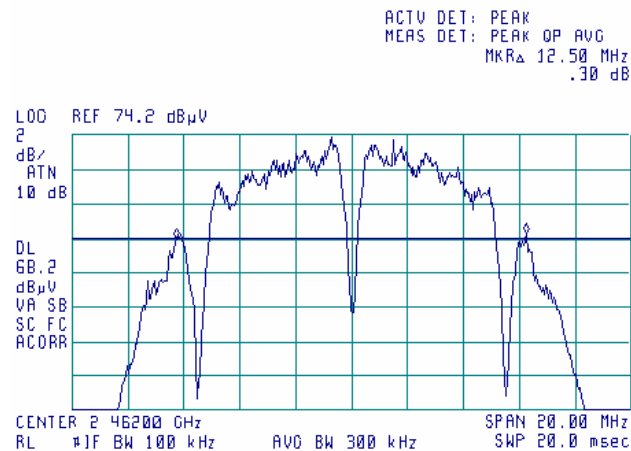




Test specification: FCC section 15.247(a)2, RSS-210 section 6.2.2(o)(iv), 6 dB bandwidth			
Test procedure: FR Vol.62, page 26243, Section 15.247(a)2			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:45:16 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.1.11 The 6 dB bandwidth test result at high frequency, bitrate 5.5 Mbit/s

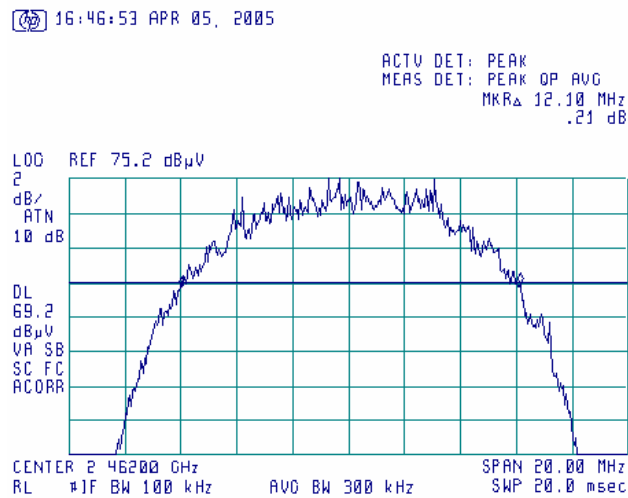

Plot 7.1.12 The 6 dB bandwidth test result at high frequency, bitrate 11 Mbit/s

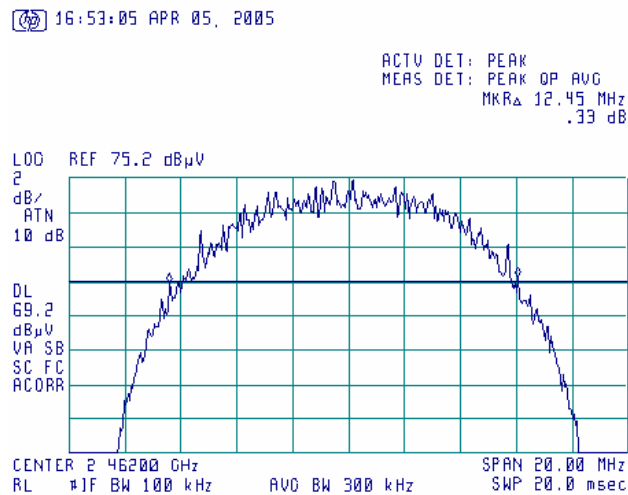



Test specification:		FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:43:20 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits according to FCC part 15 section 15.247(b)3 and RSS-210 section 6.2.2(o)(b) are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(μV/m)**
		W	dBm	
902.0 – 928.0	6.0	1.0	30.0	131.2
2400.0 – 2483.5				
5725.0 – 5850.0				

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

** - Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.

7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.

7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V/m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.

Test specification:	FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b),Peak output power		
Test procedure:	FR Vol.62, page 26243, Section 15.247(b)		
Test mode:	Compliance	Verdict: PASS	
Date & Time:	4/6/2005 10:43:20 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

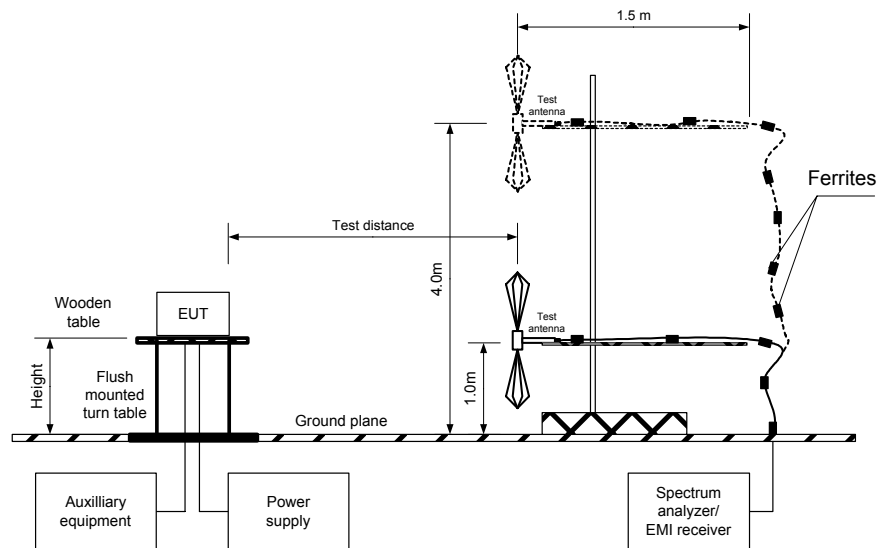



Test specification:		FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:43:20 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: OATS
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 TEST ANTENNA TYPE: Double ridged guide horn
 MODULATION: DBPSK, QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 and 11 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak

Frequency, MHz	Field strength, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
1 Mbit/s									
2412	114.1	H	1.44	181	2.7	16.17	30	13.83	Pass
2437	115.3	H	1.37	162	2.7	17.37	30	12.63	Pass
2462	115.1	H	1.45	175	2.7	17.17	30	12.83	Pass
11 Mbit/s									
2412	114.0	H	1.44	181	2.7	16.07	30	13.93	Pass
2437	115.4	H	1.37	162	2.7	17.47	30	12.53	Pass
2462	115.1	H	1.45	175	2.7	17.17	30	12.83	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**-. Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(μV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Reference numbers of test equipment used


HL 0038	HL 0287	HL 1365	HL 1424	HL 1947	HL 2432		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




Test specification: FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power			
Test procedure: FR Vol.62, page 26243, Section 15.247(b)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 4/6/2005 10:43:20 AM			
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.2.1 Field strength of carrier at low frequency, bitrate 1 Mbit/s

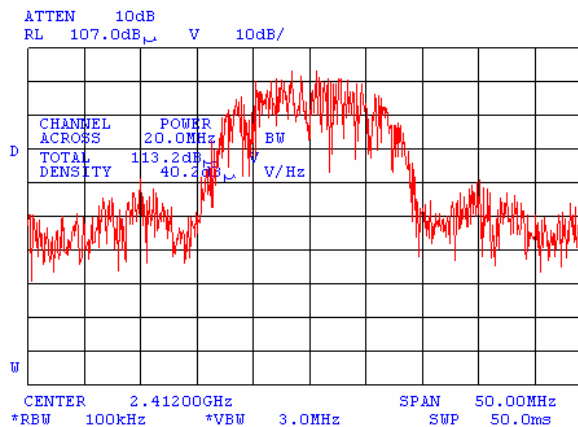

2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB


Plot 7.2.2 Field strength of carrier at mid frequency, bitrate 1 Mbit/s

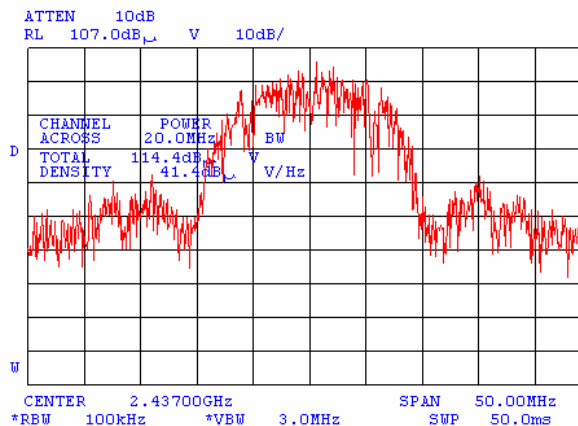


2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB



Test specification:		FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:43:20 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

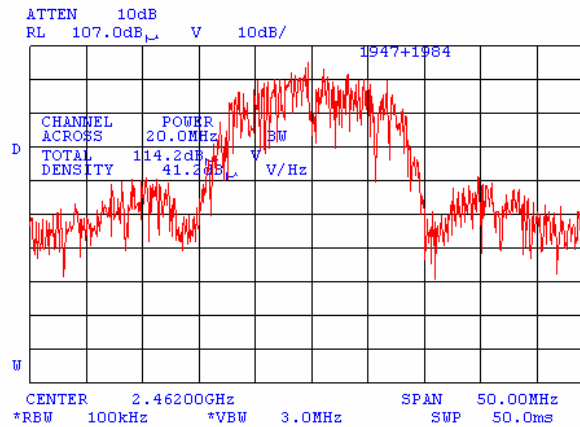Plot 7.2.3 Field strength of carrier at high frequency, bitrate 1 Mbit/s


2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB

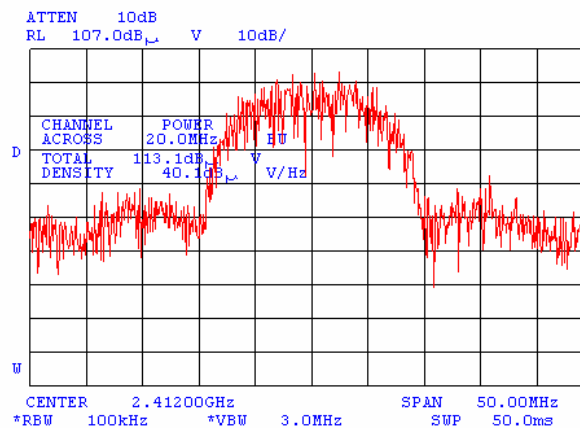Plot 7.2.4 Field strength of carrier at low frequency, bitrate 11 Mbit/s


2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB



Test specification:		FCC section 15.247(b)3, RSS-210 section 6.2.2(o)(b), Peak output power	
Test procedure:		FR Vol.62, page 26243, Section 15.247(b)	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:43:20 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

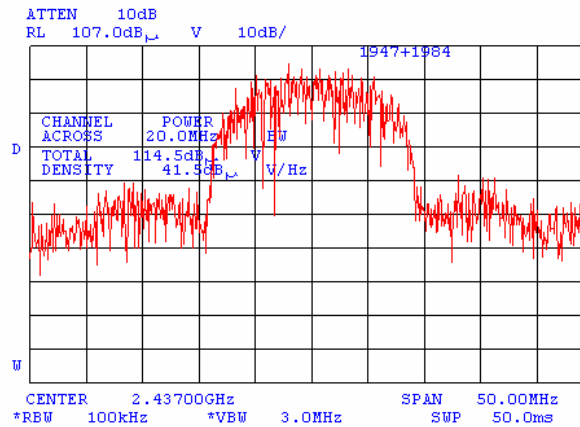Plot 7.2.5 Field strength of carrier at mid frequency, bitrate 11 Mbit/s

2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB

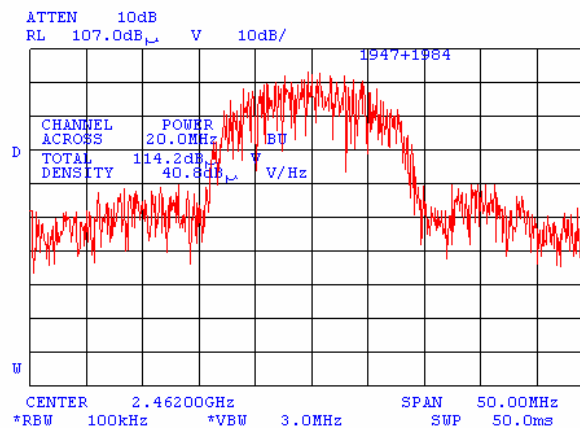Plot 7.2.6 Field strength of carrier at high frequency, bitrate 11 Mbit/s

2432+1947+1365 were used instead of 1984+1947. Correction factor =0.9 dB



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits according to FCC part 15 section 15.247(c) and RSS-210 section 6.2.2(o)(e1) are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.490*	NA	128.5 – 93.8**	NA	20.0
0.490 – 1.705*		73.8 – 63.0**		
1.705 – 30.0*		69.5**		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


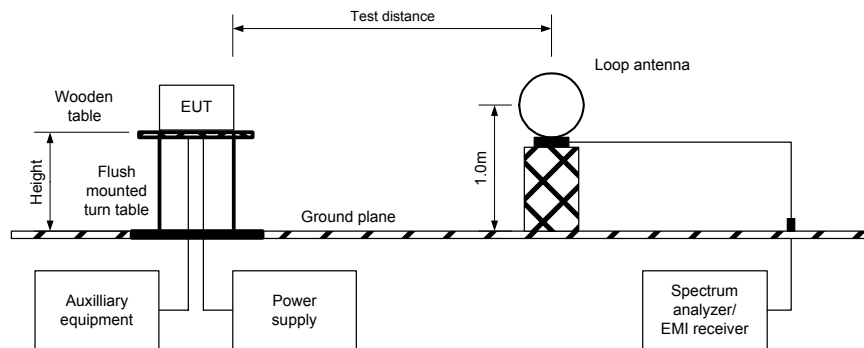


Figure 7.3.2 Setup for spurious emission field strength measurements above 30 MHz



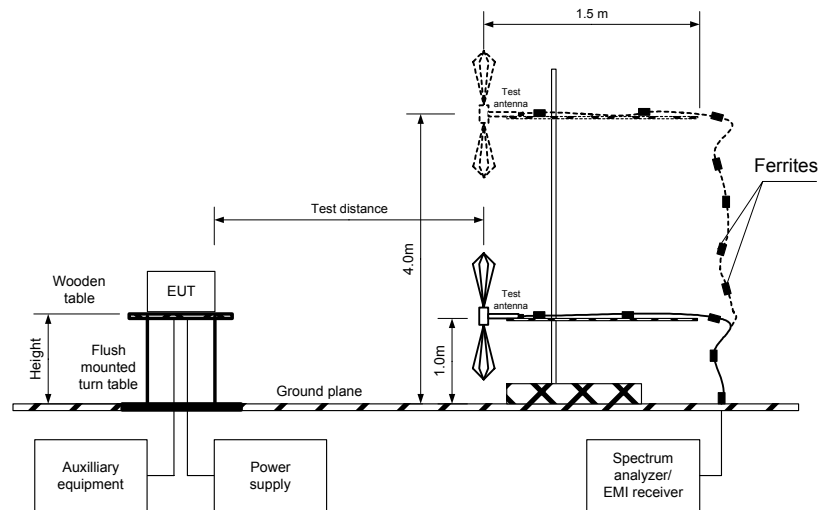

Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.3.2 Field strength of emissions outside restricted bands

OPERATING FREQUENCY BAND: 2412-2462 MHz MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: BT: CW, WLAN:DBPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
3215.96	52.33	H	1.32	243	102.50	50.17	20	30.17	Pass
Mid carrier frequency									
3249.29	52.50	H	1.32	243	97.10	44.60	20	24.60	Pass
High carrier frequency									
3282.62	46.50	H	1.32	243	102.90	56.40	20	36.40	Pass

*- EUT front panel refers to 0 degrees position of turntable.

** - Margin = Attenuation below carrier – specification limit.



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

OPERATING FREQUENCY BAND: 2412-2462 MHz MHz
 INVESTIGATED FREQUENCY RANGE: 1 - 25 GHz
 TEST DISTANCE: 3 m
 MODULATION: BT: CW, WLAN:DBPSK
 MODULATING SIGNAL: PRBS
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak, average
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
BIT RATE: 1 Mbps											
Low carrier frequency											
2385.8	H	1.0	0	58.78	74	15.22	50.64	50.64	54	3.36	Pass
4824	H	1.15	150	53.33	74	20.67	50.00	50.00	54	4.00	Pass
Mid carrier frequency											
4874	H	1.15	150	53.83	74	20.17	50.83	50.83	54	3.17	Pass
High carrier frequency											
2483.5	H	1.0	0	60.43	74	13.57	52.18	52.18	54	1.82	Pass
4924	H	1.15	150	53.33	74	20.67	50.00	50.00	54	4.00	Pass
BIT RATE: 11 Mbps											
Low carrier frequency											
2390	H	1.0	0	60.59	74	13.41	48.15	48.15	54	5.85	Pass
High carrier frequency											
2483.5	H	1.0	0	61.83	74	12.17	49.89	49.89	54	4.11	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
Duty cycle 100%					0



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

OPERATING FREQUENCY BAND: 2412-2462 MHz MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: BT: CW, WLAN:DBPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low carrier frequency								
All spurious emissions were found at least 20 dB below specified limit								Pass
Mid carrier frequency								
All spurious emissions were found at least 20 dB below specified limit								Pass
High carrier frequency								
All spurious emissions were found at least 20 dB below specified limit								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Table 7.3.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2655 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0038	HL 0091	HL 0287	HL 0410	HL 0446	HL 0465	HL 0521	HL 0589
HL 0604	HL 0768	HL 0769	HL 1200	HL 1424	HL 1942	HL 1947	HL 1984
HL 2009	HL 2259	HL 2432	HL 2499				

Full description is given in Appendix A.




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.1 Radiated emission measurements at the low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and horizontal

15:41:14 MAR 24, 2005

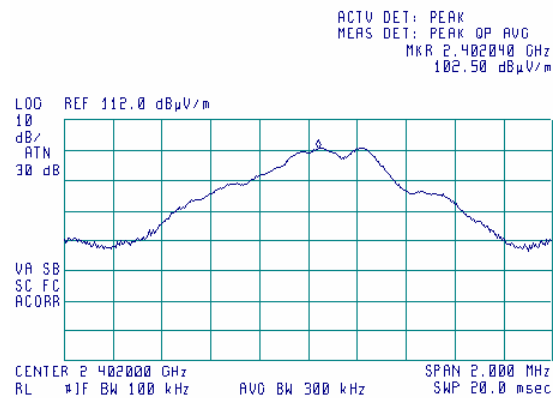


The Bluetooth transmitter was measured to calculate the limit of spurious emissions because its power is less than the power of WLAN transmitter.

Plot 7.3.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

10:22:57 MAR 27, 2005

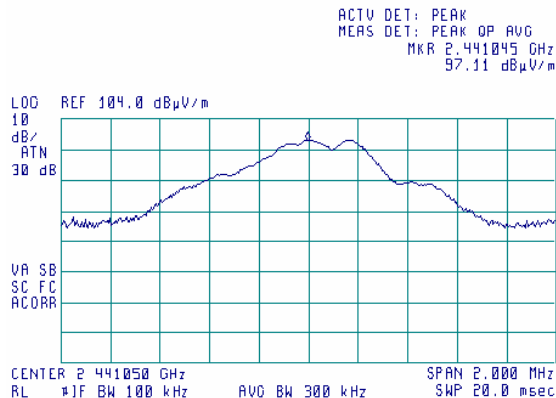

The Bluetooth transmitter was measured to calculate the limit of spurious emissions because its power is less than the power of WLAN transmitter.




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.3 Radiated emission measurements at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

11:45:54 MAR 27, 2005

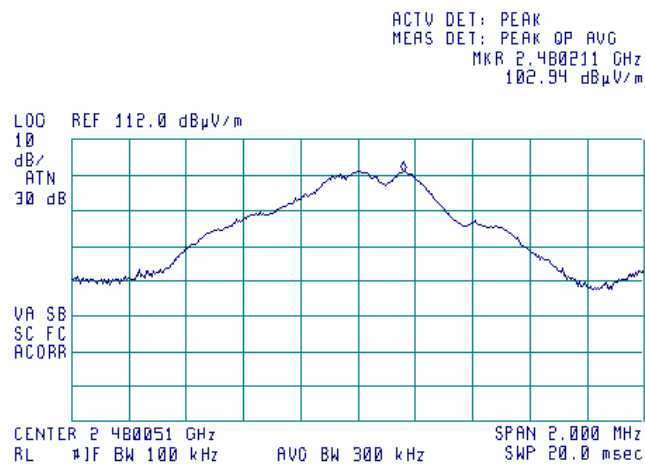

The Bluetooth transmitter was measured to calculate the limit of spurious emissions because its power is less than the power of WLAN transmitter.




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.4 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

07:50:40 APR 04, 2005

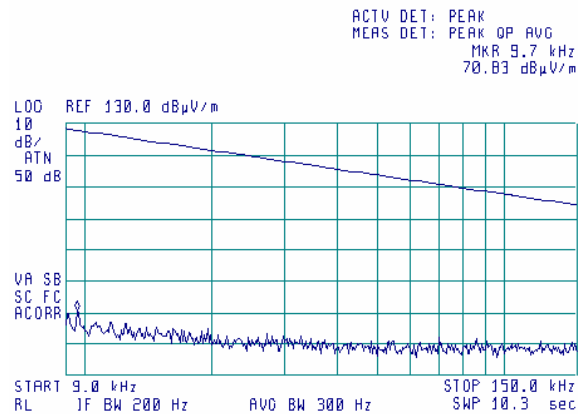**Plot 7.3.5 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

07:54:33 APR 04, 2005

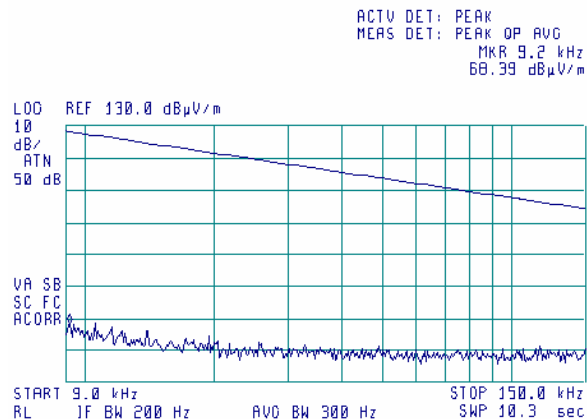




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.6 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

(75) 08:04:00 APR 04, 2005

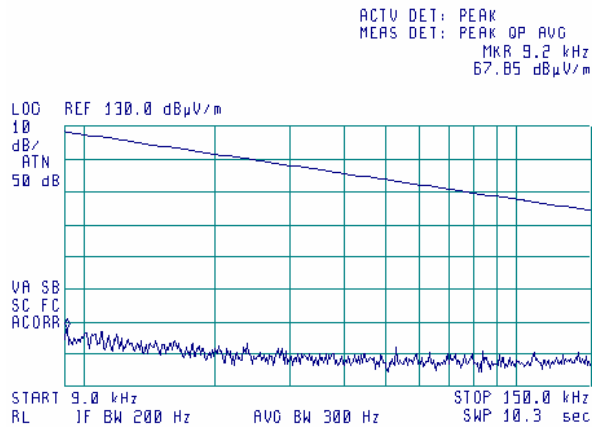**Plot 7.3.7 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

(75) 07:44:50 APR 04, 2005

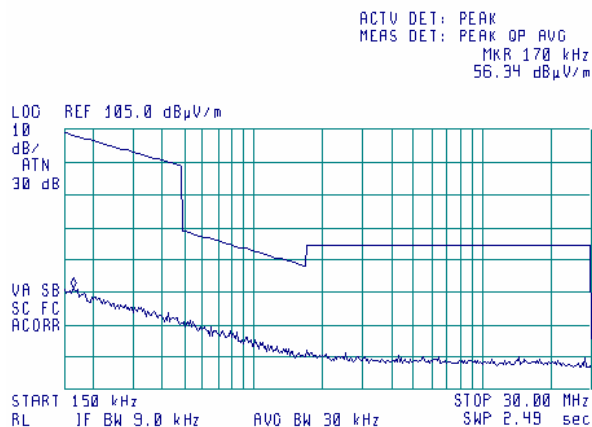




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.8 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical


07:57:23 APR 04, 2005

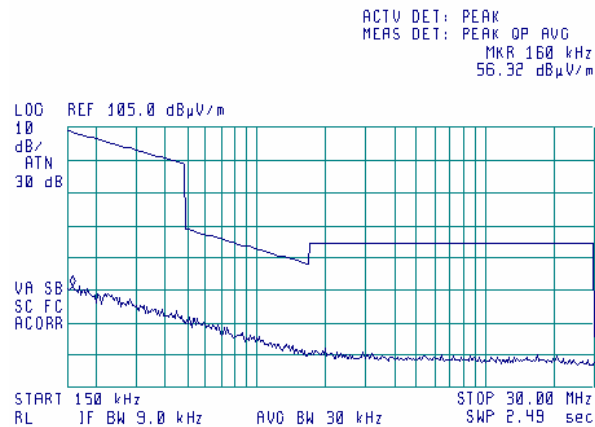

Plot 7.3.9 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:01:08 APR 04, 2005

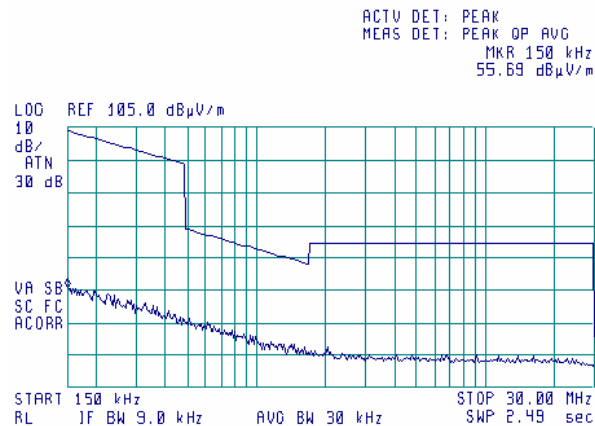




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.10 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


16:17:24 APR 03, 2005

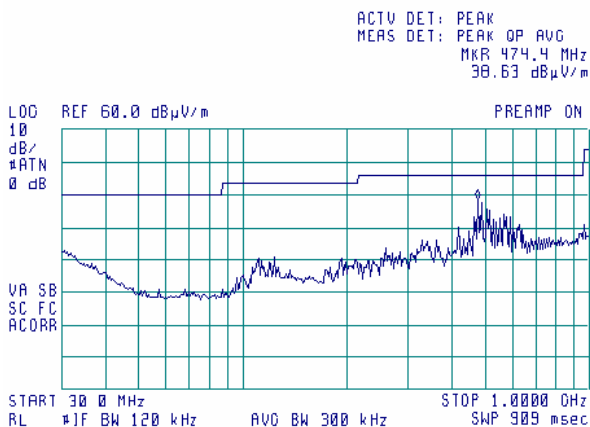

Plot 7.3.11 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:25:00 APR 03, 2005

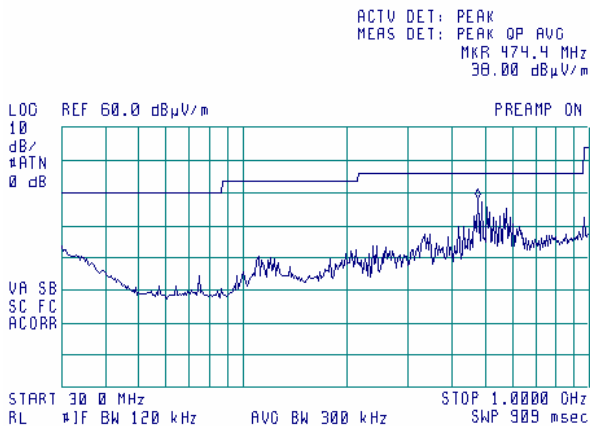




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.12 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:32:18 APR 03, 2005

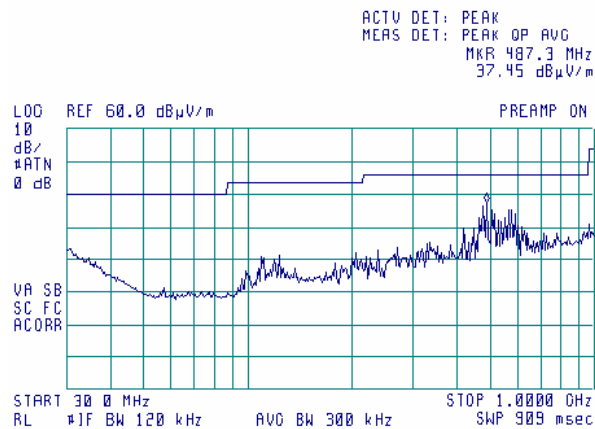




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.13 Radiated emission measurements from 1000 to 1715 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


11:57:09 MAR 30, 2005

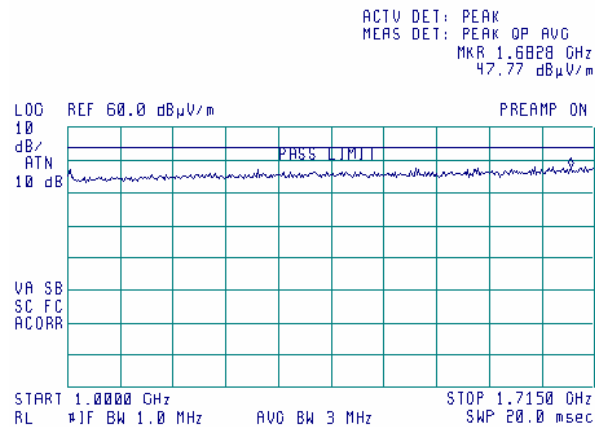

Plot 7.3.14 Radiated emission measurements from 1715 to 2350 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:43:22 MAR 30, 2005

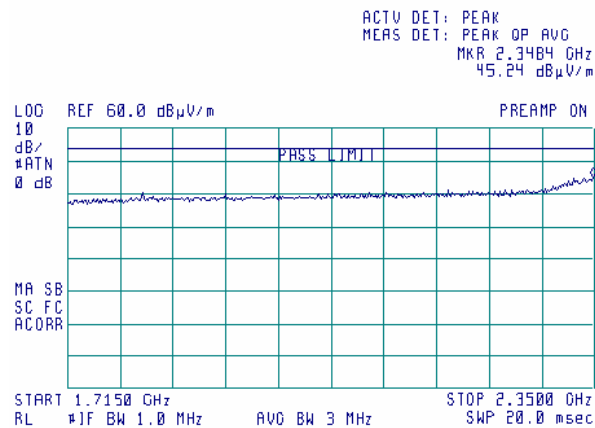




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.15 Radiated emission measurements from 1000 to 1715 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


12:08:33 MAR 30, 2005

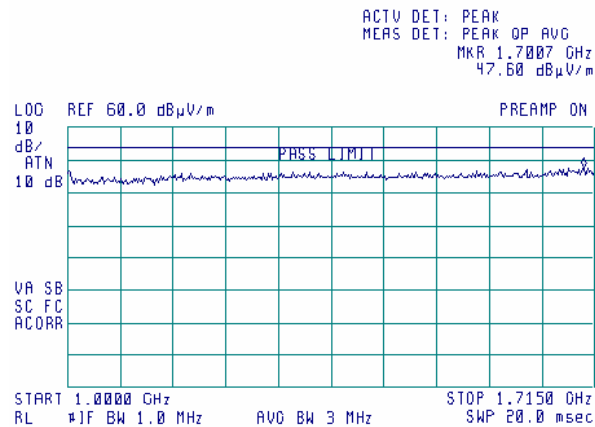

Plot 7.3.16 Radiated emission measurements from 1715 to 2400 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

12:14:34 MAR 30, 2005

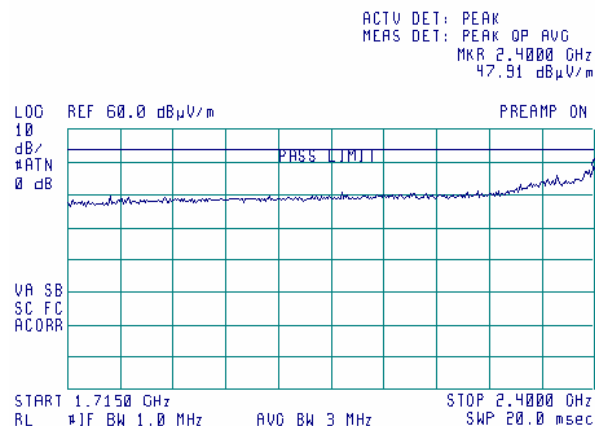




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.17 Radiated emission measurements from 1000 to 1750 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


12:33:00 MAR 30, 2005

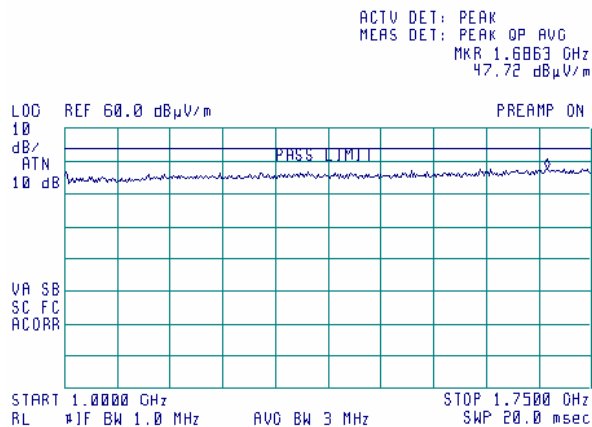

Plot 7.3.18 Radiated emission measurements from 1750 to 2400 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

12:28:46 MAR 30, 2005

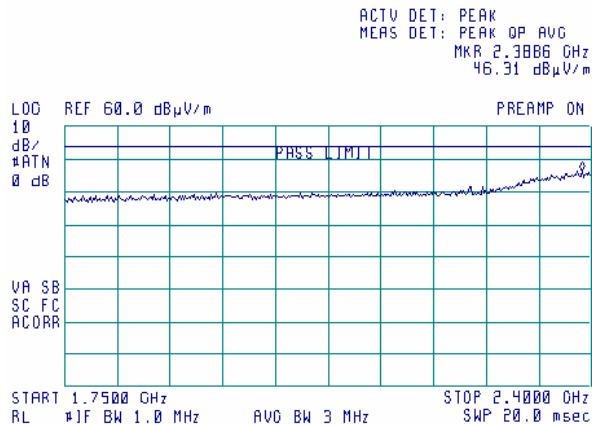




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.19 Radiated emission measurements at band edge at the low carrier frequency, bitrate 1 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

10:55:56 MAR 29, 2005

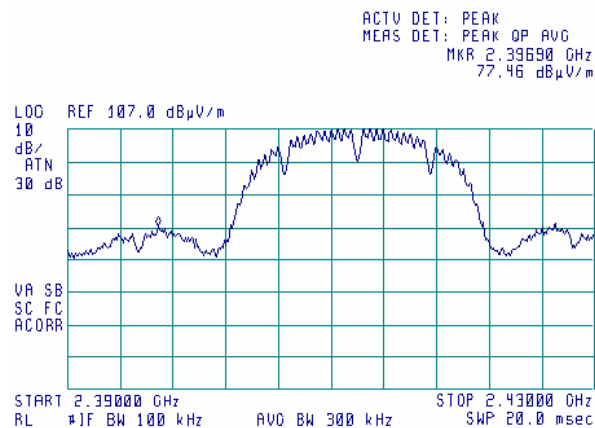




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.20 Radiated emission measurements at band edge at the low carrier frequency, bitrate 1 MBit/s


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:07:44 MAR 29, 2005

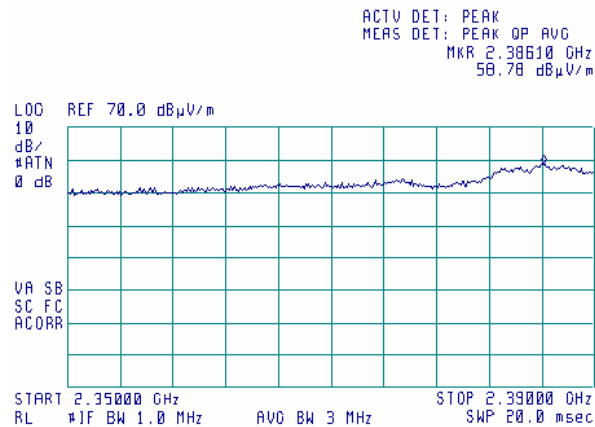**Plot 7.3.21 Radiated emission measurements at band edge at the low carrier frequency, bitrate 1 MBit/s**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:12:13 MAR 29, 2005

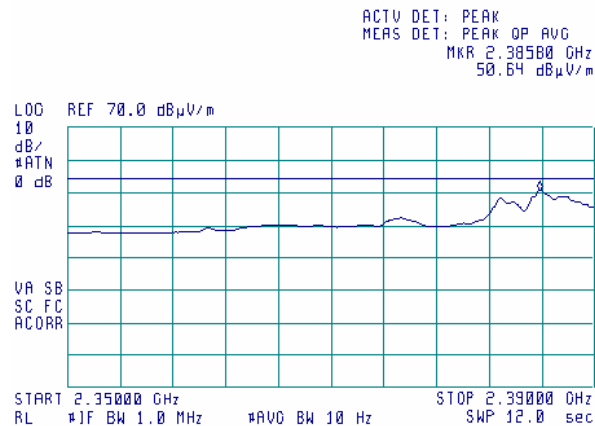




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.22 Radiated emission measurements at band edge at the low carrier frequency, bitrate 11 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


11:42:09 MAR 29, 2005

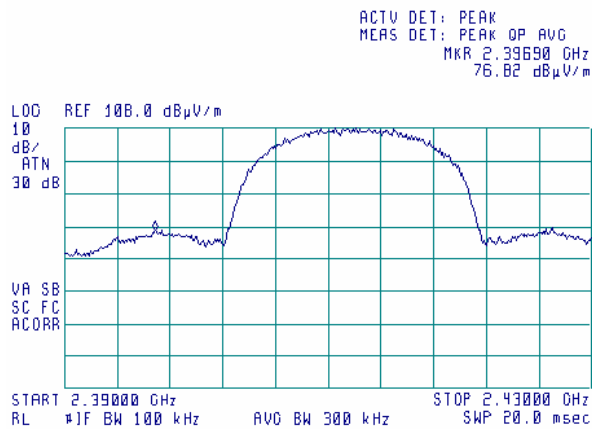

Plot 7.3.23 Radiated emission measurements at band edge at the low carrier frequency, bitrate 11 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:33:59 MAR 29, 2005

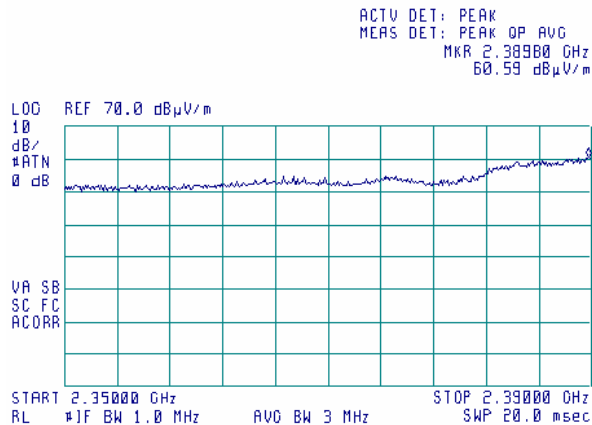




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.24 Radiated emission measurements at band edge at the low carrier frequency, bitrate 11 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:38:17 MAR 29, 2005

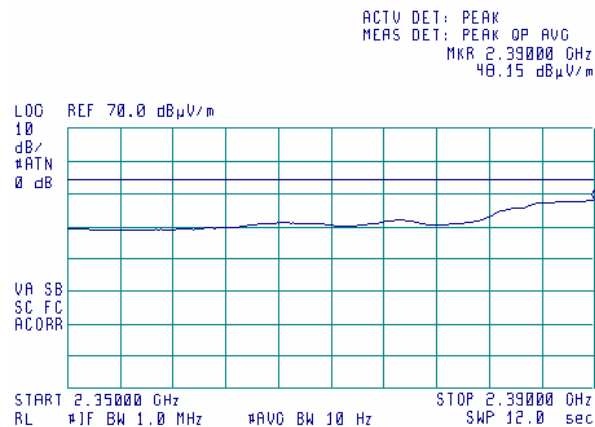




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.25 Radiated emission measurements at band edge at the high carrier frequency, bitrate 1 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


11:55:39 MAR 29, 2005

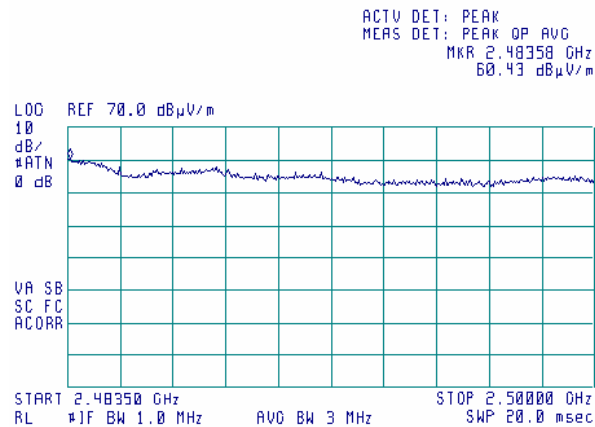

Plot 7.3.26 Radiated emission measurements at band edge at the high carrier frequency, bitrate 1 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:58:44 MAR 29, 2005

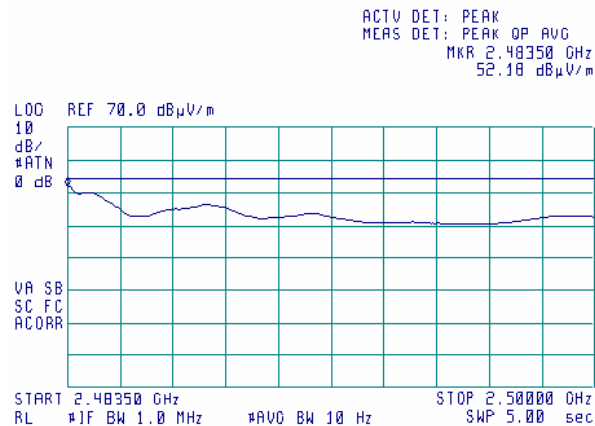




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.27 Radiated emission measurements at band edge at the high carrier frequency, bitrate 11 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


11:49:19 MAR 29, 2005

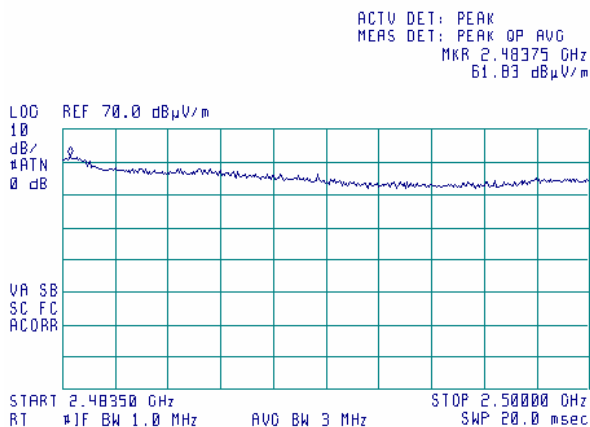

Plot 7.3.28 Radiated emission measurements at band edge at the high carrier frequency, bitrate 11 MBit/s

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

11:51:35 MAR 29, 2005

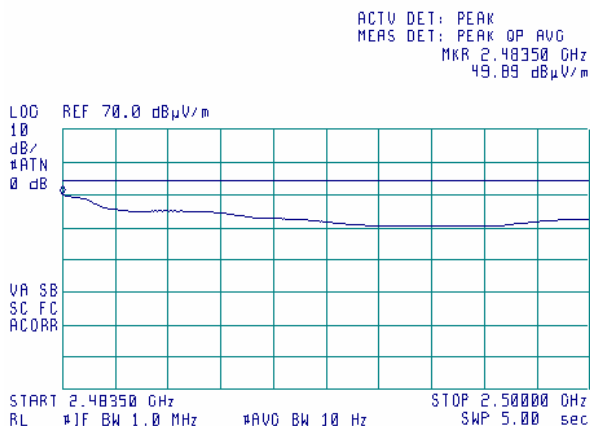




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.29 Radiated emission measurements from 2483.5 to 2900 MHz at the low carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


09:22:10 APR 03, 2005

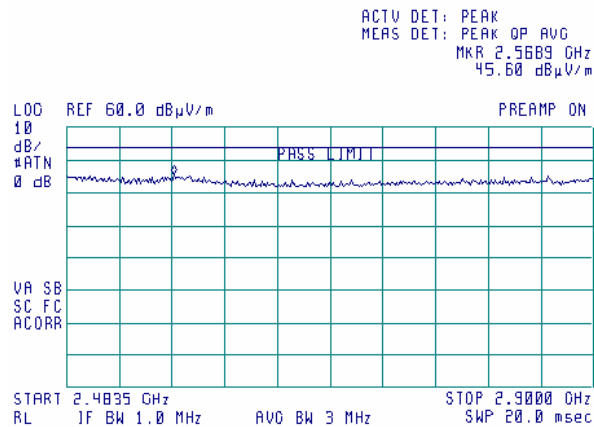

Plot 7.3.30 Radiated emission measurements from 2483.5 to 2900 MHz at the mid carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

09:32:40 APR 03, 2005

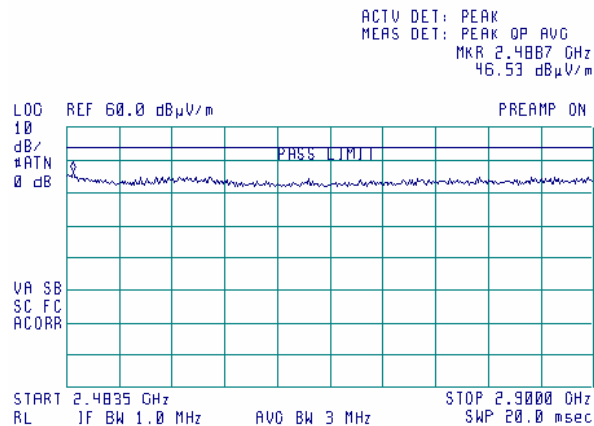




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.31 Radiated emission measurements from 2500 to 2900 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:35:52 MAR 28, 2005

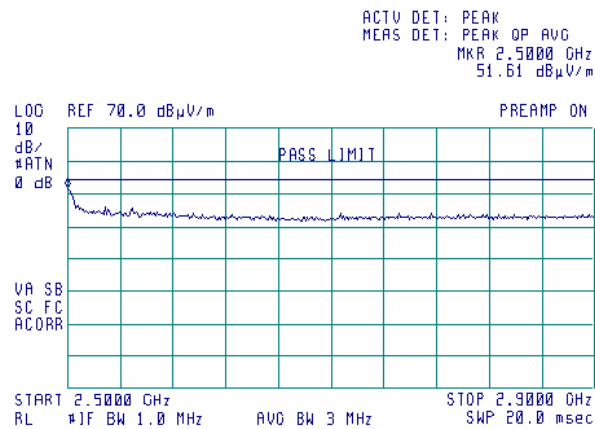




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.32 Radiated emission measurements from 2900 to 4000 MHz at the low carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

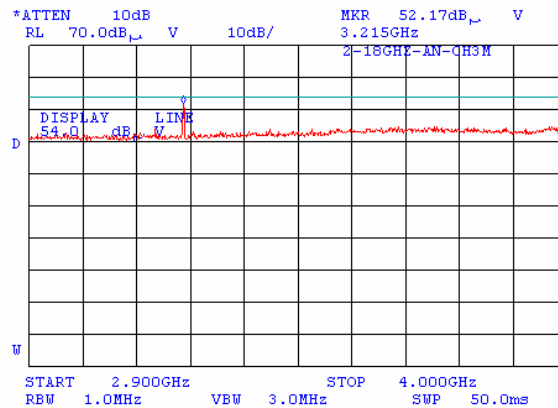

3216 MHz - not restricted band

Plot 7.3.33 Radiated emission measurements at 3215.96 MHz at the low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

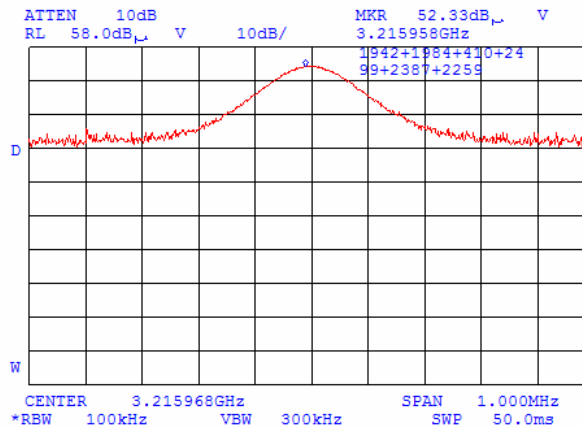




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.34 Radiated emission measurements from 2900 to 4000 MHz at the mid carrier frequency


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

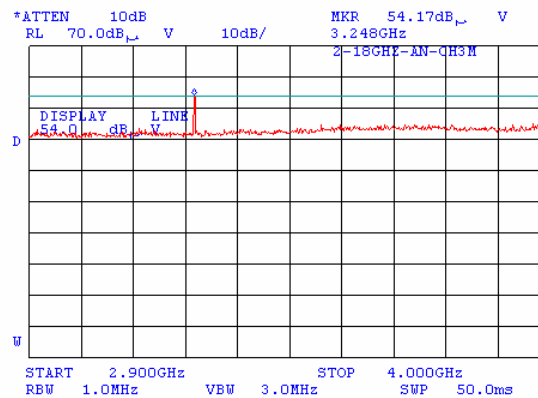

3249.29 MHz - not restricted band

Plot 7.3.35 Radiated emission measurements at 3249.29 MHz at the mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

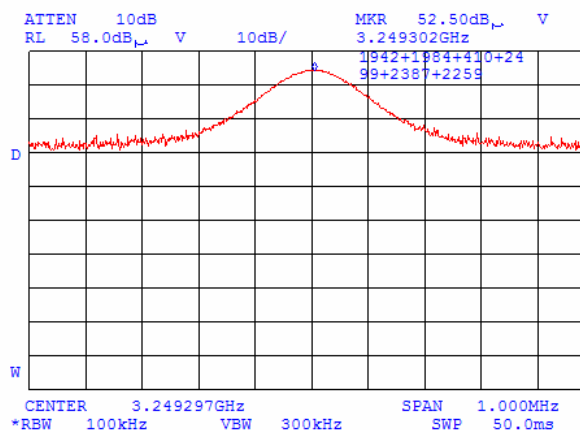




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.36 Radiated emission measurements from 2900 to 4000 MHz at the high carrier frequency

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

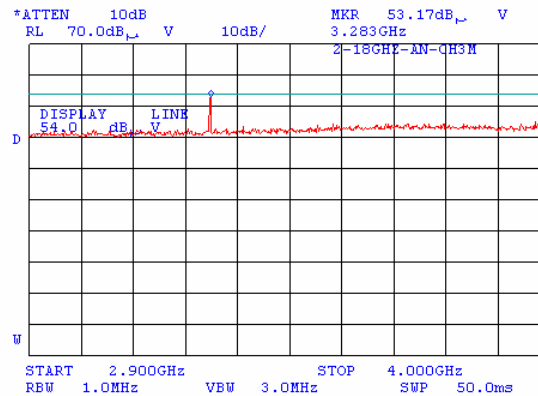

Plot 7.3.37 Radiated emission measurements at 3282.62 MHz at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

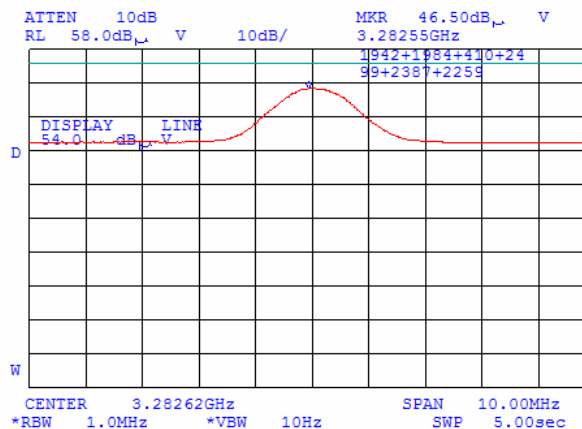




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.38 Radiated emission measurements from 4000 to 8000 MHz at the low carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

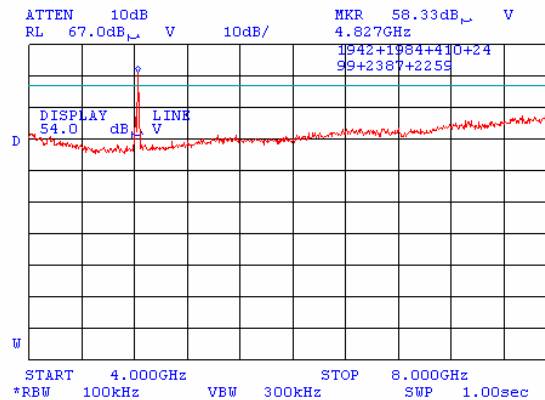

Plot 7.3.39 Radiated emission measurements from 4000 to 8000 MHz at the mid carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

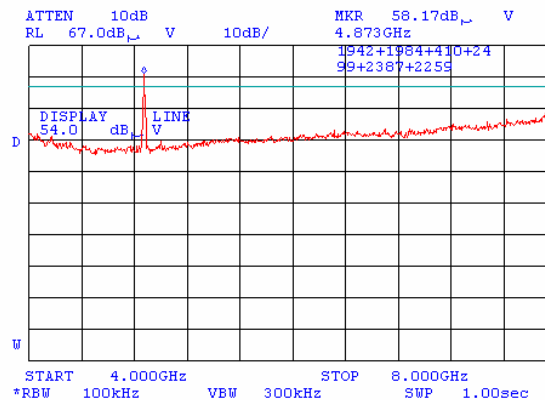




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.40 Radiated emission measurements from 4000 to 8000 MHz at the high carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

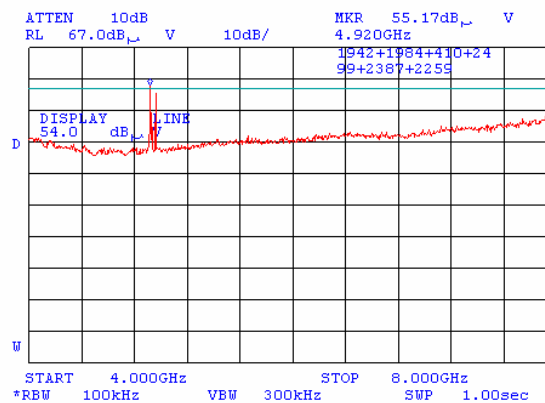




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.41 Radiated emission measurements from 4800 to 4850 MHz at the low carrier frequency
(WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

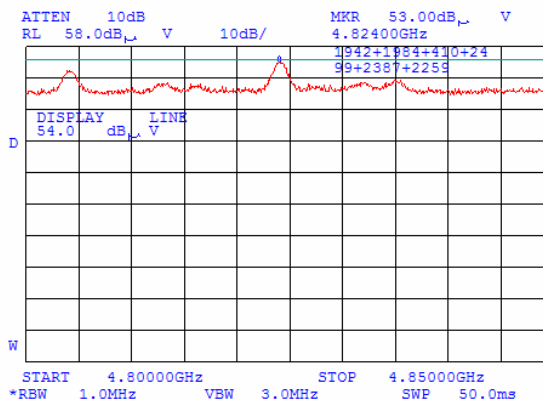

Plot 7.3.42 Radiated emission measurements from 4800 to 4850 MHz at the low carrier frequency
(WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

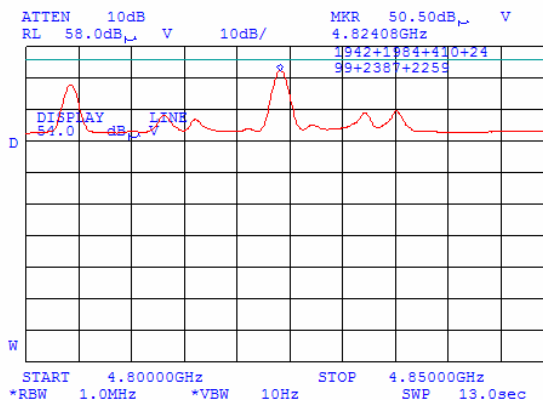


WLAN: 4824 MHz 50.5 dBuV/m
BT: 4804 MHz 45.8 dBuV/m



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.43 Radiated emission measurements from 4850 to 4900 MHz at the mid carrier frequency (WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

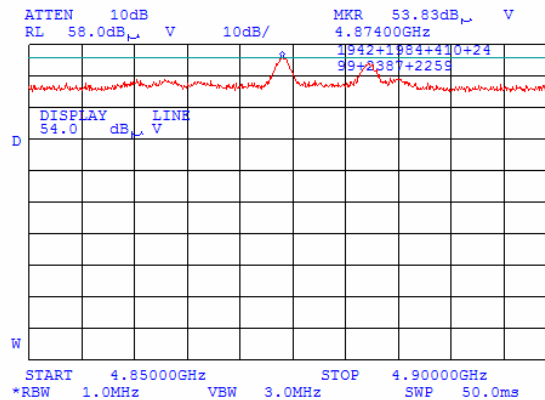

Plot 7.3.44 Radiated emission measurements from 4850 to 4900 MHz at the mid carrier frequency (WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

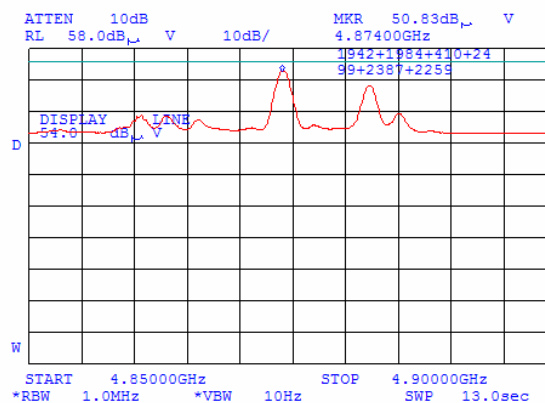


WLAN: 4874 MHz 50.8 dBuV/m
BT: 4882 MHz 46.2 dBuV/m



Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.45 Radiated emission measurements from 4900 to 4970 MHz at the high carrier frequency (WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

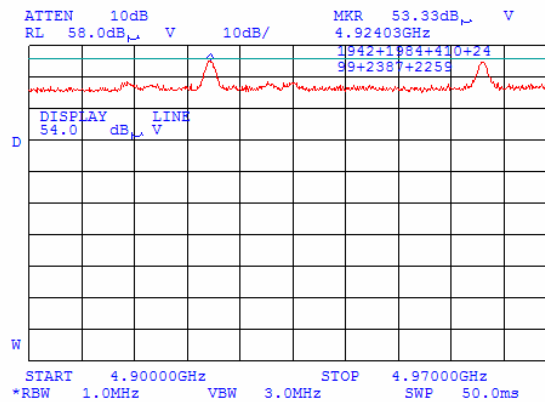

Plot 7.3.46 Radiated emission measurements from 4900 to 4970 MHz at the high carrier frequency (WLAN and BT second harmonic)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

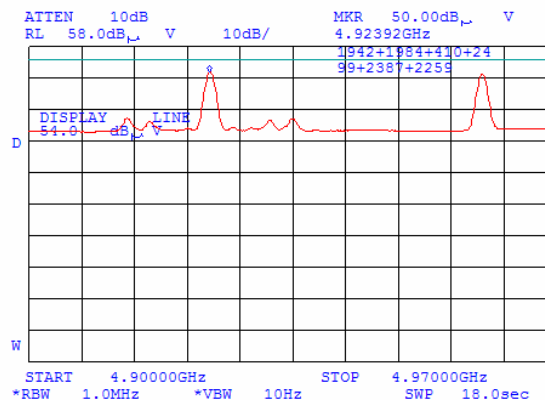

WLAN: 4924 MHz
BT: 4960 MHz


50 dBuV/m
49.2 dBuV/m




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.47 Radiated emission measurements from 8000 to 14000 MHz at the low carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

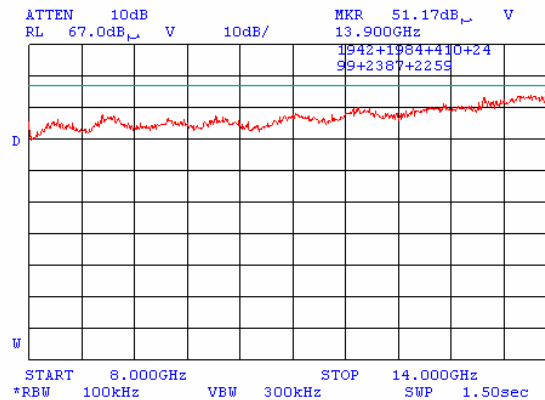**Plot 7.3.48 Radiated emission measurements from 8000 to 14000 MHz at the mid carrier frequency (WLAN + BT)**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

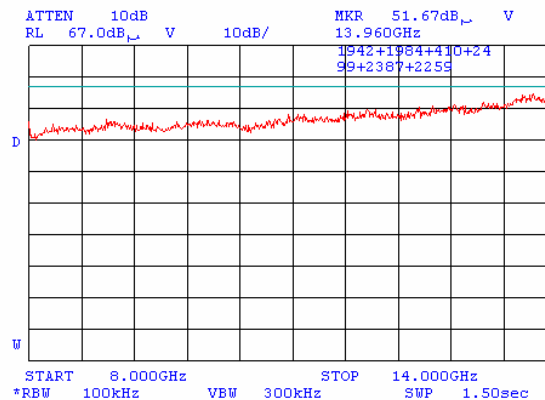




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.49 Radiated emission measurements from 8000 to 14000 MHz at the high carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

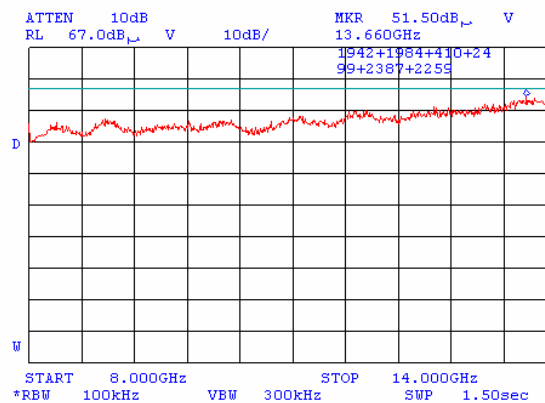

Plot 7.3.50 Radiated emission measurements from 14000 to 18000 MHz at the low carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

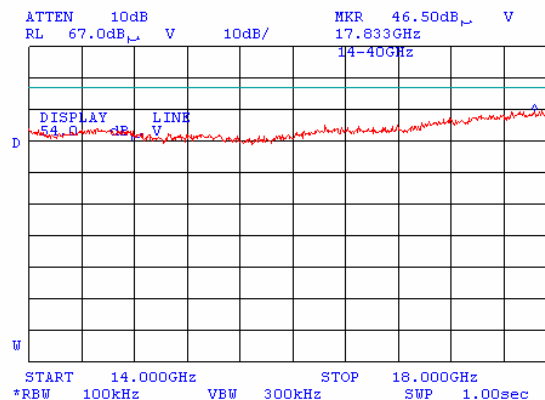





Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.51 Radiated emission measurements from 14000 to 18000 MHz at the mid carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

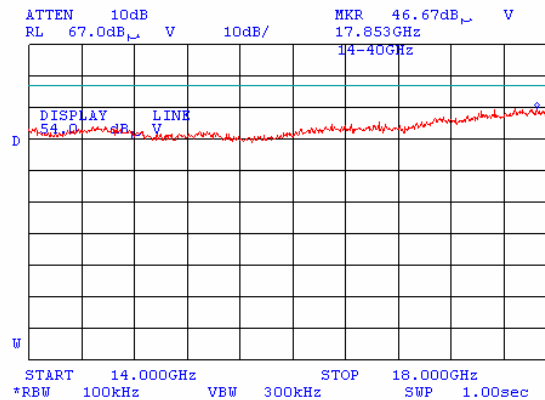**Plot 7.3.52 Radiated emission measurements from 14000 to 18000 MHz at the high carrier frequency (WLAN + BT)**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

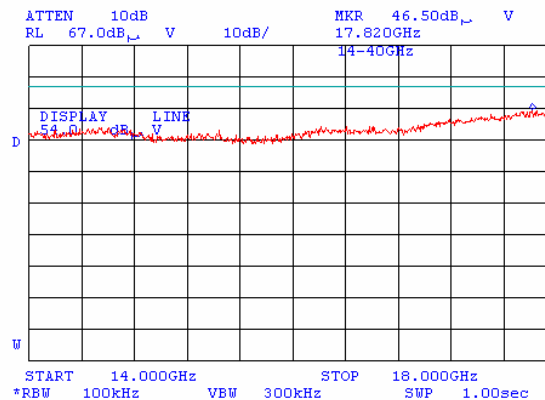




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.3.53 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

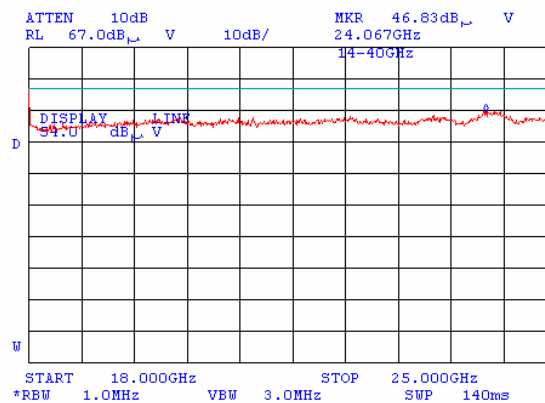

Plot 7.3.54 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

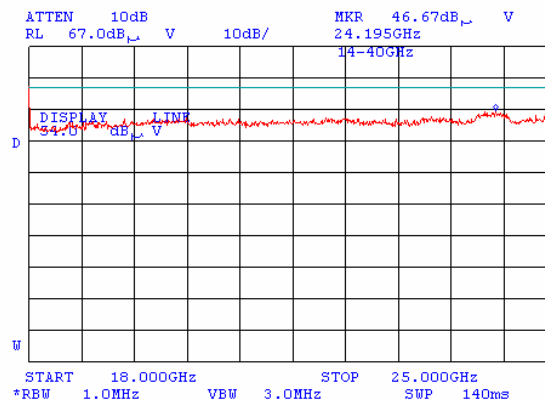




Test specification:	FCC section 15.247(c), RSS-210 section 6.2.2(o)(e1), Radiated spurious emissions		
Test procedure:	FR Vol. 62, page 26243, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 9:31:41 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.3.55 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency (WLAN + BT)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

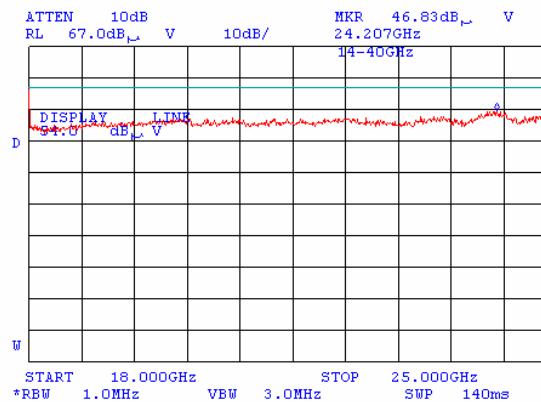



Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

7.4 Peak spectral power density

7.4.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits according to FCC part 15 section 15.247(d) and RSS-210 section 6.2.2(o)(b) are given in Table 7.4.1.

Table 7.4.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μV/m)*
902.0 – 928.0	3.0	8.0	103.2
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Equivalent field strength limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.


7.4.2 Test procedure for field strength measurements

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.4.2.3 The field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.4.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.4.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.4.2 and associated plots.
- 7.4.2.6 The EUT was found to comply with the standard requirements.



Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Figure 7.4.1 Setup for carrier field strength measurements

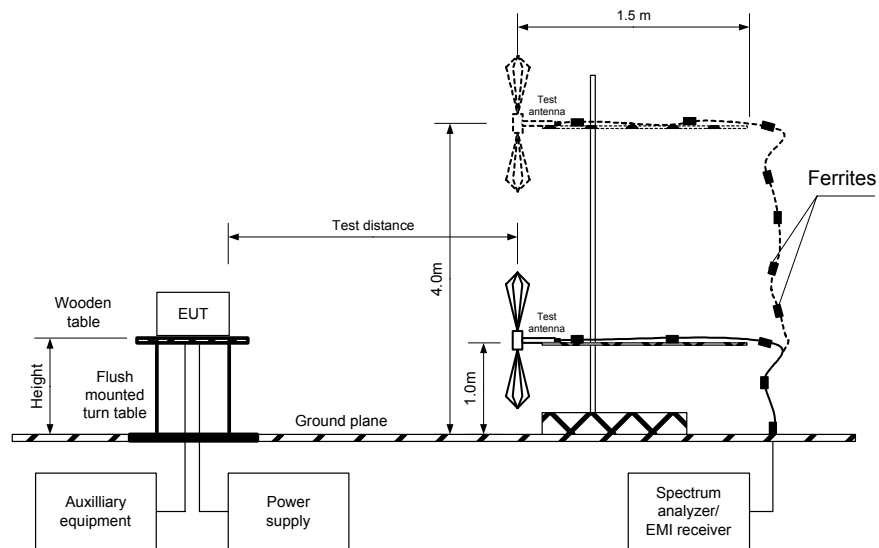



Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance	Verdict: PASS		
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 7.4.2 Field strength measurement of peak spectral power density

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 TEST DISTANCE: 3 m
 TEST SITE: OATS
 EUT HEIGHT: 0.8 m
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 3 kHz
 VIDEO BANDWIDTH: 10 kHz
 TEST ANTENNA TYPE: Double ridged guide (above 1000 MHz)
 MODULATION: DBPSK, QPSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1, 11Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum

Frequency, MHz	Field strength, dB(μV/m)	EUT antenna gain, dBi	Limit, dB(μV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees
1 Mbit/s							
2412	91.5	2.7	103.2	-14.4	H	1.2	163
2437	93.3	2.7	103.2	-12.6	H	1.2	165
2462	92.4	2.7	103.2	-13.5	H	1.2	165
11 MBit/s							
2412	91.1	2.7	103.2	-14.8	H	1.2	163
2437	92.1	2.7	103.2	-13.8	H	1.2	165
2462	91.8	2.7	103.2	-14.1	H	1.2	165

*- Margin = Field strength - EUT antenna gain - calculated field strength limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0038	HL 0287	HL 1365	HL 1430	HL 1947	HL 2432		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.4.1 Peak spectral power density at low frequency within 6 dB band, 1MBit/s

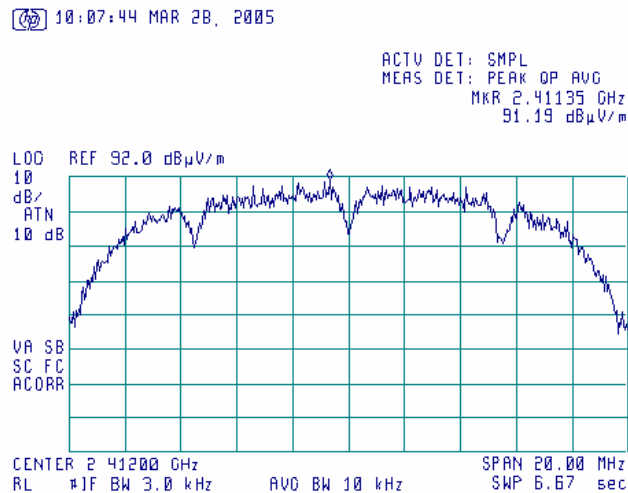


Plot 7.4.2 Peak spectral power density at low frequency zoomed at the peak, 1 MBit/s

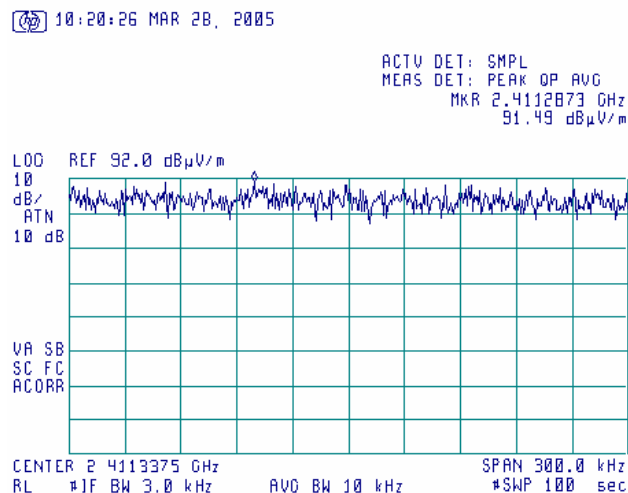




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.4.3 Peak spectral power density at mid frequency within 6 dB band, 1MBit/s

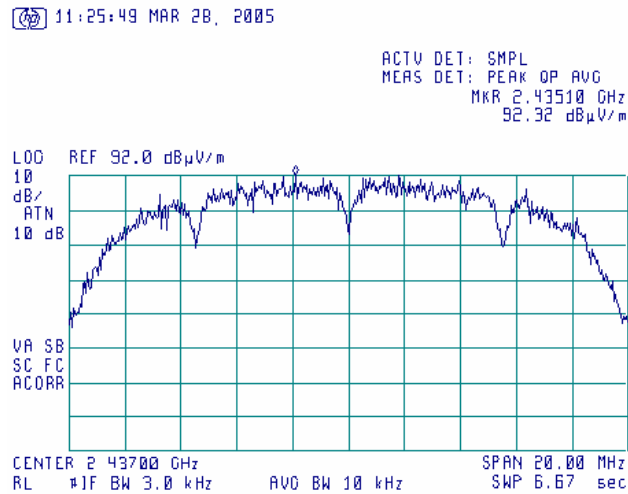

Plot 7.4.4 Peak spectral power density at mid frequency zoomed at the peak, 1MBit/s

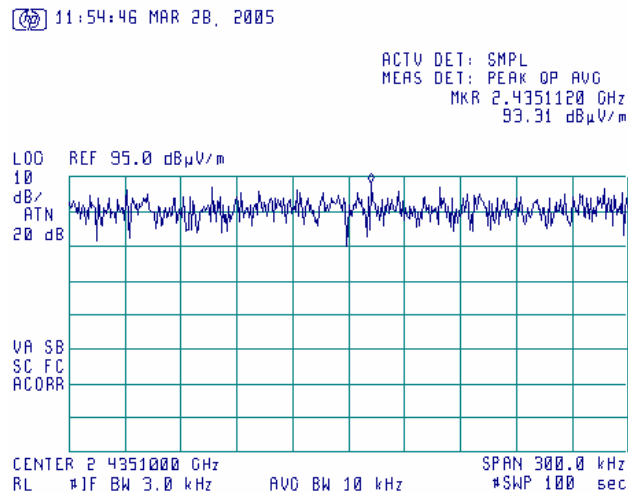




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.4.5 Peak spectral power density at high frequency within 6 dB band, 1MBit/s

12:11:14 MAR 28, 2005

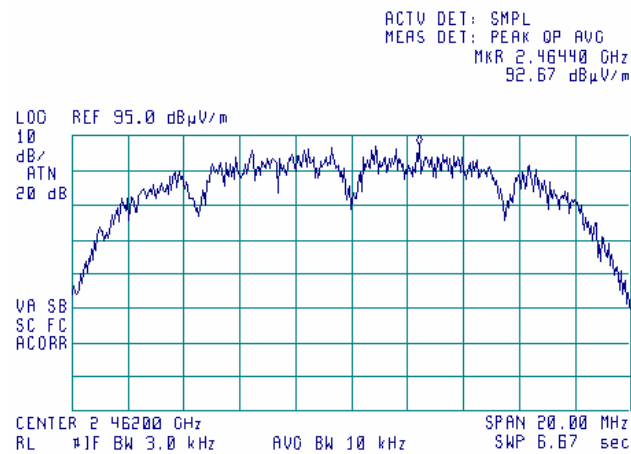

Plot 7.4.6 Peak spectral power density at high frequency zoomed at the peak, 1MBit/s

12:22:32 MAR 28, 2005

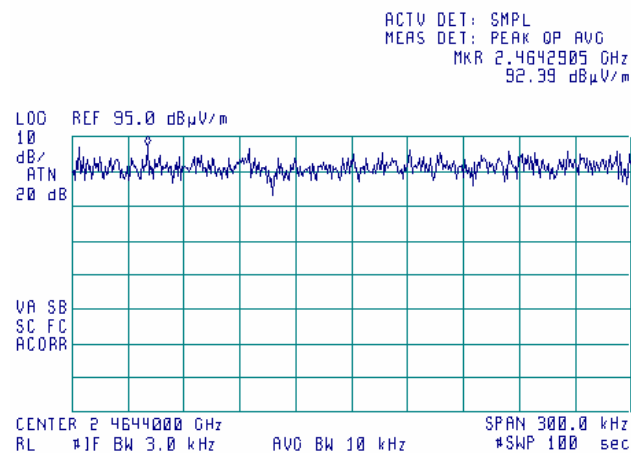




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.4.7 Peak spectral power density at low frequency within 6 dB band, 11MBit/s

10:35:19 MAR 28, 2005

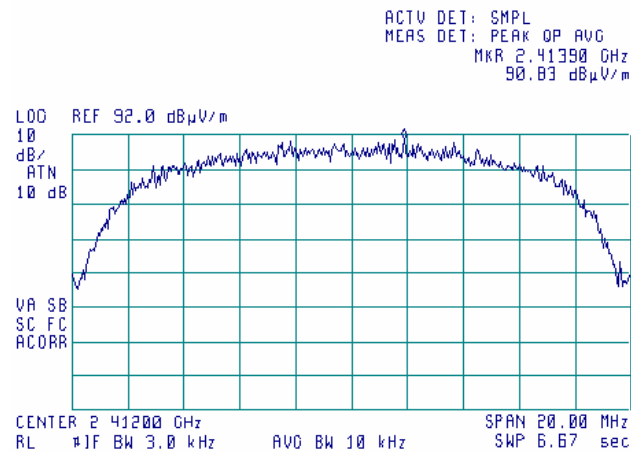

Plot 7.4.8 Peak spectral power density at low frequency zoomed at the peak, 11 MBit/s


10:50:32 MAR 28, 2005

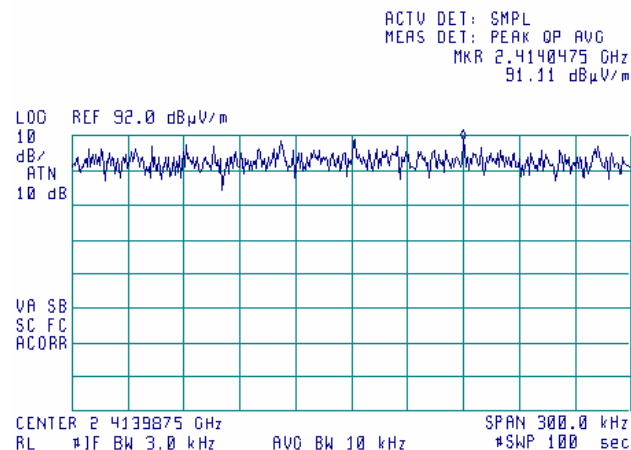




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 7.4.9 Peak spectral power density at mid frequency within 6 dB band, 11 MBit/s

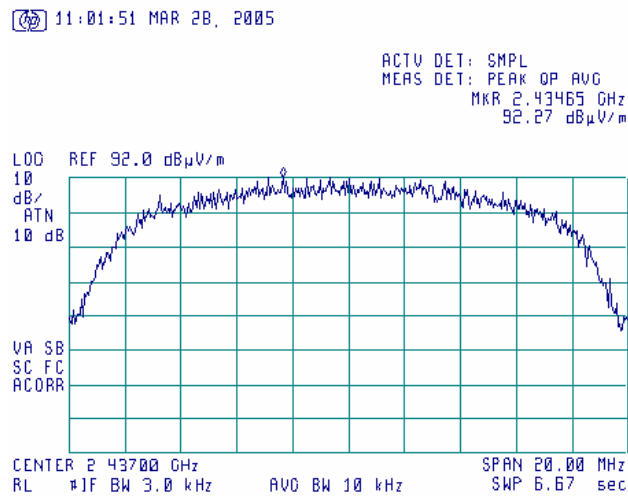

Plot 7.4.10 Peak spectral power density at mid frequency zoomed at the peak, 11 MBit/s

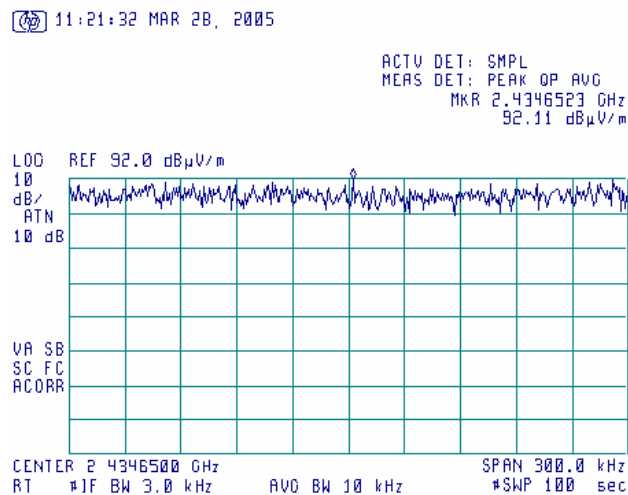




Test specification: FCC section 15.247(d), RSS-210 section 6.2.2(o)(b), Peak power density			
Test procedure: FR Vol. 62, page 26243, Section 15.247(d)			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/29/2005 12:19:29 PM			
Temperature: 22 °C	Air Pressure: 1018 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			


Plot 7.4.11 Peak spectral power density at high frequency within 6 dB band, 11 MBit/s

12:28:22 MAR 28, 2005

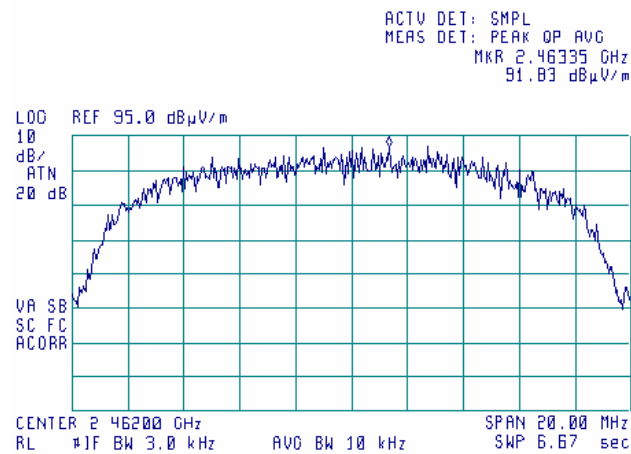

Plot 7.4.12 Peak spectral power density at high frequency zoomed at the peak, 11 MBit/s

12:40:11 MAR 28, 2005

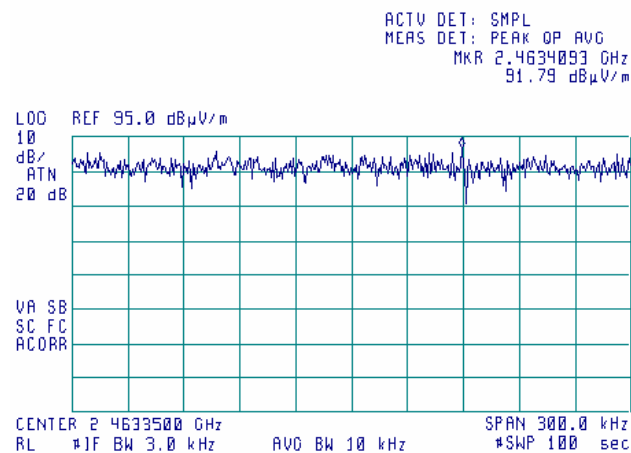



Test specification:		Section 15.247(a)1, (g), (h), Frequency hopping requirements	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	
Date & Time:	4/14/2005 2:38:36 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

8 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 requirements (FHSS)

8.1 Frequency hopping requirements

The EUT was verified for compliance with frequency hopping requirements listed below:

- The EUT shall hop to channel frequencies that are selected from a pseudorandomly ordered list;
- Each hopping frequency shall be used equally on the average;
- The EUT receiver shall have input bandwidth that match the hopping channel bandwidth of the corresponding transmitter and shall shift frequencies in synchronization with the transmitted signals;
- The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The rationale for compliance with the above requirements was either test results or supplier declaration. The summary of results is provided in Table 8.1.1.

Table 8.1.1 Frequency hopping requirements

Requirement	Rationale	Verdict
The EUT shall hop to channel frequencies that are selected from a pseudorandomly ordered list	Supplier declaration	Comply
Each hopping frequency shall be used equally on the average	Supplier declaration	Comply
The EUT receiver shall have input bandwidth that match the hopping channel bandwidth of the corresponding transmitter	Supplier declaration	Comply
The EUT receiver shall shift frequencies in synchronization with the transmitted signals	Supplier declaration	Comply
Each transmitter operates independently and there is no synchronization with other transmitters for purposes other than to avoid simultaneous channel occupancy	Supplier declaration	Comply



Test specification:		Section 15.247(a)1, 20 dB bandwidth	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/30/2005 8:47:14 PM		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 42 %	Power Supply: 7.2 V battery
Remarks:			

8.2 20 dB bandwidth

8.2.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 8.2.1.

Table 8.2.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Minimum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

8.2.2 Test procedure

8.2.2.1 The EUT was set up as shown in Figure 8.2.1, energized and its proper operation was checked.

8.2.2.2 The EUT was set to transmit modulated carrier at maximum data rate.

8.2.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 8.2.2 and associated plot.

8.2.2.4 The test was repeated for each data rate and each modulation format.

Figure 8.2.1 The 20 dB bandwidth test setup





Test specification:		Section 15.247(a)1, 20 dB bandwidth	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/30/2005 8:47:14 PM		
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 42 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.2.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400-2483.5 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the 20 dB bandwidth
 VIDEO BANDWIDTH: \geq RBW
 MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
 MODULATING SIGNAL: PRBS
 FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, Mbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency							
2402	GFSK	1	0.125	855	1000	-145	Pass
Mid frequency							
2441	GFSK	1	0.125	845	1000	-155	Pass
High frequency							
2480	GFSK	1	0.125	855	1000	-145	Pass

Reference numbers of test equipment used


HL 1430								
---------	--	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 8.2.1 The 20 dB bandwidth test result at low frequency

17:55:55 MAR 30, 2005

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR Δ 855 kHz
 .20 dB

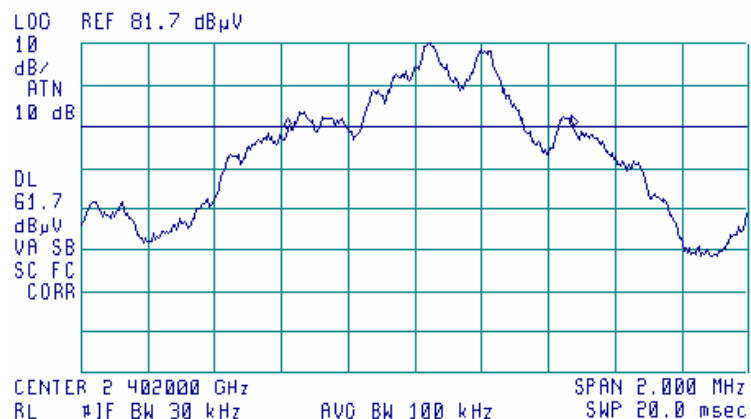




Test specification: Section 15.247(a)1, 20 dB bandwidth			
Test procedure: Public notice DA 00-705			
Test mode: Compliance		Verdict: PASS	
Date & Time: 3/30/2005 8:47:14 PM			
Temperature: 24 °C	Air Pressure: 1011 hPa	Relative Humidity: 42 %	Power Supply: 7.2 V battery
Remarks:			


Plot 8.2.2 The 20 dB bandwidth test result at mid frequency

(17:58:45 MAR 30, 2005)

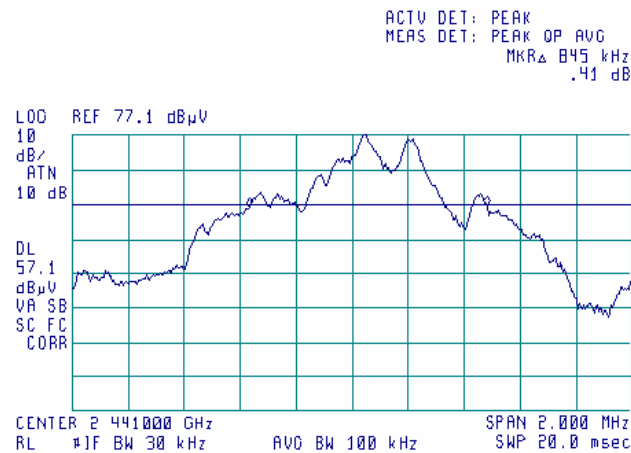

Plot 8.2.3 The 20 dB bandwidth test result at high frequency

(18:02:11 MAR 30, 2005)

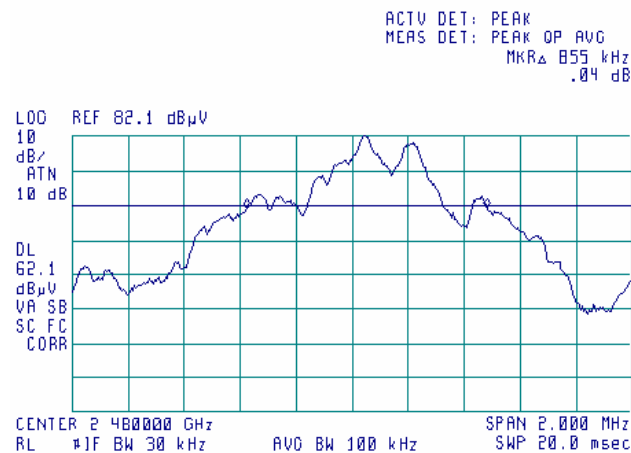



Test specification:		Section 15.247(a)1, Frequency separation	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:51:10 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

8.3 Carrier frequency separation

8.3.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 8.3.1.

Table 8.3.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

8.3.2 Test procedure

- 8.3.2.1** The EUT was set up as shown in Figure 8.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 8.3.2.2** The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 8.3.2.3** The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 8.3.2.4** The frequency separation between the peaks of adjacent channels was measured as provided in Table 8.3.2 and associated plots.

Figure 8.3.1 Carrier frequency separation test setup





Test specification:		Section 15.247(a)1, Frequency separation	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	4/6/2005 10:51:10 AM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.3.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
1000	855	145	Pass

* - Margin = Carrier frequency separation – specification limit.


Reference numbers of test equipment used

HL 1430							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 8.3.1 Carrier frequency separation

09:48:24 MAR 25, 2005

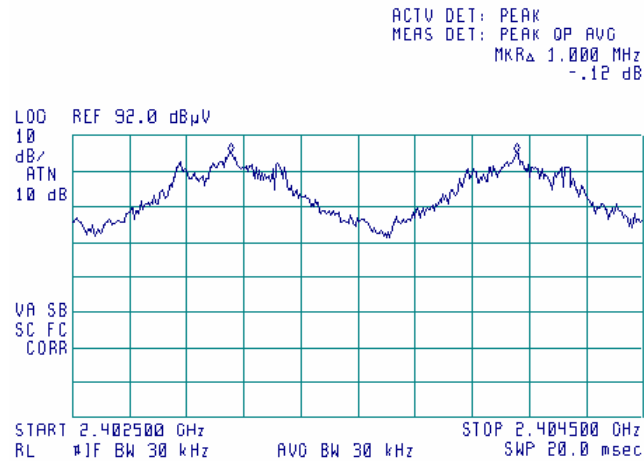



Test specification:		Section 15.247(a)1, Number of hopping frequencies	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/25/2005 11:00:33 AM		
Temperature: 24 °C	Air Pressure: 1017 hPa	Relative Humidity: 34 %	Power Supply: 7.2 V battery
Remarks:			

8.4 Number of hopping frequencies

8.4.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 8.4.1.

Table 8.4.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

8.4.2 Test procedure

8.4.2.1 The EUT was set up as shown in Figure 8.4.1, energized with frequency hopping function enabled and its proper operation was checked.

8.4.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.

8.4.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.

8.4.2.4 The number of frequency hopping channels was calculated as provided in Table 8.4.2 and associated plots.

Figure 8.4.1 Hopping frequencies test setup





Test specification:		Section 15.247(a)1, Number of hopping frequencies	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		3/25/2005 11:00:33 AM	
Temperature: 24 °C		Air Pressure: 1017 hPa	Relative Humidity: 34 %
			Power Supply: 7.2 V battery
Remarks:			

Table 8.4.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
MODULATION: GFSK
MODULATING SIGNAL: PRBS
BIT RATE: 1 Mbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: 100 kHz
VIDEO BANDWIDTH: ≥ RBW
FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
79	15	64	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used


HL 1430							
---------	--	--	--	--	--	--	--

Full description is given in Appendix A.

Plot 8.4.1 Number of hopping frequencies

10:46:45 MAR 25, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG

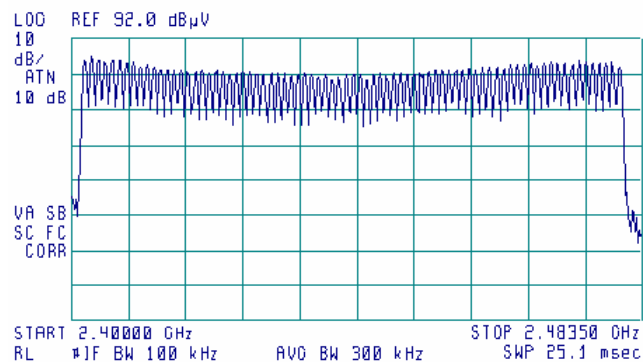



Test specification:		Section 15.247(a)1, Average time of occupancy	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/27/2005 6:47:16 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

8.5 Average time of occupancy

8.5.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 8.5.1.


Table 8.5.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	$0.4 \times N$	$N (\geq 15)$
5725.0 – 5850.0	0.4	30.0	≥ 75

8.5.2 Test procedure

- 8.5.2.1 The EUT was set up as shown in Figure 8.5.1 , energized with frequency hopping function enabled and its proper operation was checked.
- 8.5.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 8.5.2.3 The single transmission duration and period were measured with oscilloscope.
- 8.5.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 8.5.2.5 The test was repeated at each data rate and modulation type as provided in Table 8.5.2 and associated plots.

Figure 8.5.1 Average time of occupancy test setup





Test specification:		Section 15.247(a)1, Average time of occupancy	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	3/27/2005 6:47:16 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.5.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 2400-2483.5 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 NUMBER OF HOPPING FREQUENCIES: 79
 INVESTIGATED PERIOD: 31.6 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, ms	Single transmission period, ms	Average time of occupancy*, s	Bit rate, Mbps	Symbol rate, Msymbol/s	Limit, s	Margin, s**	Verdict
2402-2480	0.454	1.274	0.143	1	1	0.4	0.257	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / (Single transmission period × number of hopping channels).

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used


HL 1562	HL 2258	HL 2483					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




Test specification:	Section 15.247(a)1, Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date & Time:	3/27/2005 6:47:16 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.5.1 Single transmission duration

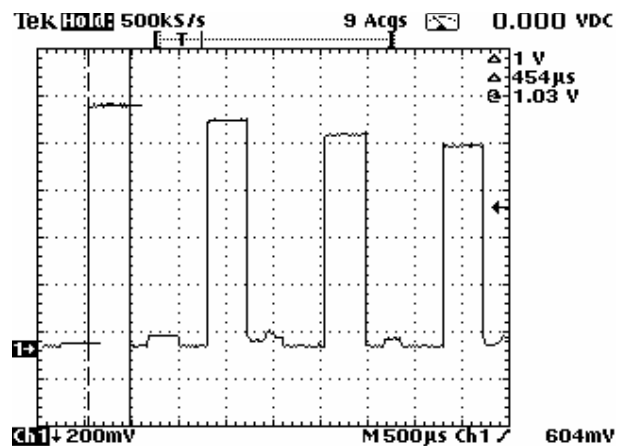

Plot 8.5.2 Single transmission period

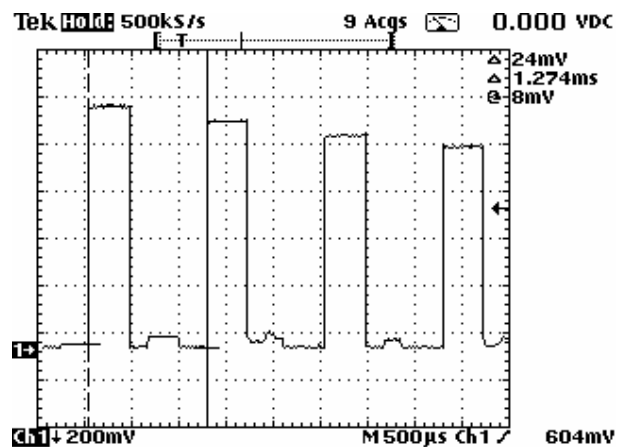



Test specification:		Section 15.247(b), Peak output power	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 3:26:38 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

8.6 Peak output power

8.6.1 General

This test was performed to measure the maximum peak output power at the transmitter RF antenna connector. Specification test limits are given in Table 8.6.1.

Table 8.6.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Maximum antenna gain, dBi
	W	dBm	
902.0 – 928.0	0.125	21.0	6.0*
2400.0 – 2483.5	0.125 (<75 hopping channels)	21.0 (<75 hopping channels)	
	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	

*- If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

8.6.2 Test procedure

8.6.2.1 The EUT was set up as shown in Figure 8.6.1, energized and its proper operation was checked.

8.6.2.2 The EUT was adjusted to produce maximum available for end user RF output power.

8.6.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. The spectrum analyzer trace was allowed to stabilize and the maximum peak output power was measured as provided in Table 8.6.2 and associated plots.

Figure 8.6.1 Peak output power test setup





Test specification:		Section 15.247(b), Peak output power	
Test procedure:		Public notice DA 00-705	
Test mode:		Verdict:	
Date & Time:			
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Intentionally blank



Test specification:		Section 15.247(b), Peak output power	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 3:26:38 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.6.2 Peak output power test results

ASSIGNED FREQUENCY: 2400 - 2483.5 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 2 MHz
 VIDEO BANDWIDTH: 3 MHz
 FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Spectrum analyzer reading, dBm	External attenuation, dB	Cable loss, dB	Peak output power, dBm	Limit, dBm	Margin*, dB	Verdict
2402	1.77	included	included	1.77	30	-28.23	Pass
2440	-3.07	included	included	-3.07	30	-33.07	Pass
2480	0.67	included	included	0.67	30	-29.33	Pass

* - Margin = Peak output power – specification limit.

Reference numbers of test equipment used


HL 1424	HL 2254	HL 2524					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




Test specification:	Section 15.247(b), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 3:26:38 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.6.1 Field strength of carrier at low frequency

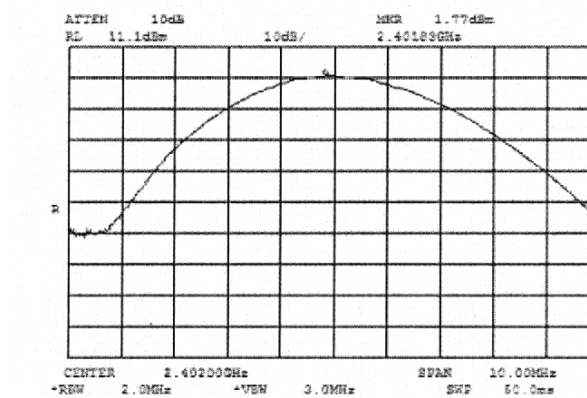


Plot 8.6.2 Field strength of carrier at mid frequency

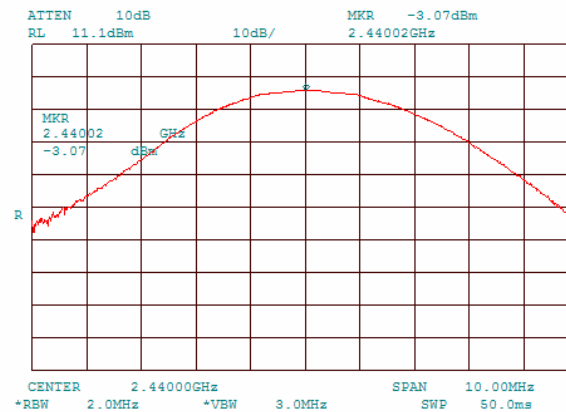



Test specification:		Section 15.247(b), Peak output power	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 3:26:38 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.6.3 Field strength of carrier at high frequency

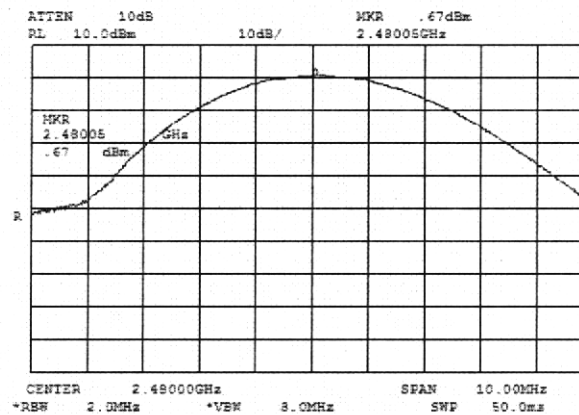



Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:	Compliance	Verdict: PASS	
Date & Time:	3/27/2005 5:53:42 PM		
Temperature: 24 °C	Air Pressure: 1016 hPa	Relative Humidity: 42 %	Power Supply: 7.2 V battery
Remarks:			

8.7 Band edge radiated emissions

8.7.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 8.7.1.

Table 8.7.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(μV/m)	
		Peak	Average
902.0 – 928.0	20.0	74.0	54.0
2400.0 – 2483.5			
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

8.7.2 Test procedure

- 8.7.2.1** The EUT was set up as shown in Figure 8.7.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 8.7.2.2** The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 8.7.2.3** The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 8.7.2.4** The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 8.7.2.5** The maximum band edge emission and modulation product outside of the band were measured as provided in Table 8.7.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 8.7.2.6** The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 8.7.2.7** The above procedure was repeated with the frequency hopping function enabled.

Figure 8.7.1 Band edge emission test setup





Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		3/27/2005 5:53:42 PM	
Temperature: 24 °C	Air Pressure: 1016 hPa	Relative Humidity: 42 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.7.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 2400-2483.5MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1 Mbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 TRANSMITTER OUTPUT POWER: dBm at low carrier frequency
 dBm at high carrier frequency
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW

Frequency, MHz	Band edge emission, dBuV/m	Emission at carrier, dBuV/m	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
2400	63.2	102.5	39.3	20	19.3	Pass
2484.08	60.7	102.9	42.2	20	22.2	Pass
Frequency hopping enabled						
2400	62.0	102.5	40.5	20	20.5	Pass
2484.08	60.2	102.9	42.7	20	22.7	Pass

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 0038	HL 0287	HL 1365	HL 1430	HL 1947	HL 2432		
---------	---------	---------	---------	---------	---------	--	--


Full description is given in Appendix A.



Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		3/27/2005 5:53:42 PM	
Temperature: 24 °C		Air Pressure: 1016 hPa	Relative Humidity: 42 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.7.1 The highest emission level within the assigned band at low carrier frequency

(42) 15:41:14 MAR 24, 2005

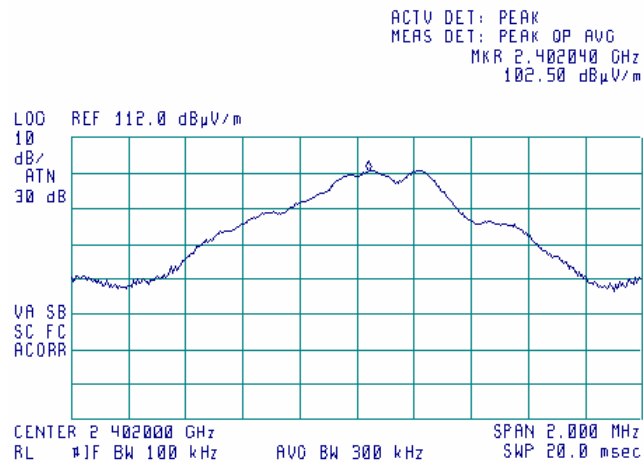

Plot 8.7.2 The highest emission level within the assigned band at high carrier frequency

(42) 11:45:54 MAR 27, 2005

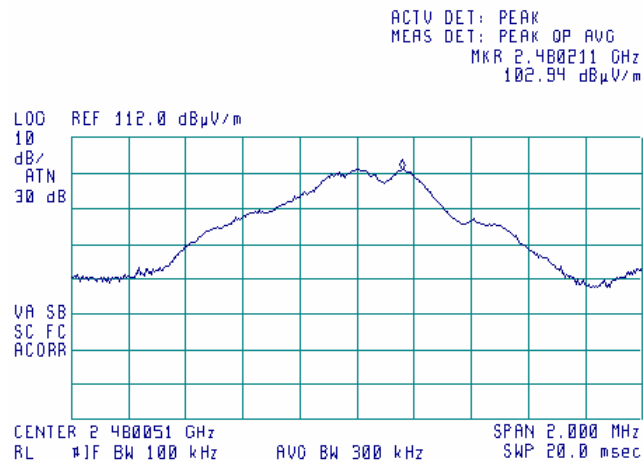




Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		3/27/2005 5:53:42 PM	
Temperature: 24 °C		Air Pressure: 1016 hPa	Relative Humidity: 42 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.7.3 The highest band edge emission at low carrier frequency with hopping function disabled

11:05:30 MAR 27, 2005

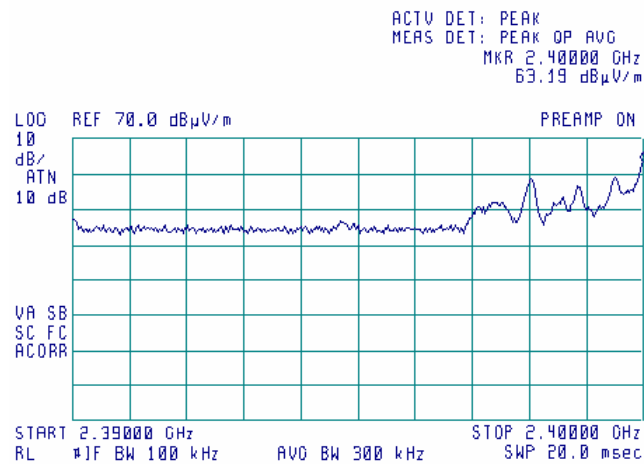

Plot 8.7.4 The highest band edge emission at high carrier frequency with hopping function disabled

12:04:26 MAR 27, 2005

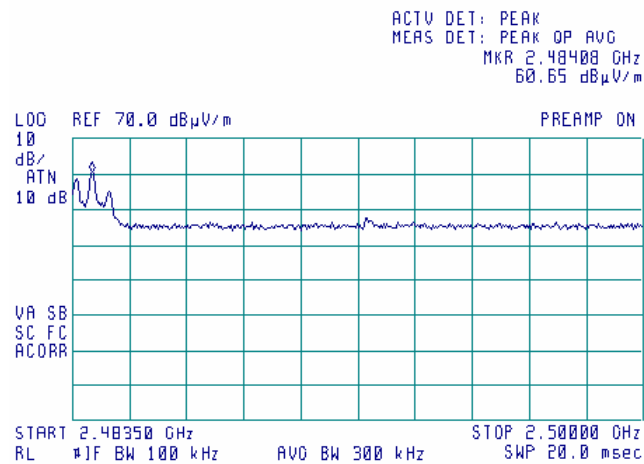




Test specification:		Section 15.247(c), Emissions at band edges	
Test procedure:		Public notice DA 00-705	
Test mode:		Compliance	Verdict: PASS
Date & Time:		3/27/2005 5:53:42 PM	
Temperature: 24 °C		Air Pressure: 1016 hPa	Relative Humidity: 42 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.7.5 The higher band edge emissions with hopping function enabled

14:15:12 MAR 27, 2005

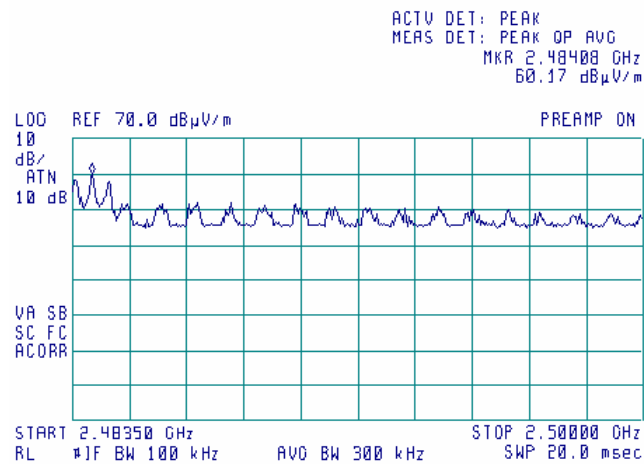

Plot 8.7.6 The lower band edge emission with hopping function enabled

14:38:42 MAR 27, 2005

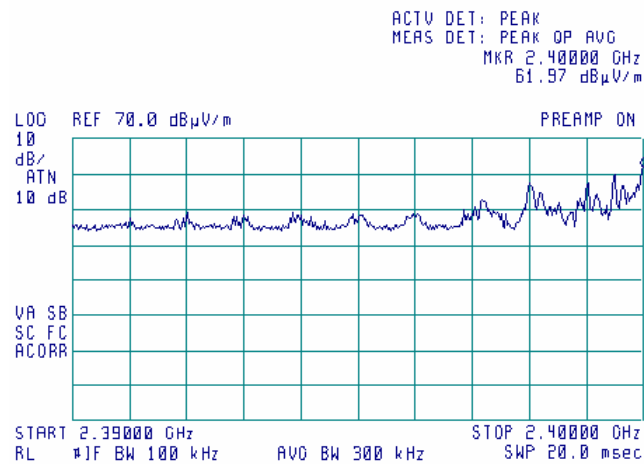



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

8.8 Field strength of spurious emissions

8.8.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 8.8.1.

Table 8.8.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(μV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.490*	NA	128.5 – 93.8**	NA	20.0
0.490 – 1.705*		73.8 – 63.0**		
1.705 – 30.0*		69.5**		
30 – 88		40.0		
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
Above 1000	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log (S_1/S_2),$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

8.8.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

8.8.2.1 The EUT was set up as shown in Figure 8.8.1, energized and the performance check was conducted.

8.8.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

8.8.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

8.8.3 Test procedure for spurious emission field strength measurements above 30 MHz

8.8.3.1 The EUT was set up as shown in Figure 8.8.2, energized and the performance check was conducted.

8.8.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

8.8.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Verdict:	
Compliance			
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	
		Relative Humidity: 43 %	
		Power Supply: 7.2 V battery	
Remarks:			

Figure 8.8.1 Setup for spurious emission field strength measurements below 30 MHz


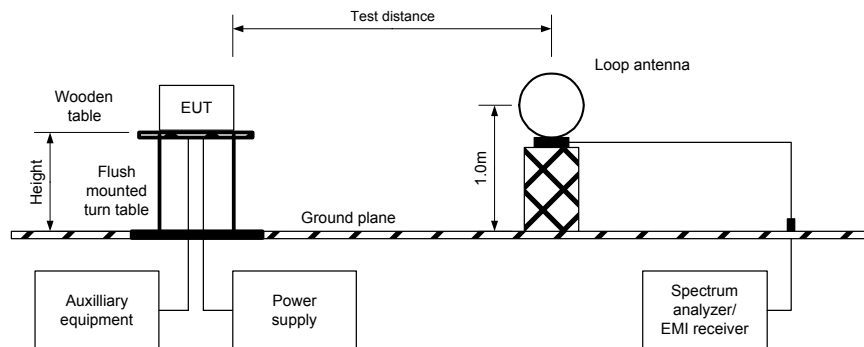


Figure 8.8.2 Setup for spurious emission field strength measurements above 30 MHz



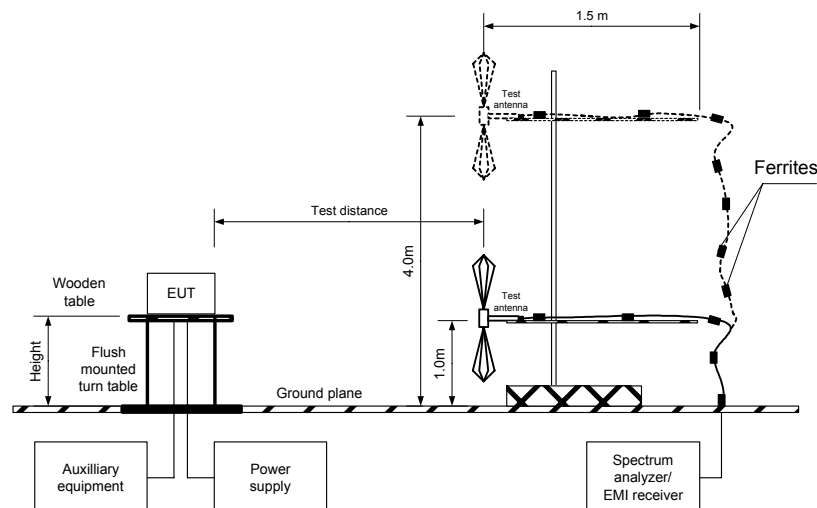

Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.8.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1.0 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 100 kHz
 VIDEO BANDWIDTH: 300 kHz
 TEST ANTENNA TYPE: Active loop (9 kHz – 30 MHz)
 Biconical (30 MHz – 200 MHz)
 Log periodic (200 MHz – 1000 MHz)
 Biconilog (30 MHz – 1000 MHz)
 Double ridged guide (above 1000 MHz)
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Field strength of spurious, dB(μV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(μV/m)	Attenuation below carrier, dBc	Limit, dBc	Verdict
Low carrier frequency								
At least 20 dB below the limit					102.50	>20	20	Pass
Mid carrier frequency								
At least 20 dB below the limit					97.10	>20	20	Pass
High carrier frequency								
At least 20 dB below the limit					102.90	>20	20	Pass

*- EUT front panel refers to 0 degrees position of turntable.



Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.8.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 1 - 25000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1.0 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)				Verdict
	Polarization	Height, m		Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Measured, dB(μV/m)	Calculated, dB(μV/m)	Limit, dB(μV/m)	Margin, dB***	
Low carrier frequency											
4804	H	1.15	150	51.50	74	22.50	45.80	45.80	54	8.20	Pass
Mid carrier frequency											
4882	H	1.15	150	52.00	74	22.00	46.20	46.20	54	7.80	Pass
High carrier frequency											
4960	H	1.15	150	53.83	74	20.17	49.20	49.20	54	5.80	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
 where Calculated field strength = Measured field strength + average factor.

Table 8.8.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
Duty cycle 100%					0



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 8.8.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY: 2400 – 2483.5 MHz
 INVESTIGATED FREQUENCY RANGE: 0.009 – 1000 MHz
 TEST DISTANCE: 3 m
 MODULATION: FSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 1.0 Mbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: 0.2 kHz (9 kHz – 150 kHz)
 9.0 kHz (150 kHz – 30 MHz)
 120 kHz (30 MHz – 1000 MHz)
 VIDEO BANDWIDTH: > Resolution bandwidth
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
Low carrier frequency								
No spurious emissions were found								Pass
Mid carrier frequency								
No spurious emissions were found								Pass
High carrier frequency								
No spurious emissions were found								Pass

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Table 8.8.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2655 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used

HL 0038	HL 0091	HL 0287	HL 0410	HL 0446	HL 0465	HL 0521	HL 0589
HL 0604	HL 0768	HL 0769	HL 1200	HL 1424	HL 1942	HL 1947	HL 1984
HL 2009	HL 2259	HL 2432	HL 2499				

Full description is given in Appendix A.




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.1 Radiated emission measurements at the low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

15:41:14 MAR 24, 2005

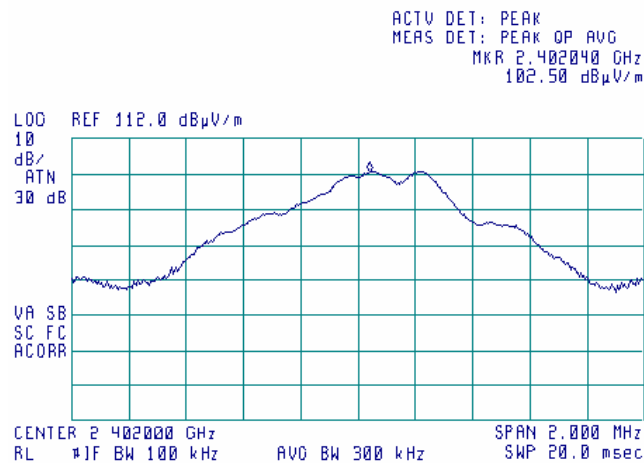**Plot 8.8.2 Radiated emission measurements at the mid carrier frequency**

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

10:22:57 MAR 27, 2005

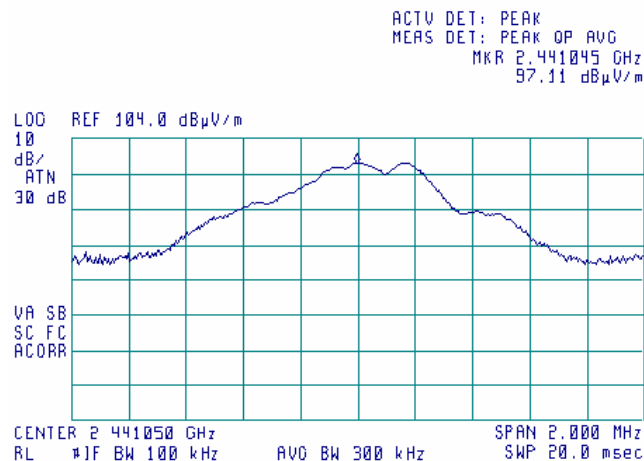




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.3 Radiated emission measurements at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

11:45:54 MAR 27, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 2.480211 GHz
102.94 dB μ V/m

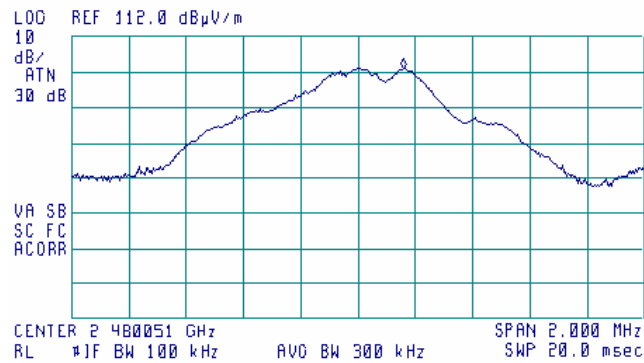




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.4 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency (BT+G20-850)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:12:36 APR 04, 2005

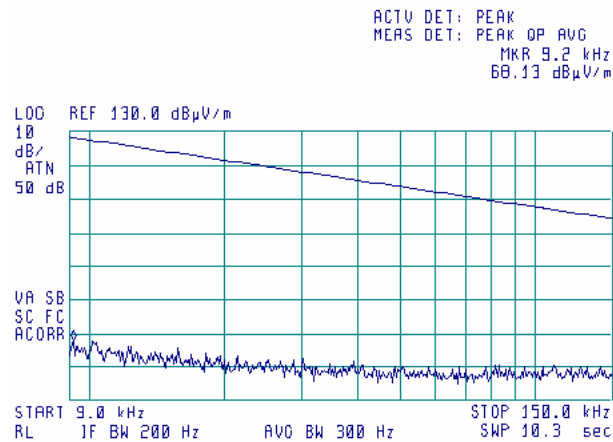**Plot 8.8.5 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency (BT+G20-850)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:24:05 APR 04, 2005

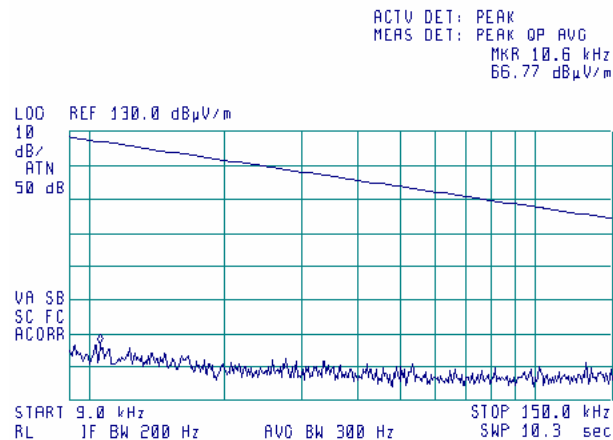




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.6 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency (BT+G20-850)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:37:31 APR 04, 2005

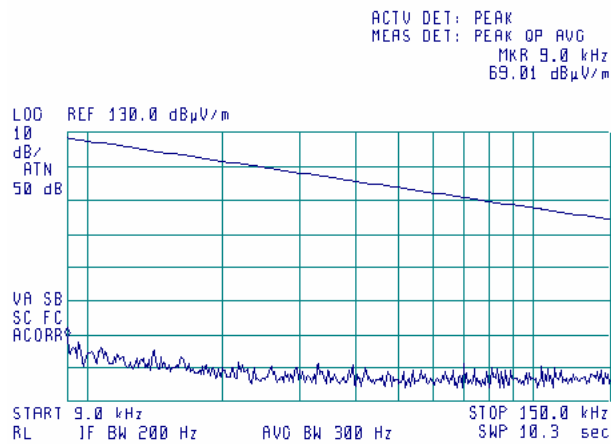**Plot 8.8.7 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency (BT+G20-850)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:18:27 APR 04, 2005

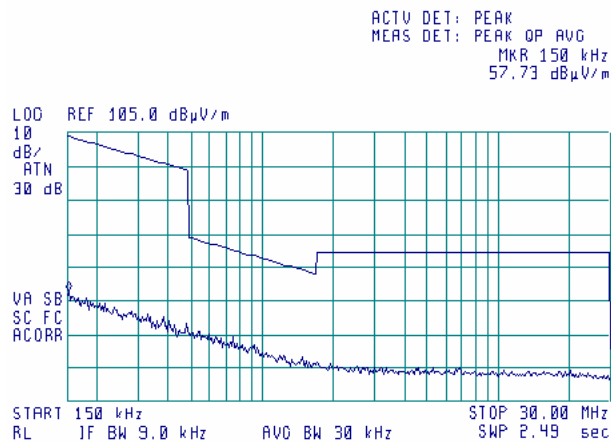




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.8 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency (BT+G20-850)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:21:50 APR 04, 2005

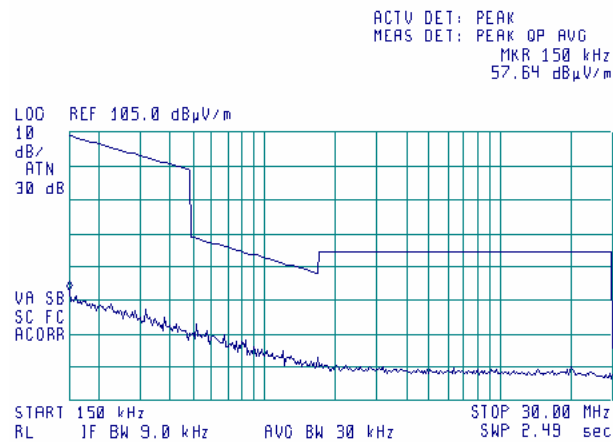**Plot 8.8.9 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency (BT+G20-850)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:34:39 APR 04, 2005

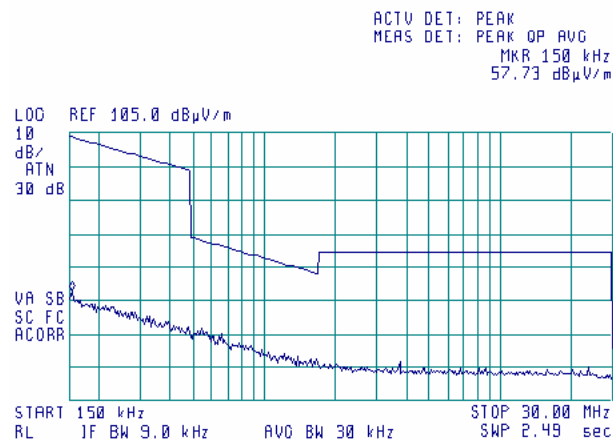




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.10 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency (BT+G20-1900)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:27:44 APR 04, 2005

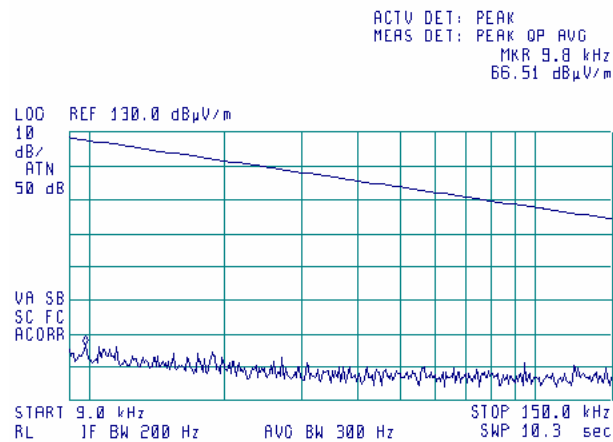**Plot 8.8.11 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency (BT+G20-1900)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:41:27 APR 04, 2005

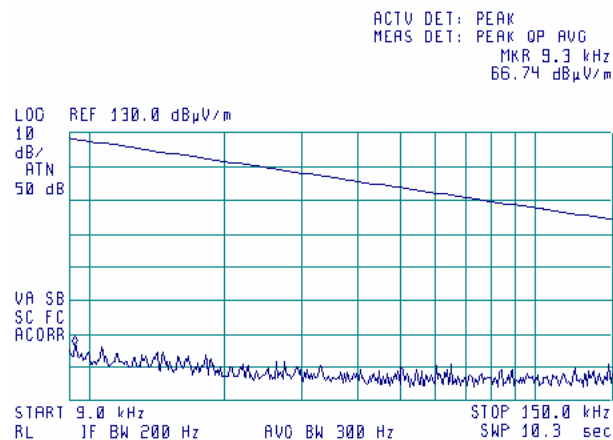




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.12 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency (BT+G20-1900)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:51:04 APR 04, 2005

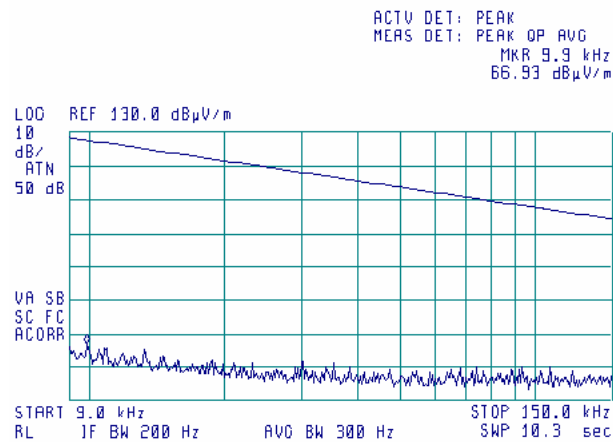**Plot 8.8.13 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency (BT+G20-1900)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:30:15 APR 04, 2005

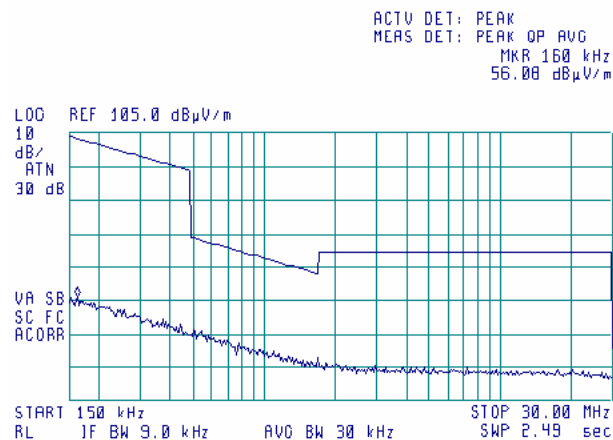




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.14 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency (BT+G20-1900)


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:44:37 APR 04, 2005

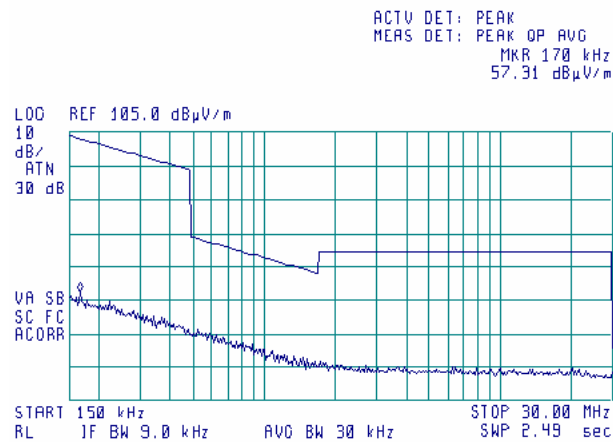**Plot 8.8.15 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency (BT+G20-1900)**

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

08:48:43 APR 04, 2005

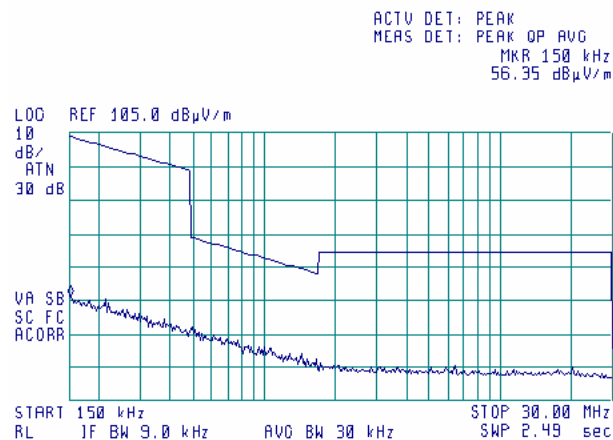



HERMON LABORATORIES

Report ID: MOTRAD_FCC.16387_rev1.doc


Date of Issue: 4/14/2005

Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.16 Radiated emission measurements from 30 to 620 MHz at the low carrier frequency (BT+G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


17:10:27 APR 03, 2005

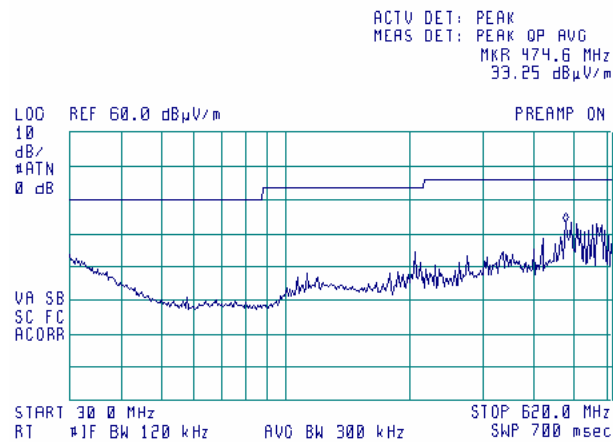

Plot 8.8.17 Radiated emission measurements from 620 to 960 MHz at the low carrier frequency (BT+G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:10:28 APR 03, 2005

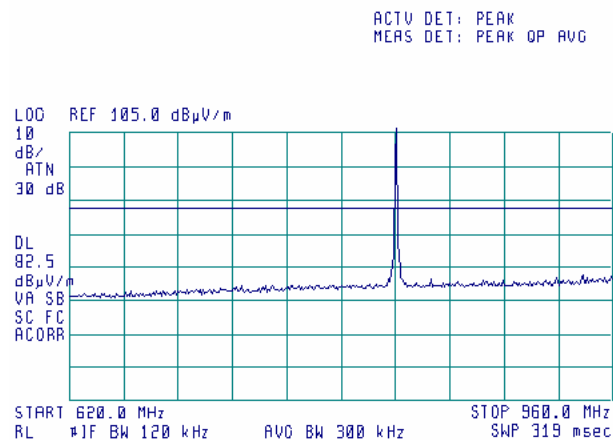




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.18 Radiated emission measurements from 960 to 1000 MHz at the low carrier frequency (BT+G20-850)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:14:11 APR 03, 2005

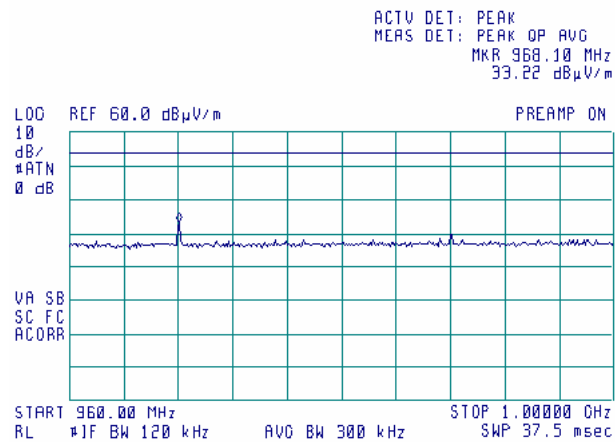**Plot 8.8.19 Radiated emission measurements from 30 to 620 MHz at the mid carrier frequency (BT+G20-850)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:33:10 APR 03, 2005

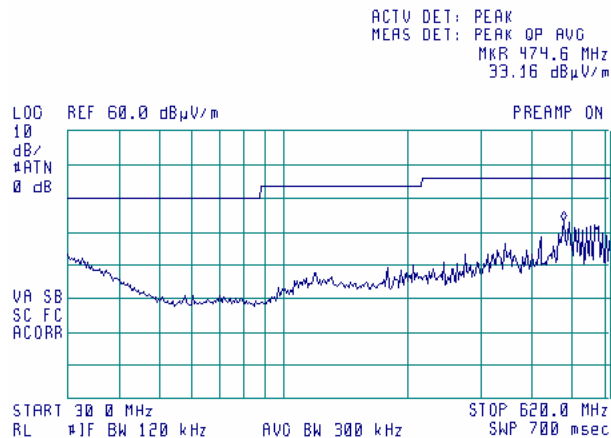




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.20 Radiated emission measurements from 620 to 960 MHz at the mid carrier frequency (BT+G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:24:38 APR 03, 2005


ACTV DET: PEAK
MEAS DET: PEAK OP AVG

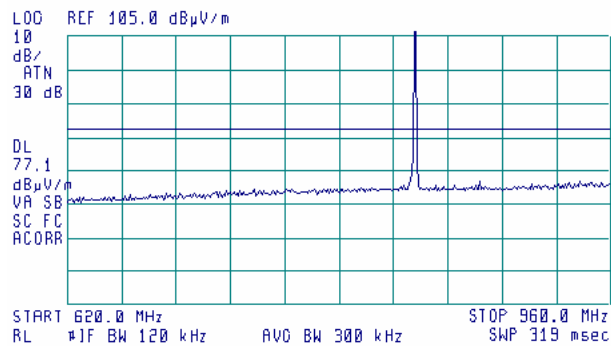**Plot 8.8.21 Radiated emission measurements from 960 to 1000 MHz at the mid carrier frequency (BT+G20-850)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:28:53 APR 03, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 960.00 MHz
33.49 dBμV/m

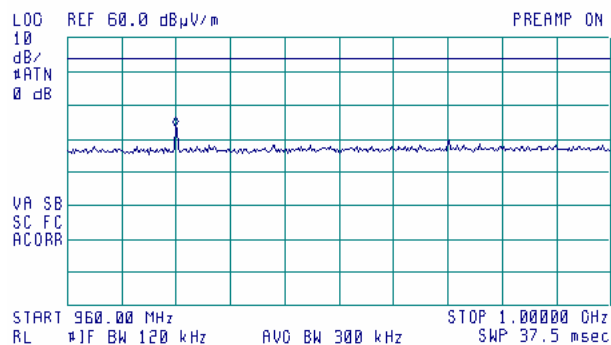




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.22 Radiated emission measurements from 30 to 620 MHz at the high carrier frequency (BT+G20-850)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:39:39 APR 03, 2005

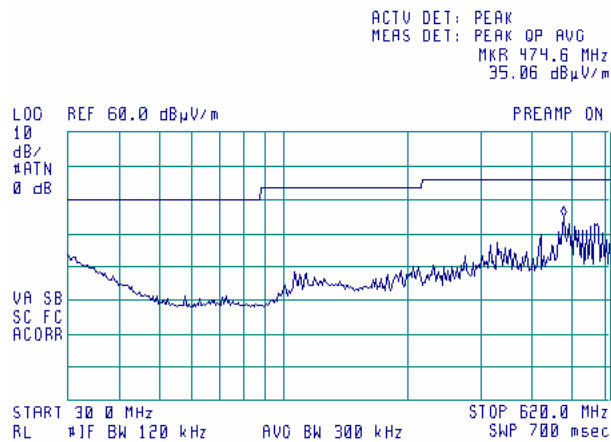**Plot 8.8.23 Radiated emission measurements from 620 to 960 MHz at the high carrier frequency (BT+G20-850)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:49:16 APR 03, 2005

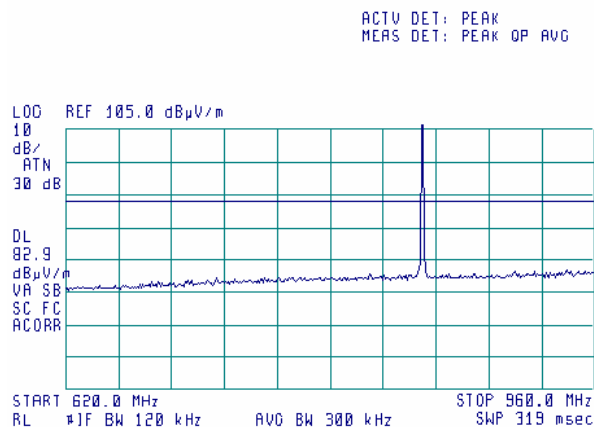




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.24 Radiated emission measurements from 960 to 1000 MHz at the high carrier frequency (BT+G20-850)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:44:12 APR 03, 2005

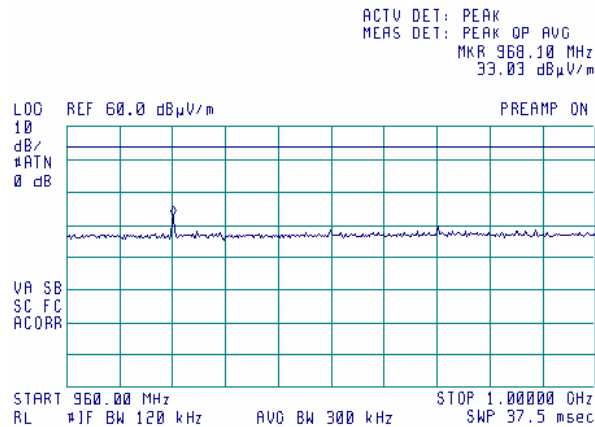**Plot 8.8.25 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency (BT+G20-1900)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:42:17 APR 03, 2005

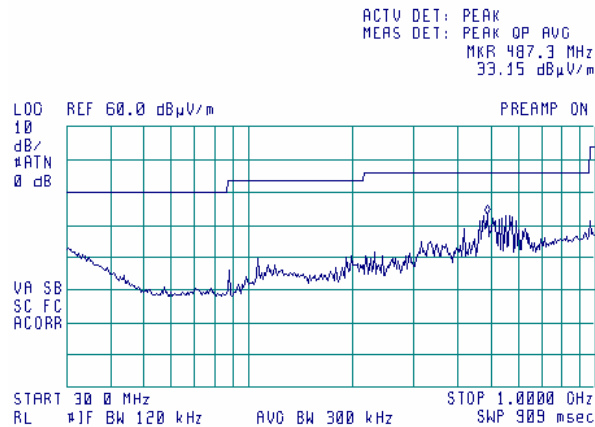




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.26 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency (BT+G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:50:35 APR 03, 2005

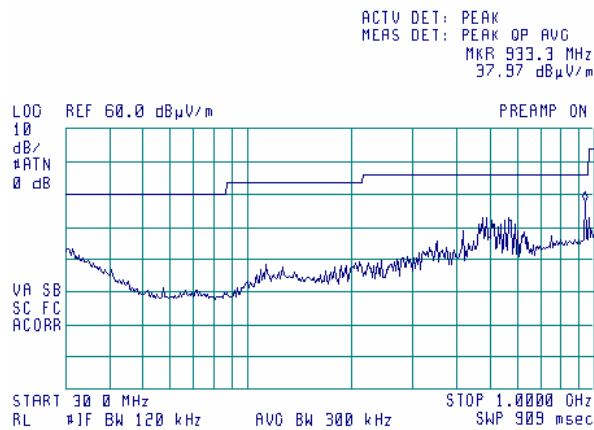


940=1880/2 – not restricted band, not digital part

Plot 8.8.27 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency (BT+G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:58:54 APR 03, 2005

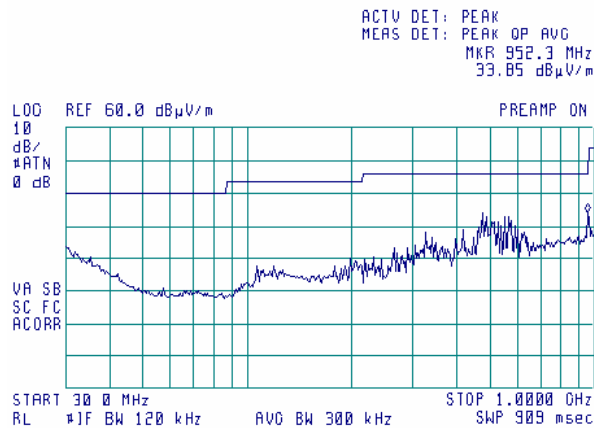

954.9=1909.8/2 - not restricted band, not digital part




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.28 Radiated emission measurements from 1000 to 1750 MHz at the low carrier frequency (BT and G20-850)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

13:34:22 MAR 30, 2005

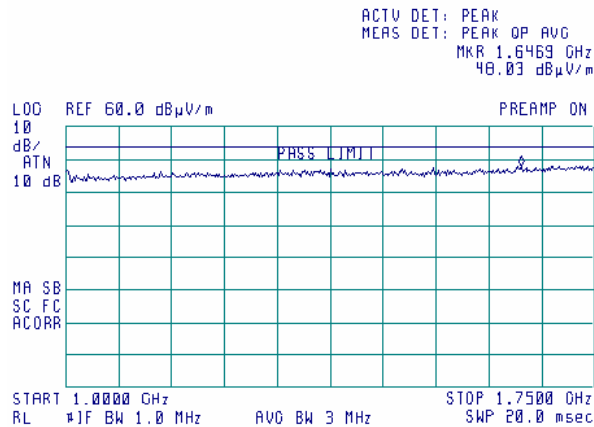**Plot 8.8.29 Radiated emission measurements from 1750 to 2390 MHz at the low carrier frequency (BT and G20-850)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

14:09:05 MAR 30, 2005

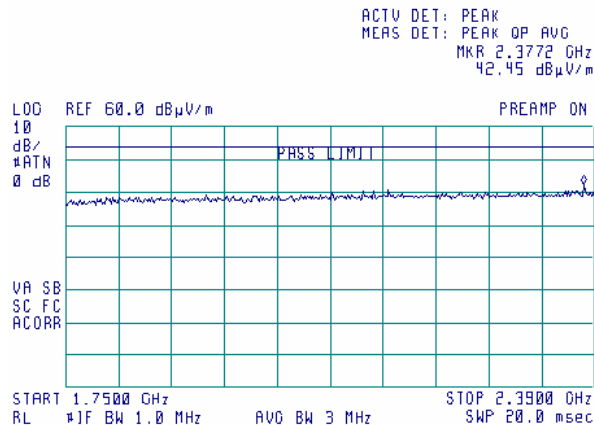




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.30 Radiated emission measurements from 1000 to 2400 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:41:11 MAR 30, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG

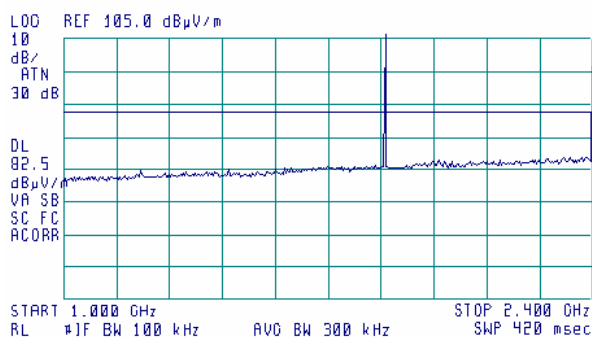

Intended emission of GPRS module




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.31 Radiated emission measurements from 1000 to 1240 MHz at the low carrier frequency (BT and G20-1900)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:19:51 MAR 30, 2005

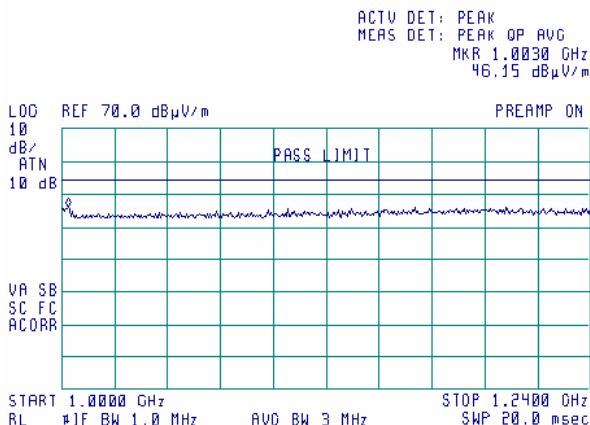**Plot 8.8.32 Radiated emission measurements from 1300 to 1725 MHz at the low carrier frequency (BT and G20-1900)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:13:37 MAR 30, 2005

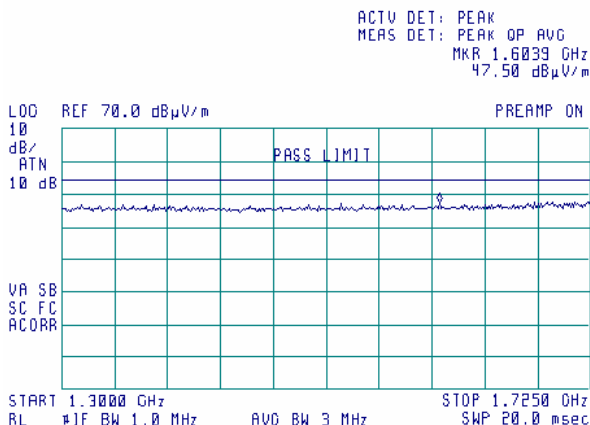




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Verdict:	
Date & Time:			
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.33 Radiated emission measurements from 2200 to 2300 MHz at the low carrier frequency (BT and G20-1900)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

14:53:02 MAR 30, 2005

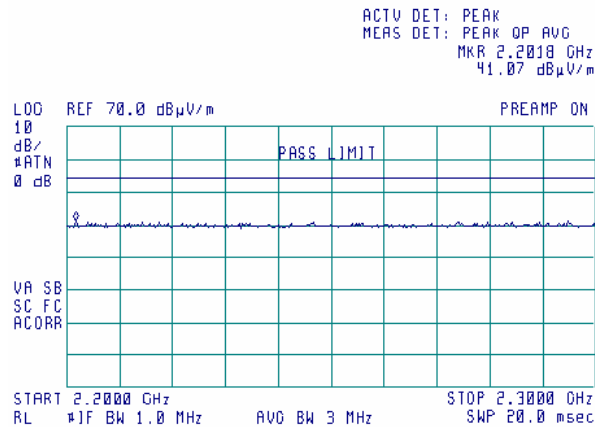**Plot 8.8.34 Radiated emission measurements from 2310 to 2390 MHz at the low carrier frequency (BT and G20-1900)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:00:02 MAR 30, 2005

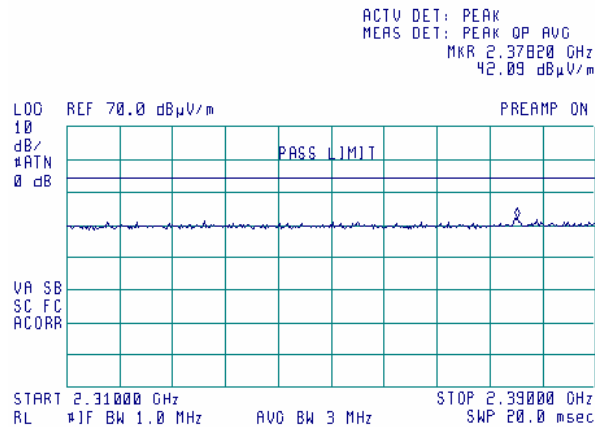




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.35 Radiated emission measurements from 1000 to 1750 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:54:57 MAR 30, 2005

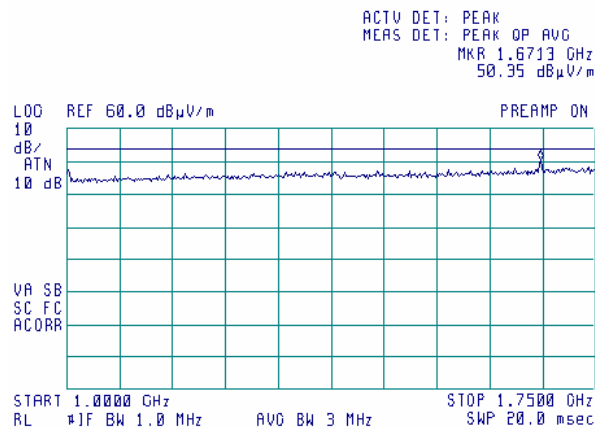


No spurious emissions except of the second harmonic of G20

Plot 8.8.36 Radiated emission measurements from 1750 to 2400 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:02:02 MAR 30, 2005

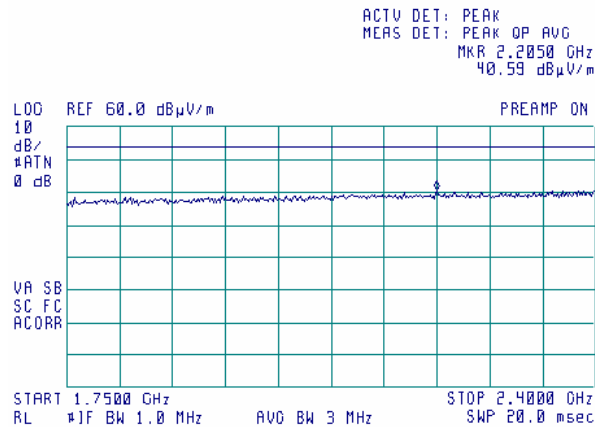




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.37 Radiated emission measurements from 1000 to 2400 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:06:39 MAR 30, 2005

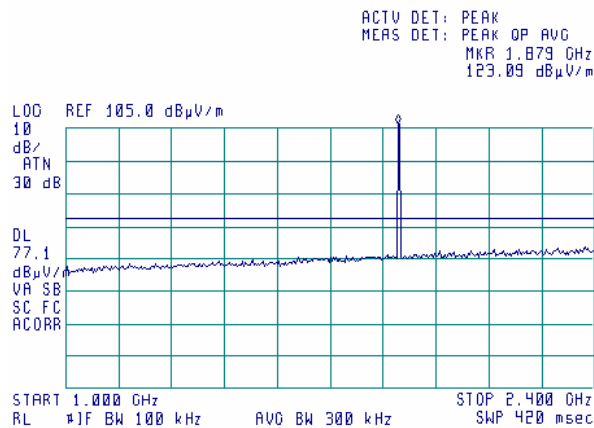


Intended emission of GPRS module

Plot 8.8.38 Radiated emission measurements from 1000 to 1240 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:13:10 MAR 30, 2005

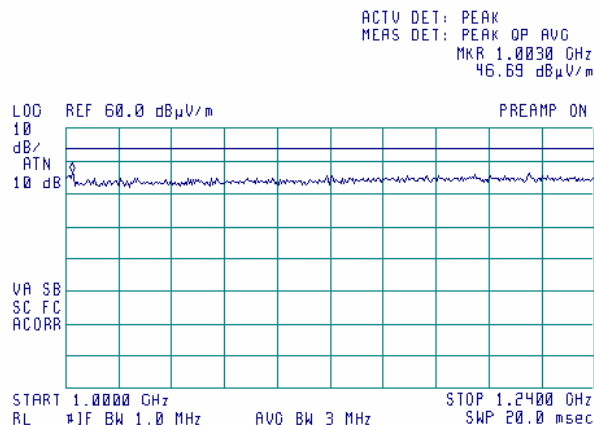




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.39 Radiated emission measurements from 1300 to 1750 MHz at the mid carrier frequency (BT and G20-1900)


TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

14:12:19 APR 03, 2005

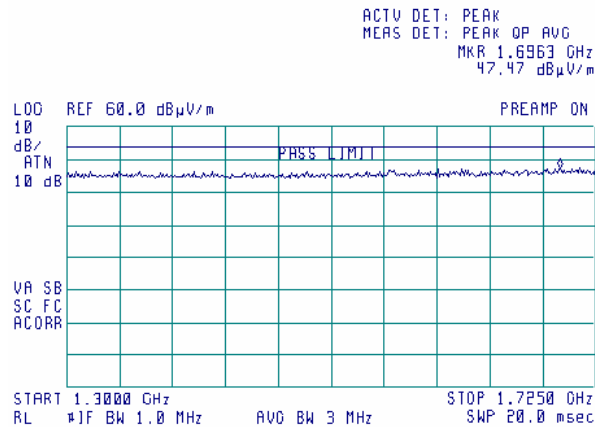**Plot 8.8.40 Radiated emission measurements from 2200 to 2390 MHz at the mid carrier frequency (BT and G20-1900)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

14:23:31 APR 03, 2005

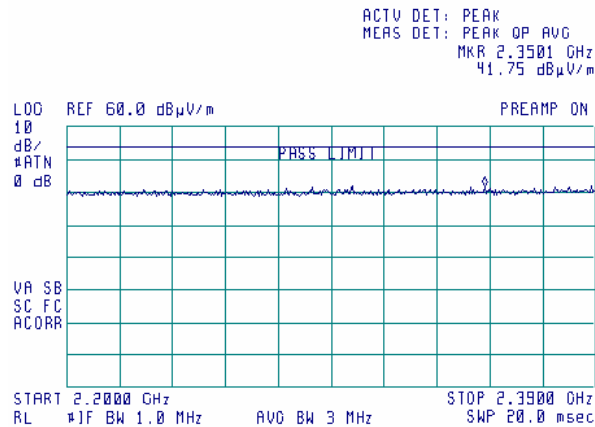




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.41 Radiated emission measurements from 1000 to 1750 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:32:41 MAR 30, 2005

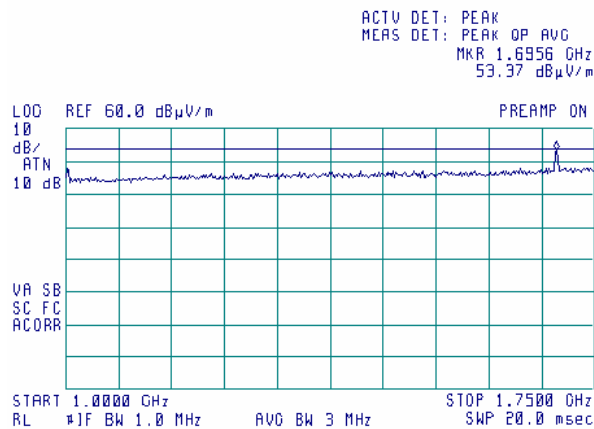


No spurious except of second harmonic of G20

Plot 8.8.42 Radiated emission measurements from 1750 to 2400 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:37:18 MAR 30, 2005

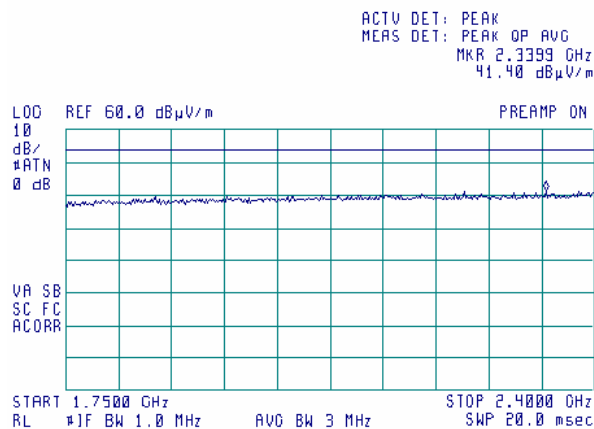




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.43 Radiated emission measurements from 1000 to 2400 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:31:07 APR 03, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG

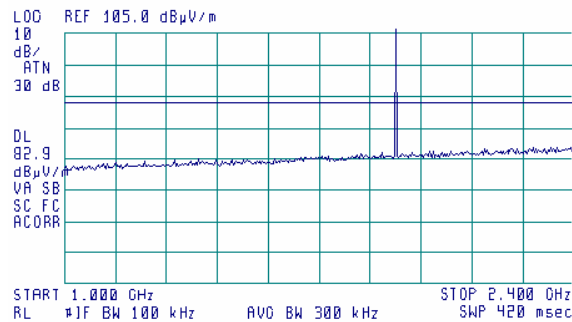


Plot 8.8.44 Radiated emission measurements from 1000 to 1725 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:14:50 APR 03, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 1.6543 GHz
43.09 dBμV/m

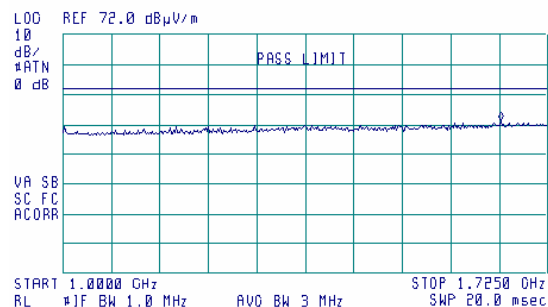




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.45 Radiated emission measurements from 2200 to 2390 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


15:20:44 APR 03, 2005

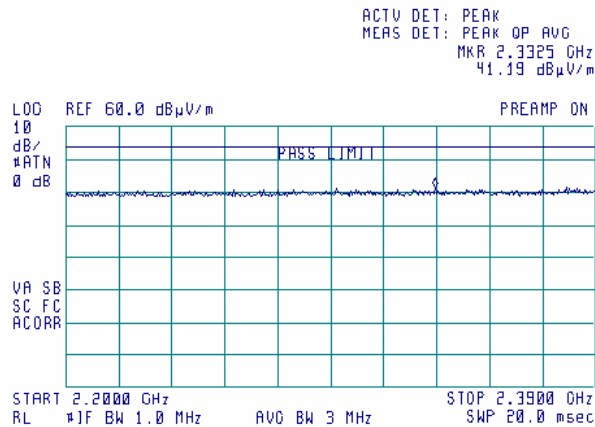

Plot 8.8.46 Radiated emission measurements from 2483.5 to 2900 MHz at the low carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:33:12 MAR 30, 2005

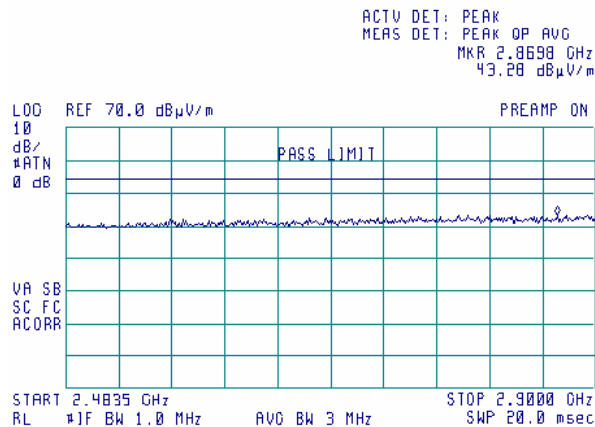




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.47 Radiated emission measurements from 2483.5 to 2900 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


15:28:59 MAR 30, 2005

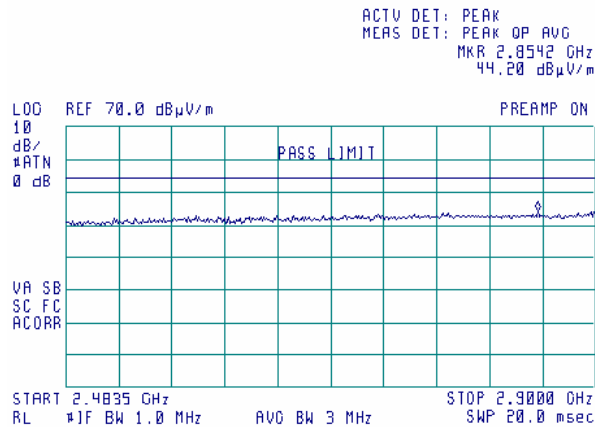

Plot 8.8.48 Radiated emission measurements from 2483.5 to 2900 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

16:13:34 MAR 30, 2005

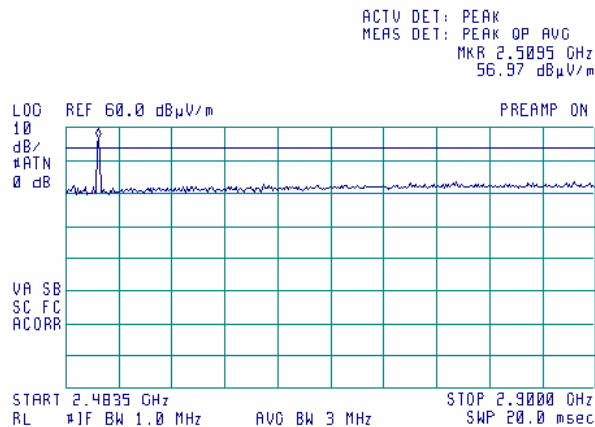

No spurious except of the third harmonic of G20




Test specification:	Section 15.247(c), Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.49 Radiated emission measurements from 2483.5 to 2900 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal


14:37:53 APR 03, 2005

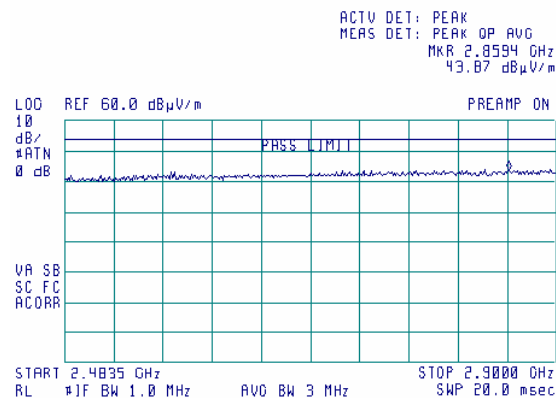

Plot 8.8.50 Radiated emission measurements from 2483.5 to 2900 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

16:42:54 MAR 30, 2005

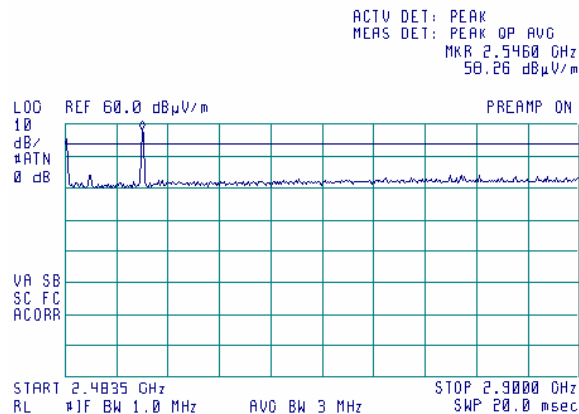

No spurious except of the third harmonic of G20




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.51 Radiated emission measurements from 2483.5 to 2500 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal


13:20:01 MAR 27, 2005

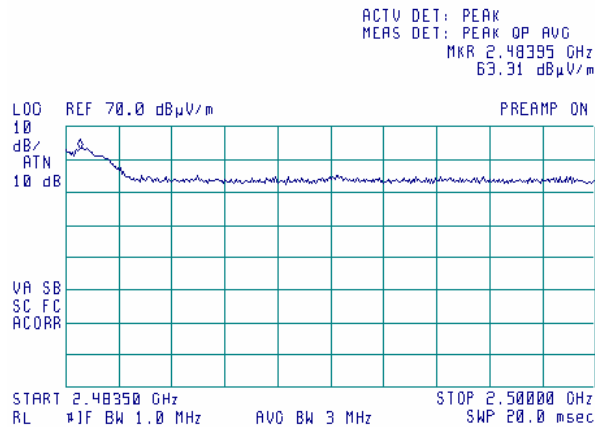

Plot 8.8.52 Radiated emission measurements from 2500 to 2900 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

15:03:26 APR 03, 2005

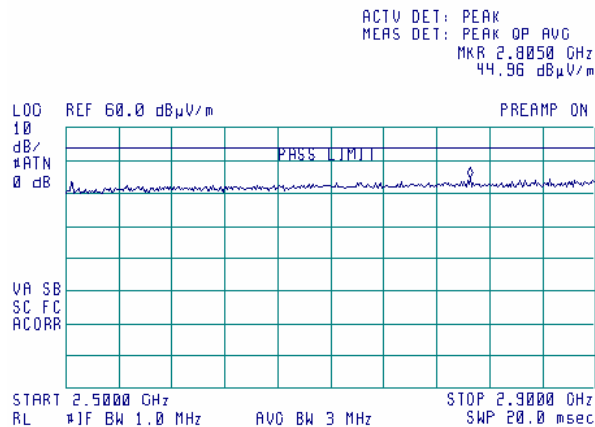





Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.53 Radiated emission measurements from 2900 to 4000 MHz at the low carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

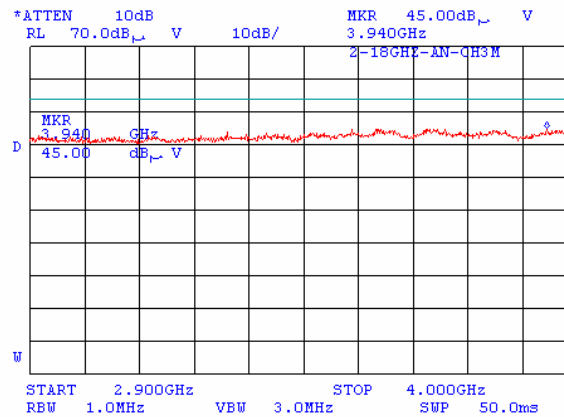**Plot 8.8.54 Radiated emission measurements from 2900 to 4000 MHz at the mid carrier frequency (BT and G20-850)**

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

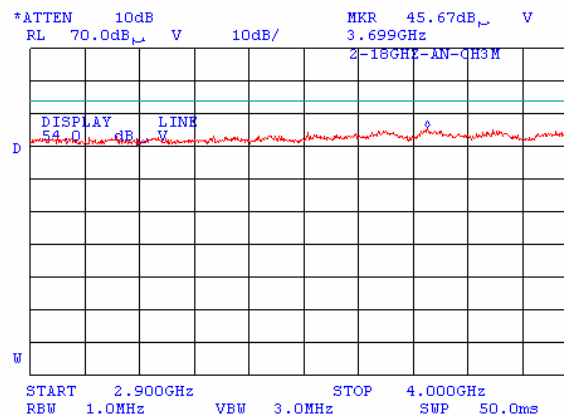




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.55 Radiated emission measurements from 2900 to 4000 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: Anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

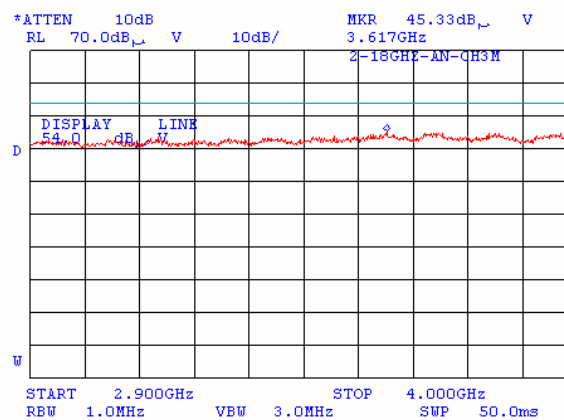


Plot 8.8.56 Radiated emission measurements from 2900 to 3260 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:25:18 APR 13, 2005

ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 3.2078 GHz
56.30 dBμV/m

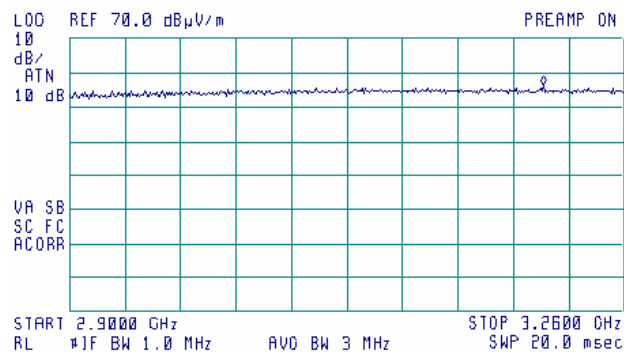




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.57 Radiated emission measurements from 3260 to 4000 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:18:50 APR 13, 2005

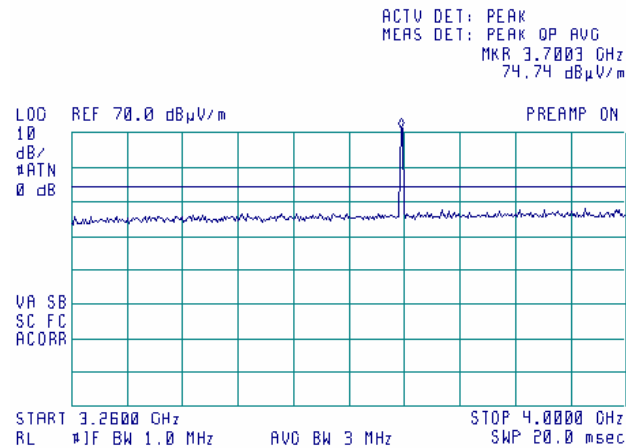


No spurious except of second harmonic of G20.

Plot 8.8.58 Radiated emission measurements from 2900 to 3260 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:33:16 APR 13, 2005

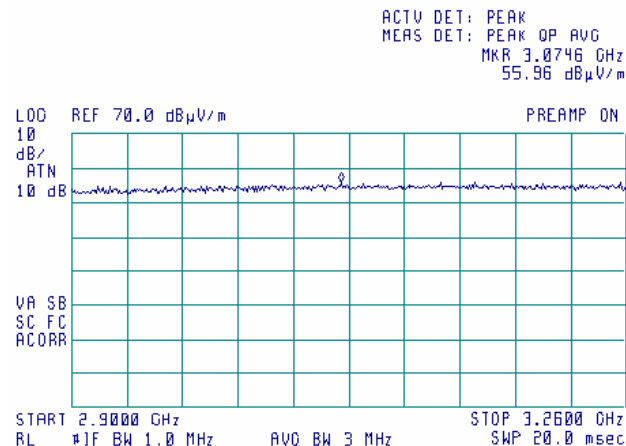




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.59 Radiated emission measurements from 3260 to 4000 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:38:19 APR 13, 2005

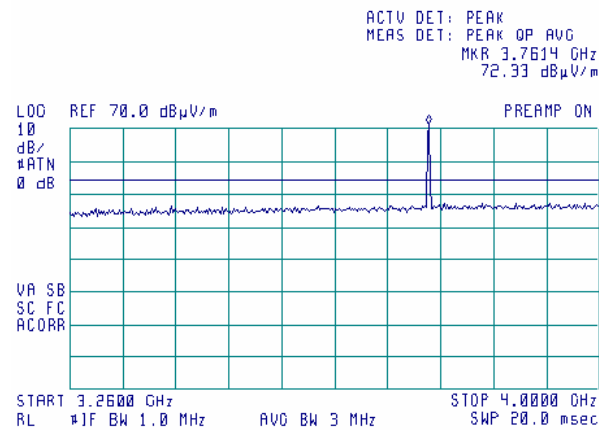


No spurious except of second harmonic of G20

Plot 8.8.60 Radiated emission measurements from 2900 to 3260 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:46:32 APR 13, 2005

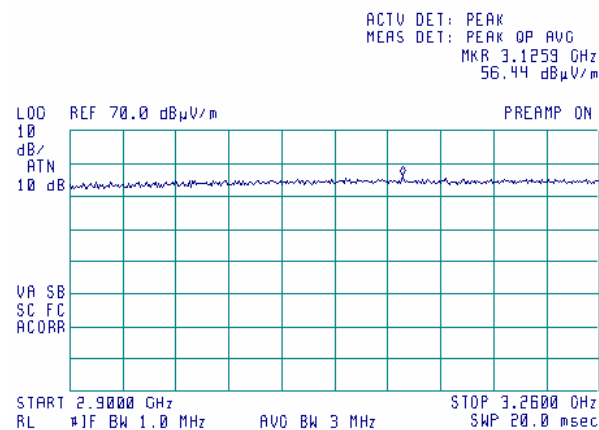




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.61 Radiated emission measurements from 3260 to 4000 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

17:43:40 APR 13, 2005

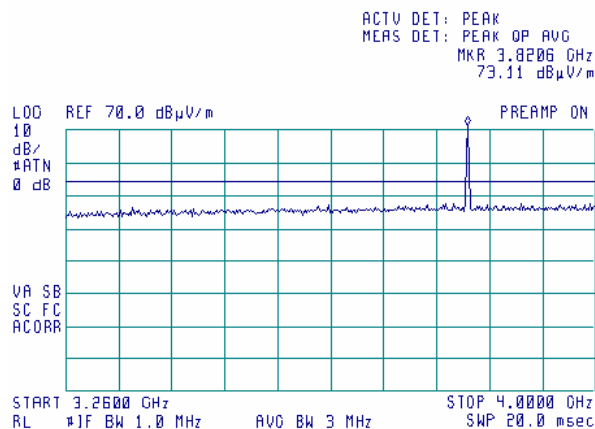


No spurious except of second harmonic of G20



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/13/2005 6:02:34 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.62 Radiated emission measurements from 4000 to 8000 MHz at the low carrier frequency (BT and G20-850)


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

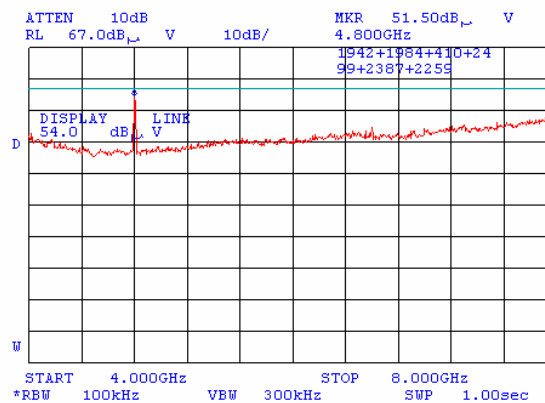

For average test result refer to plot 7.3.42

Plot 8.8.63 Radiated emission measurements from 4000 to 8000 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

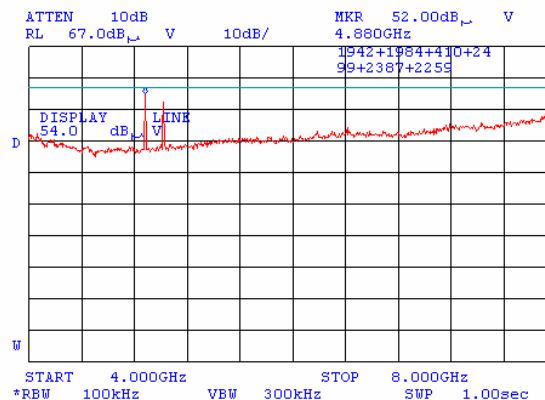


For average test result refer to plot 7.3.4
5020 MHz-ambient noise



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.64 Radiated emission measurements from 4000 to 8000 MHz at the high carrier frequency (BT and G20-850)


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

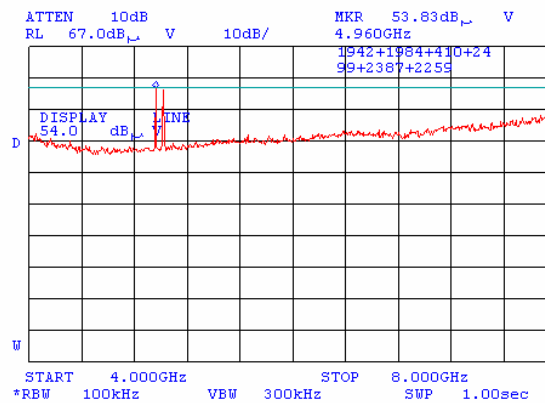

For average test result refer to plot 7.3.46
5020 MHz-ambient noise

Plot 8.8.65 Radiated emission measurements from 4000 to 8000 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

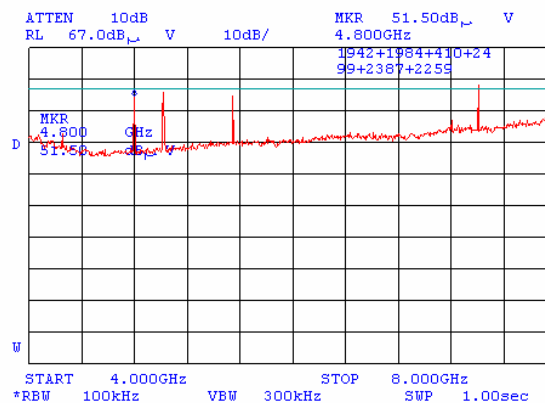


5020 MHz-ambient noise, 5550.6 and 7400.8 MHz-harmonics of G20.



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

Plot 8.8.66 Radiated emission measurements from 4000 to 8000 MHz at the mid carrier frequency (BT and G20-1900)


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

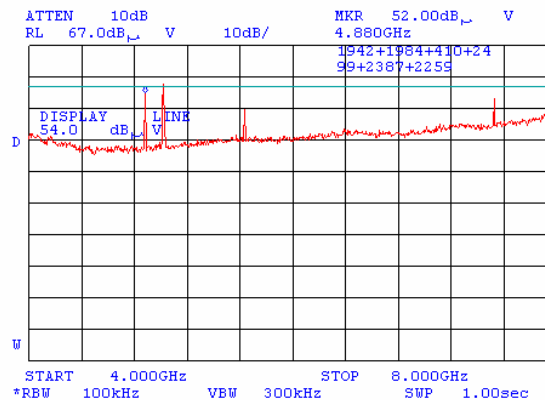

5020 MHz-ambient noise, 5640 and 7520 MHz-harmonics of G20.

Plot 8.8.67 Radiated emission measurements from 4000 to 8000 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

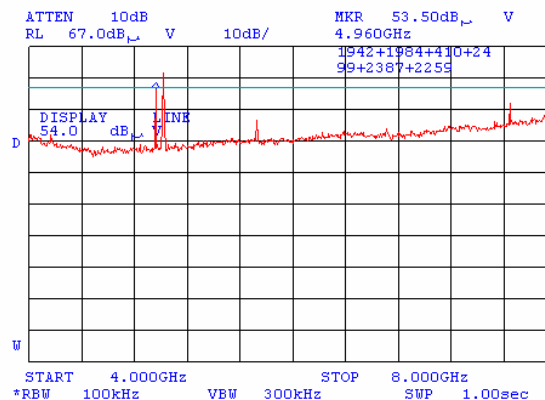


5020 MHz-ambient noise, 5729.4 and 7639.2 MHz-harmonics of G20.



Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.68 Radiated emission measurements from 8000 to 14000 MHz at the low carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

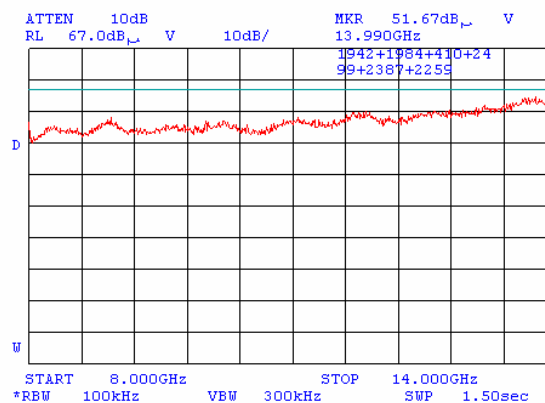

Plot 8.8.69 Radiated emission measurements from 8000 to 14000 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

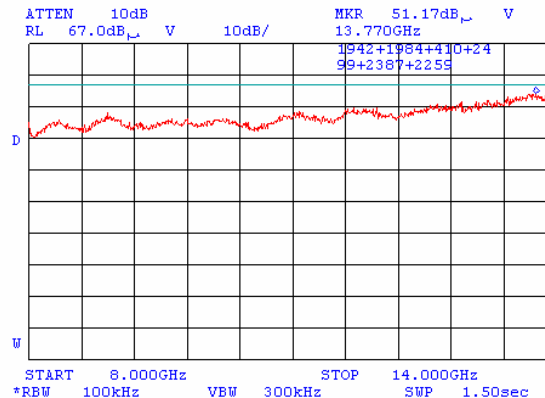




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.70 Radiated emission measurements from 8000 to 14000 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

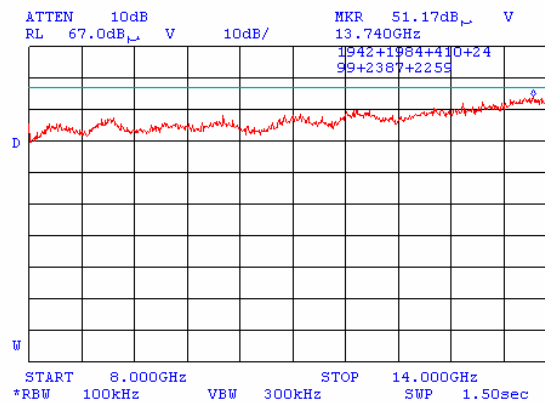

Plot 8.8.71 Radiated emission measurements from 8000 to 14000 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

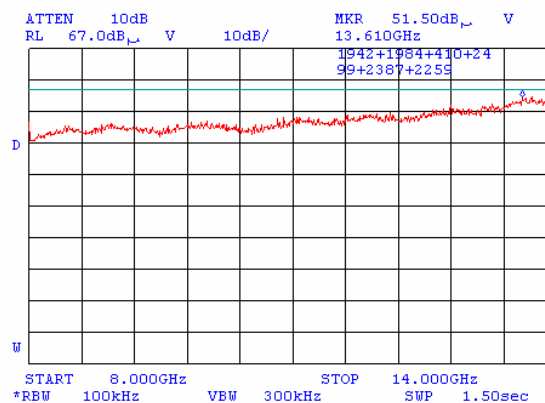




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.72 Radiated emission measurements from 8000 to 14000 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

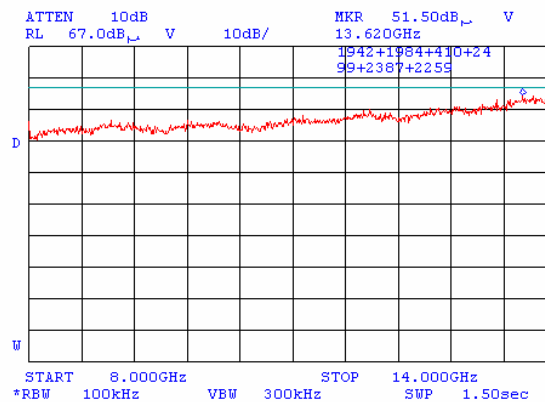

Plot 8.8.73 Radiated emission measurements from 8000 to 14000 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

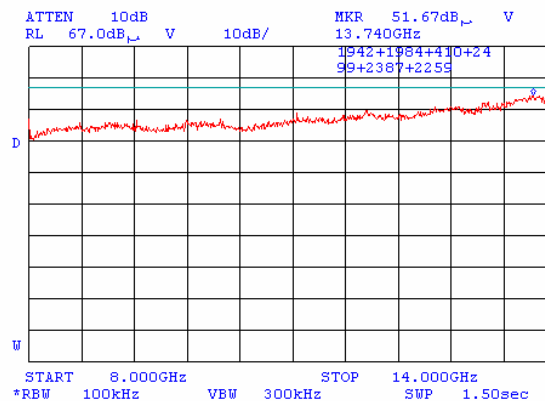




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.74 Radiated emission measurements from 14000 to 18000 MHz at the low carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

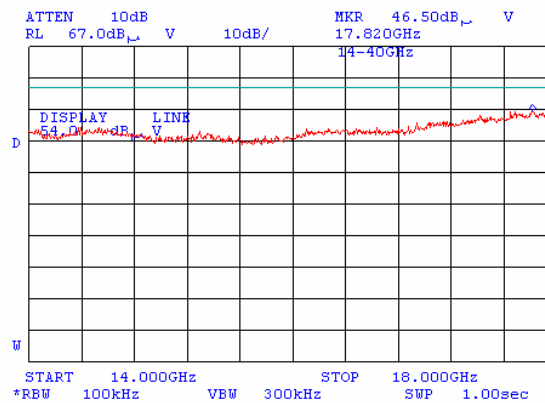

Plot 8.8.75 Radiated emission measurements from 14000 to 18000 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

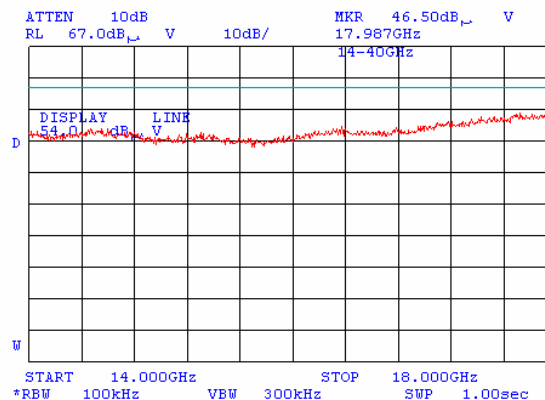




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.76 Radiated emission measurements from 14000 to 18000 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

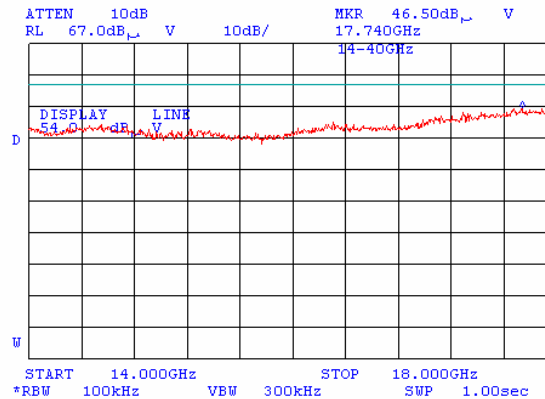

Plot 8.8.77 Radiated emission measurements from 14000 to 18000 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

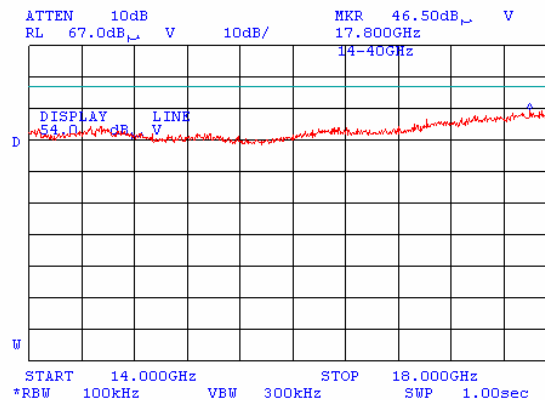




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.78 Radiated emission measurements from 14000 to 18000 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

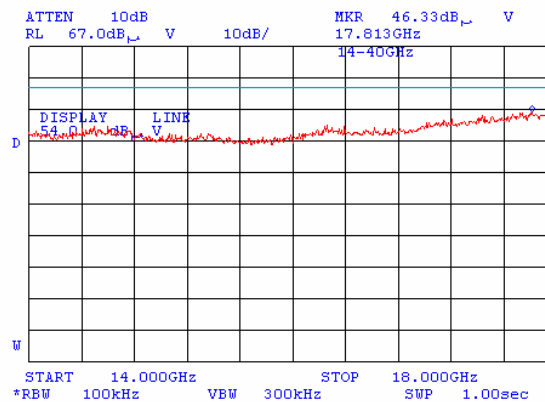

Plot 8.8.79 Radiated emission measurements from 14000 to 18000 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

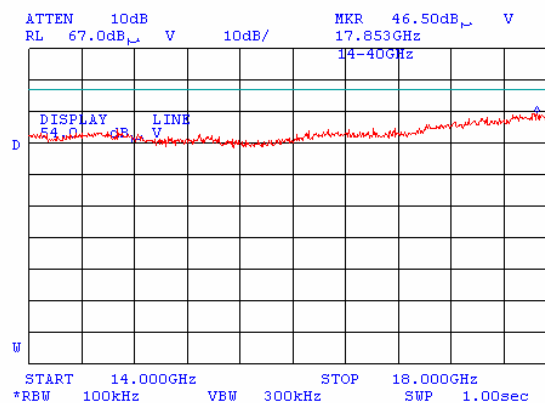




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.80 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

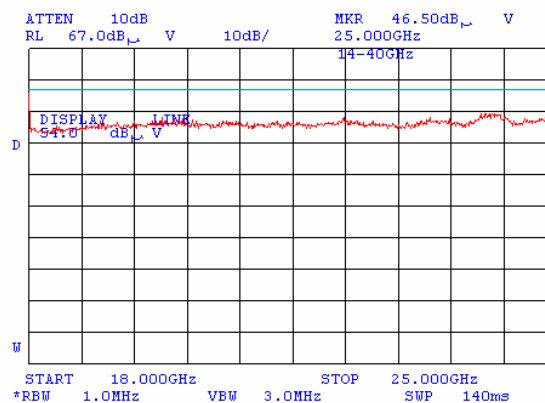

Plot 8.8.81 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

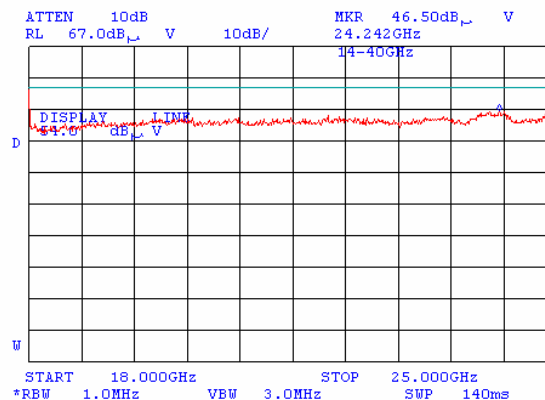




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.82 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency (BT and G20-850)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

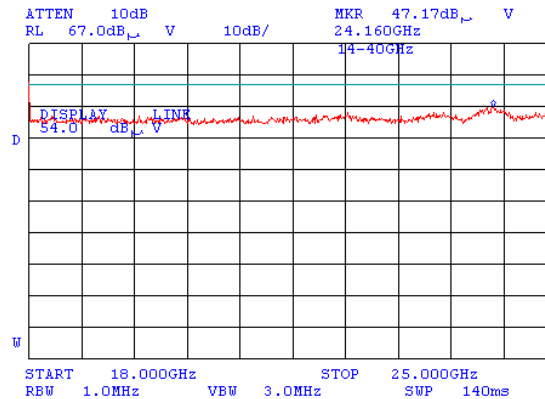

Plot 8.8.83 Radiated emission measurements from 18000 to 25000 MHz at the low carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

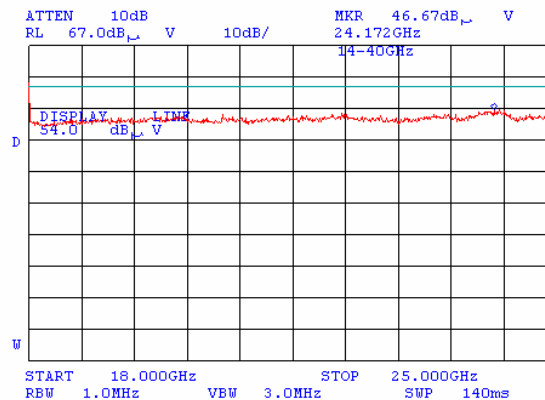




Test specification:		Section 15.247(c), Radiated spurious emissions	
Test procedure:		Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4	
Test mode:		Compliance	Verdict:
Date & Time:		4/13/2005 6:02:34 PM	
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			


Plot 8.8.84 Radiated emission measurements from 18000 to 25000 MHz at the mid carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

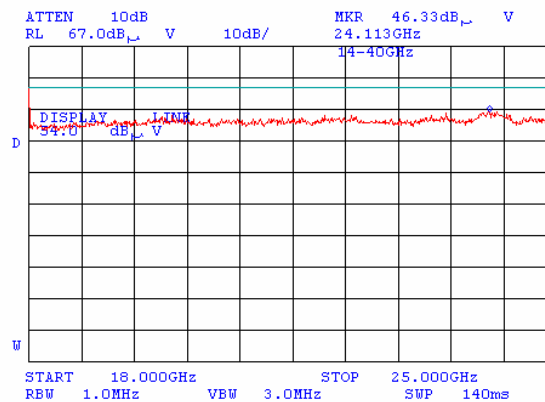

Plot 8.8.85 Radiated emission measurements from 18000 to 25000 MHz at the high carrier frequency (BT and G20-1900)

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

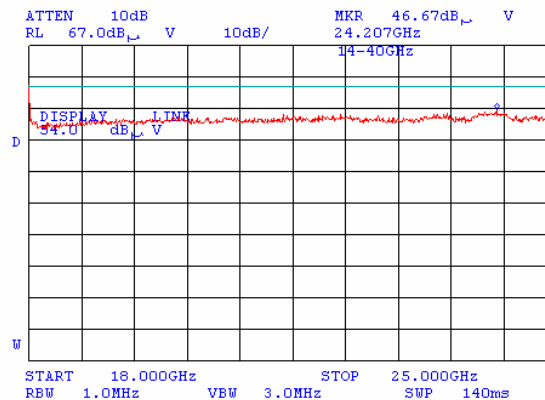



Test specification:		Section 15.203, Antenna requirements	
Test procedure:		Public notice DA 00-705	
Test mode:		Verdict:	
Date & Time:			
Temperature: 22 °C		Air Pressure: 1022 hPa	Relative Humidity: 43 %
			Power Supply: 7.2 V battery
Remarks:			

8.9 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 8.9.1.

Table 8.9.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



Test specification:		FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/5/2005 8:18:06 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

9 Emission tests according to 47CFR part 15 subpart B requirements

9.1 Radiated emission measurements

9.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits according to FCC Part 15, Section 109 are given in Table 9.1.1, according to ICES-003, Section 5 in Table 9.1.2 and according to RSS-210, Section 7.3 in Table 9.1.3.

Table 9.1.1 Radiated emission limits according to FCC Part 15, Section 109

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
960 - 5 th harmonic**	43.5*	54.0	49.5	60.0*

Table 9.1.2 Radiated emission limits according to ICES-003, Section 5

Frequency, MHz	Class B limit, dB(μV/m)		Class A limit, dB(μV/m)
	10 m distance	3 m distance	10 m distance
30 - 230	30	40.5*	40
230 - 1000	37	47.5*	47

* - The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S_2} = \text{Lim}_{S_1} + 20 \log(S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 9.1.3 Radiated emission limits according to RSS-210, Section 7.3

Frequency, MHz	Field strength limit at 3 m test distance, dB(μV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 1610	54.0
1610 - 3 rd harmonic**	60.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

9.1.2 Test procedure for measurements in semi-anechoic chamber

9.1.2.1 The EUT was set up as shown in Figure 9.1.1, energized and the performance check was conducted.


9.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.

9.1.2.3 The worst test results (the lowest margins) were recorded in Table 9.1.4 and shown in the associated plots.



Test specification:		FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/5/2005 8:18:06 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Figure 9.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

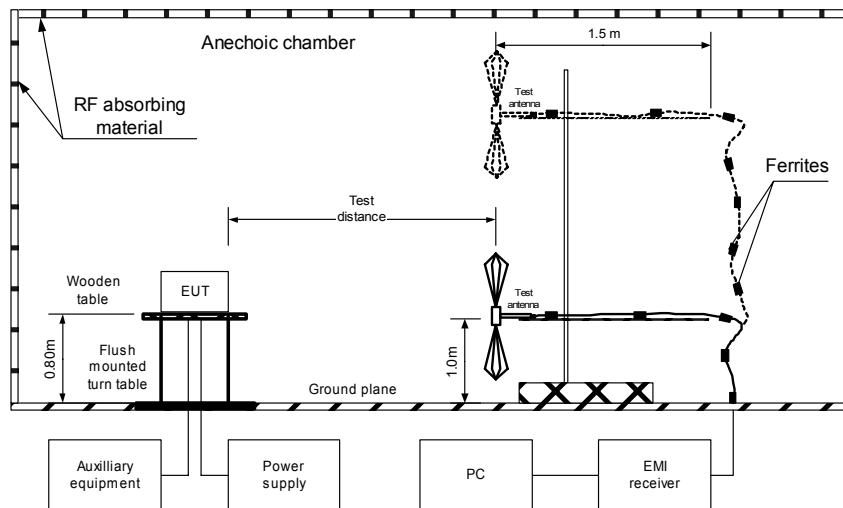



Test specification:		FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/5/2005 8:18:06 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Table 9.1.4 Radiated emission test results

EUT SET UP: TABLE-TOP
LIMIT: Class B
EUT OPERATING MODE: Receive / Stand-by
TEST SITE: SEMI ANECHOIC CHAMBER
TEST DISTANCE: 3 m
DETECTORS USED: PEAK / QUASI-PEAK
FREQUENCY RANGE: 30 MHz – 1000 MHz
RESOLUTION BANDWIDTH: 120 kHz

FCC section 15.109; RSS-210, section 7.3

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
370.505000	32.02	29.97	46.00	-16.03	V	1.1	35	PASS
439.995000	45.20	44.25	46.00	-1.75	V	1.1	127	
461.996250	44.70	43.73	46.00	-2.27	V	1.1	127	
474.477500	41.08	38.55	46.00	-7.45	V	1.1	125	
483.997500	39.61	35.90	46.00	-10.10	V	1.1	132	
500.497500	37.95	35.83	46.00	-10.17	V	1.1	120	

ICES-003

Frequency, MHz	Peak emission, dB(μV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB*				
370.505000	32.02	29.97	47.50	-17.53	V	1.1	35	PASS
439.995000	45.20	44.25	47.50	-3.25	V	1.1	127	
461.996250	44.70	43.73	47.50	-3.77	V	1.1	127	
474.477500	41.08	38.55	47.50	-8.95	V	1.1	125	
483.997500	39.61	35.90	47.50	-11.60	V	1.1	132	
500.497500	37.95	35.83	47.50	-11.67	V	1.1	120	

*- Margin = Measured emission - specification limit.

** - EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 0521	HL 0589	HL 0604	HL 1947	HL 2009	HL 2432		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




Test specification:		FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/5/2005 8:18:06 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 9.1.1 Radiated emission measurements in 30- 1000 MHz range, vertical antenna polarization


TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

10:34:12 APR 05, 2005

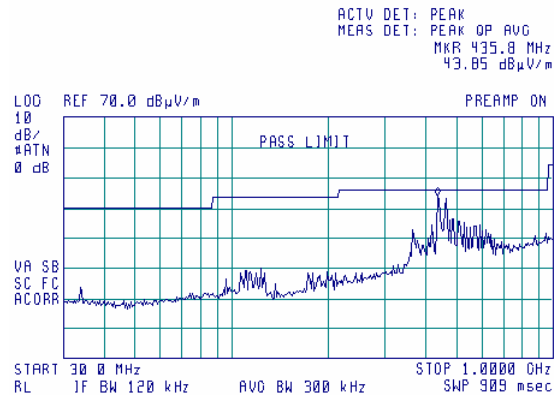**Plot 9.1.2 Radiated emission measurements in 30- 1000 MHz range, horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

10:37:57 APR 05, 2005

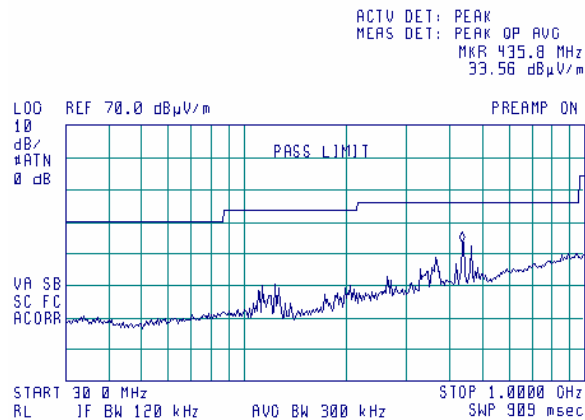





Test specification:		FCC section 15.109, ICES-003, RSS-210 section 5.17, Radiated emission	
Test procedure:		ANSI C63.4, Sections 11.6 and 12.1.4	
Test mode:	Compliance	Verdict:	
Date & Time:	4/5/2005 8:18:06 PM		
Temperature: 22 °C	Air Pressure: 1022 hPa	Relative Humidity: 43 %	Power Supply: 7.2 V battery
Remarks:			

Plot 9.1.3 Radiated emission measurements above 1000 MHz, vertical & horizontal antenna polarization

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

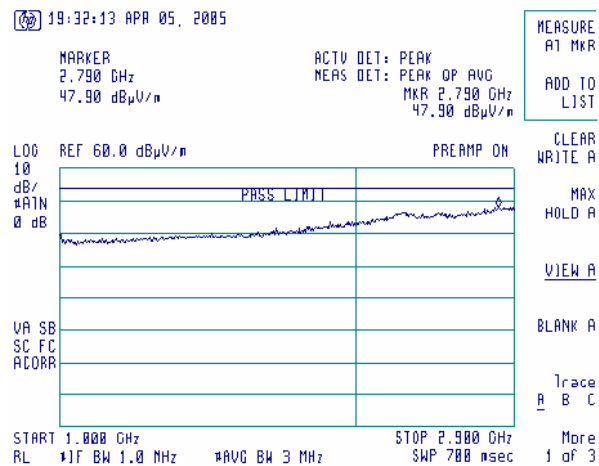**Plot 9.1.4 Radiated emission measurements above 1000 MHz, vertical & horizontal antenna polarization**

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive / Stand-by

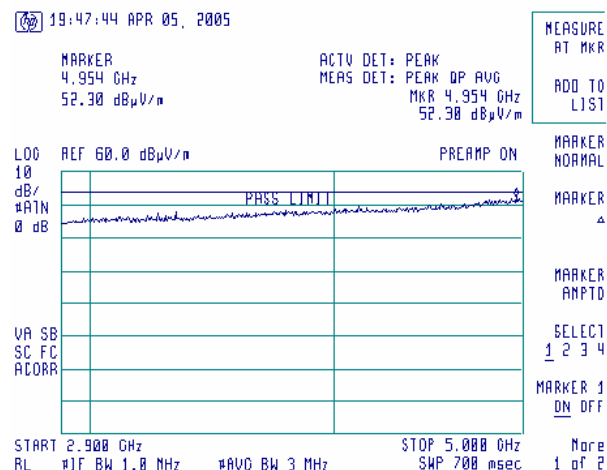

**10 APPENDIX A Test equipment and ancillaries used for tests**

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal.	Due Cal.
0038	Antenna Mast, 1-4 meter, motorized	HL	AM - 1	028	03-Feb-05	03-Feb-06
0091	Position Controller, for Antenna Mast + Turn Table, OOTS	HL	CRL-2	032	20-Apr-05	20-Apr-06
0287	Turntable, Motorized Diameter, 2 m (OATS)	HL	TMD-2	042	11-Nov-04	11-Nov-05
0410	Cable, Coax, Microwave, DC-18 GHz, N-N, 1 m	Gore	PFP01P0 1039.4	9338767	11-Nov-04	11-Nov-05
0446	Antenna, Loop active, 10kHz-30MHz	EMCO	6502	2857	11-Nov-04	11-Nov-05
0465	Anechoic Chamber 9(L) x 6.5(W) x 5.5(H) m	HL	AC - 1	023	10-Oct-04	10-Oct-05
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	10-Oct-04	10-Oct-05
0589	Cable Coaxial, GORE A2P01POL118, 2.3 m	HL	GORE-3	176	02-Dec-04	02-Dec-05
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE 26 - 2000 MHz	EMCO	3141	9611-1011	10-Jan-05	10-Jan-06
0768	Antenna Standard Gain Horn, 18-26.5 GHz, WR-42, K-band, Gain - 25 dB	Quinstar Technology	QWH-4200-BA	110	10-Jan-05	10-Jan-06
0769	Antenna Standard Gain Horn, 26.5-40 GHz, WR28, Ka band, Gain 25 dB	Quinstar Technology	QWH-2800-BA	112	10-Jan-05	10-Jan-06
1200	Quadruplexer 1-12 GHz (1-2 GHz; 2-4GHz;4-8 GHz; 8-12GHz)	Elettronica S.p.A. - Roma	UE 84	D/00240	10-Feb-05	10-Feb-06
1365	Cable Coaxial, S-FLC 12-50, 5 m	HL	C214-5	1365	02-Dec-04	02-Dec-05
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies (HP)	8564EC	3946A002 19	30-Aug-04	30-Aug-05
1430	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1431, HL1432	Agilent Technologies (HP)	8542E	3807A002 62,3705A0 0217	01-Sep-04	01-Sep-05
1562	Oscilloscope 100 MHz, DMM	Tektronix	THS720A	B039444	20-Sep-04	20-Sep-05
1942	Cable 18GHz, 4 m, blue	Rhophase Microwave Limited	SPS-1803A-4000-NPS	T4658	20-Sep-04	20-Sep-05
1947	Cable 18GHz, 6.5 m, blue	Rhophase Microwave Limited	NPS-1803A-6500-NPS	T4974	17-Oct-04	17-Oct-05
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W, N-type	EMC Test Systems	3115	9911-5964	22-Mar-05	22-Mar-06
2009	Cable RF, 8 m	Alpha Wire	RG-214	C-56	02-Dec-04	02-Dec-05
2254	Cable 40GHz, 0.8 m, blue	Rhophase Microwave Limited	KPS-1503A-800-KPS	W4907	21-Jul-04	21-Jul-05
2258	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0222	05-Nov-04	05-Nov-05
2259	Amplifier Low Noise 2-20 GHz	Sophia Wireless	LNA0220-C	0223	05-Nov-04	05-Nov-05
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	22-Mar-05	22-Mar-06
2483	Detector 0.001-12 GHz	HP	36-51	2483	22-Mar-05	22-Mar-06
2499	Quadruplexer 1-12 GHz (1-2 GHz; 2-4GHz;4-8 GHz; 8-12GHz)	Elettronica S.p.A. - Roma	UE 84	D/00239	10-Feb-05	10-Feb-06
2524	Attenuator, 10 dB, DC-18 GHz	Midwest Microwave	263-10	2524	03-Jan-05	03-Jan-06



11 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Radiated emissions at 3 m measuring distance Horizontal polarization Vertical polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error. The standards and instruments used in the calibration system conform to the present requirements of ISO/IEC 17025 (or alternately ANSI/NCSL Z540-1).

The laboratory calibrates its measurement standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements. The Hermon Labs EMC measurements uncertainty is given in the table above.



12 APPENDIX C Test facility description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility. Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47) and by Industry Canada for electromagnetic emissions (file numbers IC 2186-1 for OATS and IC 2186-2 for anechoic chamber), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site), assessed by TNO Certification EP&S (Netherlands) for a number of EMC, telecommunications, environmental, safety standards, and by AMTAC (UK) for safety of medical devices. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01).

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

13 APPENDIX D Specification references

47CFR part 15: 2005	Radio Frequency Devices.
FR Vol.62	Federal Register, Volume 62, May 13, 1997
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications.
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Issue 5: 2001 + Amendment: 2002 + Amendment 2: 2003 + Amendment 3: 2004	Low Power Licence- Exempt Radiocommunication Devices
RSS-212 Issue 1:1999	Test Facilities and Test Methods for Radio Equipment
ICES-003 Issue 4: 2004	Digital Apparatus
CAN/CSA-CEI/IEC CISPR 22: 02	Information Technology Equipment- Radio Disturbance Characteristics- Limits and Methods of measurement



14 APPENDIX E Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(μ V)	decibel referred to one microvolt
dB(μ V/m)	decibel referred to one microvolt per meter
dB(μ A)	decibel referred to one microampere
dB Ω	decibel referred to one Ohm
DC	direct current
DTS	digital transmission system
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
FHSS	frequency hopping spread spectrum
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
ITE	information technology equipment
k	kilo
kHz	kilohertz
LISN	line impedance stabilization network
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
μ s	microsecond
NA	not applicable
NT	not tested
OATS	open area test site
Ω	Ohm
PCB	printed circuit board
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
VA	volt-ampere

**15 APPENDIX F Test equipment correction factors**

Antenna Factor
Active Loop Antenna
EMC Test Systems, model 6502, serial number 2857, HL 0446

Frequency, MHz	Magnetic Antenna Factor, dB(S/m)	Electric Antenna Factor, dB(1/m)
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.7
0.750	-41.9	9.6
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.1
4.000	-41.4	10.1
5.000	-41.5	10.0
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(S/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ A/m).

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/

Antenna factor
Standard gain horn antenna
Quinstar Technology
Model QWH
Ser.No.112, HL 0768, 0769, 0770

Frequency min, GHz	Frequency max, GHz	Antenna factor, dB(1/m)
18.000	26.500	32.01
26.500	40.000	35.48
40.000	60.000	39.03
60.000	90.000	42.55
90.000	140.000	46.23
140.000	220.000	50.11

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor

Biconilog antenna EMCO, model 3141, serial number 1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	560	19.8	1300	27.0
28	7.8	580	20.6	1320	27.8
30	7.8	600	21.3	1340	28.3
40	7.2	620	21.5	1360	28.2
60	7.1	640	21.2	1380	27.9
70	8.5	660	21.4	1400	27.9
80	9.4	680	21.9	1420	27.9
90	9.8	700	22.2	1440	27.8
100	9.7	720	22.2	1460	27.8
110	9.3	740	22.1	1480	28.0
120	8.8	760	22.3	1500	28.5
130	8.7	780	22.6	1520	28.9
140	9.2	800	22.7	1540	29.6
150	9.8	820	22.9	1560	29.8
160	10.2	840	23.1	1580	29.6
170	10.4	860	23.4	1600	29.5
180	10.4	880	23.8	1620	29.3
190	10.3	900	24.1	1640	29.2
200	10.6	920	24.1	1660	29.4
220	11.6	940	24.0	1680	29.6
240	12.4	960	24.1	1700	29.8
260	12.8	980	24.5	1720	30.3
280	13.7	1000	24.9	1740	30.8
300	14.7	1020	25.0	1760	31.1
320	15.2	1040	25.2	1780	31.0
340	15.4	1060	25.4	1800	30.9
360	16.1	1080	25.6	1820	30.7
380	16.4	1100	25.7	1840	30.6
400	16.6	1120	26.0	1860	30.6
420	16.7	1140	26.4	1880	30.6
440	17.0	1160	27.0	1900	30.6
460	17.7	1180	27.0	1920	30.7
480	18.1	1200	26.7	1940	30.9
500	18.5	1220	26.5	1960	31.2
520	19.1	1240	26.5	1980	31.6
540	19.5	1260	26.5	2000	32.0
		1280	26.6		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged wave guide horn antenna
EMC Test Systems, model 3115, serial no: 9911-5964, HL 1984

Frequency, MHz	Antenna gain, dBi	Antenna factor. dB(1/m)
1000.0	5.8	24.5
1500.0	9.0	24.8
2000.0	8.6	27.7
2500.0	9.5	28.7
3000.0	8.9	30.8
3500.0	8.2	32.9
4000.0	9.6	32.7
4500.0	11.2	32.1
5000.0	10.6	33.6
5500.0	9.8	35.3
6000.0	10.1	35.7
6500.0	10.7	35.8
7000.0	10.9	36.2
7500.0	10.5	37.2
8000.0	11.1	37.2
8500.0	10.8	38.1
9000.0	10.7	38.6
9500.0	11.5	38.3
10000.0	11.8	38.4
10500.0	12.3	38.3
11000.0	12.3	38.8
11500.0	11.5	39.9
12000.0	12.2	39.6
12500.0	12.6	39.5
13000.0	12.0	40.5
13500.0	11.7	41.1
14000.0	11.7	41.5
14500.0	12.7	40.8
15000.0	14.2	39.5
15500.0	16.0	38.1
16000.0	16.2	38.1
16500.0	14.5	40.1
17000.0	12.2	42.6
17500.0	9.7	45.4
18000.0	6.6	48.7

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Antenna factor
Double-ridged wave guide horn antenna
EMC Test Systems, model 3115, serial no: 00027177, HL 2432

Frequency, MHz	Antenna gain, dBi	Antenna factor. dB(1/m)
1000.0	5.5	24.7
1500.0	8.0	25.7
2000.0	8.4	27.8
2500.0	9.3	28.9
3000.0	9.0	30.7
3500.0	9.3	31.8
4000.0	9.3	33.0
4500.0	10.4	32.8
5000.0	10.0	34.2
5500.0	10.1	34.9
6000.0	10.6	35.2
6500.0	11.0	35.4
7000.0	10.8	36.3
7500.0	10.4	37.3
8000.0	10.8	37.5
8500.0	10.8	38.0
9000.0	11.0	38.3
9500.0	11.5	38.3
10000.0	11.5	38.7
10500.0	11.9	38.7
11000.0	12.2	38.9
11500.0	11.9	39.5
12000.0	12.3	39.5
12500.0	12.7	39.4
13000.0	12.0	40.5
13500.0	12.0	40.8
14000.0	11.6	41.5
14500.0	12.2	41.3
15000.0	13.6	40.2
15500.0	15.3	38.7
16000.0	15.8	38.5
16500.0	14.8	39.8
17000.0	12.9	41.9
17500.0	9.2	45.8
18000.0	6.2	49.1

Antenna factor is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



Cable loss
Cable coaxial, RG-214, 5m, model: C214-5, HL 1365

No.	Frequency, MHz	Measured, dB	Measured uncertainty dB
1	1000	0.41	±0.12
2	1200	0.44	
3	1400	0.48	
4	1600	0.52	
5	1800	0.55	
6	2000	0.58	
7	2200	0.61	
8	2400	0.64	±0.17
9	2600	0.67	
10	2800	0.7	
11	3000	0.73	
12	3300	0.79	
13	3600	0.84	
14	3900	0.94	
15	4200	1.22	

Cable loss
Cable GORE, HL 0410

No.	Frequency, GHz	Cable loss, dB
1	0.5	0.16
2	1	0.28
3	2	0.38
4	4	0.55
5	6	0.85
6	8	0.90
7	10	1.07
8	12	1.11
9	14	1.29
10	16	1.41
11	18	1.73



Cable loss

Cable 18 GHz, 4 m, blue, model: SPS-1803A-4000-NPS, S/N T4658, HL 1942

Frequency, GHz	Cable loss, dB
0.03	0.21
0.05	0.26
0.10	0.36
0.20	0.50
0.30	0.61
0.40	0.70
0.50	0.78
0.60	0.85
0.70	0.93
0.80	0.99
0.90	1.04
1.00	1.10
1.10	1.16
1.20	1.22
1.30	1.26
1.40	1.31
1.50	1.35
1.60	1.41
1.70	1.45
1.80	1.49
1.90	1.53
2.00	1.57
2.10	1.61
2.20	1.65
2.30	1.69
2.40	1.72
2.50	1.76
2.60	1.79
2.70	1.83
2.80	1.87
2.90	1.90
3.10	1.97
3.30	2.04
3.50	2.11
3.70	2.18
3.90	2.24
4.10	2.31
4.30	2.38
4.50	2.43
4.70	2.53
4.90	2.53
5.10	2.63
5.30	2.65
5.50	2.72
5.70	2.76
5.90	2.79

Frequency, GHz	Cable loss, dB
6.10	2.88
6.30	2.90
6.50	2.97
6.70	3.02
6.90	3.04
7.10	3.07
7.30	3.12
7.50	3.13
7.70	3.19
7.90	3.24
8.10	3.30
8.30	3.36
8.50	3.45
8.70	3.41
8.90	3.45
9.10	3.42
9.30	3.55
9.50	3.48
9.70	3.58
9.90	3.61
10.10	3.66
10.30	3.68
10.50	3.70
10.70	3.70
10.90	3.75
11.10	3.78
11.30	3.86
11.50	3.98
11.70	4.10
11.90	4.12
12.10	4.09
12.40	4.13
13.00	4.23
13.50	4.35
14.00	4.40
14.50	4.44
15.00	4.57
15.50	4.66
16.00	4.64
16.50	4.66
17.00	4.75
17.50	4.85
18.00	4.93



Cable loss

Cable 18 GHz, 6.5 m, blue, model: NPS-1803A-6500-NPS, S/N T4974, HL 1947

Frequency, GHz	Cable loss, dB
0.03	0.30
0.05	0.38
0.10	0.53
0.20	0.74
0.30	0.91
0.40	1.05
0.50	1.18
0.60	1.29
0.70	1.40
0.80	1.50
0.90	1.59
1.00	1.68
1.10	1.77
1.20	1.86
1.30	1.94
1.40	2.01
1.50	2.08
1.60	2.16
1.70	2.22
1.80	2.29
1.90	2.36
2.00	2.42
2.10	2.48
2.20	2.54
2.30	2.60
2.40	2.66
2.50	2.71
2.60	2.77
2.70	2.83
2.80	2.89
2.90	2.95
3.10	3.06
3.30	3.17
3.50	3.28
3.70	3.39
3.90	3.51
4.10	3.62
4.30	3.76
4.50	3.87
4.70	4.01
4.90	4.10
5.10	4.21
5.30	4.31
5.50	4.43
5.70	4.56
5.90	4.71

Frequency, GHz	Cable loss, dB
6.10	4.87
6.30	4.95
6.50	4.94
6.70	4.88
6.90	4.87
7.10	4.83
7.30	4.85
7.50	4.86
7.70	4.91
7.90	4.96
8.10	5.03
8.30	5.08
8.50	5.13
8.70	5.21
8.90	5.22
9.10	5.34
9.30	5.35
9.50	5.52
9.70	5.51
9.90	5.66
10.10	5.70
10.30	5.78
10.50	5.79
10.70	5.82
10.90	5.86
11.10	5.94
11.30	6.06
11.50	6.21
11.70	6.44
11.90	6.61
12.10	6.76
12.40	6.68
13.00	6.66
13.50	6.81
14.00	6.90
14.50	6.90
15.00	6.97
15.50	7.17
16.00	7.28
16.50	7.27
17.00	7.38
17.50	7.68
18.00	7.92



Cable loss
RF cable 8 m, model RG-214, HL 2009

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	1	0.10	NA	±0.12
2	10	0.14		
3	30	0.25		
4	50	0.34		
5	100	0.53		
6	300	0.99		
7	500	1.31		
8	800	1.73		
9	1000	1.98		
10	1100	2.11		
11	1200	2.21		
12	1300	2.35		
13	1400	2.46		
14	1500	2.55		
15	1600	2.68		
16	1700	2.78		
17	1800	2.88		
18	1900	2.98		
19	2000	3.09		



Cable loss

Cable Coaxial, GORE A2P01POL118, 2.3 m, model:GORE-3, HL 0589
+ Cable Coaxial, ANDREW PSWJ4, 6m, model: ANDREW-6, HL 1004

No.	Frequency, MHz	Cable loss, dB	Tolerance (Specification), dB	Measurement uncertainty, dB
1	30	0.33	≤ 6.5	± 0.12
2	50	0.40		
3	100	0.57		
4	300	0.97		
5	500	1.25		
6	800	1.59		
7	1000	1.81		
8	1200	1.97		
9	1400	2.15		
10	1600	2.28		
11	1800	2.43		
12	2000	2.61		
13	2200	2.75		
14	2400	2.89		
15	2600	2.97		
16	2800	3.21	≤ 6.5	± 0.12
17	3000	3.32		± 0.17
18	3300	3.47		
19	3600	3.62		
20	3900	3.84		
21	4200	3.92		
22	4500	4.07		
23	4800	4.36		
24	5100	4.62		
25	5400	4.78		
26	5700	5.16		
27	6000	5.67		
28	6500	5.99		