



FCC RF Test Report

APPLICANT : Motorola Mobility LLC.
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 7383
FCC ID : IHDT56VD4
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on May 07, 2016 and testing was completed on Jun. 01, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency Channel 8

 2.2 Pre-Scanned RF Power 9

 2.3 Test Mode 10

 2.4 Connection Diagram of Test System..... 11

 2.5 Support Unit used in test configuration and system 13

 2.6 EUT Operation Test Setup 13

 2.7 Measurement Results Explanation Example..... 14

3 TEST RESULT 15

 3.1 6dB and 99% Bandwidth Measurement 15

 3.2 Output Power Measurement..... 17

 3.3 Power Spectral Density Measurement 19

 3.4 Conducted Band Edges and Spurious Emission Measurement 21

 3.5 Radiated Band Edges and Spurious Emission Measurement 31

 3.6 AC Conducted Emission Measurement..... 36

 3.7 Antenna Requirements 40

4 LIST OF MEASURING EQUIPMENT 41

5 UNCERTAINTY OF EVALUATION 42

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED TEST RESULTS

APPENDIX C. DUTY CYCLE PLOTS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	RSS-247 5.2(1)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	RSS-Gen 6.6	99% Bandwidth	-	Pass	-
3.2	15.247(b)	RSS-247 A5.4(4)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	RSS-247 5.2(2)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	RSS-247 5.5	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
			Conducted Spurious Emission		Pass	-
3.5	15.247(d)	RSS-247 5.5	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.54 dB at 4824.000 MHz
3.6	15.207	RSS-GEN 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 8.36 dB at 4.450 MHz
3.7	15.203 & 15.247(b)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Motorola Mobility LLC.
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC.
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	7383
FCC ID	IHDT56VD4
EUT supports Radios application	CDMA/EV-DO/GSM/EGPRS/WCDMA/HSPA/LTE/FM WLAN 11b/g/n HT20 Bluetooth v3.0 EDR Bluetooth v4.1 LE
IMEI Code	Conducted: 354140070005208 Conduction: 354140070011602 Radiation: 354140070005281
HW Version	DVT2-A
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Accessory List	
AC Adapter 1	Brand Name : Motorola
	Model Name : SPN5945A
AC Adapter 2	Brand Name : Motorola
	Model Name : SPN5838A
Battery 1	Brand Name : Motorola
	Model Name : SNN5976A
Battery 2	Brand Name : Motorola
	Model Name : SNN5977A
Earphone	Brand Name : Motorola
	Model Name : SJYN1181B
USB Cable	Brand Name : Motorola
	Model Name : SKN6462A



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	802.11b/g/n : 2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to Antenna	802.11b : 21.27 dBm (0.1340 W) 802.11g : 23.76 dBm (0.2377 W) 802.11n HT20 : 22.62 dBm (0.1828 W)
99% Occupied Bandwidth	802.11b : 13.64MHz 802.11g : 19.03MHz 802.11n HT20 : 19.08MHz
Antenna Type	802.11b/g/n : PIFA Antenna with gain -0.7 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.			
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
Test Site No.	Sporton Site No.			FCC Registration No.
	TH01-KS	03CH03-KS	CO01-KS	306251

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test shown in the following tables.

2.4GHz 802.11b RF Output Power (dBm)					
Power vs. Channel		Power vs. Data Rate			
Channel	Frequency (MHz)	1Mbps	2Mbps	5.5Mbps	11Mbps
CH 01	2412	20.61	19.65	19.71	19.81
CH 06	2437	21.27	20.75	20.75	20.85
CH 11	2462	21.18	20.31	20.38	20.44

2.4GHz 802.11g RF Output Power (dBm)									
Power vs. Channel		Power vs. Data Rate							
Channel	Frequency (MHz)	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
CH 01	2412	23.50	22.66	22.74	22.65	22.72	22.83	22.78	22.73
CH 06	2437	23.76	22.86	22.91	23.12	22.94	23.08	23.10	23.13
CH 11	2462	23.46	23.04	23.14	22.97	23.01	23.02	23.08	23.07

2.4GHz 802.11n HT20 RF Output Power (dBm)									
Power vs. Channel		Power vs. MCS Index							
Channel	Frequency (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	22.51	21.03	21.07	21.10	21.05	20.82	21.01	21.12
CH 06	2437	22.57	21.62	21.93	21.68	22.03	21.75	21.76	21.88
CH 11	2462	22.62	21.27	21.04	21.34	21.25	21.28	21.57	21.52



2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.



<2.4GHz>

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0



Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN 2.4G Link + USB Cable (Charging from Adapter 1) + Earphone + MP3 + Battery 1 Mode 2 : GSM850 Idle + Bluetooth Link + WLAN 2.4G Link + Adapter 2 + Earphone + MP3 + Battery 2
Remark: 1. For radiated test cases, the tests were performed with adapter 1, earphone, battery 1 and USB cable. The adapter 2 and battery 2 verify the worst case. 2. The worst case of conducted emission is mode 2; only the test data of it was reported.	

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

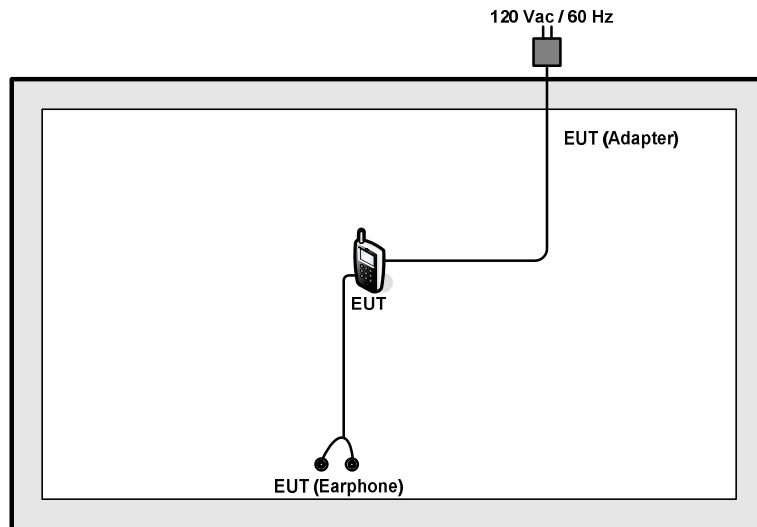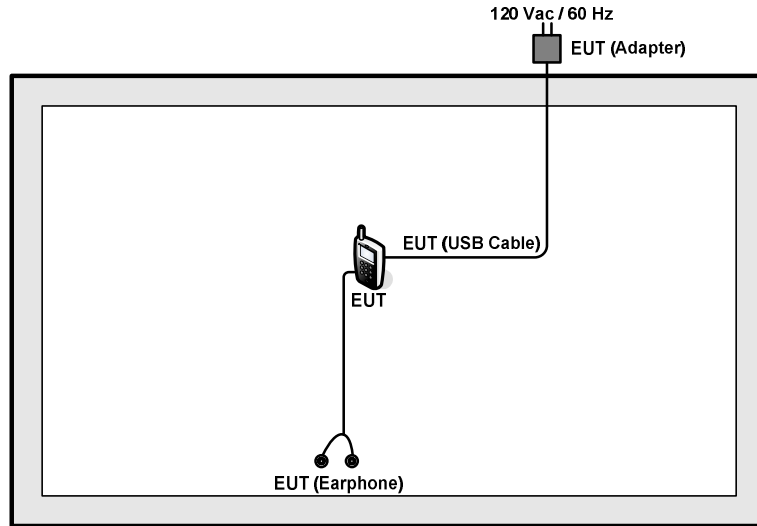

<AC Conducted Emission Mode>

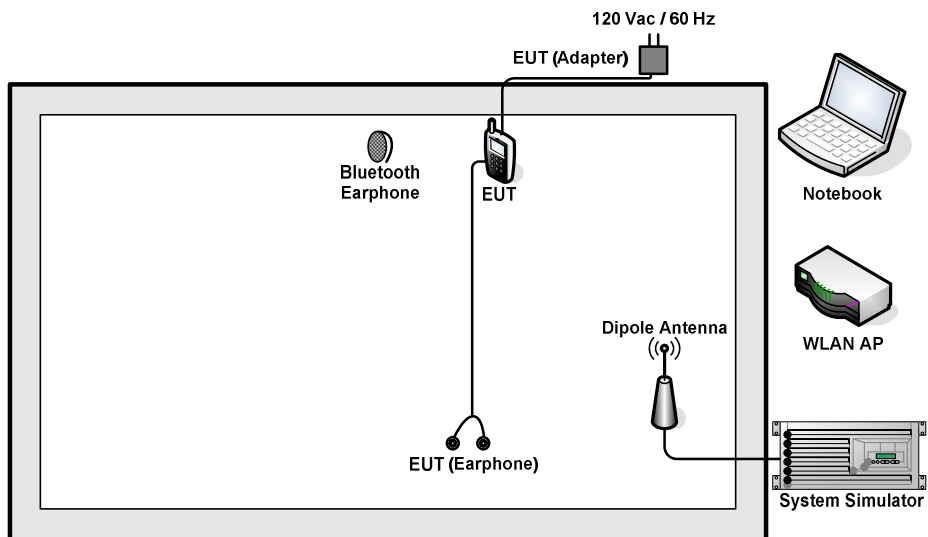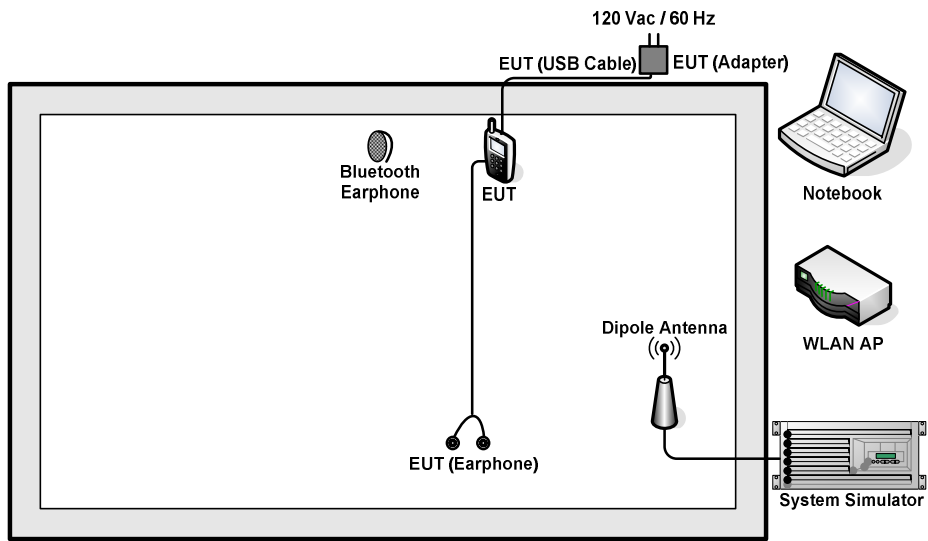



2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.8 m
3.	Notebook	Lenovo	G480	PD93160NGU	N/A	shielded cable DC O/P1.8m Unshielded AC I/P cable 1.8m
4.	Bluetooth Earphone	Lenovo	LBH505	N/A	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.



2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.5 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup

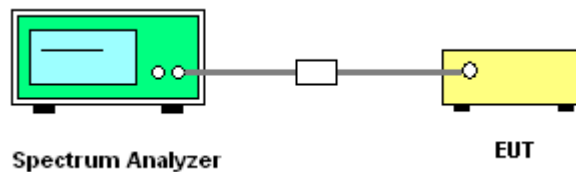



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A of this test report.

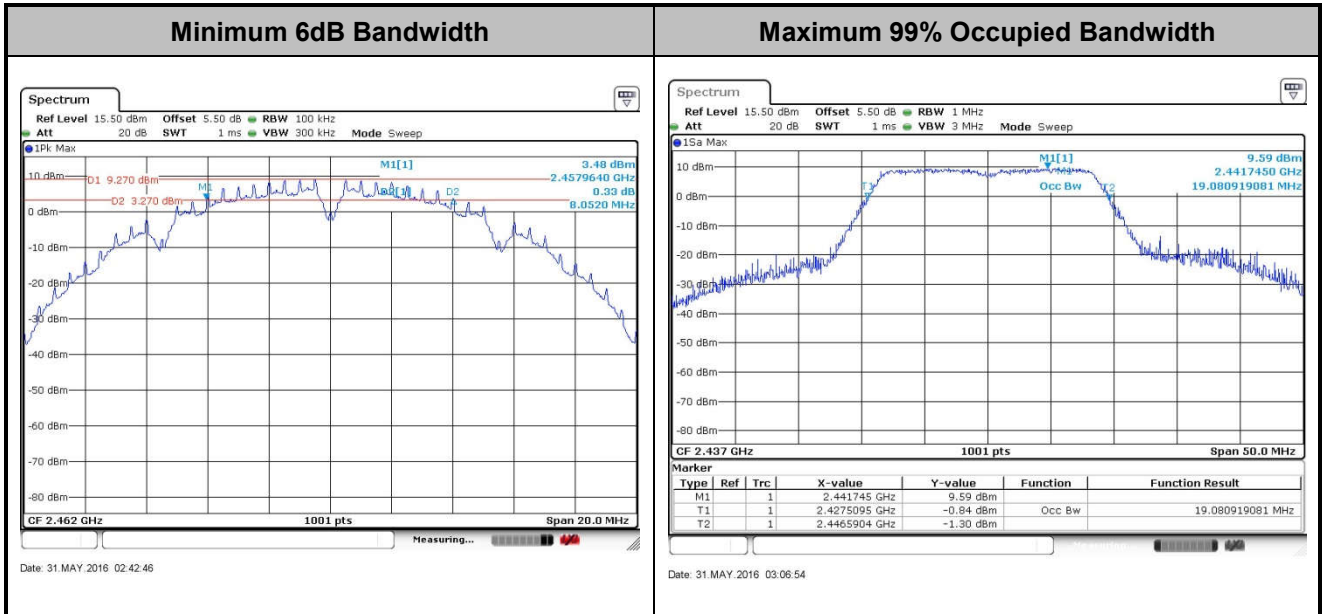

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting Antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the Antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

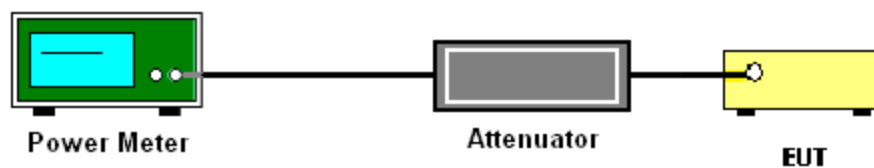



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A of this test report.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A of this test report.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup

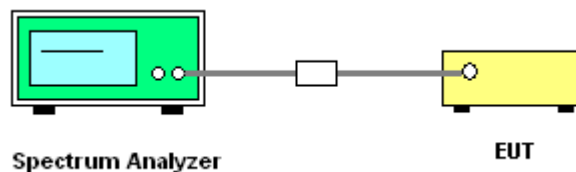



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A of this test report.

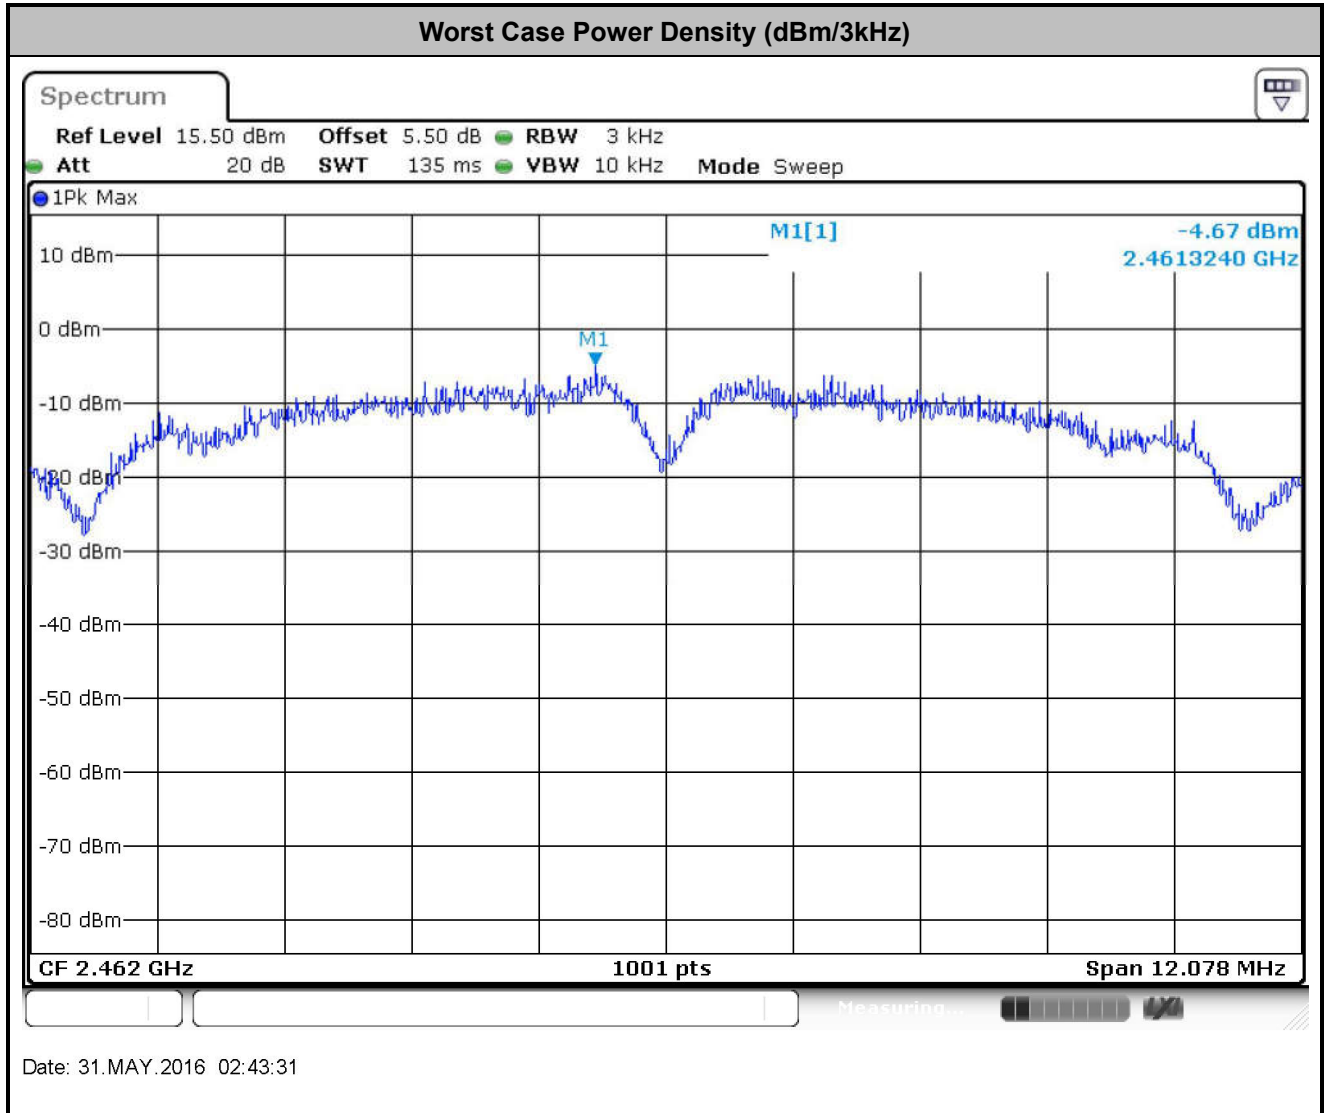

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

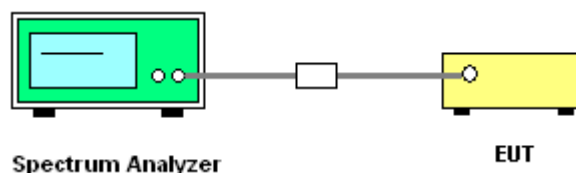



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Ivan Zhang

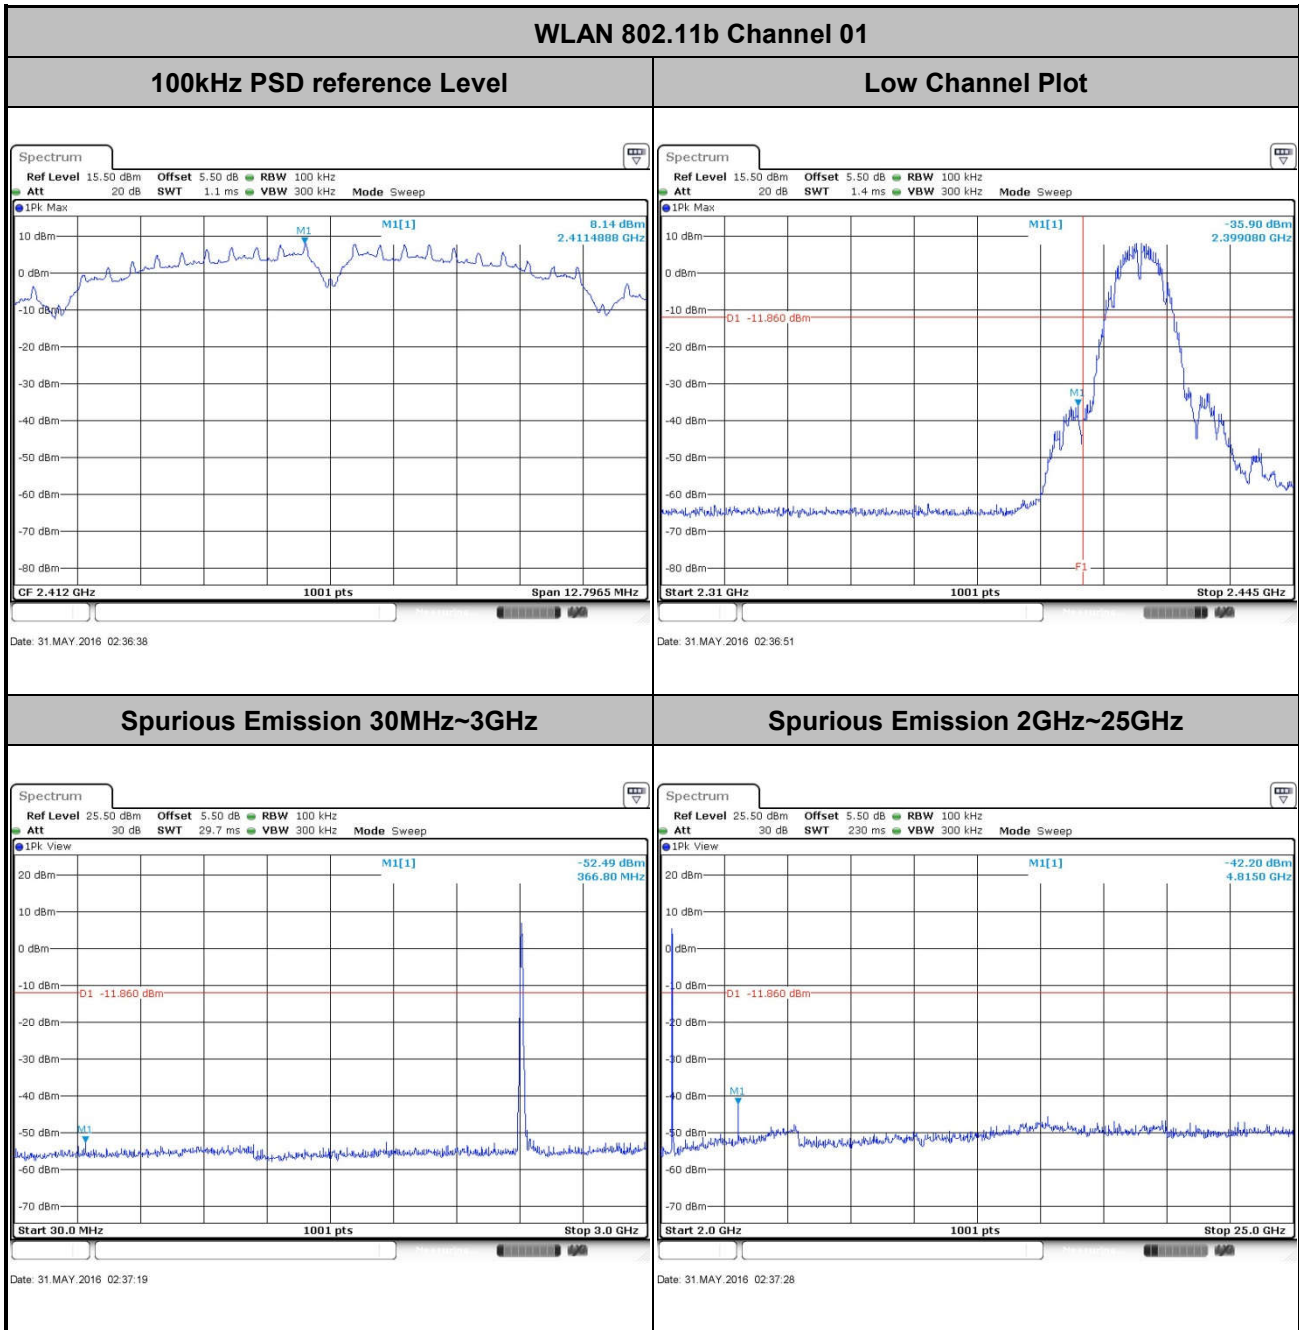




Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Ivan Zhang


WLAN 802.11b Channel 06

100kHz PSD reference Level

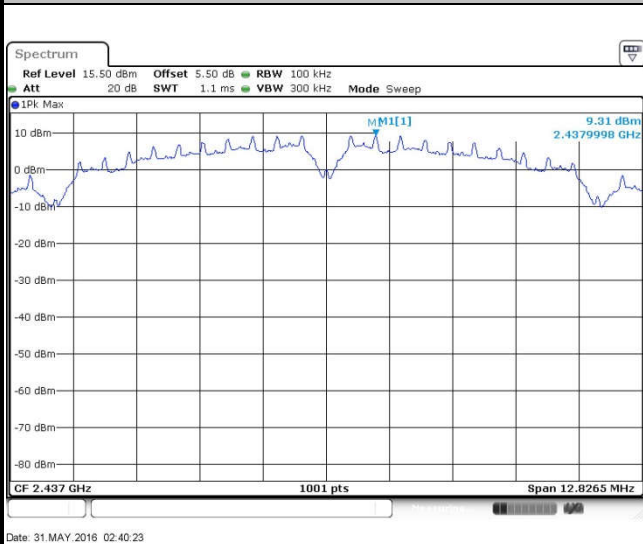


Date: 31.MAY.2016 02:40:23

Spurious Emission 30MHz~3GHz

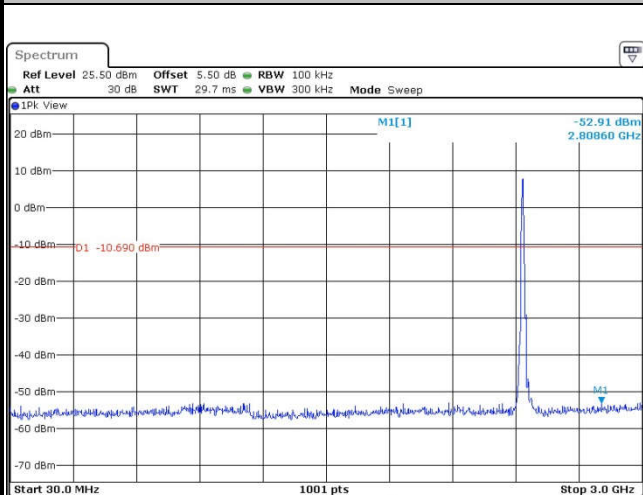

Date: 31.MAY.2016 02:40:34

Spurious Emission 2GHz~25GHz

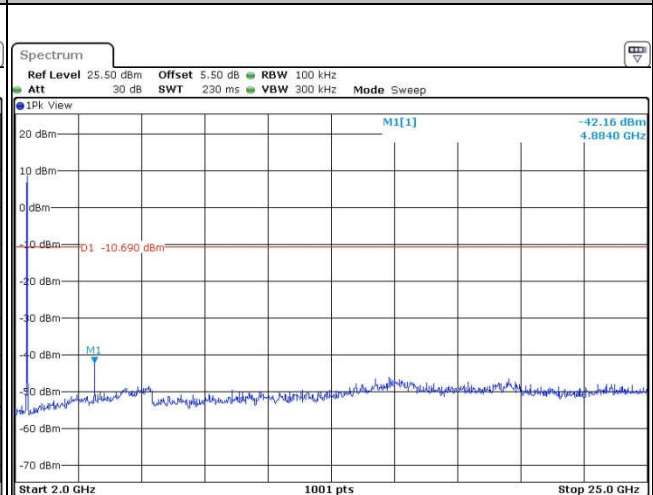


Date: 31.MAY.2016 02:40:43



Test Mode :	802.11b	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Ivan Zhang


WLAN 802.11b Channel 11

100kHz PSD reference Level

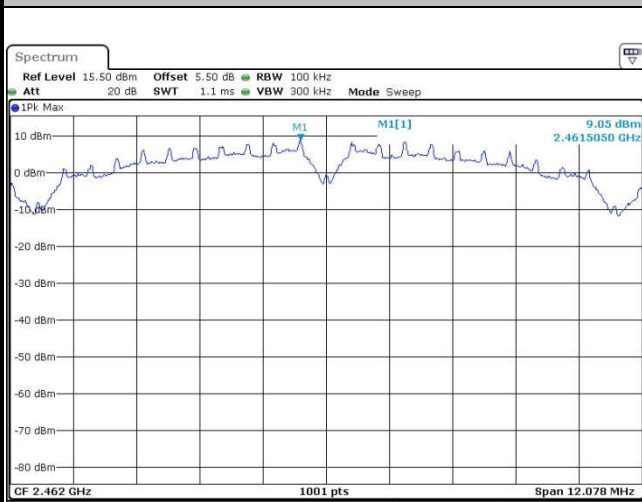


Date: 31.MAY.2016 02:43:46

High Channel Plot

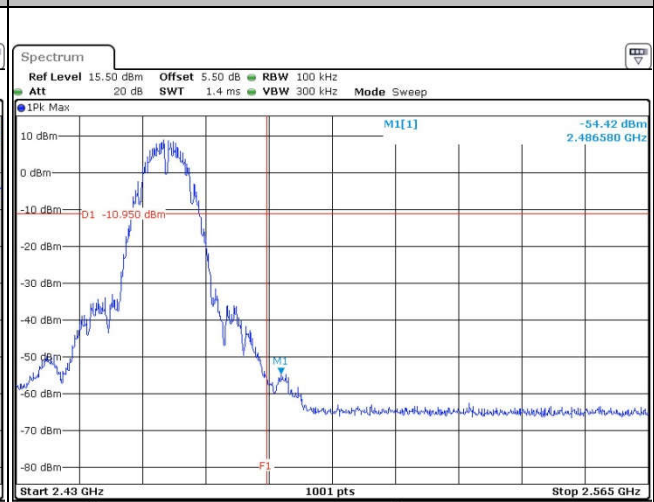


Date: 31.MAY.2016 02:43:56

Spurious Emission 30MHz~3GHz

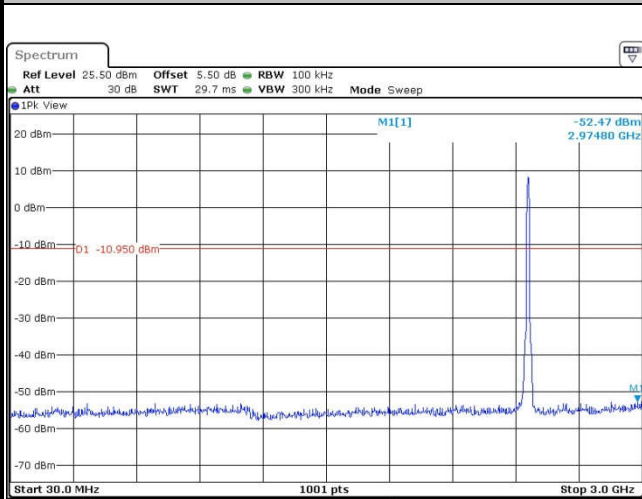

Date: 31.MAY.2016 02:44:08

Spurious Emission 2GHz~25GHz

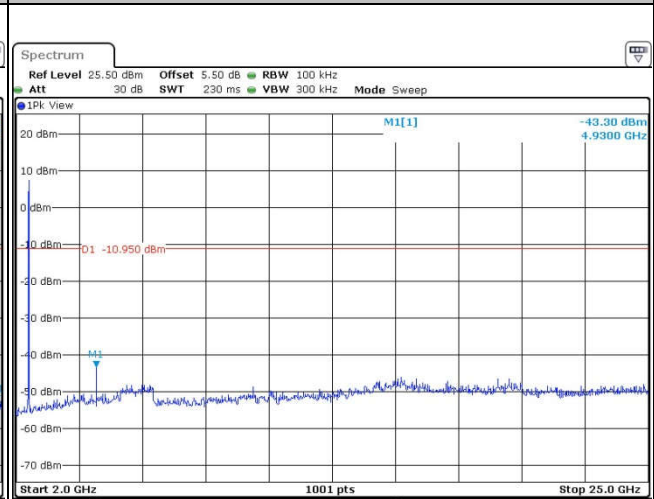


Date: 31.MAY.2016 02:44:17




Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Ivan Zhang

WLAN 802.11g Channel 01


100kHz PSD reference Level

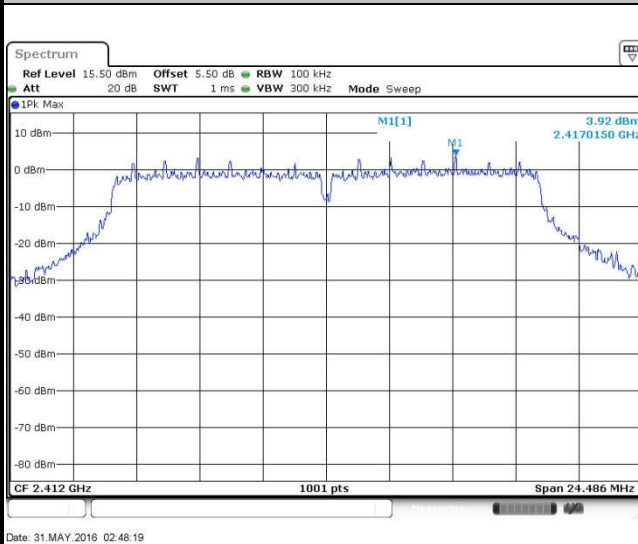


Low Channel Plot

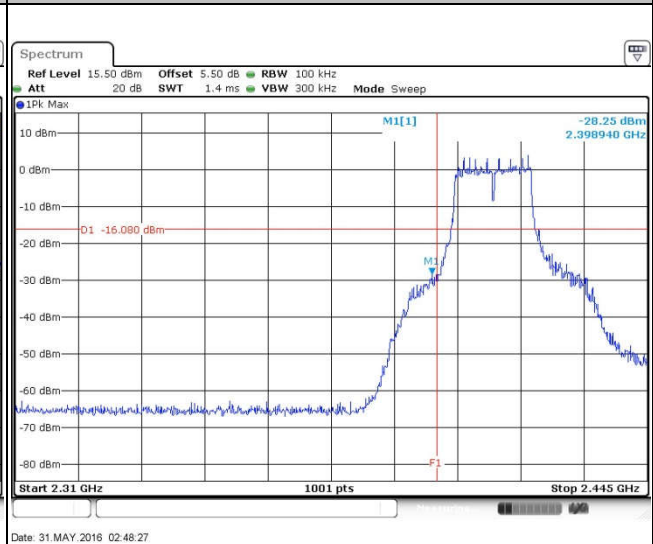

Spurious Emission 30MHz~3GHz

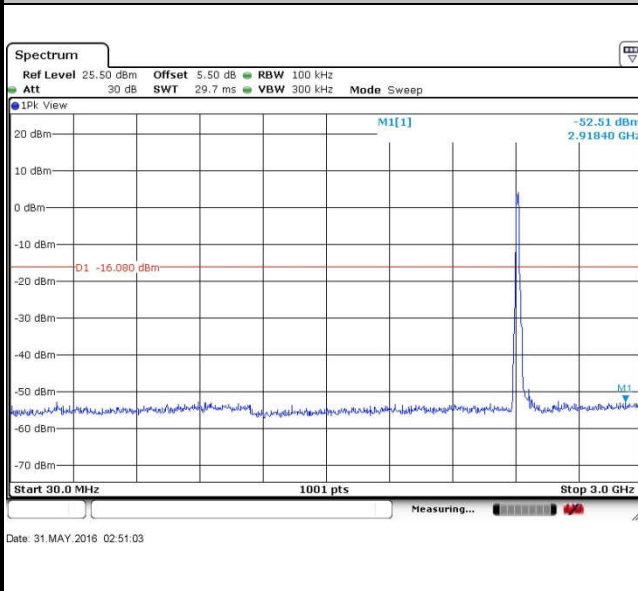

Spurious Emission 2GHz~25GHz

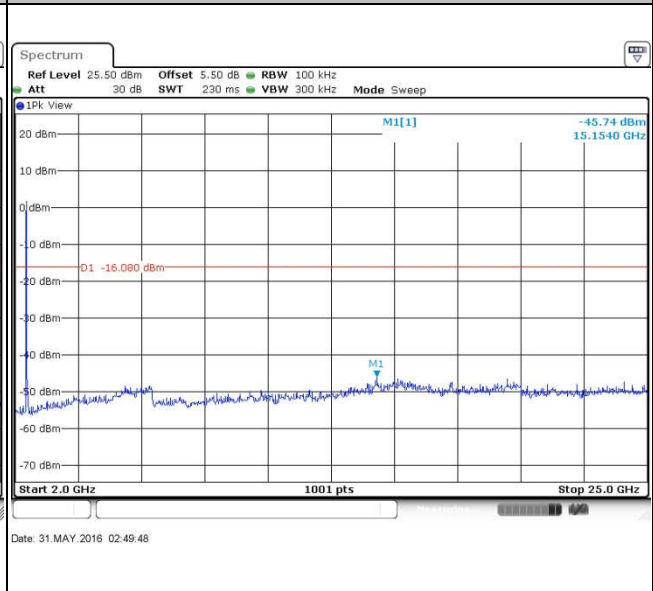





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Ivan Zhang

WLAN 802.11g Channel 06


100kHz PSD reference Level

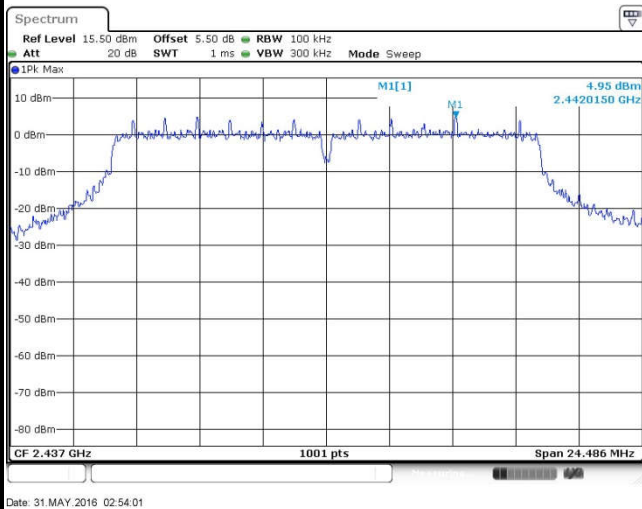

Spurious Emission 30MHz~3GHz

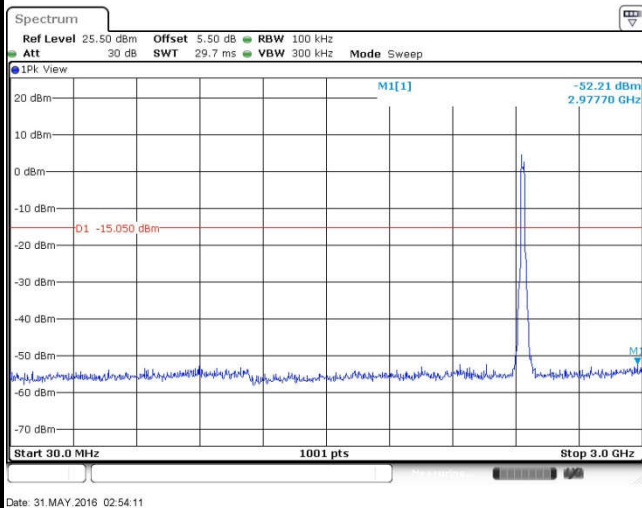

Spurious Emission 2GHz~25GHz

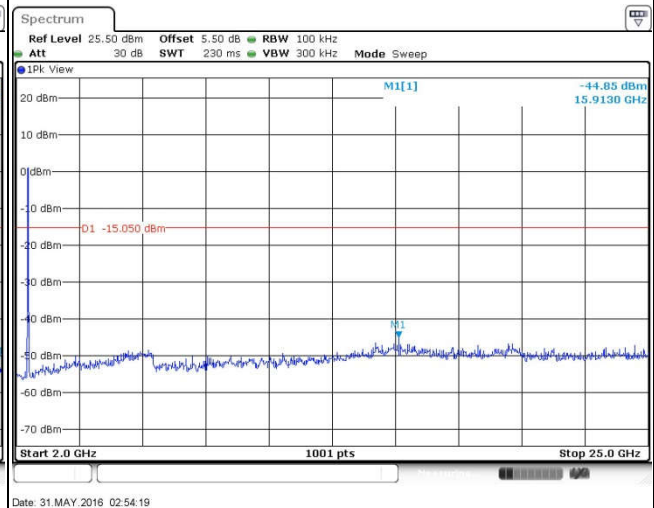





Test Mode :	802.11g	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Ivan Zhang

WLAN 802.11g Channel 11


100kHz PSD reference Level

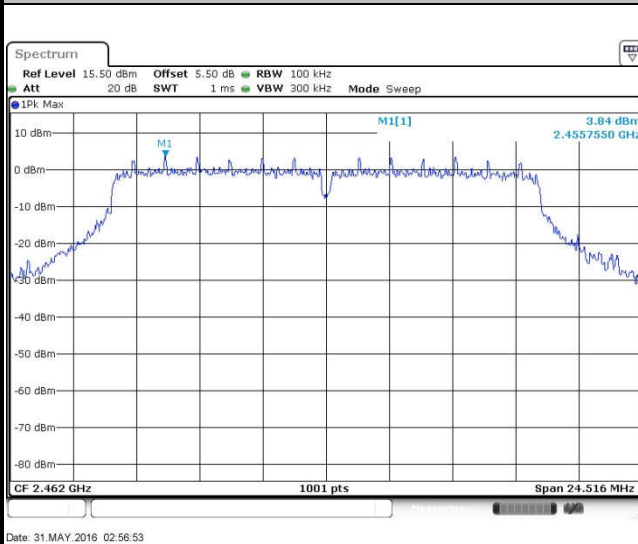


High Channel Plot

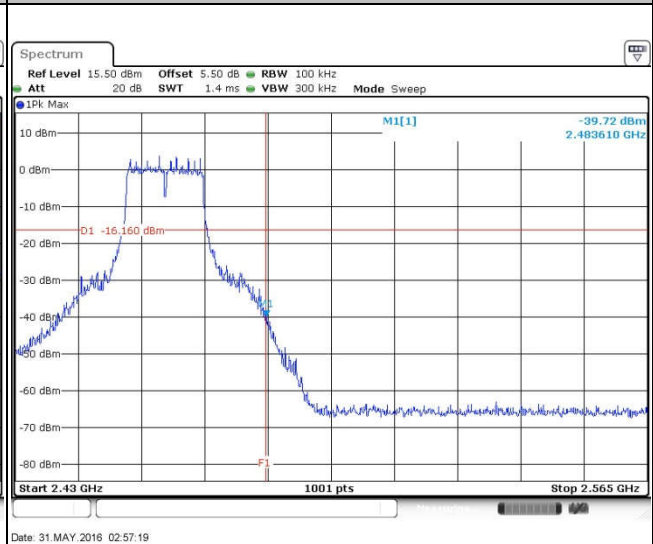

Spurious Emission 30MHz~3GHz

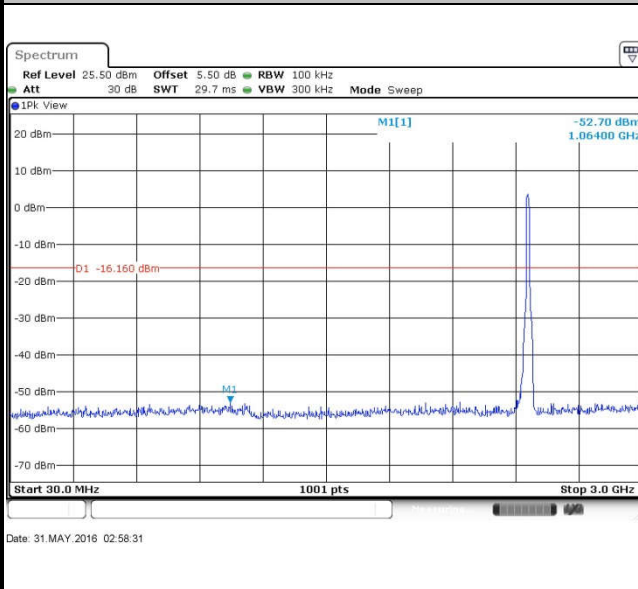


Spurious Emission 2GHz~25GHz

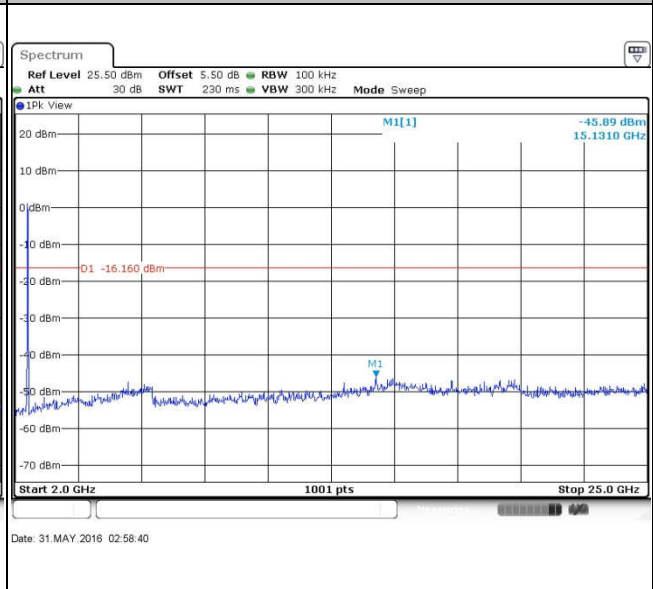



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Low	Relative Humidity :	49~51%
Test Channel :	01	Test Engineer :	Ivan Zhang

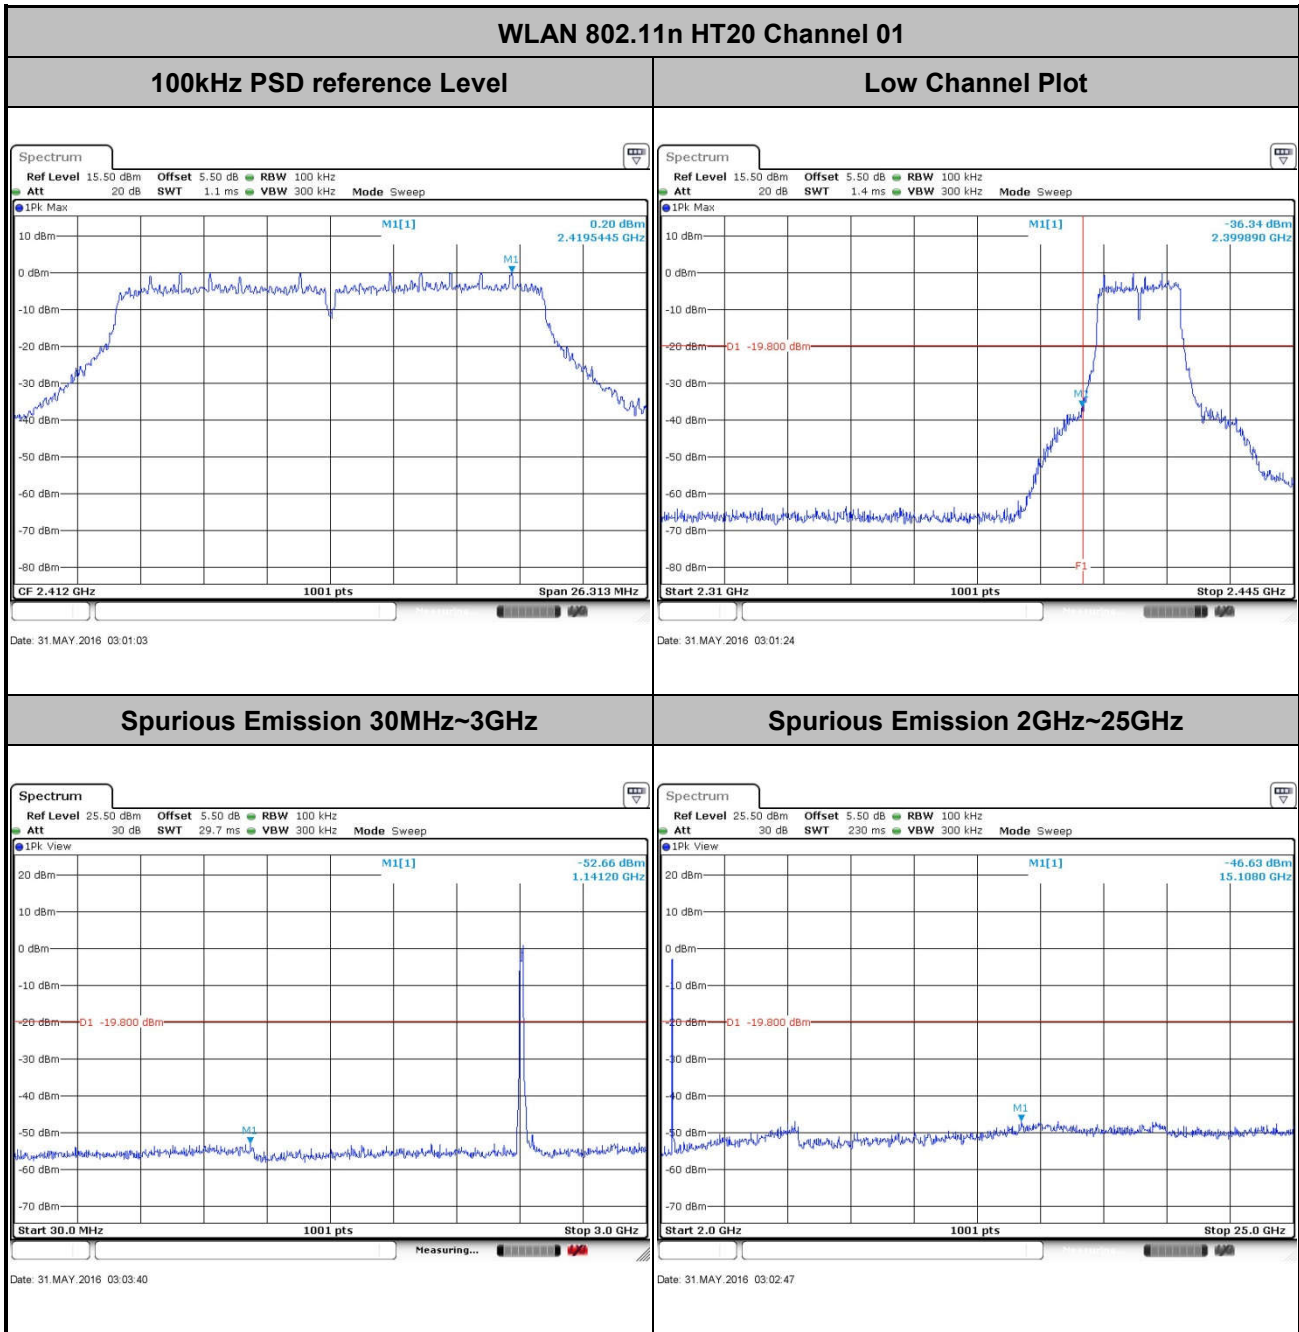





Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	49~51%
Test Channel :	06	Test Engineer :	Ivan Zhang

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

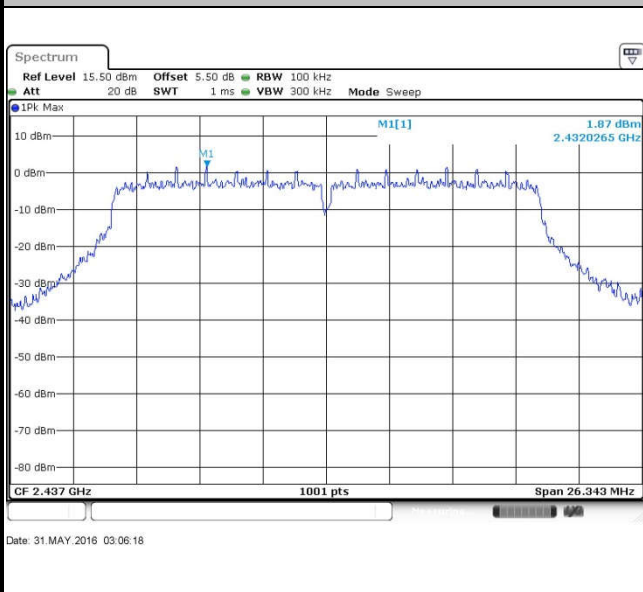

Spurious Emission 30MHz~3GHz

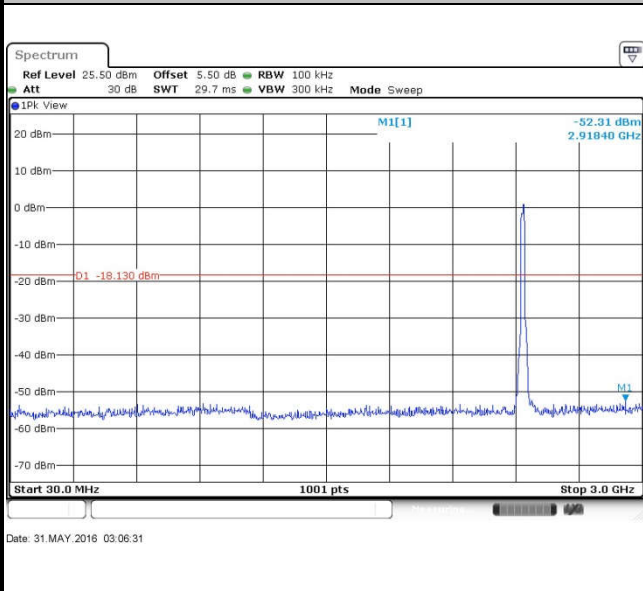


Spurious Emission 2GHz~25GHz

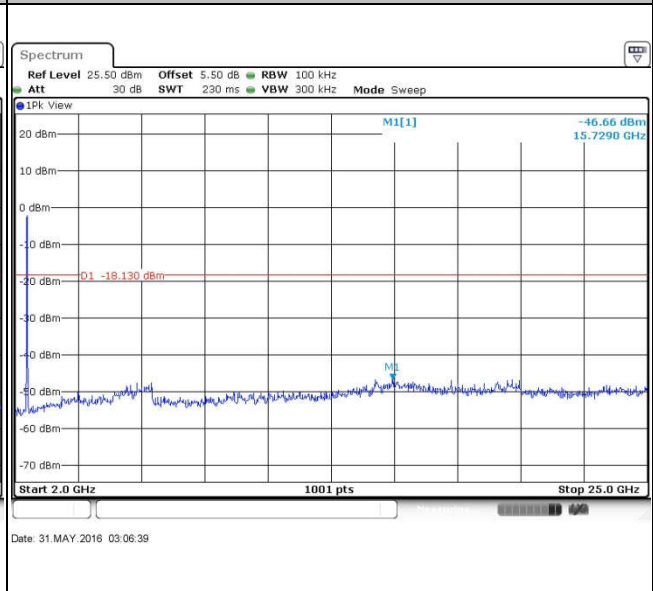



Test Mode :	802.11n HT20	Temperature :	24~25°C
Test Band :	2.4GHz High	Relative Humidity :	49~51%
Test Channel :	11	Test Engineer :	Ivan Zhang

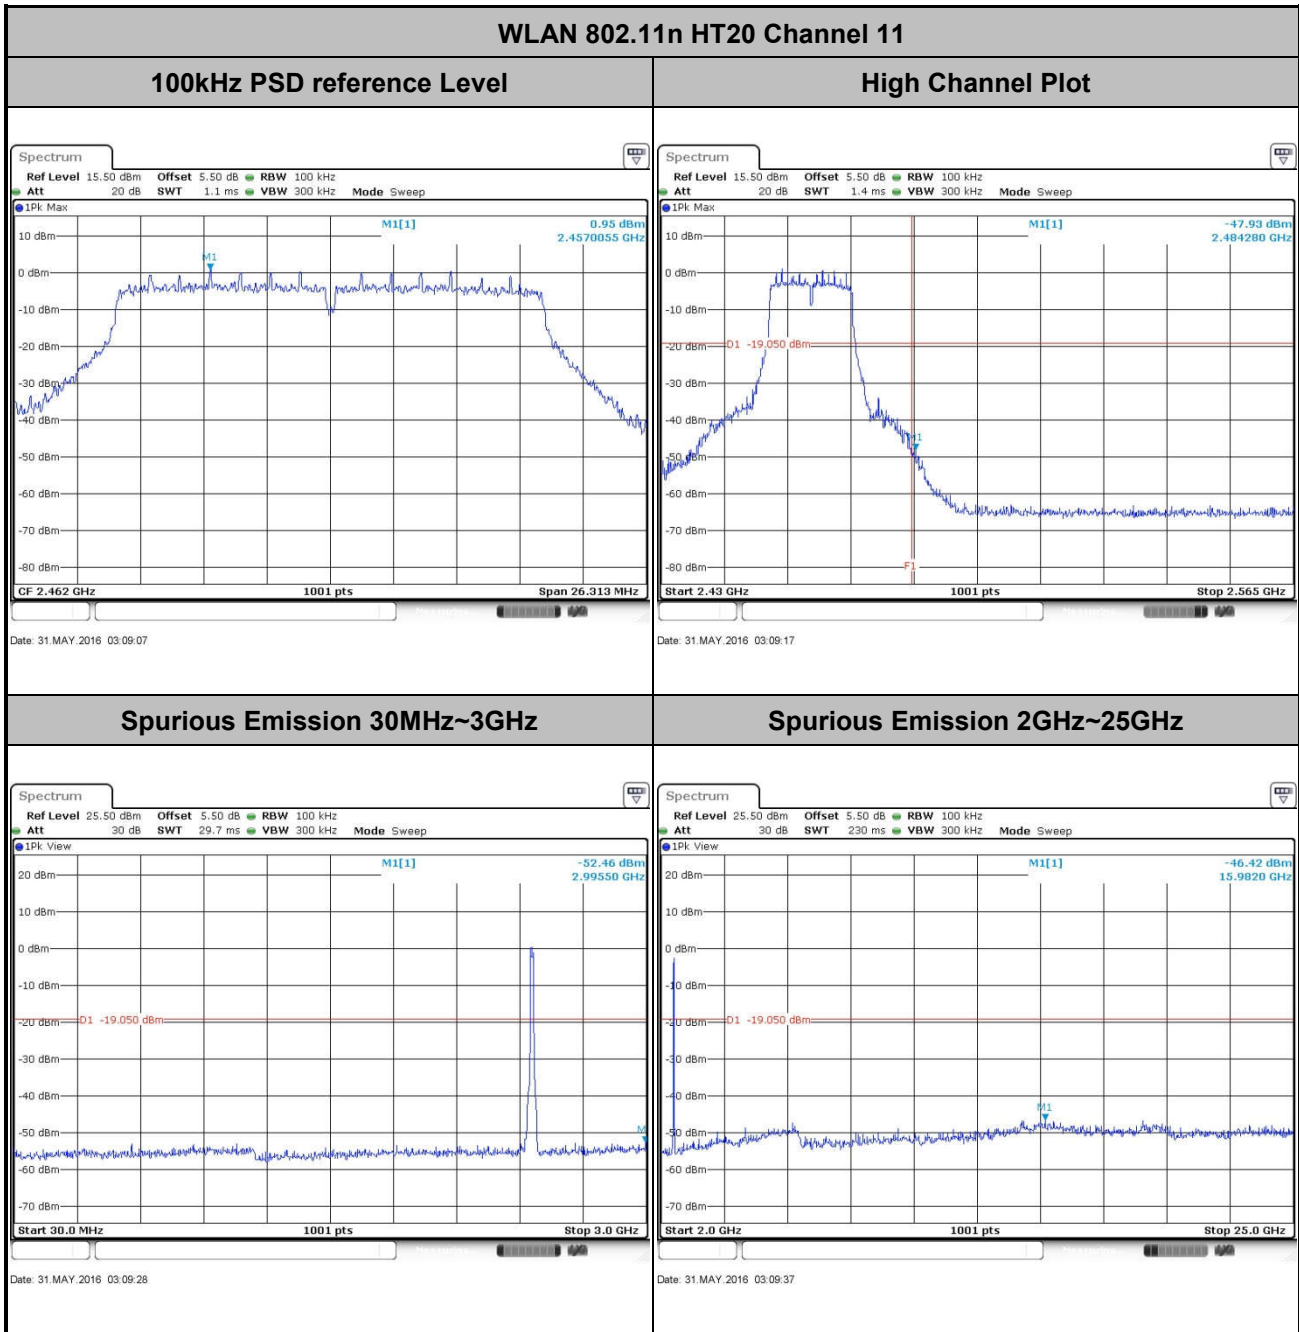



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

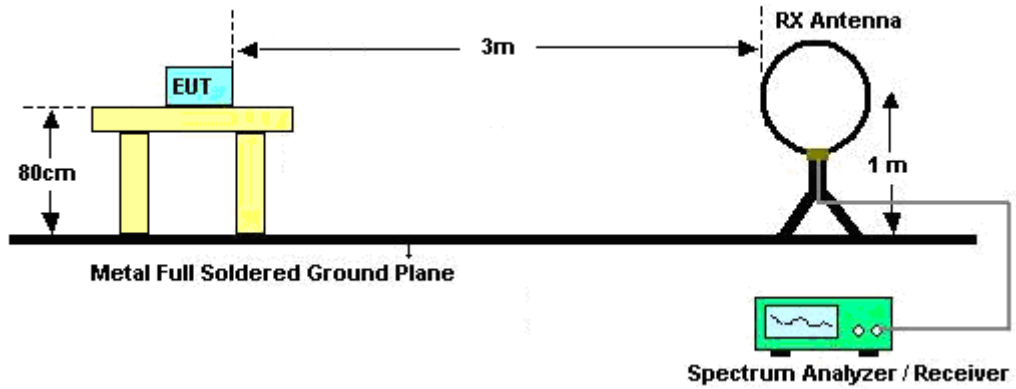

For radiated emissions from 30MHz to 1GHz

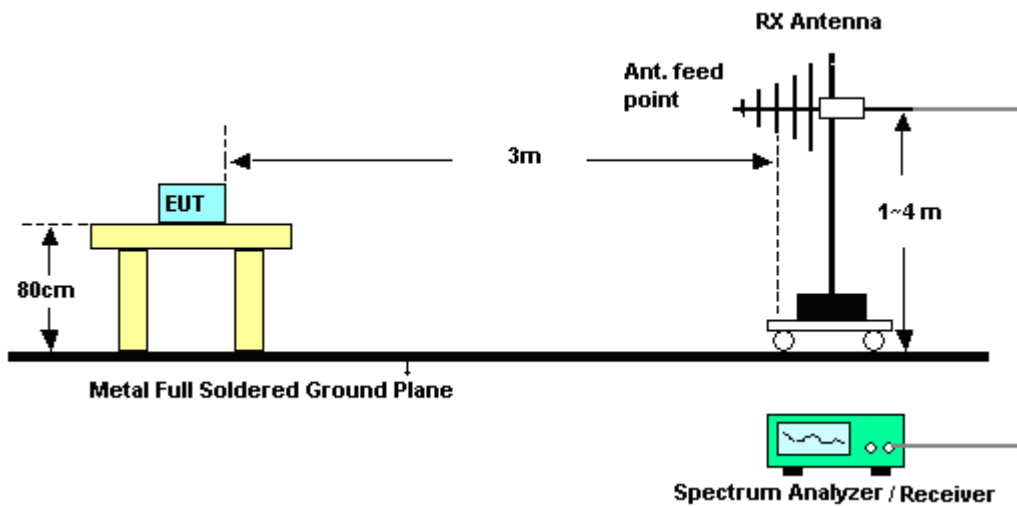

For radiated emissions above 1GHz

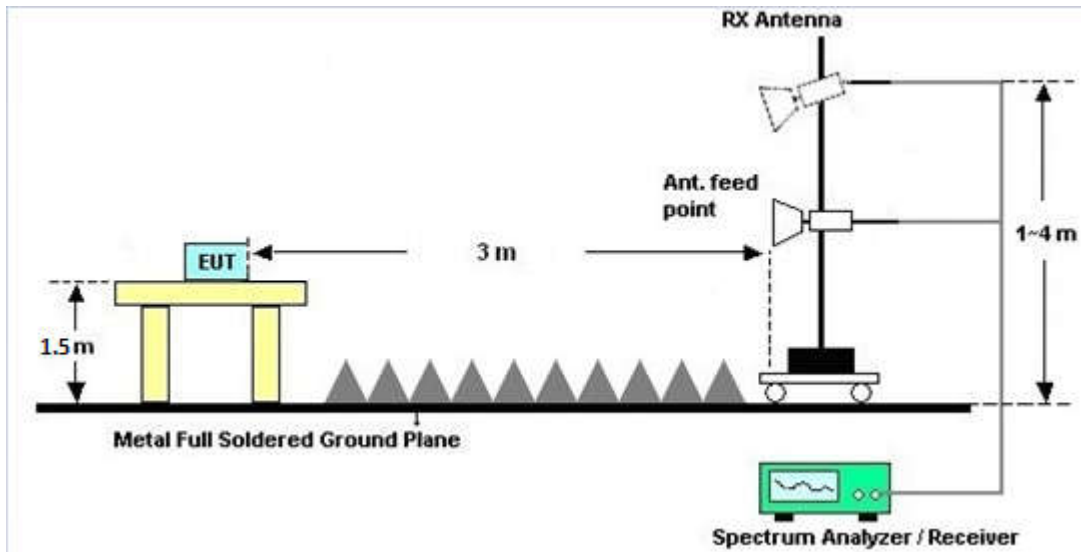

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.



3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


3.6.4 Test Setup

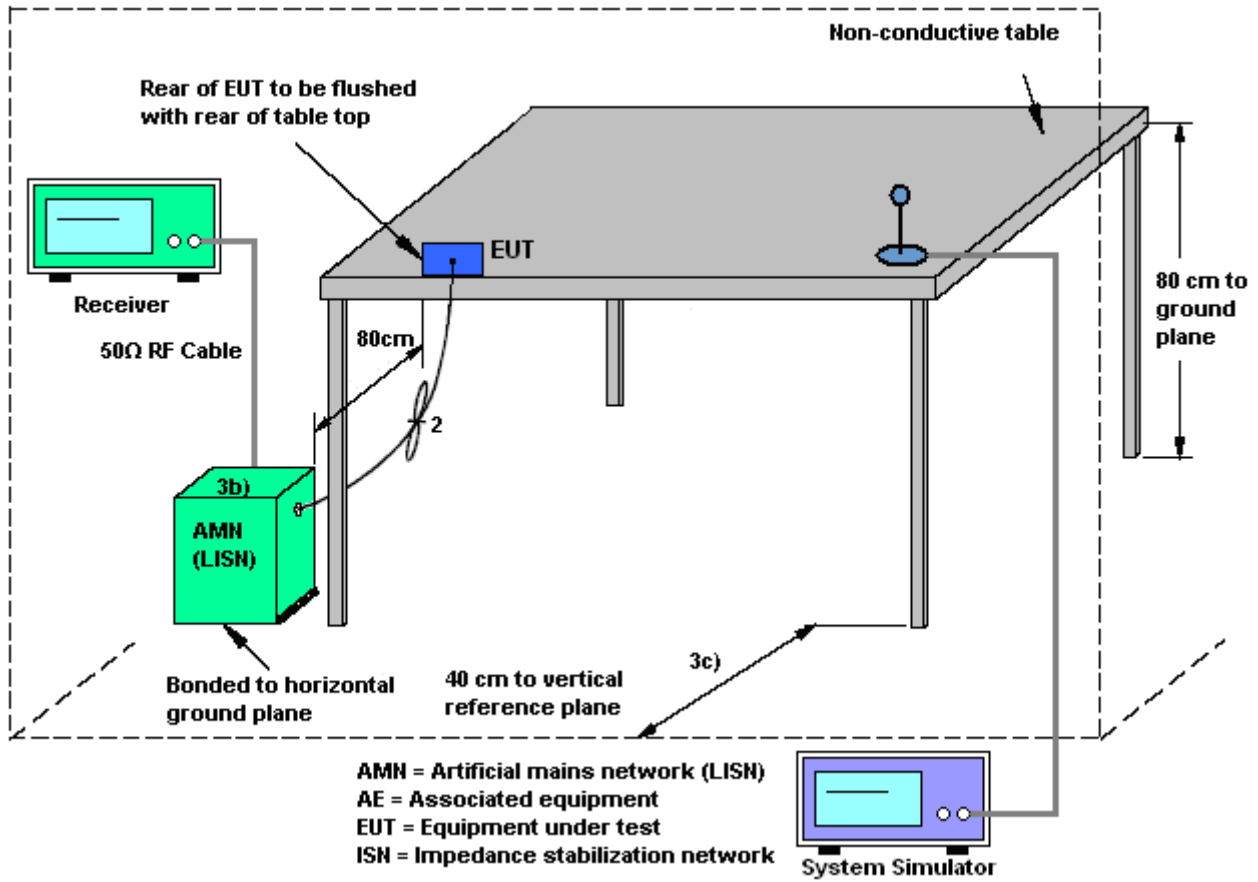



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN 2.4G Link + Adapter 2 + Earphone + MP3 + Battery 2		

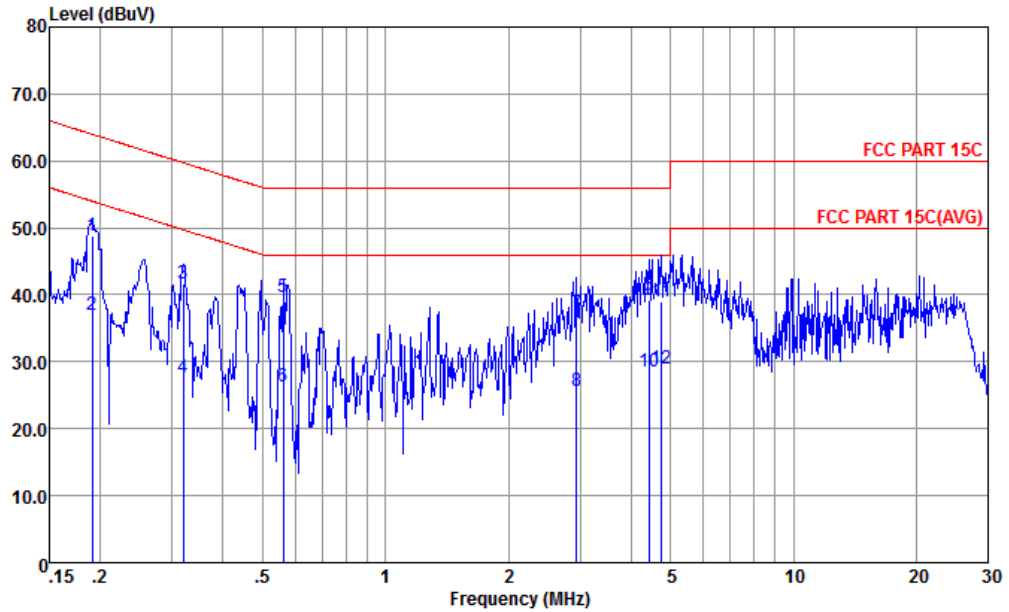


Site : CO01-KS
 Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 2
 : 354140070011602 #7

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.19	48.88	-15.10	63.98	38.50	0.26	10.12	QP
2	0.19	36.98	-17.00	53.98	26.60	0.26	10.12	Average
3	0.32	41.68	-18.03	59.71	31.29	0.23	10.16	QP
4	0.32	27.58	-22.13	49.71	17.19	0.23	10.16	Average
5	0.56	39.69	-16.31	56.00	29.30	0.23	10.16	QP
6	0.56	26.19	-19.81	46.00	15.80	0.23	10.16	Average
7	2.95	37.24	-18.76	56.00	26.91	0.18	10.15	QP
8	2.95	25.64	-20.36	46.00	15.31	0.18	10.15	Average
9	4.43	39.16	-16.84	56.00	28.80	0.19	10.17	QP
10	4.43	28.46	-17.54	46.00	18.10	0.19	10.17	Average
11	4.75	38.97	-17.03	56.00	28.60	0.19	10.18	QP
12	4.75	28.87	-17.13	46.00	18.50	0.19	10.18	Average



Test Mode :	Mode 2	Temperature :	22~24°C
Test Engineer :	Amos Zhang	Relative Humidity :	44~47%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN 2.4G Link + Adapter 2 + Earphone + MP3 + Battery 2		

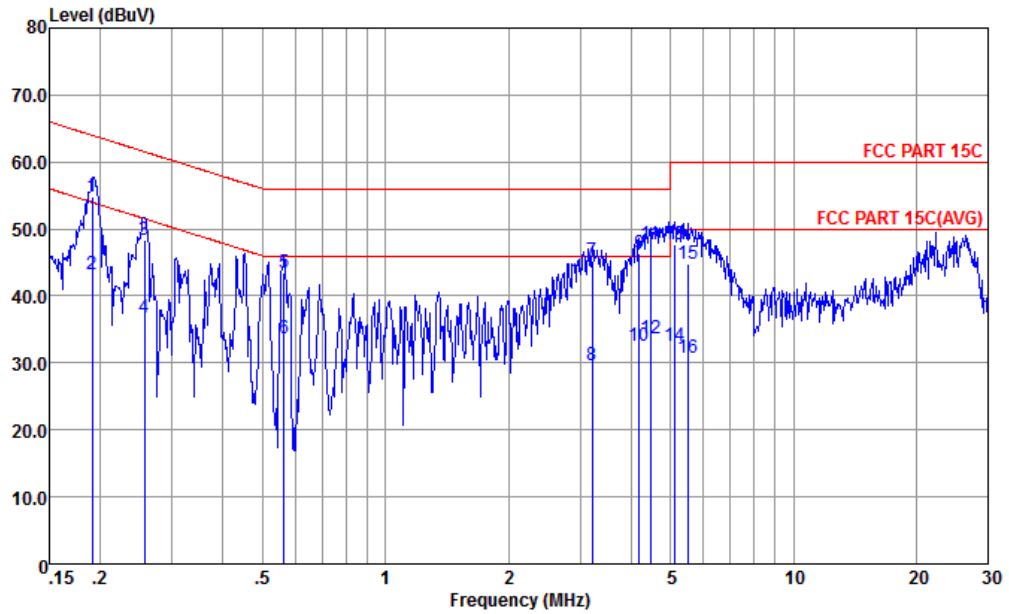

Site : CO01-KS
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL

mode : Mode 2
 : 354140070011602 #7

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	54.73	-9.25	63.98	44.30	0.31	10.12	QP
2	0.19	43.13	-10.85	53.98	32.70	0.31	10.12	Average
3	0.26	48.36	-13.20	61.56	37.91	0.31	10.14	QP
4	0.26	36.76	-14.80	51.56	26.31	0.31	10.14	Average
5	0.56	43.39	-12.61	56.00	32.90	0.33	10.16	QP
6	0.56	33.69	-12.31	46.00	23.20	0.33	10.16	Average
7	3.21	45.13	-10.87	56.00	34.60	0.37	10.16	QP
8	3.21	29.73	-16.27	46.00	19.20	0.37	10.16	Average
9	4.18	46.33	-9.67	56.00	35.80	0.36	10.17	QP
10	4.18	32.63	-13.37	46.00	22.10	0.36	10.17	Average
11 *	4.45	47.64	-8.36	56.00	37.11	0.36	10.17	QP
12	4.45	33.64	-12.36	46.00	23.11	0.36	10.17	Average
13	5.11	47.74	-12.26	60.00	37.20	0.36	10.18	QP
14	5.11	32.44	-17.56	50.00	21.90	0.36	10.18	Average
15	5.51	44.83	-15.17	60.00	34.30	0.34	10.19	QP
16	5.51	30.83	-19.17	50.00	20.30	0.34	10.19	Average



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Sep. 10, 2015	May 31, 2016	Sep. 09, 2016	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	May 31, 2016	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	May 31, 2016	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESCI	100534	9kHz~3GHz	Oct. 24, 2015	May 13, 2016~ May 30, 2016	Oct. 23, 2016	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	May 13, 2016~ May 30, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 07, 2015	May 13, 2016~ May 30, 2016	Nov. 06, 2016	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz-2GHz	Apr. 16, 2016	May 13, 2016~ May 30, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	May 13, 2016~ May 30, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz-40GHz	Oct. 10, 2015	May 13, 2016~ May 30, 2016	Oct. 09, 2016	Radiation (03CH03-KS)
Amplifier	Burgeon	BPA-530	102212	0.01MHz-3000MHz	Aug. 10, 2015	May 13, 2016~ May 30, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Aug. 27, 2015	May 13, 2016~ May 30, 2016	Aug. 26, 2016	Radiation (03CH03-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1889560	1GHz-18GHz	Aug. 10, 2015	May 13, 2016~ May 30, 2016	Aug. 09, 2016	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 13, 2016~ May 30, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 13, 2016~ May 30, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 13, 2016~ May 30, 2016	NCR	Radiation (03CH03-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Sep. 10, 2015	Jun. 01, 2016	Sep. 09, 2016	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 24, 2015	Jun. 01, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 24, 2015	Jun. 01, 2016	Oct. 23, 2016	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 24, 2015	Jun. 01, 2016	Oct. 23, 2016	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Ivan Zhang	Temperature:	24~25	°C
Test Date:	2016/5/31	Relative Humidity:	49~51	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.49	8.53	0.50	Pass
11b	1Mbps	1	6	2437	13.64	8.55	0.50	Pass
11b	1Mbps	1	11	2462	13.24	8.05	0.50	Pass
11g	6Mbps	1	1	2412	18.63	16.32	0.50	Pass
11g	6Mbps	1	6	2437	19.03	16.32	0.50	Pass
11g	6Mbps	1	11	2462	18.58	16.34	0.50	Pass
HT20	MCS0	1	1	2412	18.98	17.54	0.50	Pass
HT20	MCS0	1	6	2437	19.08	17.56	0.50	Pass
HT20	MCS0	1	11	2462	18.93	17.54	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	20.61	30.00	-0.70	19.91	36.00	Pass
11b	1Mbps	1	6	2437	21.27	30.00	-0.70	20.57	36.00	Pass
11b	1Mbps	1	11	2462	21.18	30.00	-0.70	20.48	36.00	Pass
11g	6Mbps	1	1	2412	23.50	30.00	-0.70	22.80	36.00	Pass
11g	6Mbps	1	6	2437	23.76	30.00	-0.70	23.06	36.00	Pass
11g	6Mbps	1	11	2462	23.46	30.00	-0.70	22.76	36.00	Pass
HT20	MCS0	1	1	2412	22.51	30.00	-0.70	21.81	36.00	Pass
HT20	MCS0	1	6	2437	22.57	30.00	-0.70	21.87	36.00	Pass
HT20	MCS0	1	11	2462	22.62	30.00	-0.70	21.92	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.10	17.82
11b	1Mbps	1	6	2437	0.10	18.73
11b	1Mbps	1	11	2462	0.10	18.55
11g	6Mbps	1	1	2412	0.59	15.92
11g	6Mbps	1	6	2437	0.59	16.72
11g	6Mbps	1	11	2462	0.59	16.60
HT20	MCS0	1	1	2412	0.63	12.91
HT20	MCS0	1	6	2437	0.63	13.61
HT20	MCS0	1	11	2462	0.63	13.66

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-6.03	-0.70	8.00	Pass
11b	1Mbps	1	6	2437	-5.10	-0.70	8.00	Pass
11b	1Mbps	1	11	2462	-4.67	-0.70	8.00	Pass
11g	6Mbps	1	1	2412	-10.16	-0.70	8.00	Pass
11g	6Mbps	1	6	2437	-9.20	-0.70	8.00	Pass
11g	6Mbps	1	11	2462	-10.64	-0.70	8.00	Pass
HT20	MCS0	1	1	2412	-14.11	-0.70	8.00	Pass
HT20	MCS0	1	6	2437	-12.88	-0.70	8.00	Pass
HT20	MCS0	1	11	2462	-14.01	-0.70	8.00	Pass







Appendix B. Radiated Spurious Emission





For battery 1, adapter 1

WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		

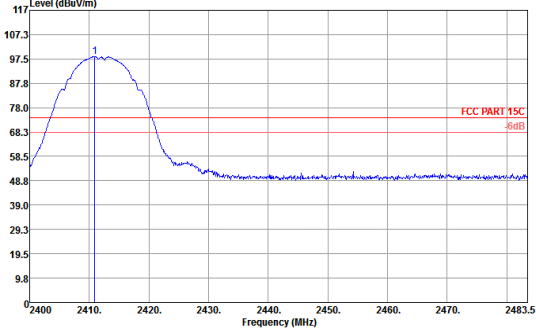
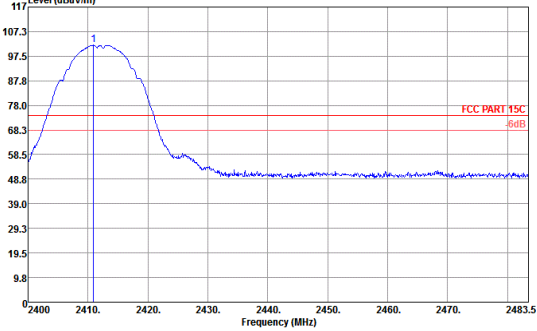
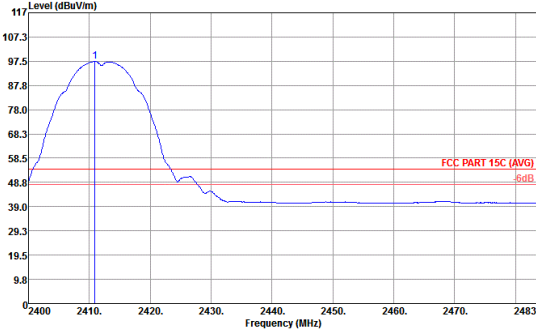
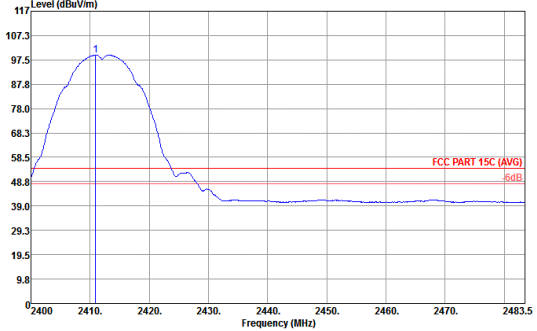


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Fundamental Emission @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		

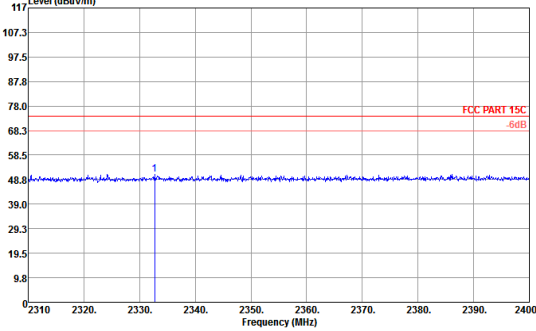
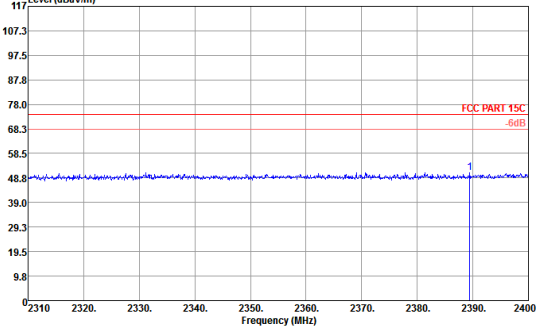
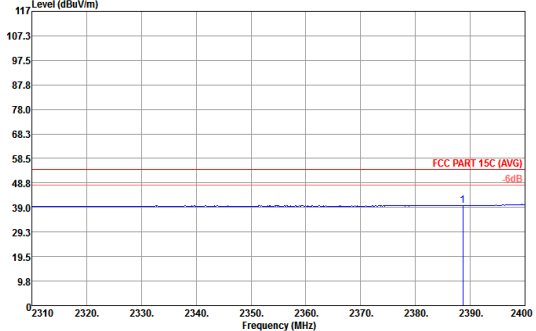
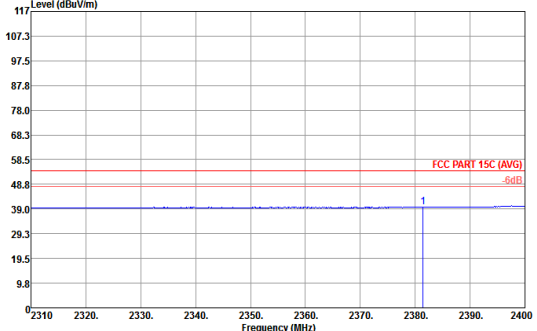


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

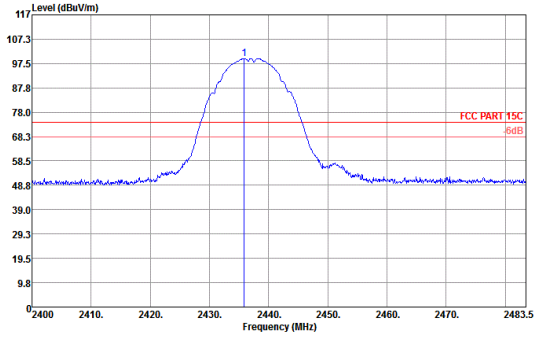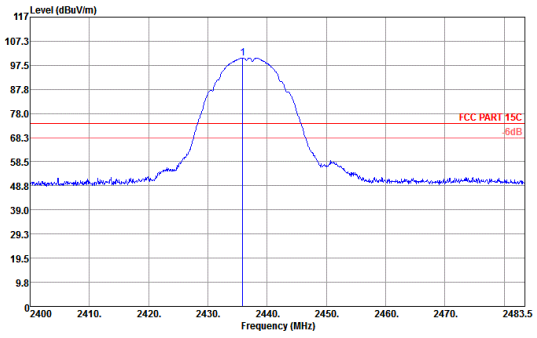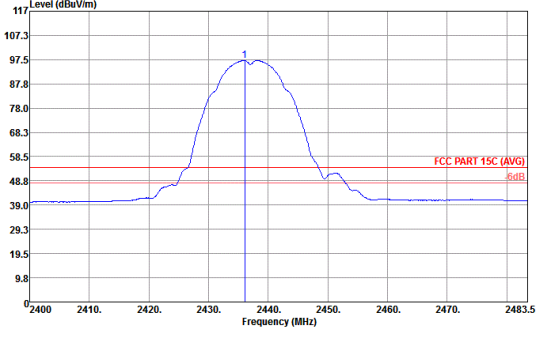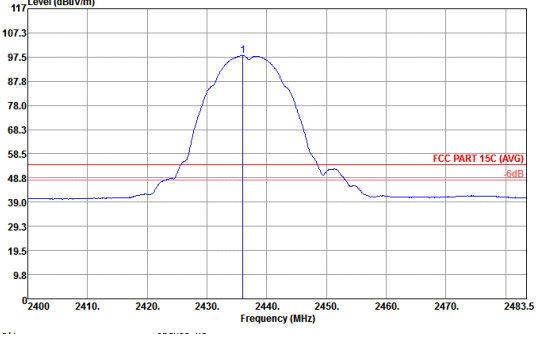

WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Fundamental Emission @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

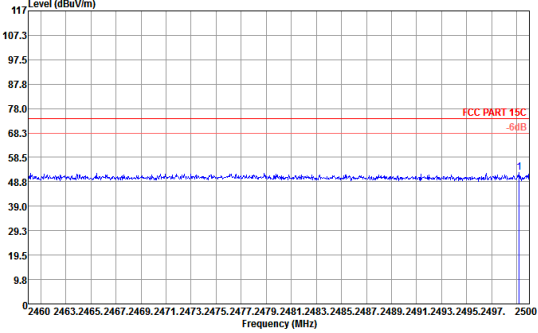
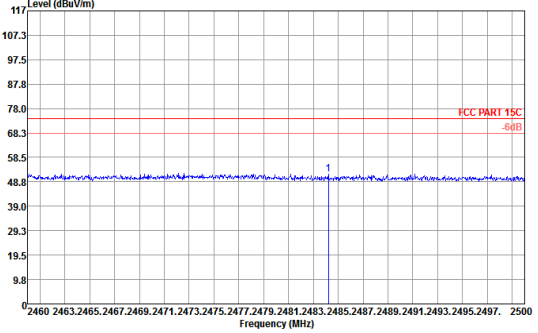
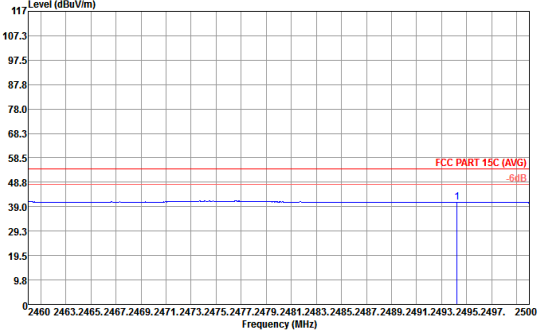
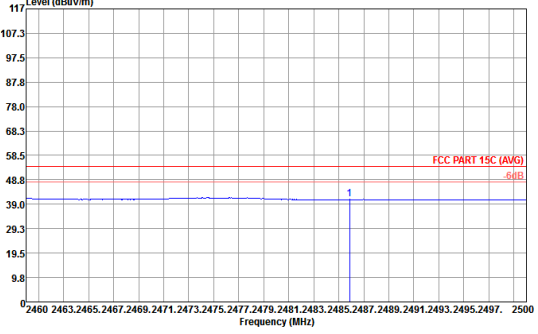


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		







WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak	<p>Peak Horizontal plot showing Level (dBuV/m) vs Frequency (MHz). The y-axis ranges from 9.8 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A blue line represents the signal level, which starts at approximately 97.5 dBuV/m at 2460 MHz and decreases to about 48.8 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC PART 15C -6dB limit at approximately 68.3 dBuV/m. A vertical blue line is present at 2462 MHz.</p>	<p>Peak Vertical plot showing Level (dBuV/m) vs Frequency (MHz). The y-axis ranges from 9.8 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A blue line represents the signal level, which starts at approximately 97.5 dBuV/m at 2460 MHz and decreases to about 48.8 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC PART 15C -6dB limit at approximately 68.3 dBuV/m. A vertical blue line is present at 2462 MHz.</p>
Average	<p>Average Horizontal plot showing Level (dBuV/m) vs Frequency (MHz). The y-axis ranges from 9.8 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A blue line represents the average signal level, which starts at approximately 97.5 dBuV/m at 2460 MHz and decreases to about 48.8 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) -6dB limit at approximately 68.3 dBuV/m. A vertical blue line is present at 2462 MHz.</p>	<p>Average Vertical plot showing Level (dBuV/m) vs Frequency (MHz). The y-axis ranges from 9.8 to 117 dBuV/m, and the x-axis ranges from 2460 to 2500 MHz. A blue line represents the average signal level, which starts at approximately 97.5 dBuV/m at 2460 MHz and decreases to about 48.8 dBuV/m at 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) -6dB limit at approximately 68.3 dBuV/m. A vertical blue line is present at 2462 MHz.</p>

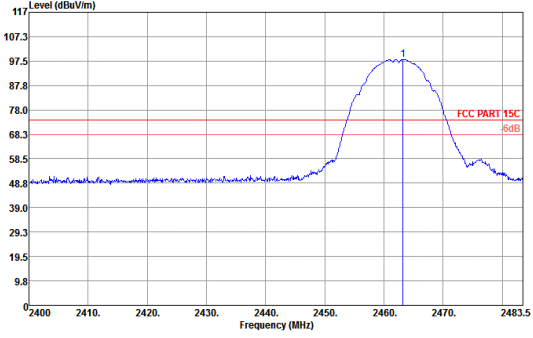
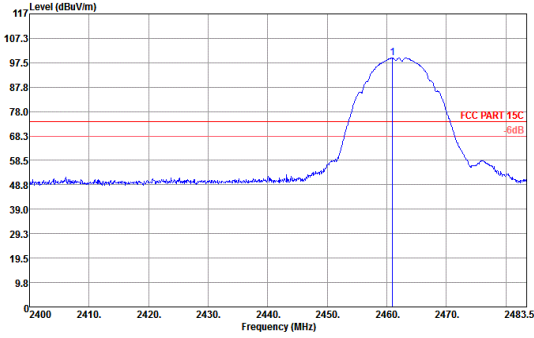
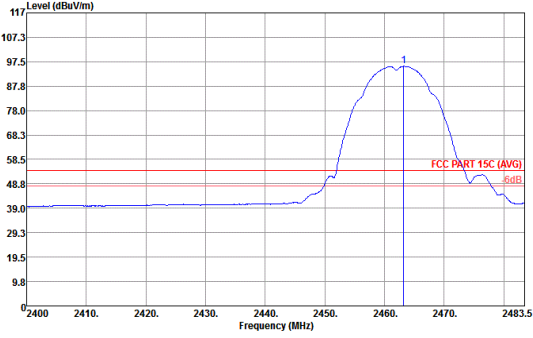
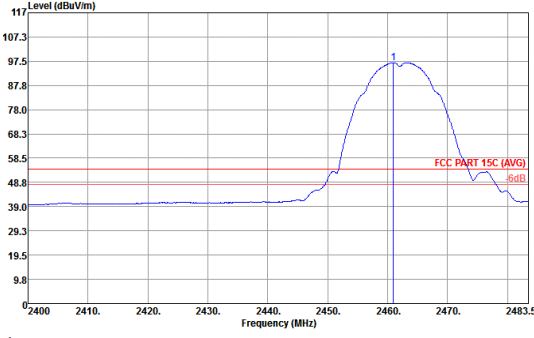


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Fundamental Emission @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak		
Average		

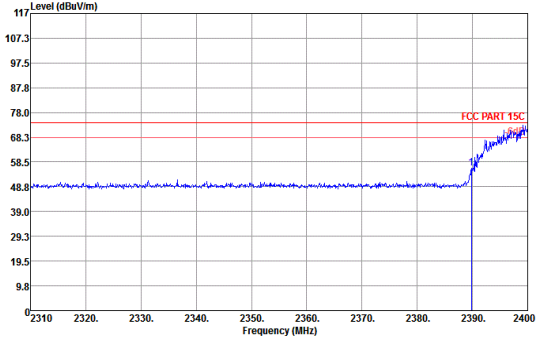
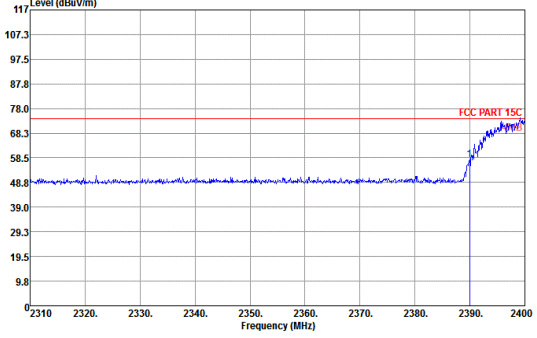
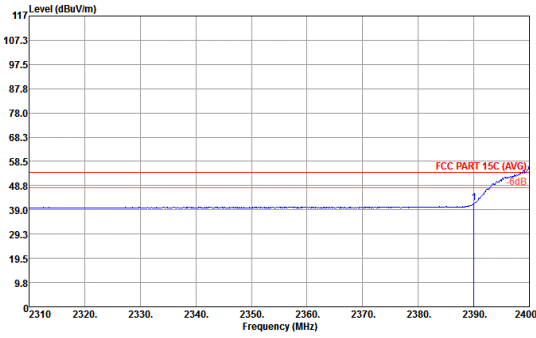
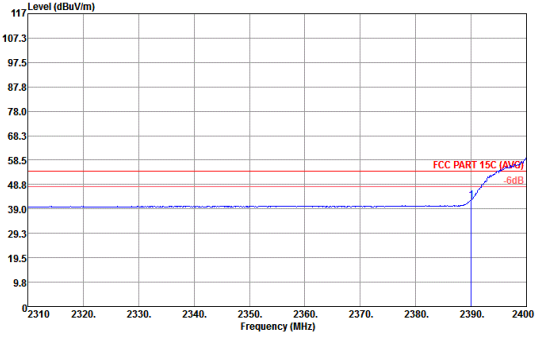


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		

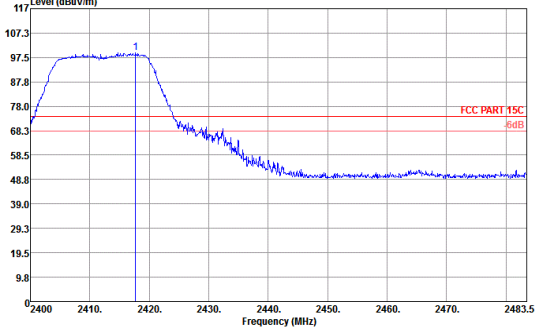
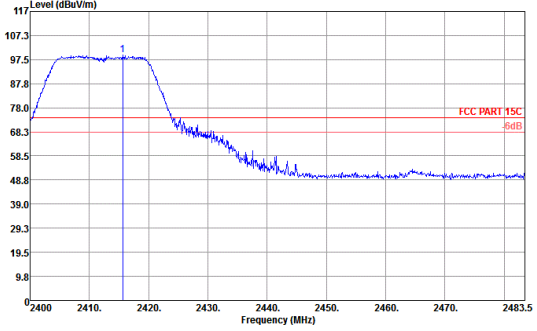
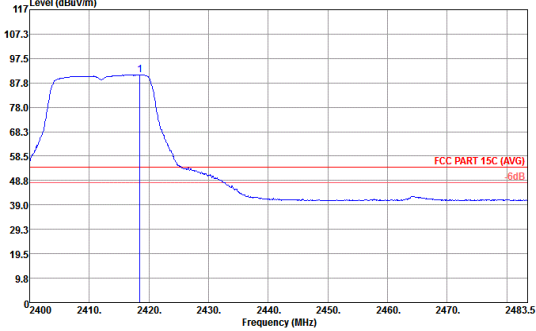
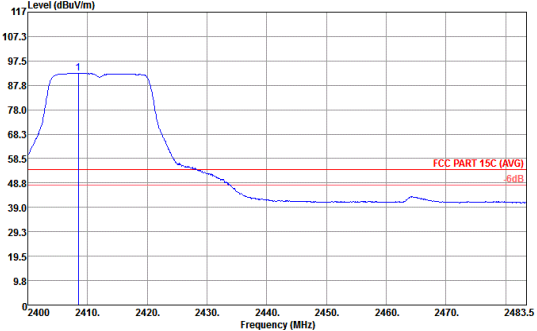


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Fundamental Emission @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Peak Horizontal. The plot shows a signal peak at 2412 MHz reaching approximately 97.5 dBuV/m. A red horizontal line indicates the FCC PART 15C -5dB limit at approximately 68.3 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Peak Vertical. The plot shows a signal peak at 2412 MHz reaching approximately 97.5 dBuV/m. A red horizontal line indicates the FCC PART 15C -5dB limit at approximately 68.3 dBuV/m.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) for Average Horizontal. The plot shows a signal peak at 2412 MHz reaching approximately 97.5 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) -5dB limit at approximately 48.8 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Average Vertical. The plot shows a signal peak at 2412 MHz reaching approximately 97.5 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) -5dB limit at approximately 48.8 dBuV/m.</p>

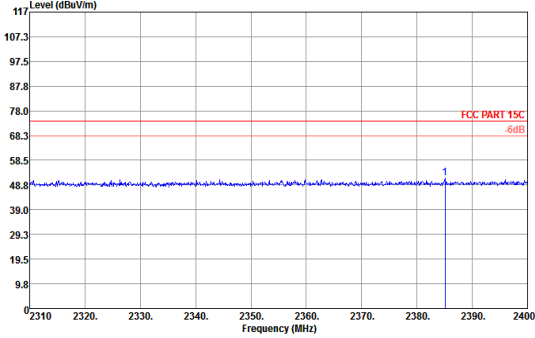
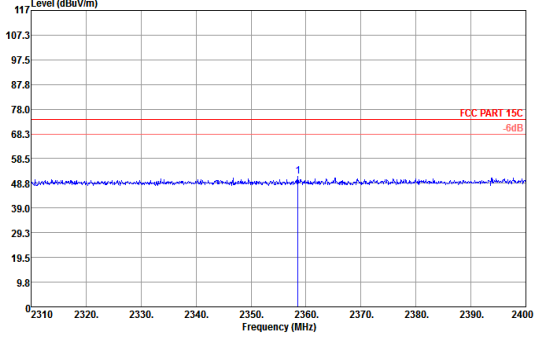
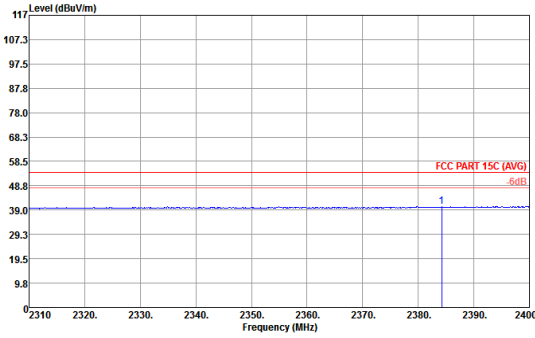
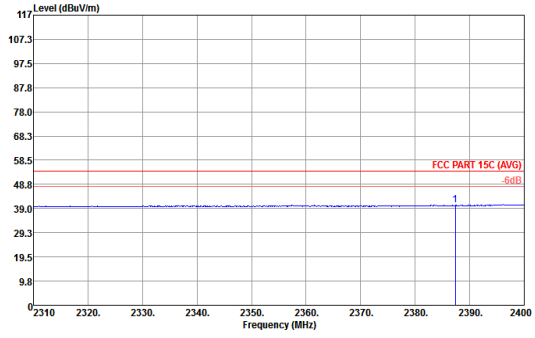


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2310 to 2400 MHz. A peak is observed at approximately 2387 MHz, reaching a level of about 50 dBuV/m. A red horizontal line at 68.3 dBuV/m is labeled 'FCC PART 15C .6dB'.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2310 to 2400 MHz. A peak is observed at approximately 2387 MHz, reaching a level of about 50 dBuV/m. A red horizontal line at 68.3 dBuV/m is labeled 'FCC PART 15C .6dB'.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2310 to 2400 MHz. The average level is approximately 39 dBuV/m. A red horizontal line at 68.3 dBuV/m is labeled 'FCC PART 15C (AVG) .6dB'.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2310 to 2400 MHz. The average level is approximately 39 dBuV/m. A red horizontal line at 68.3 dBuV/m is labeled 'FCC PART 15C (AVG) .6dB'.</p>

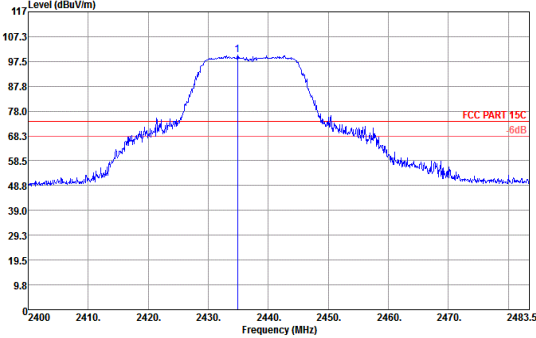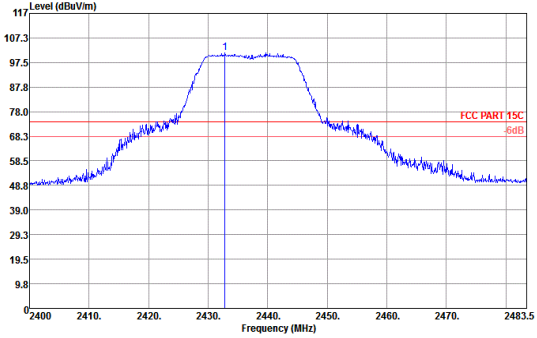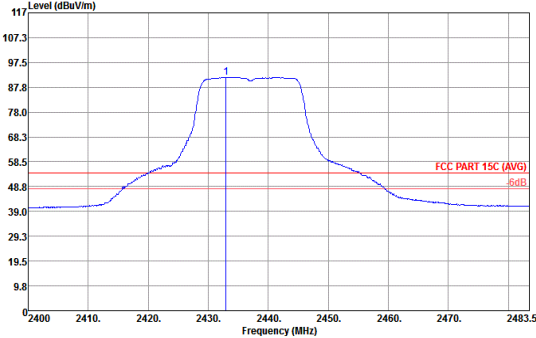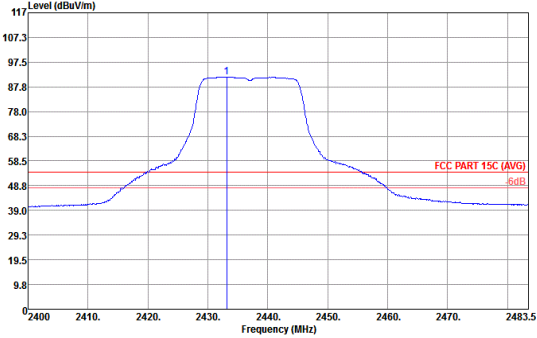

WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Fundamental Emission @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

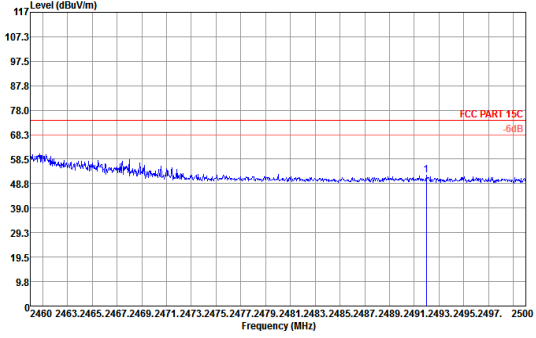
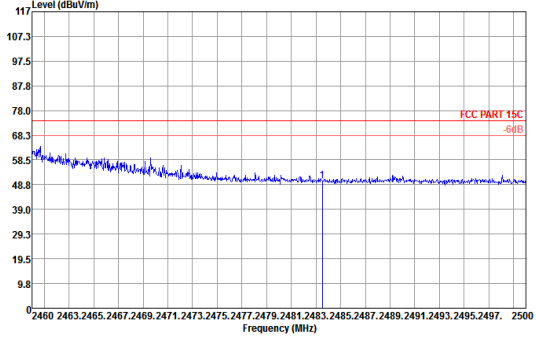
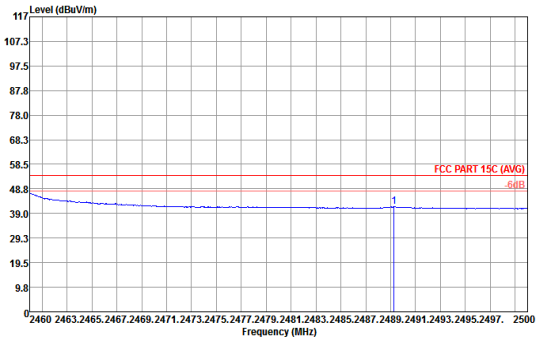
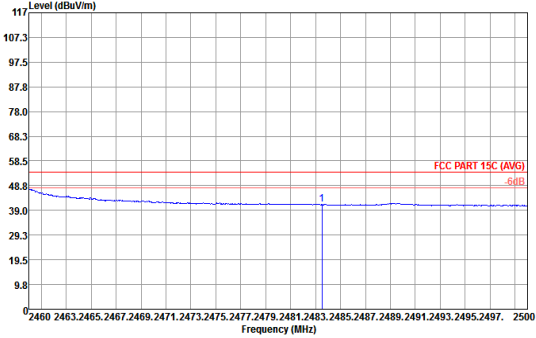


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2460 to 2500 MHz. A blue signal line shows a peak at approximately 2437 MHz. A red horizontal line is labeled 'FCC PART 15C -5dB' at approximately 78 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2460 to 2500 MHz. A blue signal line shows a peak at approximately 2437 MHz. A red horizontal line is labeled 'FCC PART 15C -5dB' at approximately 78 dBuV/m.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2460 to 2500 MHz. A blue signal line shows a peak at approximately 2437 MHz. A red horizontal line is labeled 'FCC PART 15C (AVG) -5dB' at approximately 78 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical orientation. The y-axis ranges from 9.8 to 117 dBuV/m. The x-axis ranges from 2460 to 2500 MHz. A blue signal line shows a peak at approximately 2437 MHz. A red horizontal line is labeled 'FCC PART 15C (AVG) -5dB' at approximately 78 dBuV/m.</p>







WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Band Edge @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak		
Average		

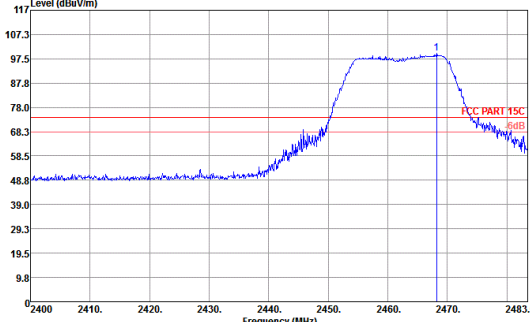
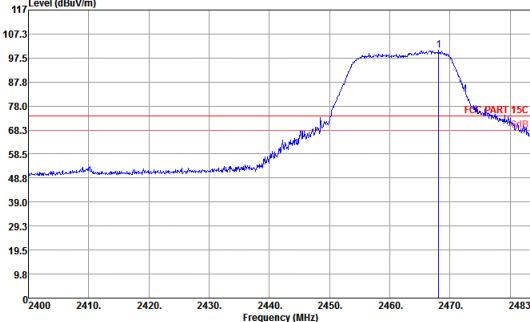
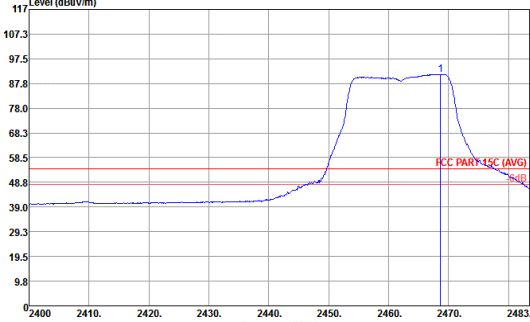
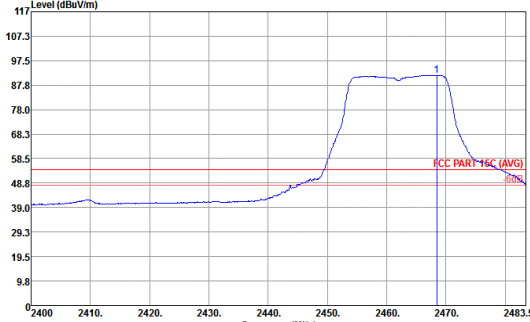


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Fundamental Emission @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Peak. The plot shows a signal between 2450 and 2475 MHz. A red horizontal line indicates the FCC PART 15C limit at 68.3 dB. A vertical blue line marks the peak at 2462 MHz. The peak level is approximately 97.5 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. The plot shows a signal between 2450 and 2475 MHz. A red horizontal line indicates the FCC PART 15C limit at 68.3 dB. A vertical blue line marks the peak at 2462 MHz. The peak level is approximately 97.5 dBuV/m.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal Average. The plot shows a signal between 2450 and 2475 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at 48.8 dB. A vertical blue line marks the peak at 2462 MHz. The average level is approximately 87.8 dBuV/m.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical Average. The plot shows a signal between 2450 and 2475 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at 48.8 dB. A vertical blue line marks the peak at 2462 MHz. The average level is approximately 87.8 dBuV/m.</p>

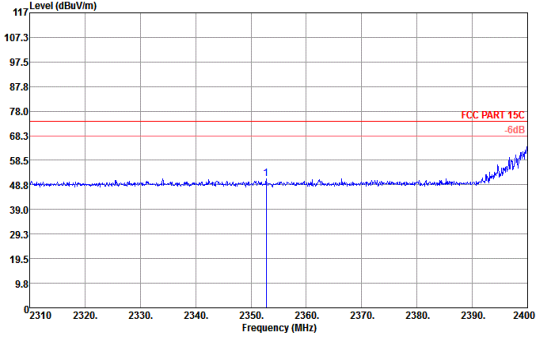
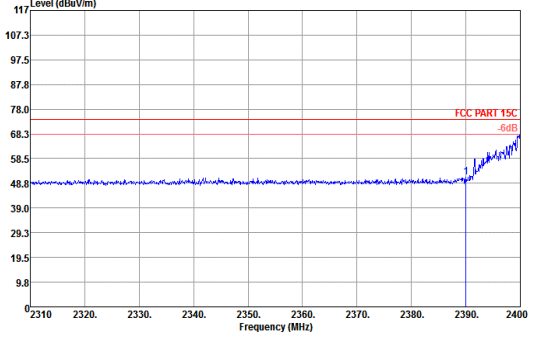
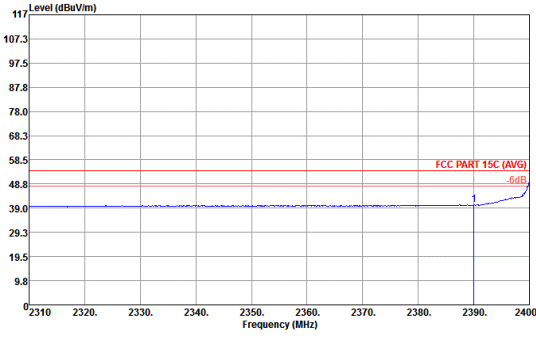
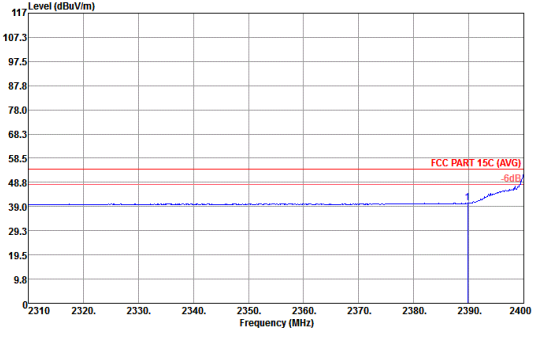


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		

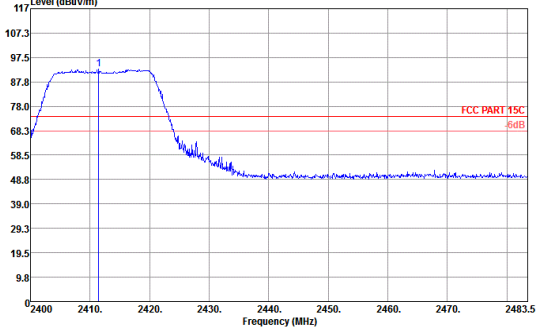
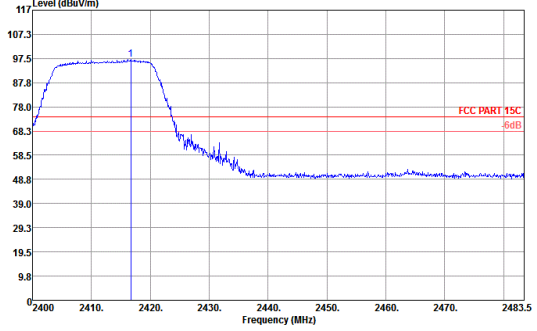
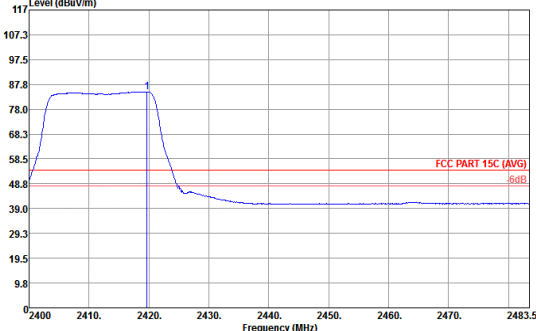
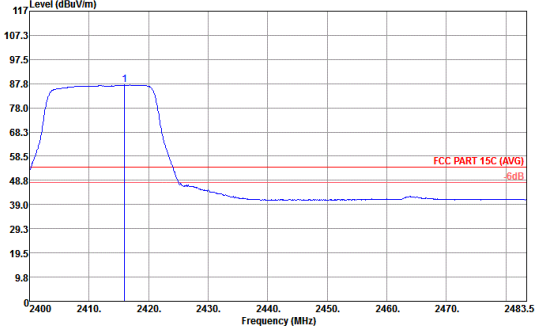


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Fundamental Emission @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		

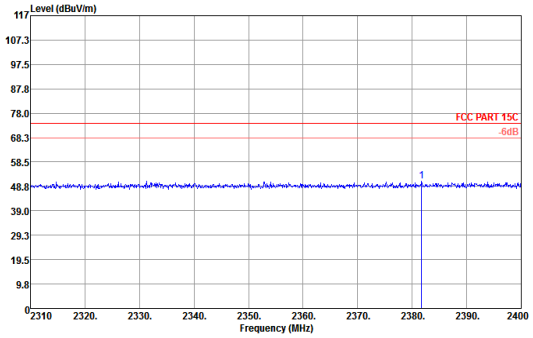
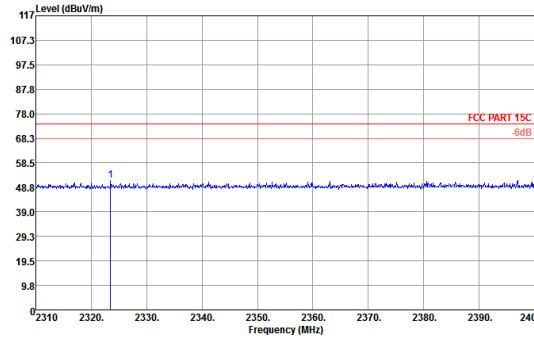
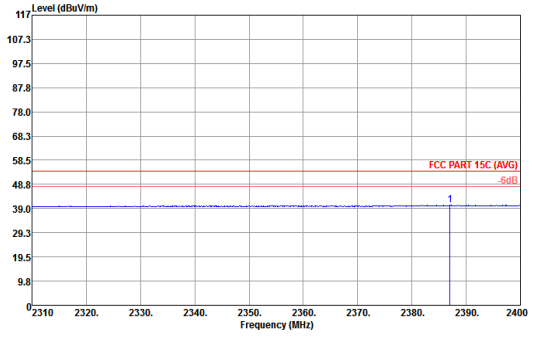
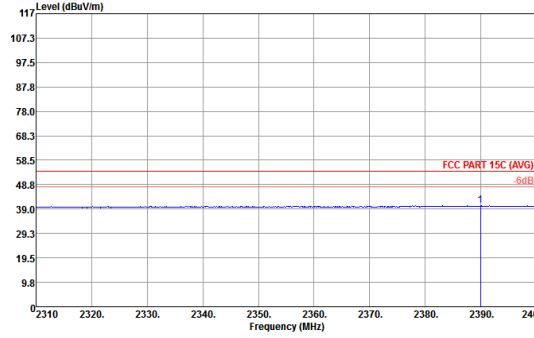


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

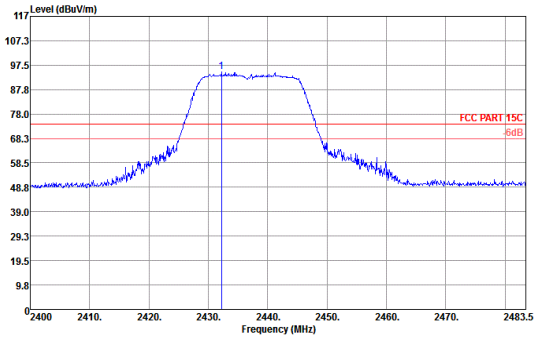
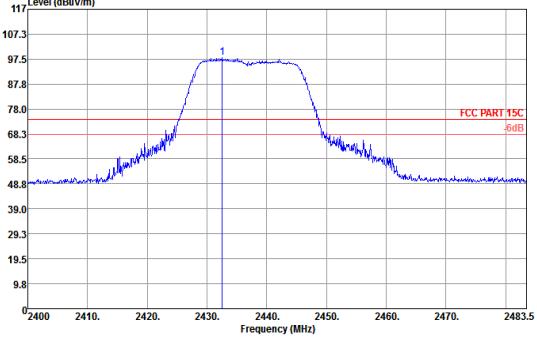
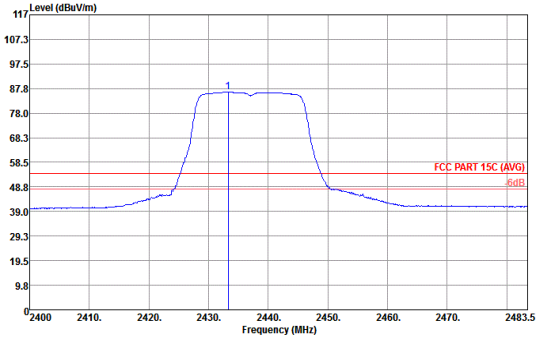
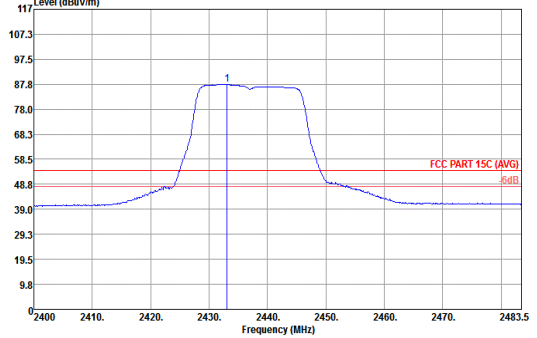


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Fundamental Emission @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

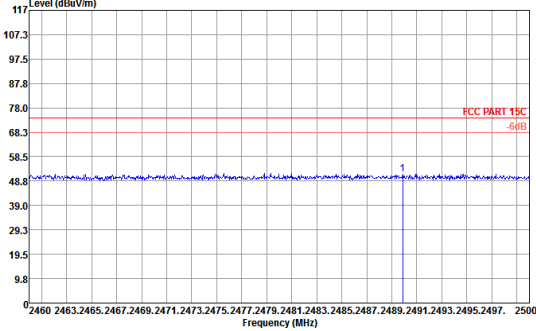
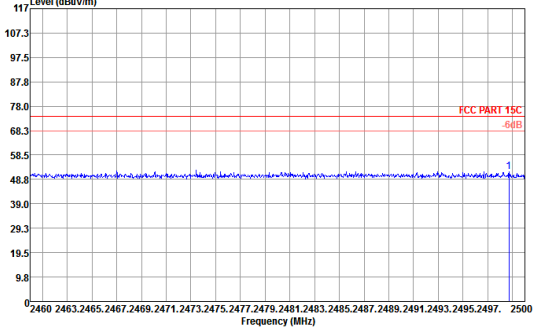
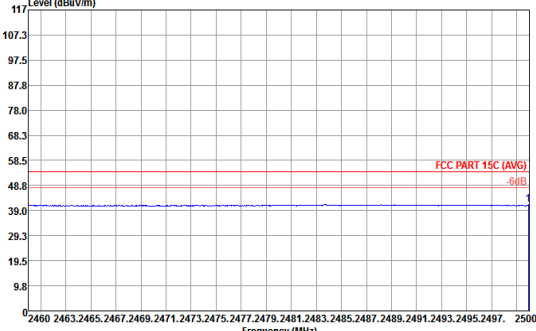
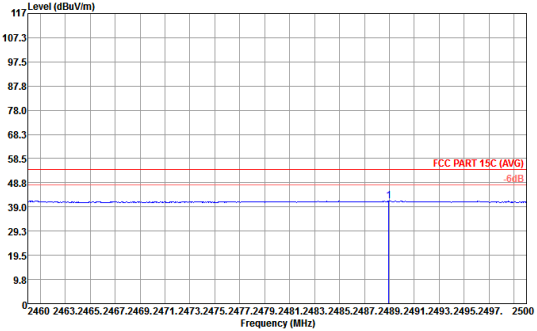


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
Average		

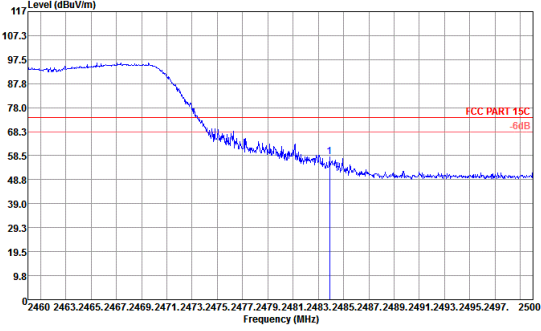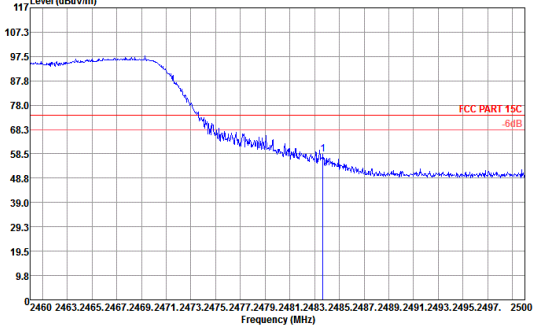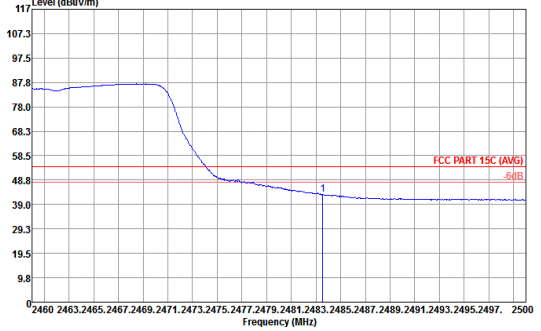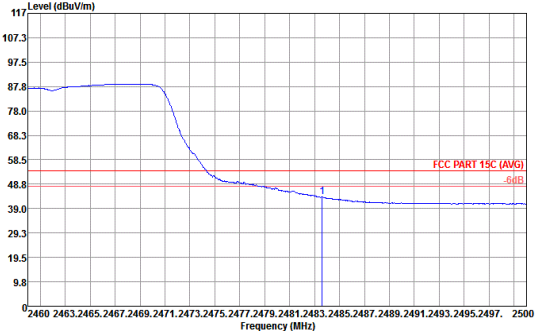

WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Band Edge @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal orientation. The plot shows a signal level starting at approximately 97.5 dBuV/m at 2460 MHz, dropping to about 78.0 dBuV/m by 2470 MHz, and then fluctuating between 48.8 and 58.5 dBuV/m up to 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at -64dB.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical orientation. The plot shows a signal level starting at approximately 97.5 dBuV/m at 2460 MHz, dropping to about 78.0 dBuV/m by 2470 MHz, and then fluctuating between 48.8 and 58.5 dBuV/m up to 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at -64dB.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal orientation (Average). The plot shows a smoothed signal level starting at approximately 87.8 dBuV/m at 2460 MHz, dropping to about 48.8 dBuV/m by 2470 MHz, and then remaining around 39.0 dBuV/m up to 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at -64dB.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical orientation (Average). The plot shows a smoothed signal level starting at approximately 87.8 dBuV/m at 2460 MHz, dropping to about 48.8 dBuV/m by 2470 MHz, and then remaining around 39.0 dBuV/m up to 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at -64dB.</p>

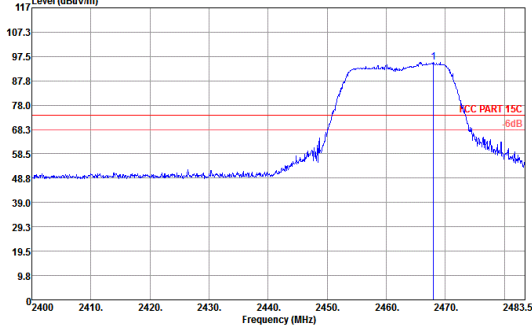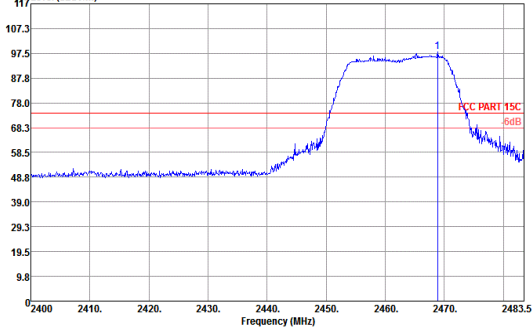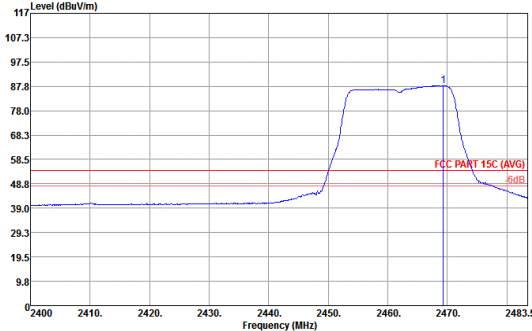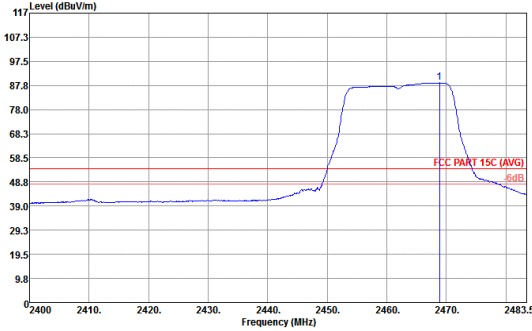

WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Fundamental Emission @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a signal between 2450 and 2470 MHz. A red horizontal line indicates the FCC PART 15C limit at 68.3 dB. A vertical blue line marks the peak at 2462 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Vertical. The plot shows a signal between 2450 and 2470 MHz. A red horizontal line indicates the FCC PART 15C limit at 68.3 dB. A vertical blue line marks the peak at 2462 MHz.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal. The plot shows a signal between 2450 and 2470 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at 48.8 dB. A vertical blue line marks the peak at 2462 MHz.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Vertical. The plot shows a signal between 2450 and 2470 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at 48.8 dB. A vertical blue line marks the peak at 2462 MHz.</p>





WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Harmonic @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak/ Average		
WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Harmonic @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak/ Average		



WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Harmonic @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak/Average		
WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Harmonic @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Harmonic @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		

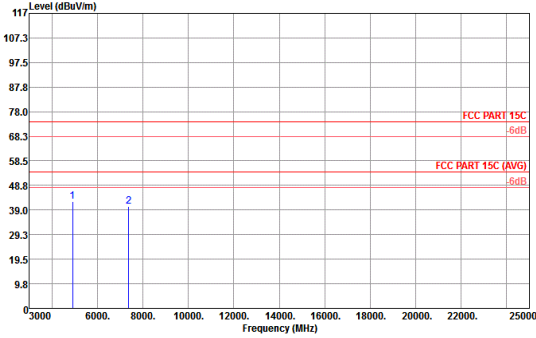
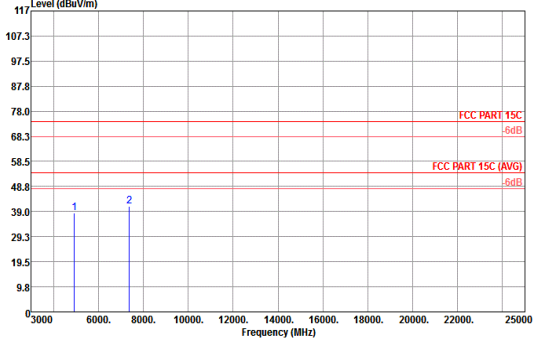


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11g (Harmonic @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak		







WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Harmonic @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Harmonic @ 3m)	
ANT	CH06 2437MHz	
1	Horizontal	Vertical
Peak		
WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11n HT20 (Harmonic @ 3m)	
ANT	CH11 2462MHz	
1	Horizontal	Vertical
Peak		

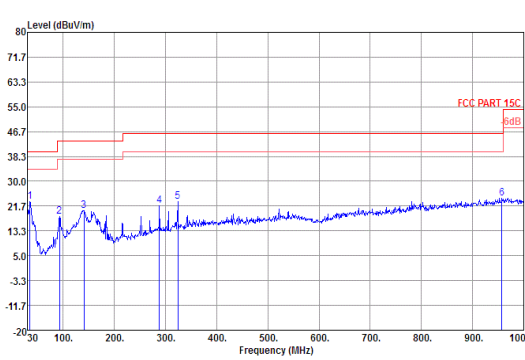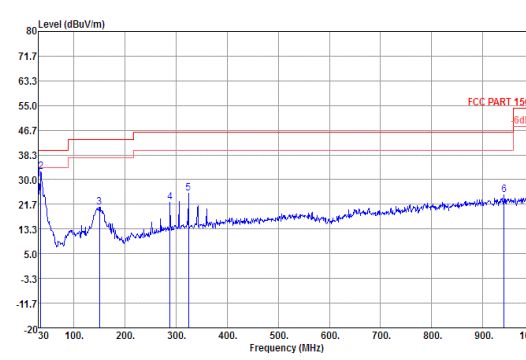





WIFI	Emission below 1GHz	
ANT	2.4GHz WIFI 802.11b (LF)	
1	Horizontal	Vertical
Peak		



For battery 2, adapter 2

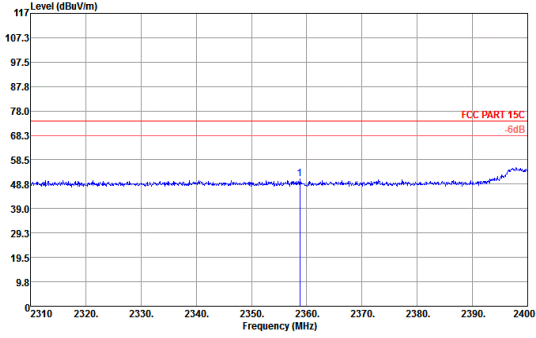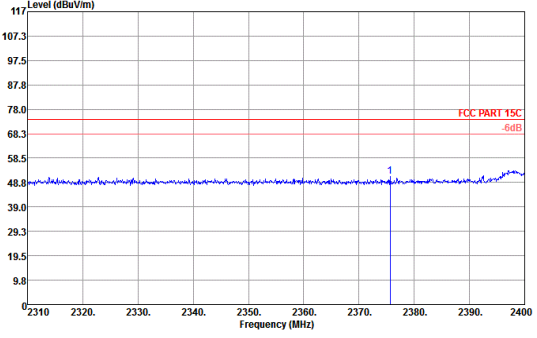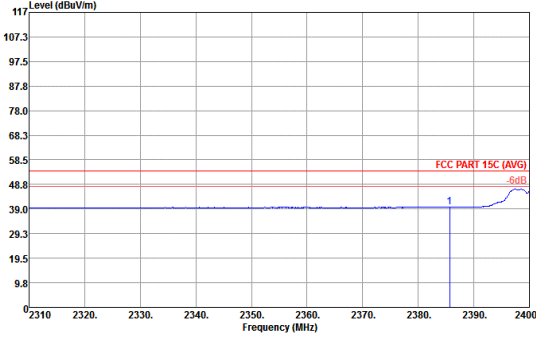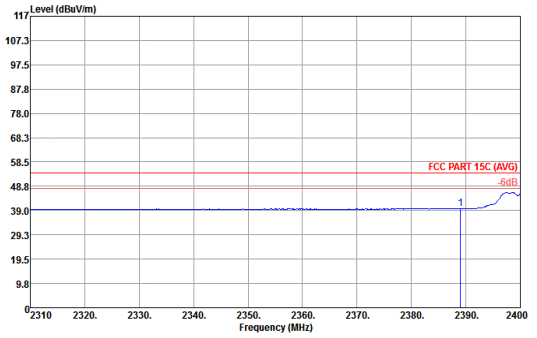WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Band Edge @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A blue signal line shows a peak at approximately 2360 MHz. Two red horizontal lines represent FCC PART 15C limits at approximately 78.0 dBuV/m and 68.3 dBuV/m, with a -6dB margin indicated.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Vertical. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A blue signal line shows a peak at approximately 2360 MHz. Two red horizontal lines represent FCC PART 15C limits at approximately 78.0 dBuV/m and 68.3 dBuV/m, with a -6dB margin indicated.</p>
Average	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A blue signal line shows a peak at approximately 2360 MHz. Two red horizontal lines represent FCC PART 15C (AVG) limits at approximately 78.0 dBuV/m and 68.3 dBuV/m, with a -6dB margin indicated.</p>	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Average Vertical. The y-axis ranges from 0 to 117 dBuV/m, and the x-axis ranges from 2310 to 2400 MHz. A blue signal line shows a peak at approximately 2360 MHz. Two red horizontal lines represent FCC PART 15C (AVG) limits at approximately 78.0 dBuV/m and 68.3 dBuV/m, with a -6dB margin indicated.</p>

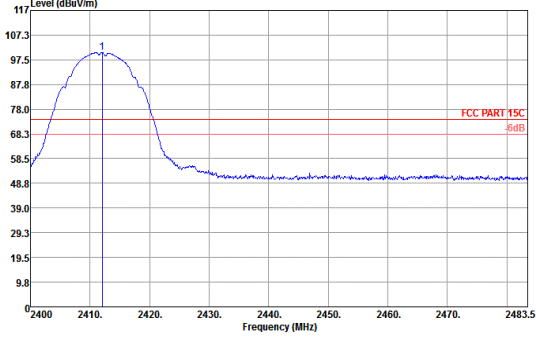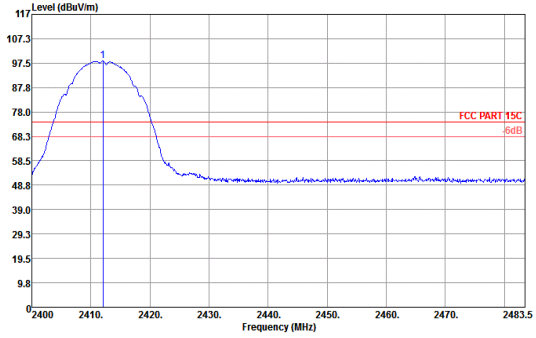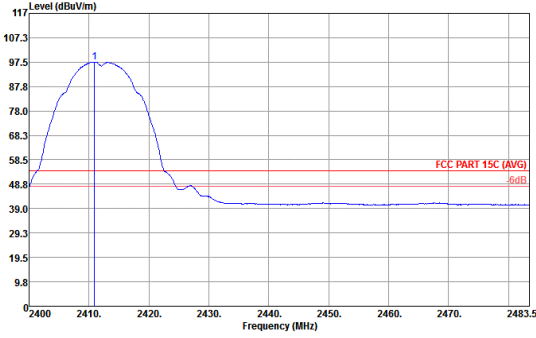
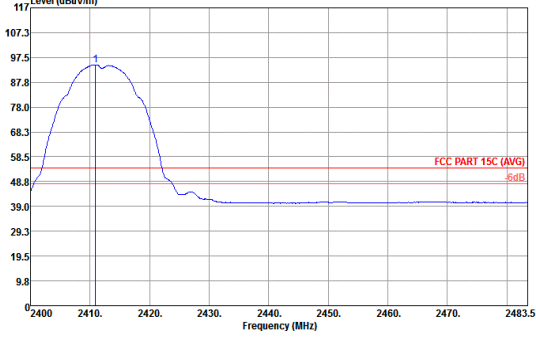


WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Fundamental Emission @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		
Average		



WIFI	2.4GHz 2400~2483.5MHz WIFI 802.11b (Harmonic @ 3m)	
ANT	CH01 2412MHz	
1	Horizontal	Vertical
Peak		

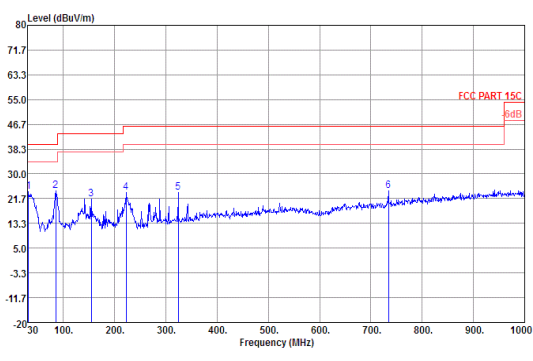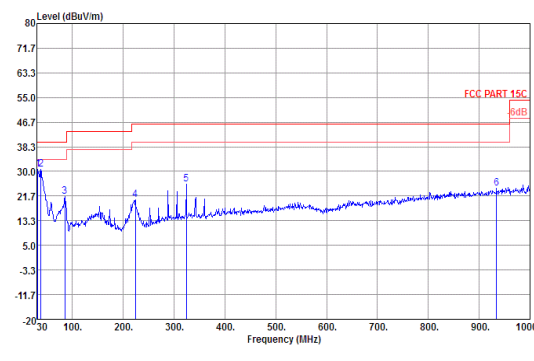

WIFI	Emission below 1GHz	
ANT	2.4GHz WIFI 802.11b (LF)	
1	Horizontal	Vertical
Peak		



For battery 1, adapter 1

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2365.98	50.77	-23.23	74	55.34	26.91	5.54	37.02	329	138	P	H
		2390	39.84	-14.16	54	44.27	27	5.59	37.02	329	138	A	H
	*	2410.938	98.45	-	-	102.71	27.13	5.61	37	329	138	P	H
	*	2410.938	97.36	-	-	101.62	27.13	5.61	37	329	138	A	H
		2382.54	51.1	-22.9	74	55.6	26.95	5.57	37.02	126	102	P	V
		2386.77	39.85	-14.15	54	44.28	27	5.59	37.02	126	102	A	V
	*	2410.938	101.88	-	-	106.14	27.13	5.61	37	126	102	P	V
	*	2410.938	99.42	-	-	103.68	27.13	5.61	37	126	102	A	V
802.11b CH 06 2437MHz		2332.68	50.72	-23.28	74	55.41	26.82	5.5	37.01	364	149	P	H
		2388.66	39.87	-14.13	54	44.3	27	5.59	37.02	364	149	A	H
	*	2435.905	99.53	-	-	103.63	27.26	5.63	36.99	364	149	P	H
	*	2436.072	97.11	-	-	101.21	27.26	5.63	36.99	364	149	A	H
		2499.2	52.4	-21.6	74	55.85	27.77	5.71	36.93	364	149	P	H
		2494.24	40.88	-13.12	54	44.33	27.77	5.71	36.93	364	149	A	H
		2389.47	50.89	-23.11	74	55.32	27	5.59	37.02	148	121	P	V
		2381.46	39.89	-14.11	54	44.39	26.95	5.57	37.02	148	121	A	V
	*	2435.905	100.53	-	-	104.63	27.26	5.63	36.99	148	121	P	V
	*	2435.989	98.08	-	-	102.18	27.26	5.63	36.99	148	121	A	V
		2484.2	51.84	-22.16	74	55.45	27.64	5.69	36.94	148	121	P	V
	2485.88	40.93	-13.07	54	44.54	27.64	5.69	36.94	148	121	A	V	



802.11b CH 11 2462MHz	*	2463.209	98.21	-	-	101.99	27.51	5.67	36.96	317	138	P	H
	*	2463.209	95.66	-	-	99.44	27.51	5.67	36.96	317	138	A	H
		2490.6	52.03	-21.97	74	55.48	27.77	5.71	36.93	317	138	P	H
		2484.32	41.33	-12.67	54	44.94	27.64	5.69	36.94	317	138	A	H
	*	2460.955	99.35	-	-	103.13	27.51	5.67	36.96	113	120	P	V
	*	2460.955	96.92	-	-	100.7	27.51	5.67	36.96	113	120	A	V
		2483.84	52.23	-21.77	74	55.84	27.64	5.69	36.94	113	120	P	V
		2484.32	41.5	-12.5	54	45.11	27.64	5.69	36.94	113	120	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11b CH 01 (2412MHz) and CH 06 (2437MHz), and 802.11b CH 11 (2462MHz).



**2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.83	56.03	-17.97	74	60.46	27	5.59	37.02	371	139	P	H
		2390	41.8	-12.2	54	46.23	27	5.59	37.02	371	139	A	H
	*	2417.702	99.3	-	-	103.56	27.13	5.61	37	371	139	P	H
	*	2418.454	90.97	-	-	95.23	27.13	5.61	37	371	139	A	H
		2389.92	57.79	-16.21	74	62.22	27	5.59	37.02	134	116	P	V
		2390	42.52	-11.48	54	46.95	27	5.59	37.02	134	116	A	V
	*	2415.615	99.26	-	-	103.52	27.13	5.61	37	134	116	P	V
	*	2408.434	92.64	-	-	96.9	27.13	5.61	37	134	116	A	V
02.11g CH 06 2437MHz		2385.06	51.35	-22.65	74	55.85	26.95	5.57	37.02	361	137	P	H
		2384.25	40.32	-13.68	54	44.82	26.95	5.57	37.02	361	137	A	H
	*	2434.903	100.18	-	-	104.28	27.26	5.63	36.99	361	137	P	H
	*	2432.982	91.71	-	-	95.81	27.26	5.63	36.99	361	137	A	H
		2491.96	52.11	-21.89	74	55.56	27.77	5.71	36.93	361	137	P	H
		2489.28	41.66	-12.34	54	45.11	27.77	5.71	36.93	361	137	A	H
		2358.51	51.52	-22.48	74	56.09	26.91	5.54	37.02	149	118	P	V
		2387.4	40.34	-13.66	54	44.77	27	5.59	37.02	149	118	A	V
	*	2432.815	101.26	-	-	105.36	27.26	5.63	36.99	149	118	P	V
	*	2433.149	91.63	-	-	95.73	27.26	5.63	36.99	149	118	A	V
		2483.52	50.1	-23.9	74	53.71	27.64	5.69	36.94	149	118	P	V
		2483.52	41.27	-12.73	54	44.88	27.64	5.69	36.94	149	118	A	V



802.11g CH 11 2462MHz	*	2468.219	99.78	-	-	103.56	27.51	5.67	36.96	400	144	P	H
	*	2468.637	91.4	-	-	95.18	27.51	5.67	36.96	400	144	A	H
		2484.16	63.05	-10.95	74	66.66	27.64	5.69	36.94	400	144	P	H
		2483.56	46.56	-7.44	54	50.17	27.64	5.69	36.94	400	144	A	H
	*	2468.136	100.56	-	-	104.34	27.51	5.67	36.96	155	103	P	V
	*	2468.47	91.69	-	-	95.47	27.51	5.67	36.96	100	121	A	V
		2484.08	62.52	-11.48	74	66.13	27.64	5.69	36.94	100	121	P	V
	!	2483.52	48.65	-5.35	54	52.26	27.64	5.69	36.94	100	121	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2352.75	51.29	-22.71	74	55.86	26.91	5.54	37.02	384	204	P	H
		2390	40.37	-13.63	54	44.8	27	5.59	37.02	384	204	A	H
	*	2411.439	92.89	-	-	97.15	27.13	5.61	37	384	204	P	H
	*	2419.706	84.89	-	-	88.99	27.26	5.63	36.99	384	204	A	H
		2390	51.3	-22.7	74	55.73	27	5.59	37.02	100	240	P	V
		2389.83	40.41	-13.59	54	44.84	27	5.59	37.02	100	240	A	V
	*	2416.7	97.16	-	-	101.42	27.13	5.61	37	100	240	P	V
	*	2415.948	87.21	-	-	91.47	27.13	5.61	37	100	240	A	V
802.11n HT20 CH 06 2437MHz		2381.73	50.94	-23.06	74	55.44	26.95	5.57	37.02	232	217	P	H
		2387.04	40.34	-13.66	54	44.77	27	5.59	37.02	232	217	A	H
	*	2432.231	94.81	-	-	98.91	27.26	5.63	36.99	232	217	P	H
	*	2433.316	86.33	-	-	90.43	27.26	5.63	36.99	232	217	A	H
		2489.88	51.63	-22.37	74	55.08	27.77	5.71	36.93	232	217	P	H
		2499.92	41.35	-12.65	54	44.8	27.77	5.71	36.93	232	217	A	H
		2323.5	51.6	-22.4	74	56.29	26.82	5.5	37.01	100	259	P	V
		2389.92	40.42	-13.58	54	44.85	27	5.59	37.02	100	259	A	V
	*	2432.565	97.96	-	-	102.06	27.26	5.63	36.99	100	259	P	V
	*	2433.066	87.68	-	-	91.78	27.26	5.63	36.99	100	259	A	V
		2498.72	51.92	-22.08	74	55.37	27.77	5.71	36.93	100	259	P	V
	2488.96	41.42	-12.58	54	44.87	27.77	5.71	36.93	100	259	A	V	



802.11n HT20 CH 11 2462MHz	*	2467.969	95.32	-	-	99.1	27.51	5.67	36.96	400	149	P	H
	*	2469.305	87.95	-	-	91.73	27.51	5.67	36.96	400	149	A	H
		2483.88	57.97	-16.03	74	61.58	27.64	5.69	36.94	400	149	P	H
		2483.56	42.92	-11.08	54	46.53	27.64	5.69	36.94	400	149	A	H
	*	2468.887	98.08	-	-	101.86	27.51	5.67	36.96	155	116	P	V
	*	2468.887	88.87	-	-	92.65	27.51	5.67	36.96	155	116	A	V
		2483.68	58.41	-15.59	74	62.02	27.64	5.69	36.94	155	116	P	V
		2483.6	43.69	-10.31	54	47.3	27.64	5.69	36.94	155	116	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include test results for 802.11n HT20 channels 01, 06, and 11 at various frequencies.

Remark

- 1. No other spurious found.
2. All results are PASS against Peak and Average limit line.



Emission below 1GHz
2.4GHz WIFI 802.11b (LF)

Table with 14 columns: WIFI, Note, Frequency, Level, Over, Limit, Read, Antenna, Cable, Preamp, Ant, Table, Peak, Pol. It contains 12 rows of test data for 2.4GHz WIFI 802.11b LF and a Remark section at the bottom.



For battery 2, adapter 2

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2358.78	50.75	-23.25	74	55.32	26.91	5.54	37.02	338	91	P	H
		2385.69	39.92	-14.08	54	44.35	27	5.59	37.02	338	91	A	H
	*	2412.024	100.38	-	-	104.64	27.13	5.61	37	338	91	P	H
	*	2410.938	97.58	-	-	101.84	27.13	5.61	37	338	91	A	H
		2375.61	51.05	-22.95	74	55.55	26.95	5.57	37.02	345	46	P	V
		2389.02	39.86	-14.14	54	44.29	27	5.59	37.02	345	46	A	V
	*	2412.024	98.33	-	-	102.59	27.13	5.61	37	345	46	P	V
	*	2410.938	94.63	-	-	98.89	27.13	5.61	37	345	46	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		4824	48.74	-25.26	74	70.2	31.51	9.13	62.1	100	360	P	H
		4824	45.84	-28.16	74	67.3	31.51	9.13	62.1	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Emission below 1GHz
2.4GHz WIFI 802.11b (LF)**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		31.94	23.98	-16.02	40	37.53	18.32	0.68	32.55	-	-	P	H
		85.29	24.32	-15.68	40	45.31	10.2	1.12	32.31	154	97	P	H
		154.16	21.53	-21.97	43.5	38.9	13.56	1.5	32.43	-	-	P	H
		222.06	23.61	-22.39	46	42.41	11.81	1.73	32.34	-	-	P	H
		323.91	23.78	-22.22	46	38.48	15.33	2.21	32.24	-	-	P	H
		734.22	24.19	-21.81	46	32.03	20.67	3.43	31.94	-	-	P	H
		31.94	30.65	-9.35	40	44.2	18.32	0.68	32.55	102	317	P	V
		37.76	30.61	-9.39	40	46.71	15.68	0.74	32.52	-	-	P	V
		85.29	21.43	-18.57	40	42.42	10.2	1.12	32.31	-	-	P	V
		224	20.32	-25.68	46	39.03	11.9	1.73	32.34	-	-	P	V
		323.91	25.57	-20.43	46	40.27	15.33	2.21	32.24	-	-	P	V
		934.04	24.41	-21.59	46	28.56	23.35	3.94	31.44	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.625	8.220	0.122	300Hz
802.11g	87.261	1.370	0.730	1kHz
2.4GHz 802.11n HT20	86.450	1.276	0.784	1kHz


802.11b

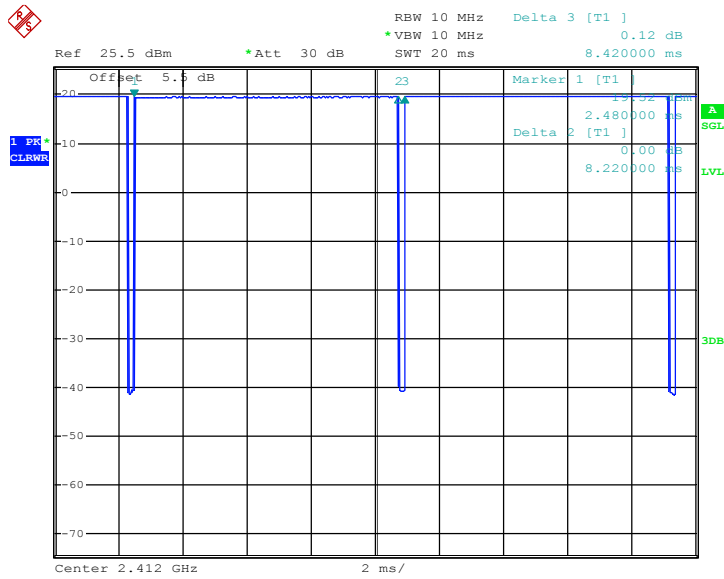

Date: 13.MAY.2016 15:53:09




802.11g

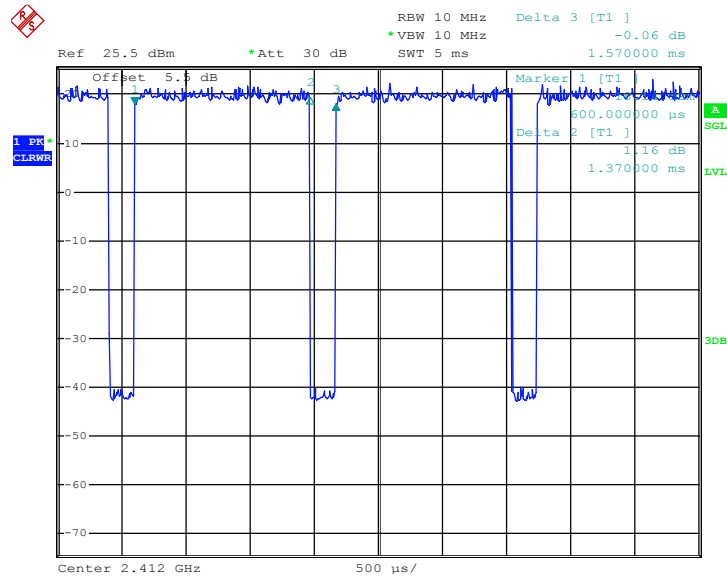

Date: 13.MAY.2016 15:55:17

2.4GHz 802.11n HT20

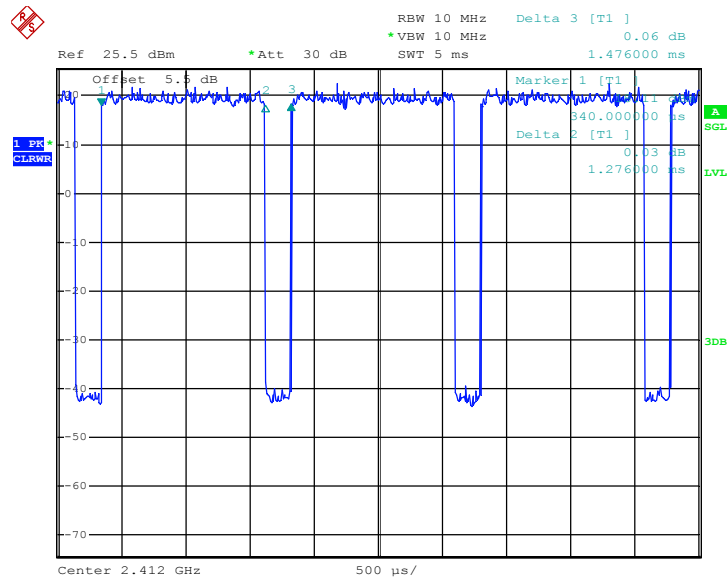

Date: 13.MAY.2016 16:00:45