



Variant FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 9370, 9842
FCC ID : IHDT56VE2
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

This is a variant report which is only valid together with the original test report. The product was received on Dec. 10, 2016 and testing completed on Dec. 15, 2016. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Specification of Accessory 6
1.6 Modification of EUT 6
1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator 7
1.8 Testing Location 8
1.9 Applicable Standards 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9
2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 12
3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power and EIRP 13
3.5 Occupied Bandwidth 14
3.6 Conducted Band Edge 15
3.7 Conducted Spurious Emission 16
4 RADIATED TEST ITEMS 17
4.1 Measuring Instruments 17
4.2 Test Setup 17
4.3 Test Result of Radiated Test 18
4.4 Radiated Spurious Emission 19
5 LIST OF MEASURING EQUIPMENT 20
6 UNCERTAINTY OF EVALUATION 21
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS
APPENDIX D. PRODUCT EQUALITY DECLARATION
APPENDIX E. ORIGINAL REPORT



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 7)	EIRP < 2Watt	PASS	-
3.5	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.6	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)	PASS	-
3.7	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])	PASS	-
4.4	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log ₁₀ (P[Watts])	PASS	Under limit 31.21 dB at 10125.000 MHz



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	9370, 9842
FCC ID	IHDT56VE2
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/ HSPA+(16QAM uplink is not supported)/LTE/NFC/ WLAN2.4GHz 802.11b/g/n HT20 WLAN5GHz 802.11a/n HT20/HT40/ Bluetooth v3.0+EDR/Bluetooth v4.0 LE/ Bluetooth v4.2 LE
IMEI Code	Conducted: 351557080038050/351557080038068 Radiation: 351557080038217/351557080038255
HW Version	DVT2
SW Version	potter_oem_userdebug_7.0_NPN25.124_1787_intcfg-test-ke ys_oem
EUT Stage	Identical Prototype



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz
Rx Frequency	LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz
Bandwidth	LTE Band 7 : 5MHz/ 10MHz / 15MHz / 20MHz
Antenna Type	Fixed Internal Antenna
Maximum Output Power to Antenna	LTE Band 7 : 23.34 dBm
Antenna Gain	LTE Band 7 : 2.51 dBi
Type of Modulation	QPSK / 16QAM

1.5 Specification of Accessory

Specification of Accessory				
AC Adapter	Brand Name	Motorola(Salom)	Model Name	SSW-2680US/SSW-2680UK/ SSW-2680EU/SSW-2680MX/ SSW-2680AR
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5 Vdc,1600mA or 9Vdc,1600mA or 12Vdc,1200mA		
Battery 1	Brand Name	motorola(SUNWODA)	Model Name	HG40
	Power Rating	3.8Vdc,2810/3000mAh (Min/Typ)	Type	Li-ion
Battery 2	Brand Name	motorola(AmpereX)	Model Name	HG40
	Power Rating	3.8Vdc,2810/3000mAh (Min/Typ)	Type	Li-ion
USB Cable	Brand Name	Motorola	Model Name	SKN6461A
	Signal Line Type	1.0 meter, non-shielded cable, without ferrite core		
Earphone	Brand Name	Motorola(Jiangxi Lianchuang)	Model Name	MEMD1532B080008
	Signal Line Type	1.2 meter, non-shielded cable, without ferrite core		

1.6 Modification of EUT

No modifications are made to the EUT during all test items.



1.7 Maximum EIRP Power, Frequency Tolerance, and Emission Designator

LTE Band 7		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M50G7D	-	-	4M49W7D	-	-
10	2505.0 ~ 2565.0	9M03G7D	-	-	9M01W7D	-	-
15	2507.5 ~ 2562.5	13M5G7D	-	0.3846	13M4W7D	-	0.2799
20	2510.0 ~ 2560.0	18M3G7D	-	-	18M3W7D	-	-



1.8 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH03-KS	306251

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L), 27(M), 27(H)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	7	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
26dB and 99% Bandwidth	7	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	7	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
Conducted Spurious Emission	7	-	-	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓
E.I.R.P.	7	-	-			✓		✓	✓	✓			✓	✓	✓
Radiated Spurious Emission	7	-	-		✓			✓		✓				✓	
Note	<ol style="list-style-type: none"> The mark "✓" means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 														

2.2 Connection Diagram of Test System

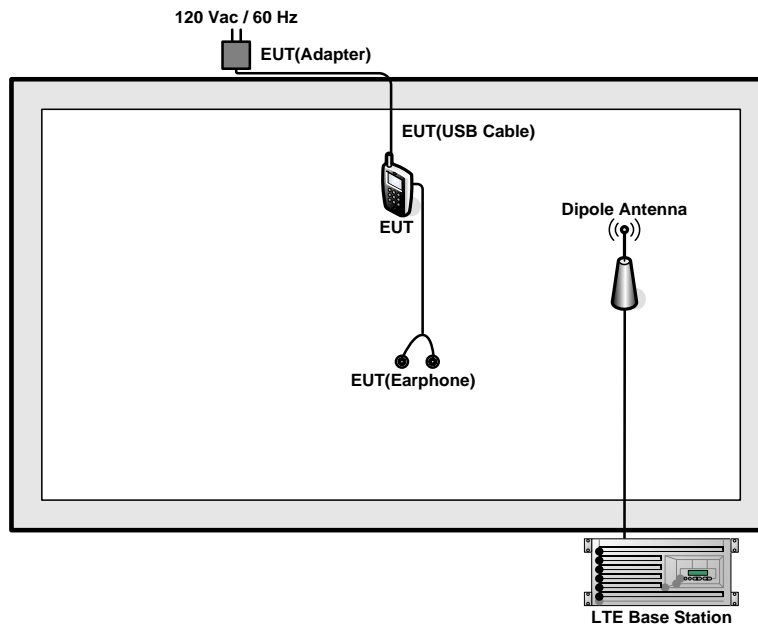

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.9 dB.

Example :

Offset(dB) = RF cable loss(dB).= 5.9 (dB)



2.5 Frequency List of Low/Middle/High Channels

LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

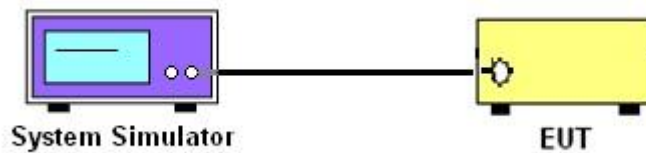

3.2.2 Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

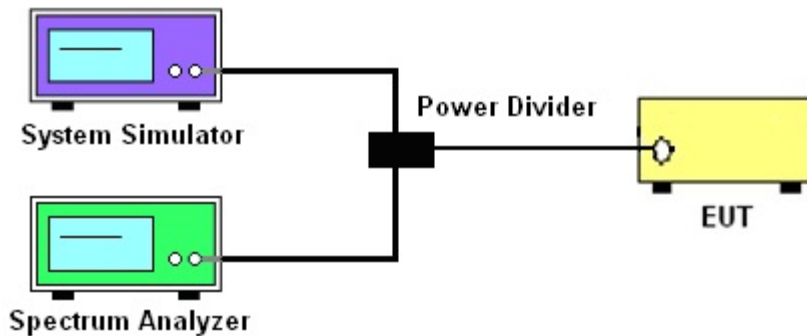

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band Band 7.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW \geq 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= P(W)- [43 + 10log(P)] (dB)
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.
11. For Band 7
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [55 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
= -25dBm.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

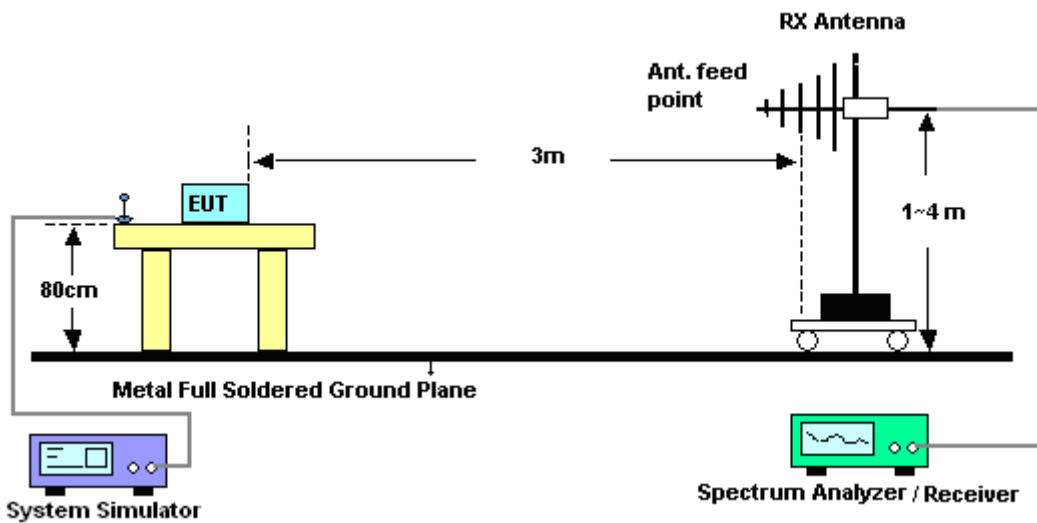

4.2.2 For radiated test above 1GHz

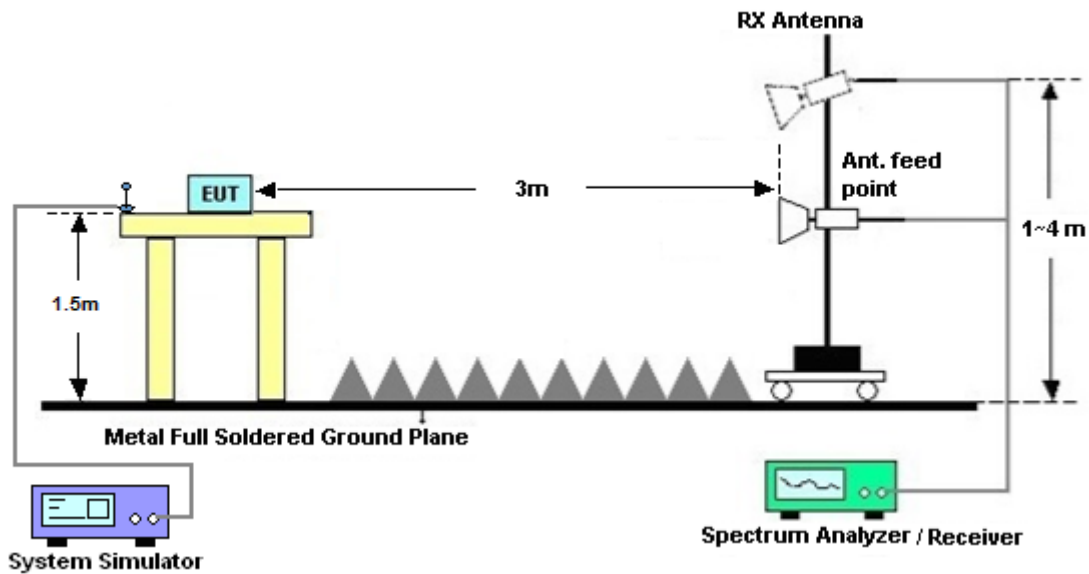



4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [43 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
= -13dBm.

12. For Band 7

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV30	101338	10Hz~30GHz	Apr. 22, 2016	Dec. 13, 2016	Apr. 21, 2017	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Dec. 13, 2016	Aug. 08, 2017	Conducted (TH01-KS)
Thermal Chamber	Ten Billion	TTC-B3S	TBN-960502	-40~+150°C	Oct. 13, 2016	Dec. 13, 2016	Oct. 12, 2017	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 22, 2016	Dec. 15, 2016	Apr. 21, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 16, 2016	Dec. 15, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 16, 2016	Dec. 15, 2016	Apr. 15, 2017	Radiation (03CH03-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Mar. 03, 2016	Dec. 15, 2016	Mar. 02, 2017	Radiation (03CH03-KS)
Amplifier	SONOMA	310N	187289	9kHz~1GHz	Aug. 09, 2016	Dec. 15, 2016	Aug. 08, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	Dec. 15, 2016	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Jan. 20, 2016	Dec. 15, 2016	Jan. 19, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 15, 2016	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 15, 2016	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 15, 2016	NCR	Radiation (03CH03-KS)

NCR: No Calibration Required



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (25 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.8dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.2dB
---	-------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.98	22.93	22.78
20	1	49		23.28	23.32	23.33
20	1	99		22.86	22.90	22.93
20	50	0		22.31	22.21	22.32
20	50	24		22.23	22.14	22.25
20	50	50		22.18	22.17	22.30
20	100	0		22.16	22.15	22.25
20	1	0	16-QAM	21.78	21.68	21.62
20	1	49		21.84	21.40	21.86
20	1	99		21.83	21.49	21.77
20	50	0		21.34	21.15	21.36
20	50	24		21.28	21.17	21.34
20	50	50		21.22	21.14	21.40
20	100	0		21.20	21.17	21.22
15	1	0	QPSK	23.16	23.11	23.13
15	1	37		23.27	23.30	23.34
15	1	74		23.19	23.10	23.14
15	36	0		22.34	22.24	22.26
15	36	20		22.29	22.10	22.41
15	36	39		22.36	22.16	22.36
15	75	0		22.31	22.19	22.31
15	1	0	16-QAM	21.82	21.81	21.88
15	1	37		21.93	21.90	21.96
15	1	74		21.77	21.81	21.95
15	36	0		21.32	21.19	21.22
15	36	20		21.26	21.16	21.38
15	36	39		21.32	21.12	21.45
15	75	0		21.36	21.34	21.26



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.72	22.82	22.98
10	1	25		23.27	23.30	23.31
10	1	49		22.91	22.71	23.02
10	25	0		22.25	22.19	22.36
10	25	12		22.29	22.08	22.45
10	25	25		22.29	22.12	22.35
10	50	0		22.28	22.14	22.39
10	1	0	16-QAM	21.81	21.91	21.90
10	1	25		21.94	21.78	21.95
10	1	49		21.89	21.71	21.93
10	25	0		21.34	21.29	21.55
10	25	12		21.30	21.16	21.56
10	25	25		21.57	21.22	21.64
10	50	0		21.34	21.12	21.50
5	1	0	QPSK	22.58	22.63	22.70
5	1	12		23.23	23.14	23.19
5	1	24		22.75	22.59	22.81
5	12	0		22.14	22.01	22.31
5	12	7		22.31	22.08	22.35
5	12	13		22.26	22.04	22.26
5	25	0		22.22	22.10	22.35
5	1	0	16-QAM	21.96	21.94	21.95
5	1	12		21.89	21.76	21.95
5	1	24		21.80	21.67	21.86
5	12	0		21.13	21.04	21.32
5	12	7		21.39	21.20	21.38
5	12	13		21.43	21.24	21.31
5	25	0		21.37	21.26	21.42



LTE Band 7 ($G_T - L_C = 2.51$ dB) QPSK			
Bandwidth	15M		
Channel	20825	21100	21375
	(Low)	(Mid)	(High)
Frequency	2507.5	2535	2562.5
(MHz)			
Conducted Power (dBm)	23.27	23.30	23.34
Conducted Power (Watts)	0.2123	0.2138	0.2158
EIRP(dBm)	25.78	25.81	25.85
EIRP(Watts)	0.3784	0.3811	0.3846

LTE Band 7 ($G_T - L_C = 2.51$ dB) 16QAM			
Bandwidth	15M		
Channel	20825	21100	21375
	(Low)	(Mid)	(High)
Frequency	2507.5	2535	2562.5
(MHz)			
Conducted Power (dBm)	21.93	21.90	21.96
Conducted Power (Watts)	0.1560	0.1549	0.1570
EIRP(dBm)	24.44	24.41	24.47
EIRP(Watts)	0.2780	0.2761	0.2799




26dB Bandwidth

Mode	LTE Band 7 : 26dB BW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH					4.935	4.855	9.89	9.77	14.206	14.326	20.22	20.06
Middle CH					4.965	4.935	9.63	9.87	14.476	14.416	20.22	20.1
Highest CH					4.865	4.925	9.67	9.61	14.416	14.266	20.18	20.1




LTE Band 7

Lowest Channel / 5MHz / QPSK

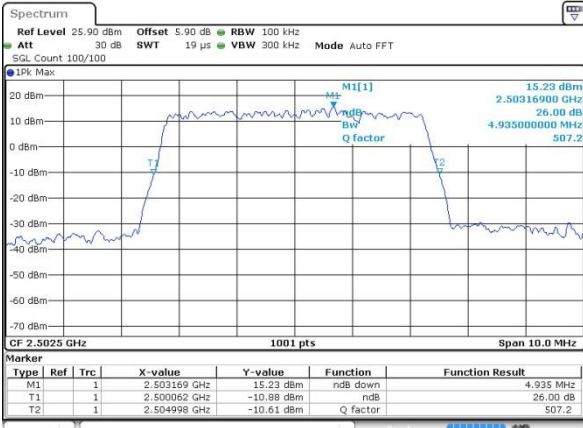


Date: 13 DEC 2016 14:57:05

Lowest Channel / 5MHz / 16QAM

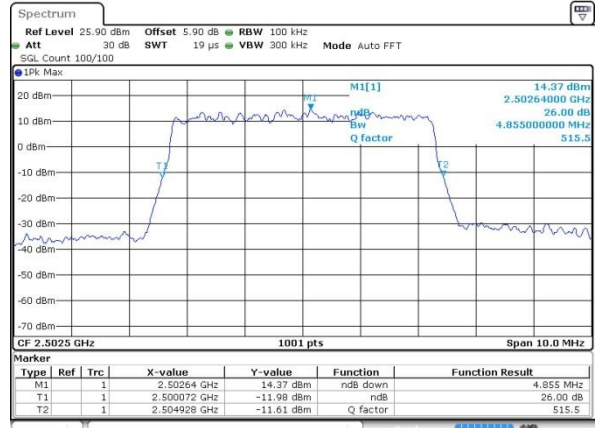


Date: 13 DEC 2016 14:57:26

Middle Channel / 5MHz / QPSK

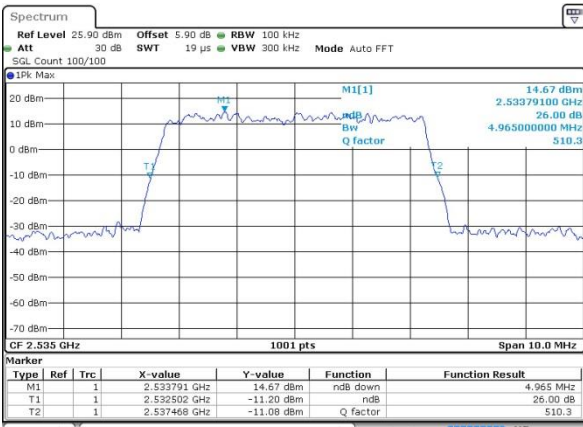


Date: 13 DEC 2016 14:58:08

Middle Channel / 5MHz / 16QAM

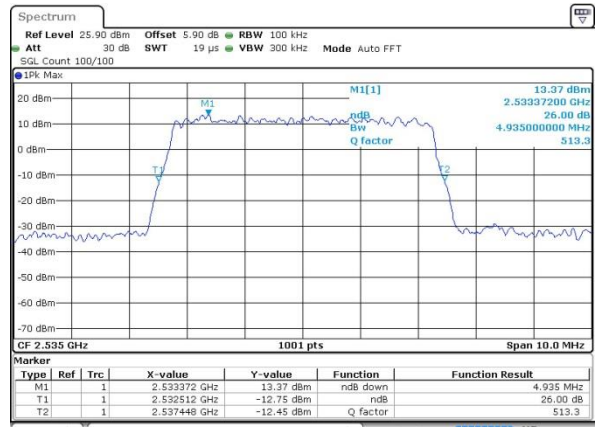


Date: 13 DEC 2016 14:57:47

Highest Channel / 5MHz / QPSK

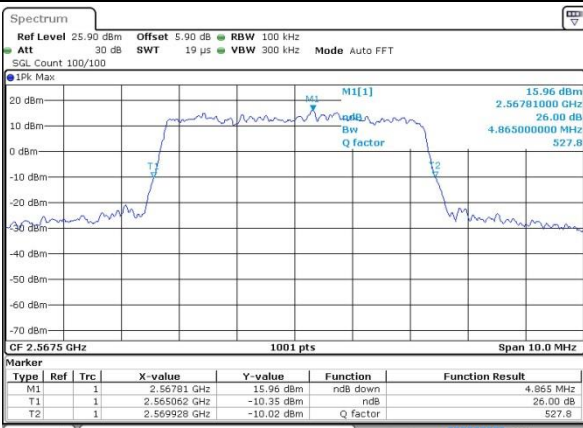

Date: 13 DEC 2016 14:58:29

Highest Channel / 5MHz / 16QAM

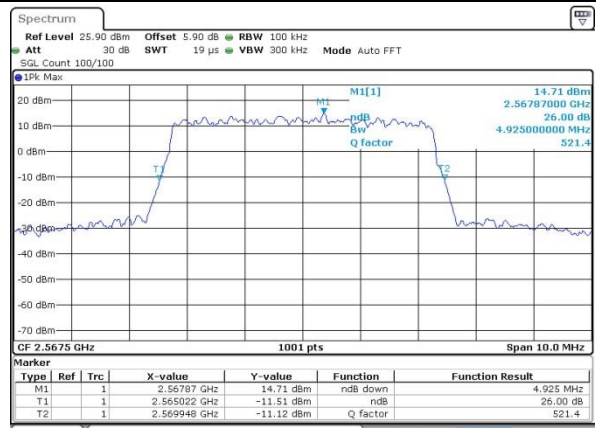


Date: 13 DEC 2016 14:58:50




LTE Band 7

Lowest Channel / 10MHz / QPSK

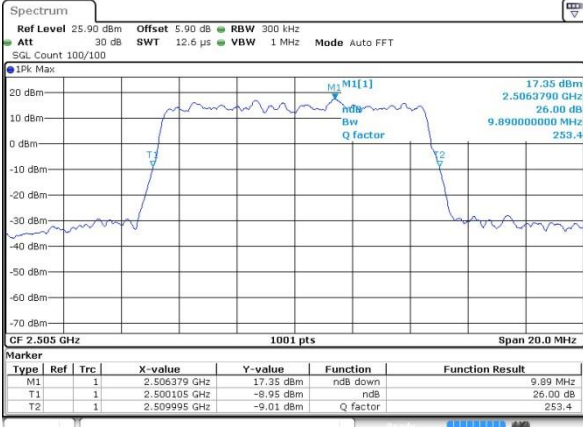

Date: 13 DEC 2016 15:13:47

Lowest Channel / 10MHz / 16QAM

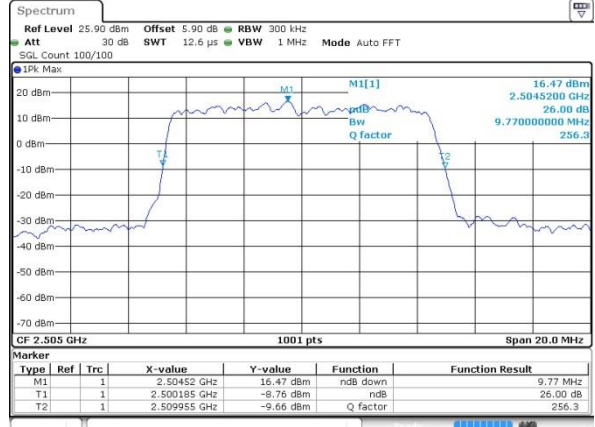

Date: 13 DEC 2016 16:12:48

Middle Channel / 10MHz / QPSK




Date: 13 DEC 2016 15:14:50

Middle Channel / 10MHz / 16QAM




Date: 13 DEC 2016 15:14:29

Highest Channel / 10MHz / QPSK

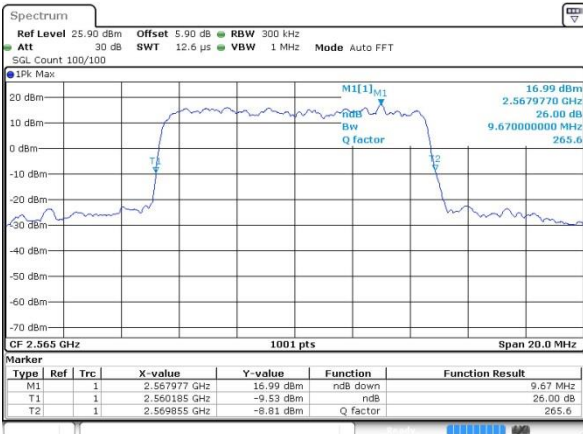

Date: 13 DEC 2016 15:15:11

Highest Channel / 10MHz / 16QAM

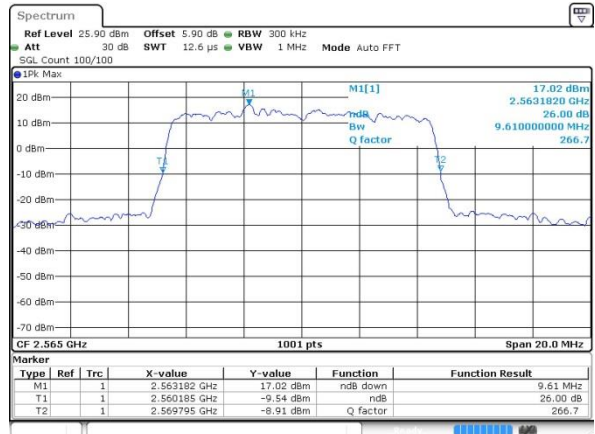


Date: 13 DEC 2016 15:15:32




LTE Band 7

Lowest Channel / 15MHz / QPSK

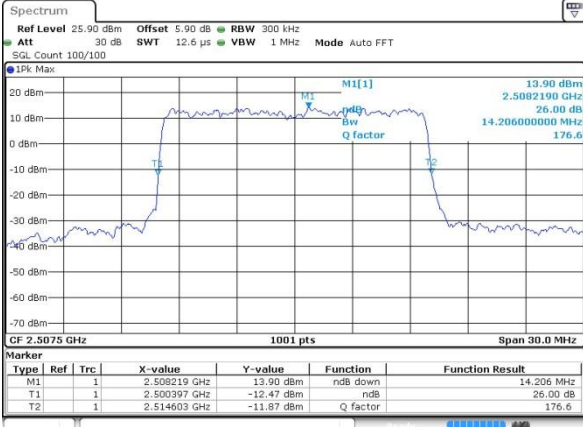


Date: 13 DEC 2016 15:30:50

Lowest Channel / 15MHz / 16QAM

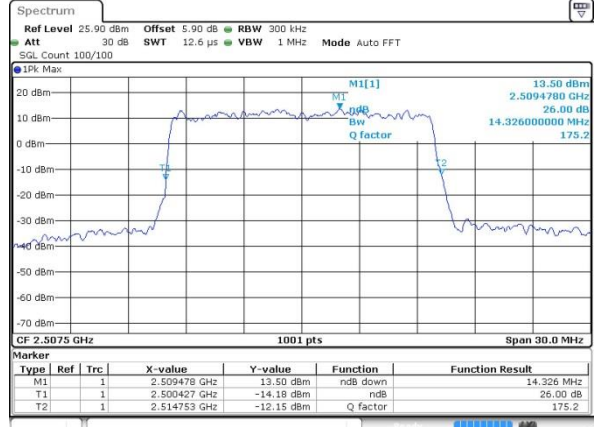


Date: 13 DEC 2016 15:30:29

Middle Channel / 15MHz / QPSK

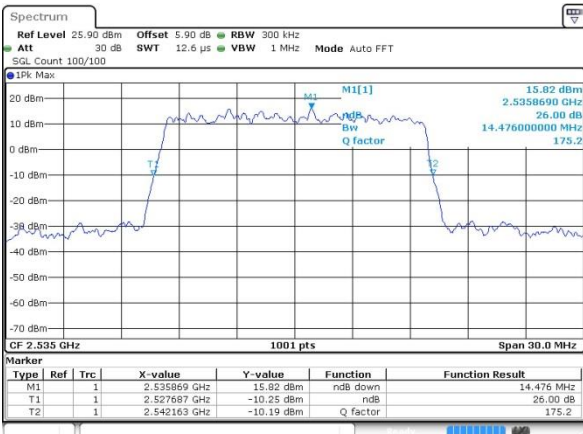


Date: 13 DEC 2016 15:31:12

Middle Channel / 15MHz / 16QAM

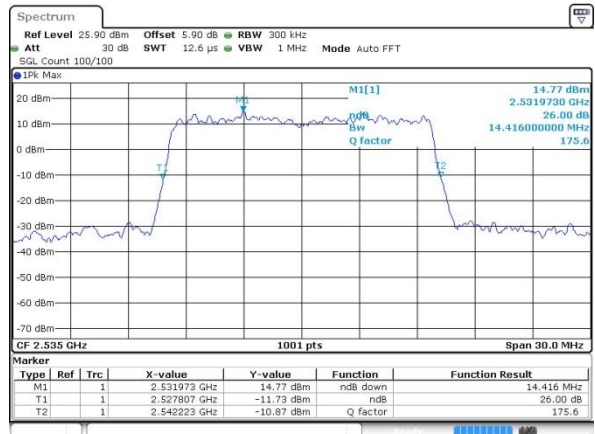


Date: 13 DEC 2016 15:31:33

Highest Channel / 15MHz / QPSK

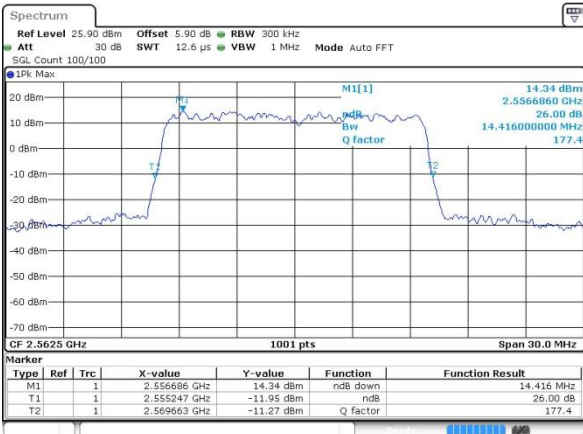

Date: 13 DEC 2016 15:32:14

Highest Channel / 15MHz / 16QAM

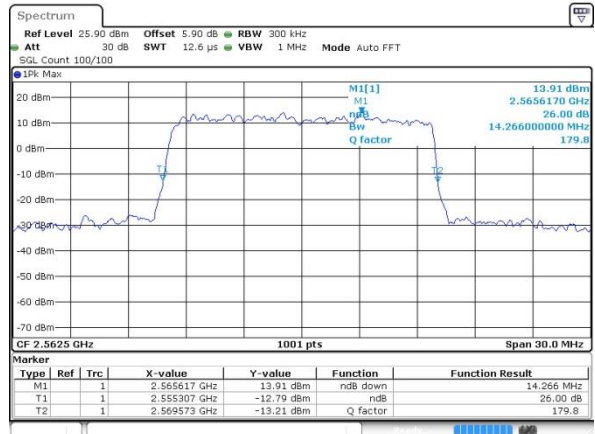


Date: 13 DEC 2016 15:31:53




LTE Band 7

Lowest Channel / 20MHz / QPSK

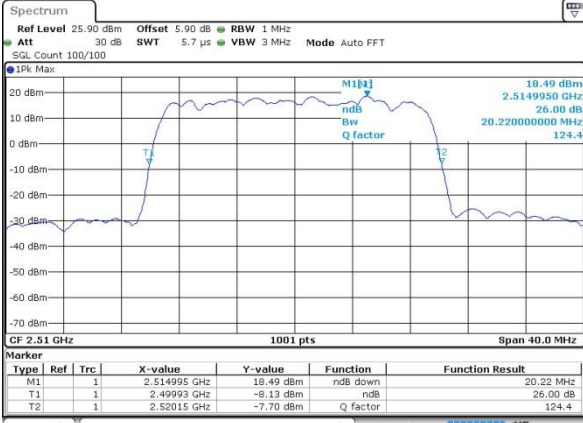


Date: 13 DEC 2016 15:47:32

Lowest Channel / 20MHz / 16QAM

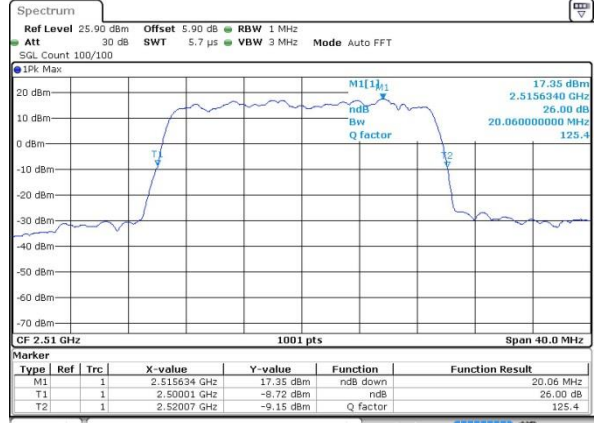


Date: 13 DEC 2016 15:47:11

Middle Channel / 20MHz / QPSK

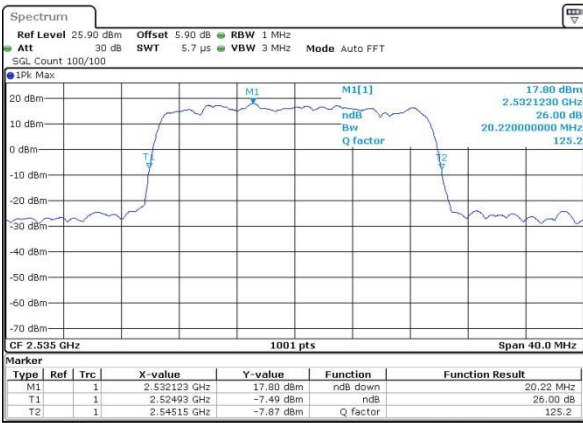


Date: 13 DEC 2016 15:47:53

Middle Channel / 20MHz / 16QAM

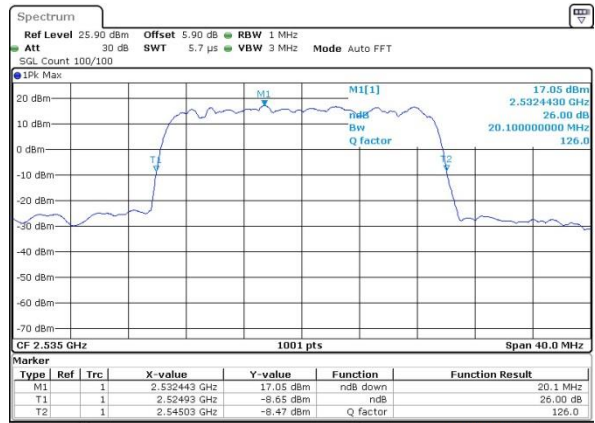


Date: 13 DEC 2016 15:48:14

Highest Channel / 20MHz / QPSK

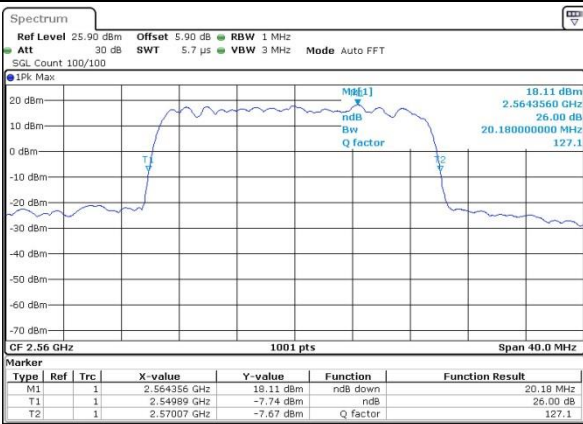

Date: 13 DEC 2016 15:48:56

Highest Channel / 20MHz / 16QAM

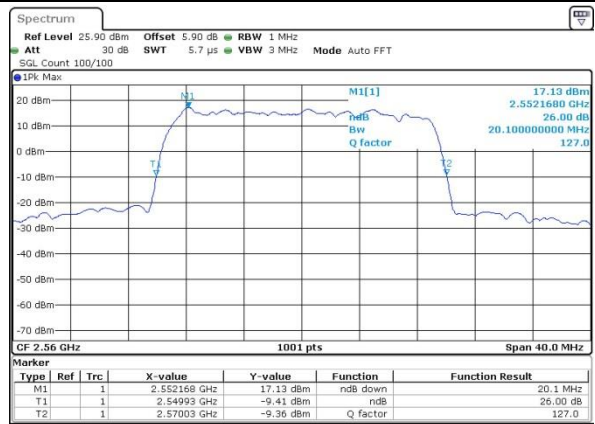

Date: 13 DEC 2016 15:48:35




Occupied Bandwidth

Mode	LTE Band 7 : 99%OBW(MHz)											
	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
BW	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	4.49	4.47	9.03	9.01	13.34	13.4	18.26	18.34
Middle CH	-	-	-	-	4.49	4.47	9.03	9.01	13.46	13.34	18.18	18.22
Highest CH	-	-	-	-	4.5	4.49	8.97	9.01	13.37	13.4	18.18	18.3




LTE Band 7

Lowest Channel / 5MHz / QPSK

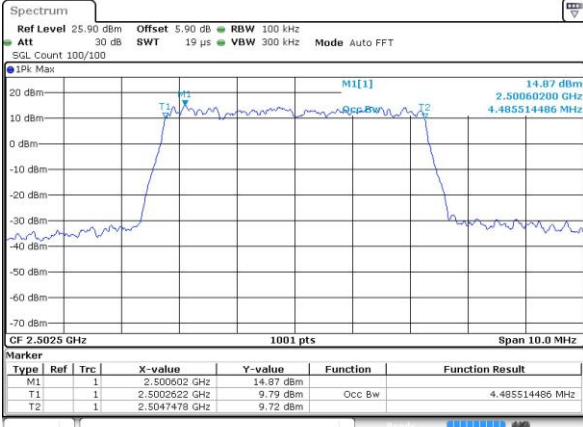


Date: 13 DEC 2016 14:56:54

Lowest Channel / 5MHz / 16QAM

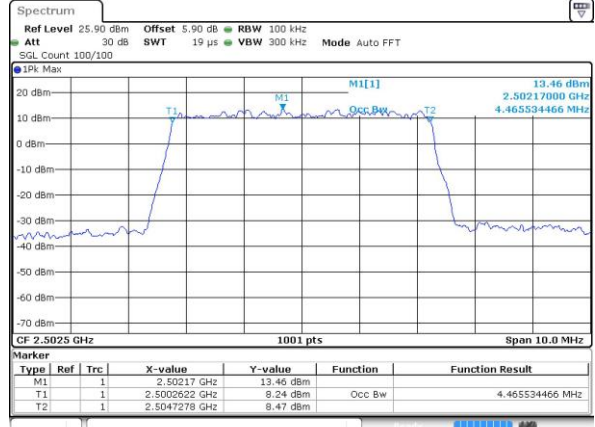


Date: 13 DEC 2016 14:57:15

Middle Channel / 5MHz / QPSK

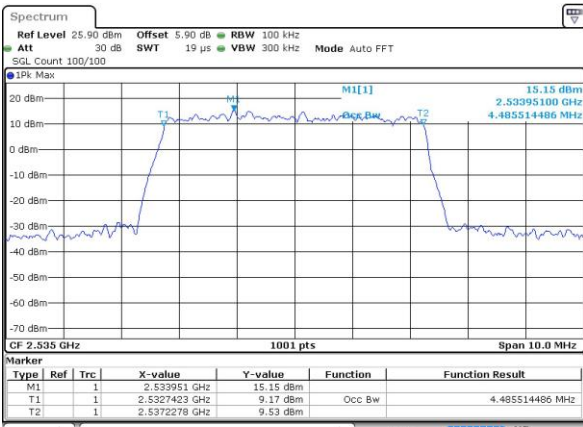


Date: 13 DEC 2016 14:57:57

Middle Channel / 5MHz / 16QAM

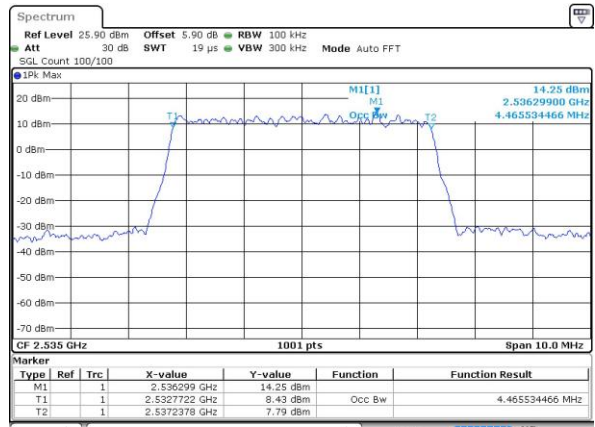


Date: 13 DEC 2016 14:57:36

Highest Channel / 5MHz / QPSK

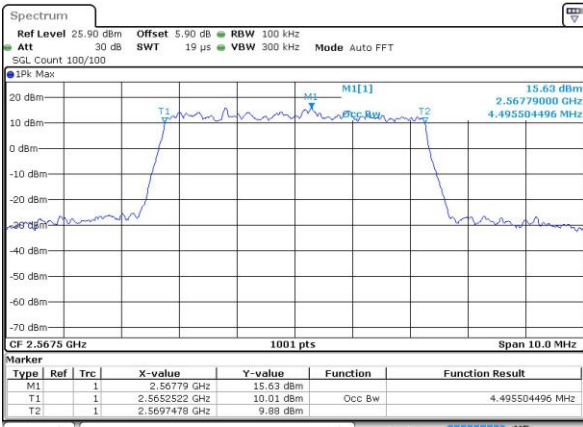

Date: 13 DEC 2016 14:58:18

Highest Channel / 5MHz / 16QAM

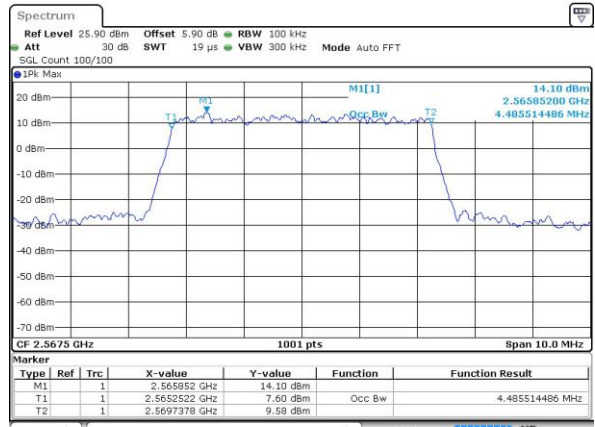


Date: 13 DEC 2016 14:58:40




LTE Band 7

Lowest Channel / 10MHz / QPSK

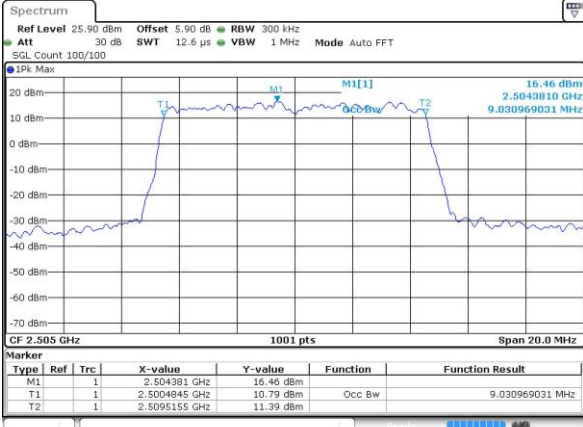


Date: 13 DEC 2016 15:13:37

Lowest Channel / 10MHz / 16QAM

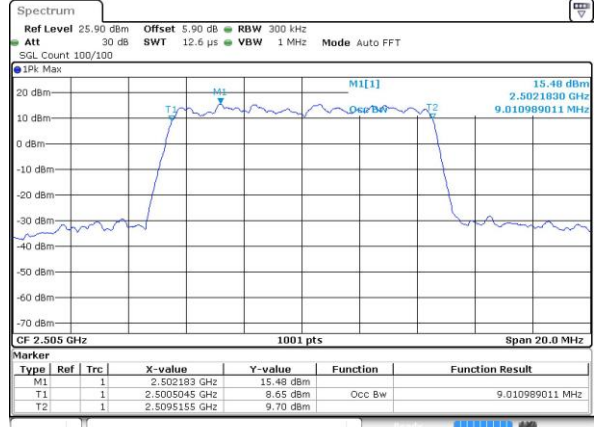


Date: 13 DEC 2016 15:13:58

Middle Channel / 10MHz / QPSK

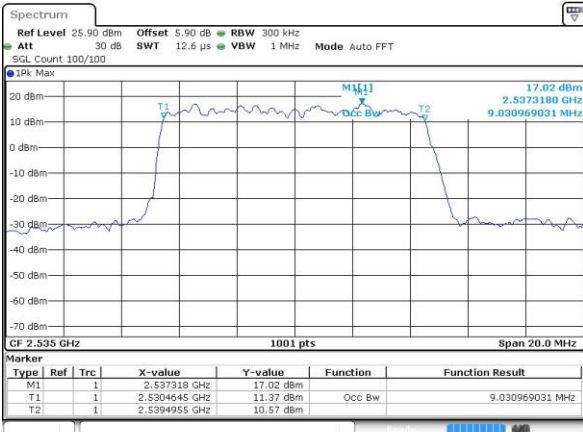


Date: 13 DEC 2016 15:14:40

Middle Channel / 10MHz / 16QAM

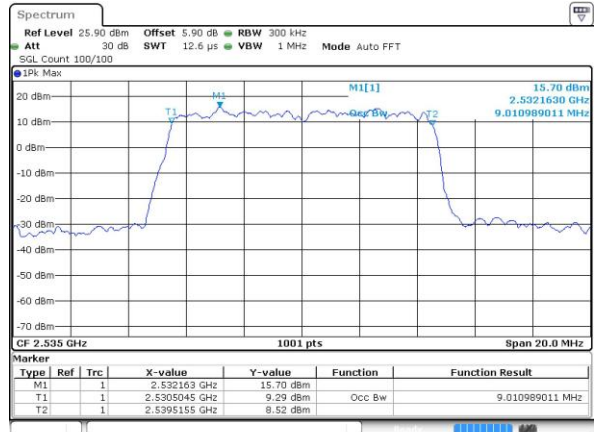


Date: 13 DEC 2016 15:14:46

Highest Channel / 10MHz / QPSK

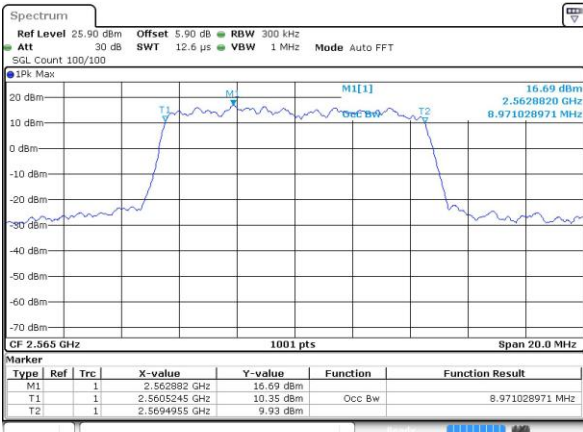

Date: 13 DEC 2016 15:15:01

Highest Channel / 10MHz / 16QAM

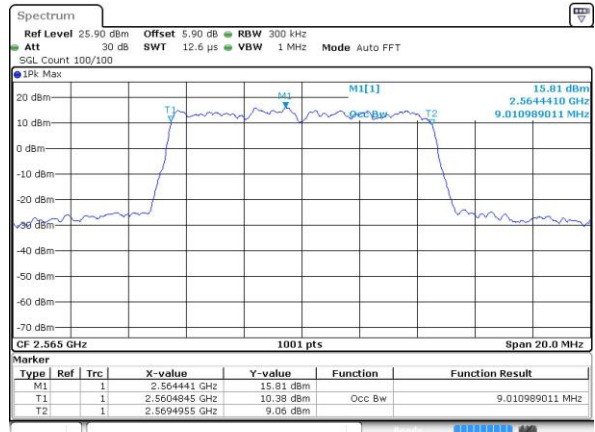


Date: 13 DEC 2016 15:15:22




LTE Band 7

Lowest Channel / 15MHz / QPSK

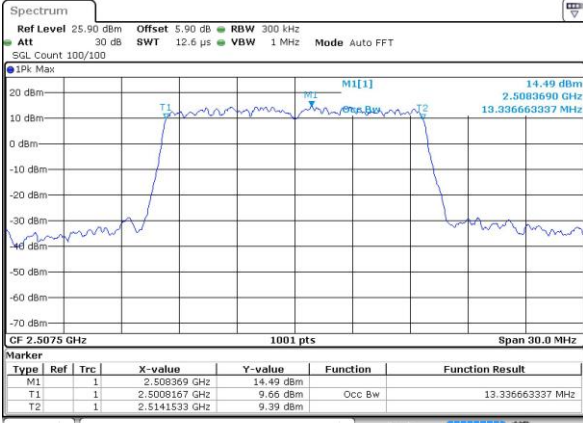


Date: 13 DEC 2016 16:25:12

Lowest Channel / 15MHz / 16QAM

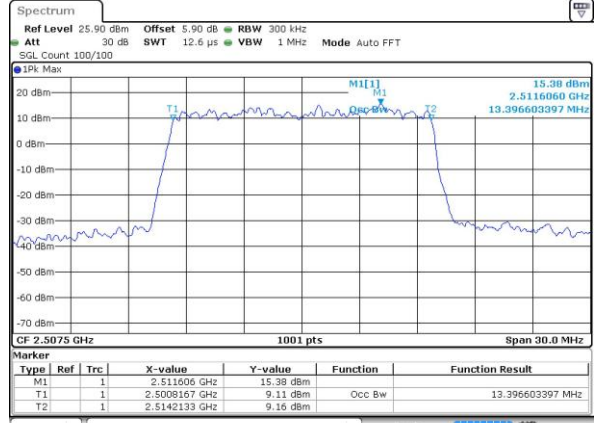


Date: 13 DEC 2016 15:30:19

Middle Channel / 15MHz / QPSK

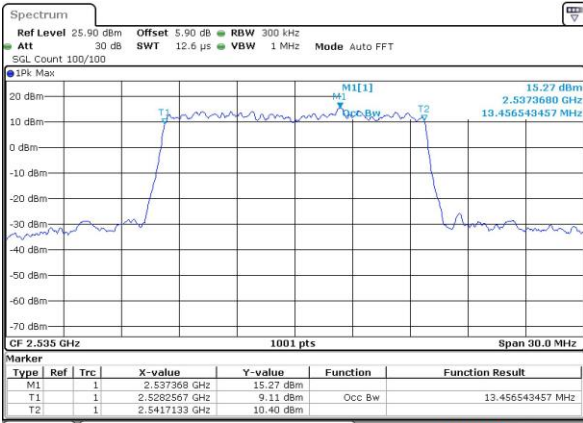


Date: 13 DEC 2016 15:31:01

Middle Channel / 15MHz / 16QAM

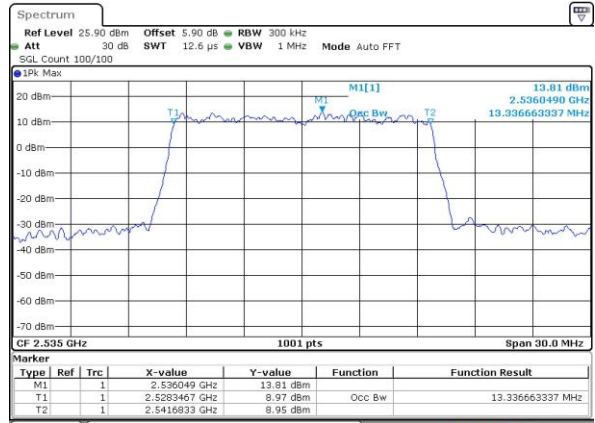


Date: 13 DEC 2016 15:31:22

Highest Channel / 15MHz / QPSK

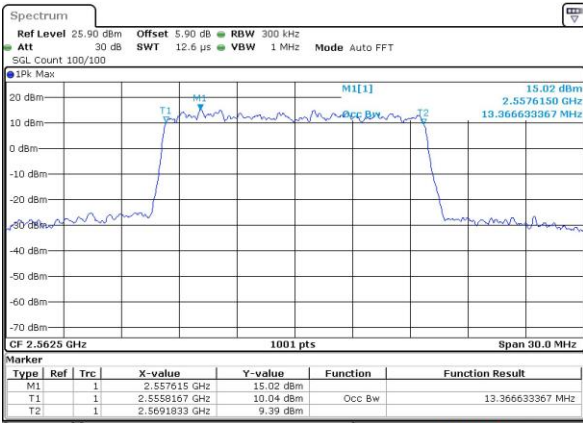

Date: 13 DEC 2016 15:32:04

Highest Channel / 15MHz / 16QAM

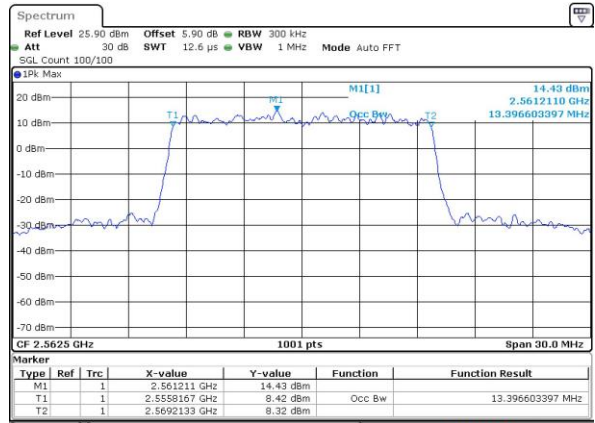


Date: 13 DEC 2016 15:31:43




LTE Band 7

Lowest Channel / 20MHz / QPSK

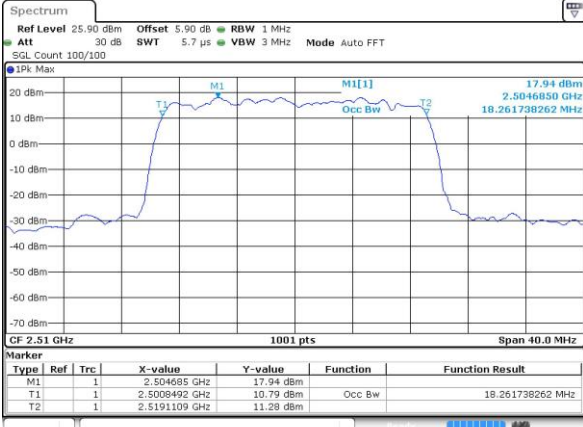


Date: 13 DEC 2016 15:47:21

Lowest Channel / 20MHz / 16QAM

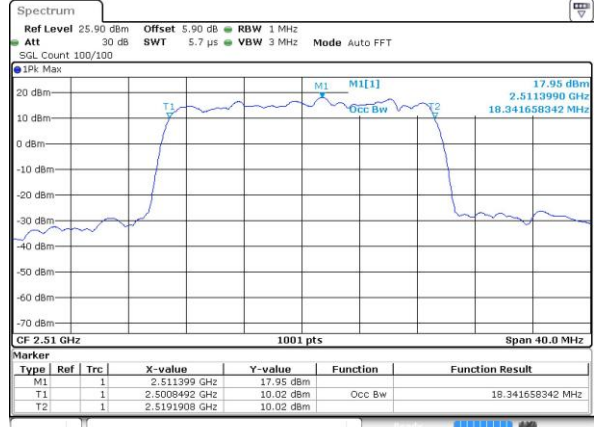


Date: 13 DEC 2016 16:33:19

Middle Channel / 20MHz / QPSK

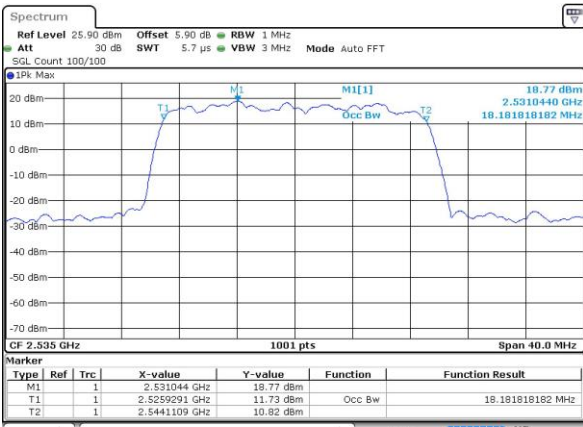


Date: 13 DEC 2016 15:47:42

Middle Channel / 20MHz / 16QAM

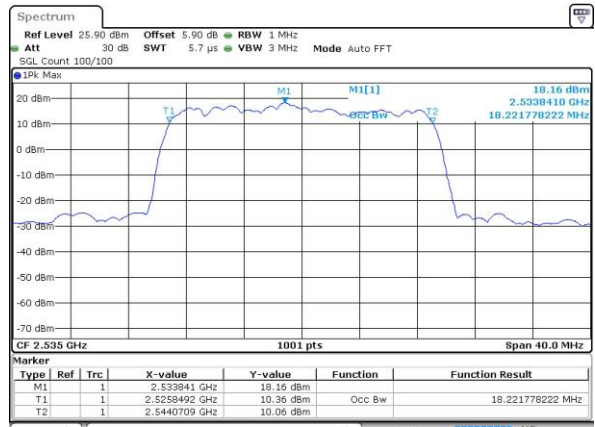


Date: 13 DEC 2016 15:48:03

Highest Channel / 20MHz / QPSK

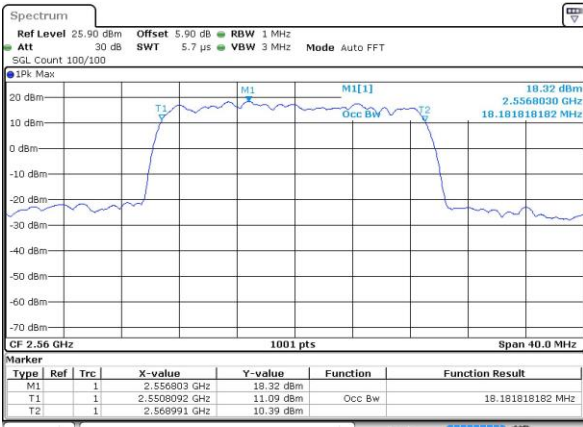

Date: 13 DEC 2016 15:48:45


Highest Channel / 20MHz / 16QAM

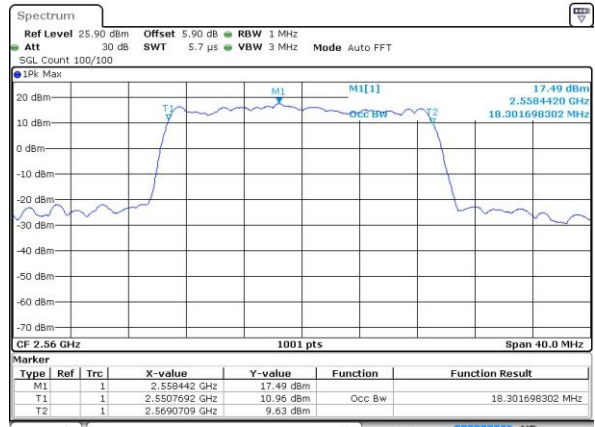

Date: 13 DEC 2016 15:48:24




Conducted Band Edge

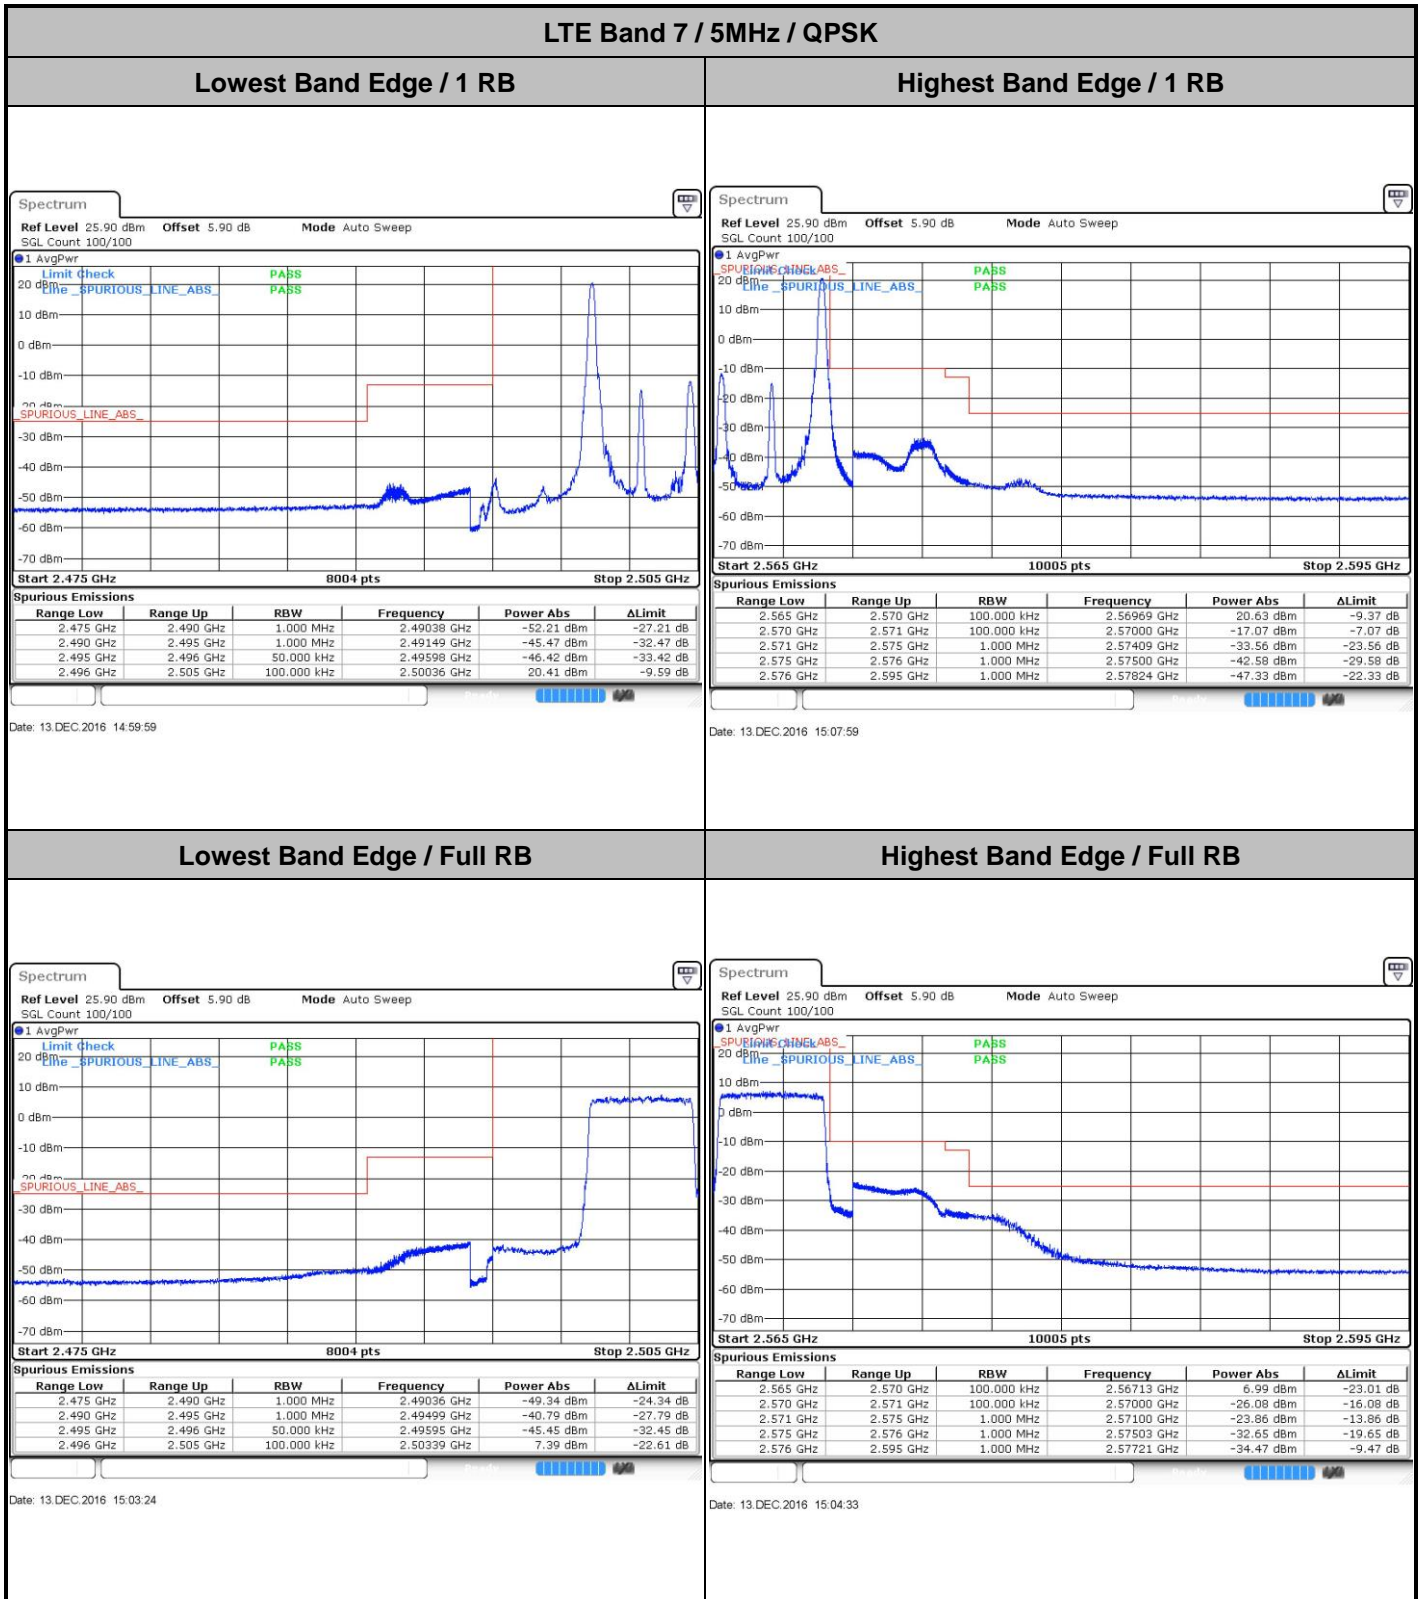




LTE Band 7 / 5MHz / 16QAM

Lowest Band Edge / 1 RB

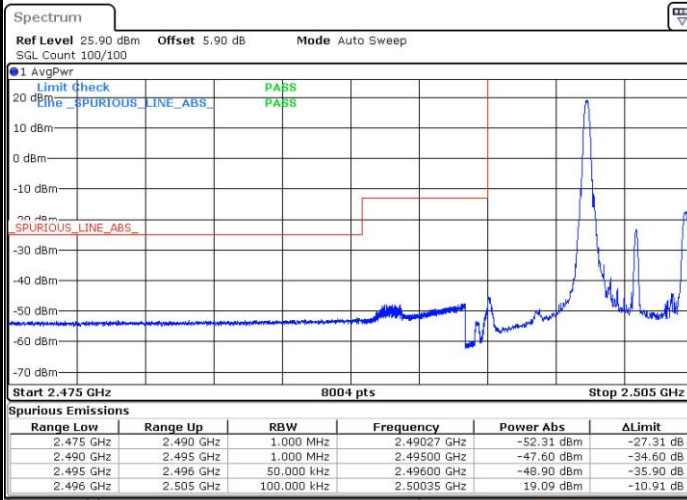


Date: 13 DEC 2016 15:01:07

Highest Band Edge / 1 RB

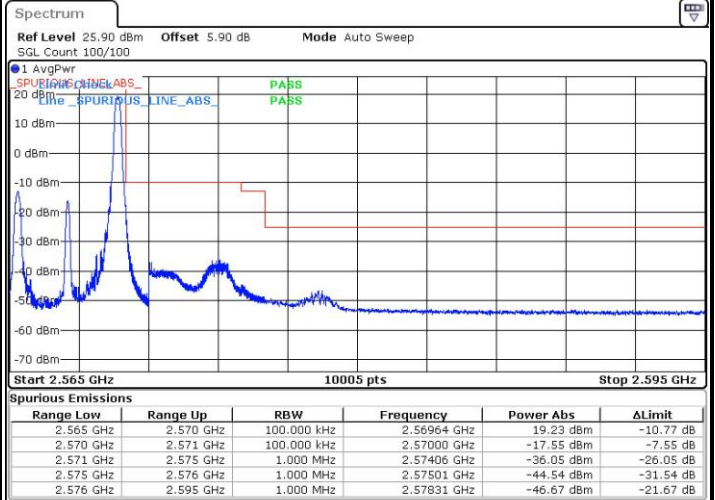


Date: 13 DEC 2016 15:06:50

Lowest Band Edge / Full RB

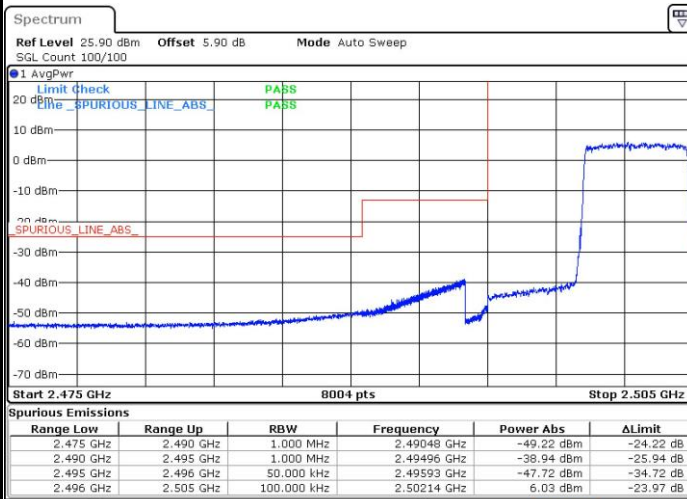

Date: 13 DEC 2016 15:02:16

Highest Band Edge / Full RB

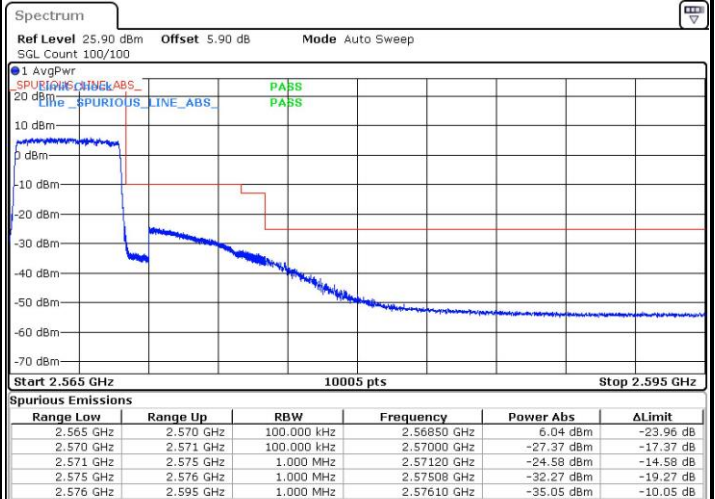


Date: 13 DEC 2016 15:05:42




LTE Band 7 / 10MHz / QPSK

Lowest Band Edge / 1 RB

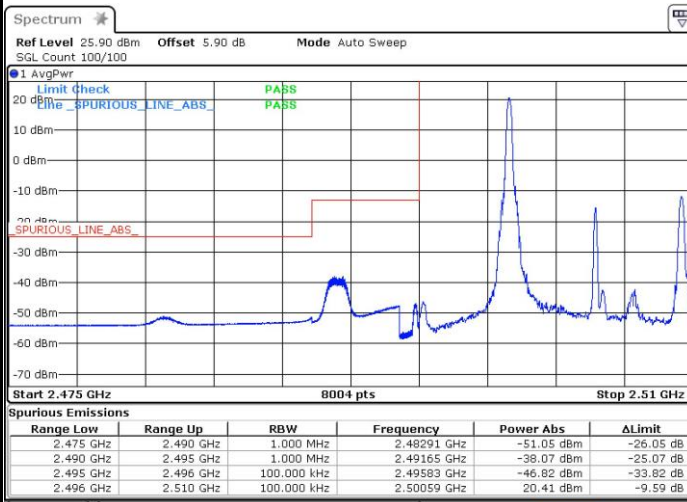


Date: 13 DEC 2016 16:22:12

Highest Band Edge / 1 RB

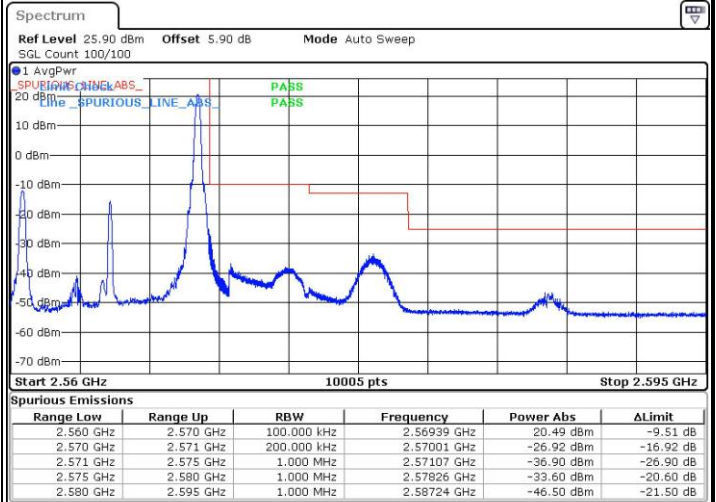


Date: 13 DEC 2016 15:24:41

Lowest Band Edge / Full RB

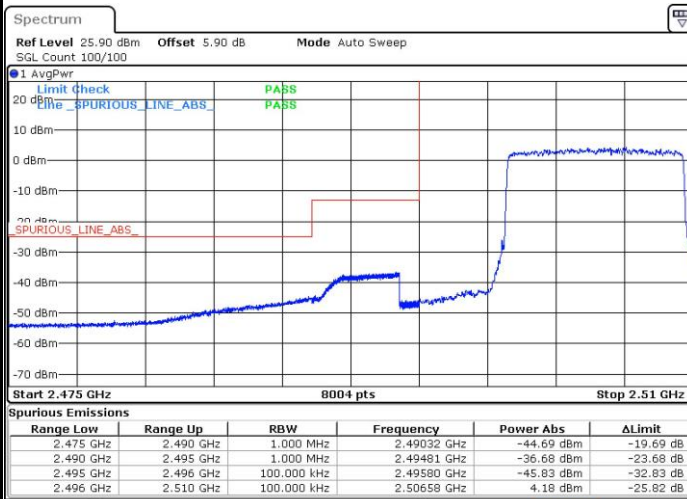

Date: 13 DEC 2016 15:20:06

Highest Band Edge / Full RB

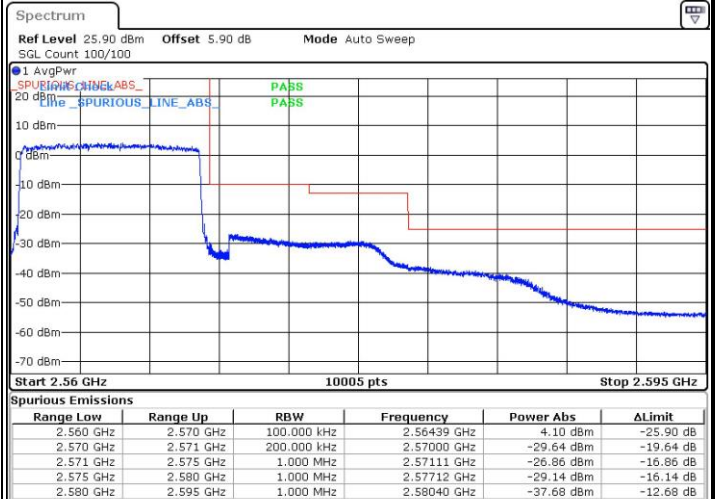


Date: 13 DEC 2016 15:21:15




LTE Band 7 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

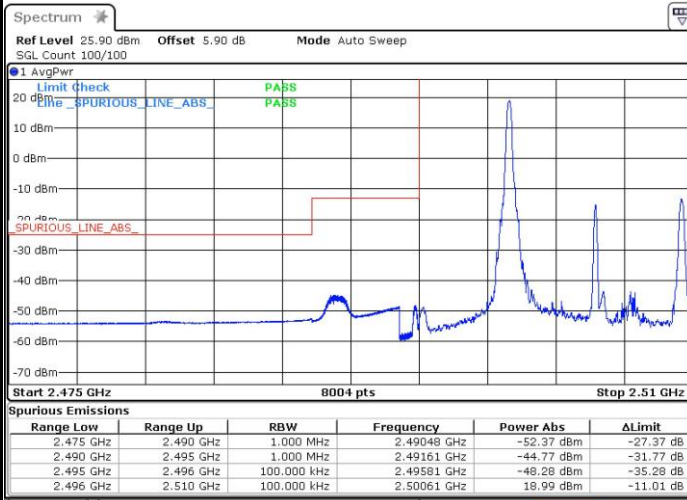


Date: 13.DEC.2016 16:23:12

Highest Band Edge / 1 RB

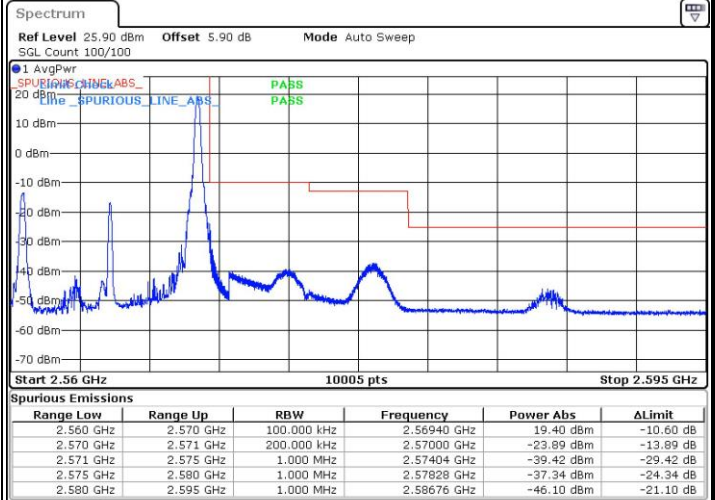


Date: 13.DEC.2016 15:23:32

Lowest Band Edge / Full RB

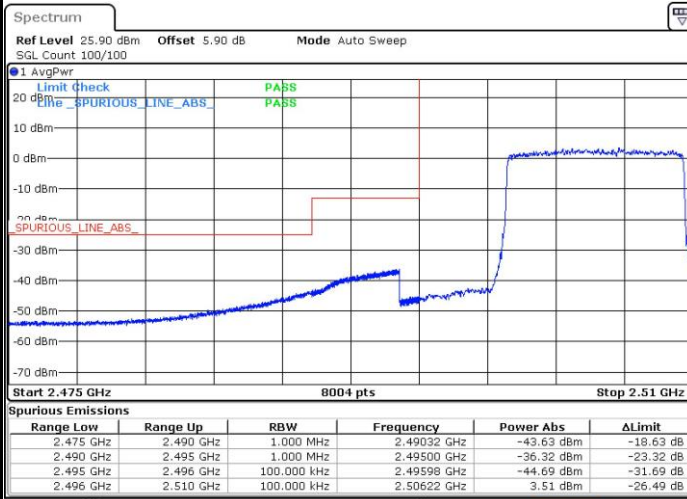

Date: 13.DEC.2016 15:18:58

Highest Band Edge / Full RB

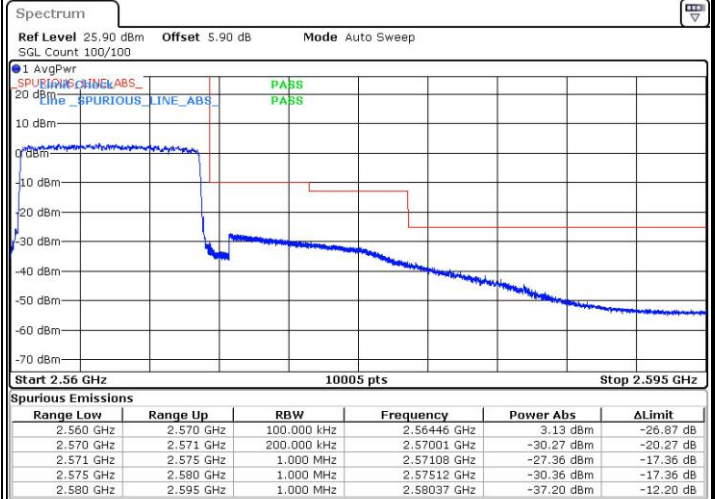


Date: 13.DEC.2016 15:22:24




LTE Band 7 / 15MHz / QPSK

Lowest Band Edge / 1 RB

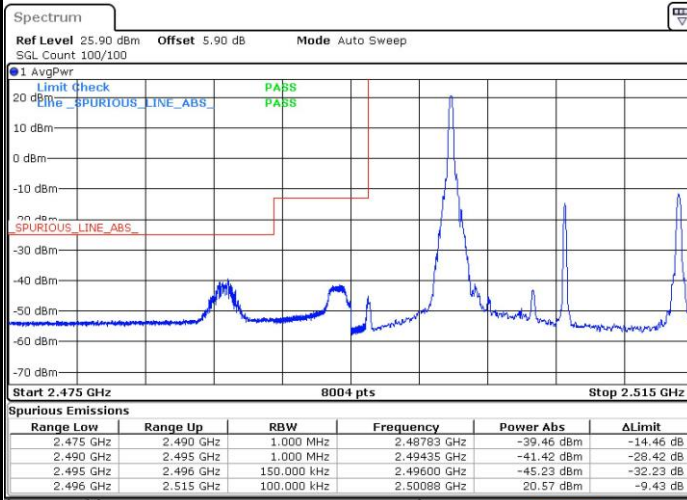


Date: 13 DEC 2016 15:33:23

Highest Band Edge / 1 RB

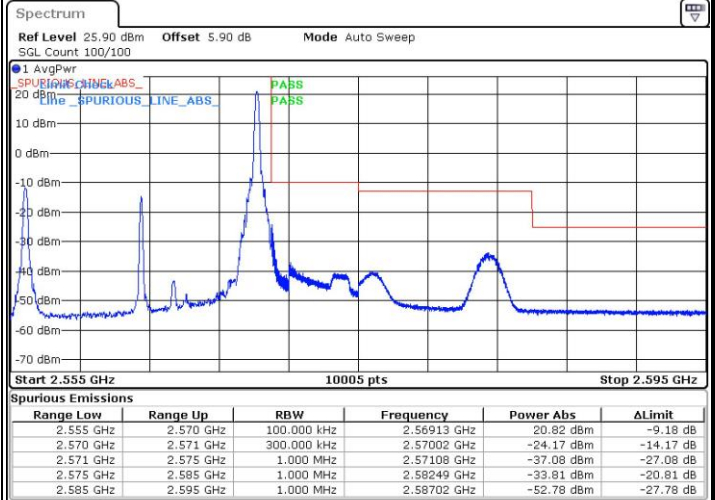

Date: 13 DEC 2016 15:41:23

Lowest Band Edge / Full RB

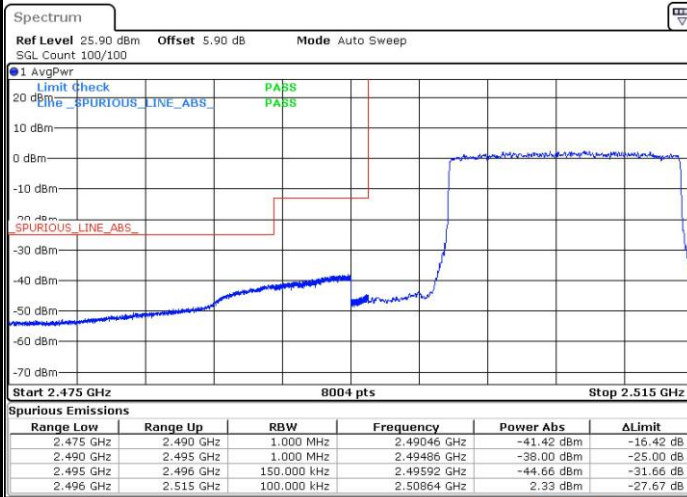

Date: 13 DEC 2016 15:36:49

Highest Band Edge / Full RB




Date: 13 DEC 2016 15:37:57




LTE Band 7 / 15MHz / 16QAM

Lowest Band Edge / 1 RB

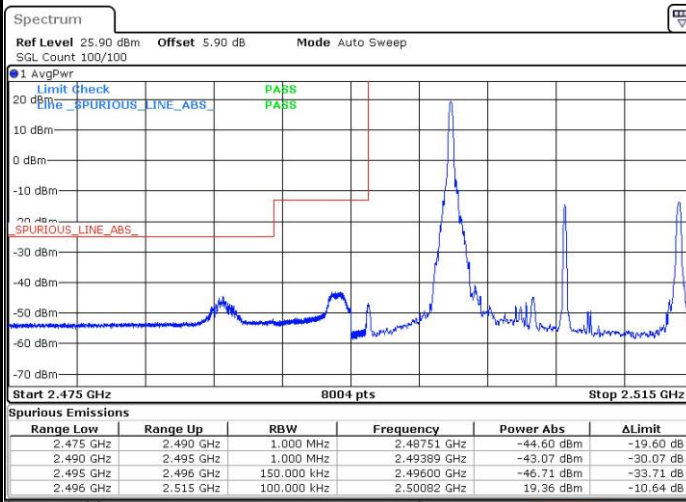


Date: 13 DEC 2016 15:34:32

Highest Band Edge / 1 RB

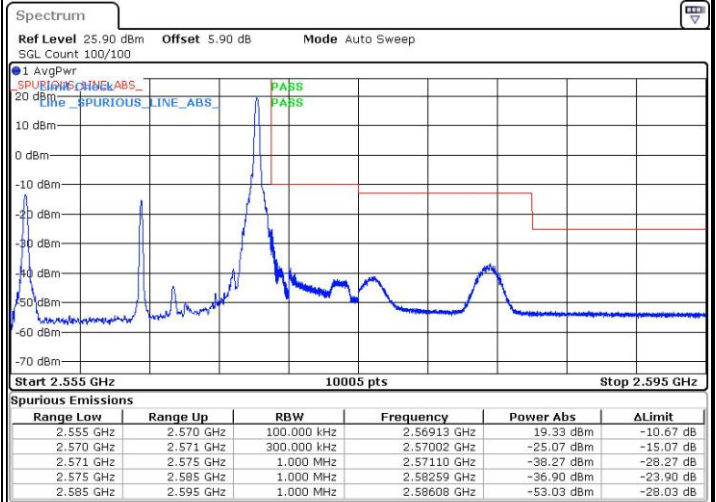


Date: 13 DEC 2016 15:40:14

Lowest Band Edge / Full RB

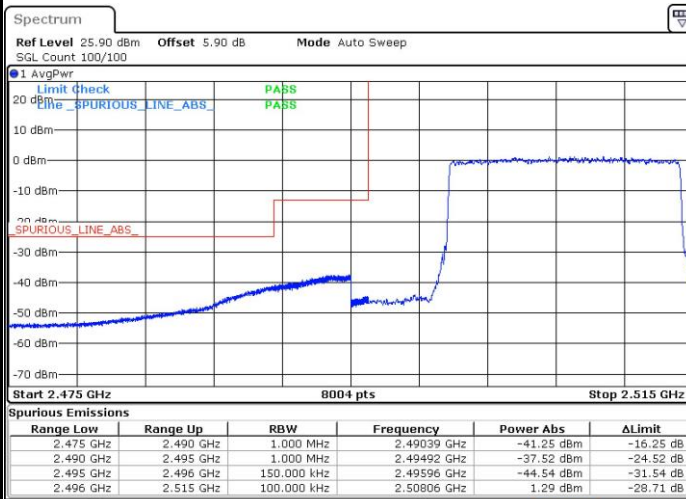

Date: 13 DEC 2016 15:35:40

Highest Band Edge / Full RB

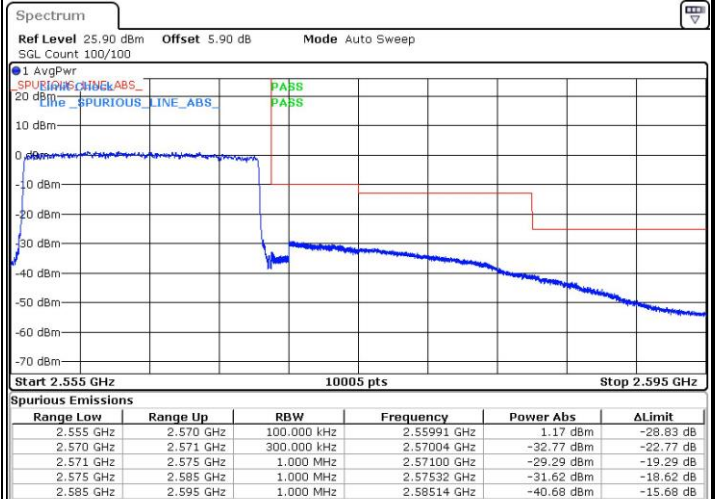

Date: 13 DEC 2016 15:39:06