

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT1926-8
FCC ID : IHDT56WL5
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, Sporton International (Xi'an) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Xi'an) Inc., the test report shall not be reproduced except in full.



Approved by: Mark Qu / Manager



Sporton International (Xi'an) Inc.
1F, Bldg. A3, No.39, Chuangye Ave. New Industrial Park, High-Tech District
Xi'an Shaanxi Province 710119 China



Table of Contents

1. Statement of Compliance 4

2. Administration Data 5

3. Guidance Applied..... 5

4. Equipment Under Test (EUT) Information..... 6

 4.1 General Information 6

 4.2 General LTE SAR Test and Reporting Considerations 8

5. Re-use of Measured Data 9

 5.1 Introduction Section 9

 5.2 Difference Section..... 9

 5.3 Spot Check Verification Data Section.....10

 5.4 Reference detail Section10

6. Simultaneous Transmission Analysis.....11

 6.1 Head Exposure Conditions12

 6.2 Hotspot Exposure Conditions.....13

 6.3 Body-Worn Accessory Exposure Conditions14

 6.4 Product specific 10g SAR Exposure Conditions.....15

 6.5 SPLSR Evaluation and Analysis16

7. Uncertainty Assessment25

8. References.....26

Appendix A. Reference Report

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT1926-8**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.19	1.13	1.13	1.59
		GSM1900	0.17	0.69	0.56	
	WCDMA	Band V	0.27	1.14	1.14	
		Band II	0.18	0.97	0.71	
	LTE	Band 5	0.24	1.16	1.16	
Band 7		0.71	0.84	0.84		
DTS	WLAN	2.4GHz WLAN	1.03	0.53	0.53	1.59
NII		5GHz WLAN	0.78	1.07	0.94	1.58
DSS	Bluetooth	2.4GHz Bluetooth		<0.10	<0.10	1.21
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM1900	2.02			3.44
	WCDMA	Band II	2.35			
	LTE	Band 7	2.94			
NII	WLAN	5GHz WLAN	0.94			3.44
Date of Testing:			2018/1/5~2018/1/17			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Testing Laboratory	
Test Site	Sporton International (Xi'an) Inc.
Test Site Location	1F, Bldg. A3, No.39, Chuangye Ave. New Industrial Park, High-Tech District Xi'an Shaanxi Province 710119 China TEL: +86-29-8860-8767 FAX: +86-29-8860-8791

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT1926-8
FCC ID	IHDT56WL5
IMEI Code	SIM1: 351880090010059 SIM2: 351880090010067
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth v3.0+EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE, Bluetooth v5.0 LE NFC:ASK
HW Version	DVT1B
SW Version	evert_n-userdebug 8.0.0 OPW27.88 1825 intcfg,test-keys
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype

Remark:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
3. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only).
4. This device does not support DTM operation and supports GRPS/EGRPS mode up to multi-slot class 12.
5. When the phone is in talking mode and receiver worked, then power reduction will be implemented immediately at WLAN2.4/5.2/5.3/5.5/5.8GHz.
6. When operating in any other radiated condition, the device uses the default power which is the same as full power level.
7. The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, GSM1900, WCDMA band II and LTE band 7 reduced powers will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.)
8. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA band II and LTE band 7.
9. This device hotspot reduced power and P-sensor reduced power level are the same. So only show one reduced power level for hotspot reduced power and P-sensor reduced power for this application.
10. P-sensor can detect handheld state, for front/back/bottom sides of product specific 10g SAR condition, GSM1900,



WCDMA band II and LTE band 7 reduced powers will be active.

11. This device has three WWAN transmitter antennas. WWAN antenna 1 is located at the middle of bottom edge of the device, WWAN antenna 2 is located at the left side of bottom edge of the device, and WWAN antenna 3 is located at the right side of bottom edge of the device which can refer to antenna location chapter. WWAN antenna 1 frequency bands include GSM850/1900, WCDMA Band II/V, LTE Band 5, WWAN antenna 2 frequency band only includes LTE Band 7 and WWAN antenna 3 frequency band also only includes LTE Band 7.
12. The device is capable of switching between the WWAN antenna 2 and WWAN antenna 3 based on signal strength. When WWAN antenna 2 acted as a transmitter, then WWAN antenna 3 acted as a receiver. The same as the reversed.
13. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
14. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the GSM, WCDMA and LTE modes of WWAN antenna 1.



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	IHDT56WL5																																																														
Equipment Name	Mobile Cellular Phone																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz																																																														
Channel Bandwidth	LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK, 16QAM and 64QAM																																																														
LTE Voice / Data requirements	Voice and Data																																																														
LTE Release Version	R8, Cat5																																																														
CA Support	Not Supported																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6" style="text-align: center;">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	<p>Yes</p> <ol style="list-style-type: none"> The device employs proximity sensors that detect the presence of the user's body at the front or back faces of the device. When front or back body worn condition is detected, LTE band 7 reduced powers will be active. (P-sensor can't work at detecting presence of the user's body at the four edges of the device.) When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE band 7. P-sensor can detect handheld state, for front/back/bottom sides of product specific 10g SAR condition, LTE band 7 reduced powers will be active. 																																																														

Transmission (H, M, L) channel numbers and frequencies in each LTE band								
LTE Band 5								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844
LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560



5. Re-use of Measured Data

5.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT1926-8, FCC ID: IHDT56WL5) is electrically identical to the reference device (Model: XT1926-6, XT1926-7, FCC ID: IHDT56WL4) for the portions of the circuitry corresponding to the data being re-used, as treated by KDB Publication 178919 D01.

5.2 Difference Section

For details concerning the similarity with respect to component placement, mechanical/electrical design etc., please refer to the Product Equality Declaration "PED" file.

The re-used RF data includes the following bands provided in Appendix A. Sporton SAR Report No. FA7D2702 for the reference device Model: XT1926-6, XT1926-7, FCC ID: IHDT56WL4.

- GSM850/1900
- WCDMA Band V/II
- LTE Band 5/7
- WLAN/Bluetooth

Spot check for WWAN and BT/WLAN are performed for ensure that SAR measurement for both device are the same. So, the original SAR value can represent this application.



5.3 Spot Check Verification Data Section

Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Original model (FCC ID: IHDT56WL4)				Spot check model (FCC ID: IHDT56WL5)				Deviation
											Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)	
GSM850	-	-	-	-	GPRS 4 Tx slots	Back	5	Full	189	836.4	27.81	28.50	0.963	1.129	27.81	28.50	0.816	0.957	-15.23%
GSM1900	-	-	-	-	GPRS 4 Tx slots	Bottom side	5	Hotspot On	512	1850.2	18.61	19.00	0.630	0.689	18.61	19.00	0.592	0.648	-2.95%
WCDMA Band V	-	-	-	-	RMC12.2Kbps	Back	5	Full	4233	846.6	22.94	24.00	0.893	1.140	22.94	24.00	0.878	1.121	0.18%
WCDMA Band II	-	-	-	-	RMC12.2Kbps	Bottom side	5	Hotspot On	9538	1907.6	14.40	15.50	0.752	0.969	14.40	15.50	0.678	0.873	-9.91%
LTE Band 5	10M	QPSK	1	0	-	Back	5	Full	20525	836.5	23.31	24.00	0.989	1.159	23.31	24.00	0.888	1.041	-10.18%
LTE Band 7 Ant.2	20M	QPSK	1	99	-	Front	5	Hotspot On	21350	2560	17.26	19.00	0.497	0.742	17.26	19.00	0.535	0.799	7.68%
LTE Band 7 Ant.3	20M	QPSK	50	24	-	Front	5	Hotspot On	21350	2560	17.19	19.00	0.554	0.840	17.19	19.00	0.637	0.966	15.00%
WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Right Cheek	0	Receiver On	11	2462	17.33	17.50	0.991	1.031	17.33	17.50	1.010	1.050	6.89%
WLAN5.2GHz	-	-	-	-	802.11a 6Mbps	Top Side	5	Full	48	5240	15.98	16.50	0.910	1.074	15.98	16.50	0.940	1.110	3.35%
Bluetooth	-	-	-	-	1Mbps	Front	5	Full	0	2402	10.62	12.00	0.040	0.060	10.62	12.00	0.038	0.056	-6.67%

Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Original model (FCC ID: IHDT56WL4)				Spot check model (FCC ID: IHDT56WL5)				Deviation
											Average Power (dBm)	Tune-Up Limit (dBm)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)	
GSM1900	-	-	-	-	GPRS 4 Tx slots	Bottom side	0	Handheld On	512	1850.2	22.82	23.00	1.940	2.022	22.82	23.00	1.750	1.824	-9.79%
WCDMA Band II	-	-	-	-	RMC12.2Kbps	Bottom side	0	Handheld On	9262	1852.4	18.27	19.50	1.770	2.349	18.27	19.50	1.670	2.217	-5.62
LTE Band 7	20M	QPSK	50	24	-	Back	0	Handheld On	21350	2560	21.82	22.50	2.510	2.935	21.82	22.50	2.470	2.889	-1.57%
WLAN5.3GHz	-	-	-	-	802.11a 6Mbps	Top Side	0	Full	52	5260	15.89	16.50	0.781	0.941	15.89	16.50	0.878	1.058	12.43%

Note: In the table above, all the deviation of SAR test results are compliant with uncertainty budget.

5.4 Reference detail Section

Reference FCC ID	Folder Test/RF Exposure	Report Title/Section
IHDT56WL4	RF Exposure(FA7D2702)	All sections applicable

6. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset				Note
		Head	Body-worn	Hotspot	Product specific 10g SAR	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes			
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Yes	WLAN Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Yes	WLAN Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Yes	WLAN Hotspot
5.	GSM Voice + WLAN5.3/5.5GHz	Yes	Yes			
6.	GPRS/EDGE + WLAN5.3/5.5GHz	Yes	Yes		Yes	WLAN Direct (GC only)
7.	WCDMA + WLAN5.3/5.5GHz	Yes	Yes		Yes	WLAN Direct (GC only)
8.	LTE + WLAN5.3/5.5GHz	Yes	Yes		Yes	WLAN Direct (GC only)
9.	GSM Voice + WLAN5.2/5.8GHz	Yes	Yes			
10.	GPRS/EDGE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
11.	WCDMA + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
12.	LTE + WLAN5.2/5.8GHz	Yes	Yes	Yes	Yes	WLAN Hotspot/Direct(GC/GO)
13.	GSM Voice + Bluetooth		Yes			
14.	GPRS/EDGE + Bluetooth		Yes	Yes	Yes	BT Tethering
15.	WCDMA + Bluetooth		Yes	Yes	Yes	BT Tethering
16.	LTE + Bluetooth		Yes	Yes	Yes	BT Tethering

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment though they have independent antenna.
6. WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
7. According to the EUT character, WLAN 5GHz and Bluetooth can't transmit simultaneously.
8. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
9. The reported SAR summation is calculated based on the same configuration and test position.
10. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
 - v) The SPLSR calculated results please refer to section 6.5.



6.1 Head Exposure Conditions

WWAN Band		Exposure Position	1		2	3	1+2		1+3			
			WWAN		2.4GHz WLAN	5GHz WLAN	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No
			Ant.	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)						
GSM	GSM850	Right Cheek	1	0.146	1.031	0.482	1.18			0.63		
		Right Tilted	1	0.100	1.000	0.780	1.10			0.88		
		Left Cheek	1	0.193	0.513	0.281	0.71			0.47		
		Left Tilted	1	0.100	1.031	0.274	1.13			0.37		
	GSM1900	Right Cheek	1	0.174	1.031	0.482	1.21			0.66		
		Right Tilted	1	0.079	1.000	0.780	1.08			0.86		
		Left Cheek	1	0.122	0.513	0.281	0.64			0.40		
		Left Tilted	1	0.088	1.031	0.274	1.12			0.36		
WCDMA	Band V	Right Cheek	1	0.183	1.031	0.482	1.21			0.67		
		Right Tilted	1	0.120	1.000	0.780	1.12			0.90		
		Left Cheek	1	0.273	0.513	0.281	0.79			0.55		
		Left Tilted	1	0.115	1.031	0.274	1.15			0.39		
	Band II	Right Cheek	1	0.180	1.031	0.482	1.21			0.66		
		Right Tilted	1	0.088	1.000	0.780	1.09			0.87		
		Left Cheek	1	0.176	0.513	0.281	0.69			0.46		
		Left Tilted	1	0.112	1.031	0.274	1.14			0.39		
LTE	Band 5	Right Cheek	1	0.218	1.031	0.482	1.25			0.70		
		Right Tilted	1	0.117	1.000	0.780	1.12			0.90		
		Left Cheek	1	0.244	0.513	0.281	0.76			0.53		
		Left Tilted	1	0.113	1.031	0.274	1.14			0.39		
	Band 7	Right Cheek	2	0.607	1.031	0.482	1.64	0.02	#1	1.09		
		Right Tilted	2	0.183	1.000	0.780	1.18			0.96		
		Left Cheek	2	0.399	0.513	0.281	0.91			0.68		
		Left Tilted	2	0.316	1.031	0.274	1.35			0.59		
		Right Cheek	3	0.449	1.031	0.482	1.48			0.93		
		Right Tilted	3	0.590	1.000	0.780	1.59			1.37		
		Left Cheek	3	0.710	0.513	0.281	1.22			0.99		
		Left Tilted	3	0.303	1.031	0.274	1.33			0.58		



6.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1		2	3	4	1+2			1+3			1+4			
		WWAN		2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No	
		Ant.	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)										
GSM	GSM850	Front	1	0.791	0.492	0.659	0.060	1.28			1.45			0.85		
		Back	1	1.129	0.533	1.050	0.050	1.66	0.01	#2	2.18	0.02	#3	1.18		
		Left Side	1	0.436	0.533	0.260	0.005	0.97			0.70			0.44		
		Right Side	1	0.203				0.20			0.20			0.20		
		Top Side	1		0.533	1.074	0.053	0.53			1.07			0.05		
	Bottom Side	1	0.567				0.57			0.57			0.57			
	GSM1900	Front	1	0.557	0.492	0.659	0.060	1.05			1.22			0.62		
		Back	1	0.517	0.533	1.050	0.050	1.05			1.57			0.57		
		Left Side	1	0.024	0.533	0.260	0.005	0.56			0.28			0.03		
		Right Side	1	0.038				0.04			0.04			0.04		
Top Side		1		0.533	1.074	0.053	0.53			1.07			0.05			
Bottom Side	1	0.689				0.69			0.69			0.69				
WCDMA	Band V	Front	1	1.023	0.492	0.659	0.060	1.52			1.68	0.01	#4	1.08		
		Back	1	1.140	0.533	1.050	0.050	1.67	0.01	#5	2.19	0.02	#6	1.19		
		Left Side	1	0.495	0.533	0.260	0.005	1.03			0.76			0.50		
		Right Side	1	0.197				0.20			0.20			0.20		
		Top Side	1		0.533	1.074	0.053	0.53			1.07			0.05		
	Bottom Side	1	0.689				0.69			0.69			0.69			
	Band II	Front	1	0.706	0.492	0.659	0.060	1.20			1.37			0.77		
		Back	1	0.674	0.533	1.050	0.050	1.21			1.72	0.01	#8	0.72		
		Left Side	1	0.022	0.533	0.260	0.005	0.56			0.28			0.03		
		Right Side	1	0.023				0.02			0.02			0.02		
Top Side		1		0.533	1.074	0.053	0.53			1.07			0.05			
Bottom Side	1	0.969				0.97			0.97			0.97				
LTE	Band 5	Front	1	0.920	0.492	0.659	0.060	1.41			1.58			0.98		
		Back	1	1.159	0.533	1.050	0.050	1.69	0.01	#10	2.21	0.02	#11	1.21		
		Left Side	1	0.290	0.533	0.260	0.005	0.82			0.55			0.30		
		Right Side	1	0.129				0.13			0.13			0.13		
		Top Side	1		0.533	1.074	0.053	0.53			1.07			0.05		
		Bottom Side	1	0.612				0.61			0.61			0.61		
	Band 7	Front	2	0.742	0.492	0.659	0.060	1.23			1.40			0.80		
		Back	2	0.683	0.533	1.050	0.050	1.22			1.73	0.02	#14	0.73		
		Left Side	2		0.533	0.260	0.005	0.53			0.26			0.01		
		Right Side	2	0.511				0.51			0.51			0.51		
		Top Side	2		0.533	1.074	0.053	0.53			1.07			0.05		
		Bottom Side	2	0.071				0.07			0.07			0.07		
		Front	3	0.840	0.492	0.659	0.060	1.33			1.50			0.90		
		Back	3	0.739	0.533	1.050	0.050	1.27			1.79	0.02	#15	0.79		
		Left Side	3	0.511	0.533	0.260	0.005	1.04			0.77			0.52		
Top Side	3		0.533	1.074	0.053	0.53			1.07			0.05				
Bottom Side	3	0.215				0.22			0.22			0.22				



6.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1		2	3	4	1+2			1+3			1+4		
			WWAN		2.4GHz WLAN	5GHz WLAN	Bluetooth	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No	Summed 1g SAR (W/kg)	SPLSR	Case No
			Ant.	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)									
GSM	GSM850	Front	1	0.791	0.492	0.576	0.060	1.28			1.37			0.85		
		Back	1	1.129	0.533	0.941	0.050	1.66	0.01	#2	2.07	0.02	#16	1.18		
	GSM1900	Front	1	0.557	0.492	0.576	0.060	1.05			1.13			0.62		
		Back	1	0.517	0.533	0.941	0.050	1.05			1.46			0.57		
WCDMA	Band V	Front	1	1.023	0.492	0.576	0.060	1.52			1.60	0.01	#17	1.08		
		Back	1	1.140	0.533	0.941	0.050	1.67	0.01	#5	2.08	0.02	#18	1.19		
	Band II	Front	1	0.706	0.492	0.576	0.060	1.20			1.28			0.77		
		Back	1	0.674	0.533	0.941	0.050	1.21			1.62	0.01	#20	0.72		
LTE	Band 5	Front	1	0.920	0.492	0.576	0.060	1.41			1.50			0.98		
		Back	1	1.159	0.533	0.941	0.050	1.69	0.01	#10	2.10	0.02	#22	1.21		
	Band 7	Front	2	0.742	0.492	0.576	0.060	1.23			1.32			0.80		
		Back	2	0.683	0.533	0.941	0.050	1.22			1.62	0.01	#25	0.73		
		Front	3	0.840	0.492	0.576	0.060	1.33			1.42			0.90		
		Back	3	0.739	0.533	0.941	0.050	1.27			1.68	0.02	#26	0.79		

6.4 Product specific 10g SAR Exposure Conditions

WWAN Band		Exposure Position	1		2	1+2		
			WWAN Bottom		5GHz WLAN	Summed 10g SAR (W/kg)	SPLSR	Case No
			Ant.	10g SAR (W/kg)	10g SAR (W/kg)			
GSM	GSM1900	Front	1	1.866	0.728	2.59		
		Back	1	1.793	0.507	2.30		
		Bottom side	1	2.022		2.02		
WCDMA	Band II	Front	1	1.795	0.728	2.52		
		Back	1	2.105	0.507	2.61		
		Bottom side	1	2.349		2.35		
LTE	Band 7	Front	2	1.661	0.728	2.39		
		Back	2	1.695	0.507	2.20		
		Front	3	2.655	0.728	3.38		
		Back	3	2.935	0.507	3.44		


Remark: For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

6.5 SPLSR Evaluation and Analysis


General Note:

- When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
- $SPLSR = (SAR1 + SAR2)1.5 / (\text{min. separation distance, mm})$. If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.


Case #1	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 7 Ant.2	Right Cheek	0.607	0	4.08	6.87	-0.16	95.3	1.64	0.02	Not required
	WLAN2.4GHz		1.031	0	0.46	-1.95	-0.2				

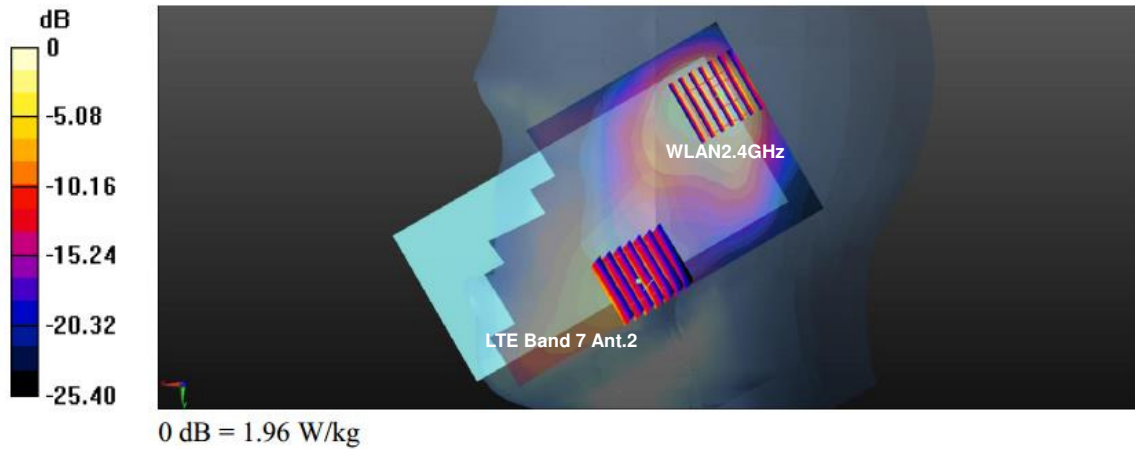


Case #2	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.129	5	-0.57	-7.91	-0.19	160.0	1.66	0.01	Not required
	WLAN2.4GHz		0.533	5	1.48	7.96	-0.12				

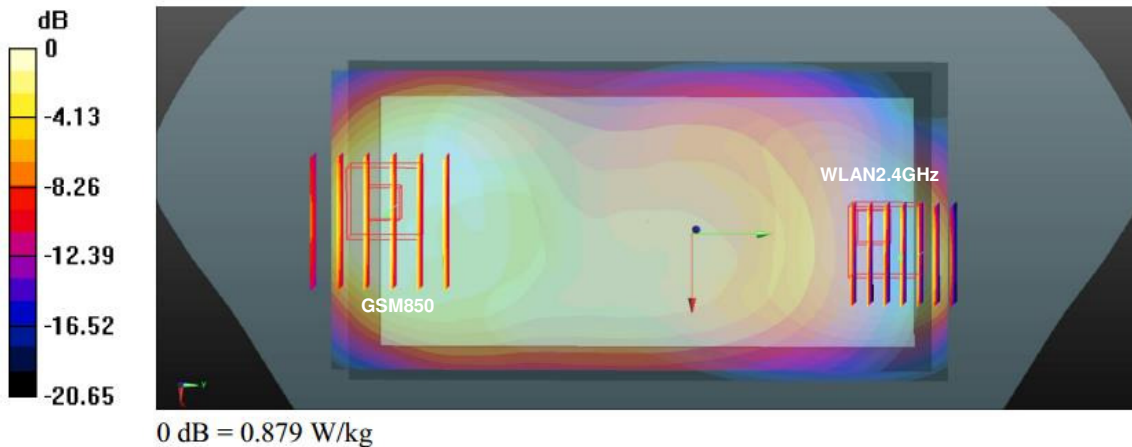


Case #3	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	GSM850	Back	1.129	5	-0.57	-7.91	-0.19	151.4	2.18	0.02	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

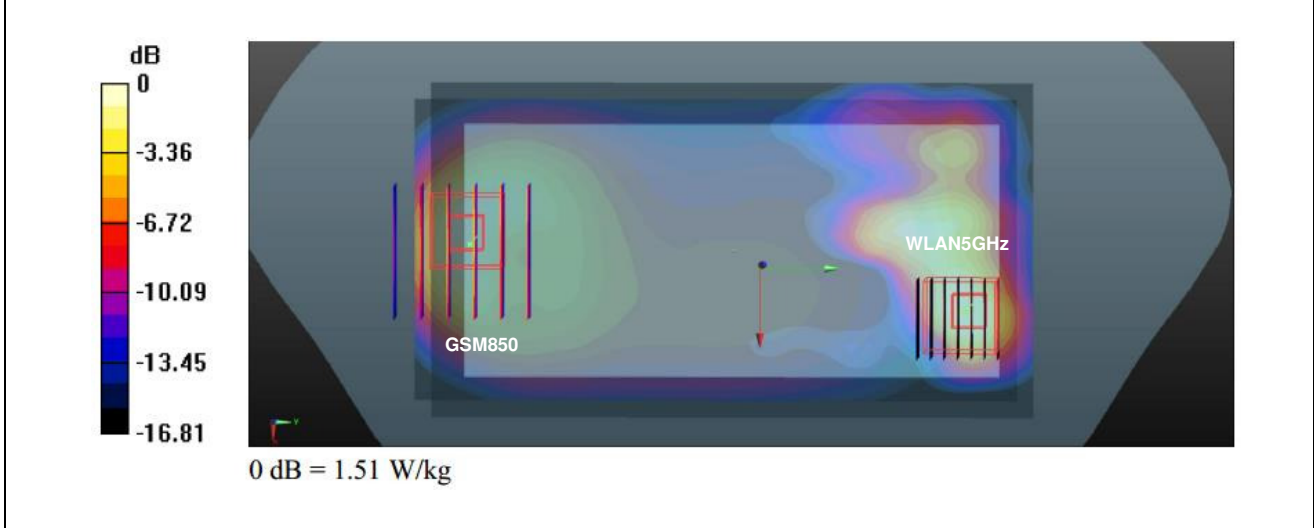


Case #4	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Front	1.023	5	1.89	-7.75	-0.17	153.2	1.68	0.01	Not required
	WLAN5GHz		0.659	5	-1.94	7.08	-0.14				

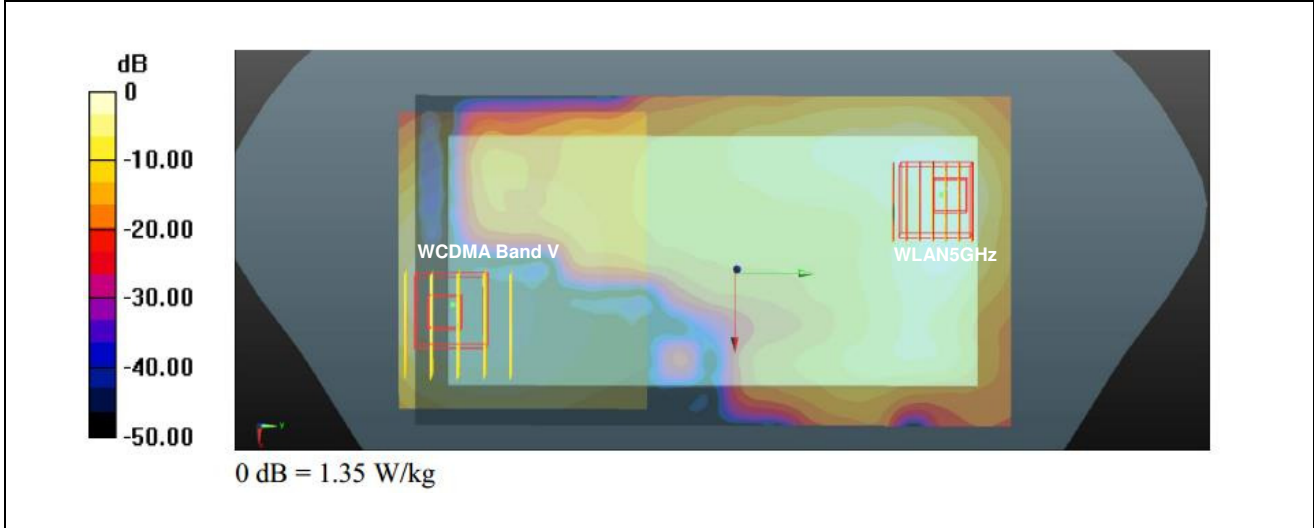


Case #5	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Back	1.140	5	-0.5	-8.08	-0.18	161.6	1.67	0.01	Not required
	WLAN2.4GHz		0.533	5	1.48	7.96	-0.12				

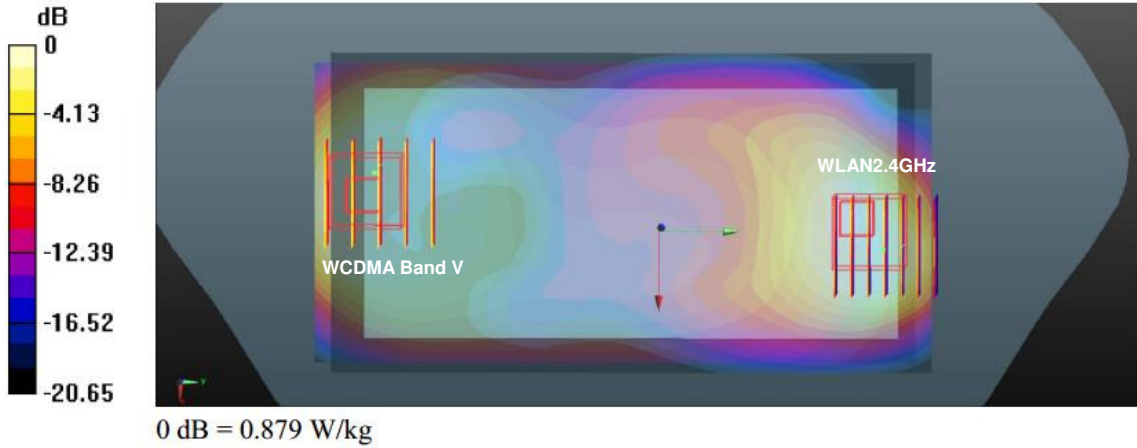


Case #6	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Back	1.140	5	-0.5	-8.08	-0.18	153.0	2.19	0.02	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

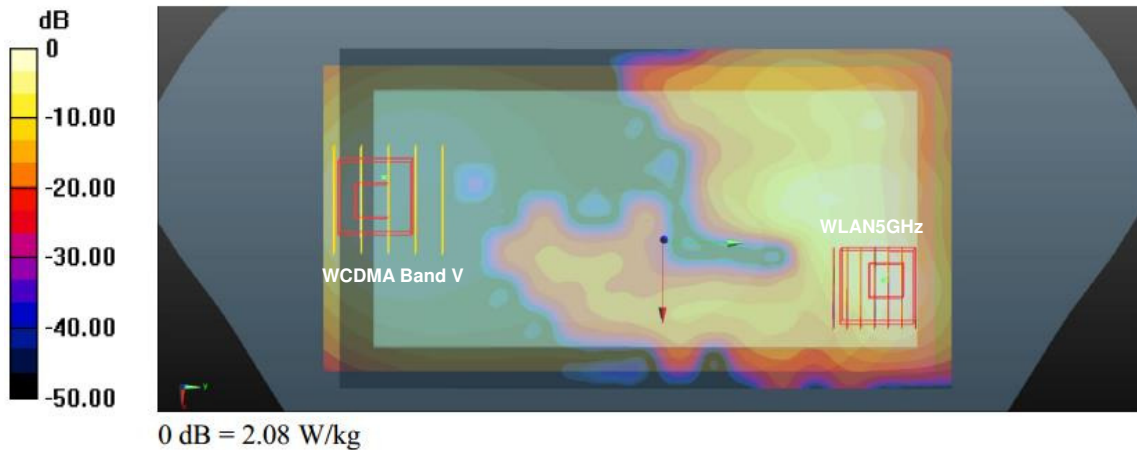


Case #8	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band II	Back	0.674	5	0.22	-8.09	-0.21	152.1	1.72	0.01	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

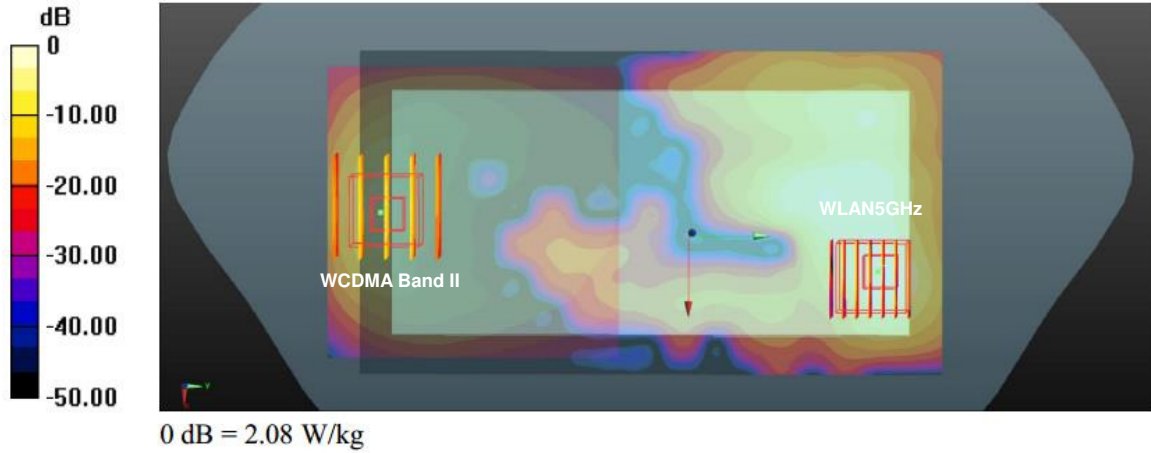


Case #10	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.159	5	-1.2	-7.75	-0.19	159.4	1.69	0.01	Not required
	WLAN2.4GHz		0.533	5	1.48	7.96	-0.12				

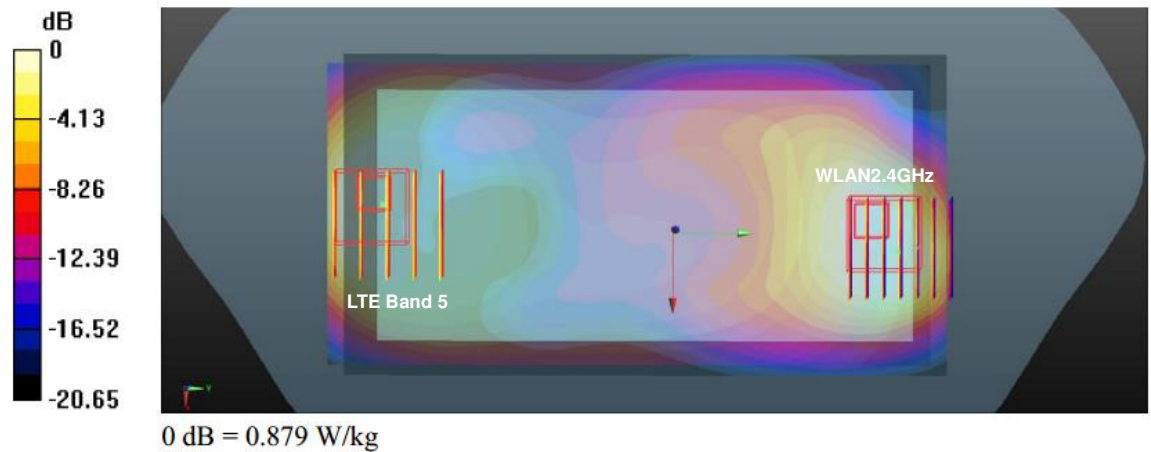


Case #11	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 5				WLAN5GHz	X	Y				
	LTE Band 5	Back	1.159	5	-1.2	-7.75	-0.19	151.0	2.21	0.02	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

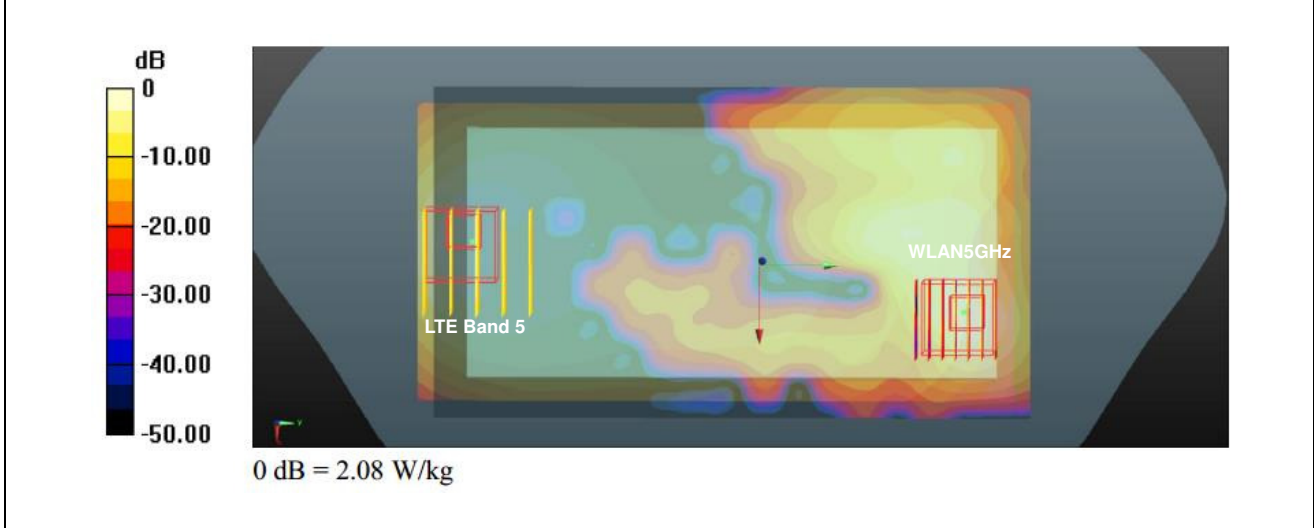


Case #14	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant.2				WLAN5GHz	X	Y				
	LTE Band 7 Ant.2	Back	0.683	5	-2.74	-6.52	-0.19	143.3	1.73	0.02	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

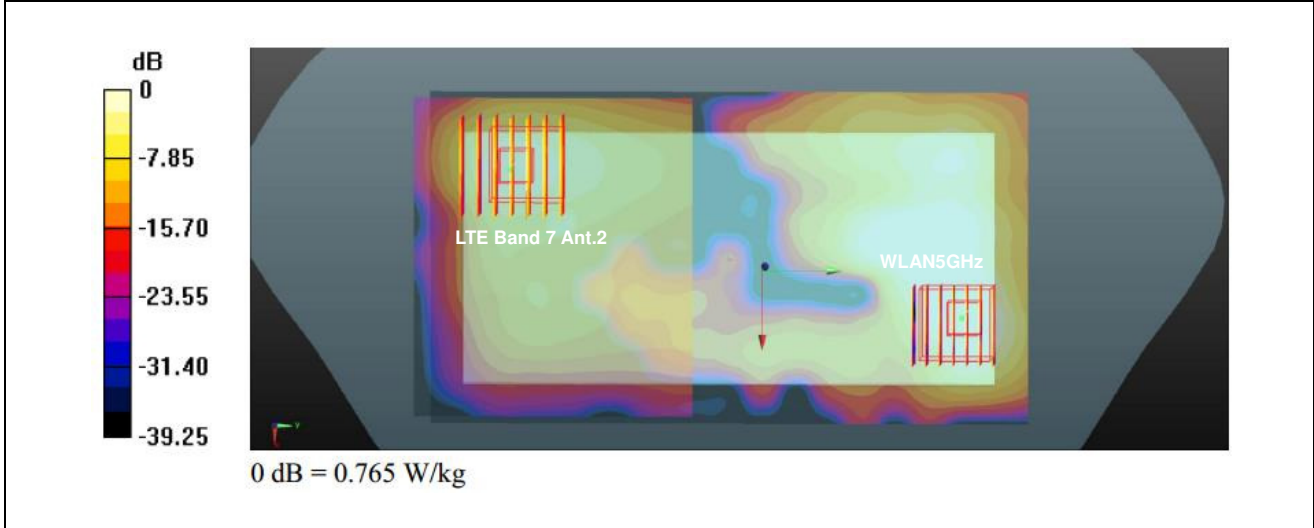


Case #15	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant.3				WLAN5GHz	X	Y				
	LTE Band 7 Ant.3	Back	0.739	5	2.88	-6.52	-0.18	135.7	1.79	0.02	Not required
	WLAN5GHz		1.050	5	1.94	7.02	-0.13				

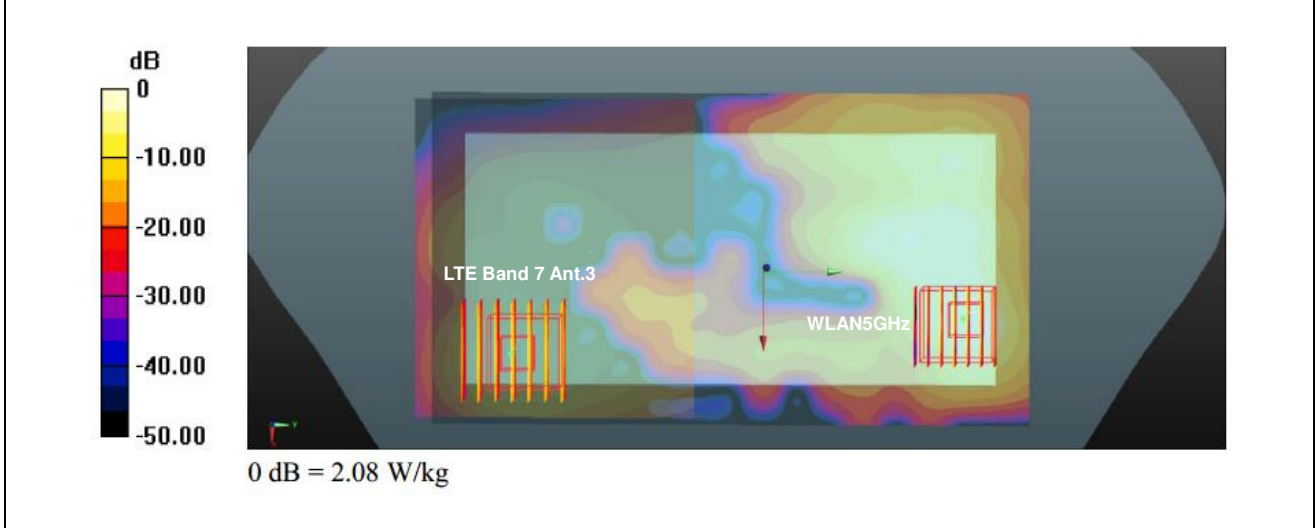


Case #16	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	GSM850				WLAN5GHz	X	Y				
	GSM850	Back	1.129	5	-0.57	-7.91	-0.19	149.6	2.07	0.02	Not required
	WLAN5GHz		0.941	5	1.94	6.84	-0.14				

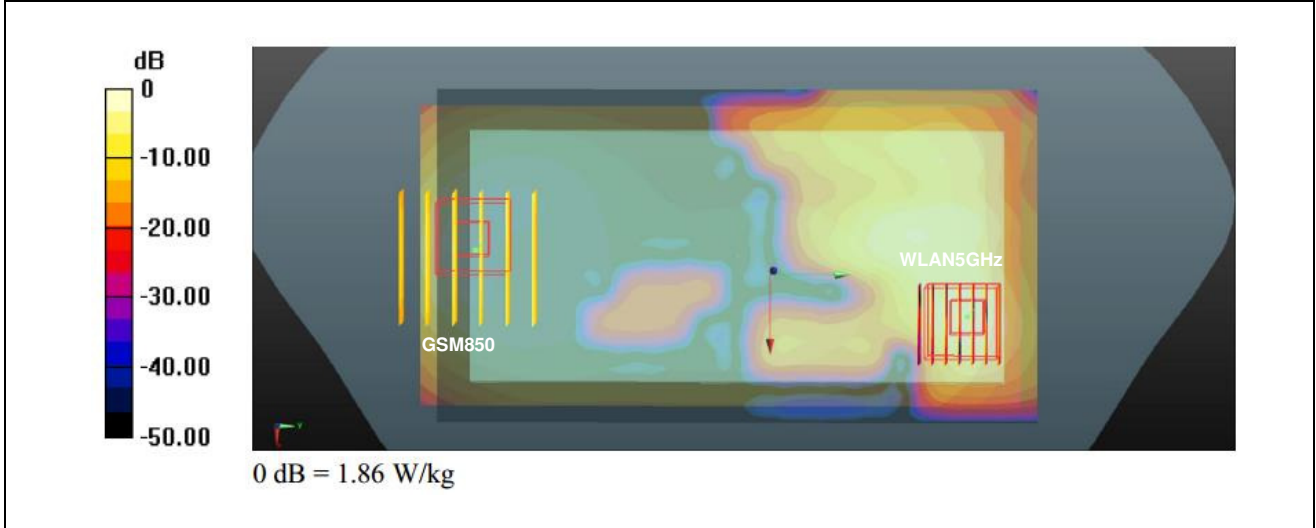


Case #17	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Front	1.023	5	1.89	-7.75	-0.17	137.1	1.60	0.01	Not required
	WLAN5GHz		0.576	5	0.4	5.88	-0.14				

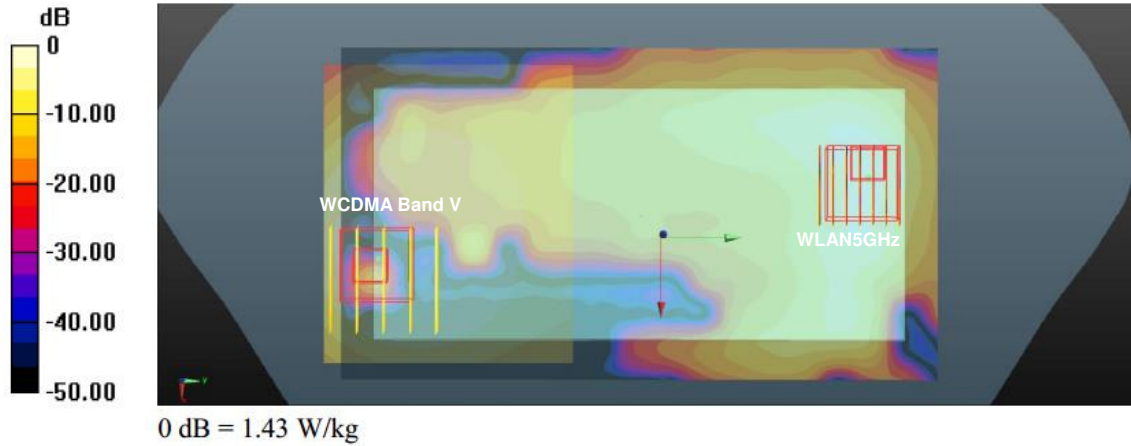


Case #18	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band V	Back	1.140	5	-0.5	-8.08	-0.18	151.2	2.08	0.02	Not required
	WLAN5GHz		0.941	5	1.94	6.84	-0.14				

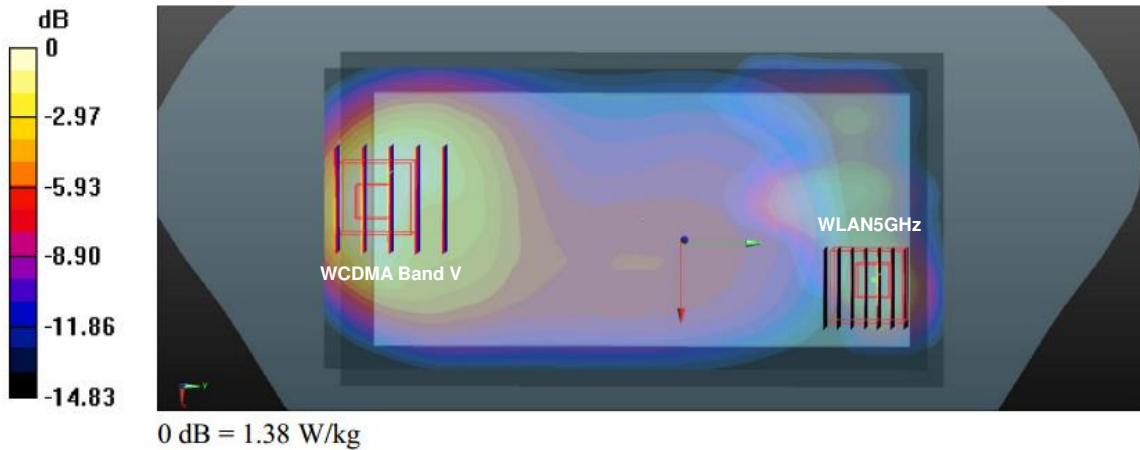


Case #20	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	WCDMA Band II	Back	0.674	5	0.22	-8.09	-0.21	150.3	1.62	0.01	Not required
	WLAN5GHz		0.941	5	1.94	6.84	-0.14				

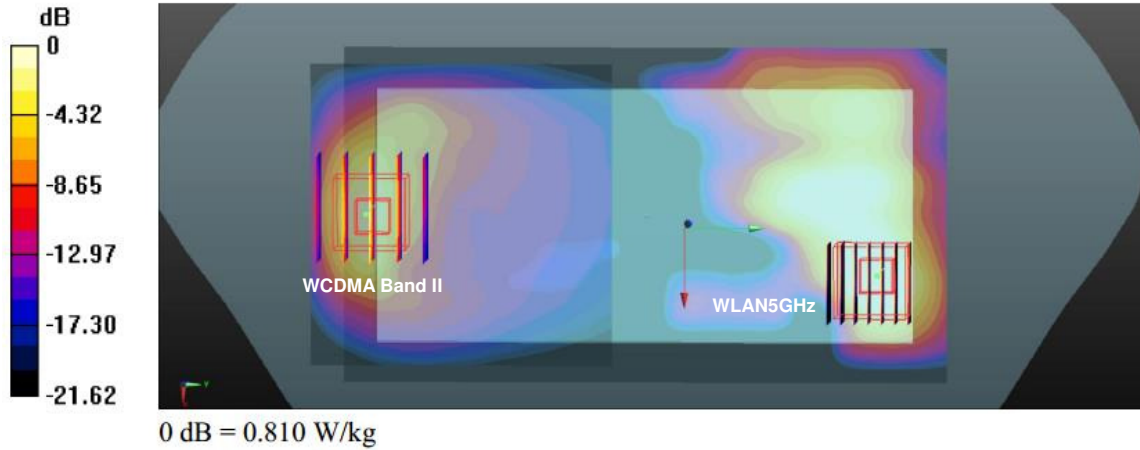


Case #22	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
	LTE Band 5	Back	1.159	5	-1.2	-7.75	-0.19	149.2	2.10	0.02	Not required
	WLAN5GHz		0.941	5	1.94	6.84	-0.14				

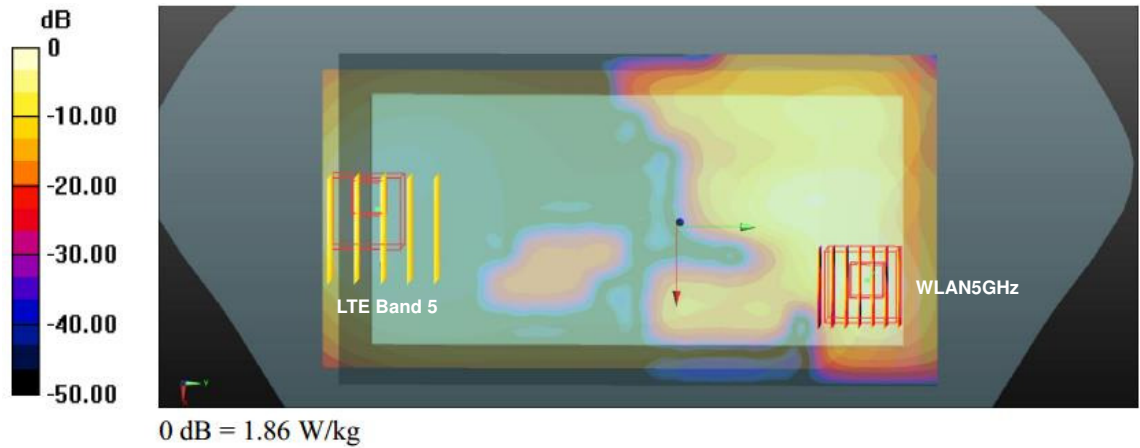

Case #25	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant.2				X	Y	Z				
	WLAN5GHz	Back	0.683	5	-2.74	-6.52	-0.19	141.6	1.62	0.01	Not required
			0.941	5	1.94	6.84	-0.14				

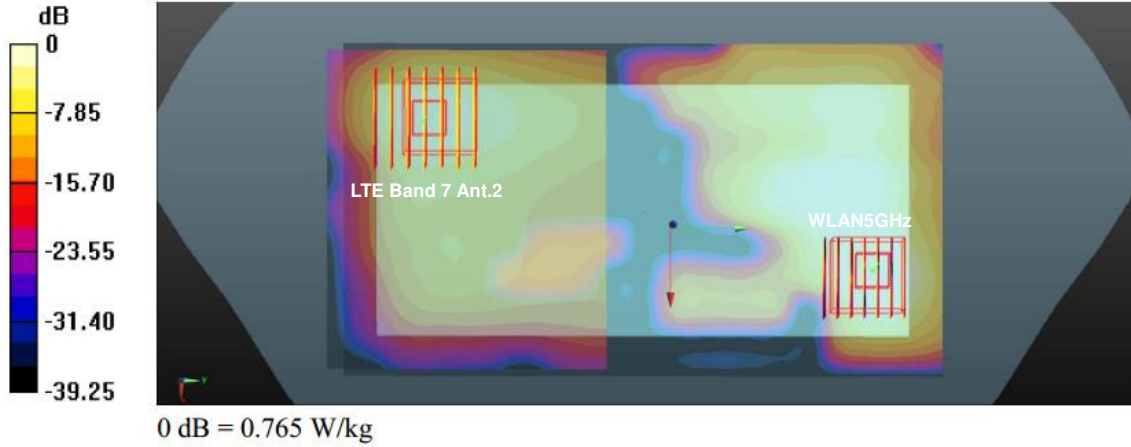

Case #26	Band	Position	SAR (W/kg)	Gap (mm)	SAR peak location (cm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
	LTE Band 7 Ant.3				X	Y	Z				
	WLAN5GHz	Back	0.739	5	2.88	-6.52	-0.18	133.9	1.68	0.02	Not required
			0.941	5	1.94	6.84	-0.14				

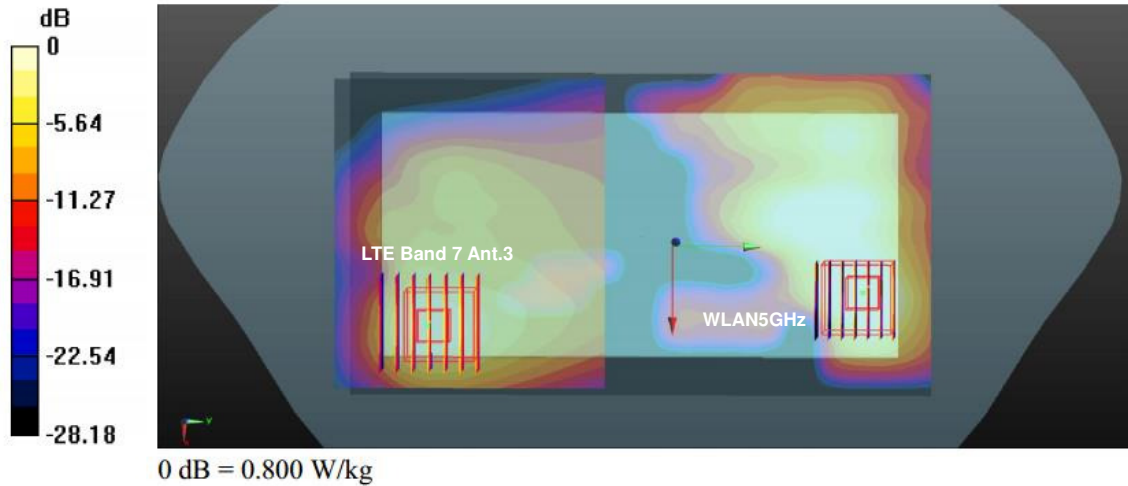

Test Engineer: Nick Hu



7. Uncertainty Assessment

Pre KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

8. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.



Appendix A. Reference Report

Please refer to Sporton report number FA7D2702 which is issued separately.