

## FCC/ISED Test Report

**Prepared for:**           **Garmin International, Inc.**

**Address:**               **1200 E. 151<sup>st</sup> Street**  
                                  **Olathe, Kansas, 66062, USA**

**Product:**               **A04624**

**Test Report No:**       **R20220615-20-E1B**

**Approved by:**

  
**Nic Johnson**  
**EMC Test Engineer**

**DATE:**                 **February 2, 2023**

**Total Pages:**         **87**

*The Nebraska Center for Excellence in Electronics (NCEE) authorizes the above named company to reproduce this report provided it is reproduced in its entirety for use by the company's employees only. Any use that a third party makes of this report, or any reliance on or decisions made based on it, are the responsibility of such third parties. NCEE accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.*



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

**REVISION PAGE**

| Rev. No. | Date             | Description   |
|----------|------------------|---|
| 0        | 15 December 2022 | Issued by FLane<br>Reviewed by KVepuri<br>Prepared by FLane |
| A        | 27 January 2023  | Corrected IC number and note in Section 2.1. -NJ            |
| B        | 2 February 2023  | Corrected FCC ID and IC on pg 5                             |



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

**CONTENTS**

Revision Page ..... 2

**1.0 Summary of test results..... 4**

**2.0 EUT Description ..... 5**

**2.1 Equipment under test ..... 5**

**2.2 Description of test modes ..... 5**

**2.3 Description of support units ..... 6**

**3.0 Laboratory and General Test Description ..... 6**

**3.1 Laboratory description ..... 6**

**3.2 Test personnel ..... 6**

**3.3 Test equipment ..... 7**

**3.4 General Test Procedure and Setup for Radio Measurements ..... 8**

**4.0 Results ..... 9**

**4.1 Output Power ..... 11**

**4.2 Bandwidth ..... 12**

**4.3 Duty Cycle ..... 13**

**4.4 Radiated emissions ..... 14**

**4.5 Conducted Spurious Emissions ..... 22**

**4.6 Band edges ..... 28**

**4.7 Power Spectral Density ..... 30**

**4.8 Conducted AC Mains Emissions ..... 31**

**4.9 Antenna Gain ..... 34**

**Appendix A: Sample Calculation ..... 36**

**Appendix B – Measurement Uncertainty ..... 38**

**Appendix C – Graphs and Tables ..... 39**

**REPORT END ..... 87**



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

## 1.0 SUMMARY OF TEST RESULTS

This report is a class 1 permissive change to FCCID: IPH-A4624. Manufacturer declares devices are electrically similar. The device tested was AA4624 and worst-case spurious emissions were compared on the A04624 to ensure compliance.

### FCC Part 15.247

The EUT has been tested according to the following specifications:

- (1) US Code of Federal Regulations, Title 47, Part 15
- (2) ISED RSS-Gen, Issue 5
- (3) ISED RSS-247, Issue 2

| APPLIED STANDARDS AND REGULATIONS  |                                |        |
|--|--------------------------------|--------|
| Standard Section   | Test Type                      | Result |
| FCC Part 15.35<br>RSS Gen, Issue 5, Section 6.10   | Duty Cycle                     | Pass   |
| FCC Part 15.247(b)(3)<br>RSS-247 Issue 2 Section 5.4(d)  | Peak output power              | Pass   |
| FCC Part 15.247(a)(2)<br>RSS-247 Issue 2 Section 5.2   | Bandwidth                      | Pass   |
| FCC Part 15.209<br>RSS-Gen Issue 5, Section 7.3  | Receiver Radiated Emissions    | Pass   |
| FCC Part 15.209 (restricted bands), 15.247 (unrestricted)<br>RSS-247 Issue 2 Section 5.5, RSS-Gen Issue 5, Section 8.9 | Transmitter Radiated Emissions | Pass   |
| FCC Part 15.247(e)<br>RSS-247 Issue 2 Section 5.2  | Power Spectral Density         | Pass   |
| FCC Part 15.209, 15.247(d)<br>RSS-247 Issue 2 Section 5.5  | Band Edge Measurement          | Pass   |
| FCC Part 15.207<br>RSS-Gen Issue 5, Section 8.8  | Conducted Emissions            | Pass   |



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

## 2.0 EUT DESCRIPTION

### 2.1 EQUIPMENT UNDER TEST

#### Summary and Operating Condition:

Note that the device that was tested included a certified module as well. The device that is the focus of this report will have this module depopulated, with no other modifications. Spots-check were performed on the device with the module depopulated to include worse-case spurious emissions as well as output power to ensure the results were within 1 dB.

|                                  |  |
|----------------------------------|--|
| <b>EUT</b>                       | A04624   |
| <b>IC</b>                        | 1792A-04624  |
| <b>FCC ID</b>                    | IPH-04624  |
| <b>EUT Received</b>              | 29 August 2022   |
| <b>EUT Tested</b>                | 5 September 2022- 28 October 2022  |
| <b>Serial No.</b>                | 3426363242 (Radiated Measurements)<br>3426363123 (Conducted Measurements)  |
| <b>Operating Band</b>            | 2400 – 2483.5 MHz  |
| <b>Device Type</b>               | <input checked="" type="checkbox"/> GMSK <input checked="" type="checkbox"/> GFSK <input type="checkbox"/> BT BR <input type="checkbox"/> BT EDR 2MB <input type="checkbox"/> BT EDR 3MB<br><input type="checkbox"/> 802.11x |
| <b>Power Supply / Voltage</b>    | Internal Battery / 5VDC Charger: Garmin (Phi Hong) Model: LACA046<br>GPN: 362-00112-00<br>(Representative Power Supply)  |
| <b>Antenna Type / Gain (dBi)</b> | Trace Antenna<br>-3.29 dBi   |

NOTE: For more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 2.2 DESCRIPTION OF TEST MODES

The operating range of the EUT is dependent on the device type found in section 2.1:


GFSK and GMSK 1MB Transmissions:

| Channel | Frequency |
|---------|-----------|
| Low     | 2402 MHz  |
| Mid     | 2440 MHz  |
| High    | 2480 MHz  |

GMSK 2MB Transmissions:

| Channel | Frequency |
|---------|-----------|
| Low     | 2404 MHz  |
| Mid     | 2440 MHz  |
| High    | 2478 MHz  |

These are the only representative channels tested in the frequency range according to FCC Part 15.31 and RSS-Gen Table A1. See the operational description for a list of all channel frequency and designations.

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R20220615-20-E1            | Rev | B |
|  | Prepared for:  | Garmin International, Inc. |     |   |

### 2.3 DESCRIPTION OF SUPPORT UNITS

None

## 3.0 LABORATORY AND GENERAL TEST DESCRIPTION

### 3.1 LABORATORY DESCRIPTION

All testing was performed at the following Facility:

The Nebraska Center for Excellence in Electronics (NCEE Labs)  
 4740 Discovery Drive  
 Lincoln, NE 68521  
 A2LA Certificate Number: 1953.01  
 FCC Accredited Test Site Designation No: US1060  
 Industry Canada Test Site Registration No: 4294A  
 NCC CAB Identification No: US0177

Environmental conditions varied slightly throughout the tests:

Relative humidity of  $35 \pm 4\%$   
 Temperature of  $22 \pm 3^\circ$  Celsius



### 3.2 TEST PERSONNEL

| No. | PERSONNEL     | TITLE           | ROLE                      |
|-----|---------------|-----------------|---------------------------|
| 1   | Fox Lane      | Test Engineer   | Review/Testing and Report |
| 2   | Blake Winter  | Test Engineer   | Testing                   |
| 3   | Grace Larsen  | Test Engineer   | Testing                   |
| 4   | Ethan Schmidt | Test Technician | Testing                   |

**Notes:** All personnel are permanent staff members of NCEE Labs. No testing or review was sub-contracted or performed by sub-contracted personnel.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

### 3.3 TEST EQUIPMENT

| DESCRIPTION AND MANUFACTURER                              | MODEL NO.                      | SERIAL NO.           | LAST CALIBRATION DATE | CALIBRATION DUE DATE |
|---|--------------------------------|----------------------|-----------------------|----------------------|
| Keysight MXE Signal Analyzer (44GHz)**                    | N9038A                         | MY59050109           | July 19, 2022         | July 19, 2024        |
| Keysight MXE Signal Analyzer (26.5GHz)**                  | N9038A                         | MY56400083           | July 19, 2022         | July 19, 2024        |
| Keysight EXA Signal Analyzer**                            | N9010A                         | MY56070862           | July 20, 2021         | July 20, 2023        |
| SunAR RF Motion   | JB1                            | A082918-1            | July 26, 2022         | July 26, 2023        |
| ETS EMCO Red Horn Antenna                                 | 3115                           | 00218655             | July 21, 2022         | July 21, 2023        |
| Com-Power LISN, Single Phase**                            | LI-220C                        | 20070017             | July 18, 2022         | July 18, 2024        |
| 8447F POT H64 Preampfier*                                 | 8447F POT H64                  | 3113AD4667           | March 21, 2022        | March 21, 2024       |
| Rohde & Schwarz Preampfier*                               | TS-PR18                        | 3545700803           | August 22, 2022       | August 22, 2024      |
| Trilithic High Pass Filter*                               | 6HC330                         | 23042                | March 21, 2022        | March 21, 2024       |
| ETS – Lindgren- VSWR on 10m Chamber***                    | 10m Semi-anechoic chamber-VSWR | 4740 Discovery Drive | July 30, 2020         | July 30, 2023        |
| NCEE Labs-NSA on 10m Chamber*                             | 10m Semi-anechoic chamber-NSA  | NCEE-001             | May 25, 2022          | May 25, 2024         |
| TDK Emissions Lab Software                                | V11.25                         | 700307               | NA                    | NA                   |
| RF Cable (preampfier to antenna)*                         | MFR-57500                      | 90-195-040           | August 22, 2022       | August 22, 2024      |
| RF Cable (antenna to 10m chamber bulkhead)*               | FSCM 64639                     | 01E3872              | September 24, 2021    | September 24, 2023   |
| RF Cable (10m chamber bulkhead to control room bulkhead)* | FSCM 64639                     | 01E3864              | September 24, 2021    | September 24, 2023   |
| RF Cable (control room bulkhead to test receiver)*        | FSCM 64639                     | 01F1206              | September 24, 2021    | September 24, 2023   |
| N connector bulkhead (10m chamber)*                       | PE9128                         | NCEEBH1              | September 24, 2021    | September 24, 2023   |
| N connector bulkhead (control room)*                      | PE9128                         | NCEEBH2              | September 24, 2021    | September 24, 2023   |

\*Internal Characterization

\*\*2 Year Cal Cycle

\*\*\*3 Year Cal Cycle

**Notes:**

All equipment is owned by NCEE Labs and stored permanently at NCEE Labs facilities.

### 3.4 GENERAL TEST PROCEDURE AND SETUP FOR RADIO MEASUREMENTS

Measurement type presented in this report (Please see the checked box below):

#### Conducted

The conducted measurements were performed by connecting the output of the transmitter directly into a spectrum analyzer using an impedance matched cable and connector soldered to the EUT in place of the antenna. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.



Figure 1 - Bandwidth Measurements Test Setup

#### Radiated

All the radiated measurements were taken at a distance of 3m from the EUT. The information regarding resolution bandwidth, video bandwidth, span and the detector used can be found in the graphs provided in the Appendix C. All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

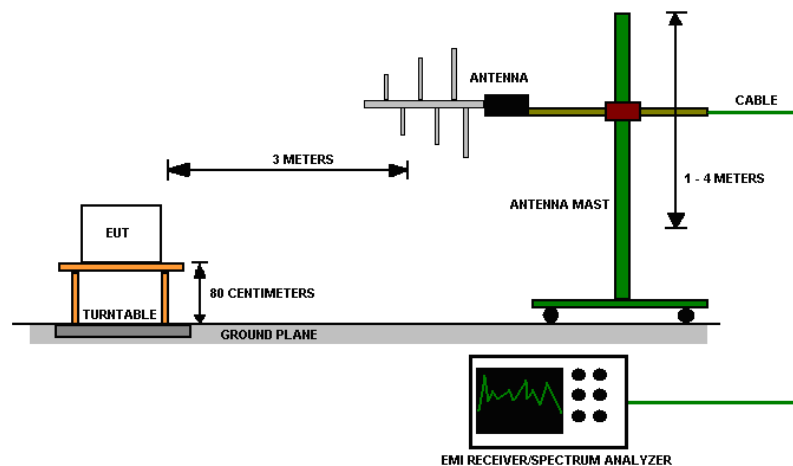


Figure 2 - Radiated Emissions Test Setup





|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

#### 4.0 RESULTS

##### DTS Radio Measurements

| CHANNEL | Transmitter | Occupied Bandwidth (kHz) | 6 dB Bandwidth (kHz) | AVERAGE OUTPUT POWER (dBm) | AVERAGE OUTPUT POWER (mW) | PSD (dBm) | RESULT |
|---------|-------------|--------------------------|----------------------|----------------------------|---------------------------|-----------|--------|
| Low     | GFSK        | 1323.10                  | 879.10               | 0.100                      | 1.023                     | -17.109   | PASS   |
| Mid     | GFSK        | 1329.60                  | 890.60               | 3.010                      | 2.000                     | -12.55    | PASS   |
| High    | GFSK        | 1479.80                  | 928.00               | -1.140                     | 0.769                     | -17.563   | PASS   |
| Low     | GMSK 1Mb    | 1310.90                  | 790.50               | 0.070                      | 1.016                     | -17.324   | PASS   |
| Mid     | GMSK 1Mb    | 1265.40                  | 767.50               | 2.830                      | 1.919                     | -13.704   | PASS   |
| High    | GMSK 1Mb    | 1316.60                  | 866.80               | -1.240                     | 0.752                     | -18.022   | PASS   |
| Low     | GMSK 2Mb    | 2515.60                  | 1395.00              | 3.300                      | 2.138                     | -13.552   | PASS   |
| Mid     | GMSK 2Mb    | 2550.40                  | 1439.00              | 2.910                      | 1.954                     | -14.429   | PASS   |
| High    | GMSK 2Mb    | 2492.10                  | 1413.00              | -1.210                     | 0.757                     | -18.071   | PASS   |

Occupied Bandwidth = N/A; 6 dB Bandwidth Limit = 500 kHz; Peak Output Power Limit = 30 dBm; PSD Limit = 8 dBm

##### Unrestricted Band-Edge

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Relative Highest out of band level (dBuV) | Relative Fundamental (dBuV) | Delta (dB) | Min Delta (dB) | Result |
|---------|----------|--|---|-----------------------------|------------|----------------|--------|
| Low     | GMSK 1Mb | 2400.00                                | 63.96                                     | 105.757                     | 39.797     | 30.00          | PASS   |
| Low     | GMSK 2Mb | 2400.00                                | 64.37                                     | 107.268                     | 42.627     | 30.00          | PASS   |
| Low     | GFSK     | 2400.00                                | 58.989                                    | 105.668                     | 36.815     | 30.00          | PASS   |
| High    | GMSK 1Mb | 2483.50                                | 51.268                                    | 104.538                     | 48.664     | 30.00          | PASS   |
| High    | GMSK 2Mb | 2483.50                                | 58.941                                    | 102.579                     | 42.055     | 30.00          | PASS   |
| High    | GFSK     | 2483.50                                | 52.82                                     | 104.528                     | 44.105     | 30.00          | PASS   |

##### Peak Restricted Band-Edge

| CHANNEL | Mode     | Band edge /Measurement Frequency (MHz) | Highest out of band level (dBuV/m @ 3m) | Measurement Type | Limit (dBuV/m @ 3m) | Margin | Result |
|---------|----------|--|---|------------------|---------------------|--------|--------|
| Low     | GMSK 1Mb | 2390.00                                | 53.093                                  | Peak             | 73.98               | 20.89  | PASS   |
| Low     | GMSK 2Mb | 2390.00                                | 53.257                                  | Peak             | 73.98               | 20.72  | PASS   |
| Low     | GFSK     | 2390.00                                | 53.986                                  | Peak             | 73.98               | 19.99  | PASS   |
| High    | GMSK 1Mb | 2483.50                                | 54.659                                  | Peak             | 73.98               | 19.32  | PASS   |
| High    | GMSK 2Mb | 2483.50                                | 56.981                                  | Peak             | 73.98               | 17.00  | PASS   |
| High    | GFSK     | 2483.50                                | 54.879                                  | Peak             | 73.98               | 19.10  | PASS   |

\*Limit shown is the peak limit taken from FCC Part 15.209



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

| Average Restricted Band-Edge |                 |  |   |                  |                     |             |             |
|------------------------------|-----------------|--|---|------------------|---------------------|-------------|-------------|
| CHANNEL                      | Mode            | Band edge /Measurement Frequency (MHz) | Highest out of band level (dBuV/m @ 3m) | Measurement Type | Limit (dBuV/m @ 3m) | Margin      | Result      |
| Low                          | GMSK 1Mb        | 2390.00                                | 40.983                                  | Average          | 53.98               | 13.00       | PASS        |
| Low                          | GMSK 2Mb        | 2390.00                                | 41.83                                   | Average          | 53.98               | 12.15       | PASS        |
| Low                          | GFSK            | 2390.00                                | 41.13                                   | Average          | 53.98               | 12.85       | PASS        |
| High                         | GMSK 1Mb        | 2483.50                                | 43.113                                  | Average          | 53.98               | 10.87       | PASS        |
| <b>High</b>                  | <b>GMSK 2Mb</b> | <b>2483.50</b>                         | <b>46.441</b>                           | <b>Average</b>   | <b>53.98</b>        | <b>7.54</b> | <b>PASS</b> |
| High                         | GFSK            | 2483.50                                | 43.172                                  | Average          | 53.98               | 10.81       | PASS        |

\*Limit shown is the average limit taken from FCC Part 15.209



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

#### 4.1 OUTPUT POWER

**Test Method:** All measurements were performed using the section 11.9.2.2.2 from ANSI C63.10.

**Limits of power measurements:**

**For FCC Part 15.247 Device:**

The maximum allowed output power is 30 dBm.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

**Pass**

Comments:

1. All the output power plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

## 4.2 BANDWIDTH

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of bandwidth measurements:**

**For FCC Part 15.247 Device:**

The 99% occupied bandwidth is for informational purpose only. The 6dB bandwidth of the signal must be greater than 500 kHz.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

**Pass**

Comments:

1. All the bandwidth plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

### 4.3 DUTY CYCLE

**Test Method:**

All Modulations/transmitters shown have a duty cycle of >98%.

#### 4.4 RADIATED EMISSIONS

**Test Method:** ANSI C63.10-2013, Section 6.5, 6.6

**Limits for radiated emissions measurements:**

Emissions radiated outside of the specified bands shall be applied to the limits in 15.209 as followed:

| FREQUENCIES (MHz) | FIELD STRENGTH ( $\mu\text{V/m}$ ) | MEASUREMENT DISTANCE (m) |
|-------------------|------------------------------------|--------------------------|
| 0.009-0.490       | 2400/F(kHz)                        | 300                      |
| 0.490-1.705       | 24000/F(kHz)                       | 30                       |
| 1.705-30.0        | 30                                 | 3                        |
| 30-88             | 100                                | 3                        |
| 88-216            | 150                                | 3                        |
| 216-960           | 200                                | 3                        |
| Above 960         | 500                                | 3                        |

**NOTE:**


1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) =  $20 * \log * \text{Emission level } (\mu\text{V/m})$ .
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits by more than 20dB under any condition of modulation.
4. The EUT was tested for spurious emissions while running off of battery power and external USB power. The worse-case emissions were produced while running off of USB power, so results from this mode are presented.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

**Test procedures:**

- a. The EUT was placed on the top of a rotating table above the ground plane in a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The table was 0.8m high for measurements from 30MHz-1Ghz and 1.5m for measurements from 1GHz and higher.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna was a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are used to make the measurement.
- d. For each suspected emission, the EUT was arranged to maximize its emissions and then the antenna height was varied from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum emission reading.
- e. The test-receiver system was set to use a peak detector with a specified resolution bandwidth. For spectrum analyzer measurements, the composite maximum of several analyzer sweeps was used for final measurements.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The EUT was maximized in all 3 orthogonal positions. The results are presented for the axis that had the highest emissions.

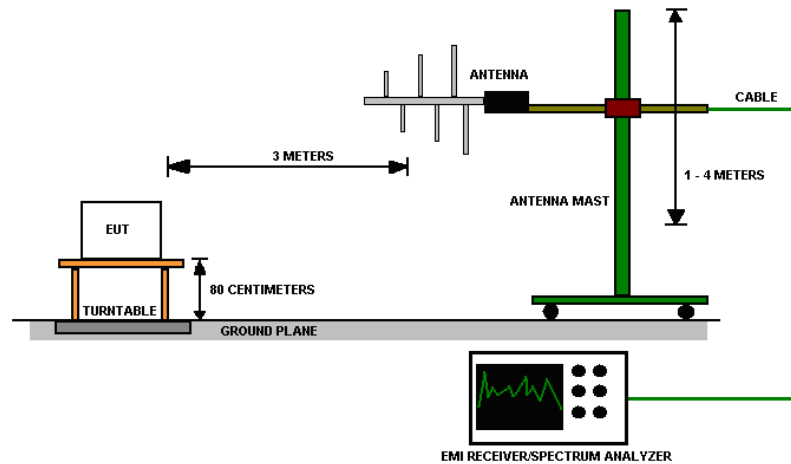**Test setup:**

**Figure 3 - Radiated Emissions Test Setup**
**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequencies below 1GHz.
2. The resolution bandwidth 1 MHz for all measurements and at frequencies above 1GHz, A peak detector was used for all measurements above 1GHz. Measurements were made with an EMI Receiver.

**Deviations from test standard:**


No deviation.

**EUT operating conditions**


Details can be found in section 2.1 of this report.



**Test results:**

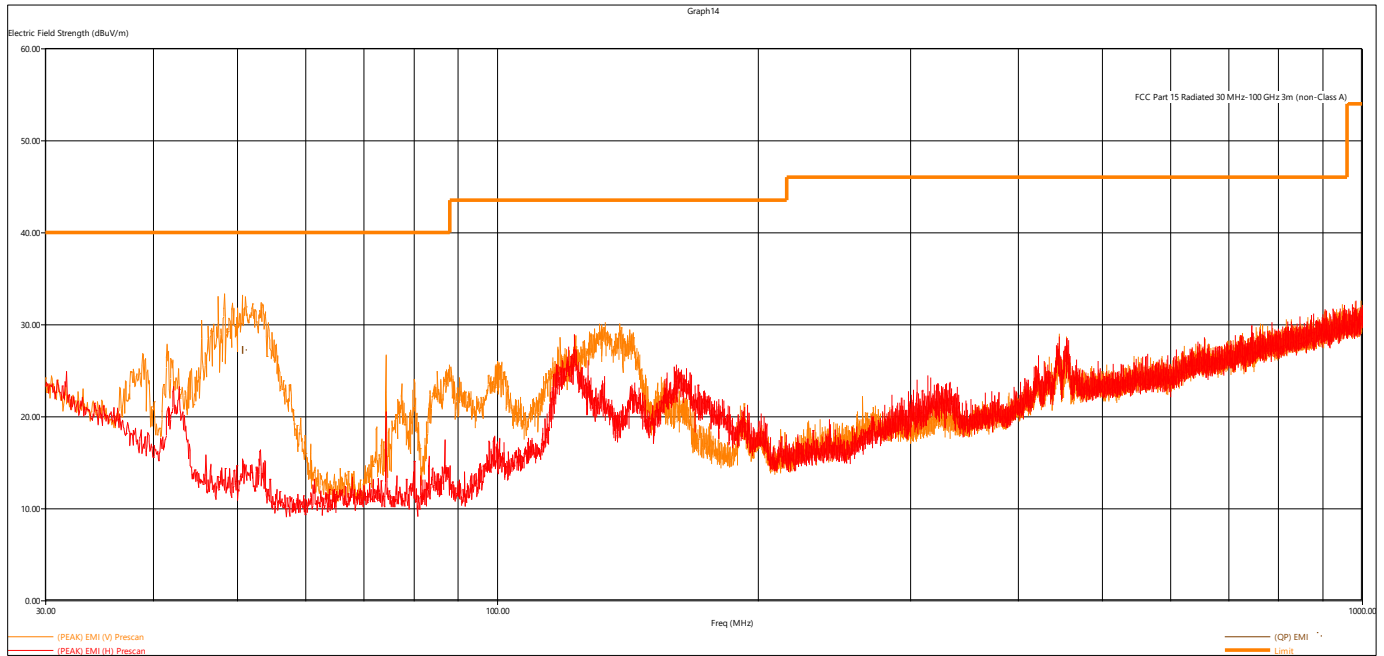

**Figure 4 - Radiated Emissions Plot, Receive**

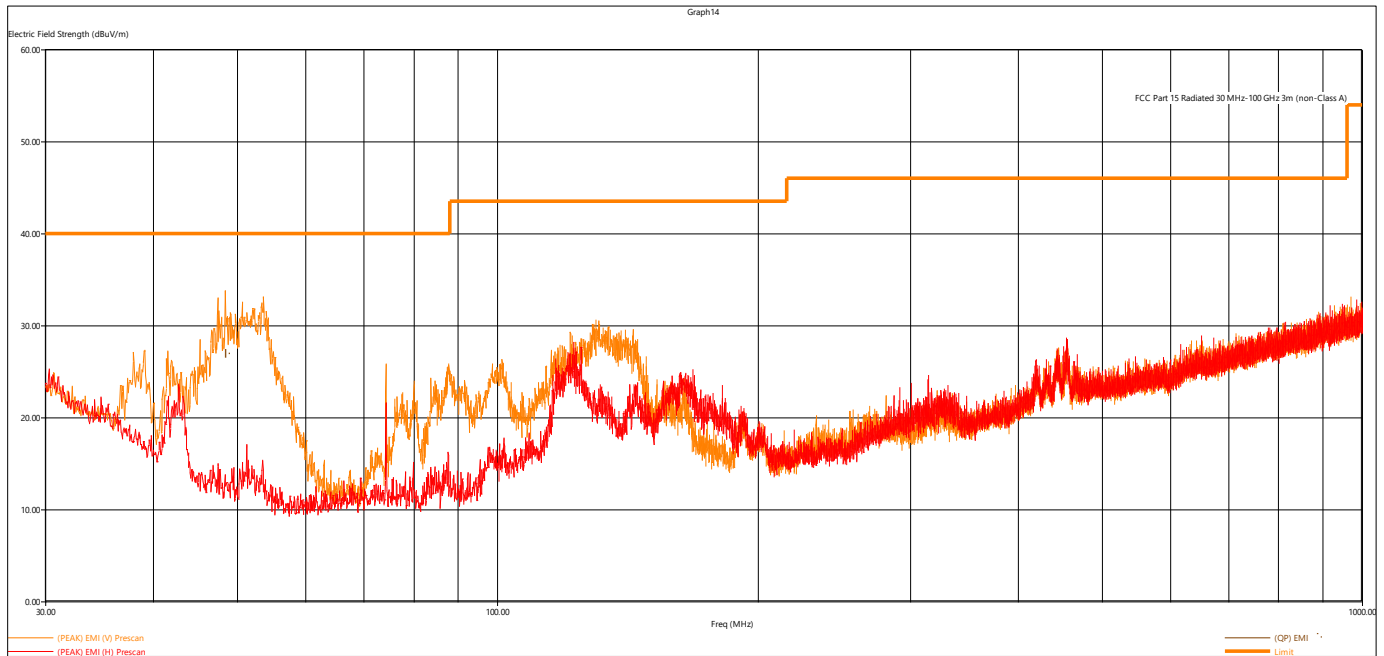

**Figure 5 - Radiated Emissions Plot, GFSK**

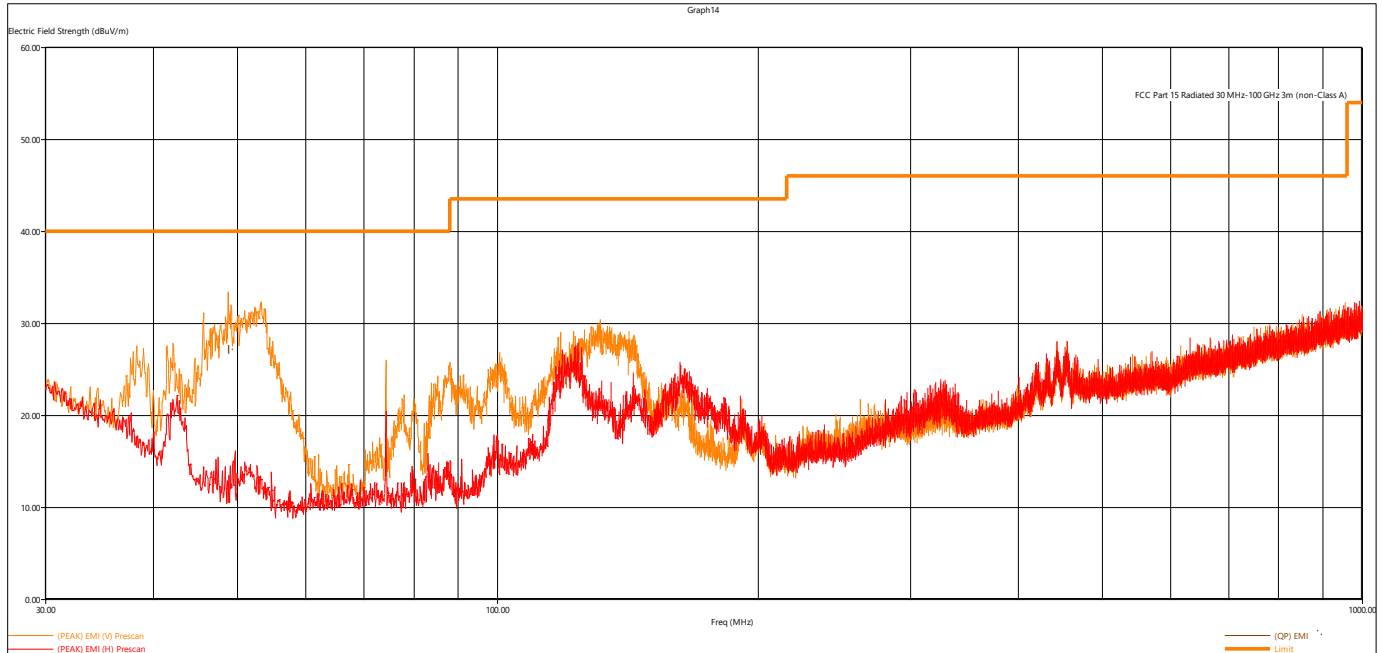


Figure 6 - Radiated Emissions Plot, GMSK 1MB

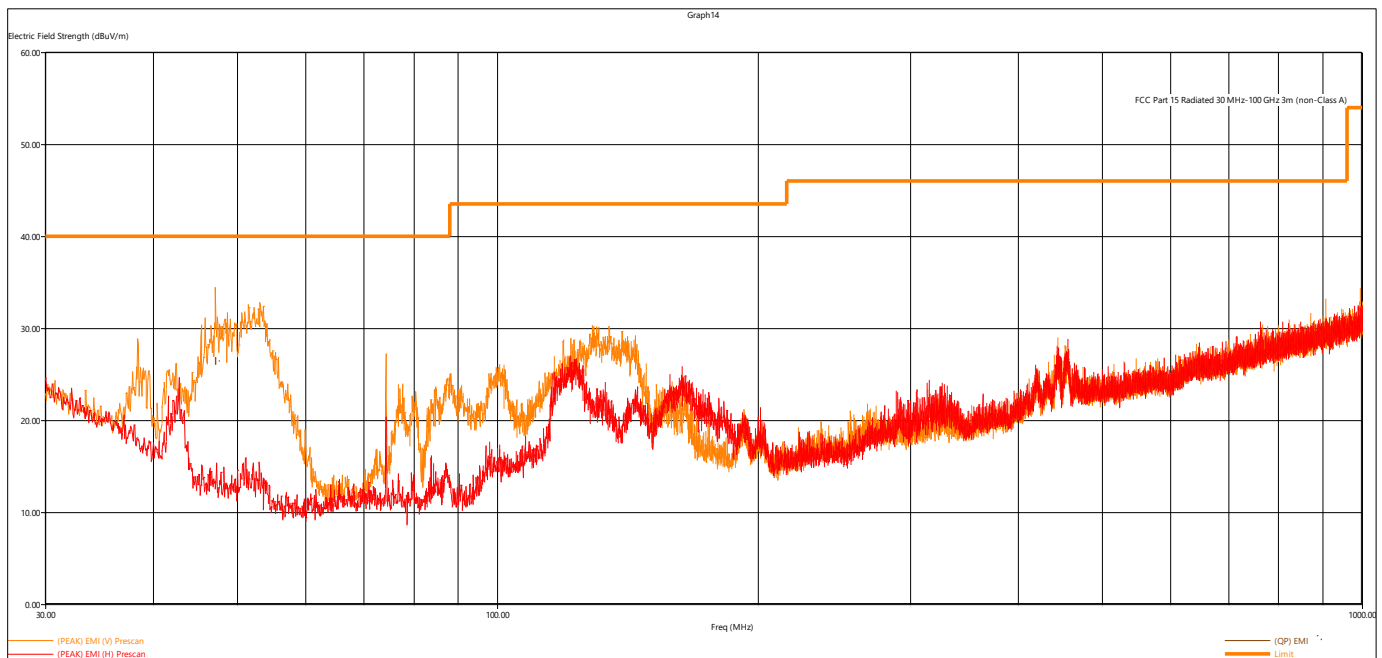


Figure 7 - Radiated Emissions Plot, GMSK 2MB

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

| Quasi-Peak Measurements, GMSK-GFSK |              |              |        |        |        |     |         |            |
|------------------------------------|--------------|--------------|--------|--------|--------|-----|---------|------------|
| Frequency                          | Level        | Limit        | Margin | Height | Angle  | Pol | Channel | Modulation |
| MHz                                | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm.    | deg.   |     |         |            |
| 48.382080                          | 26.87        | 40.00        | 13.13  | 108.00 | 140.00 | V   | Low     | GFSK       |
| 48.788640                          | 27.08        | 40.00        | 12.92  | 107.00 | 99.00  | V   | Low     | GMSK 1MB   |
| 47.134080                          | 26.42        | 40.00        | 13.58  | 112.00 | 328.00 | V   | Low     | GMSK 2MB   |
| 50.845200                          | 27.22        | 40.00        | 12.78  | 116.00 | 39.00  | V   |         | RX         |

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.  
All other measurements were found to be at least 6 dB Below the limit.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

| Peak Measurements, GMSK-GFSK |              |              |        |        |       |     |         |            |
|------------------------------|--------------|--------------|--------|--------|-------|-----|---------|------------|
| Frequency                    | Level        | Limit        | Margin | Height | Angle | Pol | Channel | Modulation |
| MHz                          | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm.    | deg.  |     |         |            |
| 2402.232000                  | 92.79        | NA           | NA     | 202    | 120   | H   | Low     | GMSK 1MB   |
| 2439.716000                  | 96.86        | NA           | NA     | 186    | 120   | H   | Mid     | GMSK 1MB   |
| 2479.712000                  | 93.30        | NA           | NA     | 366    | 122   | H   | High    | GMSK 1MB   |
| 2403.496000                  | 96.20        | NA           | NA     | 393    | 120   | H   | Low     | GMSK 2MB   |
| 2440.438000                  | 96.65        | NA           | NA     | 132    | 345   | H   | Mid     | GMSK 2MB   |
| 2477.552000                  | 92.95        | NA           | NA     | 368    | 122   | H   | High    | GMSK 2MB   |
| 2402.244000                  | 92.92        | NA           | NA     | 390    | 122   | H   | Low     | GFSK       |
| 2440.258000                  | 97.27        | NA           | NA     | 332    | 122   | H   | Mid     | GFSK       |
| 2479.716000                  | 93.56        | NA           | NA     | 421    | 125   | H   | High    | GFSK       |
| 7205.536000                  | 51.92        | 73.98        | 22.06  | 401    | 147   | V   | Low     | GFSK       |
| 7319.384000                  | 54.52        | 73.98        | 19.46  | 381    | 147   | V   | Mid     | GFSK       |
| 7438.858000                  | 51.13        | 73.98        | 22.85  | 188    | 156   | V   | High    | GFSK       |
| 7205.372000                  | 53.89        | 73.98        | 20.09  | 135    | 203   | H   | Low     | GMSK 1MB   |
| 7319.572000                  | 54.00        | 73.98        | 19.98  | 473    | 149   | V   | Mid     | GMSK 1MB   |
| 7438.644000                  | 51.62        | 73.98        | 22.36  | 458    | 147   | V   | High    | GMSK 1MB   |
| 7213.174000                  | 53.39        | 73.98        | 20.59  | 199    | 201   | H   | Low     | GMSK 2MB   |
| 7321.702000                  | 54.84        | 73.98        | 19.14  | 127    | 216   | H   | Mid     | GMSK 2MB   |
| 7432.322000                  | 52.28        | 73.98        | 21.70  | 388    | 210   | V   | High    | GMSK 2MB   |

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the plot and table above.  
 All other measurements were found to be at least 6 dB Below the limit.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

| Average Measurements, GMSK-GFSK |              |              |        |        |       |     |         |            |
|---------------------------------|--------------|--------------|--------|--------|-------|-----|---------|------------|
| Frequency                       | Level        | Limit        | Margin | Height | Angle | Pol | Channel | Modulation |
| MHz                             | dB $\mu$ V/m | dB $\mu$ V/m | dB     | cm.    | deg.  |     |         |            |
| 2402.232000                     | 90.08        | NA           | NA     | 202    | 120   | H   | Low     | GMSK 1MB   |
| 2439.716000                     | 93.82        | NA           | NA     | 186    | 120   | H   | Mid     | GMSK 1MB   |
| 2479.712000                     | 89.76        | NA           | NA     | 366    | 122   | H   | High    | GMSK 1MB   |
| 2403.496000                     | 89.74        | NA           | NA     | 393    | 120   | H   | Low     | GMSK 2MB   |
| 2440.438000                     | 91.03        | NA           | NA     | 132    | 345   | H   | Mid     | GMSK 2MB   |
| 2477.552000                     | 86.84        | NA           | NA     | 368    | 122   | H   | High    | GMSK 2MB   |
| 2402.244000                     | 89.83        | NA           | NA     | 332    | 122   | H   | Low     | GFSK       |
| 2440.258000                     | 94.29        | NA           | NA     | 390    | 332   | 122 | Mid     | GFSK       |
| 2479.716000                     | 89.87        | NA           | NA     | 421    | 125   | H   | High    | GFSK       |
| 7205.536000                     | 41.56        | 53.98        | 12.42  | 401    | 147   | V   | Low     | GFSK       |
| 7319.384000                     | 45.82        | 53.98        | 8.16   | 381    | 147   | V   | Mid     | GFSK       |
| 7438.858000                     | 39.53        | 53.98        | 14.45  | 188    | 156   | V   | High    | GFSK       |
| 7205.372000                     | 44.11        | 53.98        | 9.87   | 135    | 203   | H   | Low     | GMSK 1MB   |
| 7319.572000                     | 45.26        | 53.98        | 8.72   | 473    | 149   | V   | Mid     | GMSK 1MB   |
| 7438.644000                     | 39.11        | 53.98        | 14.87  | 458    | 147   | V   | High    | GMSK 1MB   |
| 7213.174000                     | 43.39        | 53.98        | 10.59  | 199    | 201   | H   | Low     | GMSK 2MB   |
| 7321.702000                     | 44.13        | 53.98        | 9.85   | 127    | 216   | H   | Mid     | GMSK 2MB   |
| 7432.322000                     | 40.16        | 53.98        | 13.82  | 388    | 210   | V   | High    | GMSK 2MB   |

The EUT was maximized in all 3 orthogonal axes. The worst-case is shown in the table above.  
All other measurements were found to be at least 6 dB Below the limit.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

#### 4.5 CONDUCTED SPURIOUS EMISSIONS

**Test Method:** ANSI C63.10-2013, Section 6.7

**Limits of spurious emissions:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Test procedures:**

The highest emissions level was measured and recorded. All spurious measurements were evaluated to 30dB below the fundamental. More details can be found in section 3.4 of this report.

**Deviations from test standard:**

None.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

Note that the limit shown on the plots does not apply. It is a line for reference

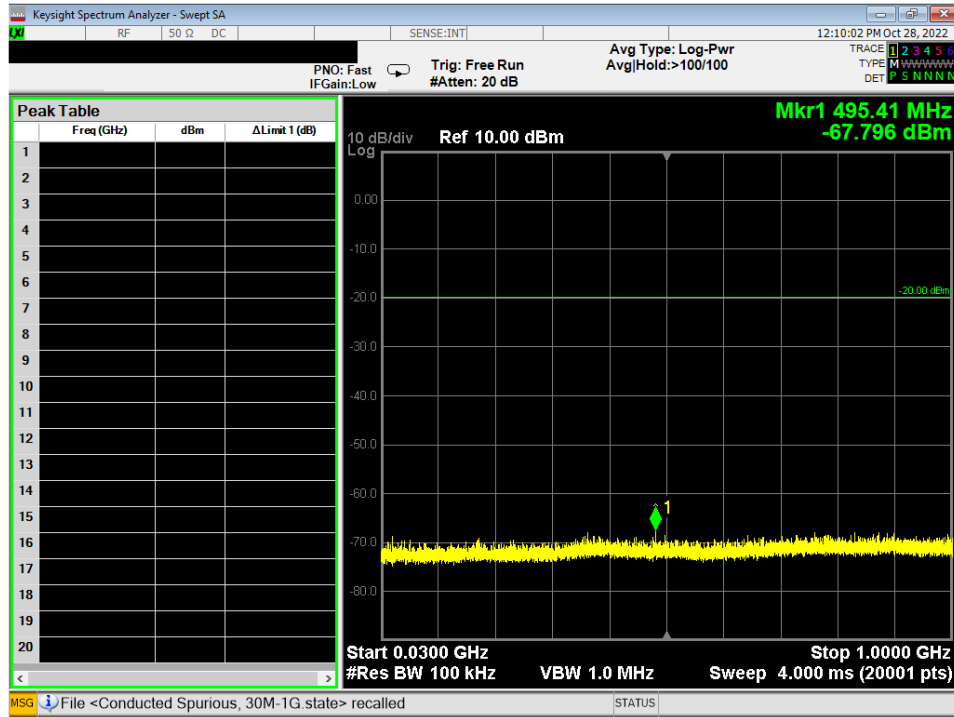


Figure 8 - Radiated Emissions Plot, GFSK, 30MHz – 1GHz, Mid

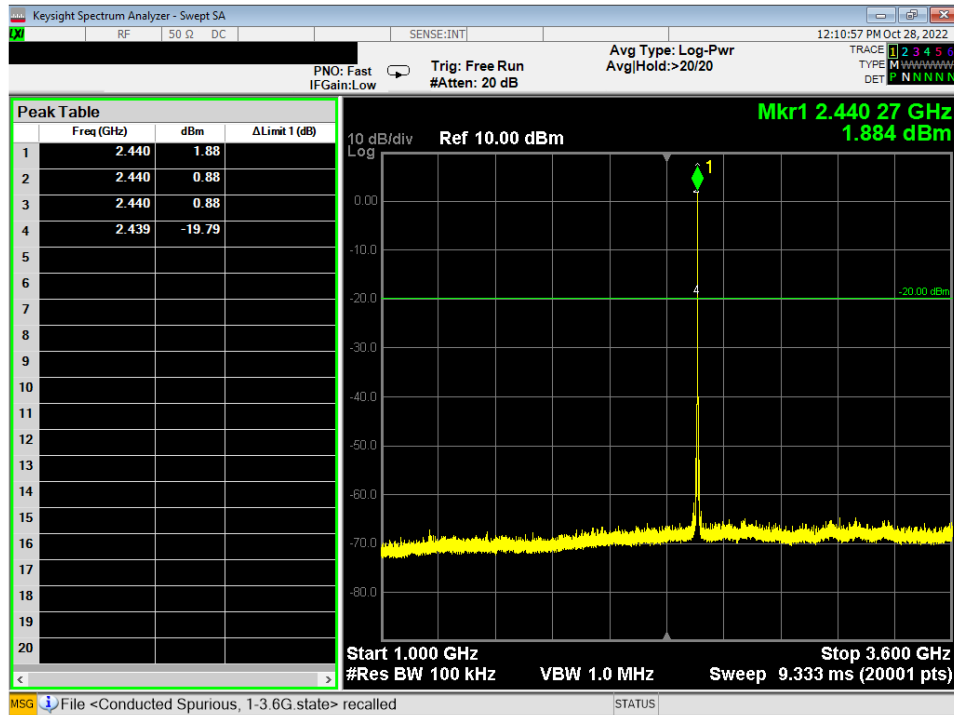


Figure 9 - Radiated Emissions Plot, GFSK, 1GHz – 3.6GHz, Mid

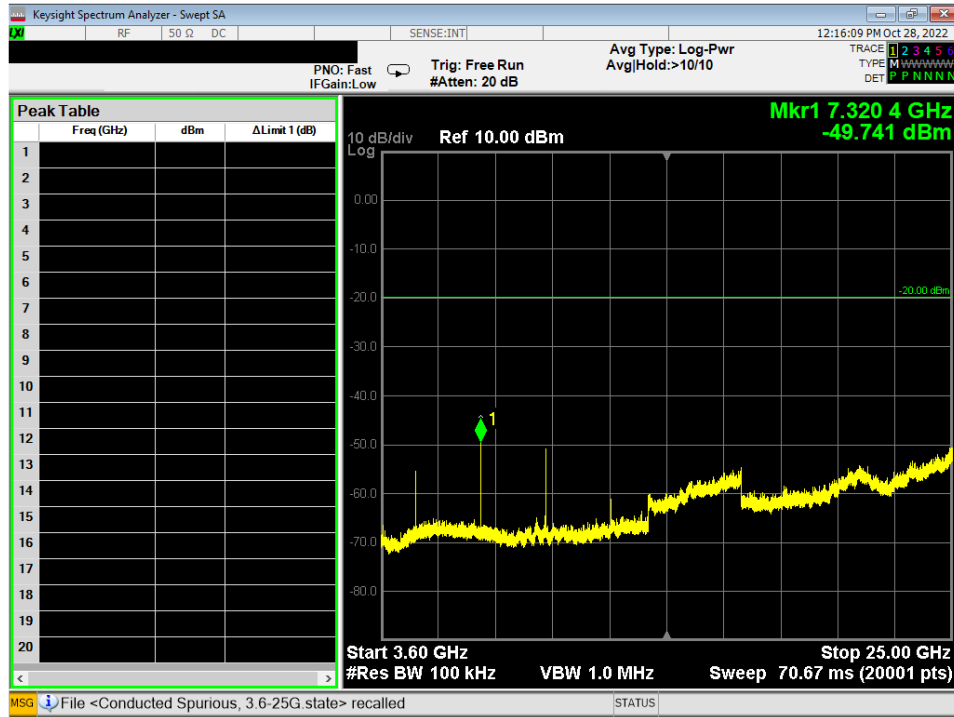


Figure 10 - Radiated Emissions Plot, GFSK, 3.6GHz – 25GHz, Mid

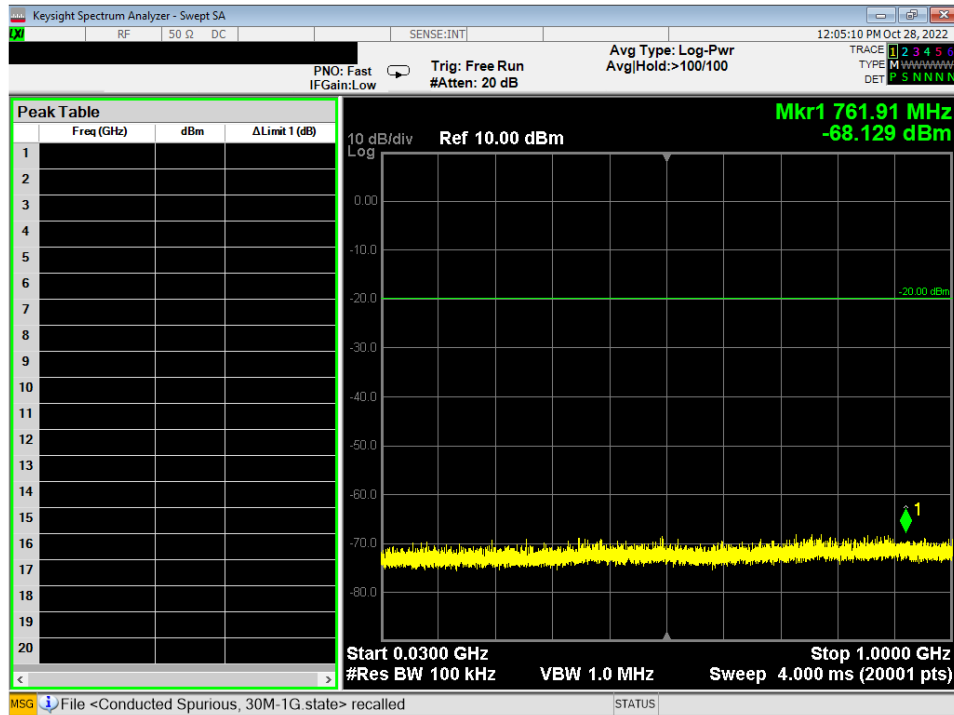


Figure 11 - Radiated Emissions Plot, GMSK 1MB, 30MHz – 1GHz, Mid



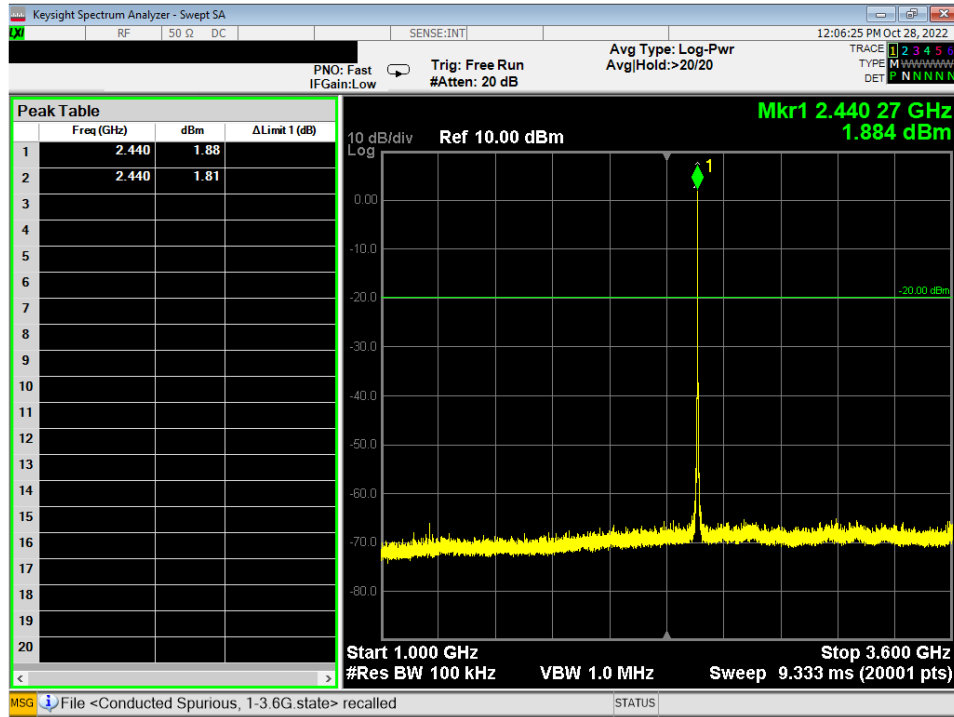


Figure 12 - Radiated Emissions Plot, GSK 1MB, 1GHz – 3.6GHz, Mid

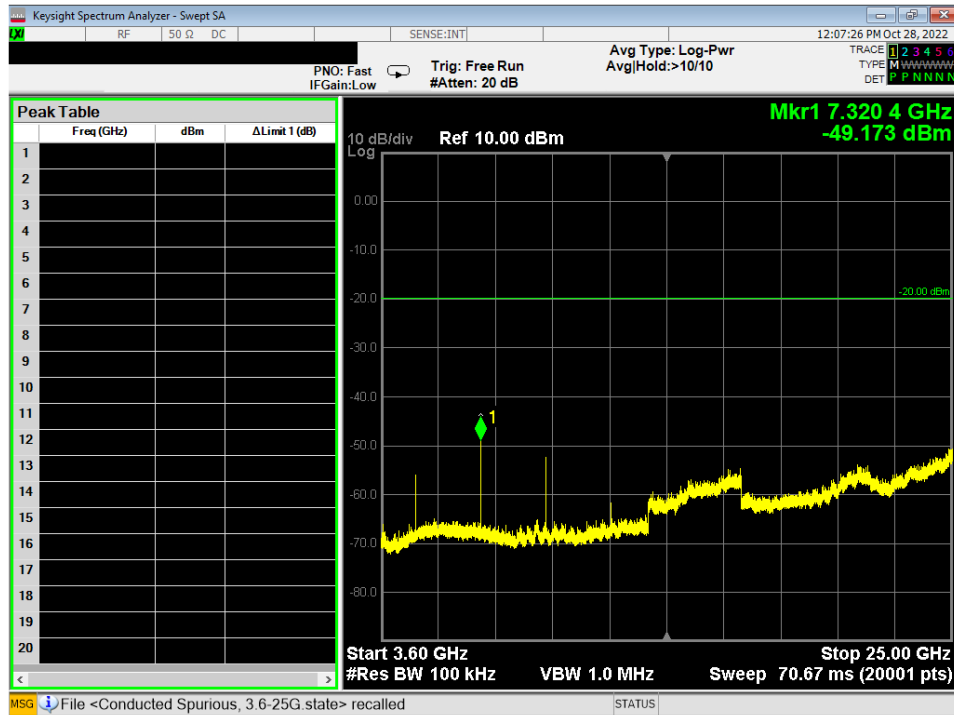


Figure 13 - Radiated Emissions Plot, GSK 1MB, 3.6GHz – 25GHz, Mid

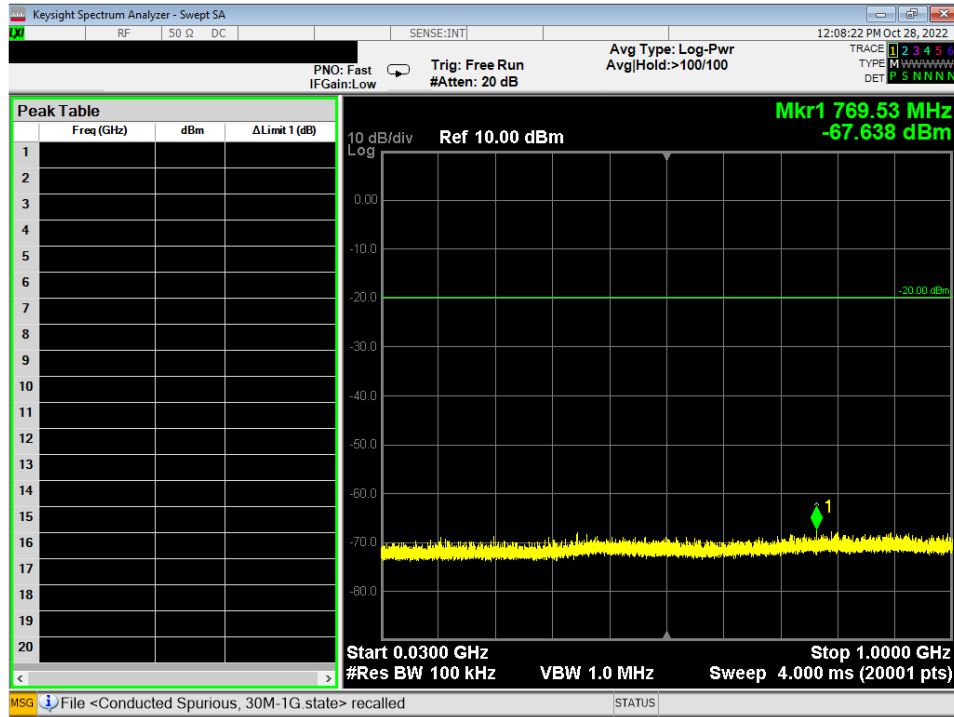


Figure 14 - Radiated Emissions Plot, GMSK 2MB, 30MHz – 1GHz, Mid

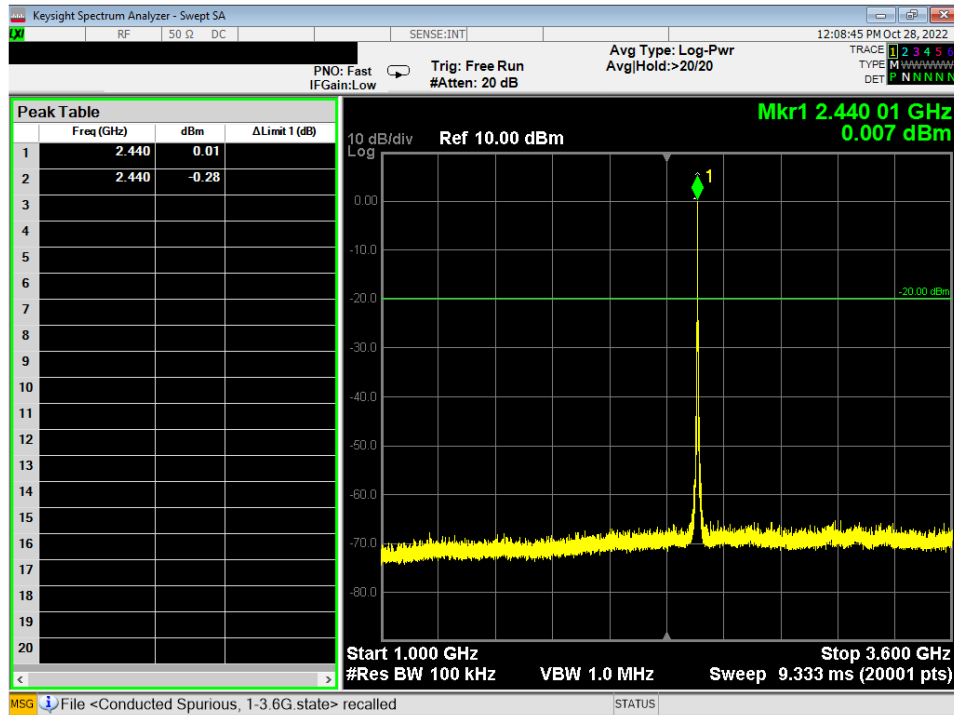


Figure 15 - Radiated Emissions Plot, GMSK 2MB, 1GHz – 3.6GHz, Mid

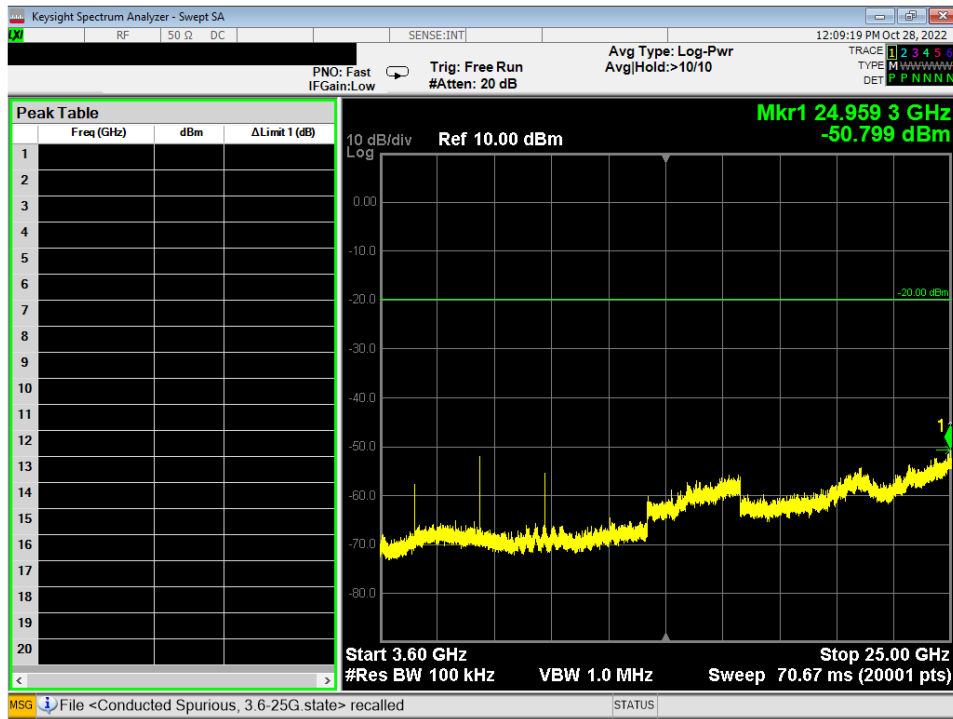


Figure 16 - Radiated Emissions Plot, GMSK 2MB, 3.6GHz – 25GHz, Mid



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

#### 4.6 BAND EDGES

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of band-edge measurements:**

**For FCC Part 15.247 Device:**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

**Test procedures:**

The highest emissions level beyond the band-edge was measured and recorded. All band edge measurements were evaluated to the general limits in Part 15.209. More details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Test setup details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

**Test results:**

**Pass**

Comments:

1. All the band edge plots can be found in the Appendix C.
2. If the device falls under FCC Part 15.247 (Details can be found in summary of test results), compliance is shown in the unrestricted band edges by showing minimum delta of 20 dB between peak and the band edge.
3. The restricted band edge compliance is shown by comparing to the general limit defined in Part 15.209.
4. Tabulated data is listed in section 4.0.



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

## 4.7 POWER SPECTRAL DENSITY

**Test Method:** All the radio measurements were performed using the sections from ANSI C63.10, details about the section used can be found in the spectrum analyzer titles on the graph.

**Limits of power measurements:**

**For FCC Part 15.247 Device:**

The maximum PSD allowed is 8 dBm.

**Test procedures:**

Details can be found in section 3.4 of this report.

**Deviations from test standard:**

No deviation.

**Test setup:**

Details can be found in section 3.4 of this report.

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

**Test results:**

**Pass**

Comments:

1. All the Power Spectral Density (PSD) plots can be found in the Appendix C.
2. All the measurements were found to be compliant.
3. Tabulated data is listed in section 4.0.

## 4.8 CONDUCTED AC MAINS EMISSIONS

**Test Method:** ANSI C63.10-2013, Section(s) 6.2

**Limits for conducted emissions measurements:**

| FREQUENCY OF EMISSION<br>(MHz) | CONDUCTED LIMIT<br>(dB $\mu$ V) |          |
|--------------------------------|---------------------------------|----------|
|                                | Quasi-peak                      | Average  |
| 0.15-0.5                       | 66 to 56                        | 56 to 46 |
| 0.5-5                          | 56                              | 46       |
| 5-30                           | 60                              | 50       |

**Notes:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

**Test Procedures:**

- a. The EUT was placed 0.8m above a ground reference plane and 0.4 meters from the conducting wall of a shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). The LISN provides 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference as well as the ground.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits are not reported.
- d. Results were compared to the 15.207 limits.

**Deviation from the test standard:**

No deviation

**EUT operating conditions:**

Details can be found in section 2.1 of this report.

Test Results:

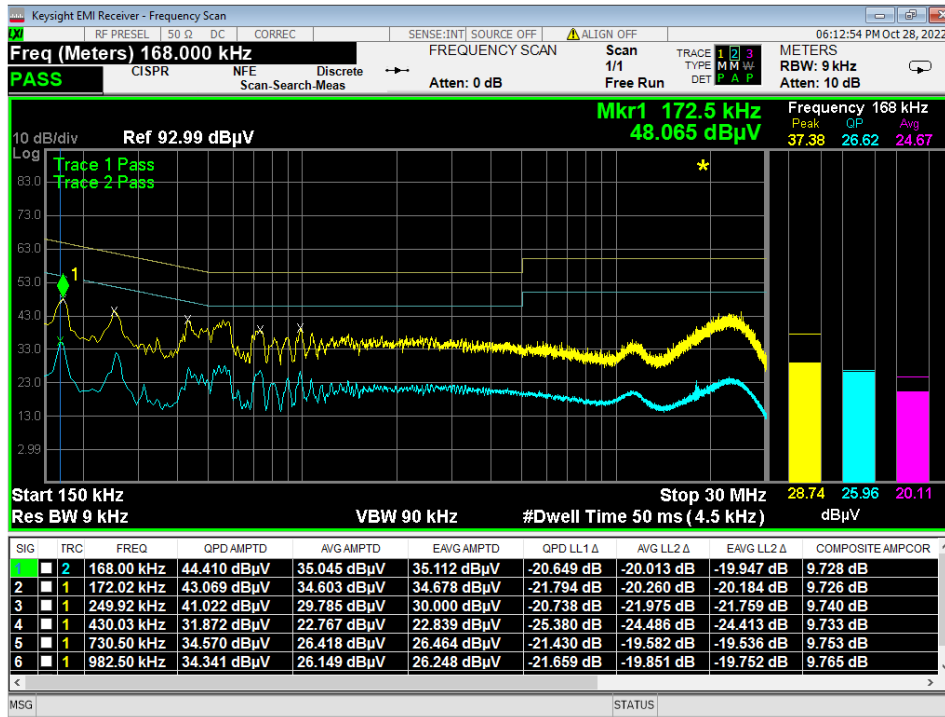


Figure 17 - Conducted Emissions Plot, Line, TX

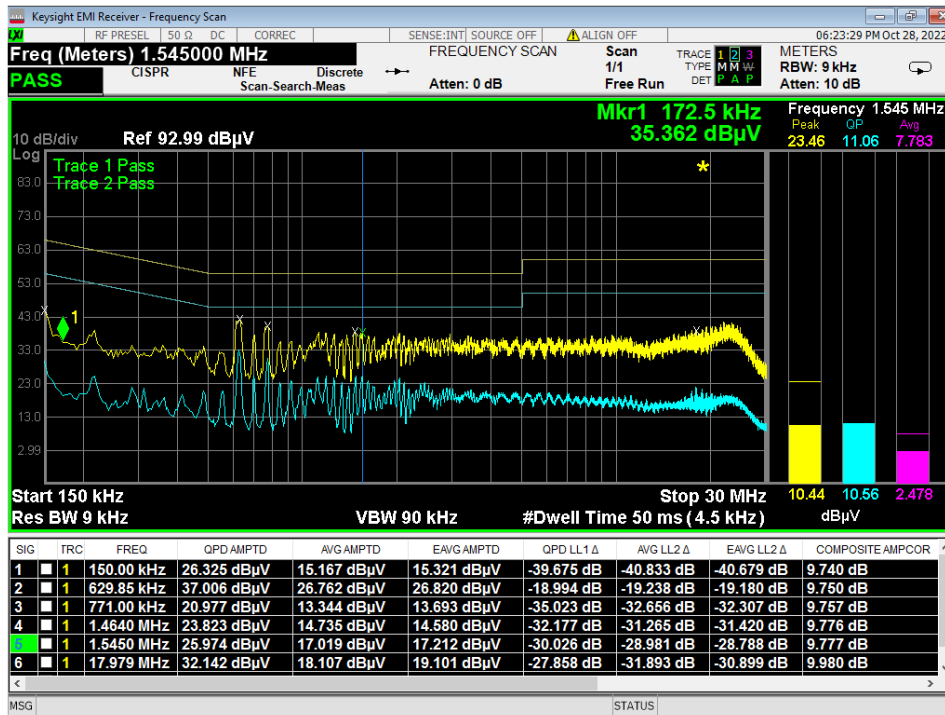


Figure 18 - Conducted Emissions Plot, Neutral, TX



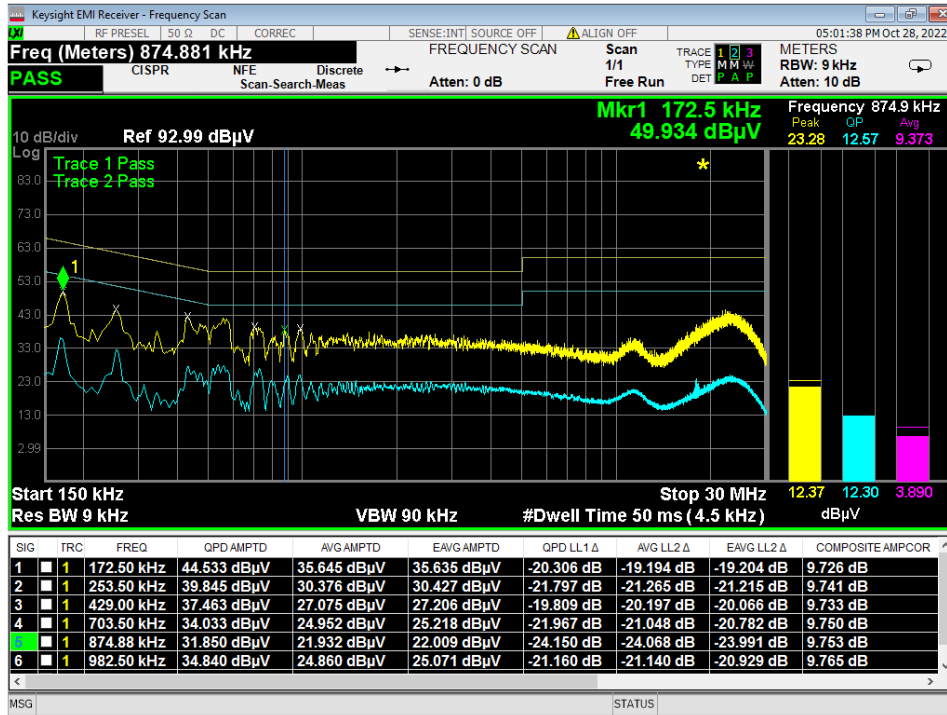


Figure 19 - Conducted Emissions Plot, Line, IDLE

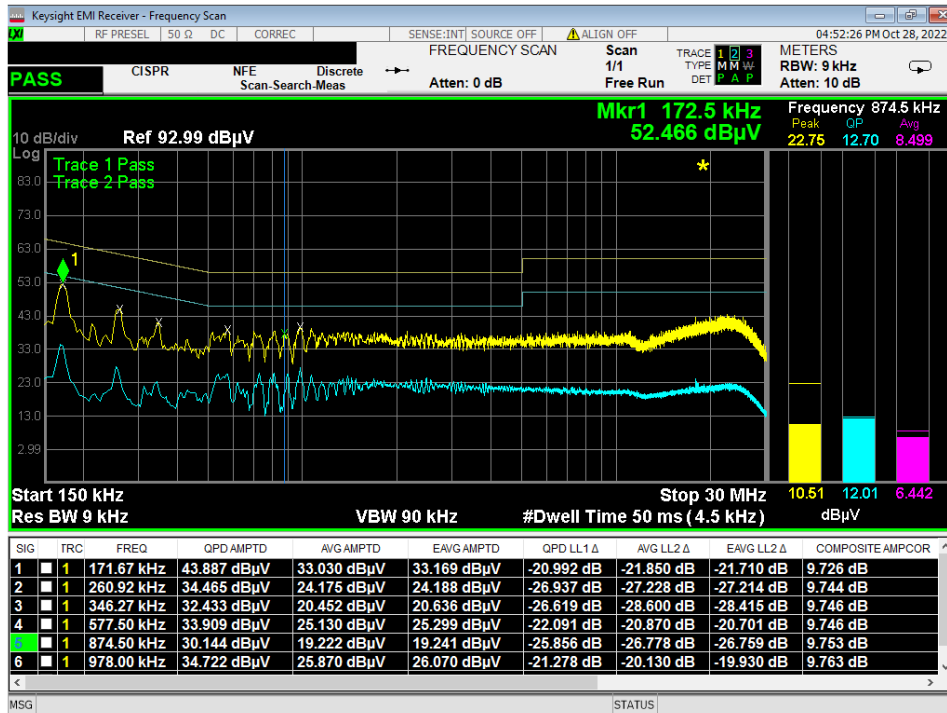


Figure 20 - Conducted Emissions Plot, Neutral, IDLE



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

## 4.9 ANTENNA GAIN

### Test procedures:

Device's conducted power was measured then the same measurement was repeated on a radiated sample at 3m test distance and converted to E.I.R.P.

### Test setup:

Details can be found in section 2.1 of this report.

### EUT operating conditions:

Details can be found in section 2.1 and 2.2 of this report.

### Test results:

#### Antenna Gain:

Radiated Average power – Conducted Average Power = Antenna gain

12.24 dBm – 15.53 dBm = **-3.29 dBi**

#### Comments:

1. Data was used from a different transmitter that utilizes the same antenna and same frequency band
2. Since antenna gain was negative, conducted values were compared to the limit as if 0dBm gain for worst case

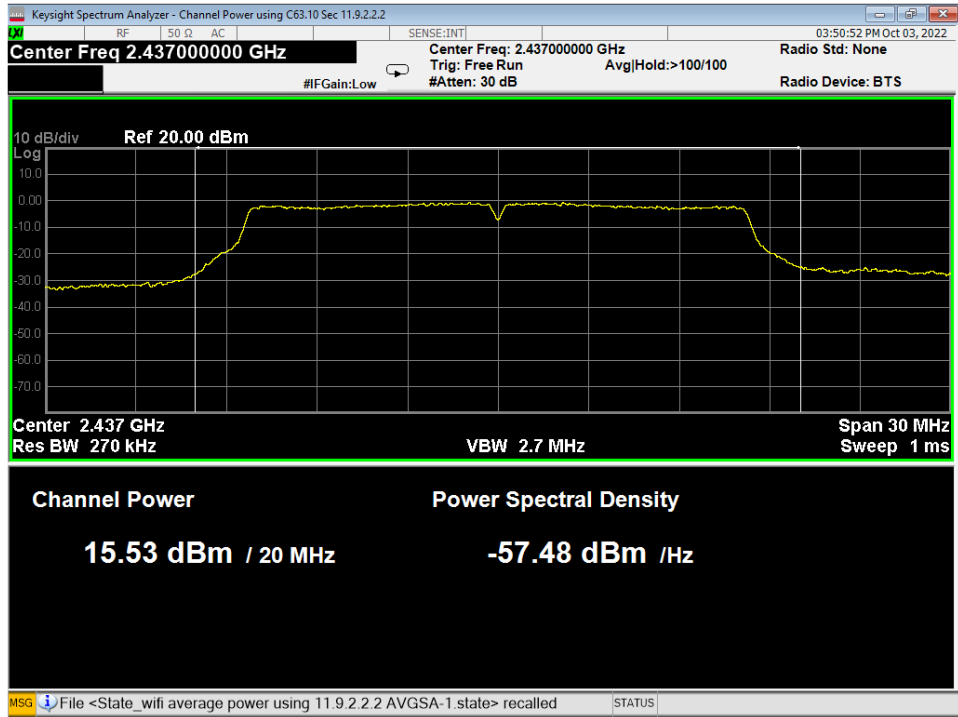


Figure 21 – Conducted Average Power Measurement, 802.11g 6MB

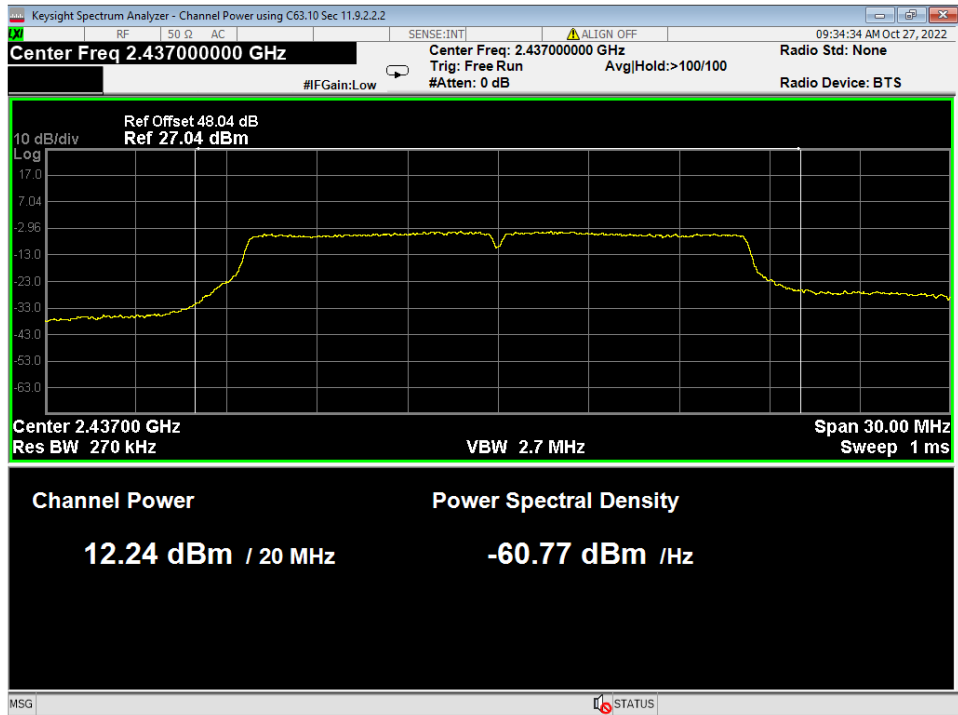


Figure 22 – Radiated Average Power Measurement, 802.11g 6MB  
 Reference offset includes EIRP conversion and corrections



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

**APPENDIX A: SAMPLE CALCULATION**

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF - (-CF + AG) + AV$$

where FS = Field Strength

- RA = Receiver Amplitude
- AF = Antenna Factor
- CF = Cable Attenuation Factor
- AG = Amplifier Gain
- AV = Averaging Factor (if applicable)


Assume a receiver reading of 55 dB $\mu$ V is obtained. The Antenna Factor of 12 and a Cable Factor of 1.1 is added. The Amplifier Gain of 20 dB is subtracted, giving a field strength of 48.1 dB $\mu$ V/m.

$$FS = 55 + 12 - (-1.1 + 20) + 0 = 48.1 \text{ dB}\mu\text{V/m}$$

The 48.1 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(48.1 \text{ dB}\mu\text{V/m})/20] = 254.1 \mu\text{V/m}$$

AV is calculated by the taking the  $20 \cdot \log(T_{on}/100)$  where  $T_{on}$  is the maximum transmission time in any 100ms window.

|  |                |                            |     |   |
|--|----------------|----------------------------|-----|---|
|  | Report Number: | R20220615-20-E1            | Rev | B |
|  | Prepared for:  | Garmin International, Inc. |     |   |

## EIRP Calculations

In cases where direct antenna port measurement is not possible or would be inaccurate, output power is measured in EIRP. The maximum field strength is measured at a specified distance and the EIRP is calculated using the following equation;

$$EIRP \text{ (Watts)} = [\text{Field Strength (V/m)} \times \text{antenna distance (m)}]^2 / 30$$

$$\text{Power (watts)} = 10^{[\text{Power (dBm)}/10]} / 1000$$

$$\text{Voltage (dB}\mu\text{V)} = \text{Power (dBm)} + 107 \text{ (for } 50\Omega \text{ measurement systems)}$$

$$\text{Field Strength (V/m)} = 10^{[\text{Field Strength (dB}\mu\text{V/m)} / 20]} / 10^6$$

$$\text{Gain} = 1 \text{ (numeric gain for isotropic radiator)}$$

Conversion from 3m field strength to EIRP (d=3):

$$EIRP = [\text{FS(V/m)} \times d^2]/30 = \text{FS} [0.3] \quad \text{for } d = 3$$

$$EIRP(\text{dBm}) = \text{FS}(\text{dB}\mu\text{V/m}) - 10(\log 10^9) + 10\log[0.3] = \text{FS}(\text{dB}\mu\text{V/m}) - 95.23$$

*10log( 10^9) is the conversion from micro to milli*



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |


**APPENDIX B – MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been for tests performed in this test report:

| <b>Test</b>                 | <b>Frequency Range</b> | <b>Uncertainty Value (dB)</b> |
|-----------------------------|------------------------|-------------------------------|
| Radiated Emissions, 3m      | 30MHz - 1GHz           | ±4.31                         |
| Radiated Emissions, 3m      | 1GHz - 18GHz           | ±5.08                         |
| Emissions limits, conducted | 150kHz – 30MHz         | ±3.03                         |

Expanded uncertainty values are calculated to a confidence level of 95%.


APPENDIX C – GRAPHS AND TABLES

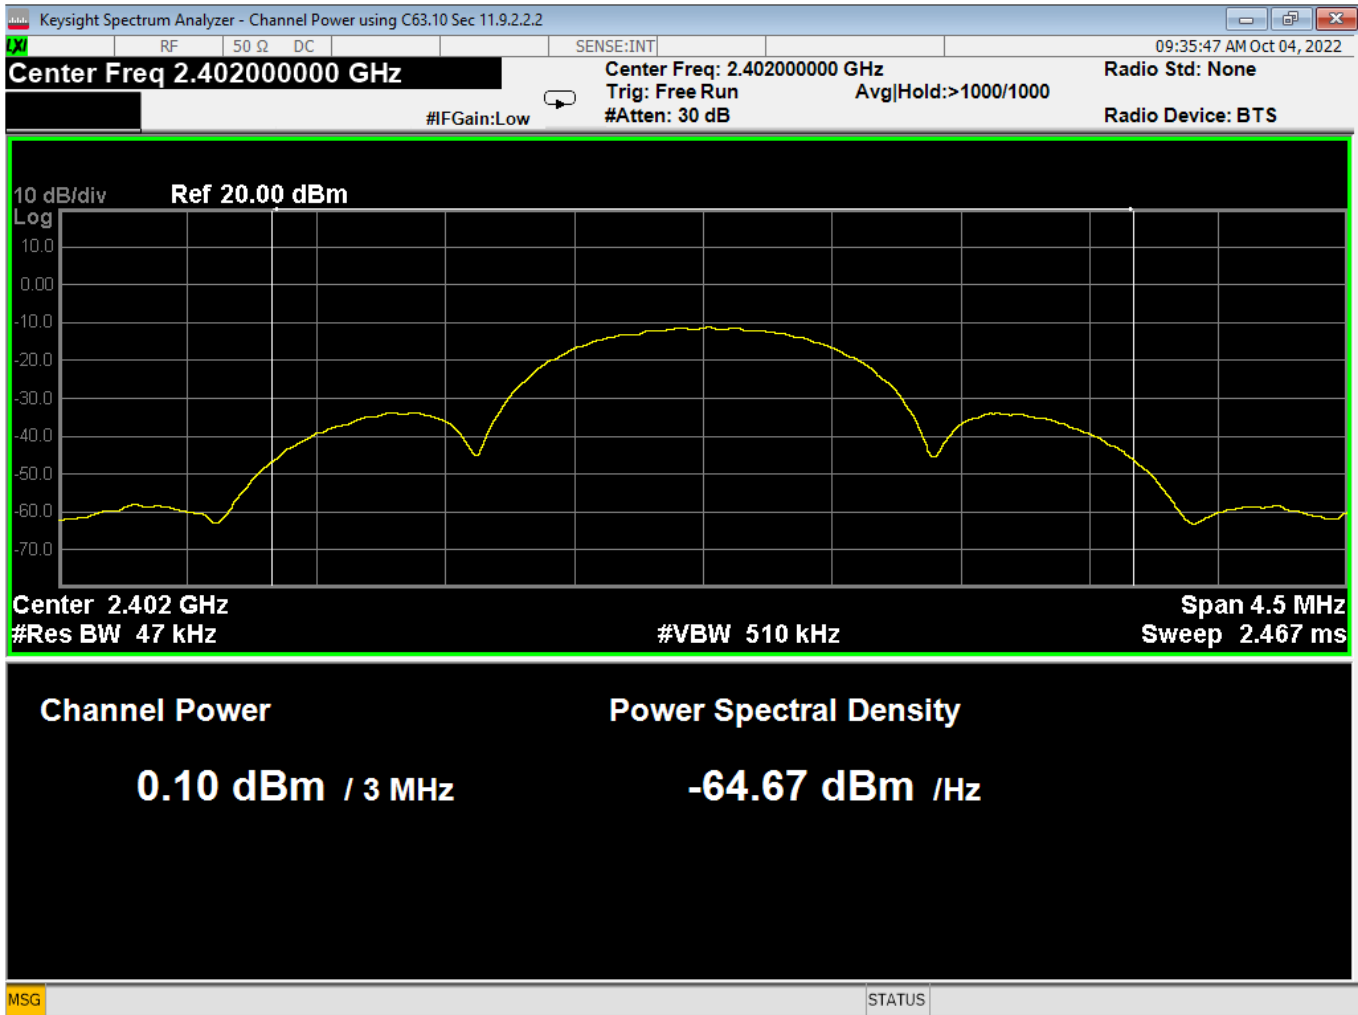

01 Average Power, Low Channel, GFSK



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

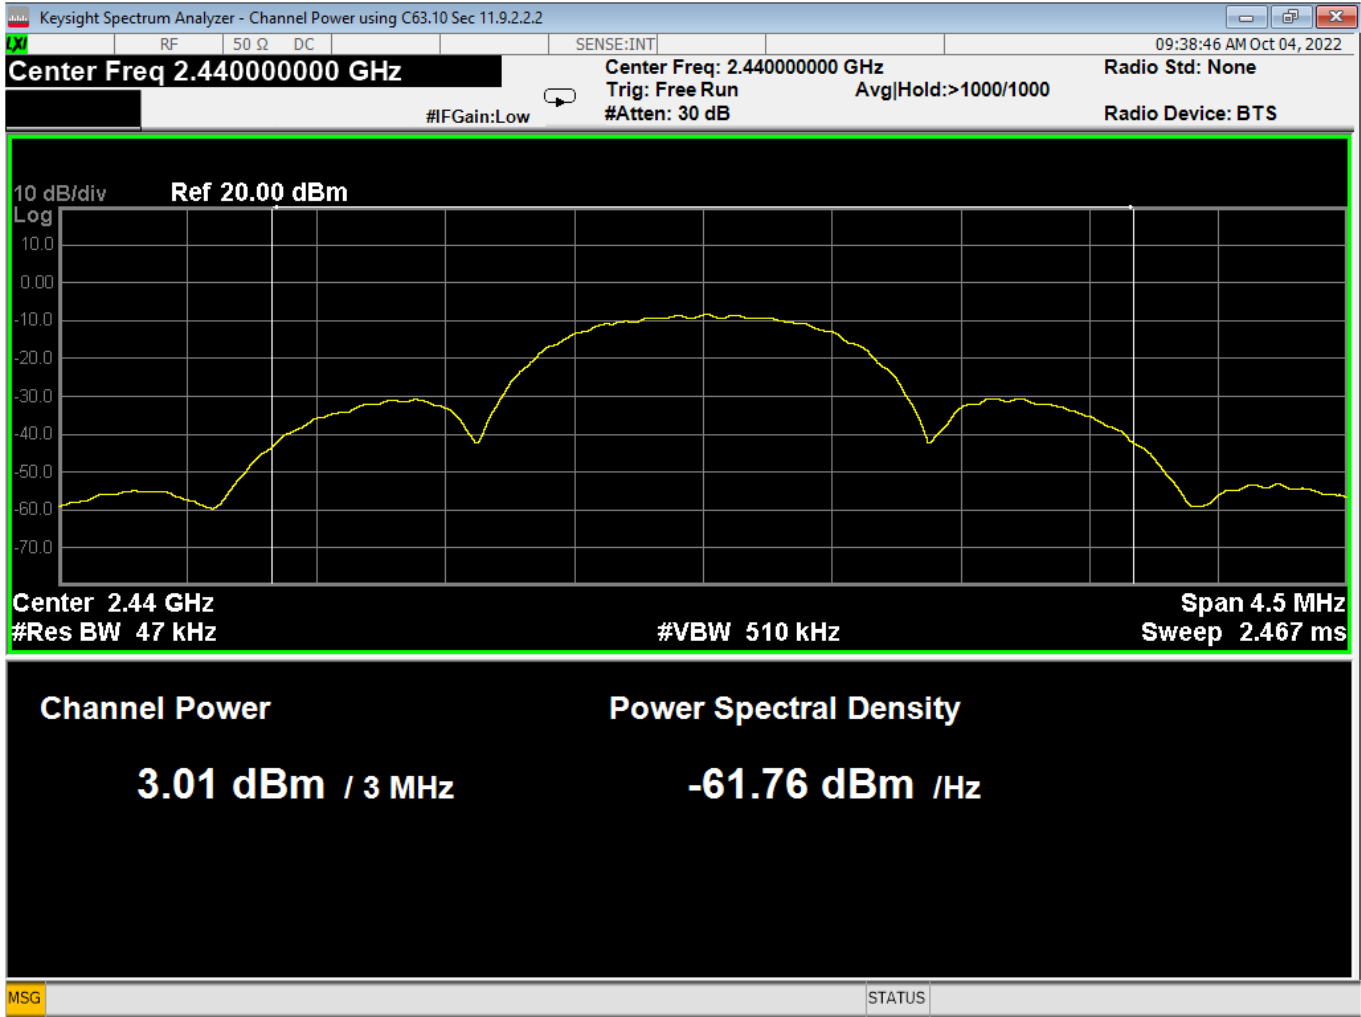


02 Average Power, Mid Channel, GFSK






|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

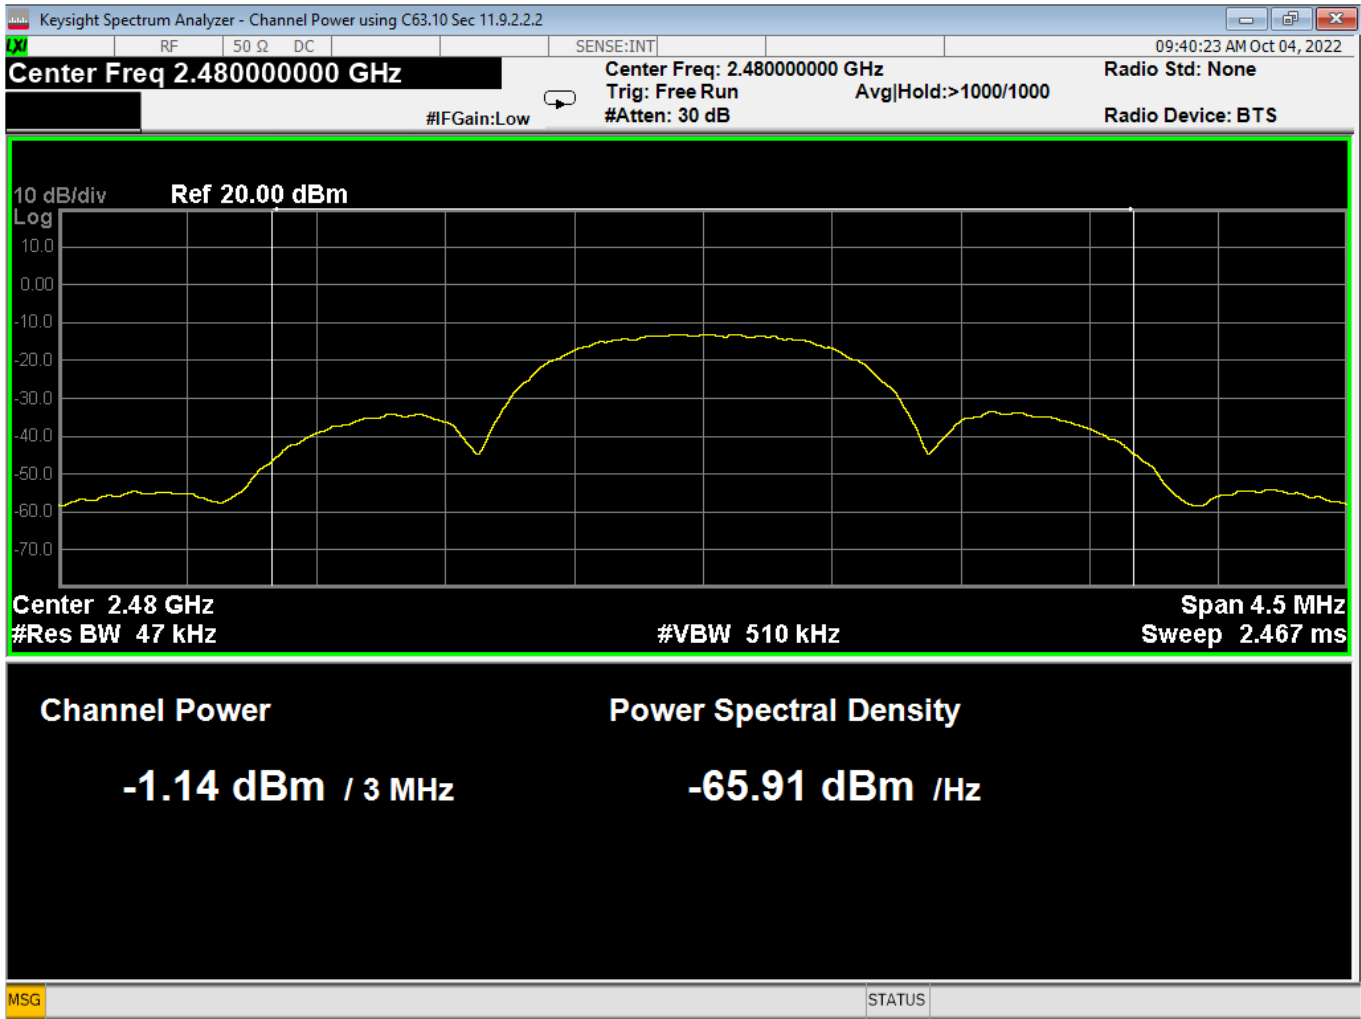

03 Average Power, High Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

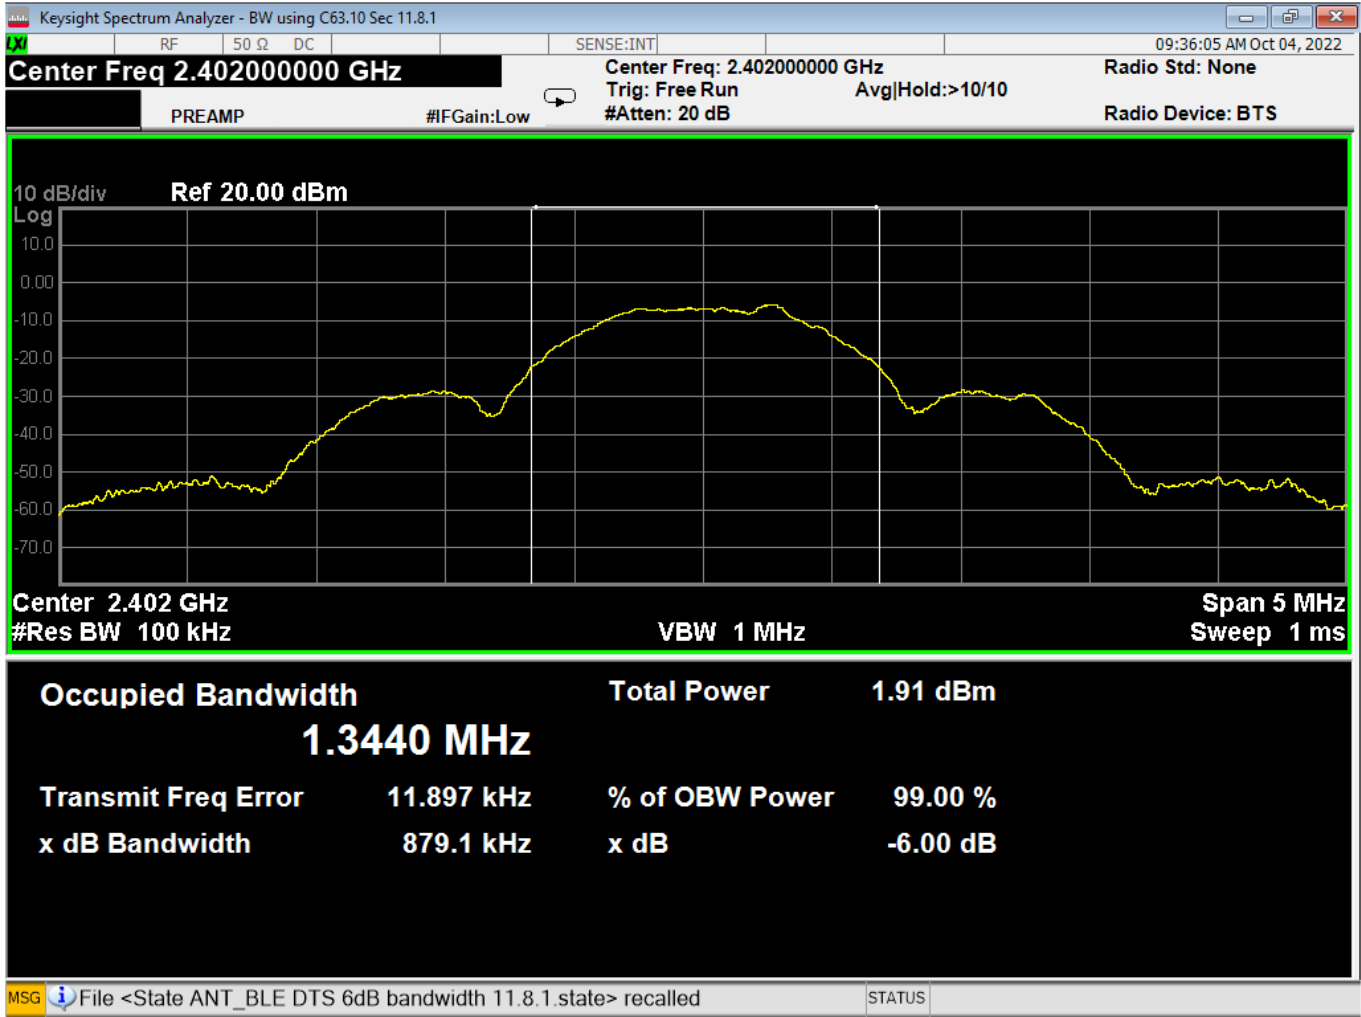

04 6dB Bandwidth, Low Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

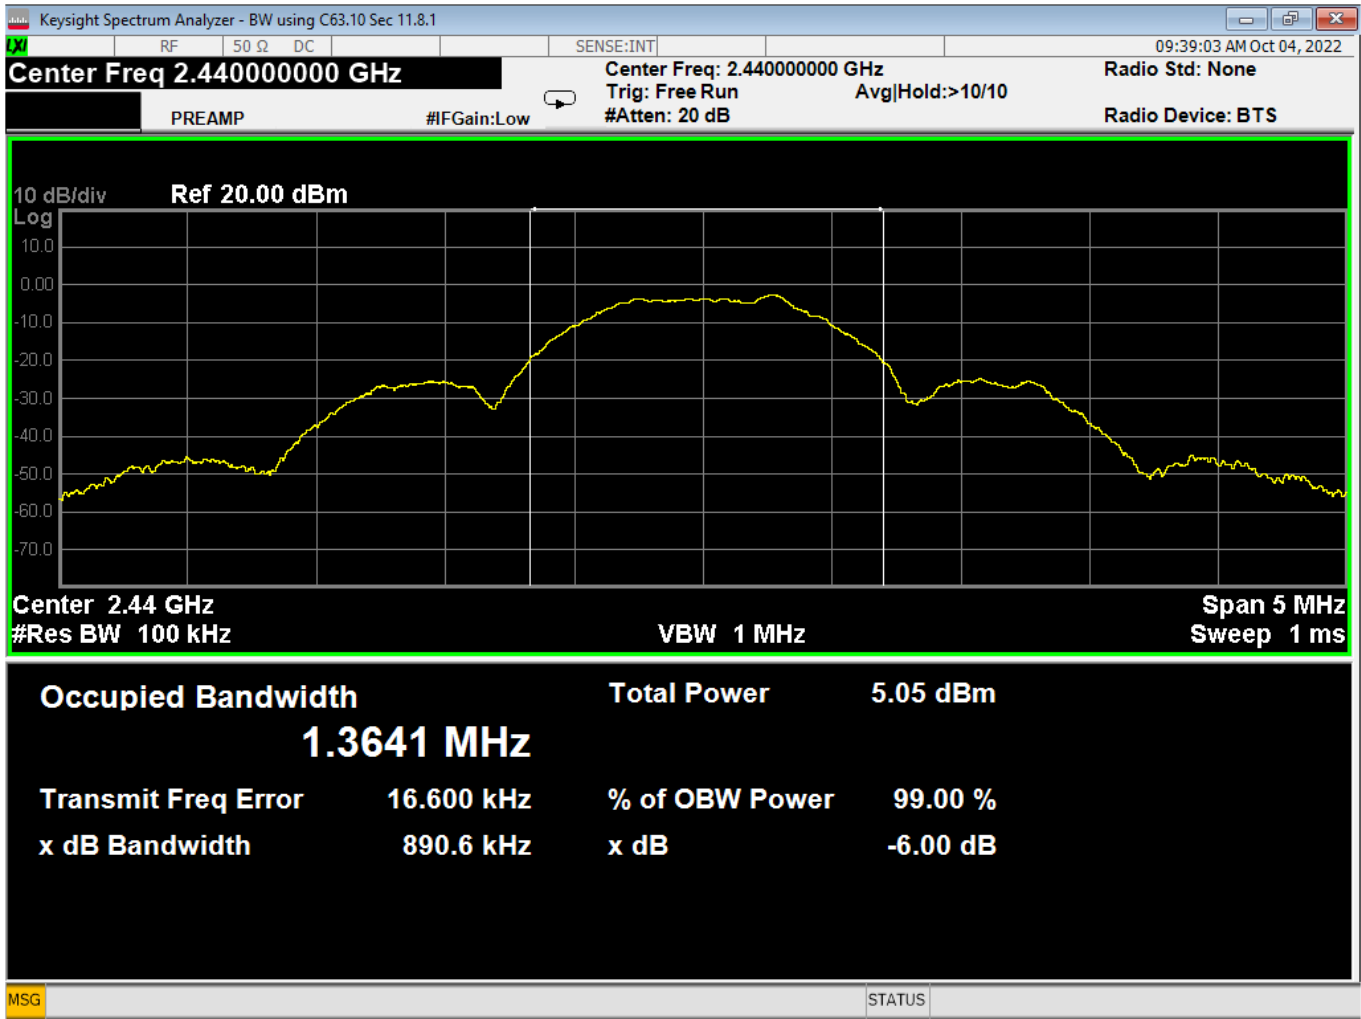

05 6dB Bandwidth, Mid Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

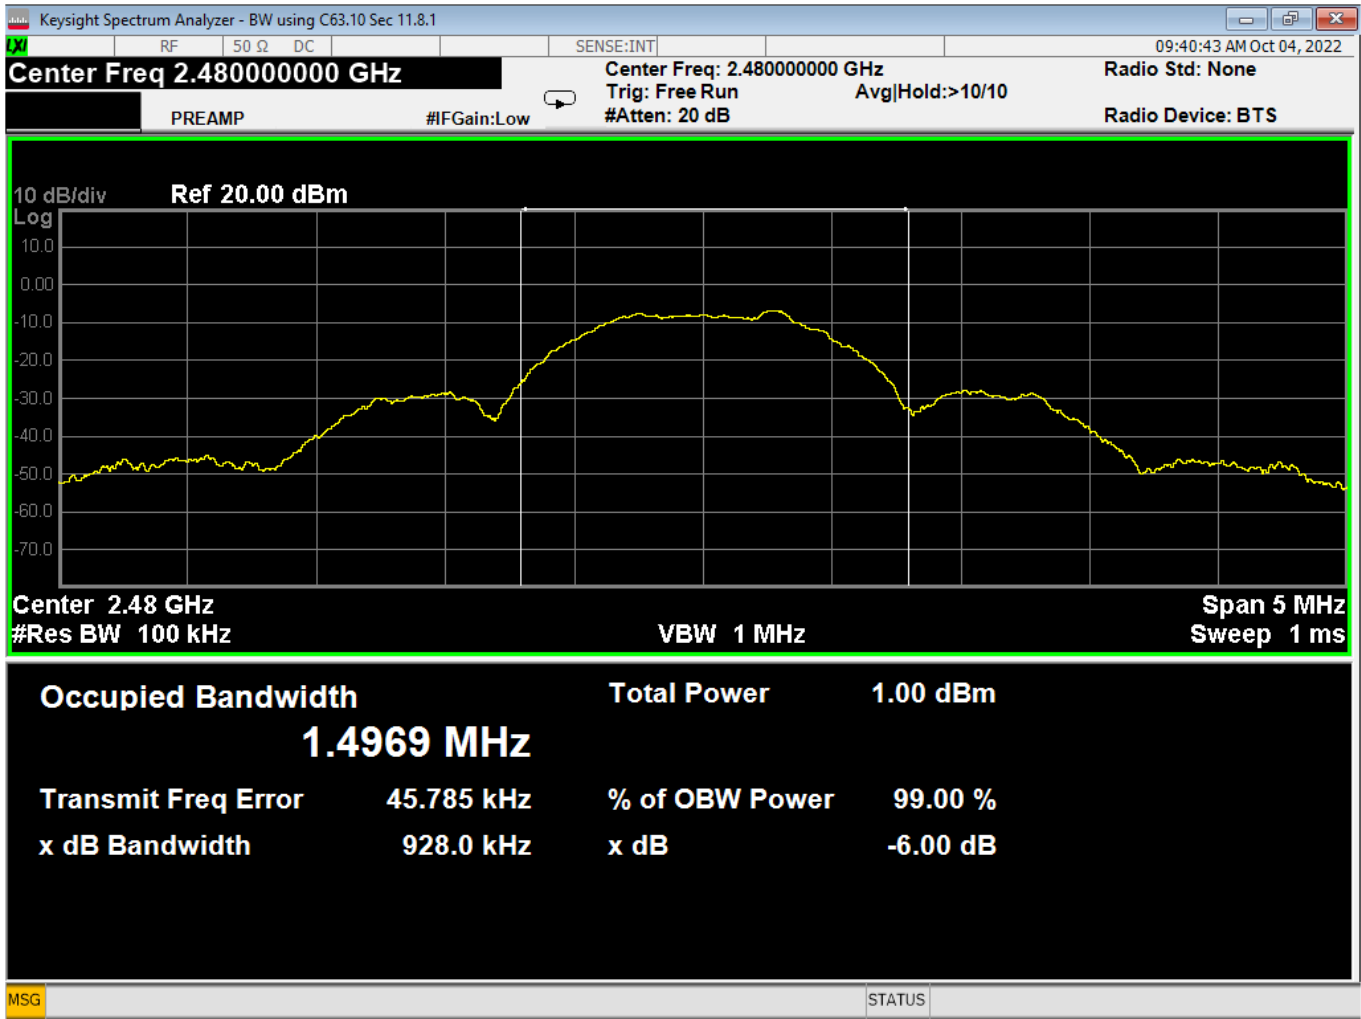

06 6dB Bandwidth, High Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

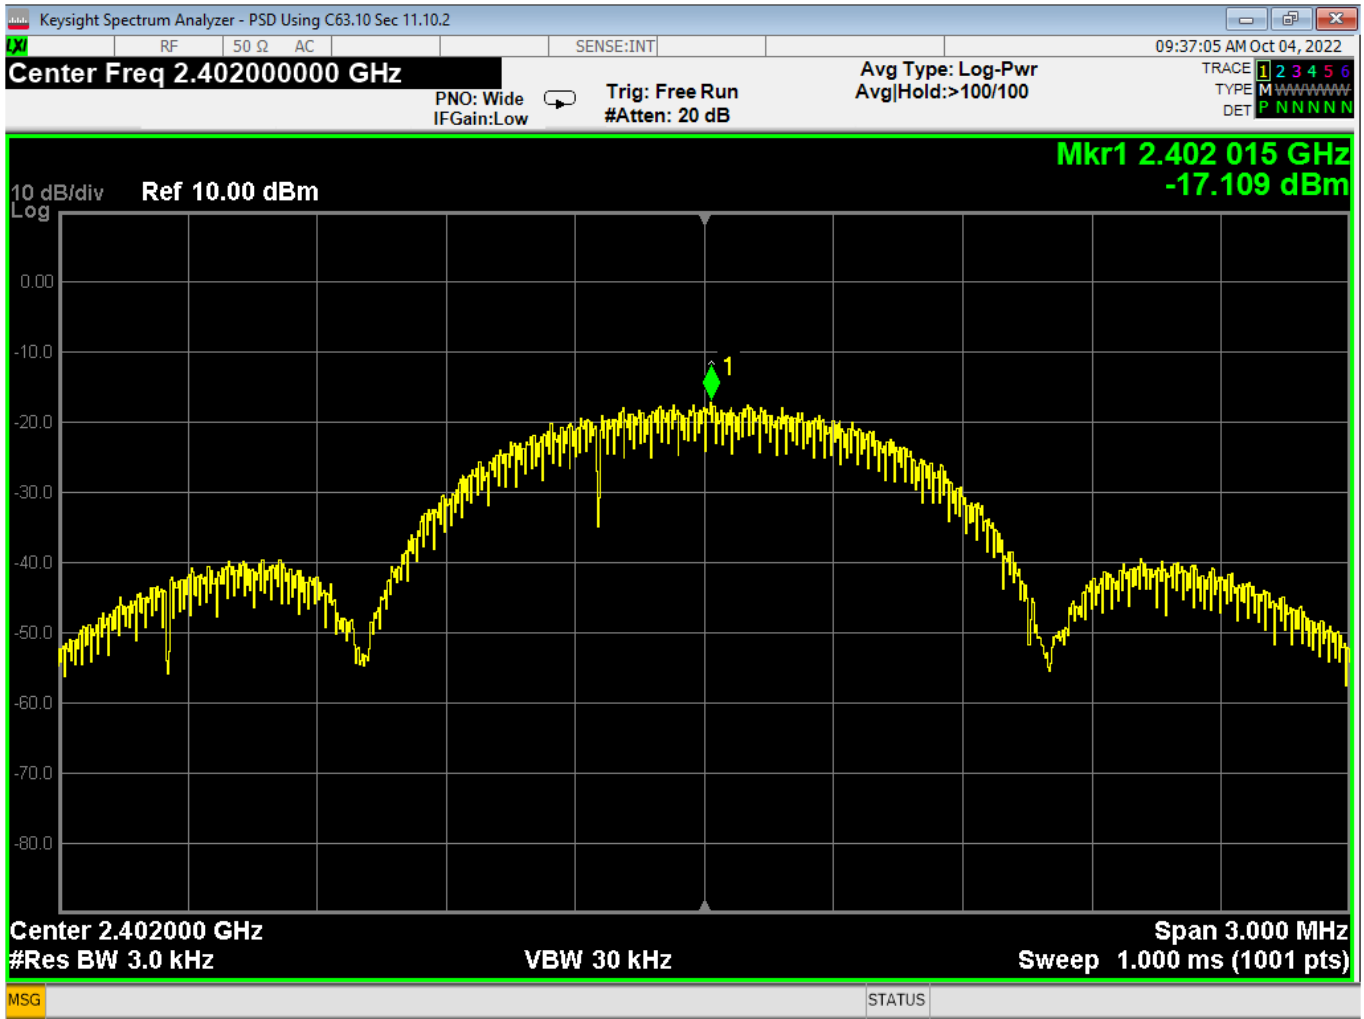

07 PSD, Low Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

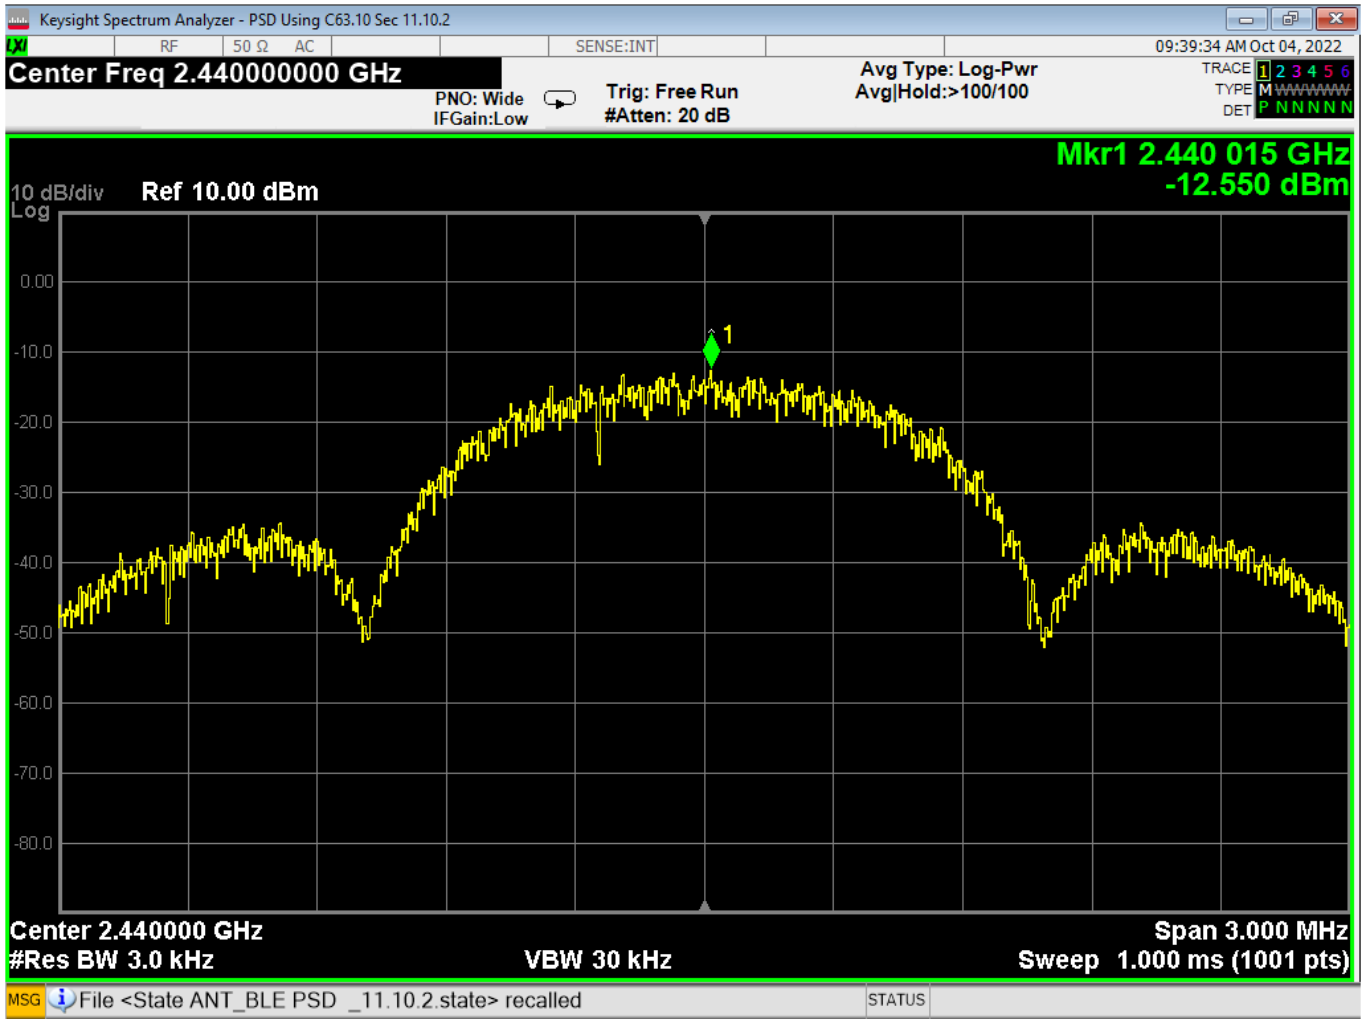

08 PSD, Mid Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

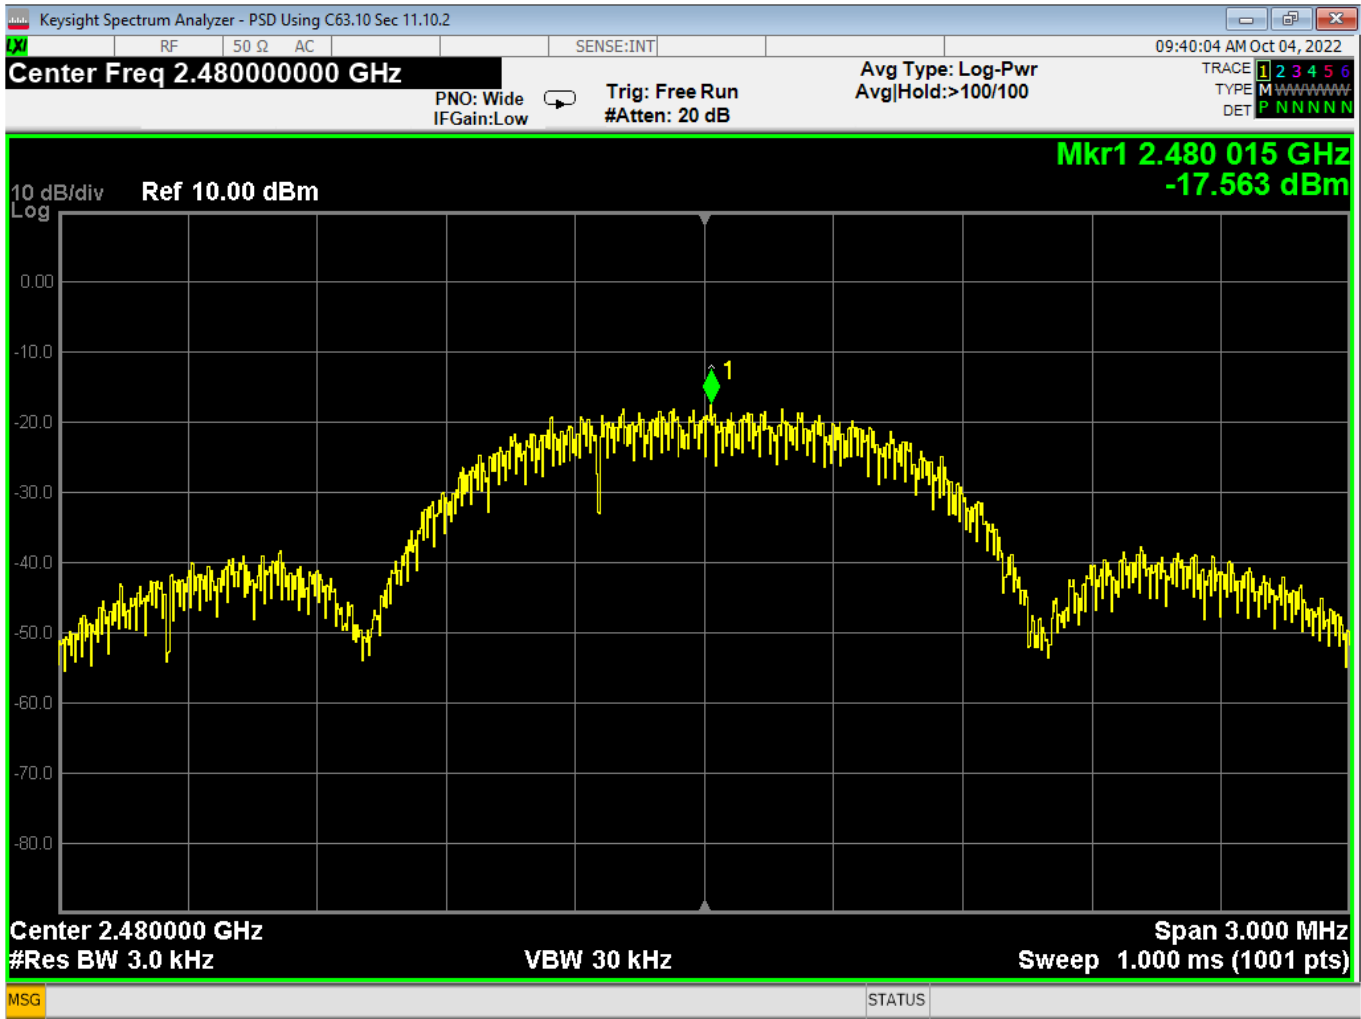

09 PSD, High Channel, GFSK



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

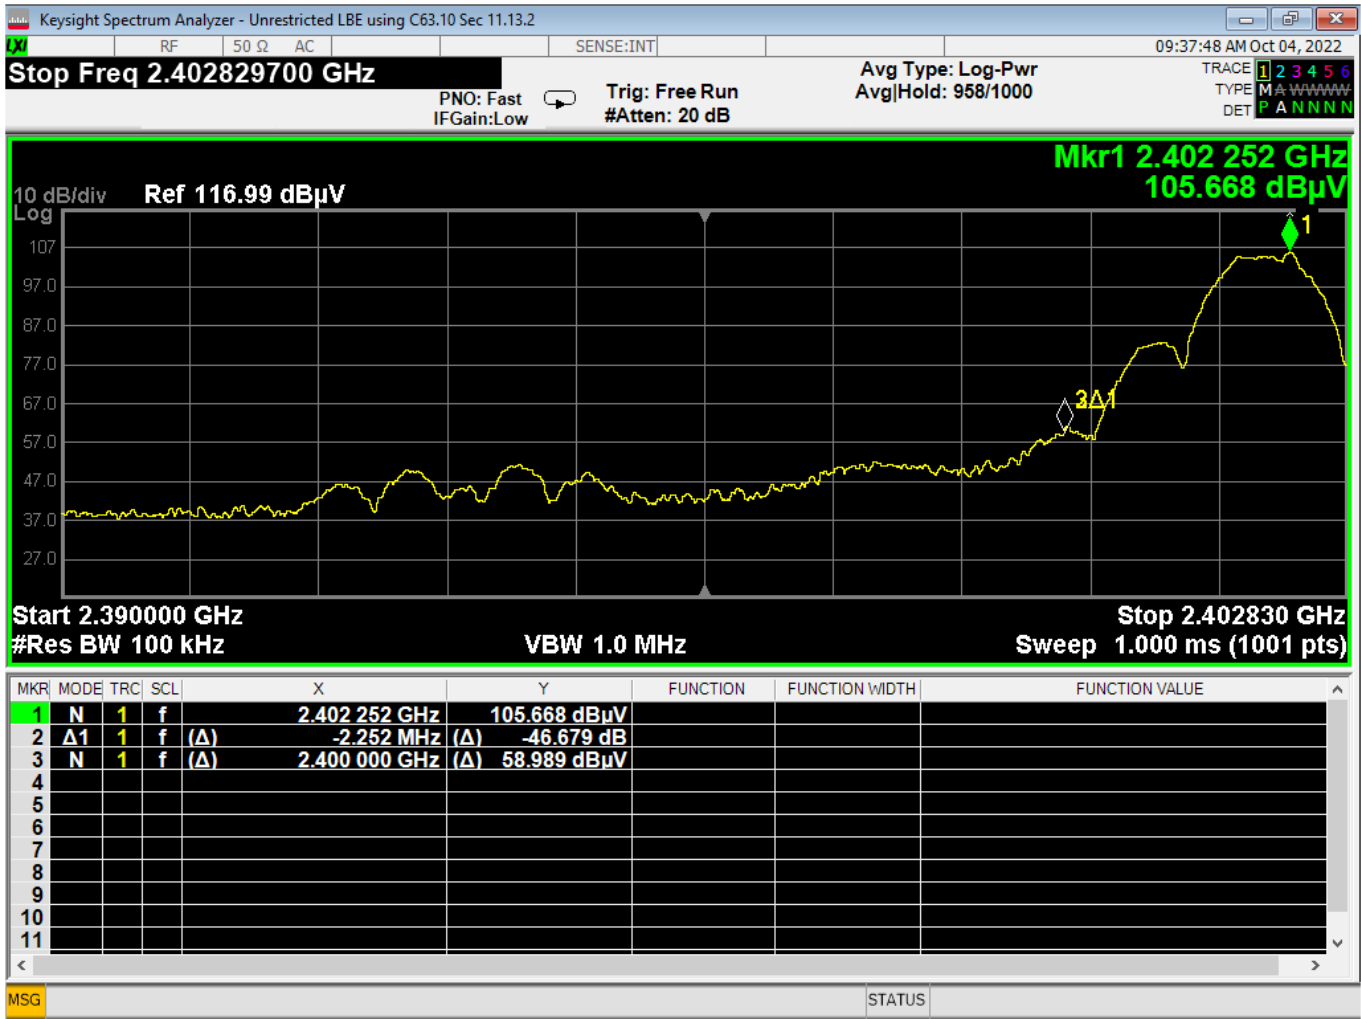


10 Lower Bandedge, Unrestricted, GFSK





|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

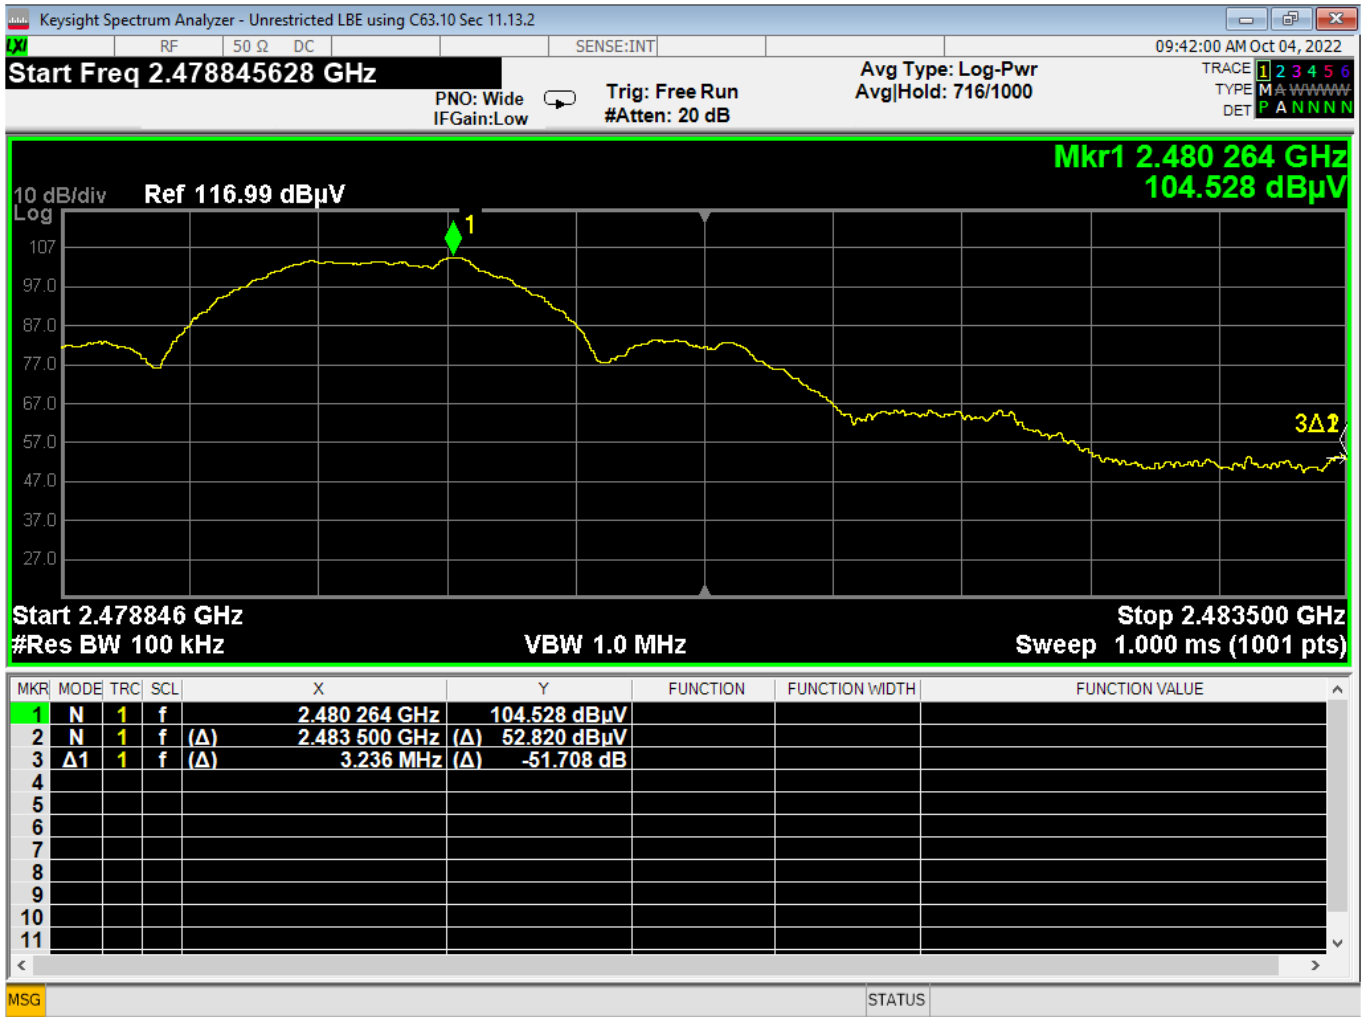

11 Higher Bandedge, Unrestricted, GFSK



Report Number:


R20220615-20-E1

Rev

B

Prepared for:


Garmin International, Inc.

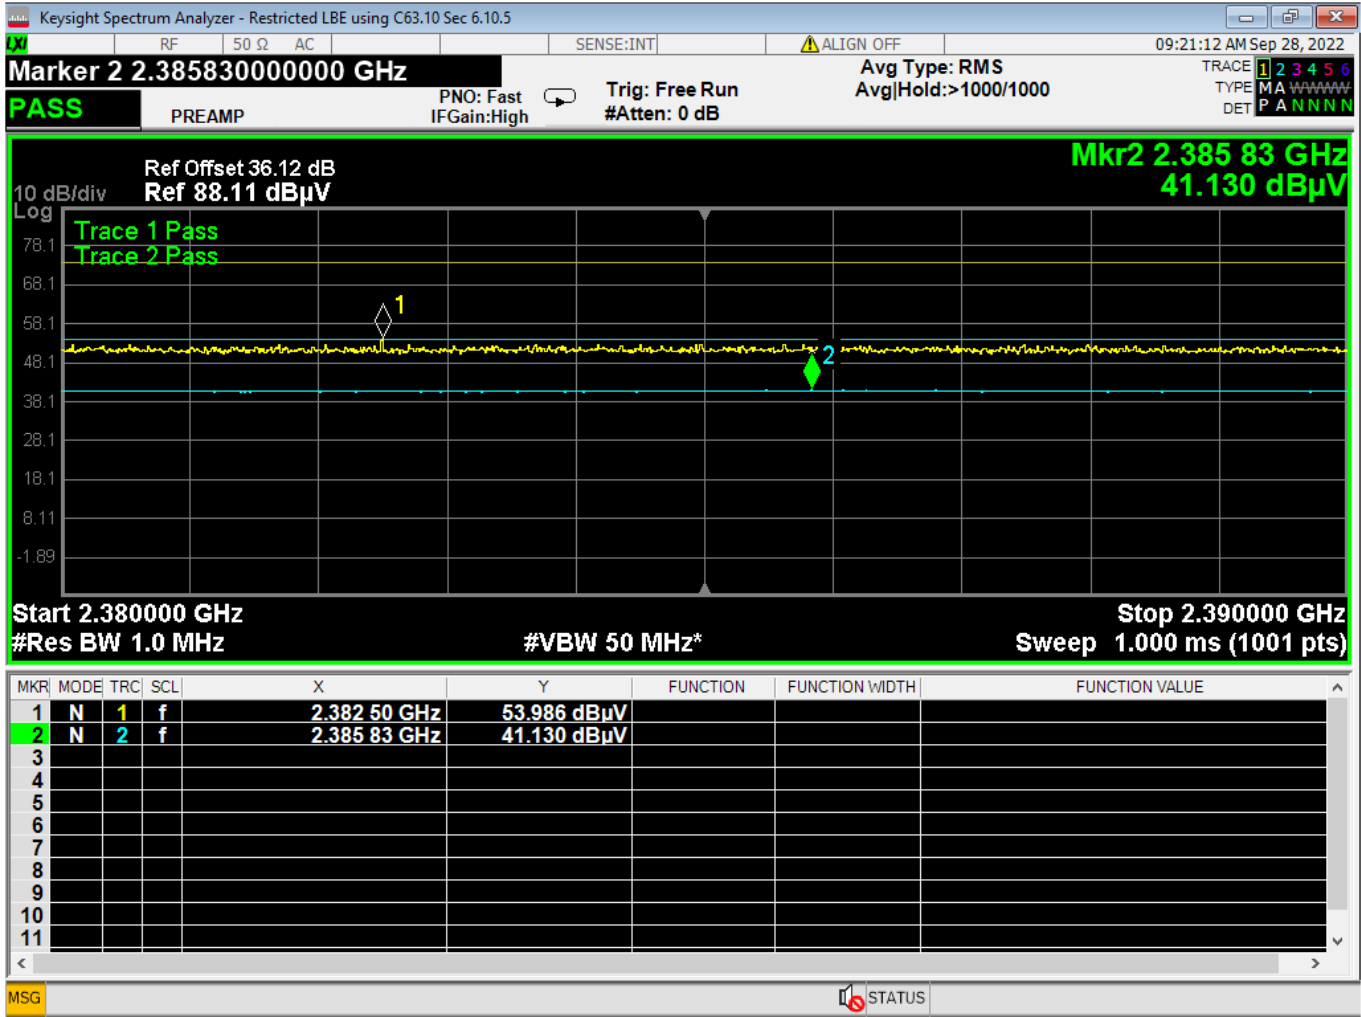

12 Lower Bandedge, Restricted, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

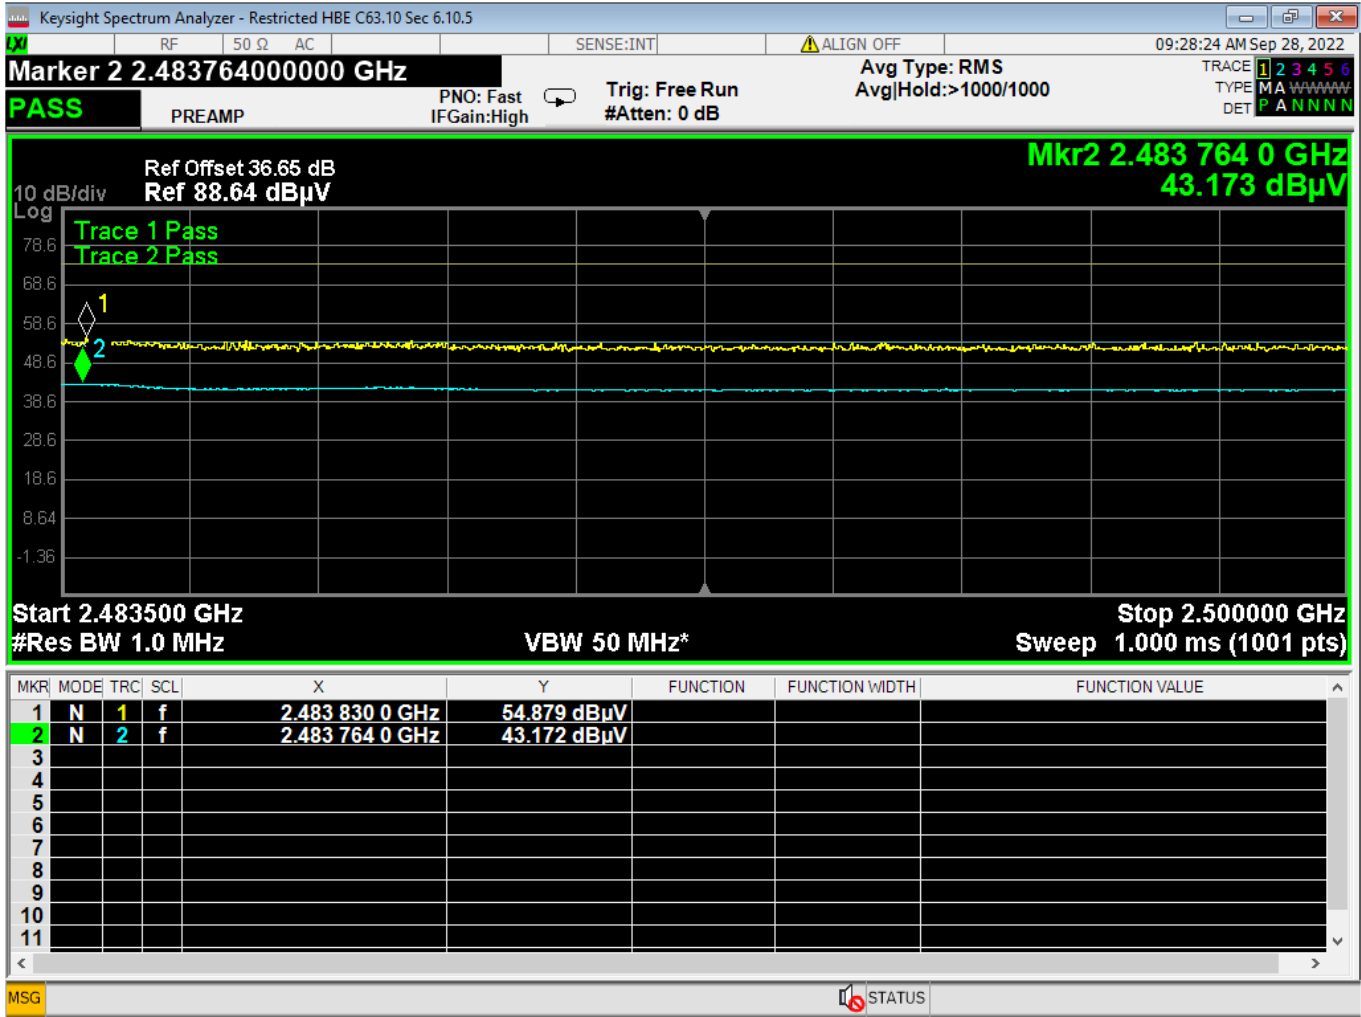

13 Higher Bandedge, Restricted, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

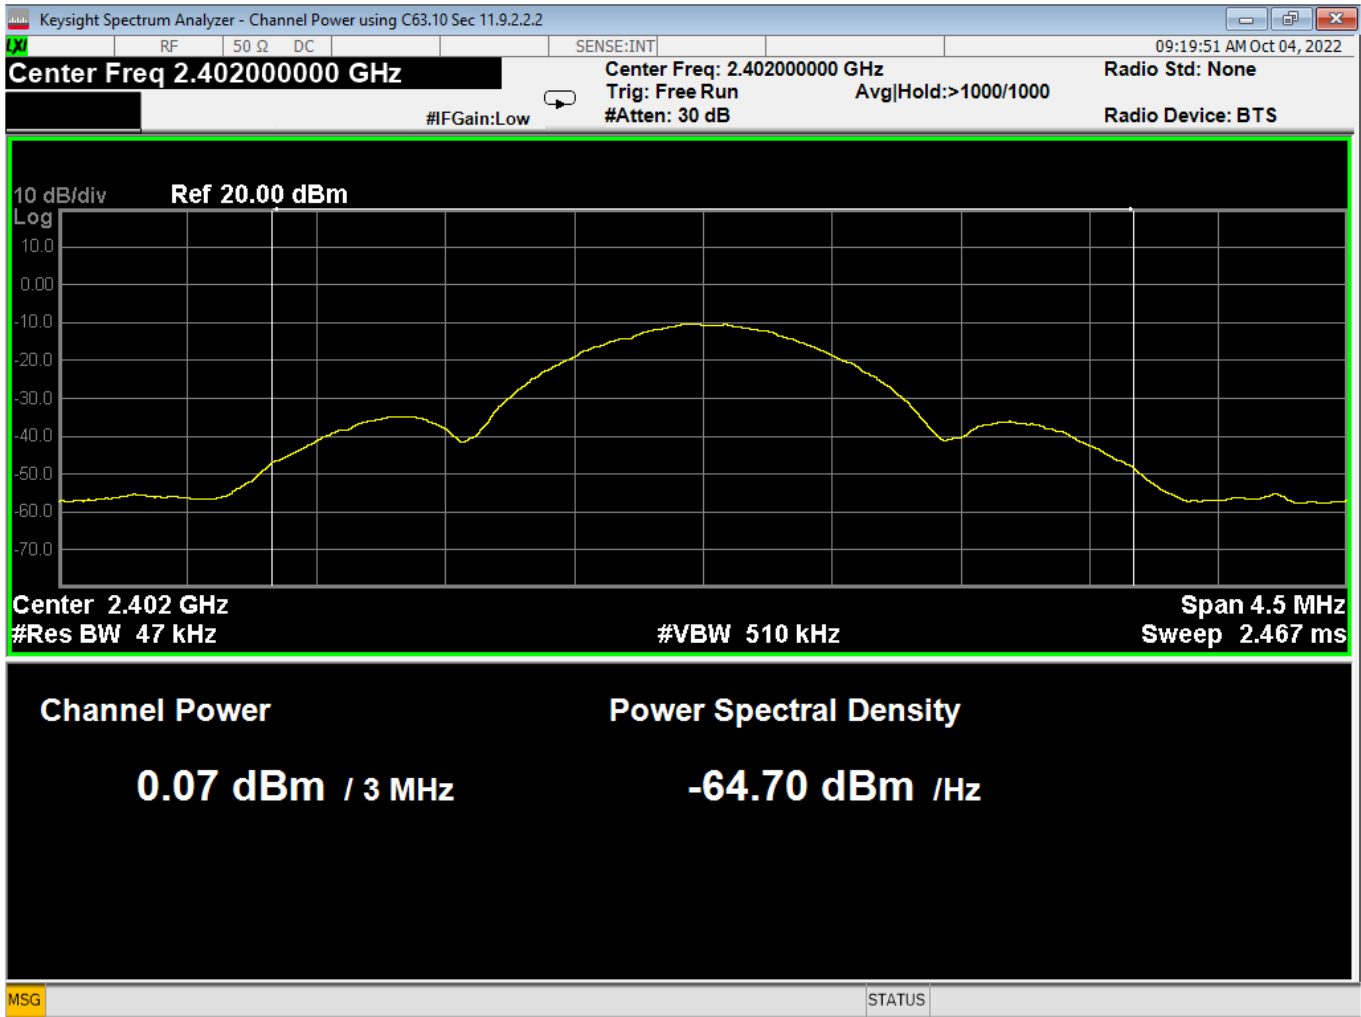

14 Average Power, Low Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

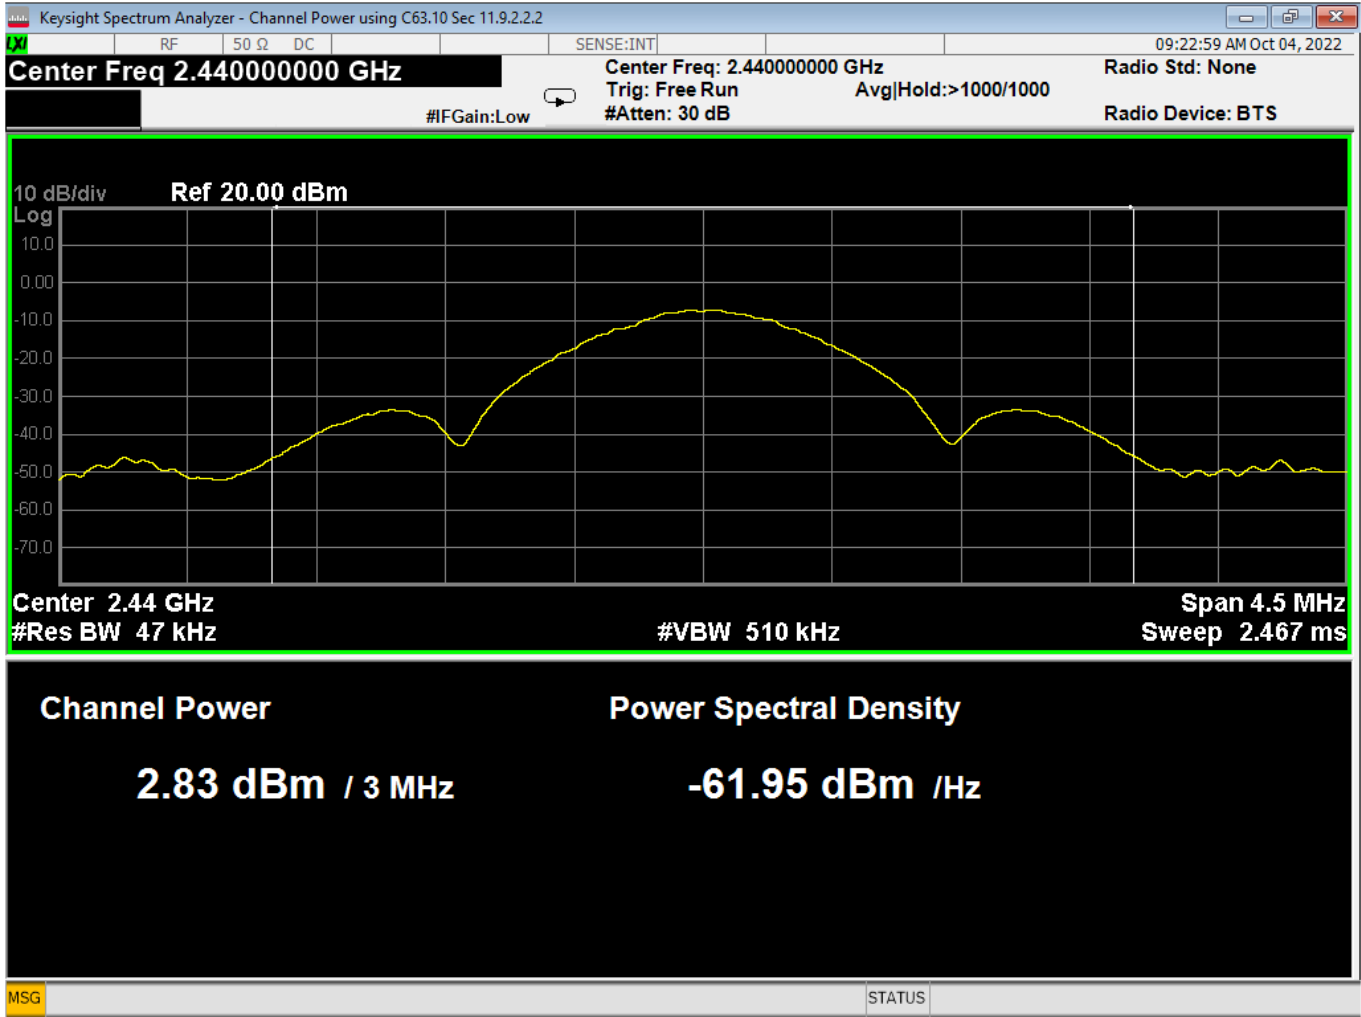

15 Average Power, Mid Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

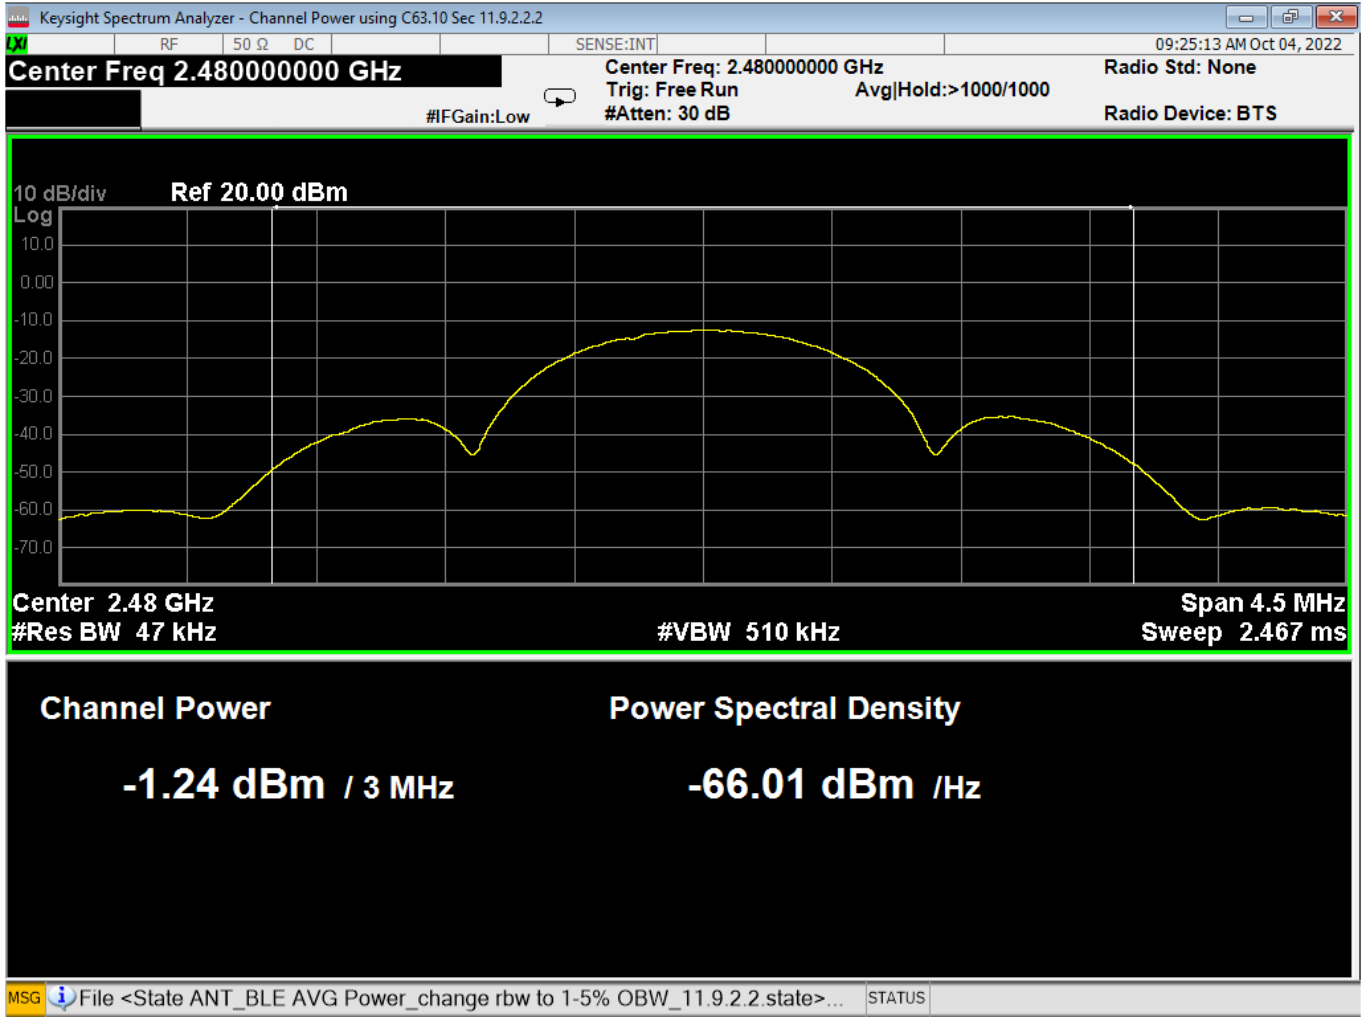

**16 Average Power, High Channel, GMSK 1MB**




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

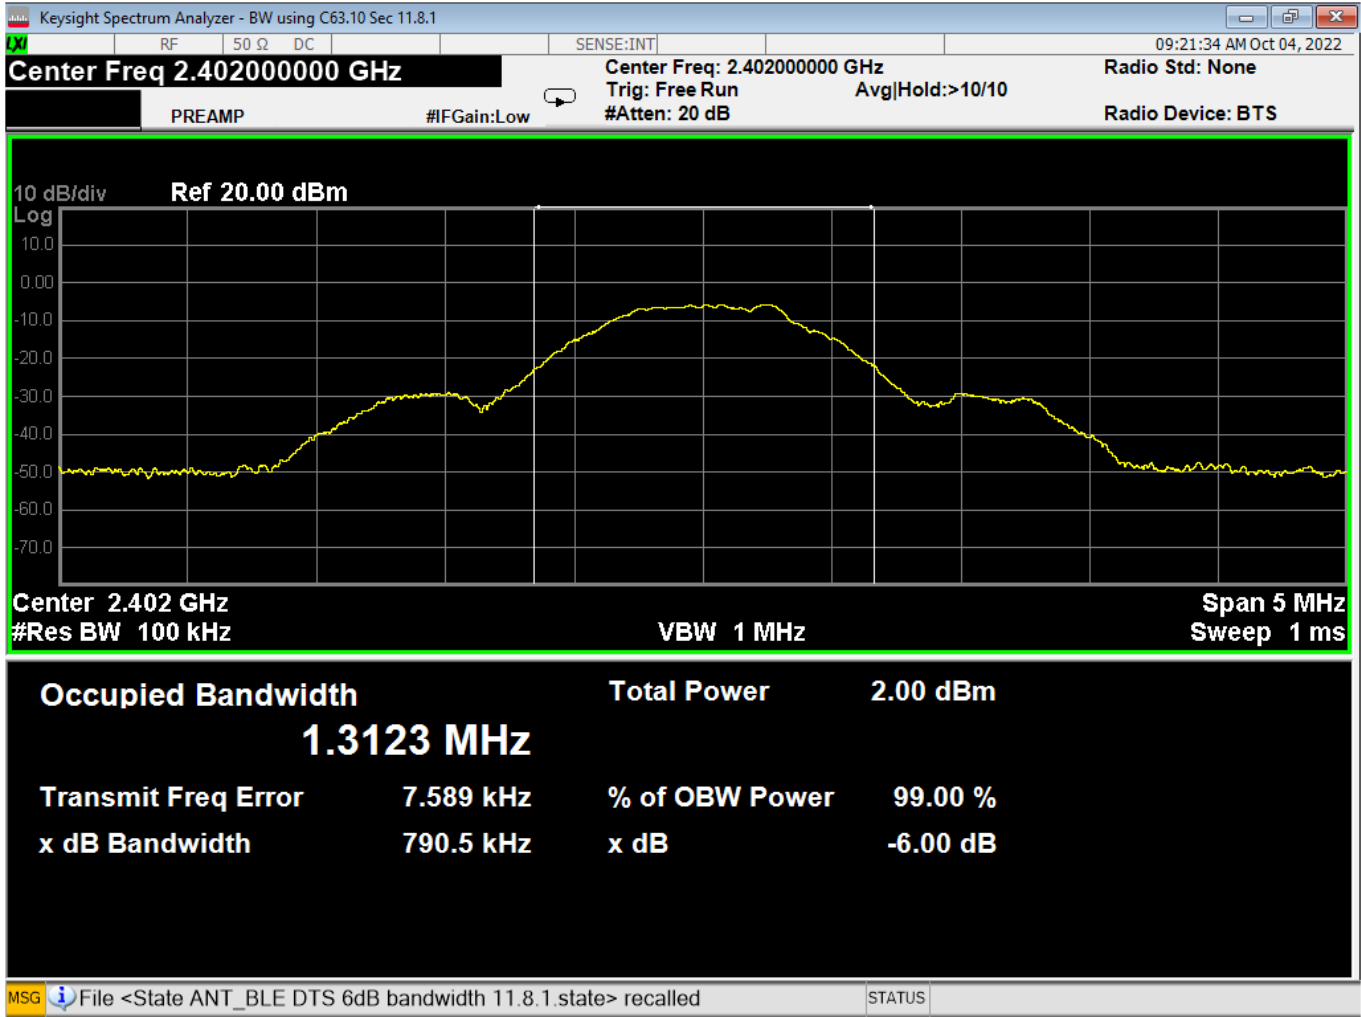

17 6dB Bandwidth, Low Channel, GMSK 1MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

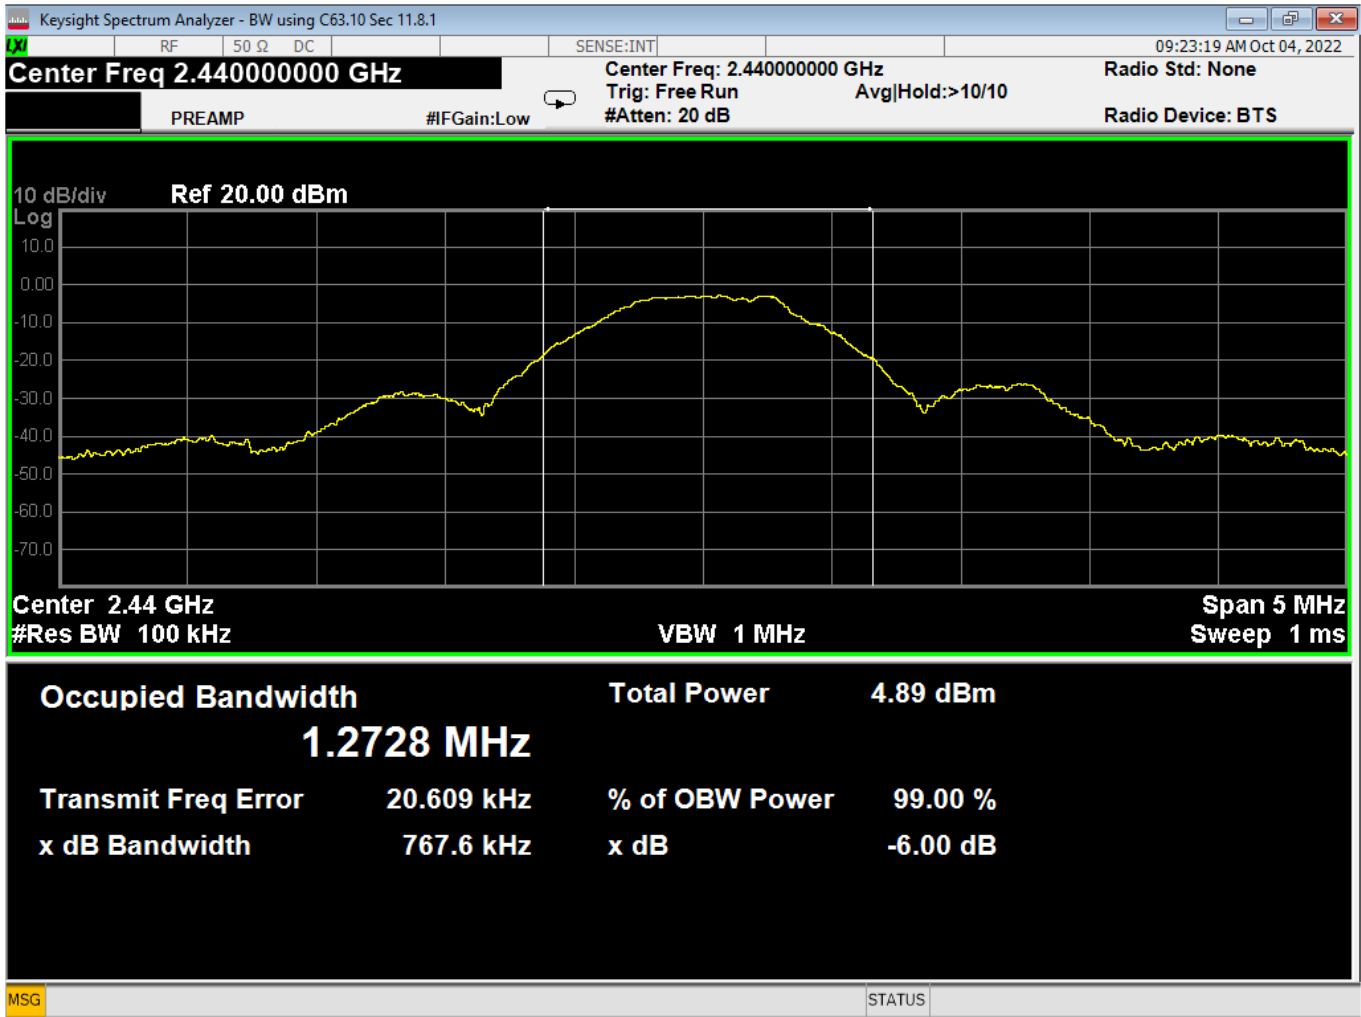

18 dB Bandwidth, Mid Channel, GMSK 1MB





Report Number:


R20220615-20-E1

Rev

B

Prepared for:


Garmin International, Inc.

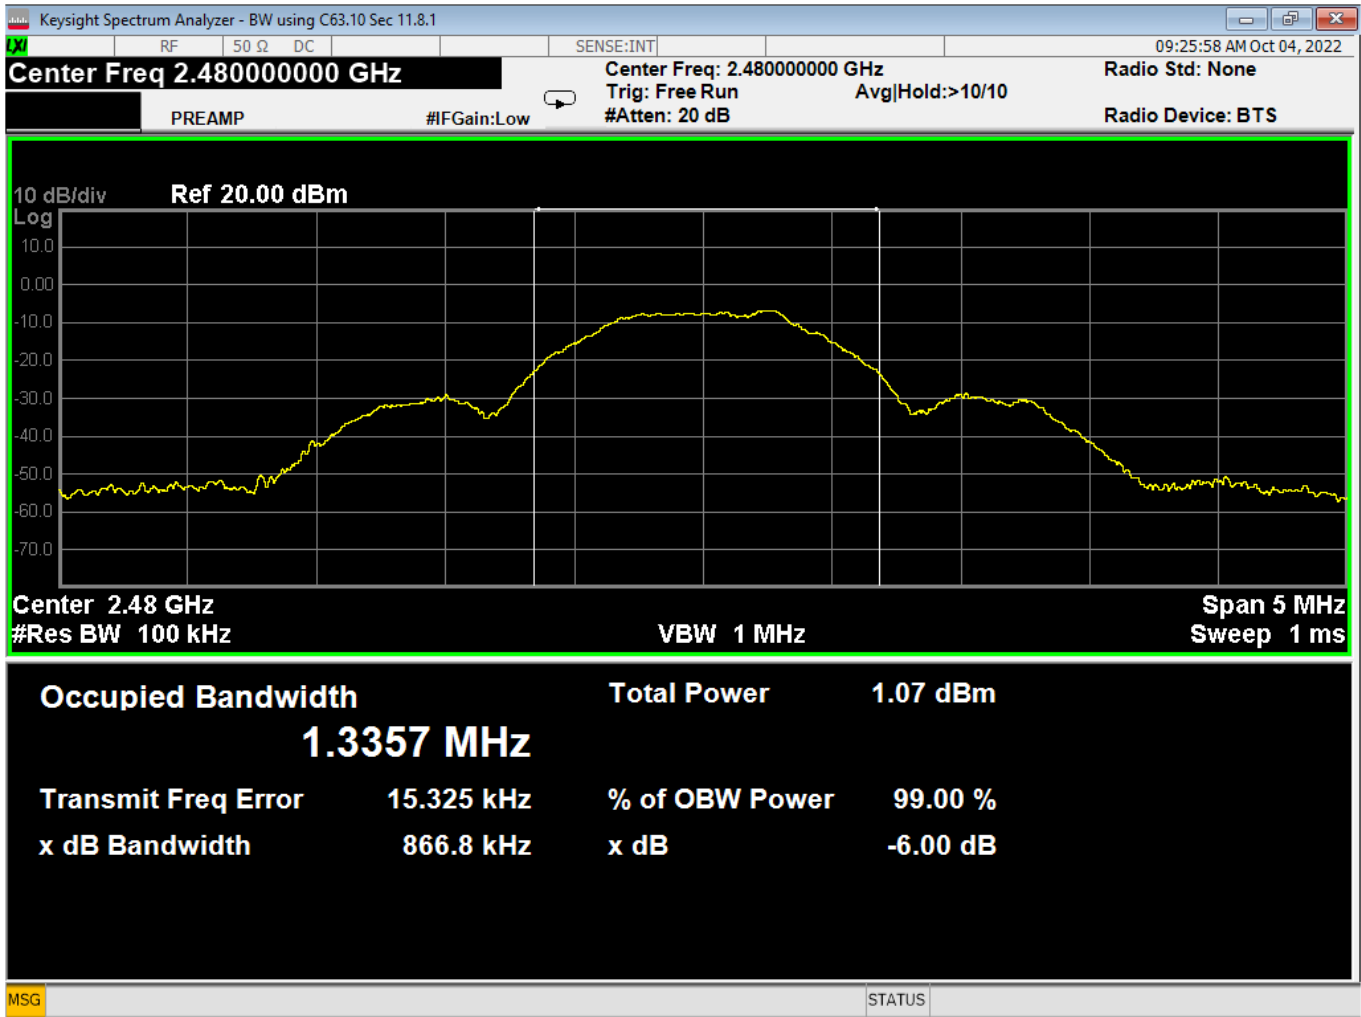

19 6dB Bandwidth, High Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

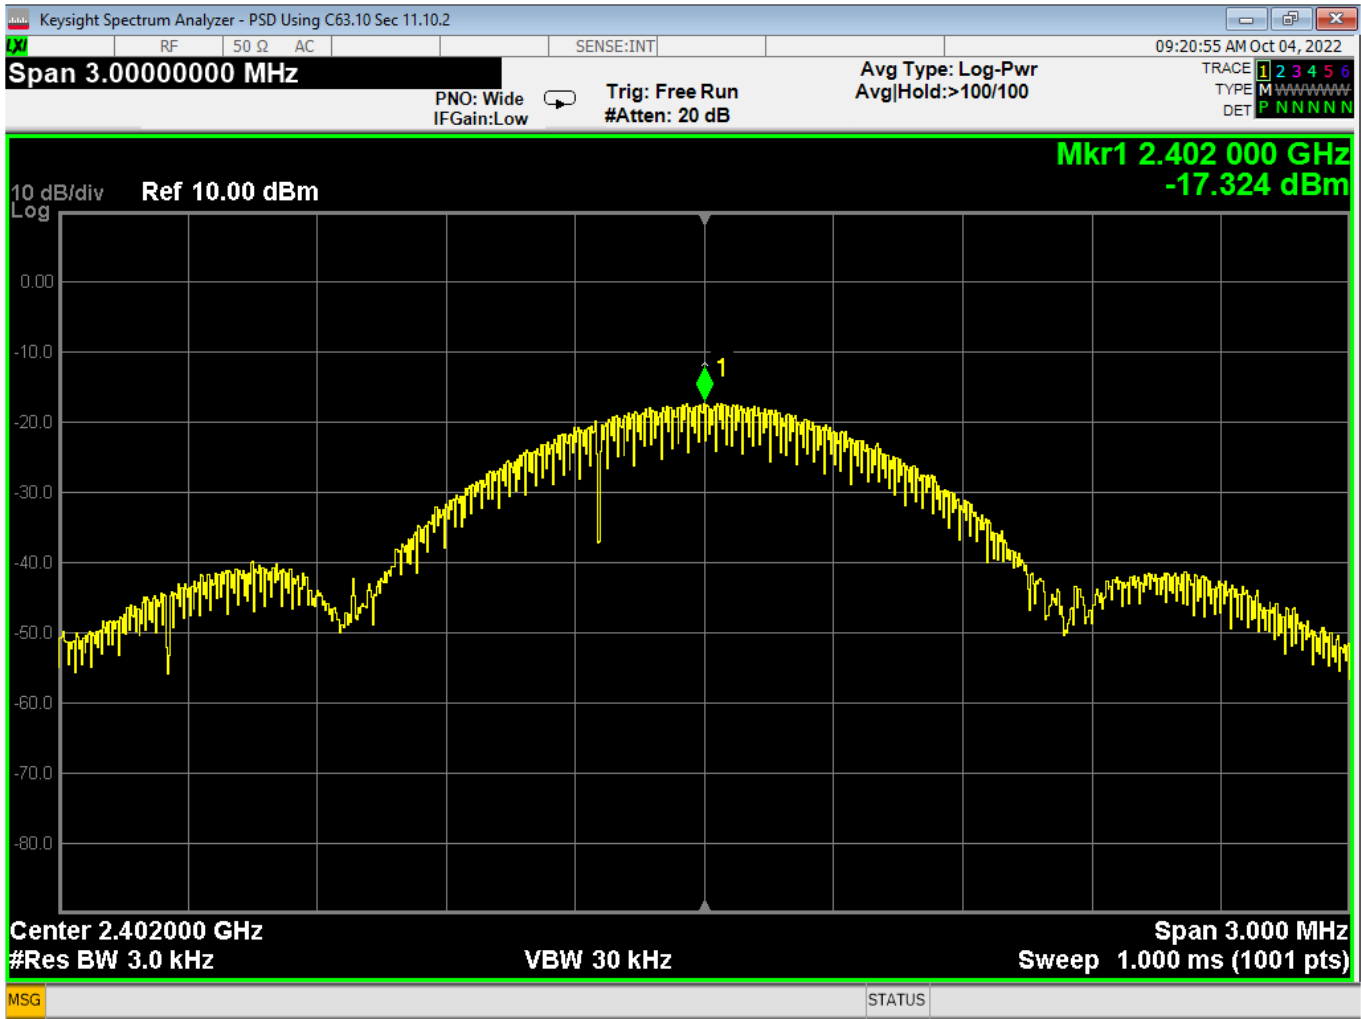

20 PSD, Low Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

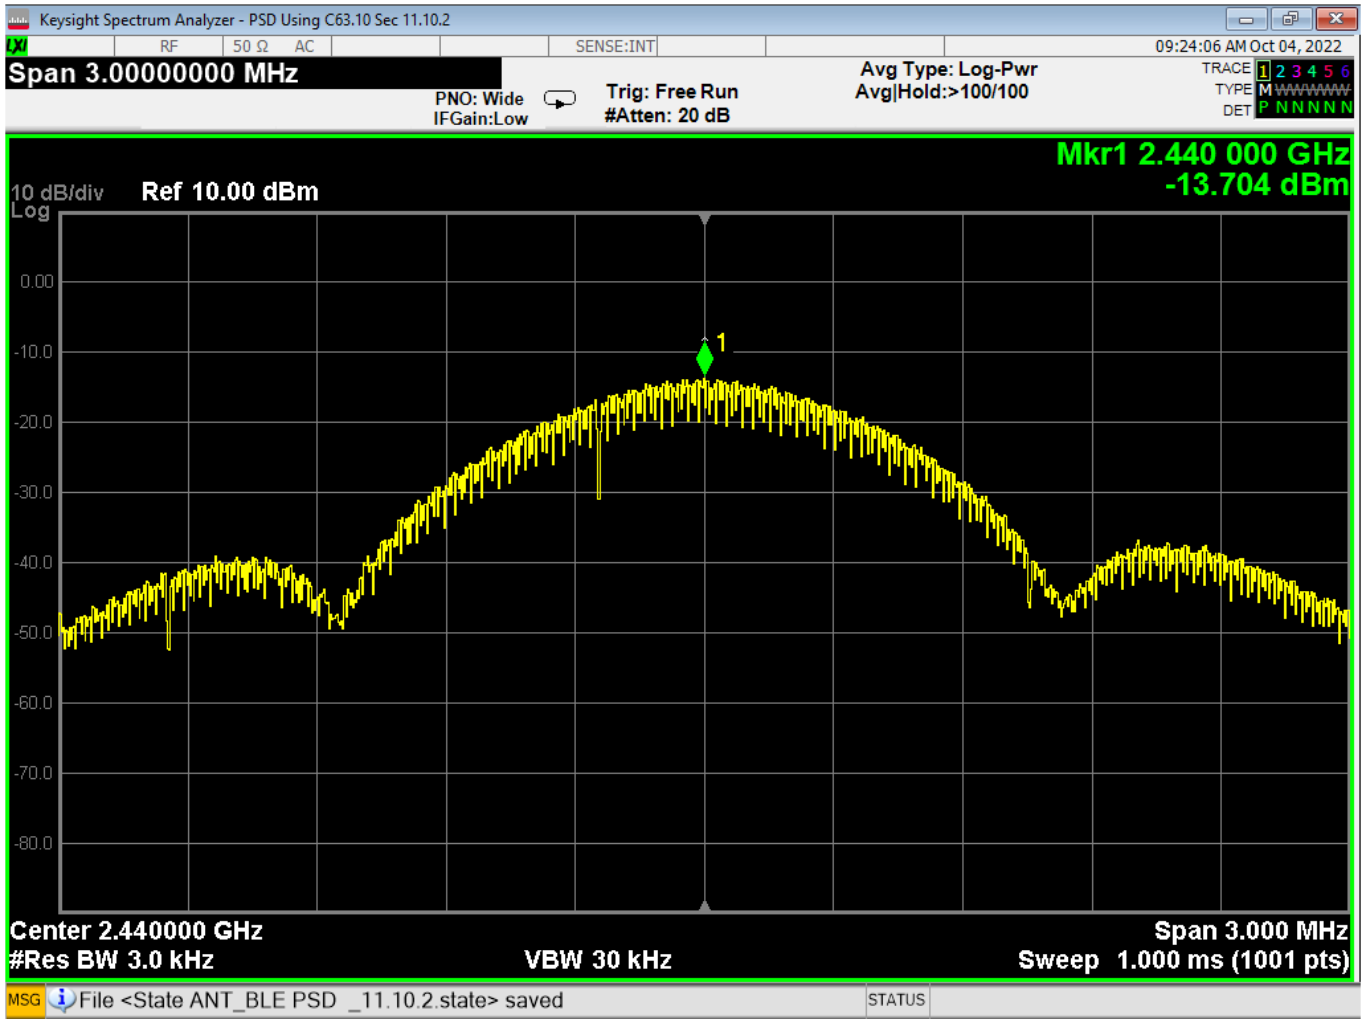

21 PSD, Mid Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

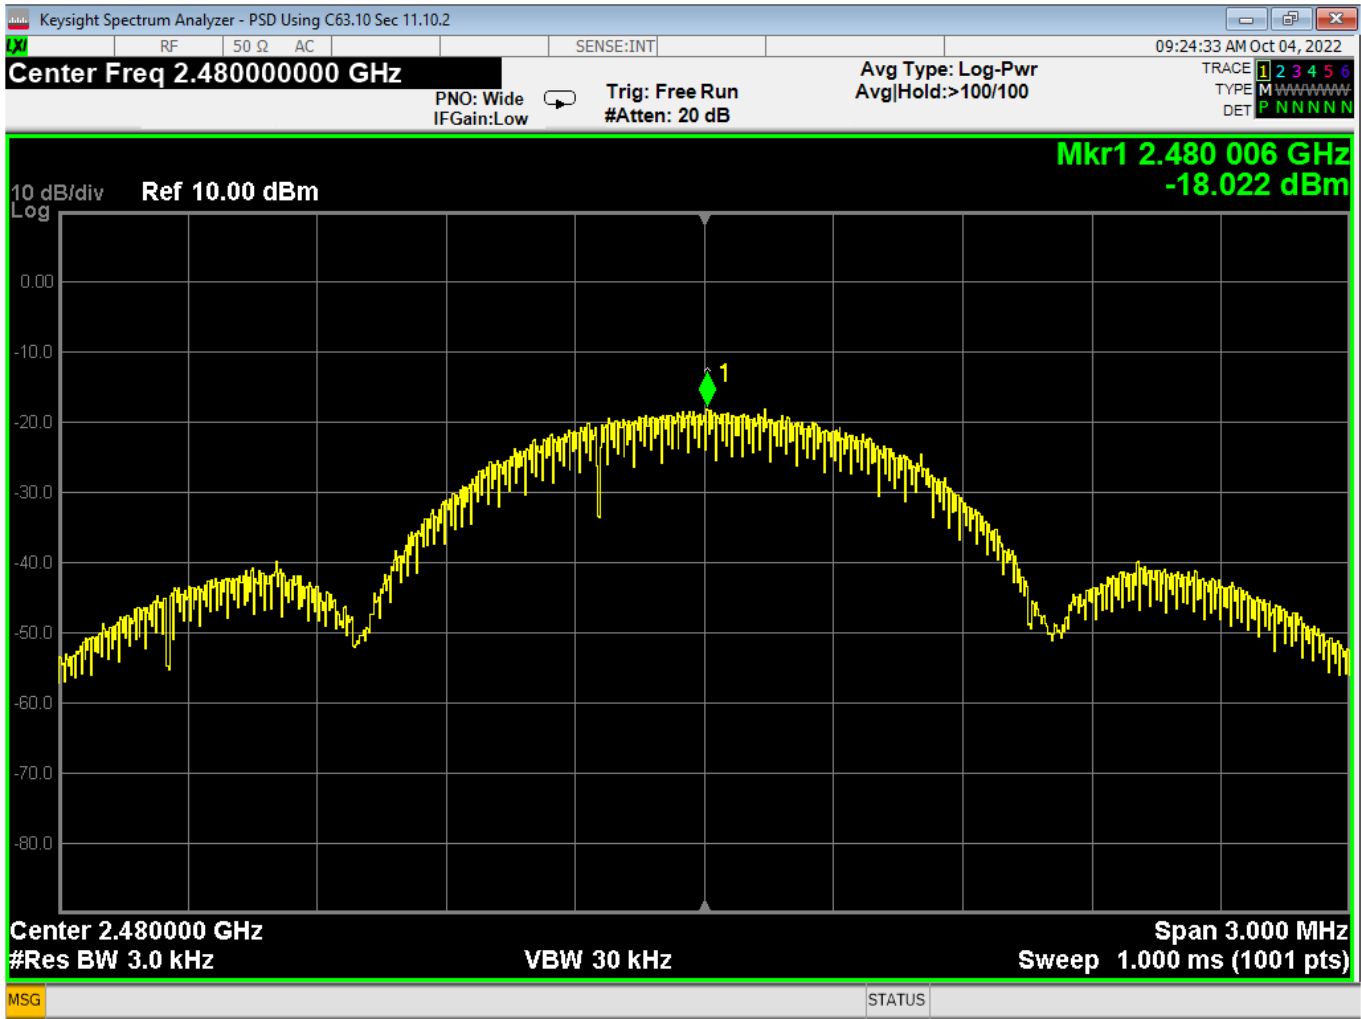

22 PSD, High Channel, GMSK 1MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

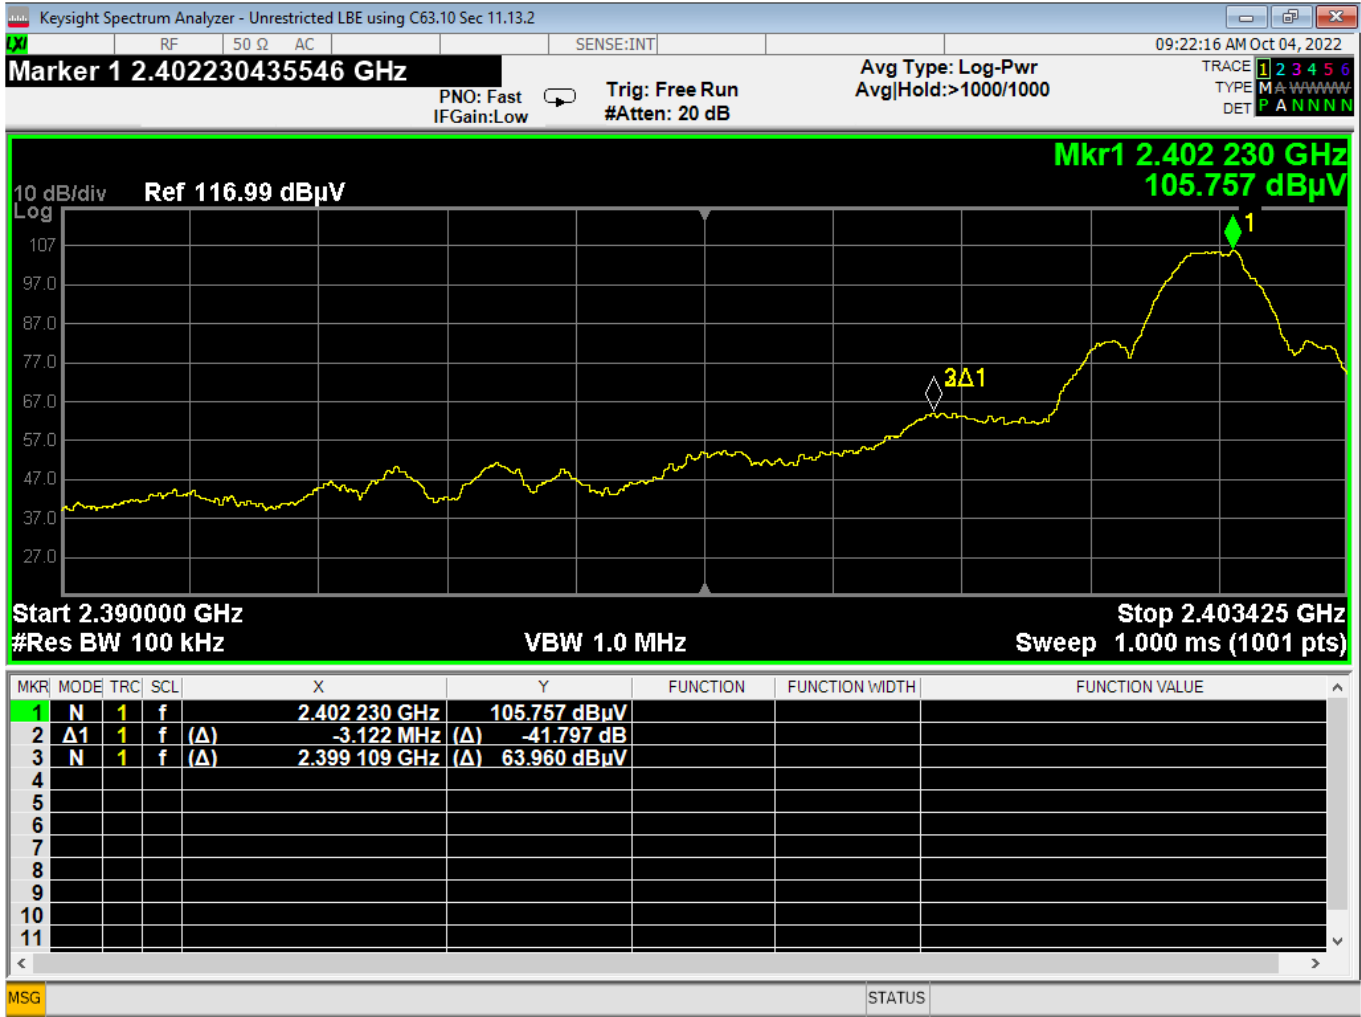

23 LBE, unrestricted GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |



24 HBE, unrestricted GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

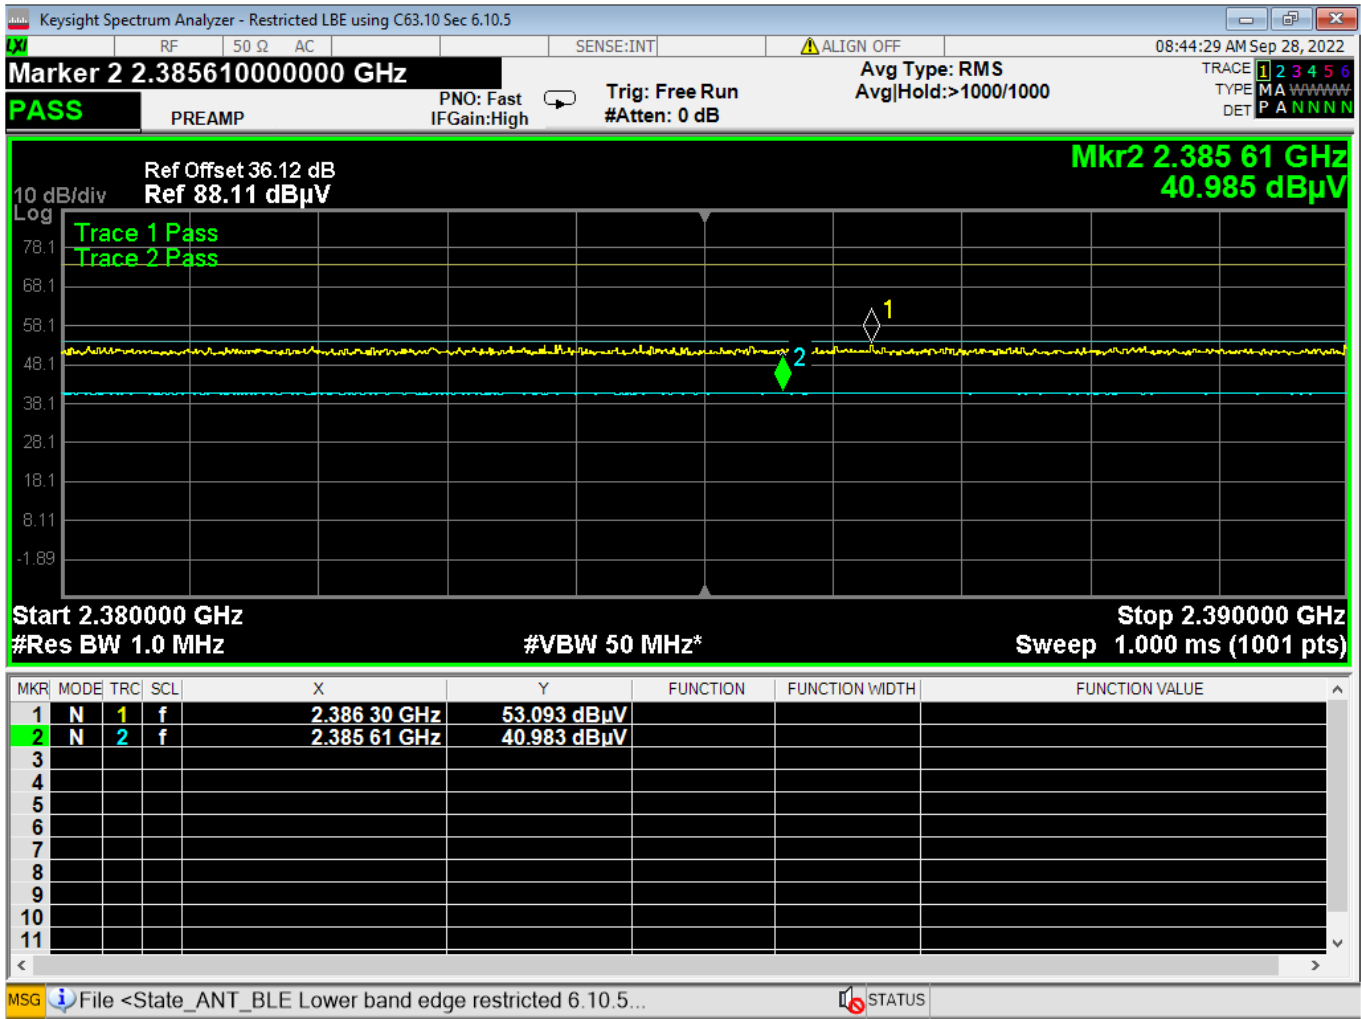

25 LBE, Restricted GMSK 1MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

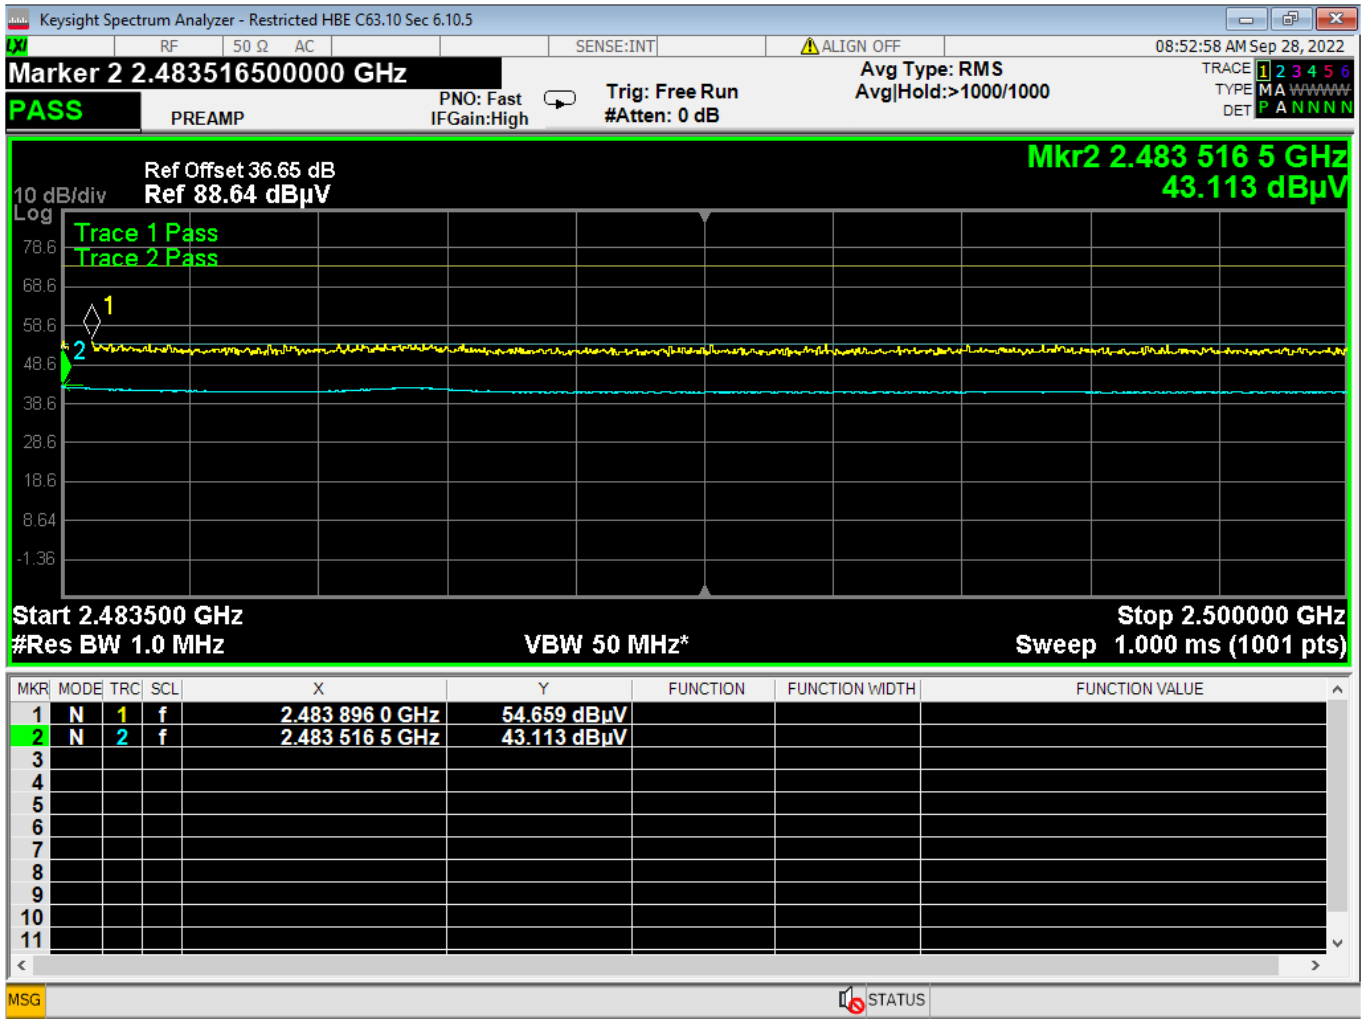


26 HBE, Restricted GMSK 1MB






|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

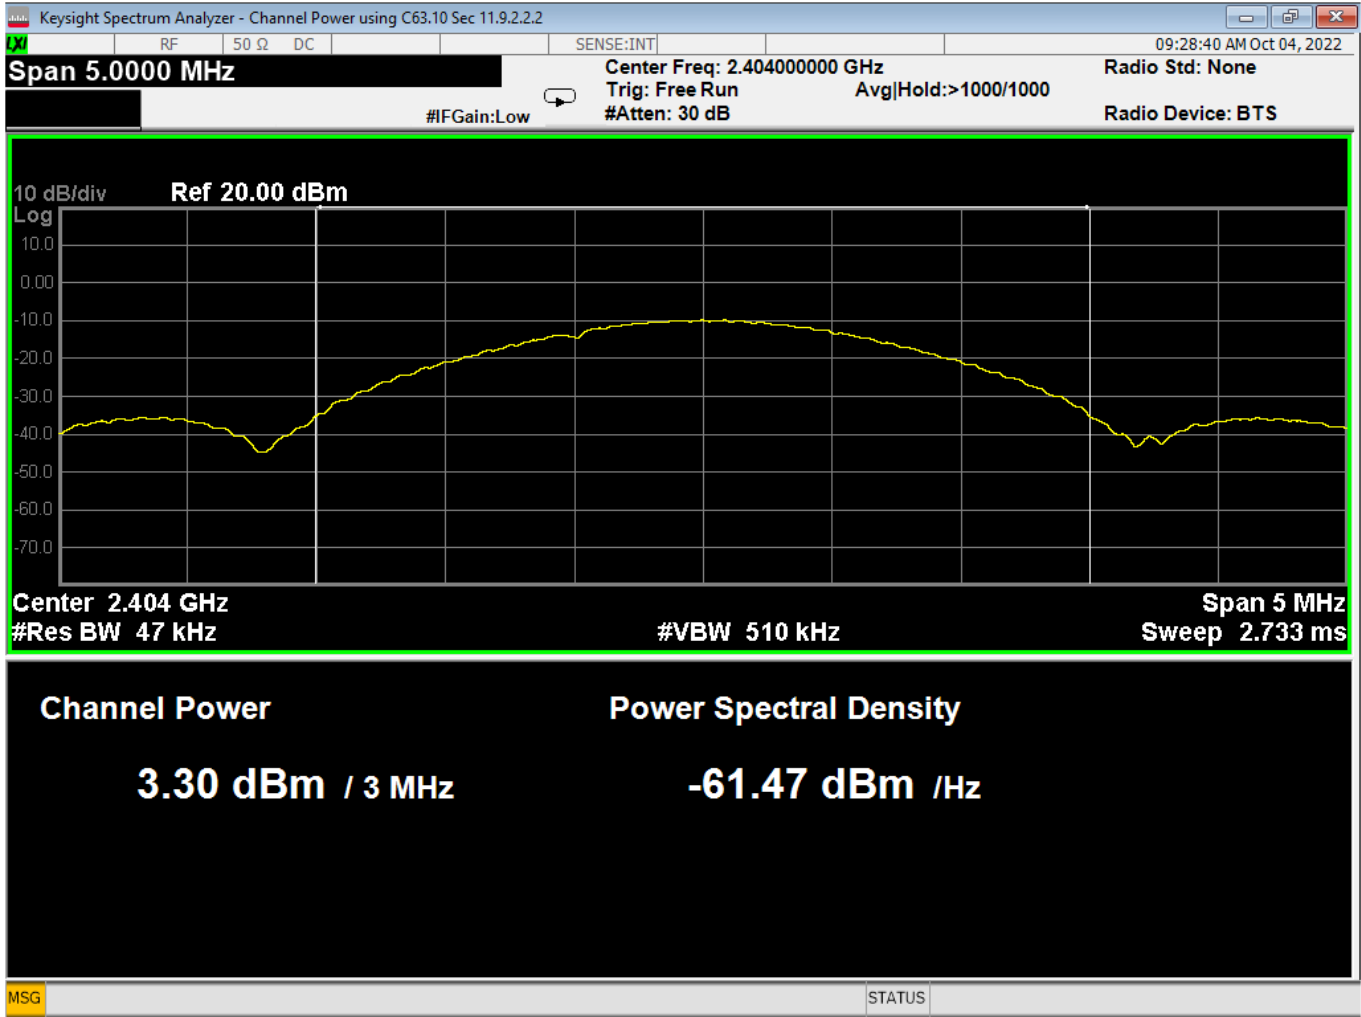

27 Average Power, Low Channel, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

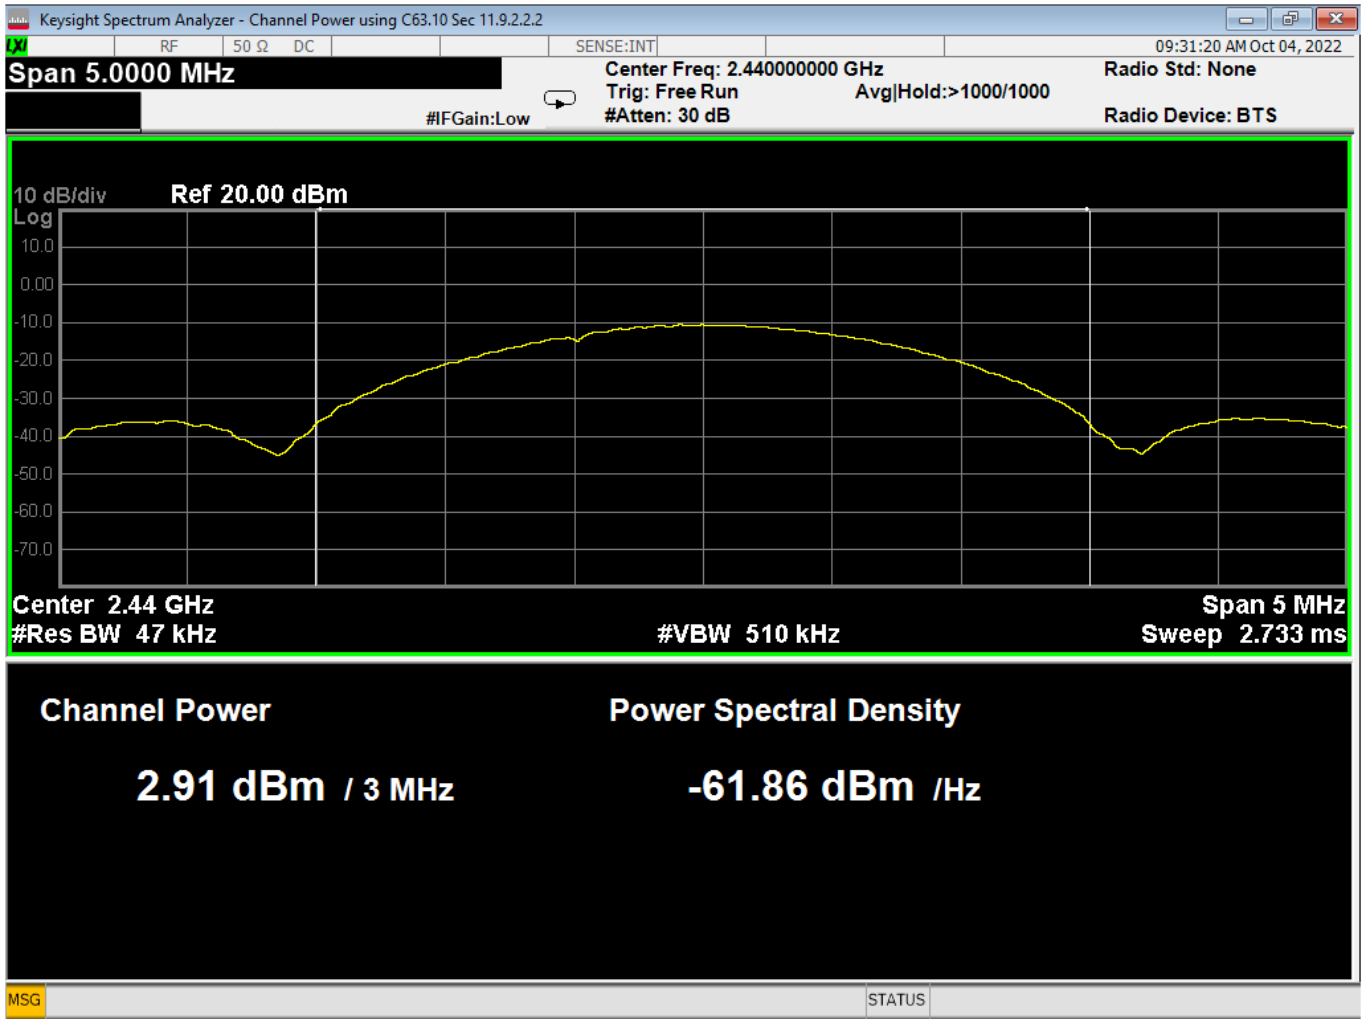

28 Average Power, Mid Channel, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

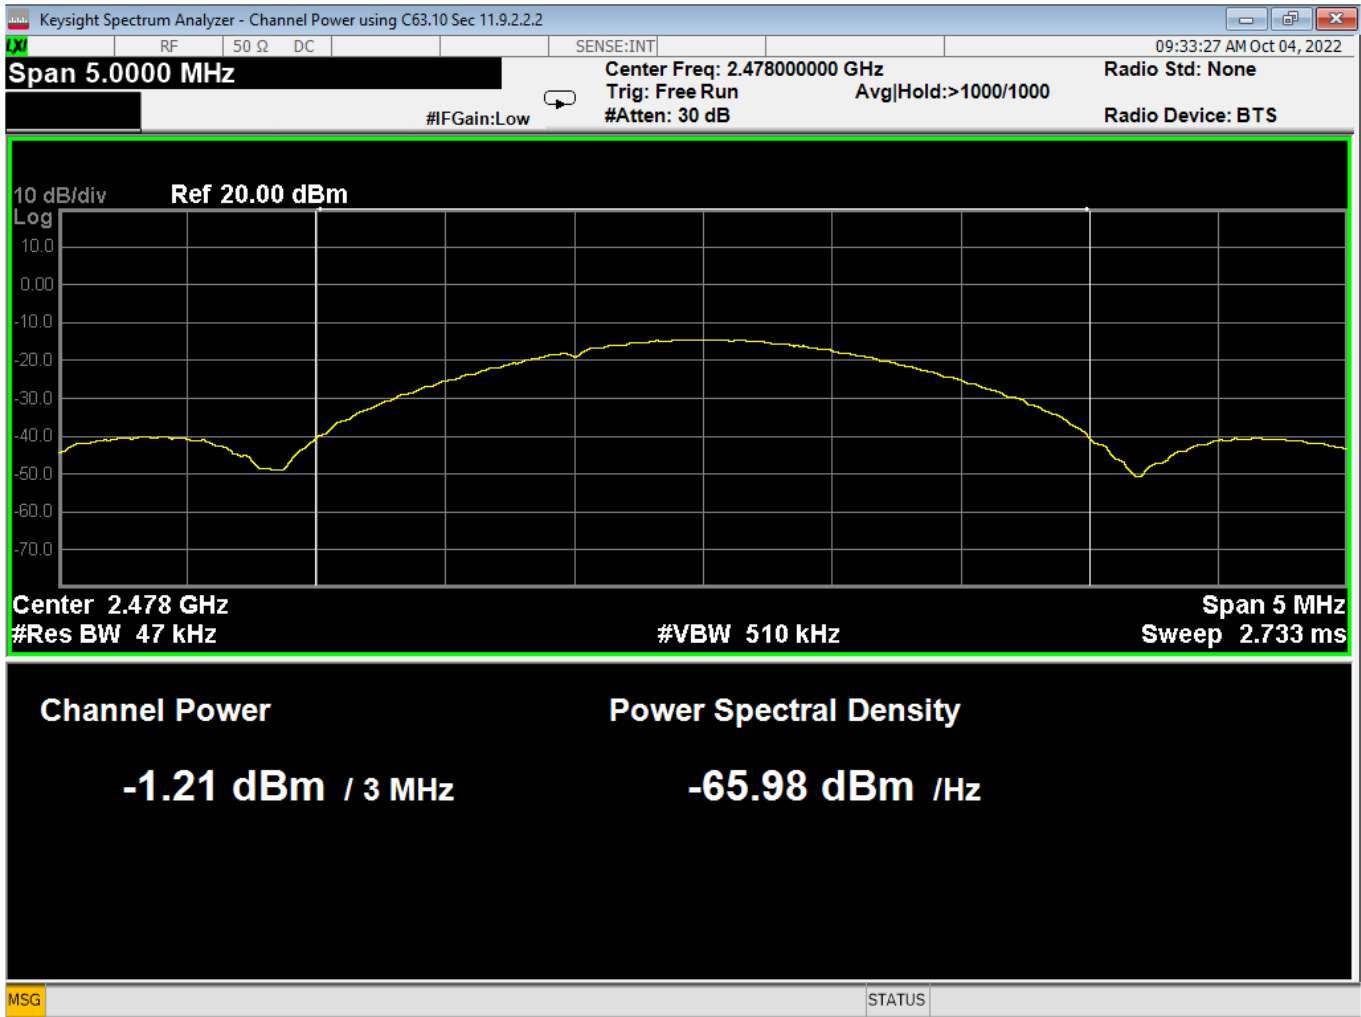

29 Average Power, High Channel, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

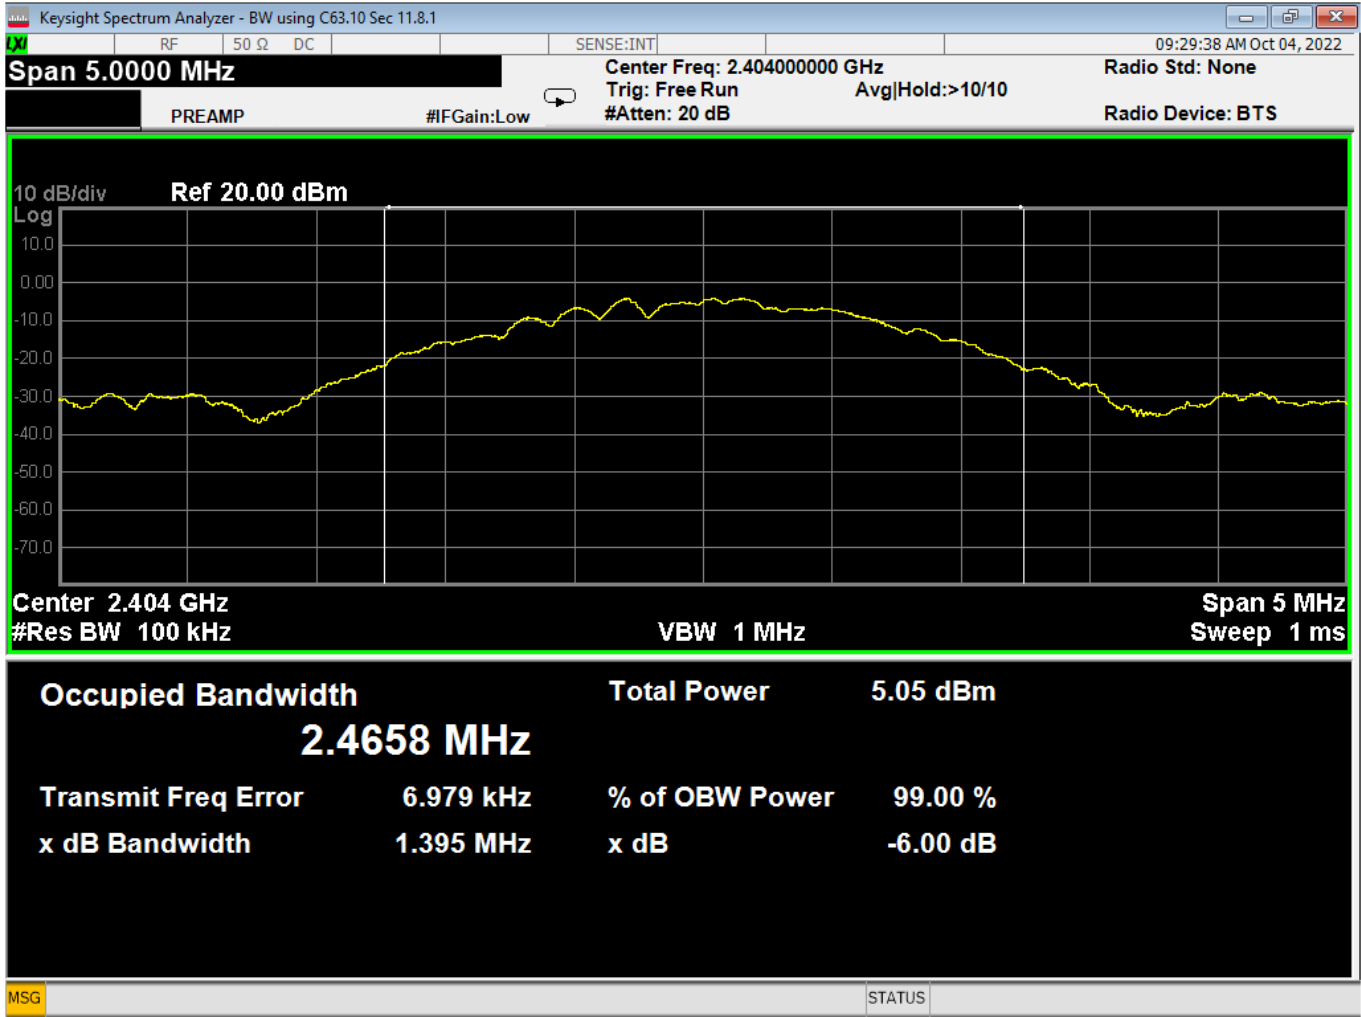

30 6dB Bandwidth, Low Channel, GMSK 2MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

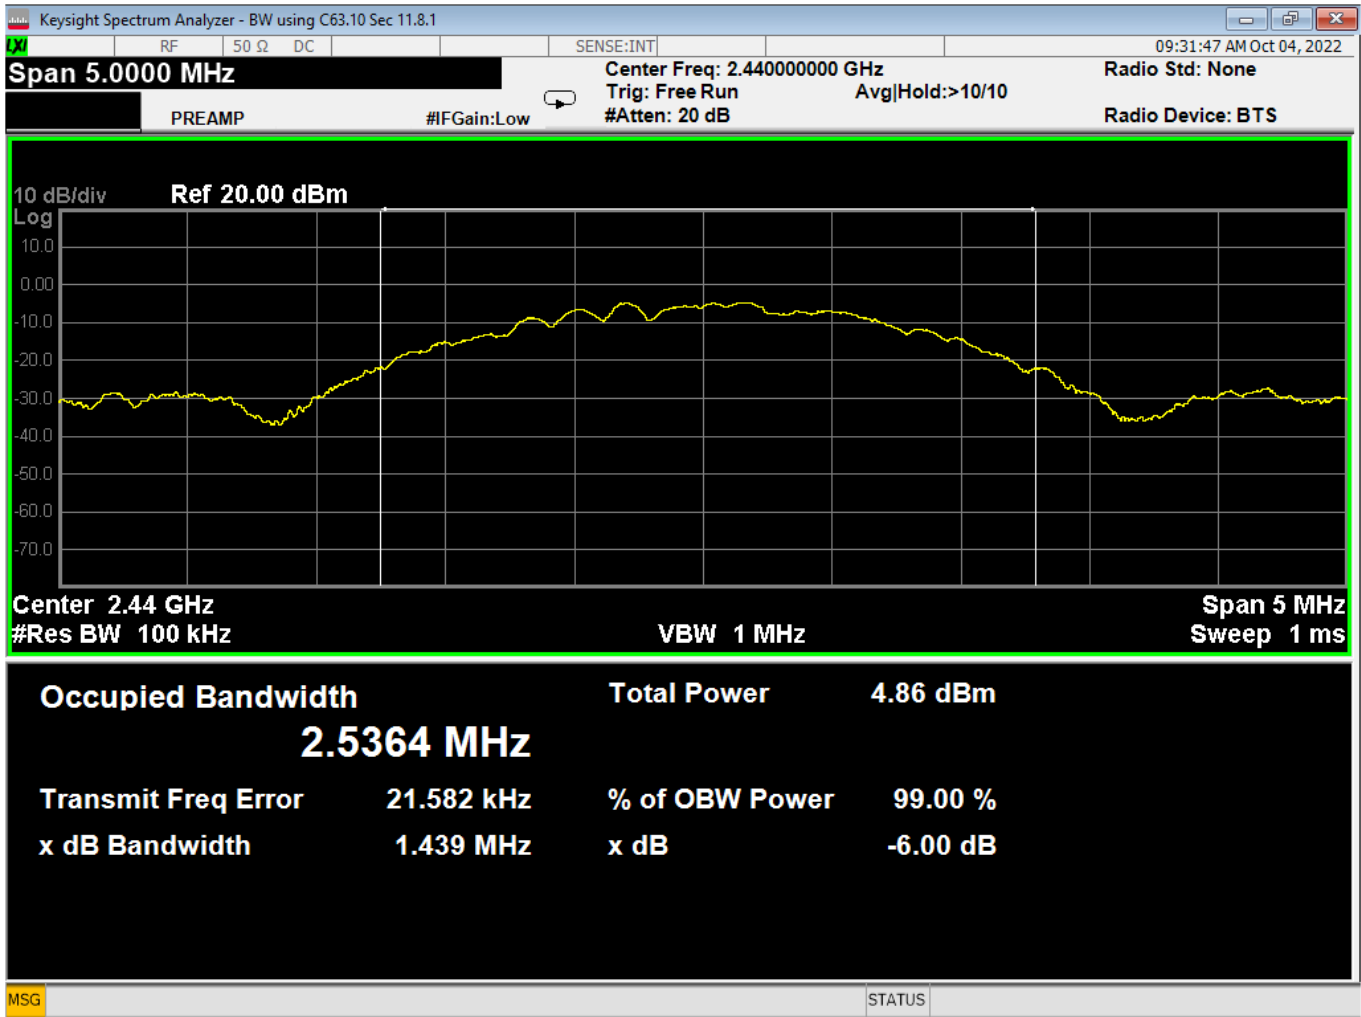

31 6dB Bandwidth, Mid Channel, GMSK 2MB



Report Number:


R20220615-20-E1

Rev

B

Prepared for:

Garmin International, Inc.

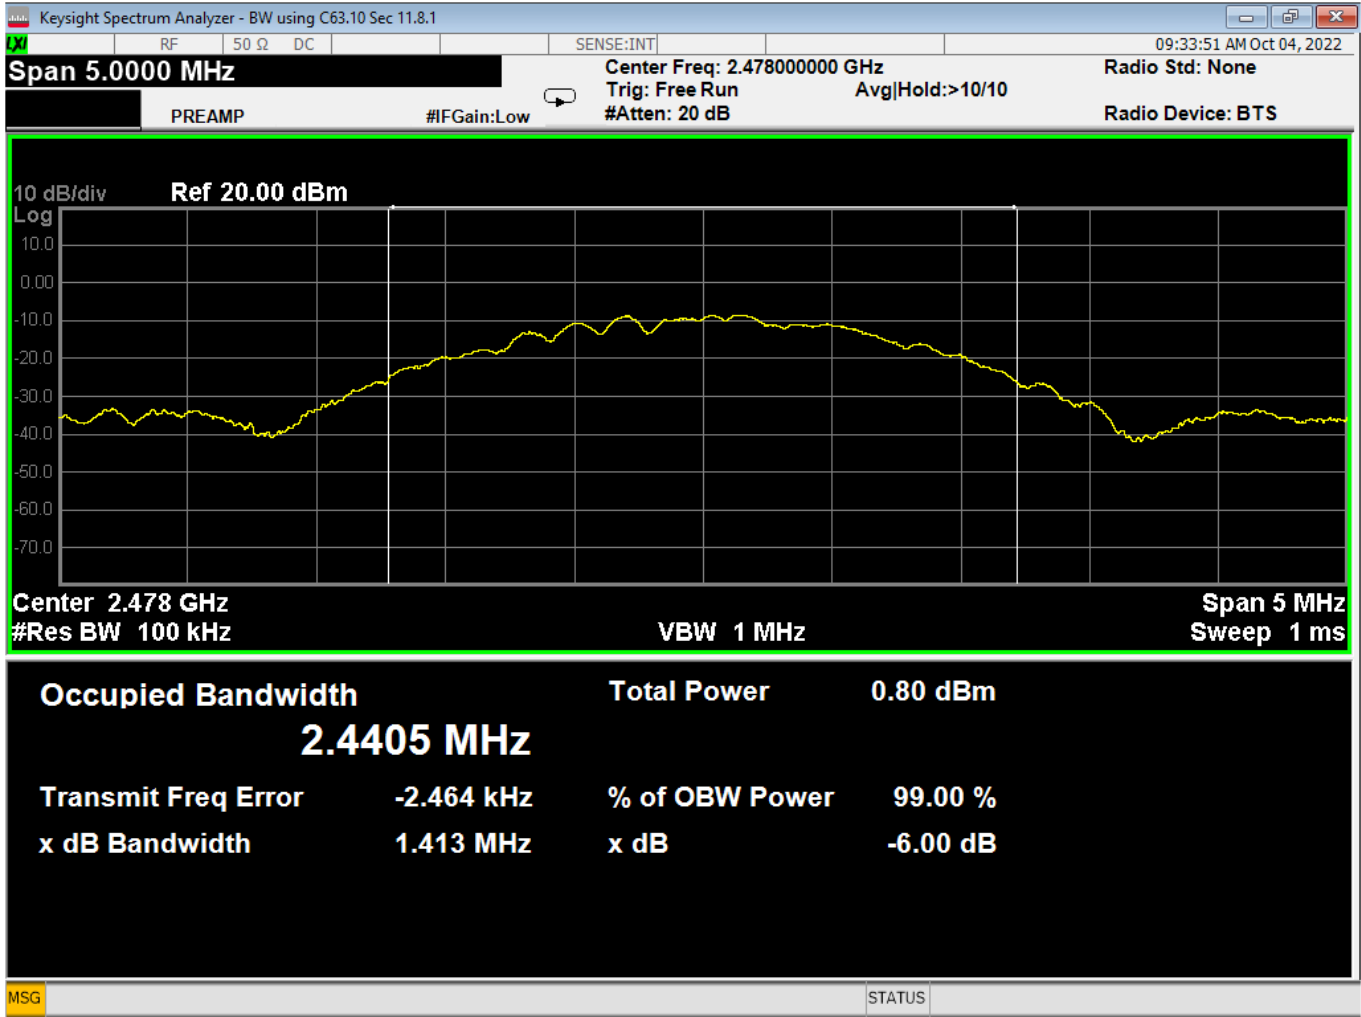

32 6dB Bandwidth, High Channel, GMSK 2MB



Report Number:


R20220615-20-E1

Rev

B

Prepared for:


Garmin International, Inc.

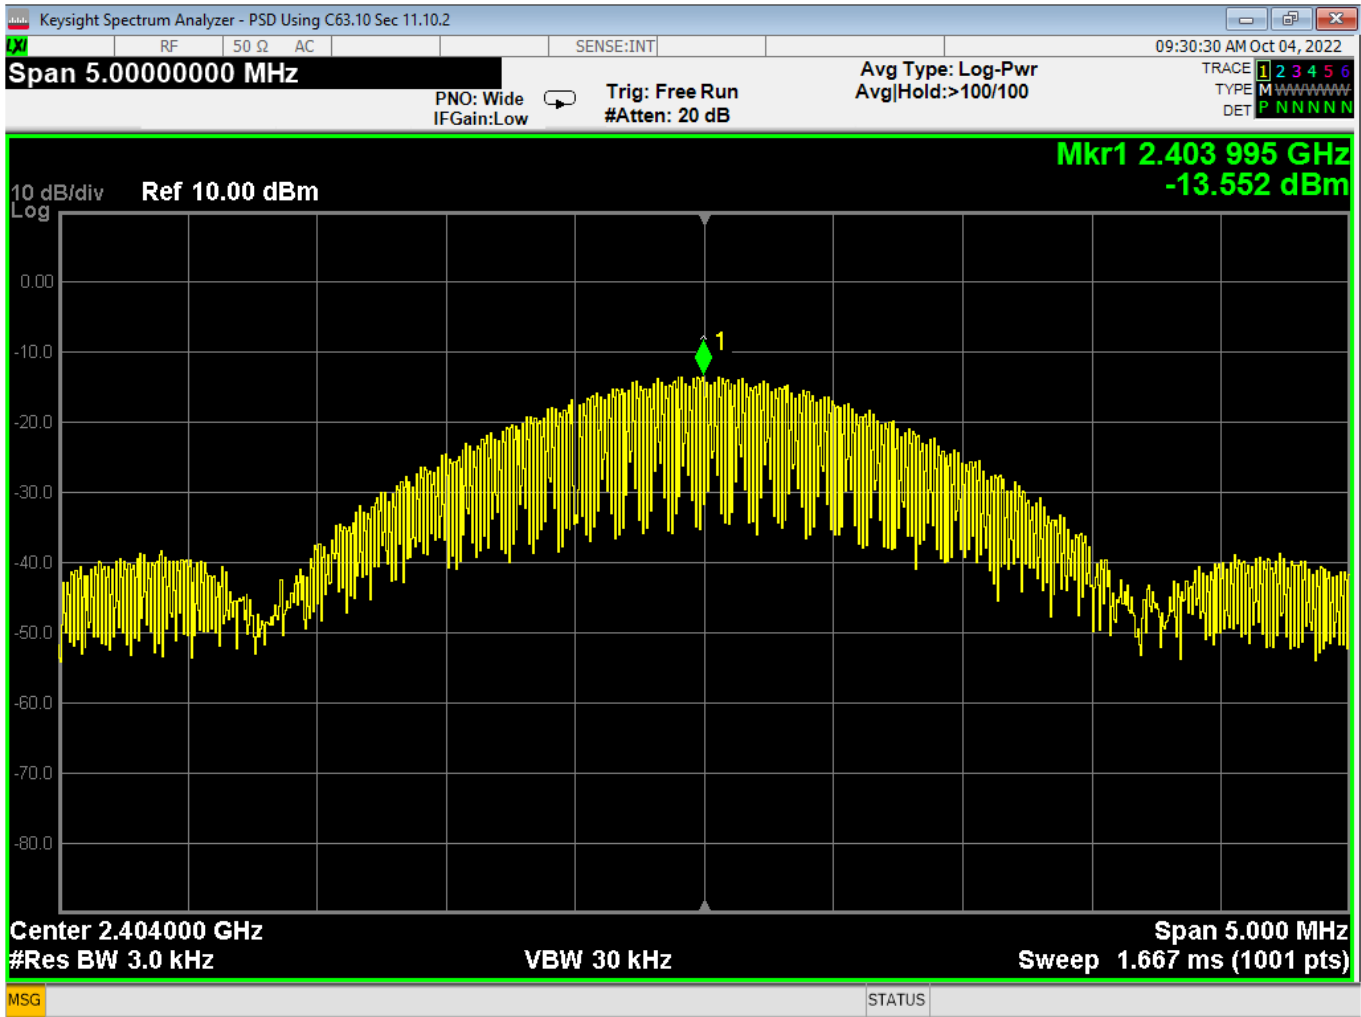

33 PSD, Low Channel, GMSK 2MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

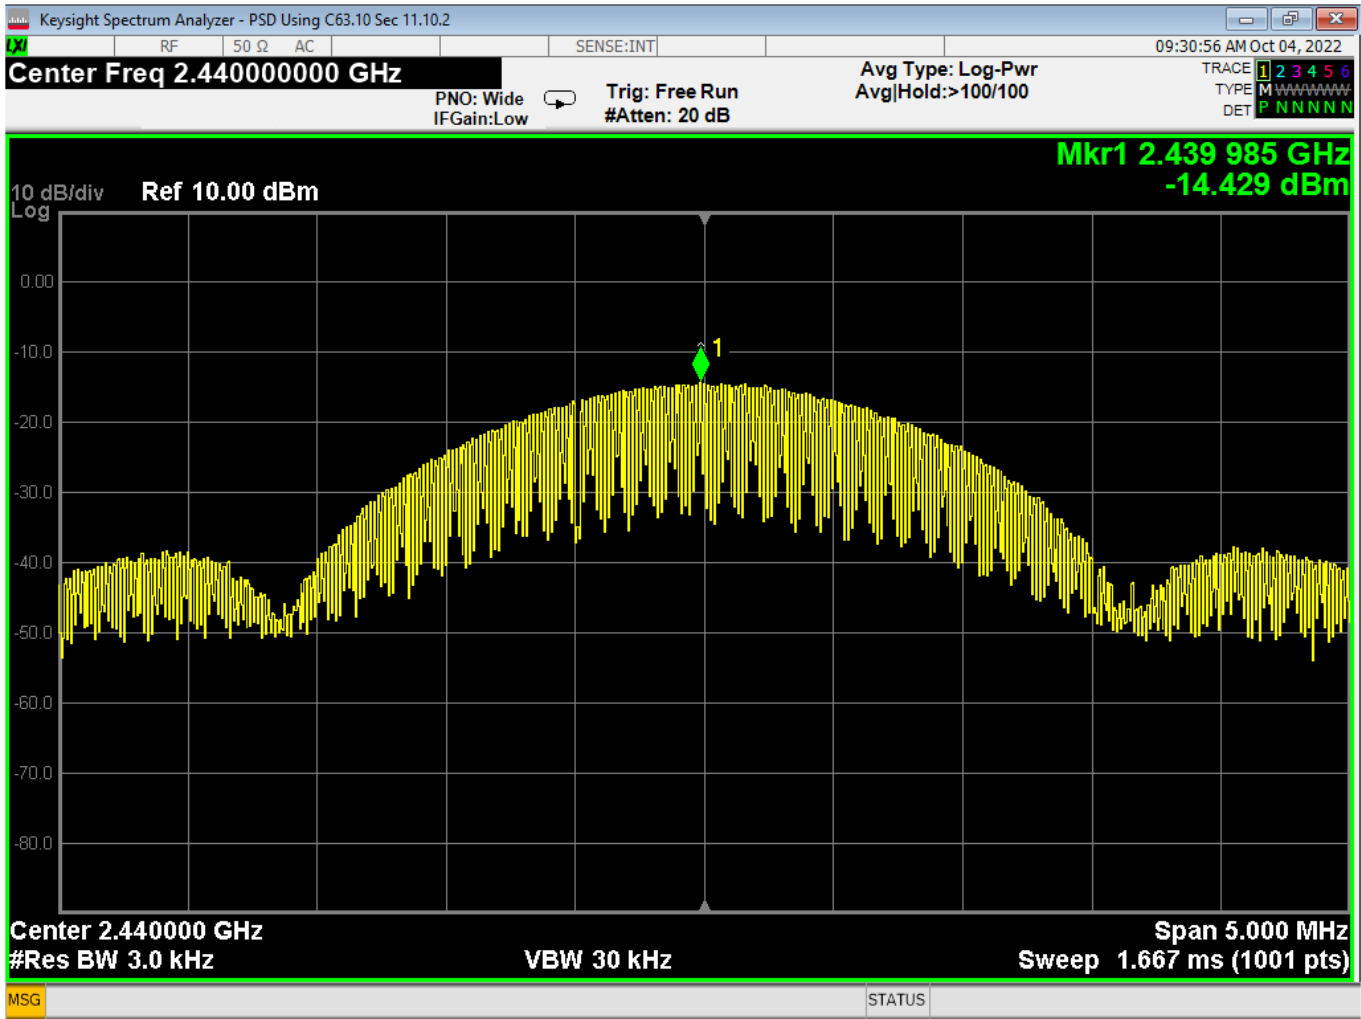


34 PSD, Mid Channel, GMSK 2MB






|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

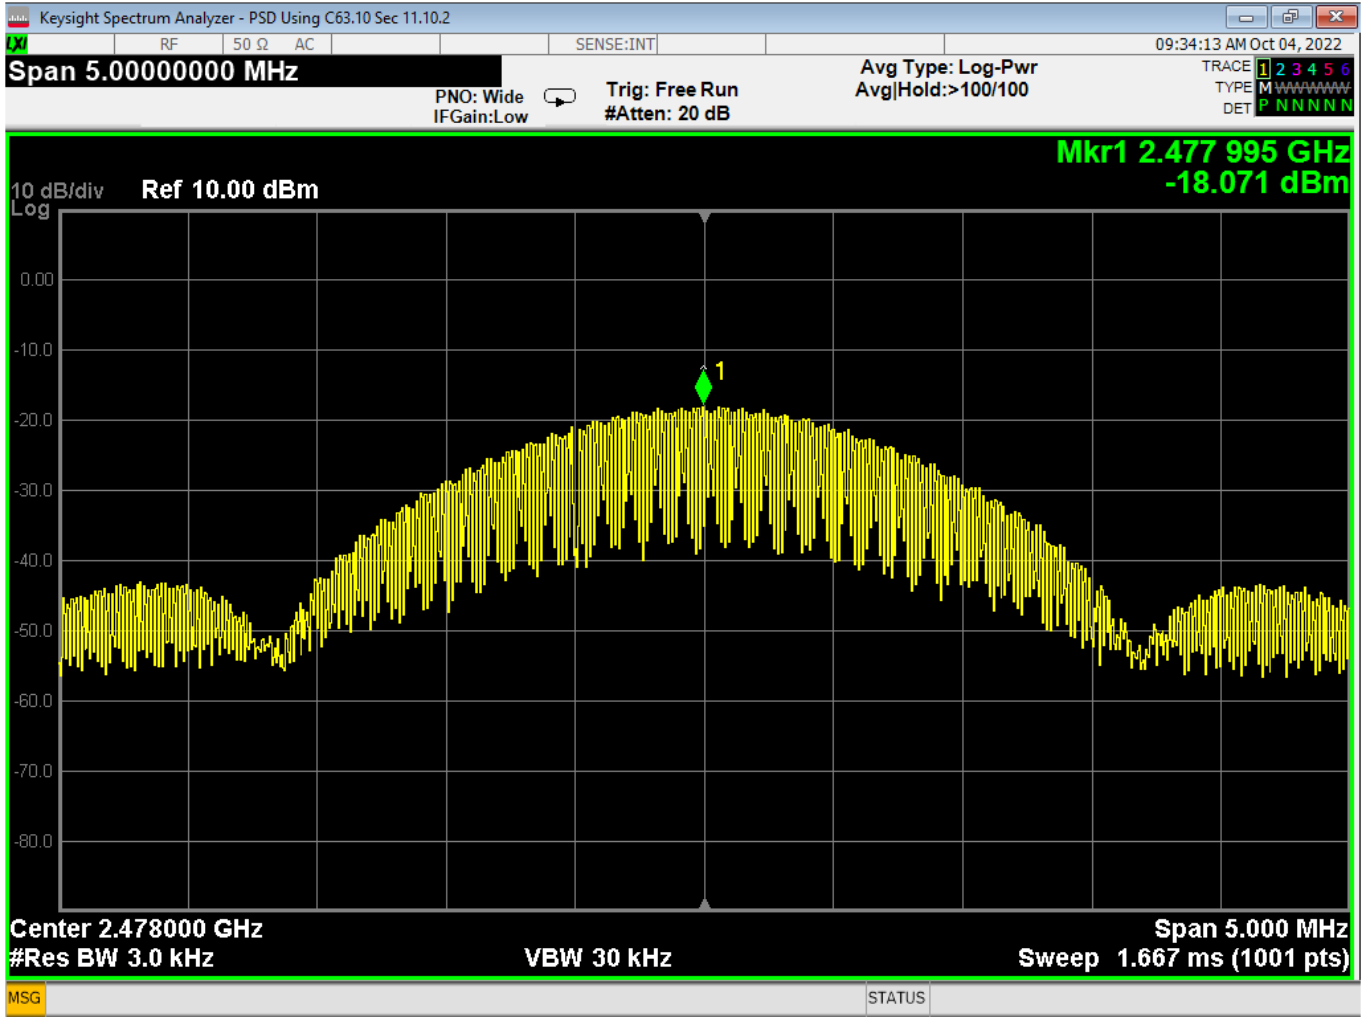

35 PSD, High Channel, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

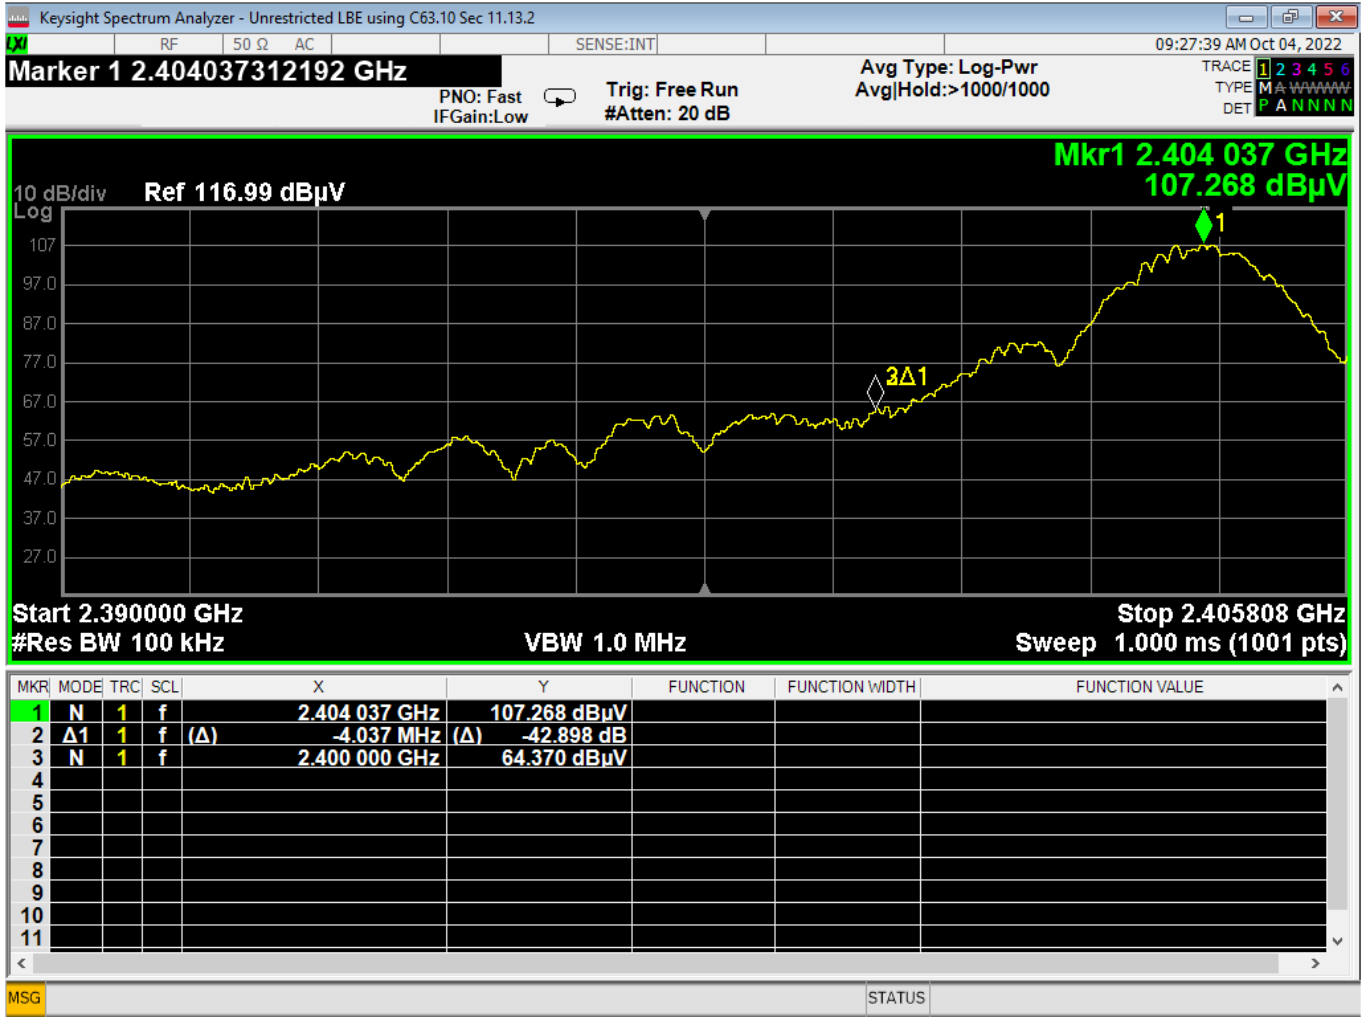

36 Lower Bandedge, Unrestricted, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

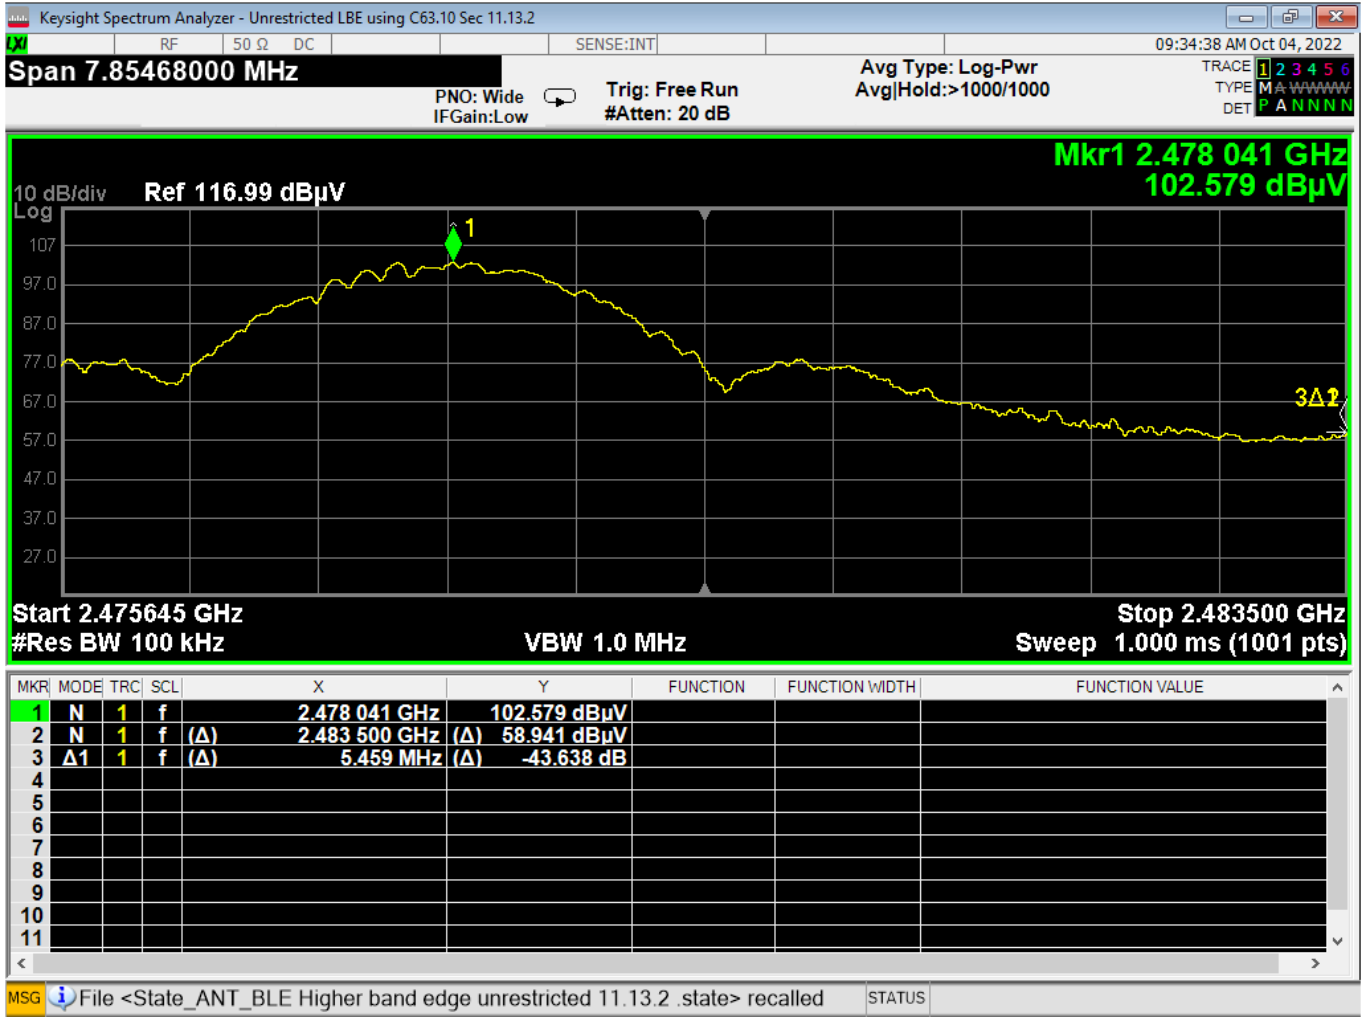

**37 Higher Bandedge, Unrestricted, GMSK 2MB**




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

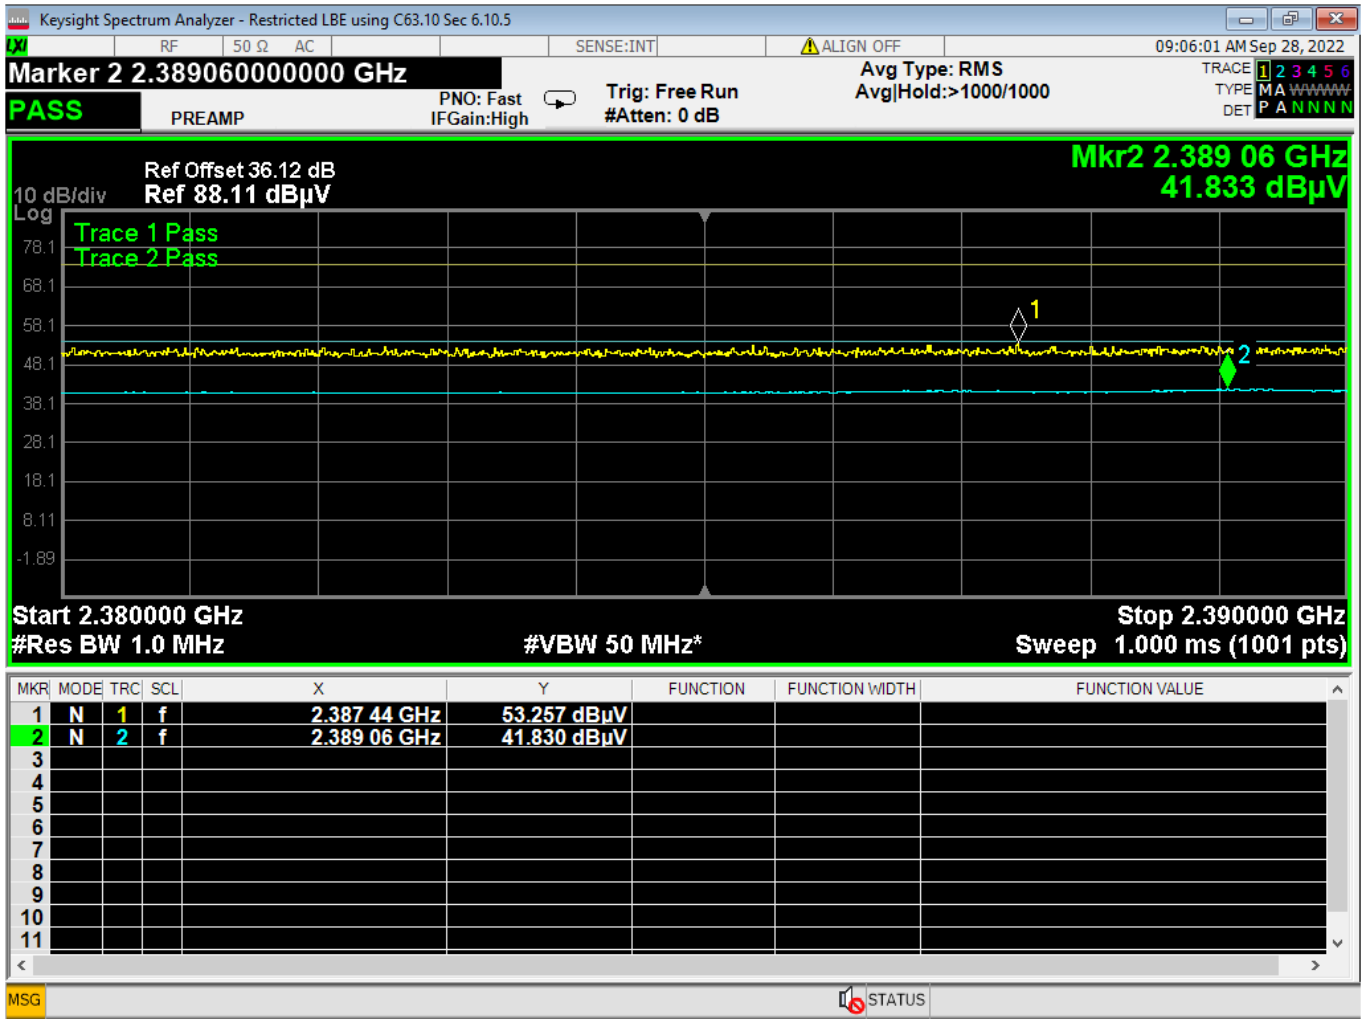

38 Lower Bandedge, Restricted, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

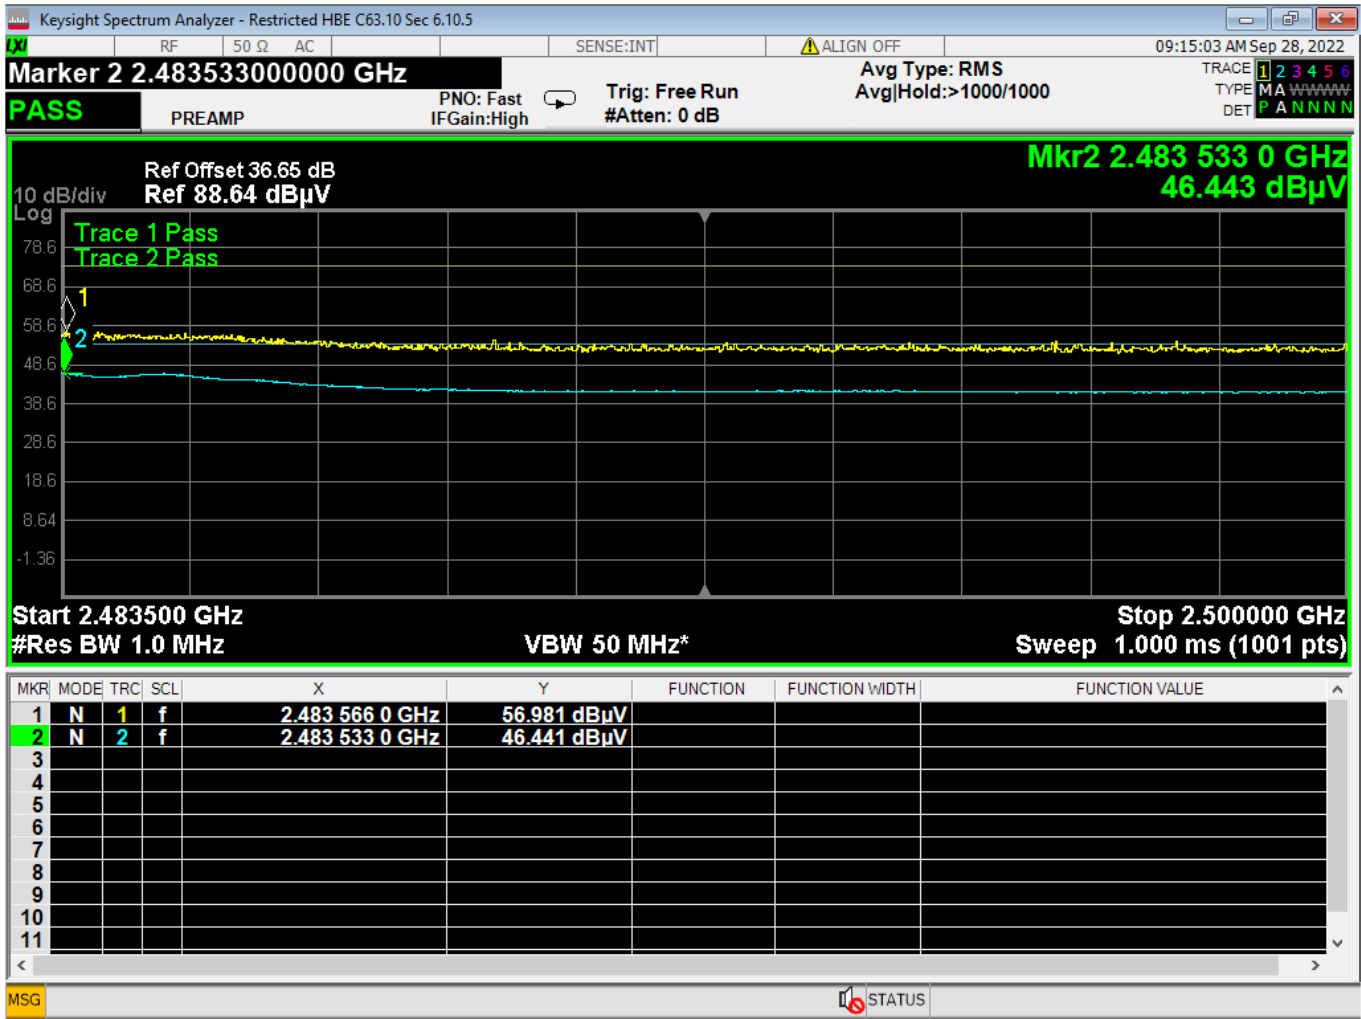

39 Higher Bandedge, Restricted, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

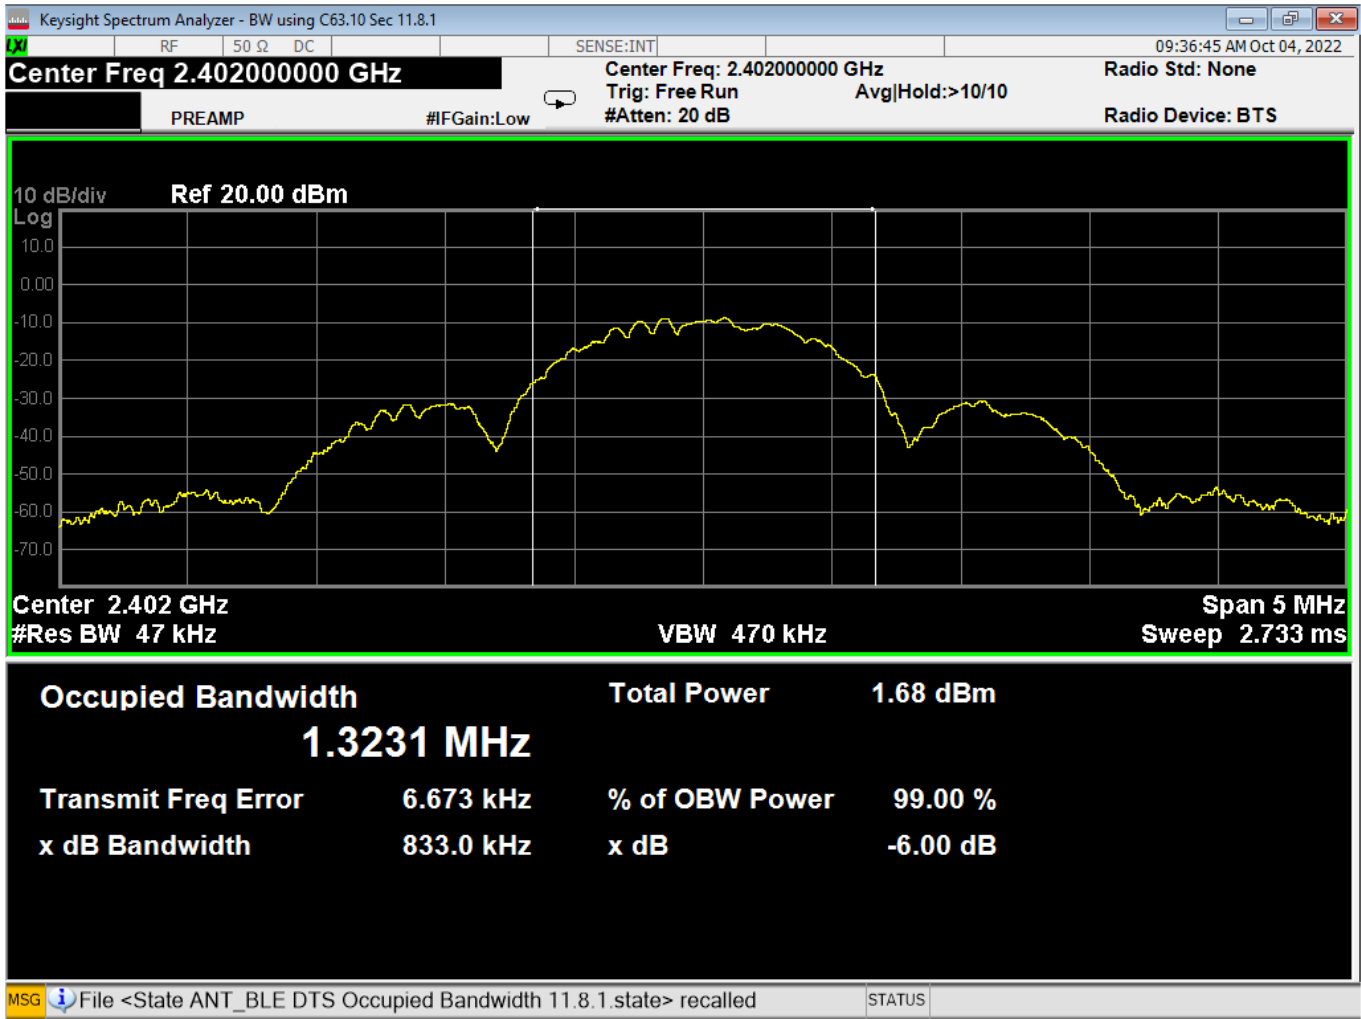

40 Occupied Bandwidth, Low Channel, GFSK




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

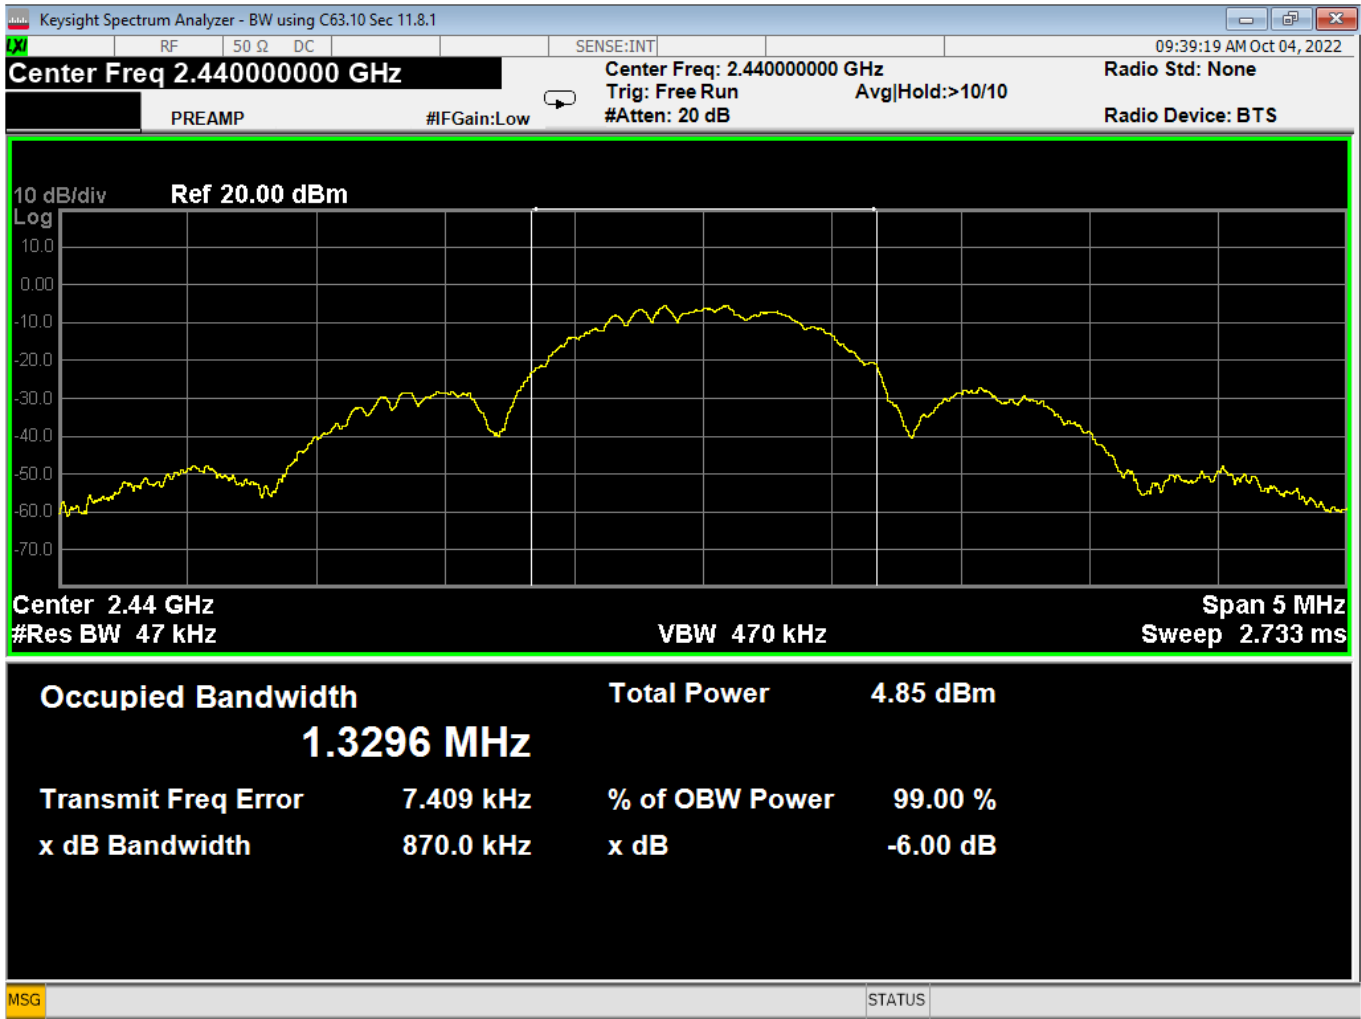

41 Occupied Bandwidth, Mid Channel, GFSK



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

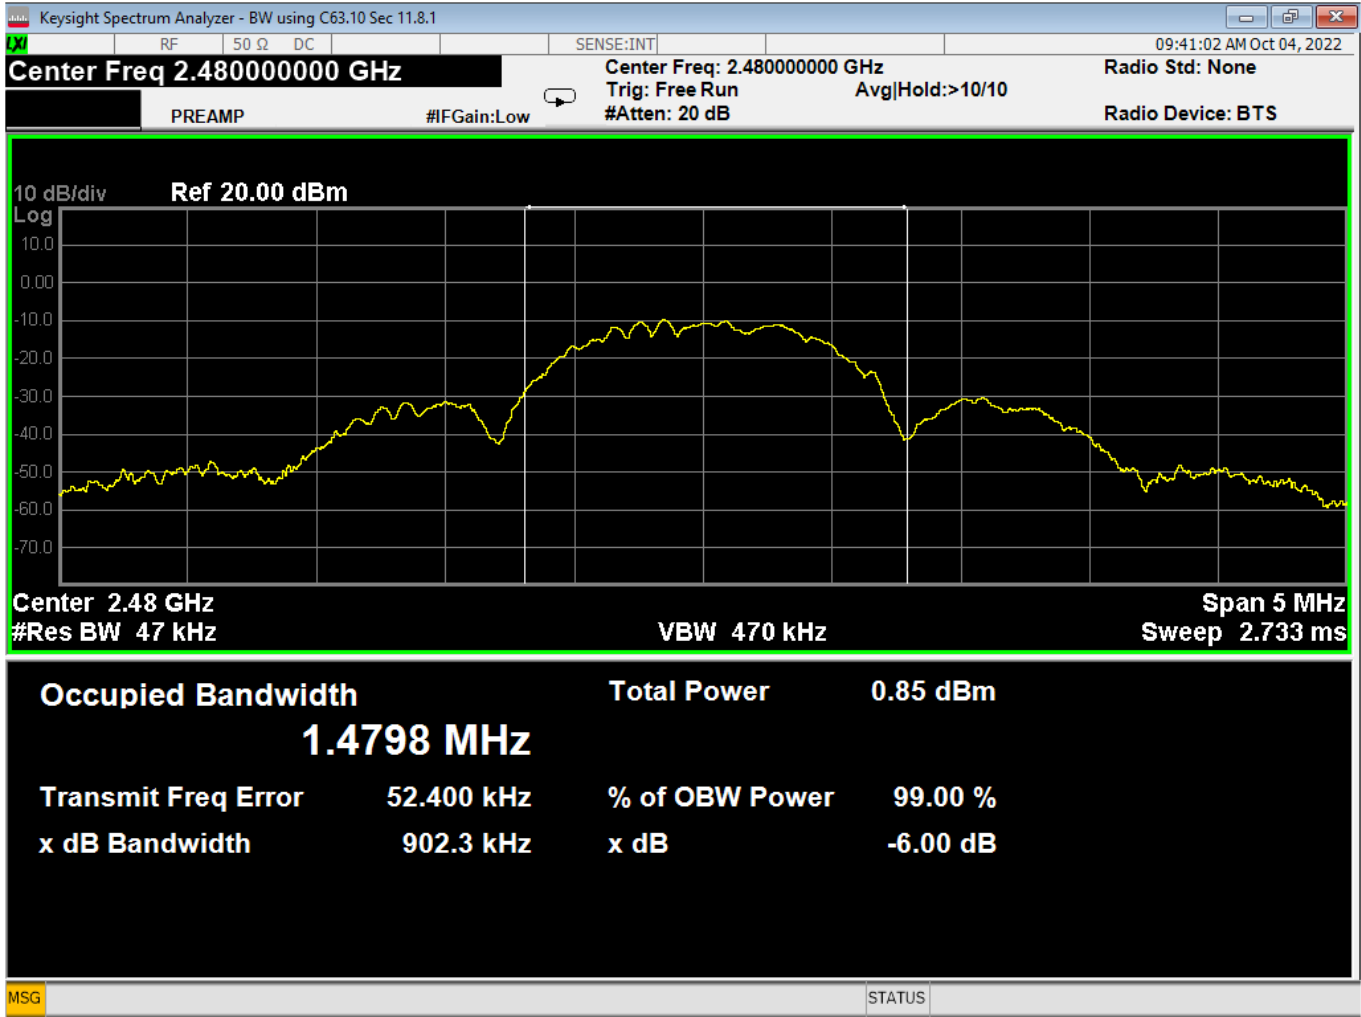


42 Occupied Bandwidth, High Channel, GFSK






|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

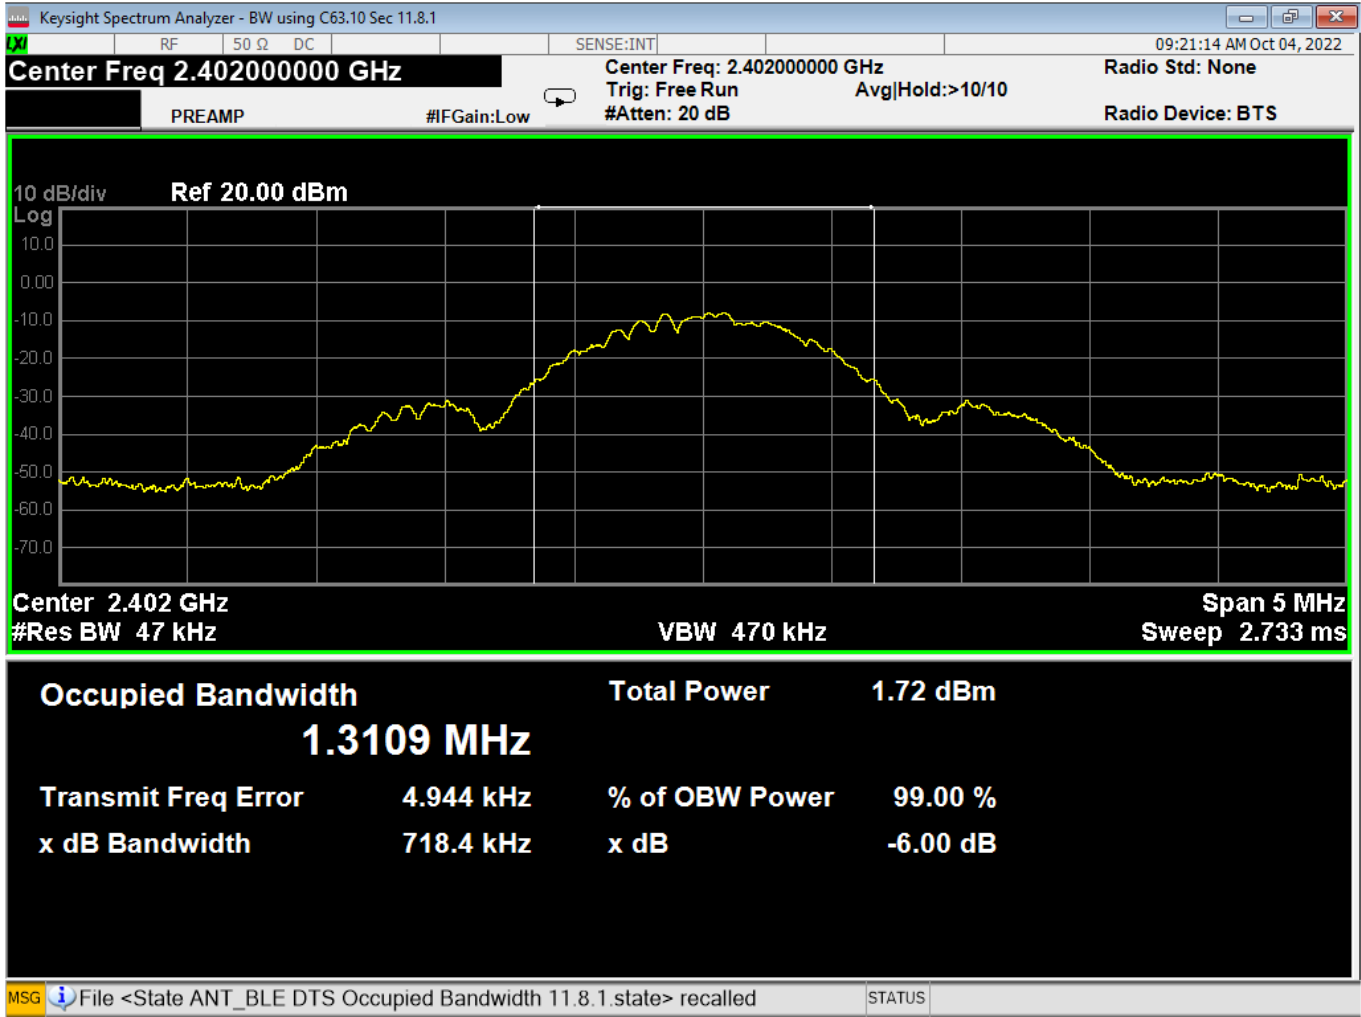

43 Occupied Bandwidth, Low Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

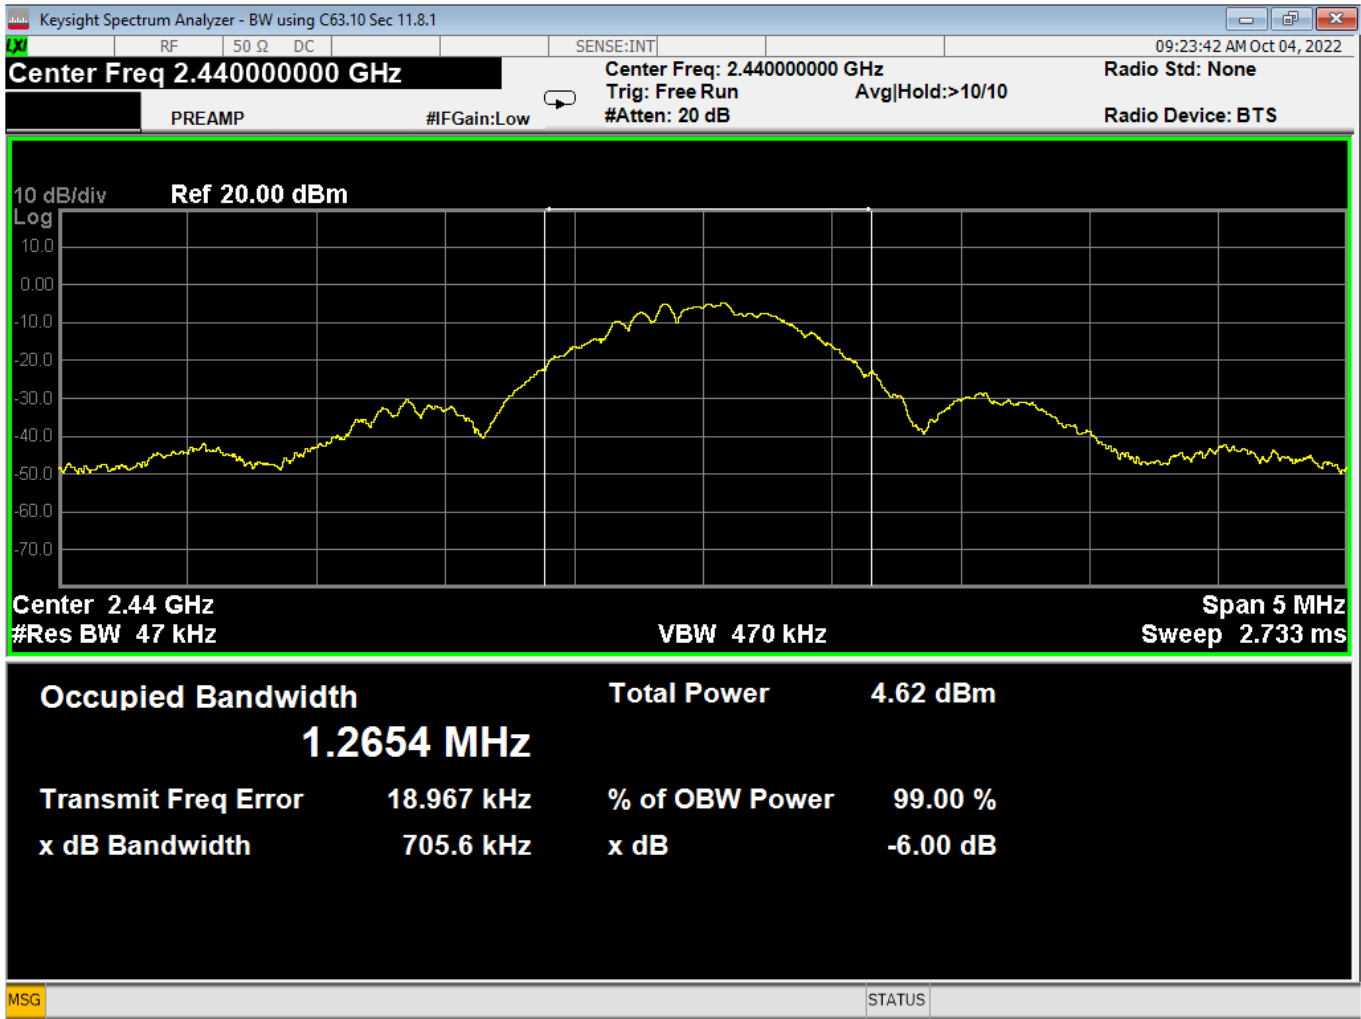

44 Occupied Bandwidth, Mid Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

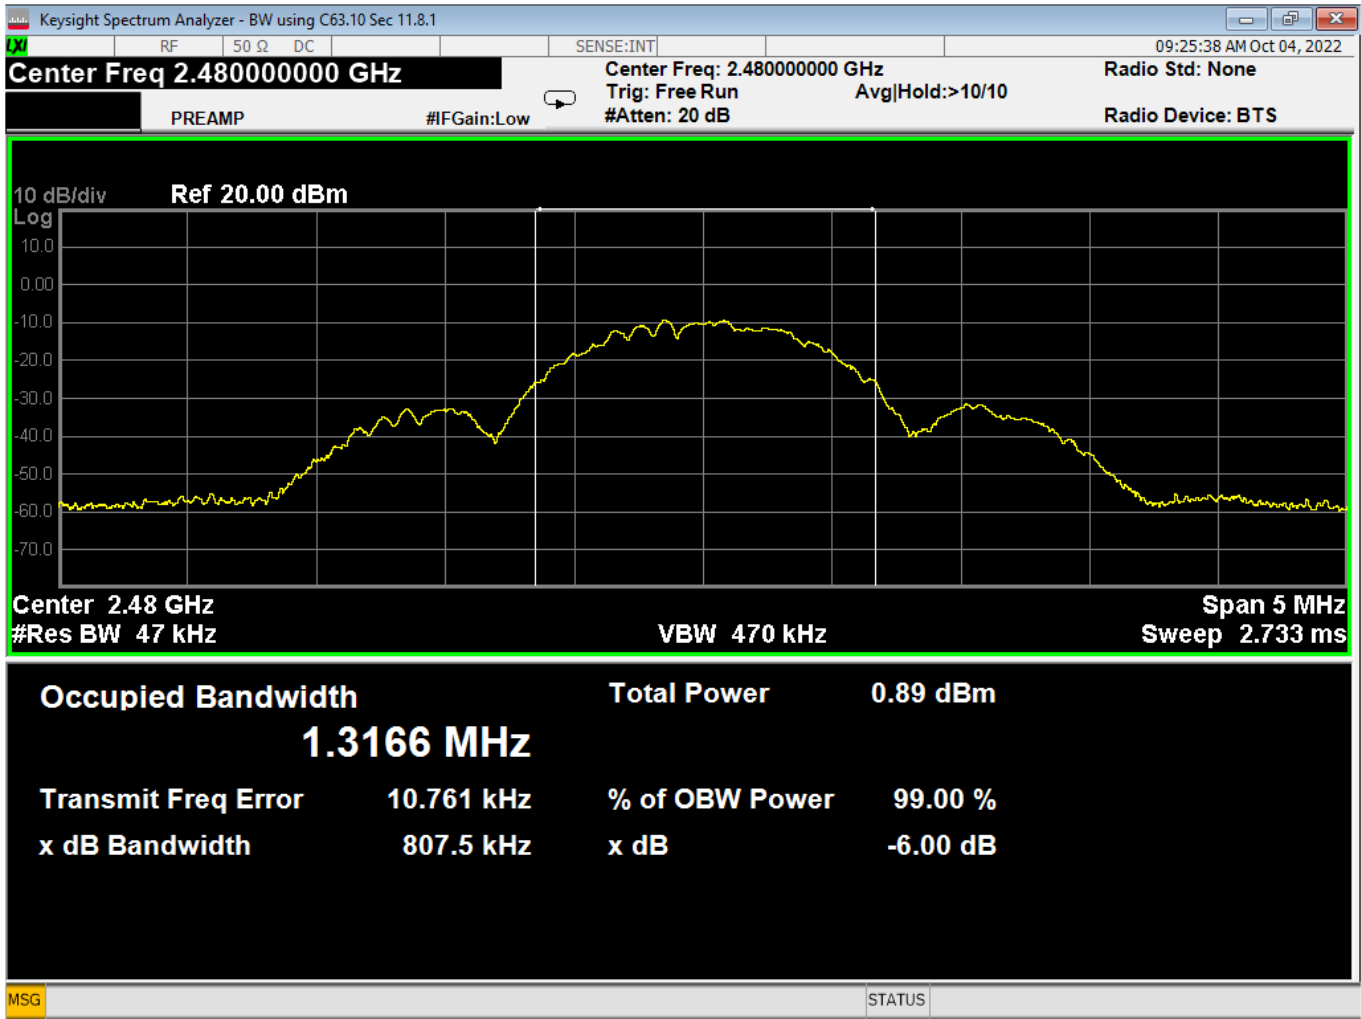

45 Occupied Bandwidth, High Channel, GMSK 1MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

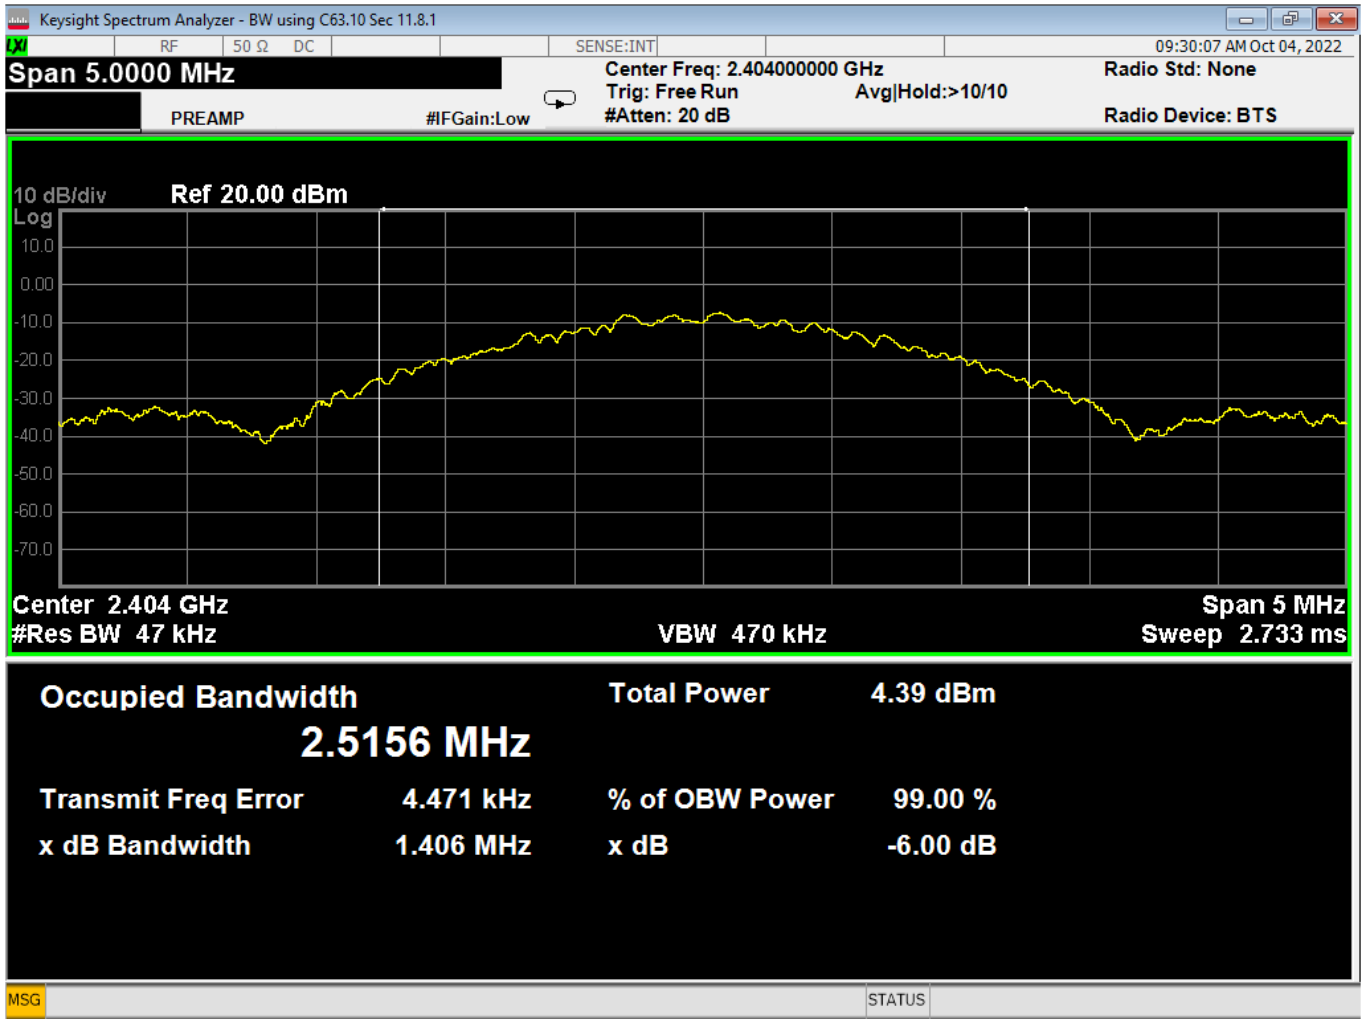

46 Occupied Bandwidth, Low Channel, GMSK 2MB




|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

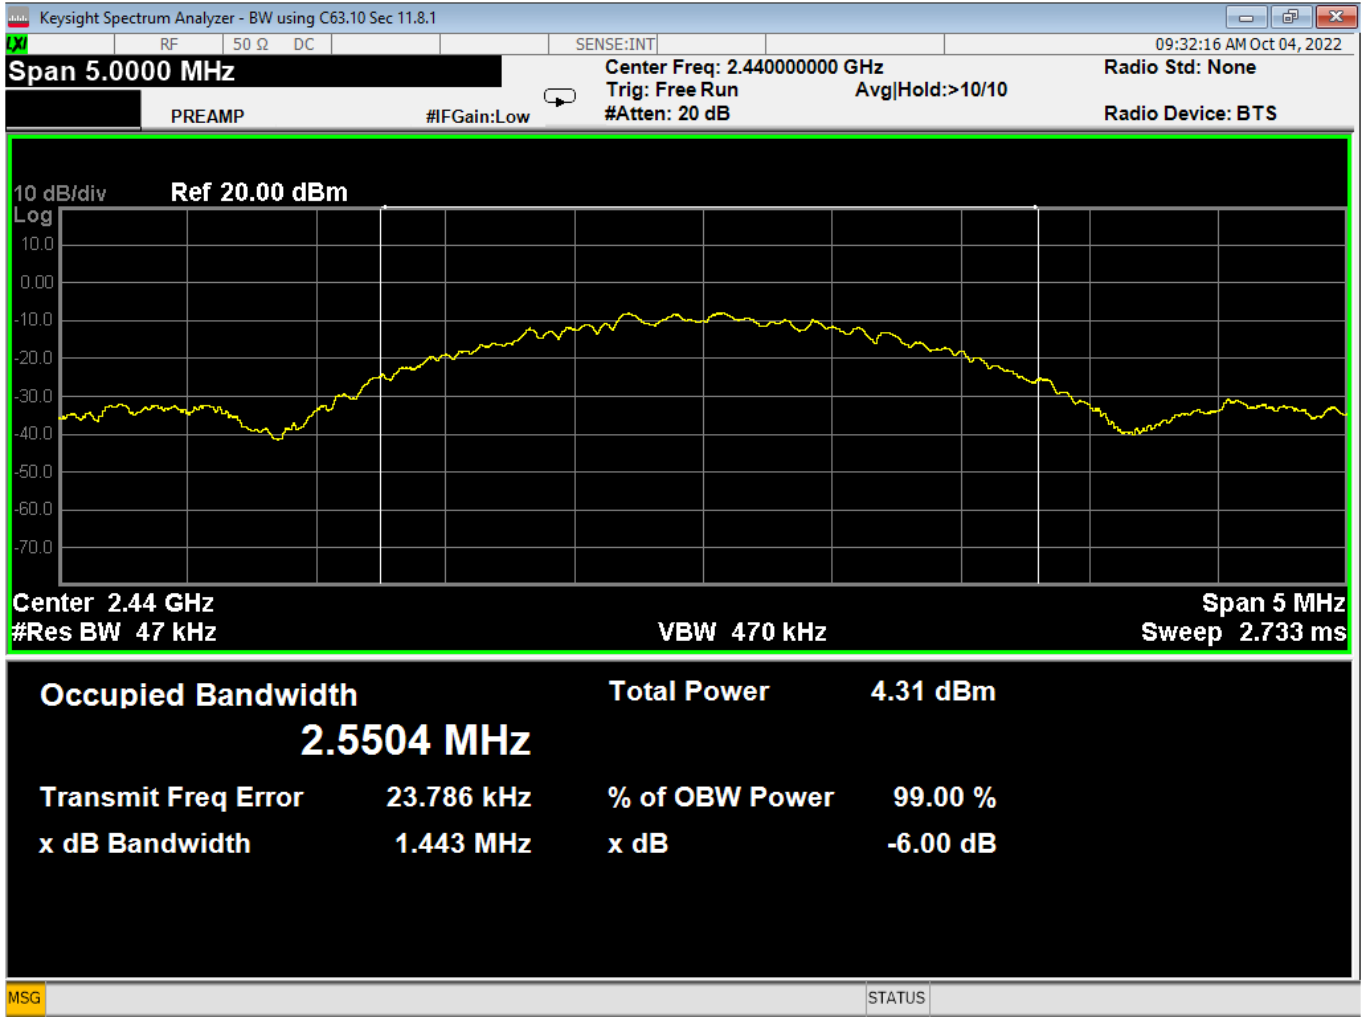

47 Occupied Bandwidth, Mid Channel, GMSK 2MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

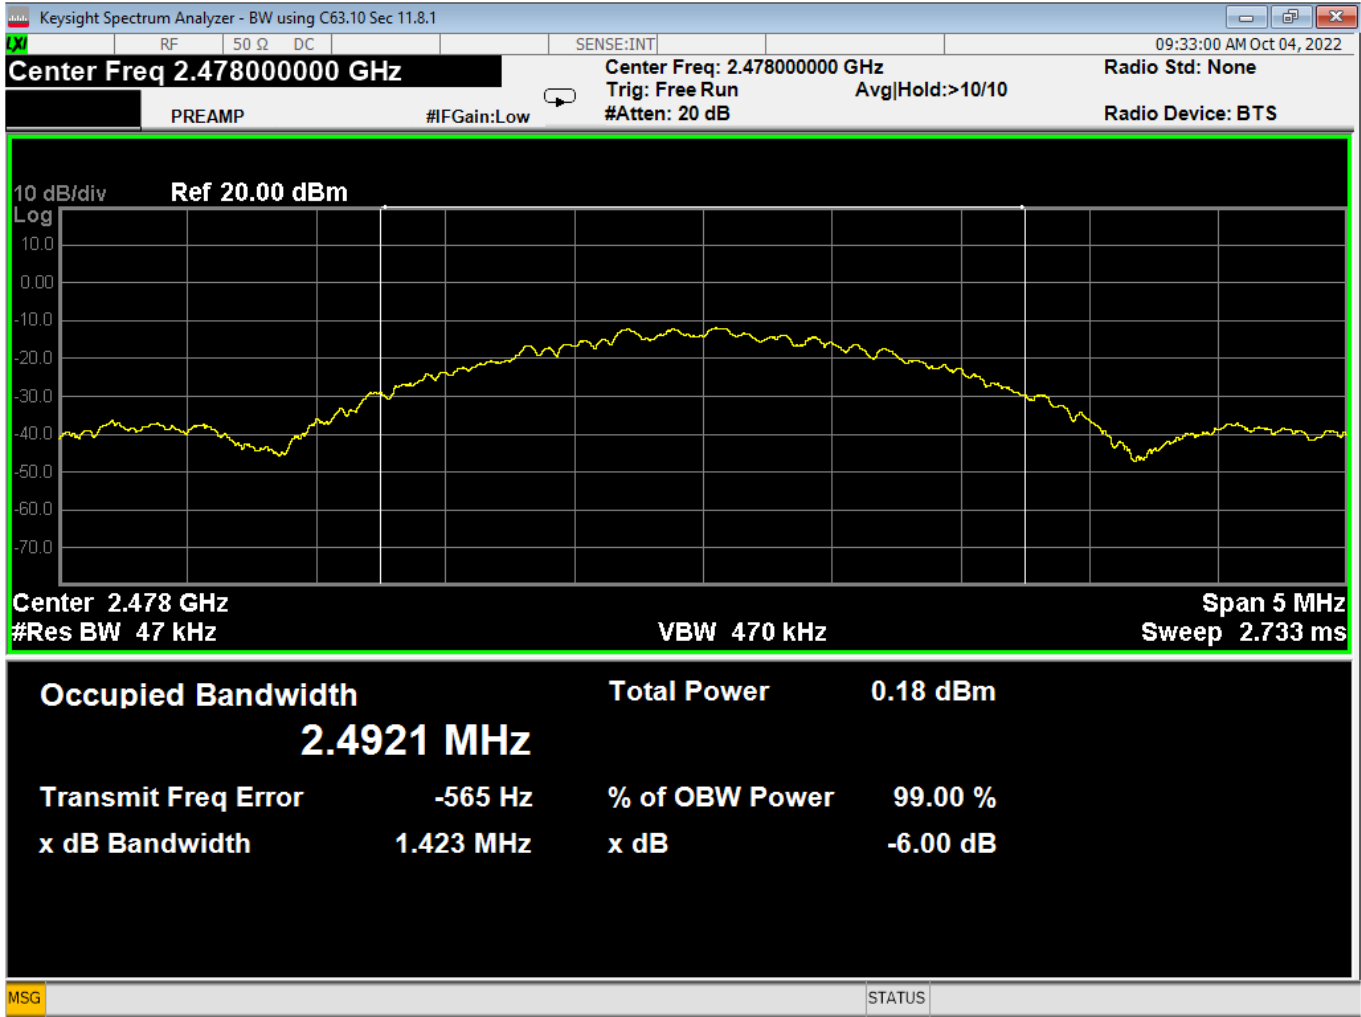

48 Occupied Bandwidth, High Channel, GMSK 2MB



|                |                            |     |   |
|----------------|----------------------------|-----|---|
| Report Number: | R20220615-20-E1            | Rev | B |
| Prepared for:  | Garmin International, Inc. |     |   |

REPORT END