



FCC TEST REPORT

FCC ID: L73-RX-493

On Behalf of

Sanwa Electronic Instrument Co., Ltd

2.4GHz Radio Control System

Model No.: RX-493

Prepared for : Sanwa Electronic Instrument Co., Ltd
Address : 1-2-50, Yoshida Honmachi, Higashi-Osaka, Osaka 578-0982, Japan

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2002042-C02-R04
Date of Receipt : February 27, 2020
Date of Test : February 27, 2020-March 06, 2020
Date of Report : March 06, 2020
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT).....	7
2.2. Accessories of Device (EUT)	10
2.3. Tested Supporting System Details	10
2.4. Block Diagram of connection between EUT and simulators	10
2.5. Test Mode Description.....	10
2.6. Test Conditions	10
2.7. Test Facility	11
2.8. Measurement Uncertainty.....	11
2.9. Test Equipment List	12
3. Maximum Peak Output power	13
3.1. Limit	13
3.2. Test Procedure	13
3.3. Test Setup.....	13
3.4. Test Result	13
4. Bandwidth.....	15
4.1. Limit	15
4.2. Test Procedure	15
4.3. Test Result	15
5. Carrier Frequency Separation.....	28
5.1. Limit	28
5.2. Test Procedure	28
5.3. Test Result	28
6. Number Of Hopping Channel.....	30
6.1. Limit	30
6.2. Test Procedure	30
6.3. Test Result	30
7. Dwell Time.....	31
7.1. Test limit	31
7.2. Test Procedure	31
7.3. Test Result	31
8. Radiated emissions.....	40
8.1. Limit	40
8.2. Block Diagram of Test setup	41
8.3. Test Procedure	42
8.4. Test Result	42
9. Band Edge Compliance	46

9.1. Block Diagram of Test Setup.....	46
9.2. Limit	46
9.3. Test Procedure	46
9.4. Test Result	46
10. Power Line Conducted Emissions	59
10.1. Block Diagram of Test Setup.....	59
10.2. Limit	59
10.3. Test Procedure	59
10.4. Test Result	59
10.5. Limit	60
10.6. Result	60
11. Test setup photo	61
11.1. Photos of Radiated emission.....	61
12. Photos of The EUT.....	62

TEST REPORT DECLARATION

Applicant : Sanwa Electronic Instrument Co., Ltd
Address : 1-2-50, Yoshida Honmachi, Higashi-Osaka, Osaka 578-0982, Japan
Manufacturer : Dongguan Fountain Electronics
Address : Qiaolian Industrial District, Erhuan St., Dongkeng Town, Dongguan City,
Guangdong, P.R.China
EUT Description : 2.4GHz Radio Control System
(A) Model No. : RX-493
(B) Trademark : SANWA

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Ella Liang
Project Engineer


.....

Approved by (name + signature).....: Simple Guan
Project Manager


.....

Date of issue..... : March 04, 2020

Revision History

Revision	Issue Date	Revisions	Revised By
V0	March 04, 2020	Initial released Issue	Simple Guan

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 :2013	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	N/A
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Name	: 2.4GHz Radio Control System
Model No.	: RX-493
DIFF	: N/A
Trademark	: SANWA
Power rate	: DC 3.7-7.4V, 30mA
Test Power supply	: 4*DC 1.5V by AA battery
Radio Technology	: 2.4G
Operation frequency	: ① 2404-2470 MHz ② 2405-2471 MHz ③ 2412-2478 MHz ④ 2413-2479MHz
Channel No.	: 34Channels
Channel Separation	: 2MHz
Modulation	: GFSK
Antenna Type	: Integrated Antenna, Maximum Gain is 2.7dBi
Software version	: V118
Hardware version	: 700A17491A

Channel list:

2404-2470MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2404	10CH	2422	19CH	2440	28CH	2458
2CH	2406	11CH	2424	20CH	2442	29CH	2460
3CH	2408	12CH	2426	21CH	2444	30CH	2462
4CH	2410	13CH	2428	22CH	2446	31CH	2464
5CH	2412	14CH	2430	23CH	2448	32CH	2466
6CH	2414	15CH	2432	24CH	2450	33CH	2468
7CH	2416	16CH	2434	25CH	2452	34CH	2470
8CH	2418	17CH	2436	26CH	2454		
9CH	2420	18CH	2438	27CH	2456		

2405-2471MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2405	10CH	2423	19CH	2441	28CH	2459
2CH	2407	11CH	2425	20CH	2443	29CH	2461
3CH	2409	12CH	2427	21CH	2445	30CH	2463
4CH	2411	13CH	2429	22CH	2447	31CH	2465
5CH	2413	14CH	2431	23CH	2449	32CH	2467
6CH	2415	15CH	2433	24CH	2451	33CH	2469
7CH	2417	16CH	2435	25CH	2453	34CH	2471
8CH	2419	17CH	2437	26CH	2455		
9CH	2421	18CH	2439	27CH	2457		

2412-2478MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2412	10CH	2430	19CH	2448	28CH	2466
2CH	2414	11CH	2432	20CH	2450	29CH	2468
3CH	2416	12CH	2434	21CH	2452	30CH	2470
4CH	2418	13CH	2436	22CH	2454	31CH	2472
5CH	2420	14CH	2438	23CH	2456	32CH	2474
6CH	2422	15CH	2440	24CH	2458	33CH	2476
7CH	2424	16CH	2442	25CH	2460	34CH	2478
8CH	2426	17CH	2444	26CH	2462		
9CH	2428	18CH	2446	27CH	2464		

2413-2479MHz:

Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)	Channel	Freq (MHz)
1CH	2413	10CH	2431	19CH	2449	28CH	2467
2CH	2415	11CH	2433	20CH	2451	29CH	2469
3CH	2417	12CH	2435	21CH	2453	30CH	2471
4CH	2419	13CH	2437	22CH	2455	31CH	2473
5CH	2421	14CH	2439	23CH	2457	32CH	2475
6CH	2423	15CH	2441	24CH	2459	33CH	2477
7CH	2425	16CH	2443	25CH	2461	34CH	2479
8CH	2427	17CH	2445	26CH	2463		
9CH	2429	18CH	2447	27CH	2465		


2.2. Accessories of Device (EUT)

Accessories1 : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or DOC
1	AA Battery case	--	--	--	--
1	2.4GHz Radio Control System	SANWA	M17	/	/

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Tested mode, channel, and data rate information	
Mode	Channel
GFSK	Low
	Middle
	High

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
Registration Number: 293961

July 15, 2019 Certificated by IC
Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.16dB(Polarize: H)
	4.13dB(Polarize: V)
Uncertainty for radio frequency	5.4×10^{-8}
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2019.09.05	1Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2019.09.06	1Year
Receiver	R&S	ESCI	101165	2019.09.05	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.04.13	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2018.04.13	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1Year
Cable	Resenberger	N/A	No.2	2019.09.05	1Year
Cable	Resenberger	N/A	No.3	2019.09.05	1Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2019.09.05	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.08.26	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.06	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000-40-80	100631	2019.09.06	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.05	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1.Limit


Please refer section15.247.

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2.Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3.Test Setup



3.4.Test Result

2404-2470 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2404	1.915	21	Pass
	2438	2.425	21	Pass
	2470	1.63	21	Pass
Conclusion: PASS				

2405-2471 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2405	2.007	21	Pass
	2437	2.138	21	Pass
	2471	1.476	21	Pass
Conclusion: PASS				

2412-2478 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2412	1.496	21	Pass
	2446	2.438	21	Pass
	2478	1.311	21	Pass
Conclusion: PASS				

2413-2479 MHz:

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2413	1.467	21	Pass
	2445	2.442	21	Pass
	2479	1.304	21	Pass
Conclusion: PASS				

4. BANDWIDTH

4.1.Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3.Test Result

2404-2470 MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2404	Ant 1	2.0008	2.0406	N/A	Pass
2438	Ant 1	2.0161	2.0397	N/A	Pass
2470	Ant 1	2.0191	2.037	N/A	Pass

OBW NVNT user 2404MHz Ant1

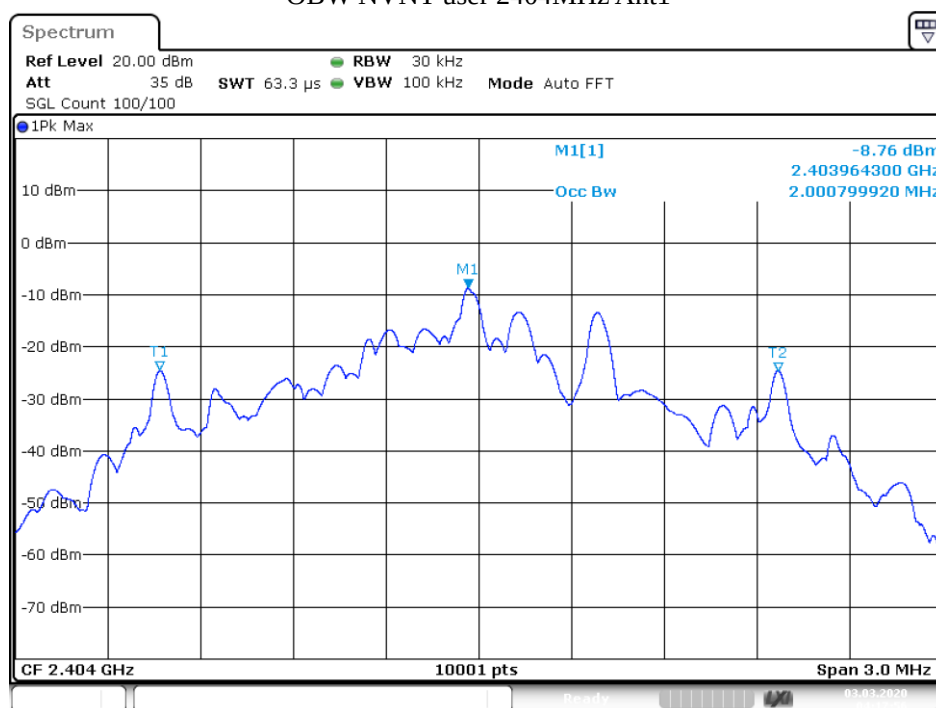


Date: 3.MAR.2020 04:17:57

-20 dB BW NVNT user 2404MHz Ant1

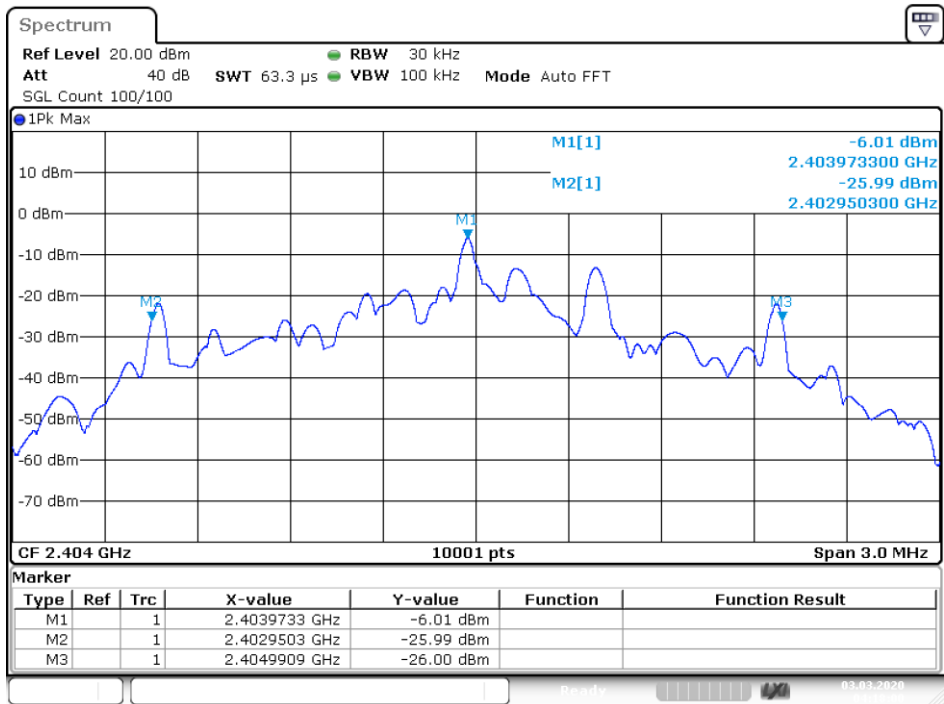


Date: 3.MAR.2020 04:18:00

OBW NVNT user 2438MHz Ant1

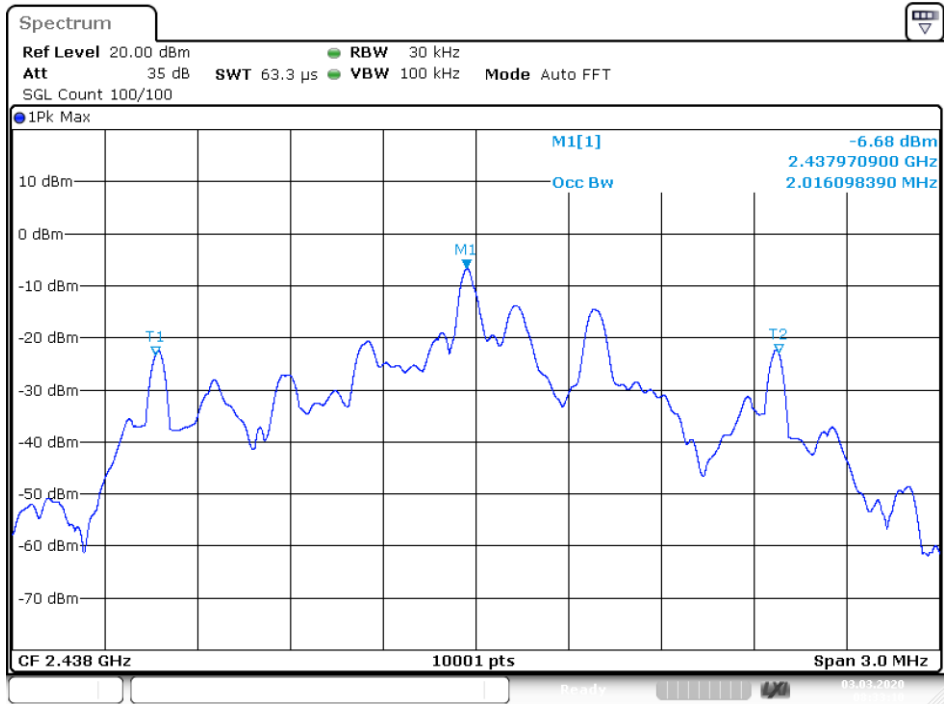


Date: 3.MAR.2020 08:33:10

-20 dB BW NVNT user 2438MHz Ant1

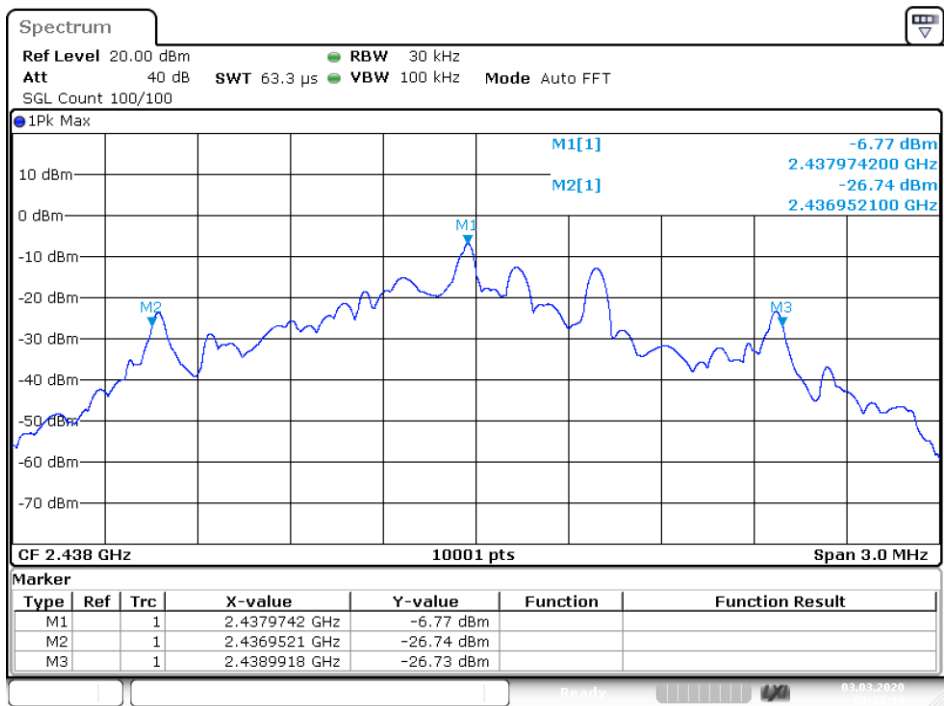


Date: 3.MAR.2020 08:33:14

OBW NVNT user 2470MHz Ant1

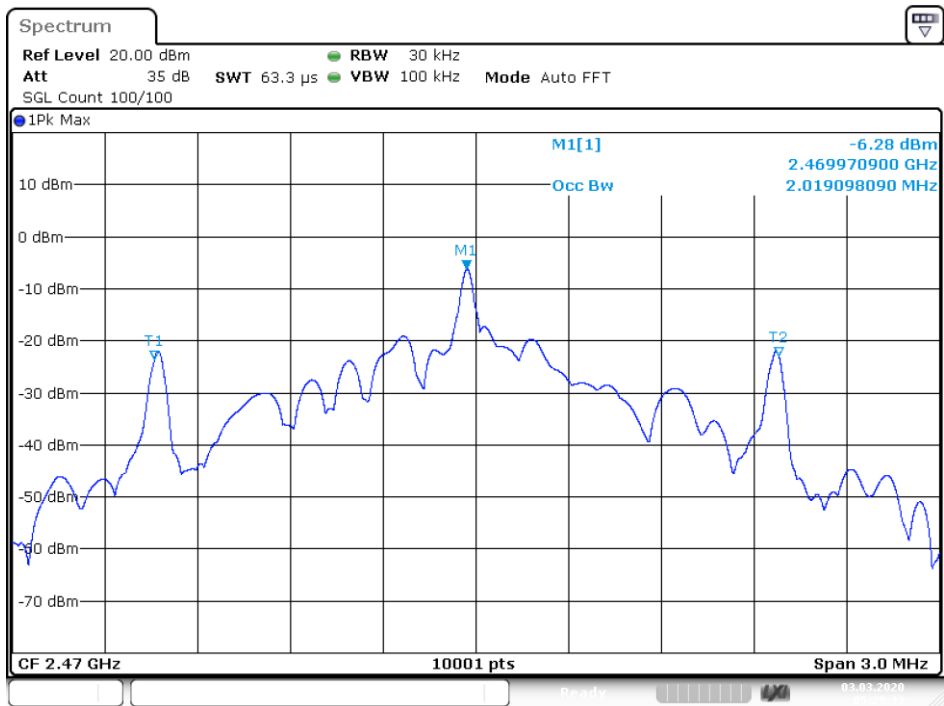

Date: 3.MAR.2020 05:29:33

-20 dB BW NVNT user 2470MHz Ant1

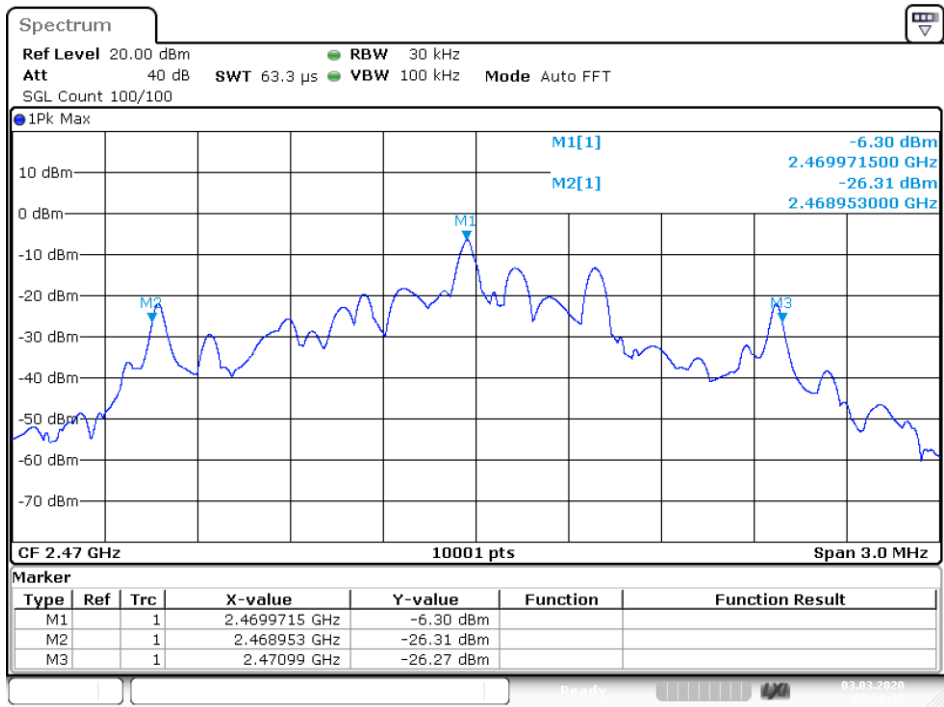


Date: 3.MAR.2020 05:29:37

2405-2471 MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2405	Ant 1	2.0086	2.0442	N/A	Pass
2437	Ant 1	2.0083	2.0475	N/A	Pass
2471	Ant 1	2.005	2.0427	N/A	Pass

OBW NVNT user 2405MHz Ant1

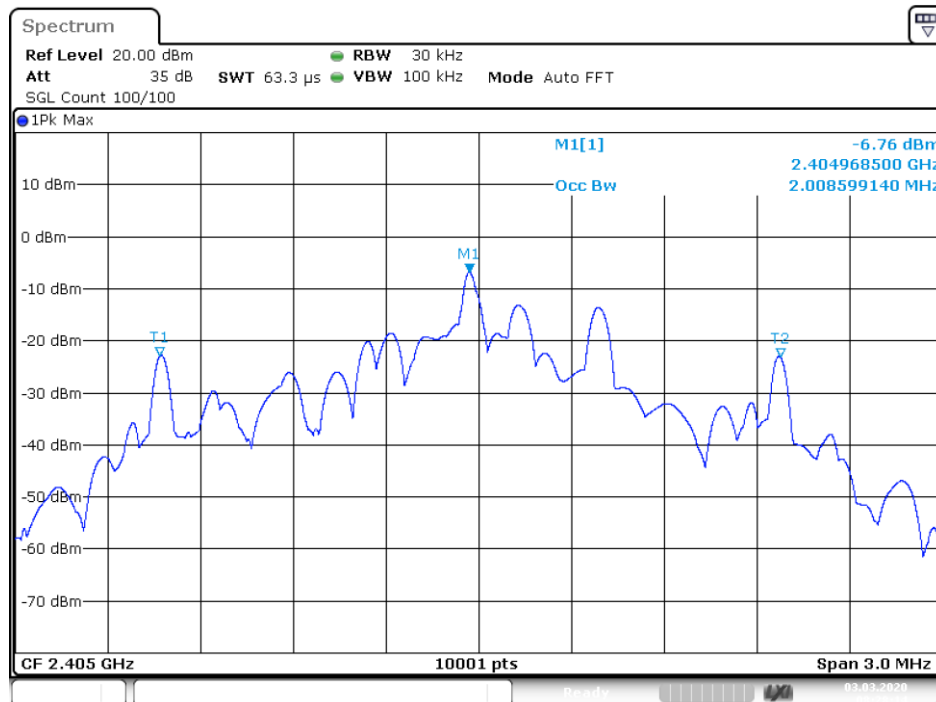


Date: 3.MAR.2020 08:28:14

-20 dB BW NVNT user 2405MHz Ant1

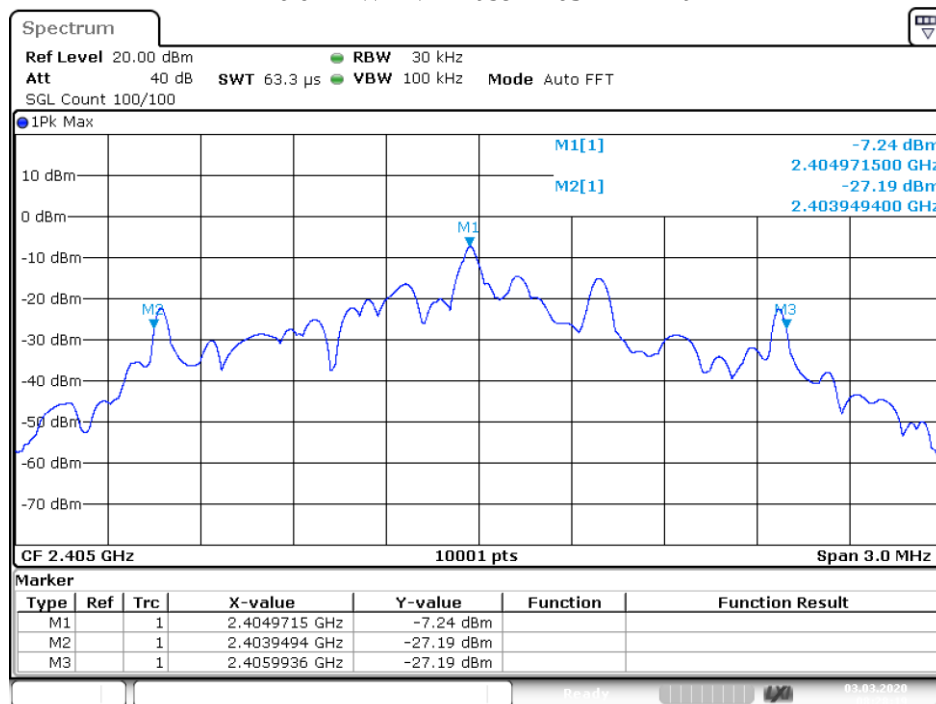


Date: 3.MAR.2020 08:28:18

OBW NVNT user 2437MHz Ant1

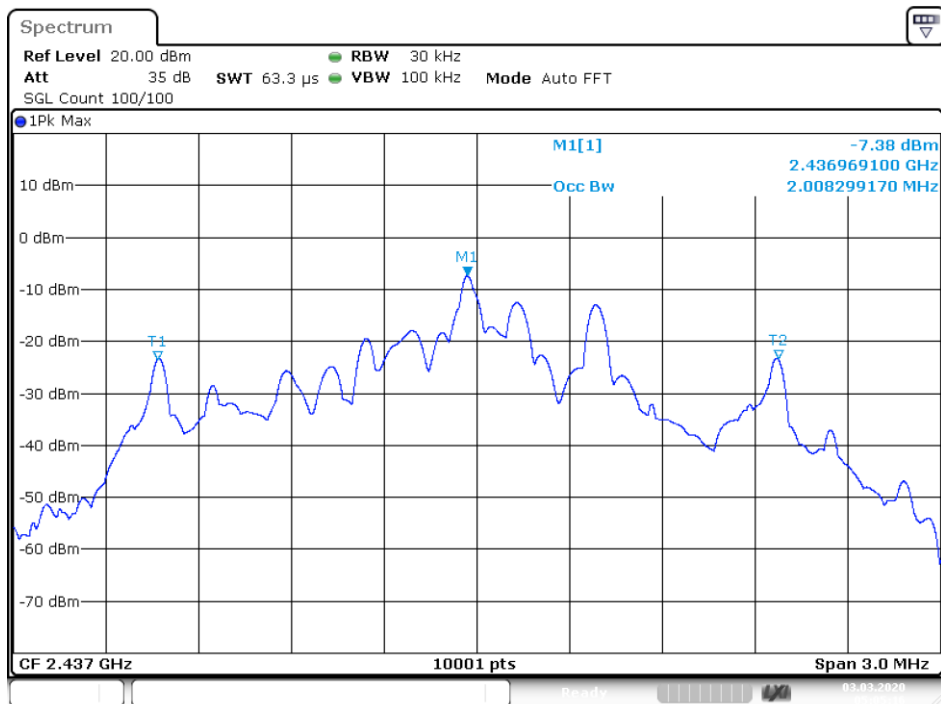


Date: 3.MAR.2020 05:05:16

-20 dB BW NVNT user 2437MHz Ant1

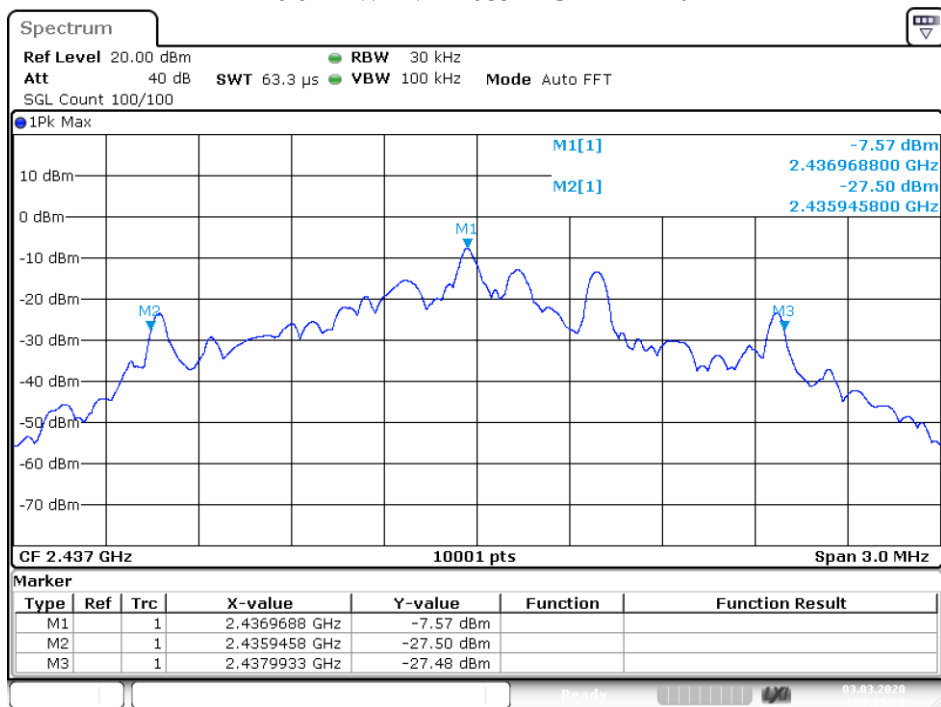


Date: 3.MAR.2020 05:05:20

OBW NVNT user 2471MHz Ant1

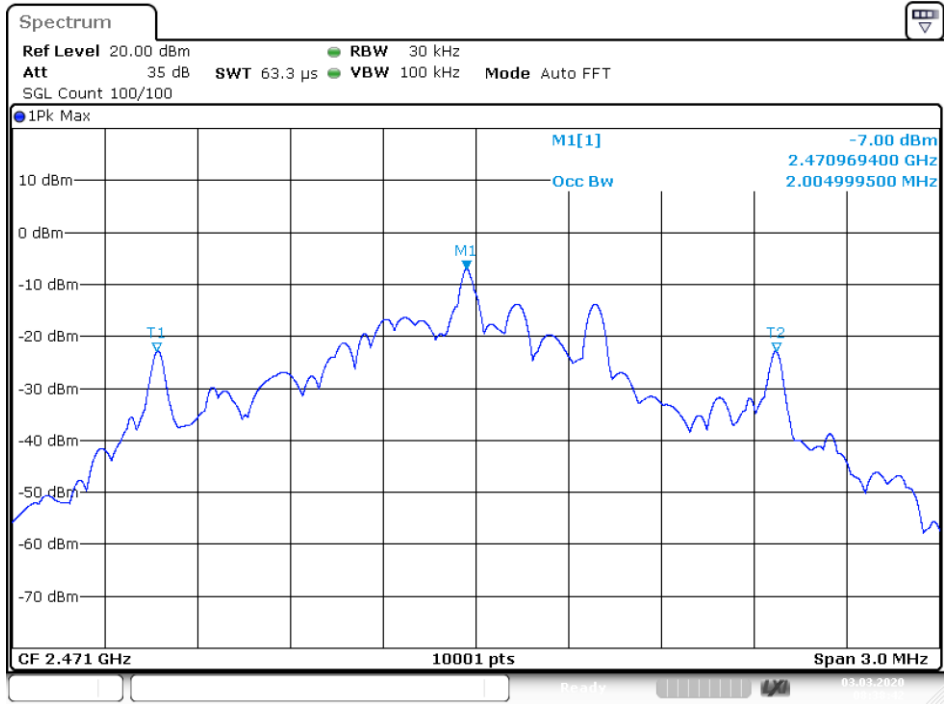

Date: 3.MAR.2020 08:38:42

-20 dB BW NVNT user 2471MHz Ant1

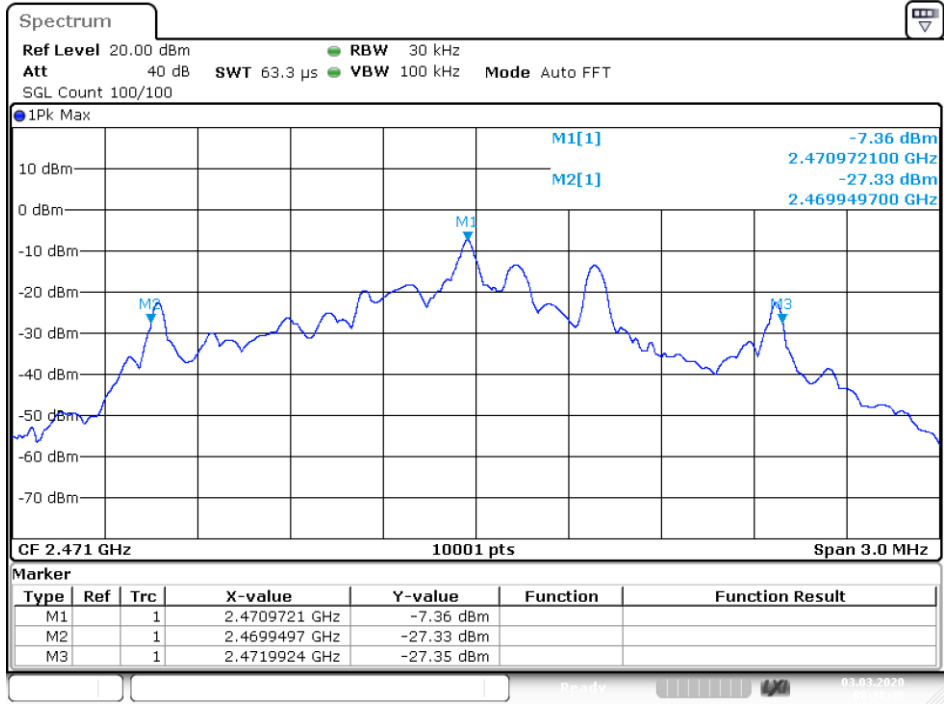


Date: 3.MAR.2020 08:38:46

2412-2478 MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2412	Ant 1	2.0086	2.037	N/A	Pass
2446	Ant 1	2.0143	2.0427	N/A	Pass
2478	Ant 1	2.0119	2.0409	N/A	Pass

OBW NVNT user 2412MHz Ant1

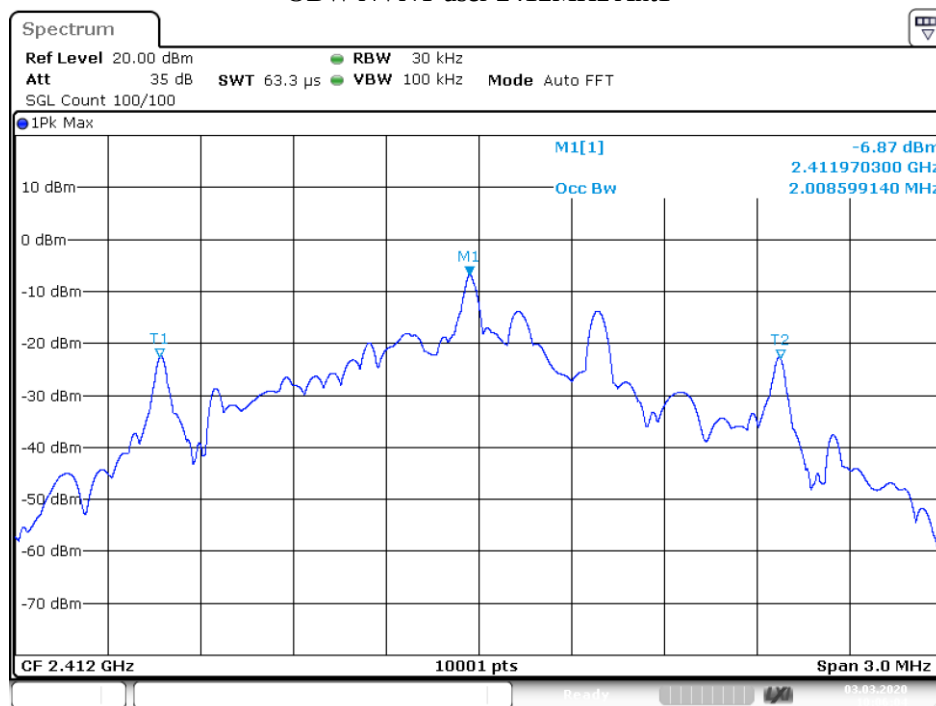


Date: 3.MAR.2020 10:06:04

-20 dB BW NVNT user 2412MHz Ant1

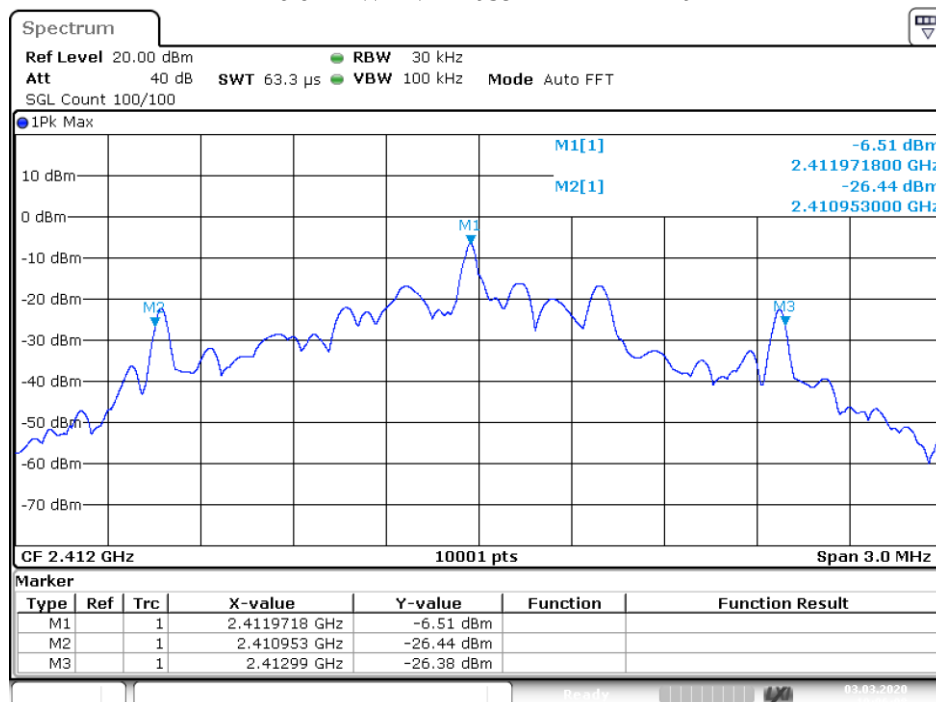


Date: 3.MAR.2020 10:06:08

OBW NVNT user 2446MHz Ant1

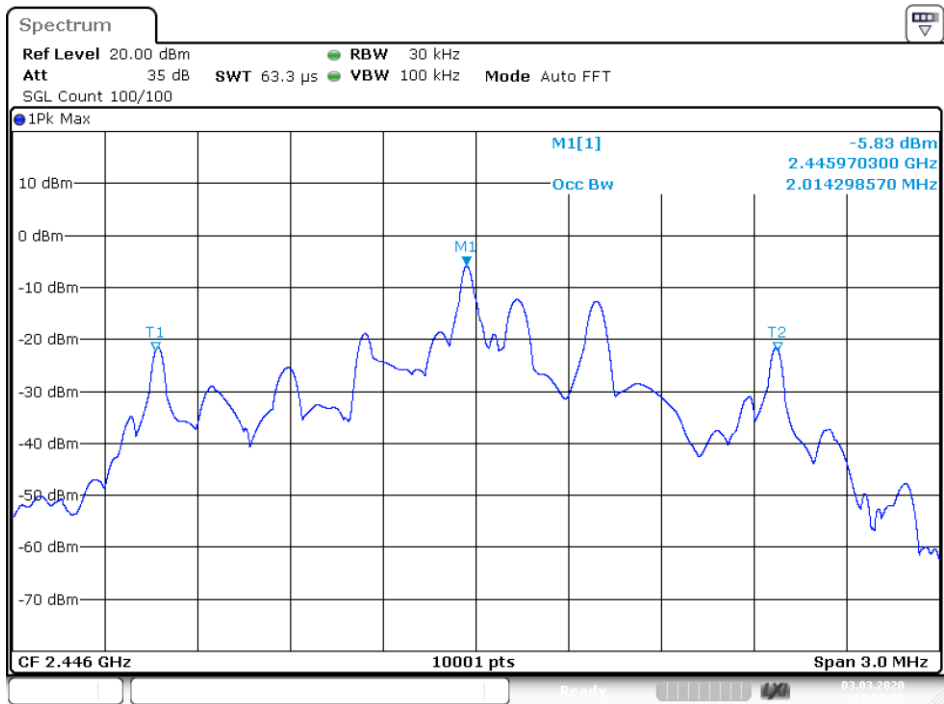


Date: 3.MAR.2020 11:32:56

-20 dB BW NVNT user 2446MHz Ant1

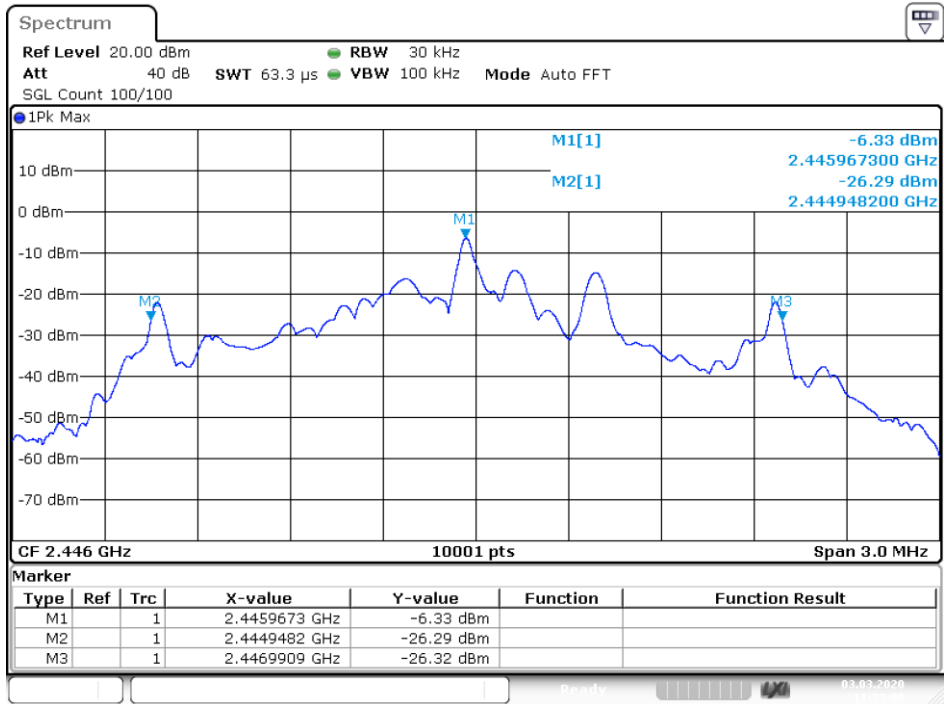


Date: 3.MAR.2020 11:32:59

OBW NVNT user 2478MHz Ant1

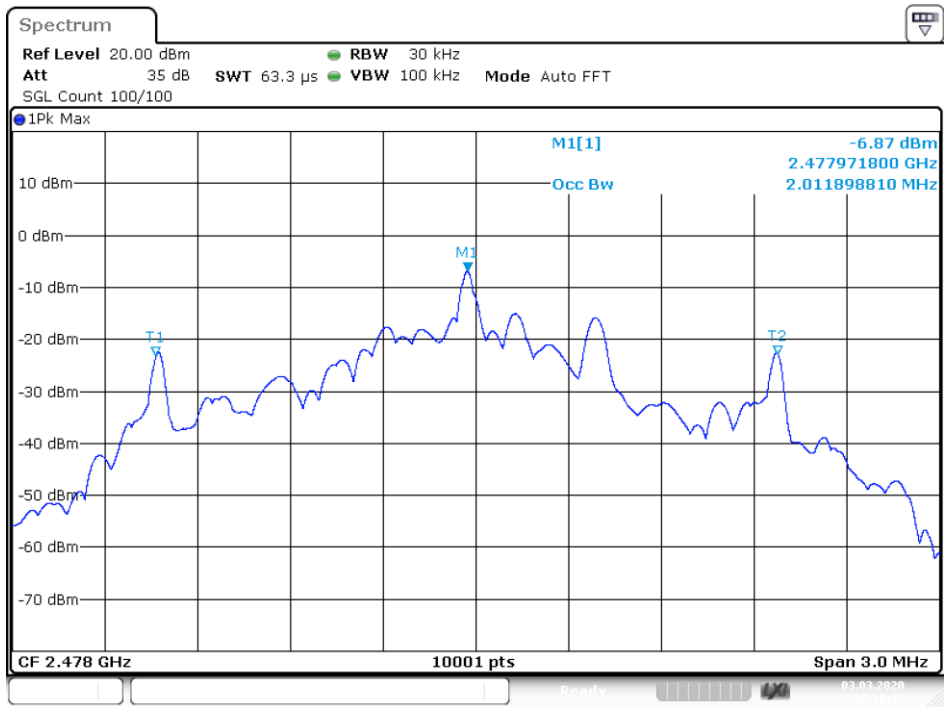

Date: 3.MAR.2020 10:18:43

-20 dB BW NVNT user 2478MHz Ant1

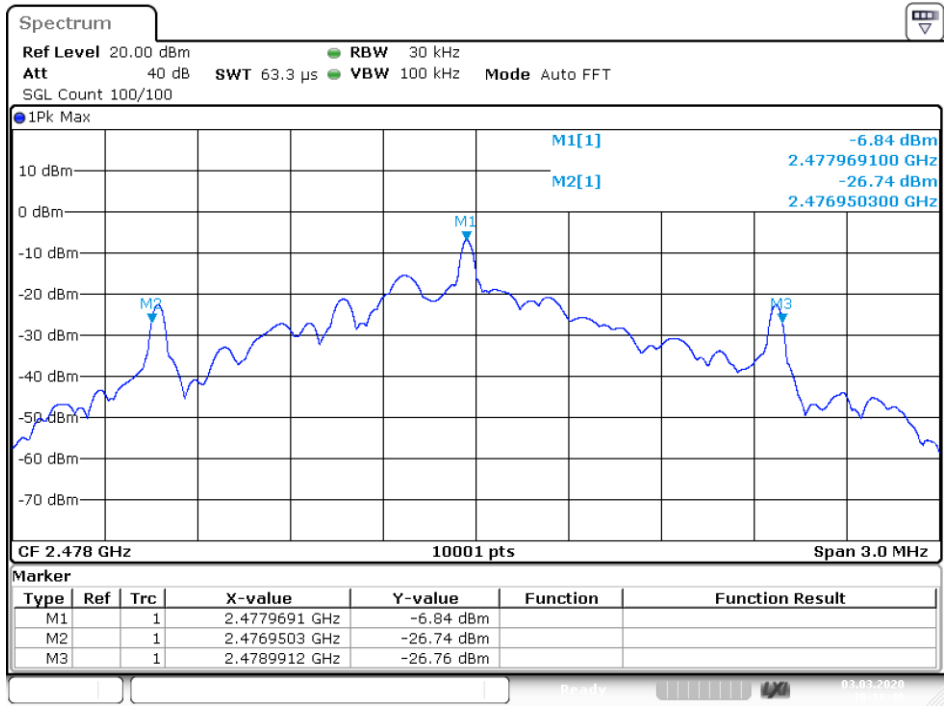


Date: 3.MAR.2020 10:18:47

2413-2479MHz:


Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
2413	Ant 1	2.0119	2.0583	N/A	Pass
2445	Ant 1	2.0095	2.0409	N/A	Pass
2479	Ant 1	2.0101	2.0367	N/A	Pass

OBW NVNT user 2413MHz Ant1

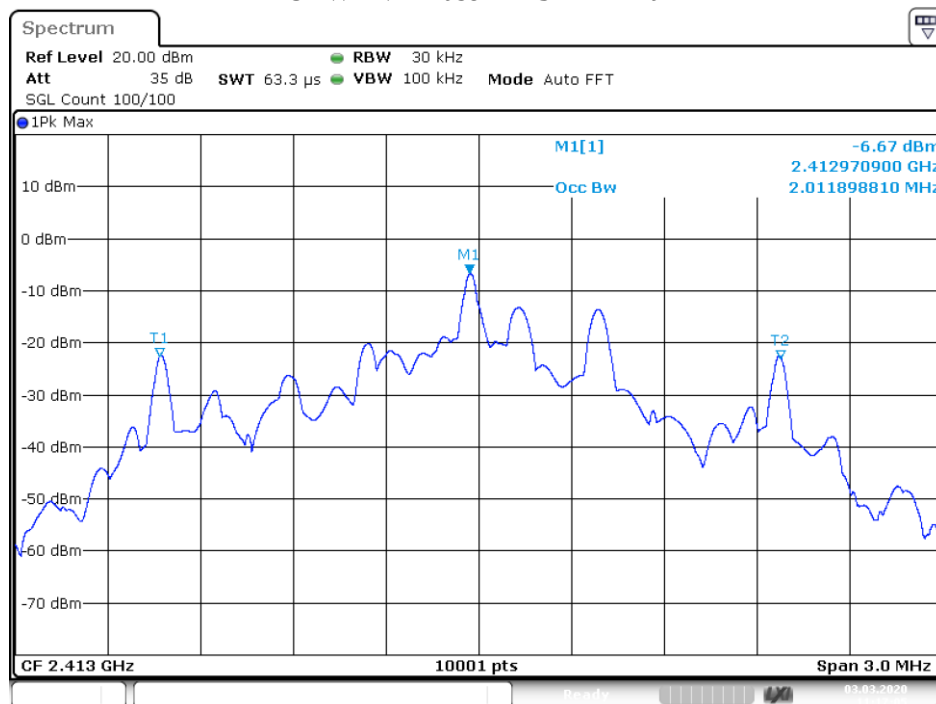


Date: 3.MAR.2020 11:17:05

-20 dB BW NVNT user 2413MHz Ant1

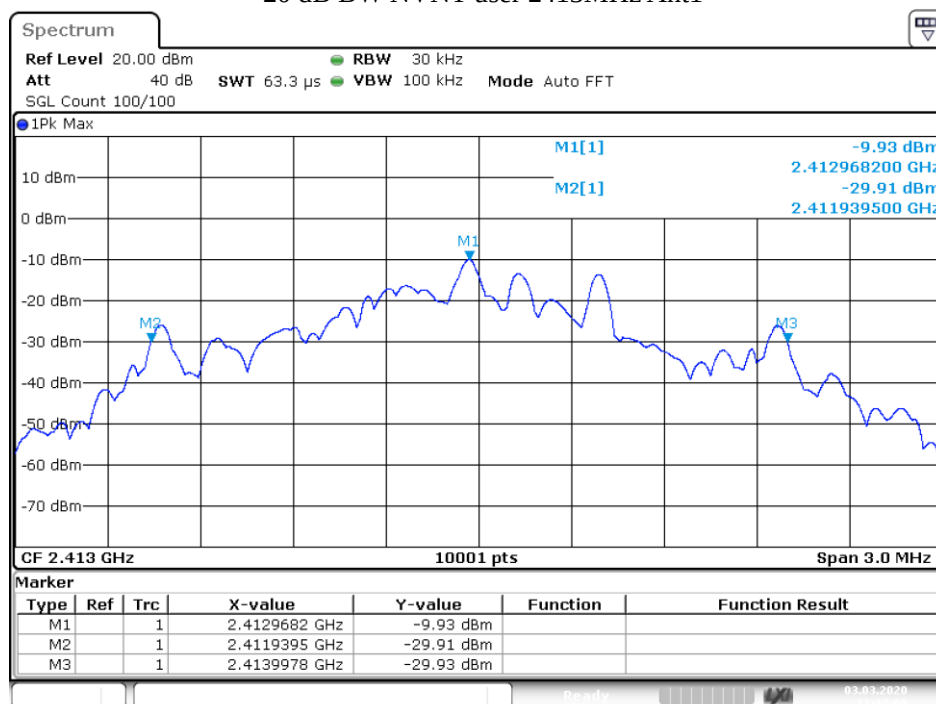


Date: 3.MAR.2020 11:17:08

OBW NVNT user 2445MHz Ant1

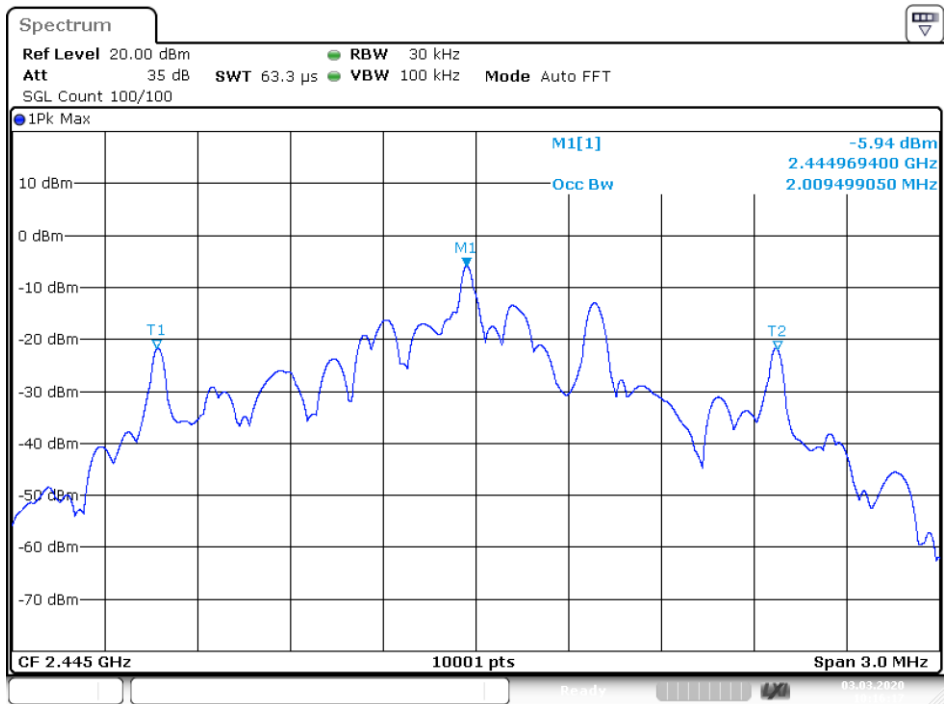


Date: 3.MAR.2020 10:16:17

-20 dB BW NVNT user 2445MHz Ant1

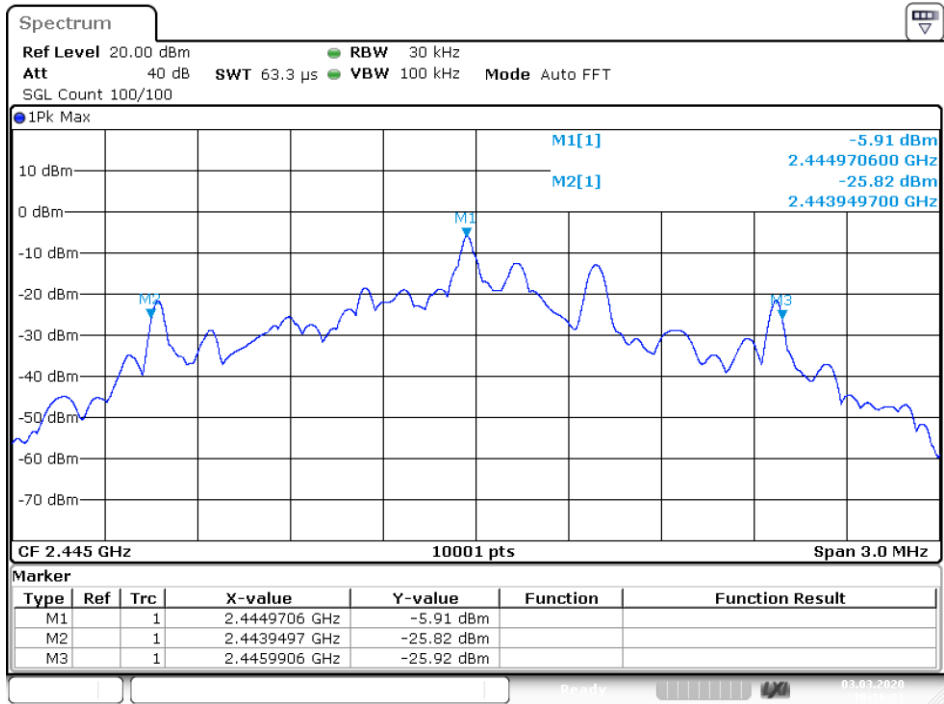


Date: 3.MAR.2020 10:16:21

OBW NVNT user 2479MHz Ant1

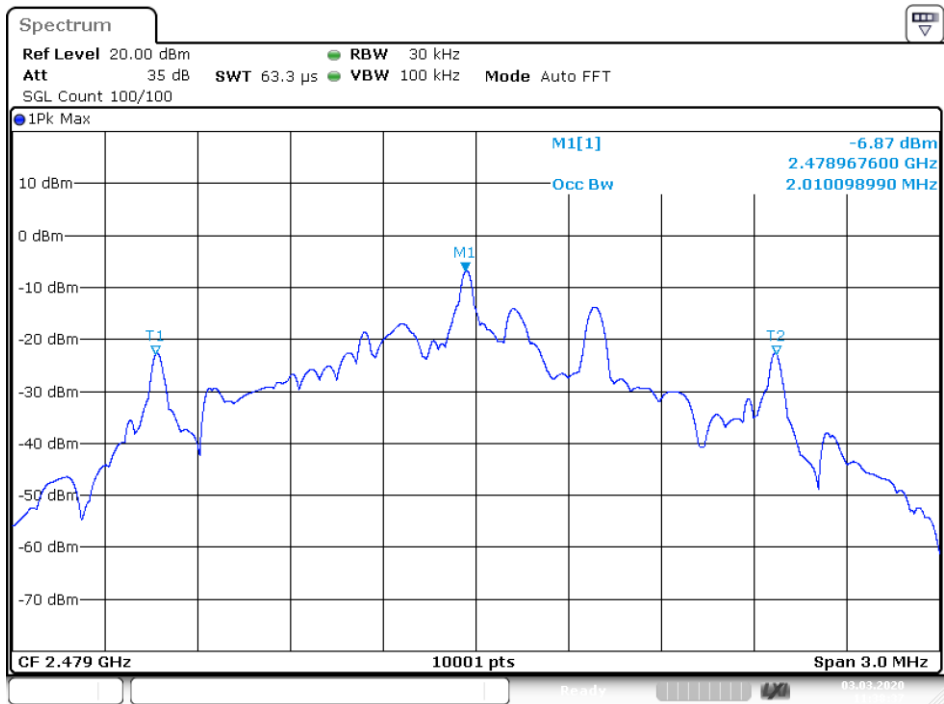

Date: 3.MAR.2020 11:38:37

-20 dB BW NVNT user 2479MHz Ant1

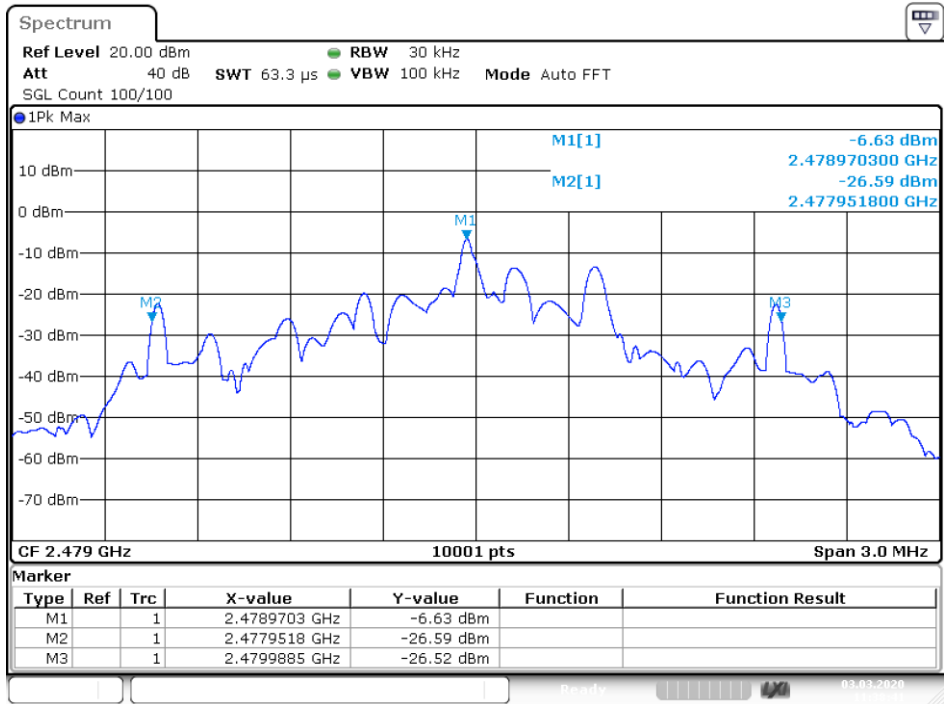

Date: 3.MAR.2020 11:38:41

5. CARRIER FREQUENCY SEPARATION

5.1.Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

5.3.Test Result


Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
GFSK (2404-2470MHz)	2435.968	2437.969	2.001	1.358	Pass
GFSK (2405-2471MHz)	2436.968	2438.972	2.004	1.362	Pass
GFSK (2412-2478MHz)	2437.968	2439.5	1.532	1.361	Pass
GFSK (2413-2479MHz)	2444.972	2446.98	2.008	1.358	Pass

Original test data for channel separation


① 2404-2470 MHz

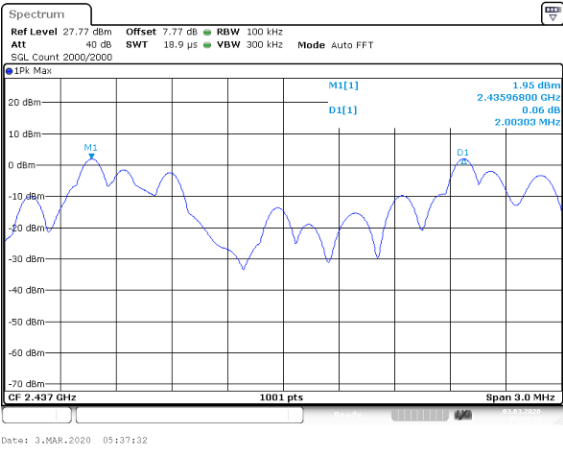


② 2405-2471 MHz

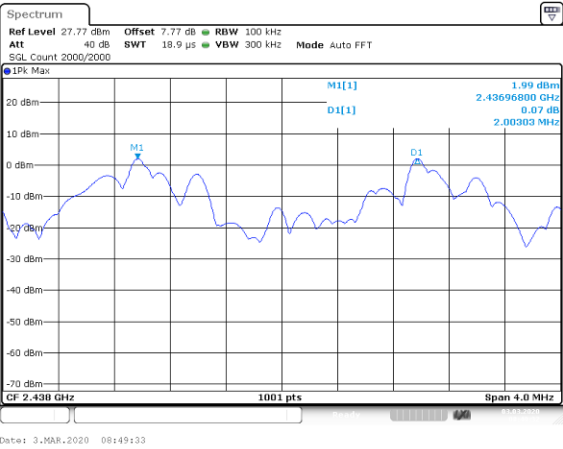

③ 2412-2478 MHz

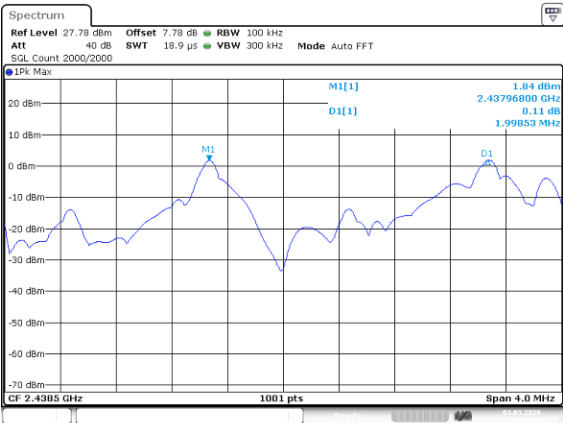

④ 2413-2479MHz

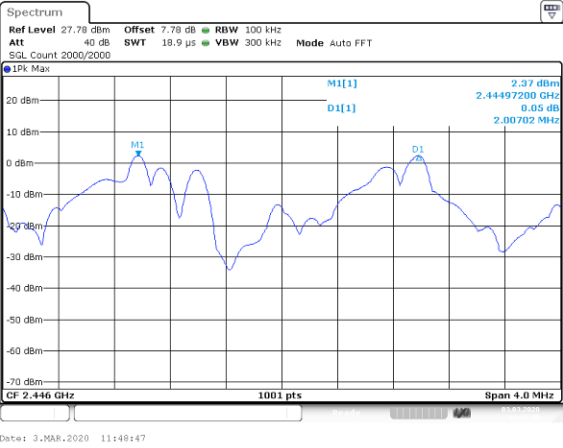

6. NUMBER OF HOPPING CHANNEL

6.1.Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2.Test Procedure


The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300KHz VBW.

6.3.Test Result


Mode	Number of hopping channel	Limit	Conclusion
GFSK	34	>15	PASS

Original test data for hopping channel number


① 2404-2470 MHz

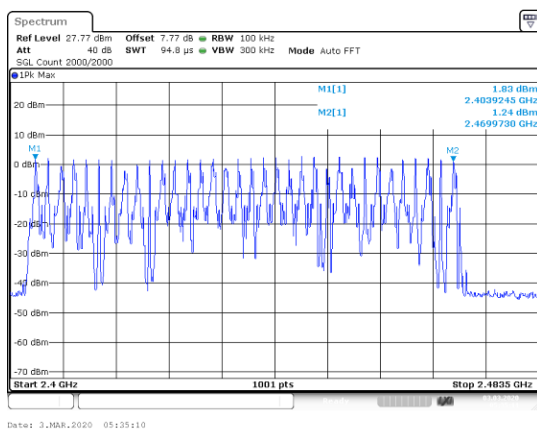


② 2405-2471 MHz

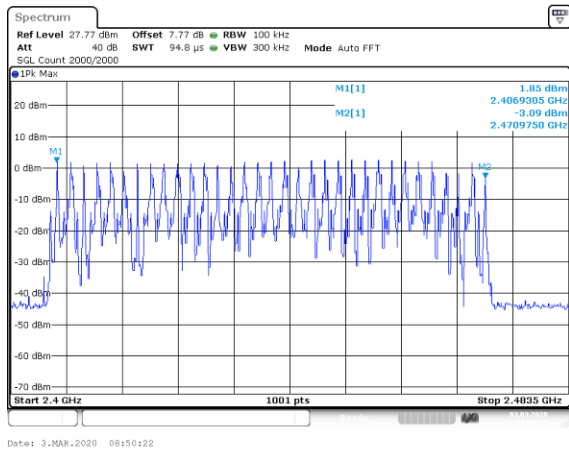

③ 2412-2478 MHz

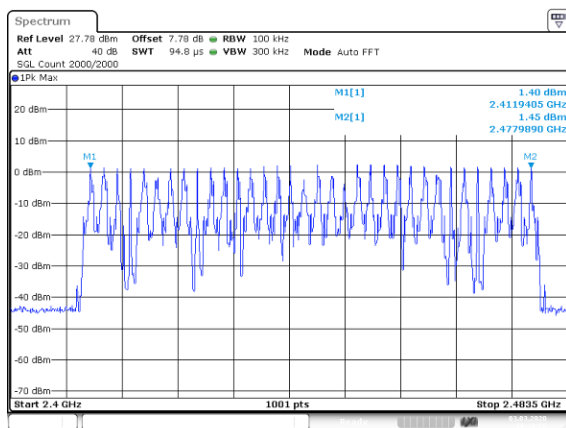

④ 2413-2479MHz

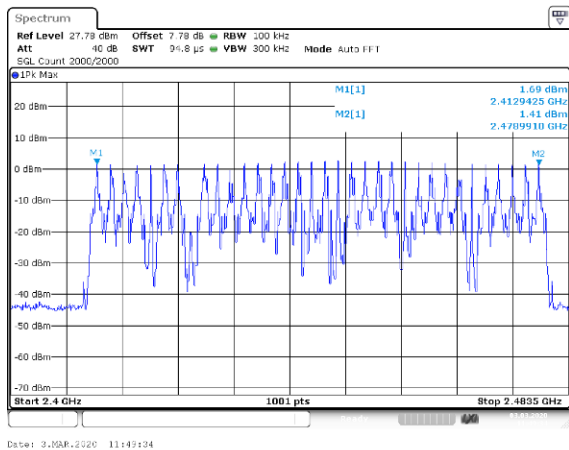

7. DWELL TIME

7.1. Test limit

Please refer section 15.247

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.2.6. The spectrums are scanned by using the spectrum analyzer. And the numbers of occupied channels per Nsec (period of 0.4 seconds multiplied by the number of hopping channels employed) were counted by using the delta-marker function of spectrum analyzer and recorded as "N".

7.2.7. The dwell time was calculated by:

Dwell time = $N \text{ (hop per 1 second)} \times 0.4 \text{ (period)} \times T_{\text{on}} \text{ (hop duration)}$.

7.3. Test Result


PASS.

Detailed information please see the following page.

2404-2470 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2438	0.0792	29.08	400	Pass


Note: Dwell time=27(hop per 1 second) *34*0.4 (period)*0.0792 (hop duration) =29.08 ms

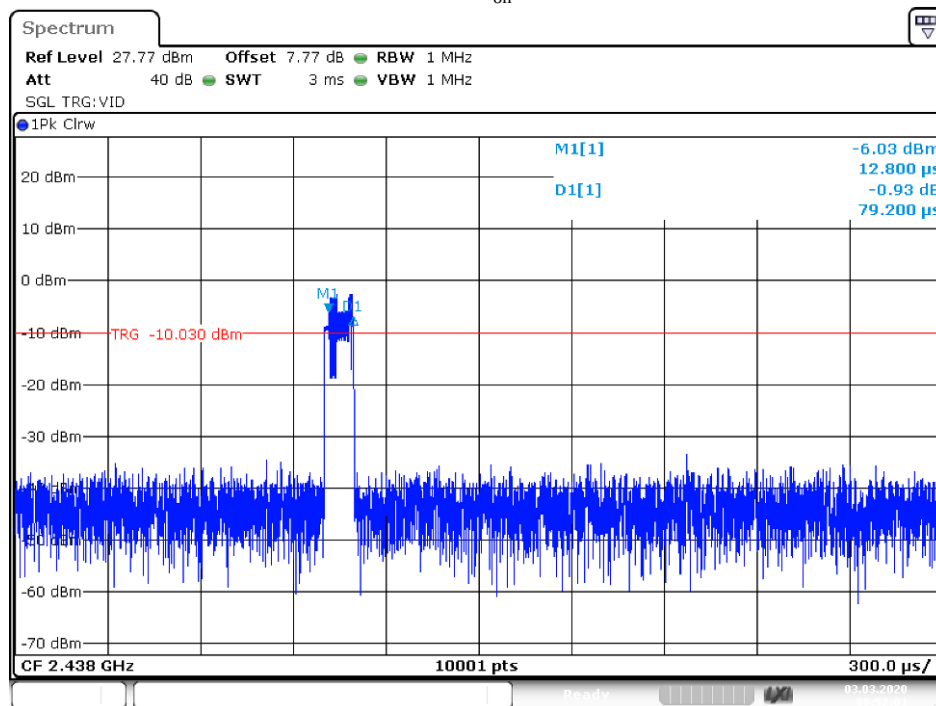2438MHz: $T_{on}=0.0792\text{ms}$ 

Date: 3.MAR.2020 08:52:00

N=27

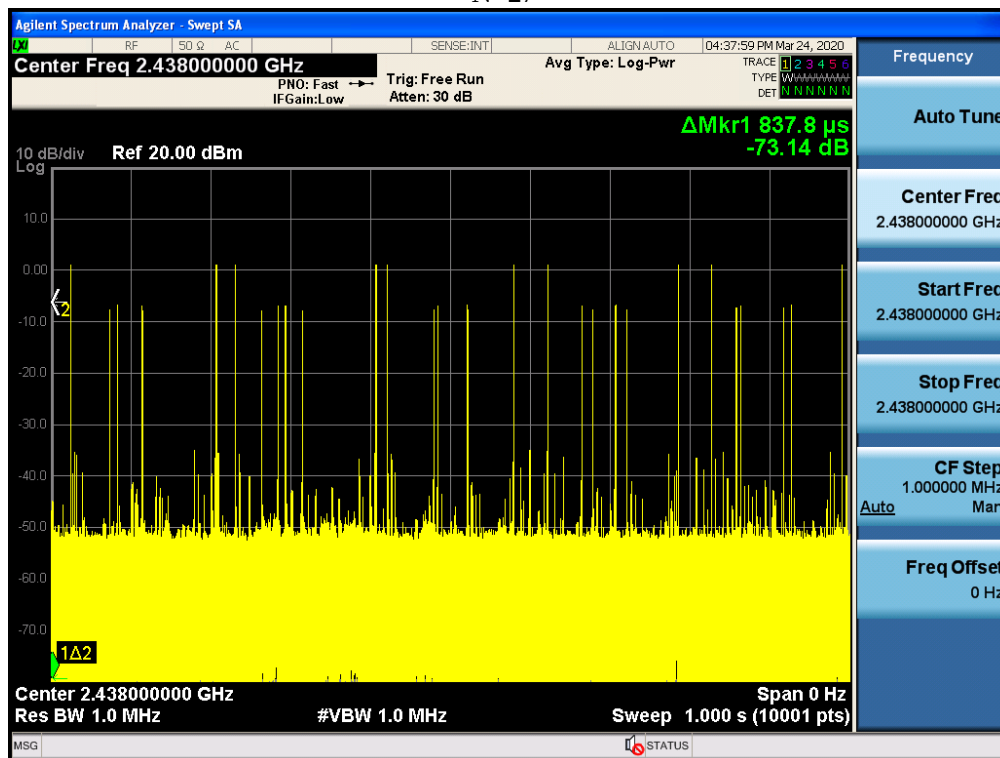


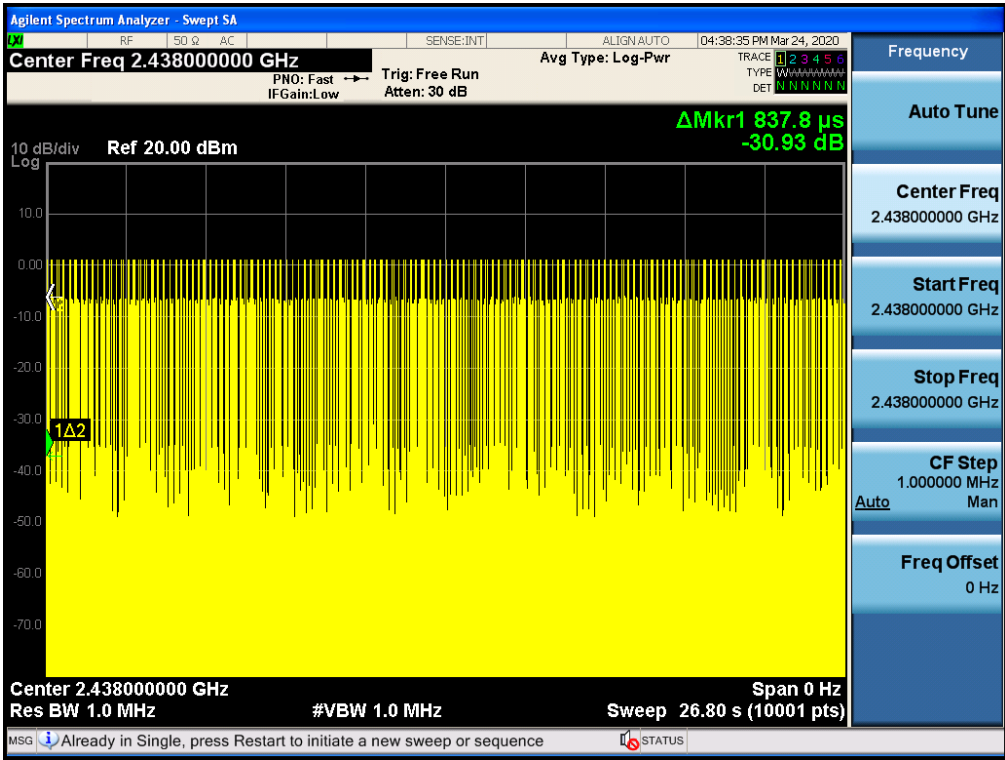

2405-2471 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2437	0.0792	29.08	400	Pass


Note: Dwell time=27(hop per 1 second) *34*0.4 (period)*0.0792 (hop duration) =29.08 ms

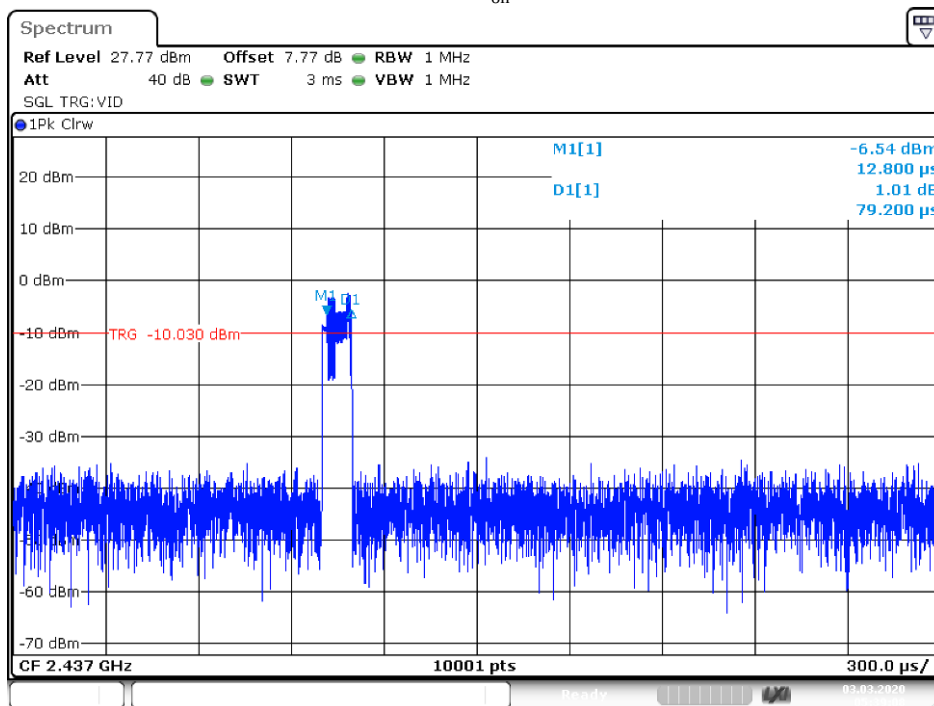2437MHz: $T_{on}=0.0792\text{ms}$ 

Date: 3.MAR.2020 05:39:08

N=27

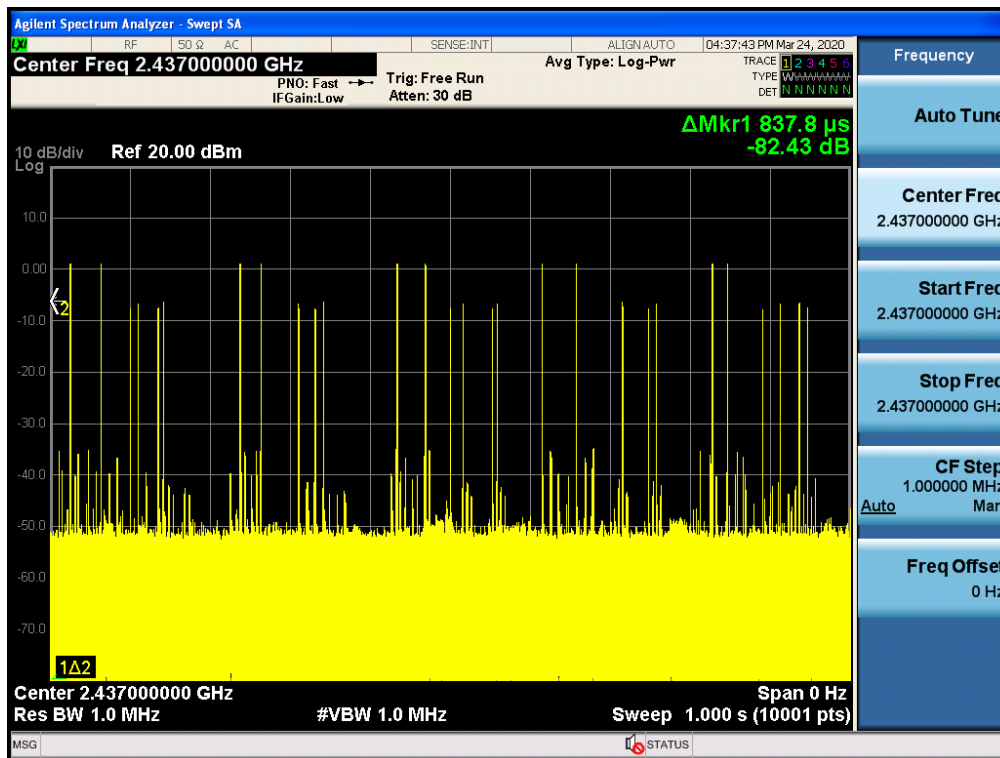


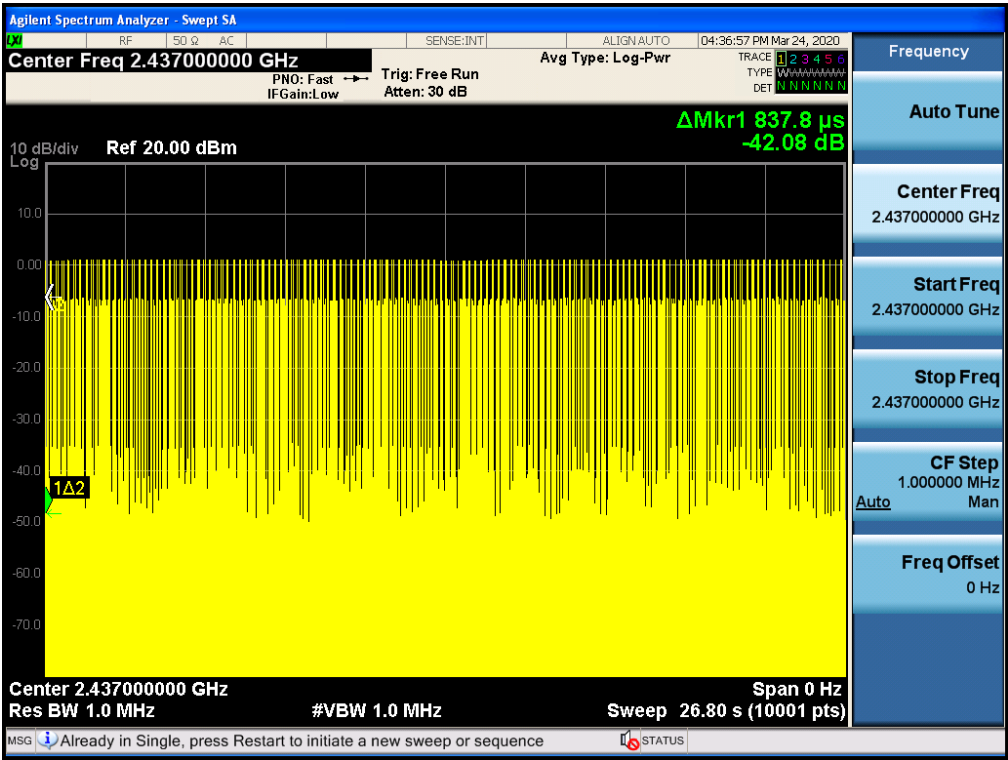

2412-2478 MHz:


Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2446	0.0789	30.05	400	Pass


Note: Dwell time=28(hop per 1 second) *34*0.4 (period)*0.0789 (hop duration) =30.05 ms

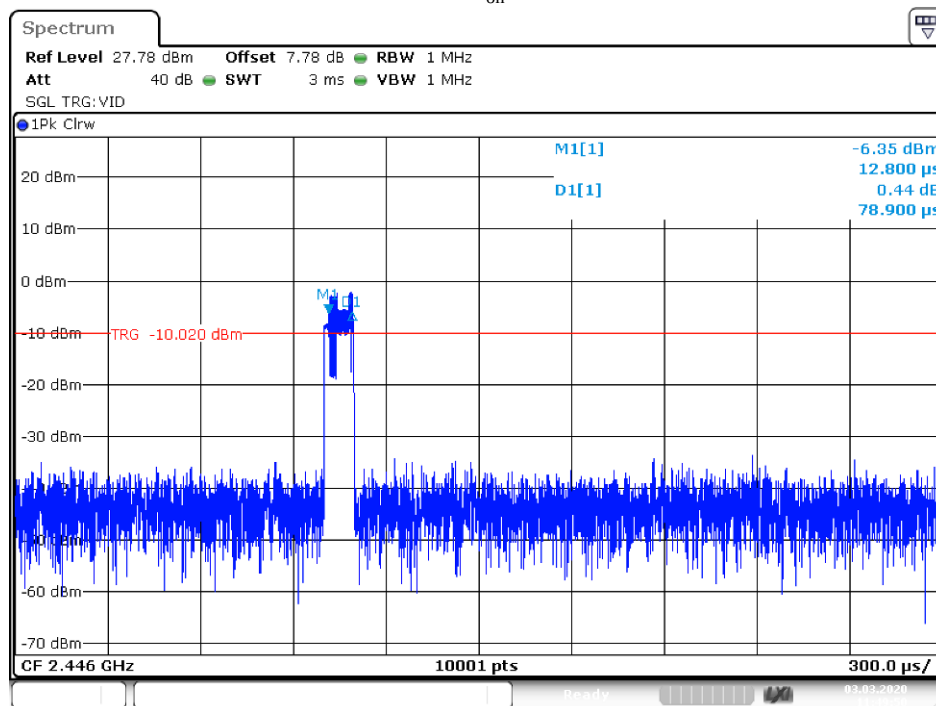2446MHz: $T_{on}=0.0789\text{ms}$ 

Date: 3.MAR.2020 11:49:50


N=28

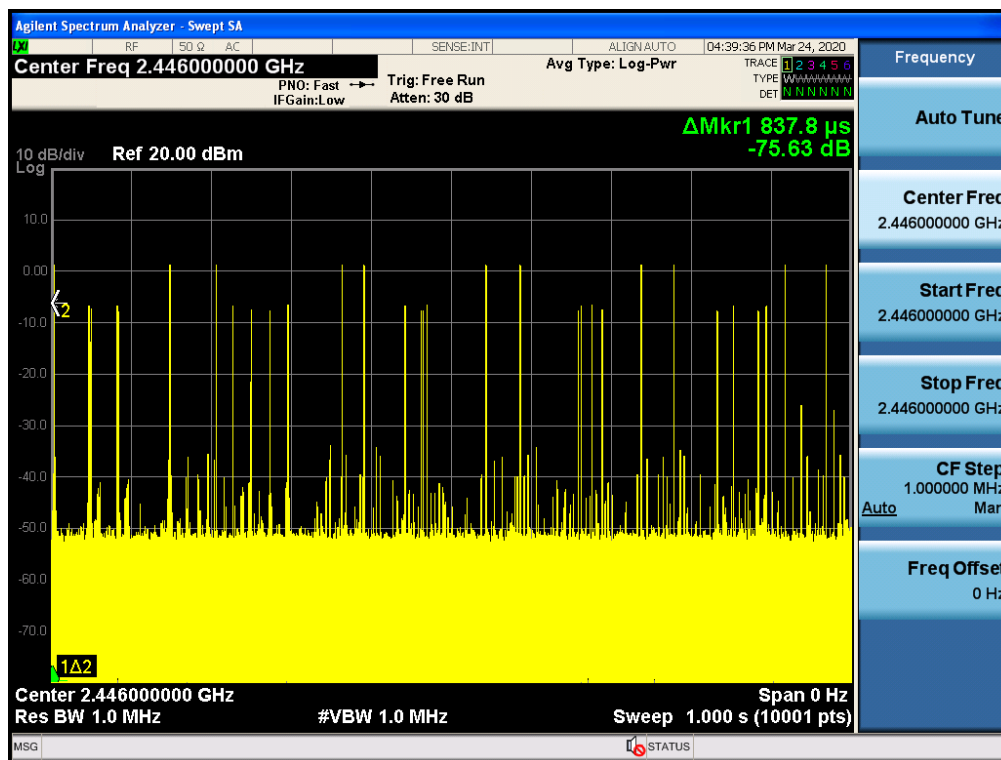

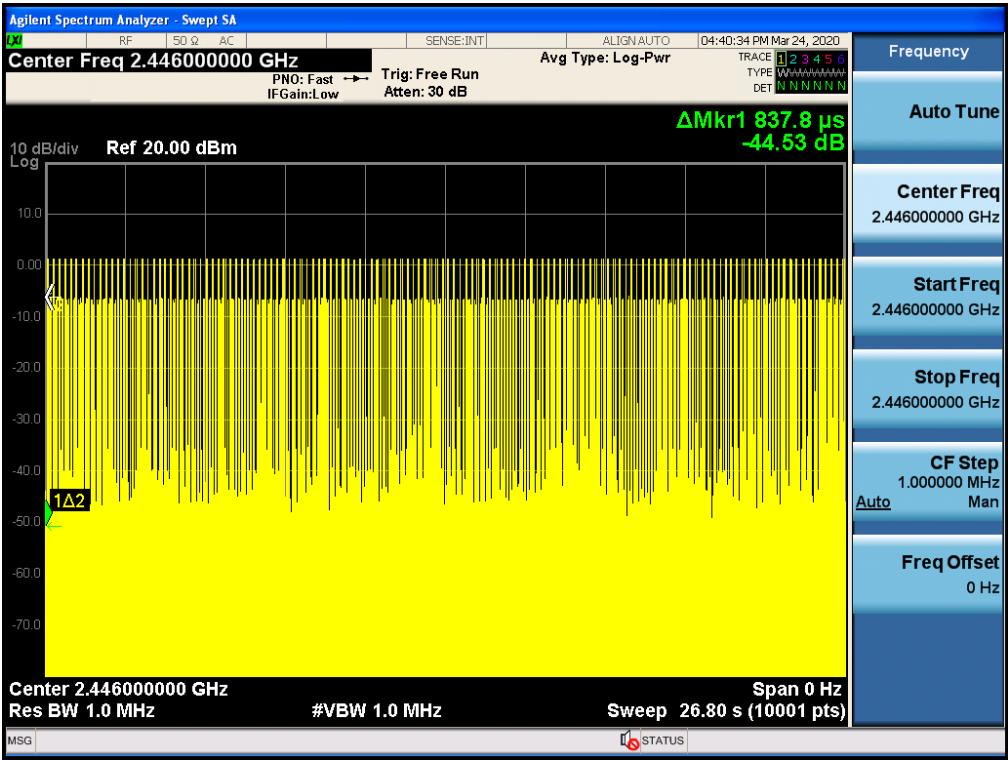



2413-2479MHz:

Frequency (MHz)	Pulse Duration (ms)	Dwell Time (ms)	Limit (ms)	Conclusion
2445	0.0792	32.31	400	Pass
Note: Dwell time=30(hop per 1 second)*34*0.4 (period)*0.0792 (hop duration) =32.31 ms				

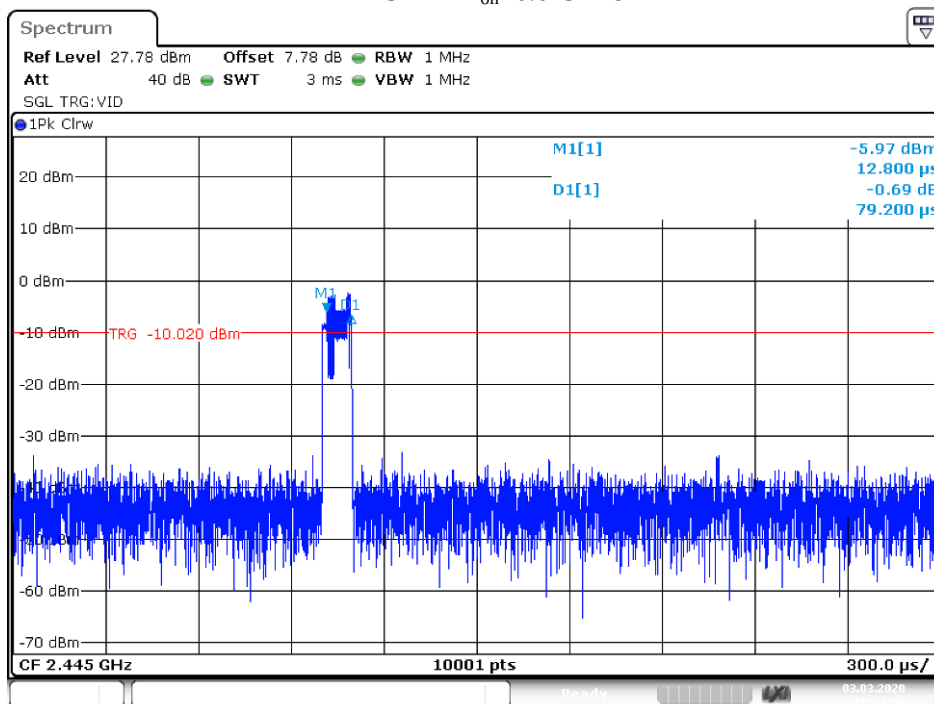2445MHz T_{on}=0.0792ms

N=30

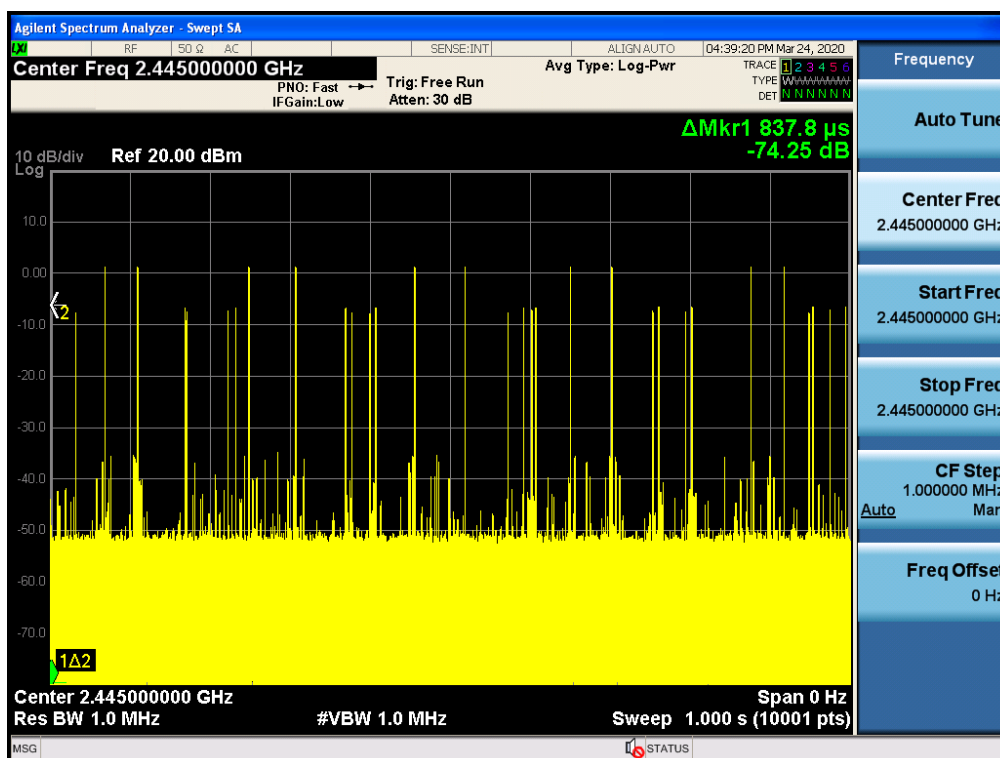

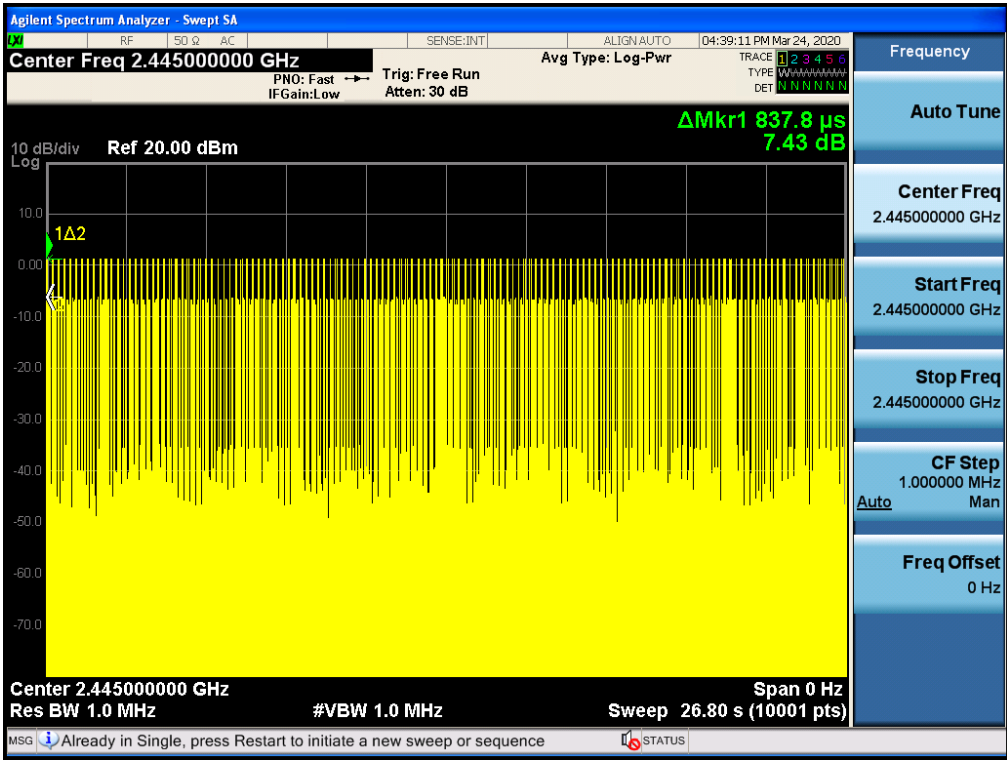

8. RADIATED EMISSIONS

8.1.Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band


MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

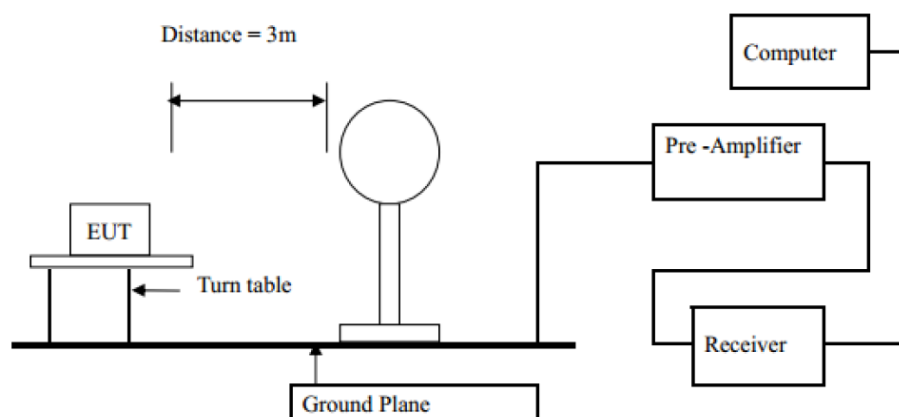

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

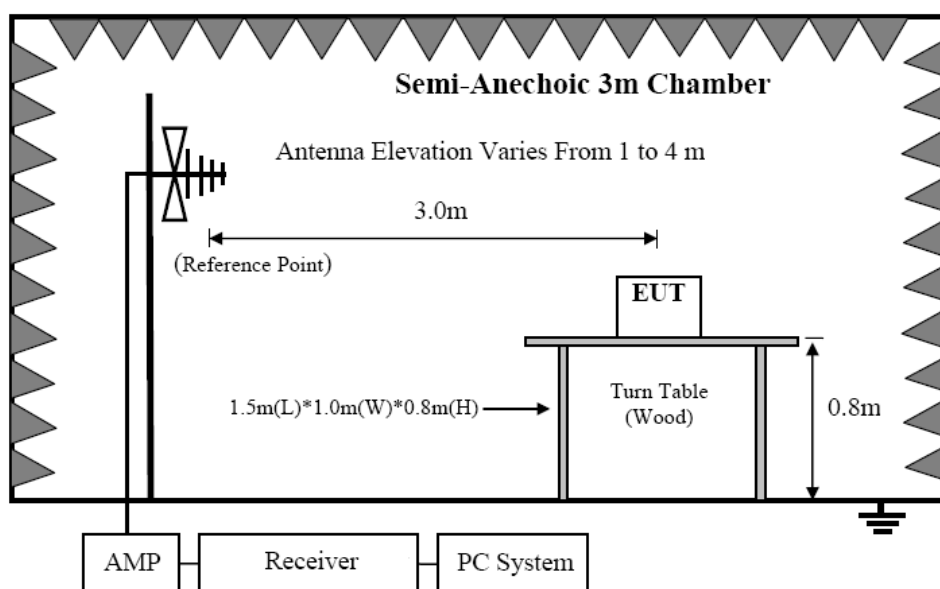

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

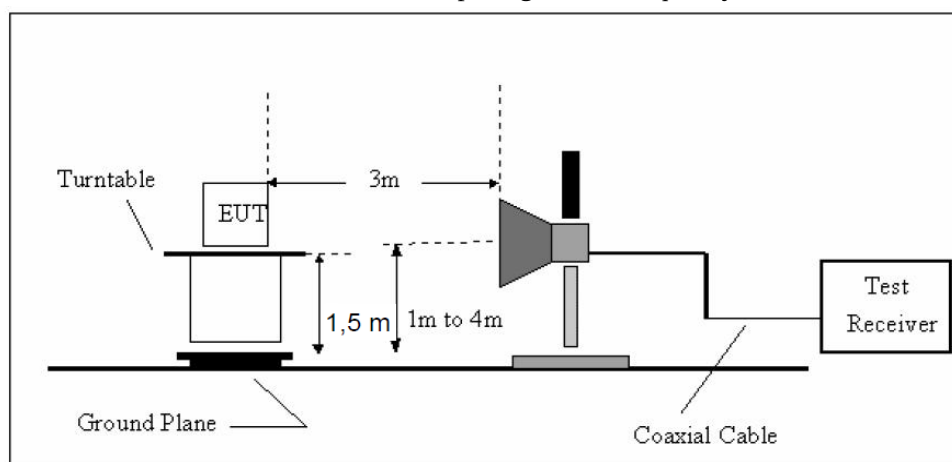

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1GHz and 150 cm above the ground plane inside a semi-anechoic chamber for above 1GHz.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency..
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

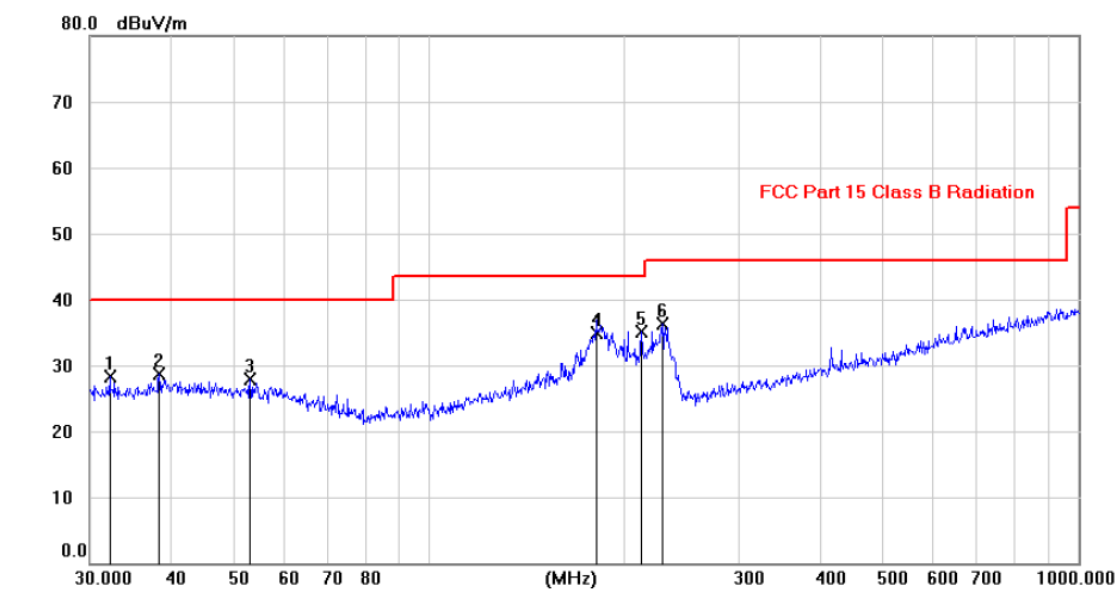

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree Comment
1		32.2218	14.57	13.65	28.22	40.00	-11.78	peak		
2		38.3967	14.40	14.26	28.66	40.00	-11.34	peak		
3		52.9918	14.14	13.68	27.82	40.00	-12.18	peak		
4		180.8865	22.46	12.49	34.95	43.50	-8.55	QP		
5	*	212.9218	23.84	11.25	35.09	43.50	-8.41	peak		
6		228.6908	24.07	12.20	36.27	46.00	-9.73	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

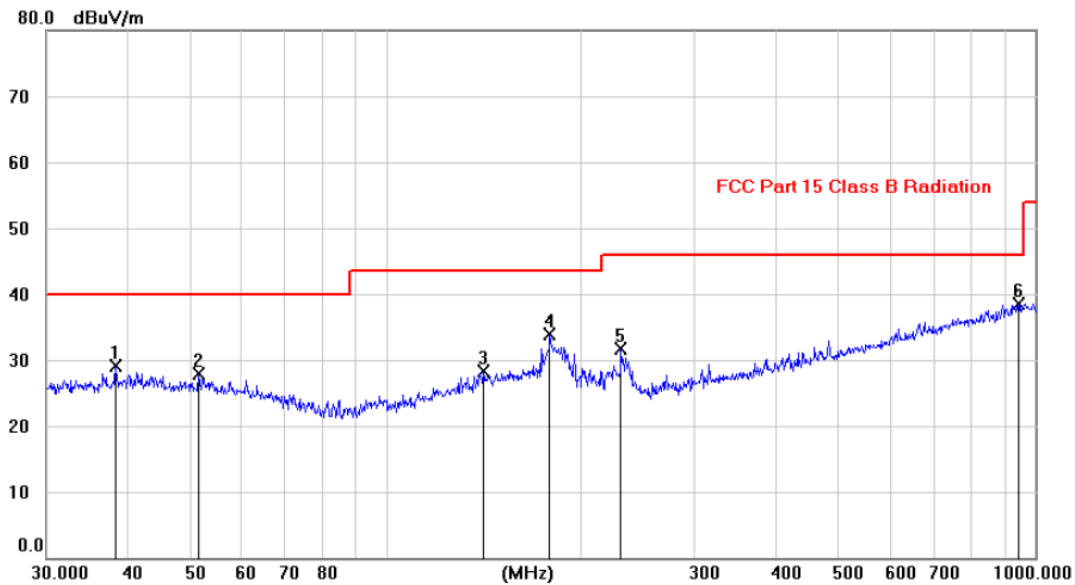Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		38.3967	14.89	14.26	29.15	40.00	-10.85	peak		
2		51.6389	13.99	13.84	27.83	40.00	-12.17	peak		
3		141.3917	13.84	14.40	28.24	43.50	-15.26	peak		
4		179.3077	21.26	12.70	33.96	43.50	-9.54	peak		
5		230.1994	19.35	12.27	31.62	46.00	-14.38	peak		
6	*	943.7838	13.78	24.77	38.55	46.00	-7.45	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2446MHz (2413-2479MHz, DC 6V) was listed in this report.

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4808	42.57	V	33.95	10.18	34.26	52.44	74	21.56	PK
4808	31.99	V	33.95	10.18	34.26	41.86	54	12.14	AV
7212	/	/	/	/	/	/	/	/	/
9616	/	/	/	/	/	/	/	/	/
4808	43.93	H	33.95	10.18	34.26	53.80	74	20.20	PK
4808	32.83	H	33.95	10.18	34.26	42.70	54	11.30	AV
7212	/	/	/	/	/	/	/	/	/
9616	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4884	42.89	V	33.93	10.2	34.29	52.73	74	21.27	PK
4884	31.58	V	33.93	10.2	34.29	41.42	54	12.58	AV
7326	/	/	/	/	/	/	/	/	/
9768	/	/	/	/	/	/	/	/	/
4884	42.96	H	33.93	10.2	34.29	52.80	74	21.20	PK
4884	34.97	H	33.93	10.2	34.29	44.81	54	9.19	AV
7326	/	/	/	/	/	/	/	/	/
9768	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4958	44.08	V	33.98	10.22	34.25	54.03	74	19.97	PK
4958	31.61	V	33.98	10.22	34.25	41.56	54	12.44	AV
7437	/	/	/	/	/	/	/	/	/
9916	/	/	/	/	/	/	/	/	/
4958	43.29	H	33.98	10.22	34.25	53.24	74	20.76	PK
4958	31.36	H	33.98	10.22	34.25	41.31	54	12.69	AV
7437	/	/	/	/	/	/	/	/	/
9916	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

9. BAND EDGE COMPLIANCE

9.1. Block Diagram of Test Setup

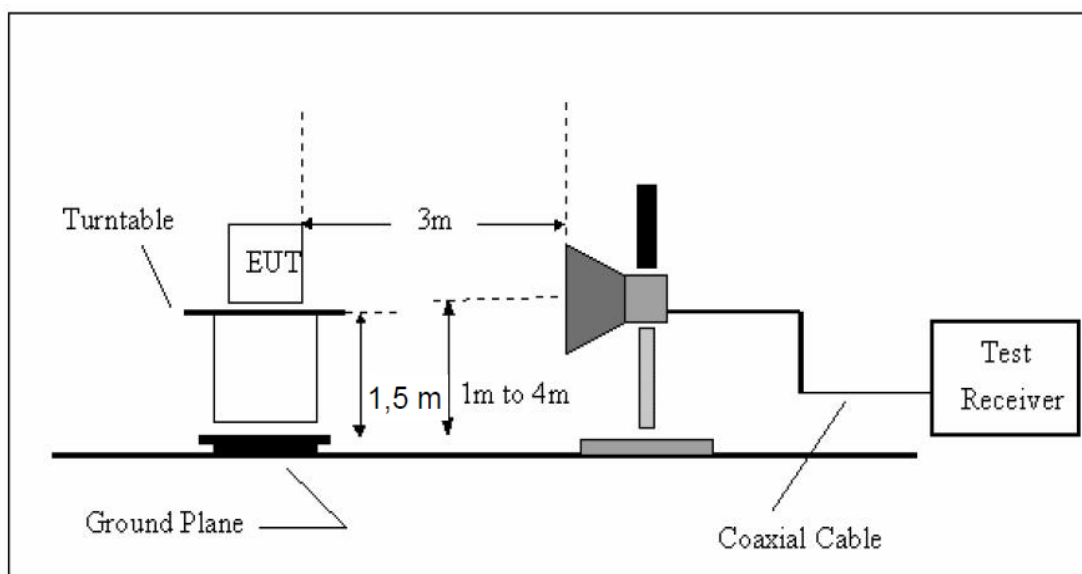

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.3. Test Procedure

All restriction band and non- restriction band have been tested , only worse case is reported.

9.4. Test Result

PASS. (See below detailed test data)