



JAPAN QUALITY ASSURANCE ORGANIZATION
21-25, KINUTA 1-CHOME, SETAGAYA-KU, TOKYO 157-8573 JAPAN
PHONE (03) 3416-0111, TELEX 242-2531 JQA J FAX (03) 3416-9691

JQA APPLICATION NO.: 400-10613
Issue Date : February 4, 2002
Page 1 of 31

EMI TEST REPORT

JQA APPLICATION NO. : 400-10613

Model No. : SWU-T1-01

Type of Equipment : Silwatch

Regulations Applied : CFR 47 FCC Rules and Regulations Part 15

FCC ID : P5NSWU-T1-01

Applicant : Tokyo Shinyu Co., Ltd.

Address : Shinjuku KM Building, 1-14-5 Shinjuku, Shinjuku-ku, Tokyo 160-0022, Japan

Manufacture : Tokyo Shinyu Co., Ltd.

Address : Shinjuku KM Building, 1-14-5 Shinjuku, Shinjuku-ku, Tokyo 160-0022, Japan

Received date of EUT : December 7, 2001

Final Judgment : **Passed**



Test results in this report are obtained in use of equipment that is traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and Communication Research Laboratory (CRL) of Japan.

The test results only respond to the tested sample.

This report should not be reproduced except in full, without the written approval of JQA EMC Engineering Dept. Testing Div.

TABLE OF CONTENTS

	Page
1 Documentation	
1.1 Test Regulation	3
1.2 General Information	3
1.3 Test Condition	4 - 8
1.4 EUT Modifications / Deviation from Standard	9
1.5 Test results	10
1.6 Summary	11
1.7 Test Configuration / Operation of EUT	12
1.8 EUT Arrangement(Drawing)	13
1.9 Preliminary Test and Test-setup (Drawings)	14 - 19
1.10 EUT Arrangement(Photographs)	20 - 23
2 Test Data	
2.1 AC Power Line Conducted Emission 0.45 MHz - 30 MHz	24 - 25
2.2 Radiated Emission (Electric Field)	26 - 29
2.3 Frequency Stability	N/A
2.4 Occupied Bandwidth	30 - 31

1 DOCUMENTATION

1.1 TEST REGULATION

FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) Intentional Radiators

Test procedure :

AC power line conducted emission, radiated emission, frequency stability and occupied bandwidth tests were performed according to the procedures in ANSI C63.4-1992.

1.2 GENERAL INFORMATION

1.2.1 Test facility :

1) Test Facility located at EMC Engineering Dept. Testing Div. :

- No.2 and 3 Anechoic Chambers(3 meters Site).
- Shielded Enclosure.

Expiration date of FCC test facility filing : June 04, 2002

2) EMC Engineering Dept. Testing Div. is recognized under the National Voluntary Laboratory accreditation Program for satisfactory compliance established in title 15, Part 285 Code of Federal Regulations.

NVLAP Lab Code : 200189-0 (Effective through June 30, 2002)

1.2.2 Description of the Equipment Under Test (EUT) :

1) Type of Equipment	: Silwatch
2) Product Type	: Production
3) Category	: Security/Remote Control Transmitter
4) EUT Authorization	: Certification
5) FCC ID	: P5NSWU-T1-01
6) Trade Name	: Silwatch
7) Model No.	: SWU-T1-01
8) Operating Frequency Range	: 426.05 MHz
9) Highest Frequency Used in the EUT	: 426.05 MHz
10) Serial No.	: 10141
11) Date of Manufacture	: None
12) Power Rating	: DC 3.0V(Battery) or DC 9.0V(External Input)

The EUT is operated with the AC adaptor(Model:NP12-1S-0912, Input:120VAC 60Hz, Output:9.0VDC by GO FORWARD ENTERPRISE CORP.).

13) EUT Grounding : None

1.2.3 Definitions for symbols used in this test report :

x - indicates that the listed condition, standard or equipment is applicable for this report.

 - indicates that the listed condition, standard or equipment is not applicable for this report.

1.3 TEST CONDITION

1.3.1 The measurement of the AC Power Line Conducted Emission

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Shielded Enclosure
 - Anechoic Chamber No. 2 (portable Type)

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Test Receiver	ESH-2	Rohde & Schwarz	880370/016	June 2001	1 Year
<input type="checkbox"/> - Test Receiver	ESH-3	Rohde & Schwarz	881460/030	May 2001	1 Year
<input checked="" type="checkbox"/> - Test Receiver	ESHS10	Rohde & Schwarz	835871/004	Aug. 2001	1 Year
<input type="checkbox"/> - LISN(for Peripheral)	KNW-407	Kyoritsu Electrical	8-833-6	Apr. 2001	1 Year
<input checked="" type="checkbox"/> - LISN(for EUT)	KNW-407	Kyoritsu Electrical	8-855-2	Apr. 2001	1 Year
<input type="checkbox"/> - LISN	KNW-407	Kyoritsu Electrical	8-757-1	Apr. 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable	3D-2W	Fujikura	155-21-006E0	Apr. 2001	1 Year
<input type="checkbox"/> - RF Cable	3D-2W	Fujikura	155-21-007E0	Apr. 2001	1 Year
<input type="checkbox"/> - 50ohm Termination	SUHNER	SUHNER	154-06-501E0	Jan. 2002	1 Year
<input type="checkbox"/> - 50ohm Termination	SUHNER	SUHNER	154-06-502E0	Jan. 2002	1 Year

1.3.2 The measurement of the Radiated Emission(9 kHz - 30 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan


- Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Test Receiver	ESH-2	Rohde & Schwarz	880370/016	June 2001	1 Year
<input type="checkbox"/> - Test Receiver	ESH-3	Rohde & Schwarz	881460/030	May 2001	1 Year
<input checked="" type="checkbox"/> - Test Receiver	ESHS10	Rohde & Schwarz	835871/004	Aug 2001	1 Year
<input type="checkbox"/> - Antenna	HFH2-Z2	Rohde & Schwarz	881058/62	Nov 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable	RG-213/U	F & G	155-21-010E0	Apr. 2001	1 Year

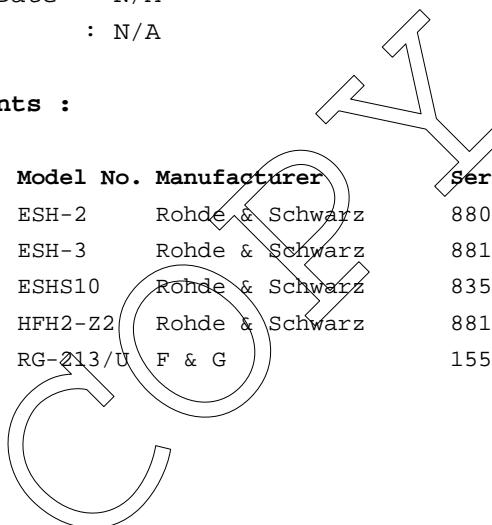

1.3.3 The measurement of the Radiated Emission(30 MHz - 1000 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- Anechoic Chamber No. 2 (3 meters)
 - Anechoic Chamber No. 3 (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date :March, 2001
2) Interval :1 year

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Nov. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Apr. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	June 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	June 2001	1 Year
<input type="checkbox"/> - Test Receiver	ESV	Rohde & Schwarz	872148/039	June 2000	1 Year
<input type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	826148/002	May 2001	1 Year
<input checked="" type="checkbox"/> - Test Receiver	ESVS10	Rohde & Schwarz	832699/001	May 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-511	Kyoritsu Electrical	0-170-1	Nov. 2001	1 Year
<input checked="" type="checkbox"/> - Antenna	KBA-511A	Kyoritsu Electrical	0-201-13	Nov. 2001	1 Year
<input type="checkbox"/> - Antenna	KBA-611	Kyoritsu Electrical	0-147-14	Nov. 2001	1 Year
<input checked="" type="checkbox"/> - Antenna	KBA-611	Kyoritsu Electrical	0-210-5	Nov. 2001	1 Year
<input type="checkbox"/> - Biconical Antenna	BBA9106	Schwarzbeck	VHA91031150	Nov. 2001	1 Year
<input type="checkbox"/> - Biconical Antenna	BBA9106	Schwarzbeck	11905078E0	Nov. 2001	1 Year
<input type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905079E0	Nov. 2001	1 Year
<input type="checkbox"/> - Log-Periodic Antenna	UHALP9107	Schwarzbeck	11905110	Nov. 2001	1 Year
<input type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-001E0	Feb. 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable	5D-2W	Fujikura	155-21-002E0	Feb. 2001	1 Year

1.3.4 The measurement of the Radiated Emission(Above 1000 MHz)

- was performed in the following test site.
 - was not applicable.

Test location :

Safety & EMC Center EMC Engineering Dept. Testing Div.
21-25, Kinuta 1-chome, Setagaya-ku, Tokyo 157-8573, Japan

- No. 2 site (3 meters)
 - No. 3 site (3 meters)

Validation of Site Attenuation :

1) Last Confirmed Date : N/A
2) Interval : N/A

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Nov. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 2001	1 Year
<input type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2648A00522	Apr. 2001	1 Year
<input checked="" type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	June 2001	1 Year
<input checked="" type="checkbox"/> - RF Pre-selector	85685A	Hewlett Packard	2091A00933	June 2001	1 Year
<input checked="" type="checkbox"/> - Log-Periodic Antenna	HL 025	Rohde & Schwarz	340182/015	Nov. 2001	1 Year
<input type="checkbox"/> - RF Amplifier	DBP-0102N5334272B	DBS Microwave Inc.	012	Mar. 2001	1 Year
<input checked="" type="checkbox"/> - RF Amplifier	WJ-6882-814	Watkins-Johnson	0414	June 2001	1 Year
<input type="checkbox"/> - RF Amplifier	WJ-5315-556	Watkins-Johnson	106	June 2001	1 Year
<input type="checkbox"/> - RF Amplifier	WJ-5320-307	Watkins-Johnson	645	June 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable(10m)	S 04272B	Suhner	155-21-011E0	May 2001	1 Year
<input type="checkbox"/> - RF Cable(2m)	SUCOFLEX 104	Suhner	155-21-012E0	May 2001	1 Year
<input checked="" type="checkbox"/> - RF Cable(1m)	SUCOFLEX 104	Suhner	155-21-013E0	May 2001	1 Year
<input type="checkbox"/> - RF Cable(1m)	S 04272B	Suhner	155-21-015E0	June 2001	1 Year

1.3.5 The measurement of the Frequency Stability

- was performed.
 - was not applicable.

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Frequency Counter	53131A	Hewlett Packard	3546A11807	May 2001	1 Year
<input type="checkbox"/> - Oven	-	Ohnishi Co. Ltd.	-	May 2001	1 Year
<input type="checkbox"/> - DC Power Supply	6628A	Hewlett Packard	3224A00284	June 2001	1 Year

1.3.6 The measurement of the Occupied Bandwidth

- was performed.
 - was not applicable.

Used test instruments :

Type	Model No.	Manufacturer	Serial No.	Last Cal.	Interval
<input type="checkbox"/> - Spectrum Analyzer	8560E	Hewlett Packard	3240A00189	Nov. 2001	1 Year
<input type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2140A01091	Apr. 2001	1 Year
<input checked="" type="checkbox"/> - Spectrum Analyzer	8566B	Hewlett Packard	2747A05855	June 2001	1 Year
<input type="checkbox"/> - Function Generator	3325A	Hewlett Packard	2512A21776	May 2001	1 Year
<input type="checkbox"/> - FM Linear Detector	MS611A	Anritsu Corp.	M77486	Sep. 2001	1 Year
<input type="checkbox"/> - Level Meter	ML4222Q	Anritsu Corp.	M87571	June 2001	1 Year
<input type="checkbox"/> - Measuring Amplifier	2636	B & K	1614851	June 2001	1 Year
<input type="checkbox"/> - AF Amplifier	P-500L	Accuphase	BOY806	June 2001	1 Year
<input type="checkbox"/> - Microphone	4134	B & K	1269477	May 2001	1 Year
<input type="checkbox"/> - Preamplifier	2639	B & K	1268763	May 2001	1 Year
<input type="checkbox"/> - Pistonphone	4220	B & K	1165008	Apr. 2001	1 Year
<input type="checkbox"/> - Artificial Mouth	4227	B & K	1274869	N/A	N/A

1.4 EUT MODIFICATION / Deviation from Standard

1.4.1 EUT MODIFICATION

- No modifications were conducted by JQA to achieve compliance to Class B levels.
 - To achieve compliance to Class B levels, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant :


Date :

Typed Name :

Position :

1.4.2 Deviation from Standard:

- No deviations from the standard described in clause 1.1.
 - The following deviations were employed from the standard described in clause 1.1:

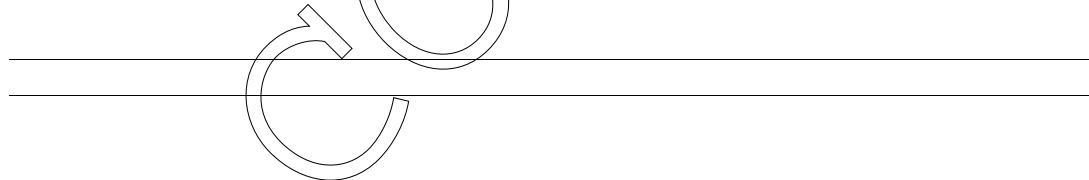

1.5 TEST RESULTS

AC Power Line Conducted Emission [§15.207] - Applicable - NOT Applicable


The requirements are - PASSED - NOT PASSED


Remarks :

Radiated Emission [§15.31(e),§15.231(b)] - Applicable - NOT Applicable


The requirements are - PASSED - NOT PASSED


Remarks:

Frequency Stability  - Applicable - NOT Applicable

The requirements are  - PASSED - NOT PASSED

Remarks:

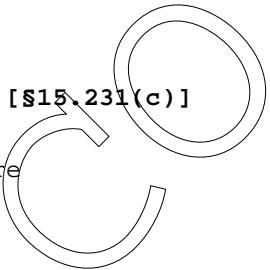Occupied Bandwidth [§15.231(c)]  - Applicable - NOT Applicable

The requirements are  - PASSED - NOT PASSED

Remarks:

1.6 SUMMARY

General Remarks :

The EUT was tested according to the requirements of FCC Rules and Regulations Part 15 Subpart A and C (June 23, 1989) under the test configuration, as shown in clause 1.7 to 1.10.

The conclusion for the test items which are required by the applied regulation is indicated under the final judgment.

Final Judgment :

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.1.
- fulfill the test requirements of the regulation mentioned on clause 1.1, but with certain qualifications.
- doesn't fulfill the test regulation mentioned on clause 1.1.

Begin of testing : December 26, 2001

End of testing : January 11, 2002

- JAPAN QUALITY ASSURANCE ORGANIZATION -

Approved by:



Masaaki Takahashi
Senior Manager
JQA EMC Engineering Dept.

Signatories:

Issued by:



Shigeru Osawa
Assistant Manager
JQA EMC Engineering Dept.

1.7 TEST CONFIGURATION / OPERATION OF EUT

1.7.1 Test Configuration

The equipment under test (EUT) consists of :

Symbol	Item	Manufacturer	Model No.	FCC ID	Serial No.
A(*1)	Silwatch	Tokyo Shinyu Co., Ltd.	SWU-T1-01	P5NSWU-T1-01	10141

Note 1. This equipment is operated with the AC adaptor (Input:120VAC, 60Hz, Output:9.0VDC by GO FORWARD ENTERPRISE CORP.).

The measurements was carried out with the following supported connected :

Symbol	Item	Manufacturer	Model No.	Serial No.
B	AC Adaptor	GO FORWARD ENTERPRISE CORP.	NP12-1S0912	01093
C	Microphone	ASHIDA SOUND CO., LTD.	HF-2	None

Type of Cable :

Symbol	Description	Identification (Manufacturer etc.)	Shielded YES / NO	Ferrite Core	Connector type Shielded YES / NO	Length (m)
1	AC Adaptor Cable	GO FORWARD ENTERPRISE CORP.	NO	NO	NO	1.7
2	Microphone Cable	ASHIDA SOUND CO., LTD.	YES	NO	NO	1.0

1.7.2 Operating condition


Power supply Voltage : 120VAC 60Hz(for AC Adaptor)

The tests have been carried out under the following condition.

- Transmitting (Operating Frequency: 426.05 MHz)

1.7.3 Generating and Operating frequency of EUT

3.686 MHz, 60.864 MHz and 426.05 MHz

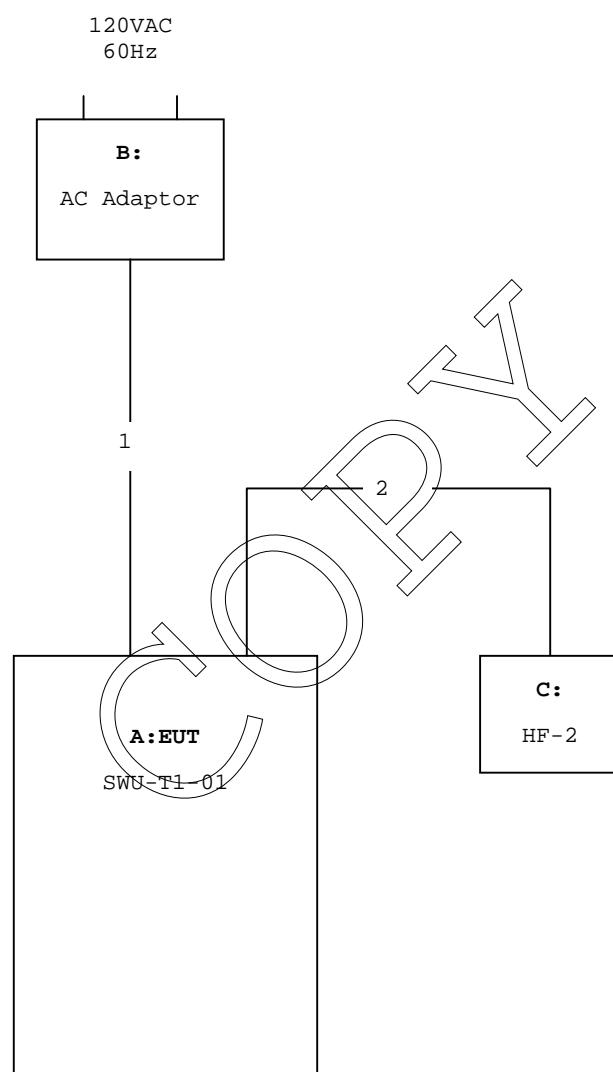1.8 EUT ARRANGEMENT (DRAWINGS)

1.9 PRELIMINARY TEST AND TEST-SETUP (DRAWINGS)

1.9.1 AC Power Line Conducted Emission (450 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.3.1, the AC power line preliminary conducted emissions measurements were carried out.


The preliminary conducted measurements were performed using the spectrum analyzer to observe the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for final AC power line conducted emissions measurements.

Shielded Enclosure

- Side View -

Vertical
Ground
Plane

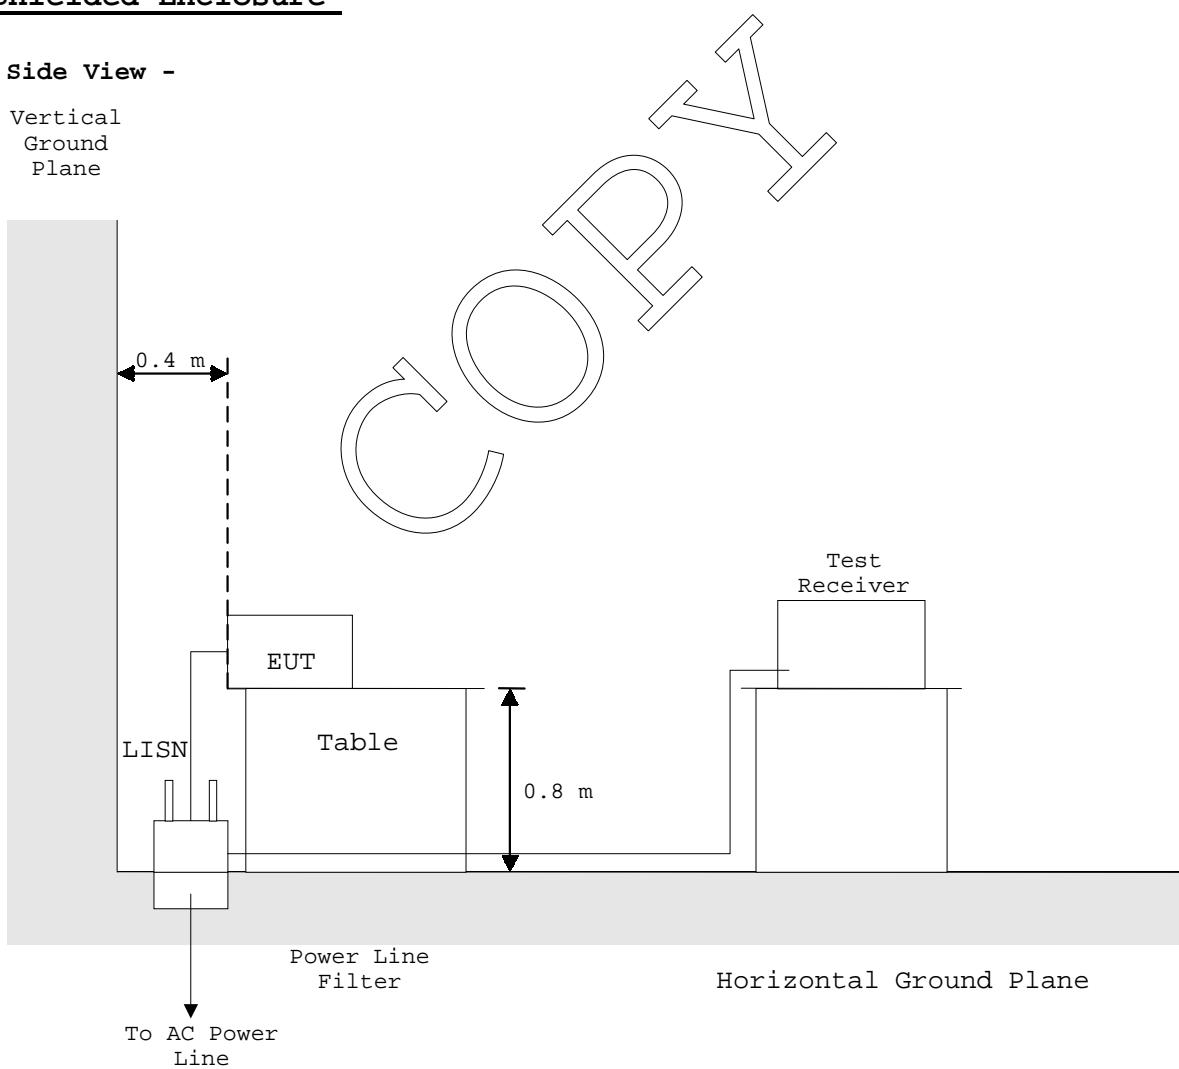


1.9.2 Radiated Emission (9 kHz - 30 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

- Side View -

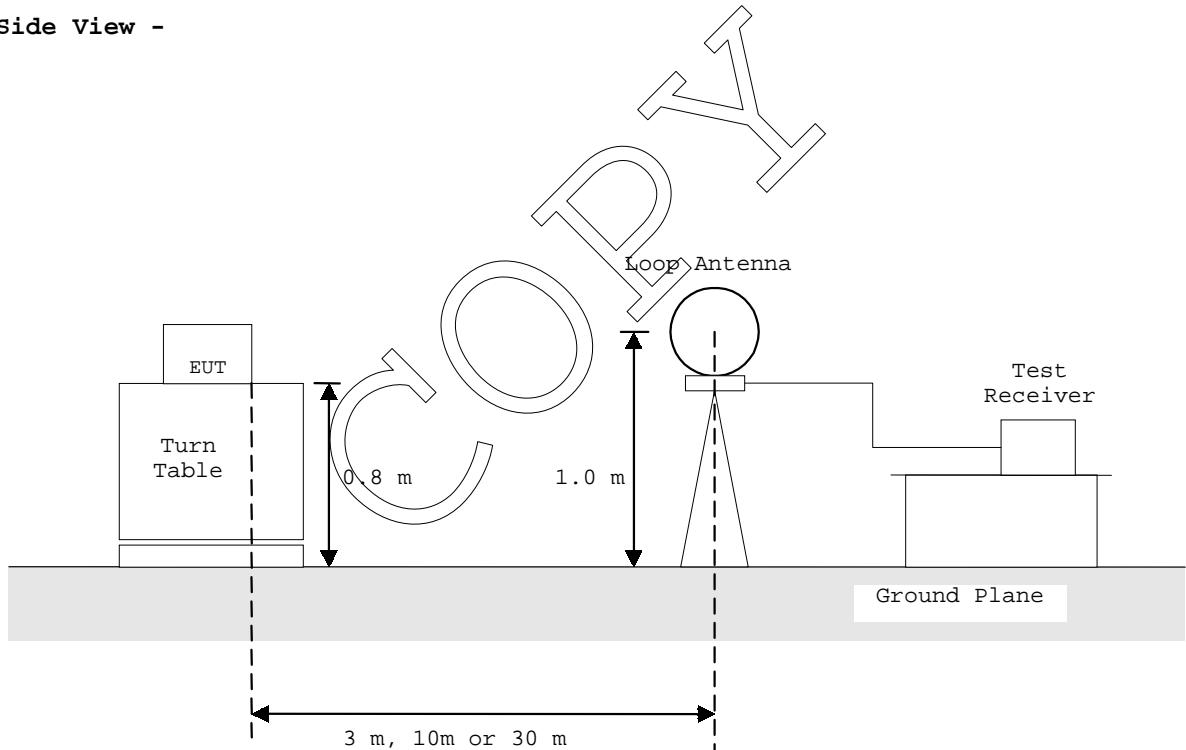


1.9.3 Radiated Emission (30 MHz - 1000 MHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurement were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber

- Side View -

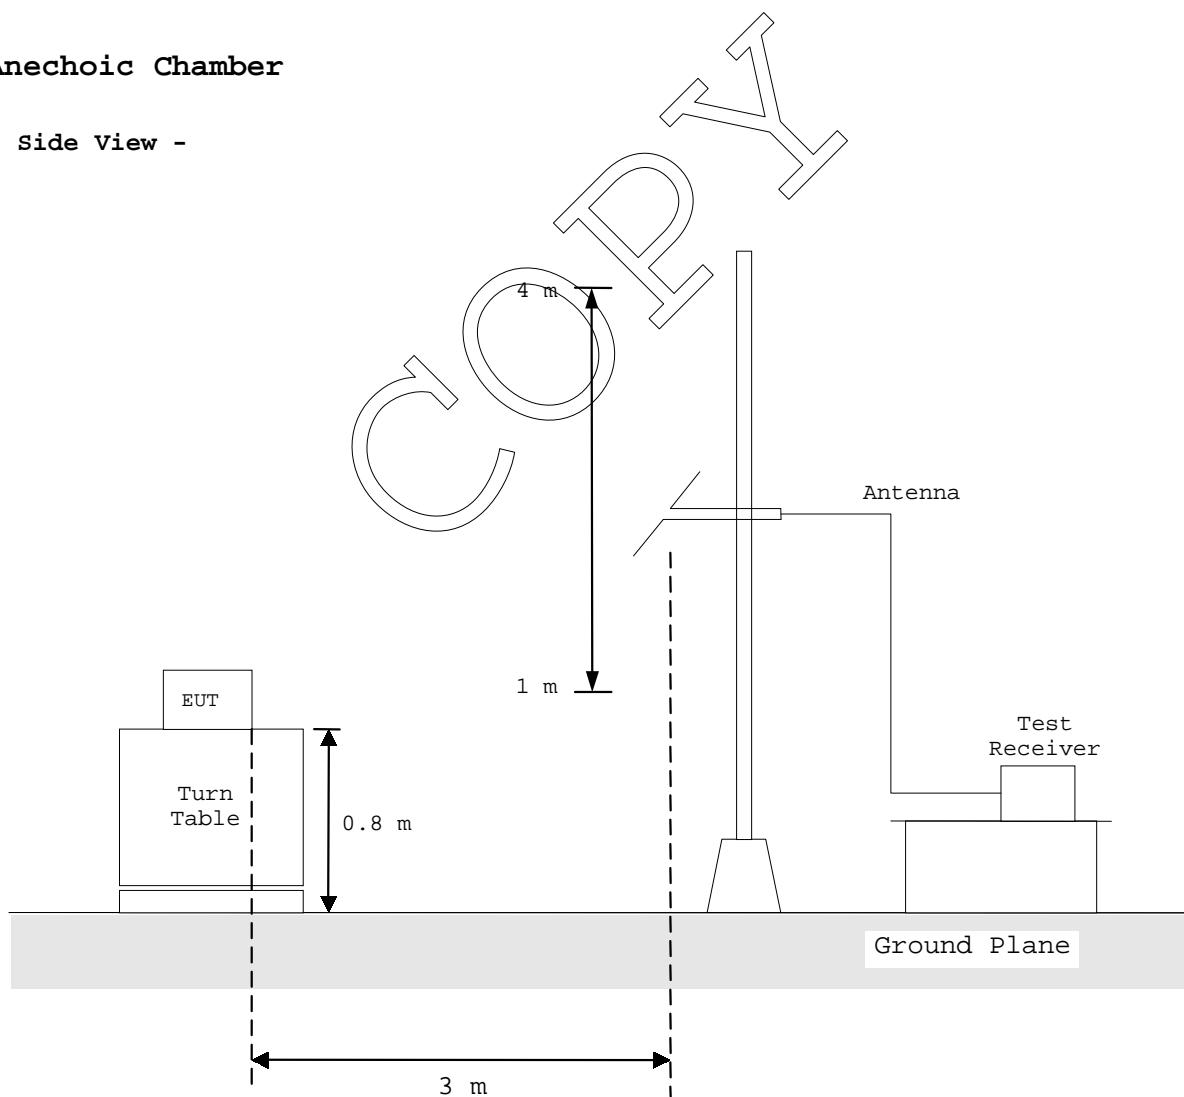


1.9.4 Radiated Emission (Above 1 GHz) :

According to description of ANSI C63.4-1992 sec.13.1.4.1, the preliminary radiated emissions measurements were carried out. The preliminary radiated measurements were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions. These configurations were used for the final radiated emissions measurements.

Anechoic Chamber


- Side View -

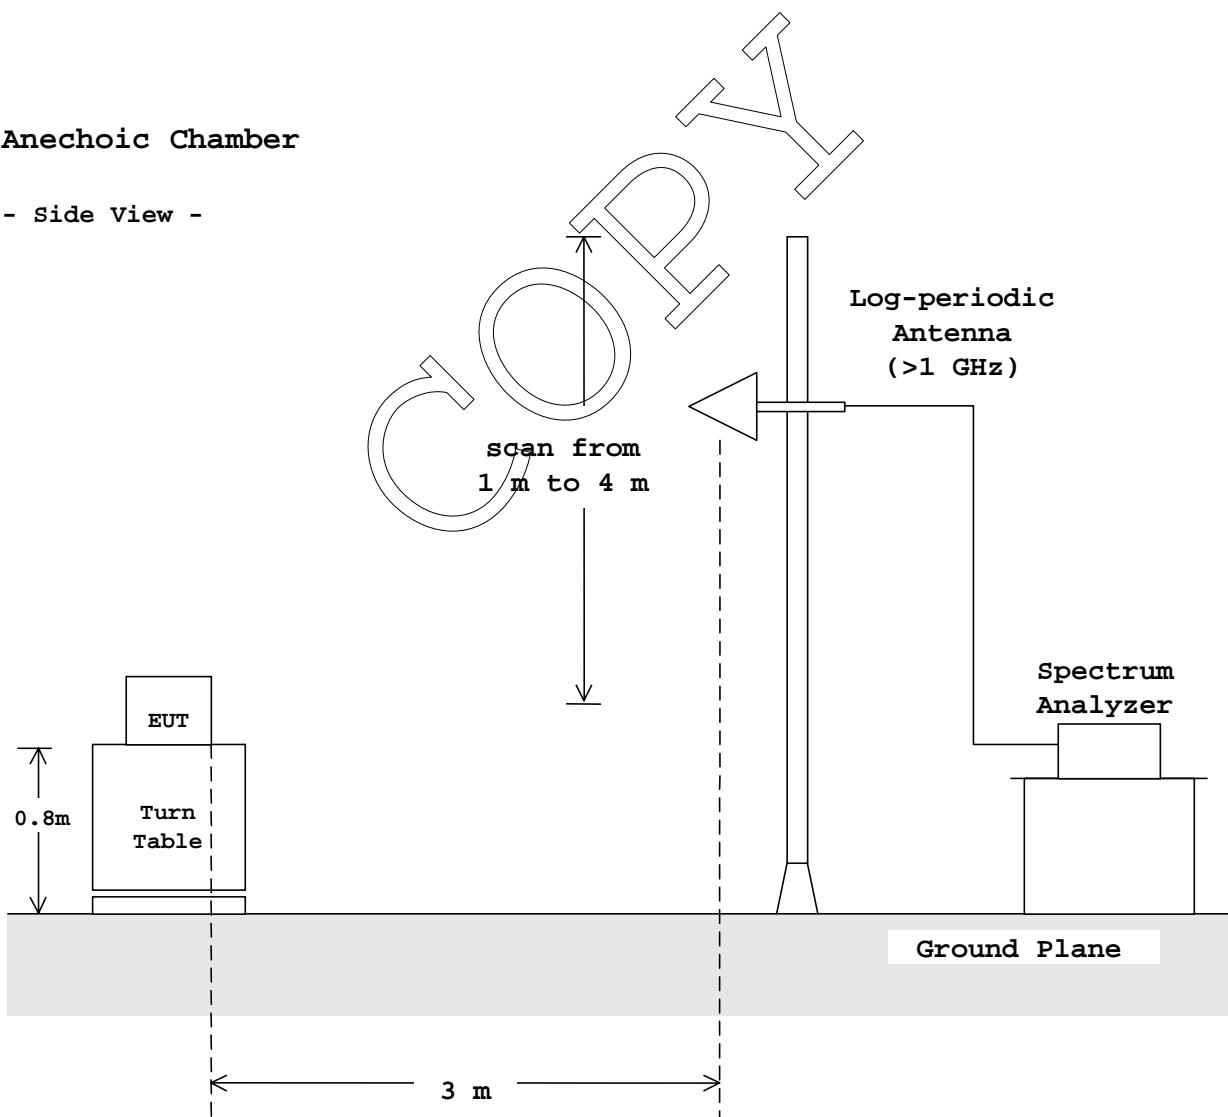

1.9.5 Frequency Stability :

According to description of ANSI C63.4-1992 sec.13.1.5 and sec.13.1.6, the frequency stability measurements were carried out. By using frequency counter with suitable RF amplifier, the carrier frequency of the transmitter under test was measured with a temperature variation of -20°C to +50°C at the normal supply voltage, and if required, with a variation in the primary voltage from 85 % to 115 % the rated supply voltage at the temperature of +20°C.


These measurements were carried out after allow sufficient time (approximately 1 hour) for the temperature of the chamber to stabilize.

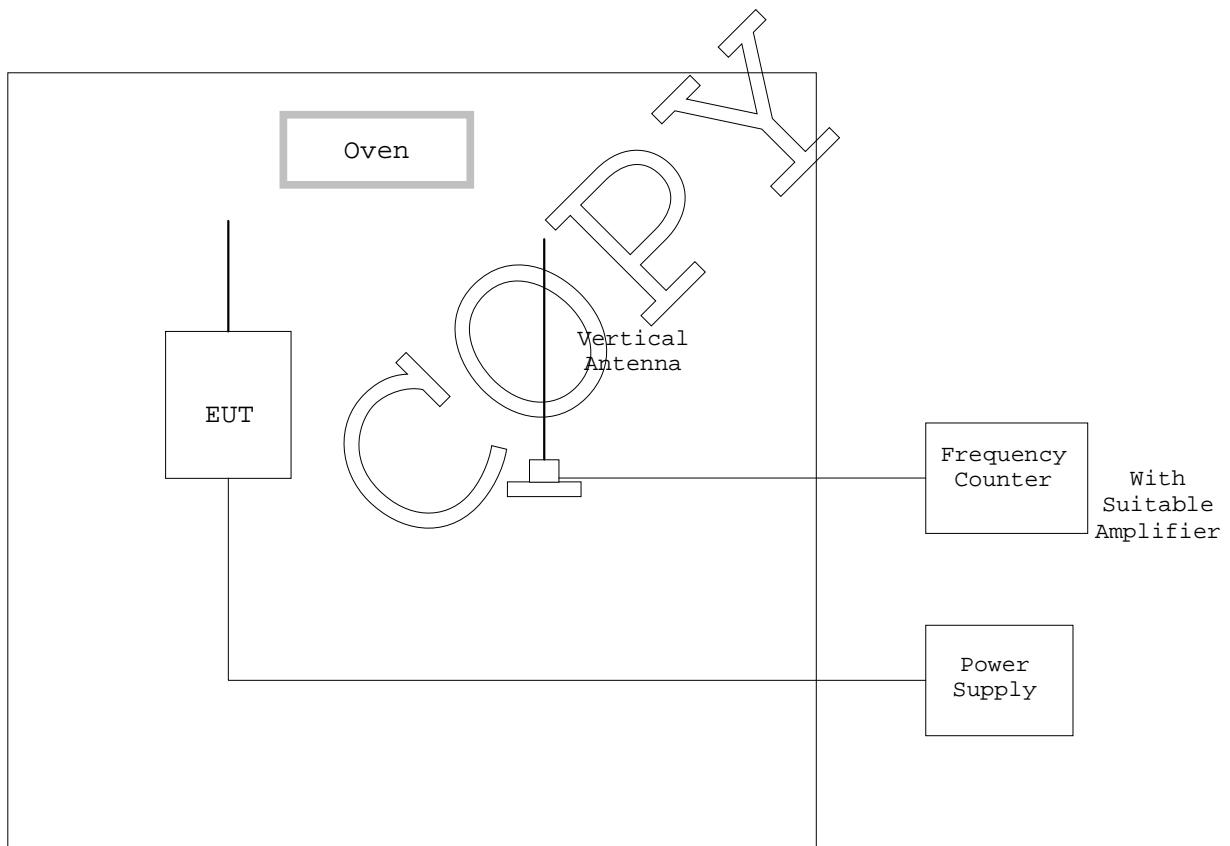

1.9.6 Occupied Bandwidth :

According to description of ANSI C63.4-1992 sec.13.1.7, the occupied bandwidth measurements were carried out. By using a spectrum analyzer with a vertical antenna for picking up the signal, the measurements of the emission were made under the transmitting modes of the EUT.

The resolution bandwidth of spectrum analyzer was set to the value specified in sec.13.1.7.

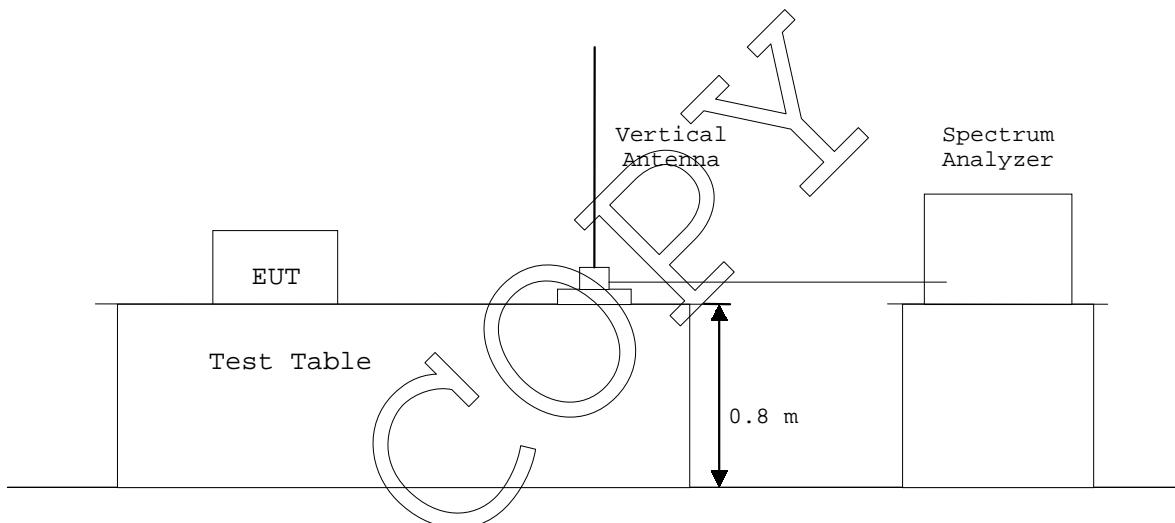

1.10 TEST ARRANGEMENT (PHOTOGRAPHS)



PHOTOGRAPHS OF EUT CONFIGURATION FOR AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT


Photograph present configuration with maximum emission




PHOTOGRAPHS OF EUT CONFIGURATION FOR RADIATED EMISSIONS MEASUREMENT

Photograph present configuration with maximum emission

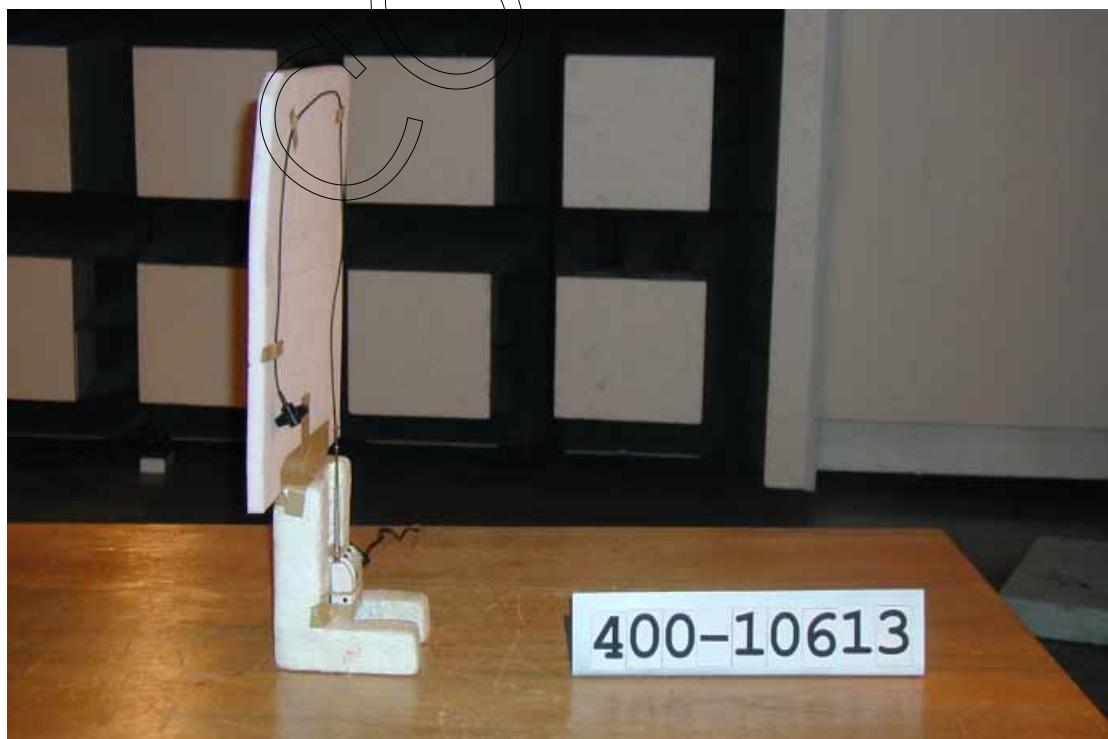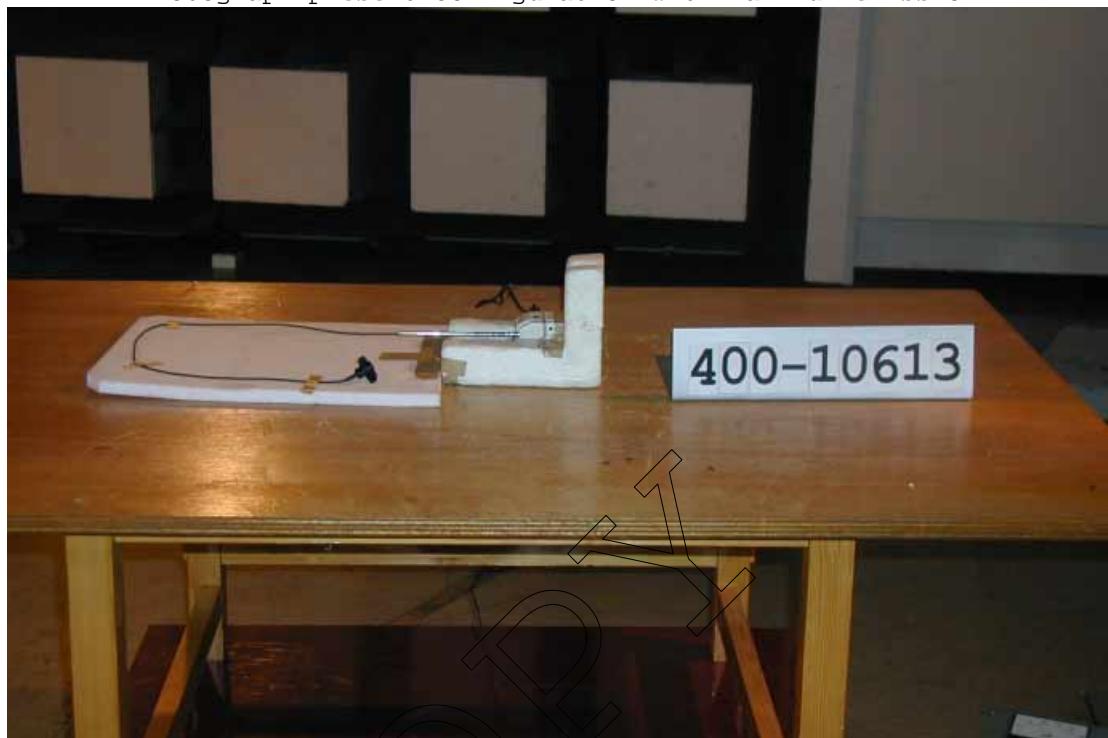

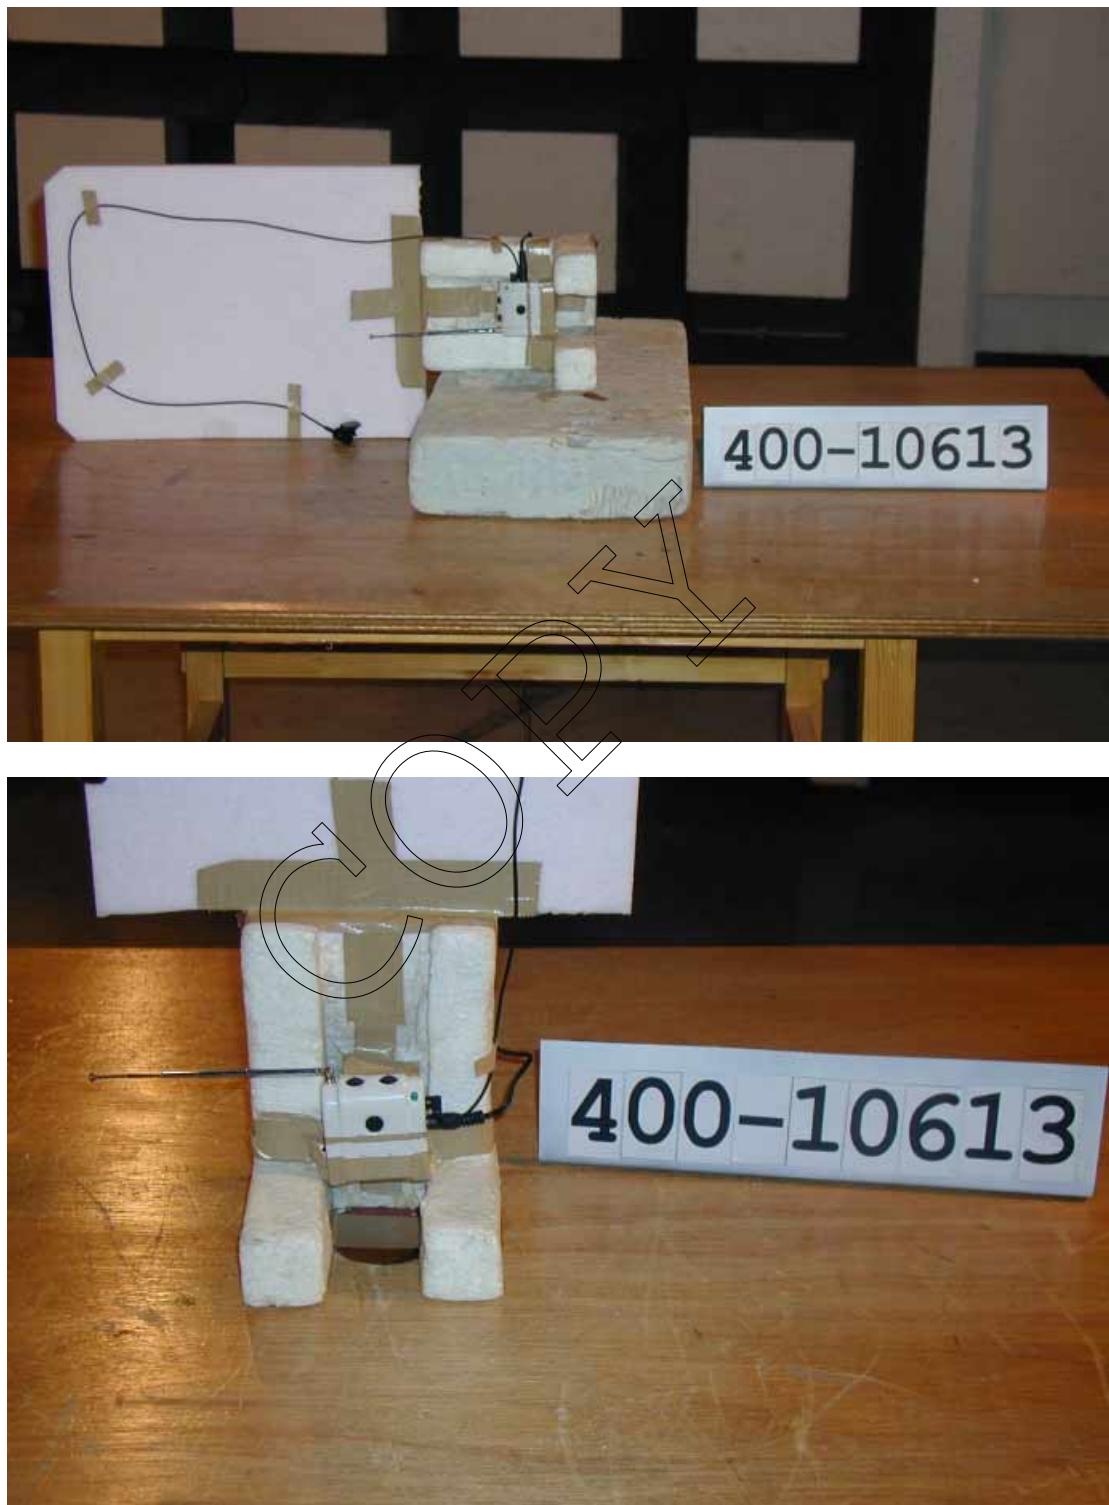

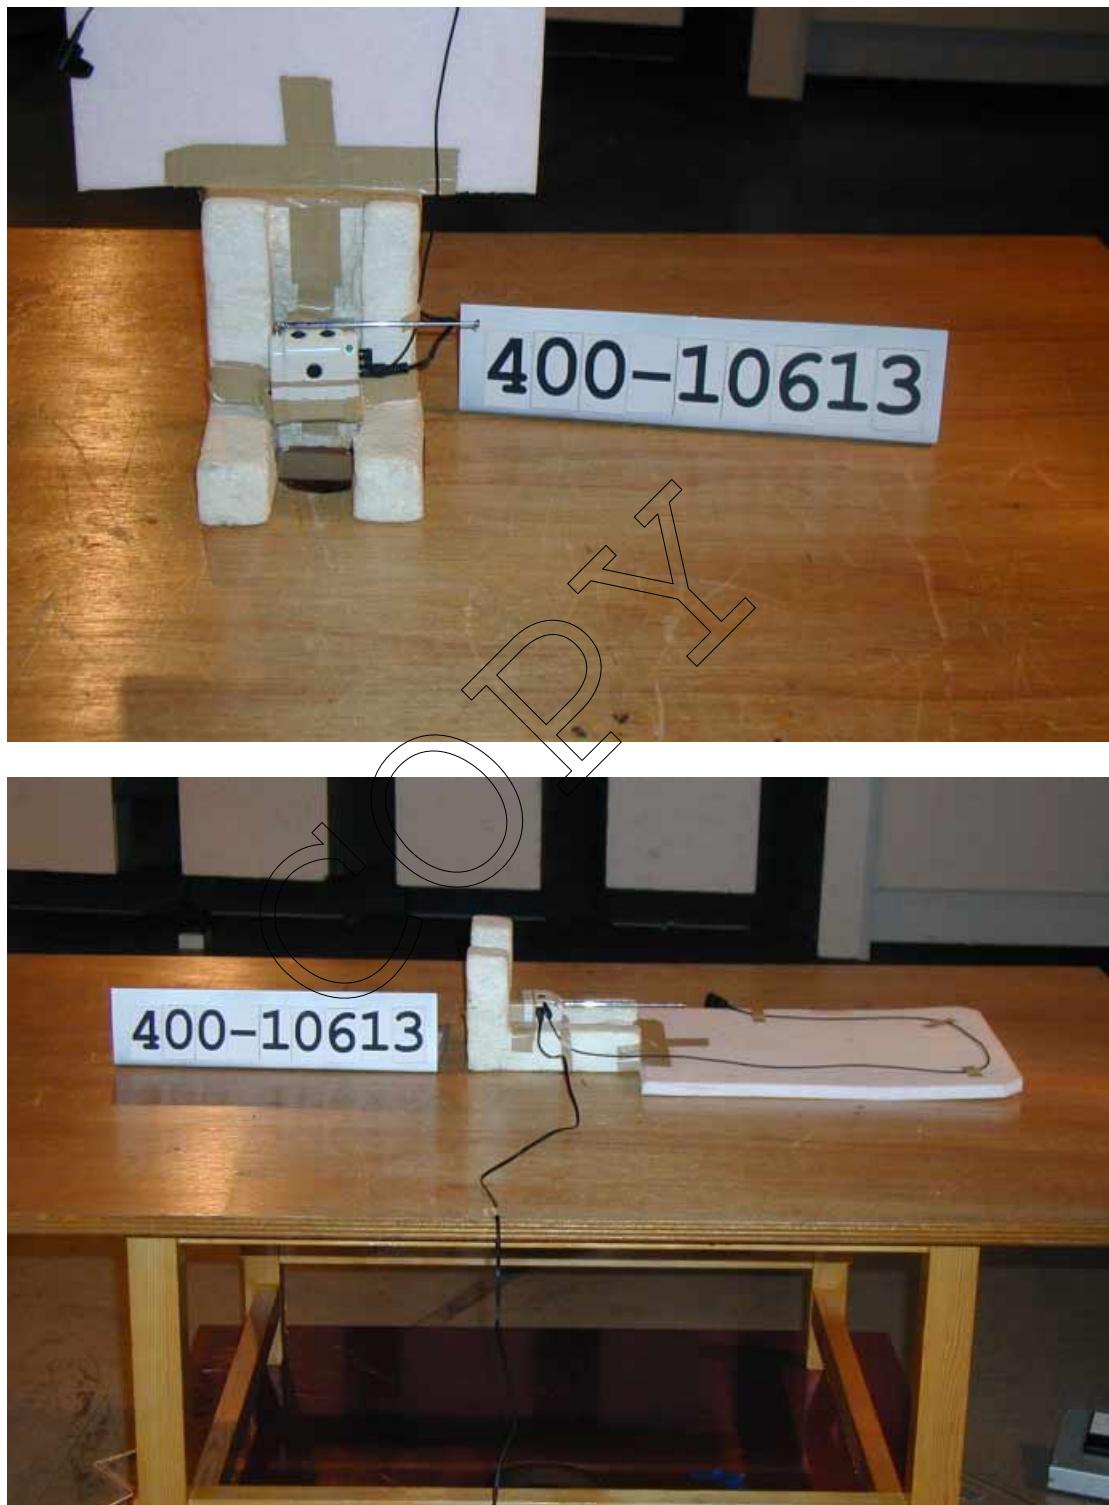

TEST DATA**2.1 AC Power Line Conducted Emission Measurement(0.45 MHz - 30 MHz)**

										Date December 26, 2001			
										Temp.	19 °C	Humi.	33 %
Frequency (MHz)	LISN Factor (dB)	Meter Reading (dBuV)				Limits (dBuV)		Emission Level (dBuV)		Margins (dB)			
		V-A Q.P	V-A AVE	V-B Q.P	V-B AVE	Q.P	AVE	Q.P	AVE	Q.P	AVE		
0.45	0.2	18.2	-	18.7	-	48.0	-	18.9	-	29.1	-		
0.55	0.2	32.8	-	29.7	-	48.0	-	33.0	-	15.0	-		
0.83	0.2	25.7	-	23.4	-	48.0	-	25.9	-	22.1	-		
1.11	0.2	29.7	-	30.5	-	48.0	-	30.7	-	17.3	-		
1.39	0.2	24.9	-	21.3	-	48.0	-	25.1	-	22.9	-		
1.66	0.2	28.5	-	29.9	-	48.0	-	30.1	-	17.9	-		
2.22	0.2	27.2	-	28.8	-	48.0	-	29.0	-	19.0	-		
2.77	0.2	26.3	-	24.4	-	48.0	-	26.5	-	21.5	-		
3.33	0.2	26.3	-	24.4	-	48.0	-	26.5	-	21.5	-		
4.44	0.2	18.3	-	16.4	-	48.0	-	18.5	-	29.5	-		
5.54	0.2	11.3	-	12.0	-	48.0	-	12.2	-	35.8	-		
6.38	0.2	14.8	-	11.5	-	48.0	-	15.0	-	33.0	-		
8.04	0.2	12.4	-	< 10.0	-	48.0	-	12.6	-	35.4	-		
13.59	0.3	10.3	-	10.8	-	48.0	-	11.1	-	36.9	-		
15.26	0.3	13.8	-	13.0	-	48.0	-	14.1	-	33.9	-		
16.93	0.3	15.3	-	13.5	-	48.0	-	15.6	-	32.4	-		
18.87	0.4	15.7	-	16.6	-	48.0	-	17.0	-	31.0	-		
21.37	0.4	11.6	-	10.5	-	48.0	-	12.0	-	36.0	-		
22.20	0.4	13.0	-	13.6	-	48.0	-	14.0	-	34.0	-		

Notes : 1) The spectrum was checked from 0.45 MHz to 30 MHz.
 2) The cable loss is included in the LISN factor.
 3) The symbol of "<"means "or less".
 4) The symbol of ">"means "or greater".
 5) The symbol of "-"means "Not applicable".
 6) V-A : One end & Ground V-B : The other end & Ground
 7) Q.P : Quasi-peak AVE : Average
 8) A sample calculation was made at 0.45 (MHz).

$$Lf + Mr = 0.2 + 18.7 = 18.9(\text{dBuV})$$

Lf = LISN Factor


Mr = Meter Reading

Tested by :

Shigeru Osawa
 Shigeru Osawa
 Testing Engineer

AC POWER LINE CONDUCTED EMISSION MEASUREMENT

Model No. : SWU-T1-01

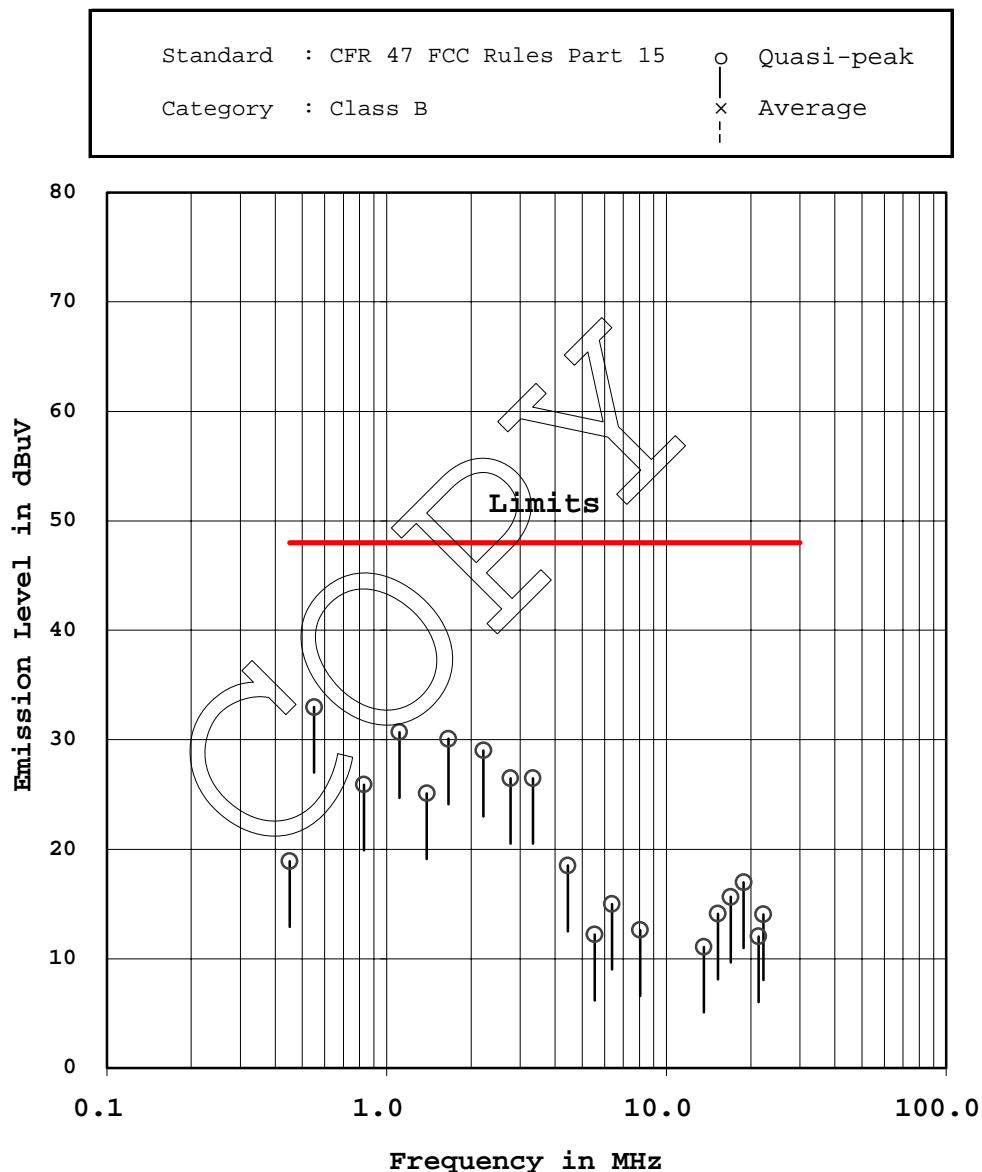

2.2 Radiated Emissions Measurement

Operating Frequency : 426.05 MHz

Distance of Measurement : 3.0 meters

 Date : December 26, 2001
 Temp.: 24 °C Humi.: 33 %

Variation of Input Power[§15.31(e)]: 426.05 MHz

Percentage of Rated Supply	Input Voltage (Vac 60 Hz)	Emission Level (dB μ V/m)	Limits(QP/AV) (dB μ V/m)
85 %	102	75.4	80.6
100 %	120	75.4	80.6
115 %	138	75.4	80.6

Frequency (MHz)	P-A Factor (dB)	Antenna Polarization	Meter Reading (dB μ V)			Limits (dB μ V/m)		Emission Levels (dB μ V/m)		Margins (dB)	
			QP	AV	Peak	QP/AV	Peak	QP/AV	Peak	QP/AV	Peak
426.1	0.0	23.8 H	51.6	-	-	80.6	100.6	75.4	-	5.2	-
60.9	0.0	5.4 V	33.1	-	-	60.6	80.6	38.5	-	22.1	-
121.7	0.0	11.8 V	25.4	-	-	43.5	80.6	37.2	-	6.3	-
182.6	0.0	15.6 H	18.0	-	-	60.6	80.6	33.6	-	27.0	-
243.5	0.0	18.3 H	19.4	-	-	46.0	80.6	37.7	-	8.3	-
304.3	0.0	20.5 H	17.0	-	-	60.6	80.6	37.5	-	23.1	-
365.2	0.0	22.3 H	26.4	-	-	60.6	80.6	48.7	-	11.9	-
486.9	0.0	25.1 V	25.9	-	-	60.6	80.6	51.0	-	9.6	-
547.8	0.0	26.3 H	12.1	-	-	60.6	80.6	38.4	-	22.2	-
608.7	0.0	27.4 H	4.8	-	-	46.0	80.6	32.2	-	13.8	-
852.1	0.0	31.5 V	9.0	-	-	60.6	80.6	40.5	-	20.1	-
973.9	0.0	33.3 V	5.4	-	-	54.0	80.6	38.7	-	15.3	-

Notes :

- 1) The spectrum was checked from 3 MHz to 1000 MHz.
- 2) The cable loss is included in the antenna factor.
- 3) The symbol of "<" means "or less".
- 4) The symbol of ">" means "or greater".
- 5) A sample calculation(QP/AV) was made at 426.05 (MHz).

$$PA + Af + Mr = 0 + 23.8 + 51.6 = 75.4 (\text{dB}\mu\text{V/m})$$

PA = Peak to Average Factor(P-A Factor)

Af = Antenna Factor

Mr = Meter Reading

- 6) Measuring Instrument Setting :

Detector function	Resolution	Bandwidth	Video Bandwidth
Quasi-peak(QP)	120 kHz	-	
Average(AV)	1 MHz	10 Hz	
Peak	1 MHz	1 MHz	

Frequency (GHz)	P-A Factor (dB)	Correction Factor (dB)	Polariza- zation	Meter Reading (dBuV)	AV	Peak	Limits (dBuV/m)	AV	Peak	Emission Levels (dBuV/m)	AV	Peak	Margins (dB)
1.2782	0.0	26.7	H	8.8	18.0	60.6	80.6	35.5	44.7	25.1	35.9		
1.3999	0.0	27.8	H	6.6	15.2	54.0	74.0	34.4	43.0	19.6	31.0		
1.4608	0.0	28.3	V	7.2	17.1	54.0	74.0	35.5	45.4	18.5	28.6		

Notes : 1) The spectrum was checked from 1.0 GHz to tenth harmonics.

2) The cable loss, amp. gain and antenna factor are included in the correction factor.

3) The symbol of "<"means "or less".

4) The symbol of ">"means "or greater".

5) A sample calculation(AV) was made at 1.27815 (GHz).

$$PA + Cf + Mr = 0 + 26.7 + 18 = 44.7 \text{ (dBuV/m)}$$

PA = Peak to Average Factor(P-A Factor)

Cf = Correction Factor

Mr = Meter Reading

6) Measuring Instrument Setting :

Detector function Resolution Bandwidth Video Bandwidth

Average(AV)


Peak

1 MHz

1 MHz

10 Hz

1 MHz

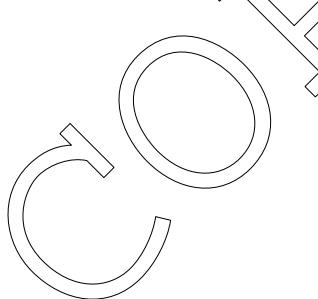

Tested by :

Shigeru Osawa


Shigeru Osawa

Testing Engineer

RADIATED EMISSION MEASUREMENT


Model No. : SWU-T1-01

Standard : CFR 47 FCC Rules Part 15 QP/AV
Operating Frequency(MHz) : 426.05

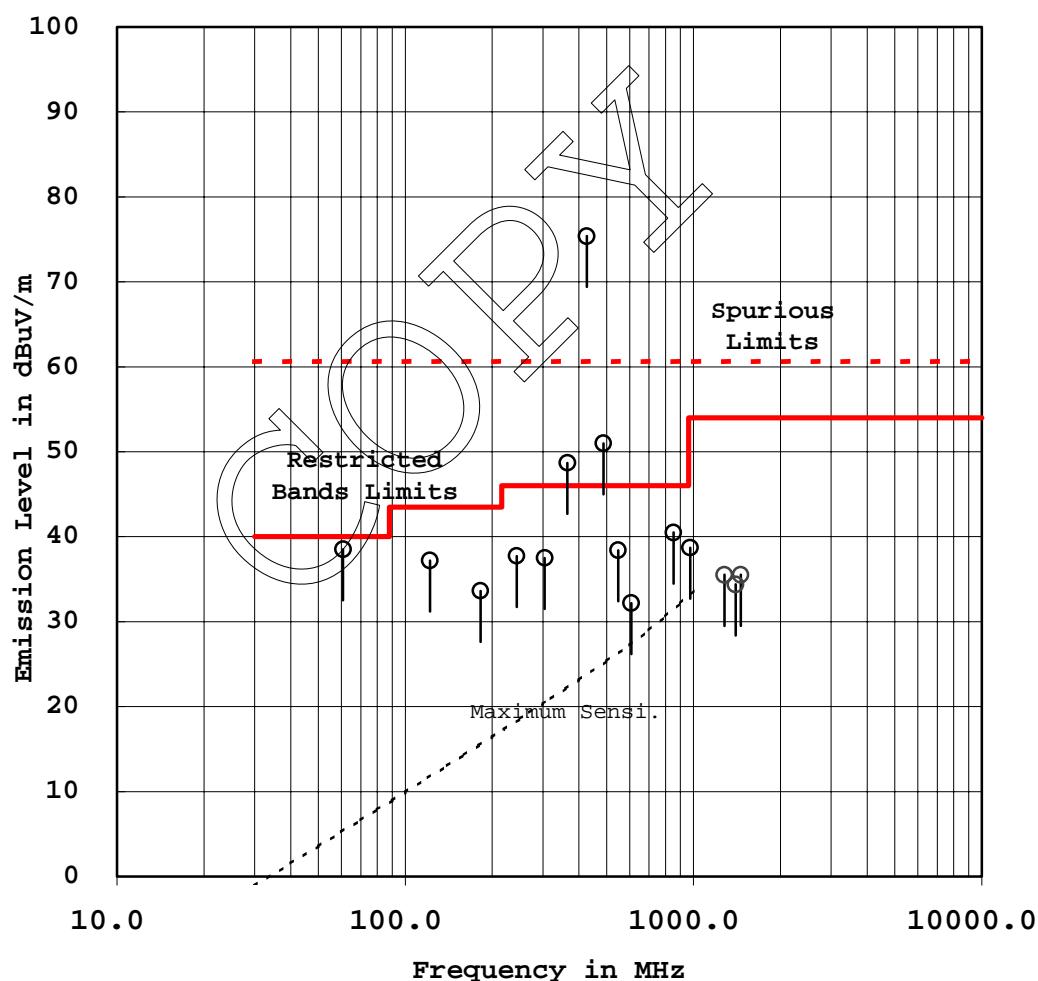

Holdover time after manual release[§15.231(a)(1)] : 3.3125 sec.
(Limit: Less thsn 5 sec.) (Manufacturer designed)
Duration of transmission after automatic activation : 3.3125 sec.
[§15.231(a)(2)] (Limit: Less thsn 5 sec.) (Manufacturer designed)

The typical waveform in the time domain is indicated as follows:

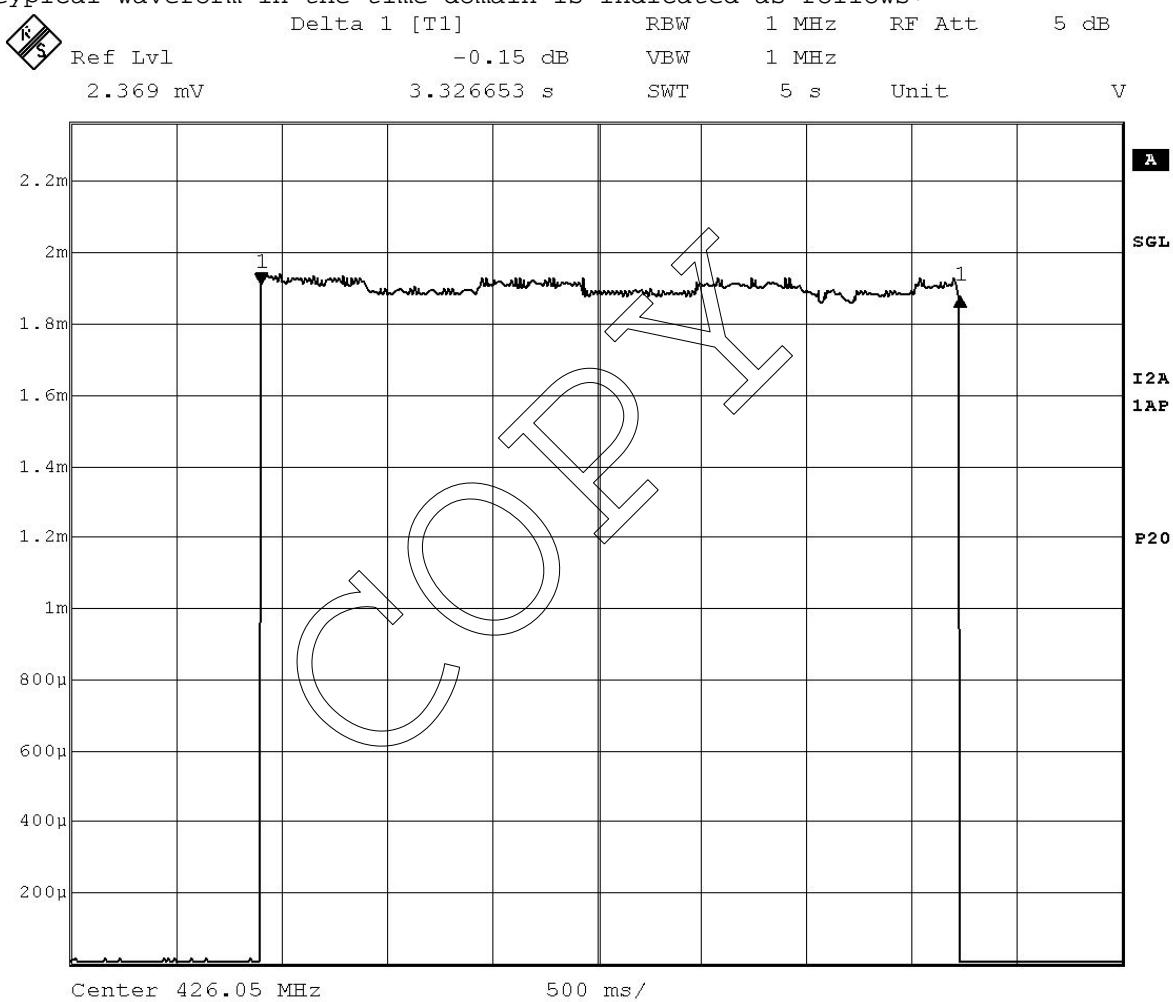

Date: 11.JAN.2002 13:08:27


2.4 Occupied Bandwidth Measurement

Date : December 26, 2001
Temp.: 24 °C Humi.: 33 %

Measurements Results :

Specified Limits : 0.25 % of the fundamental frequency
426.05 MHz x 0.0025 = 1065 kHz

Refer to the attached graphs.

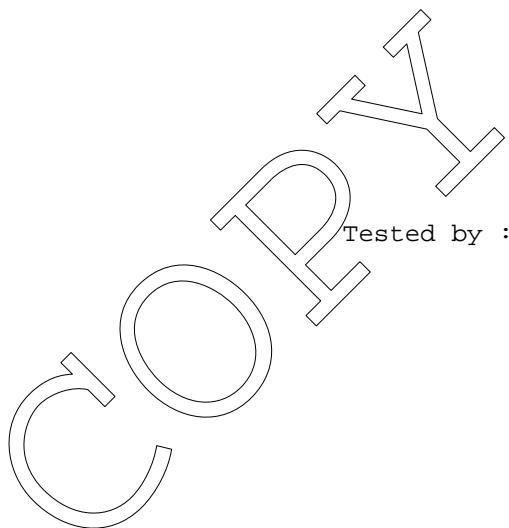

Shigeru Osawa
Shigeru Osawa
Testing Engineer

Emission Limitation

FCC ID : P5NSWU-T1-01
Model : SWU-T1-01

Mode of EUT : Transmit

