


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	20.7°C	Humidity	63%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz
Test Mode	Mode 1		

Horizontal

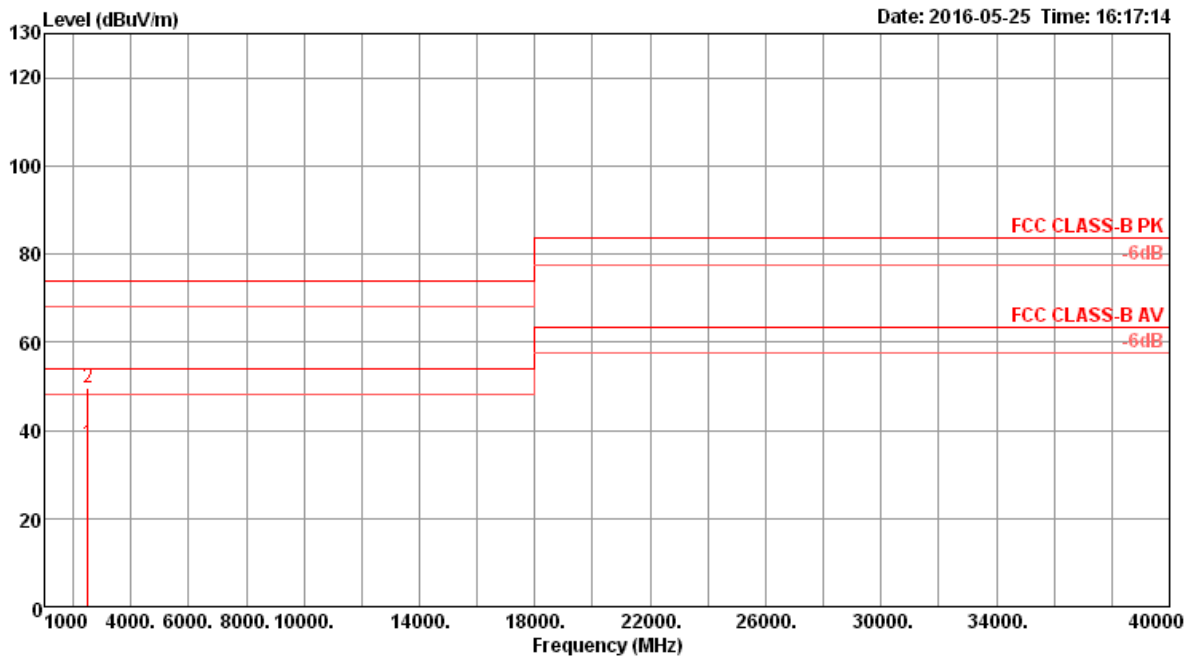

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2499.89	36.99	54.00	-17.01	36.20	5.36	28.50	33.07	179	220	Average	HORIZONTAL
2	2500.36	49.71	74.00	-24.29	48.92	5.36	28.50	33.07	179	220	Peak	HORIZONTAL

Vertical

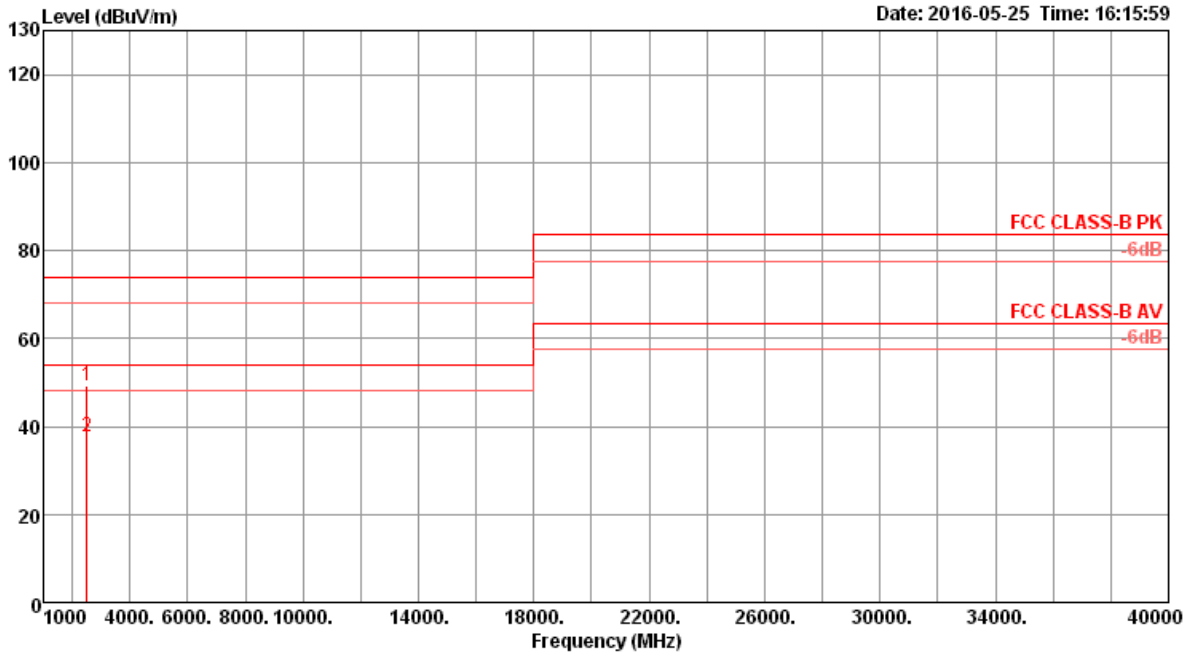

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2500.23	49.43	74.00	-24.57	48.64	5.36	28.50	33.07	156	239 Peak	VERTICAL
2	2500.37	37.60	54.00	-16.40	36.81	5.36	28.50	33.07	156	239 Average	VERTICAL